

# TEST REPORT

**Reference No.**..... : WTX23X08189289W001  
**FCC ID** ..... : 2AUTE-7278  
**Applicant** ..... : Xiamen Hanin Co.,Ltd.  
**Address** ..... : Room 305A, Angye Building, Pioneering Park, Torch High- tech, Zone,  
Xiamen, China  
**Manufacturer** ..... : Xiamen Hanin Co.,Ltd.  
**Address** ..... : Room 305A, Angye Building, Pioneering Park, Torch High- tech, Zone,  
Xiamen, China  
**Product Name** ..... : Handheld Barcode Scanner  
**Model No.**..... : HN-7278HD  
**Standards** ..... : FCC Part 15.247  
**Date of Receipt sample** .... : 2023-08-29  
**Date of Test**..... : 2023-08-29 to 2023-11-16  
**Date of Issue** ..... : 2023-11-16  
**Test Report Form No.** ..... : WTX\_Part 15\_247W  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**


**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,

Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

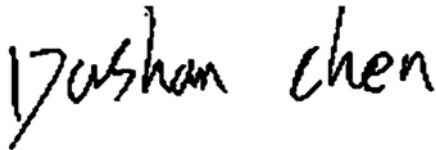

Dashan Chen

Approved by:



Silin Chen

## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
<b>2. SUMMARY OF TEST RESULTS</b>	<b>11</b>
<b>3. ANTENNA REQUIREMENT</b>	<b>12</b>
3.1 STANDARD APPLICABLE	12
3.2 EVALUATION INFORMATION	12
<b>4. POWER SPECTRAL DENSITY</b>	<b>13</b>
4.1 STANDARD APPLICABLE	13
4.2 TEST SETUP BLOCK DIAGRAM	13
4.3 TEST PROCEDURE	13
4.4 SUMMARY OF TEST RESULTS/PLOTS	13
<b>5. DTS BANDWIDTH</b>	<b>14</b>
5.1 STANDARD APPLICABLE	14
5.2 TEST SETUP BLOCK DIAGRAM	14
5.3 TEST PROCEDURE	14
5.4 SUMMARY OF TEST RESULTS/PLOTS	14
<b>6. RF OUTPUT POWER</b>	<b>15</b>
6.1 STANDARD APPLICABLE	15
6.2 TEST SETUP BLOCK DIAGRAM	15
6.3 TEST PROCEDURE	15
6.4 SUMMARY OF TEST RESULTS/PLOTS	15
<b>7. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>16</b>
7.1 STANDARD APPLICABLE	16
7.2 TEST PROCEDURE	16
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
7.4 SUMMARY OF TEST RESULTS/PLOTS	18
<b>8. OUT OF BAND EMISSIONS</b>	<b>29</b>
8.1 STANDARD APPLICABLE	29
8.2 TEST PROCEDURE	29
8.3 SUMMARY OF TEST RESULTS/PLOTS	30
<b>9. CONDUCTED EMISSIONS</b>	<b>35</b>
9.1 TEST PROCEDURE	35
9.2 BASIC TEST SETUP BLOCK DIAGRAM	35
9.3 TEST RECEIVER SETUP	35
9.4 SUMMARY OF TEST RESULTS/PLOTS	35
<b>APPENDIX SUMMARY</b>	<b>38</b>
<b>APPENDIX A</b>	<b>39</b>
<b>APPENDIX B</b>	<b>42</b>
<b>APPENDIX C</b>	<b>45</b>
<b>APPENDIX D</b>	<b>48</b>
<b>APPENDIX PHOTOGRAPHS</b>	<b>52</b>

**Report version**

Version No.	Date of issue	Description
Rev.00	2023-11-16	Original
/	/	/

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Handheld Barcode Scanner
Trade Name	/
Model No.:	HN-7278HD
Adding Model(s):	HN-3578SR, N150BT, BR150BT, HN-3578XX-XXXR, N170BT, BR170BT, HN-7278SR, HN-7278XX-XXXR, HN-7278XX, HN-3578XX (XX represents the focal distance of lens maybe SR/ MR / LR / HD / HP / WA, etc;X represents software version,maybe (0-9);XX represents customer code,maybe (00-99);R represents ROHS certification)
Rated Voltage:	DC 3.6V
Battery Capacity:	3200mAh
Power Adapter:	/
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model HN-7278HD, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Bluetooth Version:	V5.1 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1Mbps: 4.01dBm (Conducted) 2Mbps: 4.01dBm (Conducted)
Data Rate:	1Mbps, 2Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	0.5dBi
<p><i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i></p>	

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

<b>Test Mode List</b>		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

<b>Test Conditions</b>	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB data Cable	1.9	Unshielded	Without Ferrite

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
Adapter	Mediacom	BOS050200-02A	/
Phone	Xiaomi	Mi10	/

### 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-26GHz ±3.92dB

**1.7 Test Equipment List and Details**

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2023-02-25	2024-02-24
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2023-02-25	2024-02-24
WTXE1004A 1-001	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2023-02-25	2024-02-24
<input type="checkbox"/> Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2023-02-25	2024-02-24
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
<input type="checkbox"/> Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
<input type="checkbox"/> Chamber B: Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2023-02-25	2024-02-24



WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Chamber C: Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2023-02-25	2024-02-24
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
<input checked="" type="checkbox"/> Conducted Room 1#						
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2023-02-25	2024-02-24
<input type="checkbox"/> Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2023-02-25	2024-02-24
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2023-02-25	2024-02-24

<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 1#)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission Room 2#)*	SKET	EMC-I	V2.0

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

### **3. Antenna Requirement**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Evaluation Information**

This product has a PCB antenna, fulfill the requirement of this section.


## 4. Power Spectral Density

---

### 4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 4.2 Test Setup Block Diagram

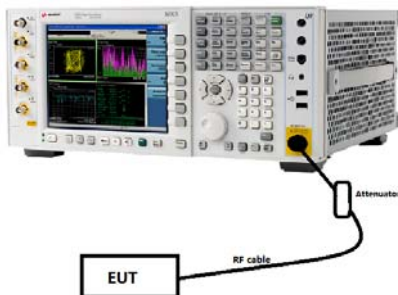

### 4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

### 4.4 Summary of Test Results/Plots

Please refer to Appendix A


## 5. DTS Bandwidth

---

### 5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

### 5.2 Test Setup Block Diagram

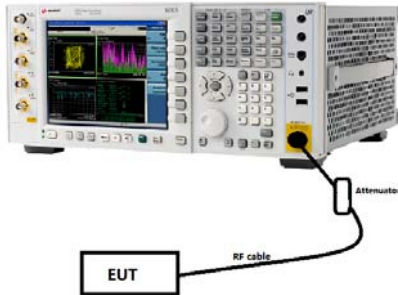

### 5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

### 5.4 Summary of Test Results/Plots

Please refer to Appendix B


## 6. RF Output Power

---

### 6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

### 6.2 Test Setup Block Diagram

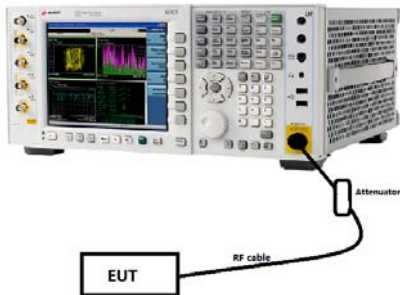

### 6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 6.4 Summary of Test Results/Plots

Please refer to Appendix C

## 7. Field Strength of Spurious Emissions

### 7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 7.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

The test setup for emission measurement below 30MHz.

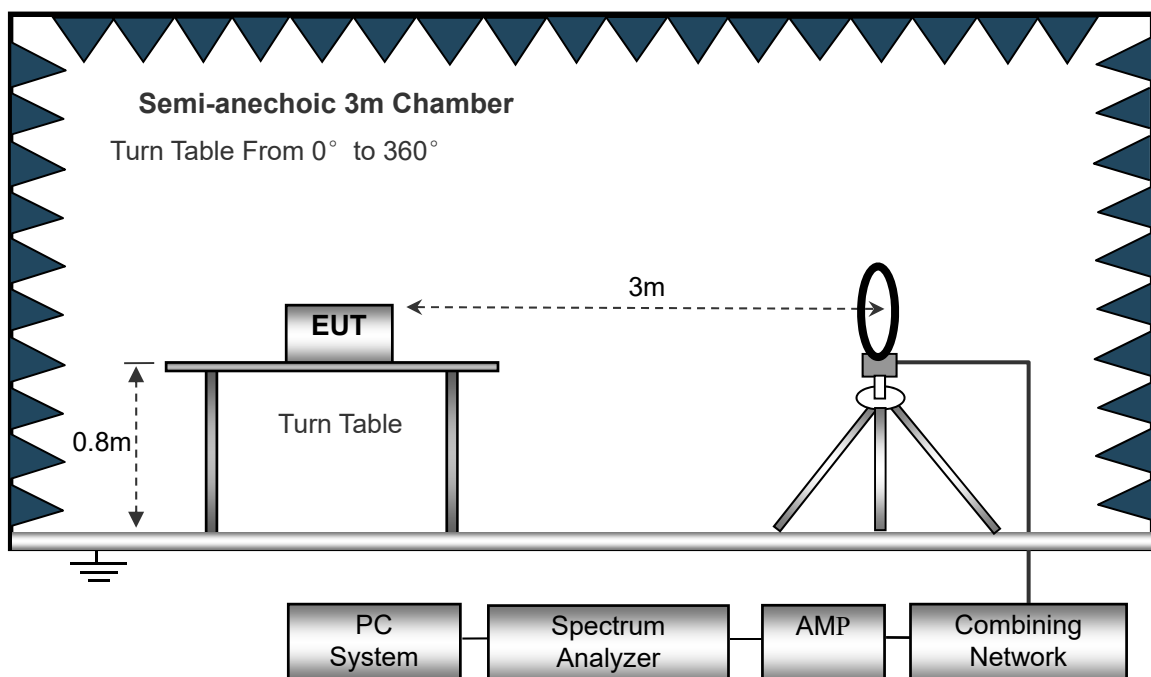




The test setup for emission measurement from 30MHz to 1GHz.

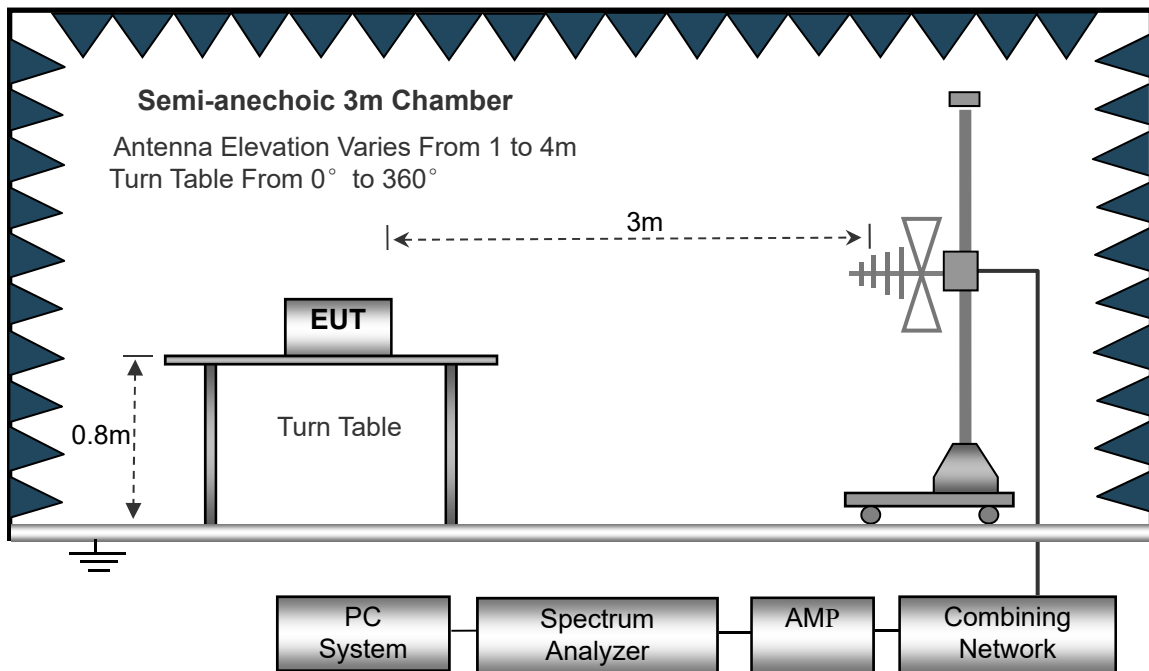

The test setup for emission measurement above 1GHz.

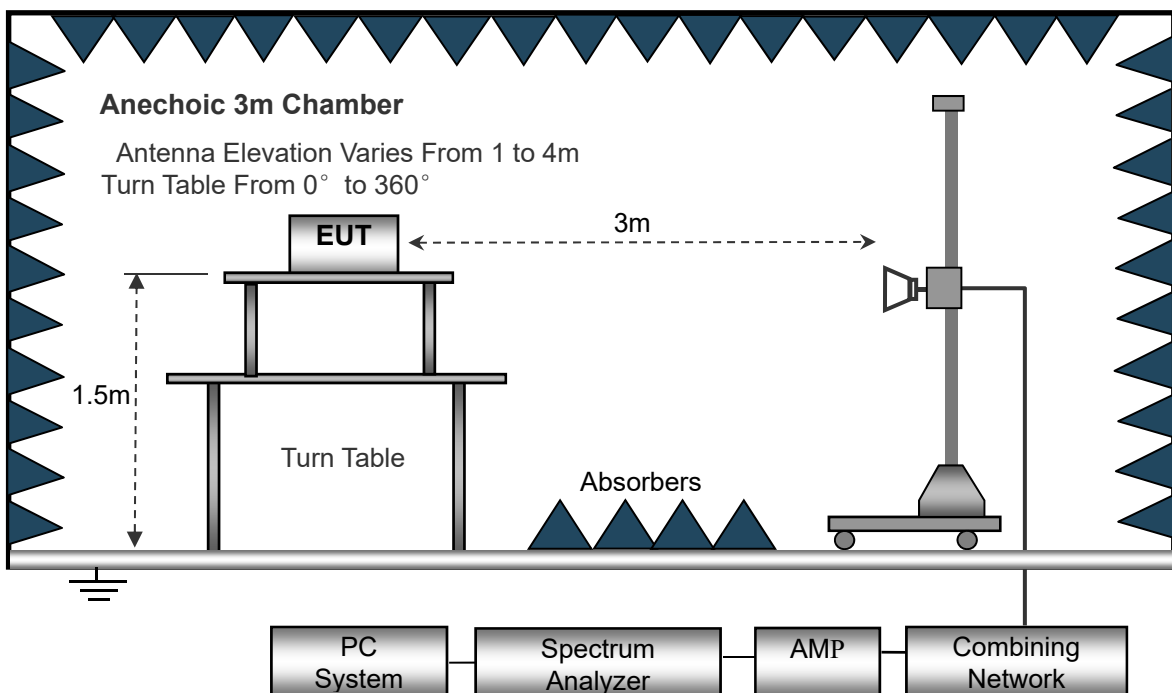

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold

Reference No.: WTX23X08189289W001

Detector function = peak

Detector function = peak, QP

Detector function = peak, AV

### 7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 7.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


- Spurious Emissions Below 1GHz
- Model: HN-7278HD
- BLE 1Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

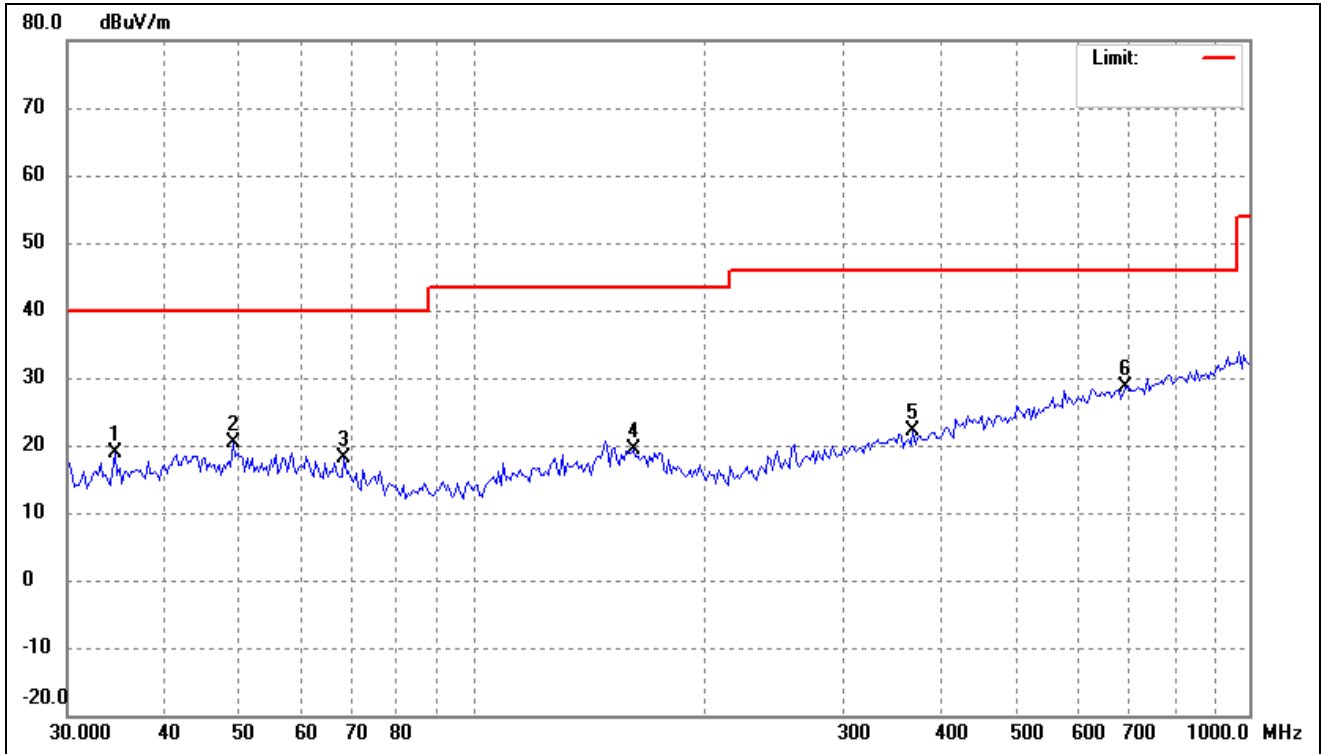

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	34.5269	28.43	-9.61	18.82	40.00	-21.18	-	-	peak
2	49.0627	28.43	-8.16	20.27	40.00	-19.73	-	-	peak
3	68.2635	28.61	-10.45	18.16	40.00	-21.84	-	-	peak
4	160.8851	27.94	-8.64	19.30	43.50	-24.20	-	-	peak
5	368.6682	28.70	-6.63	22.07	46.00	-23.93	-	-	peak
6	693.9101	29.73	-1.14	28.59	46.00	-17.41	-	-	peak


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

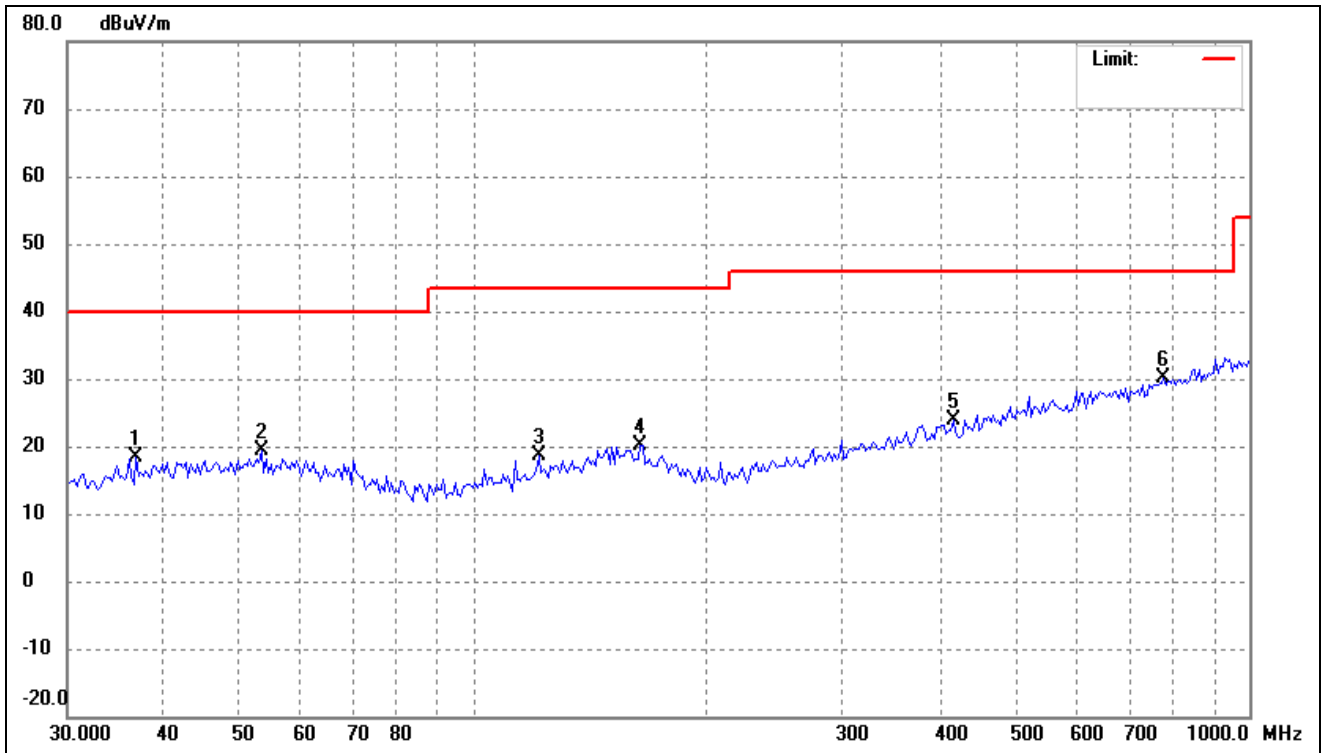

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	36.7811	27.54	-9.17	18.37	40.00	-21.63	-	-	peak
2	53.3794	27.84	-8.45	19.39	40.00	-20.61	-	-	peak
3	121.4623	29.09	-10.43	18.66	43.50	-24.84	-	-	peak
4	164.3129	28.87	-8.72	20.15	43.50	-23.35	-	-	peak
5	415.4486	29.33	-5.54	23.79	46.00	-22.21	-	-	peak
6	776.4848	29.93	0.08	30.01	46.00	-15.99	-	-	peak


➤ BLE 2Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

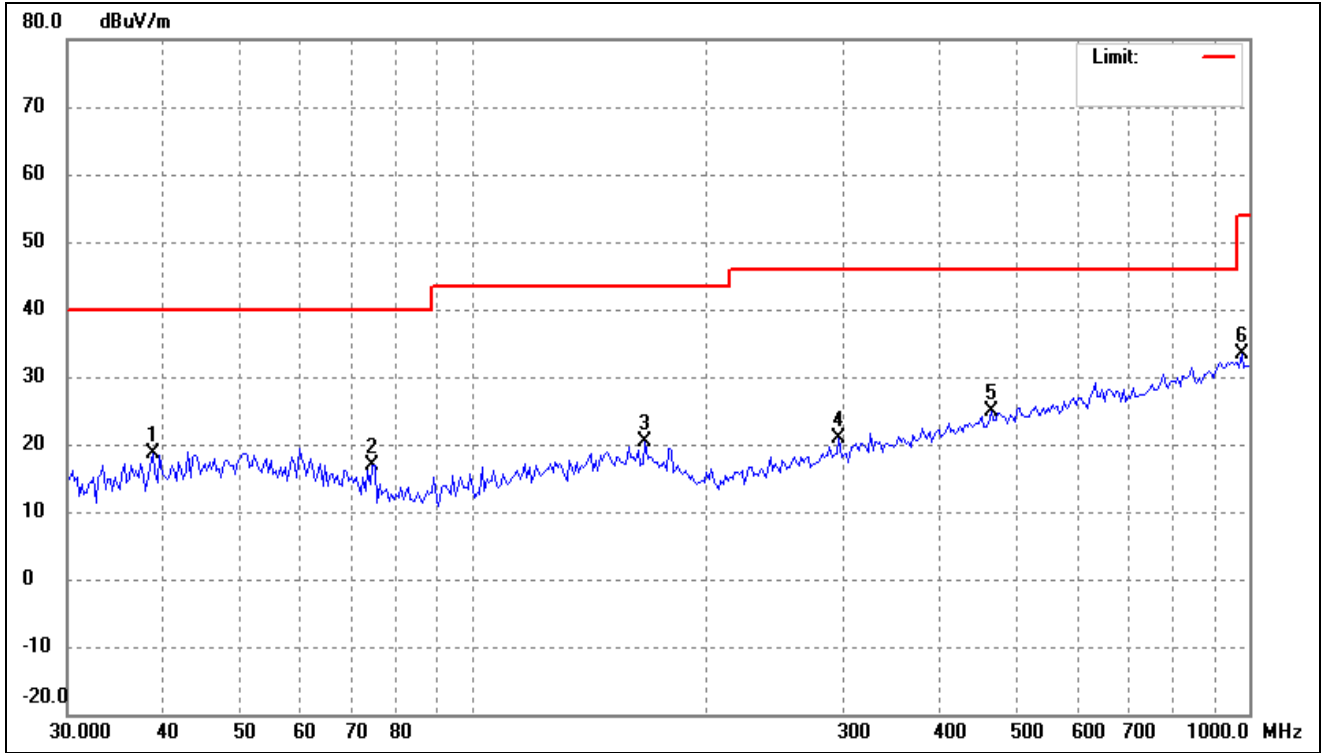

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.6356	27.36	-8.78	18.58	40.00	-21.42	-	-	peak
2	74.2696	28.63	-11.70	16.93	40.00	-23.07	-	-	peak
3	166.6385	29.16	-8.79	20.37	43.50	-23.13	-	-	peak
4	296.5022	29.37	-8.38	20.99	46.00	-25.01	-	-	peak
5	464.8867	29.18	-4.37	24.81	46.00	-21.19	-	-	peak
6	979.1391	31.00	2.28	33.28	54.00	-20.72	-	-	peak


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

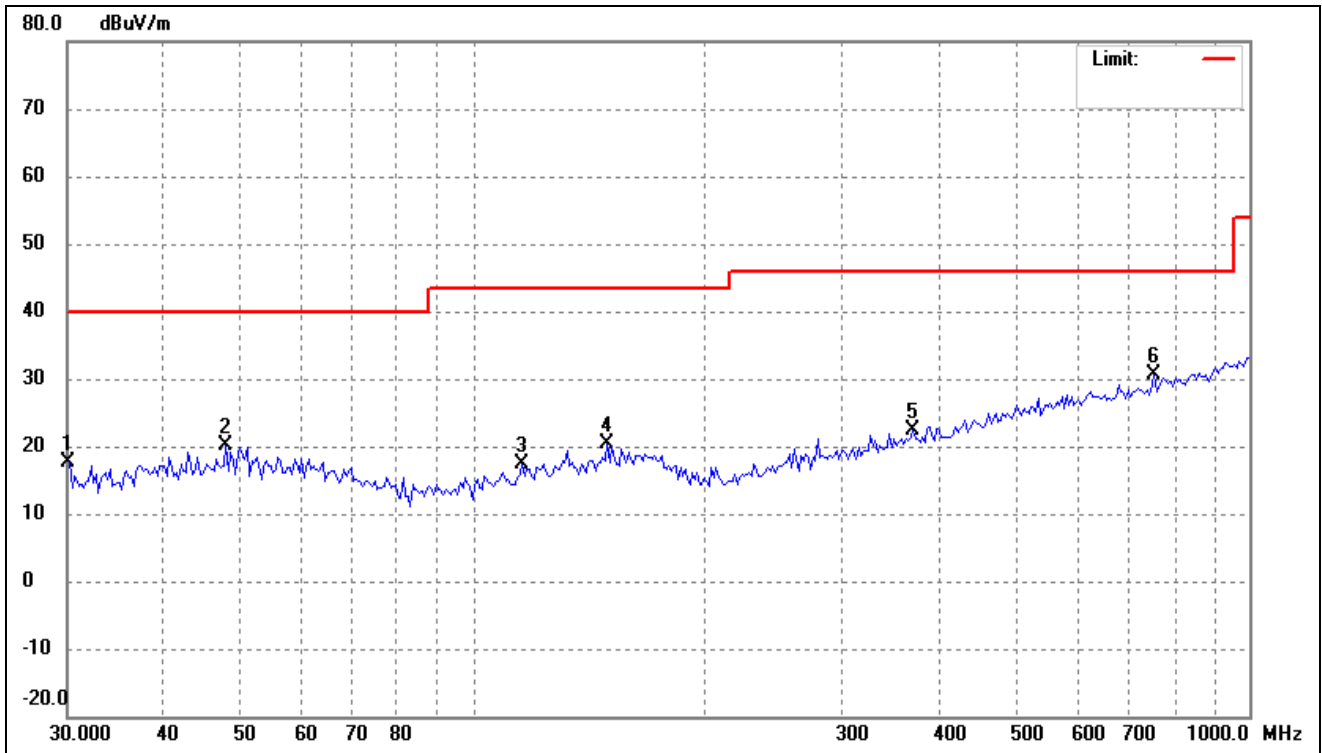

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	30.2115	27.80	-10.17	17.63	40.00	-22.37	-	-	peak
2	48.0392	28.34	-8.23	20.11	40.00	-19.89	-	-	peak
3	115.6321	28.33	-10.99	17.34	43.50	-26.16	-	-	peak
4	148.9174	28.96	-8.68	20.28	43.50	-23.22	-	-	peak
5	368.6682	29.00	-6.63	22.37	46.00	-23.63	-	-	peak
6	754.9627	30.64	-0.12	30.52	46.00	-15.48	-	-	peak


- Model: HN-3578SR
- BLE 1Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

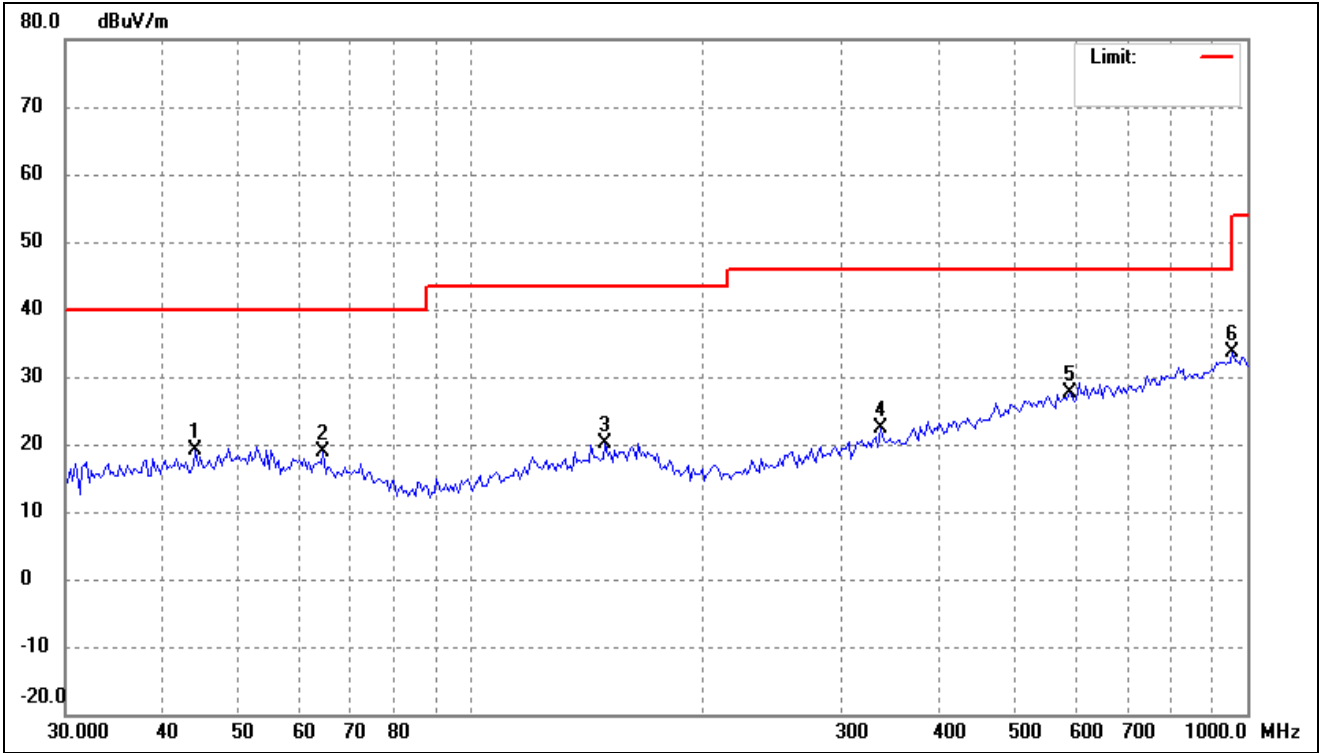

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.1543	27.52	-8.47	19.05	40.00	-20.95	-	-	peak
2	64.5318	28.69	-9.76	18.93	40.00	-21.07	-	-	peak
3	148.9174	28.87	-8.68	20.19	43.50	-23.31	-	-	peak
4	336.4817	29.66	-7.35	22.31	46.00	-23.69	-	-	peak
5	590.3511	29.48	-1.94	27.54	46.00	-18.46	-	-	peak
6	958.7134	31.45	2.26	33.71	46.00	-12.29	-	-	peak

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

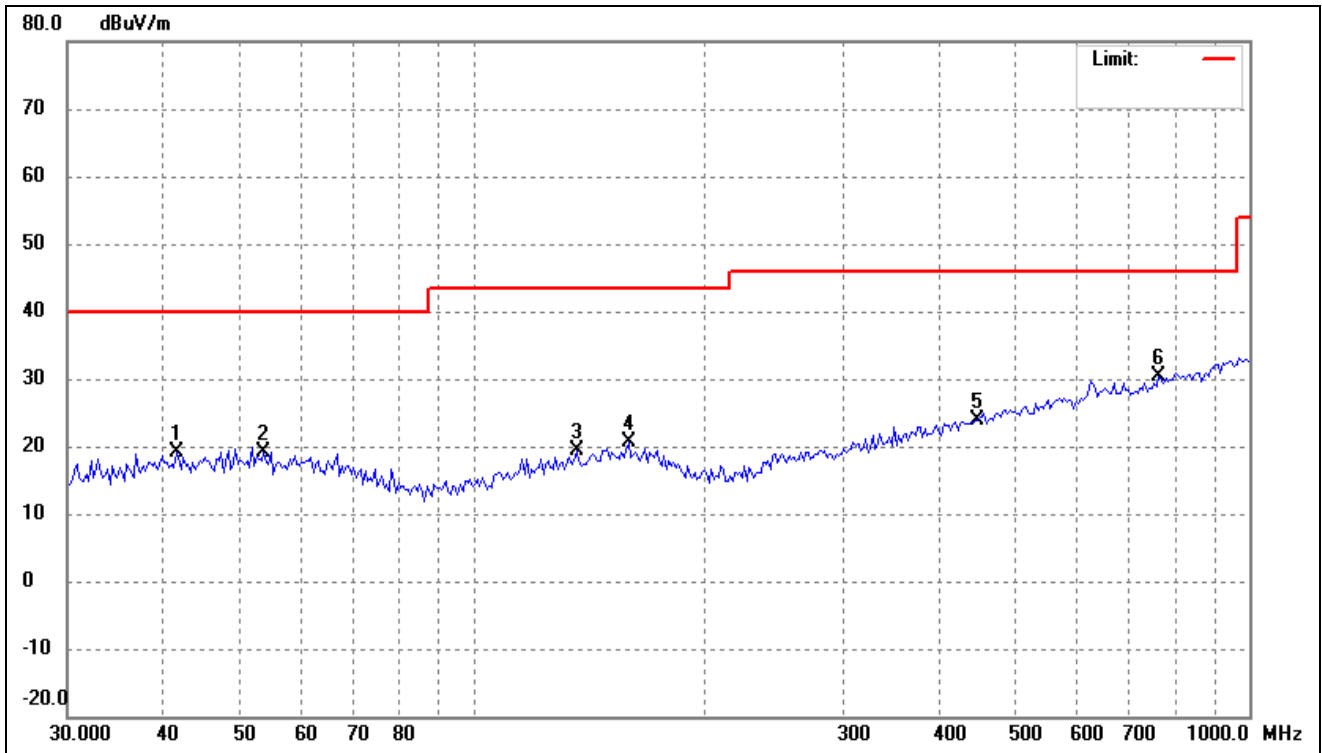


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	41.4483	27.49	-8.48	19.01	40.00	-20.99	-	-	peak
2	53.7558	27.60	-8.50	19.10	40.00	-20.90	-	-	peak
3	135.9162	28.95	-9.61	19.34	43.50	-24.16	-	-	peak
4	158.6398	29.15	-8.61	20.54	43.50	-22.96	-	-	peak
5	445.6931	28.47	-4.71	23.76	46.00	-22.24	-	-	peak
6	765.6482	30.33	-0.01	30.32	46.00	-15.68	-	-	peak




➤ BLE 2Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

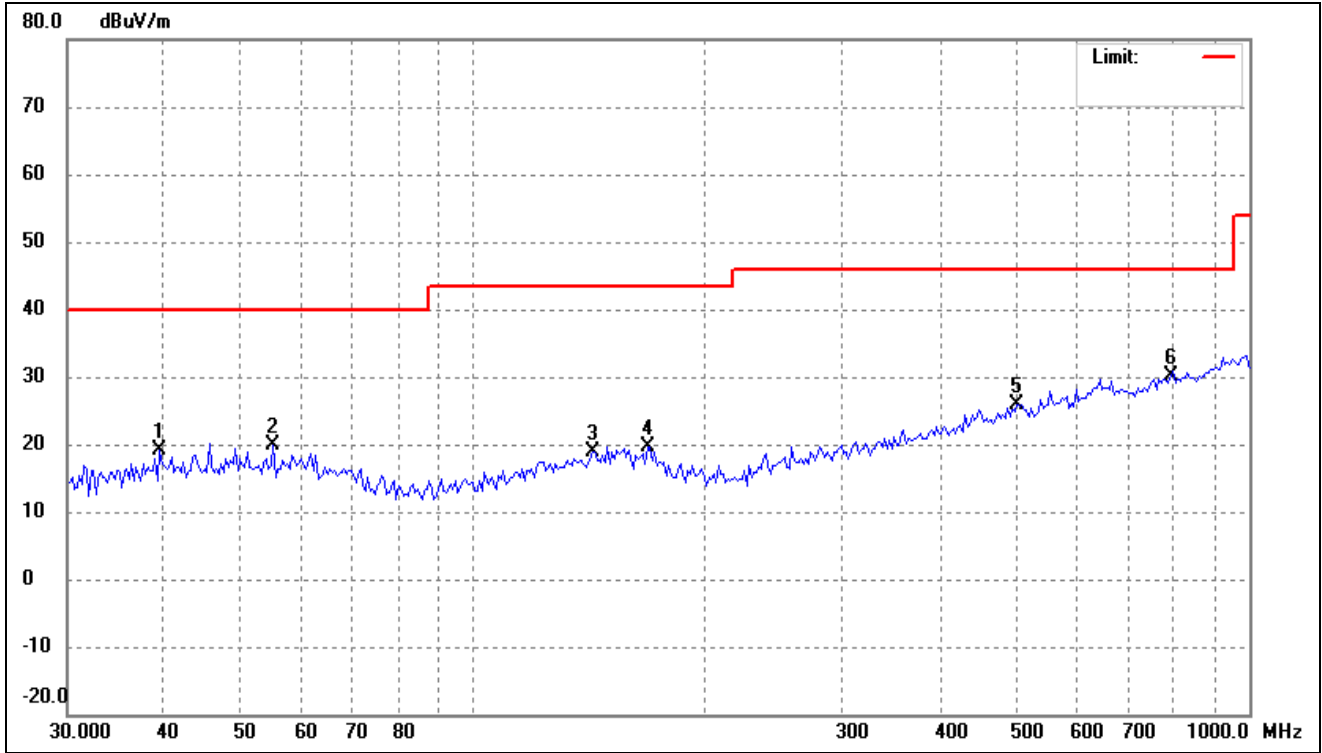

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	39.4587	27.80	-8.60	19.20	40.00	-20.80	-	-	peak
2	55.2882	28.63	-8.64	19.99	40.00	-20.01	-	-	peak
3	142.7691	28.04	-9.20	18.84	43.50	-24.66	-	-	peak
4	167.8136	28.46	-8.82	19.64	43.50	-23.86	-	-	peak
5	502.2472	29.86	-3.87	25.99	46.00	-20.01	-	-	peak
6	793.0281	29.92	0.23	30.15	46.00	-15.85	-	-	peak

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

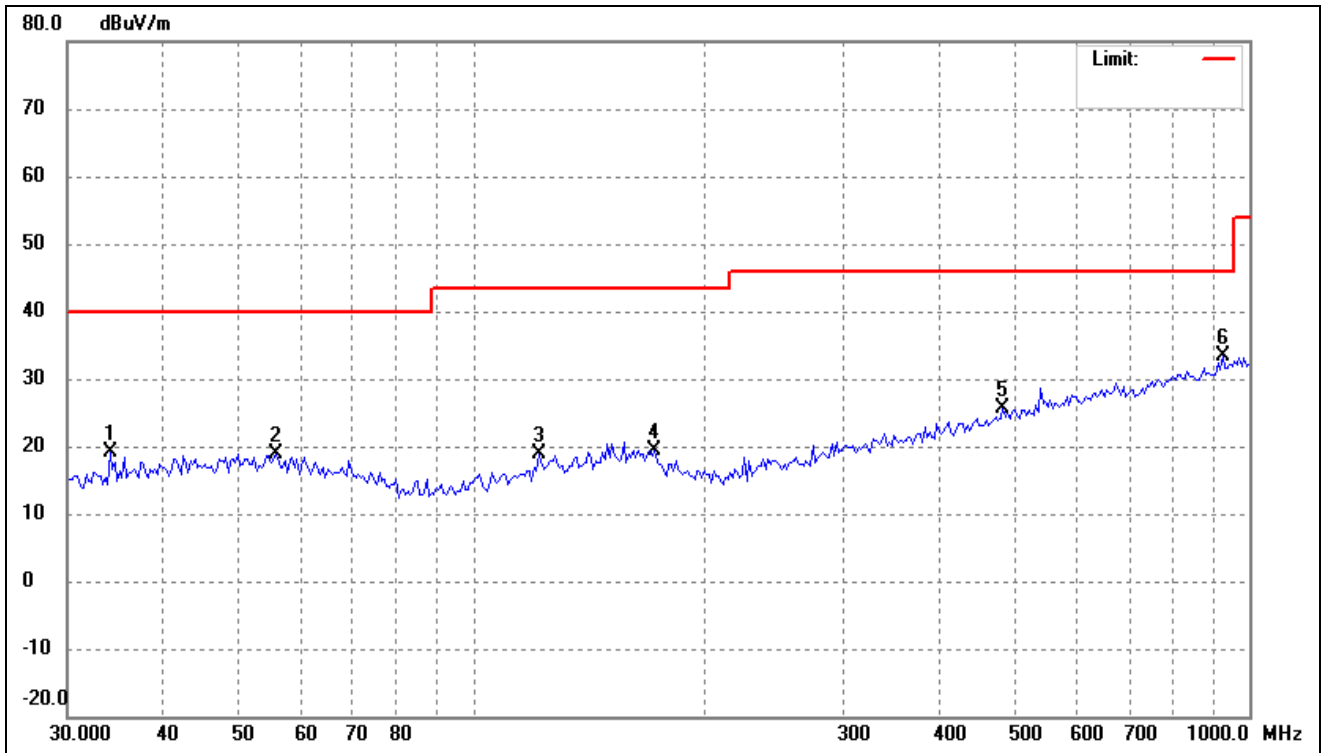

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	34.0451	28.90	-9.67	19.23	40.00	-20.77	-	-	peak
2	55.6781	27.46	-8.67	18.79	40.00	-21.21	-	-	peak
3	121.4623	29.21	-10.43	18.78	43.50	-24.72	-	-	peak
4	171.3889	28.44	-9.08	19.36	43.50	-24.14	-	-	peak
5	481.5112	29.71	-4.15	25.56	46.00	-20.44	-	-	peak
6	925.6131	31.55	1.74	33.29	46.00	-12.71	-	-	peak

Remark: '- Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

- Spurious Emissions Above 1GHz
- Model: HN-7278HD
- BLE 1Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4795.868	65.37	-12.67	52.70	74.00	-21.30	H	PK
7206.000	54.69	-6.21	48.48	74.00	-25.52	H	PK
4795.868	62.16	-12.67	49.49	74.00	-24.51	V	PK
7206.000	55.05	-6.21	48.84	74.00	-25.16	V	PK
Middle Channel-2440MHz							
4870.396	65.14	-12.58	52.56	74.00	-21.44	H	PK
7320.000	54.60	-6.50	48.10	74.00	-25.90	H	PK
4870.396	64.69	-12.58	52.11	74.00	-21.89	V	PK
7320.000	54.00	-6.50	47.50	74.00	-26.50	V	PK
High Channel-2480MHz							
4971.571	64.46	-12.43	52.03	74.00	-21.97	H	PK
7440.000	55.49	-6.80	48.69	74.00	-25.31	H	PK
4971.571	63.28	-12.43	50.85	74.00	-23.15	V	PK
7440.000	54.34	-6.80	47.54	74.00	-26.46	V	PK

- BLE 2Mbps

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2402MHz							
4795.868	65.00	-12.67	52.33	74.00	-21.67	H	PK
7206.000	54.99	-6.21	48.78	74.00	-25.22	H	PK
4795.868	65.03	-12.67	52.36	74.00	-21.64	V	PK
7206.000	54.00	-6.21	47.79	74.00	-26.21	V	PK
Middle Channel-2440MHz							
4870.396	64.86	-12.58	52.28	74.00	-21.72	H	PK
7320.000	54.34	-6.50	47.84	74.00	-26.16	H	PK
4870.395	64.93	-12.58	52.35	74.00	-21.65	V	PK
7320.000	55.99	-6.50	49.49	74.00	-24.51	V	PK
High Channel-2480MHz							
4971.571	64.39	-12.43	51.96	74.00	-22.04	H	PK
7440.000	54.13	-6.80	47.33	74.00	-26.67	H	PK
4971.571	62.13	-12.43	49.70	74.00	-24.30	V	PK
7440.000	53.93	-6.80	47.13	74.00	-26.87	V	PK

- Model: HN-3578SR
- BLE 1Mbps

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4795.868	63.40	-12.67	50.73	74.00	-23.27	H	PK
7206.000	54.21	-6.21	48.00	74.00	-26.00	H	PK
4795.868	61.18	-12.67	48.51	74.00	-25.49	V	PK
7206.000	55.58	-6.21	49.37	74.00	-24.63	V	PK
Middle Channel-2440MHz							
4870.395	64.19	-12.58	51.61	74.00	-22.39	H	PK
7320.000	55.63	-6.50	49.13	74.00	-24.87	H	PK
4870.395	63.72	-12.58	51.14	74.00	-22.86	V	PK
7320.000	55.05	-6.50	48.55	74.00	-25.45	V	PK
High Channel-2480MHz							
4971.571	63.49	-12.43	51.06	74.00	-22.94	H	PK
7440.000	55.64	-6.80	49.24	74.00	-24.76	H	PK
4971.571	62.32	-12.43	49.89	74.00	-24.11	V	PK
7440.000	54.87	-6.80	48.07	74.00	-25.93	V	PK

- BLE 2Mbps

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4795.868	64.08	-12.67	51.41	74.00	-22.59	H	PK
7206.000	56.51	-6.21	50.30	74.00	-23.70	H	PK
4795.868	63.57	-12.67	50.90	74.00	-23.10	V	PK
7206.000	55.58	-6.21	49.37	74.00	-24.63	V	PK
Middle Channel-2440MHz							
4870.395	63.88	-12.58	51.30	74.00	-22.70	H	PK
7320.000	55.90	-6.50	49.40	74.00	-24.60	H	PK
4870.395	64.00	-12.58	51.42	74.00	-22.58	V	PK
7320.000	57.03	-6.50	50.53	74.00	-23.47	V	PK
High Channel-2480MHz							
4971.571	64.89	-12.43	52.46	74.00	-21.54	H	PK
7440.000	55.16	-6.80	48.36	74.00	-25.64	H	PK
4971.571	63.18	-12.43	50.75	74.00	-23.25	V	PK
7440.000	54.93	-6.80	48.13	74.00	-25.87	V	PK

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 8. Out of Band Emissions

---

### 8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission

must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

**B. Antenna-port conducted measurements**

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

**8.3 Summary of Test Results/Plots**


- Radiated test
- BLE 1Mbps

Test Channel	Low	Polarity:	Horizontal(worst case)
--------------	-----	-----------	------------------------

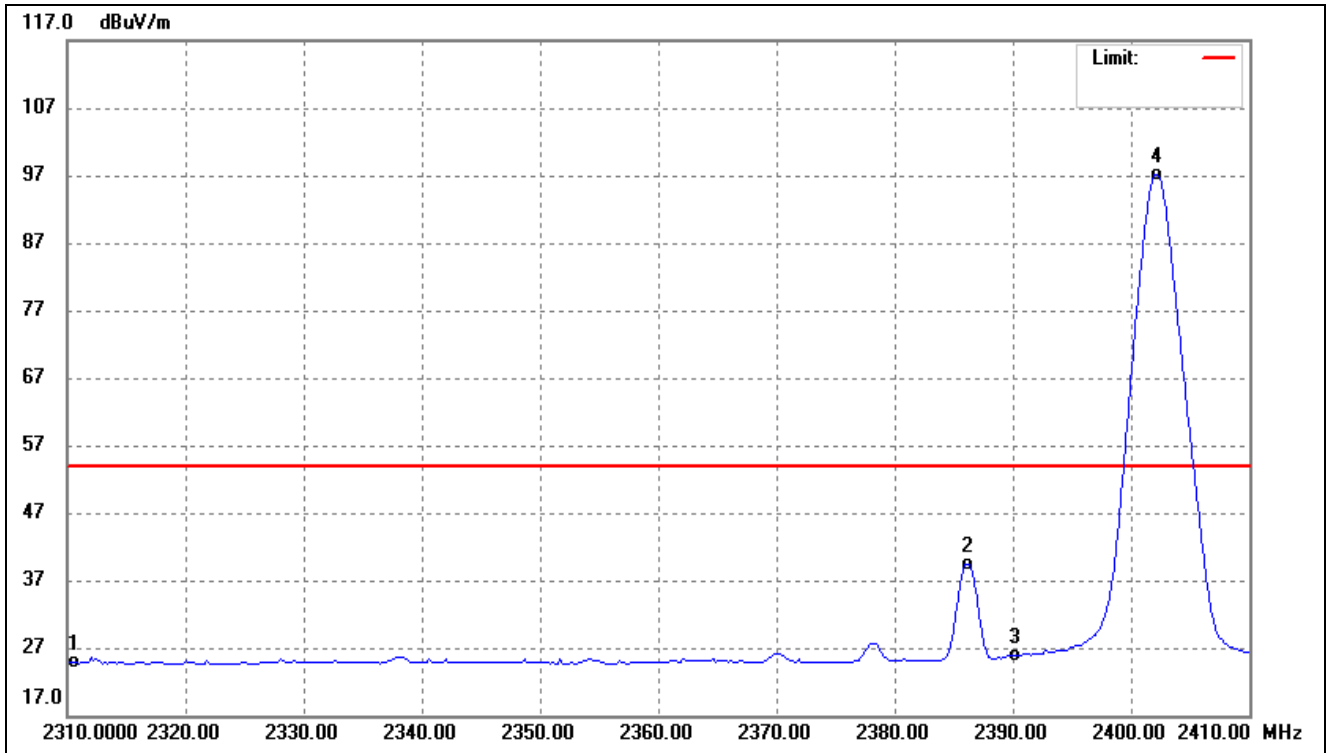

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.78	-19.02	24.76	54.00	-29.24	Average Detector
		56.19	-19.02	37.17	74.00	-36.83	Peak Detector
2	2386.152	58.36	-18.87	39.49	54.00	-14.51	Average Detector
		63.47	-18.87	44.60	74.00	-29.40	Peak Detector
3	2390.000	44.87	-18.87	26.00	54.00	-28.00	Average Detector
		58.49	-18.87	39.62	74.00	-34.38	Peak Detector
4	2402.184	115.98	-18.85	97.13	/	/	Average Detector
		116.45	-18.85	97.60	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal(worst case)
--------------	------	-----------	------------------------

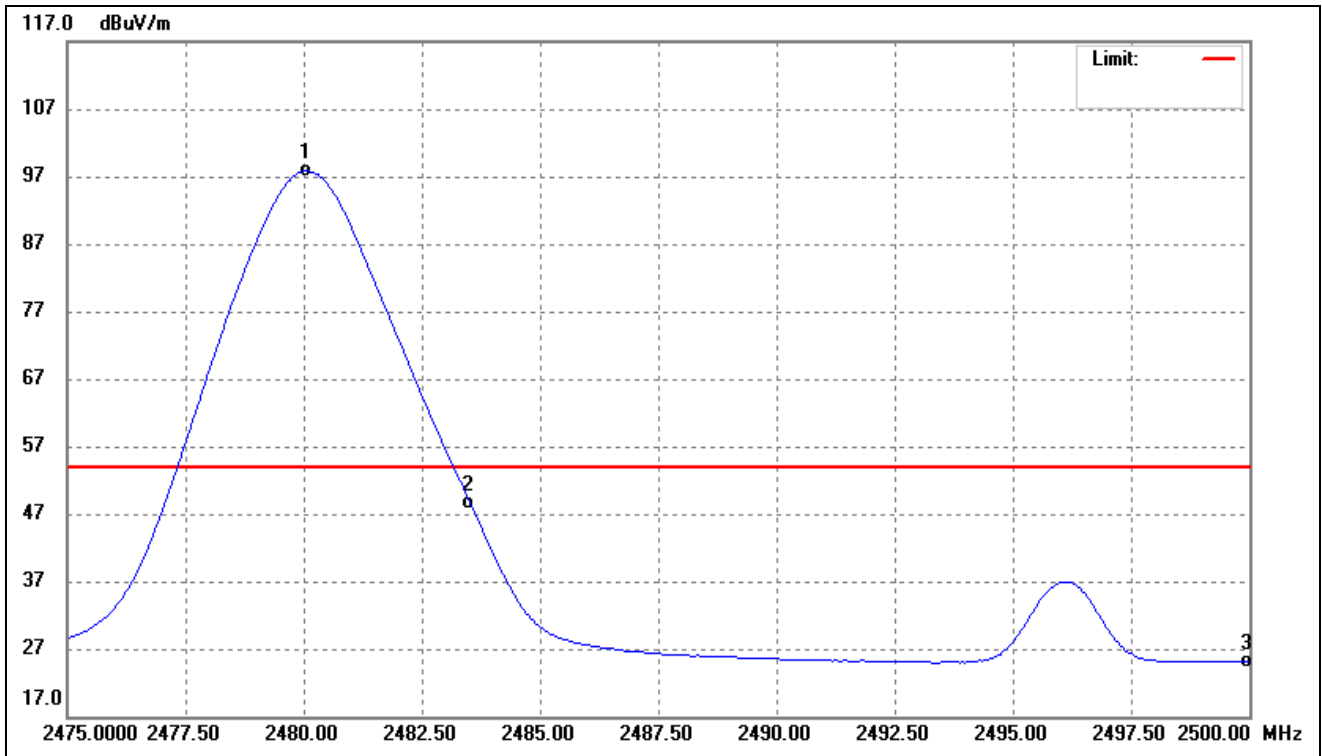


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.060	116.47	-18.68	97.79	/	/	Average Detector
	2480.160	116.95	-18.68	98.27	/	/	Peak Detector
2	2483.500	67.35	-18.68	48.67	54.00	-5.33	Average Detector
	2483.500	74.12	-18.68	55.44	74.00	-18.56	Peak Detector
3	2500.000	43.75	-18.65	25.10	54.00	-28.90	Average Detector
	2500.000	56.07	-18.65	37.42	74.00	-36.58	Peak Detector




➤ BLE 2Mbps

Test Channel	Low	Polarity:	Horizontal(worst case)
--------------	-----	-----------	------------------------

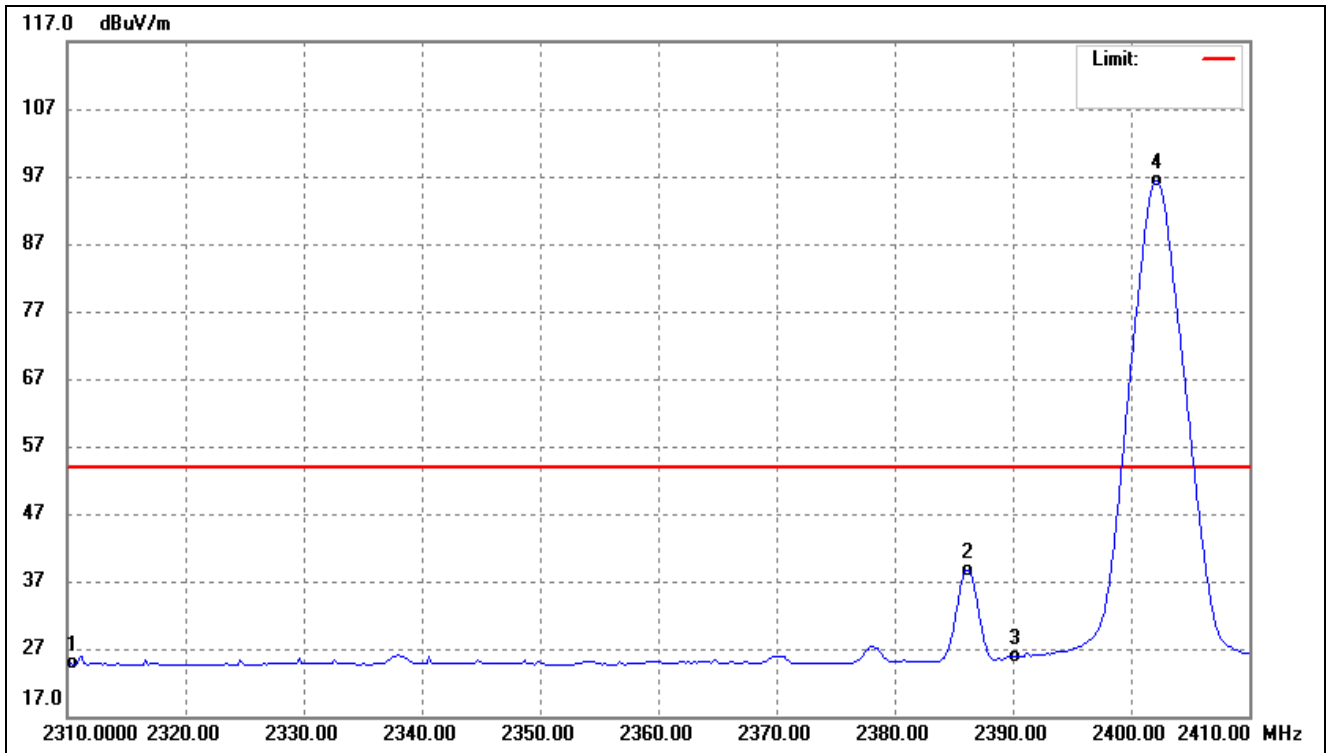

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.78	-19.02	24.76	54.00	-29.24	Average Detector
	2310.000	55.76	-19.02	36.74	74.00	-37.26	Peak Detector
2	2386.152	57.52	-18.87	38.65	54.00	-15.35	Average Detector
	2386.353	62.93	-18.87	44.06	74.00	-29.94	Peak Detector
3	2390.000	44.77	-18.87	25.90	54.00	-28.10	Average Detector
	2390.000	57.33	-18.87	38.46	74.00	-35.54	Peak Detector
4	2402.184	115.15	-18.85	96.30	/	/	Average Detector
	2401.583	116.40	-18.85	97.55	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal(worst case)
--------------	------	-----------	------------------------

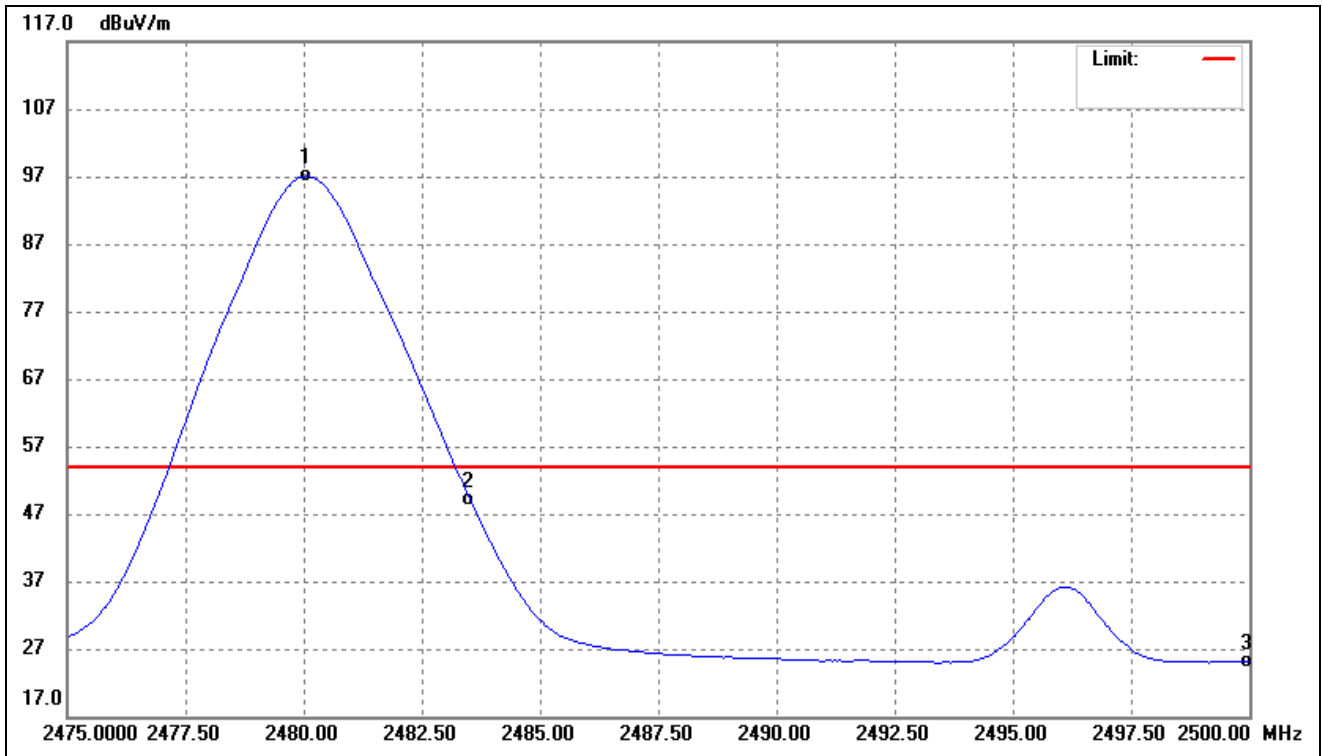

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.060	115.69	-18.68	97.01	/	/	Average Detector
	2480.461	116.95	-18.68	98.27	/	/	Peak Detector
2	2483.500	67.91	-18.68	49.23	54.00	-4.77	Average Detector
	2483.500	76.88	-18.68	58.20	74.00	-15.80	Peak Detector
3	2500.000	43.70	-18.65	25.05	54.00	-28.95	Average Detector
	2500.000	56.02	-18.65	37.37	74.00	-36.63	Peak Detector

➤ Conducted test

**Please refer to Appendix D**

## 9. Conducted Emissions


---

### 9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

### 9.2 Basic Test Setup Block Diagram

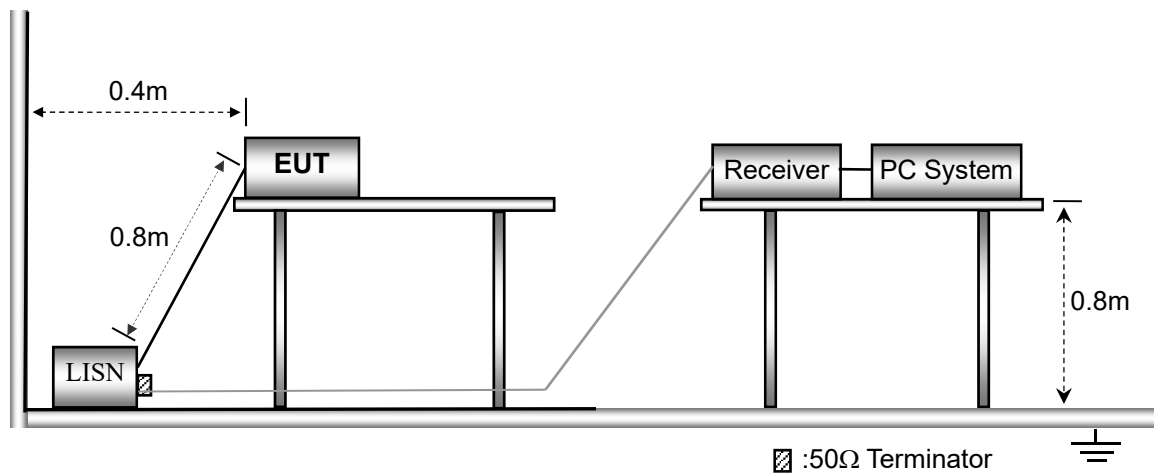


### 9.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency .....	150kHz
Stop Frequency .....	30MHz
Sweep Speed .....	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth .....	9kHz
Quasi-Peak Adapter Mode .....	Normal


### 9.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

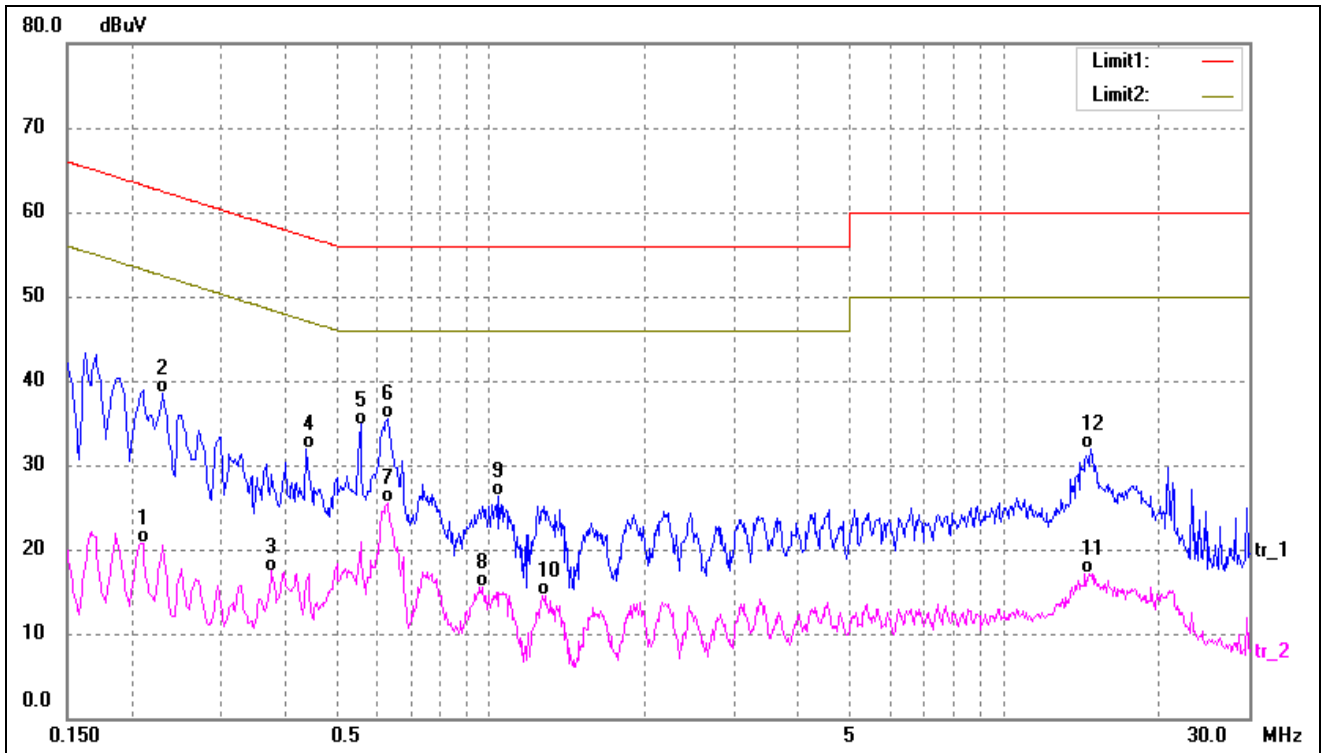

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2099	10.37	10.38	20.75	53.21	-32.46	AVG
2	0.2300	28.08	10.36	38.44	62.45	-24.01	QP
3	0.3739	7.12	10.28	17.40	48.41	-31.01	AVG
4	0.4380	21.64	10.25	31.89	57.10	-25.21	QP
5	0.5580	24.58	10.22	34.80	56.00	-21.20	QP
6*	0.6300	25.24	10.20	35.44	56.00	-20.56	QP
7	0.6300	15.21	10.20	25.41	46.00	-20.59	AVG
8	0.9579	5.30	10.15	15.45	46.00	-30.55	AVG
9	1.0420	16.23	10.13	26.36	56.00	-29.64	QP
10	1.2820	4.42	10.10	14.52	46.00	-31.48	AVG
11	14.6539	6.95	10.23	17.18	50.00	-32.82	AVG
12	14.8260	21.65	10.22	31.87	60.00	-28.13	QP

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

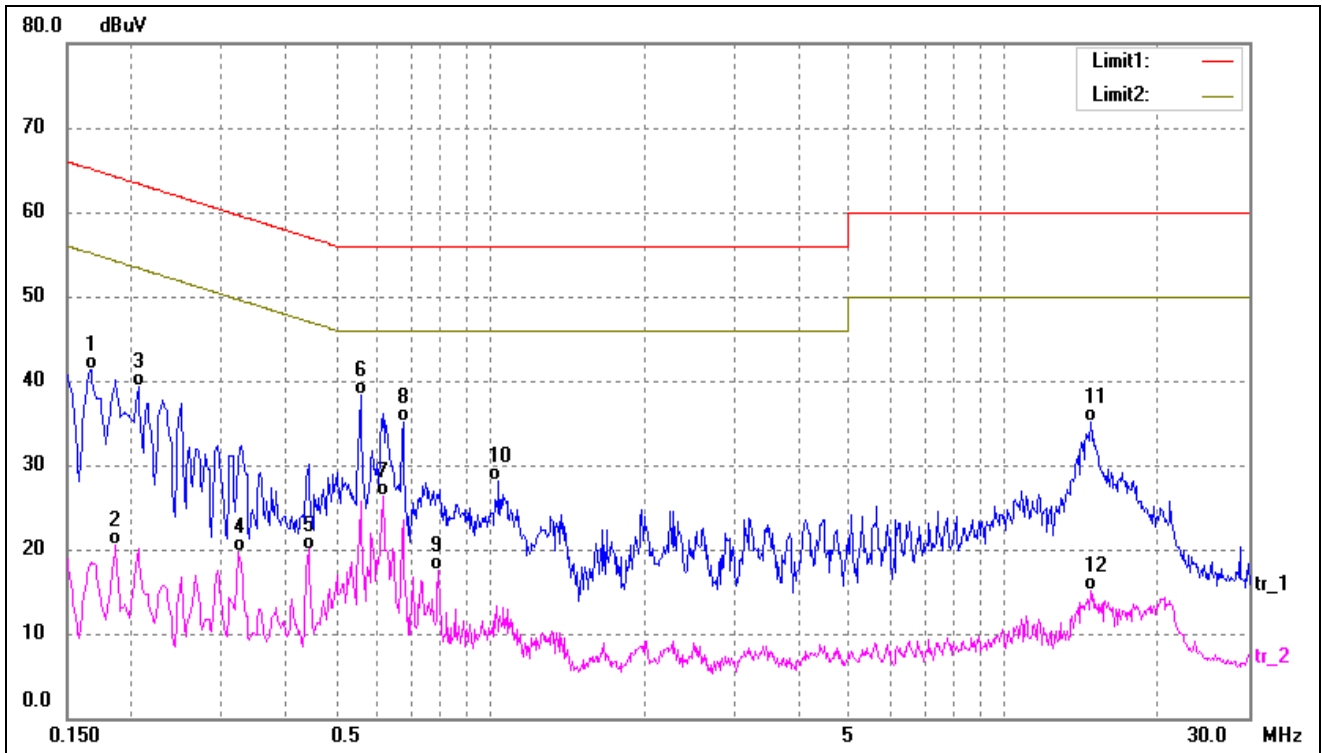

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	30.95	10.40	41.35	65.15	-23.80	QP
2	0.1859	10.09	10.40	20.49	54.21	-33.72	AVG
3	0.2059	28.89	10.38	39.27	63.37	-24.10	QP
4	0.3220	9.44	10.30	19.74	49.65	-29.91	AVG
5	0.4420	9.75	10.25	20.00	47.02	-27.02	AVG
6*	0.5580	28.05	10.22	38.27	56.00	-17.73	QP
7	0.6179	16.00	10.21	26.21	46.00	-19.79	AVG
8	0.6780	24.94	10.20	35.14	56.00	-20.86	QP
9	0.7940	7.31	10.18	17.49	46.00	-28.51	AVG
10	1.0420	17.90	10.13	28.03	56.00	-27.97	QP
11	14.7980	24.86	10.22	35.08	60.00	-24.92	QP
12	14.7980	4.90	10.22	15.12	50.00	-34.88	AVG

## APPENDIX SUMMARY

---




Project No.	WTX23X08189289W	Test Engineer	BAldi Zhong
Start date	2023/9/5	Finish date	2023/9/6
Temperature	22°C	Humidity	59%

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

## APPENDIX A

---

Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)-1M	Low	-10.57	8
	Middle	-10.74	8
	High	-9.76	8
GFSK(BLE)-2M	Low	-12.78	8
	Middle	-13.00	8
	High	-13.87	8
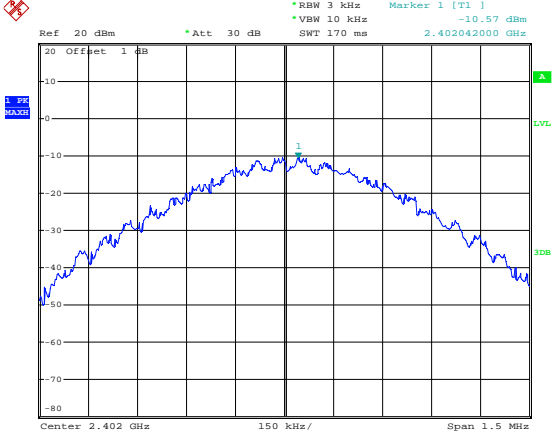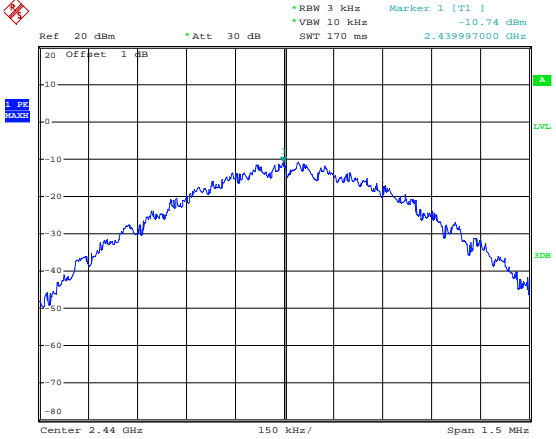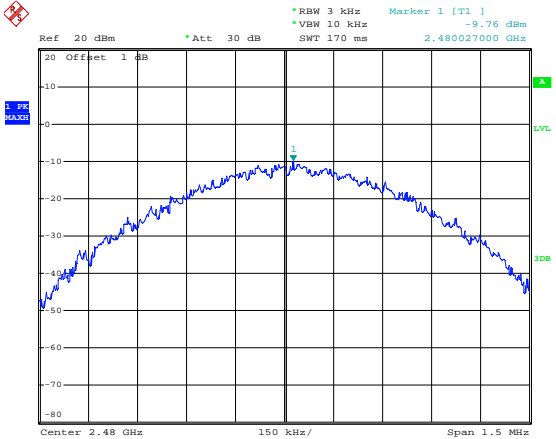
<p>Low(1M)</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1 ] -10.57 dBm *VBW 10 kHz 2.402042000 GHz SWT 170 ms</p> <p>Center 2.402 GHz 150 kHz/ Span 1.5 MHz</p> <p>Date: 6.SEP.2023 16:35:07</p>
<p>Middle(1M)</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1 ] -10.74 dBm *VBW 10 kHz 2.439997000 GHz SWT 170 ms</p> <p>Center 2.44 GHz 150 kHz/ Span 1.5 MHz</p> <p>Date: 6.SEP.2023 16:35:17</p>
<p>High(1M)</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 kHz Marker 1 [T1 ] -9.76 dBm *VBW 10 kHz 2.480027000 GHz SWT 170 ms</p> <p>Center 2.48 GHz 150 kHz/ Span 1.5 MHz</p> <p>Date: 6.SEP.2023 16:35:28</p>




<p>Low(2M)</p>	<p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -12.78 dBm  *VBW 10 kHz    SWT 340 ms    2.402060000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.402 GHz    300 kHz/    Span 3 MHz</p> <p>Date: 6.SEP.2023 16:35:46</p>
<p>Middle(2M)</p>	<p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -13.00 dBm  *VBW 10 kHz    SWT 340 ms    2.440060000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.44 GHz    300 kHz/    Span 3 MHz</p> <p>Date: 6.SEP.2023 16:36:30</p>
<p>High(2M)</p>	<p>Ref 20 dBm    *Att 30 dB    *RBW 3 kHz    Marker 1 [T1]    -13.87 dBm  *VBW 10 kHz    SWT 340 ms    2.480060000 GHz</p> <p>20 Offset 1 dB</p> <p>Center 2.48 GHz    300 kHz/    Span 3 MHz</p> <p>Date: 6.SEP.2023 16:36:44</p>

## APPENDIX B

---

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(BLE)1M	Low	690	≥500
	Middle	690	≥500
	High	696	≥500
GFSK(BLE)2M	Low	1070	≥500
	Middle	1100	≥500
	High	1130	≥500

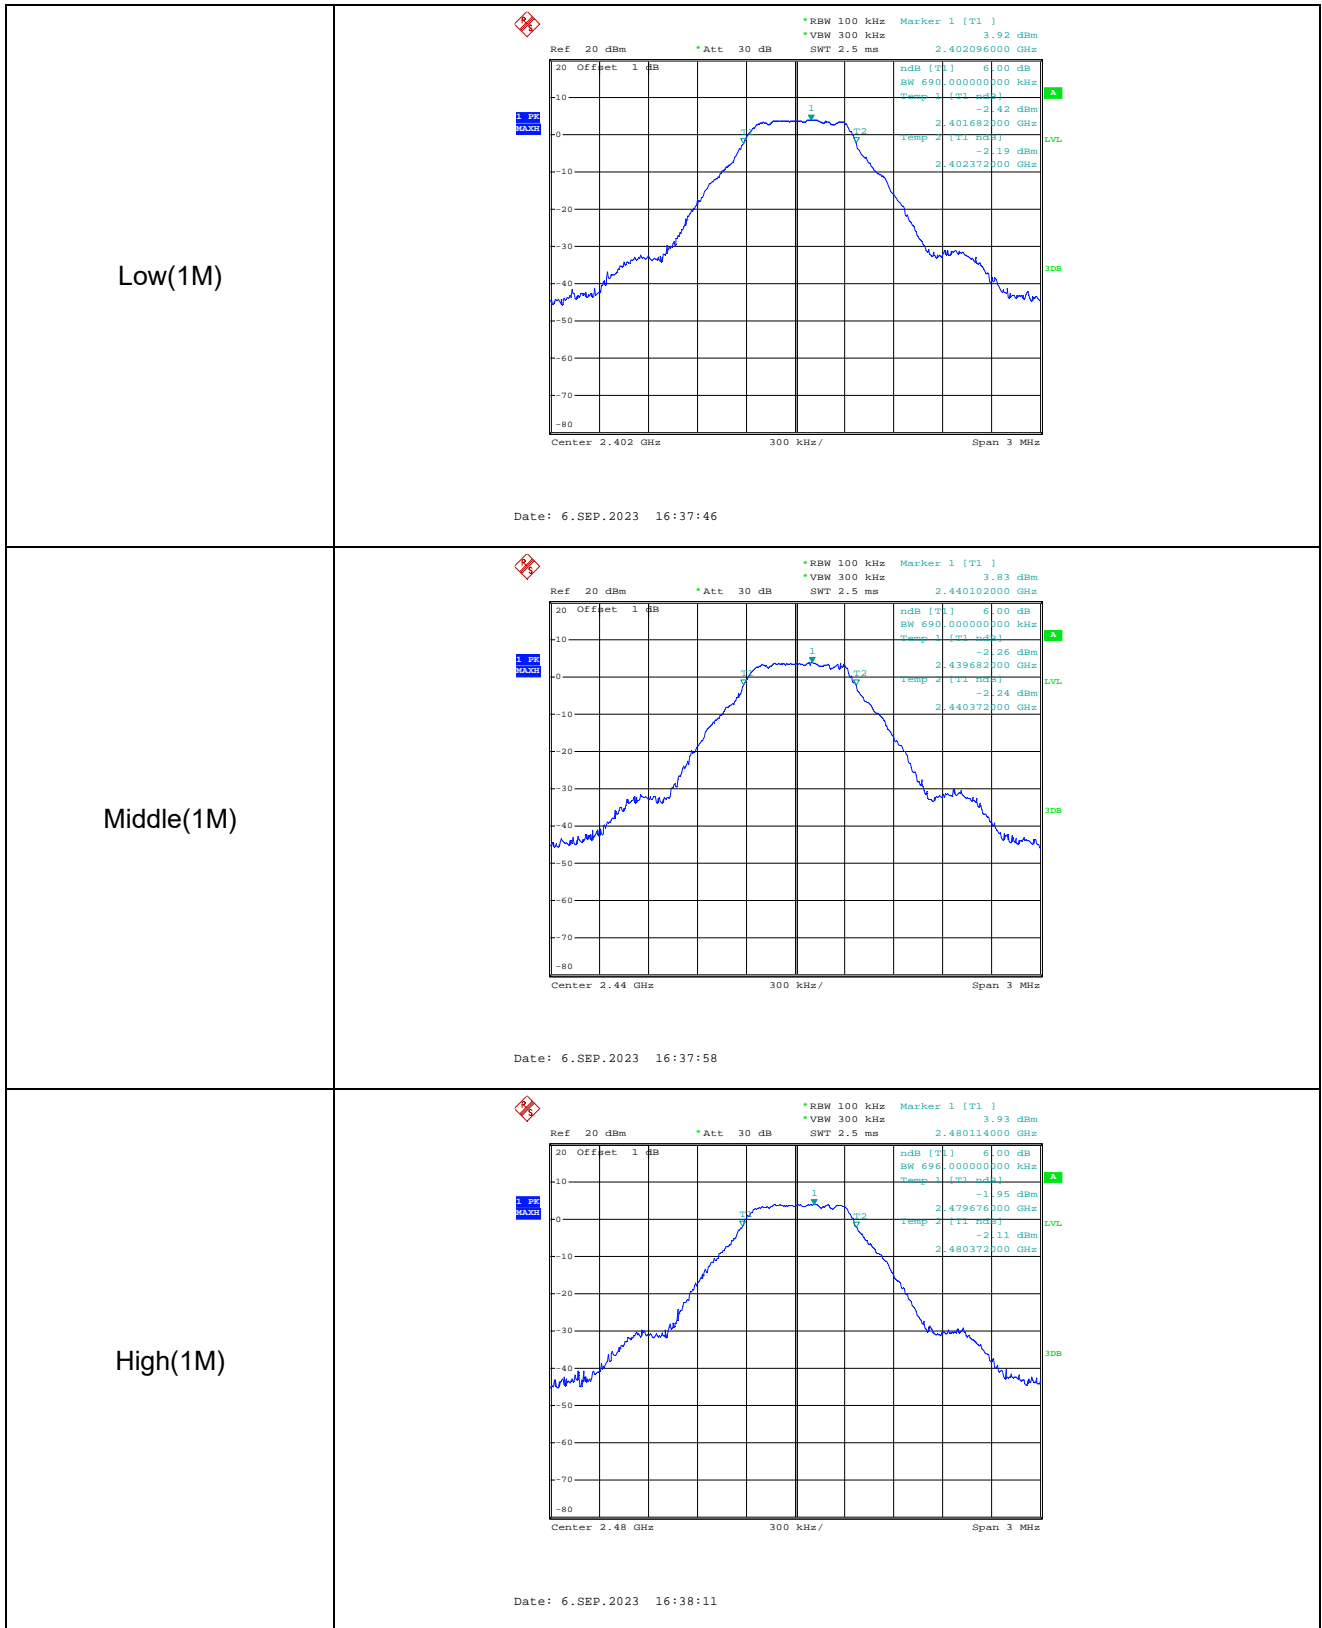




<p>Low(2M)</p>	<p>Date: 6.SEP.2023 16:38:32</p>
<p>Middle(2M)</p>	<p>Date: 6.SEP.2023 16:38:47</p>
<p>High(2M)</p>	<p>Date: 6.SEP.2023 16:39:06</p>

## APPENDIX C

---




RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
GFSK(BLE)-1M	Low	3.89	30.00
	Middle	3.95	30.00
	High	4.01	30.00
GFSK(BLE)-2M	Low	3.89	30.00
	Middle	3.95	30.00
	High	4.01	30.00

<p>Low(1M)</p>	<p>Date: 6.SEP.2023 16:32:57</p>
<p>Middle(1M)</p>	<p>Date: 6.SEP.2023 16:33:12</p>
<p>High(1M)</p>	<p>Date: 6.SEP.2023 16:33:25</p>

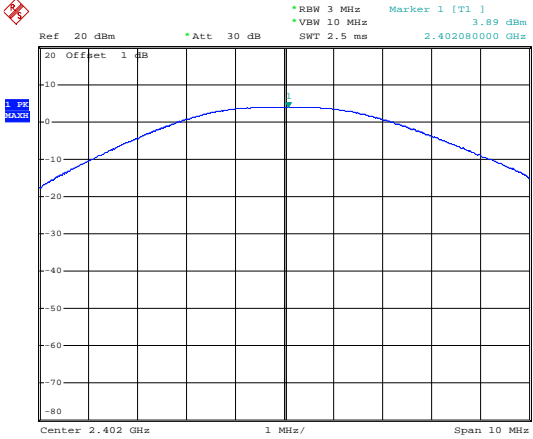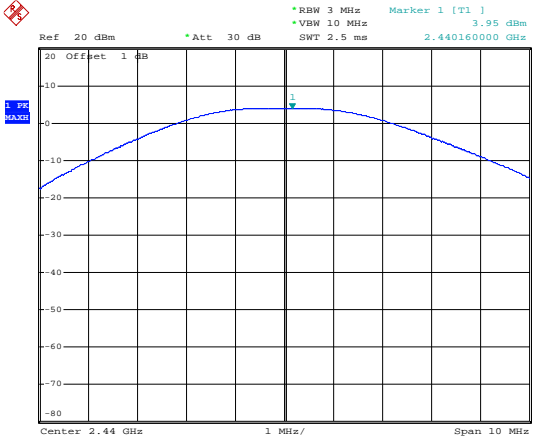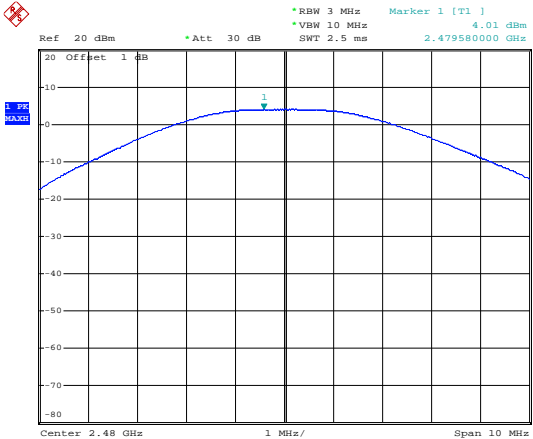
<p>Low(2M)</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] 3.89 dBm          *VBW 10 MHz SWT 2.5 ms 2.40200000 GHz</p> <p>Center 2.402 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 6.SEP.2023 16:33:41</p>
<p>Middle(2M)</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] 3.95 dBm          *VBW 10 MHz SWT 2.5 ms 2.44016000 GHz</p> <p>Center 2.44 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 6.SEP.2023 16:34:02</p>
<p>High(2M)</p>	 <p>Ref 20 dBm *Att 30 dB *RBW 3 MHz Marker 1 [T1] 4.01 dBm          *VBW 10 MHz SWT 2.5 ms 2.47958000 GHz</p> <p>Center 2.48 GHz 1 MHz/ Span 10 MHz</p> <p>Date: 6.SEP.2023 16:34:15</p>

# APPENDIX D


## Conducted Out of Band Emissions
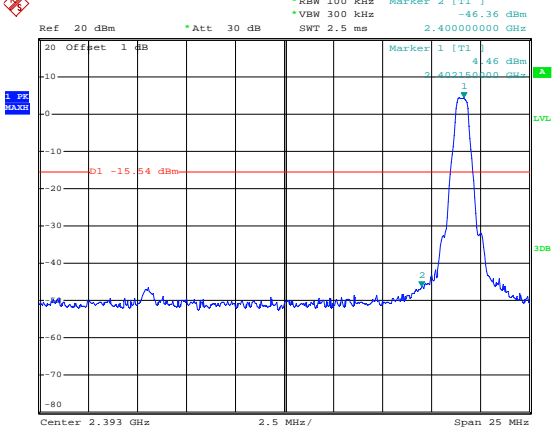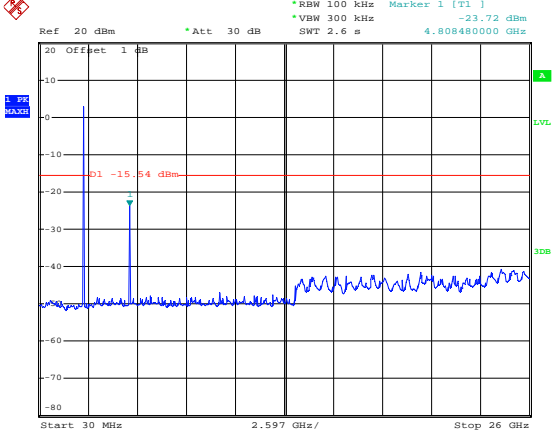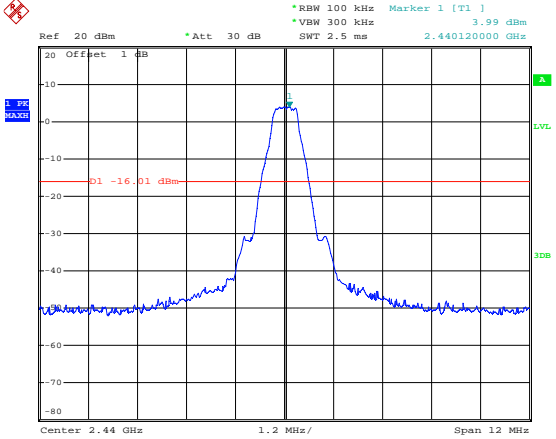
<p>Low1Mbps</p>	 <p>Ref 20 dBm *Att 30 dB RBW 100 kHz Marker 2 [T1] -46.36 dBm VBW 300 kHz 2.40000000 GHz SWT 2.5 ms</p> <p>Offset 1 dB Marker: 1 [T1] 4.46 dBm 2.40216000 GHz</p> <p>D1 -15.94 dBm</p> <p>Center 2.393 GHz 2.5 MHz/ Span 25 MHz</p> <p>Date: 6.SEP.2023 16:40:06</p>
	 <p>Ref 20 dBm *Att 30 dB RBW 100 kHz Marker 1 [T1] -23.72 dBm VBW 300 kHz 4.80848000 GHz SWT 2.6 s</p> <p>Offset 1 dB Marker: 1 [T1]</p> <p>D1 -15.94 dBm</p> <p>Start 30 MHz 2.597 GHz/ Step 26 GHz</p> <p>Date: 6.SEP.2023 16:40:19</p>
<p>Middle1Mbps</p>	 <p>Ref 20 dBm *Att 30 dB RBW 100 kHz Marker 1 [T1] 3.99 dBm VBW 300 kHz 2.44012000 GHz SWT 2.5 ms</p> <p>Offset 1 dB Marker: 1 [T1]</p> <p>D1 -16.01 dBm</p> <p>Center 2.44 GHz 1.2 MHz/ Span 12 MHz</p> <p>Date: 6.SEP.2023 16:40:50</p>




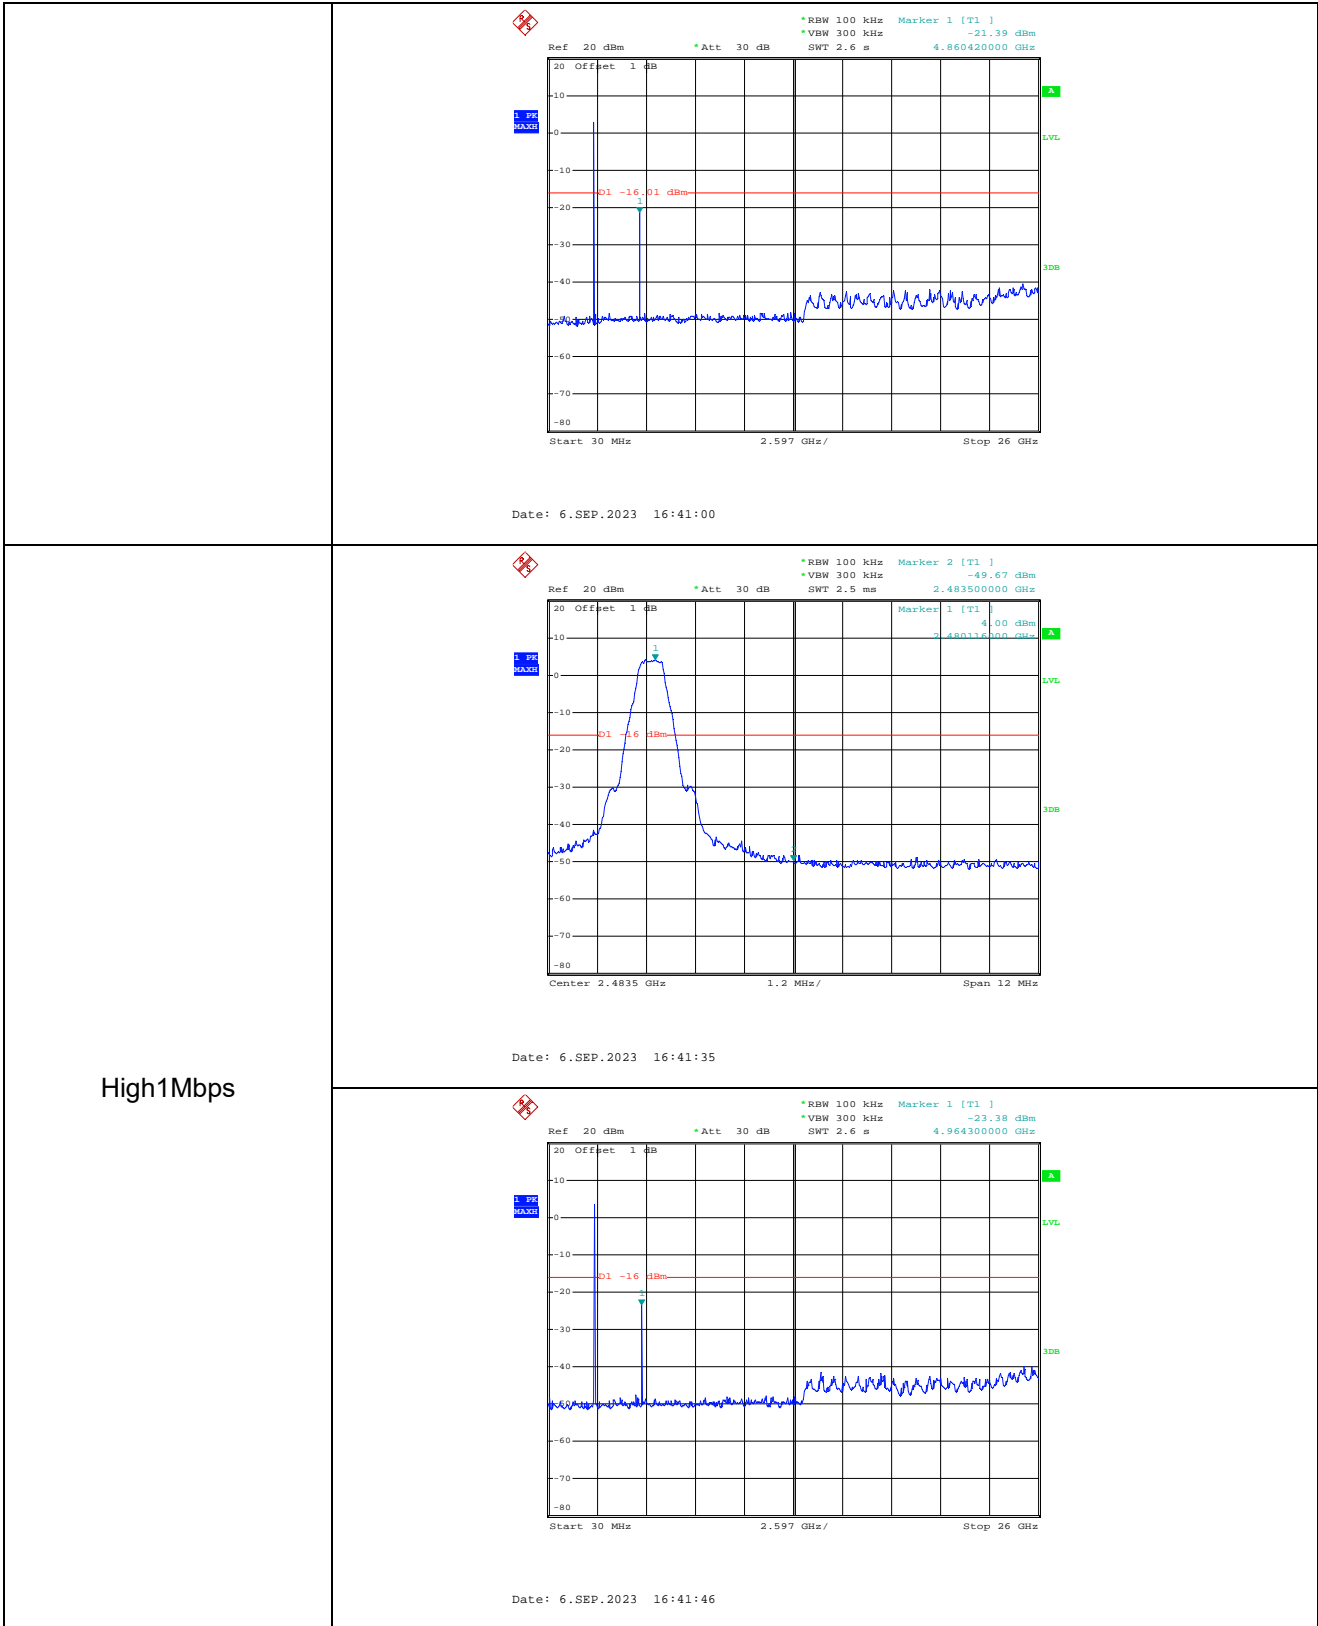

Low2Mbps

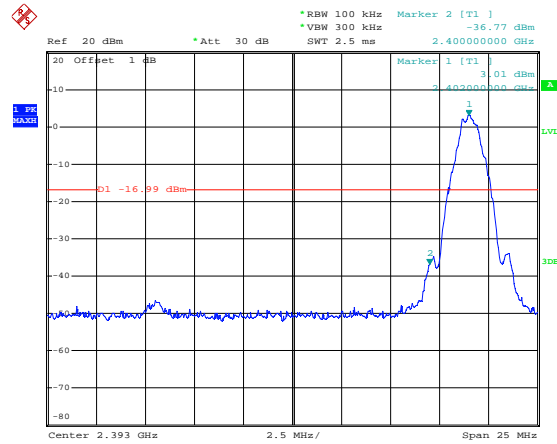


Date: 6.SEP.2023 16:42:38

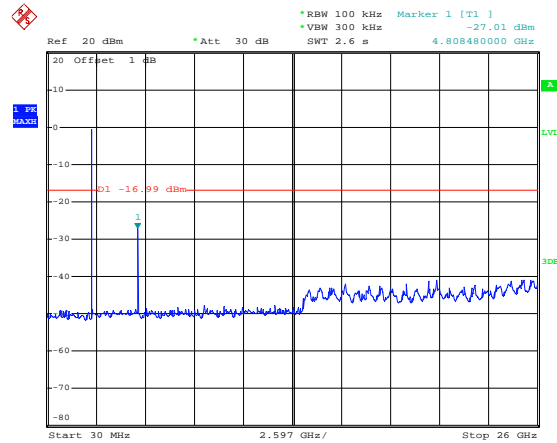


Date: 6.SEP.2023 16:42:49

Middle2Mbps

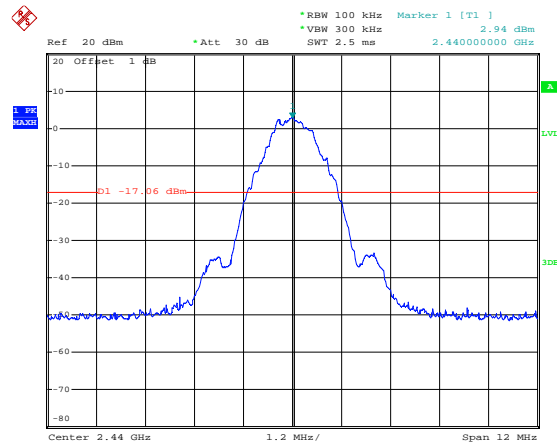

Date: 6.SEP.2023 16:43:30

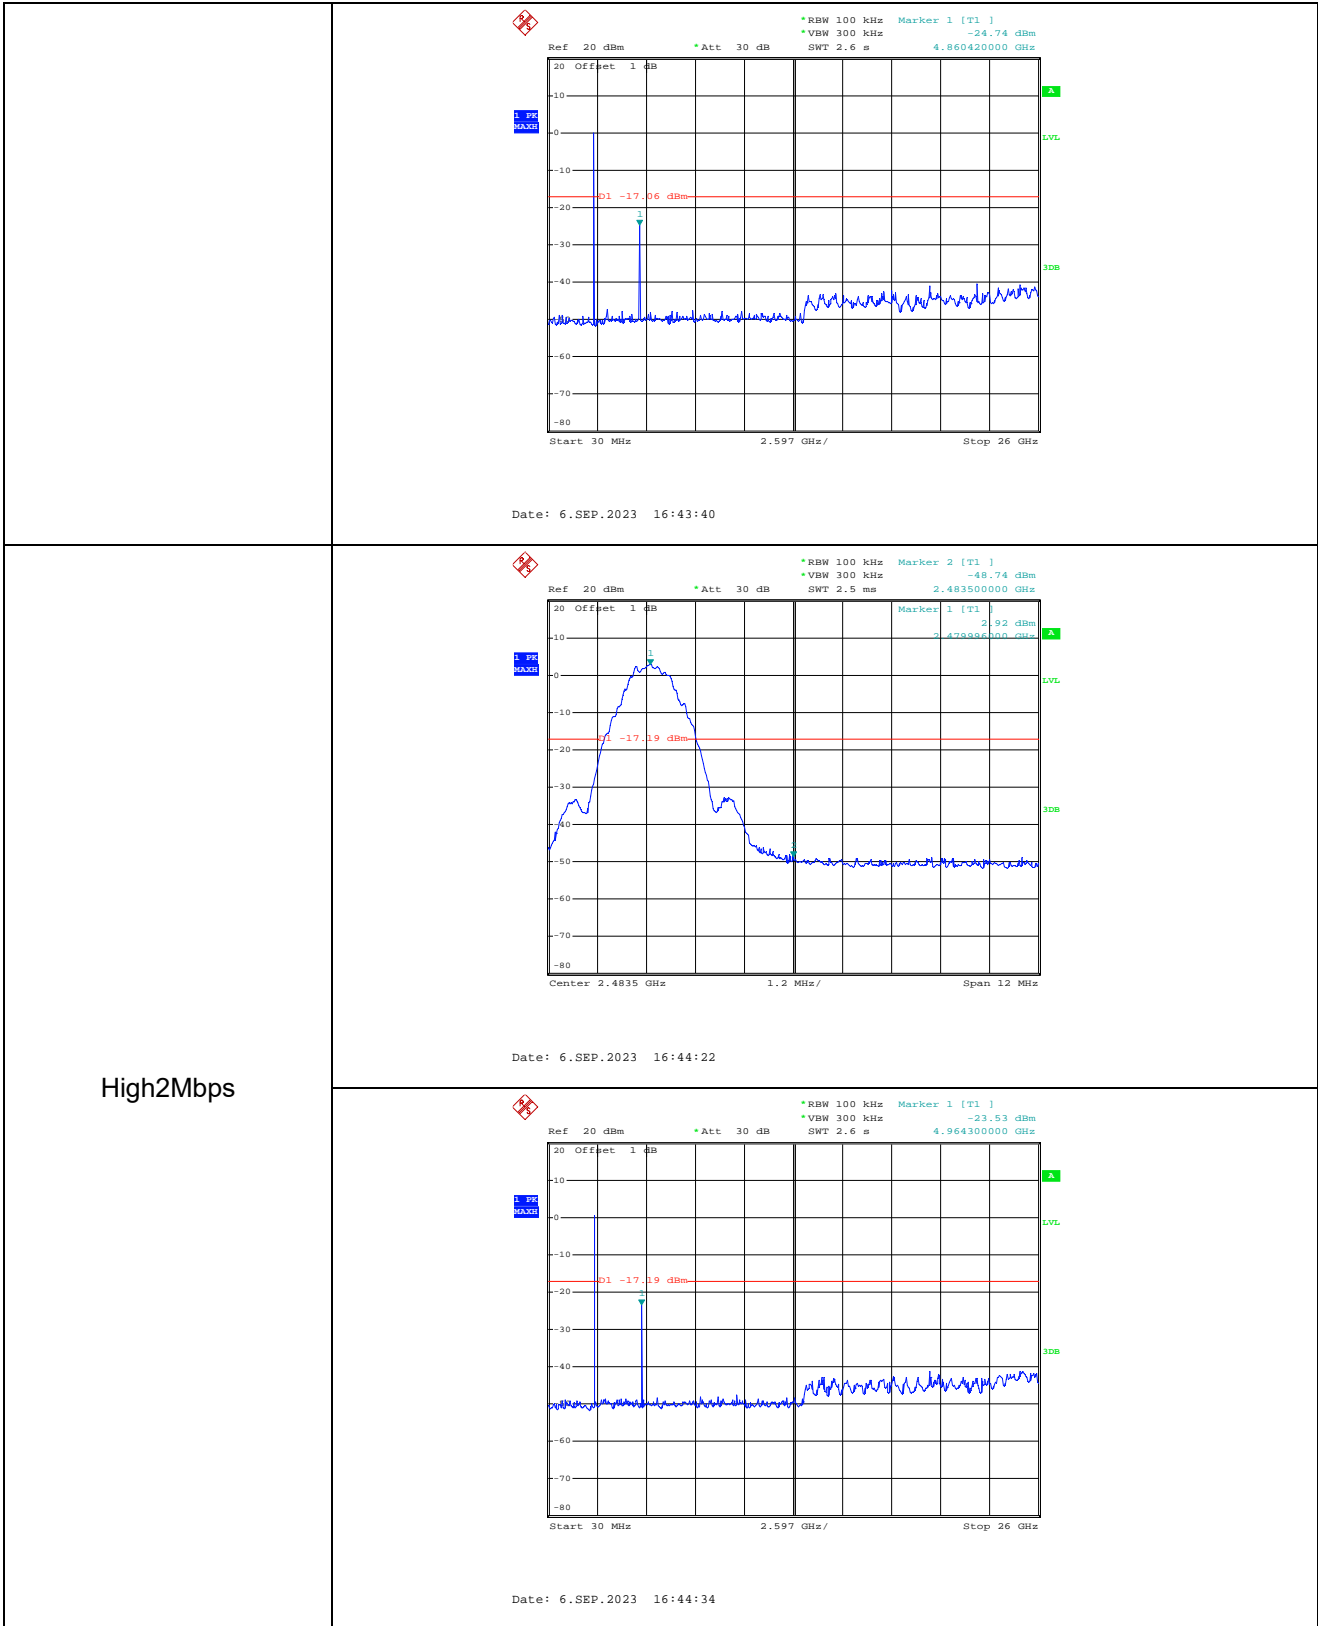

## APPENDIX PHOTOGRAPHS

---

Please refer to "ANNEX"

\*\*\*\* END OF REPORT \*\*\*\*