

TEST REPORT

Reference No..... : WTX22X12243358W002
FCC ID : 2AUTE-8TT22G
Applicant : Xiamen Hanin Electronic Technology Co.,Ltd.
Address..... : Room 305A, Angye Building, Pioneering Park,Torch High-tech,Zone,Xiamen
Manufacturer : The same as Applicant
Address..... : The same as Applicant
Product Name : WIRELESS AI PRINTER, AI PRINTER
Model No..... : GT1
Standards : FCC Part 15.247
Date of Receipt sample : 2022-12-02
Date of Test..... : 2022-12-02 to 2023-02-15
Date of Issue : 2023-02-15
Test Report Form No. : WTX_Part 15_247W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:


Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Approved by:



Dashan Chen



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	11
3. ANTENNA REQUIREMENT	12
3.1 STANDARD APPLICABLE	12
3.2 EVALUATION INFORMATION	12
4. POWER SPECTRAL DENSITY	13
4.1 STANDARD APPLICABLE	13
4.2 TEST SETUP BLOCK DIAGRAM	13
4.3 TEST PROCEDURE	13
4.4 SUMMARY OF TEST RESULTS/PLOTS	13
5. DTS BANDWIDTH	14
5.1 STANDARD APPLICABLE	14
5.2 TEST SETUP BLOCK DIAGRAM	14
5.3 TEST PROCEDURE	14
5.4 SUMMARY OF TEST RESULTS/PLOTS	14
6. RF OUTPUT POWER	15
6.1 STANDARD APPLICABLE	15
6.2 TEST SETUP BLOCK DIAGRAM	15
6.3 TEST PROCEDURE	15
6.4 SUMMARY OF TEST RESULTS/PLOTS	15
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	16
7.1 STANDARD APPLICABLE	16
7.2 TEST PROCEDURE	16
7.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
7.4 SUMMARY OF TEST RESULTS/PLOTS	18
8. OUT OF BAND EMISSIONS	24
8.1 STANDARD APPLICABLE	24
8.2 TEST PROCEDURE	24
8.3 SUMMARY OF TEST RESULTS/PLOTS	25
9. CONDUCTED EMISSIONS	30
9.1 TEST PROCEDURE	30
9.2 BASIC TEST SETUP BLOCK DIAGRAM	30
9.3 TEST RECEIVER SETUP	30
9.4 SUMMARY OF TEST RESULTS/PLOTS	30
APPENDIX SUMMARY	35
APPENDIX A	36
APPENDIX B	39
APPENDIX C	42
APPENDIX D	45
APPENDIX PHOTOGRAPHS	49

Report version

Version No.	Date of issue	Description
Rev.00	2023-02-15	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	WIRELESS AI PRINTER, AI PRINTER
Trade Name	HPRT, iDPRT
Model No.:	GT1
Adding Model(s):	Future 999
Rated Voltage:	DC 14V
Power Adapter 1#:	GMB36-140200-D Input:AC100-240 50/60Hz 1.5A Output:DC14V2.0A
Power Adapter 2#:	AP091G-140250 Input:AC100-240 50/60Hz 1.5A Output:DC14V2.5A
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model GT1, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Bluetooth Version:	V5.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	1Mbps: 2.86dBm (Conducted) 2Mbps: 2.94dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	0.9dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under section 15.247 of the Fcc rules.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.5	Unshielded	Without Ferrite
DC Cable	1.0	Unshielded	Without Ferrite
AC Cable	1.5	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi 100-14IBD	PF0F4ABV
Phone	XIAOMI	MI10	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-26GHz ±3.92dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2022-03-25	2023-03-24
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2022-03-22	2023-03-21
SMET-1313	Spectrum Analyzer	Agilent	N9020A	MY54320548	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1008	Amplifier	HP	8447F	2805A03475	2022-01-07	2023-01-06
					2022-12-30	2023-12-29
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2022-03-22	2023-03-21

SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
					2022-12-30	2023-12-29
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
<input checked="" type="checkbox"/> Conducted Room 1#						
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-21	2023-03-20
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
SEMT-1003	AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
<input type="checkbox"/> Conducted Room 2#						
SEMT-1334	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2022-03-22	2023-03-21
SEMT-1336	LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information


This product has a PCB antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

4.2 Test Setup Block Diagram

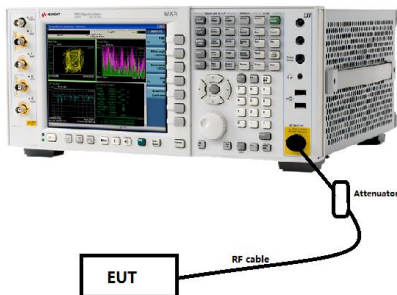

4.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

4.4 Summary of Test Results/Plots


Please refer to Appendix A

5. DTS Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928MHz, 2400–2483.5MHz, and 5725–5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

5.2 Test Setup Block Diagram

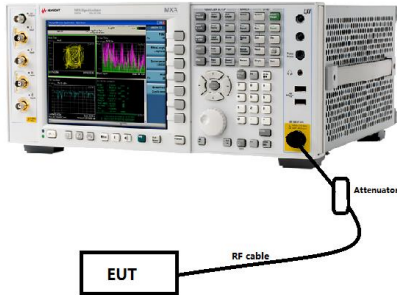

5.3 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

5.4 Summary of Test Results/Plots


Please refer to Appendix B

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz bands: 1 Watt.

6.2 Test Setup Block Diagram

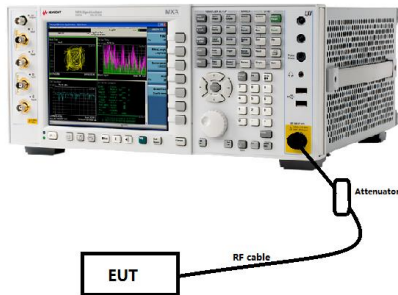

6.3 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

6.4 Summary of Test Results/Plots

Please refer to Appendix C

7. Field Strength of Spurious Emissions

7.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

7.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

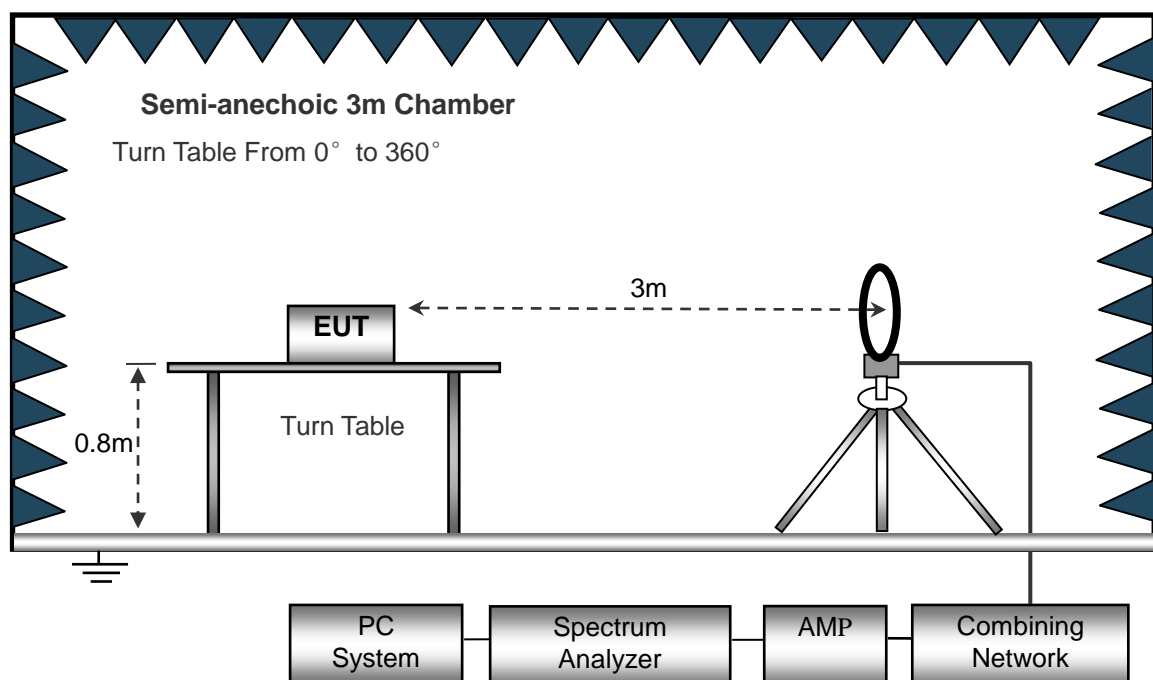

The test setup for emission measurement from 30MHz to 1GHz.

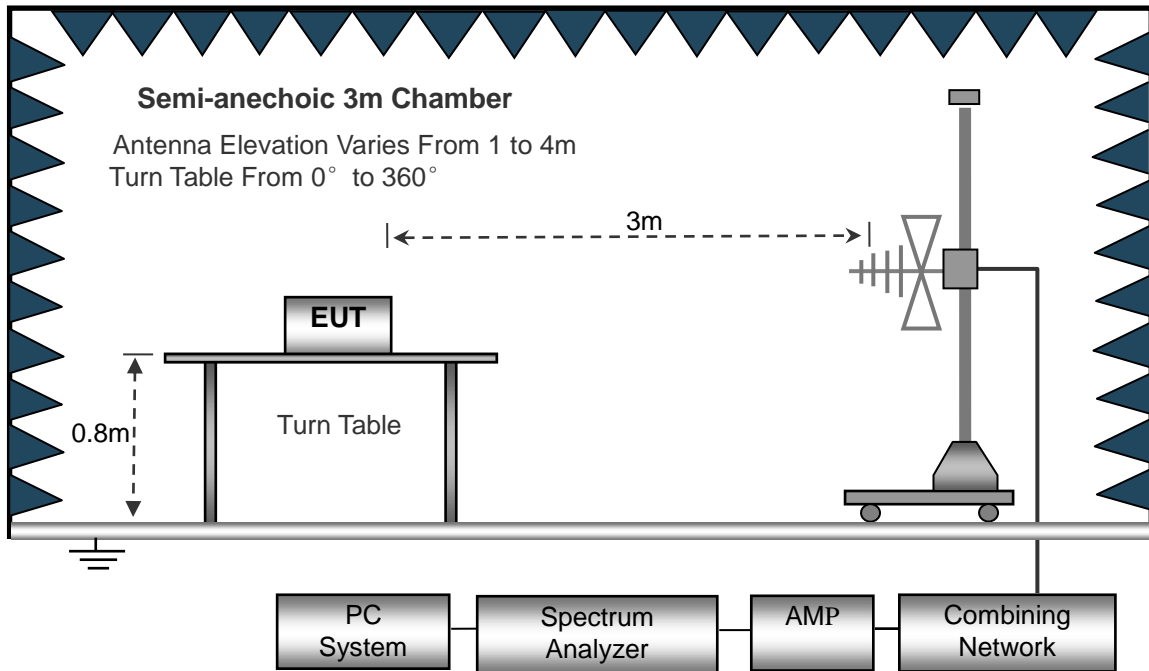

The test setup for emission measurement above 1GHz.

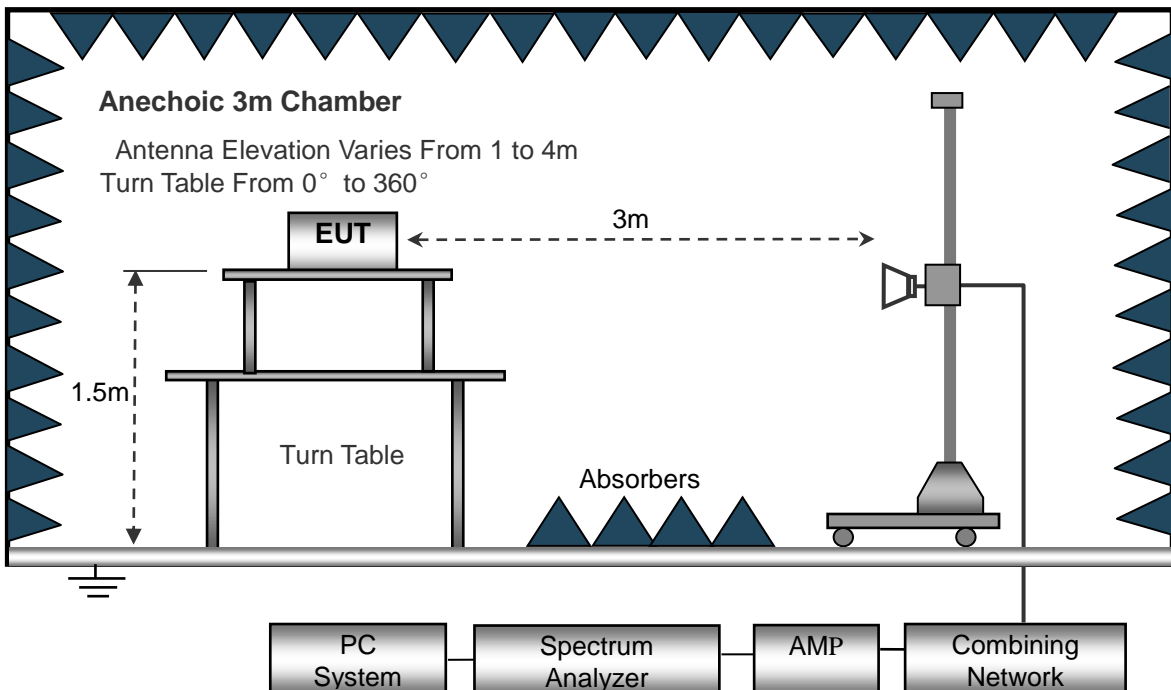

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold

Reference No.: WTX22X12243358W002

Detector function = peak

Detector function = peak, QP

Detector function = peak, AV

7.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The "**Margin**" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emissions Below 1GHz
- 1Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

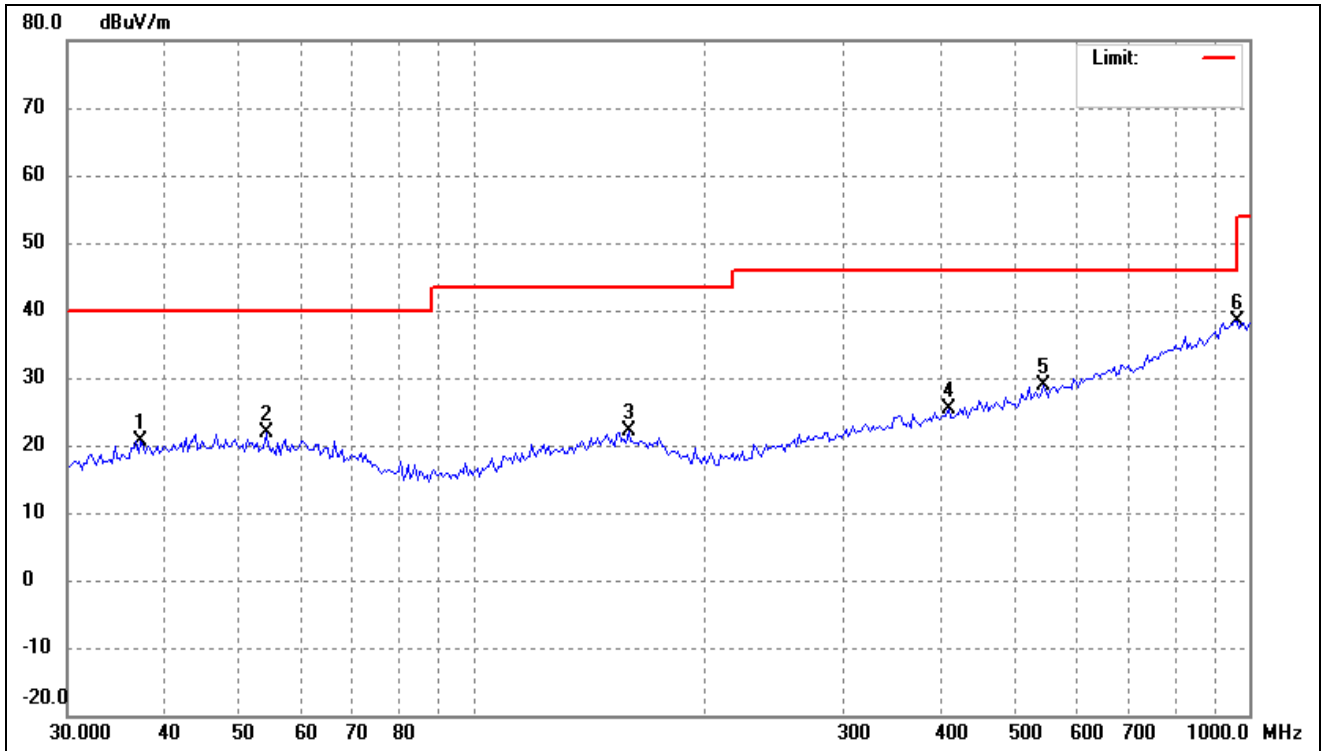

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.3017	29.71	-8.99	20.72	40.00	-19.28	-	-	peak
2	54.1349	30.48	-8.48	22.00	40.00	-18.00	-	-	peak
3	158.6399	31.02	-8.95	22.07	43.50	-21.43	-	-	peak
4	409.6506	32.03	-6.56	25.47	46.00	-20.53	-	-	peak
5	542.6104	33.14	-4.16	28.98	46.00	-17.02	-	-	peak
6	958.7135	35.08	3.18	38.26	46.00	-7.74	-	-	peak


Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

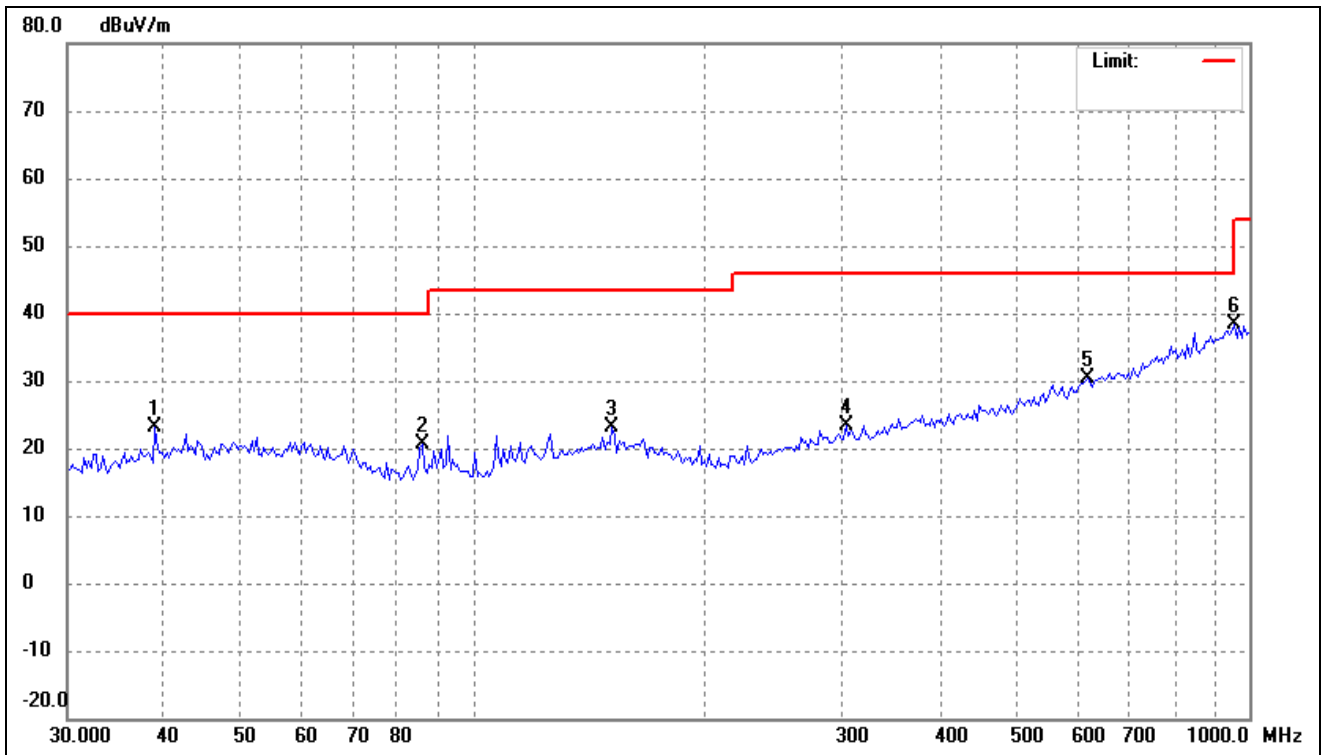

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.9081	31.88	-8.65	23.23	40.00	-16.77	-	-	peak
2	86.0796	34.03	-13.30	20.73	40.00	-19.27	-	-	peak
3	151.0252	32.13	-8.95	23.18	43.50	-20.32	-	-	peak
4	302.8193	31.89	-8.40	23.49	46.00	-22.51	-	-	peak
5	620.1167	32.55	-2.06	30.49	46.00	-15.51	-	-	peak
6	958.7135	35.26	3.18	38.44	46.00	-7.56	-	-	peak


➤ 2Mbps

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

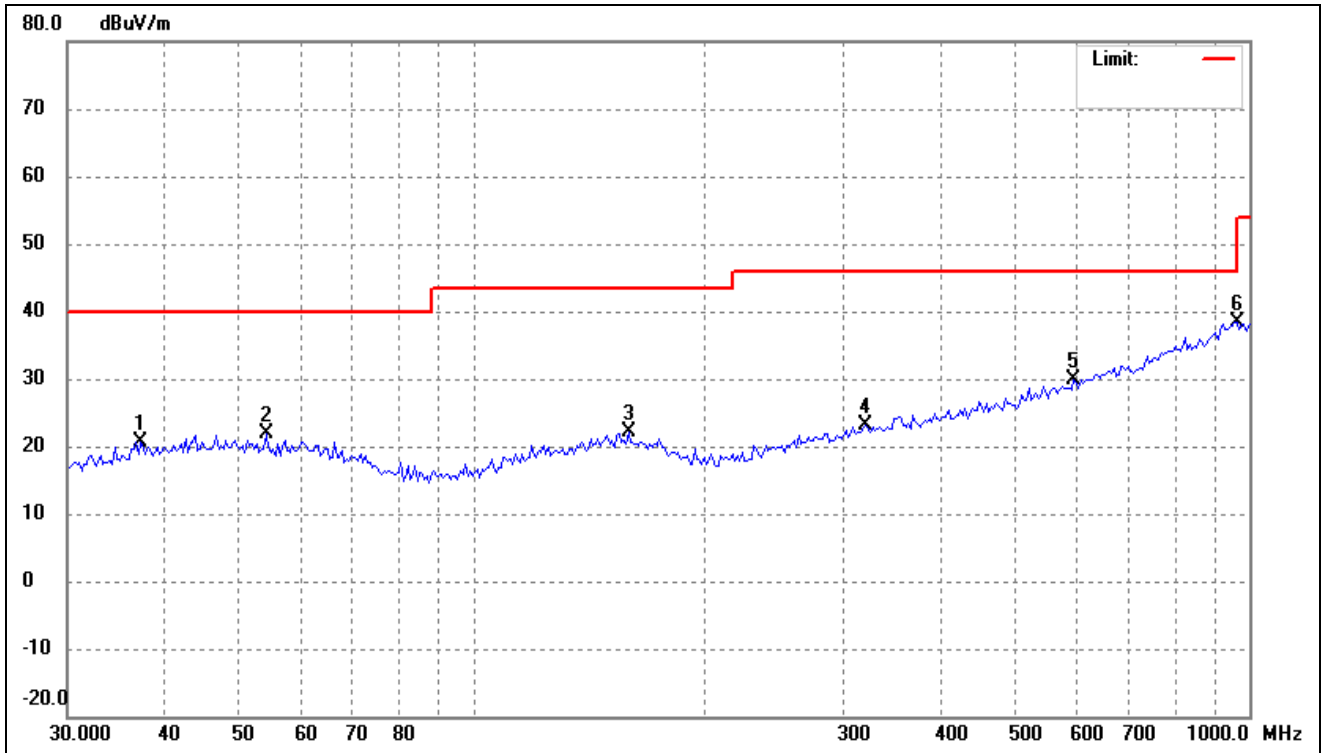

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	37.3017	29.71	-8.99	20.72	40.00	-19.28	-	-	peak
2	54.1349	30.48	-8.48	22.00	40.00	-18.00	-	-	peak
3	158.6399	31.02	-8.95	22.07	43.50	-21.43	-	-	peak
4	320.3306	31.25	-8.00	23.25	46.00	-22.75	-	-	peak
5	594.5143	32.63	-2.63	30.00	46.00	-16.00	-	-	peak
6	965.4742	35.29	3.20	38.49	54.00	-15.51	-	-	peak

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

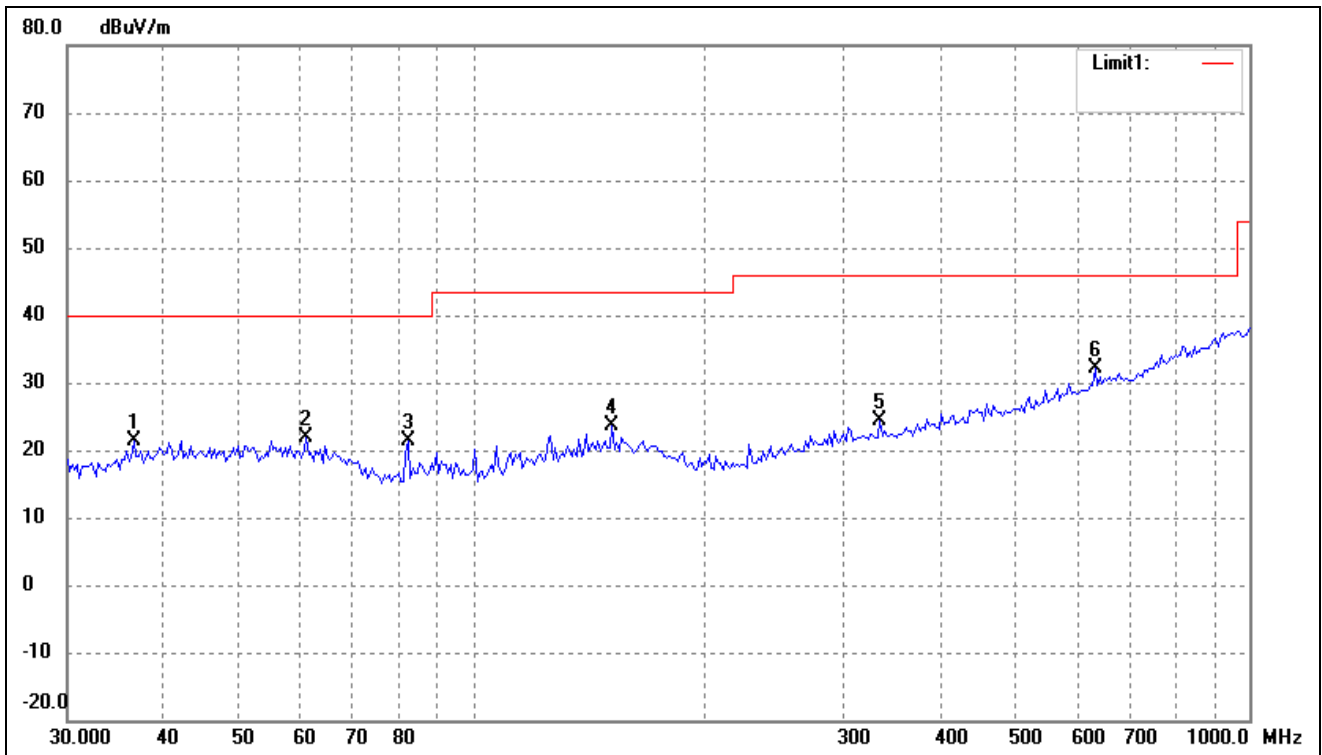

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.5235	30.45	-9.16	21.29	40.00	-18.71	-	-	peak
2	61.0041	30.97	-9.12	21.85	40.00	-18.15	-	-	peak
3	82.5257	34.67	-13.22	21.45	40.00	-18.55	-	-	peak
4	151.0251	32.59	-8.95	23.64	43.50	-19.86	-	-	peak
5	334.1255	32.24	-7.80	24.44	46.00	-21.56	-	-	peak
6	633.3284	33.97	-1.88	32.09	46.00	-13.91	-	-	peak

Remark: '-Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

➤ Spurious Emissions Above 1GHz

1Mbps

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804.000	55.74	-14.52	41.22	74.00	-32.78	H	PK
7206.000	56.73	-10.14	46.59	74.00	-27.41	H	PK
4804.000	56.63	-14.52	42.11	74.00	-31.89	V	PK
7206.000	56.02	-10.14	45.88	74.00	-28.12	V	PK
Middle Channel-2440MHz							
4880.000	56.49	-14.47	42.02	74.00	-31.98	H	PK
7320.000	56.17	-10.60	45.57	74.00	-28.43	H	PK
4880.000	56.58	-14.47	42.11	74.00	-31.89	V	PK
7320.000	56.31	-10.60	45.71	74.00	-28.29	V	PK
High Channel-2480MHz							
4960.000	56.61	-14.42	42.19	74.00	-31.81	H	PK
7440.000	57.23	-11.08	46.15	74.00	-27.85	H	PK
4960.000	56.66	-14.42	42.24	74.00	-31.76	V	PK
7440.000	57.12	-11.08	46.04	74.00	-27.96	V	PK

2Mbps

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804.000	56.31	-14.52	41.79	74.00	-32.21	H	PK
7206.000	56.65	-10.14	46.51	74.00	-27.49	H	PK
4804.000	55.41	-14.52	40.89	74.00	-33.11	V	PK
7206.000	56.84	-10.14	46.70	74.00	-27.30	V	PK
Middle Channel-2440MHz							
4880.000	56.27	-14.47	41.80	74.00	-32.20	H	PK
7320.000	55.90	-10.60	45.30	74.00	-28.70	H	PK
4880.000	56.32	-14.47	41.85	74.00	-32.15	V	PK
7320.000	56.91	-10.60	46.31	74.00	-27.69	V	PK
High Channel-2480MHz							
4960.000	55.69	-14.42	41.27	74.00	-32.73	H	PK
7440.000	57.37	-11.08	46.29	74.00	-27.71	H	PK
4960.000	55.72	-14.42	41.30	74.00	-32.70	V	PK
7440.000	57.49	-11.08	46.41	74.00	-27.59	V	PK

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission

must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

RBW as a function of frequency

Frequency	RBW
9kHz to 150kHz	200Hz to 300Hz
0.15MHz to 30MHz	9kHz to 10kHz
30MHz to 1000MHz	100kHz to 120kHz
>1000MHz	1MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

8.3 Summary of Test Results/Plots

➤ Radiated test


1Mbps

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

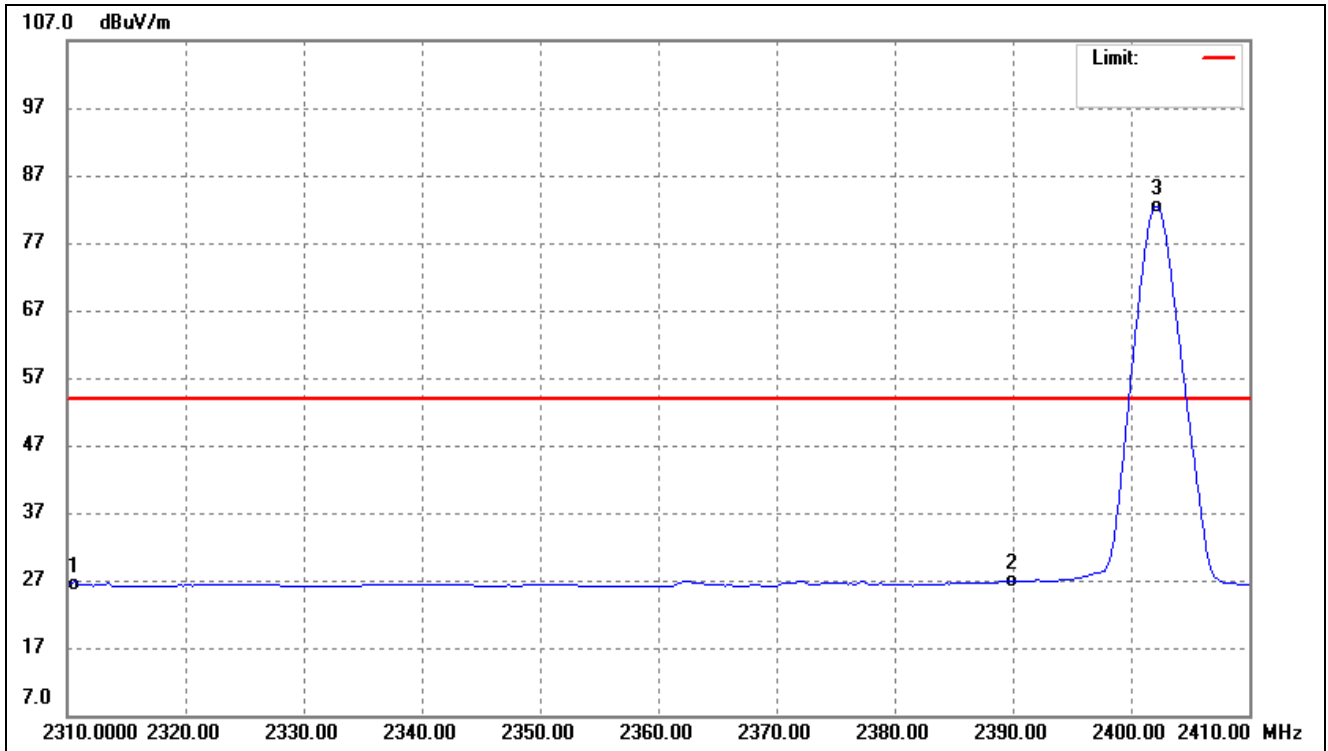

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	44.48	-18.19	26.29	54.00	-27.71	Average Detector
	2310.000	57.78	-18.19	39.59	74.00	-34.41	Peak Detector
2	2390.000	45.02	-18.23	26.79	54.00	-27.21	Average Detector
	2390.000	57.93	-18.23	39.70	74.00	-34.30	Peak Detector
3	2402.184	100.66	-18.23	82.43	/	/	Average Detector
	2401.984	112.15	-18.24	93.91	/	/	Peak Detector


Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

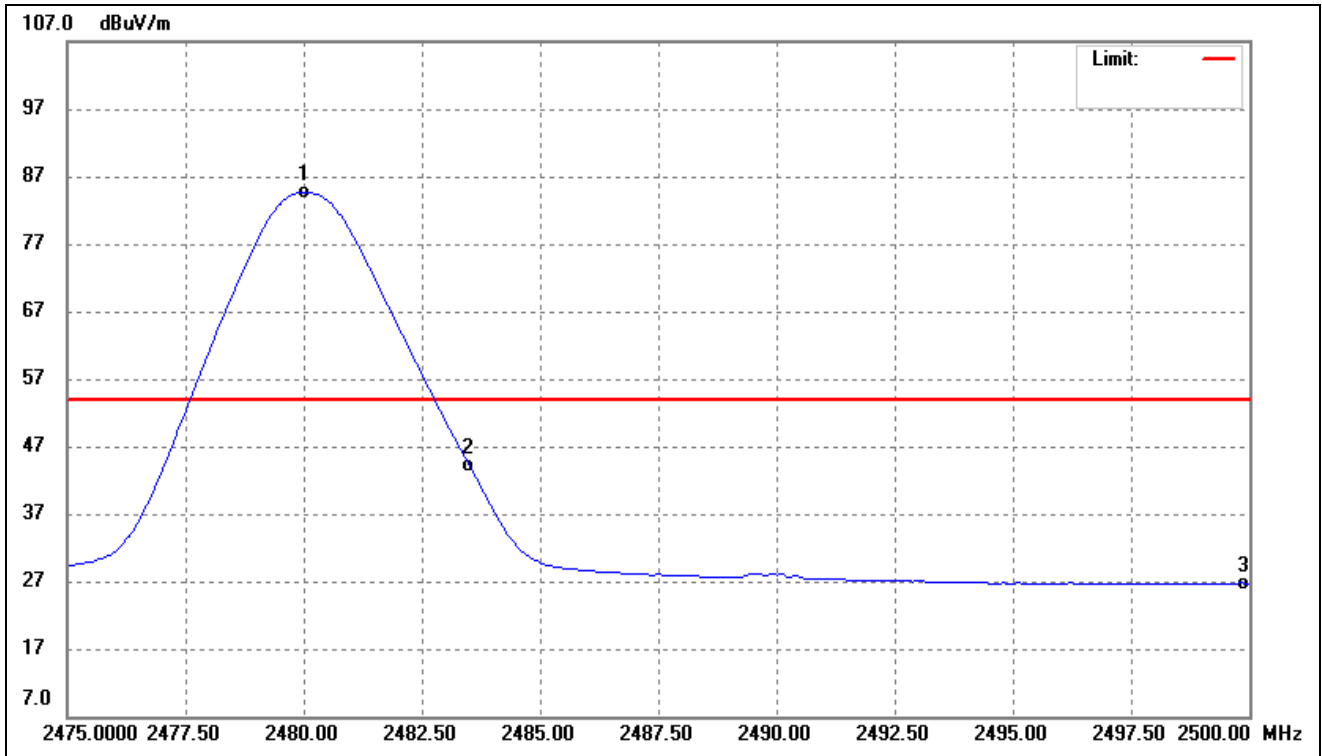

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.010	102.68	-18.04	84.64	/	/	Average Detector
	2479.960	114.23	-18.04	96.19	/	/	Peak Detector
2	2483.500	62.04	-18.03	44.01	54.00	-9.99	Average Detector
	2483.500	71.06	-18.03	53.03	74.00	-20.97	Peak Detector
3	2500.000	44.71	-17.99	26.72	54.00	-27.28	Average Detector
	2500.000	60.23	-17.99	42.24	74.00	-31.76	Peak Detector


2Mbps

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

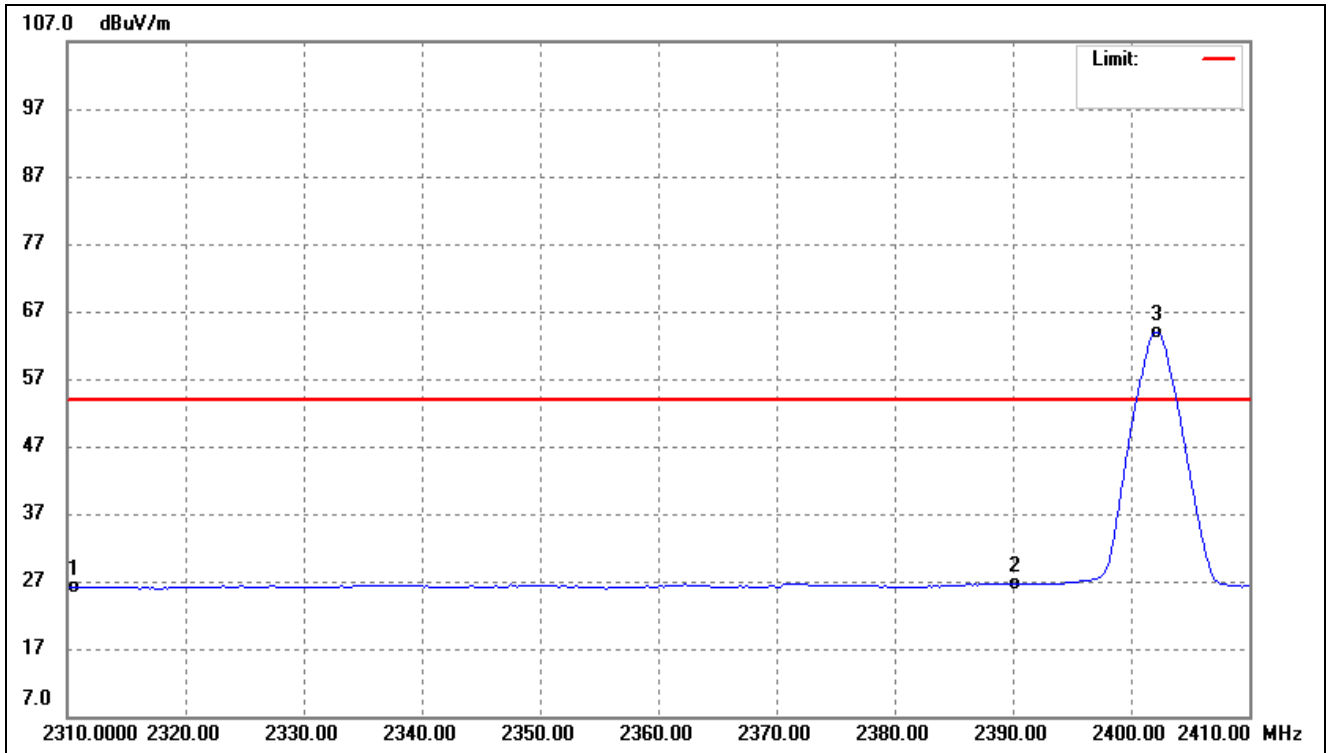

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	44.39	-18.19	26.20	54.00	-27.80	Average Detector
	2310.000	58.98	-18.19	40.79	74.00	-33.21	Peak Detector
2	2390.000	44.84	-18.23	26.61	54.00	-27.39	Average Detector
	2390.000	58.29	-18.23	40.06	74.00	-33.94	Peak Detector
3	2402.184	82.23	-18.23	64.00	/	/	Average Detector
	2401.984	112.16	-18.24	93.92	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

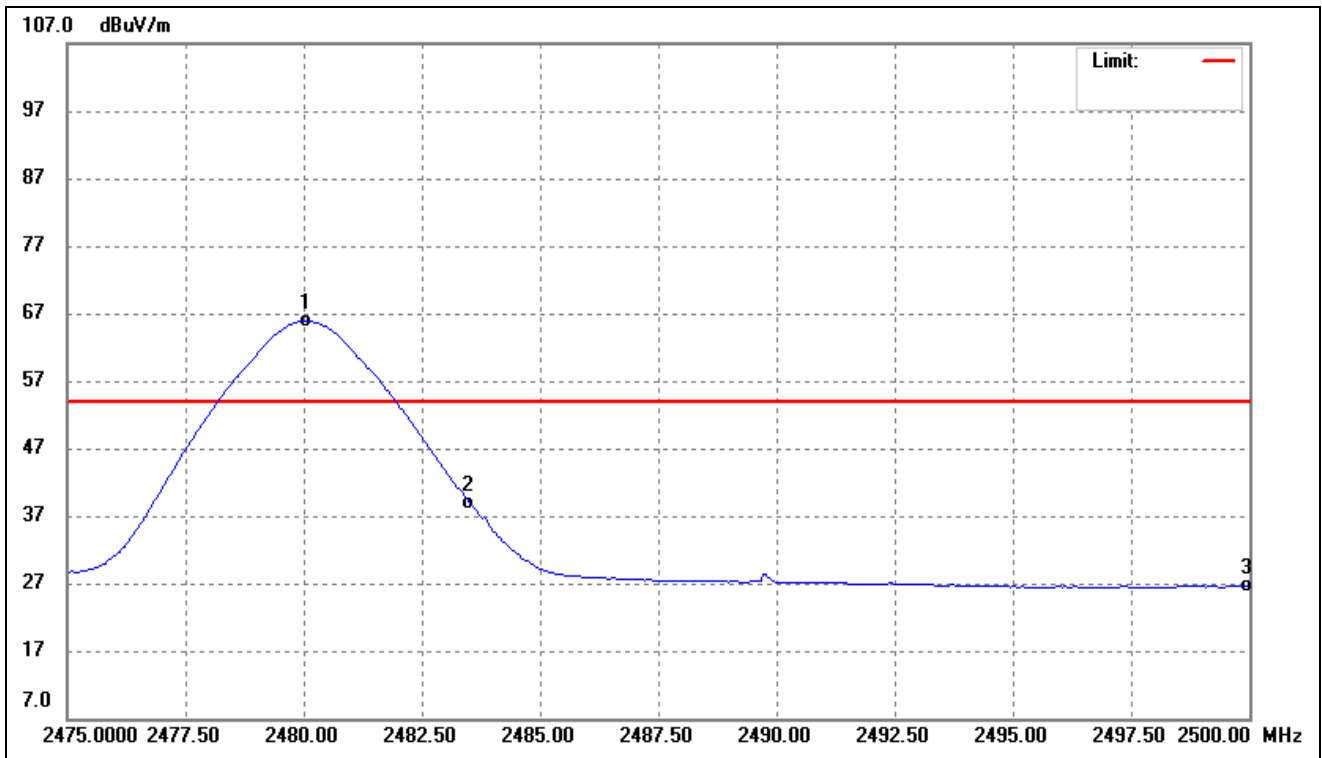

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.060	83.90	-18.04	65.86	/	/	Average Detector
	2479.960	114.24	-18.04	96.20	/	/	Peak Detector
2	2483.500	56.89	-18.03	38.86	54.00	-15.14	Average Detector
	2483.500	74.43	-18.03	56.40	74.00	-17.60	Peak Detector
3	2500.000	44.54	-17.99	26.55	54.00	-27.45	Average Detector
	2500.000	59.07	-17.99	41.08	74.00	-32.92	Peak Detector

➤ Conducted test

Please refer to Appendix D


9. Conducted Emissions

9.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

9.2 Basic Test Setup Block Diagram

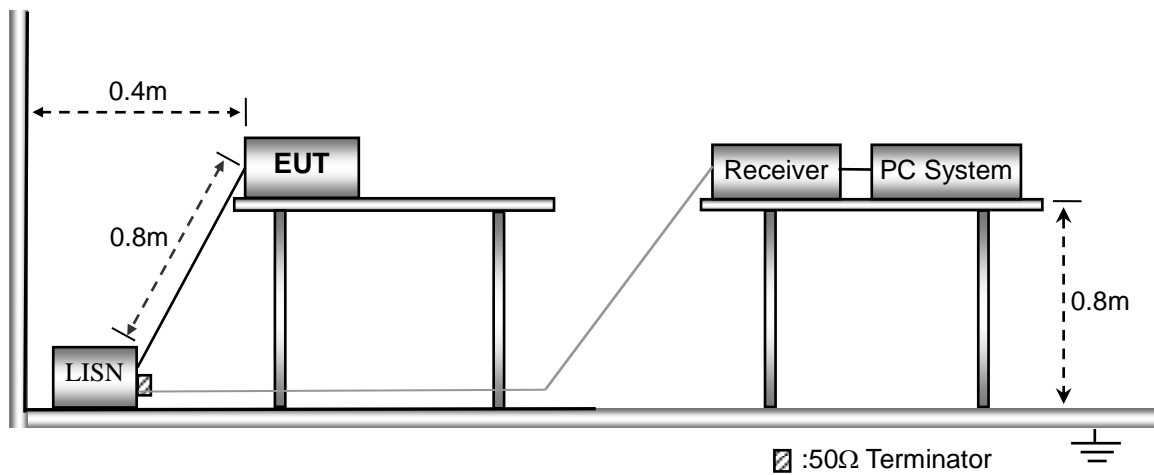

9.3 Test Receiver Setup


During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal

9.4 Summary of Test Results/Plots


1Mbps

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

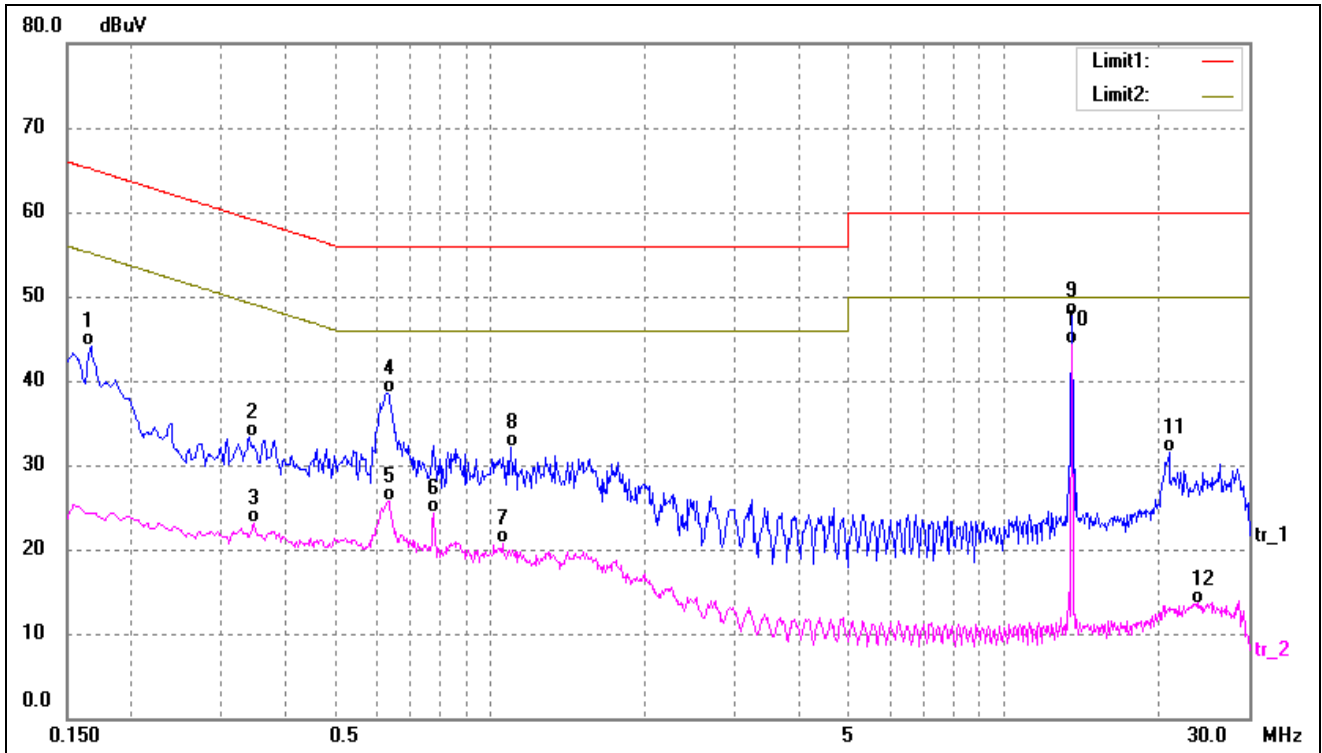

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	33.77	10.31	44.08	65.15	-21.07	QP
2	0.3380	23.01	10.23	33.24	59.25	-26.01	QP
3	0.3459	12.86	10.23	23.09	49.06	-25.97	AVG
4	0.6300	28.39	10.20	38.59	56.00	-17.41	QP
5	0.6340	15.57	10.20	25.77	46.00	-20.23	AVG
6	0.7780	14.22	10.17	24.39	46.00	-21.61	AVG
7	1.0580	10.54	10.15	20.69	46.00	-25.31	AVG
8	1.0980	21.87	10.15	32.02	56.00	-23.98	QP
9	13.5579	37.46	10.27	47.73	60.00	-12.27	QP
10*	13.5579	34.05	10.27	44.32	50.00	-5.68	AVG
11	20.9499	21.22	10.37	31.59	60.00	-28.41	QP
12	23.7379	3.21	10.38	13.59	50.00	-36.41	AVG


Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

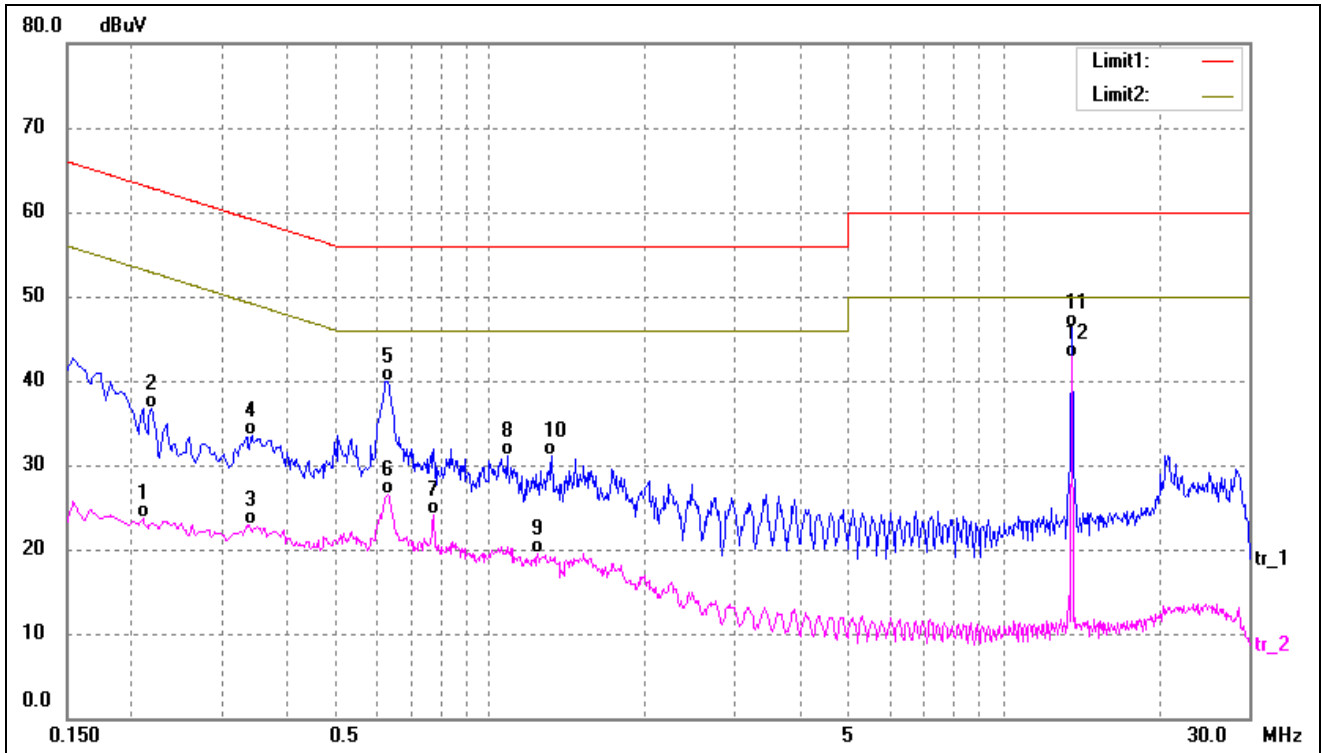

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2100	13.34	10.29	23.63	53.21	-29.58	AVG
2	0.2180	26.49	10.28	36.77	62.89	-26.12	QP
3	0.3380	12.72	10.23	22.95	49.25	-26.30	AVG
4	0.3420	23.21	10.23	33.44	59.15	-25.71	QP
5	0.6260	29.78	10.20	39.98	56.00	-16.02	QP
6	0.6300	16.21	10.20	26.41	46.00	-19.59	AVG
7	0.7780	13.88	10.17	24.05	46.00	-21.95	AVG
8	1.0780	20.87	10.15	31.02	56.00	-24.98	QP
9	1.2380	9.39	10.16	19.55	46.00	-26.45	AVG
10	1.3180	21.01	10.17	31.18	56.00	-24.82	QP
11	13.5580	36.04	10.27	46.31	60.00	-13.69	QP
12*	13.5580	32.53	10.27	42.80	50.00	-7.20	AVG


2Mbps

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

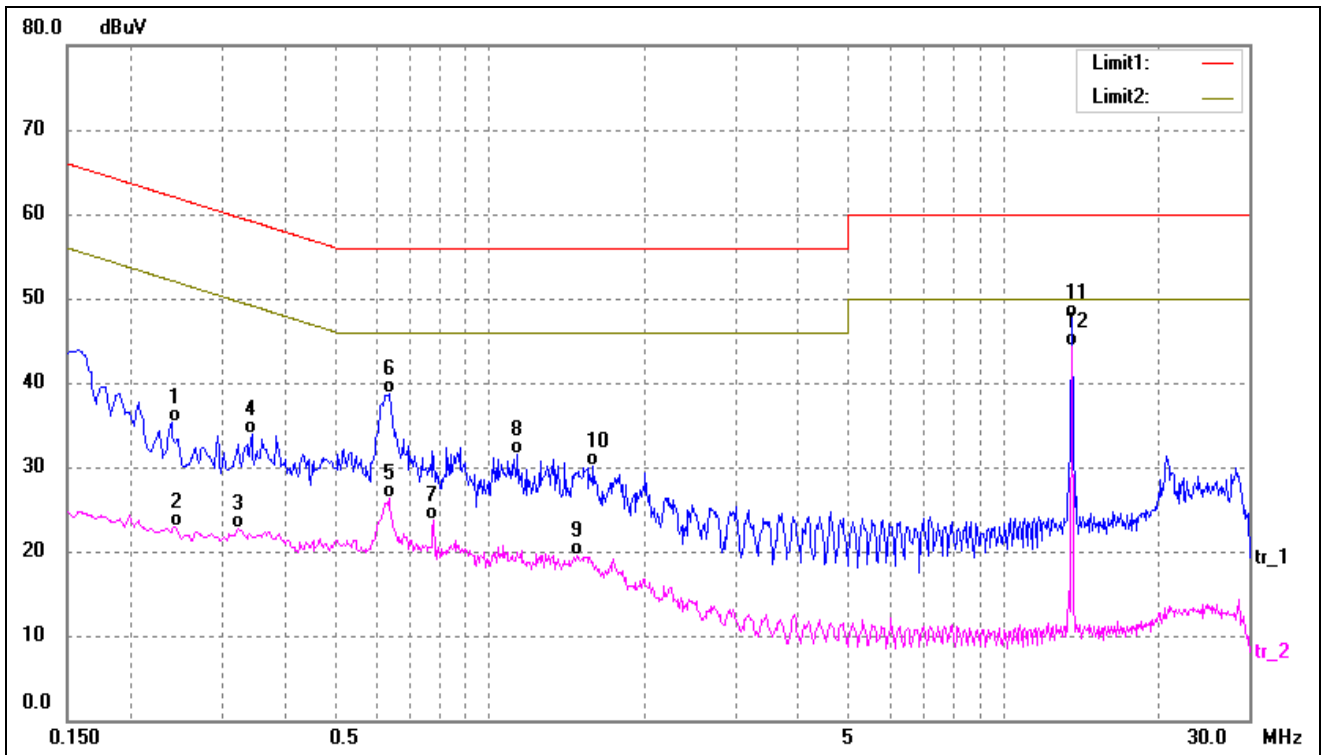

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2380	25.01	10.27	35.28	62.17	-26.89	QP
2	0.2420	12.68	10.27	22.95	52.03	-29.08	AVG
3	0.3220	12.43	10.24	22.67	49.66	-26.99	AVG
4	0.3420	23.65	10.23	33.88	59.15	-25.27	QP
5	0.6340	16.09	10.20	26.29	46.00	-19.71	AVG
6	0.6380	28.46	10.20	38.66	56.00	-17.34	QP
7	0.7780	13.50	10.17	23.67	46.00	-22.33	AVG
8	1.1340	21.27	10.15	31.42	56.00	-24.58	QP
9	1.4780	9.35	10.19	19.54	46.00	-26.46	AVG
10	1.5900	19.91	10.21	30.12	56.00	-25.88	QP
11	13.5580	37.48	10.27	47.75	60.00	-12.25	QP
12*	13.5580	33.98	10.27	44.25	50.00	-5.75	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

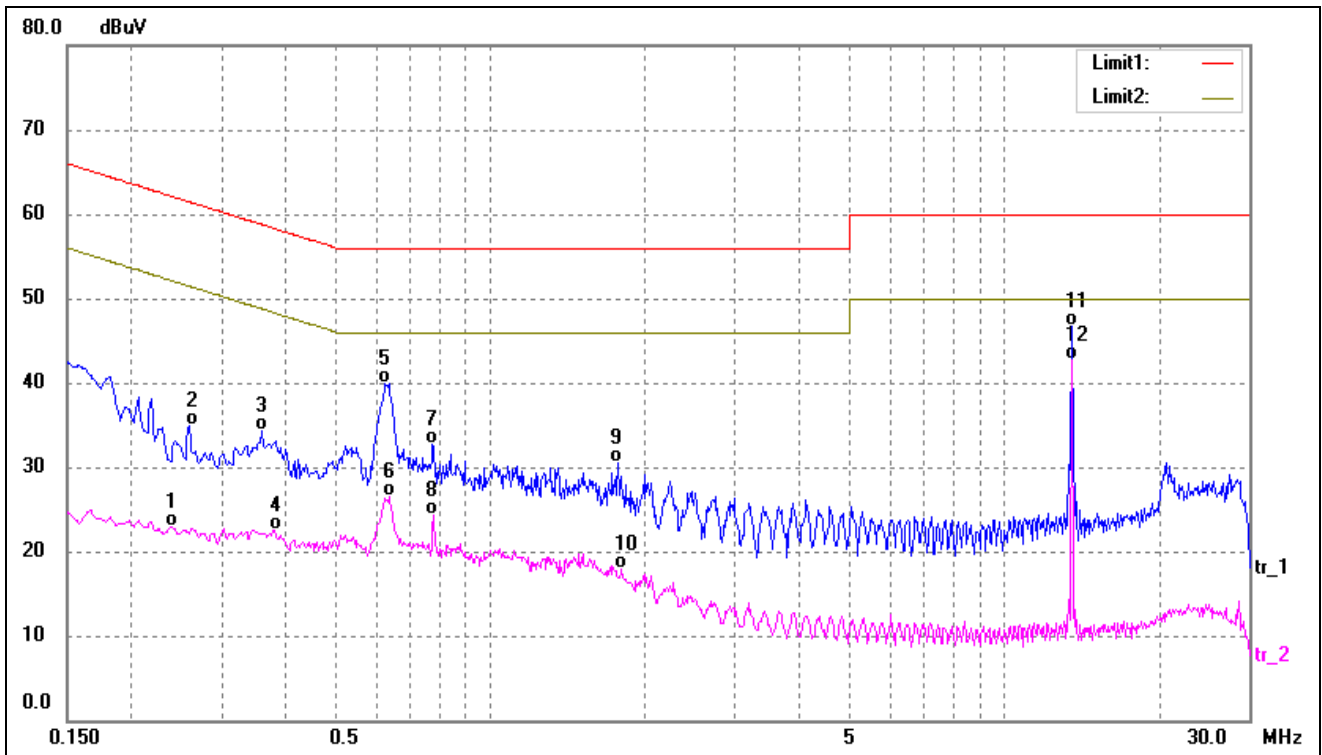

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2380	12.62	10.27	22.89	52.16	-29.27	AVG
2	0.2580	24.74	10.26	35.00	61.49	-26.49	QP
3	0.3580	24.16	10.23	34.39	58.77	-24.38	QP
4	0.3780	12.36	10.23	22.59	48.32	-25.73	AVG
5	0.6260	29.67	10.20	39.87	56.00	-16.13	QP
6	0.6340	16.34	10.20	26.54	46.00	-19.46	AVG
7	0.7740	22.55	10.17	32.72	56.00	-23.28	QP
8	0.7780	14.08	10.17	24.25	46.00	-21.75	AVG
9	1.7780	20.18	10.23	30.41	56.00	-25.59	QP
10	1.8020	7.66	10.23	17.89	46.00	-28.11	AVG
11	13.5580	36.35	10.27	46.62	60.00	-13.38	QP
12*	13.5580	32.44	10.27	42.71	50.00	-7.29	AVG

Note: Performed only the worst case (Power Adapter 1#: GMB36-140200-D) is recorded in this report.




APPENDIX SUMMARY




Project No.	WTX22X12243358W	Test Engineer	Timi Huang
Start date	2022/12/13	Finish date	2022/12/13
Temperature	23°C	Humidity	43%

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	DTS Bandwidth	Compliant
C	RF Output Power	Compliant
D	Conducted Out of Band Emissions	Compliant

APPENDIX A

Power Spectral Density			
Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
BLE-GFSK-1Mbps	Low	-12.44	8
	Middle	-13.31	8
	High	-14.12	8
BLE-GFSK-2Mbps	Low	-15.15	8
	Middle	-15.42	8
	High	-16.85	8

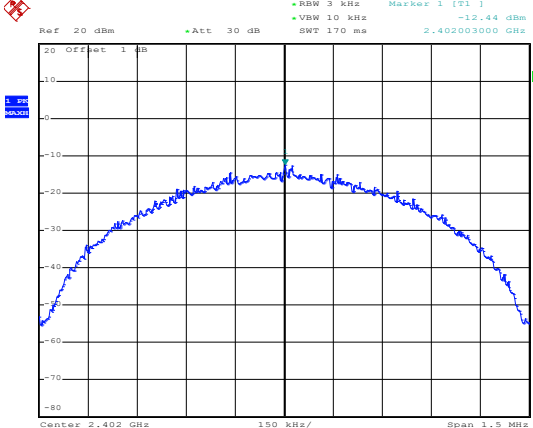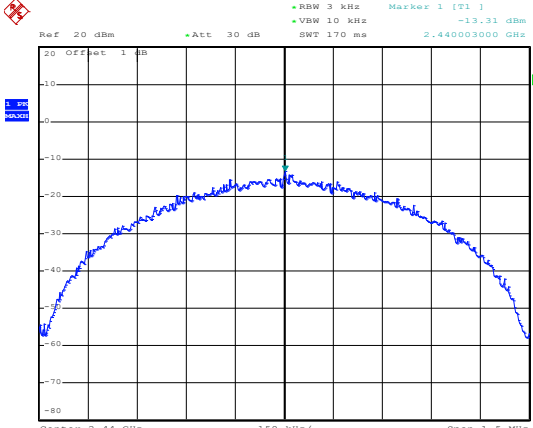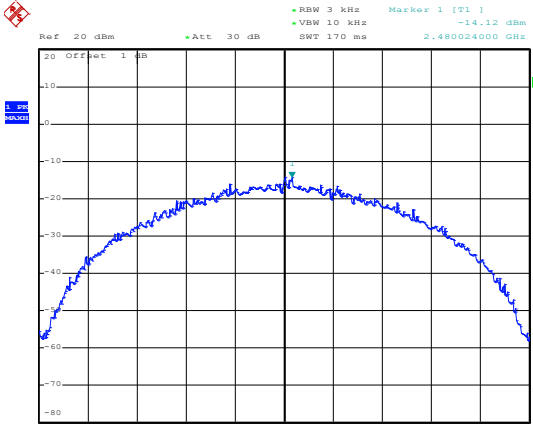
<p>Low-1Mbps</p>	 <p>Date: 13.DEC.2022 17:50:37</p>
<p>Middle-1Mbps</p>	 <p>Date: 13.DEC.2022 17:51:05</p>
<p>High-1Mbps</p>	 <p>Date: 13.DEC.2022 17:51:30</p>
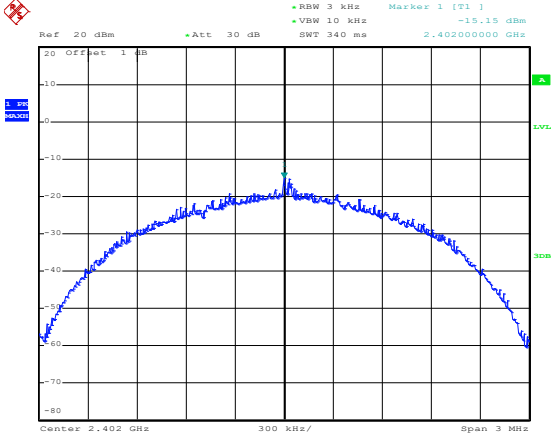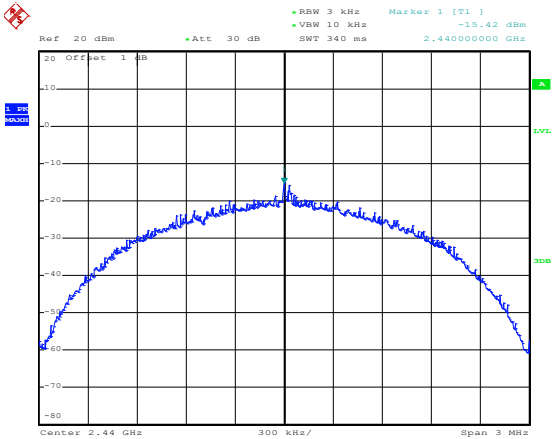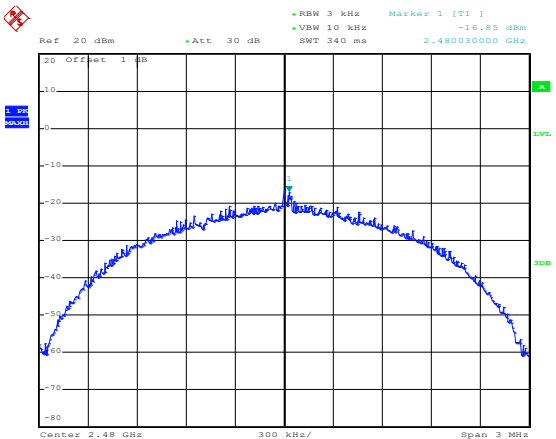
<p>Low-2Mbps</p>	 <p>Ref 20 dBm +Att 30 dB RBW 3 kHz Marker 1 [T1] -15.15 dBm VBW 10 kHz SWT 340 ms 2.40200000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 2.402 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 13.DEC.2022 18:02:27</p>
<p>Middle-2Mbps</p>	 <p>Ref 20 dBm +Att 30 dB RBW 3 kHz Marker 1 [T1] -15.42 dBm VBW 10 kHz SWT 340 ms 2.44000000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 2.44 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 13.DEC.2022 18:02:57</p>
<p>High-2Mbps</p>	 <p>Ref 20 dBm +Att 30 dB RBW 3 kHz Marker 1 [T1] -16.85 dBm VBW 10 kHz SWT 340 ms 2.48000000 GHz</p> <p>20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 2.48 GHz 300 kHz/ Span 3 MHz</p> <p>Date: 13.DEC.2022 18:03:21</p>

APPENDIX B


Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
BLE-GFSK-1Mbps	Low	648	≥500
	Middle	648	≥500
	High	648	≥500
BLE-GFSK-2Mbps	Low	1160	≥500
	Middle	1140	≥500
	High	1140	≥500

Low-1Mbps

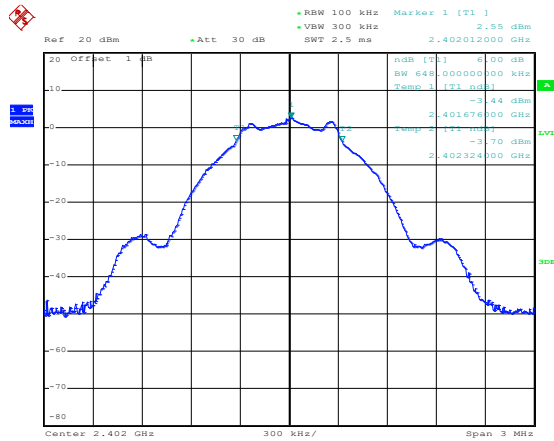


Date: 13.DEC.2022 17:52:43

Middle-1Mbps



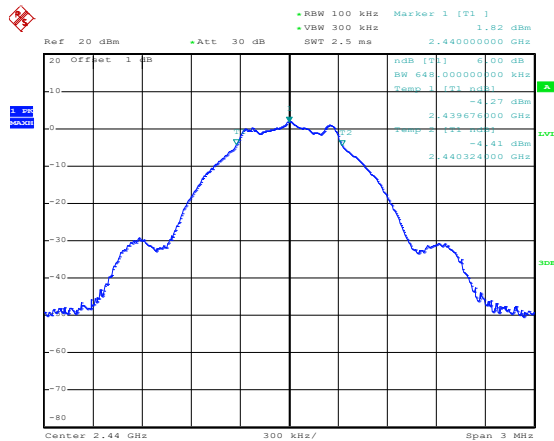


Date: 13.DEC.2022 17:53:08

High-1Mbps



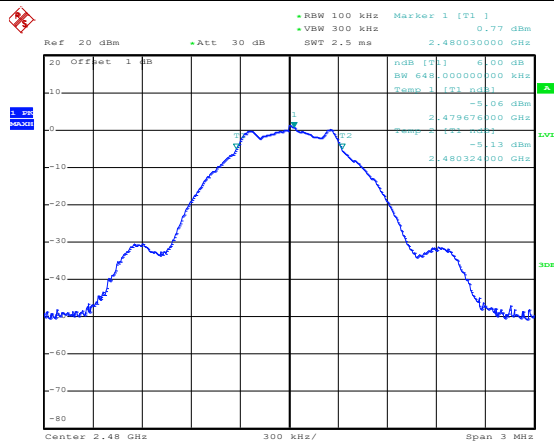





Date: 13.DEC.2022 17:53:31
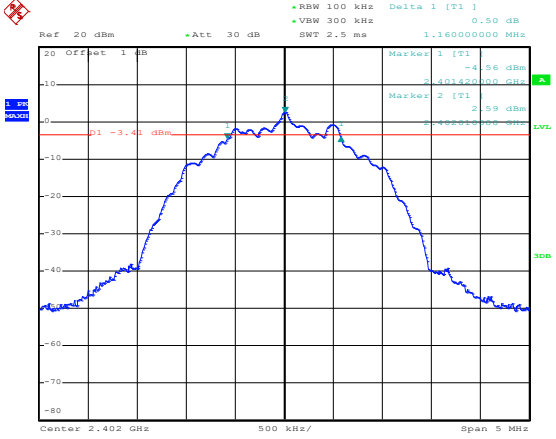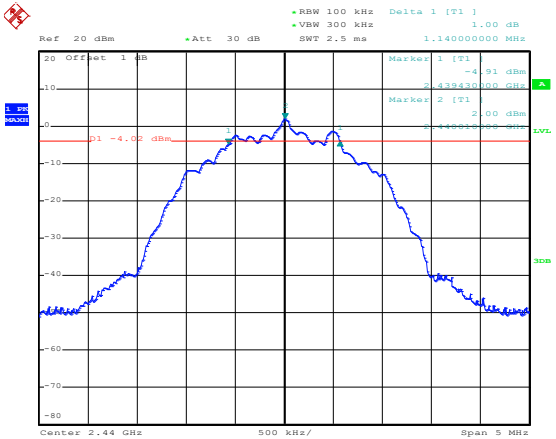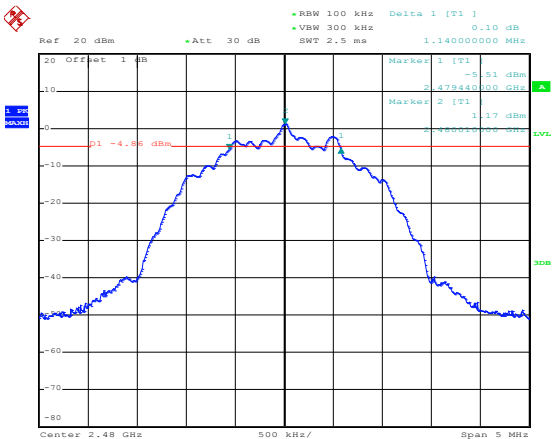
<p>Low-2Mbps</p>	 <p> *RBW 100 kHz Delta 1 [T1] 0.50 dB *VBW 300 kHz Ref 20 dBm +Att 30 dB SWT 2.5 ms 1.160000000 MHz Marker 1 [T1] -4.56 dBm Marker 2 [T1] -2.59 dBm D1 -3.43 dBm 3dB Center 2.402 GHz 500 kHz/ Span 5 MHz </p> <p>Date: 13.DEC.2022 18:04:57</p>
<p>Middle-2Mbps</p>	 <p> *RBW 100 kHz Delta 1 [T1] 1.00 dB *VBW 300 kHz Ref 20 dBm +Att 30 dB SWT 2.5 ms 1.140000000 MHz Marker 1 [T1] -4.91 dBm Marker 2 [T1] 2.00 dBm D1 -4.03 dBm 3dB Center 2.44 GHz 500 kHz/ Span 5 MHz </p> <p>Date: 13.DEC.2022 18:05:55</p>
<p>High-2Mbps</p>	 <p> *RBW 100 kHz Delta 1 [T1] 0.10 dB *VBW 300 kHz Ref 20 dBm +Att 30 dB SWT 2.5 ms 1.140000000 MHz Marker 1 [T1] -5.51 dBm Marker 2 [T1] 1.17 dBm D1 -4.88 dBm 3dB Center 2.48 GHz 500 kHz/ Span 5 MHz </p> <p>Date: 13.DEC.2022 18:06:44</p>

APPENDIX C

RF Output Power			
Test Mode	Test Channel	Reading dBm	Limit dBm
BLE-GFSK-1Mbps	Low	2.86	30.00
	Middle	2.11	30.00
	High	1.36	30.00
BLE-GFSK-2Mbps	Low	2.94	30.00
	Middle	2.08	30.00
	High	1.38	30.00

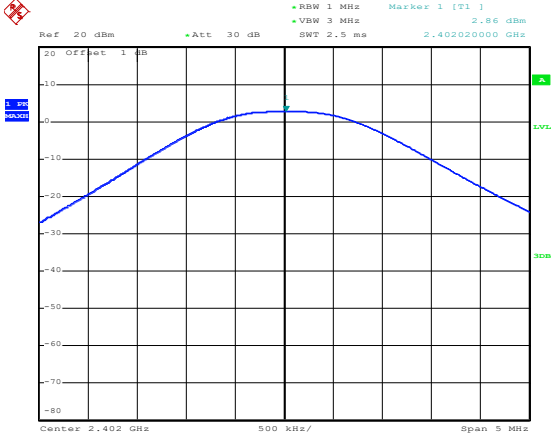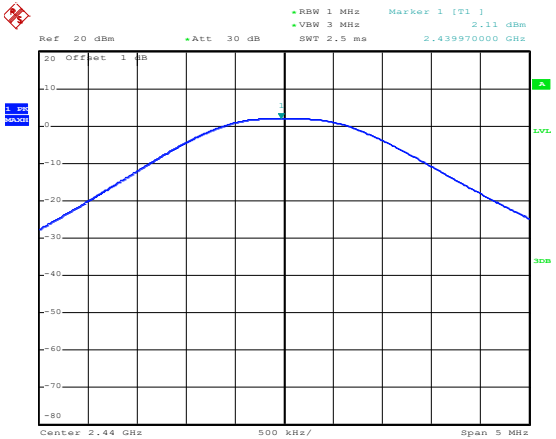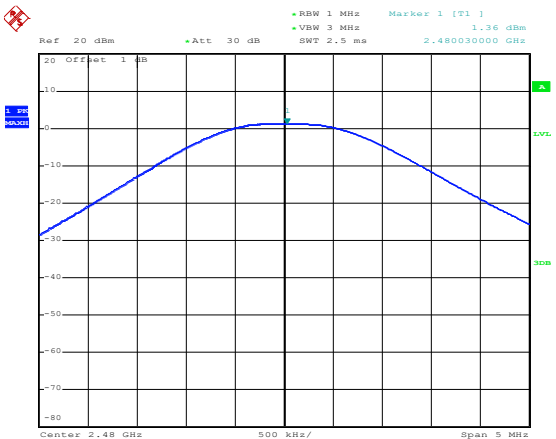
<p>Low-1Mbps</p>	 <p>Date: 13.DEC.2022 17:47:52</p>
<p>Middle-1Mbps</p>	 <p>Date: 13.DEC.2022 17:48:43</p>
<p>High-1Mbps</p>	 <p>Date: 13.DEC.2022 17:49:08</p>
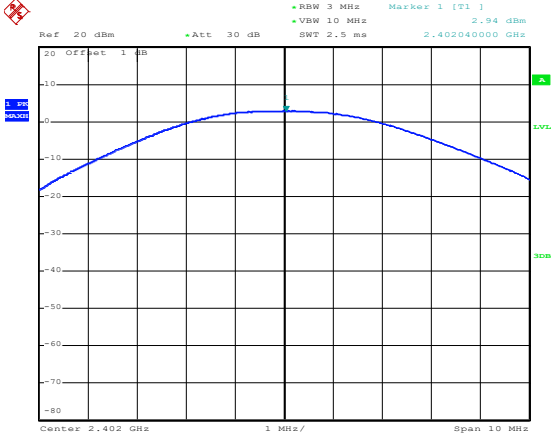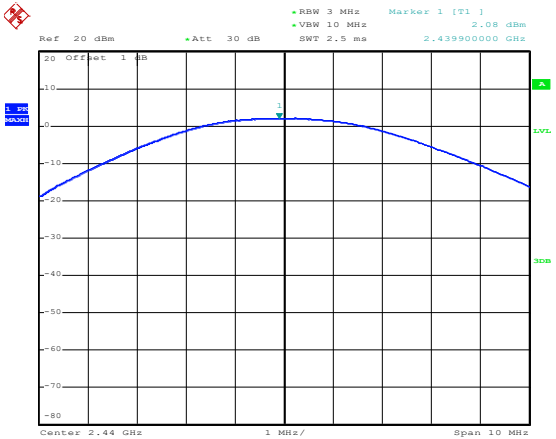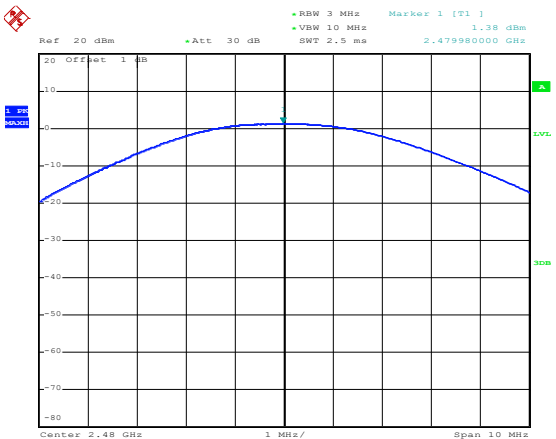
<p>Low-2Mbps</p>	 <p>Date: 13.DEC.2022 18:00:50</p>
<p>Middle-2Mbps</p>	 <p>Date: 13.DEC.2022 18:01:11</p>
<p>High-2Mbps</p>	 <p>Date: 13.DEC.2022 18:01:29</p>


APPENDIX D

Conducted Out of Band Emissions


<p>Low-1Mbps</p>	<p>Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 2.5 ms Marker 2 [T1] -48.29 dBm 2.40000000 GHz</p> <p>Offset 1 dB Marker 1 [T1] 2.94 dBm 2.40000000 GHz</p> <p>Center 2.393 GHz 2.5 MHz/ Span 25 MHz</p> <p>Date: 13.DEC.2022 17:54:57</p>
	<p>Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 2.6 s Marker 1 [T1] -39.78 dBm 2.57403000 GHz</p> <p>Offset 1 dB</p> <p>Start 30 MHz 2.597 GHz/ Stop 26 GHz</p> <p>Date: 13.DEC.2022 17:55:23</p>
<p>Middle-1Mbps</p>	<p>Ref 20 dBm Att 30 dB RBW 100 kHz VBW 300 kHz SWT 2.5 ms Marker 1 [T1] 1.78 dBm 2.44002400 GHz</p> <p>Offset 1 dB</p> <p>Center 2.44 GHz 1.2 MHz/ Span 12 MHz</p> <p>Date: 13.DEC.2022 17:56:23</p>

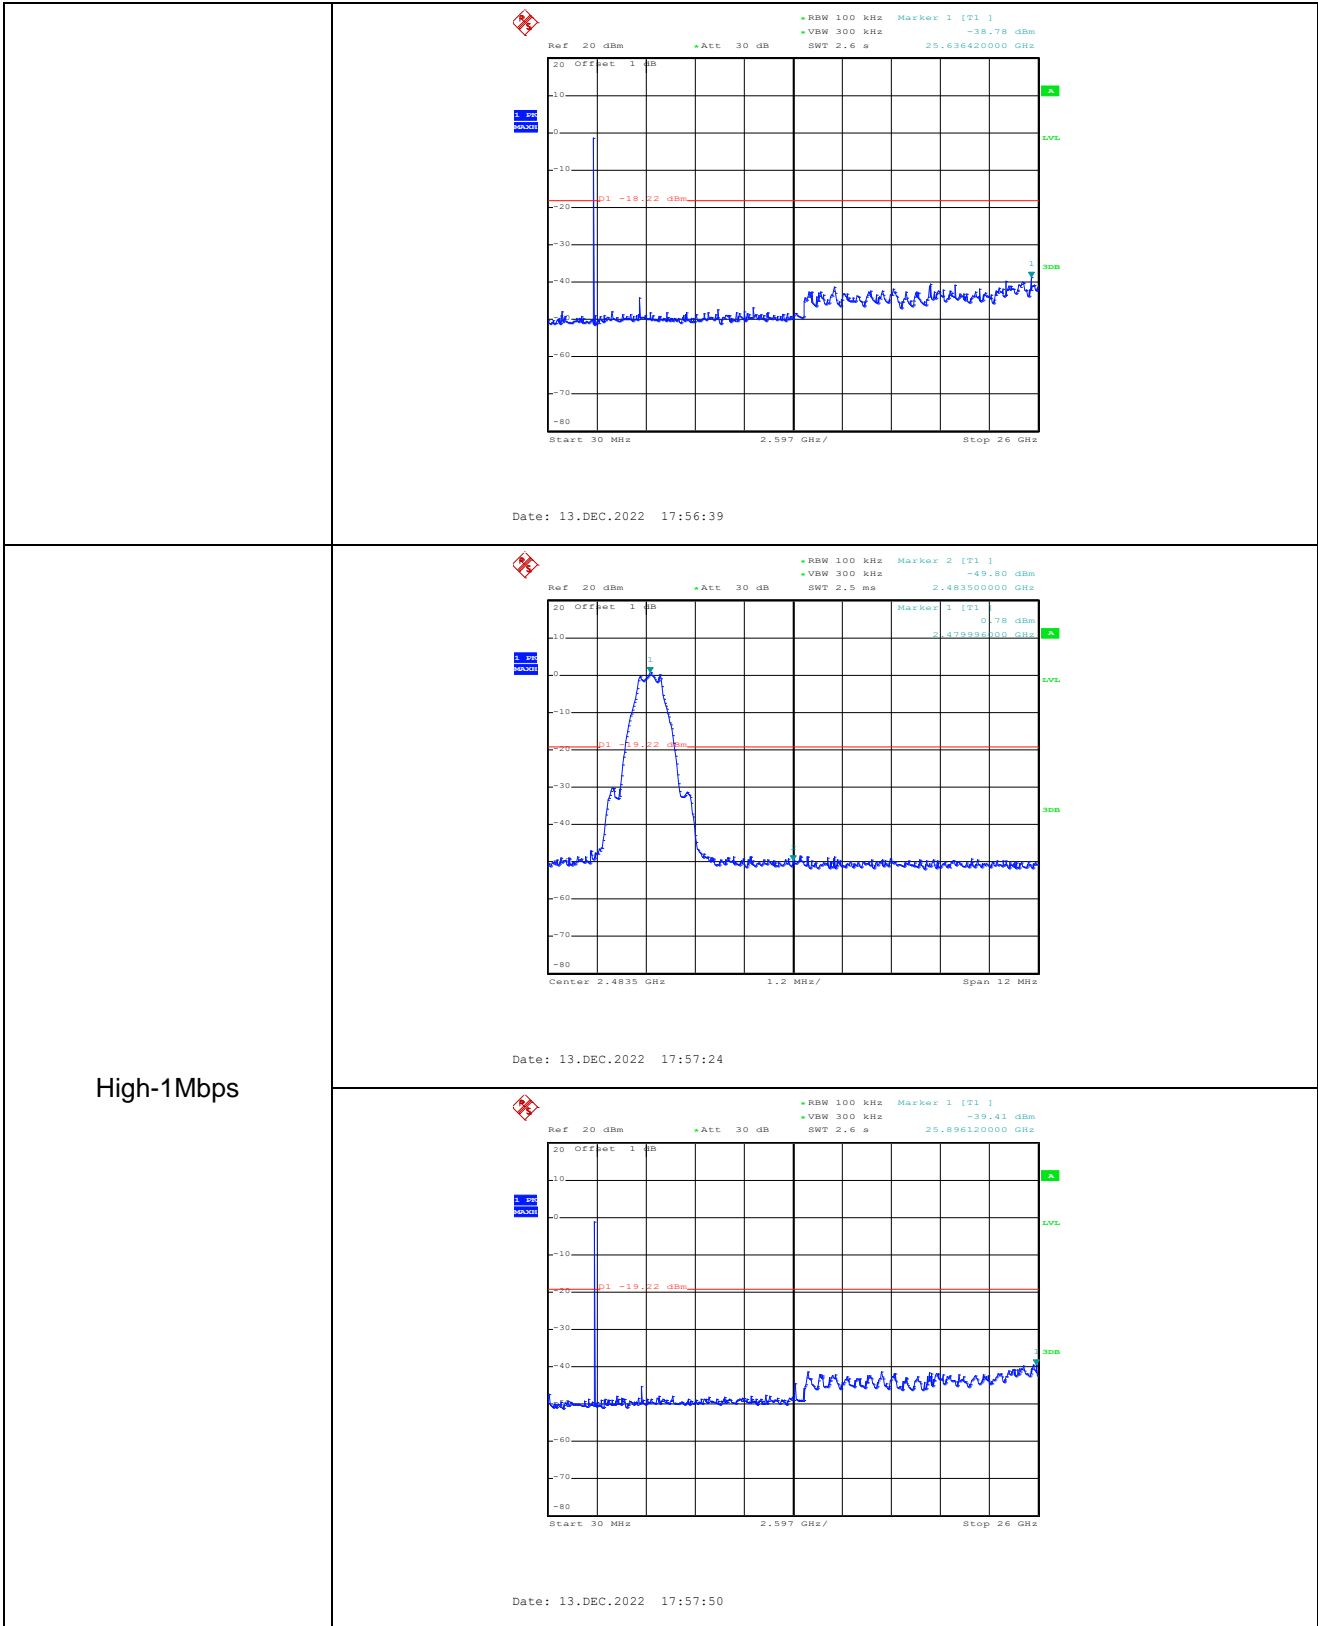

Low-2Mbps

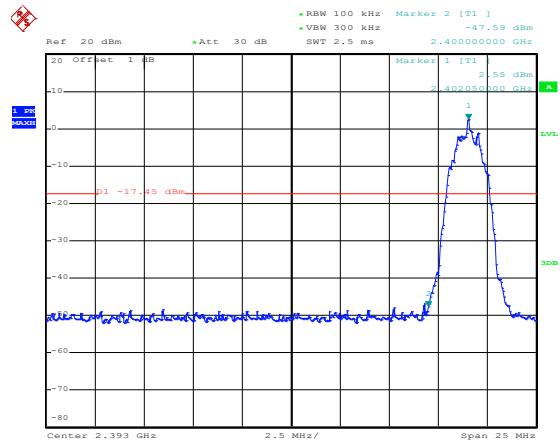


Date: 13.DEC.2022 18:07:38



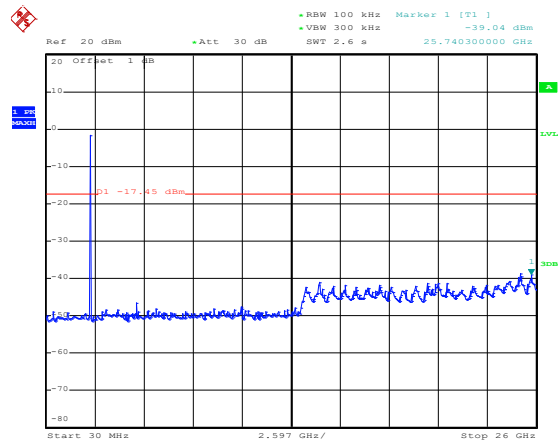


Date: 13.DEC.2022 18:07:55

Middle-2Mbps

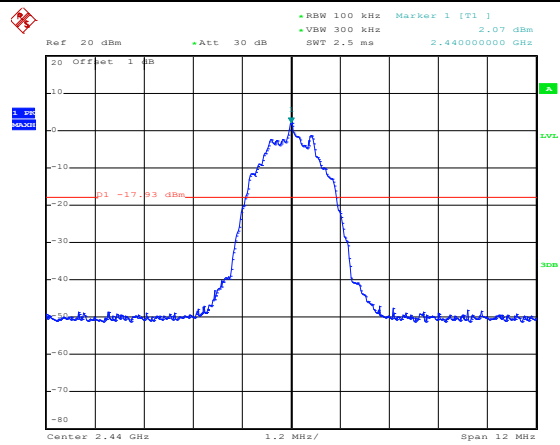

Date: 13.DEC.2022 18:08:52

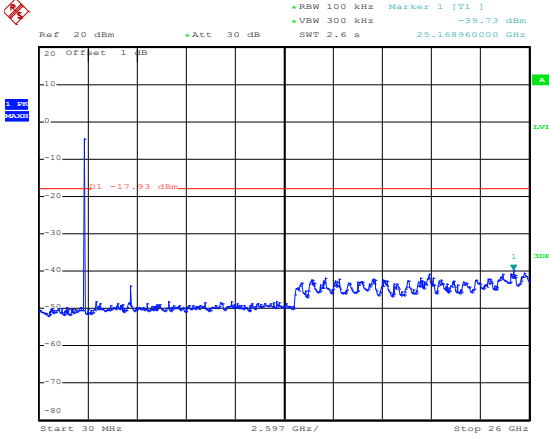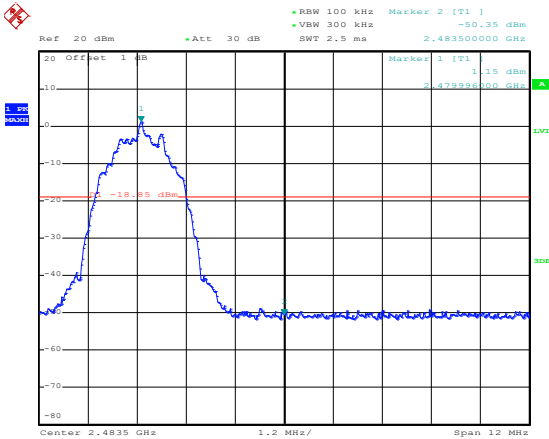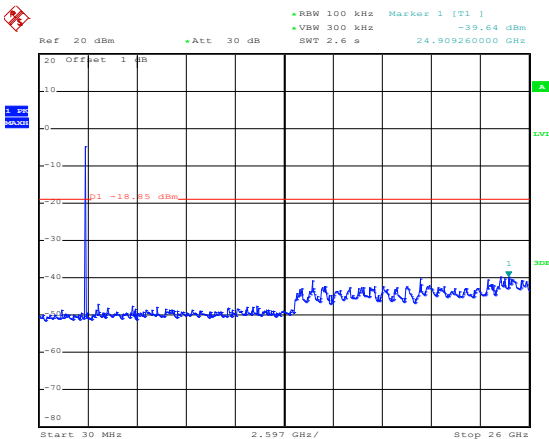	 <p>Date: 13.DEC.2022 18:09:08</p>
<p>High-2Mbps</p>	 <p>Date: 13.DEC.2022 18:09:50</p>
	 <p>Date: 13.DEC.2022 18:10:07</p>

APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****