



Engineering Test Report No. 2104122-01

| | | | | |
|--|---|--|--|--|
| Report Date | June 29, 2022 | | | |
| Manufacturer Name | Pro IAQ Inc | | | |
| Manufacturer Address | 2650 N Westgate Ave Ste 112 Springfield, MO 65803 | | | |
| Test Item Name Model No. | UBase | | | |
| Date Received | June 20, 2022 | | | |
| Test Dates | June 20, 2022 to June 29, 2022 | | | |
| Specifications | FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 Innovation, Science, and Economic Development Canada, RSS-GEN Innovation, Science, and Economic Development Canada, RSS-247 | | | |
| Test Facility | Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515 | FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107 | | |
| Signature | | | | |
| Tested by | Javier Cardenas | | | |
| Signature | | | | |
| Approved by | Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894 | | | |
| PO Number | 1871 | | | |
| <p>This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.</p> | | | | |
| <p>This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.</p> | | | | |
| <p>Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT on the test dates specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.</p> | | | | |

Table of Contents

| | | |
|------|---|----|
| 1. | Report Revision History | 3 |
| 2. | Introduction | 4 |
| 2.1. | Scope of Tests | 4 |
| 2.2. | Purpose | 4 |
| 2.3. | Identification of the EUT..... | 4 |
| 3. | Power Input | 4 |
| 4. | Grounding | 4 |
| 5. | Support Equipment | 5 |
| 6. | Interconnect Leads..... | 5 |
| 7. | Modifications Made to the EUT | 5 |
| 8. | Modes of Operation..... | 5 |
| 8.1. | Tx | 5 |
| 8.2. | Rx | 5 |
| 9. | Test Specifications | 5 |
| 10. | Test Plan | 6 |
| 11. | Deviation, Additions to, or Exclusions from Test Specifications | 6 |
| 12. | Laboratory Conditions | 6 |
| 13. | Summary | 6 |
| 14. | Sample Calculations | 7 |
| 15. | Statement of Conformity | 7 |
| 16. | Certification | 7 |
| 17. | Photographs of EUT..... | 8 |
| 18. | Equipment List | 10 |
| 19. | Block Diagram of Test Setup | 11 |
| 20. | Receiver Conducted Emissions (AC Mains) | 12 |
| 21. | Receiver Radiated Emissions | 19 |
| 22. | Transmitter Conducted Emissions (AC Mains)..... | 29 |
| 23. | 20dB Bandwidth | 36 |
| 24. | Occupied Bandwidth (99%) | 40 |
| 25. | Carrier Frequency Separation..... | 44 |
| 26. | Number of Carrier Channels | 46 |
| 27. | Average Time of Occupancy..... | 48 |
| 28. | Maximum Peak Conducted Output Power..... | 51 |
| 29. | Effective Isotropic Radiated Power (EIRP) | 55 |
| 30. | Duty Cycle Factor Measurements..... | 57 |
| 31. | Case Spurious Radiated Emissions..... | 59 |
| 32. | Band-Edge Compliance | 73 |
| 33. | Scope of Accreditation | 79 |

This report shall not be reproduced, except in full,
without the written approval of Elite Electronic Engineering Inc.

1. Report Revision History

| Revision | Date | Description |
|----------|-------------|---|
| – | 27 JUL 2022 | Initial Release of Engineering Test Report No. 2104122-01 |

2. Introduction

2.1. Scope of Tests

This document presents the results of a series of RF emissions tests that were performed on the Pro IAQ Inc Pro1 (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by Pro IAQ Inc located in Springfield, MO.

2.2. Purpose

The test series was performed to determine if the EUT meets the RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, §15.107 and §15.109 for Receivers and Subpart C, §15.247 for a Frequency Hopping Spread Spectrum intentional radiator operating within the 902 – 928MHz band.

The test series was also performed to determine if the EUT meets the RF emission requirements of the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen and Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-247 for a Frequency Hopping Spread Spectrum intentional radiator operating within the 902 – 928MHz band.

Testing was performed in accordance with ANSI C63.10-2013.

2.3. Identification of the EUT

The EUT was identified as follows:

| EUT Identification | |
|------------------------------|---|
| Test Item #1 | |
| Product Description | Pro1 |
| Model/Part No. | UBase |
| Serial No. | N/A |
| Size of EUT | 11cm Length x 11cm Width x 7.5cm Height |
| Software/Firmware Version | Not Provided |
| Device Type | Frequency Hopping Transmission Device |
| Band of Operation | 902 – 928MHz |
| Modulation Type | FSK |
| Antenna Type | trace |
| Antenna Gain (dBi) | Not Provided |
| Conducted Output Power | 11.69dBm (14.76mW) |
| EIRP | 17.1dBm (51.29mW) |
| 20dB Bandwidth | 39.71kHz |
| Occupied Bandwidth (99% CBW) | 33.55kHz |
| Emission Classification | 33K6F1D |

The EUT listed above was used throughout the test series.

3. Power Input

The EUT obtained 24V 60Hz power through 2 leads from the secondary of a step-down transformer. The primary of this transformer received 120V 60Hz power through low pass powerline filters on the wall of the shielded enclosure.

4. Grounding

The EUT was not connected to ground.

5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

| Description | Model # | S/N |
|-----------------------|---------|-----|
| Step Down Transformer | 125 | --- |

6. Interconnect Leads

No interconnect leads were used during the tests.

7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

8. Modes of Operation

The EUT and all peripheral equipment were energized. The unit was programmed to transmit in one of the following modes:

8.1. Tx

| Frequency | Description |
|-----------------|---|
| 902.500MHz | Power Setting = 14dBm |
| 914.768MHz | Power Setting = 14dBm |
| 927.547MHz | Power Setting = 14dBm |
| Hopping Enabled | Receiver hopped to all 50 channels in a pseudo random order |

8.2. Rx

| Frequency | Description |
|-----------------|---|
| Hopping Enabled | Receiver hopped to all 50 channels in a pseudo random order |

9. Test Specifications

The tests were performed to selected portions of, and in accordance with, the test specifications.

- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart B
- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Compliance Measurements On Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 April 2, 2019

KDB 558074 D01v05r02

- RSS-Gen Issue 5, February 2020, Amendment 2, Innovation, Science, and Economic Development Canada, "General Requirements for Compliance of Radio Apparatus"
- RSS-247 Issue 2, February 2017, "Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices"

10. Test Plan

No test plan was provided. Instructions were provided by personnel from Pro IAQ Inc and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247, Innovation, Science, and Economic Development Canada, RSS-247, and ANSI C63.4-2014 specifications.

11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

12. Laboratory Conditions

The ambient parameters of the laboratory during testing were as follows:

| Ambient Parameters | Value |
|----------------------|----------|
| Temperature | 22°C |
| Relative Humidity | 35% |
| Atmospheric Pressure | 1021.4mb |

13. Summary

The following EMC tests were performed, and the results are shown below:

| Test Description | Requirements | Test Method | S/N | Results |
|--|----------------------------|------------------|-----|----------|
| Receiver Conducted Emissions (AC Mains) | FCC 15.107 ISED RSS-GEN | ANSI C63.4:2014 | N/A | Conforms |
| Receiver Radiated Emissions | FCC 15.107 ISED RSS-GEN | ANSI C63.4:2014 | N/A | Conforms |
| Transmitter Conducted Emissions (AC Mains) | FCC 15.107 ISED RSS-GEN | ANSI C63.10:2013 | N/A | Conforms |
| 20dB Bandwidth | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |
| Occupied Bandwidth (99%) | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |
| Carrier Frequency Separation | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |
| Number of Carrier Channels | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |
| Average Time of Occupancy | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |
| Maximum Peak Conducted Output Power | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |
| Effective Isotropic Radiated Power (EIRP) | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |
| Duty Cycle Factor Measurements | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | N/A |
| Case Spurious Radiated Emissions | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |

| | | | | |
|----------------------|----------------------------|------------------|-----|----------|
| Band-Edge Compliance | FCC 15.247 ISED RSS-247 | ANSI C63.10:2013 | N/A | Conforms |
|----------------------|----------------------------|------------------|-----|----------|

14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL (\text{dB}\mu\text{V}) = MTR (\text{dB}\mu\text{V}) + CF (\text{dB})$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: } FS (\text{dB}\mu\text{V}/\text{m}) = MTR (\text{dB}\mu\text{V}) + AF (\text{dB}/\text{m}) + CF (\text{dB}) + (-PA (\text{dB})) + DC (\text{dB})$$

To convert the Field Strength $\text{dB}\mu\text{V}/\text{m}$ term to $\mu\text{V}/\text{m}$, the $\text{dB}\mu\text{V}/\text{m}$ is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in $\mu\text{V}/\text{m}$ terms.

$$\text{Formula 2: } FS (\mu\text{V}/\text{m}) = \text{AntiLog} [(FS (\text{dB}\mu\text{V}/\text{m}))/20]$$


15. Statement of Conformity

The Pro IAQ Inc Pro1, Model No. UBase, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247.

16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

17. Photographs of EUT

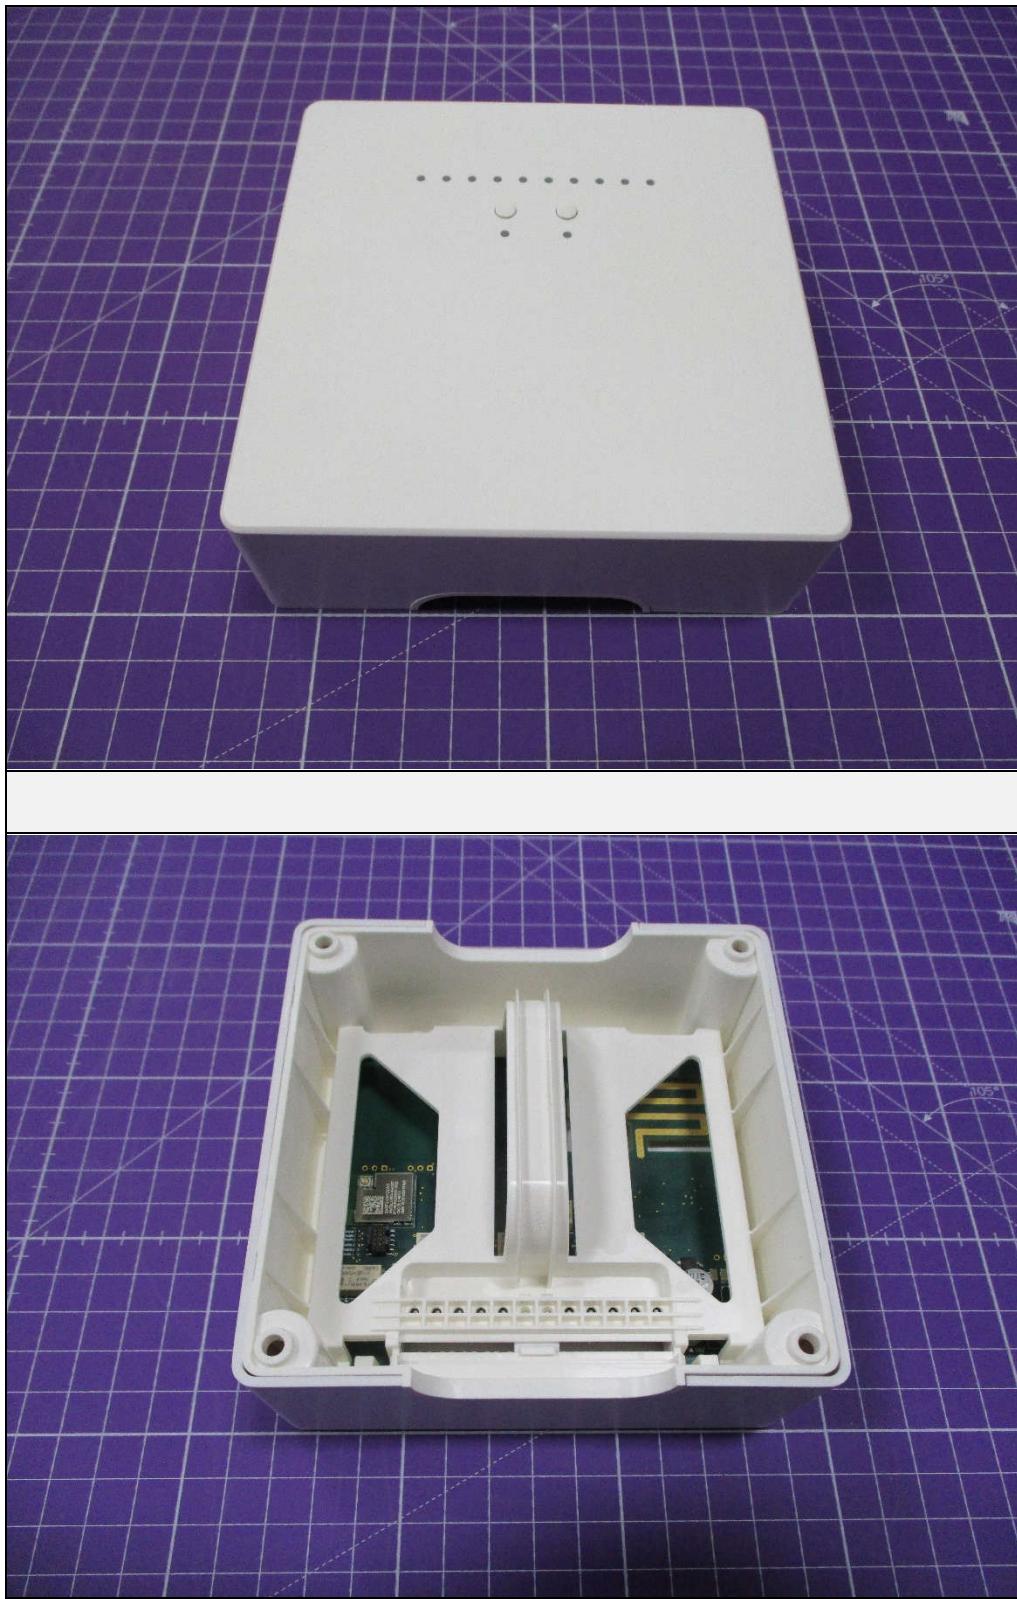



18. Equipment List

| Eq ID | Equipment Description | Manufacturer | Model No. | Serial No. | Frequency Range | Cal Date | Due Date |
|-------|-----------------------------|--------------------|--------------------------|------------|-----------------|-----------|-----------|
| APW3 | PREAMPLIFIER | PLANAR ELECTRONICS | PE2-35-120-5R0-10-12 | PL2924 | 1GHZ-20GHZ | 3/9/2022 | 3/9/2023 |
| CDY0 | WORKSTATION | ELITE | WORKSTATION | | WINDOWS 7 | N/A | |
| CDZ4 | LAB WORKSTATION | ELITE | LWS-10 | | WINDOWS 10 | CNR | |
| GRB0 | 1MHZ, LISN SIGNAL CHECKER | ELITE | LISNCHKR1M | 1 | 1MHZ | 6/17/2021 | 6/17/2023 |
| GSD7 | SIGNAL GENERATOR | ROHDE & SCHWARZ | SMB100A | 115256 | 9KHZ-6GHZ | 6/24/2022 | 6/24/2023 |
| NTA4 | BILOG ANTENNA | TESEQ | 6112D | 46660 | 20-2000GHZ | 10/5/2020 | 10/5/2022 |
| PLF2 | CISPR16 50UH LISN | ELITE | CISPR16/70A | 002 | .15-30MHz | 4/5/2022 | 4/5/2023 |
| PLF4 | CISPR16 50UH LISN | ELITE | CISPR16/70A | 003 | .15-30MHz | 4/5/2022 | 4/5/2023 |
| R21F | 3M ANECHOIC CHAMBER NSA | EMC TEST SYSTEMS | 3M ANECHOIC | | 30MHZ-18GHZ | 3/30/2022 | 3/30/2023 |
| R23P | ROOM 23 | | | 001 | --- | CNR | |
| RBG3 | EMI ANALYZER | ROHDE & SCHWARZ | ESW44 | 101592 | 2HZ-44GHZ | 4/7/2022 | 4/7/2023 |
| RBH2 | EMI ANALYZER | ROHDE & SCHWARZ | ESW26 | 103005 | 2HZ-26GHZ | 3/23/2022 | 3/28/2023 |
| SHC2 | Power Supplies | HENGFU | HF60W-SL-24 | A11372702 | 24V | NOTE 1 | |
| T1E16 | 10DB 25W ATTENUATOR | WEINSCHEL | 46-10-43 | CM5685 | DC-18GHZ | 5/18/2022 | 5/18/2024 |
| T2DA | 20DB, 25W ATTENUATOR | WEINSCHEL | 46-20-34 | BH5446 | DC-18GHZ | 1/7/2022 | 1/7/2024 |
| T2S3 | 20DB 25W ATTENUATOR | WEINSCHEL | 46-20-34 | BV3544 | DC-18GHZ | 1/20/2022 | 1/20/2024 |
| VBR8 | CISPR EN FCC CE VOLTAGE.exe | | | | | N/A | |
| VBV2 | CISPR EN FCC ICES RE.EXE | ELITE | CISPR EN FCC ICES RE.EXE | --- | --- | N/A | |
| WKA1 | SOFTWARE, UNIVERSAL RCV EMI | ELITE | UNIV_RCV_EMI | 1 | --- | I/O | |
| XLQY | 5W, 50 OHM TERMINATION | JFW INDUSTRIES | 50T-052 | --- | DC-2GHZ | 1/5/2022 | 1/5/2024 |
| XLTK | 5W, 50 OHM TERMINATION | JFW INDUSTRIES | 50T-052 | --- | DC-2GHZ | 1/5/2022 | 1/5/2024 |
| XPQ7 | HIGH PASS FILTER | K&L MICROWAVE | 4IH30-1804/T10000-0 | 5 | 1.8-10GHZ | 2/3/2021 | 2/3/2023 |
| XPR0 | HIGH PASS FILTER | K&L MICROWAVE | 11SH10-4800/X20000 | 001 | 4.8-20GHZ | 9/7/2021 | 9/7/2023 |


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

19. Block Diagram of Test Setup

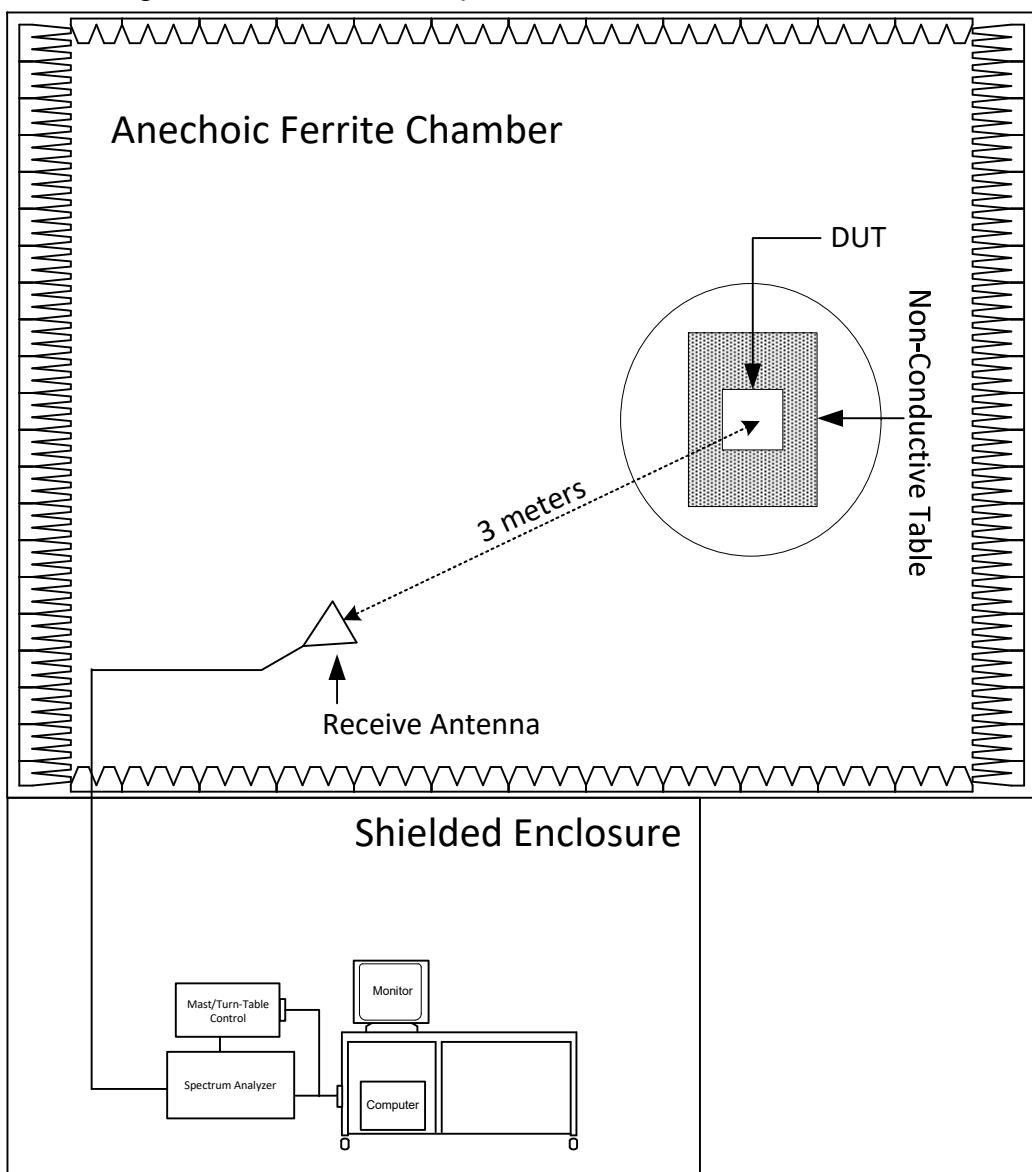

Radiated Measurements Test Setup

20. Receiver Conducted Emissions (AC Mains)

| Test Information | |
|------------------|--------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Rx - Hopping |

| Test Setup Details | |
|--------------------|--------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Type of Test Site | Shielded Enclosure |
| Test Site Used | R23P |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Conducted disturbance (mains port) (150 kHz – 30 MHz) | 2.7 |

| Requirements |
|---|
| All radio frequency voltages on the power lines for any frequency or frequencies of an unintentional radiator shall not exceed the limits in the following table. |

| Receiver Conducted Emissions Limits | | |
|-------------------------------------|----------------------------------|---------|
| Frequency of Emission (MHz) | Conducted Limits (dB μ V) | |
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56-46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

* The lower limit shall apply at the transition frequencies.


Procedure

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- 1) The EUT was operated in the Rx - Hopping mode.
- 2) Measurements were first made on the primary side of the 120V/24V transformer high line.
- 3) The frequency range from 150kHz to 30MHz was broken up into smaller frequency sub-bands.
- 4) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- 5) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- 6) Steps (4) and (5) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits. The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dB}\mu\text{V)} = MTR \text{ (dB}\mu\text{V)} + CF \text{ (dB)}$$

- 7) Steps (3) through (6) were repeated on the neutral line.

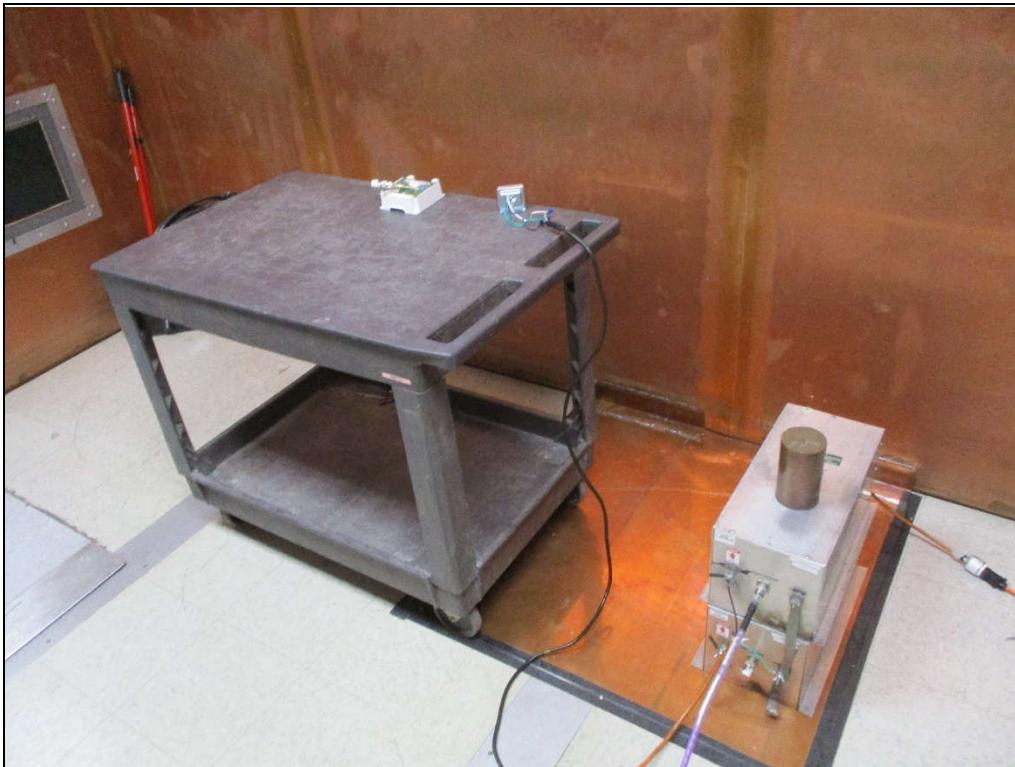

Test Setup for RF Conducted Emissions (AC Mains)



Test Setup for RF Conducted Emissions (AC Mains)

FCC Part 15 Subpart B Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Pro IAQ Inc
 Model : UBase
 DUT Revision : N/A
 Serial Number : N/A
 DUT Mode : Rx
 Line Tested : Line
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes : Hopping
 Test Engineer : J. Cardenas
 Limit : FCC 15.107
 Test Date : Jun 23, 2022 09:19:52 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

| Freq MHz | Quasi-peak Level dB μ V | Quasi-peak Limit dB μ V | Excessive Quasi-peak Emissions | Average Level dB μ V | Average Limit dB μ V | Excessive Average Emissions |
|----------|-----------------------------|-----------------------------|--------------------------------|--------------------------|--------------------------|-----------------------------|
| 0.159 | 42.7 | 65.5 | | 16.4 | 55.5 | |
| 0.270 | 23.5 | 61.1 | | 4.5 | 51.1 | |
| 0.532 | 8.9 | 56.0 | | 2.8 | 46.0 | |
| 0.889 | 8.8 | 56.0 | | 2.1 | 46.0 | |
| 1.606 | 8.9 | 56.0 | | 2.7 | 46.0 | |
| 2.232 | 9.3 | 56.0 | | 3.2 | 46.0 | |
| 5.000 | 9.2 | 56.0 | | 2.7 | 46.0 | |
| 11.781 | 8.1 | 60.0 | | 2.0 | 50.0 | |
| 23.972 | 20.7 | 60.0 | | 17.2 | 50.0 | |

FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Pro IAQ Inc
 Model : UBase
 DUT Revision : N/A
 Serial Number : N/A
 DUT Mode : Rx
 Line Tested : Line
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes : Hopping
 Test Engineer : J. Cardenas
 Limit : FCC 15.107
 Test Date : Jun 23, 2022 09:19:52 AM

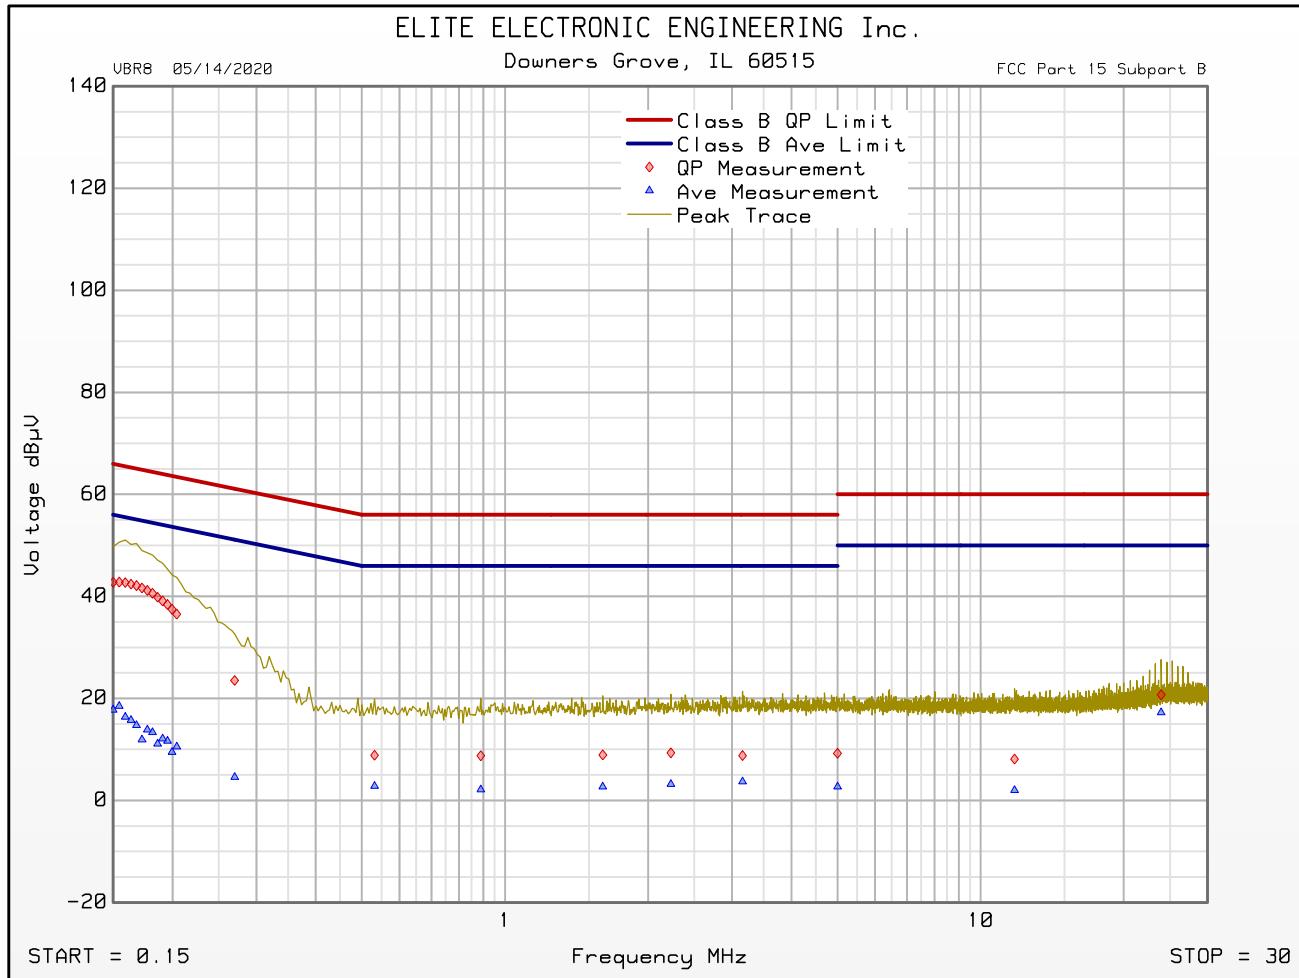

Emissions Meet QP Limit
 Emissions Meet Ave Limit

FCC Part 15 Subpart B Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Pro IAQ Inc
 Model : UBase
 DUT Revision : N/A
 Serial Number : N/A
 DUT Mode : Rx
 Line Tested : Neutral
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes : Hopping
 Test Engineer : J. Cardenas
 Limit : FCC 15.107
 Test Date : Jun 23, 2022 09:07:03 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

| Freq MHz | Quasi-peak Level dB μ V | Quasi-peak Limit dB μ V | Excessive Quasi-peak Emissions | Average Level dB μ V | Average Limit dB μ V | Excessive Average Emissions |
|----------|-----------------------------|-----------------------------|--------------------------------|--------------------------|--------------------------|-----------------------------|
| 0.155 | 42.6 | 65.8 | | 22.1 | 55.8 | |
| 0.270 | 23.2 | 61.1 | | 4.8 | 51.1 | |
| 0.703 | 8.7 | 56.0 | | 2.7 | 46.0 | |
| 1.204 | 8.9 | 56.0 | | 2.8 | 46.0 | |
| 1.615 | 9.2 | 56.0 | | 2.9 | 46.0 | |
| 2.592 | 8.8 | 56.0 | | 3.7 | 46.0 | |
| 4.045 | 9.0 | 56.0 | | 3.1 | 46.0 | |
| 5.711 | 9.0 | 60.0 | | 3.1 | 50.0 | |
| 13.986 | 14.4 | 60.0 | | 11.0 | 50.0 | |
| 24.643 | 23.4 | 60.0 | | 22.1 | 50.0 | |

FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Pro IAQ Inc
 Model : UBase
 DUT Revision : N/A
 Serial Number : N/A
 DUT Mode : Rx
 Line Tested : Neutral
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes : Hopping
 Test Engineer : J. Cardenas
 Limit : FCC 15.107
 Test Date : Jun 23, 2022 09:07:03 AM

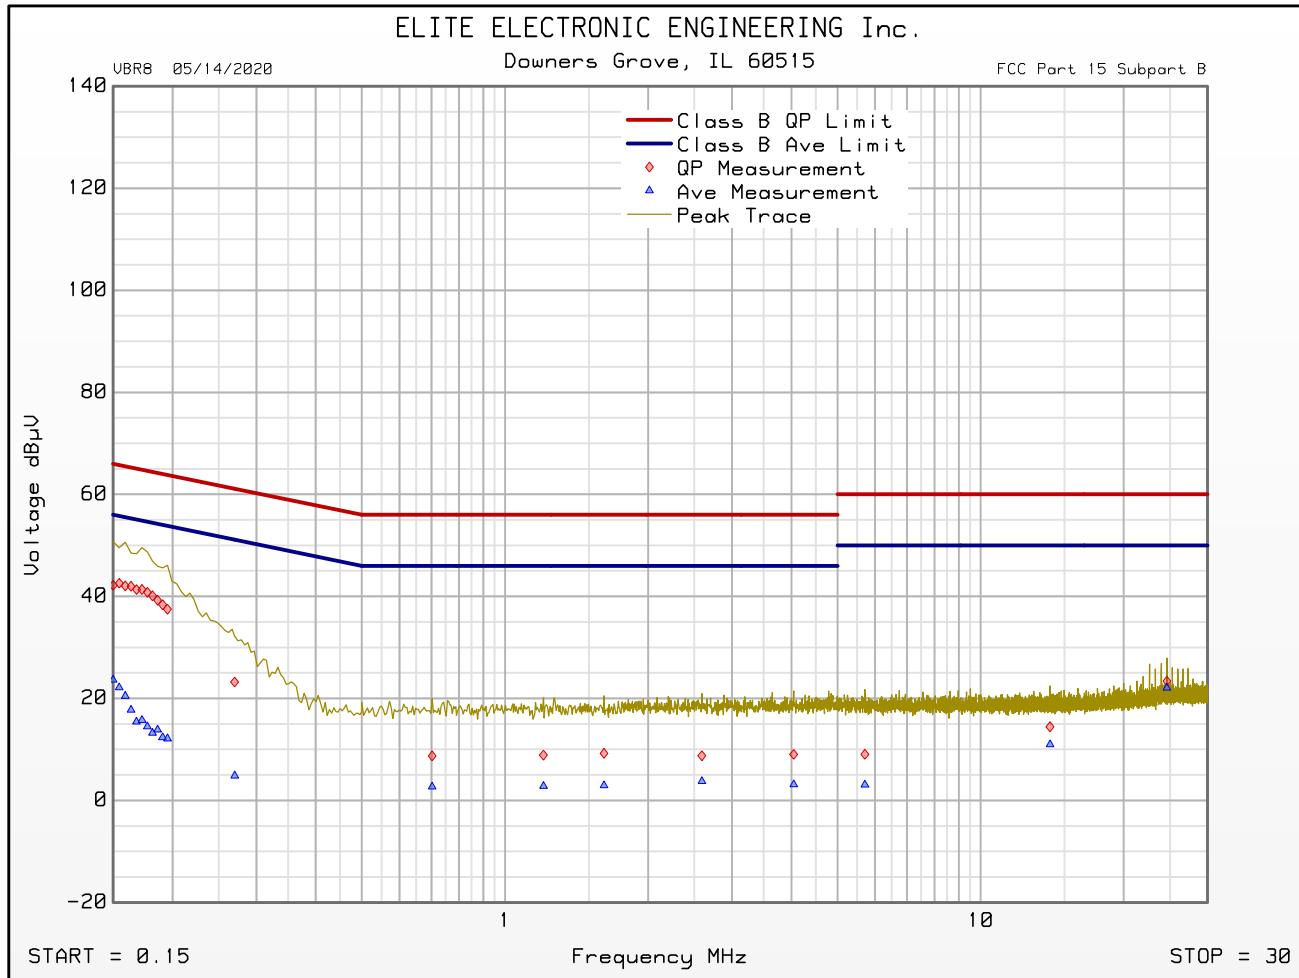

Emissions Meet QP Limit
 Emissions Meet Ave Limit

21. Receiver Radiated Emissions

| EUT Information | |
|-----------------|--------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Rx – Hopping |

| Test Site Information | |
|-------------------------------|--|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Type of Test Site | Semi-Anechoic Chamber |
| Test Site Used | R21F |
| Type of Antennas Used | Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent) |
| Highest Receive Frequency | 928MHz |
| Highest Measurement Frequency | 10GHz |
| Notes | The cables were manually maximized during the preliminary emissions sweeps. The cable arrangement which resulted in the worst-case emissions was utilized. |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz) | 3.2 |

| Requirements | |
|---|--|
| The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the values in the following table. | |

| Radiated Emissions Limits (30MHz to 1GHz) | | |
|---|-----------------------------|-------------------------------|
| Frequency of Emission (MHz) | Field Strength (μ V/m) | Field Strength (dB μ V/m) |
| 30 – 88 | 100 | 40 |
| 88 – 216 | 150 | 43.5 |
| 216 – 960 | 200 | 46 |
| Above 960 | 500 | 54 |

| Radiated Emissions Limits (Above 1GHz) | | |
|--|---------------------------|------------------------------|
| Frequency of Emission (MHz) | Peak Limit (dB μ V/m) | Average Limit (dB μ V/m) |
| Above 1000 | 74 | 54 |

Procedure

Since a quasi-peak detector and an average detector requires long integration times, it is not practical to automatically sweep through the quasi-peak and average levels. Therefore, radiated emissions from the EUT were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector or average detector.

The EUT and all peripheral equipment were placed on an 80cm high non-conductive stand. The broadband measuring antenna was positioned at a 3-meter distance from the EUT. The frequency range from 30MHz to 1GHz was investigated using a peak detector function with the bilog antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The frequency range from 1GHz to 10GHz was investigated using a peak detector function with the double ridged waveguide antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The maximum levels for each antenna polarization were plotted.

Final radiated emissions were performed on all significant broadband and narrowband emissions found in the exploratory sweeps using the following methods:


- 1) Measurements from 30MHz to 1GHz were made using a quasi-peak detector and a broadband bilog antenna. Measurements above 1GHz were made using an average detector and a broadband double ridged waveguide antenna.
- 2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken:
 - a) The EUT was rotated so that all sides were exposed to the receiving antenna.
 - b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
 - d) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.




Test Setup for Radiated Emissions: 30MHz to 1GHz, Horizontal Polarization



Test Setup for Radiated Emissions: 30MHz to 1GHz, Vertical Polarization

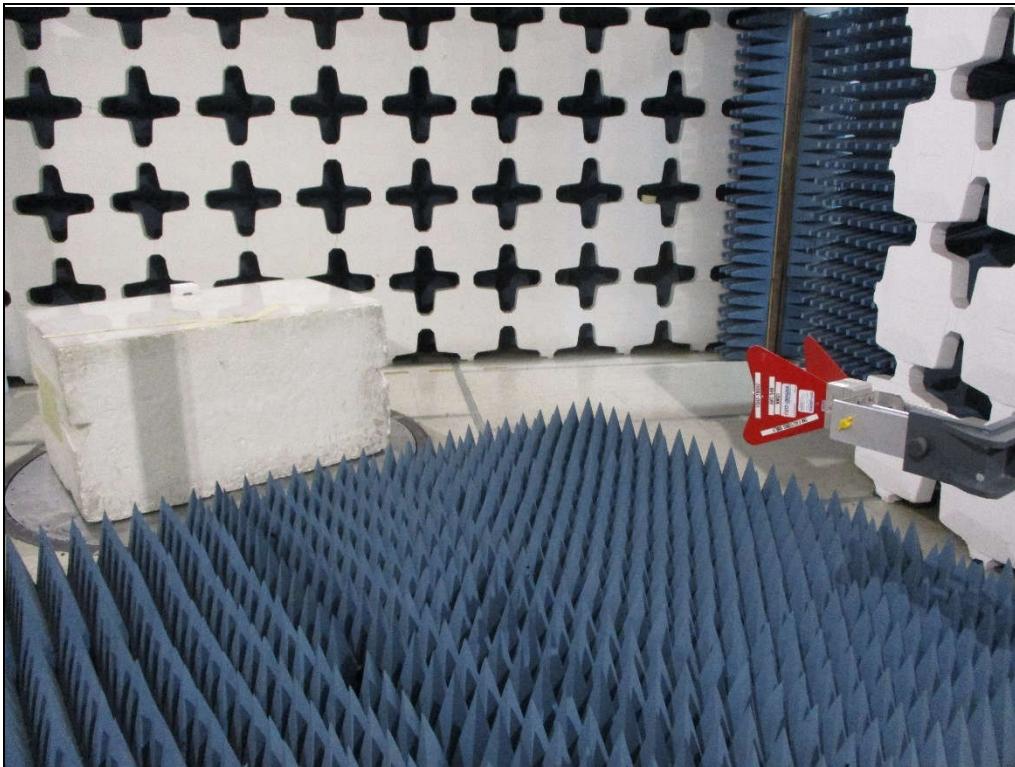

Test Setup for Radiated Emissions: 1GHz to 10GHz, Horizontal Polarization

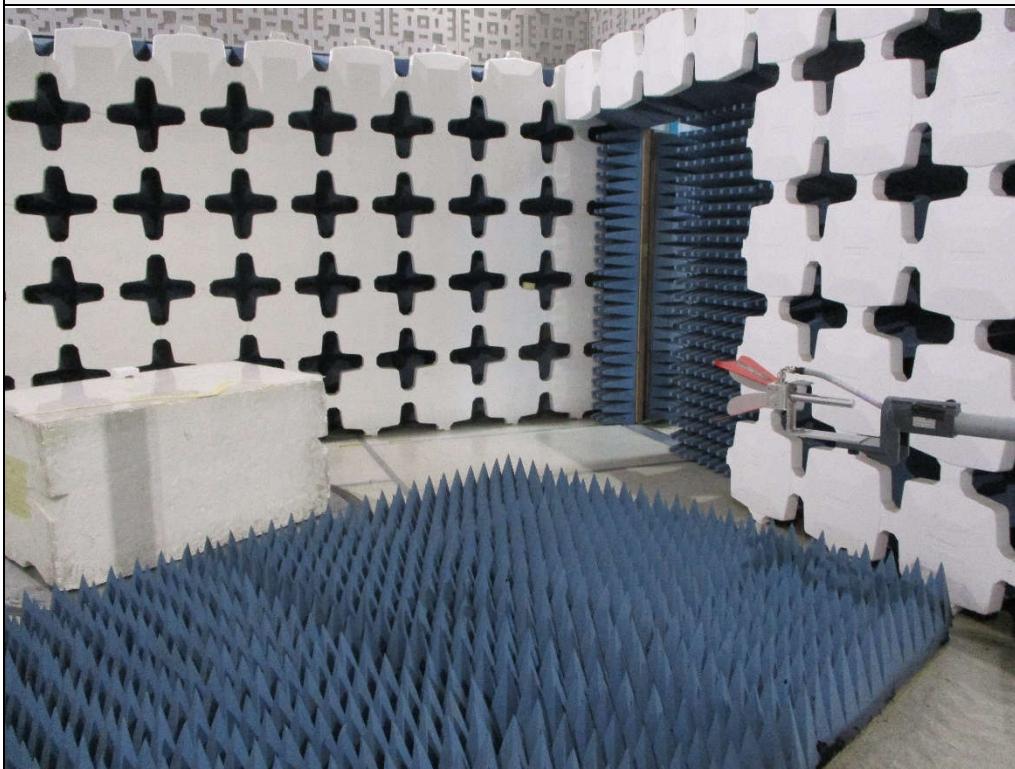

Test Setup for Radiated Emissions: 1GHz to 10GHz, Vertical Polarization

FCC Part 15 Subpart B Section 15.109

Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022


Manufacturer : Pro IAQ Inc
 Model : UBase
 Serial Number : N/A
 DUT Mode : Rx
 Turntable Step Angle (°) : 45
 Mast Positions (cm) : 120, 200, 340
 Scan Type : Stepped Scan
 Test RBW : 120 kHz
 Prelim Dwell Time (s) : 0.0001
 Notes : Hopping
 Test Engineer : J. Cardenas
 Test Date : Jun 27, 2022 08:48:01 AM

| Freq MHz | Peak Mtr Rdg dBuV | QP Mtr Rdg dBuV | Ant Fac dB/m | Amp Fac dB | Cbl Fac dB | Dist Corr dB | Peak Total dB μ V/m | QP Total dB μ V/m | QP Limit dB μ V/m | QP Lim Mrg dB | Ant Pol | Mast Ht cm | Azim ° | Excessive QP Level |
|-------------|----------------------------|--------------------------|--------------------|------------------|------------------|--------------------|-------------------------------|-----------------------------|-----------------------------|------------------------|------------|------------------|-----------|--------------------------|
| 32.100 | 5.9 | -5.2 | 23.7 | 0.0 | 0.5 | 0.0 | 30.1 | 19.0 | 40.0 | -21.0 | Vertical | 120 | 225 | |
| 65.220 | 6.8 | -1.1 | 12.3 | 0.0 | 0.5 | 0.0 | 19.7 | 11.7 | 40.0 | -28.3 | Vertical | 200 | 90 | |
| 119.320 | 3.1 | -7.5 | 18.2 | 0.0 | 0.6 | 0.0 | 21.9 | 11.3 | 43.5 | -32.2 | Horizontal | 340 | 0 | |
| 256.200 | 3.3 | -7.2 | 18.9 | 0.0 | 1.0 | 0.0 | 23.2 | 12.7 | 46.0 | -33.3 | Horizontal | 120 | 0 | |
| 534.180 | 4.7 | -7.3 | 24.8 | 0.0 | 1.5 | 0.0 | 31.0 | 19.0 | 46.0 | -27.0 | Vertical | 120 | 0 | |
| 925.860 | 4.2 | -6.9 | 26.7 | 0.0 | 2.0 | 0.0 | 32.9 | 21.9 | 46.0 | -24.1 | Horizontal | 340 | 270 | |

FCC Part 15 Subpart B Section 15.109 Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022


Manufacturer : Pro IAQ Inc
Model : UBase
Serial Number : N/A
DUT Mode : Rx
Turntable Step Angle (°) : 45
Mast Positions (cm) : 120, 200, 340
Antenna Polarization : Horizontal
Scan Type : Stepped Scan
Test RBW : 120 kHz
Prelim Dwell Time (s) : 0.0001
Notes : Hopping
Test Engineer : J. Cardenas
Test Date : Jun 27, 2022 08:48:01 AM

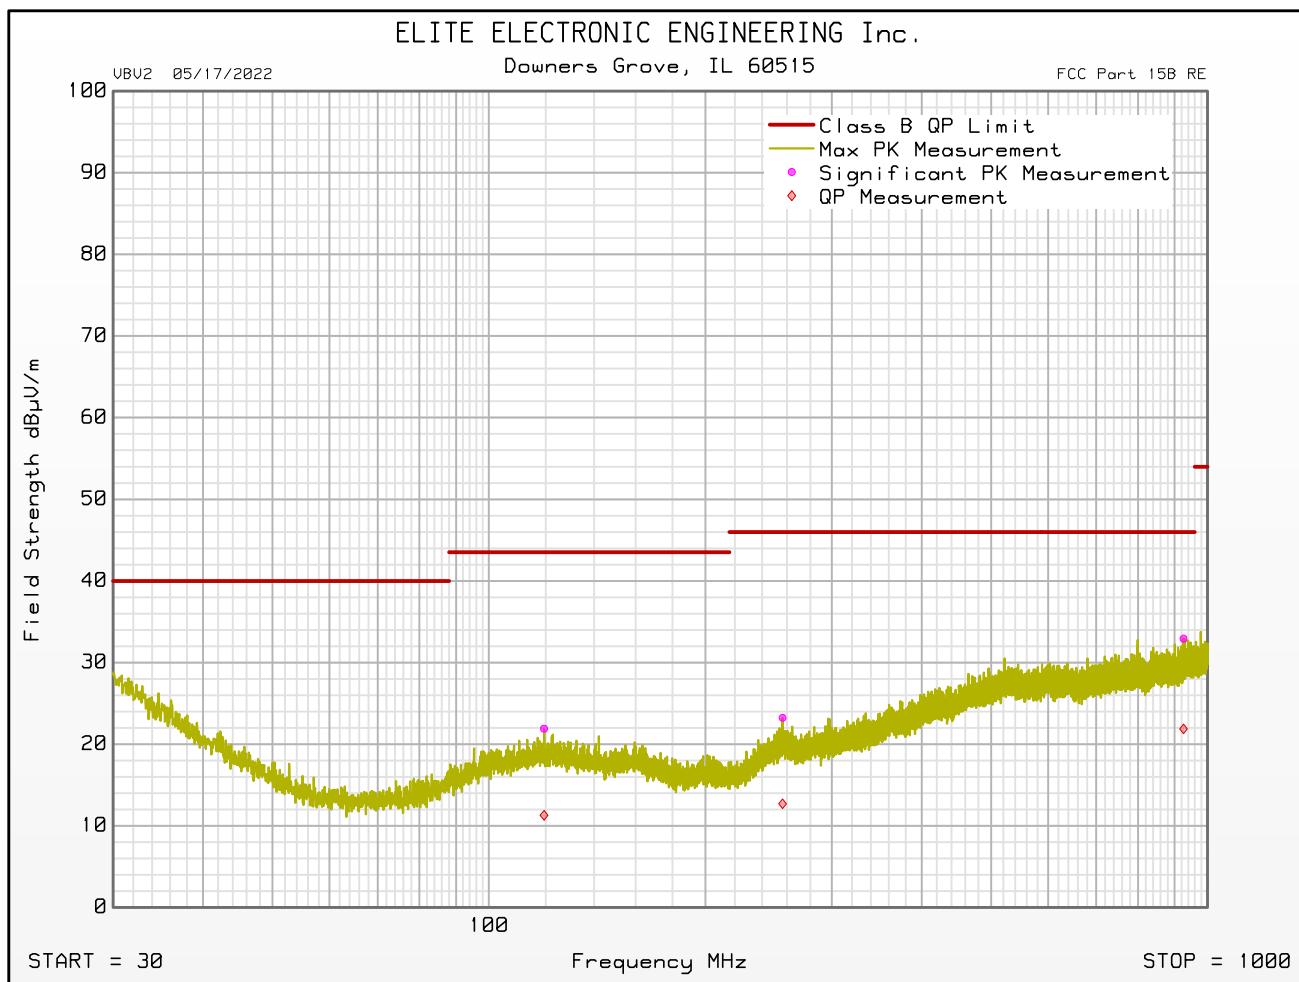

FCC Part 15 Subpart B Section 15.109 Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022

Manufacturer : Pro IAQ Inc
Model : UBase
Serial Number : N/A
DUT Mode : Rx
Turntable Step Angle (°) : 45
Mast Positions (cm) : 120, 200, 340
Antenna Polarization : Vertical
Scan Type : Stepped Scan
Test RBW : 120 kHz
Prelim Dwell Time (s) : 0.0001
Notes : Hopping
Test Engineer : J. Cardenas
Test Date : Jun 27, 2022 08:48:01 AM

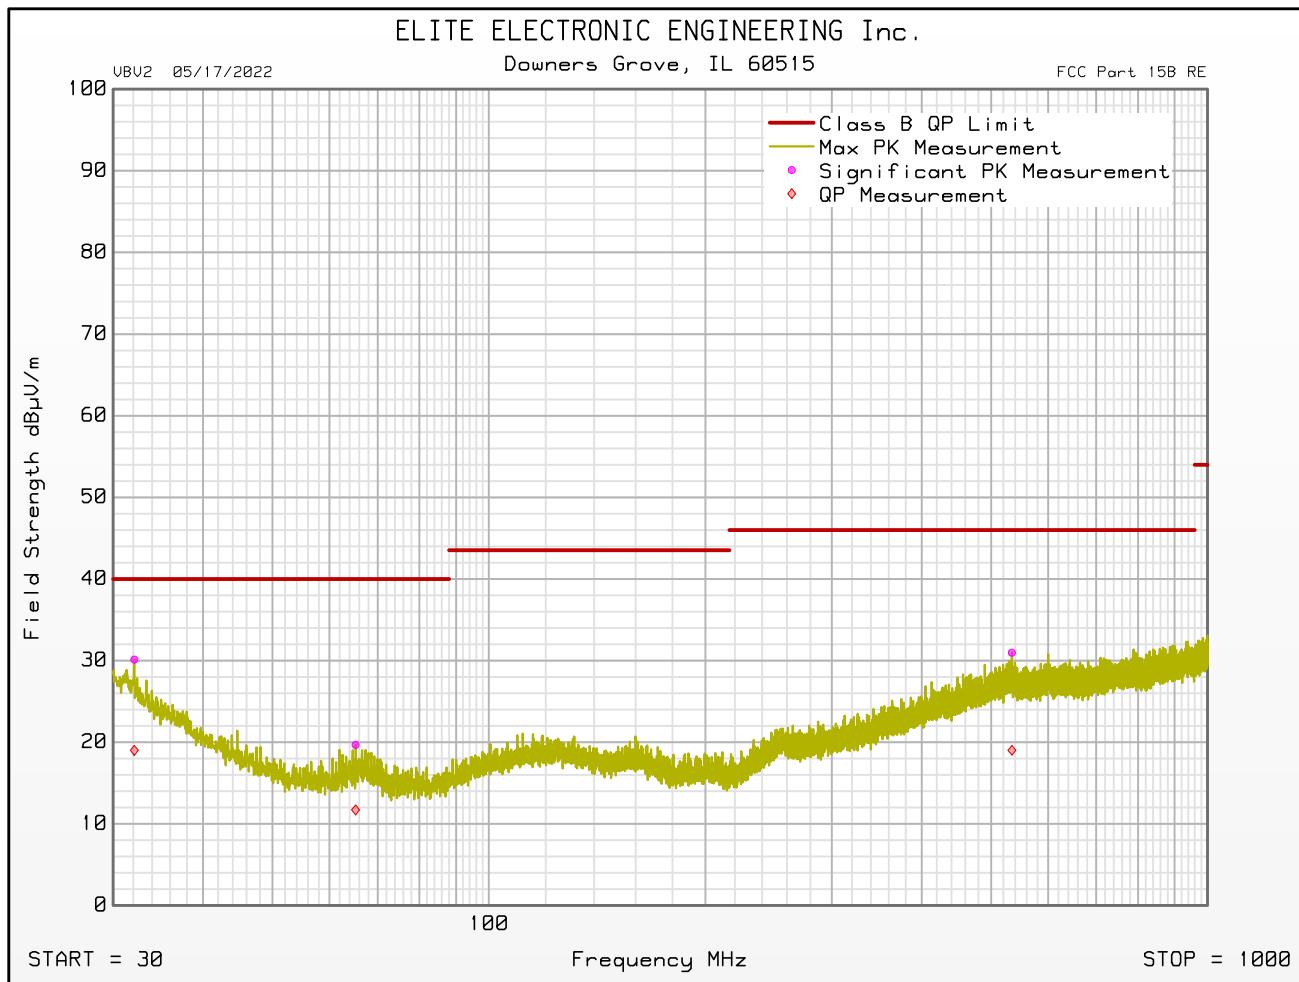

FCC Part 15 Subpart B Section 15.109

Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022

Manufacturer : Pro IAQ Inc
 Model : UBase
 Serial Number : N/A
 DUT Mode : Rx
 Turntable Step Angle (°) : 45
 Mast Positions (cm) : 120, 200, 340
 Scan Type : Stepped Scan
 Test RBW : 1 MHz
 Prelim Dwell Time (s) : 0.0001
 Notes : Hopping
 Test Engineer : J. Cardenas
 Test Date : Jun 27, 2022 11:07:23 AM


| Freq MHz | Peak Mtr Rdg dBuV | Ant Fac dB/m | Amp Fac dB | Cbl Fac dB | Dist Corr dB | Peak Total dB μ V/m | Peak Limit dB μ V/m | Peak Lim Mrg dB | Ant Pol | Mast Ht cm | Azim ° | Excessive Peak Level |
|----------|-------------------|--------------|------------|------------|--------------|-------------------------|-------------------------|-----------------|------------|------------|--------|----------------------|
| 1269.500 | 50.8 | 29.7 | -41.9 | 2.3 | 0.0 | 41.0 | 74.0 | -33.0 | Vertical | 120 | 135 | |
| 2028.500 | 49.4 | 30.7 | -40.7 | 3.0 | 0.0 | 42.4 | 74.0 | -31.5 | Vertical | 120 | 45 | |
| 2784.000 | 50.1 | 32.9 | -41.3 | 3.7 | 0.0 | 45.5 | 74.0 | -28.4 | Horizontal | 340 | 0 | |
| 4432.500 | 48.0 | 34.0 | -40.4 | 4.7 | 0.0 | 46.3 | 74.0 | -27.7 | Horizontal | 200 | 0 | |
| 6795.000 | 47.5 | 35.9 | -40.6 | 5.9 | 0.0 | 48.7 | 74.0 | -25.3 | Vertical | 340 | 45 | |
| 9599.500 | 48.2 | 36.7 | -40.9 | 6.8 | 0.0 | 50.8 | 74.0 | -23.2 | Horizontal | 200 | 270 | |

| Freq MHz | Average Mtr Rdg dBuV | Ant Fac dB/m | Amp Fac dB | Cbl Fac dB | Dist Corr dB | Average Total dB μ V/m | Average Limit dB μ V/m | Average Lim Mrg dB | Ant Pol | Mast Ht cm | Azim ° | Excessive Average Level |
|----------|----------------------|--------------|------------|------------|--------------|----------------------------|----------------------------|--------------------|------------|------------|--------|-------------------------|
| 1269.500 | 37.3 | 29.7 | -41.9 | 2.3 | 0.0 | 27.4 | 54.0 | -26.5 | Vertical | 120 | 135 | |
| 2028.500 | 35.6 | 30.7 | -40.7 | 3.0 | 0.0 | 28.6 | 54.0 | -25.4 | Vertical | 120 | 45 | |
| 2784.000 | 35.6 | 32.9 | -41.3 | 3.7 | 0.0 | 31.0 | 54.0 | -23.0 | Horizontal | 340 | 0 | |
| 4432.500 | 34.0 | 34.0 | -40.4 | 4.7 | 0.0 | 32.2 | 54.0 | -21.7 | Horizontal | 200 | 0 | |
| 6795.000 | 33.9 | 35.9 | -40.6 | 5.9 | 0.0 | 35.1 | 54.0 | -18.9 | Vertical | 340 | 45 | |
| 9599.500 | 34.7 | 36.7 | -40.9 | 6.8 | 0.0 | 37.3 | 54.0 | -16.7 | Horizontal | 200 | 270 | |

FCC Part 15 Subpart B Section 15.109 Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022


Manufacturer : Pro IAQ Inc
Model : UBase
Serial Number : N/A
DUT Mode : Rx
Turntable Step Angle (°) : 45
Mast Positions (cm) : 120, 200, 340
Antenna Polarization : Horizontal
Scan Type : Stepped Scan
Test RBW : 1 MHz
Prelim Dwell Time (s) : 0.0001
Notes : Hopping
Test Engineer : J. Cardenas
Test Date : Jun 27, 2022 11:07:23 AM

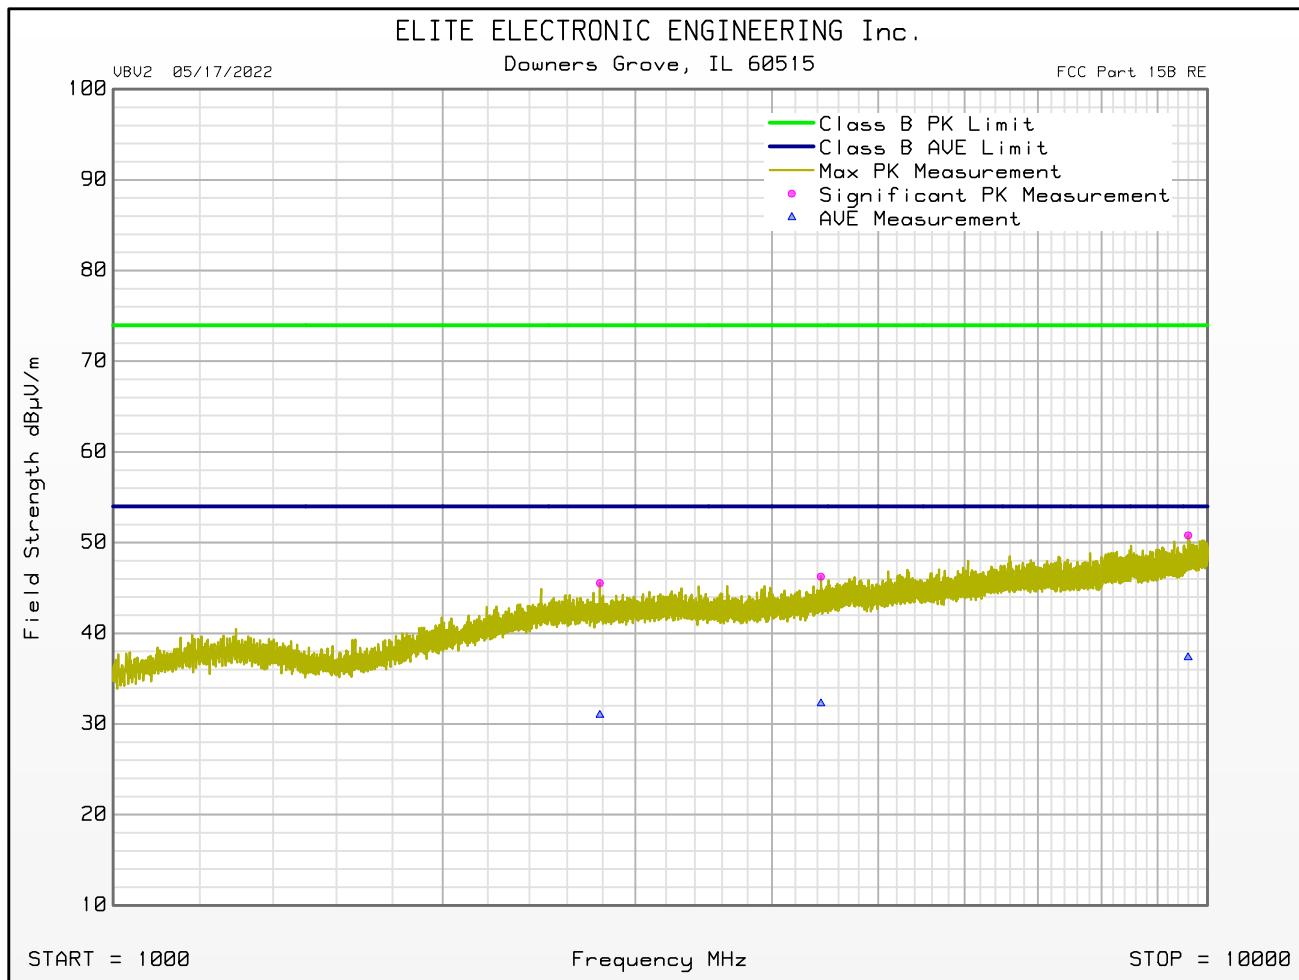

FCC Part 15 Subpart B Section 15.109 Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022

Manufacturer : Pro IAQ Inc
Model : UBase
Serial Number : N/A
DUT Mode : Rx
Turntable Step Angle (°) : 45
Mast Positions (cm) : 120, 200, 340
Antenna Polarization : Vertical
Scan Type : Stepped Scan
Test RBW : 1 MHz
Prelim Dwell Time (s) : 0.0001
Notes : Hopping
Test Engineer : J. Cardenas
Test Date : Jun 27, 2022 11:07:23 AM

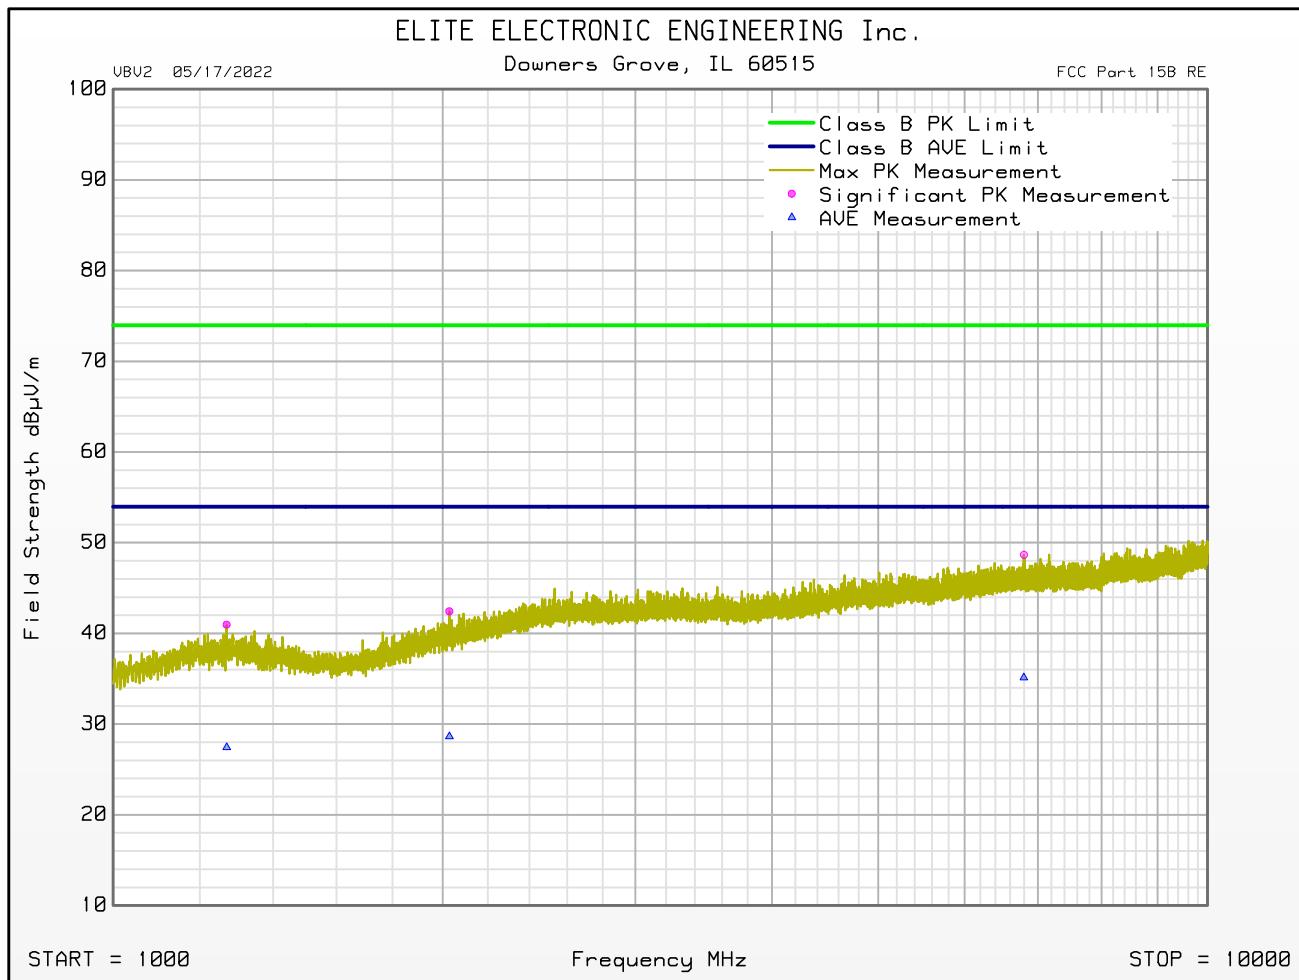

22. Transmitter Conducted Emissions (AC Mains)

| Test Information | |
|------------------|--------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx – Hopping |

| Test Setup Details | |
|--------------------|--------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Type of Test Site | Shielded Enclosure |
| Test Site Used | R23P |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Conducted disturbance (mains port) (150 kHz – 30 MHz) | 2.7 |

| Requirements | |
|---|--|
| All radio frequency voltages on the power lines for any frequency or frequencies of an intentional radiator shall not exceed the limits in the following table: | |

| Transmitter Conducted Emissions Limits | | |
|--|----------------------------------|---------|
| Frequency of Emission (MHz) | Conducted Limits (dB μ V) | |
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56-46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

* The lower limit shall apply at the transition frequencies.

Procedure

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- 1) The EUT was operated in the Tx – Hopping mode.
- 2) Measurements were first made on the primary side of the 120V/24V transformer high line.
- 3) The frequency range from 150kHz to 30MHz was broken up into smaller frequency sub-bands.
- 4) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- 5) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- 6) Steps (4) and (5) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits. The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dB}\mu\text{V)} = MTR \text{ (dB}\mu\text{V)} + CF \text{ (dB)}$$

- 7) Steps (3) through (6) were repeated on the neutral line.



Test Setup for RF Conducted Emissions (AC Mains)



Test Setup for RF Conducted Emissions (AC Mains)

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Pro IAQ Inc
 Model : UBase
 DUT Revision : N/A
 Serial Number : N/A
 DUT Mode : Tx
 Line Tested : Line
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes : Hopping
 Test Engineer : J. Cardenas
 Limit : FCC 15.207
 Test Date : Jun 23, 2022 09:46:35 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

| Freq MHz | Quasi-peak Level dB μ V | Quasi-peak Limit dB μ V | Excessive Quasi-peak Emissions | Average Level dB μ V | Average Limit dB μ V | Excessive Average Emissions |
|----------|-----------------------------|-----------------------------|--------------------------------|--------------------------|--------------------------|-----------------------------|
| 0.159 | 44.0 | 65.5 | | 19.1 | 55.5 | |
| 0.270 | 24.7 | 61.1 | | 5.9 | 51.1 | |
| 0.527 | 9.0 | 56.0 | | 3.6 | 46.0 | |
| 1.096 | 9.0 | 56.0 | | 3.7 | 46.0 | |
| 1.439 | 8.6 | 56.0 | | 3.6 | 46.0 | |
| 2.201 | 8.9 | 56.0 | | 2.3 | 46.0 | |
| 5.000 | 9.2 | 56.0 | | 2.0 | 46.0 | |
| 14.508 | 8.8 | 60.0 | | 3.5 | 50.0 | |
| 23.968 | 17.4 | 60.0 | | 10.7 | 50.0 | |

FCC Part 15 Subpart C Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Pro IAQ Inc
 Model : UBase
 DUT Revision : N/A
 Serial Number : N/A
 DUT Mode : Tx
 Line Tested : Line
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes : Hopping
 Test Engineer : J. Cardenas
 Limit : FCC 15.207
 Test Date : Jun 23, 2022 09:46:35 AM

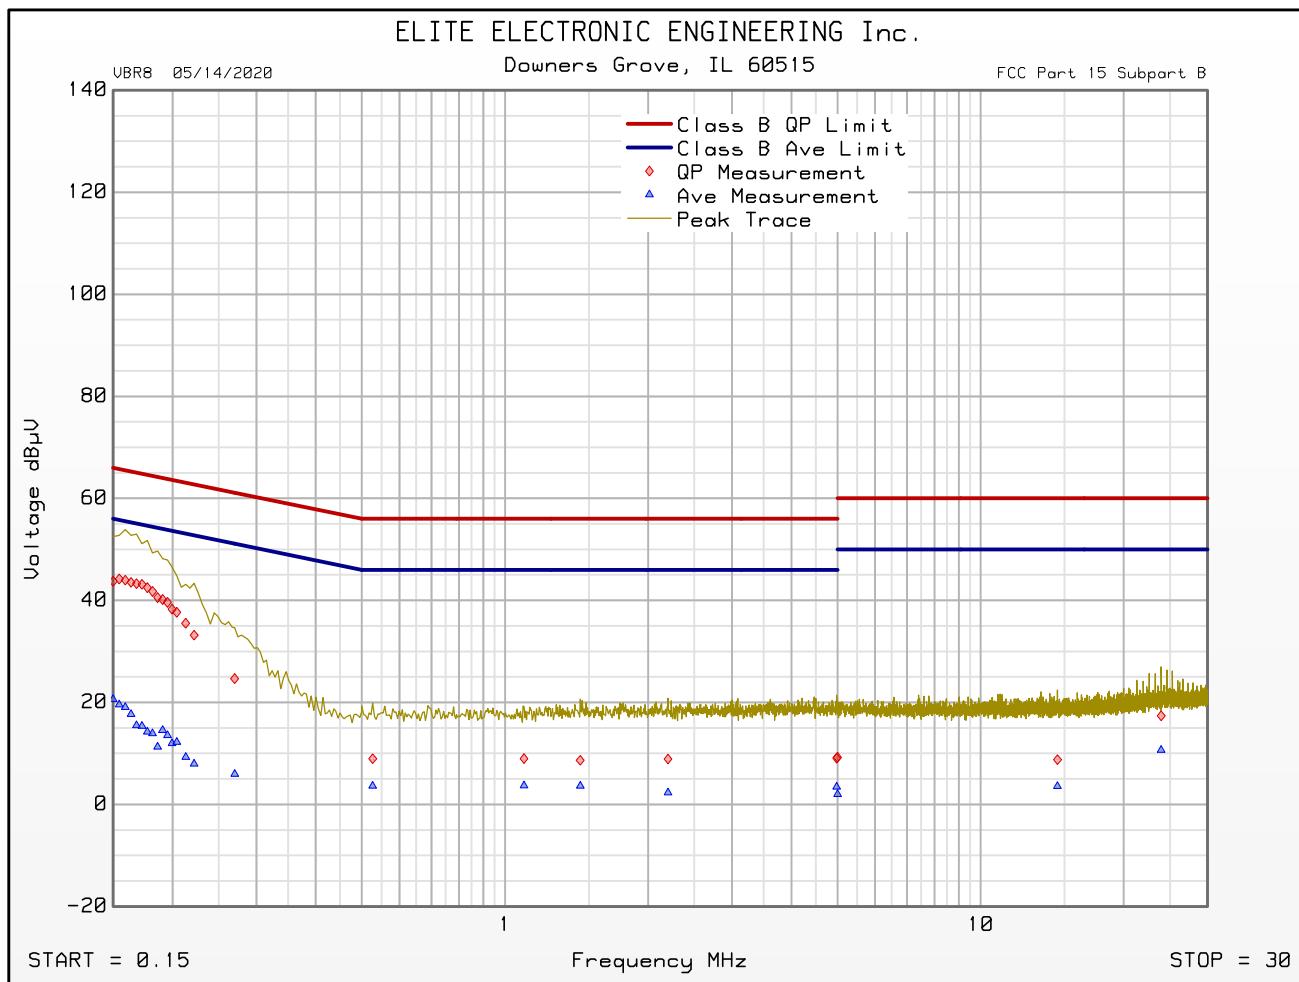

Emissions Meet QP Limit
 Emissions Meet Ave Limit

FCC Part 15 Subpart C Conducted Emissions Test

Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Pro IAQ Inc
 Model : UBase
 DUT Revision : N/A
 Serial Number : N/A
 DUT Mode : Tx
 Line Tested : Neutral
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes : Hopping
 Test Engineer : J. Cardenas
 Limit : FCC 15.207
 Test Date : Jun 23, 2022 09:41:07 AM
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

| Freq MHz | Quasi-peak Level dB μ V | Quasi-peak Limit dB μ V | Excessive Quasi-peak Emissions | Average Level dB μ V | Average Limit dB μ V | Excessive Average Emissions |
|----------|-----------------------------|-----------------------------|--------------------------------|--------------------------|--------------------------|-----------------------------|
| 0.168 | 42.8 | 65.1 | | 16.8 | 55.1 | |
| 0.270 | 24.0 | 61.1 | | 5.5 | 51.1 | |
| 0.500 | 8.9 | 56.0 | | 3.0 | 46.0 | |
| 1.087 | 9.0 | 56.0 | | 1.7 | 46.0 | |
| 1.259 | 8.9 | 56.0 | | 2.8 | 46.0 | |
| 3.092 | 8.8 | 56.0 | | 3.5 | 46.0 | |
| 3.329 | 9.4 | 56.0 | | 2.9 | 46.0 | |
| 5.000 | 9.2 | 56.0 | | 3.3 | 46.0 | |
| 13.977 | 13.5 | 60.0 | | 8.0 | 50.0 | |
| 24.634 | 21.3 | 60.0 | | 19.4 | 50.0 | |

FCC Part 15 Subpart C Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Pro IAQ Inc
 Model : UBase
 DUT Revision : N/A
 Serial Number : N/A
 DUT Mode : Tx
 Line Tested : Neutral
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -10
 Notes : Hopping
 Test Engineer : J. Cardenas
 Limit : FCC 15.207
 Test Date : Jun 23, 2022 09:41:07 AM

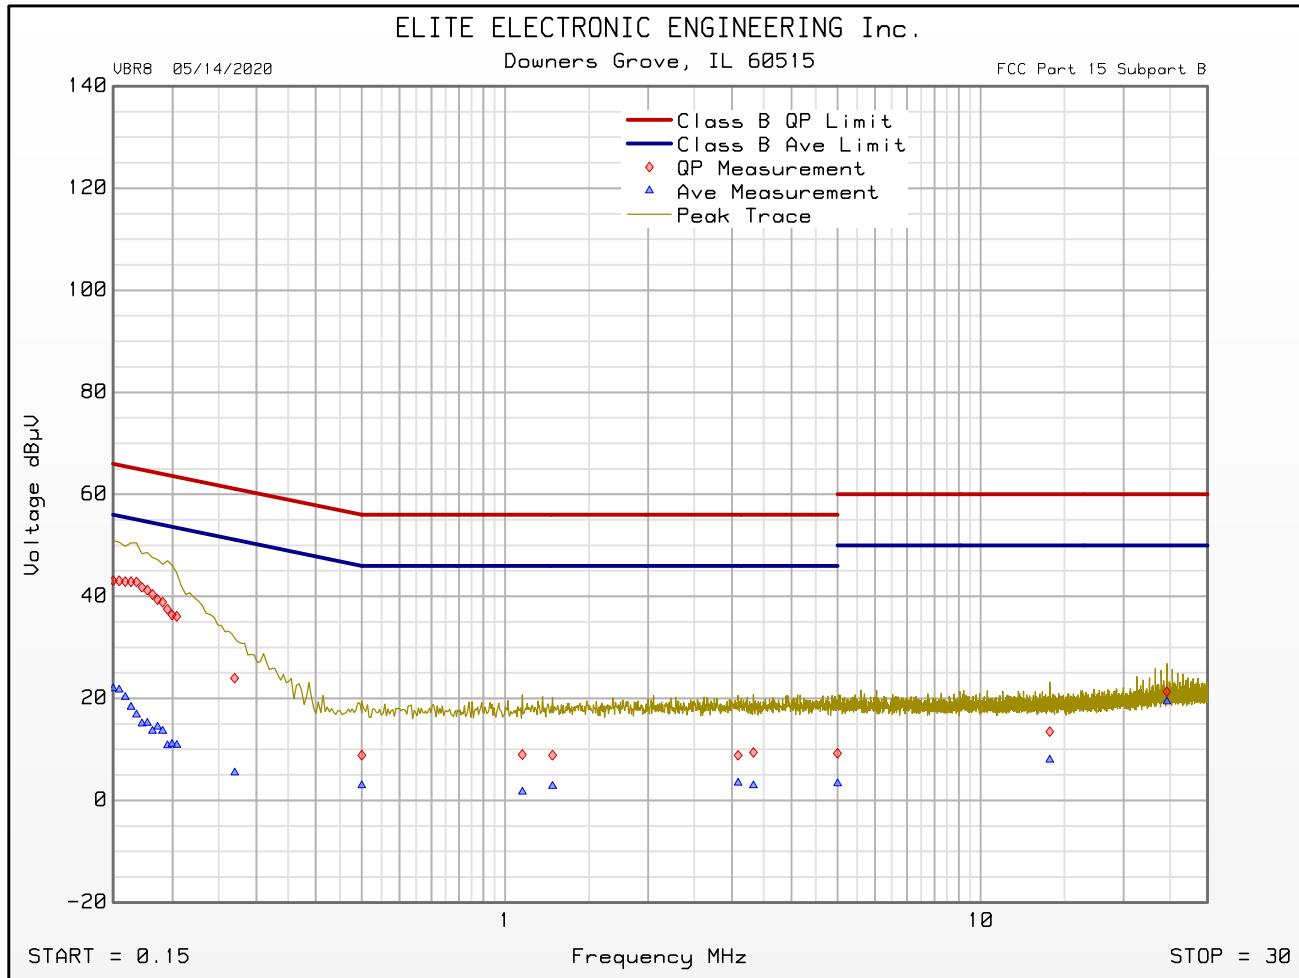

Emissions Meet QP Limit
 Emissions Meet Ave Limit

23. 20dB Bandwidth

| EUT Information | |
|-----------------|-------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |


| Test Setup Details | |
|-----------------------|--|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Measurement Method | Antenna Conducted |
| Type of Test Site | Tabletop |
| Test Site Used | EMC Workbench |
| Type of Antennas Used | Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent) |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |

| Requirements |
|---|
| Systems using frequency hopping techniques operating in the 902 – 928MHz band are allowed a maximum 20dB bandwidth of 500kHz. |


| Procedure |
|---|
| The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. |
| The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to $\geq 1\%$ of the 20dB BW. The span was set to approximately 2 to 3 times the 20dB bandwidth. |
| The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was then screenshot and saved. |

| Test Details | |
|------------------|--------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 902.500MHz |
| Result | 20dB BW = 39.56kHz |
| Test Date | June 20, 2022 |
| Notes | None |

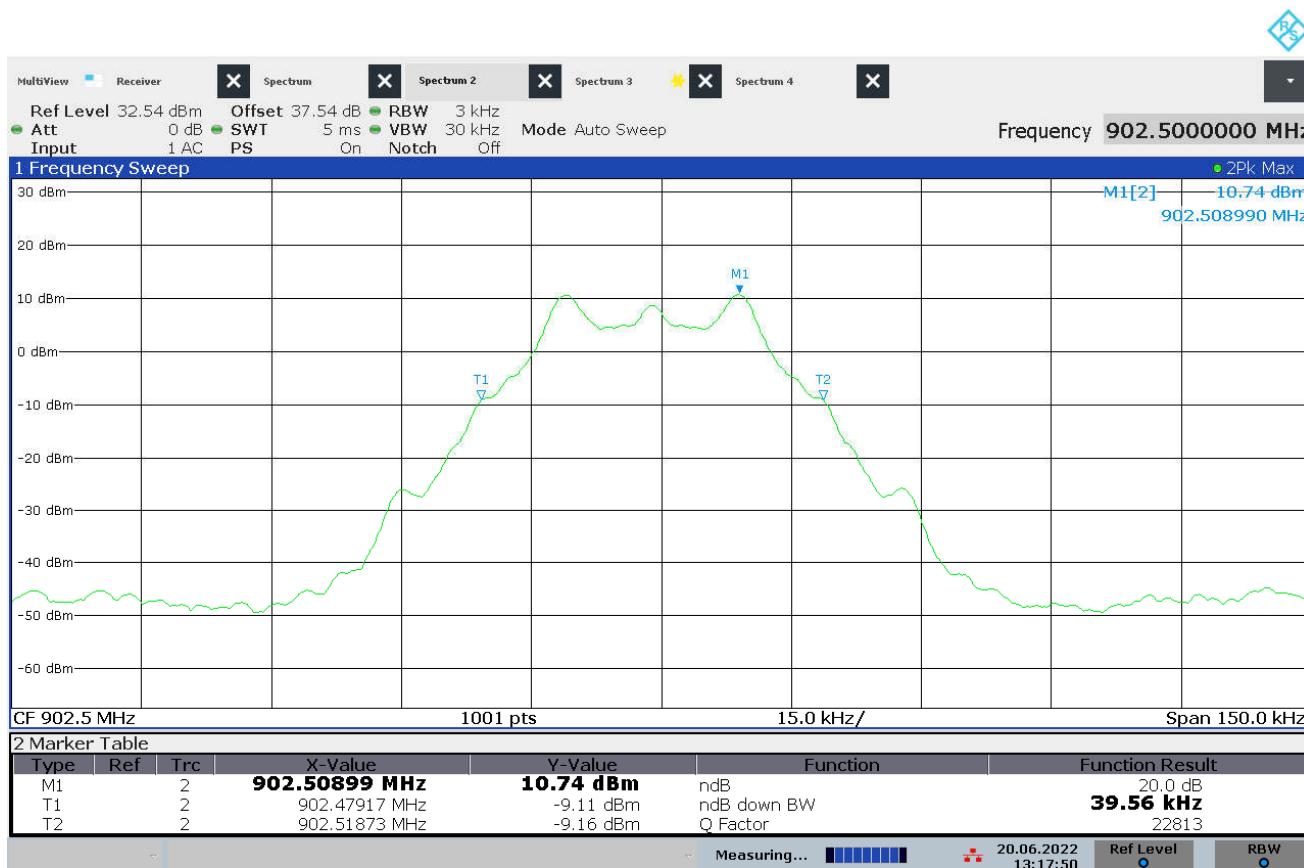


13:17:50 20.06.2022

| Test Details | |
|------------------|--------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 914.768MHz |
| Result | 20dB BW = 39.71kHz |
| Test Date | June 20, 2022 |
| Notes | None |

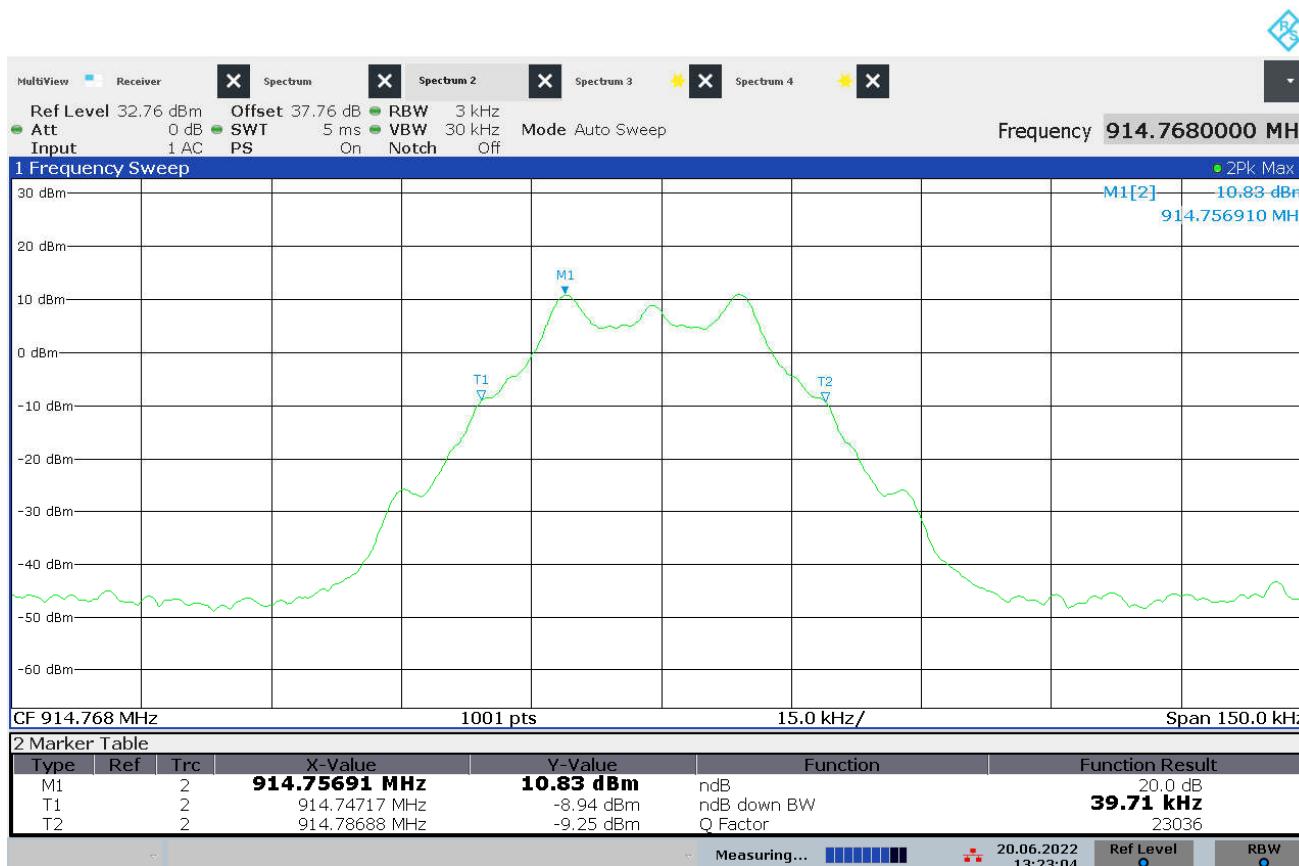

13:23:05 20.06.2022

| Test Details | |
|------------------|--------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 928.547MHz |
| Result | 20dB BW = 39.41kHz |
| Test Date | June 20, 2022 |
| Notes | None |

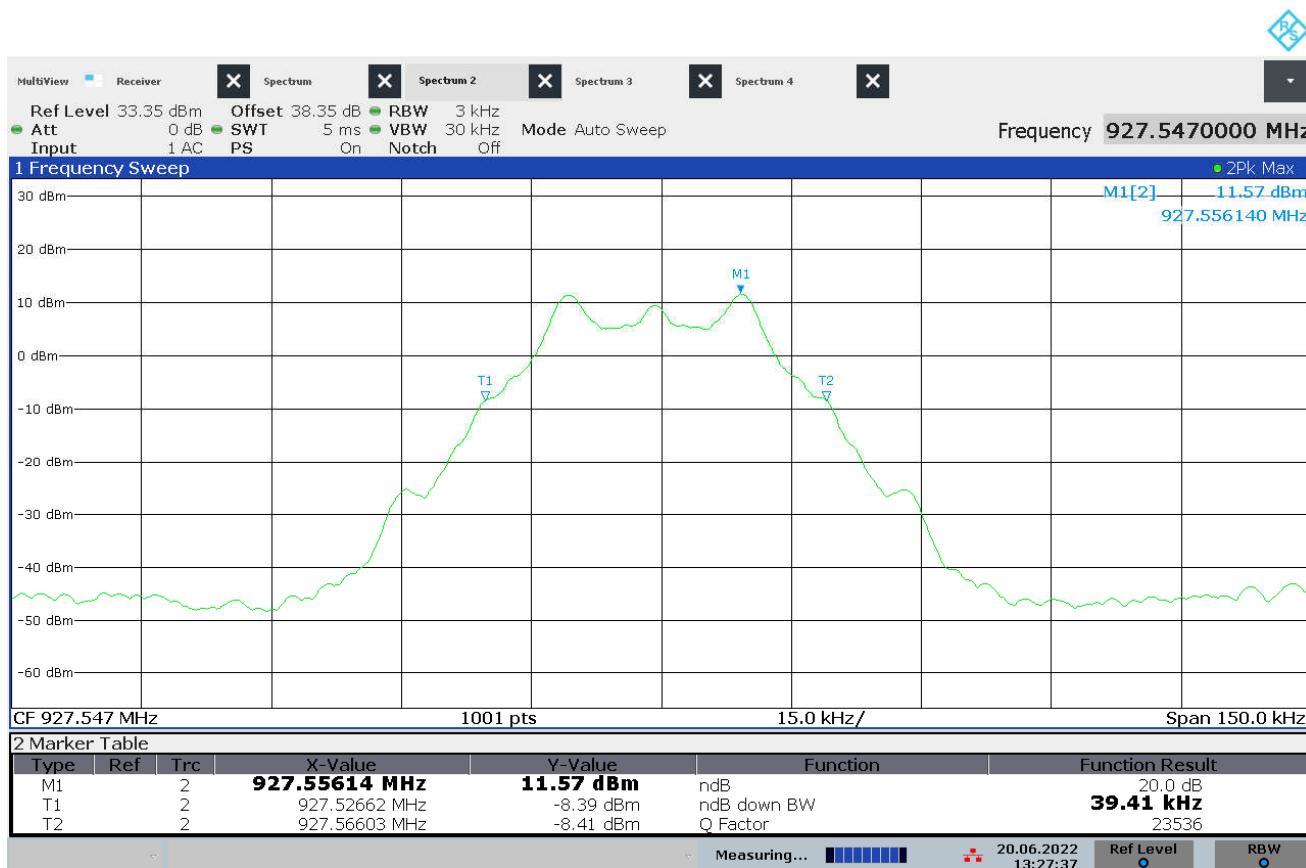

13:27:38 20.06.2022

24. Occupied Bandwidth (99%)

| EUT Information | |
|-----------------|-------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |

| Test Setup Details | |
|-----------------------|-------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Measurement Method | Antenna Conducted |
| Type of Test Site | Tabletop |
| Test Site Used | EMC Workbench |
| Type of Antennas Used | N/A |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |

| Procedure | |
|--|--|
| The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. | |
| The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 1% to 5% of the actual occupied / x dB bandwidth, the video bandwidth (VBW) was set 3 times greater than the RBW, and the span was set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency. | |
| The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility. | |

| Test Details | |
|------------------|----------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 902.500kHz |
| Result | OBW = 33.55kHz |
| Test Date | June 20, 2022 |
| Notes | None |




13:17:27 20.06.2022

| Test Details | |
|------------------|----------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 914.768kHz |
| Result | OBW = 33.53kHz |
| Test Date | June 20, 2022 |
| Notes | None |



13:22:48 20.06.2022

| Test Details | |
|------------------|----------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 927.547kHz |
| Result | OBW = 33.53kHz |
| Test Date | June 20, 2022 |
| Notes | None |

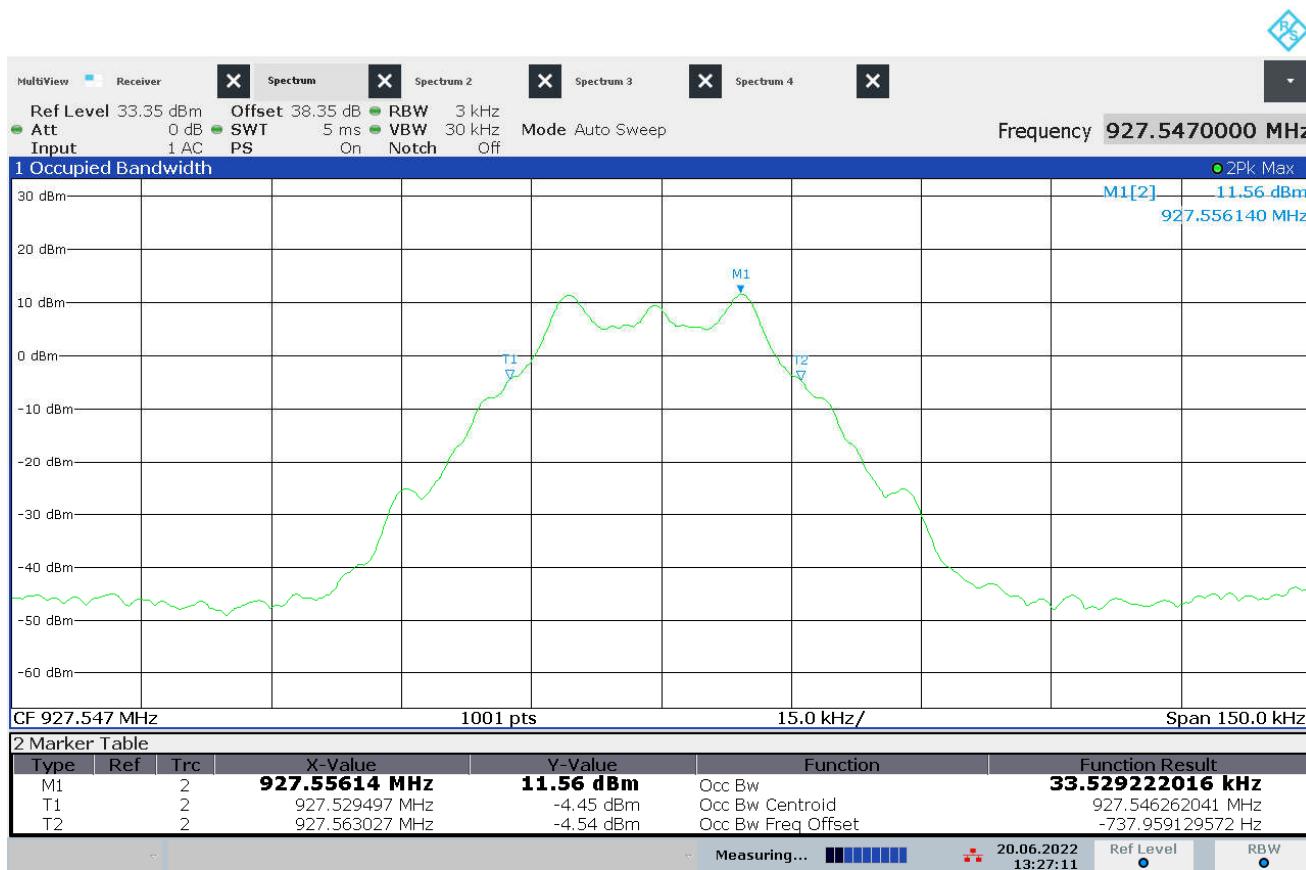

13:27:12 20.06.2022

25. Carrier Frequency Separation

| EUT Information | |
|-----------------|--------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx - Hopping |


| Test Setup Details | |
|-----------------------|-------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Measurement Method | Antenna Conducted |
| Type of Test Site | Tabletop |
| Test Site Used | EMC Workbench |
| Type of Antennas Used | N/A |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |

| Requirement | |
|---|--|
| Channel carrier frequencies shall be separated by a minimum of 25kHz or the 20dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW. | |

| Procedure | |
|---|--|
| The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously. | |
| Span was set wide enough to capture the peaks of two adjacent channels. The resolution bandwidth was set to approximately 30% of the channel spacing. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels. When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility. | |

| Test Details | |
|--------------|-----------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx - Hopping |
| Result | Separation = 511.5kHz |
| Test Date | June 20, 2022 |
| Notes | None |

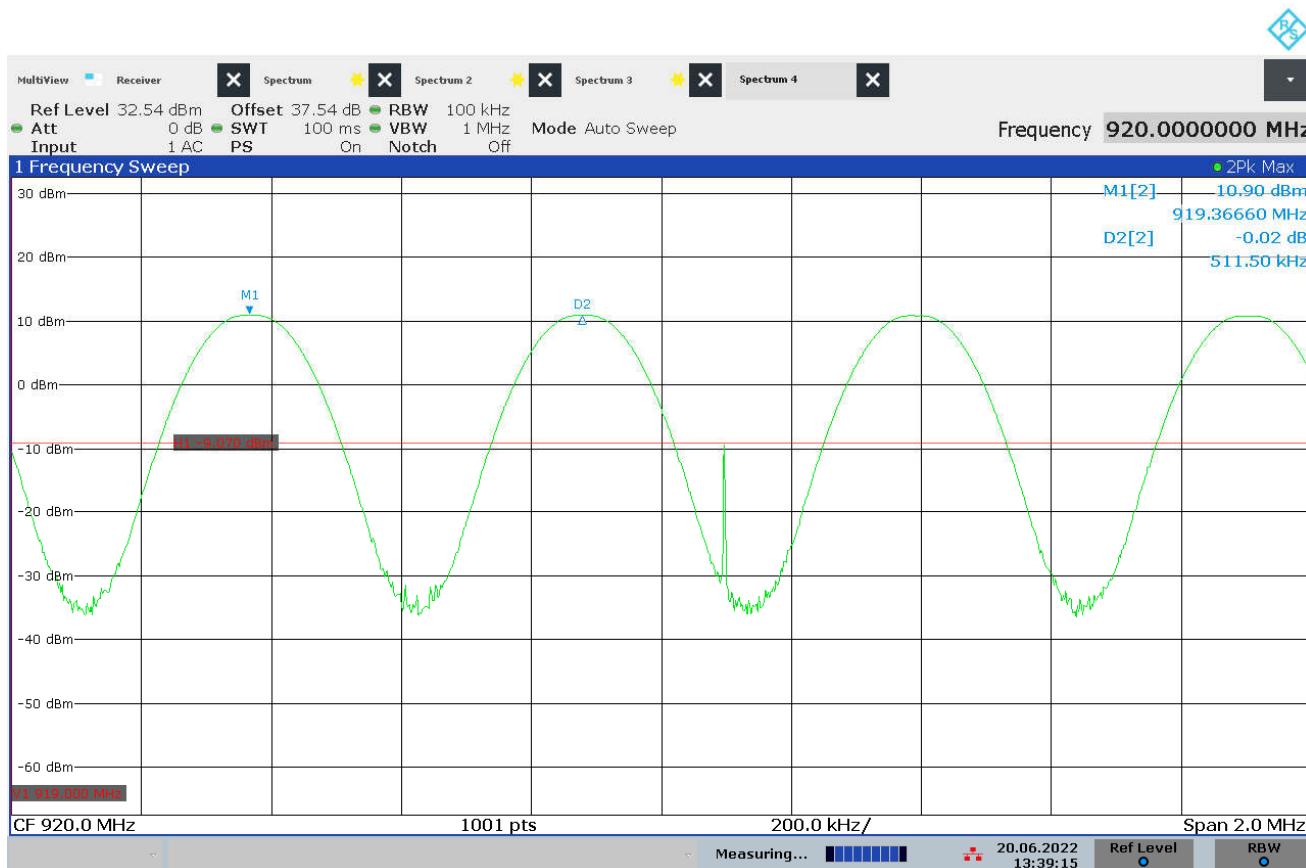

13:39:15 20.06.2022

26. Number of Carrier Channels

| EUT Information | |
|-----------------|--------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx – Hopping |


| Test Setup Details | |
|-----------------------|-------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Measurement Method | Antenna Conducted |
| Type of Test Site | Tabletop |
| Test Site Used | EMC Workbench |
| Type of Antennas Used | N/A |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |

| Requirements |
|---|
| The system shall use at least 50 hopping frequencies. |

| Procedure |
|---|
| The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously. |
| The resolution bandwidth (RBW) was set to less than 30% of the channel spacing or the 20dB bandwidth, whichever is smaller. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation. |
| The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility. |

| Test Details | |
|--------------|------------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx - Hopping |
| Result | 50 hopping frequencies |
| Test Date | June 20, 2022 |
| Notes | None |

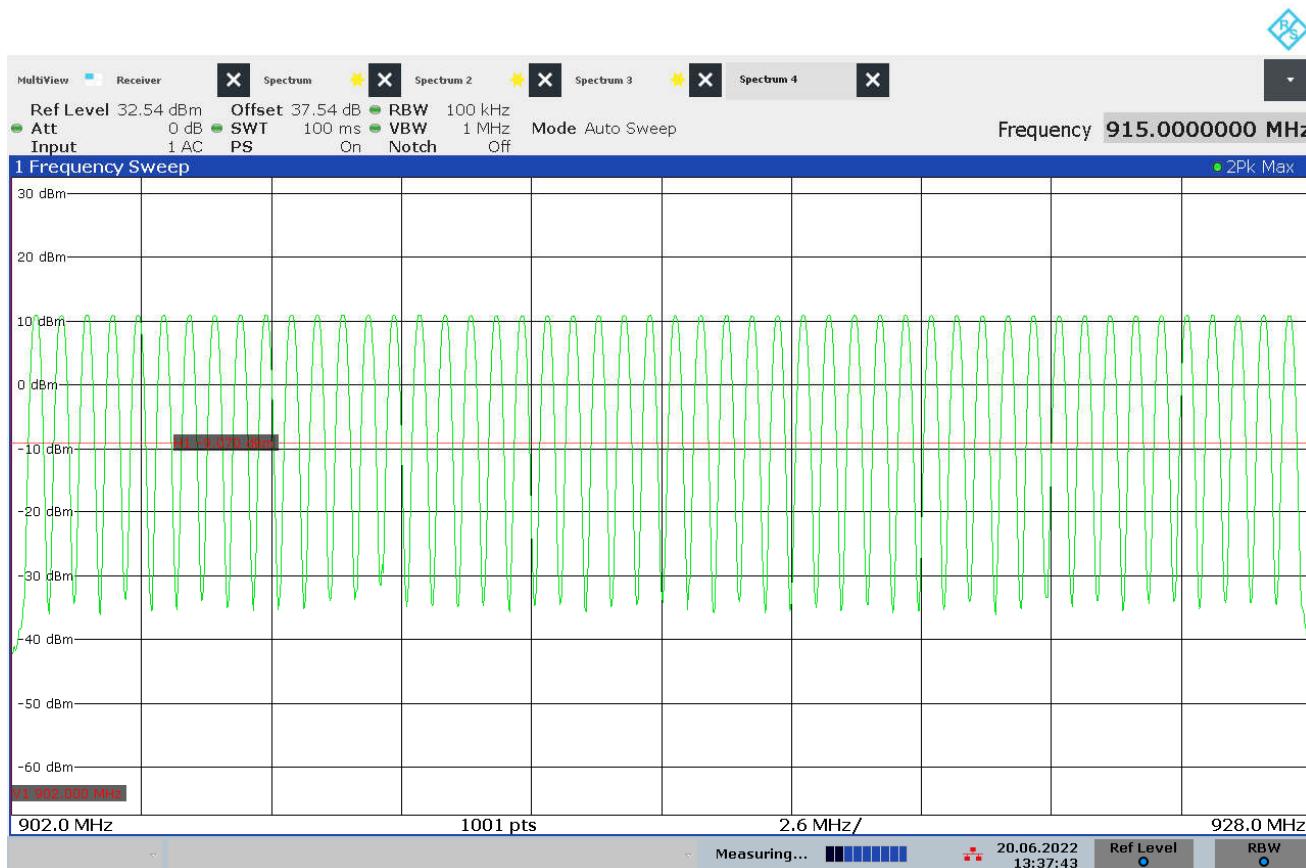

13:37:43 20.06.2022

27. Average Time of Occupancy

| EUT Information | |
|-----------------|--------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx – Hopping |


| Test Setup Details | |
|-----------------------|-------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Measurement Method | Antenna Conducted |
| Type of Test Site | EMC Workbench |
| Test Site Used | N/A |
| Type of Antennas Used | N/A |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |


| Requirements |
|---|
| The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period. |

| Procedure |
|---|
| The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function enabled, the EUT was allowed to transmit continuously. |
| The spectrum analyzer was set to zero span centered on a hopping channel. The resolution bandwidth (RBW) was set \geq to the channel spacing. The sweep was set to capture the entire dwell time per hopping channel. The peak detector and 'Max-Hold' function were engaged. The analyzer's display was plotted using a 'screen dump' utility. |

| Test Details | |
|------------------|----------------------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 902.5MHz |
| Result | Ave. Time of Occupancy = 0.0199s |
| Test Date | June 23, 2022 |
| Notes | None |

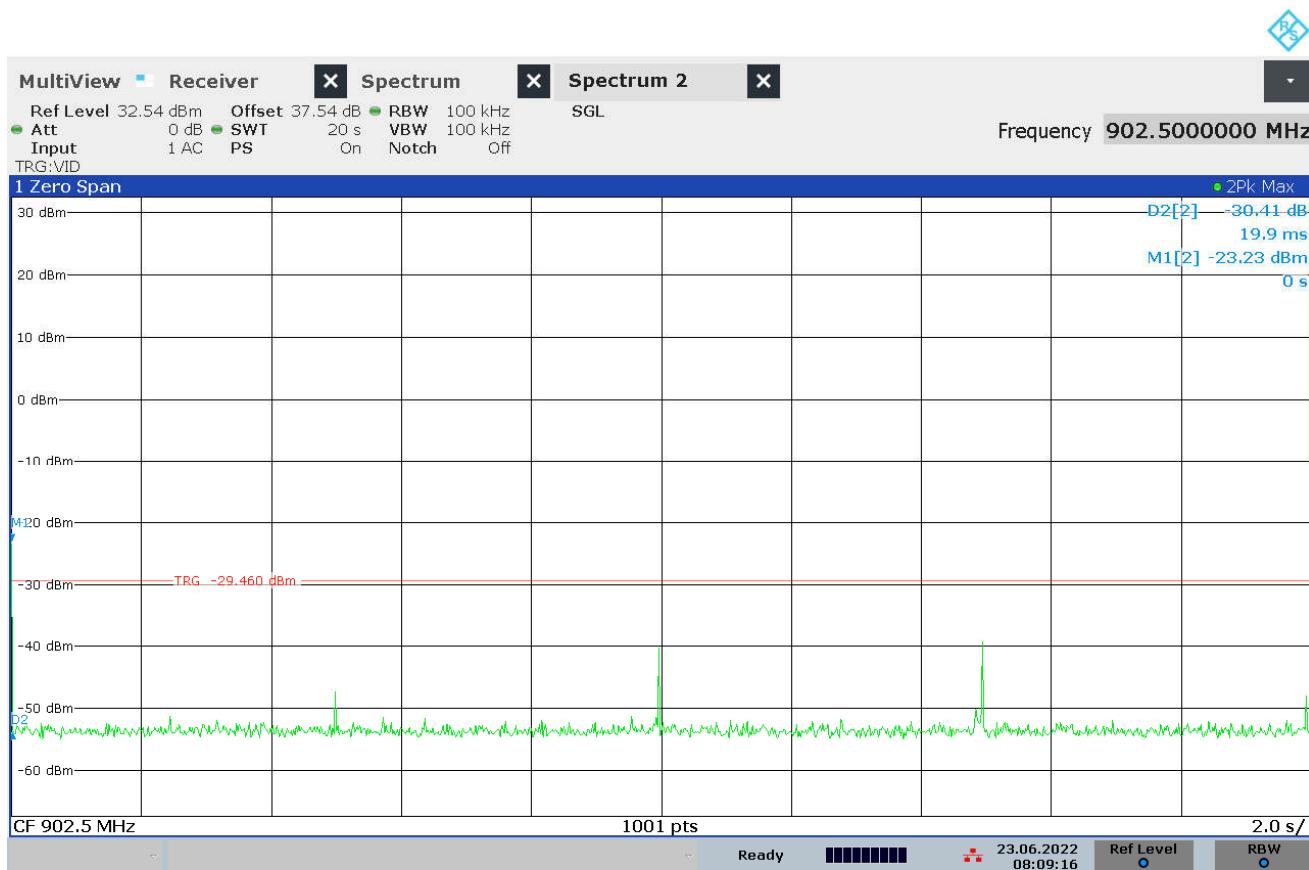

08:09:17 23.06.2022

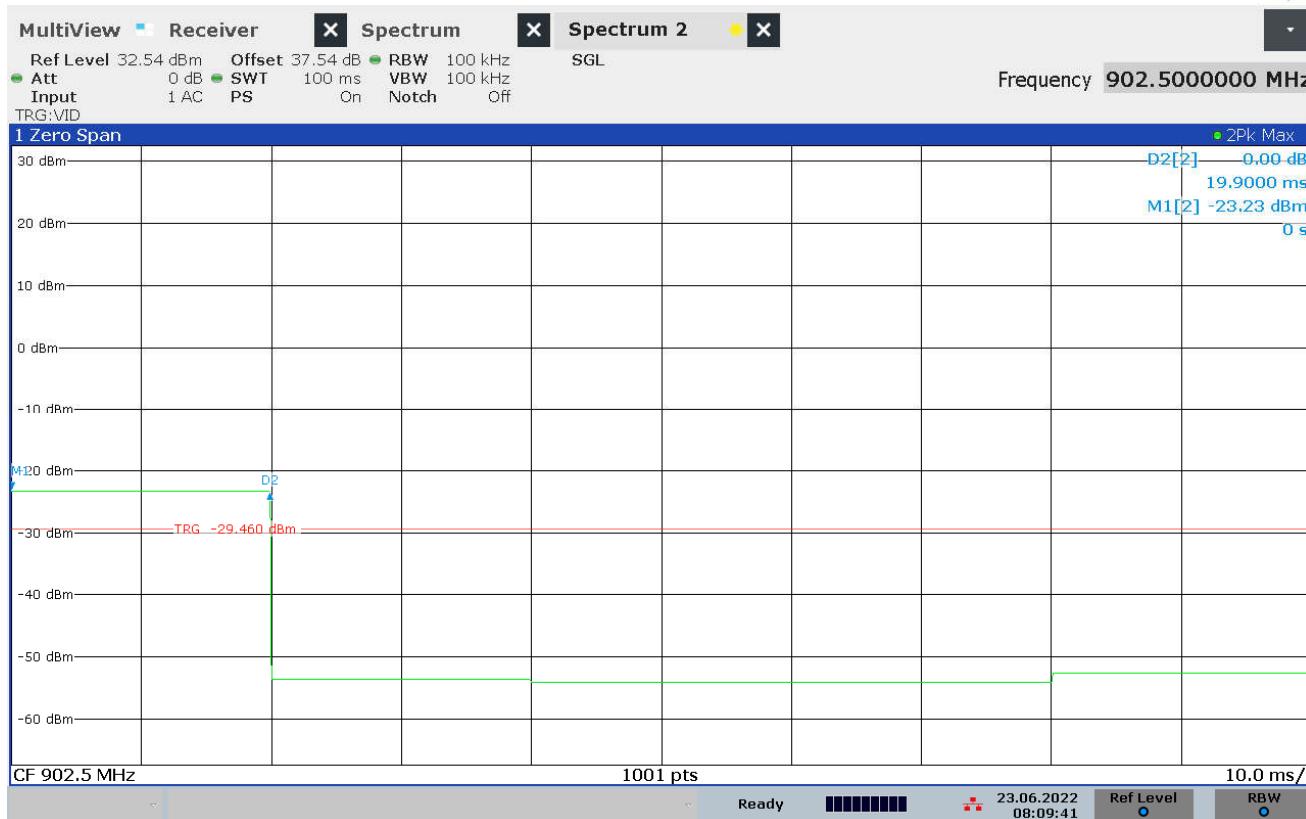

08:09:42 23.06.2022

28. Maximum Peak Conducted Output Power


| EUT Information | |
|-----------------|-------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |

| Test Setup Details | |
|--------------------|-------------------|
| Setup Format | Floor Standing |
| Height of Support | N/A |
| Measurement Method | Antenna Conducted |
| Type of Test Site | Tabletop |
| Test Site Used | EMC Workbench |
| Notes | None |


| Requirements |
|---|
| The output power shall not exceed 1W (30dBm). |

| Procedure |
|---|
| The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle, and high hopping frequencies. |

| Test Details | |
|------------------|-----------------------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 902.500MHz |
| Result | Output Power = 12.33mW (10.91dBm) |
| Test Date | June 20, 2022 |
| Notes | None |

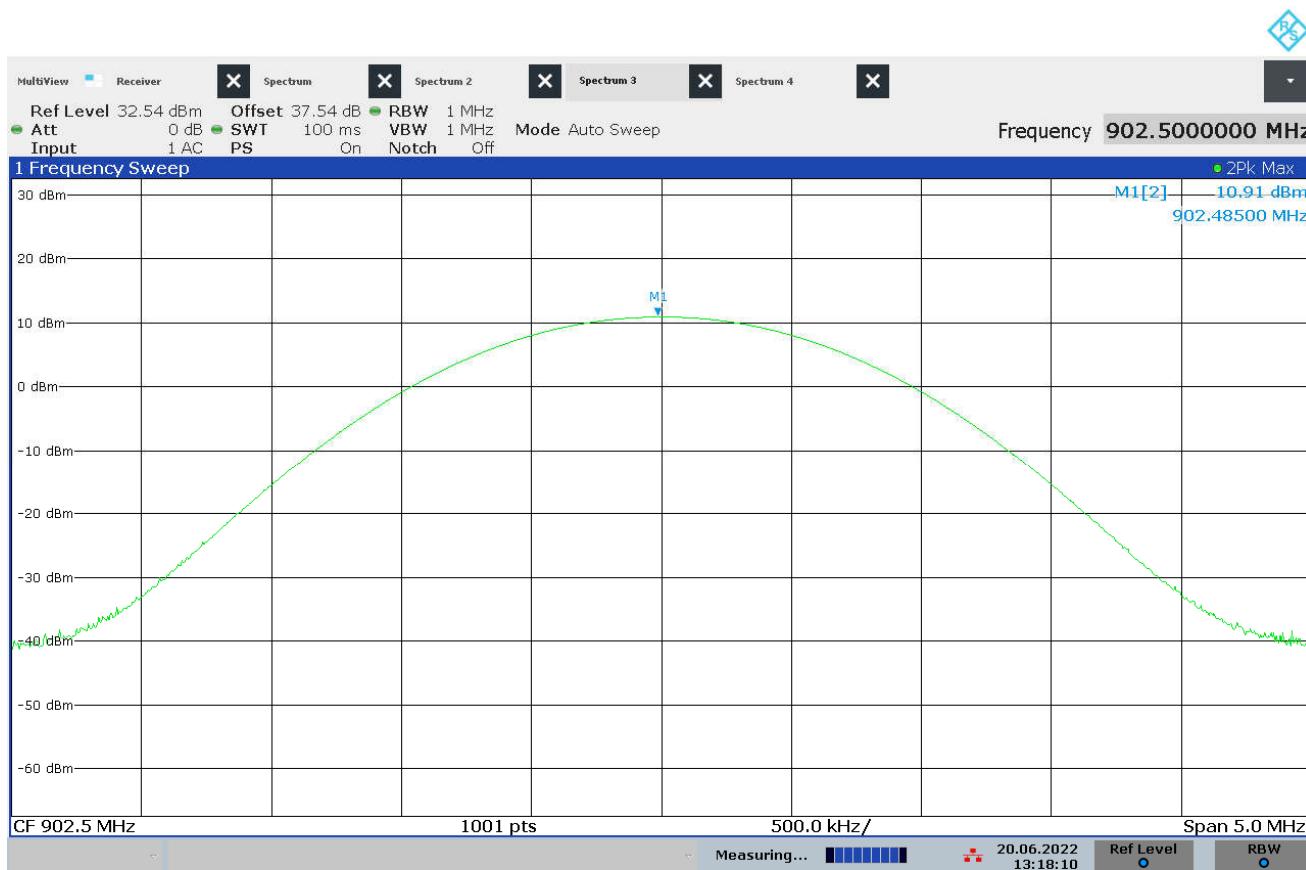


| Test Details | |
|------------------|-----------------------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 914.768MHz |
| Result | Output Power = 12.94mW (11.12dBm) |
| Test Date | June 20, 2022 |
| Notes | None |

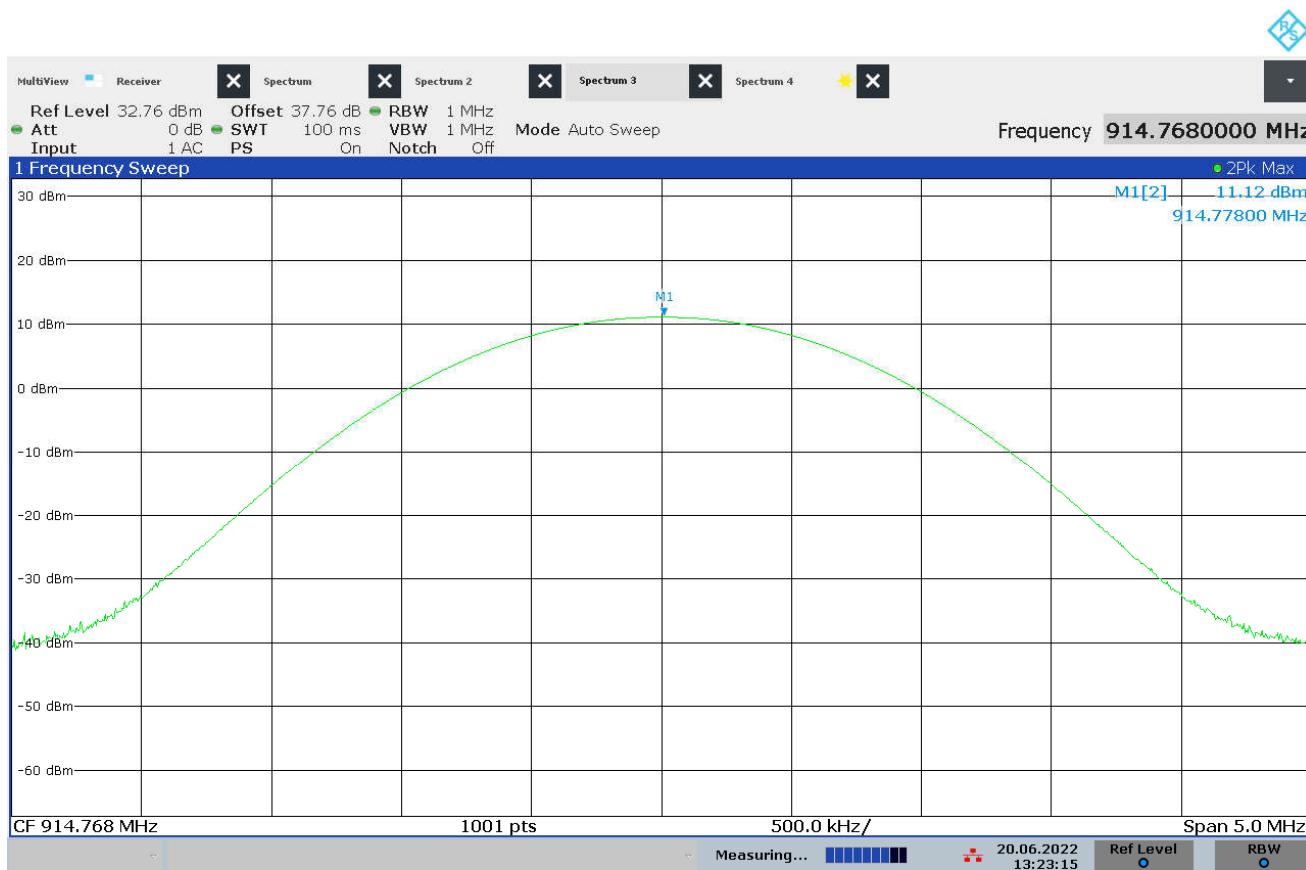

13:23:15 20.06.2022

| Test Details | |
|------------------|-----------------------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 927.547MHz |
| Result | Output Power = 14.76mW (11.69dBm) |
| Test Date | June 20, 2022 |
| Notes | None |

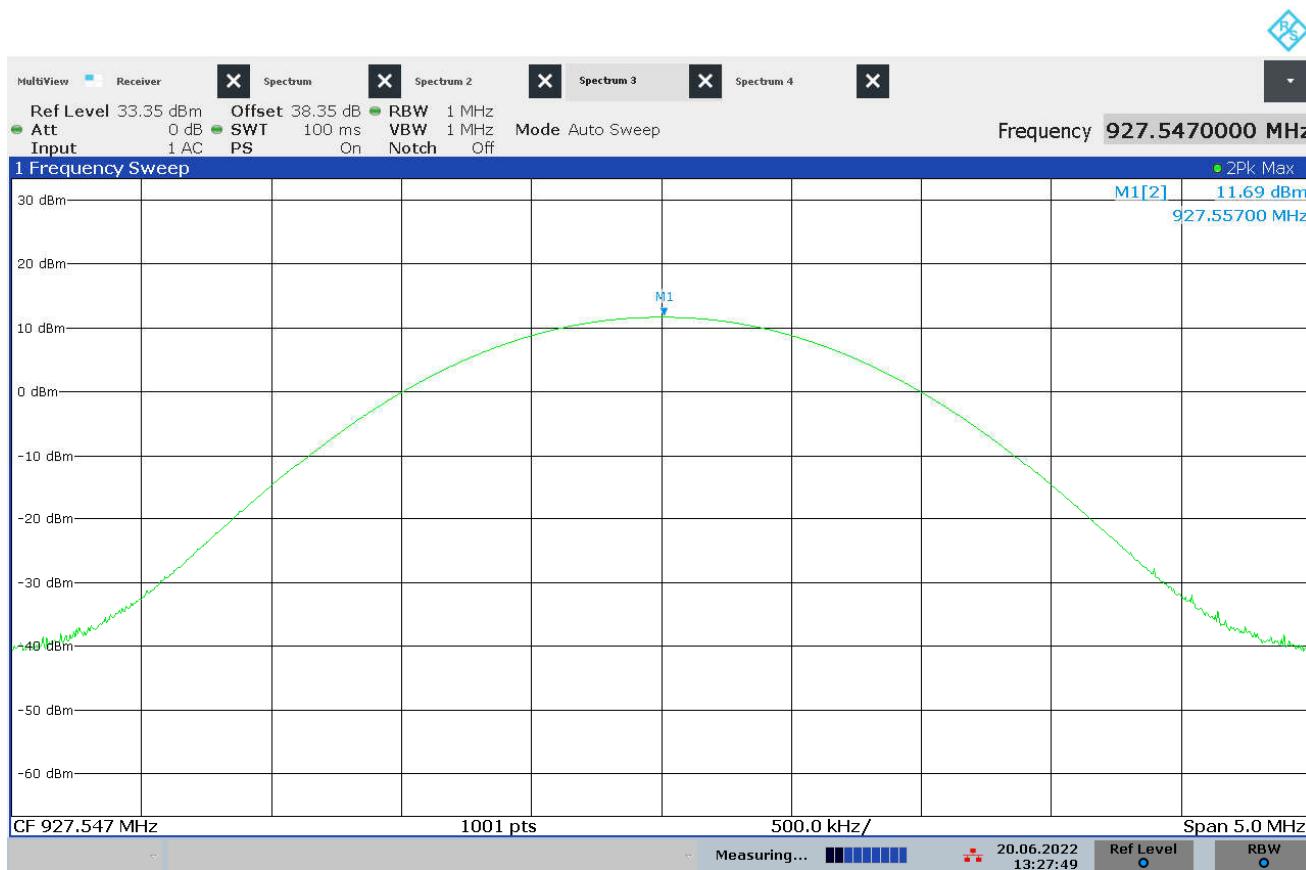

13:27:50 20.06.2022

29. Effective Isotropic Radiated Power (EIRP)

| EUT Information | |
|-----------------|-------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |

| Test Setup Details | |
|-----------------------|-----------------------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Measurement Method | Radiated |
| Type of Test Site | Semi-Anechoic Chamber |
| Test Site Used | R21F |
| Type of Antennas Used | Below 1GHz: Bilog (or equivalent) |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |

| Requirements |
|---|
| The output power shall not exceed 4W (36dBm). |

| Procedure |
|--|
| <p>The EUT was placed on the non-conductive stand and set to transmit. A bilog antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle, and high hopping frequencies.</p> <p>The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna (double ridged waveguide antenna for all measurements above 1GHz) was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss (and antenna gain for all measurements above 1GHz), as required. The peak power output was calculated for low, middle, and high hopping frequencies.</p> |

| Test Details | |
|--------------|-----------------------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Result | Max EIRP = 51.3mW (17.1dBm) |
| Notes | None |

| Freq (MHz) | Ant Pol | Wide BW Meter Reading (dB μ V) | Matched Sig Gen Reading (dBm) | Equivalent Antenna Gain (dB) | Cable Loss (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) |
|------------|---------|------------------------------------|-------------------------------|------------------------------|-----------------|------------|-------------|-------------|
| 902.50 | H | 83.6 | 16.3 | 2.2 | 2.0 | 16.4 | 36.0 | -19.6 |
| | V | 77.6 | 12.0 | 2.2 | 2.0 | 12.1 | 36.0 | -23.9 |
| 914.77 | H | 83.9 | 16.6 | 2.2 | 2.1 | 16.7 | 36.0 | -19.3 |
| | V | 78.0 | 11.6 | 2.2 | 2.1 | 11.7 | 36.0 | -24.3 |
| 927.55 | H | 84.1 | 17.0 | 2.2 | 2.1 | 17.1 | 36.0 | -18.9 |
| | V | 78.2 | 12.1 | 2.2 | 2.1 | 12.2 | 36.0 | -23.8 |

30. Duty Cycle Factor Measurements


| EUT Information | |
|-----------------|--------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx – Hopping |

| Test Setup Details | |
|-----------------------|-------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Measurement Method | Antenna Conducted |
| Type of Test Site | EMC Workbench |
| Type of Antennas Used | N/A |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |

| Procedure |
|--|
| The duty cycle factor is used to convert peak detected readings to average readings when pulsed modulation is employed. This factor is computed from the time domain trace of the pulse modulation signal. |
| With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning center frequency to the transmitter frequency and then setting a zero-span width with 10msec/div. The amplitude settings are adjusted so that the on/off transitions clear the 4 th division from the bottom of the display. The markers are set at the beginning and end of the “on-time”. The trace is recorded. |
| Next the spectrum analyzer center frequency is set to the transmitter frequency with a zero-span width and 10msec/div. This shows if the word is longer than 100msec or shorter than 100msec. If the word period is less than 100msec, the display is set to show at least one word. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. |
| The duty cycle is then computed as $\frac{\text{On Time}}{\text{Word Period}}$, where $\text{Word Period} = (\text{On Time} + \text{Off Time})$. |

| Test Details | |
|------------------|--|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx – Hopping |
| Frequency Tested | 902.5MHz |
| Result | Duty Cycle Factor= -14.02dB |
| Test Date | June 23, 2022 |
| Notes | Duty Cycle Factor Calculation: $\text{Duty Cycle Factor} = 20 \log \left(\frac{19.9\text{ms}}{100\text{ms}} \right) = -14.02\text{dB}$ |

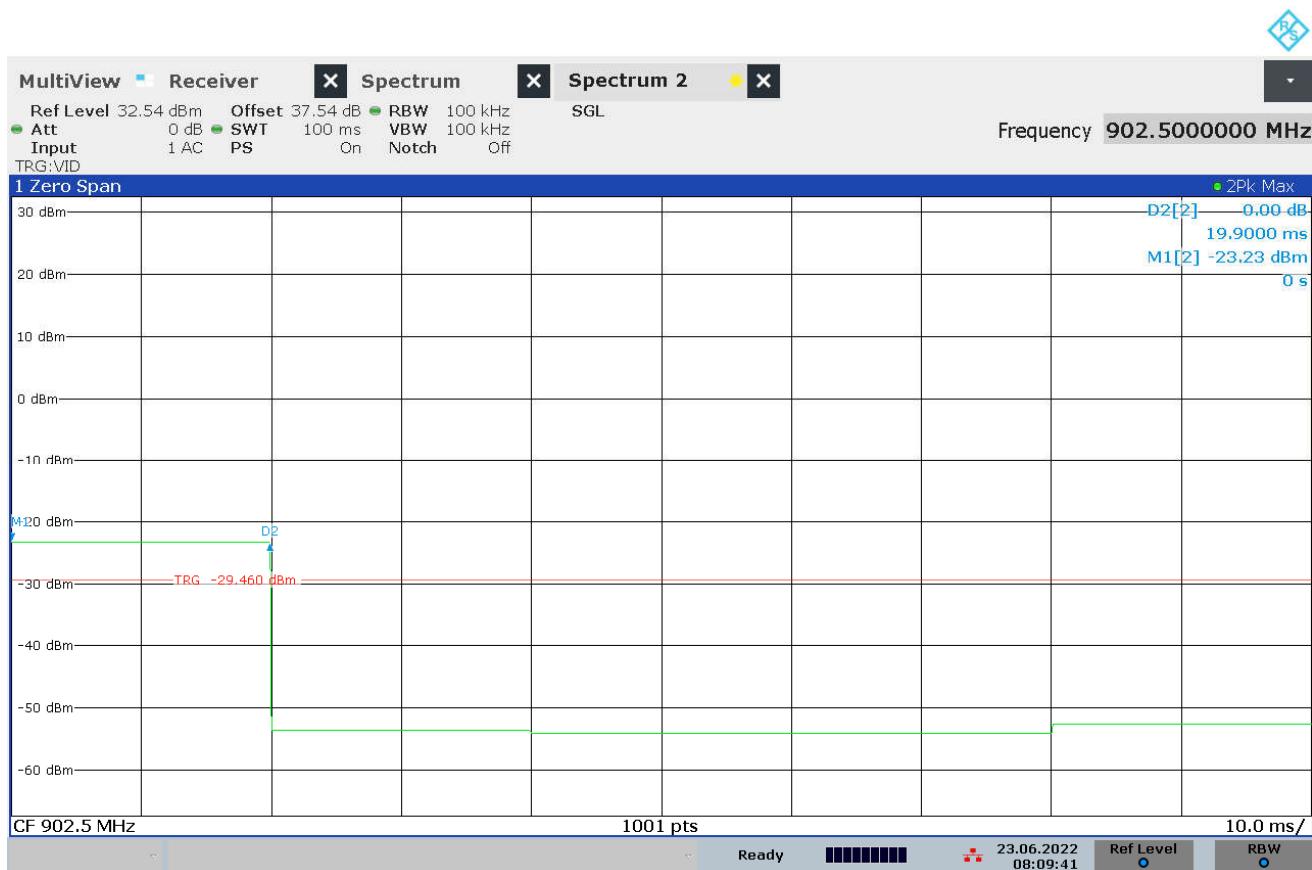

08:09:42 23.06.2022

3.1. Case Spurious Radiated Emissions

| EUT Information | |
|-----------------|-------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |

| Test Setup Details | |
|-----------------------|---|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Type of Test Site | Semi-Anechoic Chamber |
| Test Site Used | R21F |
| Type of Antennas Used | Below 1GHz: Bilog (or equivalent) 1 – 10GHz: Double-Ridged Waveguide (or equivalent) |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz) | 3.2 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz) | 3.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz) | 3.4 |

Procedure

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3-meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 10.0GHz.

1) For all harmonics not in the restricted bands, the following procedure was used:

- a) The field strength of the fundamental was measured using a bilog antenna. The bilog antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst-case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) All harmonics not in the restricted bands must be at least 20dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.

2) For all emissions in the restricted bands, the following procedure was used:

- a) The field strengths of all emissions below 1GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all emissions above 1GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 1MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst-case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components

were measured.

- iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
- iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1GHz, if the peak reading is below the limits listed in §15.209(a), no further measurements are required. If, however, the peak readings exceed the limits listed in §15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1GHz, the peak readings must comply with the §15.35(b) limits. §15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1GHz must be no greater than 20dB above the limits specified in §15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken.
- g) If the dwell time per channel of the hopping signal is less than 100msec, then the meter reading may be further adjusted by a duty cycle correction factor derived from $20 * \log(\text{dwell time}/100\text{msec})$. These readings must be no greater than the limits specified in §15.209(a).



Test Setup for Spurious Radiated Emissions, 30MHz – 1GHz – Antenna
Polarization Horizontal



Test Setup for Spurious Radiated Emissions, 30MHz – 1GHz – Antenna
Polarization Vertical



Test Setup for Spurious Radiated Emissions, 1 – 10GHz – Antenna Polarization Horizontal



Test Setup for Spurious Radiated Emissions, 1GHz to 10GHz – Antenna Polarization Vertical

| Test Details | | | | | | | | | | |
|------------------|---|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | |
| Model No. | UBase | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | |
| Mode | Tx | | | | | | | | | |
| Frequency Tested | 902.5MHz | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | |
| Notes | Peak Measurements in the Restricted Bands | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | Cable Factor (dB) | Antenna Factor (dB/m) | Pre Amp (dB) | Peak Total at 3m (dB μ V/m) | Peak Total at 3m (μ V/m) | Peak Limit at 3m (μ V/m) | Margin (dBm) |
|------------|---------|----------------------------|---------|-------------------|-----------------------|--------------|---------------------------------|-------------------------------|-------------------------------|--------------|
| 2707.50 | H | 52.0 | | 3.7 | 33.1 | -39.5 | 49.3 | 290.4 | 5000.0 | -24.7 |
| | V | 51.8 | | 3.7 | 33.1 | -39.5 | 49.0 | 282.2 | 5000.0 | -25.0 |
| 3610.00 | H | 51.6 | | 4.3 | 33.2 | -38.9 | 50.2 | 321.9 | 5000.0 | -23.8 |
| | V | 54.1 | | 4.3 | 33.2 | -38.9 | 52.7 | 433.2 | 5000.0 | -21.2 |
| 4512.50 | H | 54.3 | | 4.7 | 34.2 | -38.9 | 54.4 | 522.3 | 5000.0 | -19.6 |
| | V | 57.5 | | 4.7 | 34.2 | -38.9 | 57.5 | 750.8 | 5000.0 | -16.5 |
| 5415.00 | H | 61.6 | | 5.1 | 34.8 | -39.0 | 62.5 | 1337.4 | 5000.0 | -11.5 |
| | V | 64.3 | | 5.1 | 34.8 | -39.0 | 65.3 | 1835.5 | 5000.0 | -8.7 |
| 8122.50 | H | 52.2 | | 6.5 | 35.8 | -39.0 | 55.5 | 594.6 | 5000.0 | -18.5 |
| | V | 57.4 | | 6.5 | 35.8 | -39.0 | 60.7 | 1085.7 | 5000.0 | -13.3 |
| 9025.00 | H | 50.1 | | 6.5 | 36.2 | -38.9 | 54.0 | 499.3 | 5000.0 | -20.0 |
| | V | 54.1 | | 6.5 | 36.2 | -38.9 | 57.9 | 786.8 | 5000.0 | -16.1 |

| Test Details | | | | | | | | | | | |
|------------------|--|--|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | | |
| Model No. | UBase | | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | | |
| Mode | Tx | | | | | | | | | | |
| Frequency Tested | 902.5MHz | | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | | |
| Notes | Average Measurements in the Restricted Bands | | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | CBL Fac (dB) | Ant Fac (dB/m) | Pre Amp (dB) | Duty Cycle Factor (dB) | Average Total at 3m (dB μ V/m) | Average Total at 3m (μ V/m) | Average Limit at 3m (μ V/m) | Margin (dB) |
|------------|---------|----------------------------|---------|--------------|----------------|--------------|------------------------|------------------------------------|----------------------------------|----------------------------------|-------------|
| 2707.50 | H | 52.01 | | 3.7 | 33.1 | -39.5 | -14.0 | 35.2 | 57.8 | 500.0 | -18.7 |
| | V | 51.76 | | 3.7 | 33.1 | -39.5 | -14.0 | 35.0 | 56.2 | 500.0 | -19.0 |
| 3610.00 | H | 51.55 | | 4.3 | 33.2 | -38.9 | -14.0 | 36.1 | 64.1 | 500.0 | -17.8 |
| | V | 54.13 | | 4.3 | 33.2 | -38.9 | -14.0 | 38.7 | 86.2 | 500.0 | -15.3 |
| 4512.50 | H | 54.33 | | 4.7 | 34.2 | -38.9 | -14.0 | 40.3 | 104.0 | 500.0 | -13.6 |
| | V | 57.48 | | 4.7 | 34.2 | -38.9 | -14.0 | 43.5 | 149.5 | 500.0 | -10.5 |
| 5415.00 | H | 61.57 | | 5.1 | 34.8 | -39.0 | -14.0 | 48.5 | 266.2 | 500.0 | -5.5 |
| | V | 64.32 | | 5.1 | 34.8 | -39.0 | -14.0 | 51.3 | 365.4 | 500.0 | -2.7 |
| 8122.50 | H | 52.19 | | 6.5 | 35.8 | -39.0 | -14.0 | 41.5 | 118.4 | 500.0 | -12.5 |
| | V | 57.42 | | 6.5 | 35.8 | -39.0 | -14.0 | 46.7 | 216.1 | 500.0 | -7.3 |
| 9025.00 | H | 50.14 | | 6.5 | 36.2 | -38.9 | -14.0 | 39.9 | 99.4 | 500.0 | -14.0 |
| | V | 54.09 | | 6.5 | 36.2 | -38.9 | -14.0 | 43.9 | 156.6 | 500.0 | -10.1 |

| Test Details | | | | | | | | | | |
|------------------|---|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | |
| Model No. | UBase | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | |
| Mode | Tx | | | | | | | | | |
| Frequency Tested | 902.5MHz | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | |
| Notes | Peak Measurements in Non-Restricted Bands | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | Cable Factor (dB) | Antenna Factor (dB/m) | Pre Amp (dB) | Peak Total at 3m (dB μ V/m) | Peak Total at 3m (μ V/m) | Peak Limit at 3m (μ V/m) | Margin (dBm) |
|------------|---------|----------------------------|---------|-------------------|-----------------------|--------------|---------------------------------|-------------------------------|-------------------------------|--------------|
| 902.50 | H | 83.51 | | 2.0 | 26.5 | 0.0 | 112.0 | 398990.4 | NA | NA |
| | V | 77.35 | | 2.0 | 26.5 | 0.0 | 105.9 | 196319.1 | NA | NA |
| 1805.00 | H | 62.75 | | 2.9 | 29.3 | -39.8 | 55.2 | 577.8 | 39899.0 | -36.8 |
| | V | 62.00 | | 2.9 | 29.3 | -39.8 | 54.5 | 530.0 | 39899.0 | -37.5 |
| 6317.50 | H | 59.41 | | 5.6 | 35.5 | -39.0 | 61.5 | 1190.8 | 39899.0 | -30.5 |
| | V | 58.18 | | 5.6 | 35.5 | -39.0 | 60.3 | 1033.6 | 39899.0 | -31.7 |
| 7220.00 | H | 47.77 | | 6.1 | 35.7 | -39.0 | 50.6 | 339.8 | 39899.0 | -41.4 |
| | V | 50.01 | | 6.1 | 35.7 | -39.0 | 52.9 | 439.7 | 39899.0 | -39.2 |

| Test Details | | | | | | | | | | |
|------------------|---|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | |
| Model No. | UBase | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | |
| Mode | Tx | | | | | | | | | |
| Frequency Tested | 914.768MHz | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | |
| Notes | Peak Measurements in the Restricted Bands | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | Cable Factor (dB) | Antenna Factor (dB/m) | Pre Amp (dB) | Peak Total at 3m (dB μ V/m) | Peak Total at 3m (μ V/m) | Peak Limit at 3m (μ V/m) | Margin (dBm) |
|------------|---------|----------------------------|---------|-------------------|-----------------------|--------------|---------------------------------|-------------------------------|-------------------------------|--------------|
| 2744.30 | H | 52.9 | | 3.7 | 33.0 | -39.5 | 50.2 | 322.1 | 5000.0 | -23.8 |
| | V | 52.5 | | 3.7 | 33.0 | -39.5 | 49.7 | 306.2 | 5000.0 | -24.3 |
| 3659.07 | H | 54.3 | | 4.3 | 33.2 | -38.9 | 52.9 | 442.8 | 5000.0 | -21.1 |
| | V | 55.4 | | 4.3 | 33.2 | -38.9 | 54.1 | 506.1 | 5000.0 | -19.9 |
| 4573.84 | H | 54.5 | | 4.7 | 34.4 | -38.9 | 54.7 | 543.1 | 5000.0 | -19.3 |
| | V | 57.8 | | 4.7 | 34.4 | -38.9 | 58.0 | 797.8 | 5000.0 | -15.9 |
| 7318.14 | H | 52.4 | | 6.2 | 35.7 | -39.0 | 55.3 | 584.9 | 5000.0 | -18.6 |
| | V | 54.7 | | 6.2 | 35.7 | -39.0 | 57.6 | 754.3 | 5000.0 | -16.4 |
| 8232.91 | H | 53.0 | | 6.5 | 35.8 | -39.0 | 56.3 | 654.2 | 5000.0 | -17.7 |
| | V | 57.1 | | 6.5 | 35.8 | -39.0 | 60.4 | 1047.6 | 5000.0 | -13.6 |
| 9147.68 | H | 51.5 | | 6.6 | 36.3 | -38.9 | 55.5 | 596.0 | 5000.0 | -18.5 |
| | V | 54.6 | | 6.6 | 36.3 | -38.9 | 58.6 | 847.7 | 5000.0 | -15.4 |

| Test Details | | | | | | | | | | | |
|------------------|--|--|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | | |
| Model No. | UBase | | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | | |
| Mode | Tx | | | | | | | | | | |
| Frequency Tested | 914.768MHz | | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | | |
| Notes | Average Measurements in the Restricted Bands | | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | CBL Fac (dB) | Ant Fac (dB/m) | Pre Amp (dB) | Duty Cycle Factor (dB) | Average Total at 3m (dB μ V/m) | Average Total at 3m (μ V/m) | Average Limit at 3m (μ V/m) | Margin (dB) |
|------------|---------|----------------------------|---------|--------------|----------------|--------------|------------------------|------------------------------------|----------------------------------|----------------------------------|-------------|
| 2744.30 | H | 52.94 | | 3.7 | 33.0 | -39.5 | -14.0 | 36.1 | 64.1 | 500.0 | -17.8 |
| | V | 52.50 | | 3.7 | 33.0 | -39.5 | -14.0 | 35.7 | 60.9 | 500.0 | -18.3 |
| 3659.07 | H | 54.26 | | 4.3 | 33.2 | -38.9 | -14.0 | 38.9 | 88.1 | 500.0 | -15.1 |
| | V | 55.42 | | 4.3 | 33.2 | -38.9 | -14.0 | 40.1 | 100.7 | 500.0 | -13.9 |
| 4573.84 | H | 54.45 | | 4.7 | 34.4 | -38.9 | -14.0 | 40.7 | 108.1 | 500.0 | -13.3 |
| | V | 57.79 | | 4.7 | 34.4 | -38.9 | -14.0 | 44.0 | 158.8 | 500.0 | -10.0 |
| 7318.14 | H | 52.44 | | 6.2 | 35.7 | -39.0 | -14.0 | 41.3 | 116.4 | 500.0 | -12.7 |
| | V | 54.65 | | 6.2 | 35.7 | -39.0 | -14.0 | 43.5 | 150.2 | 500.0 | -10.4 |
| 8232.91 | H | 52.99 | | 6.5 | 35.8 | -39.0 | -14.0 | 42.3 | 130.2 | 500.0 | -11.7 |
| | V | 57.08 | | 6.5 | 35.8 | -39.0 | -14.0 | 46.4 | 208.5 | 500.0 | -7.6 |
| 9147.68 | H | 51.53 | | 6.6 | 36.3 | -38.9 | -14.0 | 41.5 | 118.6 | 500.0 | -12.5 |
| | V | 54.59 | | 6.6 | 36.3 | -38.9 | -14.0 | 44.5 | 168.7 | 500.0 | -9.4 |

| Test Details | | | | | | | | | | |
|------------------|---|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | |
| Model No. | UBase | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | |
| Mode | Tx | | | | | | | | | |
| Frequency Tested | 914.768MHz | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | |
| Notes | Peak Measurements in Non-Restricted Bands | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | Cable Factor (dB) | Antenna Factor (dB/m) | Pre Amp (dB) | Peak Total at 3m (dB μ V/m) | Peak Total at 3m (μ V/m) | Peak Limit at 3m (μ V/m) | Margin (dBm) |
|------------|---------|----------------------------|---------|-------------------|-----------------------|--------------|---------------------------------|-------------------------------|-------------------------------|--------------|
| 914.77 | H | 83.72 | | 2.1 | 26.4 | 0.0 | 112.1 | 404819.1 | NA | NA |
| | V | 77.97 | | 2.1 | 26.4 | 0.0 | 106.4 | 208814.6 | NA | NA |
| 1829.54 | H | 61.19 | | 2.9 | 29.5 | -39.7 | 53.9 | 496.2 | 40481.9 | -38.2 |
| | V | 61.20 | | 2.9 | 29.5 | -39.7 | 53.9 | 496.8 | 40481.9 | -38.2 |
| 5488.61 | H | 59.66 | | 5.2 | 34.9 | -39.0 | 60.7 | 1079.2 | 40481.9 | -31.5 |
| | V | 63.21 | | 5.2 | 34.9 | -39.0 | 64.2 | 1624.1 | 40481.9 | -27.9 |
| 6403.38 | H | 56.96 | | 5.7 | 35.6 | -39.0 | 59.2 | 912.1 | 40481.9 | -32.9 |
| | V | 58.18 | | 5.7 | 35.6 | -39.0 | 60.4 | 1049.6 | 40481.9 | -31.7 |

| Test Details | | | | | | | | | | |
|------------------|---|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | |
| Model No. | UBase | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | |
| Mode | Tx | | | | | | | | | |
| Frequency Tested | 927.547MHz | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | |
| Notes | Peak Measurements in the Restricted Bands | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | Cable Factor (dB) | Antenna Factor (dB/m) | Pre Amp (dB) | Peak Total at 3m (dB μ V/m) | Peak Total at 3m (μ V/m) | Peak Limit at 3m (μ V/m) | Margin (dBm) |
|------------|---------|----------------------------|---------|-------------------|-----------------------|--------------|---------------------------------|-------------------------------|-------------------------------|--------------|
| 2782.64 | H | 50.4 | | 3.7 | 32.9 | -39.5 | 47.6 | 240.4 | 5000.0 | -26.4 |
| | V | 50.9 | | 3.7 | 32.9 | -39.5 | 48.0 | 252.6 | 5000.0 | -25.9 |
| 3710.19 | H | 52.6 | | 4.3 | 33.3 | -38.9 | 51.3 | 366.9 | 5000.0 | -22.7 |
| | V | 56.2 | | 4.3 | 33.3 | -38.9 | 54.9 | 556.6 | 5000.0 | -19.1 |
| 4637.74 | H | 55.0 | | 4.8 | 34.6 | -38.9 | 55.4 | 589.7 | 5000.0 | -18.6 |
| | V | 55.7 | | 4.8 | 34.6 | -38.9 | 56.2 | 644.4 | 5000.0 | -17.8 |
| 7420.38 | H | 52.5 | | 6.2 | 35.7 | -39.0 | 55.5 | 594.5 | 5000.0 | -18.5 |
| | V | 52.2 | | 6.2 | 35.7 | -39.0 | 55.1 | 571.6 | 5000.0 | -18.8 |
| 8347.92 | H | 52.3 | | 6.5 | 35.8 | -39.0 | 55.6 | 605.5 | 5000.0 | -18.3 |
| | V | 58.1 | | 6.5 | 35.8 | -39.0 | 61.4 | 1175.3 | 5000.0 | -12.6 |

| Test Details | | | | | | | | | | | |
|------------------|--|--|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | | |
| Model No. | UBase | | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | | |
| Mode | Tx | | | | | | | | | | |
| Frequency Tested | 927.547MHz | | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | | |
| Notes | Average Measurements in the Restricted Bands | | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | CBL Fac (dB) | Ant Fac (dB/m) | Pre Amp (dB) | Duty Cycle Factor (dB) | Average Total at 3m (dB μ V/m) | Average Total at 3m (μ V/m) | Average Limit at 3m (μ V/m) | Margin (dB) |
|------------|---------|----------------------------|---------|--------------|----------------|--------------|------------------------|------------------------------------|----------------------------------|----------------------------------|-------------|
| 2782.64 | H | 50.43 | | 3.7 | 32.9 | -39.5 | -14.0 | 33.6 | 47.9 | 500.0 | -20.4 |
| | V | 50.86 | | 3.7 | 32.9 | -39.5 | -14.0 | 34.0 | 50.3 | 500.0 | -20.0 |
| 3710.19 | H | 52.57 | | 4.3 | 33.3 | -38.9 | -14.0 | 37.3 | 73.0 | 500.0 | -16.7 |
| | V | 56.19 | | 4.3 | 33.3 | -38.9 | -14.0 | 40.9 | 110.8 | 500.0 | -13.1 |
| 4637.74 | H | 54.97 | | 4.8 | 34.6 | -38.9 | -14.0 | 41.4 | 117.4 | 500.0 | -12.6 |
| | V | 55.74 | | 4.8 | 34.6 | -38.9 | -14.0 | 42.2 | 128.3 | 500.0 | -11.8 |
| 7420.38 | H | 52.54 | | 6.2 | 35.7 | -39.0 | -14.0 | 41.5 | 118.3 | 500.0 | -12.5 |
| | V | 52.20 | | 6.2 | 35.7 | -39.0 | -14.0 | 41.1 | 113.8 | 500.0 | -12.9 |
| 8347.92 | H | 52.33 | | 6.5 | 35.8 | -39.0 | -14.0 | 41.6 | 120.5 | 500.0 | -12.4 |
| | V | 58.09 | | 6.5 | 35.8 | -39.0 | -14.0 | 47.4 | 234.0 | 500.0 | -6.6 |

| Test Details | | | | | | | | | | |
|------------------|---|--|--|--|--|--|--|--|--|--|
| Manufacturer | Pro IAQ Inc | | | | | | | | | |
| EUT | Pro1 | | | | | | | | | |
| Model No. | UBase | | | | | | | | | |
| Serial No. | N/A | | | | | | | | | |
| Mode | Tx | | | | | | | | | |
| Frequency Tested | 927.547MHz | | | | | | | | | |
| Test Date | June 27, 2022 | | | | | | | | | |
| Notes | Peak Measurements in Non-Restricted Bands | | | | | | | | | |

| Freq (MHz) | Ant Pol | Meter Reading (dB μ V) | Ambient | Cable Factor (dB) | Antenna Factor (dB/m) | Pre Amp (dB) | Peak Total at 3m (dB μ V/m) | Peak Total at 3m (μ V/m) | Peak Limit at 3m (μ V/m) | Margin (dBm) |
|------------|---------|----------------------------|---------|-------------------|-----------------------|--------------|---------------------------------|-------------------------------|-------------------------------|--------------|
| 927.55 | H | 81.01 | | 2.1 | 26.8 | 0.0 | 109.9 | 311344.4 | NA | NA |
| | V | 78.06 | | 2.1 | 26.8 | 0.0 | 106.9 | 221687.5 | NA | NA |
| 1855.09 | H | 60.27 | | 3.0 | 29.7 | -39.7 | 53.2 | 459.1 | 31134.4 | -36.6 |
| | V | 60.88 | | 3.0 | 29.7 | -39.7 | 53.8 | 492.5 | 31134.4 | -36.0 |
| 5565.28 | H | 52.46 | | 5.2 | 34.9 | -39.0 | 53.6 | 478.5 | 31134.4 | -36.3 |
| | V | 54.59 | | 5.2 | 34.9 | -39.0 | 55.7 | 611.5 | 31134.4 | -34.1 |
| 6492.83 | H | 54.85 | | 5.7 | 35.7 | -39.0 | 57.3 | 728.8 | 31134.4 | -32.6 |
| | V | 55.90 | | 5.7 | 35.7 | -39.0 | 58.3 | 822.4 | 31134.4 | -31.6 |
| 9275.47 | H | 48.57 | | 6.6 | 36.4 | -38.9 | 52.7 | 432.2 | 31134.4 | -37.2 |
| | V | 52.21 | | 6.6 | 36.4 | -38.9 | 56.4 | 657.1 | 31134.4 | -33.5 |

32. Band-Edge Compliance

| EUT Information | |
|-----------------|-------------|
| Manufacturer | Pro IAQ Inc |
| Product | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |


| Test Setup Details | |
|-----------------------|-------------------|
| Setup Format | Tabletop |
| Height of Support | N/A |
| Measurement Method | Antenna Conducted |
| Type of Test Site | EMC Workbench |
| Type of Antennas Used | N/A |
| Notes | None |

| Measurement Uncertainty | |
|---|----------------------------------|
| Measurement Type | Expanded Measurement Uncertainty |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz) | 4.3 |
| Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz) | 3.1 |

| Procedure | |
|--------------------|--|
| 1) Low Band Edge: | |
| a) | The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. |
| b) | The EUT was set to transmit continuously at the channel closest to the low band-edge hopping function disabled. |
| c) | To determine the band edge compliance, the following spectrum analyzer settings were used: <ul style="list-style-type: none"> o Center Frequency = 902MHz (low band-edge frequency). o Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation. o Resolution Bandwidth (RBW) = $\geq 1\%$ of the span. o 'Max-Hold' function was engaged. |
| d) | The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. |
| e) | The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.) |
| f) | The analyzer's display was then screenshot and saved. |
| g) | Steps (d) through (f) were repeated with the frequency hopping function enabled. |
| 2) High Band Edge: | |
| a) | The antenna port of the EUT was connected to the spectrum analyzer through 40dB of attenuation. |


- b) The EUT was set to transmit continuously at the channel closest to the high band-edge hopping function disabled.
- c) To determine the band edge compliance, the following spectrum analyzer settings were used:
 - o Center Frequency = 928MHz (high band-edge frequency).
 - o Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
 - o Resolution Bandwidth (RBW) = $\geq 1\%$ of the span.
 - o 'Max-Hold' function was engaged.
- d) The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
- e) The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
- f) The analyzer's display was then screenshot and saved.
- g) Steps (d) through (f) were repeated with the frequency hopping function enabled.

| Test Details | |
|------------------|---------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 902.500MHz |
| Test Date | June 20, 2022 |
| Notes | Low Band Edge |

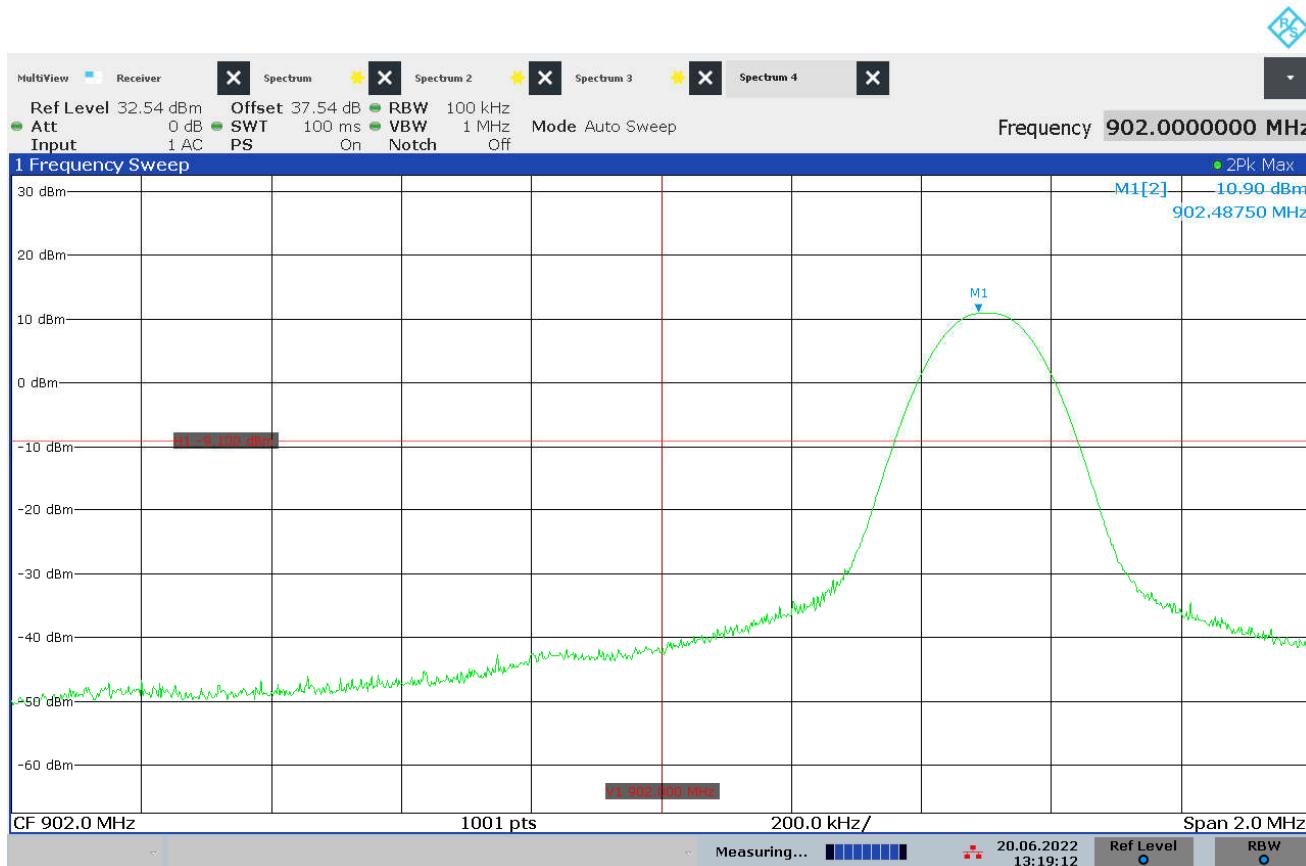


13:19:13 20.06.2022

| Test Details | |
|------------------|--|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx |
| Frequency Tested | 927.547MHz |
| Test Date | June 20, 2022 |
| Notes | High Band Edge – Peak and Average Measurements |

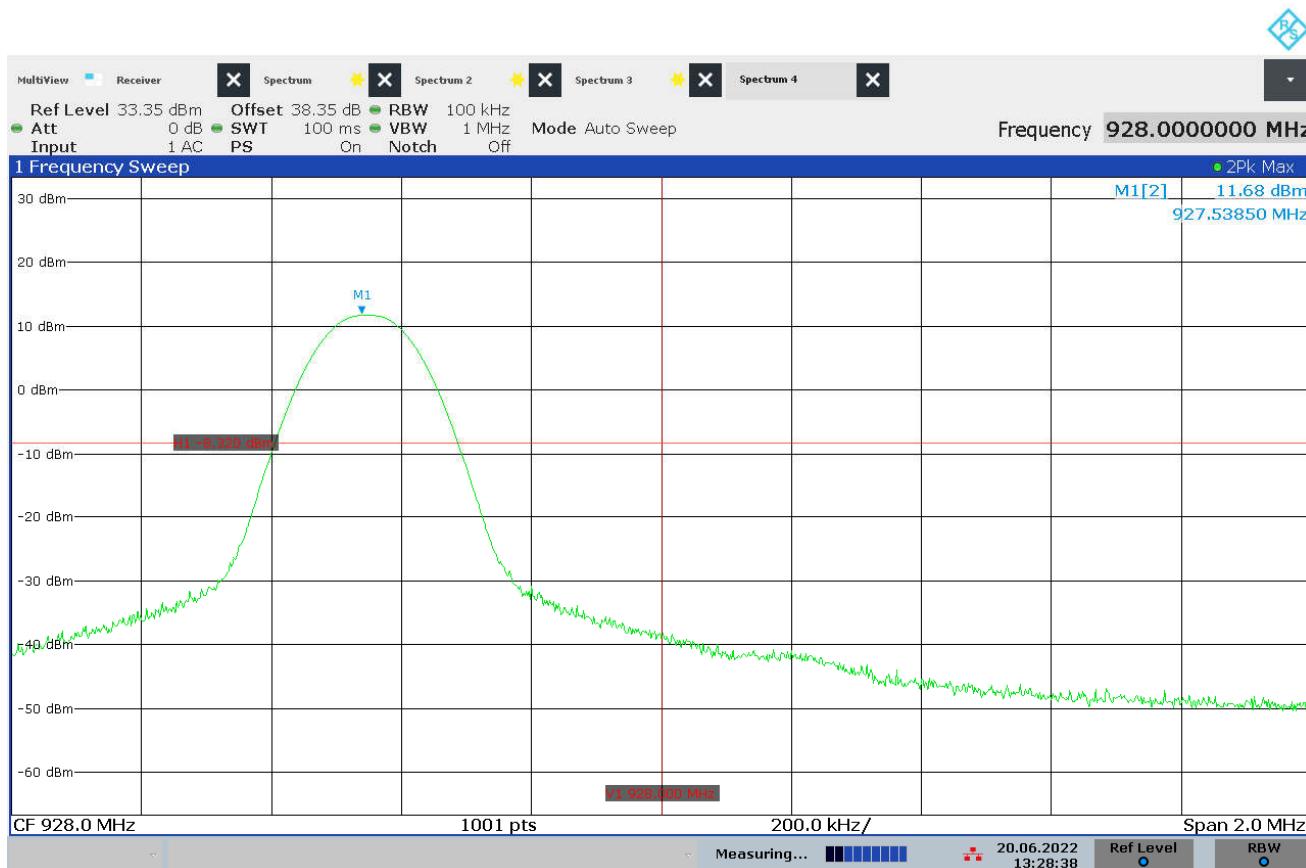


13:28:39 20.06.2022

| Test Details | |
|------------------|---------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx – Hopping |
| Frequency Tested | 902.500MHz |
| Test Date | June 20, 2022 |
| Notes | Low Band Edge |

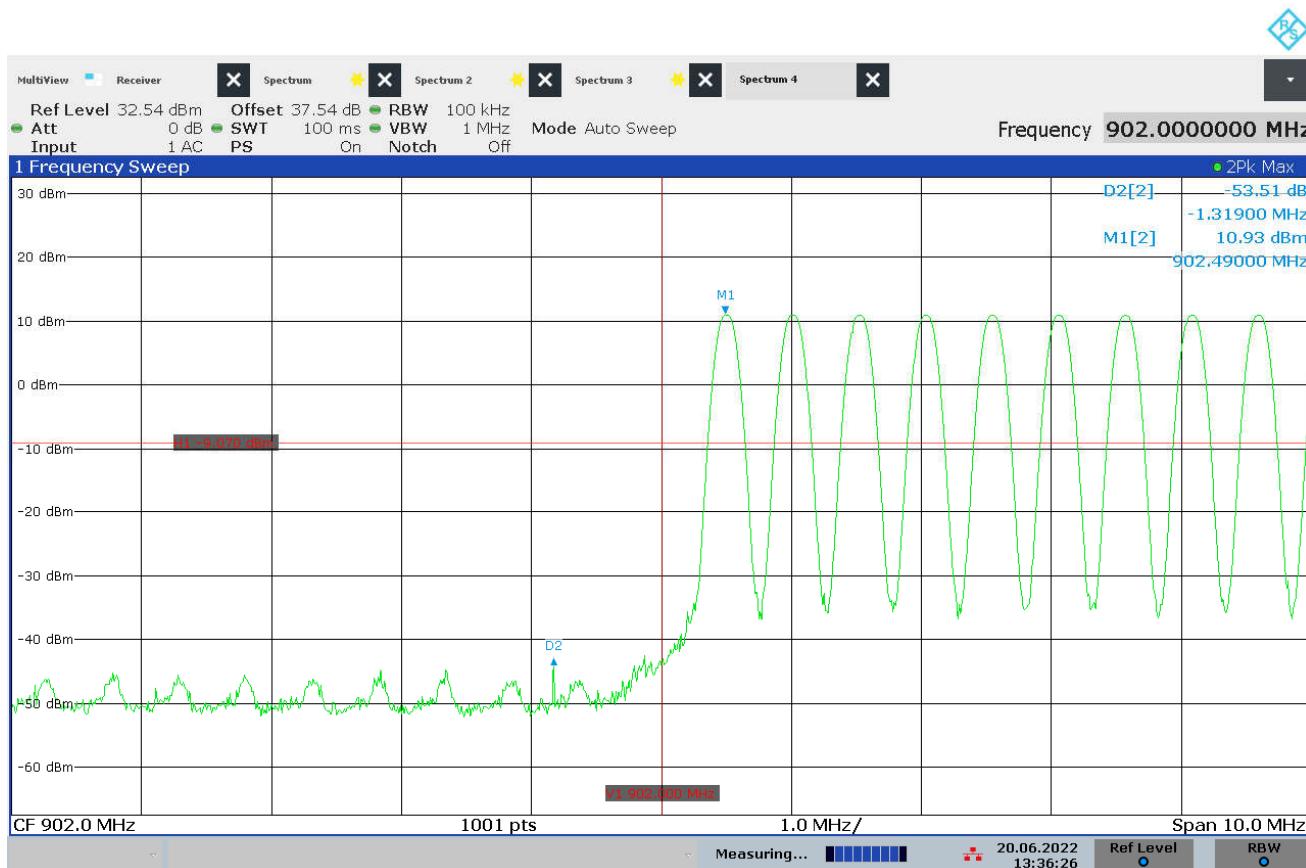

13:36:26 20.06.2022

| Test Details | |
|------------------|----------------|
| Manufacturer | Pro IAQ Inc |
| EUT | Pro1 |
| Model No. | UBase |
| Serial No. | N/A |
| Mode | Tx – Hopping |
| Frequency Tested | 927.547MHz |
| Test Date | June 20, 2022 |
| Notes | High Band Edge |

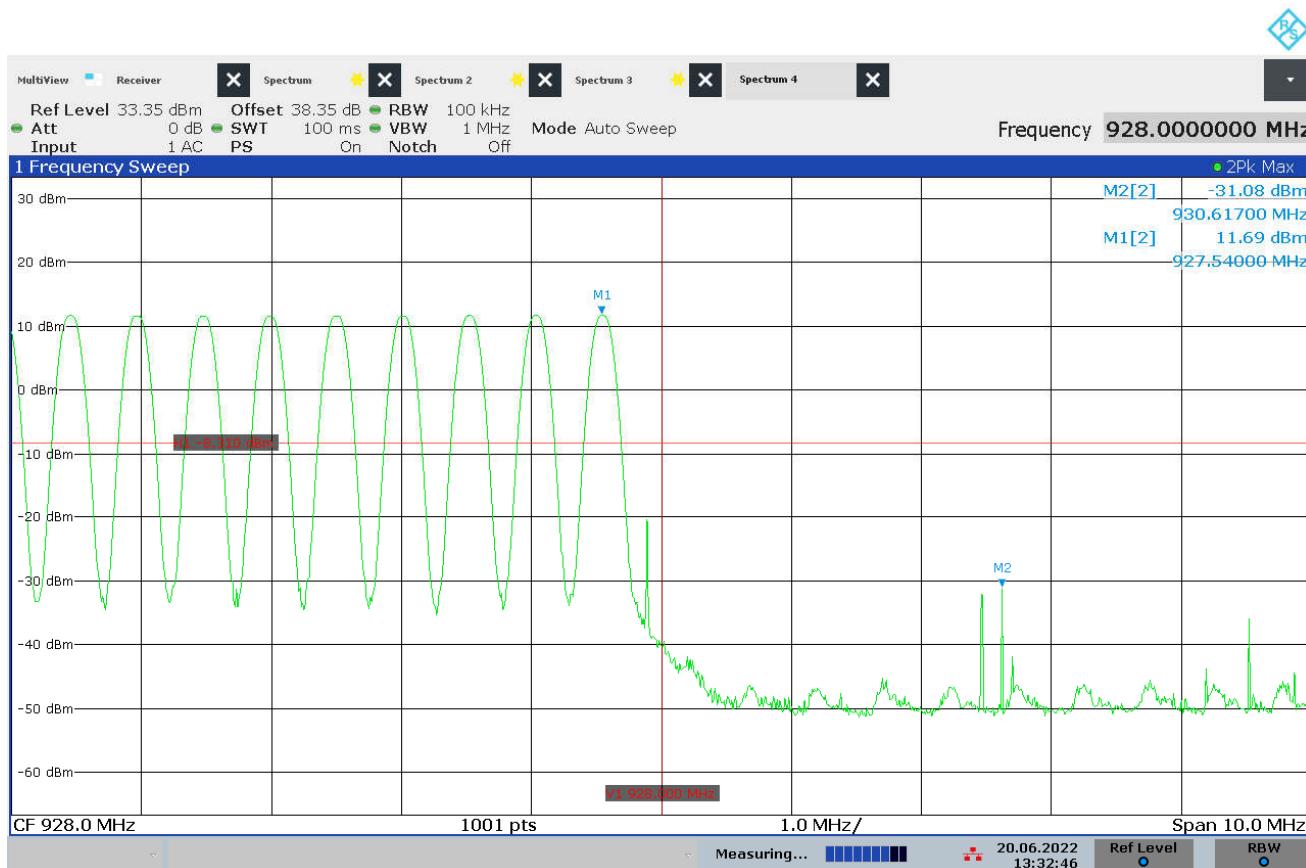

13:32:46 20.06.2022

33. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.
1516 Centre Circle
Downers Grove, IL 60515
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168
Email: rbugielski@elitetest.com
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112
Email: cfanning@elitetest.com
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163
Email: blugo@elitetest.com
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123
Email: reking@elitetest.com
Website: www.elitetest.com

ELECTRICAL

Valid To: June 30, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:Test Method(s)¹:*Transient Immunity*

ISO 7637-2 (including emissions); ISO 7637-3;
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;
CS-11979, Section 6.4; CS.00054, Section 5.9;
EMC-CS-2009.1 (CT220); FMC1278 (CT220, CT221, CT222);
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;
ECE Regulation 10.06 Annex 10

Electrostatic Discharge (ESD)

ISO 10605 (2001, 2008);
CS-11979 Section 7.0; CS.00054, Section 5.10;
EMC-CS-2009.1 (CT 280); FMC1278 (CT280); SAE J1113-13;
GMW 3097 Section 3.6

Conducted Emissions

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;
CISPR 25 (2016), Sections 6.3 and 6.4;
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;
GMW 3097, Section 3.3.2;
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

Radiated Emissions Anechoic


CISPR 25 (2002, 2008), Section 6.4;
CISPR 25 (2016), Section 6.5;
CS-11979, Section 5.3; CS.00054, Section 5.6.3;
GMW 3097, Section 3.3.1;
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);
ECE Regulation 10.06 Annex 7 (Broadband)
ECE Regulation 10.06 Annex 8 (Narrowband)

(A2LA Cert. No. 1786.01) Revised 12/17/2021

 Page 1 of 8

| <u>Test Technology:</u> | <u>Test Method(s)</u> ¹ : |
|---|--|
| <i>Vehicle Radiated Emissions</i> | CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5 |
| <i>Bulk Current Injection (BCI)</i> | ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9 |
| <i>Radiated Immunity Anechoic (Including Radar Pulse)</i> | ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9 |
| <i>Radiated Immunity Magnetic Field</i> | ISO 11452-8 |
| <i>Radiated Immunity Reverberation</i> | ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11 |
| <i>Radiated Immunity (Portable Transmitters)</i> | ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115) |
| <i>Vehicle Radiated Immunity (ALSE)</i> | ISO 11451-2; ECE Regulation 10.06 Annex 6 |
| <i>Vehicle Product Specific EMC Standards</i> | EN 14982; EN ISO 13309, ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012 |
| <i>Electrical Loads</i> | ISO 16750-2 |
| Emissions Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz) | 47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 14 |
| <i>Cellular Radiated Spurious Emissions</i> | ETSI TS 151.010-1 GSM; 3GPP TS 51.010-1, Sec 12; ETSI TS 134.124 UMTS; 3GPP TS 34.124; ETSI TS 136.124 LTE; E-UTRA; 3GPP TS 36.124 |

(A2LA Cert. No. 1786.01) Revised 12/17/2021



Page 2 of 8

| <u>Test Technology:</u> | <u>Test Method(s)¹:</u> |
|---------------------------------|---|
| Emissions (cont'd) | |
| Current Harmonics | IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2; KS C 9610-3-2; ECE Regulation 10.06 Annex 11 |
| Flicker and Fluctuations | IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3; KS C 9610-3-3; ECE Regulation 10.06 Annex 12 |
| Immunity | |
| Electrostatic Discharge | IEC 61000-4-2, Ed. 1.2 (2001); IEC 61000-4-2 (1995) + A1(1998) + A2(2000); EN 61000-4-2 (1995); EN 61000-4-2 (2009-05); KN 61000-4-2 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2; KS C 9610-4-2; IEEE C37.90.3 2001 |
| Radiated Immunity | IEC 61000-4-3 (1995) + A1(1998) + A2(2000); IEC 61000-4-3, Ed. 3.0 (2006-02); IEC 61000-4-3, Ed. 3.2 (2010); KN 61000-4-3 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3; KS C 9610-4-3; IEEE C37.90.2 2004 |
| Electrical Fast Transient/Burst | IEC 61000-4-4, Ed. 2.0 (2004-07); IEC 61000-4-4, Ed. 2.1 (2011); IEC 61000-4-4 (1995) + A1(2000) + A2(2001); KN 61000-4-4 (2008-5); RRL Notice No. 2008-5 (May 20, 2008); IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4; KS C 9610-4-4; ECE Regulation 10.06 Annex 15 |
| Surge | IEC 61000-4-5 (1995) + A1(2000); IEC 61000-4-5, Ed 1.1 (2005-11); EN 61000-4-5 (1995) + A1(2001); KN 61000-4-5 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5; KS C 9610-4-5; IEEE C37.90.1 2012; IEEE STD C62.41.2 2002; ECE Regulation 10.06 Annex 16 |
| Conducted Immunity | IEC 61000-4-6 (1996) + A1(2000); IEC 61000-4-6, Ed 2.0 (2006-05); IEC 61000-4-6 Ed. 3.0 (2008); KN 61000-4-6 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6; EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6 |

| <u>Test Technology:</u> | <u>Test Method(s):</u> |
|--|---|
| Immunity (cont'd) Power Frequency Magnetic Field Immunity (Down to 3 A/m) | IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009); EN 61000-4-8 (1994) + A1(2000); KN 61000-4-8 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8 |
| Voltage Dips, Short Interrupts, and Line Voltage Variations | IEC 61000-4-11, Ed. 2 (2004-03); KN 61000-4-11 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11; KS C 9610-4-11 |
| Ring Wave | IEC 61000-4-12, Ed. 2 (2006-09); EN 61000-4-12:2006; IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12; IEEE STD C62.41.2 2002 |
| Generic and Product Specific EMC Standards | IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1; KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2; KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3; AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3; IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4; KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2; EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3; EN 55015; EN 60730-1; EN 60945; IEC 60533; EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2; AS/NZS CISPR 14-2; KN 14-2; KS C 9814-2; IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24; IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35; KS C 9835; IEC 60601-1-2; JIS T0601-1-2 |
| TxRx EMC Requirements | EN 301 489-1; EN 301 489-3; EN 301 489-9; EN 301 489-17; EN 301 489-19; EN 301 489-20 |
| European Radio Test Standards | ETSI EN 300 086-1; ETSI EN 300 086-2; ETSI EN 300 113-1; ETSI EN 300 113-2; ETSI EN 300 220-1; ETSI EN 300 220-2; ETSI EN 300 220-3-1; ETSI EN 300 220-3-2; ETSI EN 300 330-1; ETSI EN 300 330-2; ETSI EN 300 440-1; ETSI EN 300 440-2; ETSI EN 300 422-1; ETSI EN 300 422-2; ETSI EN 300 328; ETSI EN 301 893; ETSI EN 301 511; ETSI EN 301 908-1; ETSI EN 908-2; ETSI EN 908-13; ETSI EN 303 413; ETSI EN 302 502; EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4 |

| <u>Test Technology:</u> | <u>Test Method(s)¹:</u> |
|--|--|
| <i>Canadian Radio Tests</i> | RSS-102 (RF Exposure Evaluation only); RSS-111; RSS-112; RSS-117; RSS-119; RSS-123; RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133; RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141; RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192; RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210; RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222; RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-248; RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN |
| <i>Mexico Radio Tests</i> | IFT-008-2015; NOM-208-SCFI-2016 |
| <i>Japan Radio Tests</i> | Radio Law No. 131, Ordinance of MPT No. 37, 1981, MIC Notification No. 88:2004, Table No. 22-11; ARIB STD-T66, Regulation 18 |
| <i>Taiwan Radio Tests</i> | LP-0002 (July 15, 2020) |
| <i>Australia/New Zealand Radio Tests</i> | AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014) |
| <i>Hong Kong Radio Tests</i> | HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7; HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057; HKCA 1073 |
| <i>Korean Radio Test Standards</i> | KN 301 489-1; KN 301 489-3; KN 301 489-9; KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125; KS X 3130; KS X 3126; KS X 3129 |
| <i>Vietnam Radio Test Standards</i> | QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT; QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT; QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT; QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT |
| <i>Vietnam EMC Test Standards</i> | QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT; QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT |
| <i>Unlicensed Radio Frequency Devices (3 Meter Semi-Anechoic Room)</i> | 47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H (using ANST C63.10:2013, ANST C63.17:2013 and FCC KDB 905462 D02 (v02)) |
| <i>Licensed Radio Service Equipment</i> | 47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95, 96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E, ANST C63.26:2015) |

Test Technology:

OTA (Over the Air) Performance
 GSM, GPRS, EGPRS
 UMTS (W-CDMA)
 LTE including CAT M1
 A-GPS for UMTS/GSM
 LTS A-GPS, A-GLONASS,
 STB8/STB16
 Large Device/Laptop/Tablet Testing
 Integrated Device Testing
 WiFi 802.11 a/b/g/n/a

Test Method(s)¹:

CTIA Test Plan for Wireless Device Over-the-Air Performance (Method for Measurement for Radiated Power and Receiver Performance) V3.8.2;
 CTIA Test Plan for RF Performance Evaluation of WiFi Mobile Converged Devices V2.1.0

Electrical Measurements and Simulation
AC Voltage / Current

(1mV to 5kV) 60 Hz
 (0.1V to 250V) up to 500 MHz
 (1µA to 150A) 60 Hz

FAA AC 150/5345-10H
 FAA AC 150/5345-43J
 FAA AC 150/5345-44K

DC Voltage / Current

(1mV to 15-kV) / (1µA to 10A)

FAA AC 150/5345-46E
 FAA AC 150/5345-47C

Power Factor / Efficiency / Crest Factor

(Power to 30kW)

FAA EB 67D

Resistance

(1mΩ to 4000MΩ)

Surge

(Up to 10 kV / 5 kA) (Combination Wave and Ring Wave)

On the following products and materials:

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

¹ When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - *General Requirements - Accreditation of ISO-IEC 17025 Laboratories*.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

| Rule Subpart/Technology | Test Method | Maximum Frequency (MHz) |
|--|-----------------|-------------------------|
| <u>Unintentional Radiators</u> Part 15B | ANSI C63.4:2014 | 40000 |

(A2LA Cert. No. 1786.01) Revised 12/17/2021


 Page 6 of 8

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

| Rule Subpart/Technology | Test Method | Maximum Frequency (MHz) |
|---|--|-------------------------|
| <u>Industrial, Scientific, and Medical Equipment</u> Part 18 | FCC MP-5 (February 1986) | 40000 |
| <u>Intentional Radiators</u> Part 15C | ANSI C63.10:2013 | 40000 |
| <u>Unlicensed Personal Communication Systems Devices</u> Part 15D | ANSI C63.17:2013 | 40000 |
| <u>U-NII without DFS Intentional Radiators</u> Part 15E | ANSI C63.10:2013 | 40000 |
| <u>U-NII with DFS Intentional Radiators</u> Part 15E | FCC KDB 905462 D02 (v02) | 40000 |
| <u>UWB Intentional Radiators</u> Part 15F | ANSI C63.10:2013 | 40000 |
| <u>BPL Intentional Radiators</u> Part 15G | ANSI C63.10:2013 | 40000 |
| <u>White Space Device Intentional Radiators</u> Part 15H | ANSI C63.10:2013 | 40000 |
| <u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27 | ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015 | 40000 |
| <u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz) | ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015 | 40000 |
| <u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96 | ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015 | 40000 |

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1²

| Rule Subpart/Technology | Test Method | Maximum Frequency (MHz) |
|--|--|-------------------------|
| <u>Maritime and Aviation Radio Services</u> Parts 80 and 87 | ANSI/TIA-603-E; ANSI C63.26:2015 | 40000 |
| <u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101 | ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015 | 40000 |
| <u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz) | ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015 | 40000 |
| <u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219 | ANSI C63.26:2015 | 40000 |

² Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



Accredited Laboratory

A2LA has accredited

ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 19th day of May 2021.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 1786.01
Valid to June 30, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.