



Engineering Test Report No. 2104122-02		
Report Date	June 29, 2022	
Manufacturer Name	Pro IAQ Inc	
Manufacturer Address	2650 N Westgate Ave Ste 112 Springfield, MO 65803	
Product Name Brand/Model No.	UBase	
Date Received	June 20, 2022	
Test Dates	June 20, 2022 to June 29, 2022	
Specifications	FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 Innovation, Science, and Economic Development Canada, ICES-003 Innovation, Science, and Economic Development Canada, RSS-247	
Test Facility	Elite Electronic Engineering, Inc. 1516 Centre Circle, Downers Grove, IL 60515	FCC Reg. Number: 269750 IC Reg. Number: 2987A CAB Identifier: US0107
Signature		
Tested by	Javier Cardenas	
Signature		
Approved by	Raymond J. Klouda, Registered Professional Engineer of Illinois – 44894	
PO Number	1871	
<p>This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.</p> <p>This report shall not be reproduced, except in full, without the written approval of Elite Electronic Engineering Inc.</p> <p>Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada, ICES-003 test specifications. The data presented in this test report pertains to the EUT on the test dates specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification. This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the Federal Government.</p>		

## Table of Contents

1.	Report Revision History .....	3
2.	Introduction .....	4
3.	Power Input .....	4
4.	Grounding .....	4
5.	Support Equipment .....	4
6.	Interconnect Leads.....	4
7.	Modifications Made to the EUT .....	4
8.	Modes of Operation.....	5
8.1.	Normal Operation.....	5
8.2.	Tx .....	5
9.	Test Specifications .....	5
10.	Test Plan .....	5
11.	Deviation, Additions to, or Exclusions from Test Specifications .....	5
12.	Laboratory Conditions .....	6
13.	Summary .....	6
14.	Sample Calculations .....	6
15.	Statement of Conformity .....	6
16.	Certification .....	7
17.	Photographs of EUT .....	8
18.	Equipment List .....	10
19.	Block Diagram of Test Setup .....	11
20.	RF Conducted Emissions (AC Mains) .....	12
21.	RF Radiated Emissions.....	19
22.	Module Integration – Emissions Test.....	30
23.	Scope of Accreditation .....	56

**This report shall not be reproduced, except in full,  
without the written approval of Elite Electronic Engineering Inc.**

## 1. Report Revision History

Revision	Date	Description
–	27 JUL 2022	Initial Release of Engineering Test Report No. 2104122-02

## 2. Introduction

This document presents the results of a series of electromagnetic compatibility (EMC) tests that were performed on a UBase Thermostat (hereinafter referred to as the Equipment Under Test (EUT)).

Additionally, this document presents the results of limited spurious emissions measurements performed on the EUT. The product is equipped with the following pre-certified radio modules:

- AzureWave Technologies, Inc, Model No. AW-CU300, FCC ID TLZ-CU300, IC ID 6100A-CU300, operating in the 2400-2483.5MHz band.
- ST S2-LP FHSS, FCC ID FCC ID Number 2, IC ID IC ID Number 2, operating in the 902-928MHz band.

The nature of these measurements is to ensure that the radio module and host remain in compliance with the emissions requirements of the FCC and after the integration process.

The EUT was identified as follows:

EUT Identification	
Description	UBase Thermostat
Model/Part No.	UBase
Serial No.	N/A
Software/Firmware Version	Not Provided
Size of EUT	11cm Length x 11cm Width x 7.5cm Height
Number of Interconnection Wires	0
Type of Interconnection Wires	N/A
Highest Internal Frequency of the EUT	2400-2483.5MHz

The EUT listed above was used throughout the test series.

## 3. Power Input

The EUT obtained 24V 60Hz power through 2 leads from the secondary of a step-down transformer. The primary of this transformer received 115V 60Hz power through lowpass powerline filters on the wall of the shielded enclosure.

## 4. Grounding

The EUT was not connected to ground.

## 5. Support Equipment

The EUT was submitted for testing along with the following support equipment:

Description	Model #	S/N
Step Down Transformer	125	---

## 6. Interconnect Leads

No interconnect leads were used during the tests.

## 7. Modifications Made to the EUT

No modifications were made to the EUT during the testing.

## 8. Modes of Operation

The EMC tests were performed with the EUTs operating in one or more of the test modes described below.

### 8.1. Normal Operation

This mode was achieved by applying power to the device. The onboard transceiver was put in standby mode using the EUT's UI.

### 8.2. Tx

This mode was achieved by applying power to the device. The onboard transceiver was configured to transmit at the following frequencies using the EUT's UI.

- 802.11b Ch 1: 2412MHz
- 802.11b Ch 11: 2462MHz

## 9. Test Specifications

The tests were performed to selected portions of, and in accordance with the following test specifications:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart B
- Federal Communications Commission "Code of Federal Regulations", Title 47, Chapter I, Subchapter A, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Compliance Measurements On Digital Transmission Systems, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 April 2, 2019 KDB 558074 D01v05r02
- RSS-Gen Issue 5, February 2020, Amendment 2, Innovation, Science, and Economic Development Canada, "General Requirements for Compliance of Radio Apparatus"
- RSS-247 Issue 2, February 2017, "Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices"
- 996369 D04 Module Integration Guide v02, October 13, 2020

## 10. Test Plan

No test plan was provided. Instructions were provided by personnel from Pro IAQ Inc and used in conjunction with the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B, Innovation, Science, and Economic Development Canada, ICES-003, and ANSI C63.4-2014 specifications.

## 11. Deviation, Additions to, or Exclusions from Test Specifications

There were no deviations, additions to, or exclusions from the test specifications during this test series.

## 12. Laboratory Conditions

The following were the laboratory conditions while the EMC tests were performed:

Ambient Parameters	Value
Temperature	22°C
Relative Humidity	35%
Atmospheric Pressure	1021.4mb

## 13. Summary

The following EMC tests were performed, and the results are shown below:

Test Description	Test Requirements	Test Methods	Equipment Class	EUT S/N	Results
RF Conducted Emissions (AC Mains)	FCC 15B 15.107 ISED ICES-003, Section 3.2.1	ANSI C63.4:2014	B	N/A	Conforms
RF Radiated Emissions	FCC 15B 15.109 ISED ICES-003, Section 3.2.2	ANSI C63.4:2014	B	N/A	Conforms
Module Integration – Emissions	FCC 15C 15.247 RSS-247	ANSI C63.10	---	N/A	Conforms

## 14. Sample Calculations

For Powerline Conducted Emissions:

The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL (\text{dB}\mu\text{V}) = MTR (\text{dB}\mu\text{V}) + CF (\text{dB}).$$

For Radiated Emissions:

The resultant field strength (FS) is a summation in decibels (dB) of the receiver meter reading (MTR), the antenna correction factor (AF), and the cable loss factor (CF). If an external preamplifier is used, the total is reduced by its gain (-PA). If a distance correction (DC) is required, it is added to the total.

$$\text{Formula 1: } FS (\text{dB}\mu\text{V}/\text{m}) = MTR (\text{dB}\mu\text{V}) + AF (\text{dB}/\text{m}) + CF (\text{dB}) + (-PA (\text{dB})) + DC (\text{dB})$$

To convert the Field Strength  $\text{dB}\mu\text{V}/\text{m}$  term to  $\mu\text{V}/\text{m}$ , the  $\text{dB}\mu\text{V}/\text{m}$  is first divided by 20. The Base 10 AntiLog is taken of this quotient. The result is the Field Strength value in  $\mu\text{V}/\text{m}$  terms.

$$\text{Formula 2: } FS (\mu\text{V}/\text{m}) = \text{AntiLog} [(FS (\text{dB}\mu\text{V}/\text{m}))/20]$$

## 15. Statement of Conformity

The Pro IAQ Inc UBase Thermostat, Model No. UBase, did fully conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B and Innovation, Science, and Economic Development Canada, ICES-003.


Additionally, the Pro IAQ Inc UBase Thermostat, Model No. UBase, did conform to the selected requirements of FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247 247 and Innovation,

Science, and Economic Development Canada, RSS-247.

## 16. Certification

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the FCC "Code of Federal Regulations" Title 47 Part 15, Subpart B, FCC "Code of Federal Regulations" Title 47 Part 15, Subpart C, Section 15.247, Innovation, Science, and Economic Development Canada, ICES-003 and Innovation, Science, and Economic Development Canada, RSS-247 test specifications. The data presented in this test report pertains to the EUT on the test date specified. Any electrical or mechanical modifications made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

## 17. Photographs of EUT

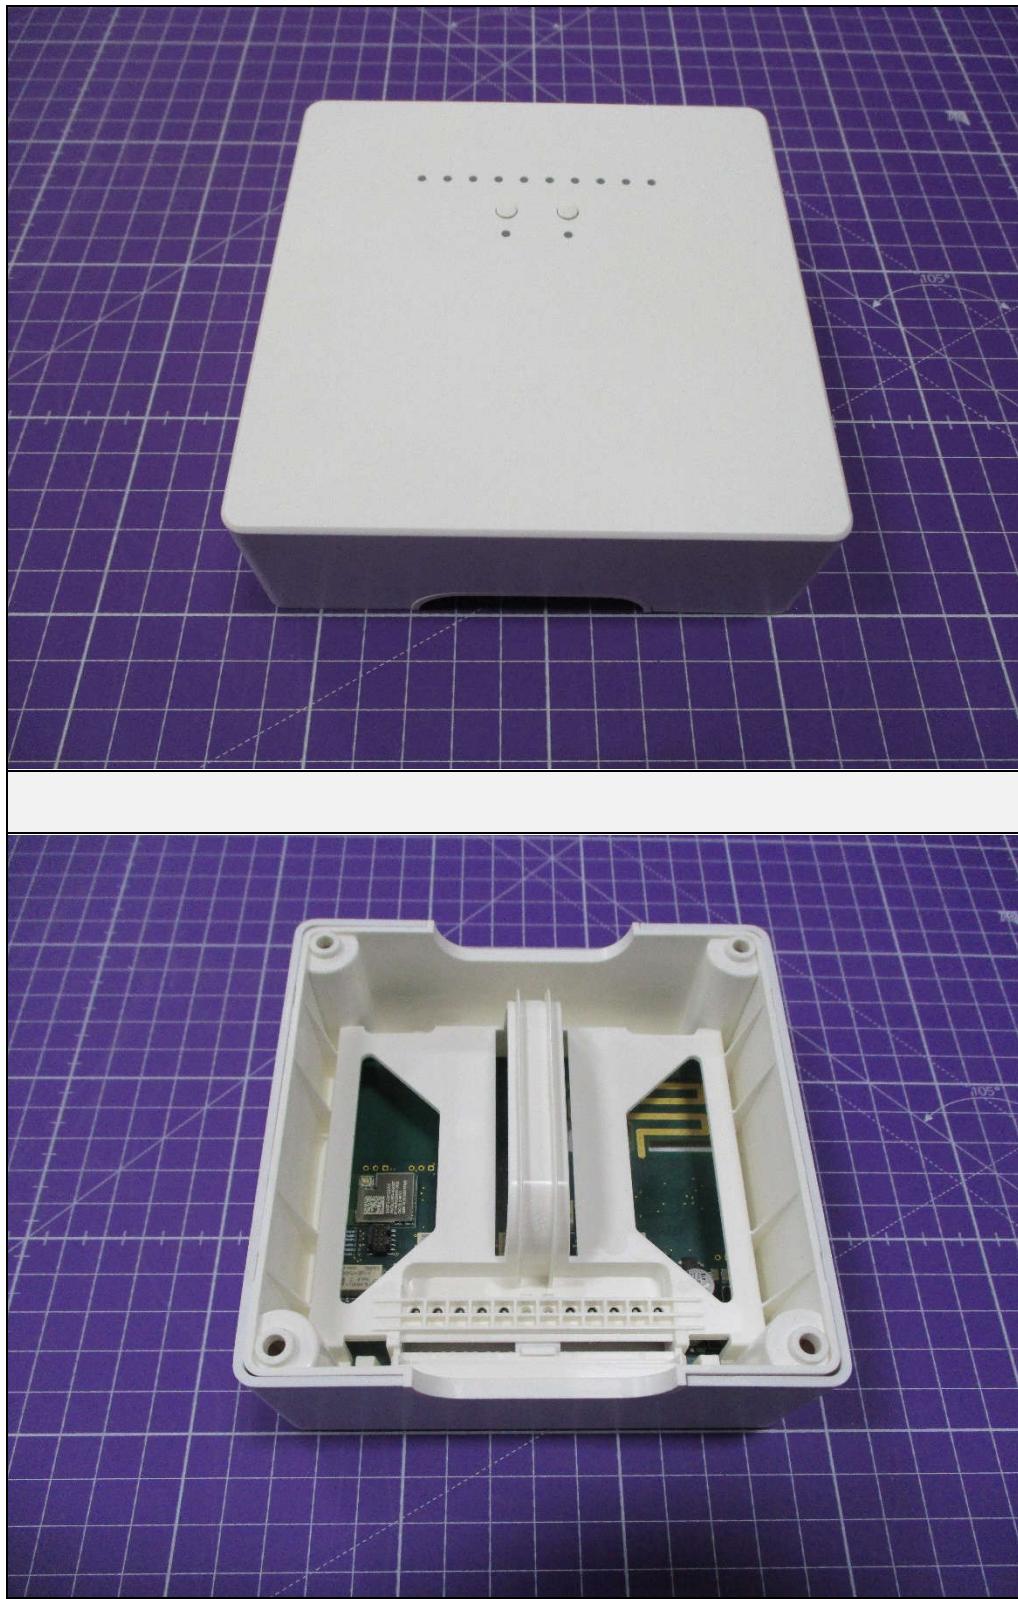



## 18. Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW3	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-35-120-5R0-10-12	PL2924	1GHZ-20GHZ	3/9/2022	3/9/2023
CDY0	WORKSTATION	ELITE	WORKSTATION		WINDOWS 7	N/A	
CDZ4	LAB WORKSTATION	ELITE	LWS-10		WINDOWS 10	CNR	
GRB0	1MHZ, LISN SIGNAL CHECKER	ELITE	LISNCHKR1M	1	1MHZ	6/17/2021	6/17/2023
NTA4	BILOG ANTENNA	TESEQ	6112D	46660	20-2000GHZ	10/5/2020	10/5/2022
PLF2	CISPR16 50UH LISN	ELITE	CISPR16/70A	002	.15-30MHz	4/5/2022	4/5/2023
PLF4	CISPR16 50UH LISN	ELITE	CISPR16/70A	003	.15-30MHz	4/5/2022	4/5/2023
R21F	3M ANECHOIC CHAMBER NSA	EMC TEST SYSTEMS	3M ANECHOIC		30MHZ-18GHZ	3/30/2022	3/30/2023
R23P	ROOM 23			001	---	CNR	
RBG3	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101592	2HZ-44GHZ	4/7/2022	4/7/2023
RBH2	EMI ANALYZER	ROHDE & SCHWARZ	ESW26	103005	2HZ-26GHZ	3/23/2022	3/28/2023
SHC2	Power Supplies	HENGFU	HF60W-SL-24	A11372702	24V	NOTE 1	
T1E16	10DB 25W ATTENUATOR	WEINSCHEL	46-10-43	CM5685	DC-18GHZ	5/18/2022	5/18/2024
VBR8	CISPR EN FCC CE VOLTAGE.exe					N/A	
VBV2	CISPR EN FCC ICES RE.EXE	ELITE	CISPR EN FCC ICES RE.EXE	---	---	N/A	
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	
XLQY	5W, 50 OHM TERMINATION	JFW INDUSTRIES	50T-052	---	DC-2GHZ	1/5/2022	1/5/2024
XLTK	5W, 50 OHM TERMINATION	JFW INDUSTRIES	50T-052	---	DC-2GHZ	1/5/2022	1/5/2024


N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

## 19. Block Diagram of Test Setup

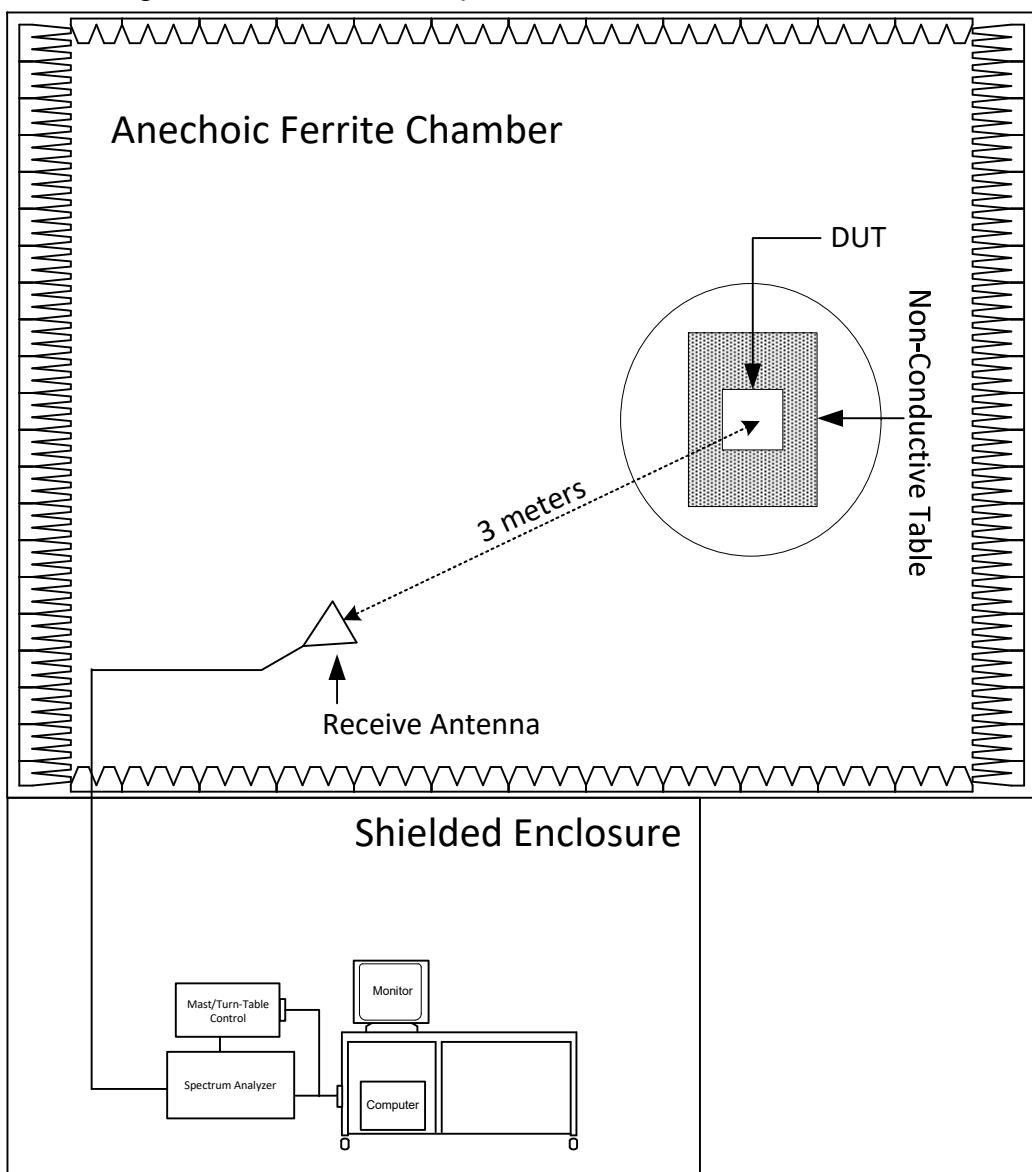

## Radiated Measurements Test Setup

## 20. RF Conducted Emissions (AC Mains)

EUT Information	
Manufacturer	Pro IAQ Inc
Product	UBase Thermostat
Model No.	UBase
Serial No.	N/A
Mode	Normal Operation

Test Site Information	
Setup Format	Tabletop
Height of Support	For Floor Standing only
Type of Test Site	Shielded Enclosure
Test Site Used	R23P
Note	None

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Conducted disturbance (mains port) (150 kHz – 30 MHz)	2.7

Requirements	
For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table.	

Conducted Emissions Class B Limits		
Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 decreasing with logarithm of frequency to 56	56 decreasing with logarithm of frequency to 46
0.5 – 5	56	46
5 – 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the EUT is considered to have met both requirements and measurements do not need to be performed using the Average detector.

### Procedure

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- 1) The EUT was operated in the Tx - Hopping mode.
- 2) Measurements were first made on the primary side of the 120V/24V transformer high line.
- 3) The frequency range from 150kHz to 30MHz was broken up into smaller frequency sub-bands.
- 4) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- 5) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- 6) Steps (4) and (5) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits. The resultant voltage level (VL) is a summation in decibels (dB) of the receiver meter reading (MTR) and the cable loss factor (CF).

$$\text{Formula 1: } VL \text{ (dB}\mu\text{V)} = MTR \text{ (dB}\mu\text{V)} + CF \text{ (dB)}$$

- 7) Steps (3) through (6) were repeated on the neutral line.



Test Setup for RF Conducted Emissions (AC Mains)



Test Setup for RF Conducted Emissions (AC Mains)

## FCC Part 15 Subpart B Conducted Emissions Test

### Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Pro IAQ Inc  
 Model : UBase  
 DUT Revision : N/A  
 Serial Number : N/A  
 DUT Mode : Normal Operation  
 Line Tested : Line  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes : Tx Standby  
 Test Engineer : J. Cardenas  
 Limit : Class B  
 Test Date : Jun 23, 2022 09:26:49 AM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.155	43.8	65.8		19.2	55.8	
0.275	23.6	61.0		5.6	51.0	
0.667	9.3	56.0		2.9	46.0	
1.173	8.5	56.0		3.3	46.0	
1.894	9.0	56.0		3.8	46.0	
2.898	9.1	56.0		3.2	46.0	
5.000	9.0	56.0		3.4	46.0	
15.318	10.7	60.0		4.9	50.0	
23.972	21.7	60.0		20.0	50.0	

## FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Pro IAQ Inc  
 Model : UBase  
 DUT Revision : N/A  
 Serial Number : N/A  
 DUT Mode : Normal Operation  
 Line Tested : Line  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes : Tx Standby  
 Test Engineer : J. Cardenas  
 Limit : Class B  
 Test Date : Jun 23, 2022 09:26:49 AM

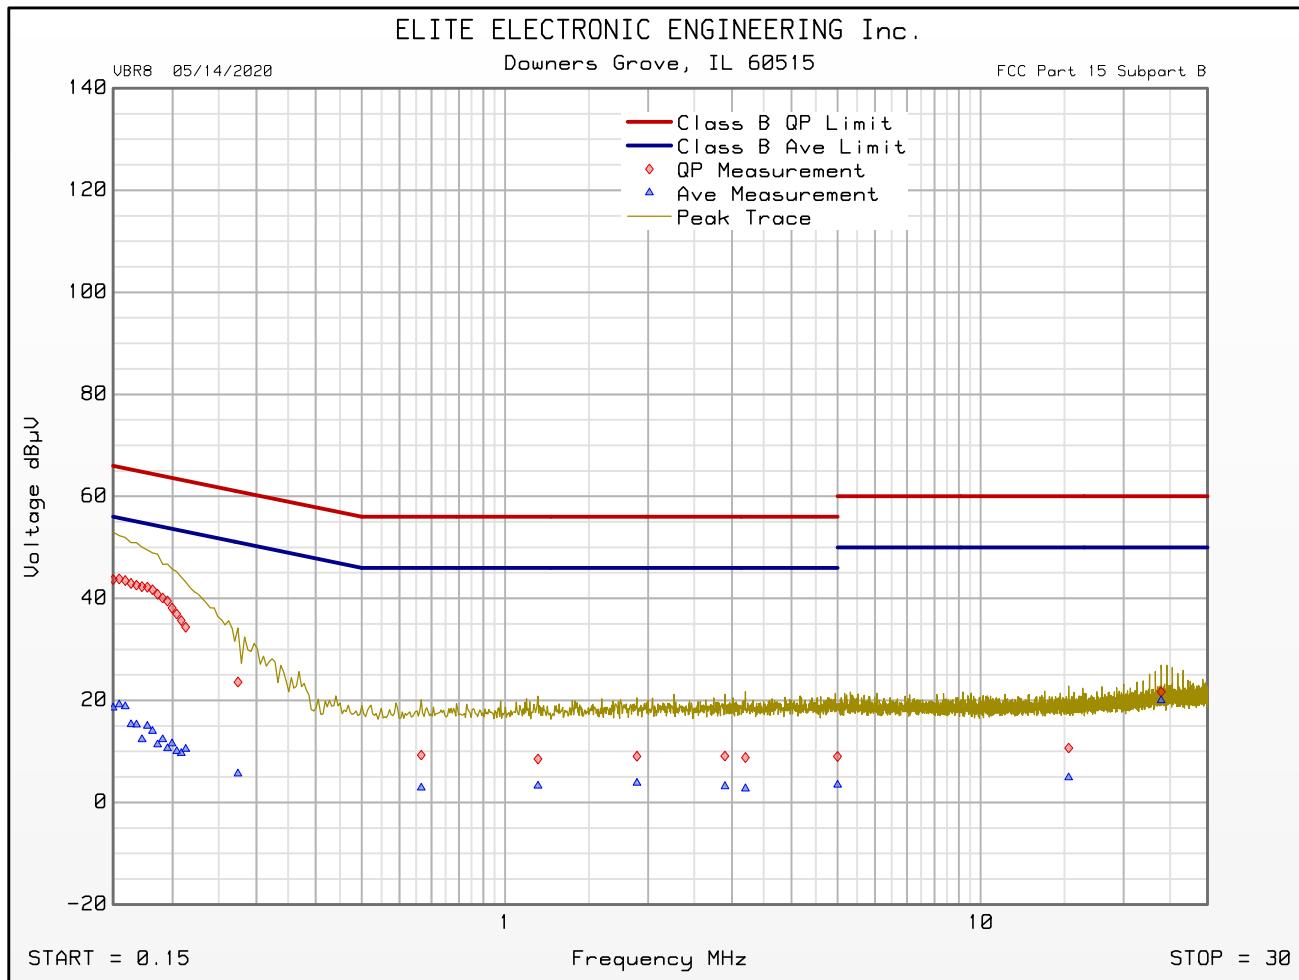

Emissions Meet QP Limit  
 Emissions Meet Ave Limit

## FCC Part 15 Subpart B Conducted Emissions Test

### Significant Emissions Data

VBR8 05/14/2020


Manufacturer : Pro IAQ Inc  
 Model : UBase  
 DUT Revision : N/A  
 Serial Number : N/A  
 DUT Mode : Normal Operation  
 Line Tested : Neutral  
 Scan Step Time [ms] : 30  
 Meas. Threshold [dB] : -10  
 Notes : Tx Standby  
 Test Engineer : J. Cardenas  
 Limit : Class B  
 Test Date : Jun 23, 2022 09:35:26 AM  
 Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 10 dB margin below limit

Freq MHz	Quasi-peak Level dB $\mu$ V	Quasi-peak Limit dB $\mu$ V	Excessive Quasi-peak Emissions	Average Level dB $\mu$ V	Average Limit dB $\mu$ V	Excessive Average Emissions
0.164	43.0	65.3		18.7	55.3	
0.275	23.7	61.0		4.8	51.0	
0.509	9.0	56.0		2.9	46.0	
1.200	8.5	56.0		2.9	46.0	
1.813	8.9	56.0		2.2	46.0	
2.970	9.1	56.0		3.0	46.0	
5.000	9.2	56.0		3.0	46.0	
14.576	8.4	60.0		1.9	50.0	
25.300	20.0	60.0		16.4	50.0	

## FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 05/14/2020

Manufacturer : Pro IAQ Inc  
Model : UBase  
DUT Revision : N/A  
Serial Number : N/A  
DUT Mode : Normal Operation  
Line Tested : Neutral  
Scan Step Time [ms] : 30  
Meas. Threshold [dB] : -10  
Notes : Tx Standby  
Test Engineer : J. Cardenas  
Limit : Class B  
Test Date : Jun 23, 2022 09:35:26 AM

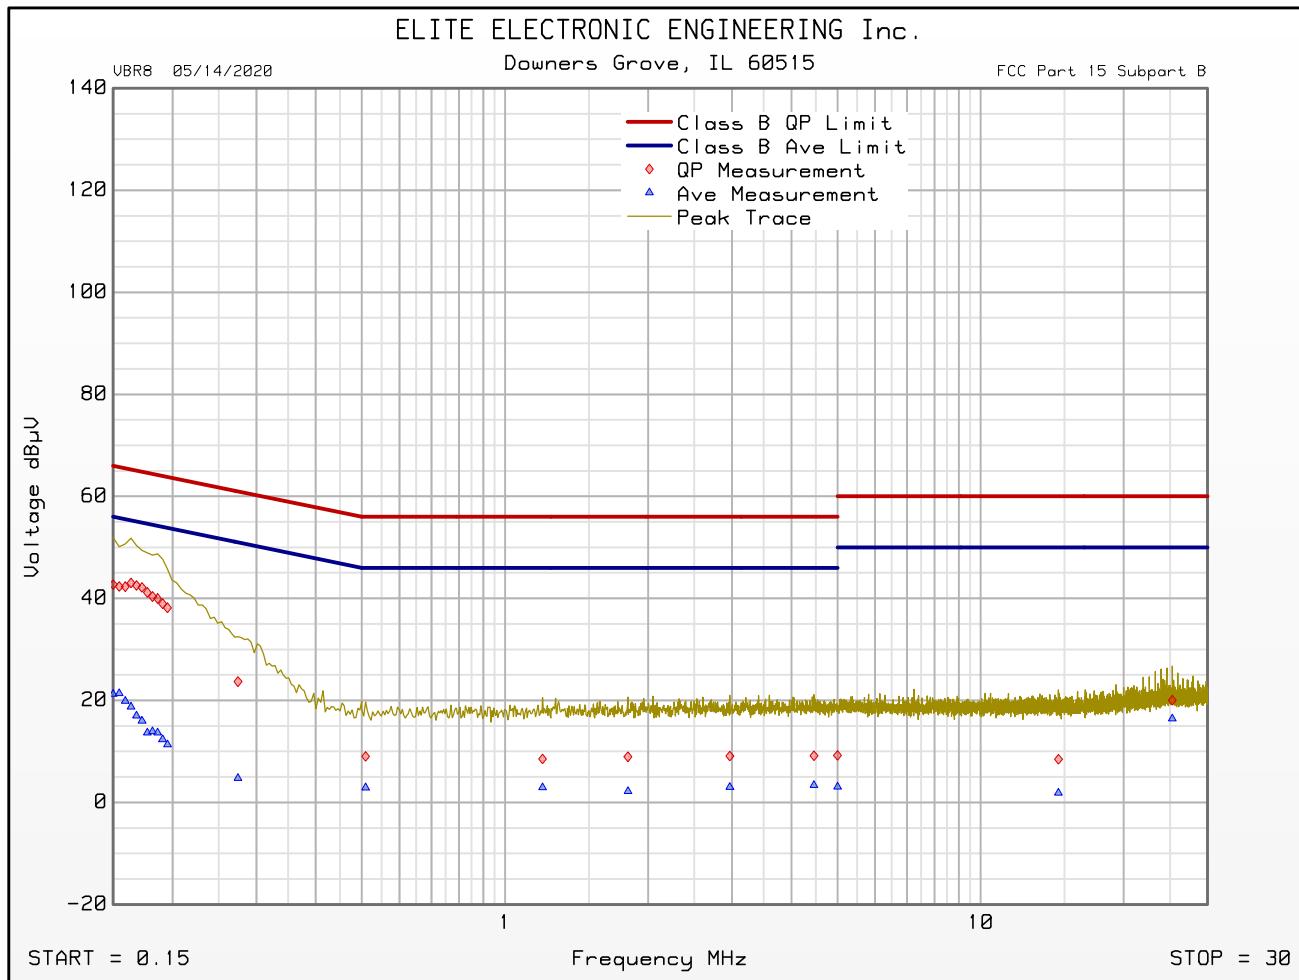

Emissions Meet QP Limit  
Emissions Meet Ave Limit

## 21. RF Radiated Emissions

EUT Information	
Manufacturer	Pro IAQ Inc
Product	UBase Thermostat
Model No.	UBase
Serial No.	N/A
Mode	Normal Operation

Test Site Information	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R21F
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Highest Receive Frequency	2400-2483.5MHz
Highest Measurement Frequency	13GHz
Notes	The cables were manually maximized during the preliminary emissions sweeps. The cable arrangement which resulted in the worst-case emissions was utilized.

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

Requirements
The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the values in the following tables.

FCC Part 15 Class B Radiated Emissions Limits (30MHz to 1GHz)		
Frequency of Emission (MHz)	Field Strength ( $\mu$ V/m)	Field Strength (dB $\mu$ V/m)
30 – 88	100	40
88 – 216	150	43.5
216 – 960	200	46
Above 960	500	54
FCC Part 15 Class B Radiated Emissions Limits (Above 1GHz)		
Frequency of Emission (MHz)	Peak Limit (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)
Above 1000	74	54

ICES-003 Class B Radiated Emissions Limits (30MHz to 1GHz)		
Frequency Range (MHz)	Field Strength at 3 meters (dB $\mu$ V/m)	Field Strength at 10 meters (dB $\mu$ V/m)
30 – 88	40	30
88 – 216	43.5	33.1
216 – 230	46	35.6
230 – 960	47	37
960 – 1000	54	43.5
ICES-003 Class B Radiated Emissions Limits (At and Above 1GHz)		
Frequency Range (GHz)	Average (dB $\mu$ V/m)	Peak (dB $\mu$ V/m)
1 – F <sub>M</sub>	54	74

F<sub>M</sub> = highest measurement frequency

#### Procedure

Since a quasi-peak detector and an average detector requires long integration times, it is not practical to automatically sweep through the quasi-peak and average levels. Therefore, radiated emissions from the EUT were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak detector or average detector.

The EUT and all peripheral equipment were placed on an 80cm high non-conductive stand. The broadband measuring antenna was positioned at a 3-meter distance from the EUT. The frequency range from 30MHz to 1GHz was investigated using a peak detector function with the bilog antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The frequency range from 1GHz to 10GHz was investigated using a peak detector function with the double ridged waveguide antenna at several heights, horizontal and vertical polarization, and with several different orientations of the EUT with respect to the antenna. The maximum levels for each antenna polarization were plotted.

Final radiated emissions were performed on all significant broadband and narrowband emissions found in the exploratory sweeps using the following methods:


- 1) Measurements from 30MHz to 1GHz were made using a quasi-peak detector and a broadband bilog antenna. Measurements above 1GHz were made using an average detector and a broadband double ridged waveguide antenna.
- 2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken:
  - a) The EUT was rotated so that all sides were exposed to the receiving antenna.
  - b) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - c) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.
- 3) For hand-held or body-worn devices, the EUT was rotated through three orthogonal axes to determine which orientation produces the highest emission relative to the limit.




Test Setup for Radiated Emissions: 30MHz to 1GHz, Horizontal Polarization



Test Setup for Radiated Emissions: 30MHz to 1GHz, Vertical Polarization

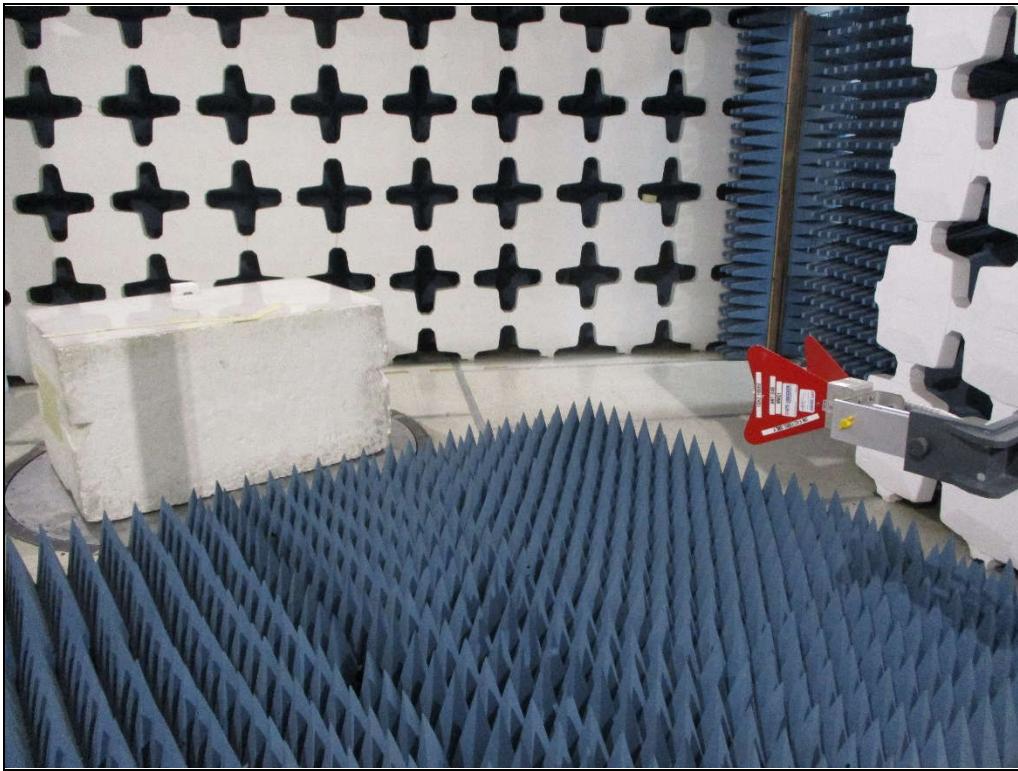

Test Setup for Radiated Emissions: Above 1GHz, Horizontal Polarization

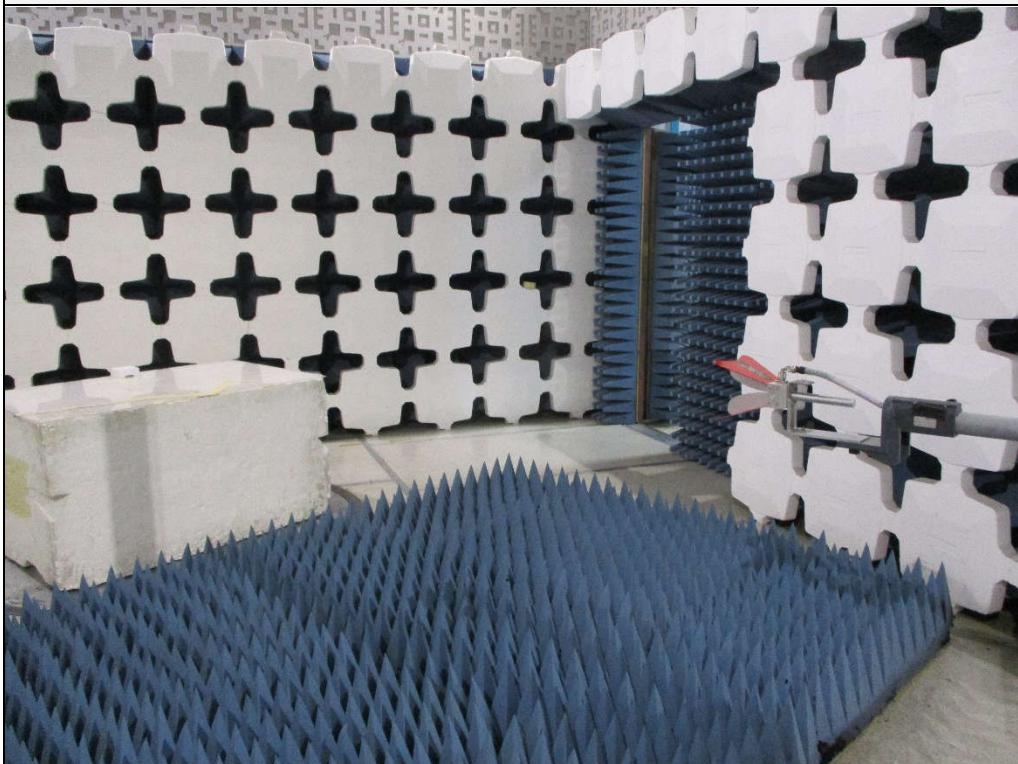

Test Setup for Radiated Emissions: Above 1GHz, Vertical Polarization

## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022


Manufacturer : Pro IAQ Inc  
 Model : UBase  
 Serial Number : N/A  
 DUT Mode : Normal Operation  
 Turntable Step Angle (°) : 45  
 Mast Positions (cm) : 120, 200, 340  
 Scan Type : Stepped Scan  
 Test RBW : 120 kHz  
 Prelim Dwell Time (s) : 0.0001  
 Notes : Tx Standby  
 Test Engineer : J. Cardenas  
 Test Date : Jun 27, 2022 09:16:22 AM

Freq MHz	Peak Mtr Rdg dBuV	QP Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Peak Total dB $\mu$ V/m	QP Total dB $\mu$ V/m	QP Limit dB $\mu$ V/m	QP Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive QP Level
30.240	5.0	-5.0	24.8	0.0	0.5	0.0	30.3	20.3	40.0	-19.7	Vertical	120	135	
64.560	6.7	-3.4	12.3	0.0	0.5	0.0	19.5	9.4	40.0	-30.6	Vertical	120	225	
127.060	3.4	-7.9	18.0	0.0	0.7	0.0	22.1	10.8	43.5	-32.7	Horizontal	340	180	
270.960	3.8	-7.6	18.3	0.0	1.0	0.0	23.1	11.7	46.0	-34.3	Vertical	120	90	
524.580	3.9	-6.7	24.6	0.0	1.5	0.0	30.1	19.4	46.0	-26.6	Horizontal	200	45	
915.540	4.2	-7.1	26.4	0.0	2.0	0.0	32.6	21.3	46.0	-24.7	Horizontal	200	135	

## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022


Manufacturer : Pro IAQ Inc  
Model : UBase  
Serial Number : N/A  
DUT Mode : Normal Operation  
Turntable Step Angle (°) : 45  
Mast Positions (cm) : 120, 200, 340  
Antenna Polarization : Horizontal  
Scan Type : Stepped Scan  
Test RBW : 120 kHz  
Prelim Dwell Time (s) : 0.0001  
Notes : Tx Standby  
Test Engineer : J. Cardenas  
Test Date : Jun 27, 2022 09:16:22 AM

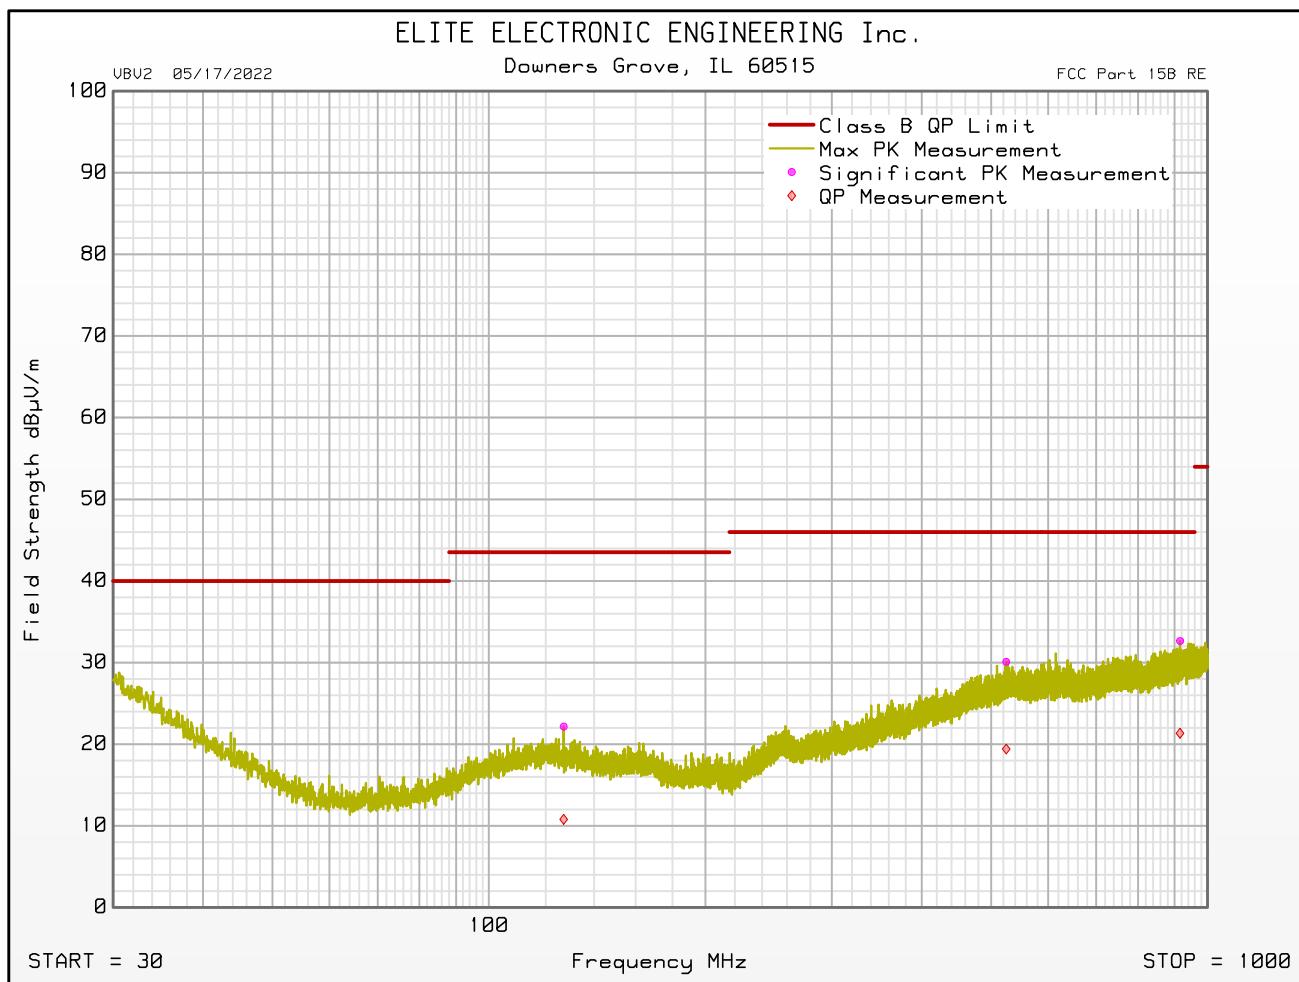

## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022

Manufacturer : Pro IAQ Inc  
Model : UBase  
Serial Number : N/A  
DUT Mode : Normal Operation  
Turntable Step Angle (°) : 45  
Mast Positions (cm) : 120, 200, 340  
Antenna Polarization : Vertical  
Scan Type : Stepped Scan  
Test RBW : 120 kHz  
Prelim Dwell Time (s) : 0.0001  
Notes : Tx Standby  
Test Engineer : J. Cardenas  
Test Date : Jun 27, 2022 09:16:22 AM

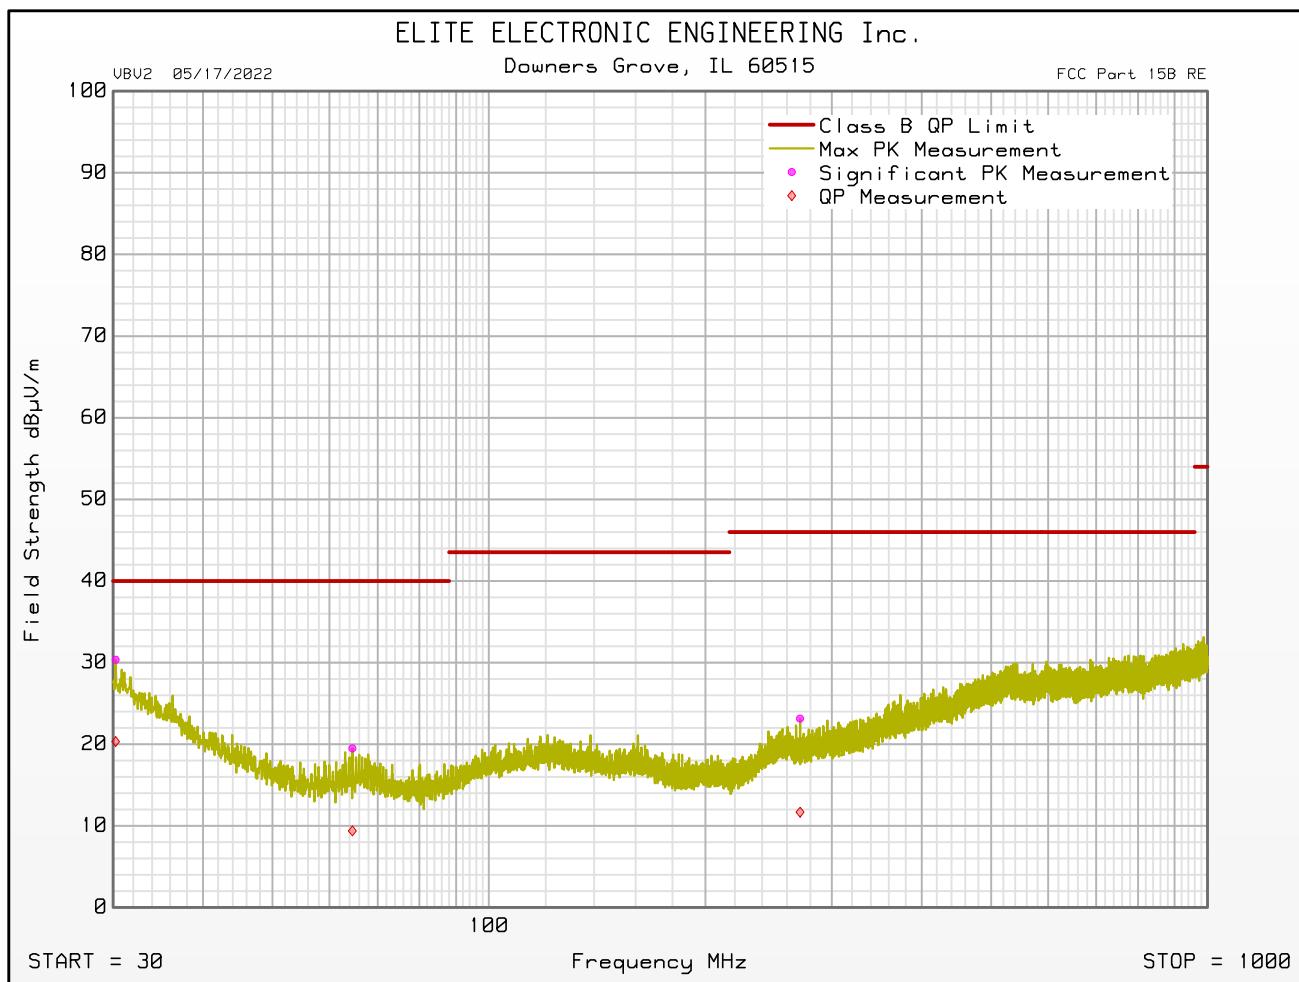

## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022

Manufacturer : Pro IAQ Inc  
 Model : UBase  
 Serial Number : N/A  
 DUT Mode : Normal Operation  
 Turntable Step Angle (°) : 45  
 Mast Positions (cm) : 120, 200, 340  
 Scan Type : Stepped Scan  
 Test RBW : 1 MHz  
 Prelim Dwell Time (s) : 0.0001  
 Notes : Tx Standby  
 Test Engineer : J. Cardenas  
 Test Date : Jun 27, 2022 10:41:43 AM


Freq MHz	Peak Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Peak Total dB $\mu$ V/m	Peak Limit dB $\mu$ V/m	Peak Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive Peak Level
1345.000	50.3	29.5	-41.6	2.4	0.0	40.7	74.0	-33.3	Horizontal	120	90	
2203.500	49.9	31.4	-40.6	3.2	0.0	44.0	74.0	-30.0	Vertical	200	225	
3451.000	48.7	33.1	-40.5	4.2	0.0	45.4	74.0	-28.5	Vertical	200	90	
5416.000	47.7	34.8	-40.4	5.2	0.0	47.3	74.0	-26.7	Vertical	120	270	
8433.000	48.1	35.8	-40.6	6.5	0.0	49.8	74.0	-24.2	Horizontal	200	0	
12434.500	48.3	38.9	-40.3	8.0	0.0	54.9	74.0	-19.1	Horizontal	120	0	

Freq MHz	Average Mtr Rdg dBuV	Ant Fac dB/m	Amp Fac dB	Cbl Fac dB	Dist Corr dB	Average Total dB $\mu$ V/m	Average Limit dB $\mu$ V/m	Average Lim Mrg dB	Ant Pol	Mast Ht cm	Azim °	Excessive Average Level
1345.000	37.2	29.5	-41.6	2.4	0.0	27.5	54.0	-26.5	Horizontal	120	90	
2203.500	35.4	31.4	-40.6	3.2	0.0	29.4	54.0	-24.5	Vertical	200	225	
3451.000	34.4	33.1	-40.5	4.2	0.0	31.2	54.0	-22.8	Vertical	200	90	
5416.000	33.9	34.8	-40.4	5.2	0.0	33.5	54.0	-20.5	Vertical	120	270	
8433.000	34.4	35.8	-40.6	6.5	0.0	36.1	54.0	-17.9	Horizontal	200	0	
12434.500	35.1	38.9	-40.3	8.0	0.0	41.6	54.0	-12.4	Horizontal	120	0	

## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022


Manufacturer : Pro IAQ Inc  
Model : UBase  
Serial Number : N/A  
DUT Mode : Normal Operation  
Turntable Step Angle (°) : 45  
Mast Positions (cm) : 120, 200, 340  
Antenna Polarization : Horizontal  
Scan Type : Stepped Scan  
Test RBW : 1 MHz  
Prelim Dwell Time (s) : 0.0001  
Notes : Tx Standby  
Test Engineer : J. Cardenas  
Test Date : Jun 27, 2022 10:41:43 AM

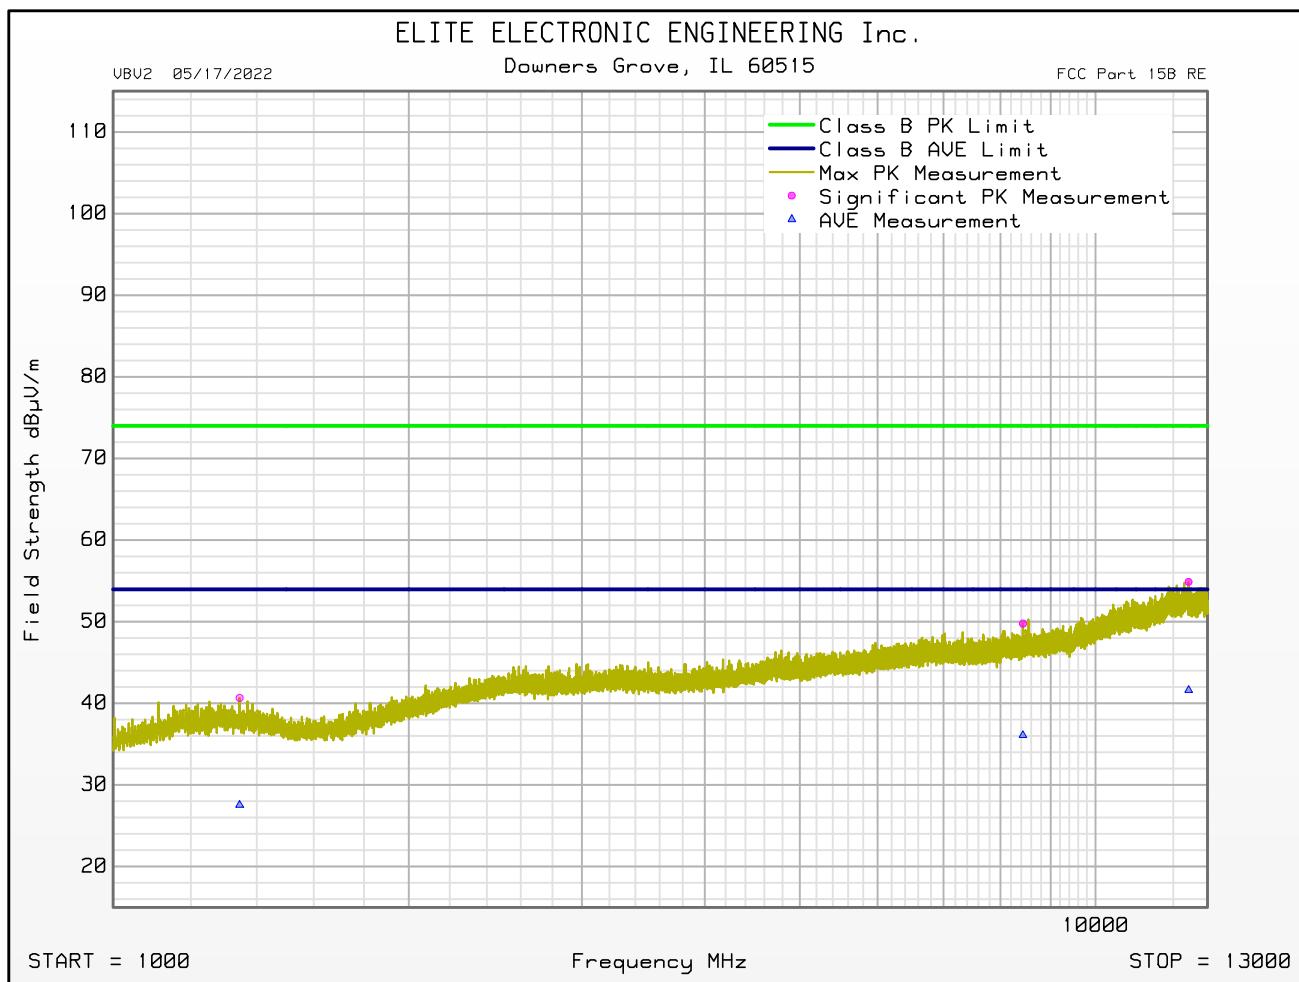

## FCC Part 15B Class B Radiated RF Emissions Test

SW ID/Rev: VBV2 05/17/2022

Manufacturer : Pro IAQ Inc  
Model : UBase  
Serial Number : N/A  
DUT Mode : Normal Operation  
Turntable Step Angle (°) : 45  
Mast Positions (cm) : 120, 200, 340  
Antenna Polarization : Vertical  
Scan Type : Stepped Scan  
Test RBW : 1 MHz  
Prelim Dwell Time (s) : 0.0001  
Notes : Tx Standby  
Test Engineer : J. Cardenas  
Test Date : Jun 27, 2022 10:41:43 AM

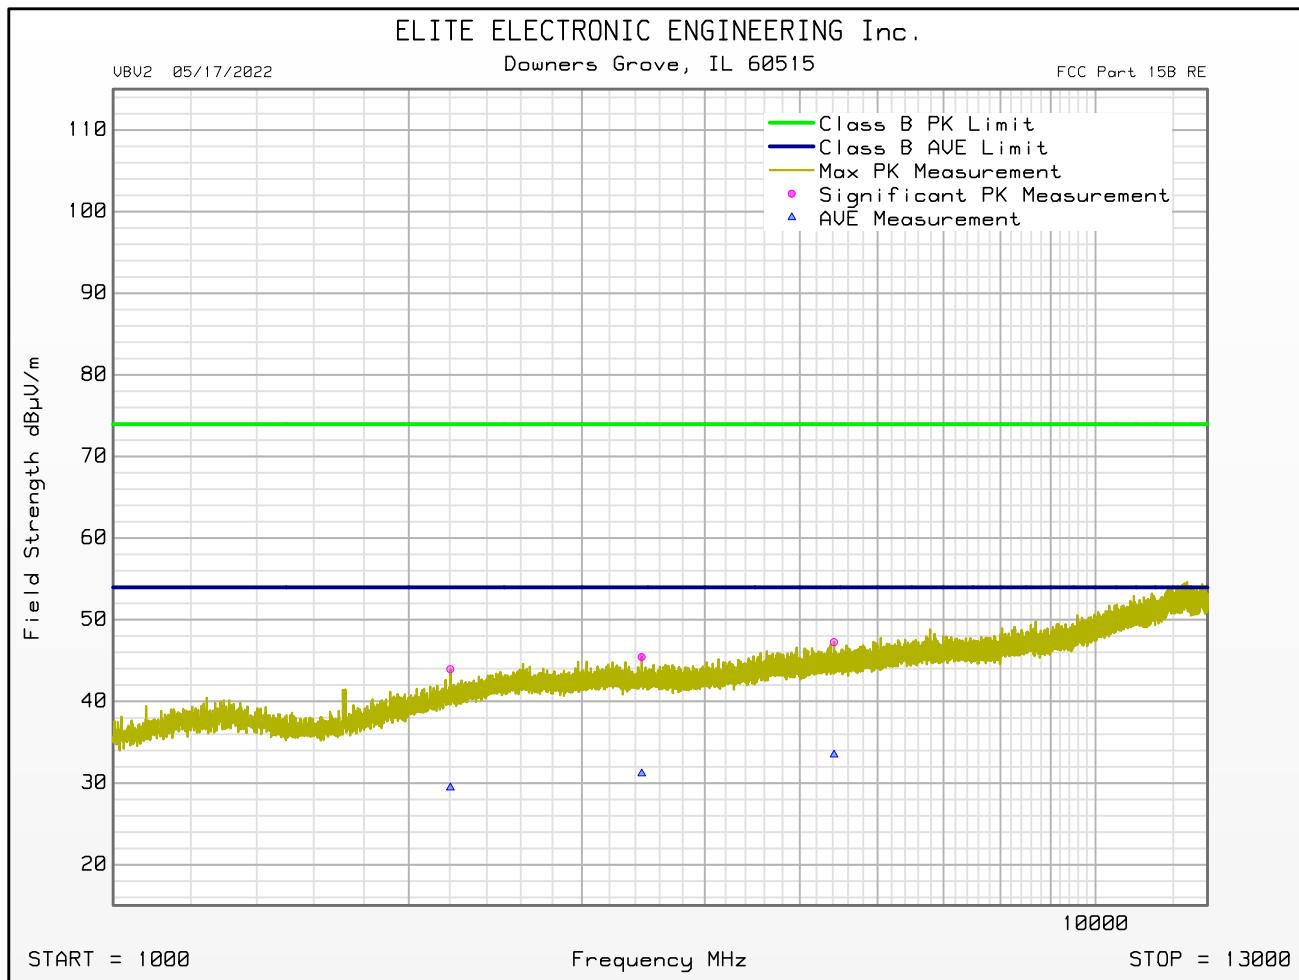

## 22. Module Integration – Emissions Test

EUT Information	
Manufacturer	Pro IAQ Inc
Product	UBase Thermostat
Model No.	UBase
Serial No.	N/A
Mode	Normal Operation

Test Site Information	
Setup Format	Tabletop
Height of Support	N/A
Type of Test Site	Semi-Anechoic Chamber
Test Site Used	R21F
Type of Antennas Used	Below 1GHz: Bilog (or equivalent) Above 1GHz: Double-ridged waveguide (or equivalent)
Notes	The cables were manually maximized during the preliminary emissions sweeps. The cable arrangement which resulted in the worst-case emissions was utilized.

Measurement Uncertainty	
Measurement Type	Expanded Measurement Uncertainty
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2
Radiated disturbance (electric field strength on an open area test site or alternative test site) (18 GHz – 26.5 GHz)	3.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (26.5 GHz – 40 GHz)	3.4

## Requirements

Per 996369 D04 Module Integration Guide v01:

Testing of the host product with all the transmitters installed is recommended, to verify that the host product meets all the applicable FCC rules. The radio spectrum is to be investigated with all the transmitters in the final host product functioning to determine that no emissions exceed the highest limit permitted for any one individual transmitter as required by Section 2.947(f).

The testing shall also check for emissions that may occur due to the intermixing of emissions with the other transmitters, digital circuitry, or due to physical properties of the host product (enclosure). This investigation is especially important when integrating multiple modular transmitters where the certification is based on testing each of them in a stand-alone configuration. No emissions exceed the highest limit permitted for any one individual transmitter as required by Section 2.947(f).

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles and anechoic absorber material is installed over the ferrite tiles. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.


The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3-meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz (10GHz used for 902-928MHz range, 25GHz used for 2400-2483.5MHz range, 40GHz used for the 5725-5850MHz) was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 18.0GHz.

- 1) For all harmonics not in the restricted bands, the following procedure was used:
  - a) The field strength of the fundamental was measured using a double ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. The EUT was centered on the turntable. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
  - b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a non-conductive stand. The EUT was centered on the turntable. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
  - c) To ensure that maximum or worst-case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
    - i. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
    - ii. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
    - iii. The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
    - iv. In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
  - d) All harmonics not in the restricted bands must be at least 20dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.
- 2) For all emissions in the restricted bands, the following procedure was used:
  - a) The field strengths of all emissions below 1GHz were measured using a bi-log antenna. The bilog antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.

- b) The field strengths of all emissions above 1GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3-meter distance from the EUT. The EUT was placed on a 1.5-meter-high non-conductive stand. A peak detector with a resolution bandwidth of 1MHz was used on the spectrum analyzer.
- c) To ensure that maximum (or worst case) emission levels were measured, the following steps were taken when taking all measurements:
  - i. The EUT was rotated so that all of its sides were exposed to the receiving antenna.
  - ii. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - iii. The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
  - iv. In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer, the measuring antenna was not raised or lowered to ensure maximized readings. Instead, the EUT was rotated through all axis to ensure the maximum readings were recorded.
- d) For all radiated emissions measurements below 1GHz, if the peak reading is below the limits listed in §15.209(a), no further measurements are required. If, however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1GHz, the peak readings must comply with the §15.35(b) limits. §15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1GHz must be no greater than 20dB above the limits specified in §15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector and an average reading was taken.

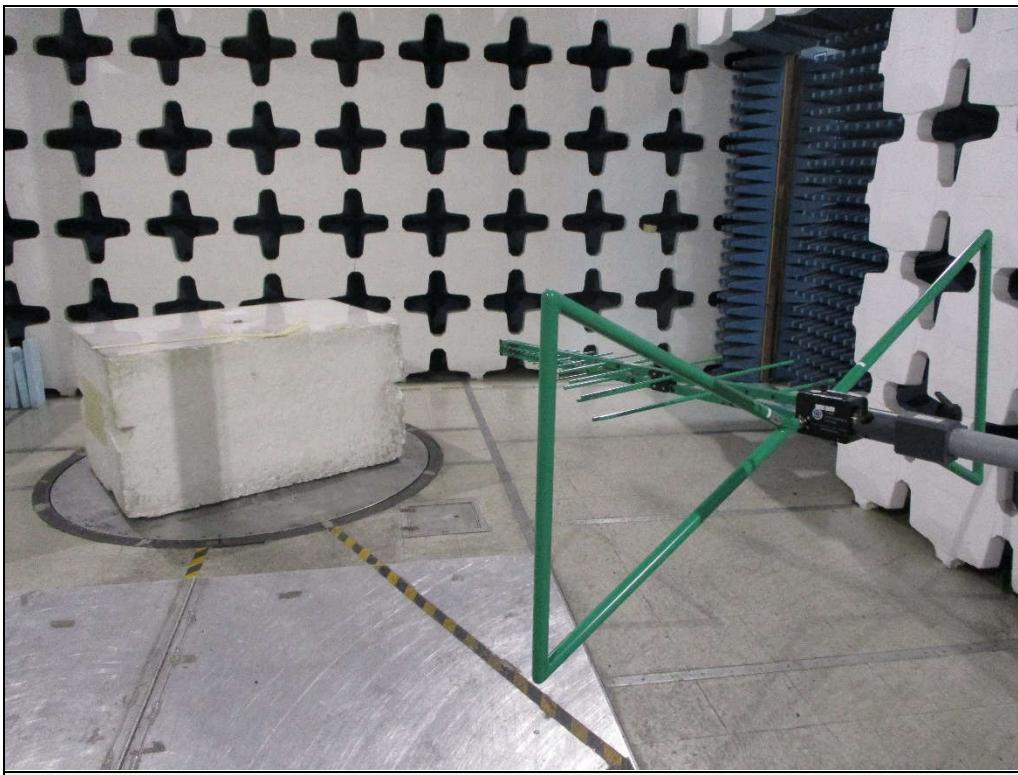

Test Setup for Spurious Emissions: 30MHz to 1GHz, Horizontal Polarization




Test Setup for Spurious Emissions: 30MHz to 1GHz, Vertical Polarization





Test Setup for Spurious Emissions: Above 1GHz, Horizontal Polarization





Test Setup for Spurious Emissions: Above 1GHz, Vertical Polarization

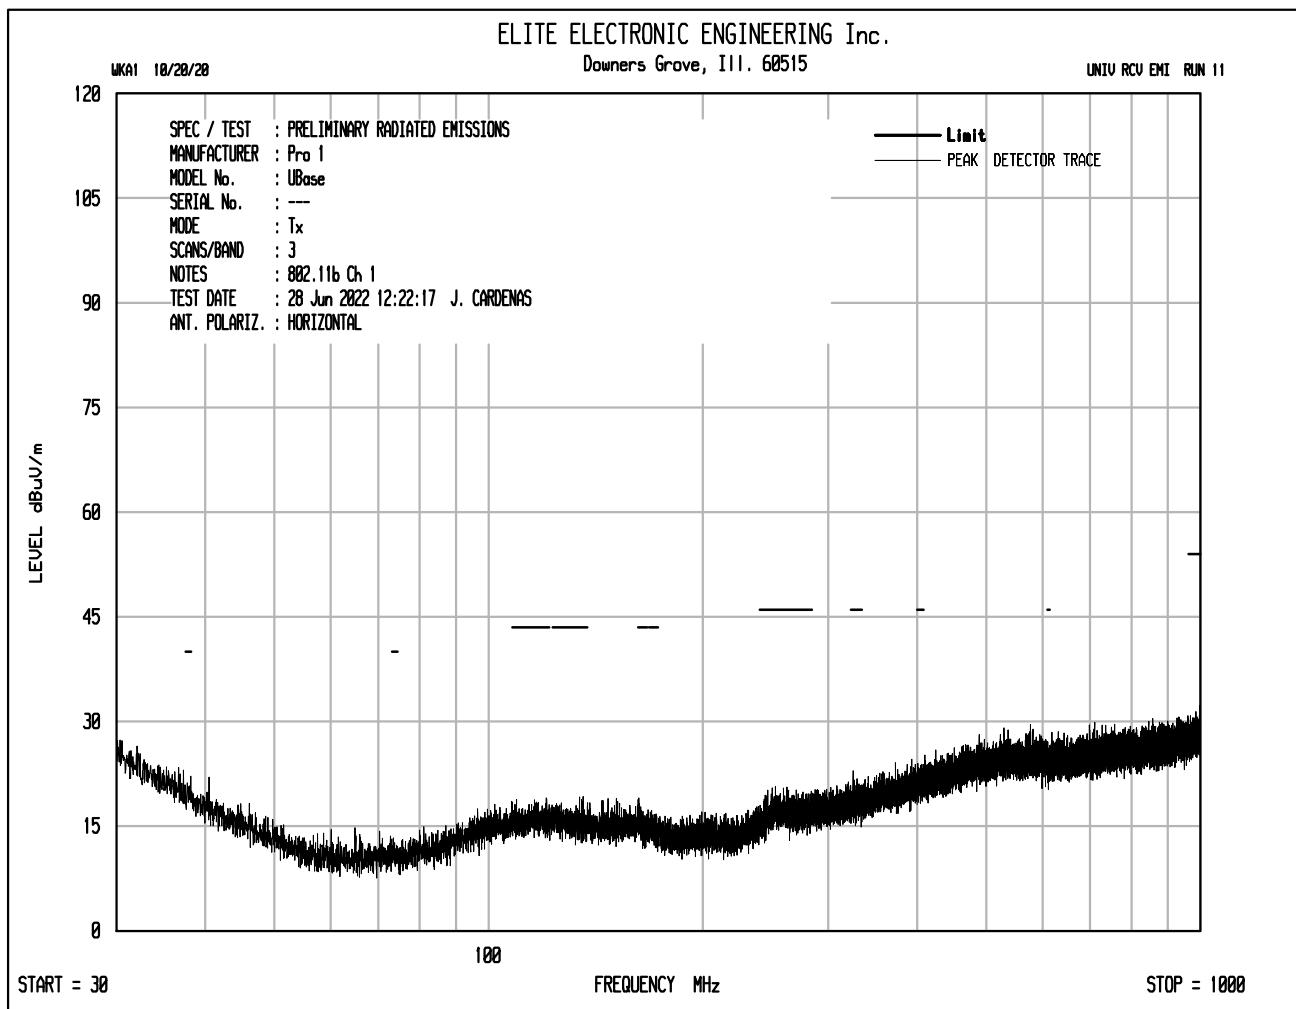


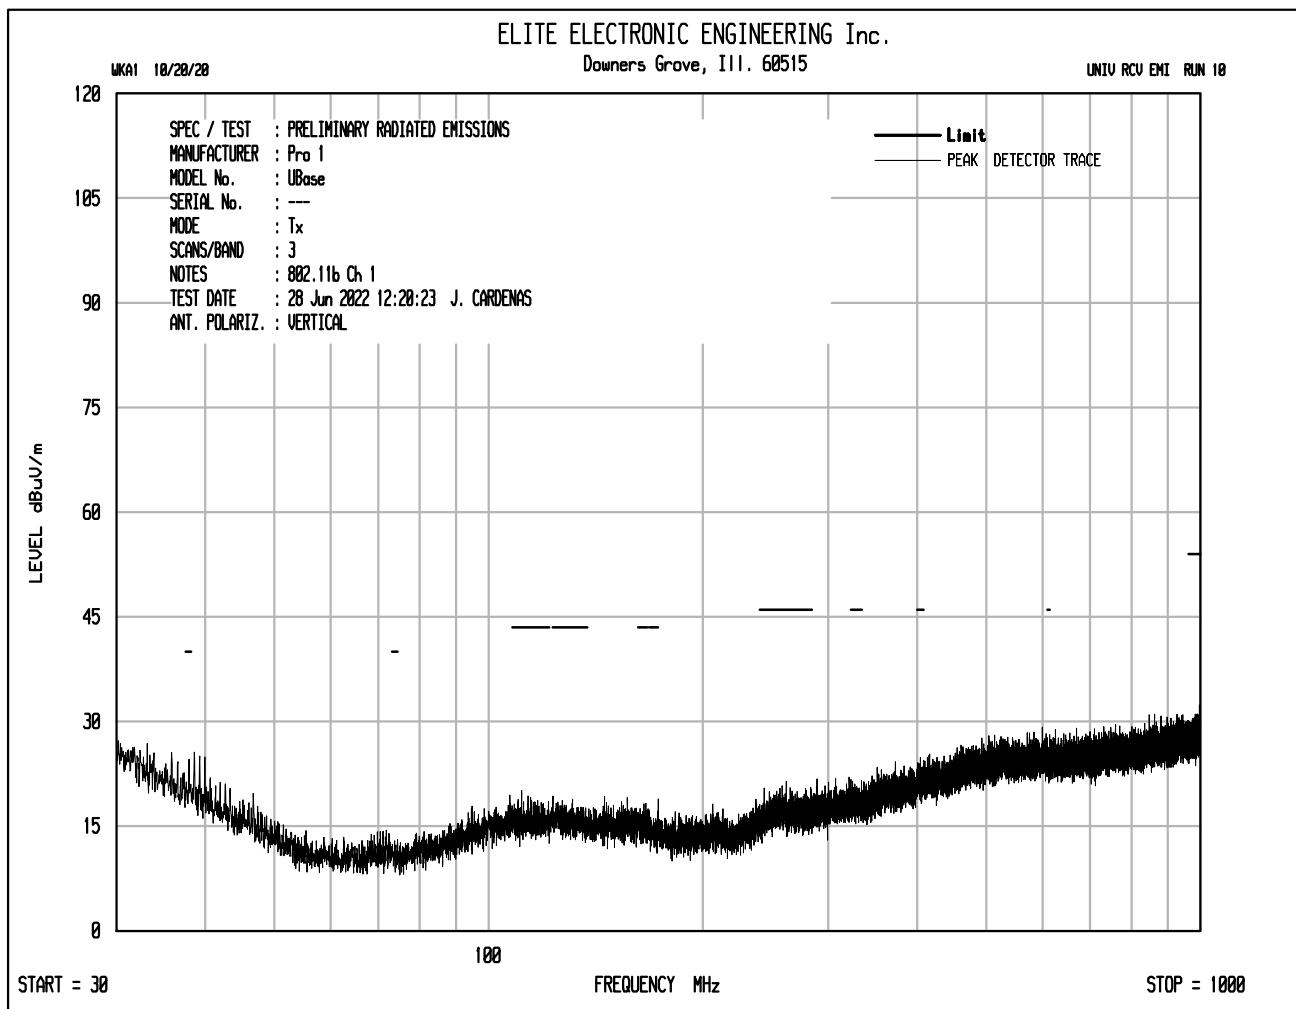


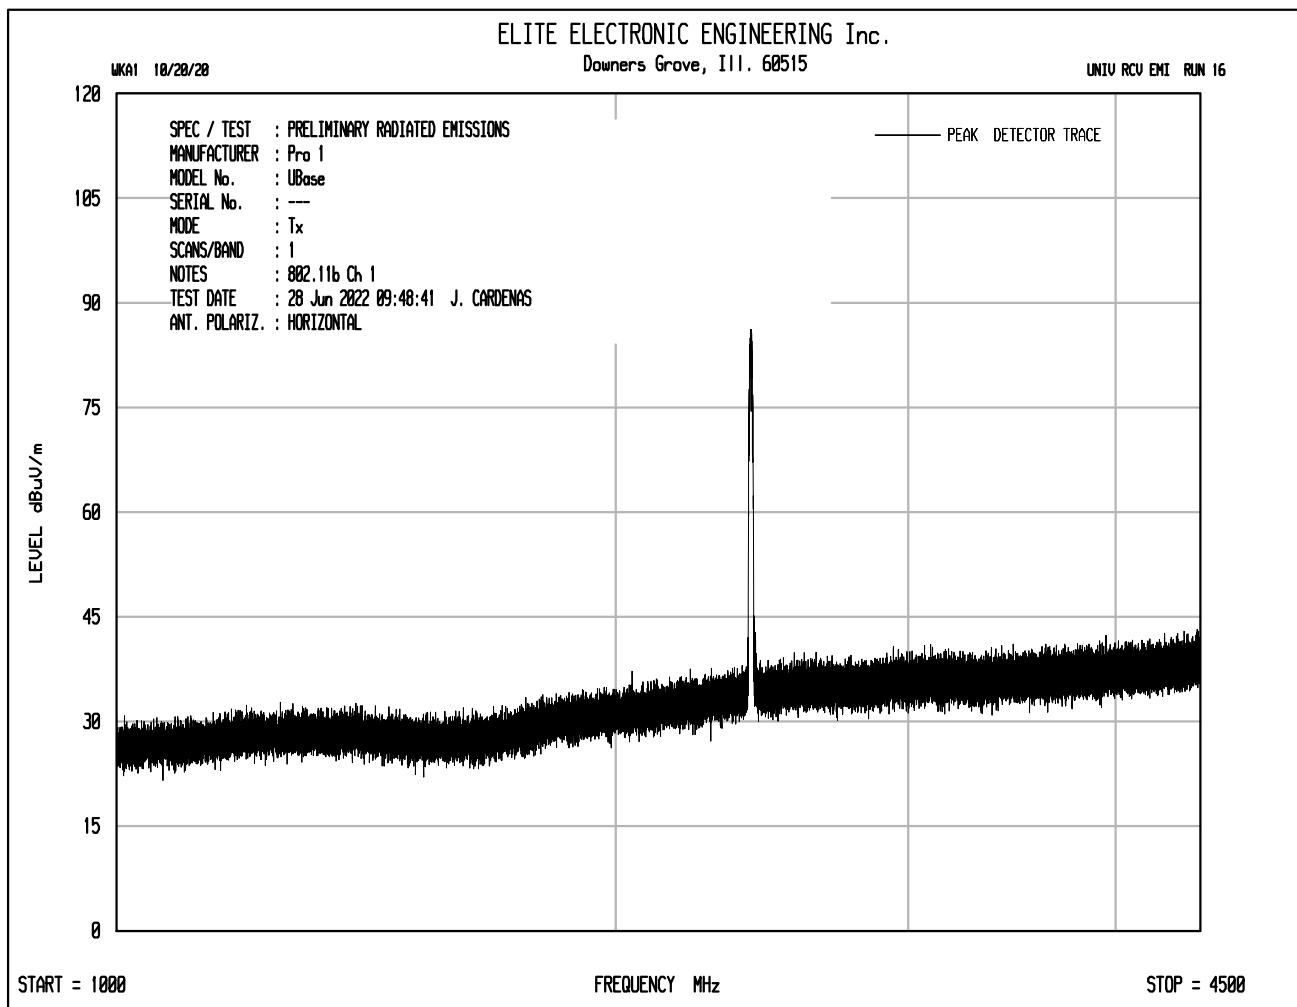


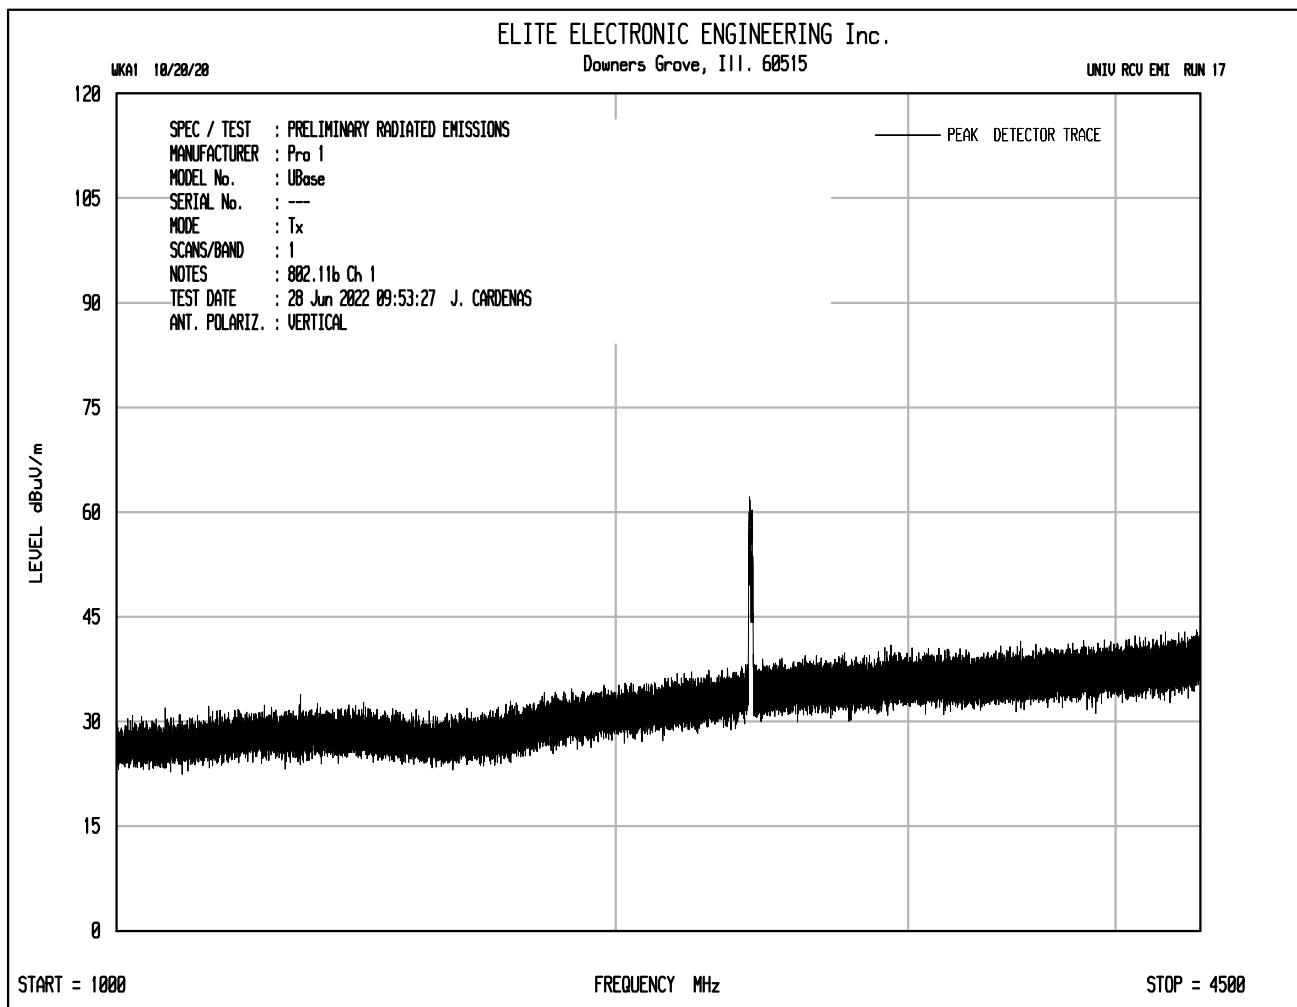


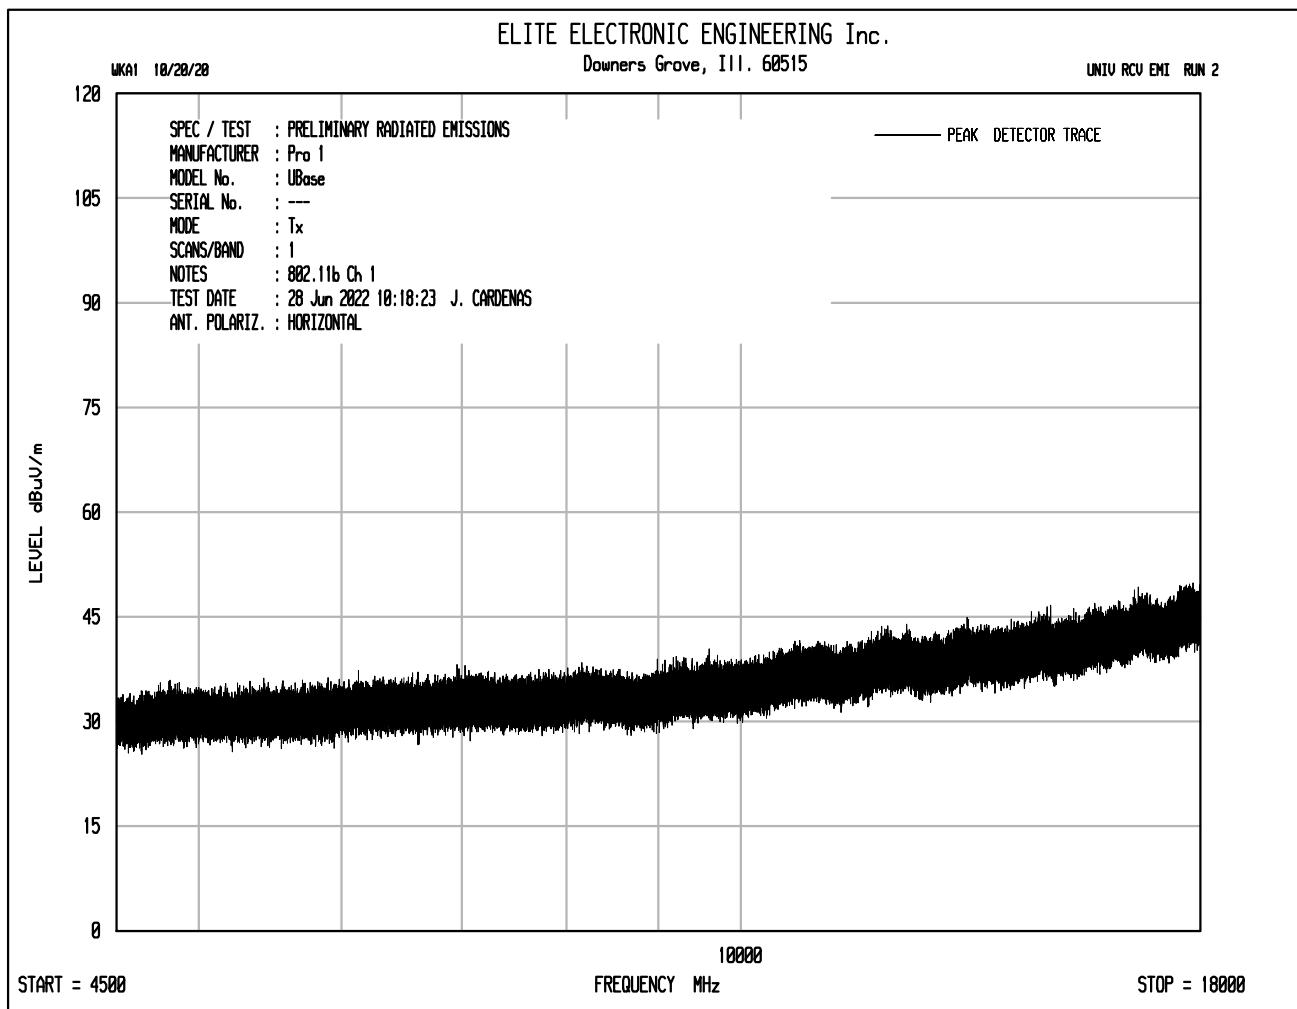


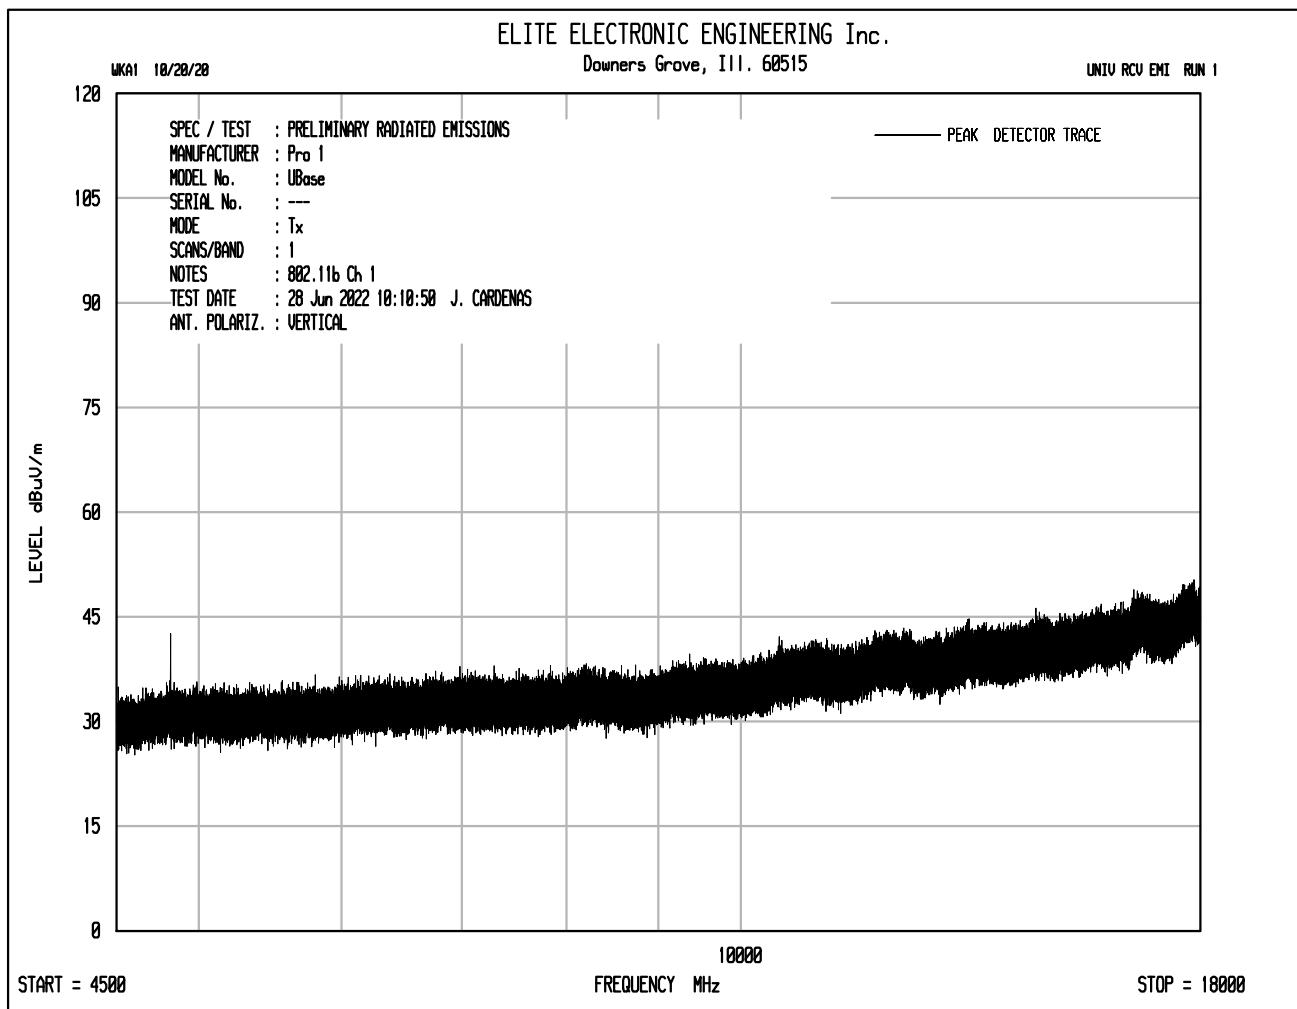


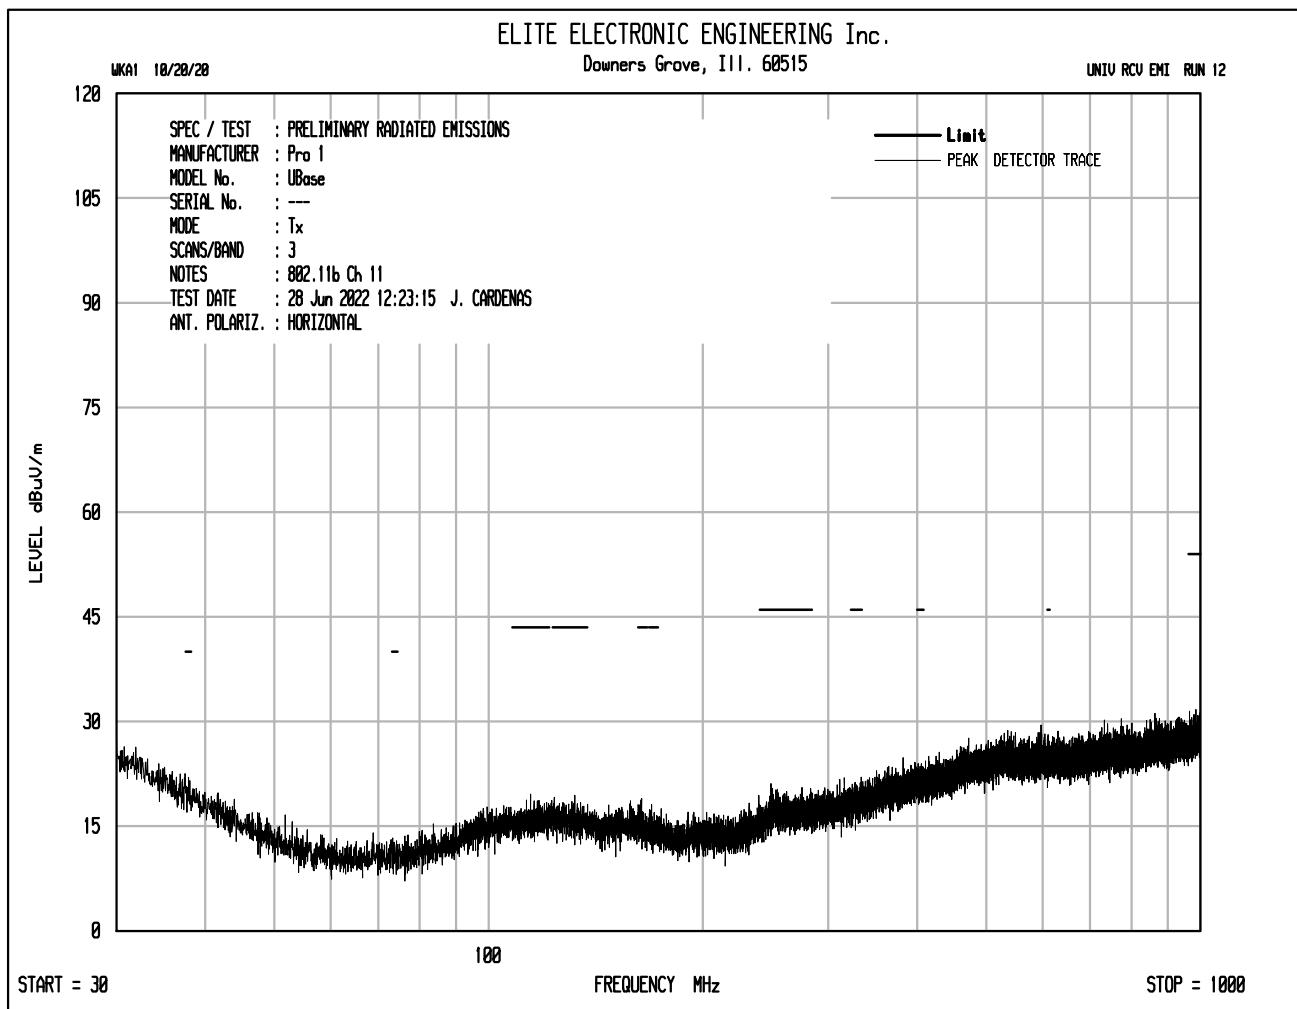


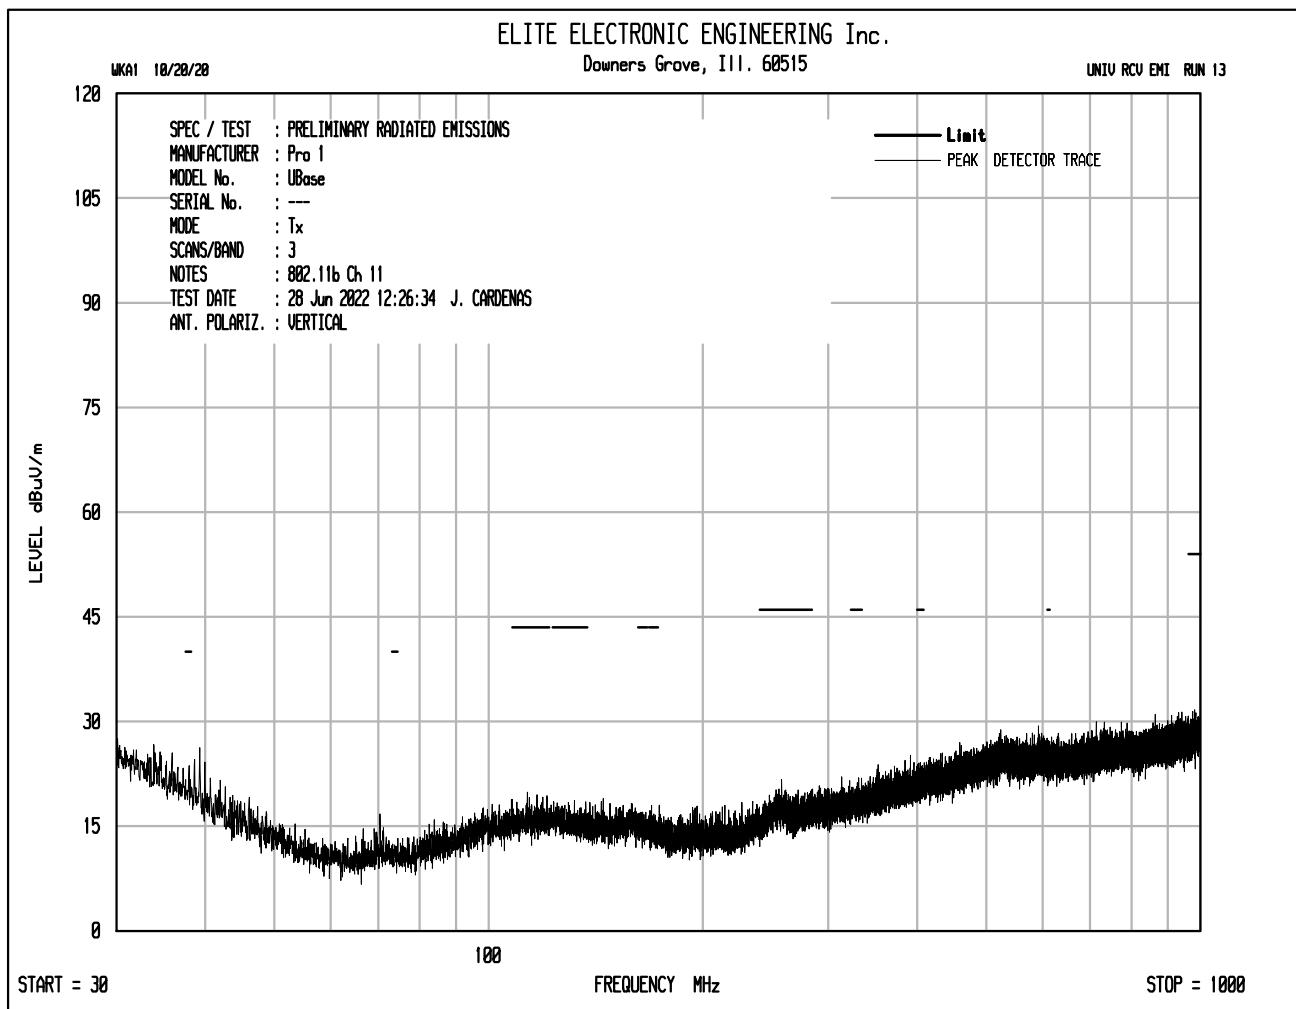

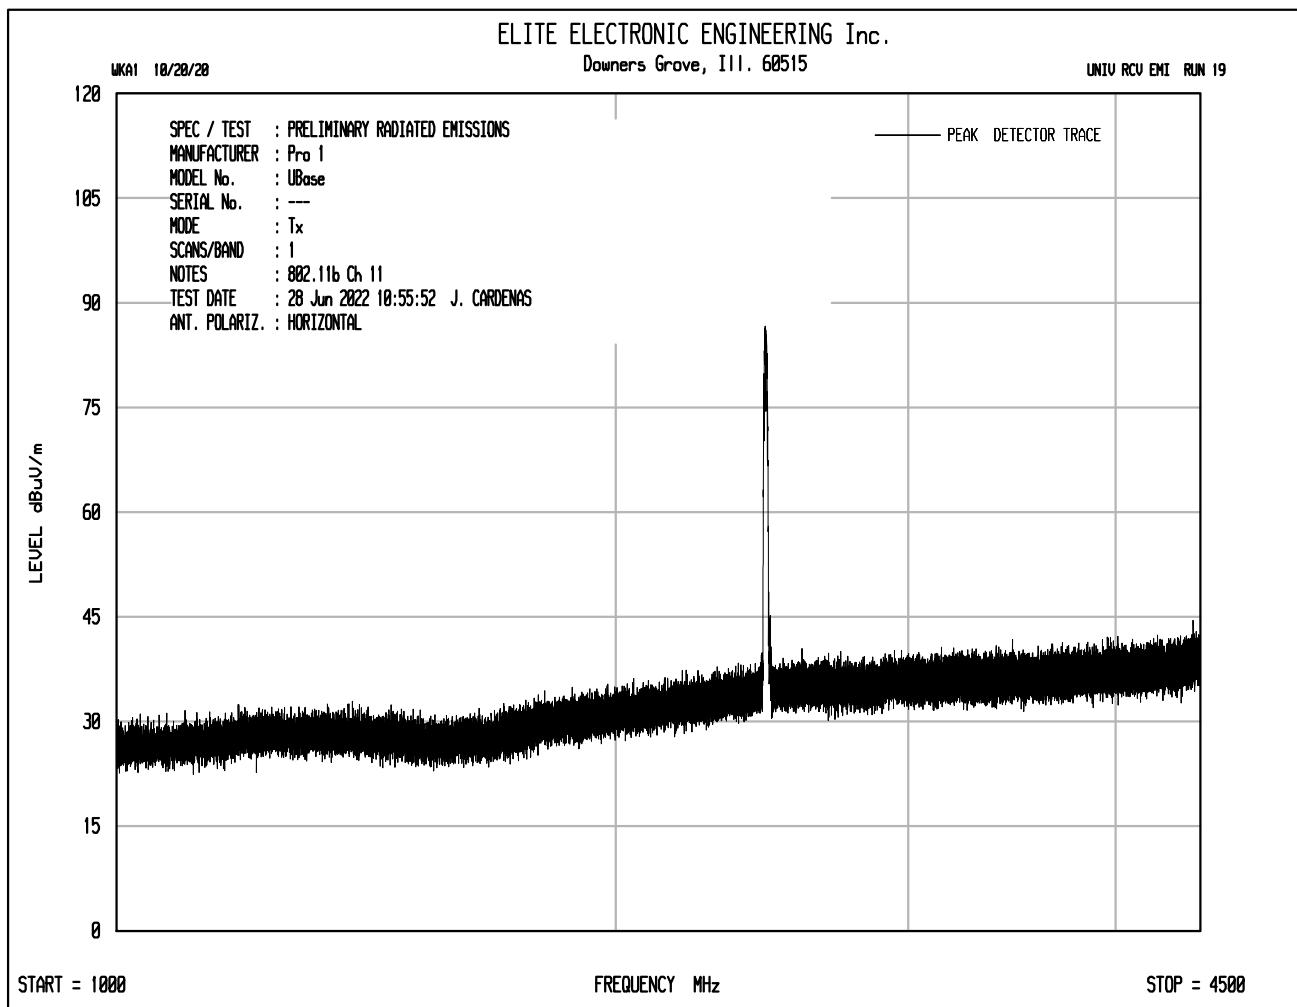

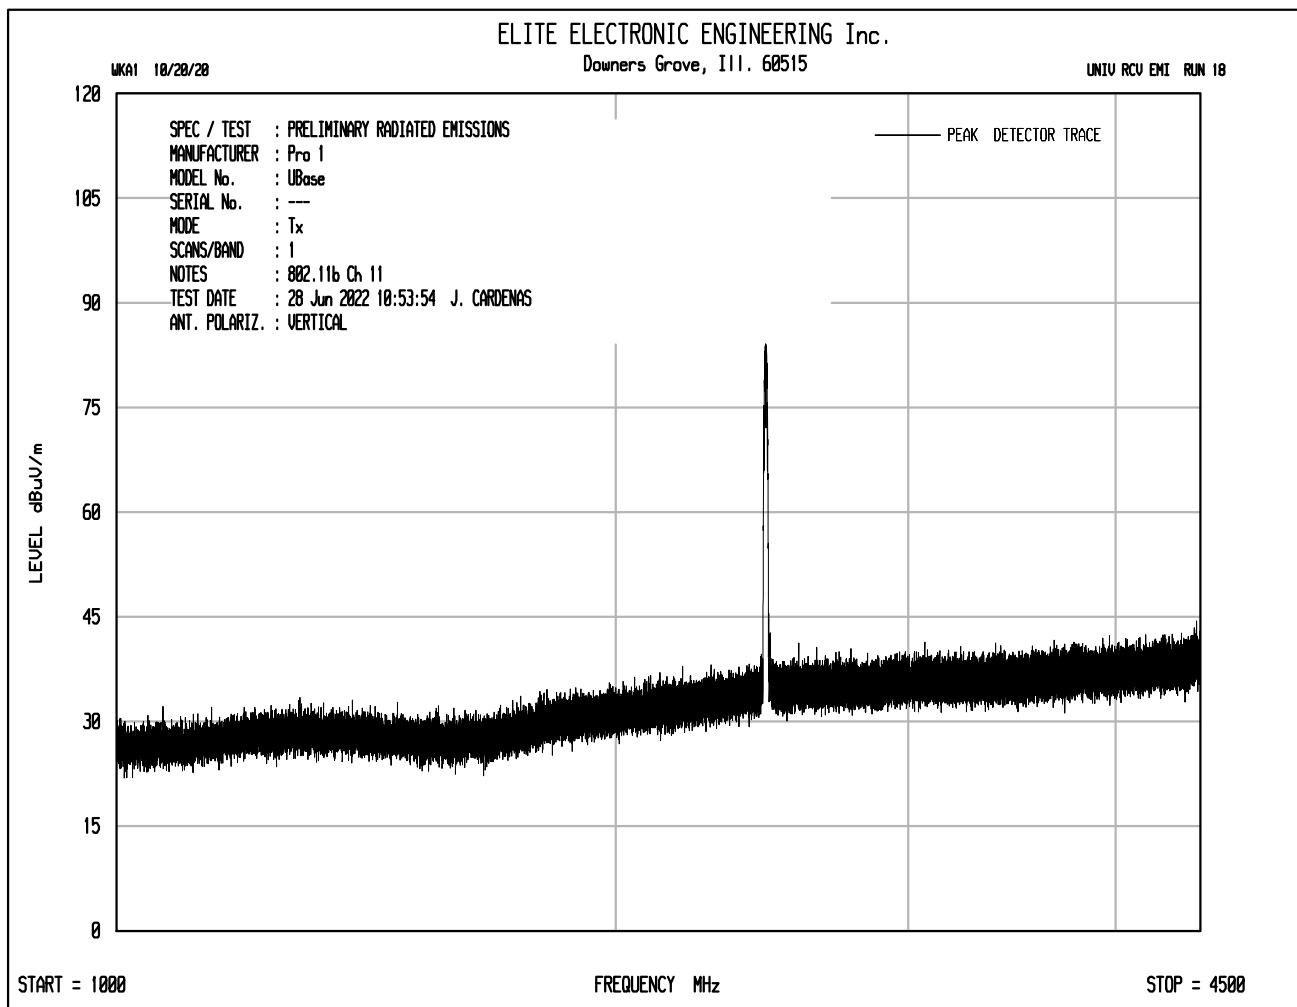

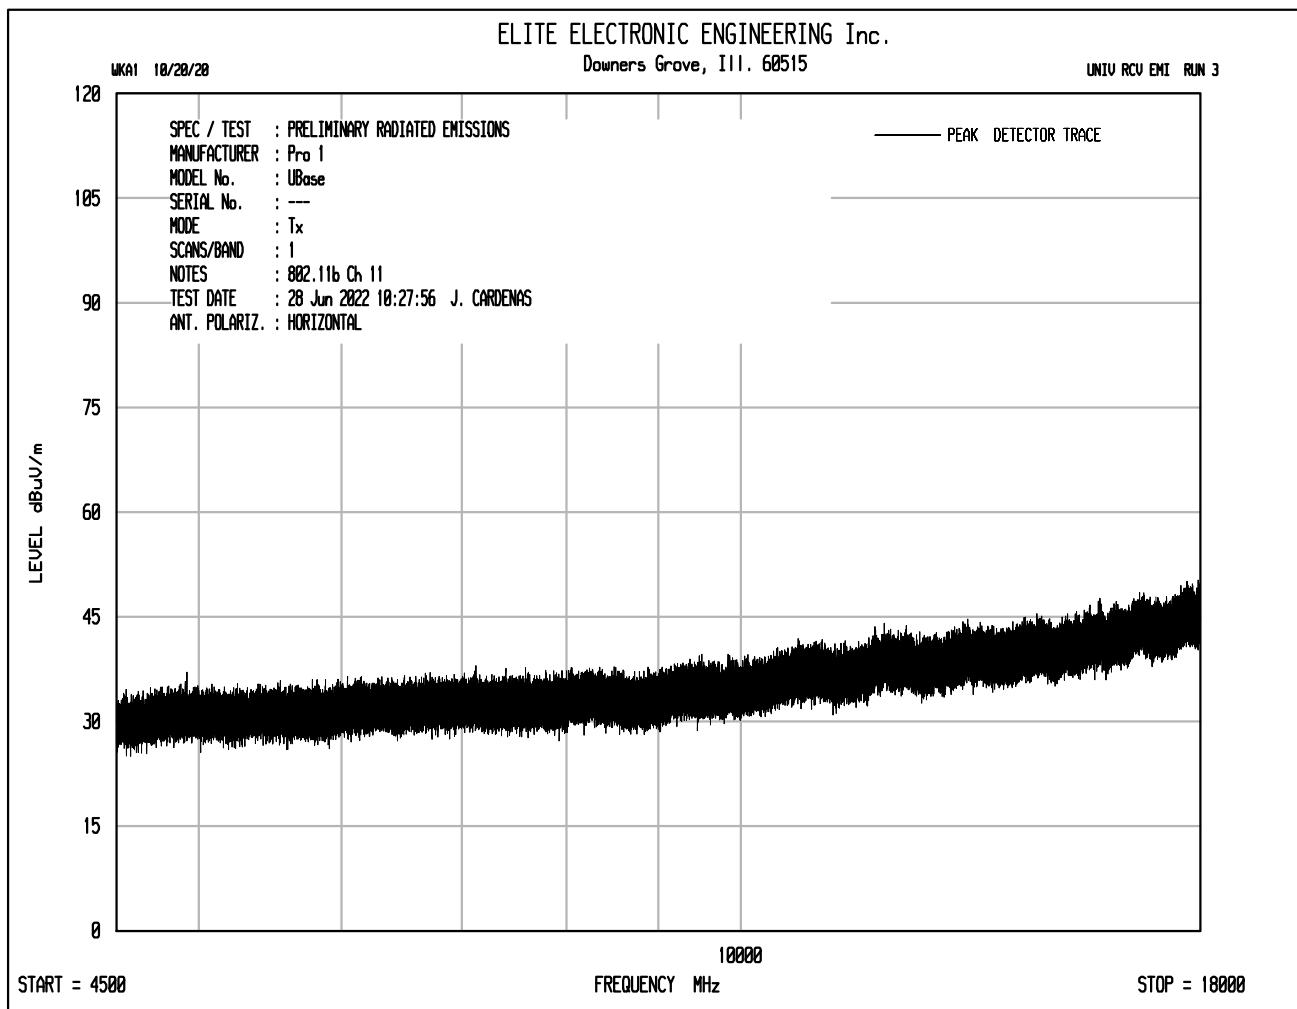

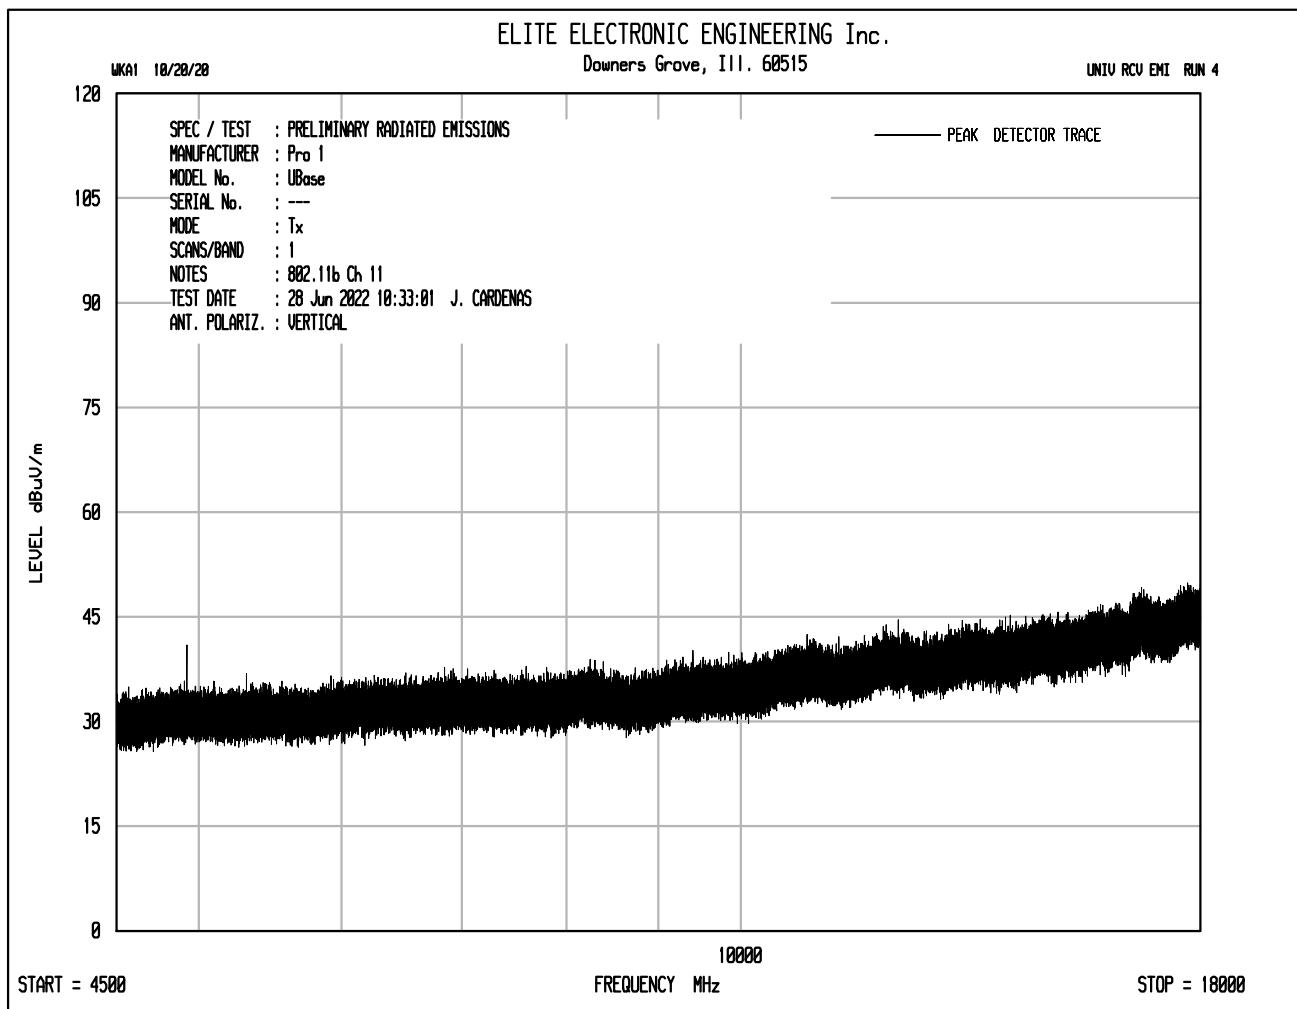

Test Details	
Manufacturer	Pro IAQ Inc
EUT	UBase Thermostat
Model No.	UBase
Serial No.	N/A
Mode	Normal Operation
Frequency Tested	2412MHz
Test Date	June 28, 2022
Notes	EIRP

Freq (MHz)	Ant Pol	Wide BW Meter Reading (dB $\mu$ V)	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total (dB $\mu$ V/m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2412.00	H	66.1	3.4	32.6	0.0	102.2	6.9	36.0	-29.1
	V	63.1	3.4	32.6	0.0	99.2	3.9	36.0	-32.1

Test Details	
Manufacturer	Pro IAQ Inc
EUT	UBase Thermostat
Model No.	UBase
Serial No.	N/A
Mode	Normal Operation
Frequency Tested	2412MHz
Test Date	June 28, 2022
Notes	Peak Measurements in the Restricted Bands

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
4824.00	H	52.7		4.8	34.7	-39.0	53.3	462.1	5000.0	-20.7
	V	50.2		4.8	34.7	-39.0	50.7	344.6	5000.0	-23.2

Test Details											
Manufacturer	Pro IAQ Inc										
EUT	UBase Thermostat										
Model No.	UBase										
Serial No.	N/A										
Mode	Normal Operation										
Frequency Tested	2412MHz										
Test Date	June 28, 2022										
Notes	Average Measurements in the Restricted Bands										

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dB $\mu$ V/m)	Average Total at 3m ( $\mu$ V/m)	Average Limit at 3m ( $\mu$ V/m)	Margin (dB)
4824.00	H	46.13		4.8	34.7	-39.0	0.0	46.7	215.9	500.0	-7.3
	V	40.78		4.8	34.7	-39.0	0.0	41.3	116.6	500.0	-12.6

Test Details										
Manufacturer	Pro IAQ Inc									
EUT	UBase Thermostat									
Model No.	UBase									
Serial No.	N/A									
Mode	Normal Operation									
Frequency Tested	2412MHz									
Test Date	June 28, 2022									
Notes	Peak Measurements in Non-Restricted Bands									

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
2412.00	H	52.11		3.4	32.6	0.0	88.2	25615.2	NA	NA
	V	49.33		3.4	32.6	0.0	85.4	18599.4	NA	NA
7236.00	H	39.17	*	6.1	35.7	-39.0	42.0	126.4	2561.5	-26.1
	V	38.36	*	6.1	35.7	-39.0	41.2	115.1	2561.5	-26.9
9648.00	H	40.86	*	6.8	36.7	-38.8	45.6	191.0	2561.5	-22.6
	V	39.15	*	6.8	36.7	-38.8	43.9	156.8	2561.5	-24.3

Test Details	
Manufacturer	Pro IAQ Inc
EUT	UBase Thermostat
Model No.	UBase
Serial No.	N/A
Mode	Normal Operation
Frequency Tested	2462MHz
Test Date	June 28, 2022
Notes	EIRP

Freq (MHz)	Ant Pol	Wide BW Meter Reading (dB $\mu$ V)	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total (dB $\mu$ V/m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
2462.00	H	68.1	3.5	32.8	0.0	104.5	9.2	36.0	-26.8
	V	64.1	3.5	32.8	0.0	100.5	5.2	36.0	-30.8

Test Details										
Manufacturer	Pro IAQ Inc									
EUT	UBase Thermostat									
Model No.	UBase									
Serial No.	N/A									
Mode	Normal Operation									
Frequency Tested	2462MHz									
Test Date	June 28, 2022									
Notes	Peak Measurements in the Restricted Bands									

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
4924.00	H	52.2		4.9	34.5	-39.0	52.5	423.9	5000.0	-21.4
	V	51.8		4.9	34.5	-39.0	52.2	405.7	5000.0	-21.8
7386.00	H	49.4	*	6.2	35.7	-39.0	52.3	412.7	5000.0	-21.7
	V	48.7	*	6.2	35.7	-39.0	51.6	381.6	5000.0	-22.3

Test Details											
Manufacturer	Pro IAQ Inc										
EUT	UBase Thermostat										
Model No.	UBase										
Serial No.	N/A										
Mode	Normal Operation										
Frequency Tested	2462MHz										
Test Date	June 28, 2022										
Notes	Average Measurements in the Restricted Bands										

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Duty Cycle Factor (dB)	Average Total at 3m (dB $\mu$ V/m)	Average Total at 3m ( $\mu$ V/m)	Average Limit at 3m ( $\mu$ V/m)	Margin (dB)
4924.00	H	44.84	*	4.9	34.5	-39.0	0.0	45.2	182.1	500.0	-8.8
	V	40.44		4.9	34.5	-39.0	0.0	40.8	109.7	500.0	-13.2
7386.00	H	34.49	*	6.2	35.7	-39.0	0.0	37.4	74.3	500.0	-16.6
	V	33.94		6.2	35.7	-39.0	0.0	36.9	69.8	500.0	-17.1

Test Details										
Manufacturer	Pro IAQ Inc									
EUT	UBase Thermostat									
Model No.	UBase									
Serial No.	N/A									
Mode	Normal Operation									
Frequency Tested	2462MHz									
Test Date	June 28, 2022									
Notes	Peak Measurements in Non-Restricted Bands									

Freq (MHz)	Ant Pol	Meter Reading (dB $\mu$ V)	Ambient	Cable Factor (dB)	Antenna Factor (dB/m)	Pre Amp (dB)	Peak Total at 3m (dB $\mu$ V/m)	Peak Total at 3m ( $\mu$ V/m)	Peak Limit at 3m ( $\mu$ V/m)	Margin (dBm)
2462.00	H	54.74		3.5	32.8	0.0	91.1	35787.0	NA	NA
	V	50.01		3.5	32.8	0.0	86.3	20759.9	NA	NA
9848.00	H	38.72	*	6.9	37.0	-38.8	43.9	156.1	3578.7	-27.2
	V	39.10	*	6.9	37.0	-38.8	44.2	163.1	3578.7	-26.8

## 23. Scope of Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:2017

ELITE ELECTRONIC ENGINEERING, INC.  
1516 Centre Circle  
Downers Grove, IL 60515  
Robert Bugielski (QA Manager) Phone: 630 495 9770 ext. 168  
Email: [rbugielski@elitetest.com](mailto:rbugielski@elitetest.com)  
Craig Fanning (EMC Lab Manager) Phone: 630 495 9770 ext. 112  
Email: [cfanning@elitetest.com](mailto:cfanning@elitetest.com)  
Brandon Lugo (Automotive Team Leader) Phone: 630 495 9770 ext. 163  
Email: [blugo@elitetest.com](mailto:blugo@elitetest.com)  
Richard King (FCC/Commercial Team Leader) Phone: 630 495 9770 ext. 123  
Email: [reking@elitetest.com](mailto:reking@elitetest.com)  
Website: [www.elitetest.com](http://www.elitetest.com)

## ELECTRICAL

Valid To: June 30, 2023

Certificate Number: 1786.01

In recognition of the successful completion of the A2LA Accreditation Program evaluation process, accreditation is granted to this laboratory to perform the following automotive electromagnetic compatibility and other electrical tests:

Test Technology:Test Method(s)<sup>1</sup>:*Transient Immunity*

ISO 7637-2 (including emissions); ISO 7637-3;  
ISO 16750-2:2012, Sections 4.6.3 and 4.6.4;  
CS-11979, Section 6.4; CS.00054, Section 5.9;  
EMC-CS-2009.1 (CT220); FMC1278 (CT220, CT221, CT222);  
GMW 3097, Section 3.5; SAE J1113-11; SAE J1113-12;  
ECE Regulation 10.06 Annex 10

*Electrostatic Discharge (ESD)*

ISO 10605 (2001, 2008);  
CS-11979 Section 7.0; CS.00054, Section 5.10;  
EMC-CS-2009.1 (CT 280); FMC1278 (CT280); SAE J1113-13;  
GMW 3097 Section 3.6

*Conducted Emissions*

CISPR 25 (2002, 2008), Sections 6.2 and 6.3;  
CISPR 25 (2016), Sections 6.3 and 6.4;  
CS-11979, Section 5.1; CS.00054, Sections 5.6.1 and 5.6.2;  
GMW 3097, Section 3.3.2;  
EMC-CS-2009.1 (CE 420); FMC1278 (CE420, CE421)

*Radiated Emissions Anechoic*


CISPR 25 (2002, 2008), Section 6.4;  
CISPR 25 (2016), Section 6.5;  
CS-11979, Section 5.3; CS.00054, Section 5.6.3;  
GMW 3097, Section 3.3.1;  
EMC-CS-2009.1 (RE 310); FMC1278 (RE310);  
ECE Regulation 10.06 Annex 7 (Broadband)  
ECE Regulation 10.06 Annex 8 (Narrowband)

(A2LA Cert. No. 1786.01) Revised 12/17/2021

 Page 1 of 8

<u>Test Technology:</u>	<u>Test Method(s)</u> <sup>1</sup> :
<i>Vehicle Radiated Emissions</i>	CISPR 12; CISPR 36; ICES-002; ECE Regulation 10.06 Annex 5
<i>Bulk Current Injection (BCI)</i>	ISO 11452-4; CS-11979, Section 6.1; CS.00054, Section 5.8.1; GMW 3097, Section 3.4.1; SAE J1113-4; EMC-CS-2009.1 (RI112); FMC1278 (RI112); ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Anechoic (Including Radar Pulse)</i>	ISO 11452-2; ISO 11452-5; CS-11979, Section 6.2; CS.00054, Section 5.8.2; GMW 3097, Section 3.4.2; EMC-CS-2009.1 (RI114); FMC1278 (RI114); SAE J1113-21; ECE Regulation 10.06 Annex 9
<i>Radiated Immunity Magnetic Field</i>	ISO 11452-8
<i>Radiated Immunity Reverb</i>	ISO/IEC 61000-4-21; GMW 3097, Section 3.4.3; EMC-CS-2009.1 (RI114); FMC1278 (RI114); ISO 11452-11
<i>Radiated Immunity (Portable Transmitters)</i>	ISO 11452-9; EMC-CS-2009.1 (RI115); FMC1278 (RI115)
<i>Vehicle Radiated Immunity (ALSE)</i>	ISO 11451-2; ECE Regulation 10.06 Annex 6
<i>Vehicle Product Specific EMC Standards</i>	EN 14982; EN ISO 13309, ISO 13766; EN 50498; EC Regulation No. 2015/208; EN 55012
<i>Electrical Loads</i>	ISO 16750-2
<b>Emissions</b> Radiated and Conducted (3m Semi-anechoic chamber, up to 40 GHz)	47 CFR, FCC Part 15 B (using ANSI C63.4:2014); 47 CFR, FCC Part 18 (using FCC MP-5:1986); ICES-001; ICES-003; ICES-005; IEC/CISPR 11, Ed. 4.1 (2004-06); AS/NZS CISPR 11 (2004); IEC/CISPR 11 Ed 5 (2009-05) + A1 (2010); KN 11 (2008-5) with RRL Notice No. 2008-3 (May 20, 2008); CISPR 11; EN 55011; KS C 9811; CNS 13803 (1997, 2003); CISPR 14-1; EN 55014-1; AS/NZS CISPR 14.1; KS C 9814-1; KN 14-1; IEC/CISPR 22 (1997); EN 55022 (1998) + A1(2000); EN 55022 (1998) + A1(2000) + A2(2003); EN 55022 (2006); IEC/CISPR 22 (2008-09); AS/NZS CISPR 22 (2004); AS/NZS CISPR 22, 3rd Edition (2006); KN 22 (up to 6 GHz); CNS 13438 (up to 6 GHz); VCCI V-3 (up to 6 GHz); CISPR 32; EN 55032; KS C 9832; KN 32; ECE Regulation 10.06 Annex 14
<i>Cellular Radiated Spurious Emissions</i>	ETSI TS 151.010-1 GSM; 3GPP TS 51.010-1, Sec 12; ETSI TS 134.124 UMTS; 3GPP TS 34.124; ETSI TS 136.124 LTE; E-UTRA; 3GPP TS 36.124

(A2LA Cert. No. 1786.01) Revised 12/17/2021


 Page 2 of 8

<u>Test Technology:</u>	<u>Test Method(s)<sup>1</sup>:</u>
<b>Emissions (cont'd)</b>	
Current Harmonics	IEC 61000-3-2; EN 61000-3-2; KN 61000-3-2; KS C 9610-3-2; ECE Regulation 10.06 Annex 11
Flicker and Fluctuations	IEC 61000-3-3; EN 61000-3-3; KN 61000-3-3; KS C 9610-3-3; ECE Regulation 10.06 Annex 12
<b>Immunity</b>	
Electrostatic Discharge	IEC 61000-4-2, Ed. 1.2 (2001); IEC 61000-4-2 (1995) + A1(1998) + A2(2000); EN 61000-4-2 (1995); EN 61000-4-2 (2009-05); KN 61000-4-2 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-2; EN 61000-4-2; KN 61000-4-2; KS C 9610-4-2; IEEE C37.90.3 2001
Radiated Immunity	IEC 61000-4-3 (1995) + A1(1998) + A2(2000); IEC 61000-4-3, Ed. 3.0 (2006-02); IEC 61000-4-3, Ed. 3.2 (2010); KN 61000-4-3 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-3; EN 61000-4-3; KN 61000-4-3; KS C 9610-4-3; IEEE C37.90.2 2004
Electrical Fast Transient/Burst	IEC 61000-4-4, Ed. 2.0 (2004-07); IEC 61000-4-4, Ed. 2.1 (2011); IEC 61000-4-4 (1995) + A1(2000) + A2(2001); KN 61000-4-4 (2008-5); RRL Notice No. 2008-5 (May 20, 2008); IEC 61000-4-4; EN 61000-4-4; KN 61000-4-4; KS C 9610-4-4; ECE Regulation 10.06 Annex 15
Surge	IEC 61000-4-5 (1995) + A1(2000); IEC 61000-4-5, Ed 1.1 (2005-11); EN 61000-4-5 (1995) + A1(2001); KN 61000-4-5 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-5; EN 61000-4-5; KN 61000-4-5; KS C 9610-4-5; IEEE C37.90.1 2012; IEEE STD C62.41.2 2002; ECE Regulation 10.06 Annex 16
Conducted Immunity	IEC 61000-4-6 (1996) + A1(2000); IEC 61000-4-6, Ed 2.0 (2006-05); IEC 61000-4-6 Ed. 3.0 (2008); KN 61000-4-6 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); EN 61000-4-6 (1996) + A1(2001); IEC 61000-4-6; EN 61000-4-6; KN 61000-4-6; KS C 9610-4-6

<u>Test Technology:</u>	<u>Test Method(s):</u>
<b>Immunity (cont'd)</b> Power Frequency Magnetic Field Immunity (Down to 3 A/m)	IEC 61000-4-8 (1993) + A1(2000); IEC 61000-4-8 (2009); EN 61000-4-8 (1994) + A1(2000); KN 61000-4-8 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-8; EN 61000-4-8; KN 61000-4-8; KS C 9610-4-8
Voltage Dips, Short Interrupts, and Line Voltage Variations	IEC 61000-4-11, Ed. 2 (2004-03); KN 61000-4-11 (2008-5); RRL Notice No. 2008-4 (May 20, 2008); IEC 61000-4-11; EN 61000-4-11; KN 61000-4-11; KS C 9610-4-11
Ring Wave	IEC 61000-4-12, Ed. 2 (2006-09); EN 61000-4-12:2006; IEC 61000-4-12; EN 61000-4-12; KN 61000-4-12; IEEE STD C62.41.2 2002
Generic and Product Specific EMC Standards	IEC/EN 61000-6-1; AS/NZS 61000-6-1; KN 61000-6-1; KS C 9610-6-1; IEC/EN 61000-6-2; AS/NZS 61000-6-2; KN 61000-6-2; KS C 9610-6-2; IEC/EN 61000-6-3; AS/NZS 61000-6-3; KN 61000-6-3; KS C 9610-6-3; IEC/EN 61000-6-4; AS/NZS 61000-6-4; KN 61000-6-4; KS C 9610-6-4; EN 50130-4; EN 61326-1; EN 50121-3-2; EN 12895; EN 50270; EN 50491-1; EN 50491-2; EN 50491-3; EN 55015; EN 60730-1; EN 60945; IEC 60533; EN 61326-2-6; EN 61800-3; IEC/CISPR 14-2; EN 55014-2; AS/NZS CISPR 14-2; KN 14-2; KS C 9814-2; IEC/CISPR 24; AS/NZS CISPR 24; EN 55024; KN 24; IEC/CISPR 35; AS/NZS CISPR 35; EN 55035; KN 35; KS C 9835; IEC 60601-1-2; JIS T0601-1-2
<b>TxRx EMC Requirements</b>	EN 301 489-1; EN 301 489-3; EN 301 489-9; EN 301 489-17; EN 301 489-19; EN 301 489-20
<b>European Radio Test Standards</b>	ETSI EN 300 086-1; ETSI EN 300 086-2; ETSI EN 300 113-1; ETSI EN 300 113-2; ETSI EN 300 220-1; ETSI EN 300 220-2; ETSI EN 300 220-3-1; ETSI EN 300 220-3-2; ETSI EN 300 330-1; ETSI EN 300 330-2; ETSI EN 300 440-1; ETSI EN 300 440-2; ETSI EN 300 422-1; ETSI EN 300 422-2; ETSI EN 300 328; ETSI EN 301 893; ETSI EN 301 511; ETSI EN 301 908-1; ETSI EN 908-2; ETSI EN 908-13; ETSI EN 303 413; ETSI EN 302 502; EN 303 340; EN 303 345-2; EN 303 345-3; EN 303 345-4

<u>Test Technology:</u>	<u>Test Method(s)<sup>1</sup>:</u>
<i>Canadian Radio Tests</i>	RSS-102 (RF Exposure Evaluation only); RSS-111; RSS-112; RSS-117; RSS-119; RSS-123; RSS-125; RSS-127; RSS-130; RSS-131; RSS-132; RSS-133; RSS-134; RSS-135; RSS-137; RSS-139; RSS-140; RSS-141; RSS-142; RSS-170; RSS-181; RSS-182; RSS-191; RSS-192; RSS-194; RSS-195; RSS-196; RSS-197; RSS-199; RSS-210; RSS-211; RSS-213; RSS-215; RSS-216; RSS-220; RSS-222; RSS-236; RSS-238; RSS-243; RSS-244; RSS-247; RSS-248; RSS-251; RSS-252; RSS-287; RSS-288; RSS-310; RSS-GEN
<i>Mexico Radio Tests</i>	IFT-008-2015; NOM-208-SCFI-2016
<i>Japan Radio Tests</i>	Radio Law No. 131, Ordinance of MPT No. 37, 1981, MIC Notification No. 88:2004, Table No. 22-11; ARIB STD-T66, Regulation 18
<i>Taiwan Radio Tests</i>	LP-0002 (July 15, 2020)
<i>Australia/New Zealand Radio Tests</i>	AS/NZS 4268; Radiocommunications (Short Range Devices) Standard (2014)
<i>Hong Kong Radio Tests</i>	HKCA 1039 Issue 6; HKCA 1042; HKCA 1033 Issue 7; HKCA 1061; HKCA 1008; HKCA 1043; HKCA 1057; HKCA 1073
<i>Korean Radio Test Standards</i>	KN 301 489-1; KN 301 489-3; KN 301 489-9; KN 301 489-17; KN 301 489-52; KS X 3124; KS X 3125; KS X 3130; KS X 3126; KS X 3129
<i>Vietnam Radio Test Standards</i>	QCVN 47:2015/BTTTT; QCVN 54:2020/BTTTT; QCVN 55:2011/BTTTT; QCVN 65:2013/BTTTT; QCVN 73:2013/BTTTT; QCVN 74:2020/BTTTT; QCVN 112:2017/BTTTT; QCVN 117:2020/BTTTT
<i>Vietnam EMC Test Standards</i>	QCVN 18:2014/BTTTT; QCVN 86:2019/BTTTT; QCVN 96:2015/BTTTT; QCVN 118:2018/BTTTT
<i>Unlicensed Radio Frequency Devices (3 Meter Semi-Anechoic Room)</i>	47 CFR FCC Part 15C, 15D, 15E, 15F, 15G, 15H (using ANST C63.10:2013, ANST C63.17:2013 and FCC KDB 905462 D02 (v02))
<i>Licensed Radio Service Equipment</i>	47 CFR FCC Parts 20, 22, 24, 25, 27, 30, 73, 74, 80, 87, 90, 95, 96, 97, 101 (using ANSI/TIA-603-E, TIA-102.CAAA-E, ANST C63.26:2015)

**Test Technology:**

**OTA (Over the Air) Performance**  
 GSM, GPRS, EGPRS  
 UMTS (W-CDMA)  
 LTE including CAT M1  
 A-GPS for UMTS/GSM  
 LTS A-GPS, A-GLONASS,  
 STB8/STB16  
 Large Device/Laptop/Tablet Testing  
 Integrated Device Testing  
 WiFi 802.11 a/b/g/n/a

**Test Method(s)<sup>1</sup>:**

CTIA Test Plan for Wireless Device Over-the-Air Performance (Method for Measurement for Radiated Power and Receiver Performance) V3.8.2;  
 CTIA Test Plan for RF Performance Evaluation of WiFi Mobile Converged Devices V2.1.0

***Electrical Measurements and Simulation***
**AC Voltage / Current**

(1mV to 5kV) 60 Hz  
 (0.1V to 250V) up to 500 MHz  
 (1µA to 150A) 60 Hz

FAA AC 150/5345-10H  
 FAA AC 150/5345-43J  
 FAA AC 150/5345-44K

**DC Voltage / Current**

(1mV to 15-kV) / (1µA to 10A)

FAA AC 150/5345-46E  
 FAA AC 150/5345-47C

**Power Factor / Efficiency / Crest Factor**

(Power to 30kW)

FAA EB 67D

**Resistance**

(1mΩ to 4000MΩ)

**Surge**

(Up to 10 kV / 5 kA) (Combination Wave and Ring Wave)

**On the following products and materials:**

Telecommunications Terminal Equipment (TTE), Radio Equipment, Network Equipment, Information Technology Equipment (ITE), Automotive Electronic Equipment, Automotive Hybrid Electronic Devices, Maritime Navigation and Radio Communication Equipment and Systems, Vehicles, Boats and Internal Combustion Engine Driven Devices, Automotive, Aviation, and General Lighting Products, Medical Electrical Equipment, Motors, Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment, Household Appliances, Electric Tools, Low-voltage Switchgear and Control gear, Programmable Controllers, Electrical Equipment for Measurement, Control and Laboratory Use, Base Materials, Power and Data Transmission Cables and Connectors

<sup>1</sup> When the date, edition, version, etc. is not identified in the scope of accreditation, laboratories may use the version that immediately precedes the current version for a period of one year from the date of publication of the standard measurement method, per part C., Section 1 of A2LA R101 - *General Requirements - Accreditation of ISO-IEC 17025 Laboratories*.

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Unintentional Radiators</u> Part 15B	ANSI C63.4:2014	40000

(A2LA Cert. No. 1786.01) Revised 12/17/2021


 Page 6 of 8

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Industrial, Scientific, and Medical Equipment</u> Part 18	FCC MP-5 (February 1986)	40000
<u>Intentional Radiators</u> Part 15C	ANSI C63.10:2013	40000
<u>Unlicensed Personal Communication Systems Devices</u> Part 15D	ANSI C63.17:2013	40000
<u>U-NII without DFS Intentional Radiators</u> Part 15E	ANSI C63.10:2013	40000
<u>U-NII with DFS Intentional Radiators</u> Part 15E	FCC KDB 905462 D02 (v02)	40000
<u>UWB Intentional Radiators</u> Part 15F	ANSI C63.10:2013	40000
<u>BPL Intentional Radiators</u> Part 15G	ANSI C63.10:2013	40000
<u>White Space Device Intentional Radiators</u> Part 15H	ANSI C63.10:2013	40000
<u>Commercial Mobile Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (cellular), 24, 25 (below 3 GHz), and 27	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>General Mobile Radio Services (FCC Licensed Radio Service Equipment)</u> Parts 22 (non-cellular), 90 (below 3 GHz), 95, 97, and 101 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Citizens Broadband Radio Services (FCC Licensed Radio Service Equipment)</u> Part 96	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000

Testing Activities Performed in Support of FCC Certification in Accordance with 47 Code of Federal Regulations and FCC KDB 974614, Appendix A, Table A.1<sup>2</sup>

Rule Subpart/Technology	Test Method	Maximum Frequency (MHz)
<u>Maritime and Aviation Radio Services</u> Parts 80 and 87	ANSI/TIA-603-E; ANSI C63.26:2015	40000
<u>Microwave and Millimeter Bands Radio Services</u> Parts 25, 30, 74, 90 (above 3 GHz), 97 (above 3 GHz), and 101	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Broadcast Radio Services</u> Parts 73 and 74 (below 3 GHz)	ANSI/TIA-603-E; TIA-102.CAAA-E; ANSI C63.26:2015	40000
<u>Signal Boosters</u> Part 20 (Wideband Consumer Signal Boosters, Provider-specific signal boosters, and Industrial Signal Boosters) Section 90.219	ANSI C63.26:2015	40000

<sup>2</sup> Accreditation does not imply acceptance to the FCC equipment authorization program. Please see the FCC website (<https://apps.fcc.gov/oetcf/eas/>) for a listing of FCC approved laboratories.



## Accredited Laboratory

A2LA has accredited

### ELITE ELECTRONIC ENGINEERING INC.

Downers Grove, IL

for technical competence in the field of

#### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 19<sup>th</sup> day of May 2021.



Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 1786.01  
Valid to June 30, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.