



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street, Longgang District,Shenzhen,Guangdong,China

TEST REPORT

FCC Part 22H

Report Reference No...... : **GTS20191021009-1-9-9**

FCC ID...... : **2AUUB-S900PLUS**

Compiled by
(position+printed name+signature) .: File administrators Jimmy Wang

Jimmy Wang

Supervised by
(position+printed name+signature) .: Test Engineer Aaron Tan

Aaron Tan

Approved by
(position+printed name+signature) .: Manager Jason Hu

Jason Hu

Date of issue.....: Oct. 24, 2019

Testing Laboratory Name: **Shenzhen Global Test Service Co.,Ltd.**

Address.....: No.7-101 and 8A-104,Building 7 and 8,DCC Cultural and Creative Garden No.98,Pingxin North Road,Shangmugu,Pinghu Street, Longgang District,Shenzhen,Guangdong,China

Applicant's name: **BOXCHIP CO.,LTD**

Address.....: Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Test specification

Standard: **FCC CFR Title 47 Part 2, Part 22H**
ANSI/TIA-603-E-2016
KDB 971168 D01

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: Smart Terminal

Trade Mark: BOXCHIP

Manufacturer.....: **BOXCHIP CO.,LTD**

Model/Type reference.....: S900Plus

Listed Models: S900A_Plus, S900B_Plus, S1000, TVX-588d

Ratings.....: DC 3.8V from battery

Modulation: QPSK, 16QAM

Hardware version: TVH30_S900+_MB_V2.0

Software version: V1.0

Frequency.....: E-UTRA FDD Band 2, 4, 5, 7, 12, 13, 17, 26

Result.....: **PASS**

TEST REPORT

Test Report No. :	GTS20191021009-1-9-9	Oct. 24, 2019
		Date of issue

Equipment under Test : Smart Terminal

Model /Type : S900Plus

Listed Models : S900A_Plus, S900B_Plus, S1000, TVX-588d

Applicant : **BOXCHIP CO.,LTD**

Address : Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Manufacturer : **BOXCHIP CO.,LTD**

Address : Room 302, Building A, Huahan Technology, No. 16 Langshan Road, Nanshan District, Shenzhen, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 4.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	SUMMARY	4
1.1	TEST STANDARDS.....	4
1.2	TEST DESCRIPTION	4
1.3	ADDRESS OF THE TEST LABORATORY	5
1.4	TEST FACILITY	5
1.5	STATEMENT OF THE MEASUREMENT UNCERTAINTY	5
2	GENERAL INFORMATION	6
2.1	ENVIRONMENTAL CONDITIONS.....	6
2.2	GENERAL DESCRIPTION OF EUT.....	6
2.3	DESCRIPTION OF TEST MODES AND TEST FREQUENCY	6
2.4	EQUIPMENTS USED DURING THE TEST	7
2.5	RELATED SUBMITTAL(S) / GRANT (S).....	7
2.6	MODIFICATIONS	8
3	TEST CONDITIONS AND RESULTS.....	9
3.1	OUTPUT POWER.....	9
3.2	PEAK-TO-AVERAGE RATIO (PAR)	15
3.3	OCCUPIED BANDWIDTH AND EMISSION BANDWIDTH	21
3.4	BAND EDGE COMPLIANCE	27
3.5	SPURIOUS EMISSION.....	33
3.6	FREQUENCY STABILITY UNDER TEMPERATURE & VOLTAGE VARIATIONS	53
4	TEST SETUP PHOTOS OF THE EUT	55
5	PHOTOS OF THE EUT.....	56

1 SUMMARY

1.1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2:](#) FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

[FCC Part 22 :](#) PUBLIC MOBILE SERVICES

[ANSI/TIA-603-E-2016:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015:](#) IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[FCC KDB971168D01](#) Power Meas License Digital Systems

1.2 Test Description

Test Item	Section in CFR 47	Result
RF Output Power	Part 2.1046 Part 22.913(a)	Pass
Peak-to-Average Ratio	n/a	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917(b)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917(b)	Pass
Out of band emission, Band Edge	Part 2.1051 Part 22.917(b)	Pass
Frequency stability	Part 2.1055 22.917	Pass

1.3 Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 165725

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

1.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Global Test Service Co.,Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)
Conducted Power	9KHz~18GHz	0.61 dB	(1)
Spurious RF Conducted Emission	9KHz~40GHz	1.22 dB	(1)
Band Edge Compliance of RF Emission	9KHz~40GHz	1.22 dB	(1)
Occupied Bandwidth	9KHz~40GHz	-	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2 General Description of EUT

Product Name:	Smart Terminal
Model/Type reference:	S900Plus
Power supply:	DC 3.8V from battery
LTE	
Operation Band:	E-UTRA Band 2, band 4, band5, band7, band12, band13, band17, band26
Support Bandwidth:	Band 2: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, ☒ 15MHz, ☒ 20MHz Band 4: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, ☒ 15MHz, ☒ 20MHz Band 5: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, Band 7: ☒ 5MHz, ☒ 10MHz, ☒ 15MHz, ☒ 20MHz Band 12: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, Band 13: ☒ 5MHz, ☒ 10MHz Band 17: ☒ 5MHz, ☒ 10MHz Band 26: ☒ 1.4MHz, ☒ 3MHz, ☒ 5MHz, ☒ 10MHz, ☒ 15MHz
TX/RXFrequency Range:	Band 2: 1850MHz-1910MHz/1930MHz-1990MHz Band 4: 1710MHz-1755MHz/2110MHz-2155MHz Band 5: 824MHz-849MHz/869MHz-894MHz Band 7: 2500MHz-2570MHz/2620MHz-2690MHz Band 12: 699MHz-716MHz/729MHz-746MHz Band 13: 777MHz-787MHz/746MHz-756MHz Band 17: 704MHz-716 MHz/734MHz-746MHz Band 26: 814MHz-849MHz/859MHz-894MHz
Modulation Type:	QPSK, 16QAM
Release Version:	Release 9
Category:	Cat 4
Antenna Type:	FPC antenna

Note: For more details, refer to the user's manual of the EUT.

2.3 Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

2.4 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2019/09/20	2020/09/19
LISN	R&S	ESH2-Z5	893606/008	2019/09/20	2020/09/19
Bilog Antenna	Schwarzbeck	VULB9163	976	2019/09/20	2020/09/19
Bilog Antenna	Schwarzbeck	VULB9163	979	2019/09/20	2020/09/19
EMI Test Receiver	R&S	ESCI7	101102	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2019/09/20	2020/09/19
Spectrum Analyzer	Agilent	4407B	MY37581274	2019/09/20	2020/09/19
Spectrum Analyzer	R&S	FSP40	100019	2019/09/20	2020/09/19
Controller	EM Electronics	Controller EM 1000	N/A	N/A	N/A
Horn Antenna	Schwarzbeck	BBHA 9120D	01622	2019/09/20	2020/09/19
Horn Antenna	Schwarzbeck	BBHA 9120D	01652	2019/09/20	2020/09/19
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2019/09/20	2020/09/19
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	971	2019/09/20	2020/09/19
Amplifier	Schwarzbeck	BBV 9743	#202	2019/09/20	2020/09/19
Amplifier	EMCI	EMC051845B	980355	2019/09/20	2020/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2019/09/20	2020/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	KL142031	2019/09/20	2020/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	KL142032	2019/09/20	2020/09/19
RF Cable(below 1GHz)	HUBER+SUHNER	RG214	RE01	2019/09/20	2020/09/19
RF Cable(above 1GHz)	HUBER+SUHNER	RG214	RE02	2019/09/20	2020/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2019/09/20	2020/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2019/09/20	2020/09/19
EMI Test Software	R&S	ES-K1	V1.7.1	2019/09/20	2020/09/19
EMI Test Software	JS Tonscend	JS32-RE	2.0.1.5	2019/09/20	2020/09/19
EMI Test Software	Audix	E3	2..1.1	2019/09/20	2020/09/19

2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AUUB-S900PLUS filing to comply with of the FCC Part 24 Rules.

2.6 Modifications

No modifications were implemented to meet testing criteria.


3 TEST CONDITIONS AND RESULTS

3.1 Output Power

LIMIT

According to § 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

TEST CONFIGURATION

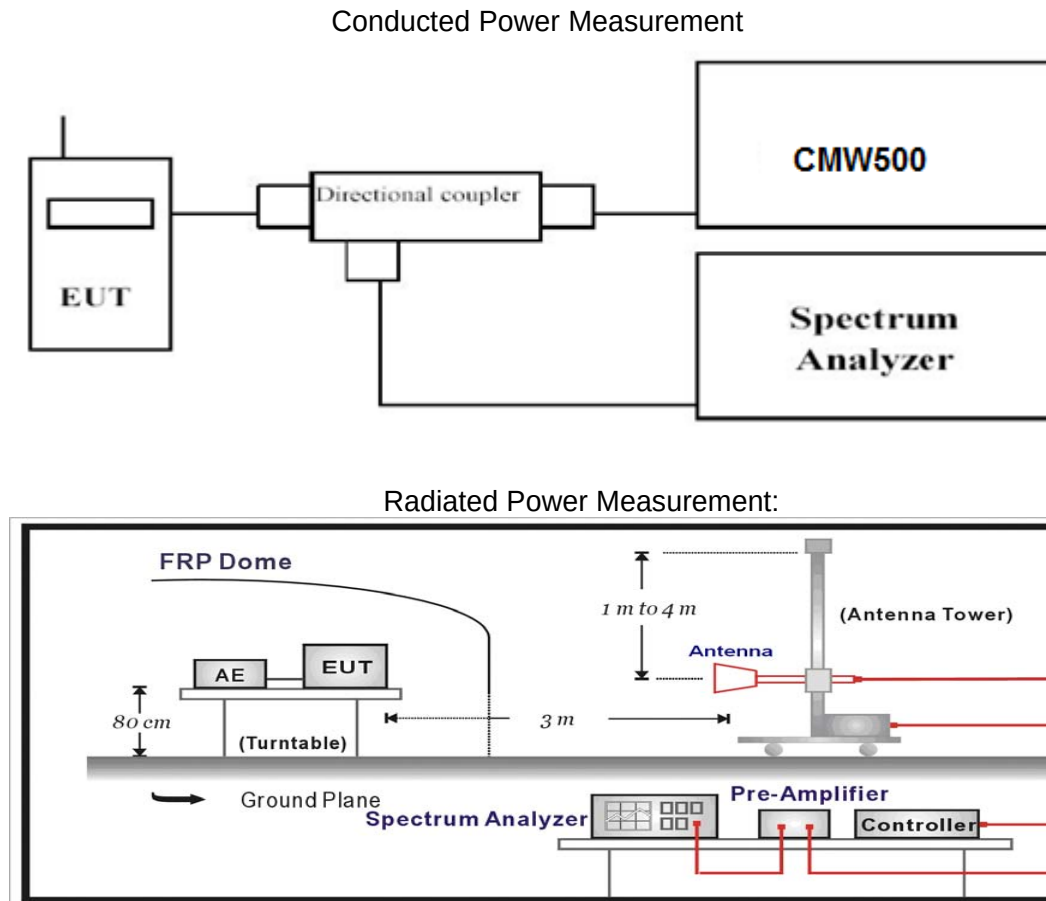

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

TEST RESULTS

Conducted Measurement:

<i>LTE FDD Band 26</i>				
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1 RB low	824.7	22.82	21.99
		836.5	22.75	22.24
		848.3	23.01	22.59
	1 RB mid	824.7	23.17	22.48
		836.5	22.85	22.09
		848.3	21.79	21.41
	1 RB high	824.7	21.80	21.25
		836.5	22.00	21.44
		848.3	22.17	21.54
	50% RB low	824.7	22.56	22.00
		836.5	22.06	21.38
		848.3	22.29	21.73
	50% RB mid	824.7	22.12	21.44
		836.5	21.73	20.97
		848.3	22.83	22.21
	50% RB High	824.7	22.37	21.65
		836.5	22.52	21.91
		848.3	22.04	21.36
	100% RB	824.7	22.65	22.01
		836.5	21.53	21.14
		848.3	22.79	22.00
3 MHz	1 RB low	825.5	21.61	20.99
		836.5	23.38	22.66
		847.5	22.32	21.73
	1 RB mid	825.5	21.64	21.29
		836.5	23.46	22.93
		847.5	22.46	21.92
	1 RB high	825.5	21.57	21.01
		836.5	22.40	21.69
		847.5	21.84	21.14
	50% RB low	825.5	22.42	21.86

		836.5	23.34	22.67
		847.5	22.61	22.17
	50% RB mid	825.5	23.23	22.49
		836.5	21.91	21.17
		847.5	21.55	20.88
	50% RB High	825.5	22.24	21.41
		836.5	23.30	22.83
		847.5	21.87	21.21
	100% RB	825.5	21.60	20.93
		836.5	23.23	22.45
		847.5	22.83	22.01
5 MHz	1 RB low	826.5	21.96	21.12
		836.5	22.93	22.13
		846.5	22.94	22.44
	1 RB mid	826.5	22.68	22.21
		836.5	22.39	21.92
		846.5	23.34	22.79
	1 RB high	826.5	21.68	20.95
		836.5	23.50	22.81
		846.5	23.39	22.59
	50% RB low	826.5	22.39	21.66
		836.5	22.70	22.27
		846.5	22.42	22.04
	50% RB mid	826.5	21.96	21.44
		836.5	23.26	22.87
		846.5	21.60	21.14
	50% RB High	826.5	22.31	21.84
		836.5	22.07	21.61
		846.5	21.55	21.20
	100% RB	826.5	22.05	21.24
		836.5	22.96	22.50
		846.5	23.20	22.64
10 MHz	1 RB low	829.0	22.92	22.47
		836.5	22.61	21.79
		844.0	22.05	21.66
	1 RB mid	829.0	22.24	21.43
		836.5	22.44	21.62
		844.0	23.31	22.73
	1 RB high	829.0	23.24	22.54
		836.5	21.87	21.23
		844.0	21.84	21.49
	50% RB low	829.0	22.64	22.17
		836.5	21.89	21.34
		844.0	21.72	21.31
	50% RB mid	829.0	21.75	21.15
		836.5	22.89	22.45
		844.0	22.65	21.90
	50% RB High	829.0	22.65	22.20
		836.5	21.62	20.80
		844.0	21.76	21.02
	100% RB	829.0	22.21	21.44
		836.5	21.76	21.37
		844.0	22.83	21.98
15 MHz	1 RB low	831.5	21.86	21.49
		836.5	23.22	22.52
		841.5	22.97	22.33
	1 RB mid	831.5	22.91	22.32

		836.5	22.58	22.10
		841.5	21.77	21.24
	1 RB high	831.5	22.36	21.74
		836.5	23.08	22.39
		841.5	21.74	20.94
	50% RB low	831.5	22.93	22.38
		836.5	21.73	21.16
		841.5	22.26	21.48
	50% RB mid	831.5	22.46	21.73
		836.5	21.52	21.15
		841.5	22.97	22.29
	50% RB High	831.5	22.10	21.63
		836.5	21.80	21.08
		841.5	22.51	21.97
	100% RB	831.5	21.74	21.25
		836.5	21.70	21.33
		841.5	21.98	21.54

Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
3. $ERP = EIRP - 2.15dBi$ as EIRP by subtracting the gain of the dipole.

LTE FDD Band 26_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-18.20	2.42	8.45	2.15	36.82	22.50	38.45	15.95	V
836.5	-19.35	2.46	8.45	2.15	36.82	21.31	38.45	17.14	V
848.3	-18.81	2.53	8.36	2.15	36.82	21.69	38.45	16.76	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-18.99	2.42	8.45	2.15	36.82	21.71	38.45	16.74	V
836.5	-19.40	2.46	8.45	2.15	36.82	21.26	38.45	17.19	V
847.5	-18.88	2.53	8.36	2.15	36.82	21.62	38.45	16.83	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-18.07	2.42	8.45	2.15	36.82	22.63	38.45	15.82	V
836.5	-18.05	2.46	8.45	2.15	36.82	22.61	38.45	15.84	V
846.5	-17.93	2.53	8.36	2.15	36.82	22.57	38.45	15.88	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-18.20	2.42	8.45	2.15	36.82	22.50	38.45	15.95	V
836.5	-18.17	2.46	8.45	2.15	36.82	22.49	38.45	15.96	V
844.0	-18.40	2.53	8.36	2.15	36.82	22.10	38.45	16.35	V

LTE FDD Band 26_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-19.18	2.42	8.45	2.15	36.82	21.52	38.45	16.93	V
836.5	-18.24	2.46	8.45	2.15	36.82	22.42	38.45	16.03	V
841.5	-18.34	2.53	8.36	2.15	36.82	22.16	38.45	16.29	V

LTE FDD Band 26_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.7	-20.60	2.42	8.45	2.15	36.82	20.10	38.45	18.35	V
836.5	-21.17	2.46	8.45	2.15	36.82	19.49	38.45	18.96	V
848.3	-20.23	2.53	8.36	2.15	36.82	20.27	38.45	18.18	V

LTE FDD Band 26_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
825.5	-20.64	2.42	8.45	2.15	36.82	20.06	38.45	18.39	V
836.5	-20.70	2.46	8.45	2.15	36.82	19.96	38.45	18.49	V
847.5	-20.70	2.53	8.36	2.15	36.82	19.80	38.45	18.65	V

LTE FDD Band 26_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
826.5	-20.08	2.42	8.45	2.15	36.82	20.62	38.45	17.83	V
836.5	-19.90	2.46	8.45	2.15	36.82	20.76	38.45	17.69	V
846.5	-19.93	2.53	8.36	2.15	36.82	20.57	38.45	17.88	V

LTE FDD Band 26_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
829.0	-19.69	2.42	8.45	2.15	36.82	21.01	38.45	17.44	V
836.5	-19.89	2.46	8.45	2.15	36.82	20.77	38.45	17.68	V
844.0	-19.76	2.53	8.36	2.15	36.82	20.74	38.45	17.71	V

LTE FDD Band 26_Channel Bandwidth 15MHz_16QAM


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	Correction (dB)	P _{Ag} (dB)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
831.5	-21.47	2.42	8.45	2.15	36.82	19.23	38.45	19.22	V
836.5	-19.94	2.46	8.45	2.15	36.82	20.72	38.45	17.73	V
841.5	-19.65	2.53	8.36	2.15	36.82	20.85	38.45	17.60	V

3.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

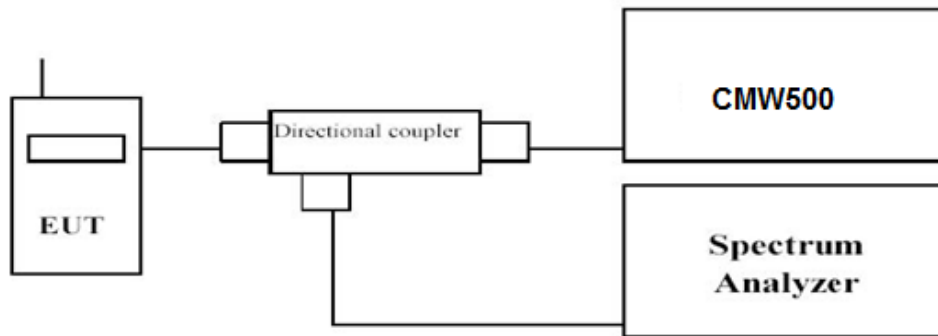

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
 - 1). for continuous transmissions, set to 1 ms,
 - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS


Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.


LTE FDD Band 5				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
1.4 MHz	824.7	1RB#0	5.68	6.68
	836.5		4.95	5.79
	848.3		5.40	6.26
3 MHz	825.5	1RB#0	5.56	6.69
	836.5		4.44	5.40
	847.5		4.73	5.94
5 MHz	826.5	1RB#0	5.65	7.11
	836.5		4.34	5.20
	846.5		5.29	6.35
10 MHz	829.0	1RB#0	5.72	7.31
	836.5		6.34	5.74
	844.0		5.27	6.26
15 MHz	831.5	1RB#0	5.41	6.24
	836.5		5.13	5.83
	841.5		6.03	6.33

LTE FDD Band 26-1.4MHz Channel Bandwidth PAPR

QPSK

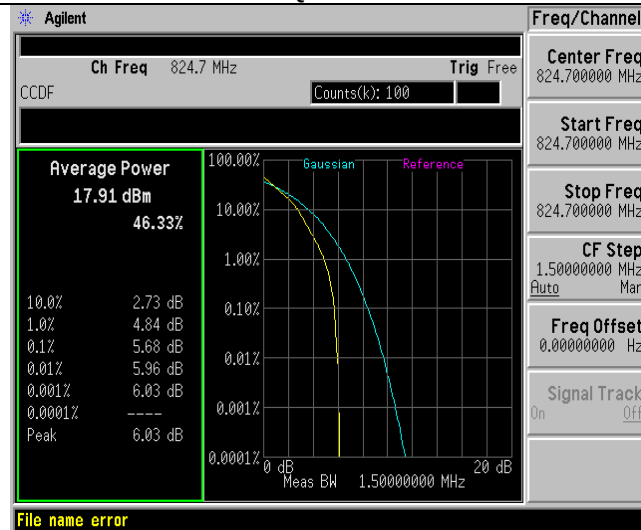


16QAM

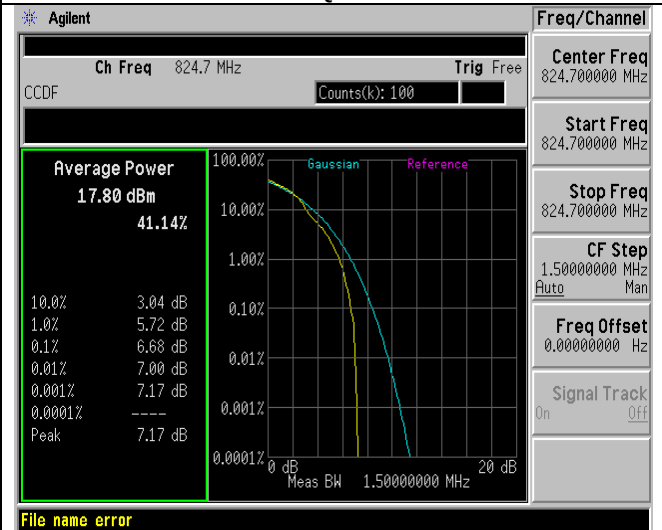


1RB#0

1RB#0

Low Channel

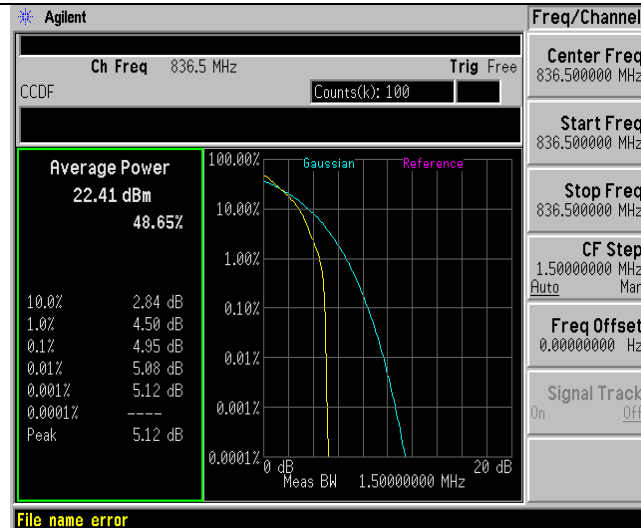

1RB#0

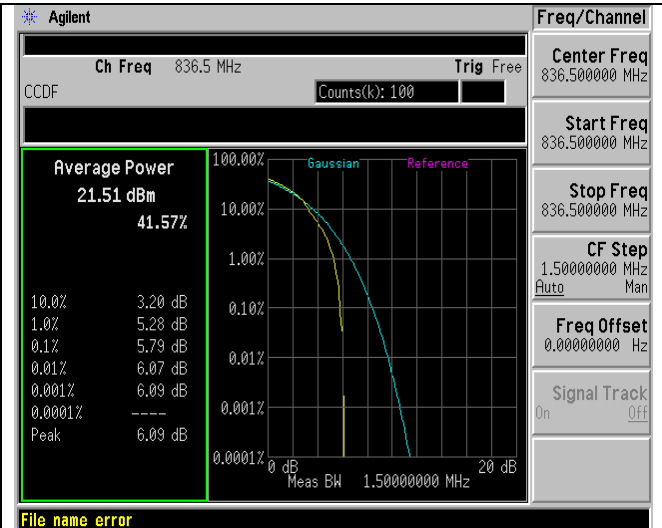


1RB#0

Middle Channel





1RB#0

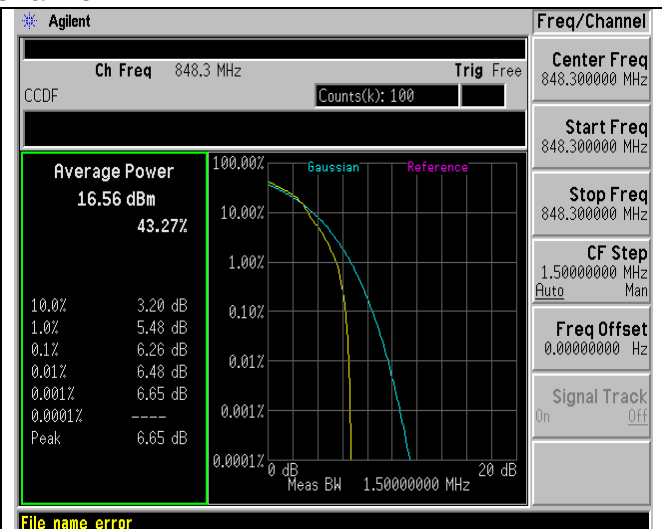

1RB#0


High Channel

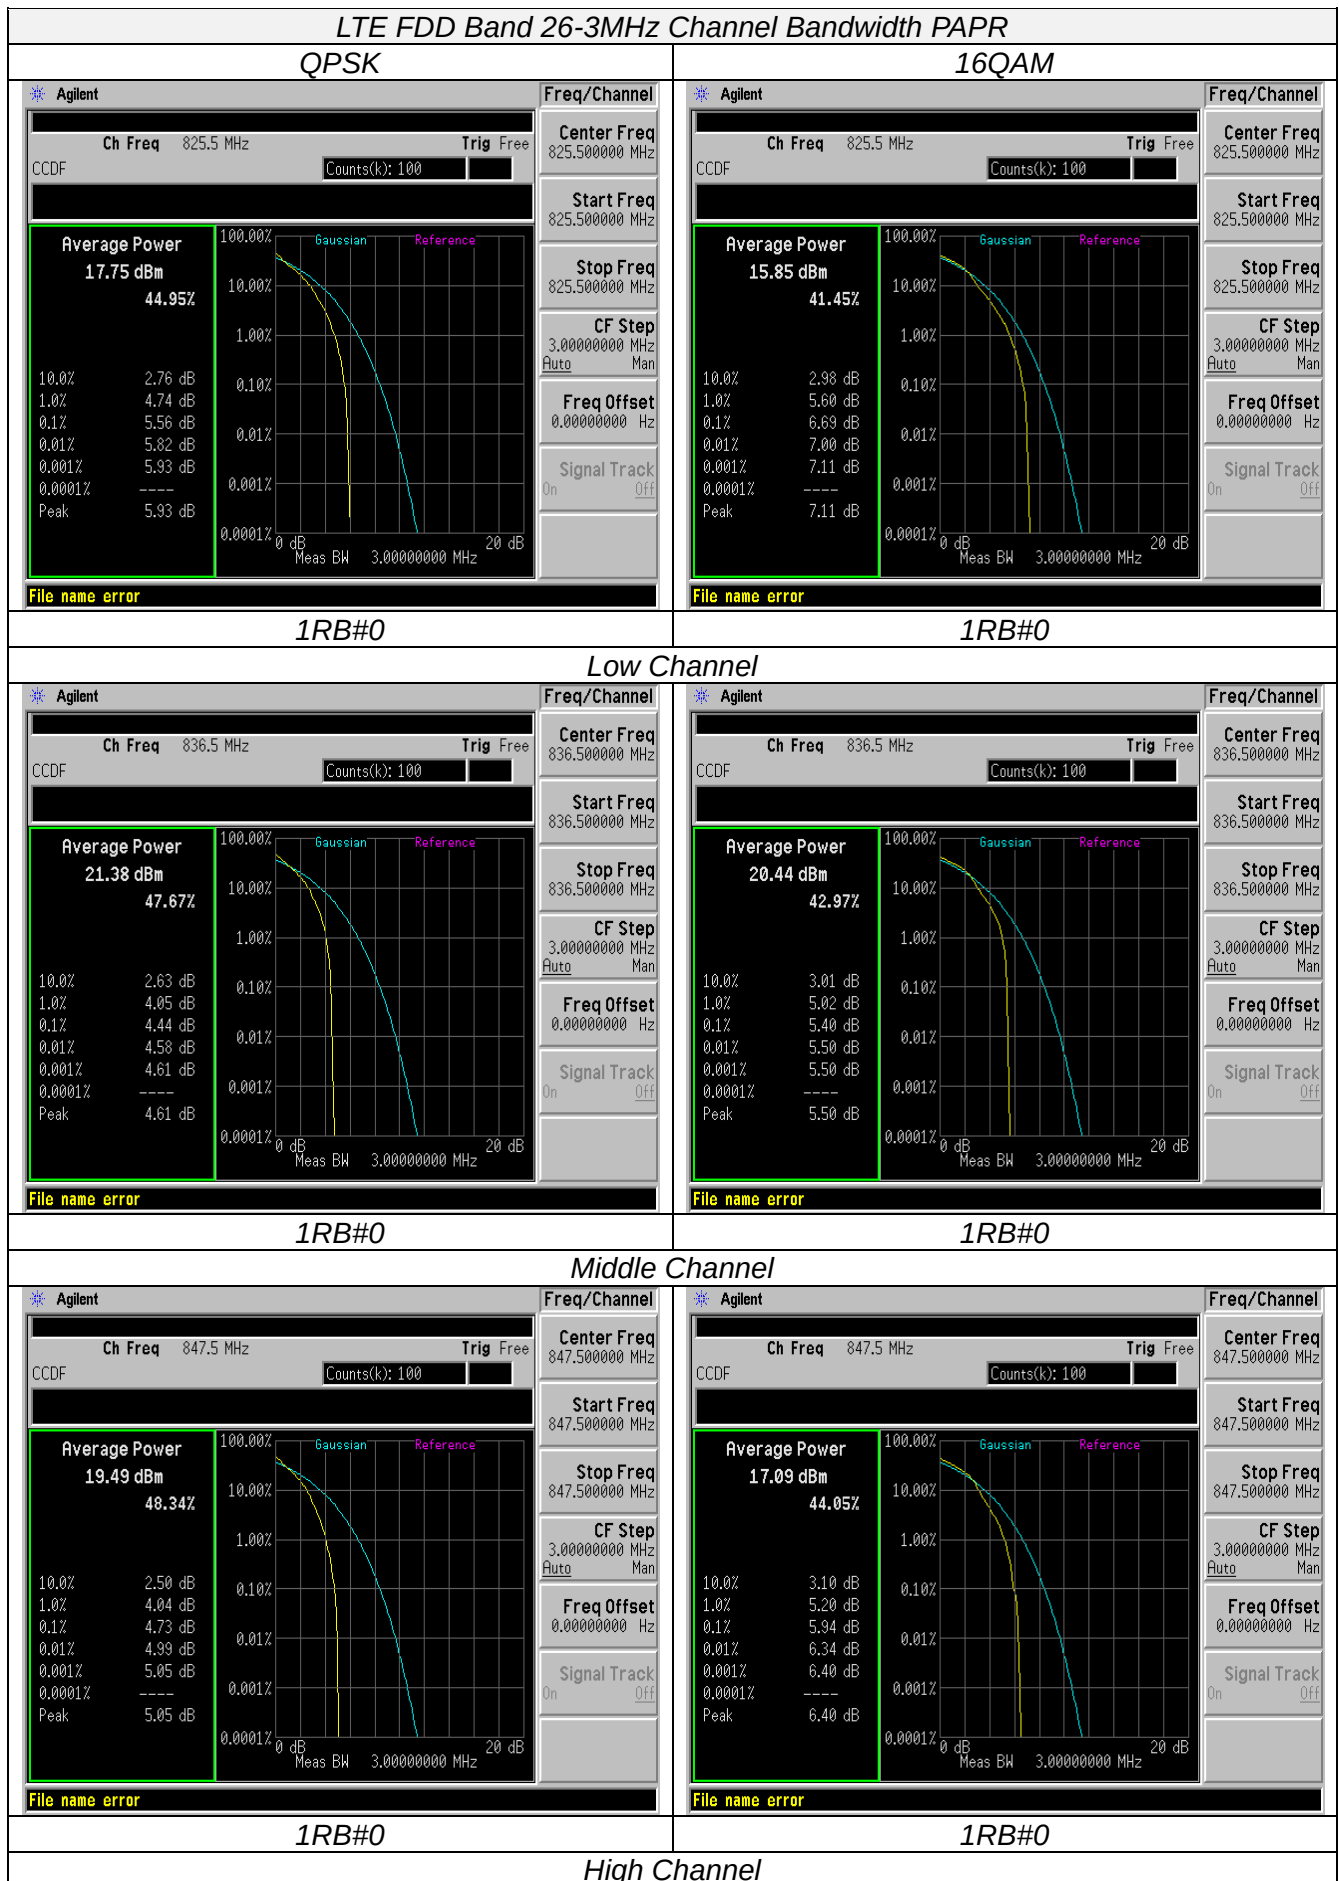

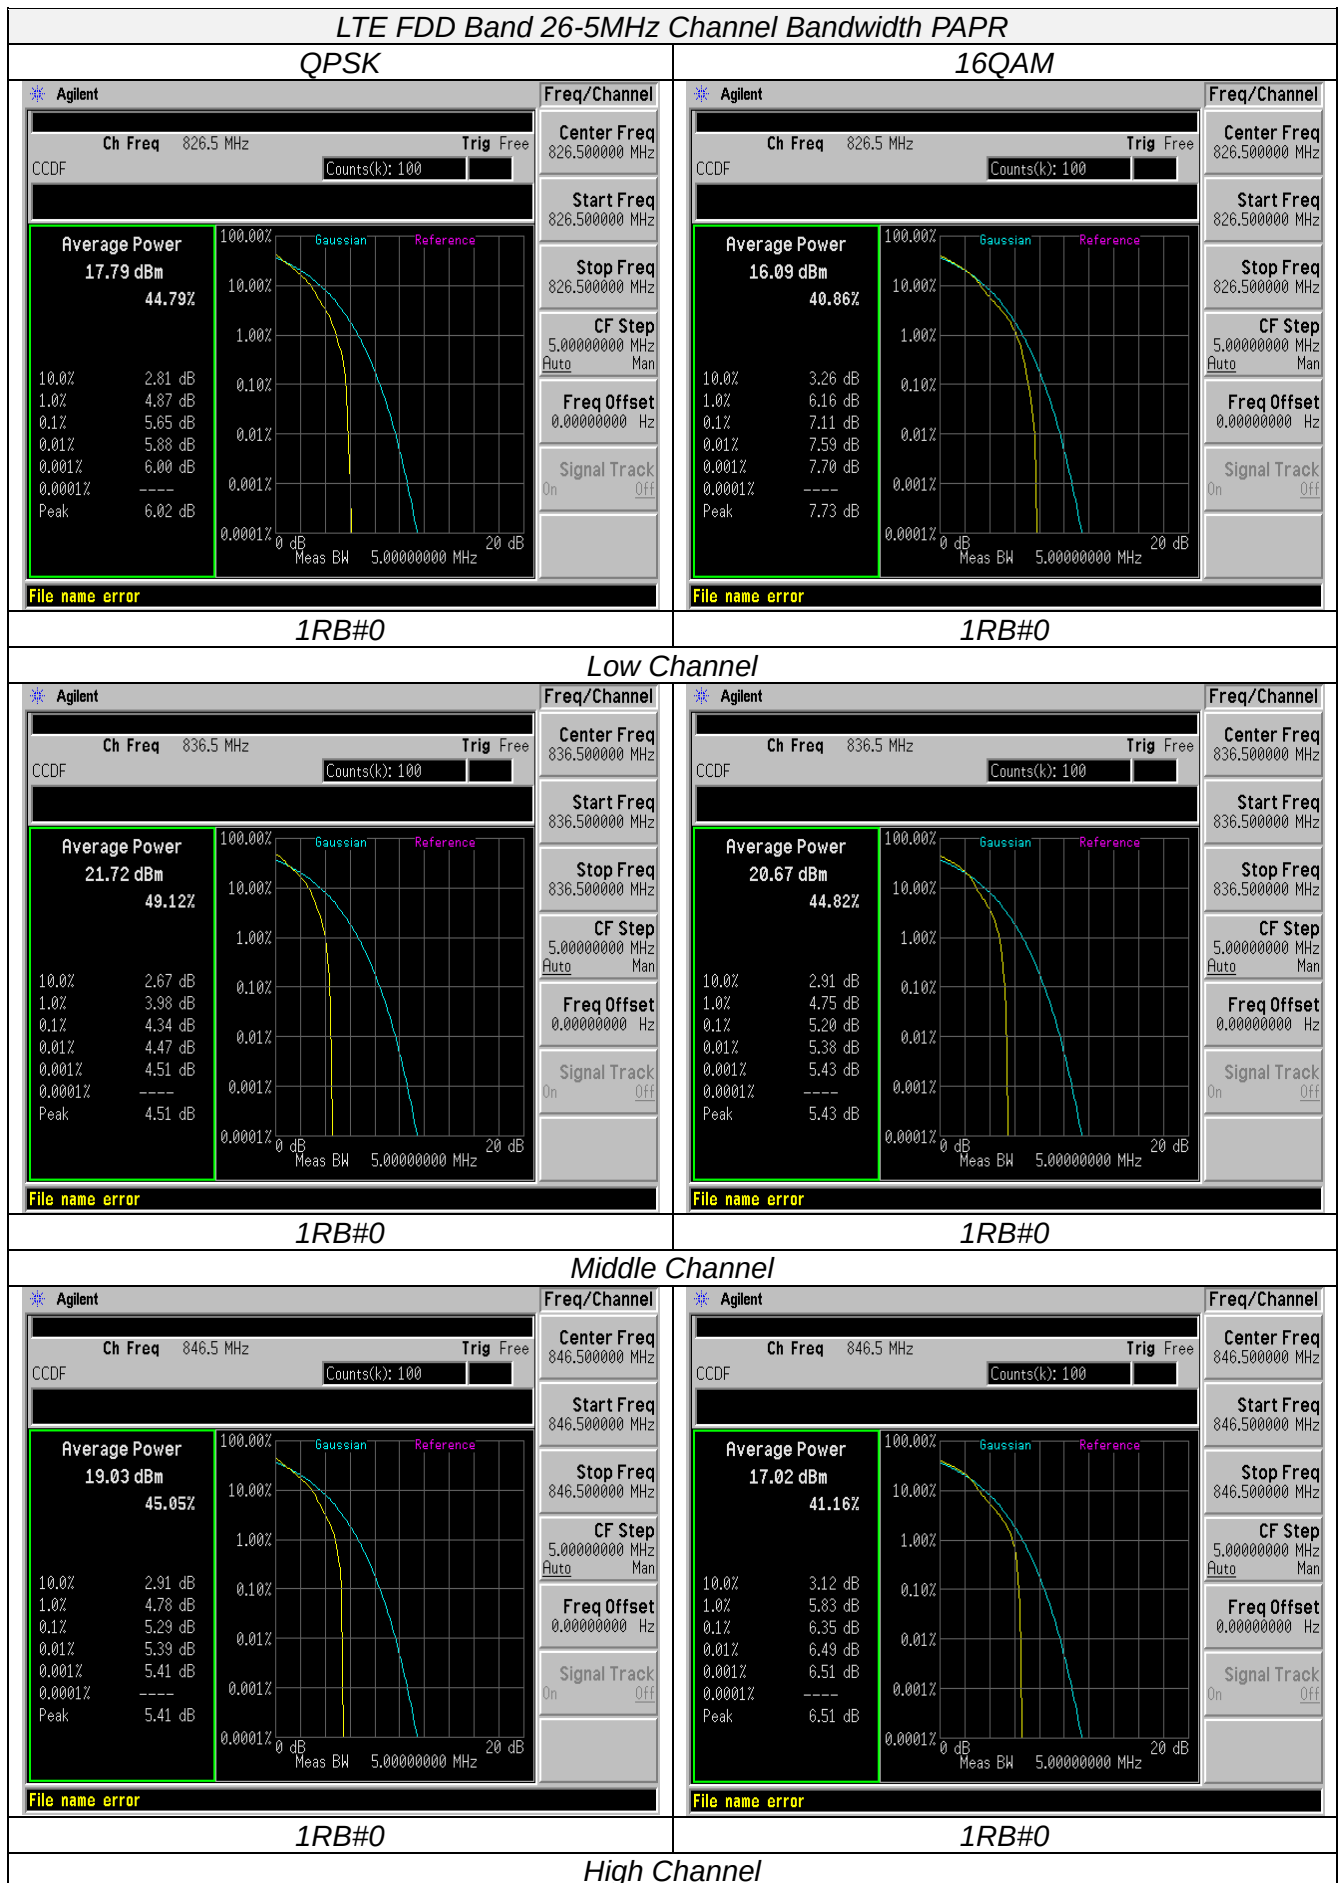


LTE FDD Band 26-10MHz Channel Bandwidth PAPR

QPSK

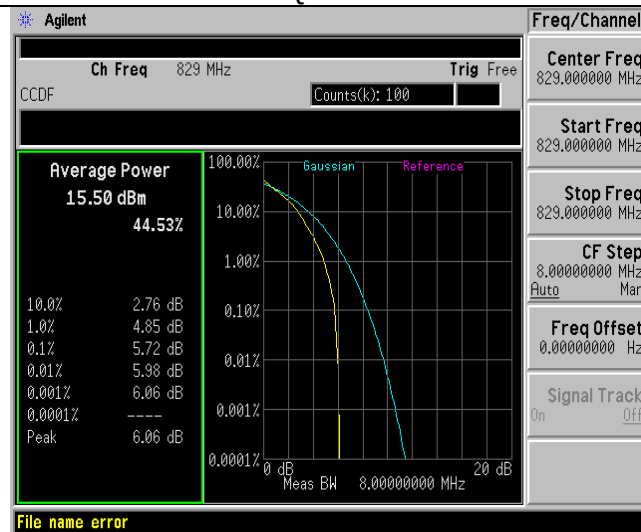



16QAM

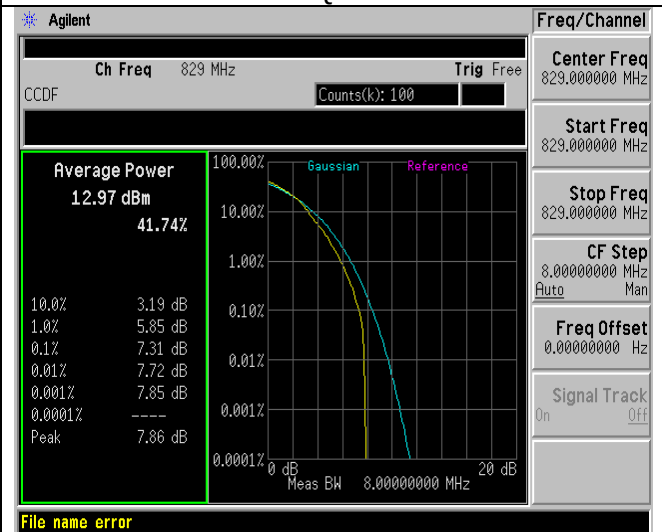

1RB#0

1RB#0



Low Channel

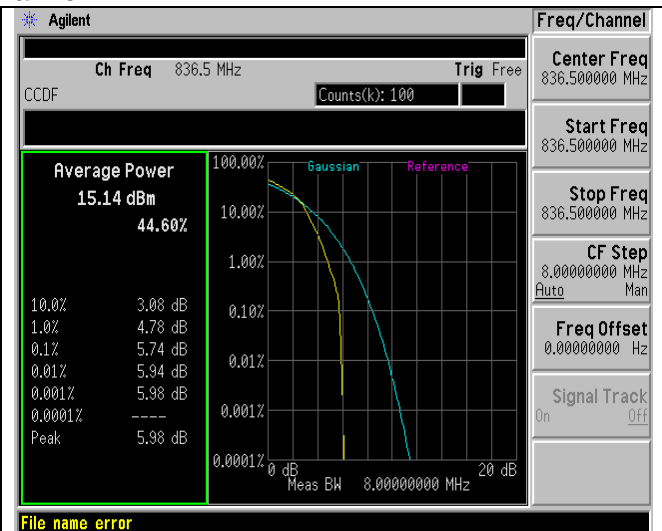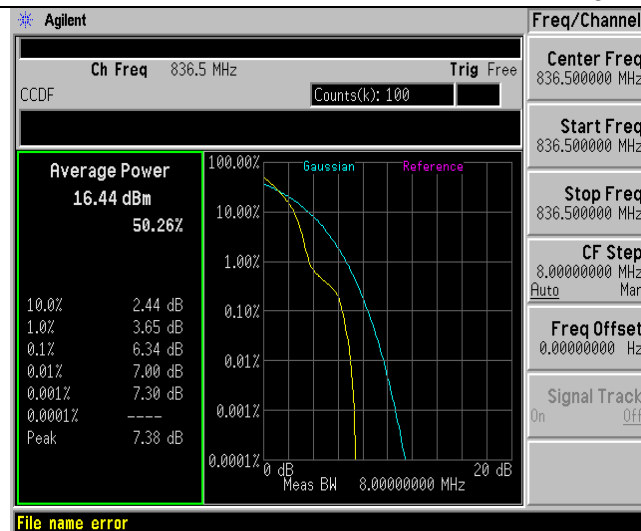

1RB#0

1RB#0

Middle Channel

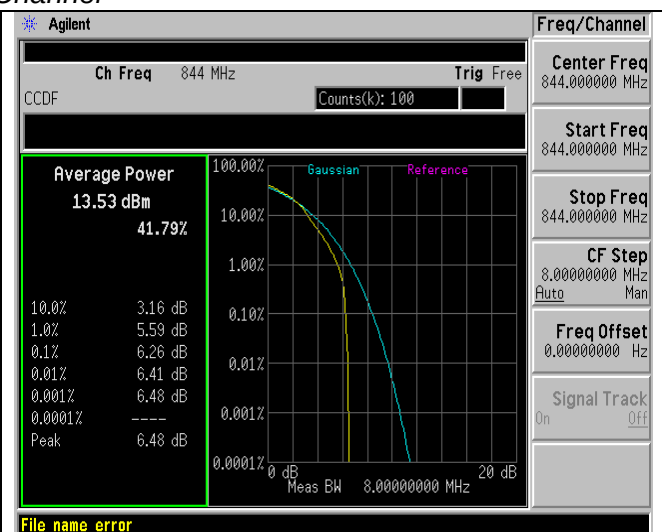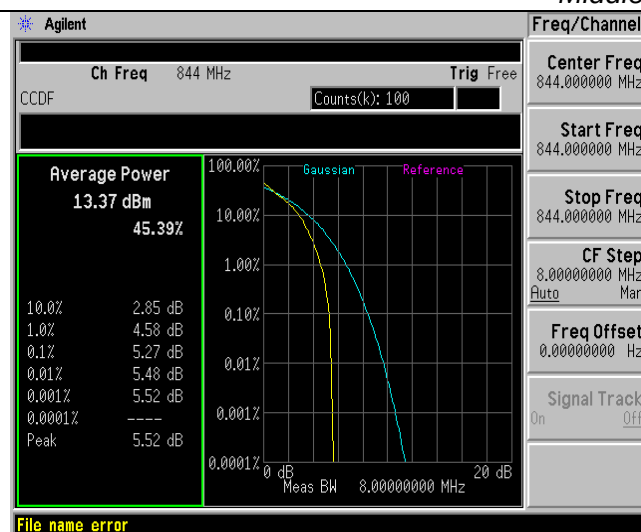


1RB#0

1RB#0

High Channel


LTE FDD Band 26-15MHz Channel Bandwidth PAPR

QPSK

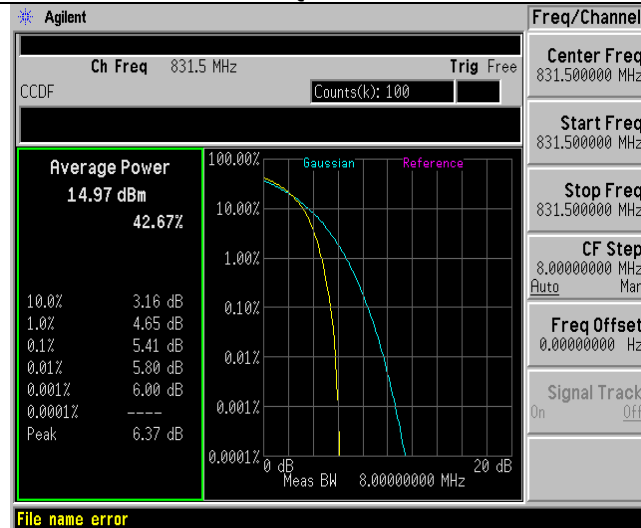


1RB#0

16QAM

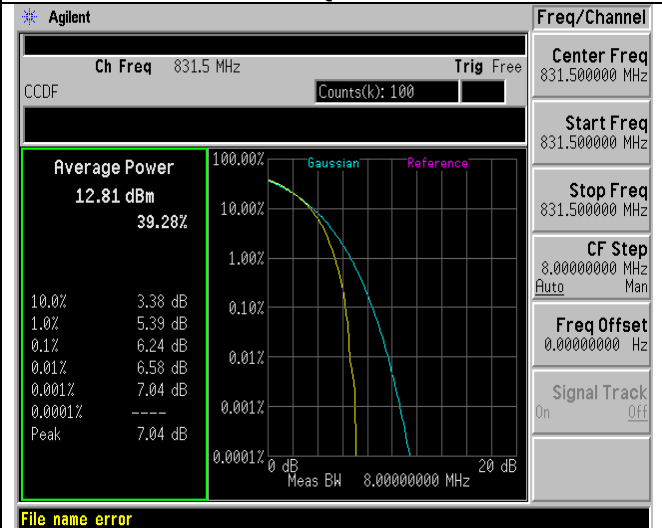


1RB#0

Low Channel

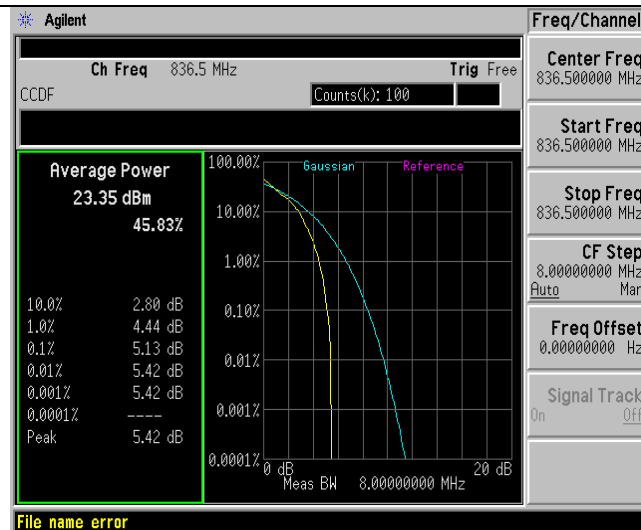


1RB#0

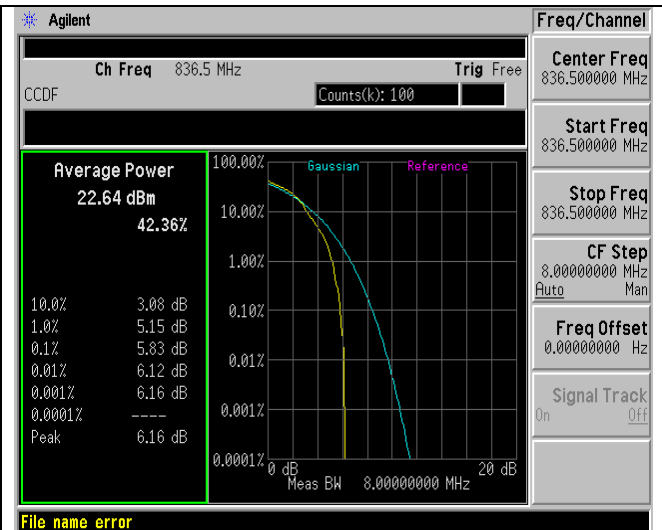


1RB#0

Middle Channel

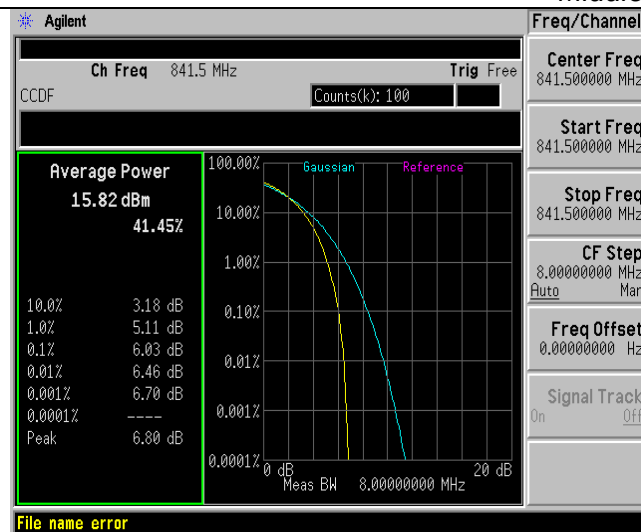

1RB#0

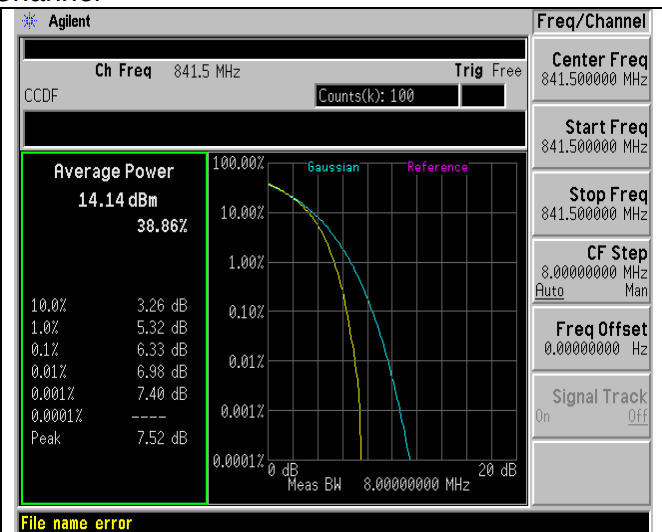

1RB#0


High Channel

3.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

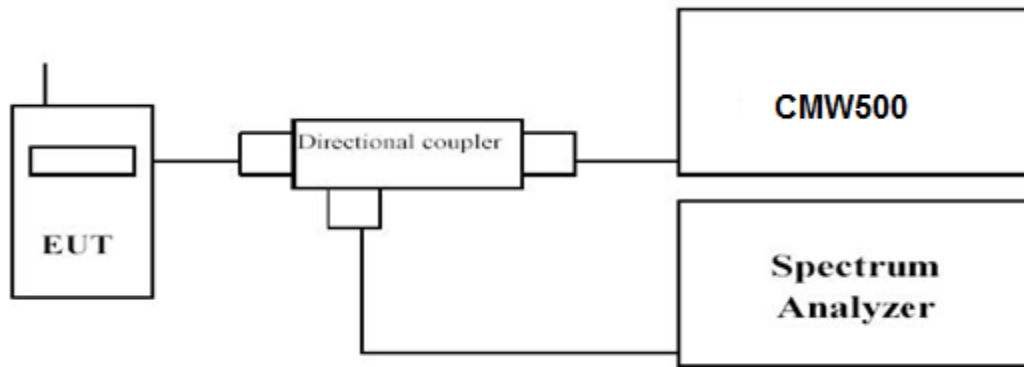

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS


Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.


LTE FDD Band 26						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
1.4 MHz	6RB#0	824.7	1.280	1.284	1.0770	1.0851
		836.5	1.258	1.299	1.0800	1.0836
		848.3	1.259	1.277	1.0770	1.0844
3 MHz	15RB#0	825.5	2.984	2.988	2.6812	2.6890
		836.5	2.985	2.980	2.6760	2.6811
		847.5	2.947	2.959	2.6776	2.6859
5 MHz	25RB#0	826.5	5.097	4.998	4.4883	4.4851
		836.5	4.996	5.005	4.4794	4.4768
		846.5	5.039	5.010	4.4766	4.4776
10 MHz	50RB#0	829.0	9.887	9.890	8.9872	8.9962
		836.5	9.946	9.898	8.9345	8.9397
		844.0	9.875	9.825	8.9673	8.9785
15 MHz	75RB#0	831.5	14.793	14.658	13.4269	13.4446
		836.5	14.472	14.595	13.3505	13.3613
		841.5	13.890	14.831	13.3852	13.4238

LTE FDD Band 26-1.4MHz Channel Bandwidth

QPSK

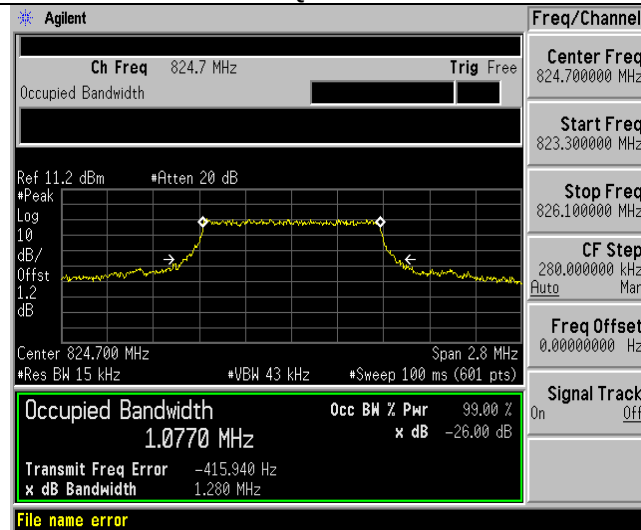



16QAM

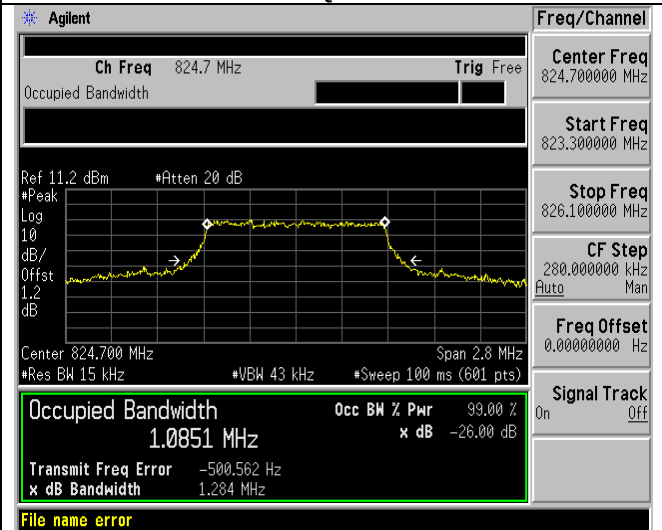

6RB#0

6RB#0



Low Channel

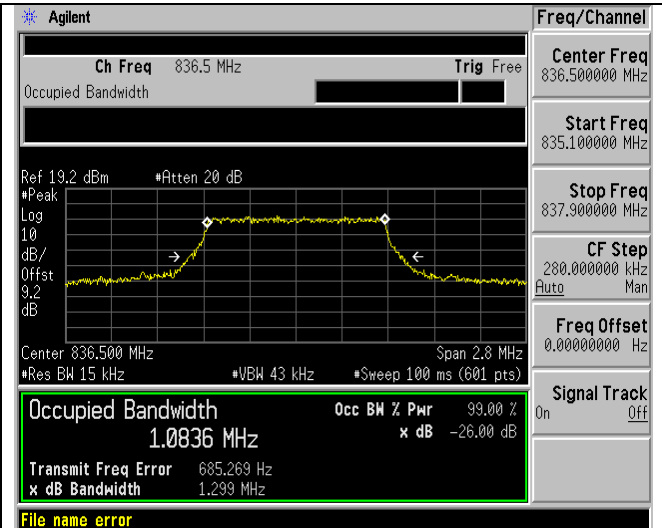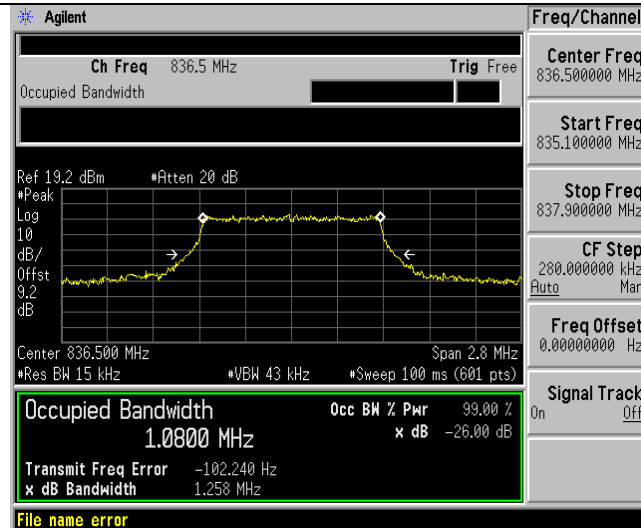

6RB#0

6RB#0

Middle Channel

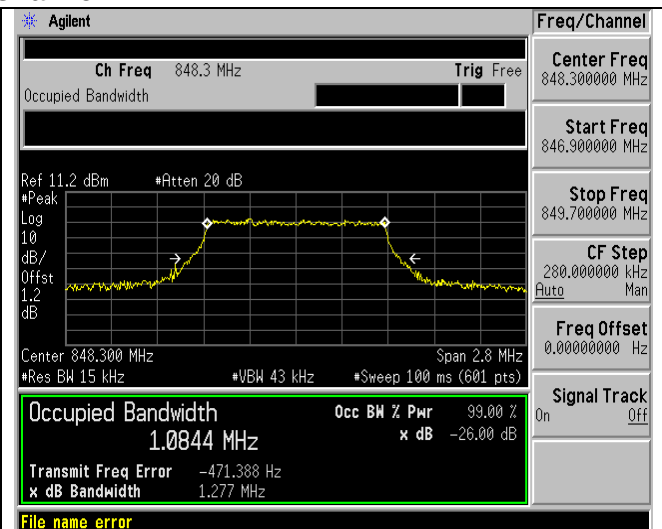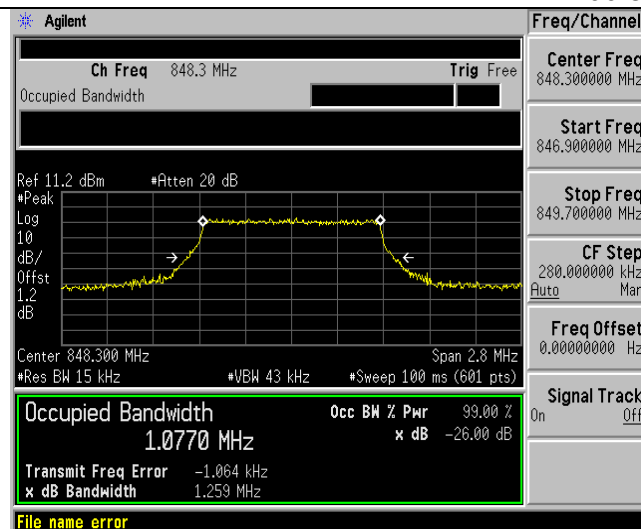

6RB#0



6RB#0

High Channel

LTE FDD Band 26-3MHz Channel Bandwidth

QPSK



16QAM

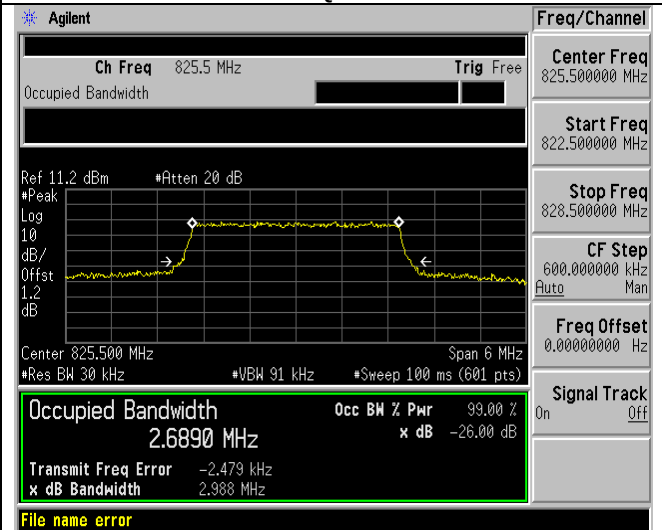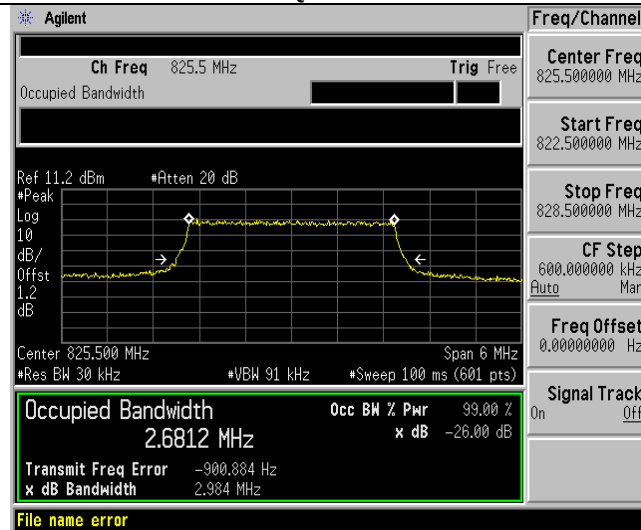

15RB#0

15RB#0



Low Channel

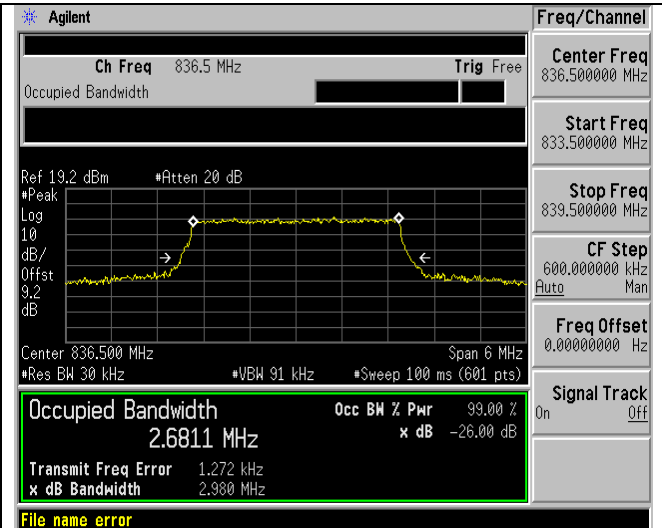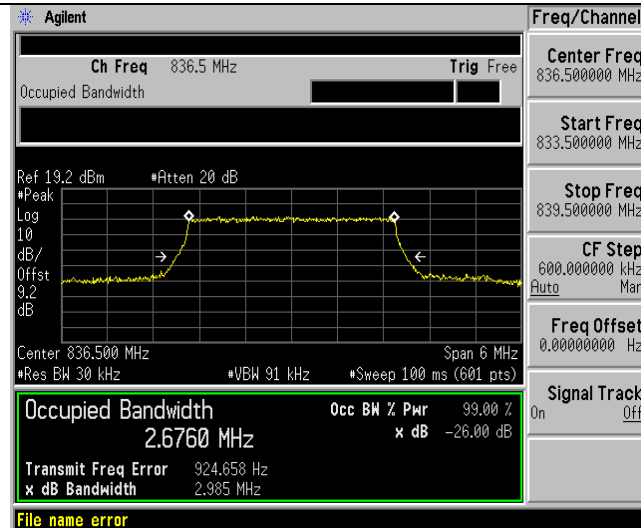

15RB#0

15RB#0

Middle Channel

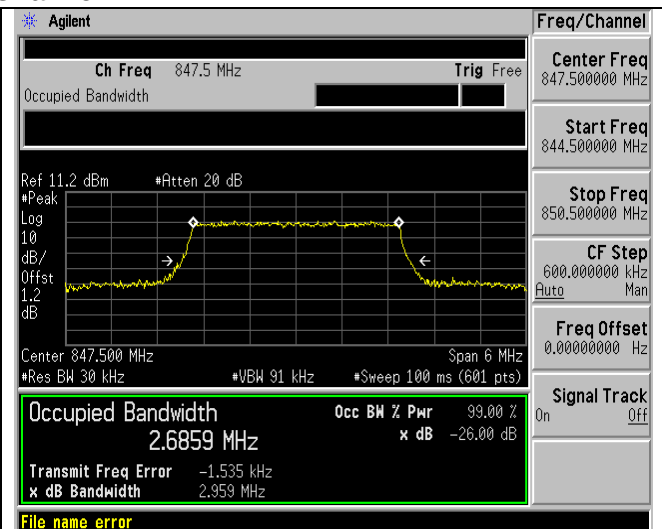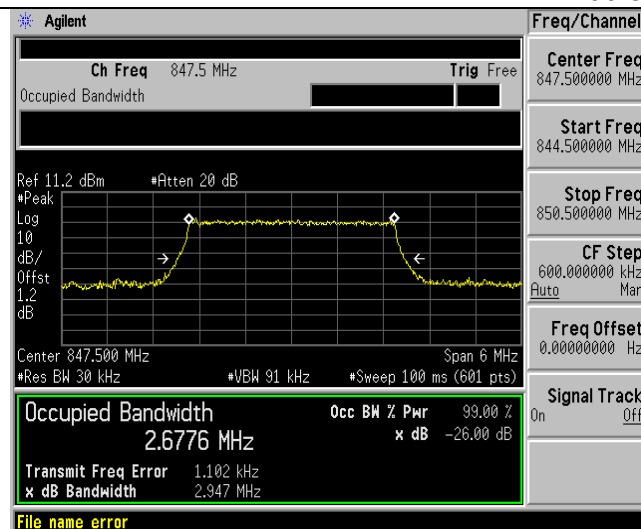


15RB#0

15RB#0


High Channel

LTE FDD Band 26-5MHz Channel Bandwidth

QPSK

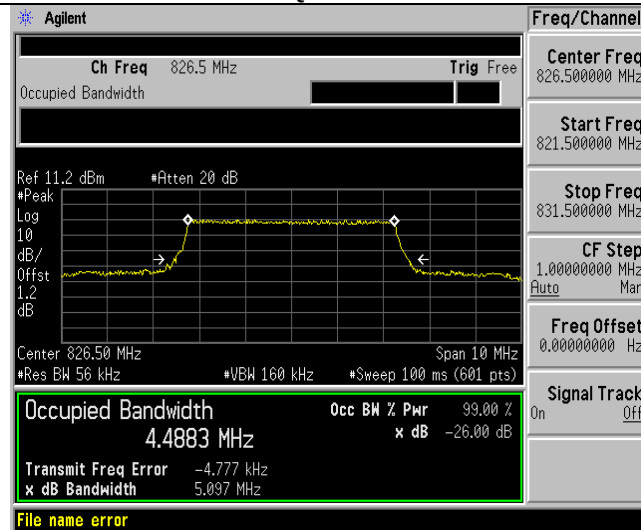



16QAM

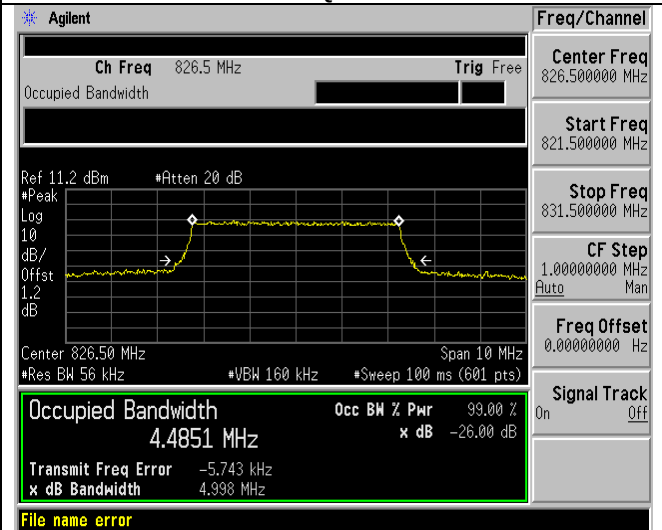

25RB#0

25RB#0



Low Channel

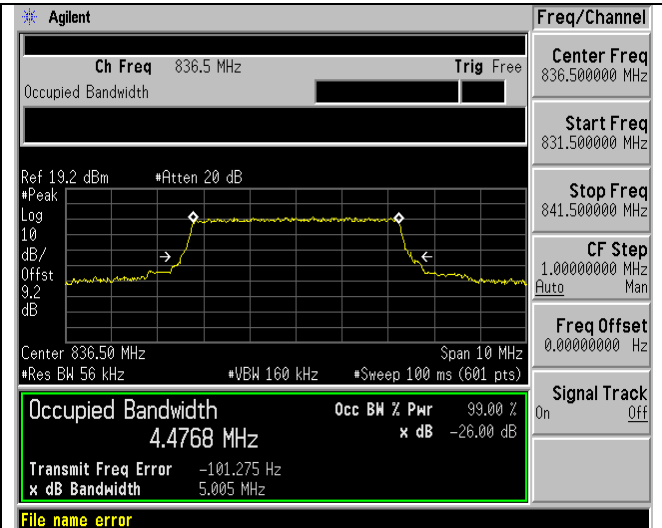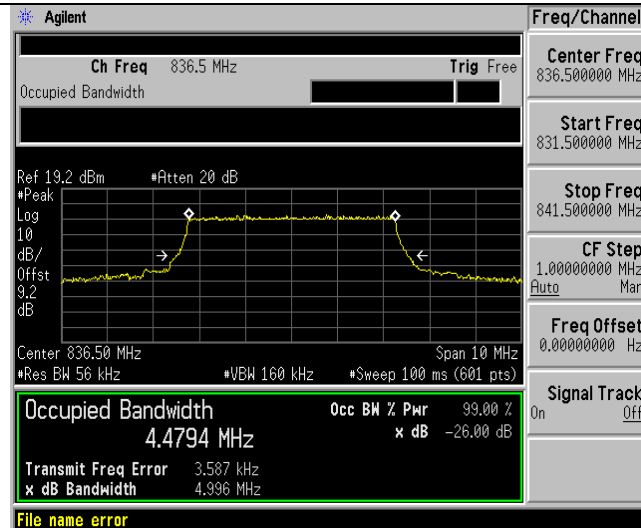

25RB#0

25RB#0

Middle Channel

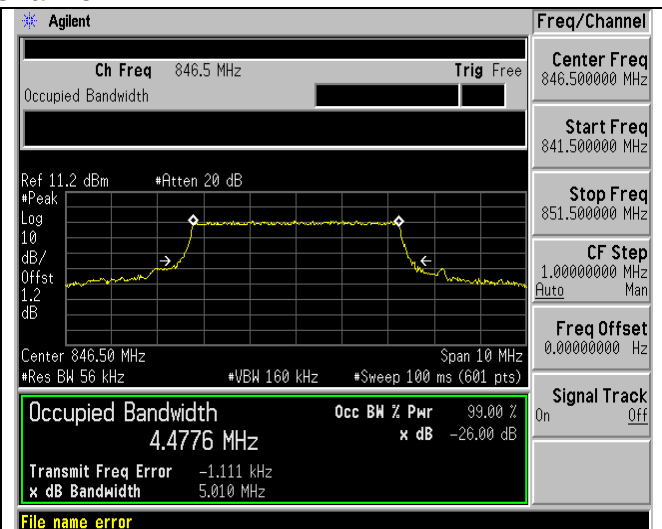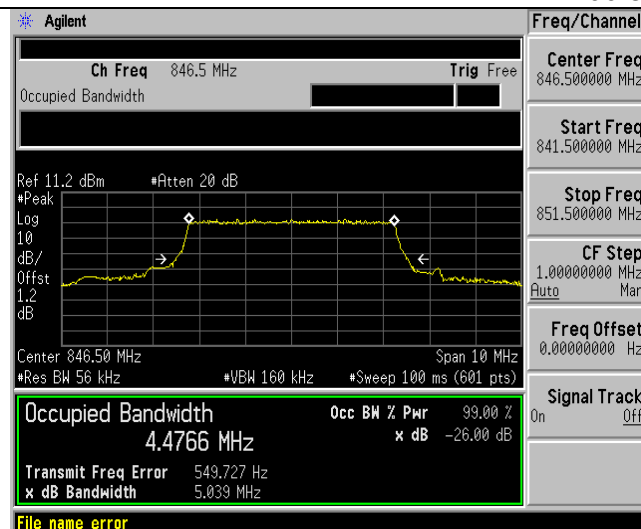


25RB#0

25RB#0


High Channel

LTE FDD Band 26-10MHz Channel Bandwidth

QPSK

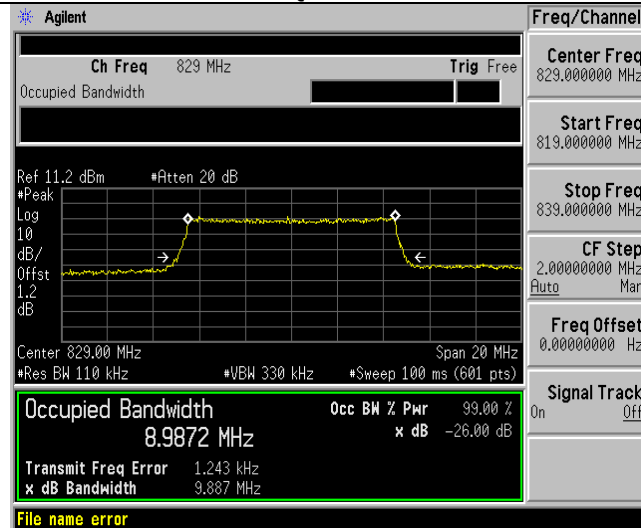



16QAM

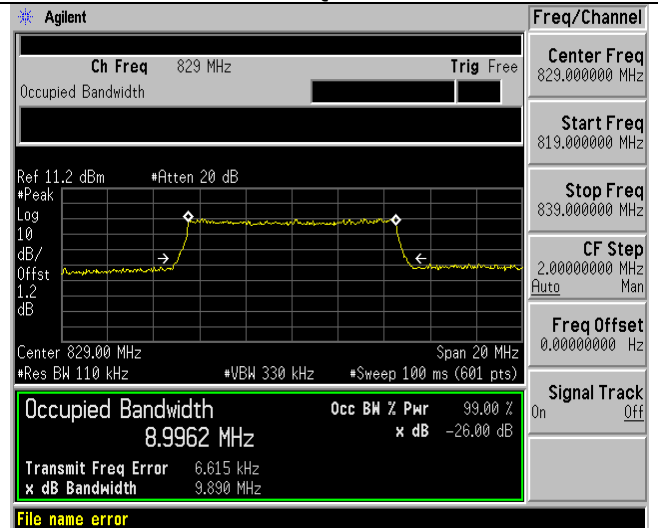

50RB#0

50RB#0



Low Channel

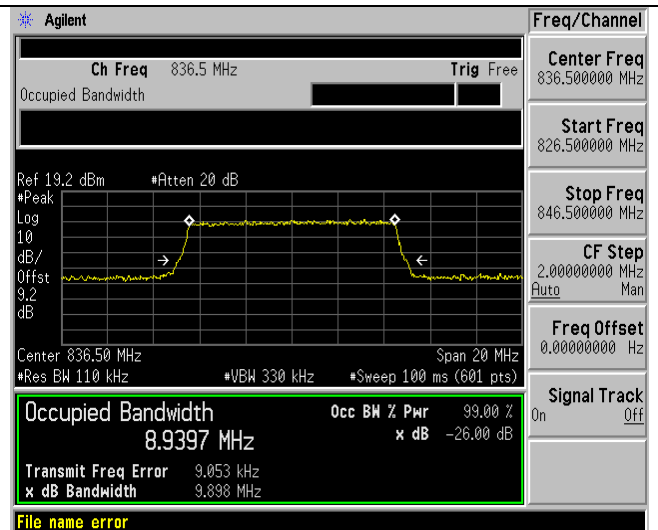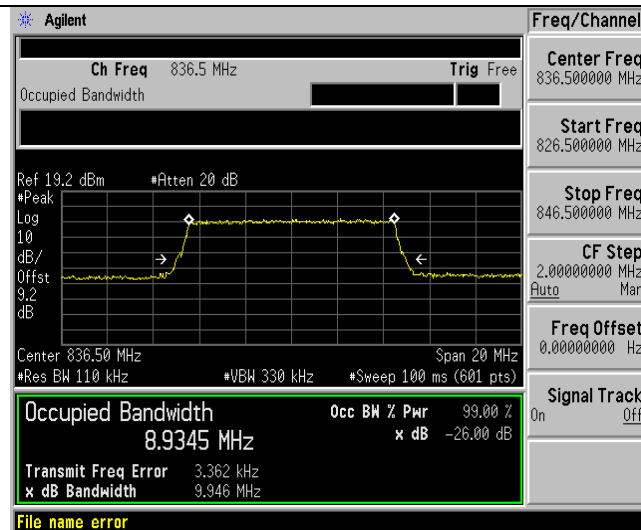

50RB#0

50RB#0

Middle Channel

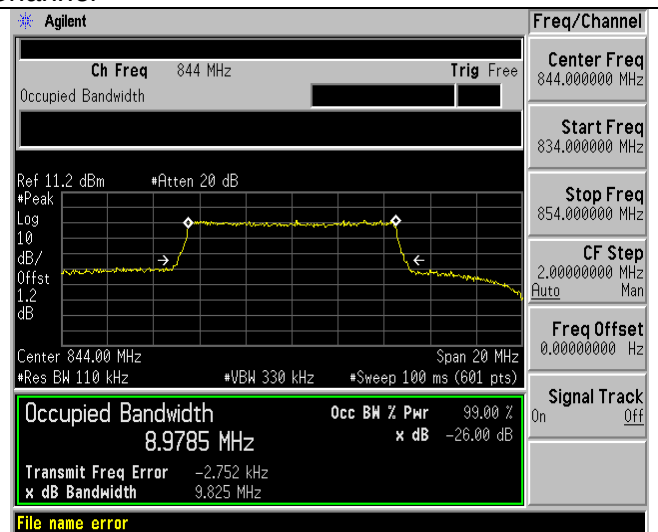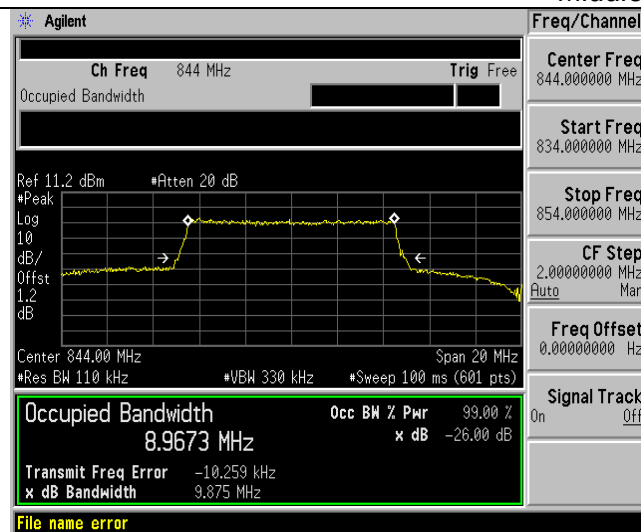


50RB#0

50RB#0


High Channel

LTE FDD Band 26-15MHz Channel Bandwidth

QPSK

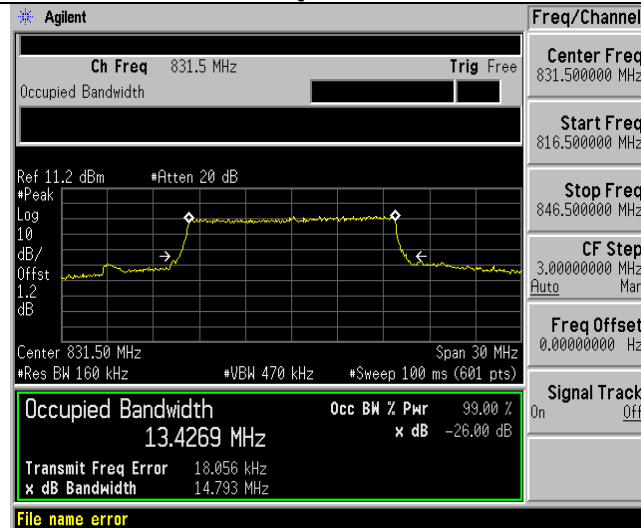



16QAM

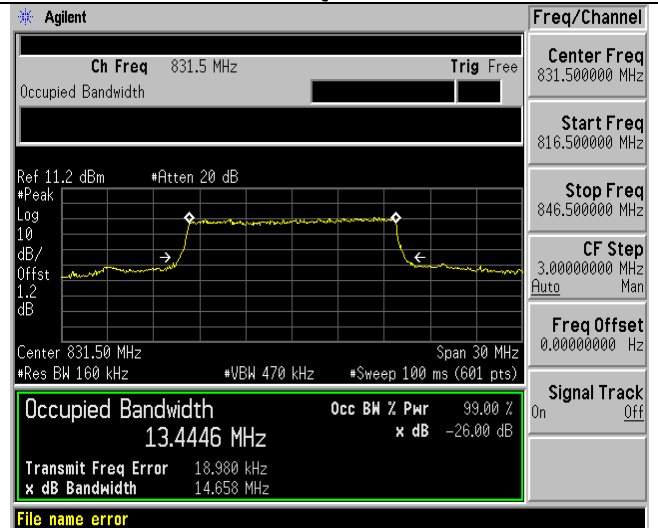

75RB#0

75RB#0



Low Channel

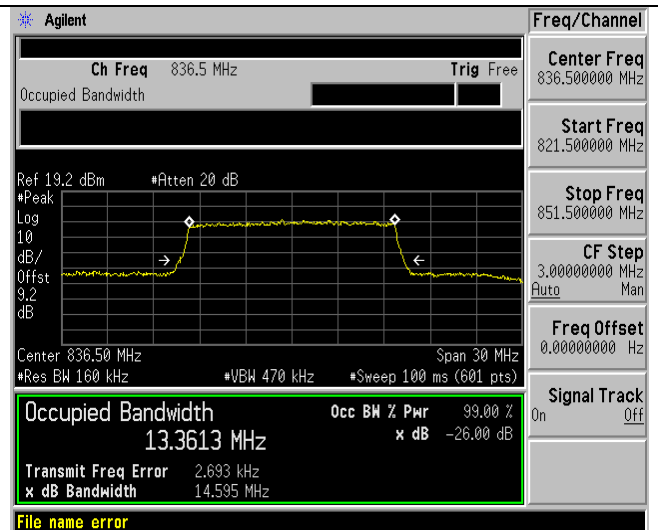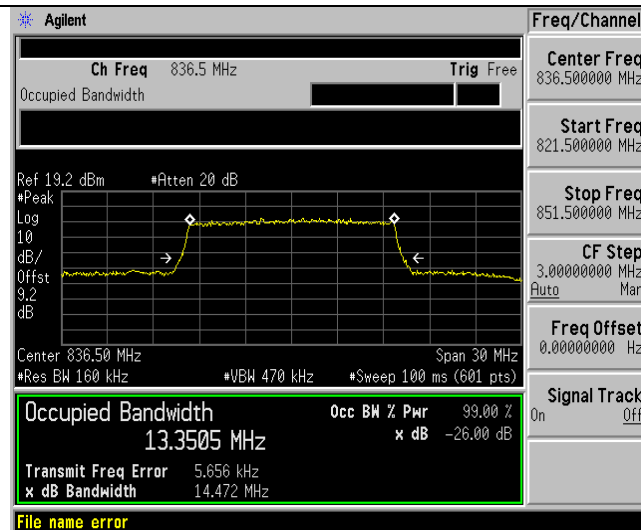

75RB#0

75RB#0

Middle Channel

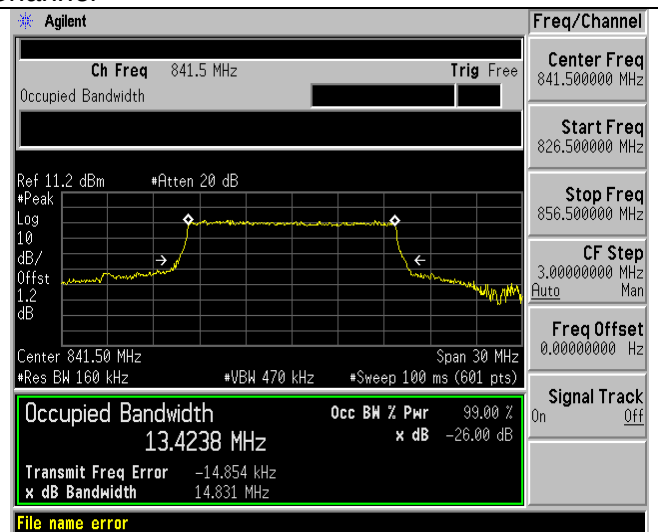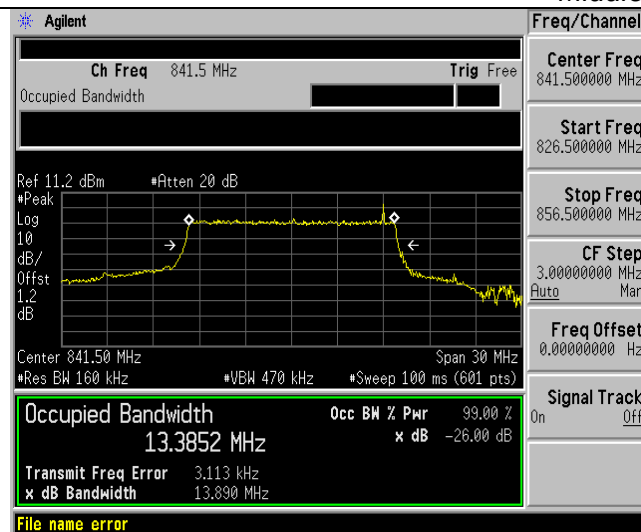

75RB#0

75RB#0

High Channel


3.4 Band Edge compliance

LIMIT

According to Part §22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

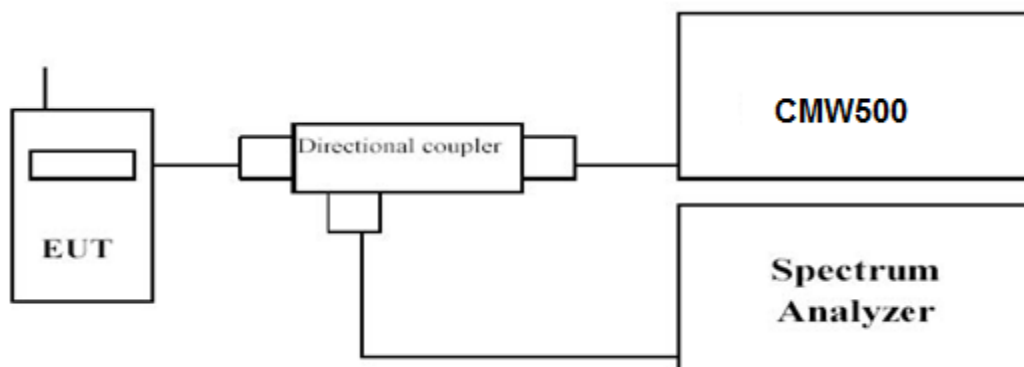

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum


TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.


LTE FDD Band 26-1.4MHz Channel Bandwidth Band Edge Compliance

QPSK

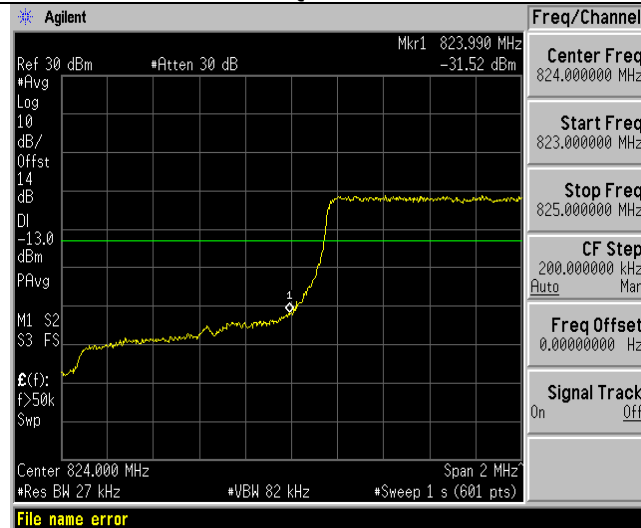


1RB#0

16QAM

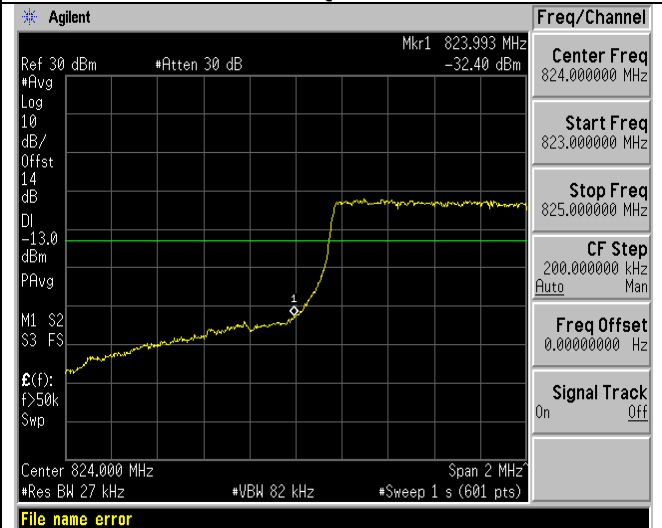


1RB#0

Low Channel

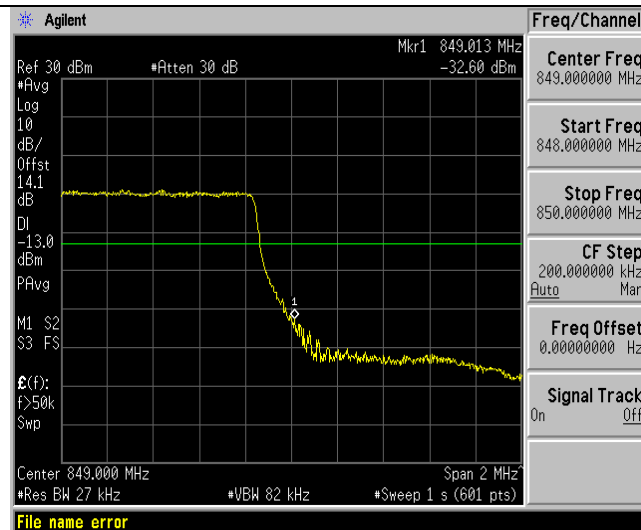

1RB#0

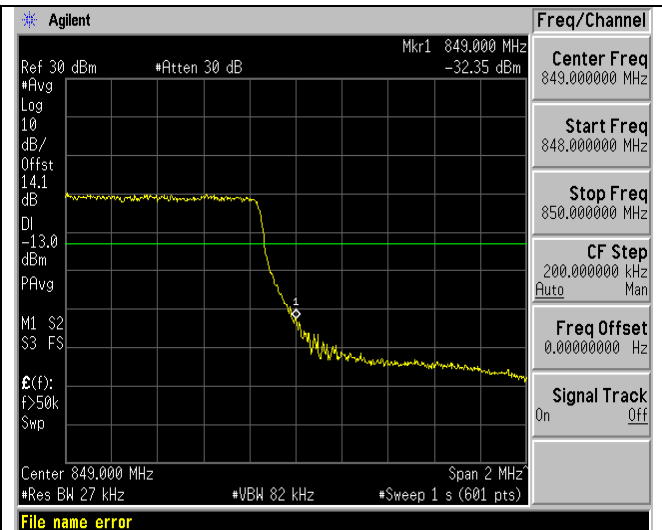


1RB#0


High Channel

LTE FDD Band 26-3MHz Channel Bandwidth Band Edge Compliance

QPSK

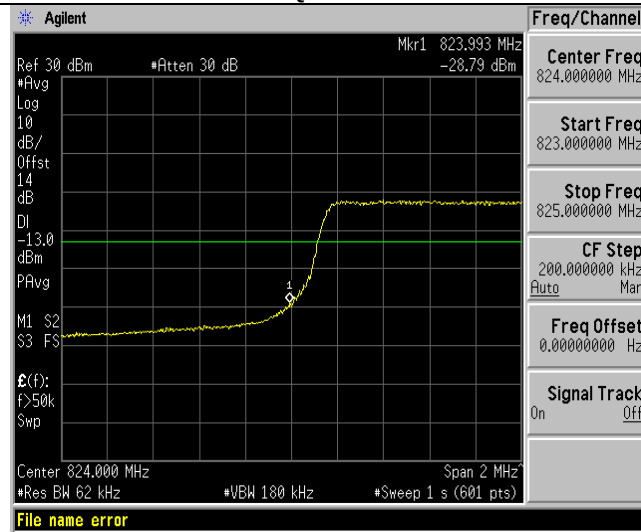


16QAM

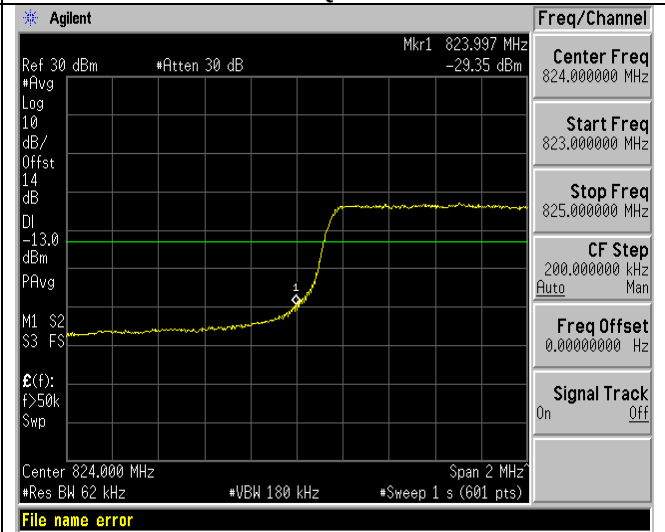


1RB#0

1RB#0

Low Channel

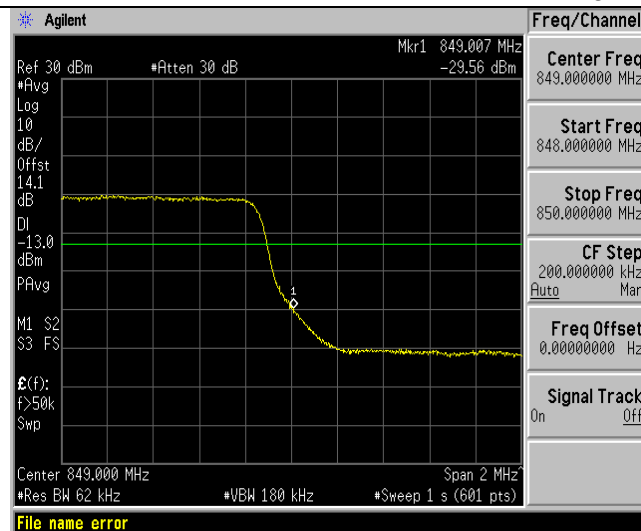

1RB#0

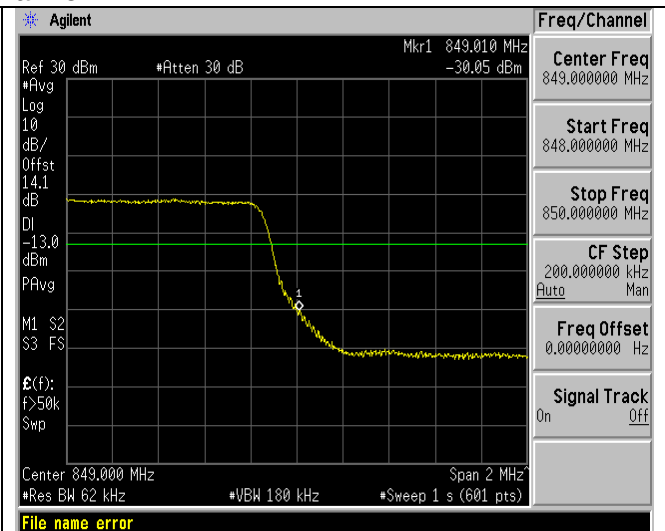


1RB#0


High Channel

LTE FDD Band 26-5MHz Channel Bandwidth Band Edge Compliance

QPSK

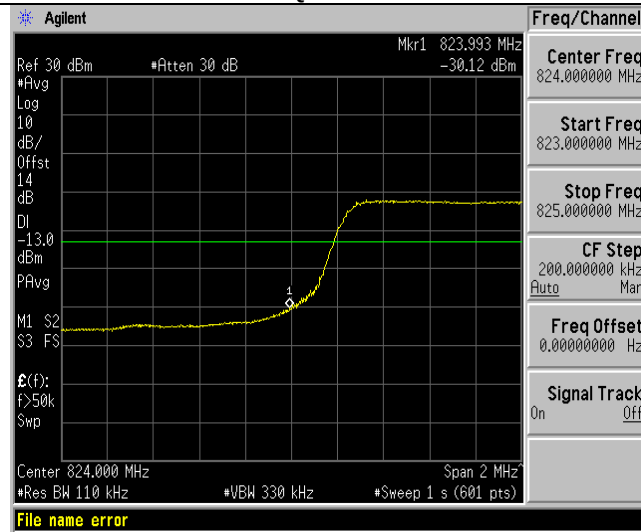


16QAM

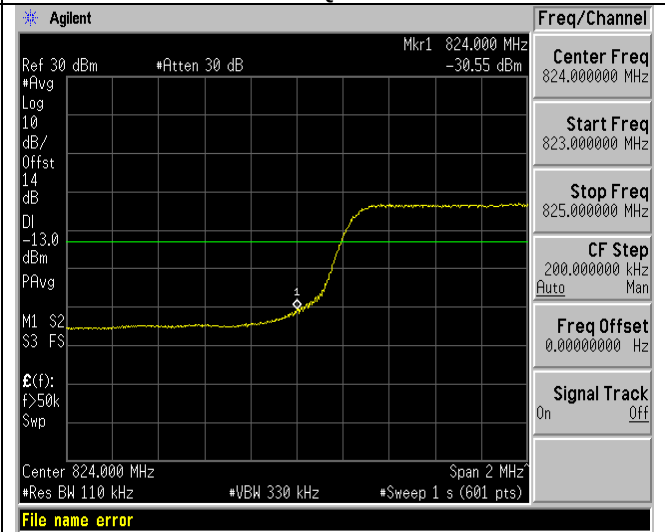


1RB#0

1RB#0

Low Channel

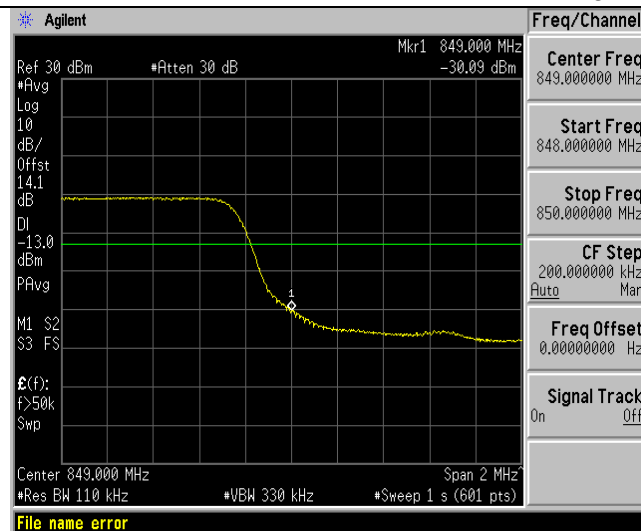

1RB#0

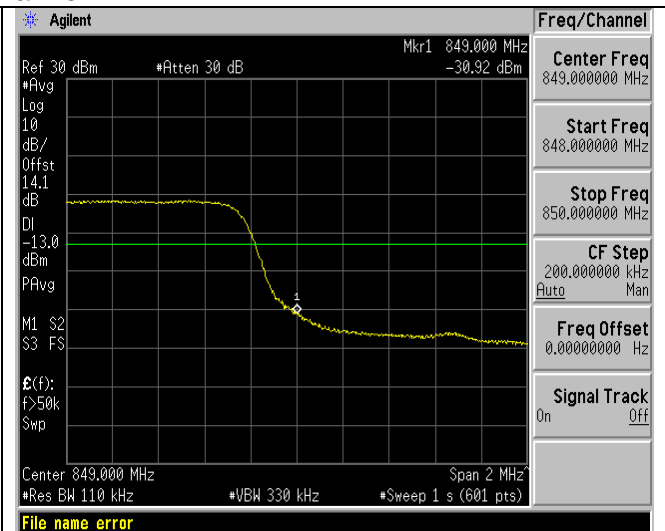


1RB#0


High Channel

LTE FDD Band 26-10MHz Channel Bandwidth Band Edge Compliance

QPSK

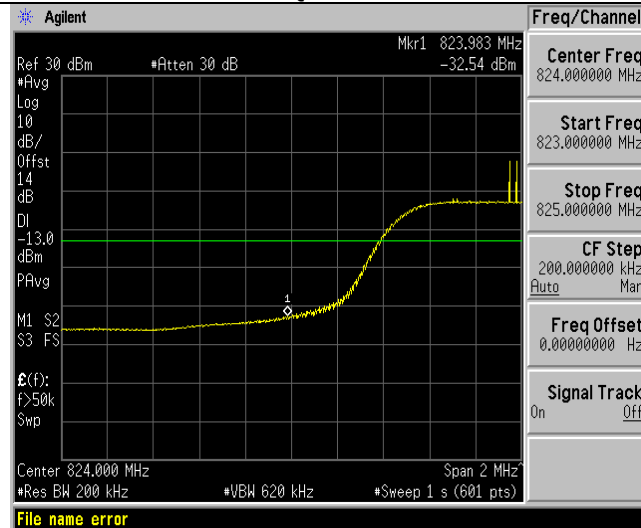


16QAM

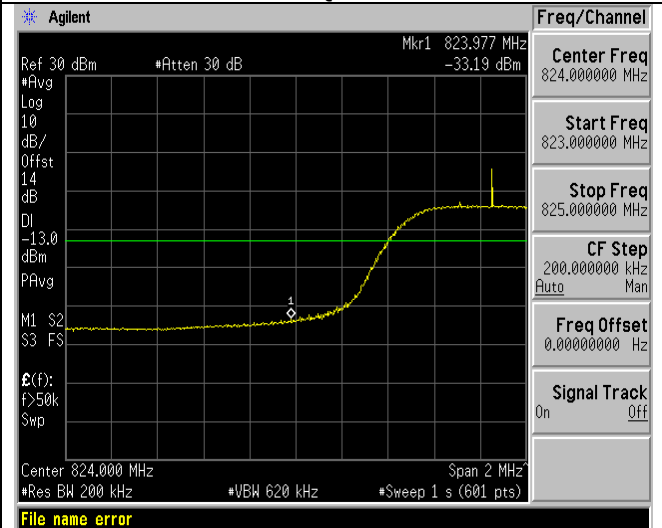


1RB#0

1RB#0

Low Channel

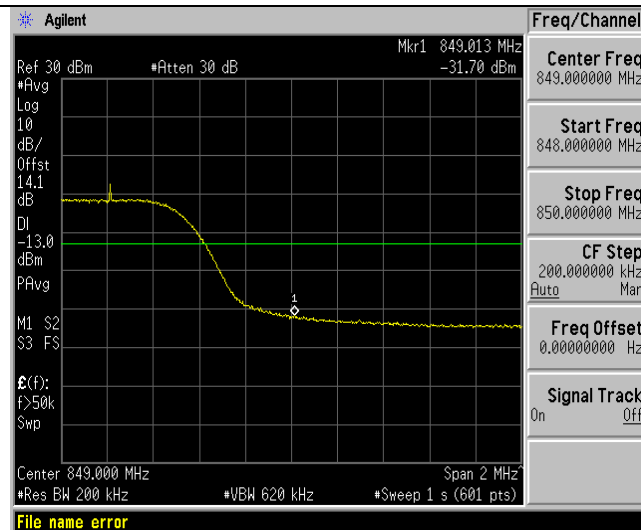

1RB#0

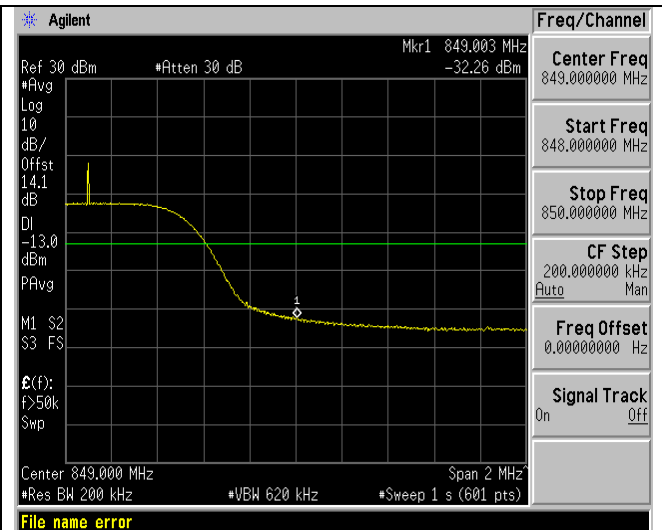


1RB#0


High Channel

LTE FDD Band 26-15MHz Channel Bandwidth Band Edge Compliance

QPSK

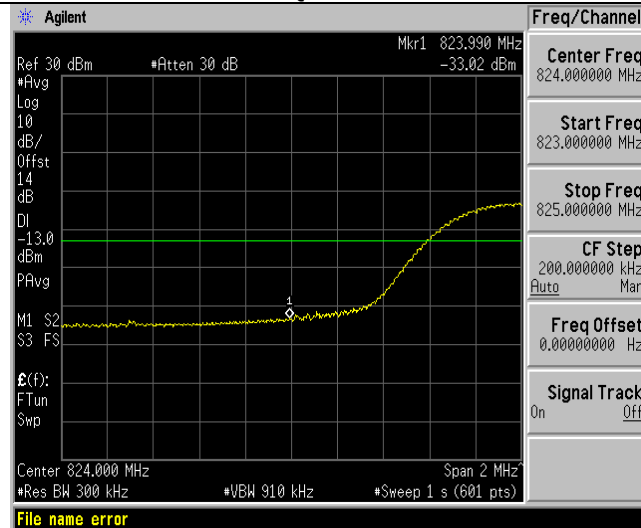


16QAM

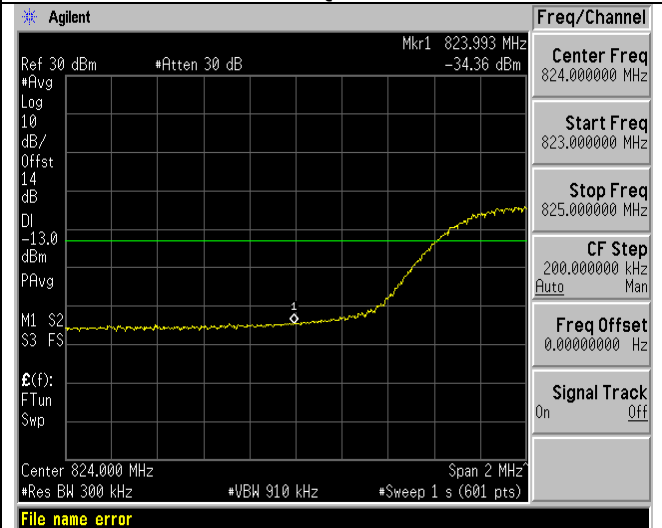


1RB#0

1RB#0

Low Channel

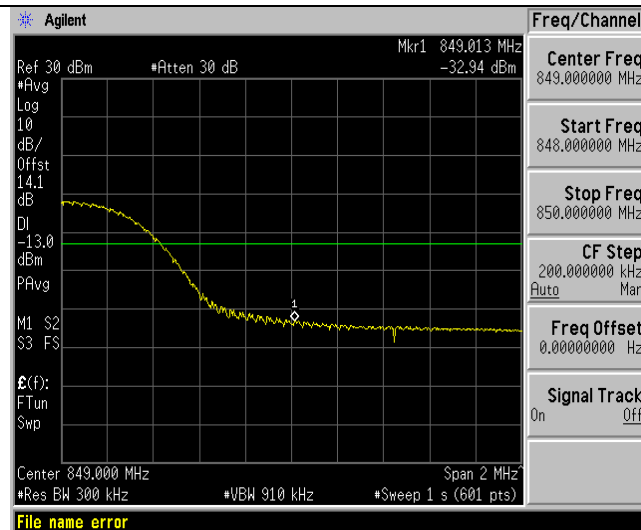

1RB#0

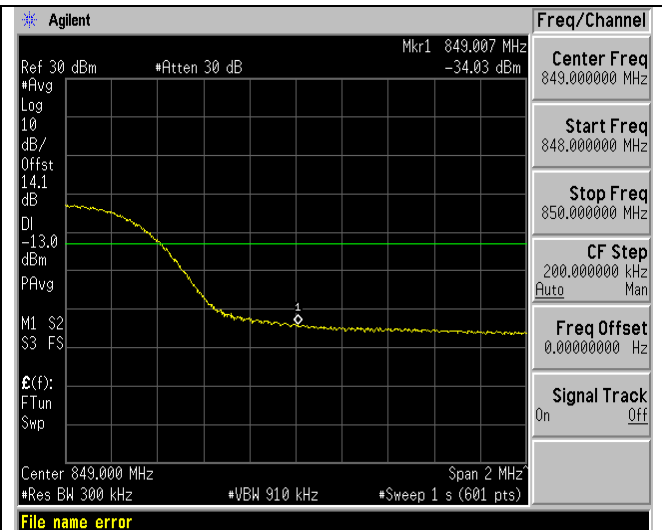

1RB#0

High Channel

3.5 Spurious Emission


LIMIT

According to Part §22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

Conducted Spurious Measurement:

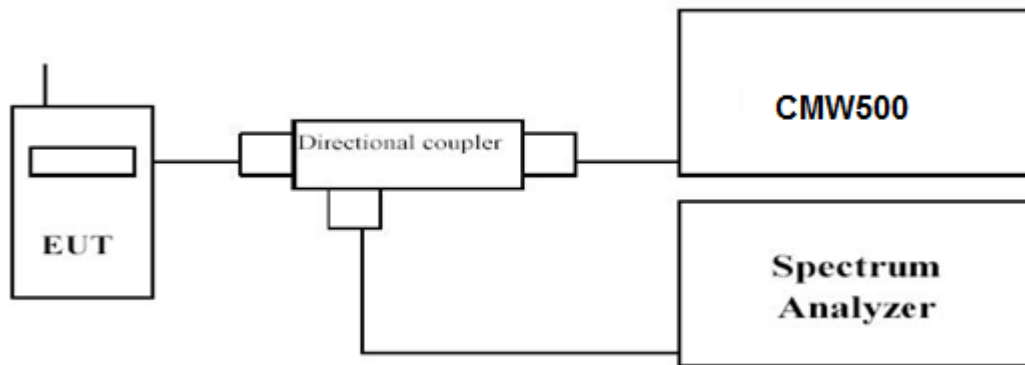

Radiated Spurious Measurement:

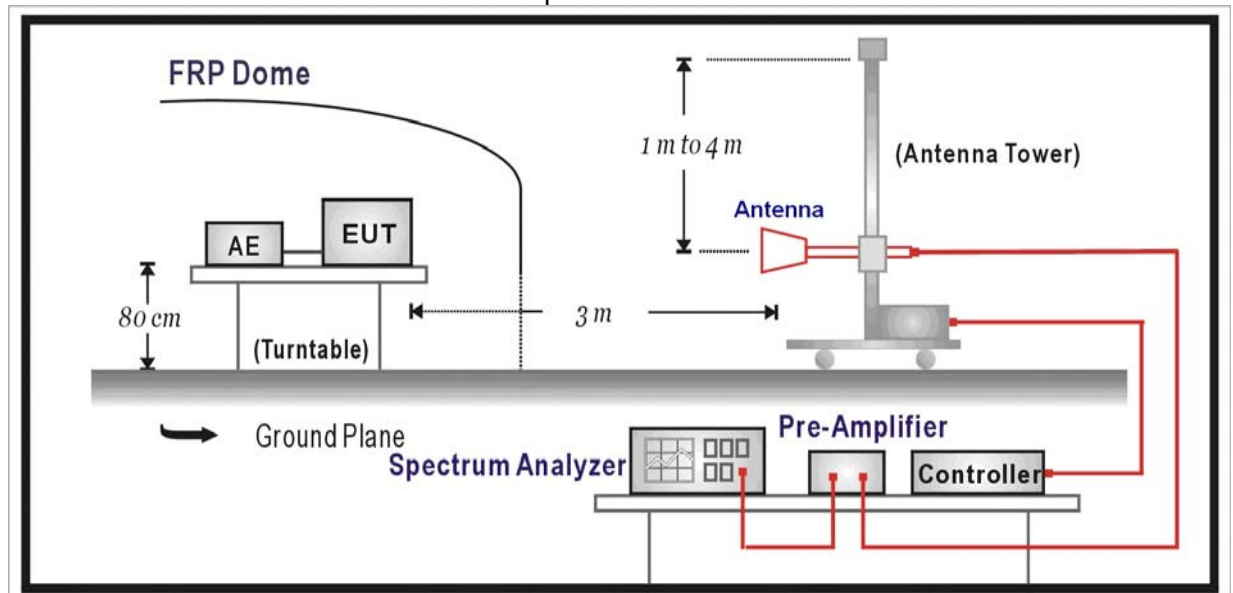

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Conducted Spurious Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

- e. The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.
- f. Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 26	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~26.5	1 MHz	3 MHz	Auto

Radiated Spurious Measurement:

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- The maximum signal level detected by the measuring receiver shall be noted.
- The transmitter shall be replaced by a substitution antenna.
- The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- The substitution antenna shall be connected to a calibrated signal generator.
- If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- The resolution bandwidth of the spectrum analyzer was set at 100 kHz for Part 22 and 1MHz for Part 24. The frequency range was checked up to 10th harmonic.
- Test site anechoic chamber refer to ANSI C63.

TEST RESULTS

Remark:


- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26.

Conducted Measurement:


LTE FDD Band 26-1.4MHz Channel Bandwidth

Low Channel


QPSK

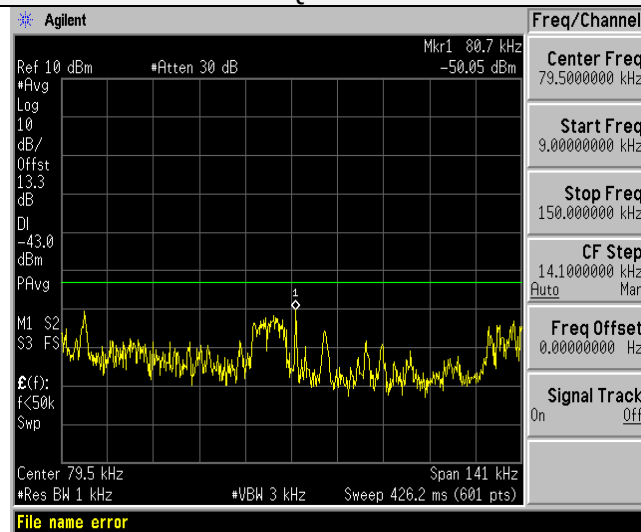


16QAM

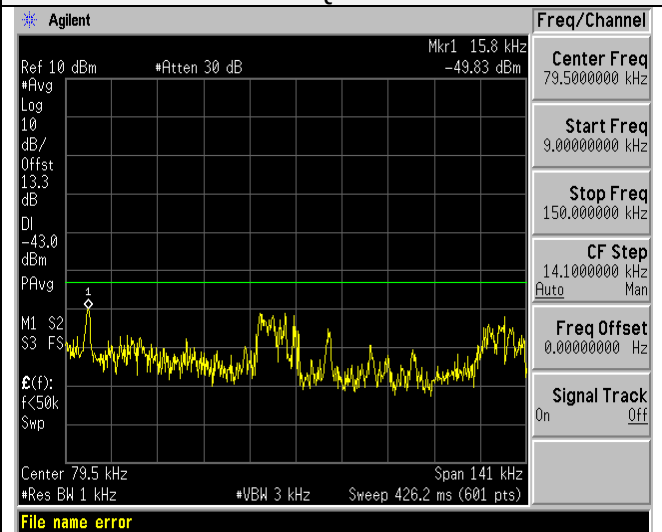


9KHz~150KHz

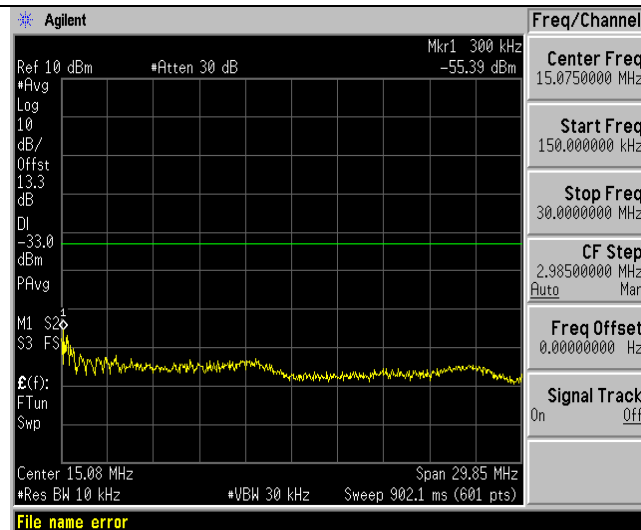


9KHz~150KHz

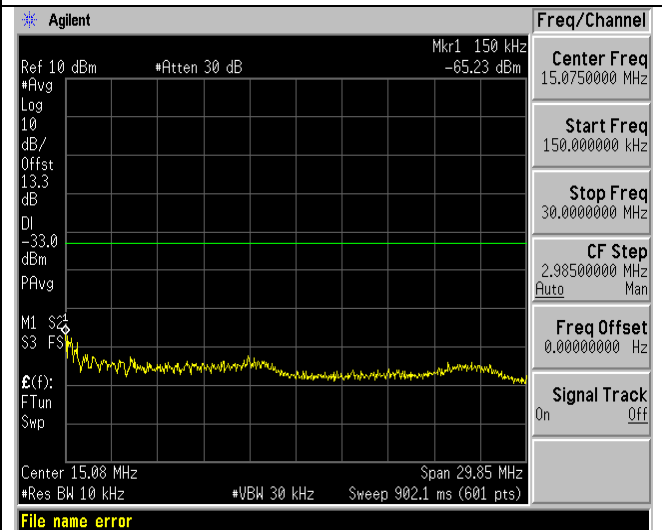

150KHz~30MHz

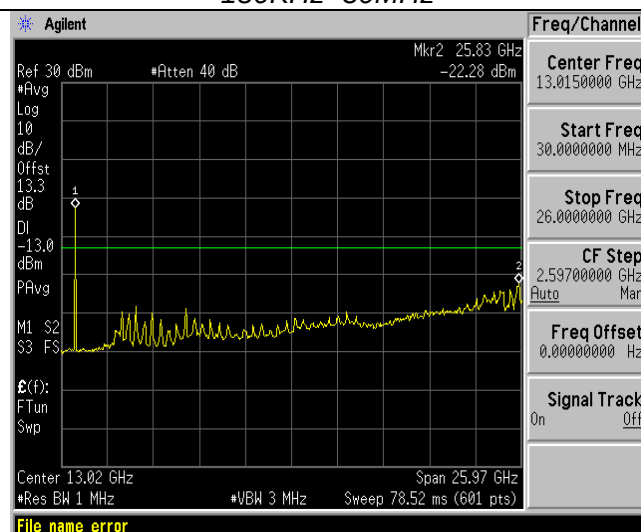

150KHz~30MHz

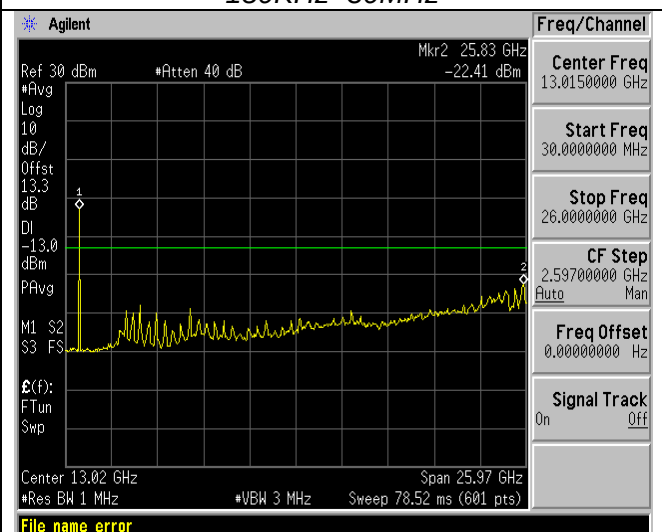


30MHz~26.5GHz

1RB#0

30MHz~26.5GHz


1RB#0

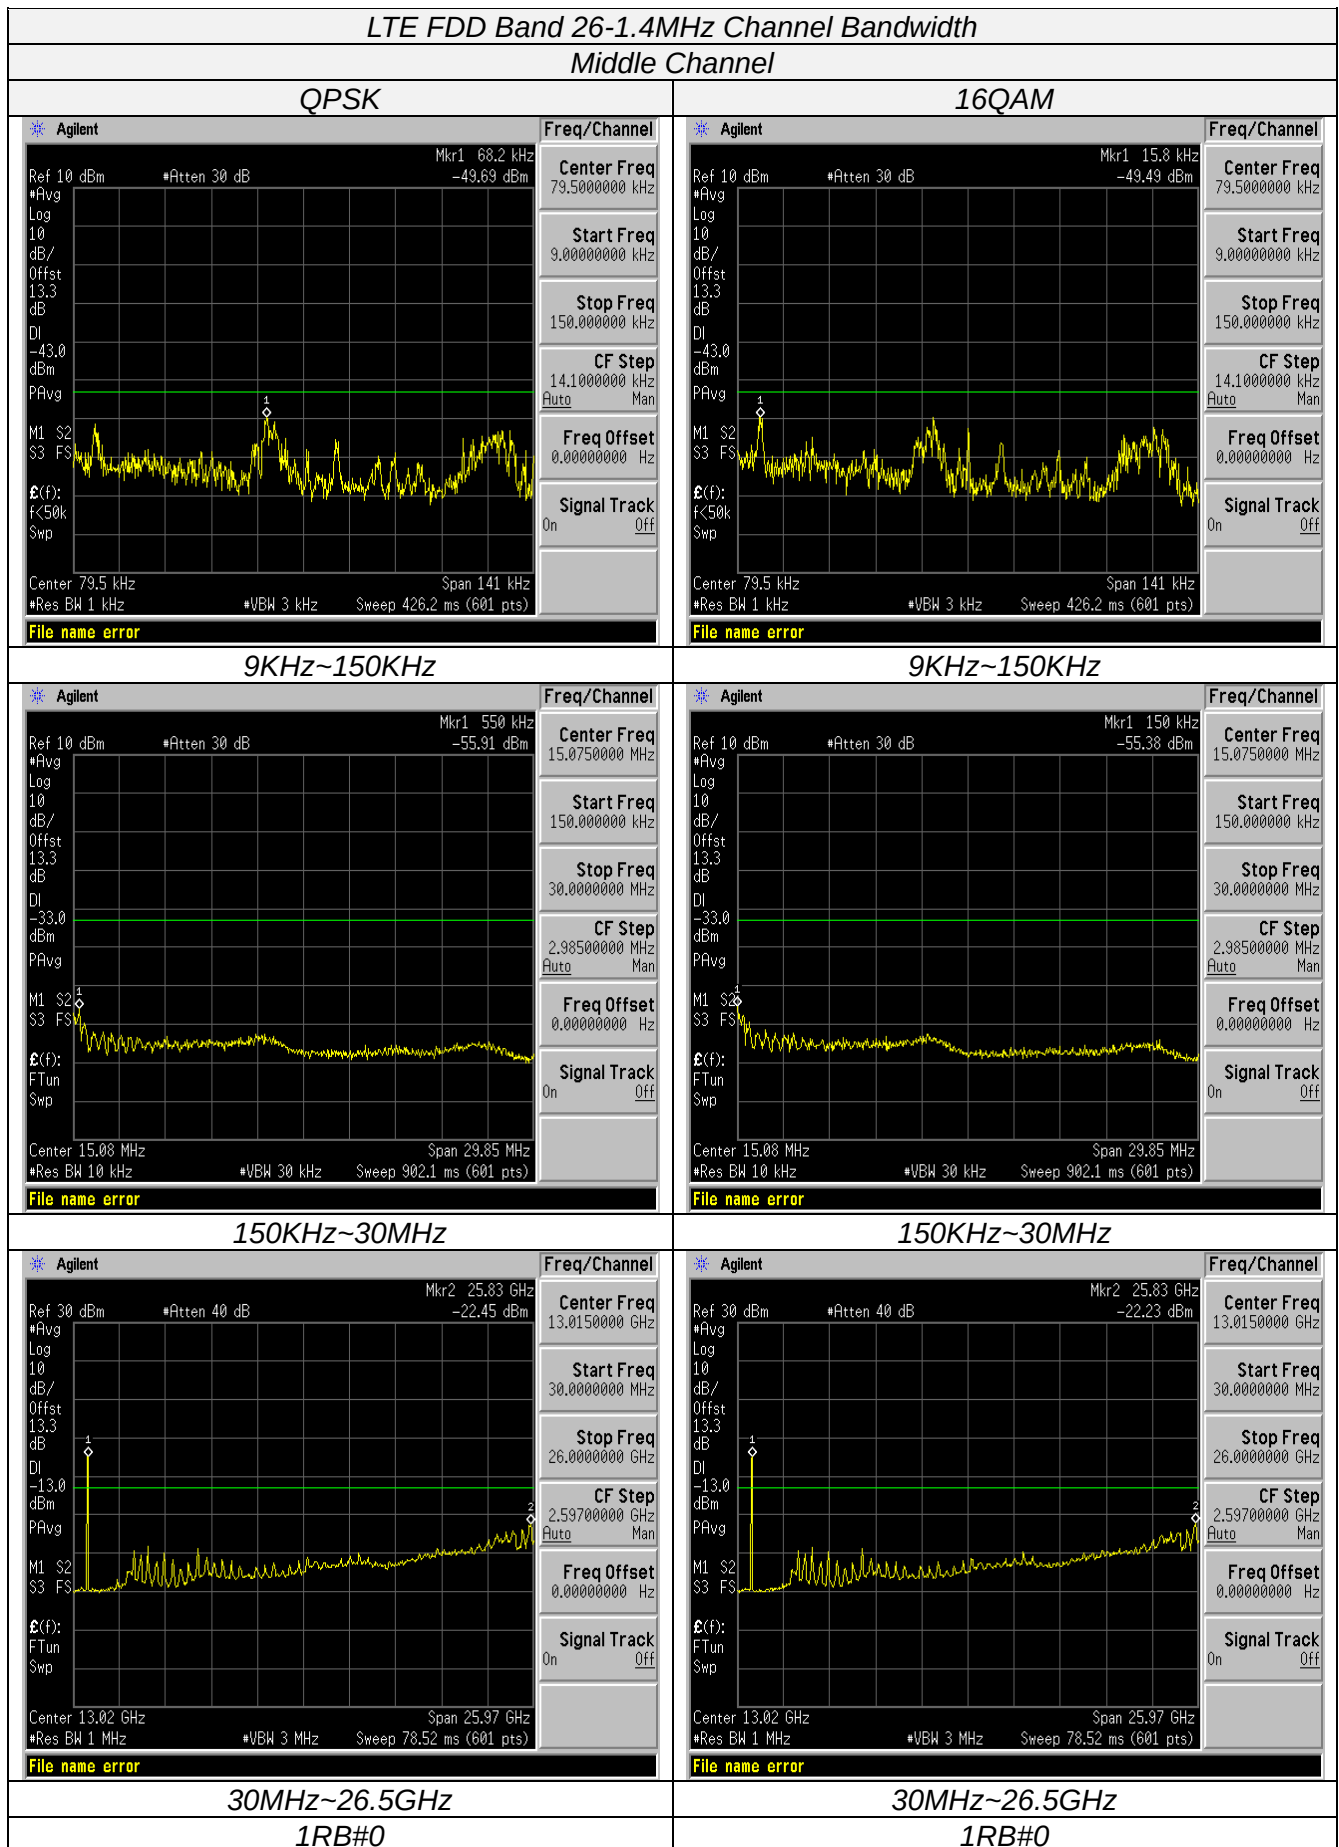


LTE FDD Band 26-1.4MHz Channel Bandwidth

High Channel


QPSK

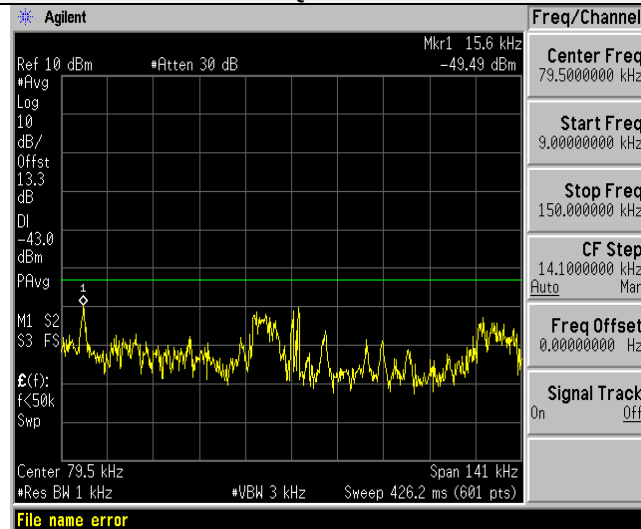


16QAM

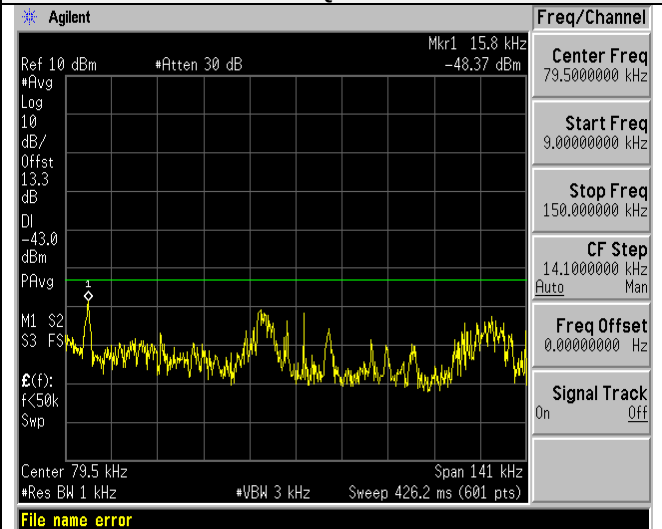


9KHz~150KHz

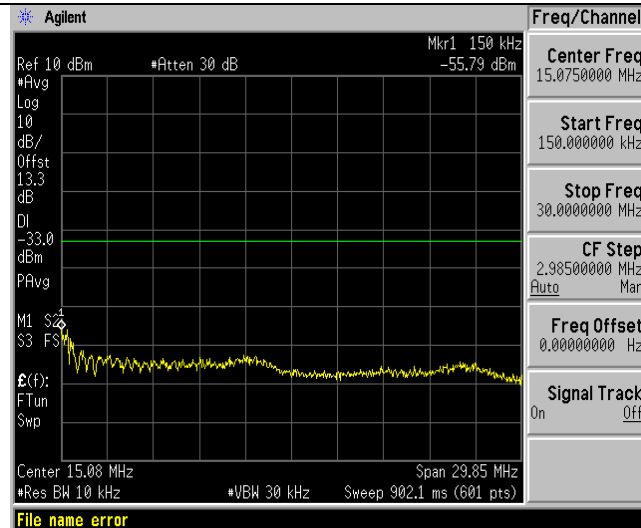


9KHz~150KHz

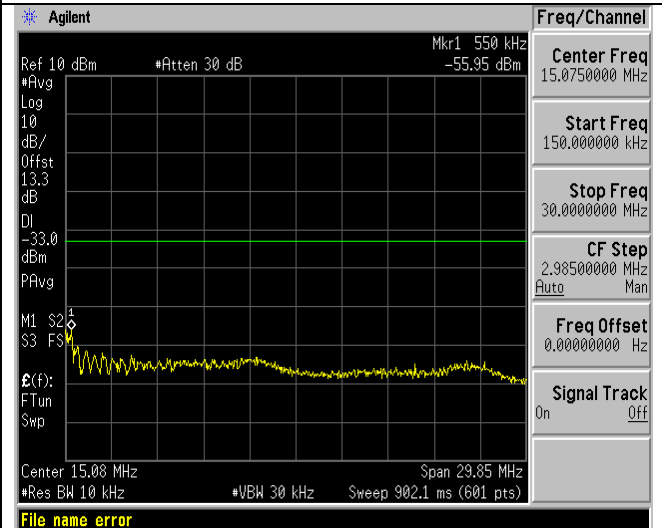

150KHz~30MHz

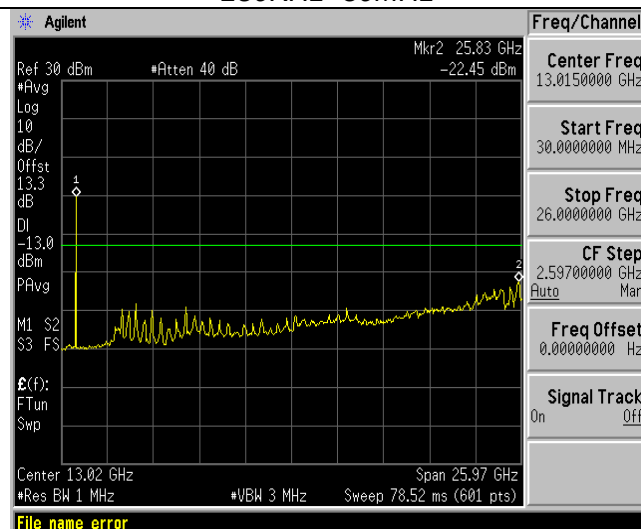

150KHz~30MHz

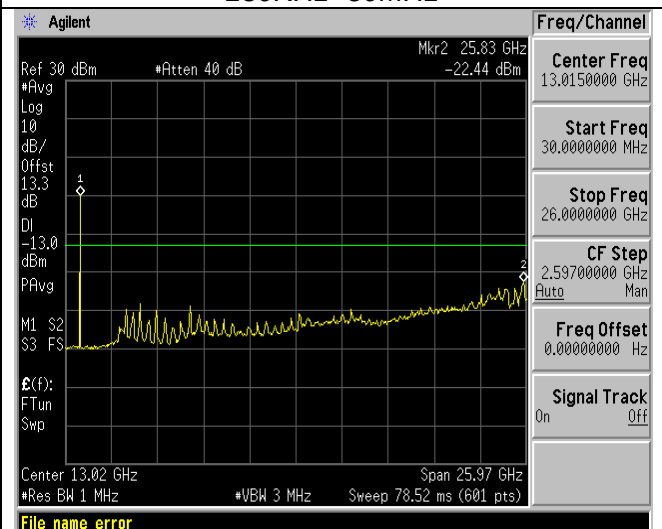



30MHz~26.5GHz


1RB#0


30MHz~26.5GHz


1RB#0

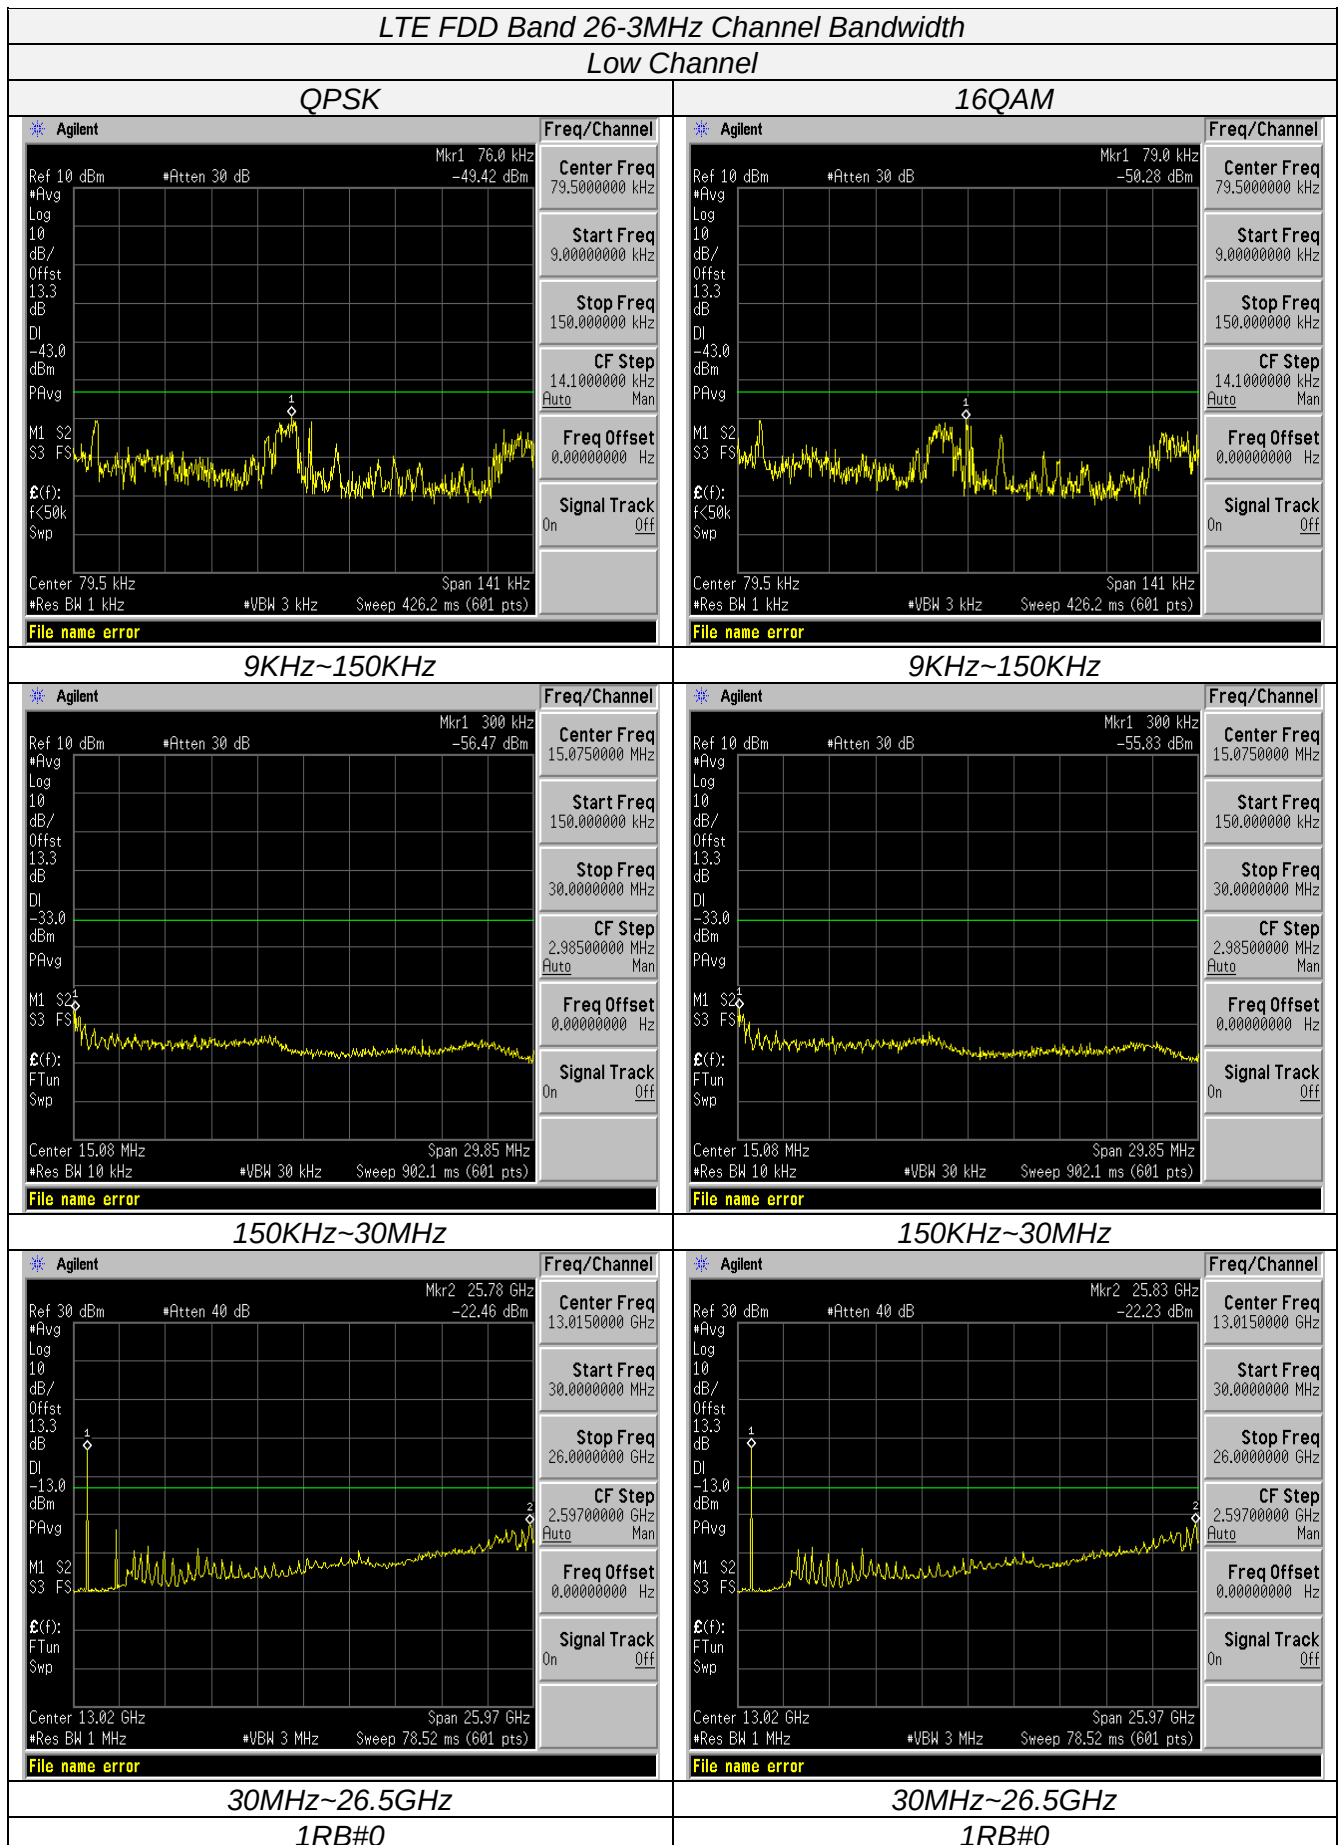


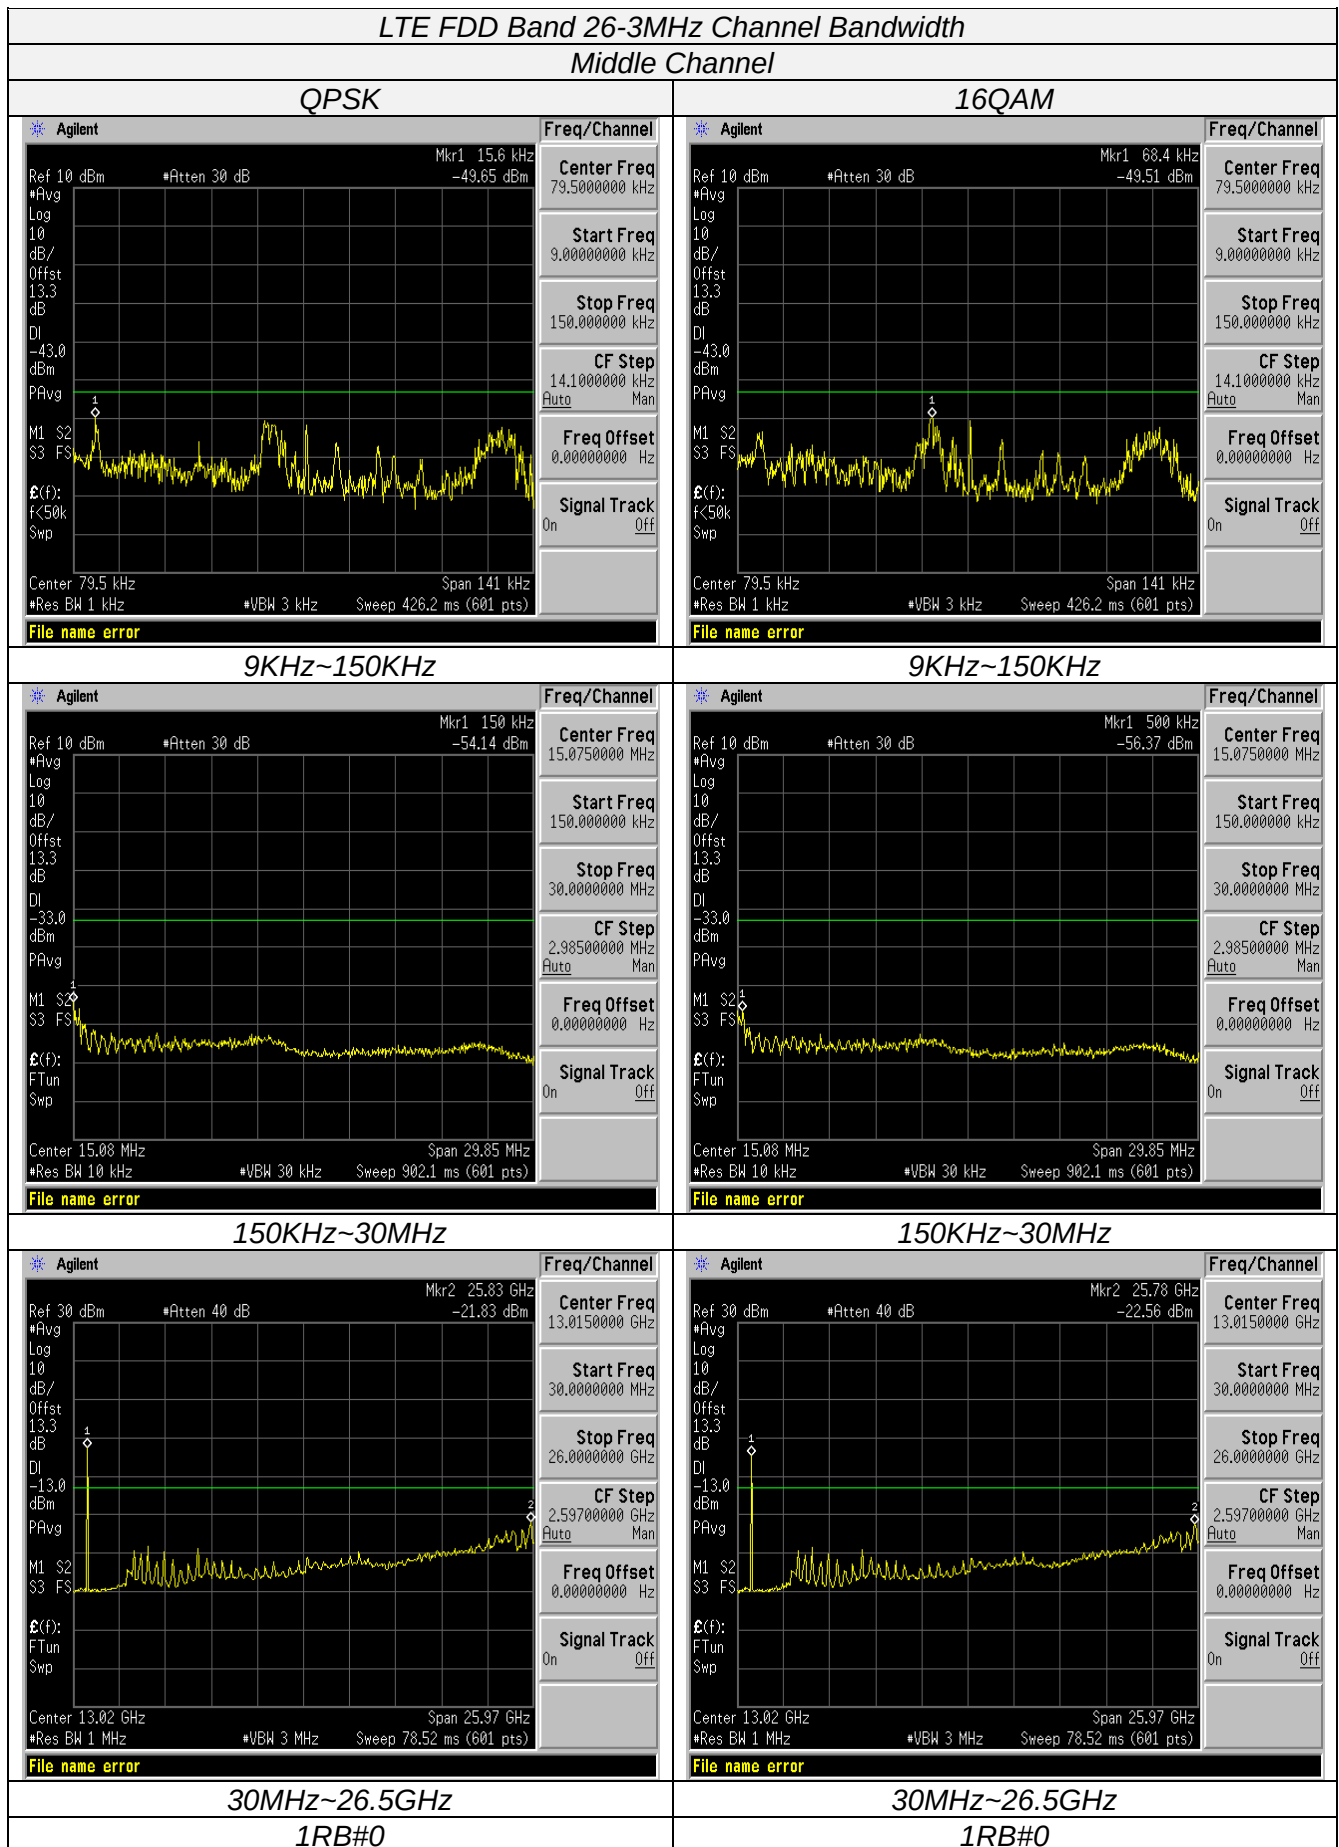


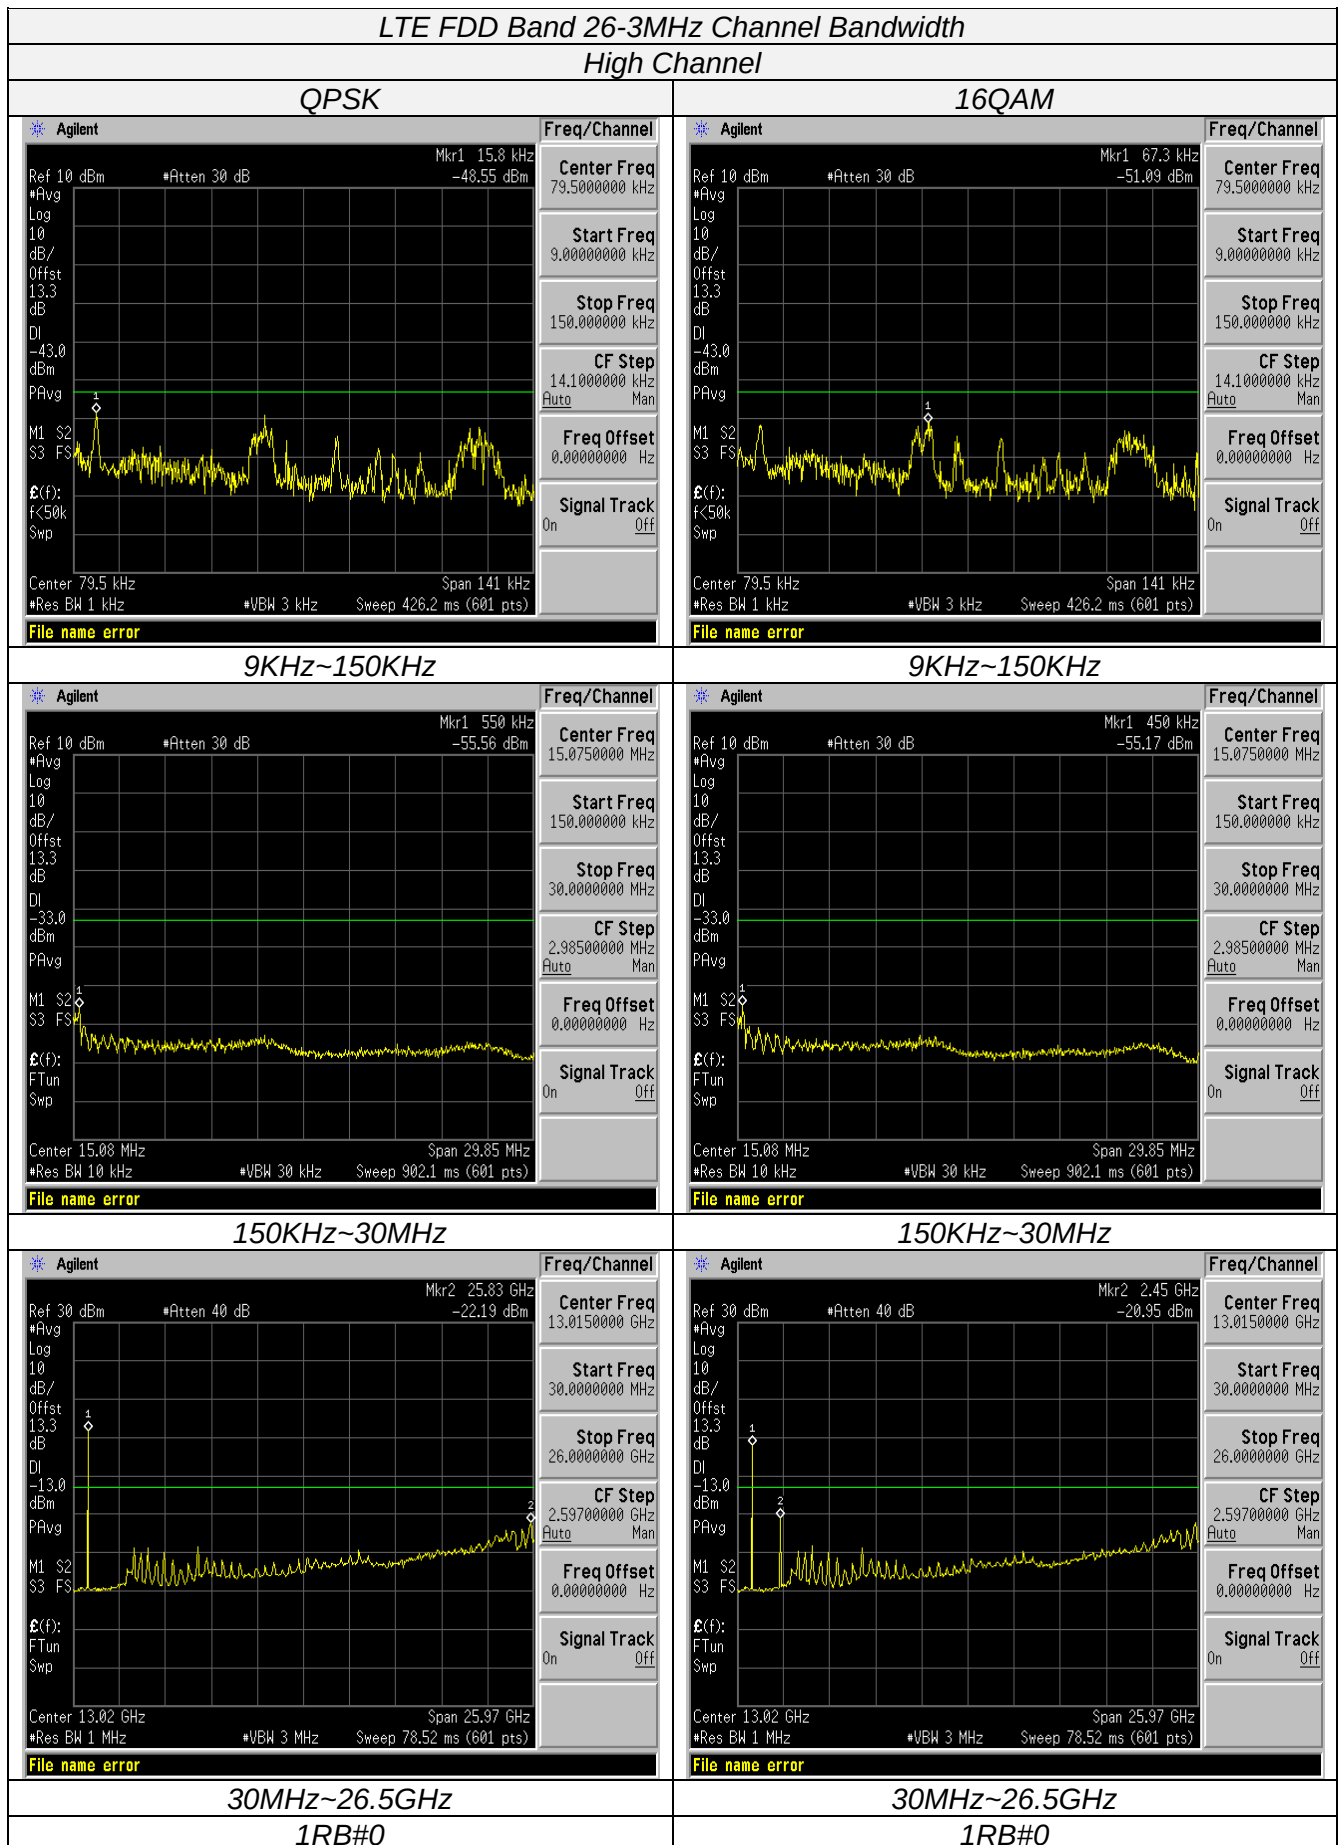


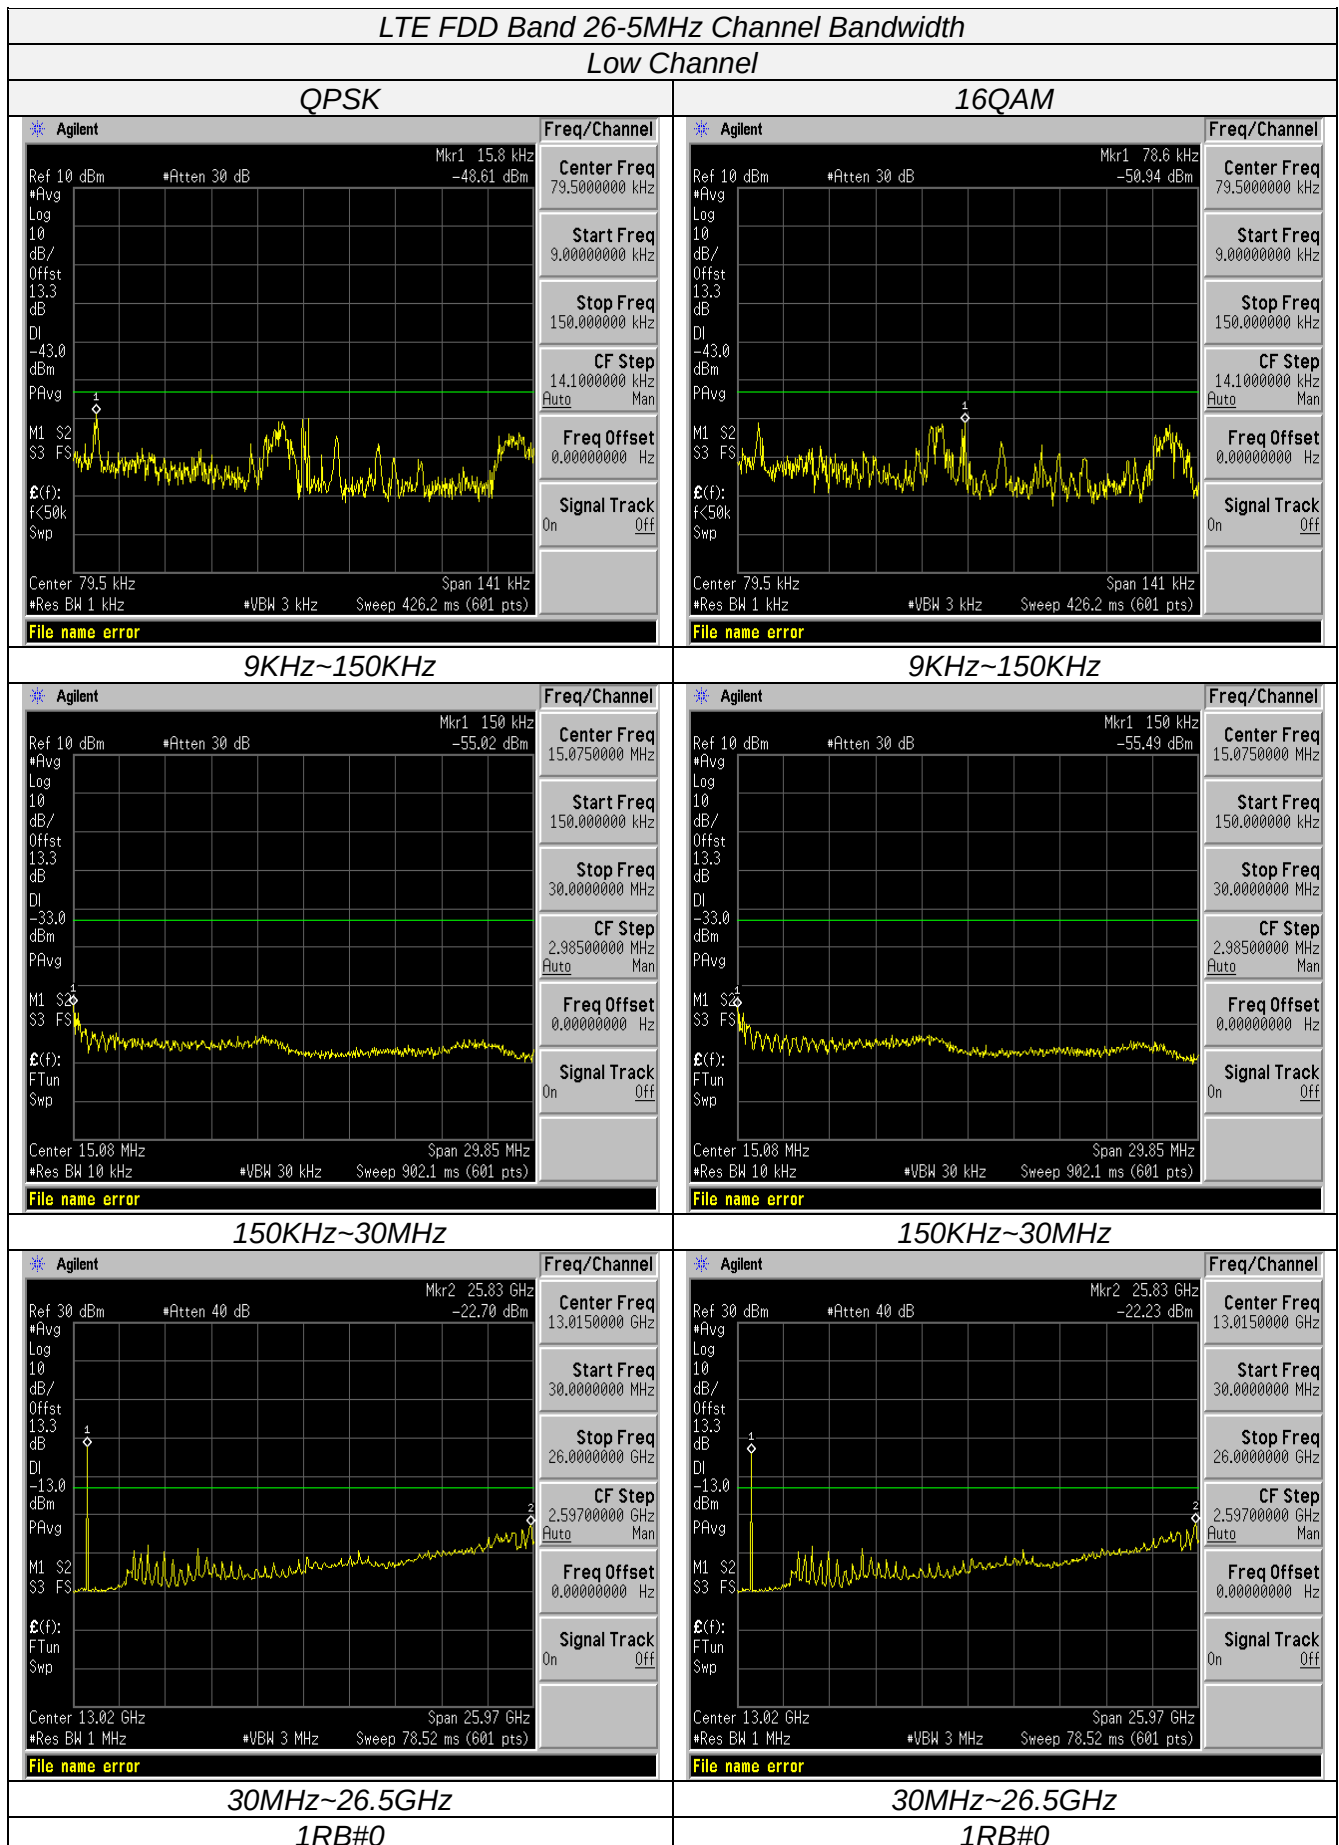


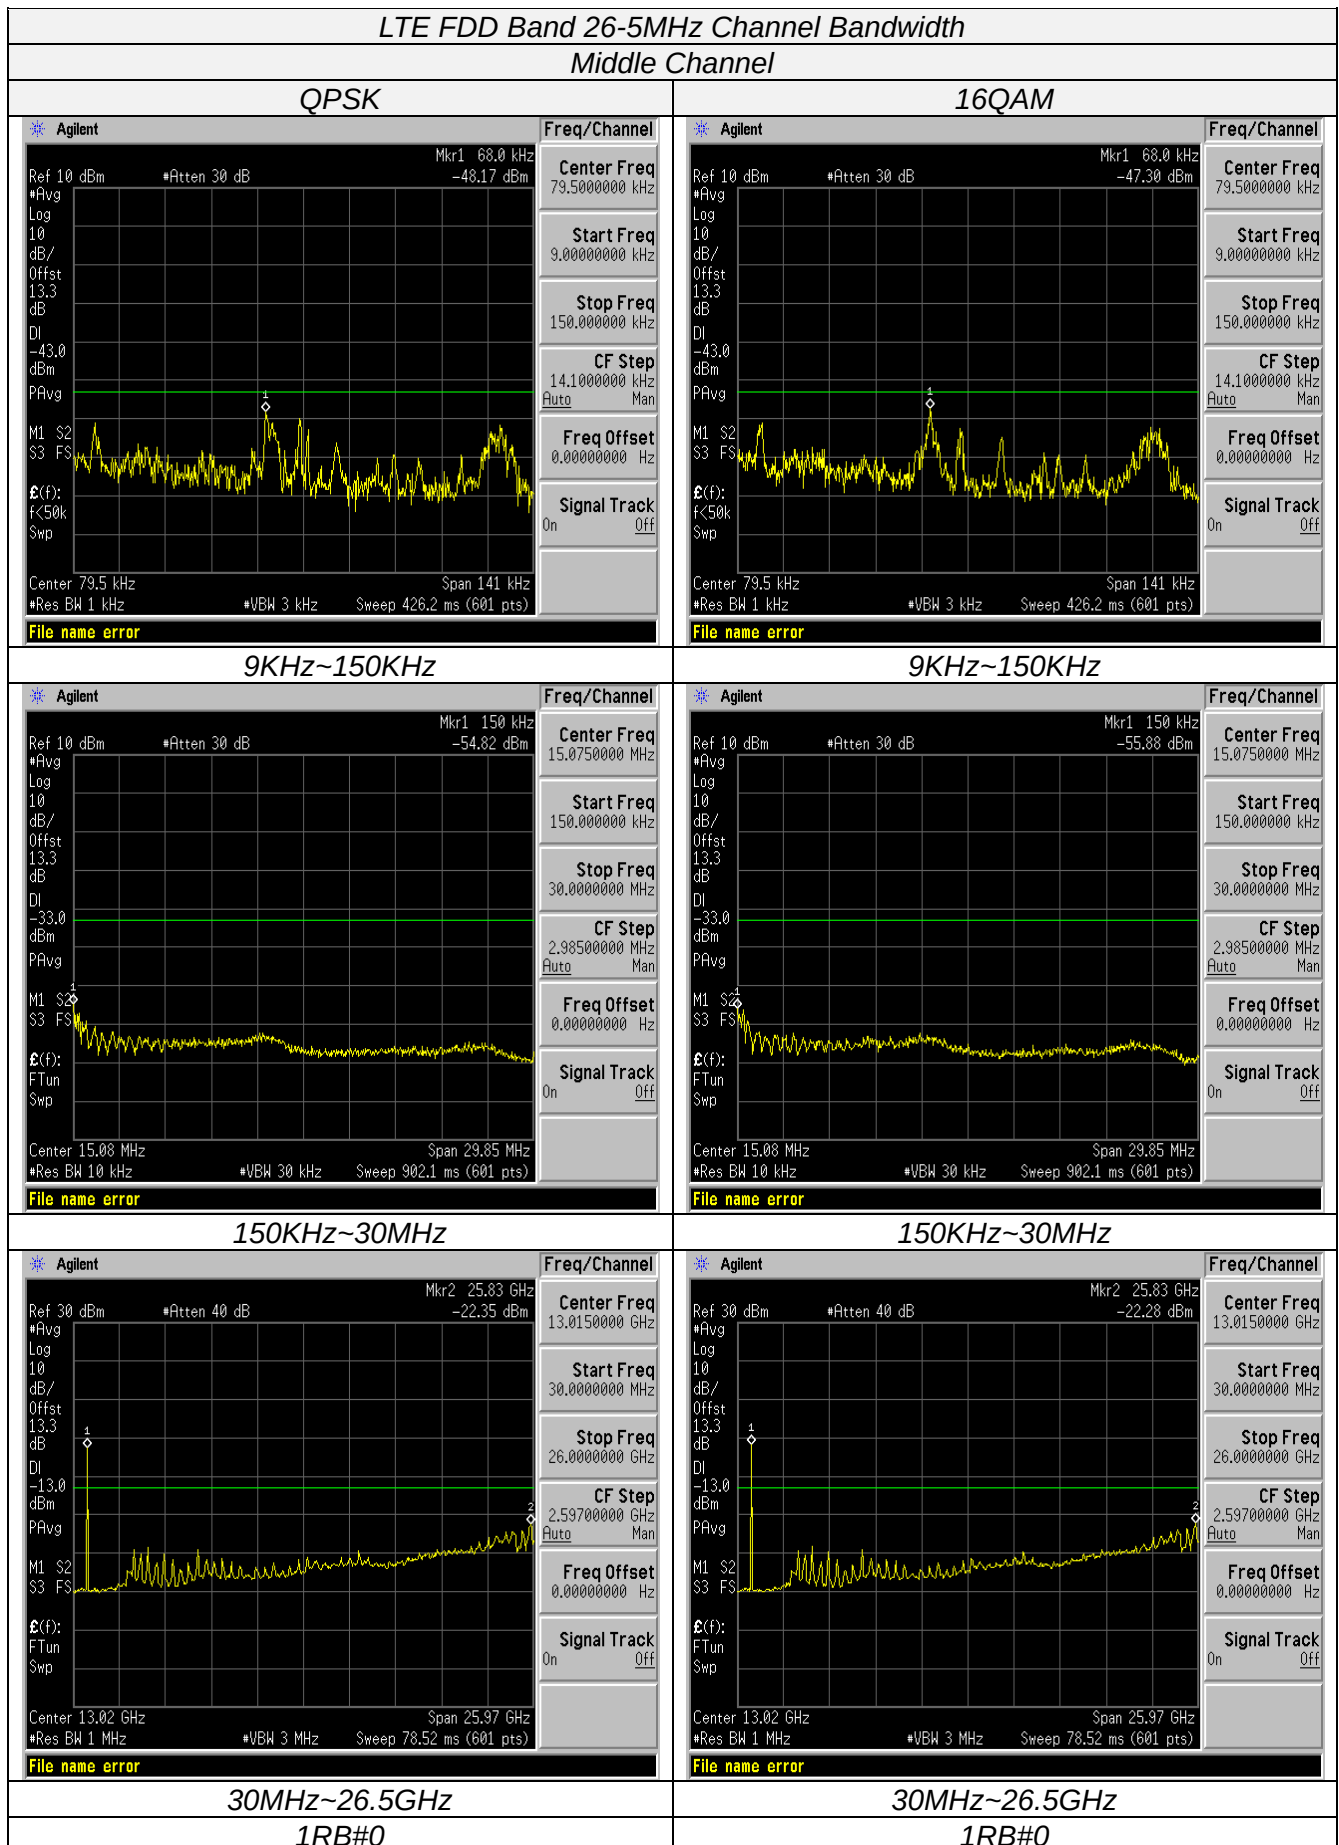


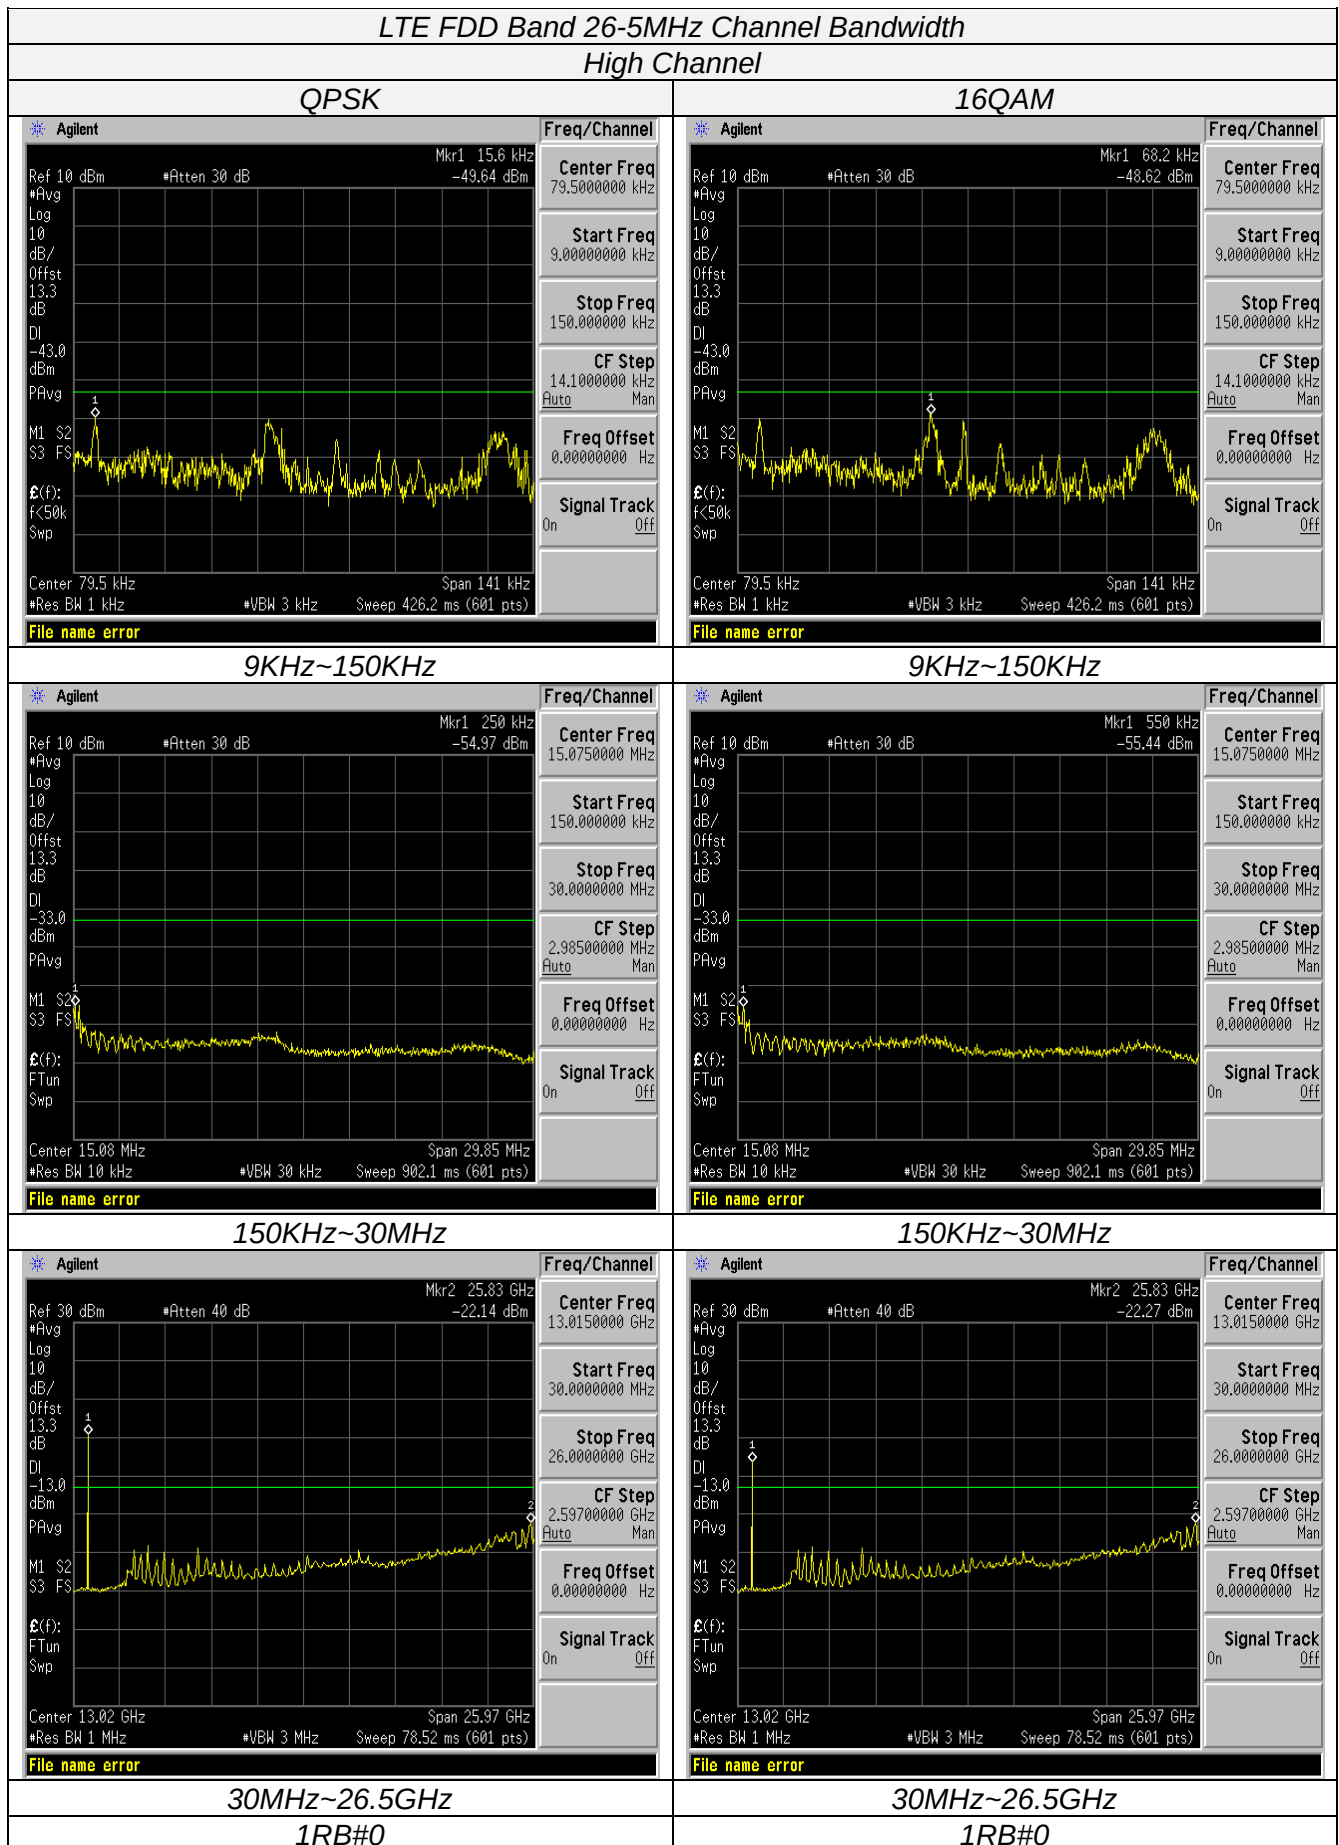


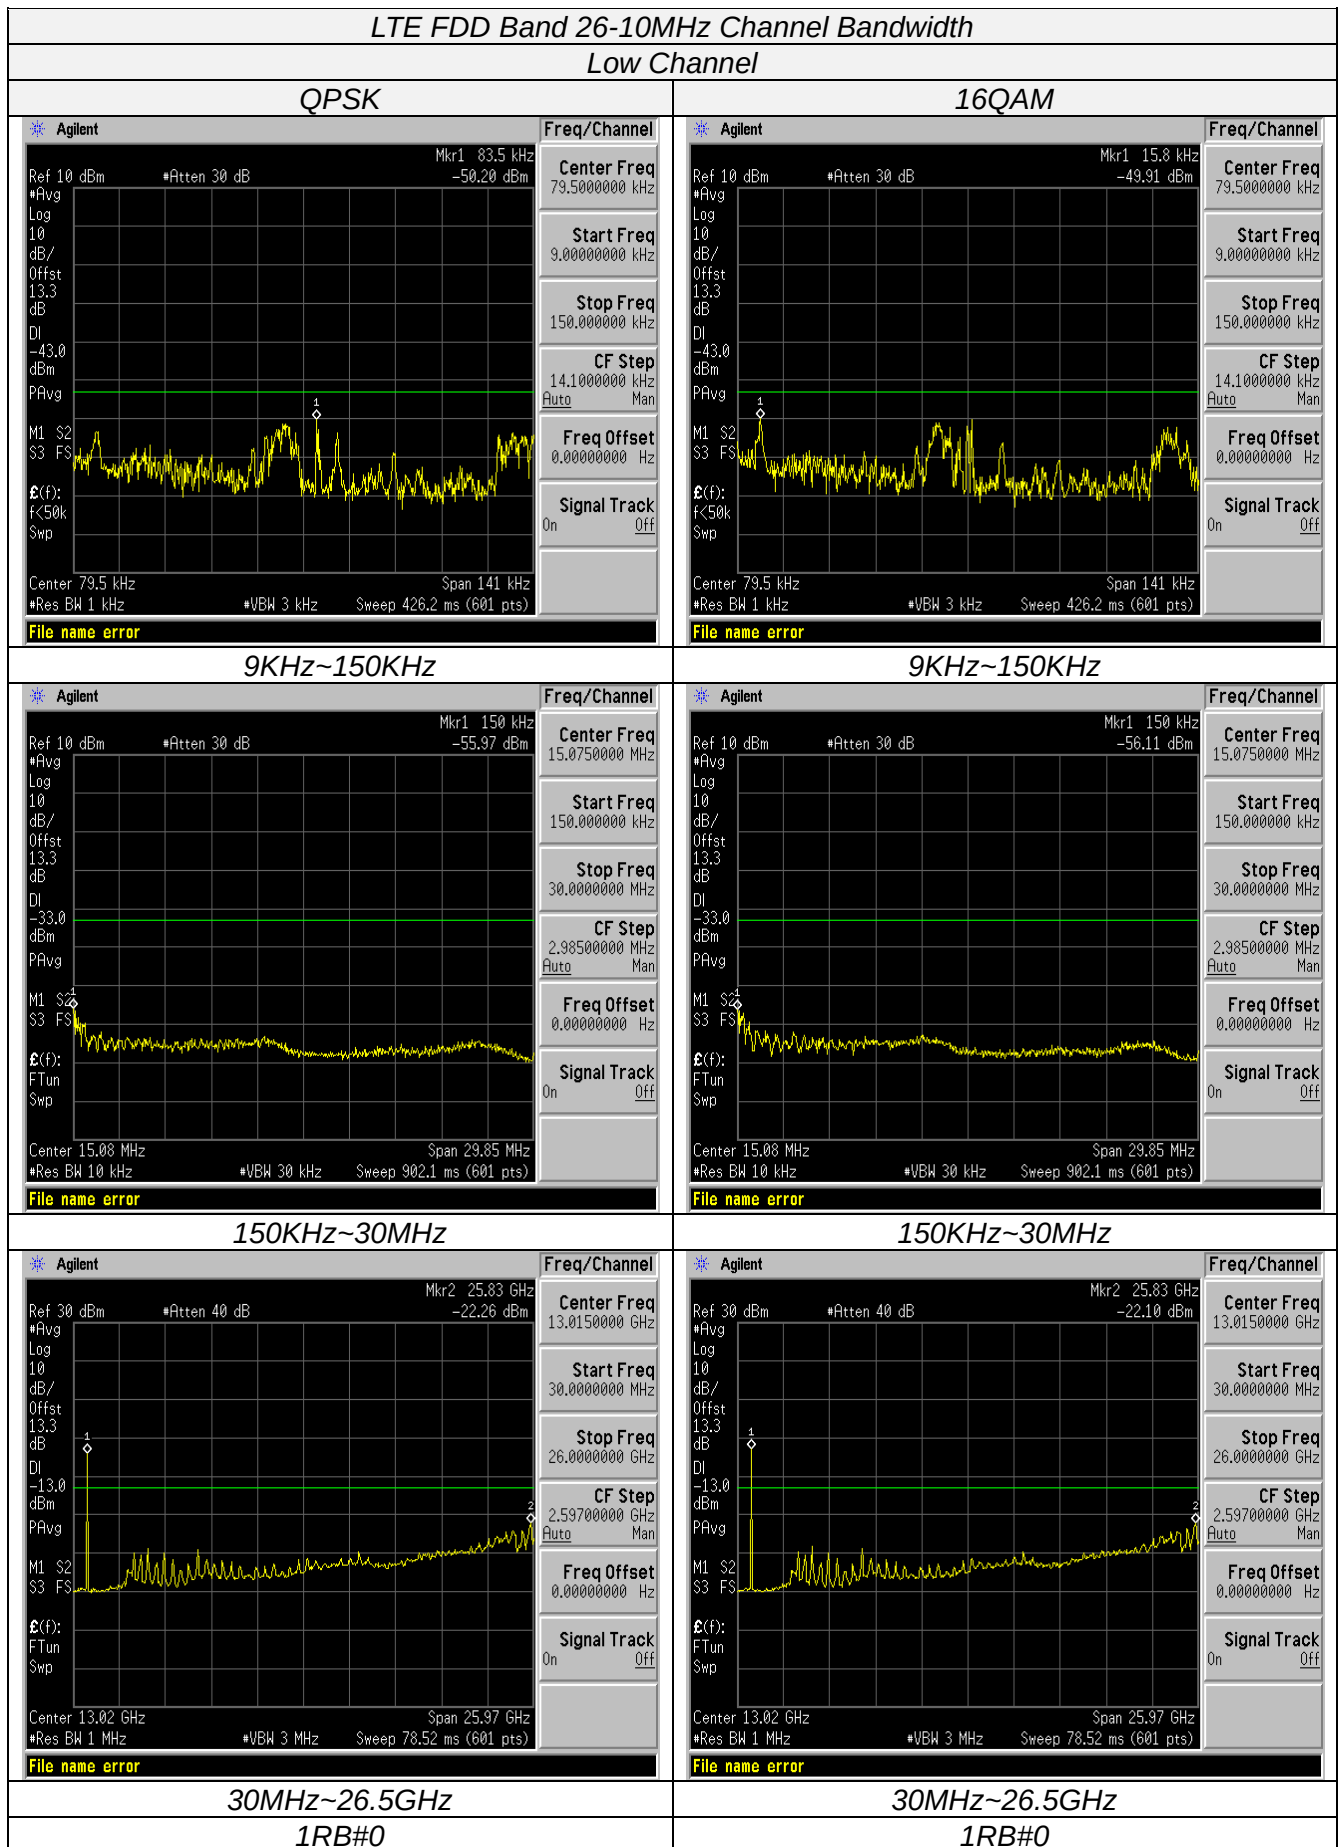


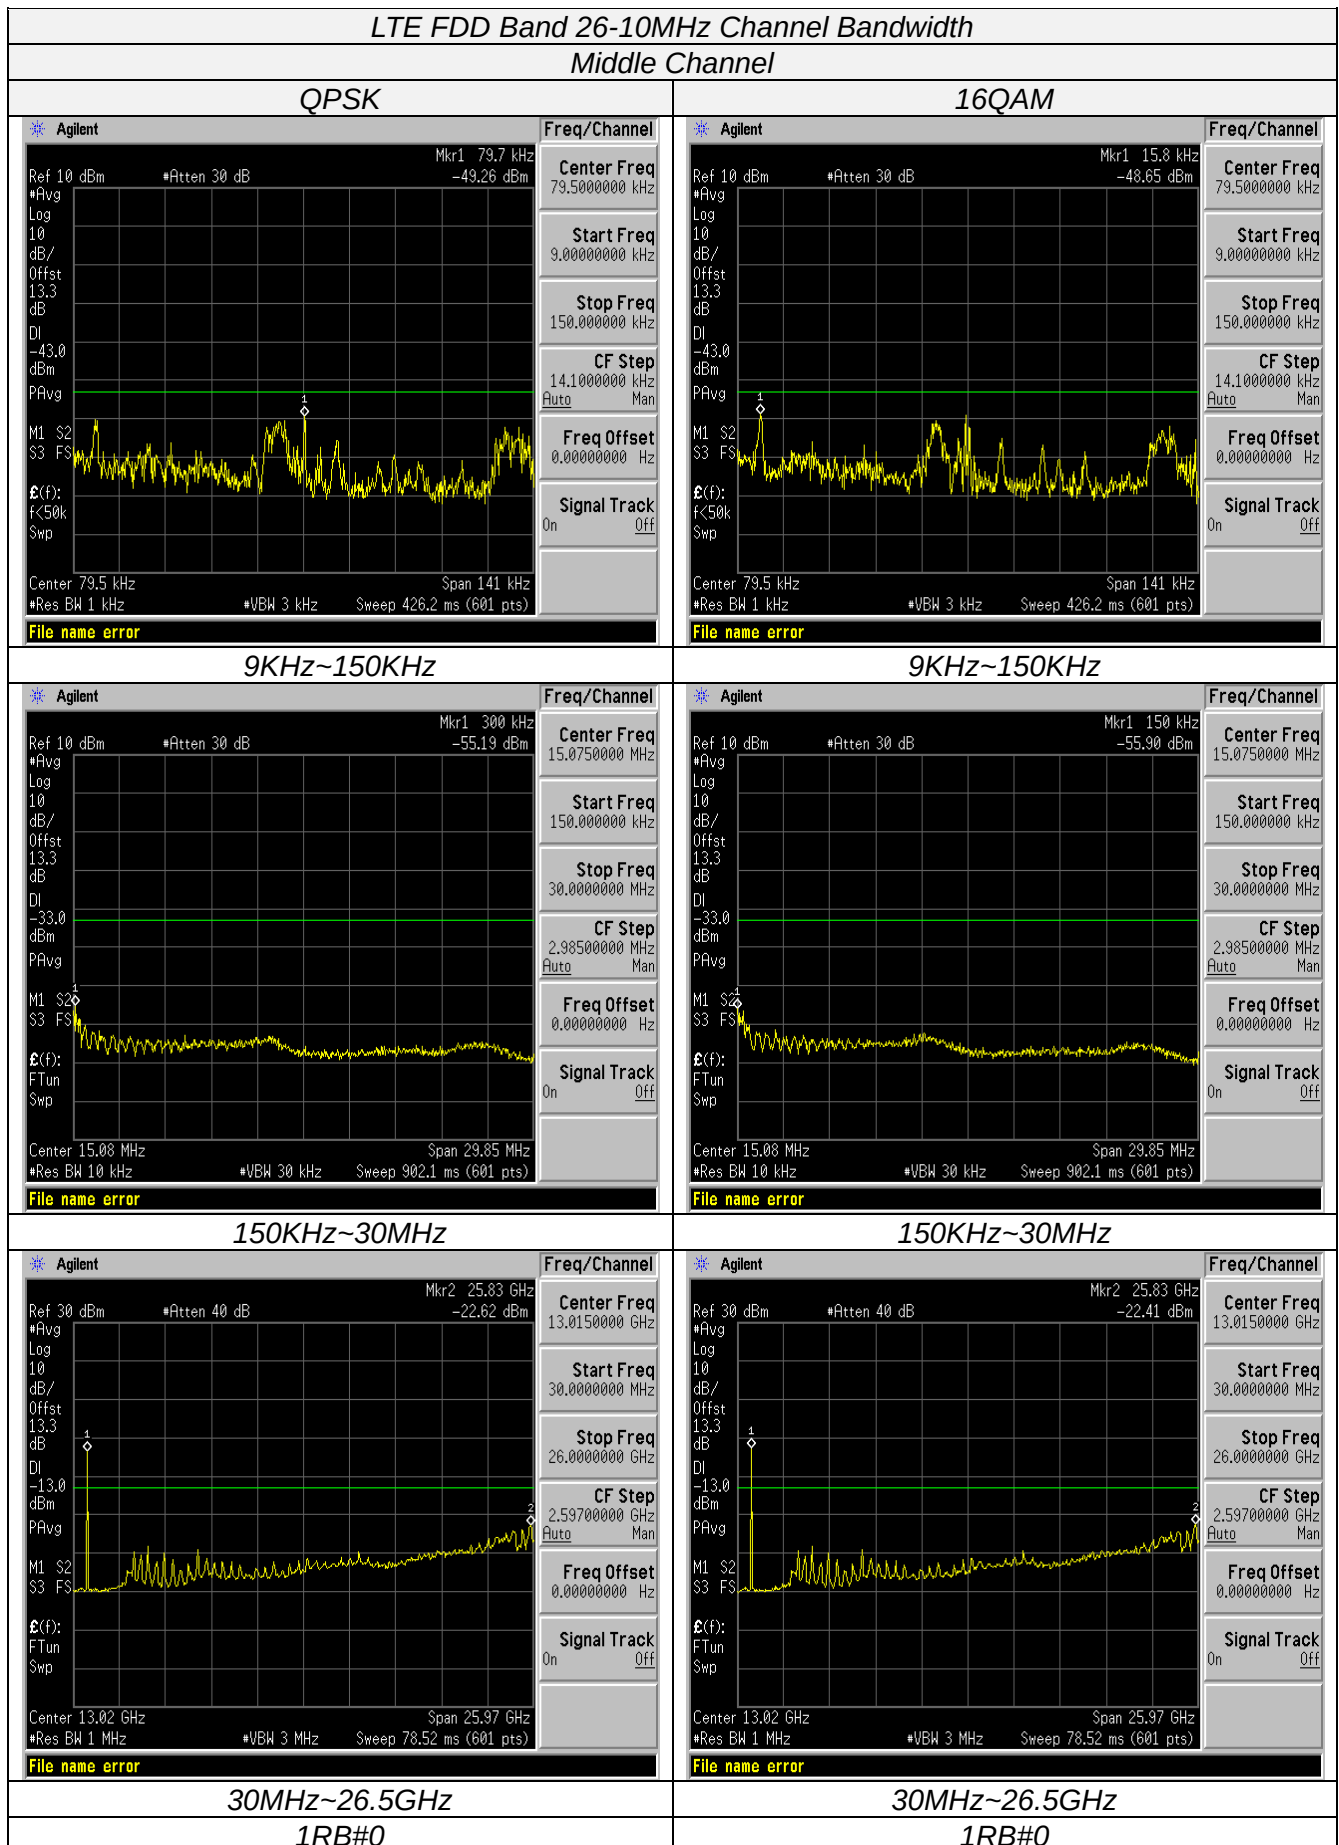

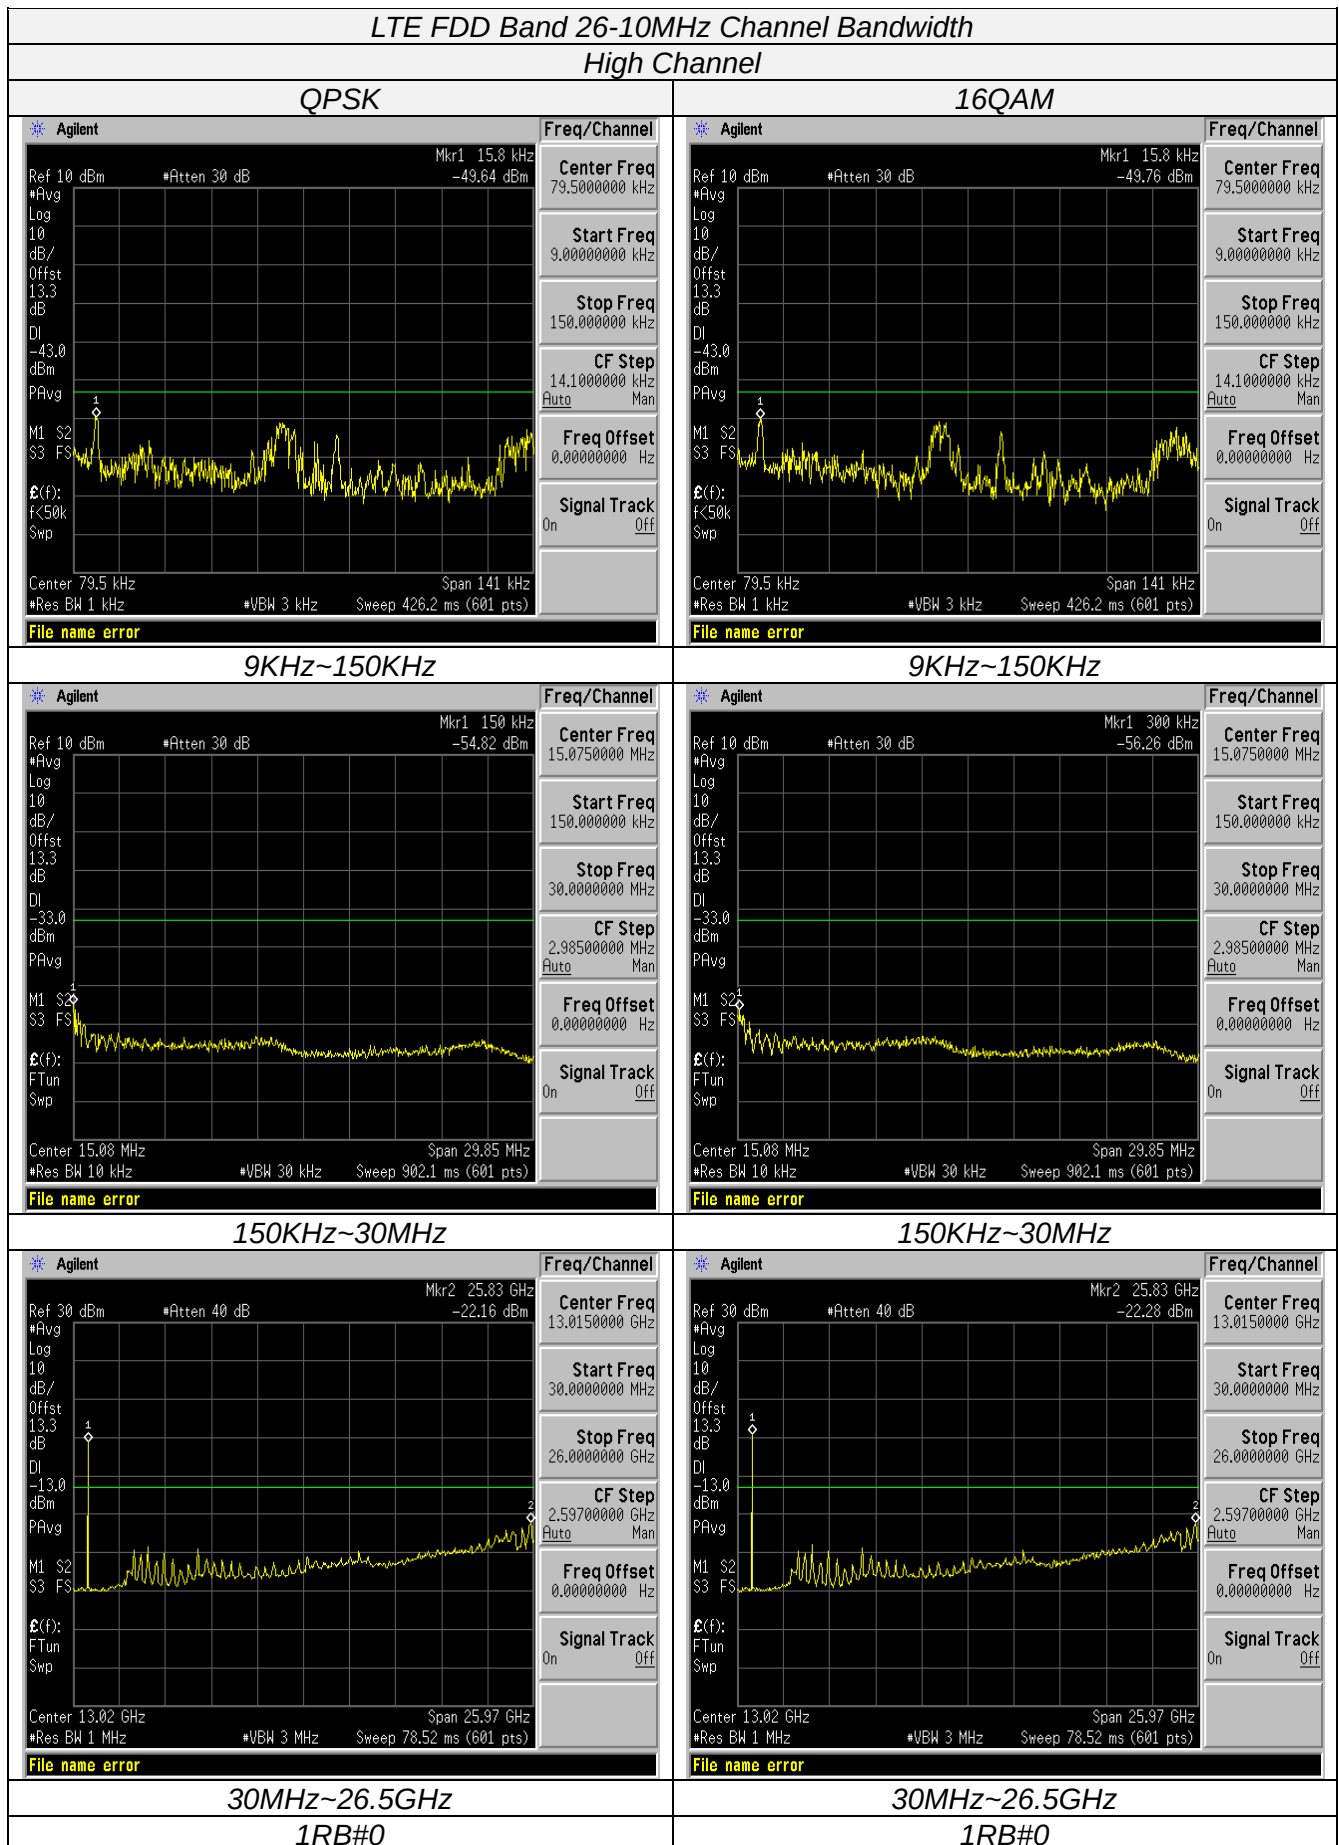

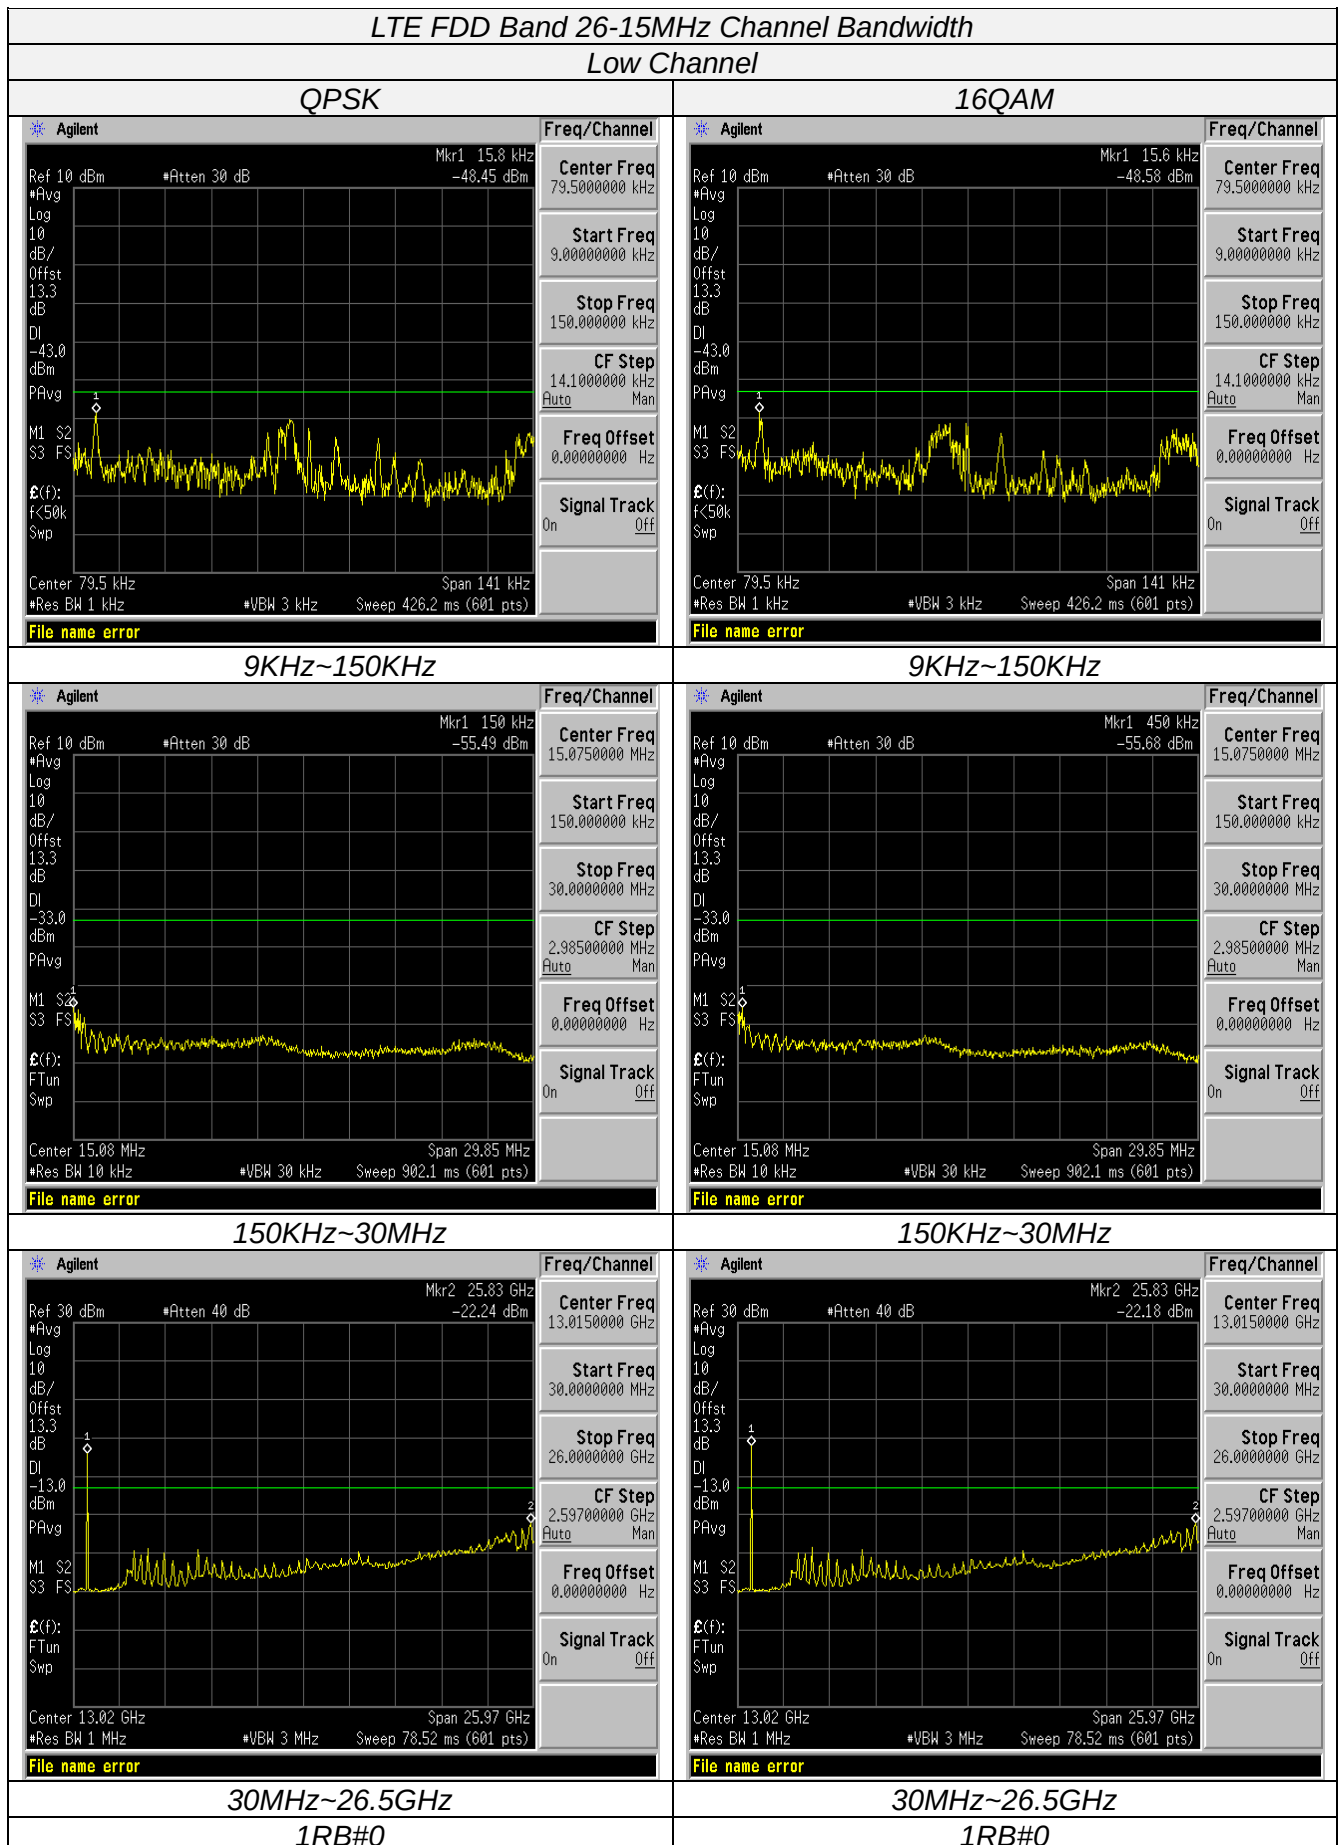

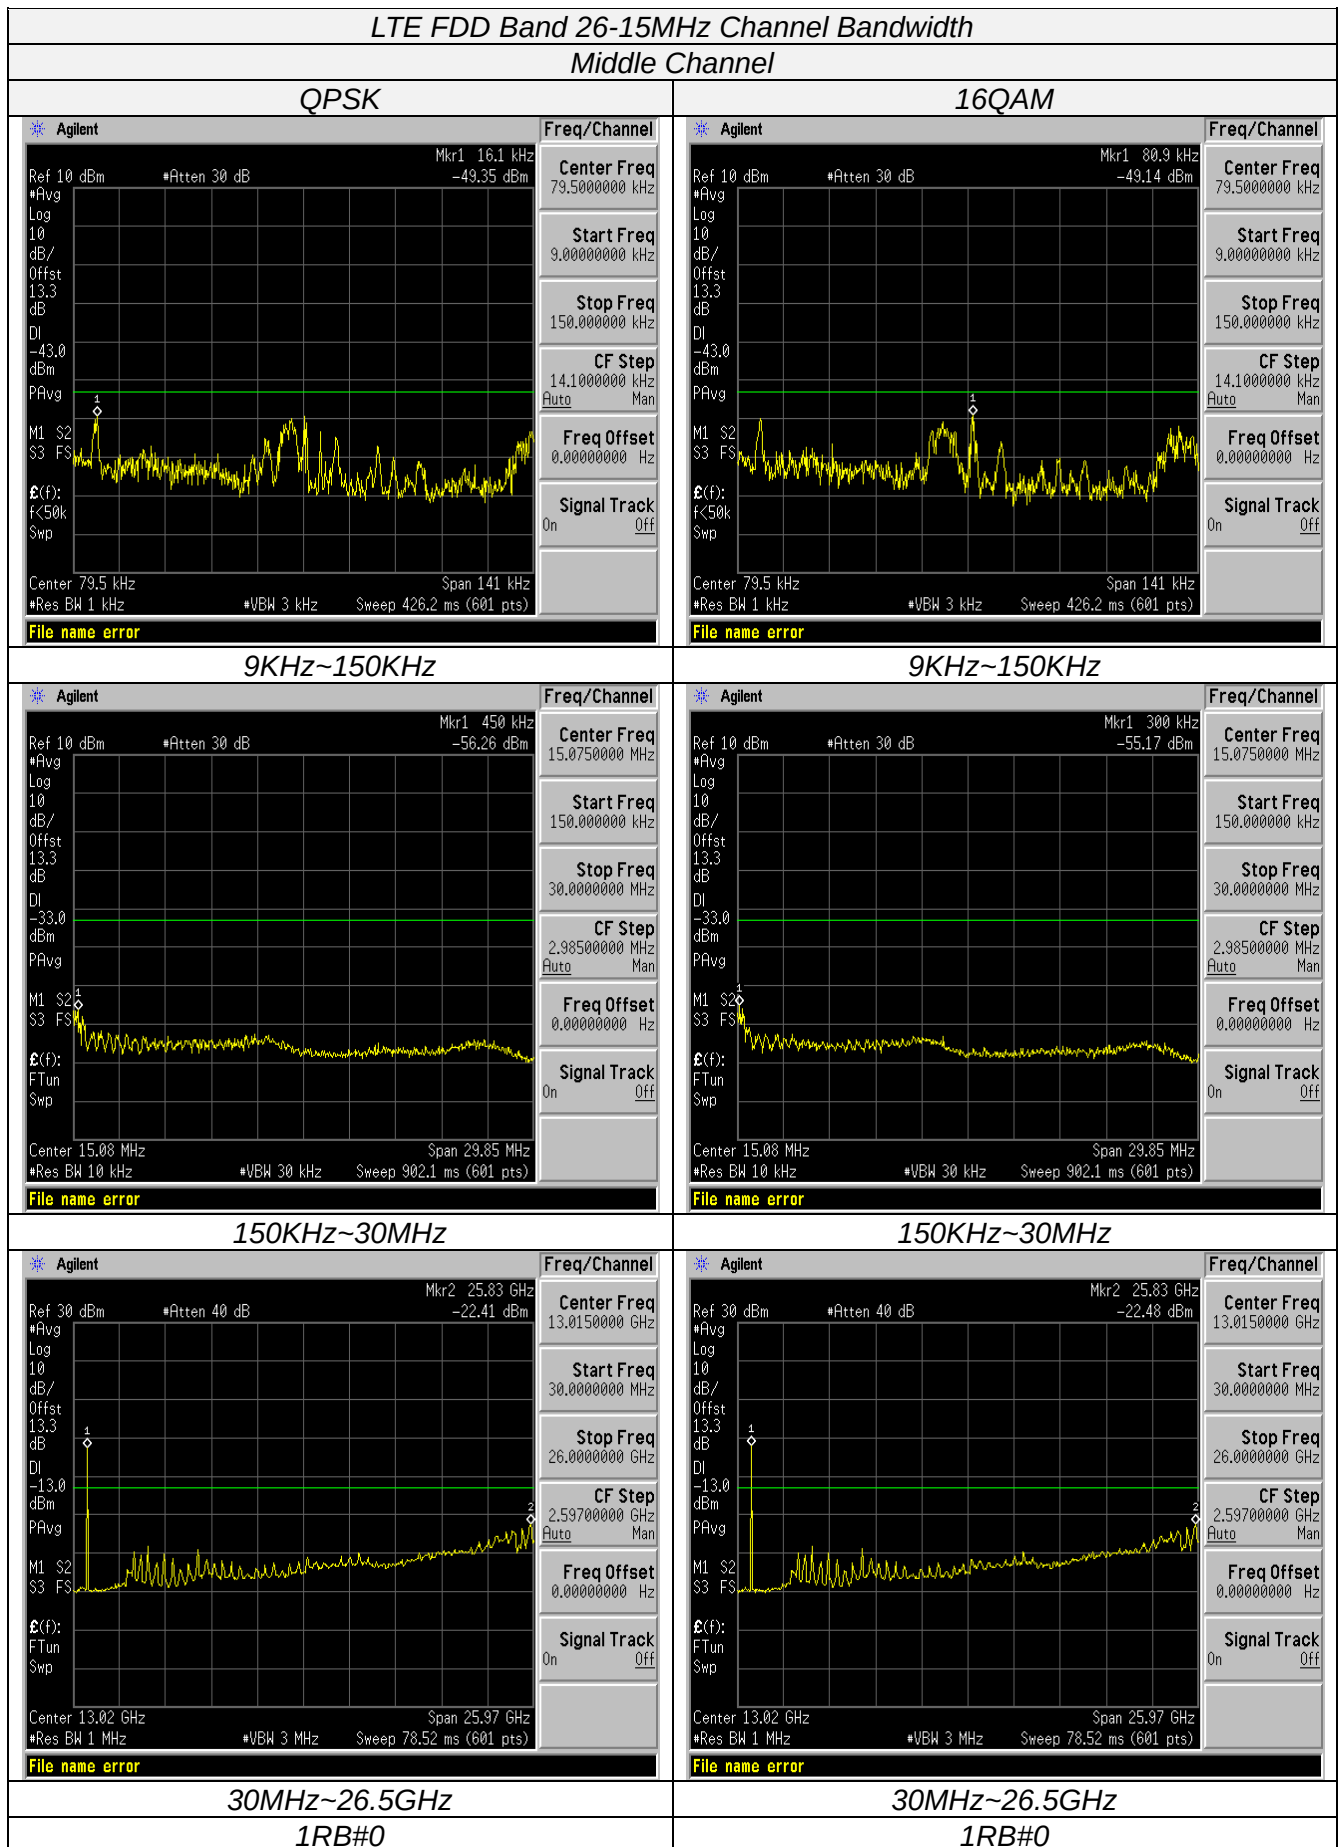

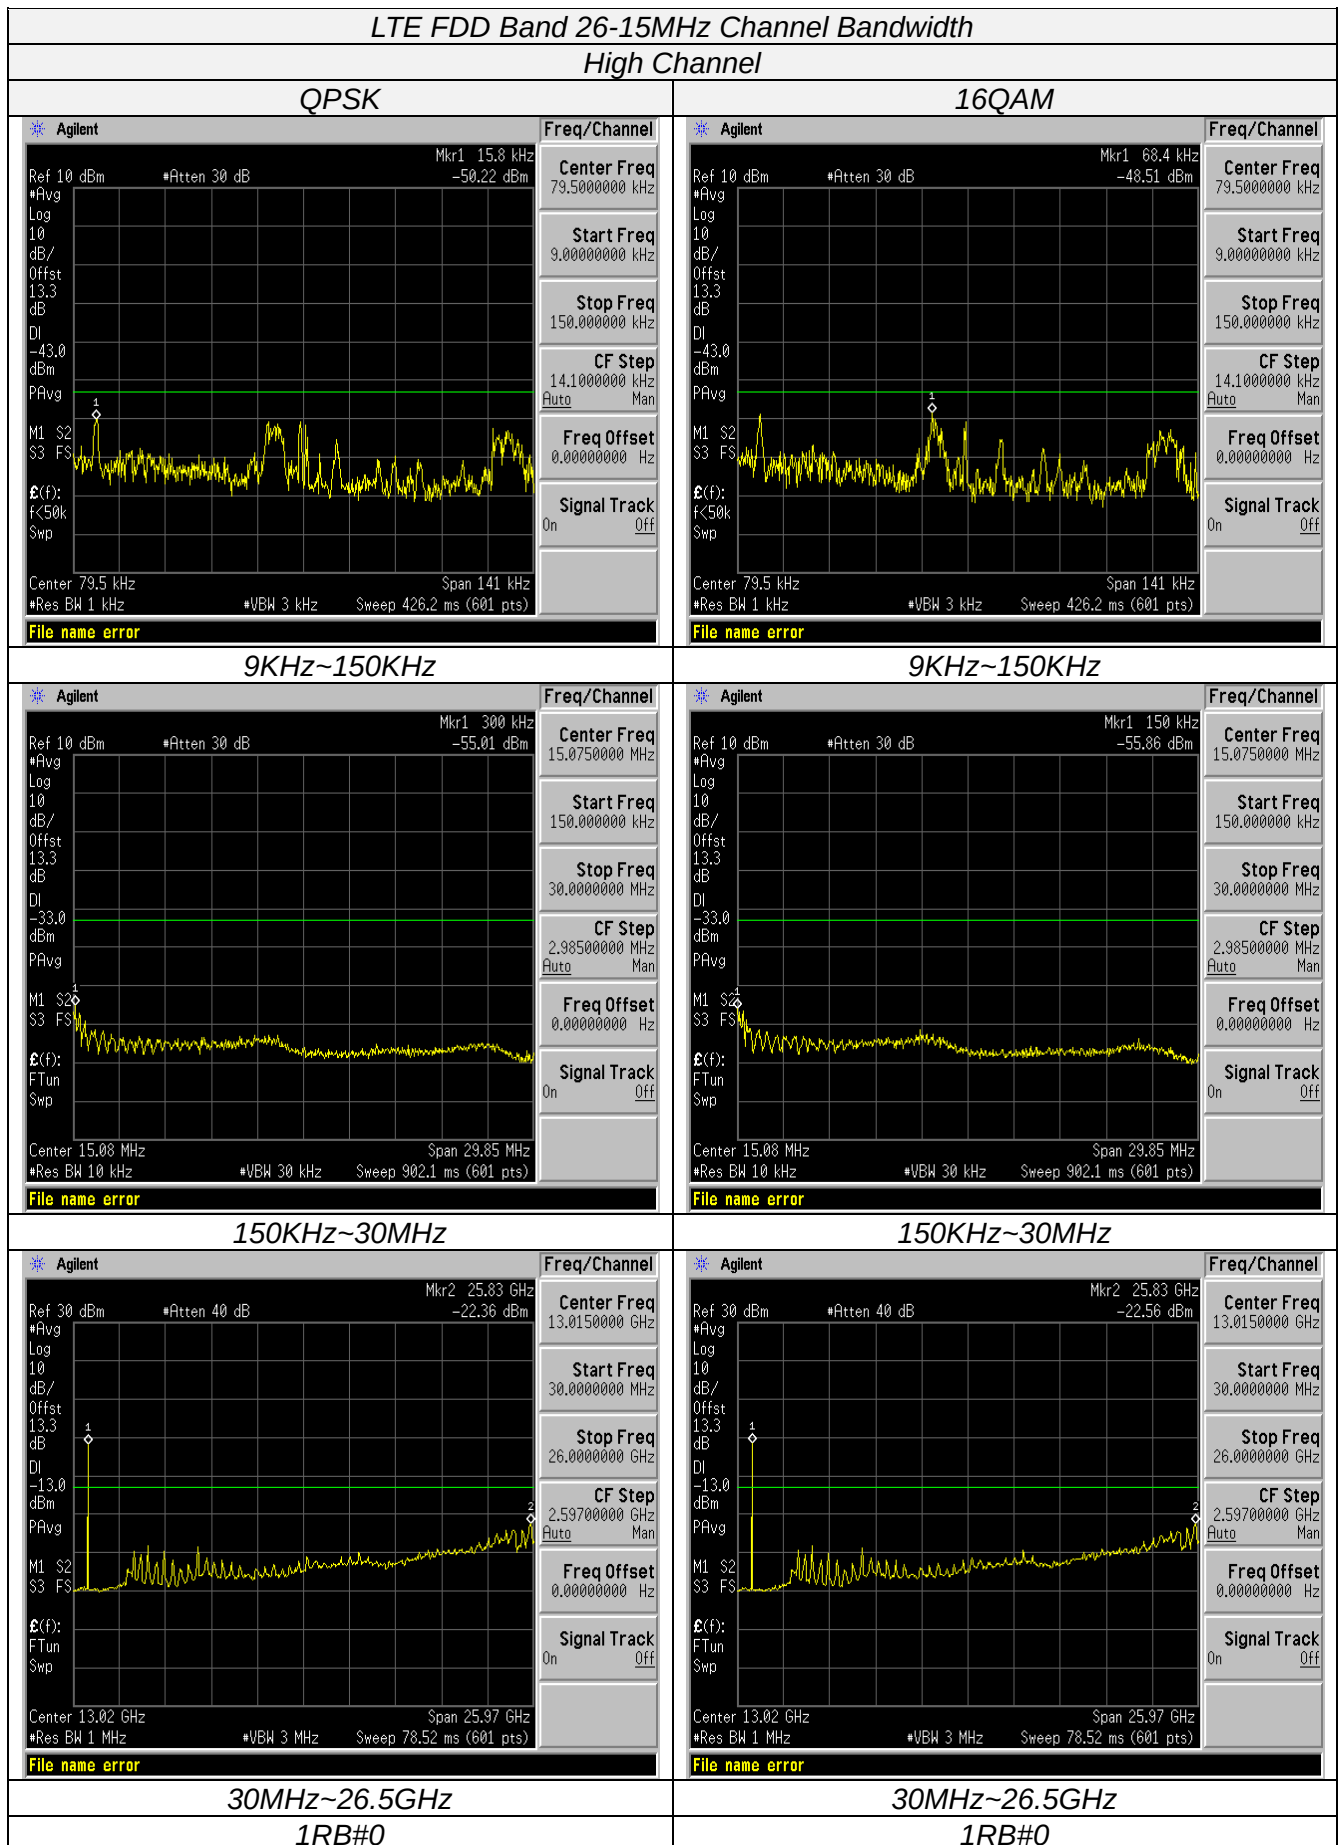

Radiated Measurement:*Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case for each Channel Bandwidth of LTE FDD Band 26 @ QPSK.
2. $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. $Margin = Limit - EIRP$

LTE FDD Band 26_Channel Bandwidth 1.4MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1649.4	-35.93	3.00	3.00	9.58	-29.35	-13.00	16.35	H
2474.1	-36.32	3.03	3.00	10.72	-28.63	-13.00	15.63	H
1649.4	-34.19	3.00	3.00	9.68	-27.51	-13.00	14.51	V
2474.1	-34.56	3.03	3.00	10.72	-26.87	-13.00	13.87	V

LTE FDD Band 26_Channel Bandwidth 1.4MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-39.42	3.00	3.00	9.61	-32.81	-13.00	19.81	H
2509.5	-35.89	3.03	3.00	10.77	-28.15	-13.00	15.15	H
1673.0	-37.44	3.00	3.00	9.61	-30.83	-13.00	17.83	V
2509.5	-34.37	3.03	3.00	10.77	-26.63	-13.00	13.63	V

LTE FDD Band 26_Channel Bandwidth 1.4MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1696.6	-39.61	3.00	3.00	9.77	-32.84	-13.00	19.84	H
2544.9	-37.72	3.03	3.00	10.89	-29.86	-13.00	16.86	H
1696.6	-37.90	3.00	3.00	9.77	-31.13	-13.00	18.13	V
2544.9	-35.16	3.03	3.00	10.89	-27.30	-13.00	14.30	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1651.0	-39.40	3.00	3.00	9.58	-32.82	-13.00	19.82	H
2476.5	-36.87	3.03	3.00	10.72	-29.18	-13.00	16.18	H
1651.0	-37.65	3.00	3.00	9.68	-30.97	-13.00	17.97	V
2476.5	-34.16	3.03	3.00	10.72	-26.47	-13.00	13.47	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-40.28	3.00	3.00	9.61	-33.67	-13.00	20.67	H
2509.5	-36.61	3.03	3.00	10.77	-28.87	-13.00	15.87	H
1673.0	-38.34	3.00	3.00	9.61	-31.73	-13.00	18.73	V
2509.5	-34.31	3.03	3.00	10.77	-26.57	-13.00	13.57	V

LTE FDD Band 26_Channel Bandwidth 3MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1695.0	-38.25	3.00	3.00	9.77	-31.48	-13.00	18.48	H
2542.5	-35.46	3.03	3.00	10.89	-27.60	-13.00	14.60	H
1695.0	-36.69	3.00	3.00	9.77	-29.92	-13.00	16.92	V
2542.5	-32.90	3.03	3.00	10.89	-25.04	-13.00	12.04	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653.0	-37.15	3.00	3.00	9.58	-30.57	-13.00	17.57	H
2479.5	-37.20	3.03	3.00	10.72	-29.51	-13.00	16.51	H
1653.0	-35.08	3.00	3.00	9.68	-28.40	-13.00	15.40	V
2479.5	-34.79	3.03	3.00	10.72	-27.10	-13.00	14.10	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-38.28	3.00	3.00	9.61	-31.67	-13.00	18.67	H
2509.5	-34.78	3.03	3.00	10.77	-27.04	-13.00	14.04	H
1673.0	-35.71	3.00	3.00	9.61	-29.10	-13.00	16.10	V
2509.5	-31.98	3.03	3.00	10.77	-24.24	-13.00	11.24	V

LTE FDD Band 26_Channel Bandwidth 5MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.0	-39.05	3.00	3.00	9.77	-32.28	-13.00	19.28	H
2539.5	-36.66	3.03	3.00	10.89	-28.80	-13.00	15.80	H
1693.0	-36.25	3.00	3.00	9.77	-29.48	-13.00	16.48	V
2539.5	-34.45	3.03	3.00	10.89	-26.59	-13.00	13.59	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.0	-39.66	3.00	3.00	9.58	-33.08	-13.00	20.08	H
2487.0	-37.12	3.03	3.00	10.72	-29.43	-13.00	16.43	H
1658.0	-36.99	3.00	3.00	9.68	-30.31	-13.00	17.31	V
2487.0	-35.15	3.03	3.00	10.72	-27.46	-13.00	14.46	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-36.01	3.00	3.00	9.61	-29.40	-13.00	16.40	H
2509.5	-36.39	3.03	3.00	10.77	-28.65	-13.00	15.65	H
1673.0	-33.42	3.00	3.00	9.61	-26.81	-13.00	13.81	V
2509.5	-34.50	3.03	3.00	10.77	-26.76	-13.00	13.76	V

LTE FDD Band 26_Channel Bandwidth 10MHz_QPSK_High Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688.0	-40.34	3.00	3.00	9.77	-33.57	-13.00	20.57	H
2532.0	-36.65	3.03	3.00	10.89	-28.79	-13.00	15.79	H
1688.0	-37.71	3.00	3.00	9.77	-30.94	-13.00	17.94	V
2532.0	-34.02	3.03	3.00	10.89	-26.16	-13.00	13.16	V

LTE FDD Band 26_Channel Bandwidth 15MHz_QPSK_Low Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1663.0	-36.60	3.00	3.00	9.58	-30.02	-13.00	17.02	H
2494.5	-37.20	3.03	3.00	10.72	-29.51	-13.00	16.51	H
1663.0	-34.35	3.00	3.00	9.68	-27.67	-13.00	14.67	V
2494.5	-34.41	3.03	3.00	10.72	-26.72	-13.00	13.72	V

LTE FDD Band 26_Channel Bandwidth 15MHz_QPSK_Middle Channel

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.0	-38.77	3.00	3.00	9.61	-32.16	-13.00	19.16	H
2509.5	-35.23	3.03	3.00	10.77	-27.49	-13.00	14.49	H
1673.0	-36.99	3.00	3.00	9.61	-30.38	-13.00	17.38	V
2509.5	-33.49	3.03	3.00	10.77	-25.75	-13.00	12.75	V

LTE FDD Band 26_Channel Bandwidth 15MHz_QPSK_High Channel


Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	Diatance	G _a Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1683.0	-38.10	3.00	3.00	9.77	-31.33	-13.00	18.33	H
2524.5	-37.48	3.03	3.00	10.89	-29.62	-13.00	16.62	H
1683.0	-35.62	3.00	3.00	9.77	-28.85	-13.00	15.85	V
2524.5	-35.12	3.03	3.00	10.89	-27.26	-13.00	14.26	V

3.6 Frequency Stability under Temperature & Voltage Variations

LIMIT

According to §22.917, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

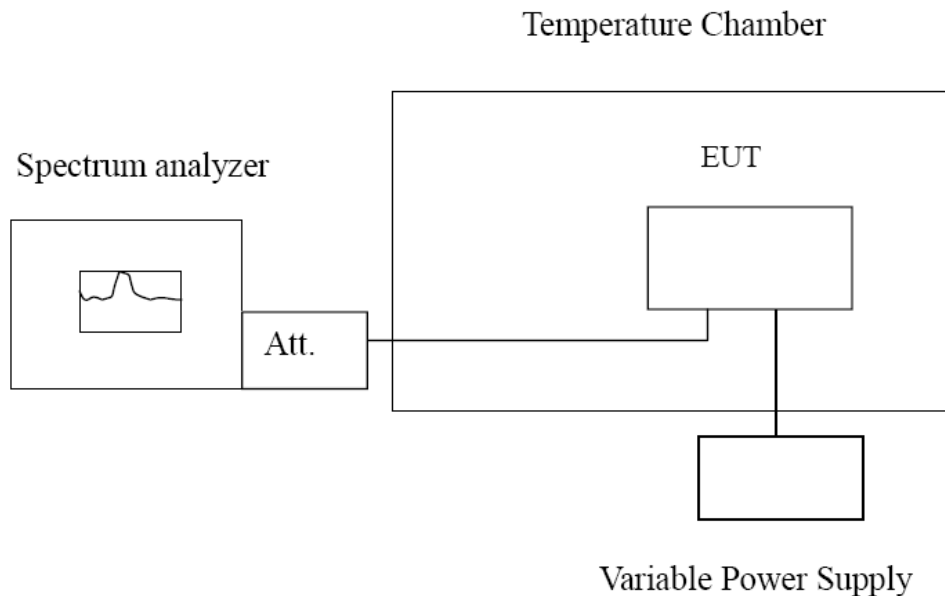

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability Under Temperature Variations:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 26, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the

desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 26; recorded worst case.

LTE Band 26, 1.4MHz bandwidth (worst case of all bandwidths)


Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
3.80	-7.34	5.89	-0.00877	0.00704	2.50
4.37	-0.81	8.51	-0.00097	0.01017	2.50
3.23	-6.23	-2.20	-0.00745	-0.00263	2.50

Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	-0.46	-5.41	-0.00055	-0.00647	2.50
-20°	6.15	-5.60	0.00735	-0.00669	2.50
-10°	-3.88	9.16	-0.00464	0.01095	2.50
0°	-7.12	1.07	-0.00851	0.00128	2.50
10°	2.64	-1.51	0.00316	-0.00181	2.50
20°	-6.23	9.22	-0.00745	0.01102	2.50
30°	-9.10	1.58	-0.01088	0.00189	2.50
40°	-7.23	6.90	-0.00864	0.00825	2.50
50°	9.39	-0.26	0.01123	-0.00031	2.50

4 Test Setup Photos of the EUT

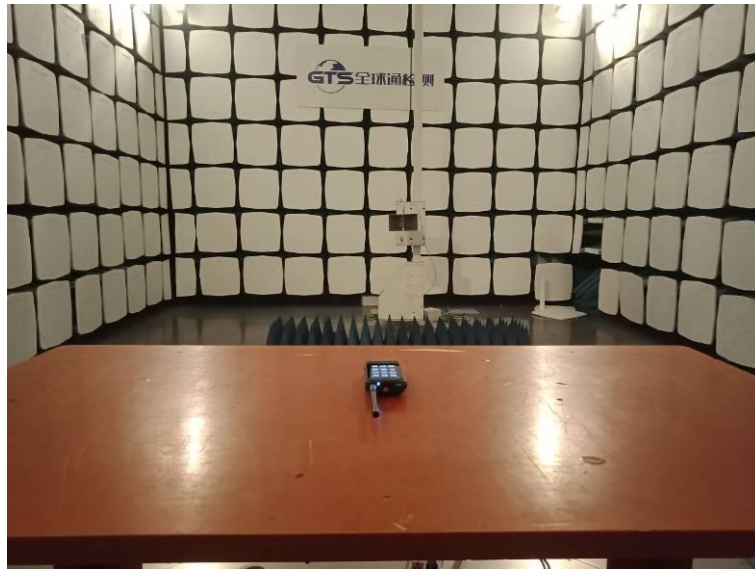

5 Photos of the EUT

Reference to the test report No. GTS20191021009-1-9-1

******* End of Report *******