



Shenzhen xingtong wireless technology co.,
Telephone: +86-755- 27850514 Fax: +86- 0755-27850514
Address: 3/F, Building A1, Qiangrongdong Industrial Zone,
Jiuwei, Xixiang, Baoan District, Shenzhen

Product specification

Product number: B5-WIFI-2.4/5GHZ

Product name: B5-FPC-WIFI-ANT

Product item number:ANT-B5WIFIANT0-XT002

Please accept your signature and seal and return one copy to our company for filing. Thank you for your cooperation!



Shenzhen Xingtong Wieress Technology Co., Ltd

Date

2023-11-06

Version

A0

File number

XT-YF-004

Product model

XT-B5-WIFI-207

Product number

B5-WIFI-APP

1.Product Constrution:


- 1. Antenna material: FPC
- 2. Adhesive tvne: 3M300
- 3. Antenna size: 38.3*21.2 (Tolerance+0.2)
- 4. Coaxial line size: 207 * 0.81 single head third-generation IPEX terminal (tolerance ± 1.0mm)

2. parameters


- Scope of use: customer-supplied machines
- Antenna frequency: 2412-2484Mhz 5150-5850Mhz
- Polarization method: horizontal/vertical
- Antenna free space gain: 2.4G≥1.5dbi 5G≥2.2dbi
- Installation mode: terminal wire is welded to motherboard OUT
- Packing method: use PE bag+packing box

3.S11 value of antenna (S11)

■ 3.1: antenna standing wave ratio

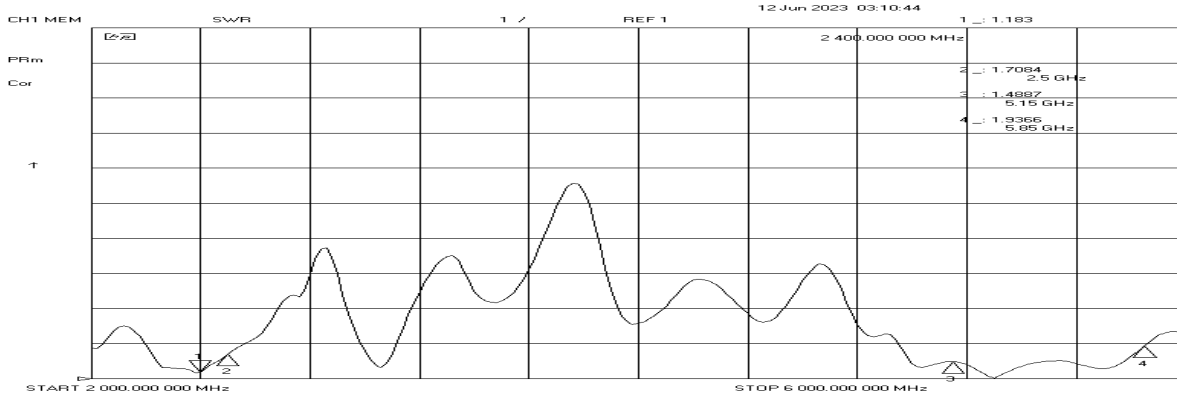

■ 3.2: Antenna return loss value

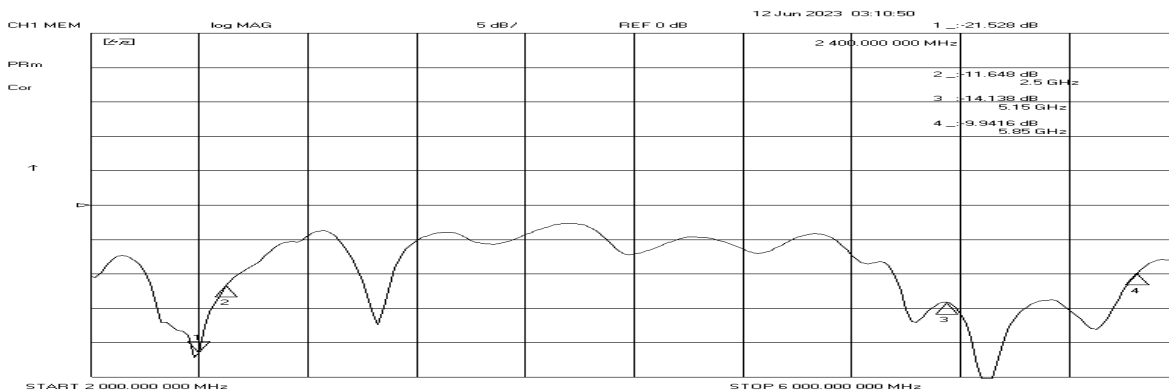



Shenzhen Xingtong Wieress Technology Co., Ltd

Date

2023-11-06

Version

A0

File number

XT-YF-004

Product model

XT-B5-WIFI-207

Product number

B5-WIFI-APP

4. Antenna performance (OTA)

- 4.1: Antenna matching recommendations
Matching without modification

- 4.2: Antenna OTA/ efficiency/gain (test instruments: network analyzer, oscilloscope, customer engineering prototype, various standard cards, etc.)

2.4G-2D

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Efficiency (dBi)	-5.31	-5.26	-5.10	-5.17	-5.49	-5.28	-5.46	-5.72	-5.44	-5.60	-5.61
Gain (dBi)	1.45	1.59	1.74	1.65	1.23	1.27	1.04	1.17	1.18	1.21	1.19
Efficiency (%)	29.43	29.77	30.93	30.40	28.27	29.64	28.47	26.79	28.59	27.53	27.46
Directivity (dB)	5.76	5.85	5.84	5.82	5.72	5.55	5.50	5.55	5.62	5.81	5.80
Peak Gain Position (Theta)	135.00	135.00	135.00	135.00	135.00	135.00	135.00	150.00	150.00	150.00	150.00
Peak Gain Position (Phi)	165.00	165.00	165.00	165.00	180.00	165.00	180.00	45.00	45.00	45.00	45.00
Efficiency ThetaPol (%)	16.78	16.91	17.54	17.25	15.73	16.17	15.32	14.33	15.09	14.20	14.01
Efficiency PhiPol (%)	12.65	12.87	13.39	13.15	12.54	13.47	13.15	12.46	13.51	13.32	13.45
Upper Hem. Efficiency (%)	11.49	11.66	12.17	11.99	11.09	11.57	11.01	10.25	10.76	10.15	9.92
Lower Hem. Efficiency (%)	17.94	18.11	18.76	18.41	17.18	18.07	17.46	16.53	17.84	17.38	17.55

5G-2D


Frequency ID	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
Frequency (MHz)	5140.0	5150.0	5160.0	5170.0	5180.0	5190.0	5200.0	5210.0	5220.0	5230.0	5240.0	5250.0	5260.0	5270.0	5280.0	5290.0	5300.0
Efficiency (dBi)	-4.78	-5.44	-4.48	-4.72	-5.25	-4.01	-4.45	-5.24	-4.22	-4.63	-5.14	-4.28	-4.73	-5.48	-4.41	-4.76	-5.17
Gain (dBi)	0.59	-0.19	0.61	0.10	0.39	1.35	1.10	0.38	1.68	1.33	0.82	1.49	1.37	0.62	2.43	0.97	0.87
Efficiency (%)	33.26	28.57	35.66	33.72	29.84	39.70	35.92	29.92	37.87	34.42	30.58	37.35	33.65	28.32	36.21	33.41	30.40
Directivity (dB)	5.37	5.25	5.09	4.82	5.64	5.36	5.55	5.62	5.89	5.96	5.97	5.76	6.10	6.09	6.84	5.73	6.04
Peak Gain Position (Theta)	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00
Peak Gain Position (Phi)	105.00	135.00	120.00	120.00	90.00	120.00	135.00	135.00	120.00	105.00	105.00	120.00	105.00	105.00	120.00	135.00	105.00
Efficiency ThetaPol (%)	16.41	14.26	18.15	17.37	15.59	20.28	18.38	15.90	19.89	18.44	16.17	19.77	18.10	15.34	19.29	17.36	16.21
Efficiency PhiPol (%)	16.86	14.31	17.51	16.34	14.25	19.42	17.55	14.01	17.98	15.99	14.42	17.57	15.55	12.98	16.93	16.05	14.20
Upper Hem. Efficiency (%)	21.13	18.38	22.66	21.47	18.78	24.90	22.71	18.34	23.50	21.34	18.65	23.13	19.99	17.12	21.66	20.34	18.09
Lower Hem. Efficiency (%)	12.13	10.18	13.00	12.25	11.07	14.80	13.21	11.58	14.37	13.09	11.94	14.22	13.66	11.20	14.56	13.07	12.31

Frequency ID	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
Frequency (MHz)	5310.0	5320.0	5330.0	5340.0	5350.0	5360.0	5370.0	5380.0	5390.0	5400.0	5410.0	5420.0	5430.0	5440.0	5450.0	5460.0	5470.0	5480.0	5490.0	5500.0
Efficiency (dBi)	-4.38	-5.04	-5.47	-4.39	-4.91	-5.22	-4.32	-5.05	-5.55	-4.63	-5.32	-5.62	-4.33	-5.22	-5.78	-4.38	-5.27	-5.75	-4.27	-5.26
Gain (dBi)	1.75	1.16	1.42	2.26	1.73	0.84	1.95	1.67	0.49	1.81	1.17	0.79	1.96	0.77	0.42	2.44	1.25	0.66	2.24	2.23
Efficiency (%)	36.49	31.32	28.39	36.36	32.28	30.06	37.02	31.24	27.87	34.43	29.37	27.42	36.86	30.06	26.43	36.49	29.72	26.62	37.38	29.78
Directivity (dB)	6.13	6.21	6.89	6.65	6.64	6.06	6.26	6.72	6.04	6.44	6.49	6.41	6.29	5.99	6.20	6.82	6.52	6.41	6.51	7.49
Peak Gain Position (Theta)	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00
Peak Gain Position (Phi)	105.00	120.00	105.00	105.00	105.00	150.00	105.00	105.00	105.00	105.00	135.00	120.00	150.00	120.00	120.00	105.00	90.00	165.00	120.00	120.00
Efficiency ThetaPol (%)	19.55	16.69	14.93	18.95	17.64	16.49	20.28	16.79	15.20	19.10	16.38	15.63	20.97	16.86	15.14	20.84	16.75	14.97	20.87	16.74
Efficiency PhiPol (%)	16.94	14.63	13.46	17.41	14.64	13.57	16.74	14.45	12.67	15.33	13.00	11.79	15.89	13.21	11.29	15.65	12.98	11.65	16.51	13.03
Upper Hem. Efficiency (%)	21.72	18.46	16.80	21.27	18.62	17.30	21.54	18.06	15.81	19.33	16.77	15.32	20.89	17.02	15.03	20.73	17.15	15.15	21.69	17.15
Lower Hem. Efficiency (%)	14.77	12.86	11.59	15.09	13.66	12.76	15.48	13.18	12.07	15.10	12.61	12.09	15.98	13.04	11.40	15.76	12.58	11.47	15.69	12.63

Frequency ID	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68
Frequency (MHz)	5510.0	5520.0	5530.0	5540.0	5550.0	5560.0	5570.0	5580.0	5590.0	5600.0	5610.0	5620.0	5630.0	5640.0	5650.0	5660.0	5670.0	5680.0	5690.0	5700.0
Efficiency (dBi)	-5.82	-3.91	-4.84	-5.10	-3.82	-4.65	-5.20	-3.69	-4.48	-4.67	-3.53	-4.36	-4.68	-3.70	-4.52	-4.52	-3.72	-4.66	-4.56	-3.90
Gain (dBi)	0.69	1.97	1.23	1.38	2.17	1.15	0.87	2.24	1.43	1.46	2.37	1.61	1.17	1.93	1.64	1.87	2.76	1.65	1.62	2.44
Efficiency (%)	26.16	40.64	32.77	30.89	41.49	34.27	30.17	42.72	35.61	34.13	44.38	36.65	34.03	42.67	35.28	35.33	42.43	34.21	34.96	40.77
Directivity (dB)	6.51	5.88	6.07	6.48	5.99	5.81	6.07	5.94	5.91	6.13	5.90	5.96	5.85	5.62	6.17	6.39	6.49	6.31	6.18	6.33
Peak Gain Position (Theta)	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00
Peak Gain Position (Phi)	120.00	105.00	105.00	105.00	150.00	120.00	165.00	165.00	120.00	135.00	150.00	105.00	105.00	120.00	105.00	105.00	195.00	135.00	195.00	165.00
Efficiency ThetaPol (%)	14.16	21.73	17.45	16.32	21.77	17.60	15.65	21.58	17.86	17.45	21.91	18.36	17.12	21.61	18.36	18.13	21.97	17.64	17.90	20.53
Efficiency PhiPol (%)	11.99	18.90	15.32	14.57	19.72	16.66	14.52	21.14	17.76	16.67	22.48	18.29	16.91	21.06	16.92	17.20	20.46	16.57	17.06	20.23
Upper Hem. Efficiency (%)	15.37	23.86	19.60	18.77	25.30	21.03	18.65	26.76	22.17	21.29	28.09	23.26	21.65	27.27	22.00	22.27	26.74	21.33	22.05	25.78
Lower Hem. Efficiency (%)	10.79	16.78	13.17	12.12	16.20	13.24	11.52	15.96	13.44	12.84	16.29	13.39	12.38	15.40	13.28	13.06	15.69	12.88	12.91	14.98

Frequency ID	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84
Frequency (MHz)	5710.0	5720.0	5730.0	5740.0	5750.0	5760.0	5770.0	5780.0	5790.0	5800.0	5810.0	5820.0	5830.0	5840.0	5850.0	5860.0
Efficiency (dBi)	-4.87	-4.61	-4.07	-5.05	-4.69	-4.17	-5.16	-4.60	-4.47	-5.45	-4.96	-4.27	-5.29	-4.45	-4.38	-5.38
Gain (dBi)	1.23	1.70	2.50	1.56	2.00	2.40	1.26	1.98	1.99	1.98	2.10	2.73	1.52	2.28	2.47	2.06
Efficiency (%)	32.55	34.56	39.19	31.25	33.93	38.27	30.45	34.65	35.76	28.52	31.93	37.41	29.58	35.92	36.46	29.01
Directivity (dB)	6.11	6.31	6.57	6.61	6.70	6.57	6.43	6.59	6.45	7.43	7.06	7.00	6.81	6.73	6.86	7.44
Peak Gain Position (Theta)	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00	165.00
Peak Gain Position (Phi)	120.00	195.00	180.00	195.00	180.00	165.00	195.00	180.00	180.00	210.00	195.00	195.00	165.00	195.00	180.00	180.00
Efficiency ThetaPol (%)	16.45	17.52	19.49	15.51	16.85	19.11	14.77	17.05	17.32	14.08	15.58	18.81	14.75	17.43	17.53	13.92
Efficiency PhiPol (%)	16.10	17.04	19.71	15.73	17.08	19.16	15.68	17.60	18.44	14.44	16.36	18.60	14.84	18.49	18.93	15.09
Upper Hem. Efficiency (%)	20.74	21.88	24.91	19.50	21.39	24.02	19.34	21.82	22.67	17.38	20.08	23.05	18.00	22.06	22.76	18.09
Lower Hem. Efficiency (%)	11.81	12.69	14.28	11.75	12.54	14.26	11.11	12.83	13.09	11.14	11.85	14.36	11.58	13.86	13.70	10.92

3D-OTA-2.4G

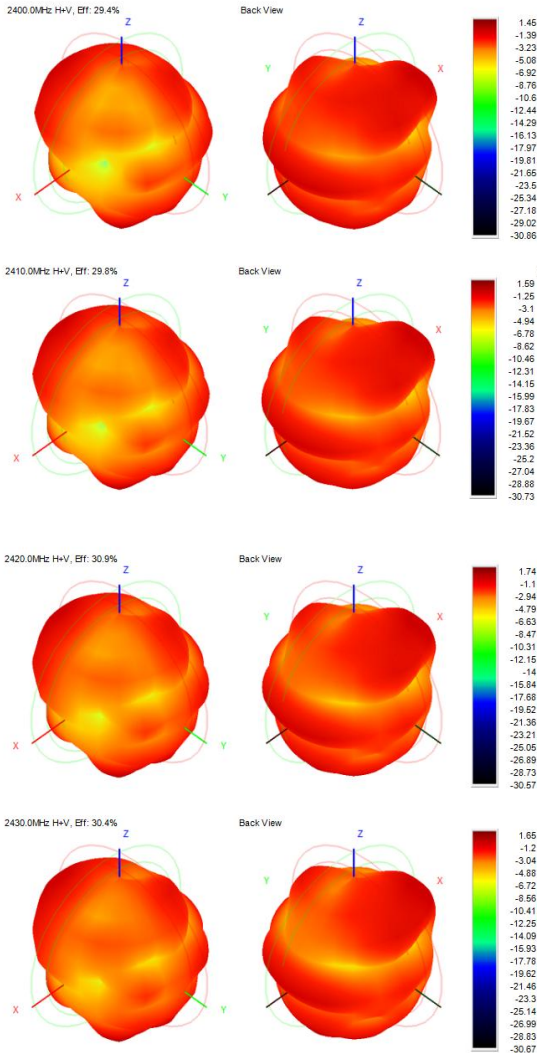



Shenzhen Xingtong Wieress Technology Co., Ltd

Date

2023-11-06

Version

A0

File number

XT-YF-004





Product model

XT-B5-WIFI-207

Product number


B5-WIFI-APP


5850MHZ

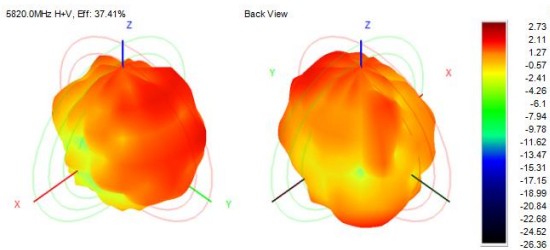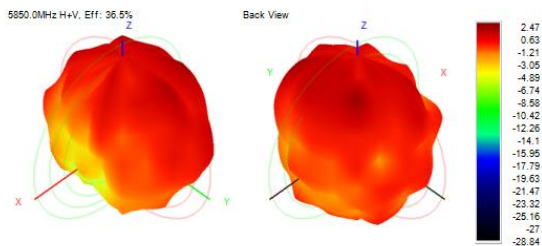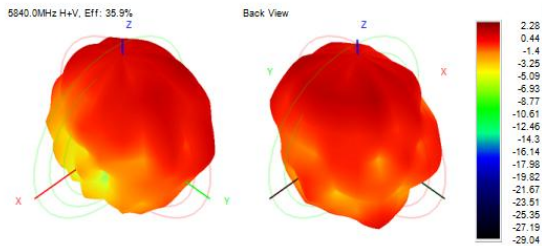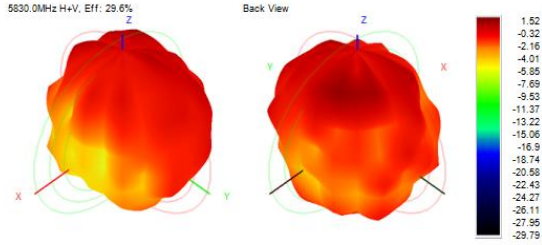

5. Attached figure:

5.1: Finished antenna drawing

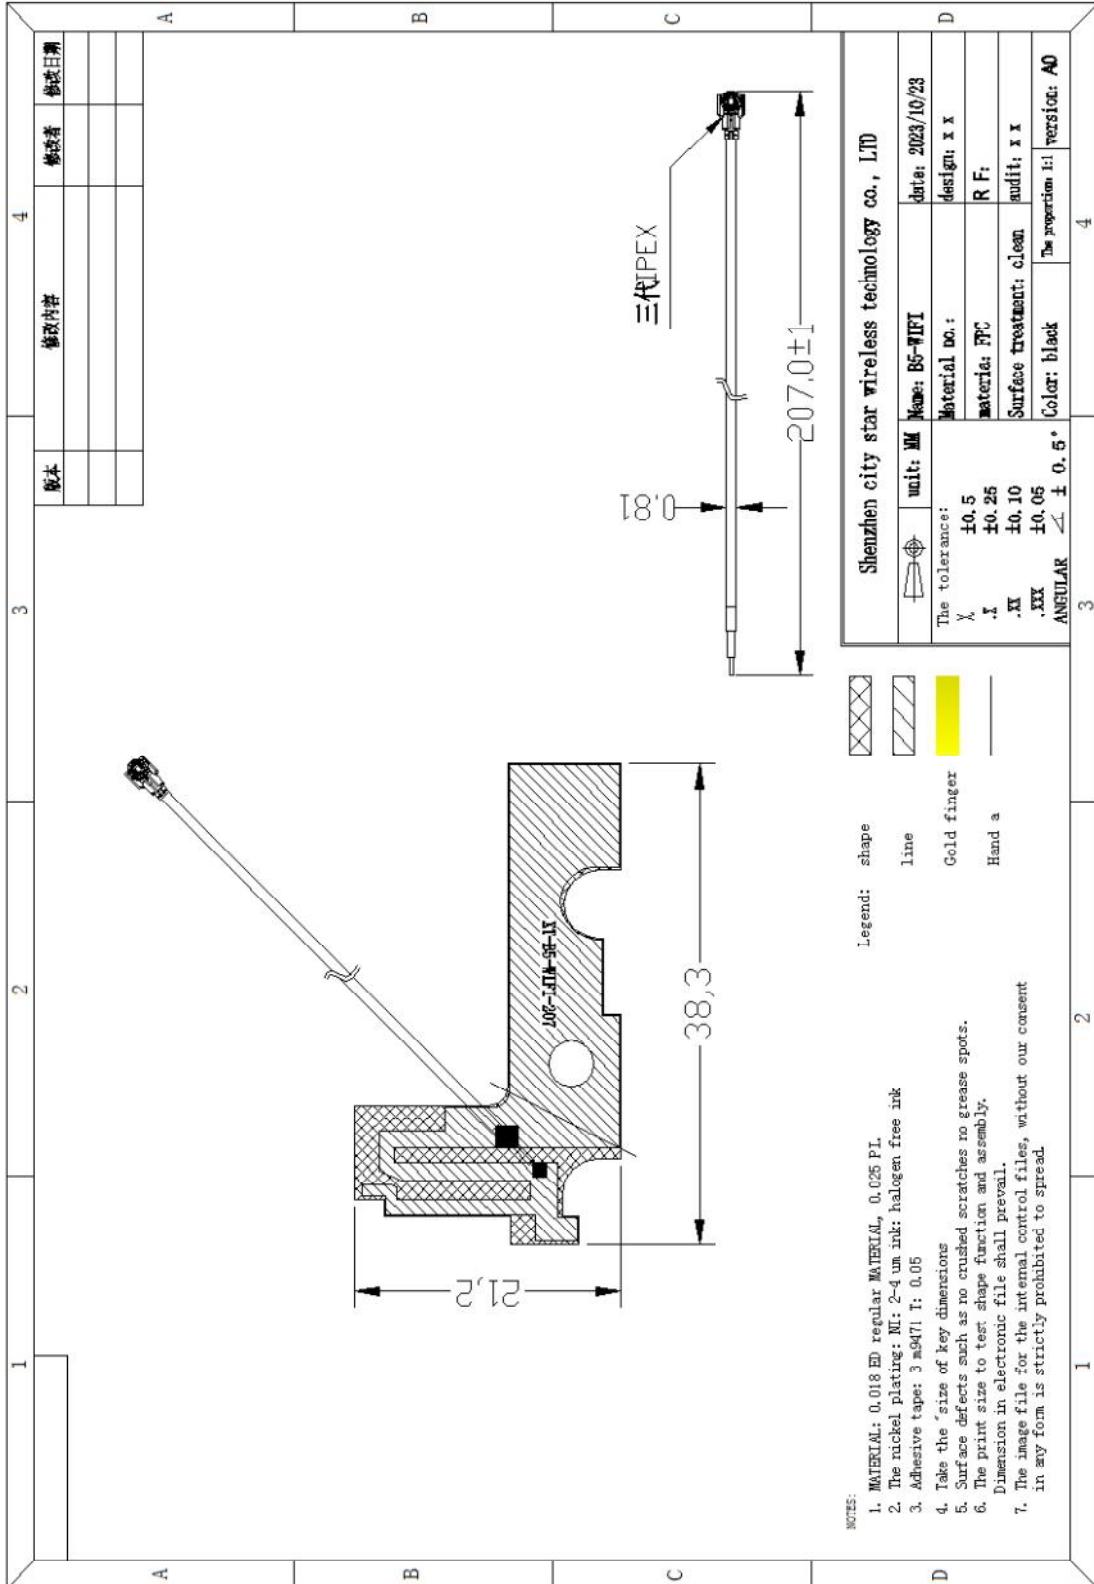

 Shenzhen Xingtong Wieress Technology Co., Ltd	Date	2023-11-06	
	Version	A0	
	File number	XT-YF-004	
Product model	XT-B5-WIFI-207	Product number	B5-WIFI-APP

6. Maintenance verification:

Tests/test items	Maintainability	Inspection order number
Product name/specification	2.4/5.8G bluetooth /WIFI built-in fpc antenna	Test quantity: 5PCS
Date of inspection: 2023/10/23		Completiondate: 2023/10/23

Test/inspection equipment:

1. The tensile tester tests 5 times. (The tester is shown in the figure)



Note: Uniform speed test is required, not extreme speed test.


Projects Condition	Maintaining force between terminal and cable $\geq 0.6\text{kgf}$.				
Test times	1	2	3	4	5
test result	0.6	0.7	0.7	0.9	0.7

Test/inspection result: acceptable

Test/inspection judgment: Qualified Unqualified Make no judgment

Test: Zhu Yongjian

Audit: Wu Yanlong

 Shenzhen Xingtong Wieress Technology Co., Ltd		Date	2023-11-06
		Version	A0
		File number	XT-YF-004
Product model	B5-WIFI antenna	Product number	B5-WIFI-APP

7. Reliability test:

Serialnumber	test item	Test requirements	testing tool	test result
1	Resistance to tin melting	288°C, 10S, no delamination, no foaming	Tin furnace	Ok
2	weldability	245°C, 5s, smooth tin surface, solder surface $\geq 95\%$	Tin furnace	Ok
3	Pulling force	N/A	tautness meter	Ok
4	Reverse pulling force	N/A	tautness meter	Ok
5	Peel strength (covering film)	$\geq 0.35\text{kg/cm}$	peel strength	Ok
6	Peel strength (copper foil)	$\geq 0.8\text{kg/cm}$	peel strength	Ok
7	Hot melt adhesive fluidity	0.1~0.15	/	Ok

7. Matters needing attention:



After opening, please carefully check whether the goods are complete. If there is any damage, please contact us immediately.