

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I
According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C
According to FCC Part 15.407(a)(3) for UNII Band III
According to 789033 D02 Section II(F)

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the 5.25-5.35 GHz and 5.47-5.725 GHz

(b) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1.

8.3.4 Test Procedure

Methods refer to FCC KDB 789033.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections.

5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

8.3.5 Test Results

Temperature : 25℃
Humidity : 60 %

ATM Pressure: 1011 mbar
Test Engineer: XXH

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	2.49	≤11.00	PASS
	Ant2	5180	4.54	≤11.00	PASS
	Ant1	5200	2.66	≤11.00	PASS
	Ant2	5200	4.72	≤11.00	PASS
	Ant1	5240	3.57	≤11.00	PASS
	Ant2	5240	5.44	≤11.00	PASS
	Ant1	5260	3.44	≤11.00	PASS
	Ant2	5260	4.91	≤11.00	PASS
	Ant1	5280	4.23	≤11.00	PASS
	Ant2	5280	4.78	≤11.00	PASS
	Ant1	5320	4.03	≤11.00	PASS
	Ant2	5320	4.65	≤11.00	PASS
	Ant1	5500	5.11	≤11.00	PASS
	Ant2	5500	5.21	≤11.00	PASS
	Ant1	5580	6.23	≤11.00	PASS
	Ant2	5580	5.83	≤11.00	PASS
	Ant1	5700	5.97	≤11.00	PASS
	Ant2	5700	4.98	≤11.00	PASS
	Ant1	5745	4.60	≤30.00	PASS
	Ant2	5745	3.62	≤30.00	PASS
	Ant1	5785	4.38	≤30.00	PASS
	Ant2	5785	3.07	≤30.00	PASS
	Ant1	5825	4.20	≤30.00	PASS
	Ant2	5825	3.13	≤30.00	PASS
11N20MIMO	Ant1	5180	2.55	≤11.00	PASS
	Ant2	5180	3.90	≤11.00	PASS
	total	5180	6.29	≤11.00	PASS
	Ant1	5200	3.30	≤11.00	PASS
	Ant2	5200	4.38	≤11.00	PASS
	total	5200	6.88	≤11.00	PASS
	Ant1	5240	3.71	≤11.00	PASS
	Ant2	5240	4.93	≤11.00	PASS
	total	5240	7.37	≤11.00	PASS
	Ant1	5260	3.53	≤11.00	PASS
	Ant2	5260	4.58	≤11.00	PASS
	total	5260	7.10	≤11.00	PASS
	Ant1	5280	3.62	≤11.00	PASS
	Ant2	5280	4.18	≤11.00	PASS
	total	5280	6.92	≤11.00	PASS
	Ant1	5320	4.13	≤11.00	PASS
	Ant2	5320	4.30	≤11.00	PASS
	total	5320	7.23	≤11.00	PASS
	Ant1	5500	3.58	≤11.00	PASS
	Ant2	5500	2.97	≤11.00	PASS
	total	5500	6.30	≤11.00	PASS
	Ant1	5580	3.99	≤11.00	PASS

	Ant2	5580	3.95	≤11.00	PASS
	total	5580	6.98	≤11.00	PASS
	Ant1	5700	4.11	≤11.00	PASS
	Ant2	5700	3.24	≤11.00	PASS
	total	5700	6.71	≤11.00	PASS
	Ant1	5745	2.76	≤30.00	PASS
	Ant2	5745	1.48	≤30.00	PASS
	total	5745	5.18	≤30.00	PASS
	Ant1	5785	2.37	≤30.00	PASS
	Ant2	5785	1.32	≤30.00	PASS
	total	5785	4.89	≤30.00	PASS
	Ant1	5825	2.13	≤30.00	PASS
	Ant2	5825	1.46	≤30.00	PASS
	total	5825	4.82	≤30.00	PASS
11N40MIMO	Ant1	5190	-1.32	≤11.00	PASS
	Ant2	5190	-0.21	≤11.00	PASS
	total	5190	2.28	≤11.00	PASS
	Ant1	5230	-1.04	≤11.00	PASS
	Ant2	5230	0.23	≤11.00	PASS
	total	5230	2.65	≤11.00	PASS
	Ant1	5270	-1.25	≤11.00	PASS
	Ant2	5270	-0.63	≤11.00	PASS
	total	5270	2.08	≤11.00	PASS
	Ant1	5310	-0.73	≤11.00	PASS
	Ant2	5310	-0.68	≤11.00	PASS
	total	5310	2.31	≤11.00	PASS
	Ant1	5510	-0.91	≤11.00	PASS
	Ant2	5510	-0.95	≤11.00	PASS
	total	5510	2.08	≤11.00	PASS
	Ant1	5550	-0.77	≤11.00	PASS
	Ant2	5550	-1.17	≤11.00	PASS
	total	5550	2.04	≤11.00	PASS
	Ant1	5670	-0.59	≤11.00	PASS
	Ant2	5670	-1.78	≤11.00	PASS
	total	5670	1.87	≤11.00	PASS
	Ant1	5755	-2.90	≤30.00	PASS
	Ant2	5755	-4.87	≤30.00	PASS
	total	5755	-0.76	≤30.00	PASS
	Ant1	5795	-3.20	≤30.00	PASS
	Ant2	5795	-4.79	≤30.00	PASS
	total	5795	-0.91	≤30.00	PASS
11AC20MIMO	Ant1	5180	2.24	≤11.00	PASS
	Ant2	5180	3.50	≤11.00	PASS
	total	5180	5.93	≤11.00	PASS
	Ant1	5200	4.77	≤11.00	PASS
	Ant2	5200	4.06	≤11.00	PASS
	total	5200	7.44	≤11.00	PASS
	Ant1	5240	3.45	≤11.00	PASS
	Ant2	5240	4.59	≤11.00	PASS
	total	5240	7.07	≤11.00	PASS
	Ant1	5260	3.03	≤11.00	PASS
	Ant2	5260	3.92	≤11.00	PASS
	total	5260	6.51	≤11.00	PASS
	Ant1	5280	3.36	≤11.00	PASS
	Ant2	5280	4.06	≤11.00	PASS

	total	5280	6.73	≤11.00	PASS
	Ant1	5320	3.57	≤11.00	PASS
	Ant2	5320	3.86	≤11.00	PASS
	total	5320	6.73	≤11.00	PASS
	Ant1	5500	3.15	≤11.00	PASS
	Ant2	5500	3.24	≤11.00	PASS
	total	5500	6.21	≤11.00	PASS
	Ant1	5580	3.79	≤11.00	PASS
	Ant2	5580	2.91	≤11.00	PASS
	total	5580	6.38	≤11.00	PASS
	Ant1	5700	3.88	≤11.00	PASS
	Ant2	5700	2.84	≤11.00	PASS
	total	5700	6.40	≤11.00	PASS
	Ant1	5745	2.42	≤30.00	PASS
	Ant2	5745	1.43	≤30.00	PASS
	total	5745	4.96	≤30.00	PASS
	Ant1	5785	2.01	≤30.00	PASS
	Ant2	5785	1.12	≤30.00	PASS
	total	5785	4.60	≤30.00	PASS
	Ant1	5825	1.72	≤30.00	PASS
	Ant2	5825	0.80	≤30.00	PASS
	total	5825	4.29	≤30.00	PASS
11AC40MIMO	Ant1	5190	-1.95	≤11.00	PASS
	Ant2	5190	-0.35	≤11.00	PASS
	total	5190	1.93	≤11.00	PASS
	Ant1	5230	-1.35	≤11.00	PASS
	Ant2	5230	-0.17	≤11.00	PASS
	total	5230	2.29	≤11.00	PASS
	Ant1	5270	-1.28	≤11.00	PASS
	Ant2	5270	-0.28	≤11.00	PASS
	total	5270	2.26	≤11.00	PASS
	Ant1	5310	-1.54	≤11.00	PASS
	Ant2	5310	-0.81	≤11.00	PASS
	total	5310	1.85	≤11.00	PASS
	Ant1	5510	-1.44	≤11.00	PASS
	Ant2	5510	-1.60	≤11.00	PASS
	total	5510	1.49	≤11.00	PASS
	Ant1	5550	-1.26	≤11.00	PASS
	Ant2	5550	-1.33	≤11.00	PASS
	total	5550	1.72	≤11.00	PASS
	Ant1	5670	-0.83	≤11.00	PASS
	Ant2	5670	-1.39	≤11.00	PASS
	total	5670	1.91	≤11.00	PASS
	Ant1	5755	-3.35	≤30.00	PASS
	Ant2	5755	-4.75	≤30.00	PASS
	total	5755	-0.98	≤30.00	PASS
11AC80MIMO	Ant1	5795	-3.05	≤30.00	PASS
	Ant2	5795	-5.05	≤30.00	PASS
	total	5795	-0.93	≤30.00	PASS
	Ant1	5210	-5.25	≤11.00	PASS
	Ant2	5210	-4.19	≤11.00	PASS
	total	5210	-1.68	≤11.00	PASS
	Ant1	5290	-4.72	≤11.00	PASS
	Ant2	5290	-4.07	≤11.00	PASS
	total	5290	-1.37	≤11.00	PASS

	Ant1	5530	-4.20	≤11.00	PASS
	Ant2	5530	-4.45	≤11.00	PASS
	total	5530	-1.31	≤11.00	PASS
	Ant1	5610	-3.88	≤11.00	PASS
	Ant2	5610	-4.75	≤11.00	PASS
	total	5610	-1.28	≤11.00	PASS
	Ant1	5775	-6.95	≤30.00	PASS
	Ant2	5775	-7.44	≤30.00	PASS
	total	5775	-4.18	≤30.00	PASS
11AX20MIMO	Ant1	5180	1.67	≤11.00	PASS
	Ant2	5180	2.53	≤11.00	PASS
	total	5180	5.13	≤11.00	PASS
	Ant1	5200	2.13	≤11.00	PASS
	Ant2	5200	3.17	≤11.00	PASS
	total	5200	5.69	≤11.00	PASS
	Ant1	5240	2.14	≤11.00	PASS
	Ant2	5240	3.16	≤11.00	PASS
	total	5240	5.69	≤11.00	PASS
	Ant1	5260	2.14	≤11.00	PASS
	Ant2	5260	2.43	≤11.00	PASS
	total	5260	5.30	≤11.00	PASS
	Ant1	5280	2.84	≤11.00	PASS
	Ant2	5280	3.58	≤11.00	PASS
	total	5280	6.24	≤11.00	PASS
	Ant1	5320	2.83	≤11.00	PASS
	Ant2	5320	2.94	≤11.00	PASS
	total	5320	5.90	≤11.00	PASS
	Ant1	5500	1.99	≤11.00	PASS
	Ant2	5500	1.66	≤11.00	PASS
	total	5500	4.84	≤11.00	PASS
	Ant1	5580	2.17	≤11.00	PASS
	Ant2	5580	2.59	≤11.00	PASS
	total	5580	5.40	≤11.00	PASS
	Ant1	5700	2.18	≤11.00	PASS
	Ant2	5700	1.37	≤11.00	PASS
	total	5700	4.80	≤11.00	PASS
	Ant1	5745	1.72	≤30.00	PASS
	Ant2	5745	-0.62	≤30.00	PASS
	total	5745	3.72	≤30.00	PASS
	Ant1	5785	0.68	≤30.00	PASS
	Ant2	5785	-0.40	≤30.00	PASS
	total	5785	3.18	≤30.00	PASS
	Ant1	5825	0.88	≤30.00	PASS
	Ant2	5825	-0.64	≤30.00	PASS
	total	5825	3.20	≤30.00	PASS
11AX40MIMO	Ant1	5190	-2.14	≤11.00	PASS
	Ant2	5190	-0.92	≤11.00	PASS
	total	5190	1.52	≤11.00	PASS
	Ant1	5230	-1.43	≤11.00	PASS
	Ant2	5230	0.01	≤11.00	PASS
	total	5230	2.36	≤11.00	PASS
	Ant1	5270	-2.52	≤11.00	PASS
	Ant2	5270	-1.42	≤11.00	PASS
	total	5270	1.08	≤11.00	PASS
	Ant1	5310	-0.81	≤11.00	PASS

	Ant2	5310	-0.56	≤11.00	PASS
	total	5310	2.33	≤11.00	PASS
	Ant1	5510	-1.04	≤11.00	PASS
	Ant2	5510	-1.12	≤11.00	PASS
	total	5510	1.93	≤11.00	PASS
	Ant1	5550	-1.08	≤11.00	PASS
	Ant2	5550	-1.49	≤11.00	PASS
	total	5550	1.73	≤11.00	PASS
	Ant1	5670	-0.60	≤11.00	PASS
	Ant2	5670	-1.70	≤11.00	PASS
	total	5670	1.90	≤11.00	PASS
	Ant1	5755	-2.87	≤30.00	PASS
	Ant2	5755	-4.83	≤30.00	PASS
	total	5755	-0.73	≤30.00	PASS
	Ant1	5795	-3.43	≤30.00	PASS
	Ant2	5795	-4.69	≤30.00	PASS
	total	5795	-1.00	≤30.00	PASS
11AX80MIMO	Ant1	5210	-5.02	≤11.00	PASS
	Ant2	5210	-3.31	≤11.00	PASS
	total	5210	-1.07	≤11.00	PASS
	Ant1	5290	-3.88	≤11.00	PASS
	Ant2	5290	-3.62	≤11.00	PASS
	total	5290	-0.74	≤11.00	PASS
	Ant1	5530	-3.89	≤11.00	PASS
	Ant2	5530	-3.66	≤11.00	PASS
	total	5530	-0.76	≤11.00	PASS
	Ant1	5610	-3.50	≤11.00	PASS
	Ant2	5610	-5.31	≤11.00	PASS
	total	5610	-1.30	≤11.00	PASS
	Ant1	5775	-6.74	≤30.00	PASS
	Ant2	5775	-7.23	≤30.00	PASS
	total	5775	-3.97	≤30.00	PASS

Test Graphs

11A_Ant1_5180



11A_Ant2_5180



11A_Ant1_5200



11A_Ant2_5200



11A_Ant1_5240



11A_Ant2_5240



11A_Ant1_5260



11A_Ant2_5260



11A_Ant1_5280



11A_Ant2_5280



11A_Ant1_5320



11A_Ant2_5320



11A_Ant1_5500



11A_Ant2_5500



11A_Ant1_5580



11A_Ant2_5580



11A_Ant1_5700



11A_Ant2_5700



11A_Ant1_5745



11A_Ant2_5745



11A_Ant1_5785



11A_Ant2_5785



11A_Ant1_5825



11A_Ant2_5825



11N20MIMO_Ant1_5180



11N20MIMO_Ant2_5180



11N20MIMO_Ant1_5200



11N20MIMO_Ant2_5200



11N20MIMO_Ant1_5240



11N20MIMO_Ant2_5240



11N20MIMO_Ant1_5260



11N20MIMO_Ant2_5260



11N20MIMO_Ant1_5280



11N20MIMO_Ant2_5280



11N20MIMO_Ant1_5320



11N20MIMO_Ant2_5320



11N20MIMO_Ant1_5500



11N20MIMO_Ant2_5500



11N20MIMO_Ant1_5580



11N20MIMO_Ant2_5580



11N20MIMO_Ant1_5700



11N20MIMO_Ant2_5700



11N20MIMO_Ant1_5745



11N20MIMO_Ant2_5745



11N20MIMO_Ant1_5785



11N20MIMO_Ant2_5785



11N20MIMO_Ant1_5825




11N20MIMO_Ant2_5825



11N40MIMO_Ant1_5190



11N40MIMO_Ant2_5190

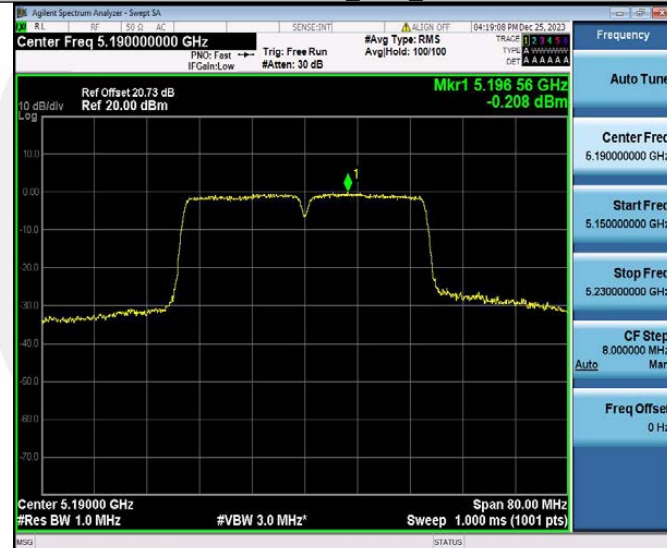

11N40MIMO_Ant1_5230



11N40MIMO_Ant2_5230




11N40MIMO_Ant1_5270



11N40MIMO_Ant2_5270



11N40MIMO_Ant1_5310

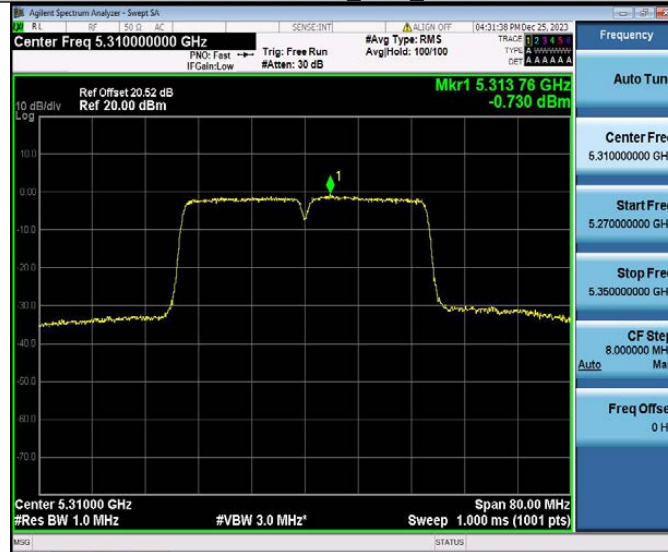

11N40MIMO_Ant2_5310



11N40MIMO_Ant1_5510



11N40MIMO_Ant2_5510




11N40MIMO_Ant1_5550



11N40MIMO_Ant2_5550



11N40MIMO_Ant1_5670

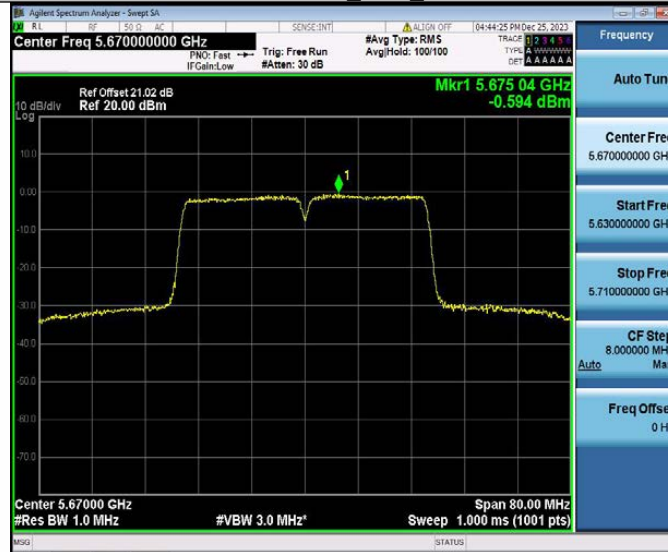

11N40MIMO_Ant2_5670




11N40MIMO_Ant1_5755



11N40MIMO_Ant2_5755



11N40MIMO_Ant1_5795

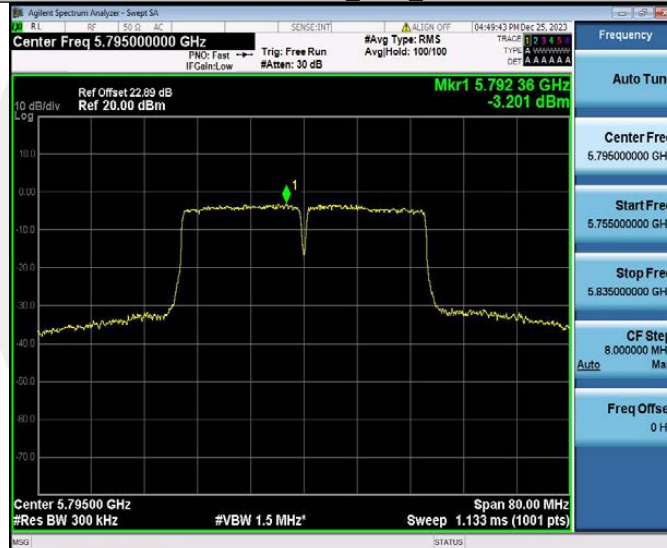

11N40MIMO_Ant2_5795



11AC20MIMO_Ant1_5180



11AC20MIMO_Ant2_5180



11AC20MIMO_Ant1_5200



11AC20MIMO_Ant2_5200



11AC20MIMO_Ant1_5240



11AC20MIMO_Ant2_5240



11AC20MIMO_Ant1 5260



11AC20MIMO_Ant2 5260



11AC20MIMO_Ant1 5280



11AC20MIMO_Ant2_5280



11AC20MIMO_Ant1_5320



11AC20MIMO_Ant2_5320



11AC20MIMO_Ant1_5500



11AC20MIMO_Ant2_5500



11AC20MIMO_Ant1_5580



11AC20MIMO_Ant2_5580



11AC20MIMO_Ant1_5700



11AC20MIMO_Ant2_5700



11AC20MIMO_Ant1 5745



11AC20MIMO_Ant2 5745



11AC20MIMO_Ant1 5785



11AC20MIMO_Ant2_5785



11AC20MIMO_Ant1_5825




11AC20MIMO_Ant2_5825



11AC40MIMO_Ant1_5190



11AC40MIMO_Ant2_5190

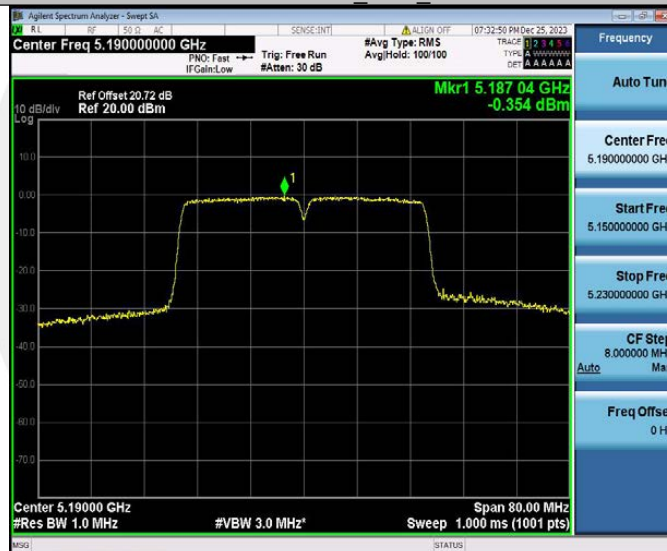

11AC40MIMO_Ant1_5230



11AC40MIMO_Ant2_5230



11AC40MIMO_Ant1_5270




11AC40MIMO_Ant2_5270



11AC40MIMO_Ant1_5310



11AC40MIMO_Ant2_5310

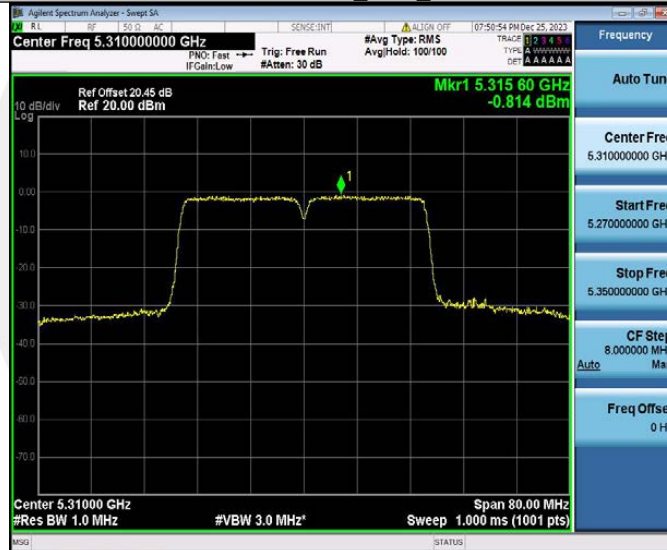

11AC40MIMO_Ant1_5510



11AC40MIMO_Ant2_5510



11AC40MIMO_Ant1_5550



11AC40MIMO_Ant2_5550

