



Report No.: TW20101170E File reference No.: 2021-01-26

Applicant: Hangzhou Roombanker Technology Co., Ltd.

Product: beacon /Bluetooth card beacon

Model No.: DSBC-120

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility



Dated: January 26, 2021

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2101170E Page 2 of 47

Date: 2021-01-26



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 47

Report No.: TW2101170E

Date: 2021-01-26



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit	9
5.6	Test Result.	9
6.0	Radiated Emission test	10
6.1	Test Method and Test Procedure.	10
6.2	Configuration of the EUT	11
6.3	EUT Operation Condition.	11
6.4	Radiated Emission Limit.	11
7.0	6dB Bandwidth Measurement Bandwidth	21
8.0	Maximum Peak Output Power	26
9.0	Power Spectral Density Measurement.	28
10.0	Out of Band Measurement	33
11.0	Antenna Requirement.	40
12.0	FCC ID Label	41
13.0	Photo of Test Setup and EUT View	42

Date: 2021-01-26



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Hangzhou Roombanker Technology Co., Ltd.

Address: A#801 Wantong center, Hangzhou, Zhejiang, China

Telephone: 18757285496

Fax: --

1.3 Description of EUT

Product: beacon /Bluetooth card beacon

Manufacturer: Hangzhou Roombanker Technology Co., Ltd.

Address: A#801 Wantong center, Hangzhou, Zhejiang, China

Brand Name: N/A
Additional Brand Name: N/A

Model Number: DSBC-120

Hardware Version: B45060917C

Software Version: V1.0.3 Serial No.: DS2045P100001

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz
Frequency Selection By software

Channel Number 40

Rating: DC3.0V

Battery: DC3.0V, 800mAh Li-ion battery

1.4 Submitted Sample: 1 Samples

Report No.: TW2101170E Page 5 of 47

Date: 2021-01-26



1.5 Test Duration

2021-01-18 to 2021-01-25

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Note: The measurement uncertainty is followerage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Date: 2021-01-26



2.0 Test Equipment								
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date			
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22			
TWO Line-V-NETW			100294	2020-06-23	2021-06-22			
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2020-06-23	2021-06-22			
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22			
Loop Antenna	EMCO	6507	00078608	2020-06-23	2021-06-22			
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22			
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22			
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08			
Power meter Anritsu		ML2487A	ML2487A 6K00003613		2021-06-22			
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22			
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03			
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06			
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22			
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22			
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22			
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22			
Spectrum	RS	FSP	1164.4391.38	2020-01-18	2021-01-17			
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22			
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22			
RF Switch	RF Switch EM		060391	2020-06-23	2021-06-22			
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22			
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22			
LISN	SCHAFFNER	NNB42	00012	2020-01-06	2021-01-05			

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-01-26



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
CC Part 15, Paragraph 15.207	Conducted Emission Test	N/A	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency	PASS	Complies

Restricted band limit:

Table 15.209

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 47


Report No.: TW2101170E

Date: 2021-01-26



5.Power Line Conducted Emission Test

5.1 Schematics of the test

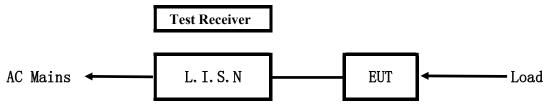


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

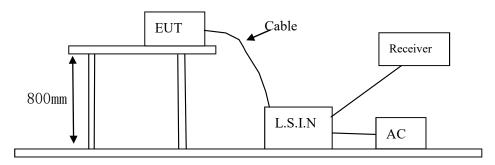

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device		Manufacturer	Model	FCC ID
beacon /Bluetooth card		Hangzhou Roombanker	DSBC-120	2AUXB-DSBC120
beacon		Technology Co., Ltd.	DSBC-120	2AOAD-D3DC120

Report No.: TW2101170E Page 9 of 47

Date: 2021-01-26



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition
- 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Class B Limits (dB μ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results N/A

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Note: EUT powered by built-in battery and there is no charging port provided to the EUT, so this test item not applicable.

Report No.: TW2101170E Page 10 of 47

Date: 2021-01-26




6 **Radiated Emission Test**

- 6.1 Test Method and test Procedure:
- The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC (1) Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up (2) is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency. (4)
- Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with (5) all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- The antenna polarization: Vertical polarization and Horizontal polarization. (6)

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

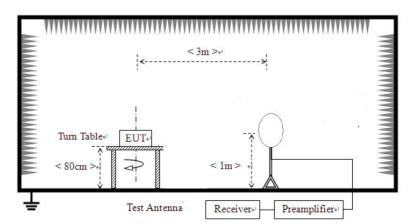


Page 11 of 47

Report No.: TW2101170E


Date: 2021-01-26



For radiated emissions from 30MHz to1GHz

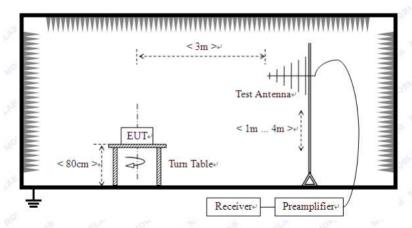

For radiated emissions above 1GHz

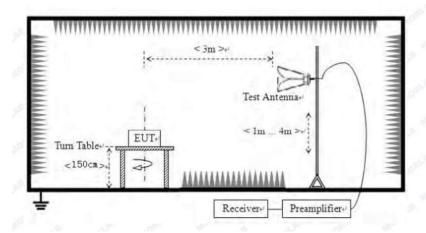

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2101170E Page 12 of 47

Date: 2021-01-26



Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

	-	
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. Battery full charged was used during tests.
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Date: 2021-01-26



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data


Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

FCC_FCC Part 15C Class B 30MHz-1GHz

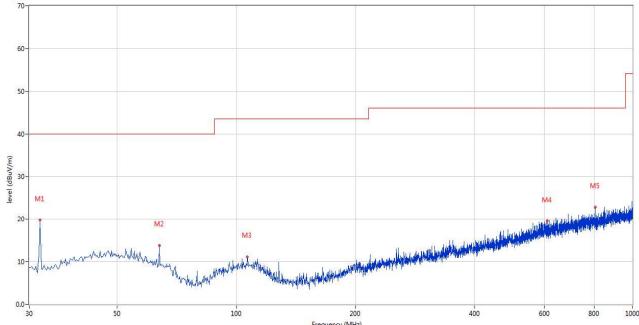

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	30.970	8.21	-14.59	40.0	-31.79	Peak	328.00	100	Horizontal	Pass
2	63.942	13.81	-13.32	40.0	-26.19	Peak	340.00	100	Horizontal	Pass
3	106.611	11.15	-13.36	43.5	-32.35	Peak	310.00	100	Horizontal	Pass
4	608.945	19.55	-4.99	46.0	-26.45	Peak	330.00	100	Horizontal	Pass
5	805.564	22.77	-3.08	46.0	-23.23	Peak	345.00	100	Horizontal	Pass

Date: 2021-01-26



Test result


General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Test Figure:

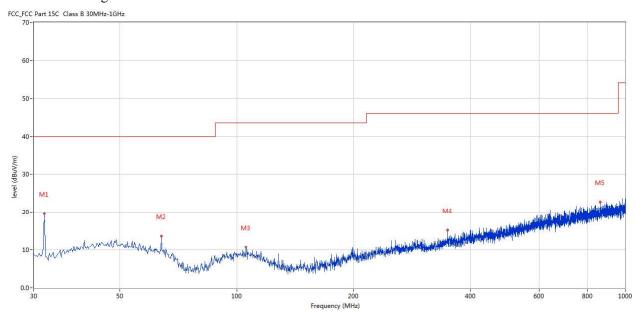

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit			(cm)		
					(dB)					
1	31.212	8.43	-14.58	40.0	-31.57	Peak	76.00	100	Vertical	Pass
2	63.942	13.70	-13.32	40.0	-26.30	Peak	81.00	100	Vertical	Pass
3	105.641	10.87	-13.27	43.5	-32.63	Peak	69.00	100	Vertical	Pass
4	348.808	15.35	-9.45	46.0	-30.65	Peak	66.00	100	Vertical	Pass
5	861.810	22.72	-2.28	46.0	-23.28	Peak	25.00	100	Vertical	Pass


Report No.: TW2101170E Page 15 of 47

Date: 2021-01-26



Please refer to the following test plots for details:

Low Channel: Vertical

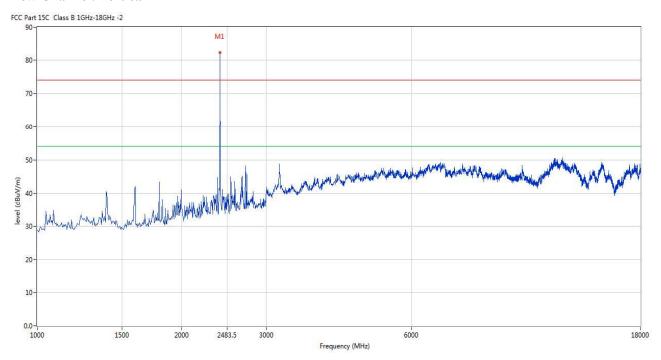


Report No.: TW2101170E Page 16 of 47

Date: 2021-01-26



Low Channel: Horizontal

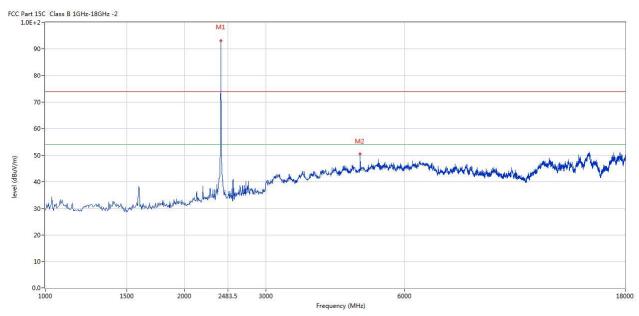


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4803.750	50.48	3.13	74.0	-23.52	Peak	1.00	100	Horizontal	Pass

Report No.: TW2101170E Page 17 of 47

Date: 2021-01-26



Middle Channel: Vertical

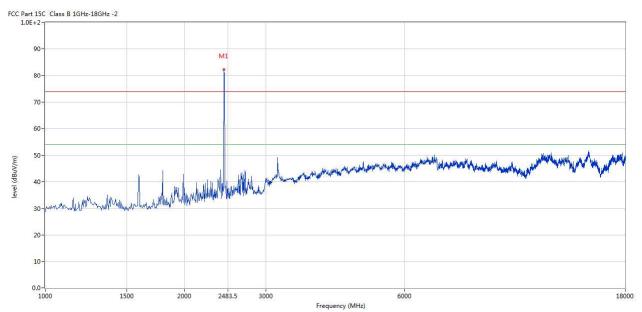


Report No.: TW2101170E Page 18 of 47

Date: 2021-01-26



Middle Channel: Horizontal

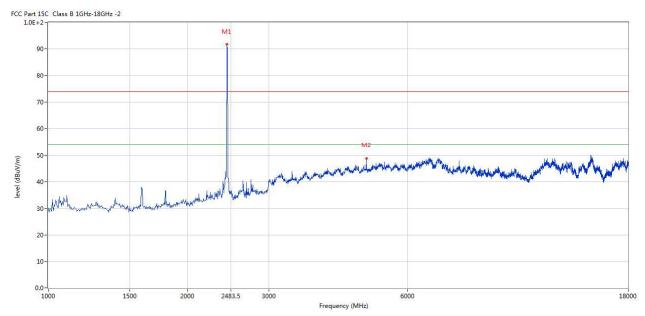


Ī	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
Ī	2	4880.250	49.74	3.20	74.0	-24.26	Peak	8.00	100	Horizontal	Pass

Report No.: TW2101170E Page 19 of 47

Date: 2021-01-26



High Channel: Vertical

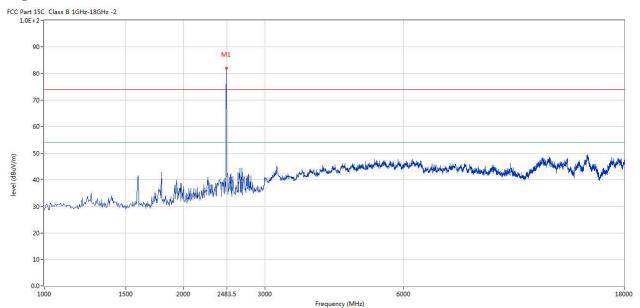


Report No.: TW2101170E Page 20 of 47

Date: 2021-01-26



High Channel: Horizontal

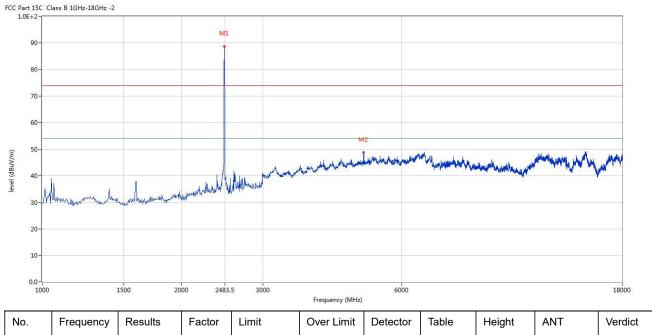

	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
	2	4961.000	48.70	3.36	74.0	-25.30	Peak	337.00	100	Horizontal	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result–Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise.
- 5. The peak value less than the AV limit, no necessary to take down the AV measurement result.


Report No.: TW2101170E Page 21 of 47

Date: 2021-01-26



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth $(VBW) \ge 3 \times RBW$.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: TW2101170E Page 22 of 47

Date: 2021-01-26



6dB BW

EUT	beacon /Blue	tooth card beacon	Mod	lel		DSBC-120
Mode	Кеер Т	ransmitting	Test Vo	ltage		DC3.0V
Temperati	ure 24	deg. C,	Humi	dity		56% RH
Channel	Channel Frequency (MHz)	6 dB Bandwi (kHz)	dth		num Limit MHz)	Pass/ Fail
Low	2402	896			0.5	Pass
Middle	2440	896	·		0.5	Pass
High	2480	896	·		0.5	Pass


Report No.: TW2101170E Page 23 of 47

Date: 2021-01-26



Test Figure:

1. Condition: Low Channel

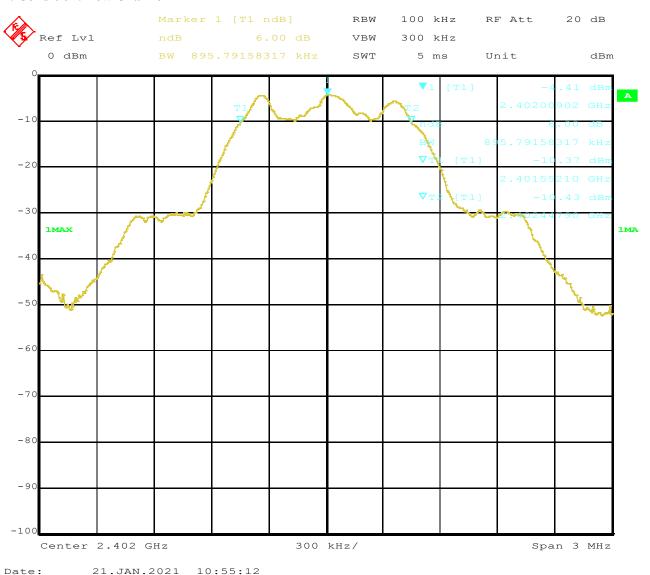


Report No.: TW2101170E Page 24 of 47

Date: 2021-01-26



2. Condition: Middle Channel

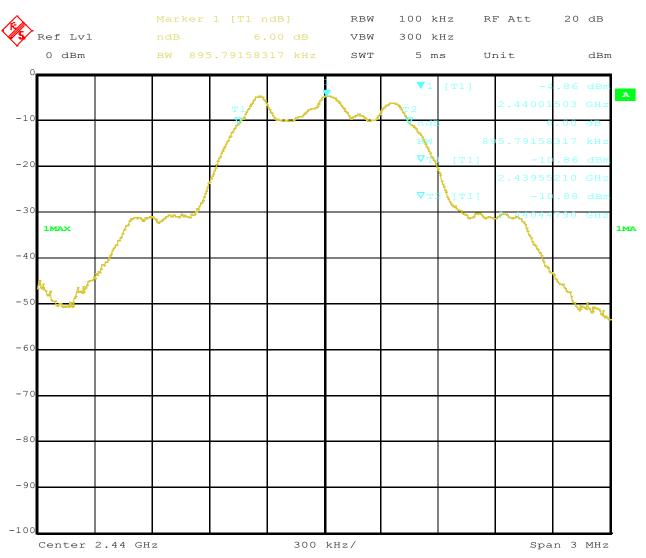


Date: 21.JAN.2021 10:57:43

Report No.: TW2101170E Page 25 of 47

Date: 2021-01-26



3. High Channel

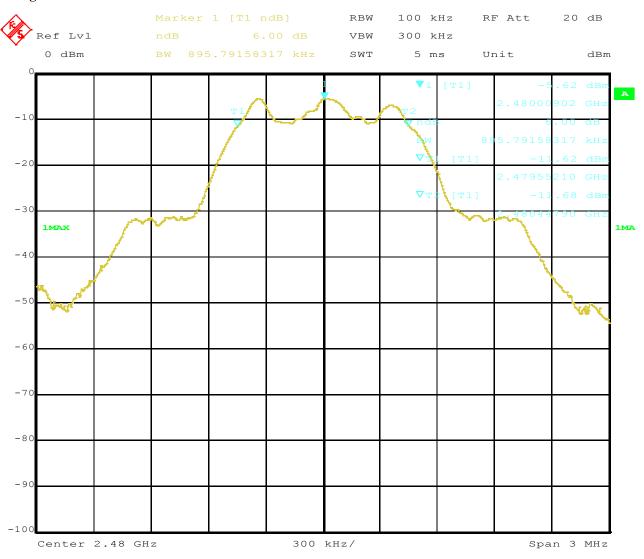

Date: 21.JAN.2021 10:58:54

Report No.: TW2101170E Page 26 of 47

Date: 2021-01-26



8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: TW2101170E Page 27 of 47

Date: 2021-01-26



8.4Test Results

EUT	beacon /Blue	tooth card beacon	Model	DSB	C-120
Mode	Кеер Т	ransmitting	Test Voltage	DC	3.0V
Temperatu	re 24	deg. C,	Humidity	56%	6 RH
Channel	Channel Frequency	Max. Power C	Output (dBm)	Peak Power Limit	Pass/ Fail
Chamier	(MHz)	Pea	ık	(dBm)	
Low	2402	-3.9	97	30	Pass
Middle	2440	-4.4	15	30	Pass
High	2480	-5.2	20	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

Report No.: TW2101170E Page 28 of 47

Date: 2021-01-26



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2101170E Page 29 of 47

Date: 2021-01-26



9.4Test Result

EUT	beacon /Bluetoot	h card	Mod	el		DSBC-120
	beacon					
Mode	Keep Transmit	ting	Test Vol	ltage		DC3.0V
Temperature	24 deg. C,		Humic	lity		56% RH
Channel		Re	c Power ading Bm)	Maxir Lim (dBm/3	nit	Pass/ Fail
Low		-7	7.99	8		Pass
Middle		-8	3.22	8		Pass
High		-9	0.17	8		Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Page 30 of 47


Report No.: TW2101170E

Date: 2021-01-26



Test Figure:

1. Condition: Low Channel

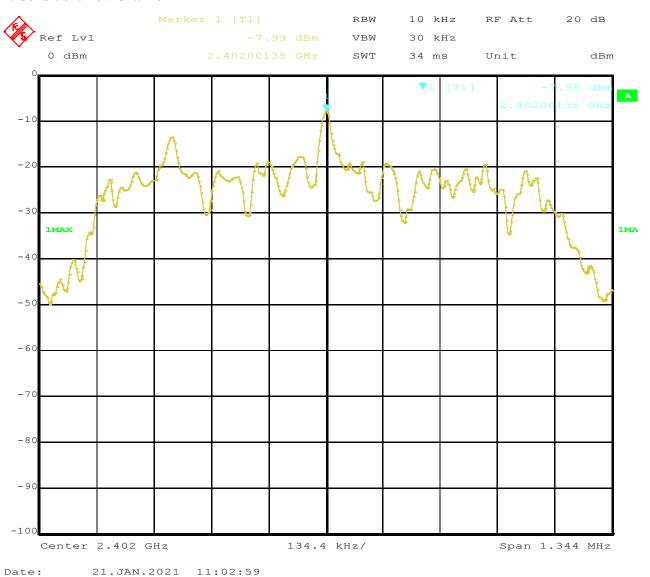


Date:

Report No.: TW2101170E Page 31 of 47

Date: 2021-01-26



2. Condition: Middle Channel

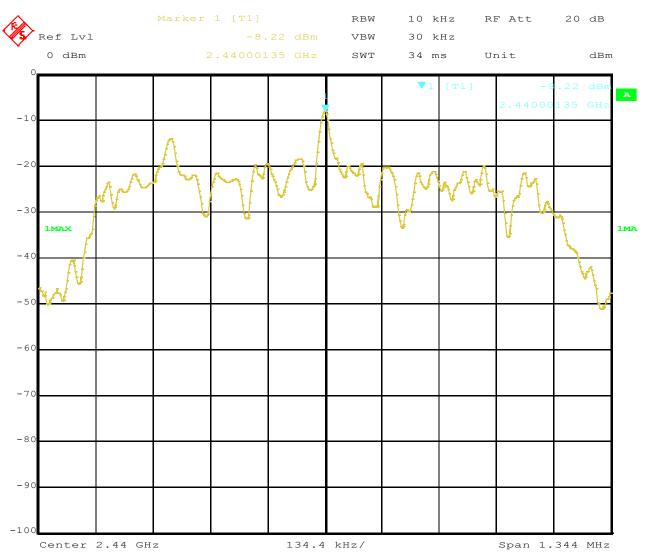


21.JAN.2021 11:04:57 Date:

Report No.: TW2101170E Page 32 of 47

Date: 2021-01-26



3. High Channel

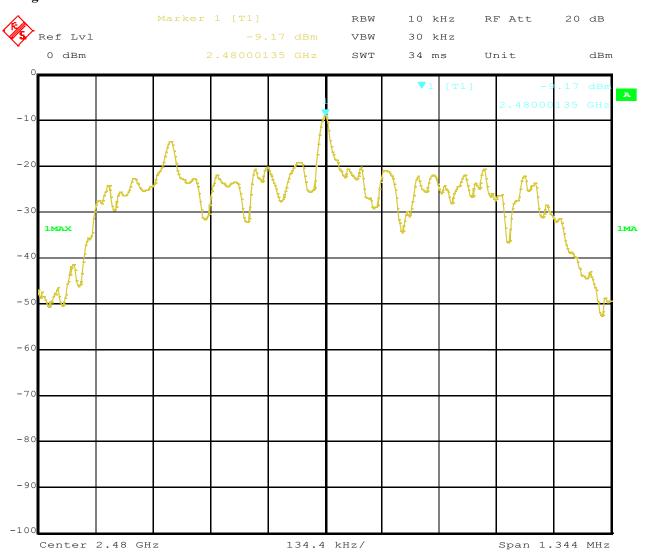


Date: 21.JAN.2021 11:05:20 Report No.: TW2101170E Page 33 of 47

Date: 2021-01-26



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: TW2101170E Page 34 of 47


Date: 2021-01-26



10.4 Band-edge Measurement

EUT	beacon /Bluetooth card beacon	Model	DSBC-120
Mode	Keep Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

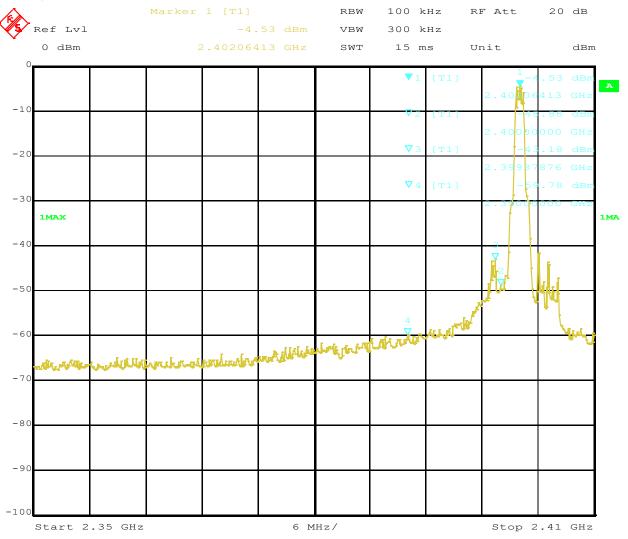

Date: 21.JAN.2021 11:07:35

Report No.: TW2101170E Page 35 of 47


Date: 2021-01-26



10.4 Band-edge Measurement

EUT	beacon /Bluetooth card beacon	Model	DSBC-120
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

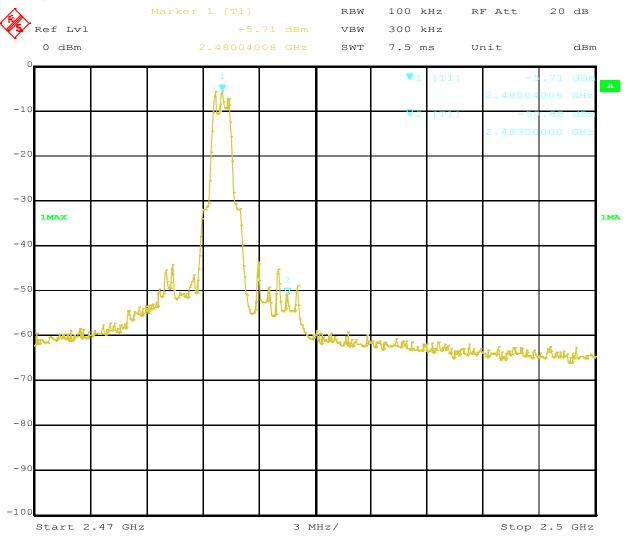

21.JAN.2021 11:06:29 Date:

Report No.: TW2101170E Page 36 of 47

Date: 2021-01-26



10.4 Restrict Band Measurement

	EUT	beacon	/Bluetoo	th card beac	on	Model			DSBC-12	20
	Mode	K	eep Tran	smitting		Test Volta	ge		DC3.0V	•
Te	emperature		24 deg	g. C,		Humidity	y		56% RH	[
T	est Result:		Pas	SS						
Part 1.0E	15C Class B 1GHz-18GHz	-2			•					
	Seton									
9	90-									
ě	80-									
9	70-									
	60-							/		
									1	
	50-							A STATE OF THE PARTY OF THE PAR	*	/
	50-					المنافلات	M1	AND THE PARTY OF T	**	
	50- 40-	and residence who headers to high	, or washing the second of the second	parilla maridinale pelatinale		a proper de la constitución de l	M1	Partition of the second	*	THE STATE OF THE S
	40-	and a state of the hospital state of the	nother their additions	and the second s	All the second being the second being the second	and delinerate the language of	M1	The state of the s	**	Mary Mary Mary Mary Mary Mary Mary Mary
	50- 40- 	and a sub-sub-sub-sub-sub-sub-sub-sub-sub-sub-	والمرابعة	And the state of t		and described in the second	M1	A STATE OF THE STA	*	
	40-	and water the hospital with	ngirinda ingilika nadilika parin	in the short and	ad person of the second particular	angold de reidende anglisser	M1	A STATE OF THE STA	*	THE WAR
	40- 	and the last of th	والمستوارة والمستوادة والمستوادة والمستوادة والمستوادة والمستوادة والمستوادة والمستوادة والمستوادة والمستوادة	ingila andro kadalandaa		hand de freeder de propieté la	M1	A CONTRACTOR OF THE PROPERTY O	*	
I Annan Dago	40- 	and and animate the large of which	npresident film and the form	vojelja na vida klasel stanovil se na	Frequency (MI		M1	PARTY CONTRACTOR OF THE PARTY	*	2410
(C	40	Results		Limit					ANT	
	40		Factor (dB)		Frequency (MI	Hz)	Table (o)	Height (cm)	ANT	2410

Report No.: TW2101170E Page 37 of 47

Date: 2021-01-26



104 Restrict Band Measurement

	EUT	beacon /Bl	uetooth card beacon	n	Model		Γ	OSBC-120	
	Mode	Keep	Transmitting	Te	st Voltage			DC3.0V	
Ter	mperature	2	24 deg. C,	I	Humidity			56% RH	
Te	st Result:		Pass						
C Part 15	5C Class B 1GHz-18GHz -	2							
90	0-								
80	0-							January .	
70	0-								
								1 \ \	
60	0-						/		
60	0-								
)	/ مرزوا <u>در ق</u> ال راز والد		
	0-	. Uhddartaankooliid a ahkir, a	anacha Address a a na baile a dhaball a hababh	والمتعاششان وبالاست	National and a strict of the state of the st	M1	Alakul kadara		Marinille
50		deligi je		Malagan all and Mala			Madalahah		"Markeyllk
50 40 30		J. Historija politika ja	WANT THE THE THE THE THE THE THE THE THE TH	Makanana darah da Maka			Allahaldah		Mentally
50 40 30 20				Mahayan dilik didi dilik di			Markador		'Menterille
50 40 30		JANA PARAMANANANANANANANANANANANANANANANANANAN		platographia politica			Markhadar		* Mahhadilka
50 40 30 20 10			www.du.pl.dayaadijahaadijahadijahadijahadijahadi	Mahayen wilde and an distribution of the control of			Algerhander		2410
50 40 30 20 10		Addid hiji karabayi bilga kaliba ka a		Frequency (MH.	lz)		Markhadar		2410
50 40 30 20 10		Results	Factor Limit	Frequency (MH:	z) Detector	Table (o)	Height	ANT	2410 Verdict
50 40 30 20 10	D- D- D- D- D- D- D- D- D- D- D- D- D- D		Factor Limit (dB) (dBuV/m)		1	Table (o)	Height (cm)	ANT	F((CU)(N))

Report No.: TW2101170E Page 38 of 47

Date: 2021-01-26



10.4 Restrict Band Measurement

	EUT	beacon /I	Bluetoot	th card beac	con	Model			DSBC-12	0
	Mode	Ke	ep Trans	smitting		Test Volta	age		DC3.0V	
Te	mperature		24 deg	g. C,		Humidit	ty		56% RH	
Te	est Result:		Pas	s						
2C Part 1 1.0E+2 96 86 76 66	0-	-2								
(E) 50 40 30 20		SAN PROPERTY AND			2483.5 Frequency (MF		ar deplea a si disea de publicado por a	ngthing gardy-dight the fifth define	oder godine od one order go	2500
(E) 50 40 30 20		Results	Factor	Limit	2483.5		Table (o)	Height	ANT	
(E/) 500 300 300 200 100 0.0	0-0-0-0-0-2470		Factor (dB)	Limit (dBuV/m)	2483.5 Frequency (MF	Hz)				2500

Report No.: TW2101170E Page 39 of 47

Date: 2021-01-26



10.4 Restrict Band Measurement

	EUT	beacon /	Bluetoo	th card beac	on	Model			DSBC-12	20
	Mode	Ke	ep Tran	smitting		Test Volta	age		DC3.0V	T
Te	mperature		24 deg	g. C,		Humidi	ty		56% RE	I
Te	est Result:		Pas	s						
CC Part 1 1.0E+ 9 8	0-	-2								
2	0-	Haddalle to the state of the st			2483.5 Frequency (M	Hz)	dipolit politico de la constitución de la constituc		and the second of the second o	2500
(m/\ngp) ava 3 2	o- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0-	Results	Factor	Limit		Hz)	Table (o)	Height	ANT	2500 Verdict
(w/\nngp) ana) 3 2 1 0.	0-0-0-0-0-2470	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (M	1	Table (o)	Height (cm)	ANT	1/1/2/2/2/2

Note: The peak value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: TW2101170E Page 40 of 47

Date: 2021-01-26



11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

PCB antennas used. The gain of the antennas is 2.2dBi. (Declared by the applicant)

Report No.: TW2101170E Page 41 of 47

Date: 2021-01-26




12.0 FCC ID Label

FCC ID: 2AUXB-DSBC120

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

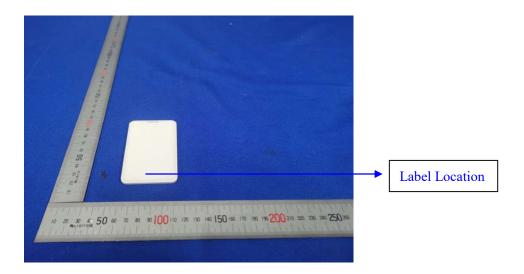


Date: 2021-01-26



13.0 **Photo of testing**

Radiated Emission Test Setup:

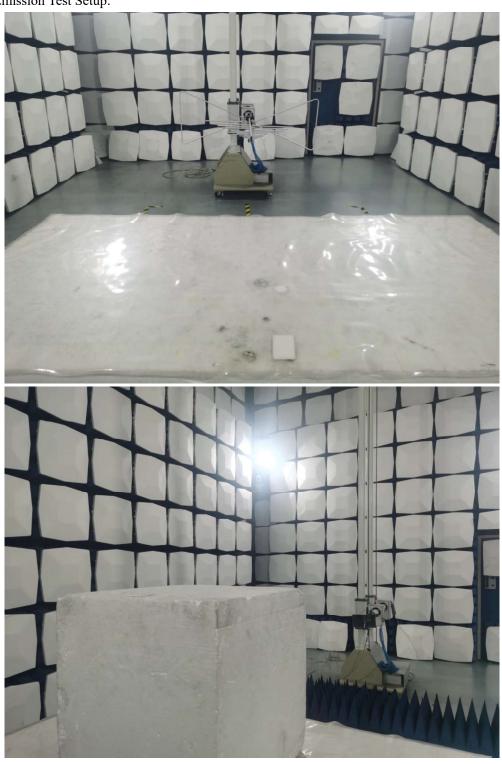


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Date: 2021-01-26



Photographs - EUT

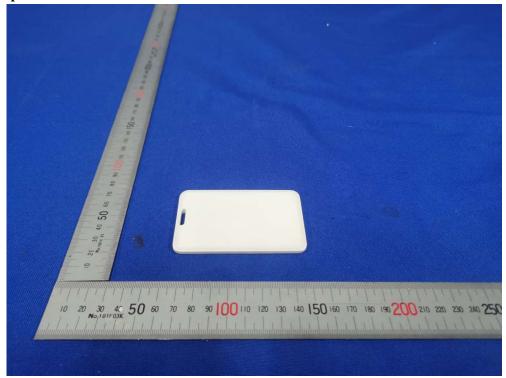



The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2021-01-26



Photographs - EUT



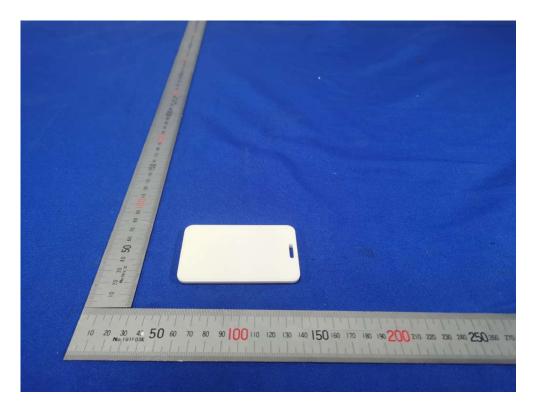

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Date: 2021-01-26



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Date: 2021-01-26



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

Report No.: TW2101170E Page 47 of 47

Date: 2021-01-26



Photographs - EUT

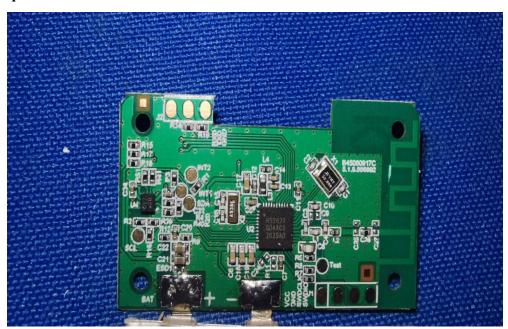

End of the report