




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	8.024	30	Pass
NVNT	BLE	2442	Ant1	7.965	30	Pass
NVNT	BLE	2480	Ant1	8.598	30	Pass



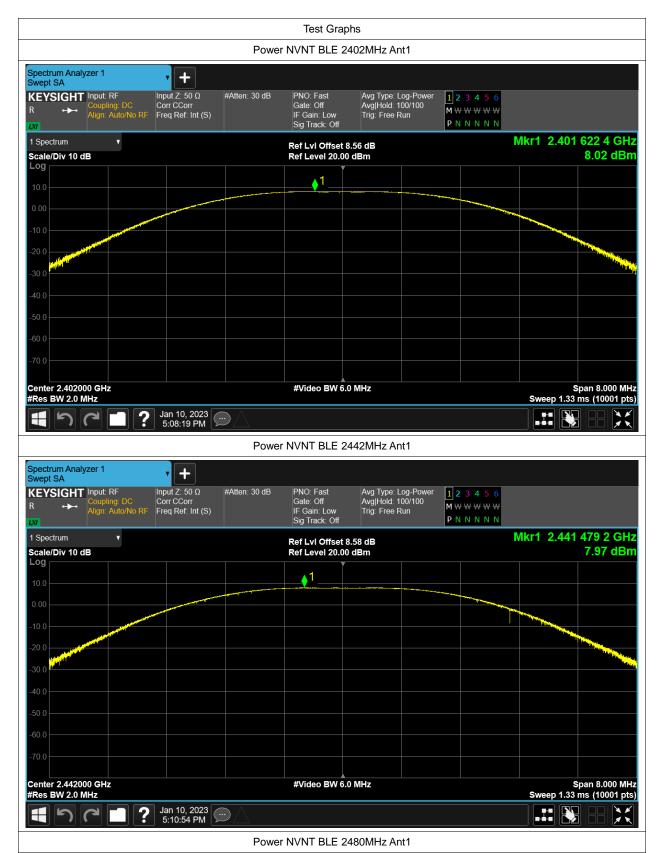









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.064	0.5	Pass
NVNT	BLE	2442	Ant1	1.076	0.5	Pass
NVNT	BLE	2480	Ant1	1.017	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.041	
NVNT	BLE	2442	Ant1	2.049	
NVNT	BLE	2480	Ant1	2.047	

Project No.: JYTSZR2212060














Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-6.694	8	Pass
NVNT	BLE	2442	Ant1	-6.766	8	Pass
NVNT	BLE	2480	Ant1	-6.135	8	Pass

Project No.: JYTSZR2212060



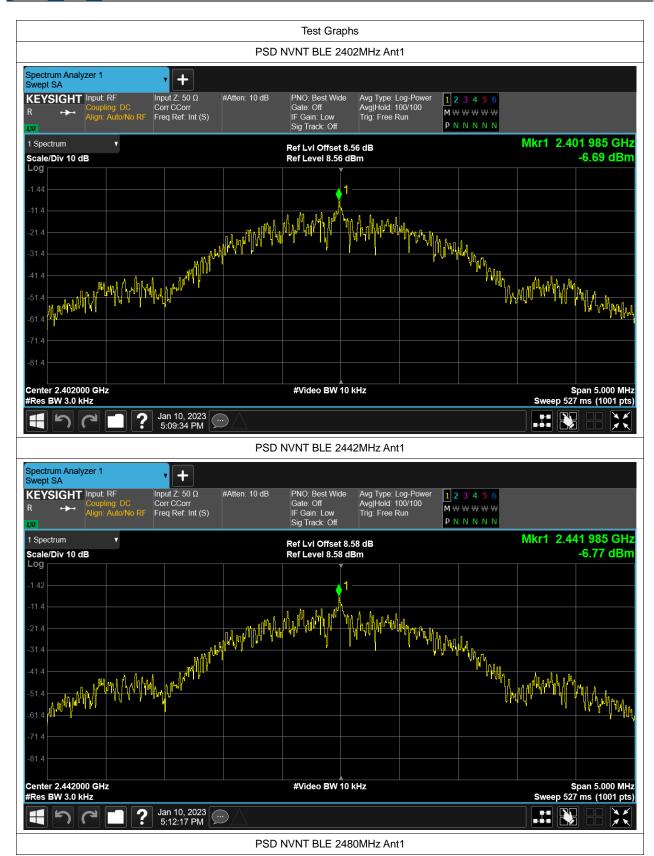



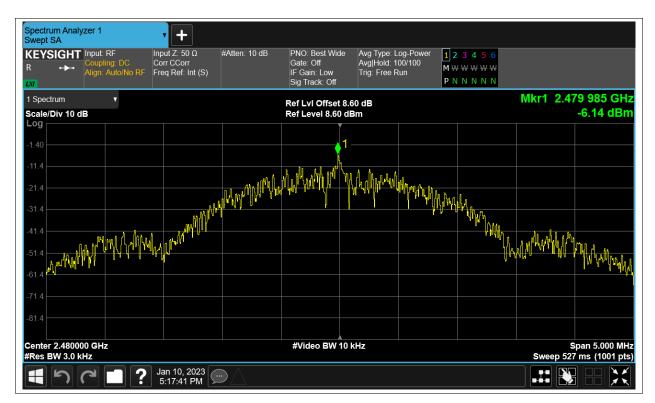






Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-54.31	-20	Pass
NVNT	BLE	2480	Ant1	-52.79	-20	Pass







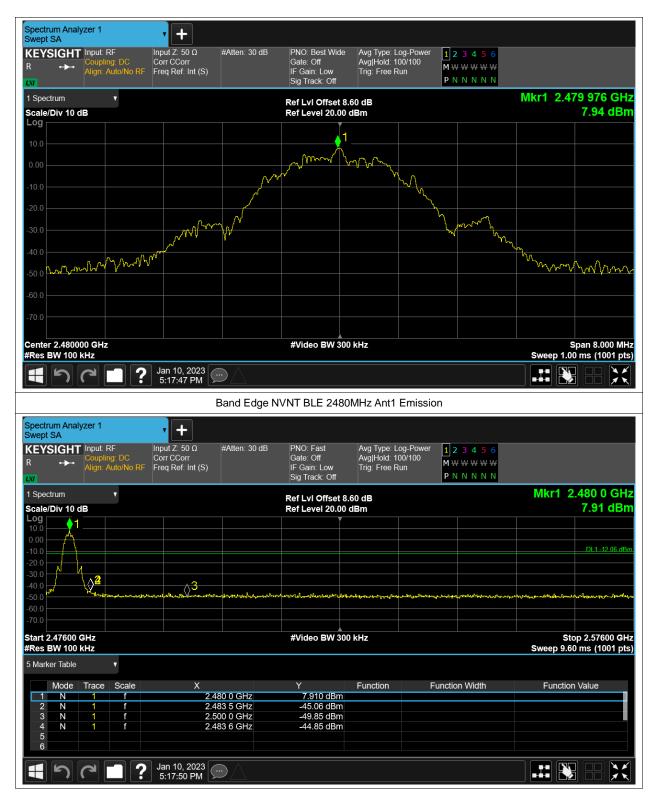






Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-48.37	-20	Pass
NVNT	BLE	2442	Ant1	-49.37	-20	Pass
NVNT	BLE	2480	Ant1	-49.08	-20	Pass



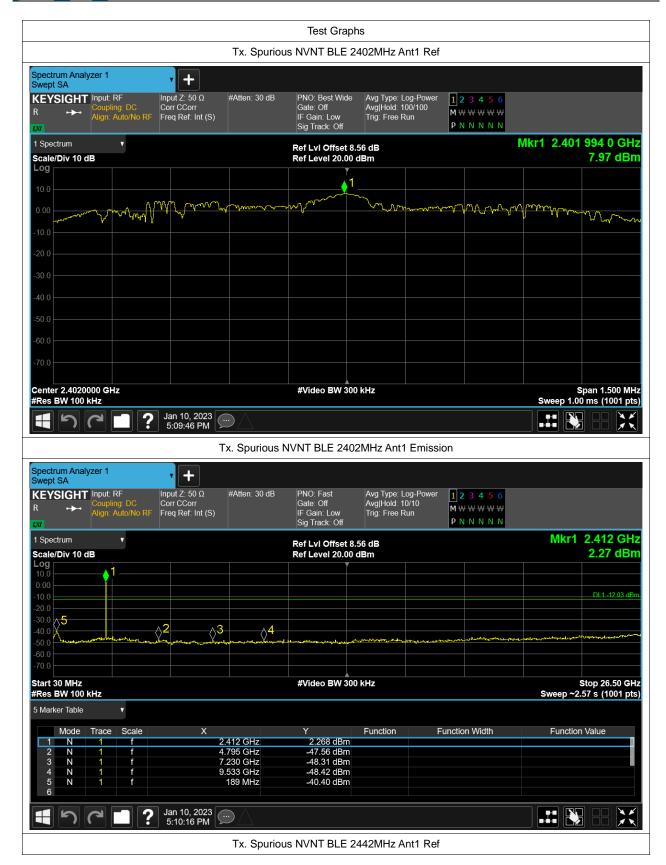





Tx. Spurious NVNT BLE 2480MHz Ant1 Ref



