




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	8.053	30	Pass
NVNT	BLE	2442	Ant1	7.943	30	Pass
NVNT	BLE	2480	Ant1	8.53	30	Pass

Project No.: JYTSZR2212060



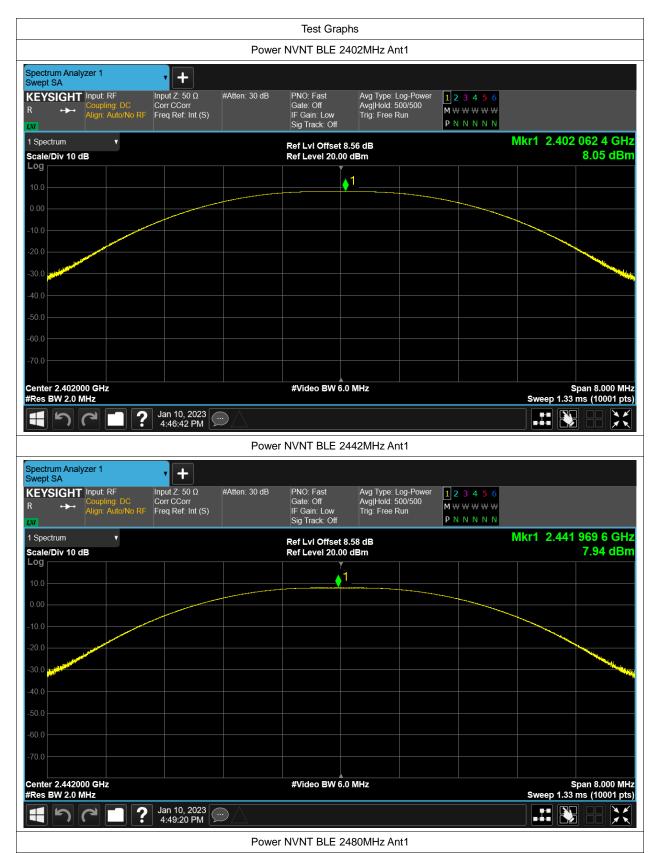









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.707	0.5	Pass
NVNT	BLE	2442	Ant1	0.707	0.5	Pass
NVNT	BLE	2480	Ant1	0.707	0.5	Pass














Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.067	
NVNT	BLE	2442	Ant1	1.066	
NVNT	BLE	2480	Ant1	1.065	



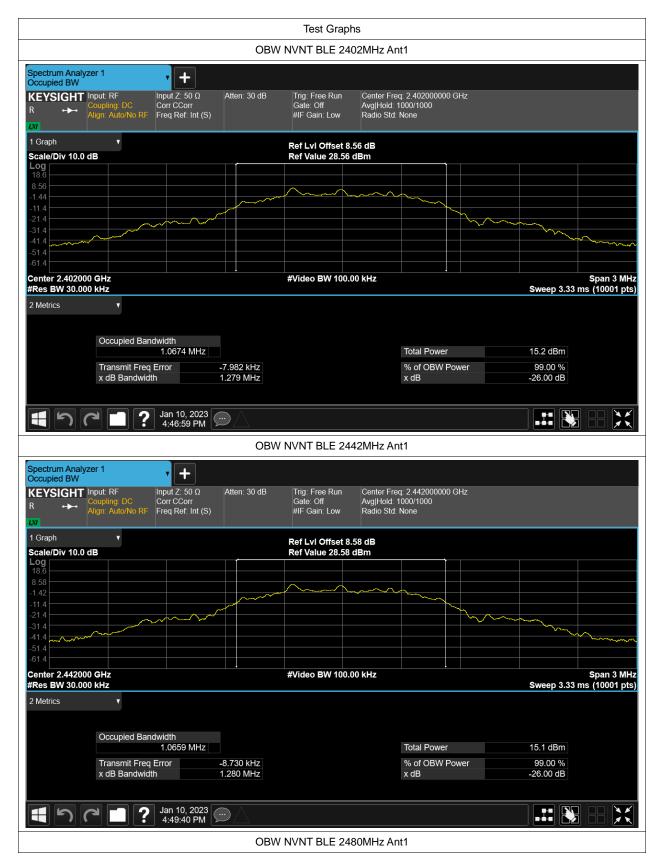











Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	2.327	8	Pass
NVNT	BLE	2442	Ant1	2.218	8	Pass
NVNT	BLE	2480	Ant1	2.777	8	Pass



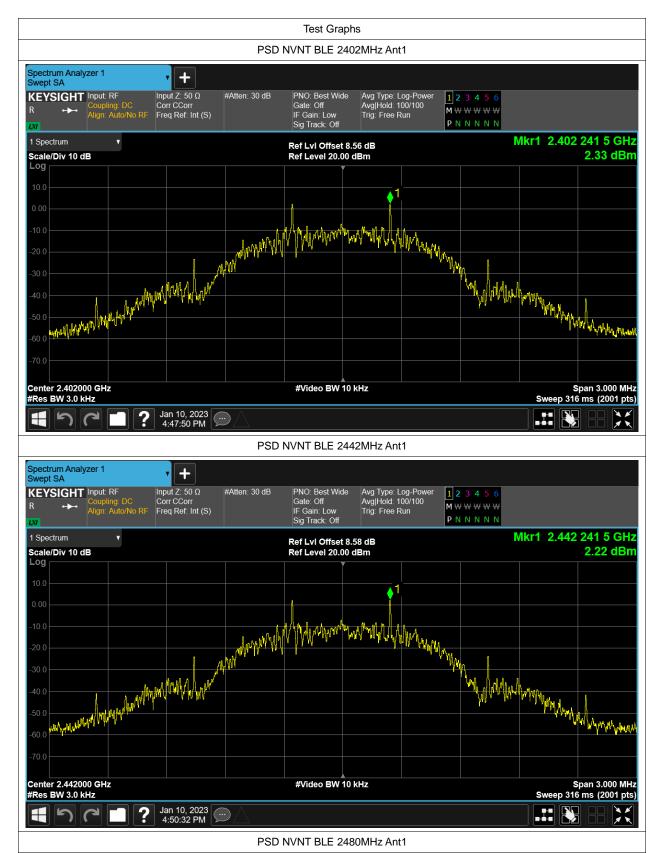



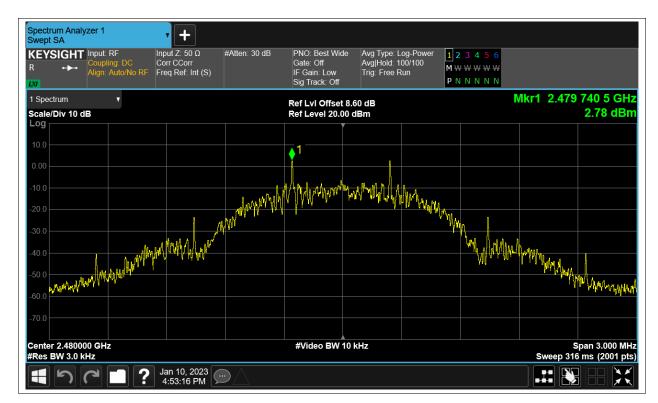







Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-54.09	-20	Pass
NVNT	BLE	2480	Ant1	-54.21	-20	Pass



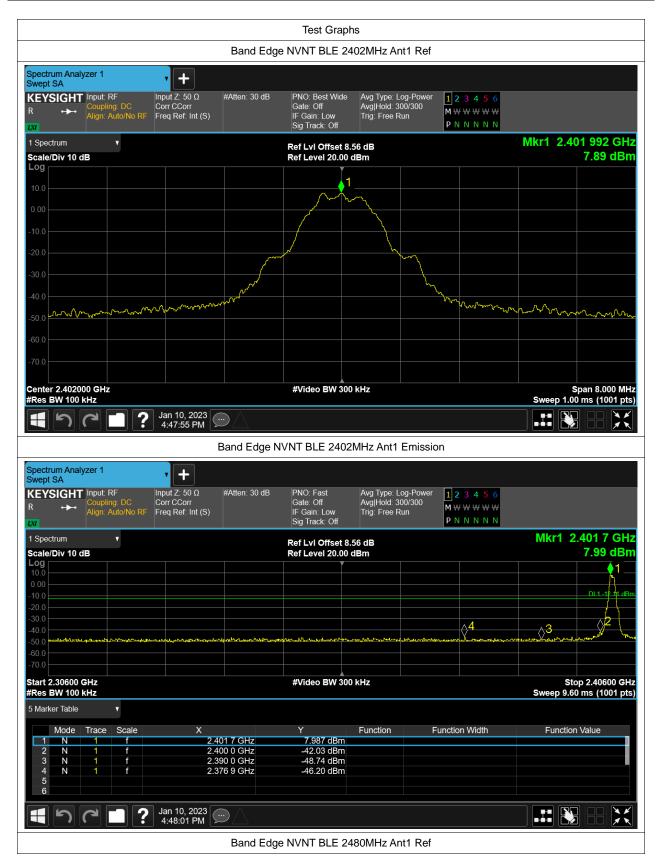



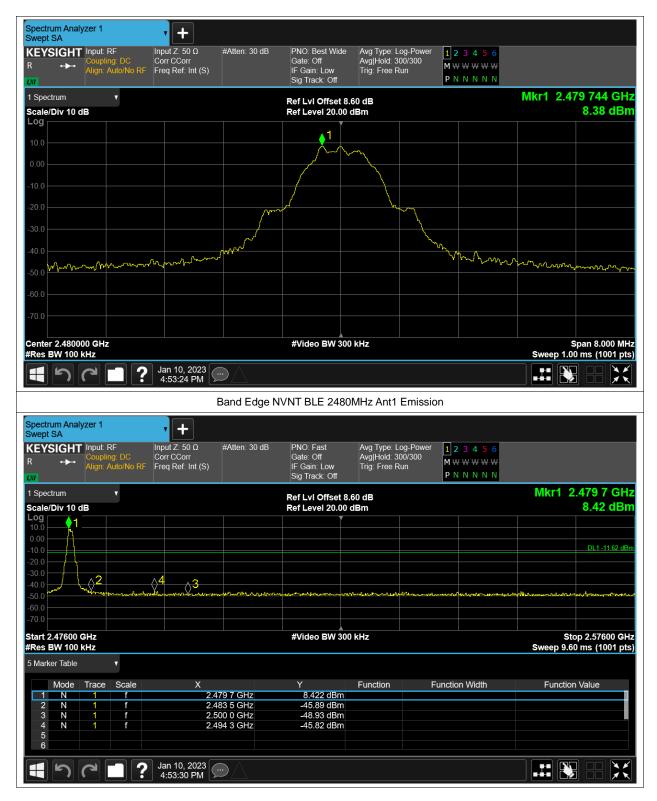





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-49.13	-20	Pass
NVNT	BLE	2442	Ant1	-48.35	-20	Pass
NVNT	BLE	2480	Ant1	-50.07	-20	Pass







