

Report No.: TW2203422-01E File reference No.: 2022-06-15

Applicant: Hangzhou Roombanker Technology Co., Ltd

Product: S-Serial Smart Gateway

Model No.: DSGW-034, RFA-Z115-Z2-001, RFA-Z115-Z2-002

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: June 15, 2022

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2203422-01E Page 2 of 50

Date: 2022-06-15



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT.	13
6.3	EUT Operation Condition.	13
6.4	Radiated Emission Limit.	13
7.0	6dB Bandwidth Measurement Bandwidth	23
8.0	Maximum Peak Output Power	28
9.0	Power Spectral Density Measurement.	30
10.0	Out of Band Measurement.	35
11.0	Antenna Requirement.	42
12.0	FCC ID Label	43
13.0	Photo of Test Setup and EUT View.	44

Report No.: TW2203422-01E

Date: 2022-06-15



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Telephone: +86-18768289112

Fax: --

1.3 Description of EUT

Product: S-Serial Smart Gateway

Manufacturer: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Trademark: N/A
Additional Trademark: N/A

Model Number: DSGW-034

Additional Number: RFA-Z115-Z2-001, RFA-Z115-Z2-002

Hardware Version: V1.0 Software Version: V1.0

Serial No.: DSGW034202205060001 Type of Modulation OQPSK

Frequency range 2405-2480MHz

Channel Separation 5MHz
Channel Number 16

Rating: DC5V, 1A

1.4 Submitted Sample: 1 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203422-01E Page 5 of 50

Date: 2022-06-15



1.5 Test Duration 2022-03-28 to 2022-06-15

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Andy-xing

Page 6 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



2.0 Test Equipment							
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17		
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2021-06-18	2022-06-17		
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2021-06-18	2022-06-17		
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17		
Loop Antenna	EMCO	6507	00078608	2021-06-18	2022-06-17		
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17		
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-06-18	2022-06-17		
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-02		
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2024-06-17		
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2024-06-17		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01		
9*6*6 Anechoic			N/A	2021-07-02	2022-07-01		
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17		
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17		
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17		
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17		
Spectrum	RS	FSP	1164.4391.38	2022-01-14	2023-01-13		
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	I	2021-06-18	2022-06-17		
RF Cable	Zhengdi	7m	I	2021-06-18	2022-06-17		
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17		
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17		
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17		
LISN	SCHAFFNER	NNB42	00012	2022-01-05	2023-01-04		
2.4G band-pass filter	Micro-Tronics	BRM50701	SN-041	2021-06-18	2022-06-17		

2.2 Automation Test Software

For Conducted Emission Test

Name	Version	
EZ-EMC	Ver.EMC-CON 3A1.1	

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203422-01E

Date: 2022-06-15



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
	Spectrum bandwidth of a	Pass	Complies
ECC David 15 Carloss and C	Orthogonal Frequency		
FCC Part 15 Subpart C	Division Multiplex System		
Paragraph 15.247(a)(2) Limit	Limit: 6dB		
	bandwidth>500kHz		
FCC Part 15, Paragraph	Maximum peak output	Pass	
15.247(b)	power		Complies
13.247(0)	Limit: max. 30dBm		
FCC Part 15, Paragraph	Transmitter Radiated	Pass	Complies
15.109,15.205 & 15.209	Emission		
	Limit: Table 15.209		
FCC Part 15, Paragraph	Power Spectral Density	Pass	Complies
15.247(e)	Limit: max. 8dBm		
FCC Part 15, Paragraph	Out of Band Emission and	Pass	Complies
15.247(d)	Restricted Band		
	Radiation		
	Limit: 20dB less than		
	peak value of fundamental		
	frequency		
	Restricted band limit:		
	Table 15.209		

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: TW2203422-01E

Date: 2022-06-15



5.Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15 MHz to 30MHz was investigated. The LISN used was 500hm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

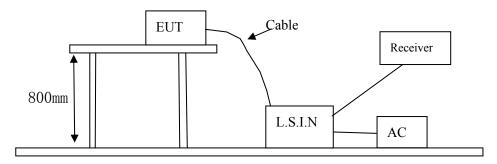

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
S-Serial Smart Gateway	Hangzhou Roombanker Technology Co., Ltd	DSGW-034, RFA-Z115-Z2-001, RFA-Z115-Z2-002	2AUXBDSGW-034

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203422-01E Page 9 of 50

Date: 2022-06-15



B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)				
(MHz)	Quasi-peak Level	Average Level			
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*			
$0.50 \sim 5.00$	56.0	46.0			
5.00 ~ 30.00	60.0	50.0			

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: TW2203422-01E

Date: 2022-06-15



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa


EUT set Condition: Keep Zigbee Transmitting

Results: Pass

Please refer to following diagram for individual

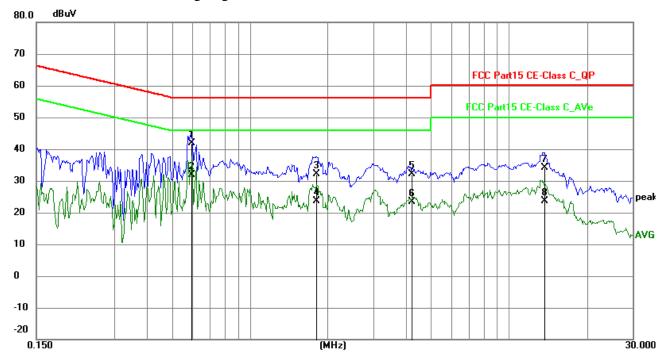

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5946	32.16	9.77	41.93	56.00	-14.07	QP	Р
2	0.5946	22.18	9.77	31.95	46.00	-14.05	AVG	Р
3	1.8036	22.45	9.80	32.25	56.00	-23.75	QP	Р
4	1.8036	13.75	9.80	23.55	46.00	-22.45	AVG	Р
5	4.2184	22.16	9.90	32.06	56.00	-23.94	QP	Р
6	4.2184	13.49	9.90	23.39	46.00	-22.61	AVG	Р
7	13.6509	23.69	10.32	34.01	60.00	-25.99	QP	Р
8	13.6509	13.25	10.32	23.57	50.00	-26.43	AVG	Р



Date: 2022-06-15



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep Zigbee Transmitting

Results: Pass

Please refer to following diagram for individual

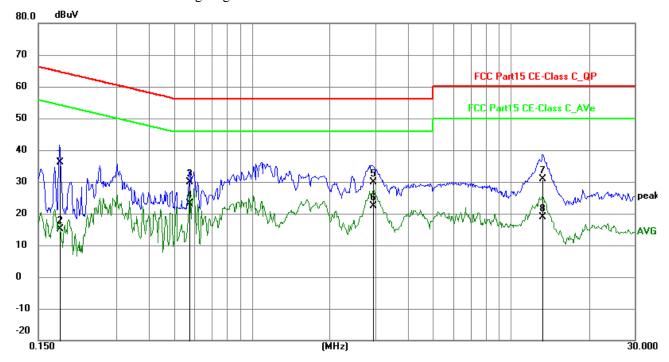

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1812	26.31	9.76	36.07	64.43	-28.36	QP	Р
2	0.1812	5.38	9.76	15.14	54.43	-39.29	AVG	Р
3	0.5751	20.13	9.77	29.90	56.00	-26.10	QP	П
4	0.5751	13.46	9.77	23.23	46.00	-22.77	AVG	Р
5	2.9307	20.15	9.84	29.99	56.00	-26.01	QP	П
6	2.9307	12.48	9.84	22.32	46.00	-23.68	AVG	П
7	13.2414	20.49	10.30	30.79	60.00	-29.21	QP Q	П
8	13.2414	8.67	10.30	18.97	50.00	-31.03	AVG	Р

Report No.: TW2203422-01E Page 12 of 50

Date: 2022-06-15




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

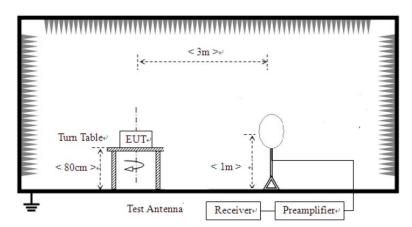


Page 13 of 50

Report No.: TW2203422-01E


Date: 2022-06-15



For radiated emissions from 30MHz to1GHz

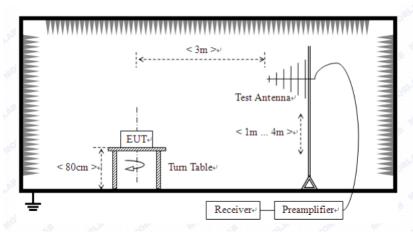

For radiated emissions above 1GHz

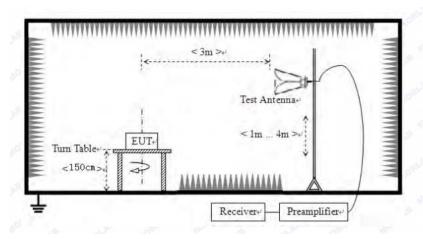

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Page 14 of 50 Report No.: TW2203422-01E

Date: 2022-06-15



Frequencies in restricted band are complied to limit on Paragraph 15.209

	<u> </u>	8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
0.009-0.049	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

600

1000

Report No.: TW2203422-01E

Date: 2022-06-15



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

Test Figure:

FEC FCC Part 15C Class B 30MHz-1GHz

60

60

M1

M2

M2

M1

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	41.152	17.23	-12.01	40.0	-22.77	Peak	257.00	100	Horizontal	Pass
2	217.163	20.15	-13.49	46.0	-25.85	Peak	90.00	100	Horizontal	Pass
3	580.095	25.79	-5.60	46.0	-20.21	Peak	300.00	100	Horizontal	Pass
4	796.593	29.69	-3.07	46.0	-16.31	Peak	111.00	100	Horizontal	Pass

Frequency (MHz)

100

Report No.: TW2203422-01E

Date: 2022-06-15



Test result


General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

Test Figure:

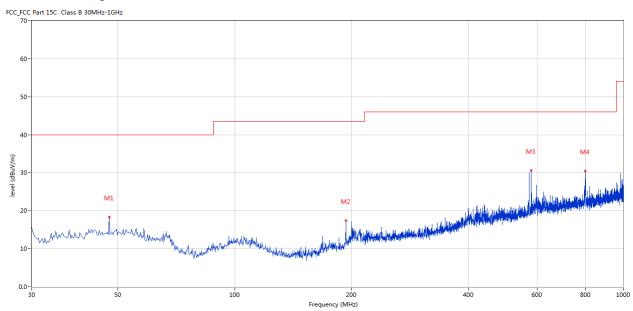

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	47.456	18.28	-11.38	40.0	-21.72	Peak	128.00	100	Vertical	Pass
2	193.162	17.37	-13.90	43.5	-26.13	Peak	273.00	100	Vertical	Pass
3	580.095	30.63	-5.60	46.0	-15.37	Peak	174.00	100	Vertical	Pass
4	798.533	30.46	-3.01	46.0	-15.54	Peak	187.00	100	Vertical	Pass


Report No.: TW2203422-01E Page 17 of 50

Date: 2022-06-15



Please refer to the following test plots for details:

Low Channel: Horizontal

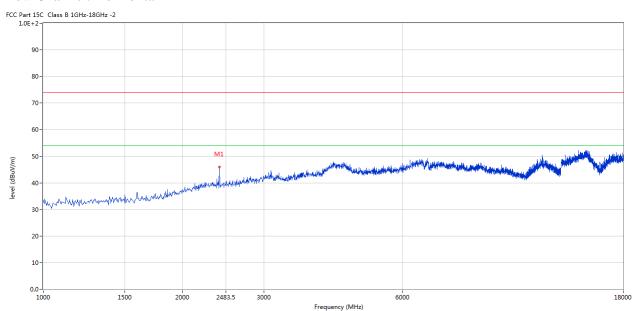


Ν	0.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1		2405	45.91	-3.57	74.0	-28.09	Peak	0.00	100	Horizontal	Pass

Report No.: TW2203422-01E Page 18 of 50

Date: 2022-06-15



Low Channel: Vertical

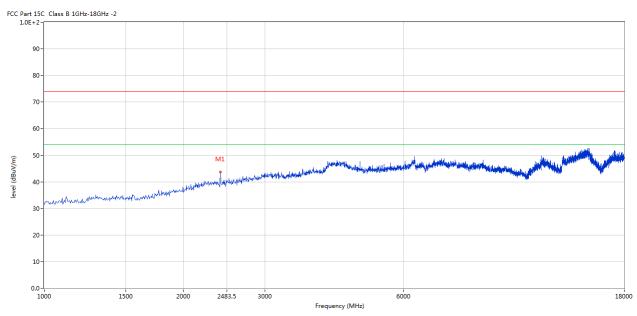


١	No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	1	2405	43.67	-3.57	74.0	-30.33	Peak	355.00	100	Vertical	Pass

Report No.: TW2203422-01E Page 19 of 50

Date: 2022-06-15



Middle Channel: Horizontal

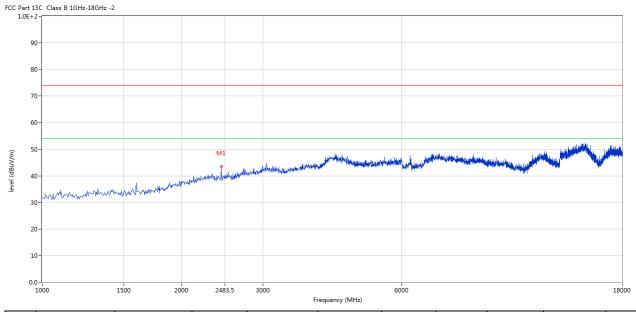


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440	43.51	-3.57	74.0	-30.49	Peak	312.00	100	Horizontal	Pass

Page 20 of 50 Report No.: TW2203422-01E

Date: 2022-06-15



Middle Channel: Vertical

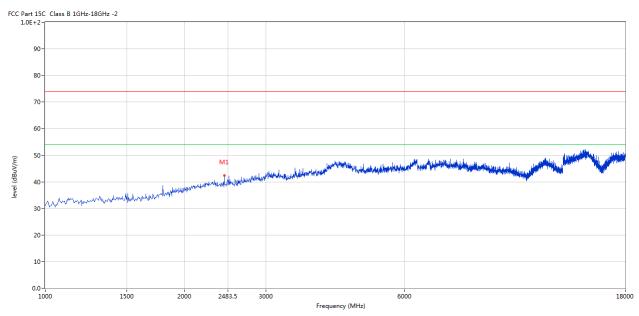


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2440	42.47	-3.57	74.0	-31.53	Peak	0.00	100	Vertical	Pass

Page 21 of 50 Report No.: TW2203422-01E

Date: 2022-06-15



High Channel: Horizontal

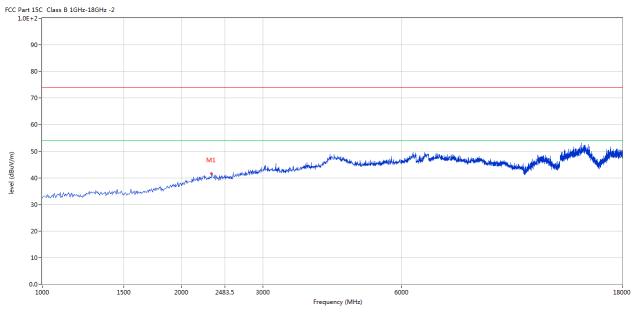

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2325.669	41.55	-3.29	74.0	-32.45	Peak	110.00	100	Horizontal	Pass


Page 22 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



High Channel: Vertical

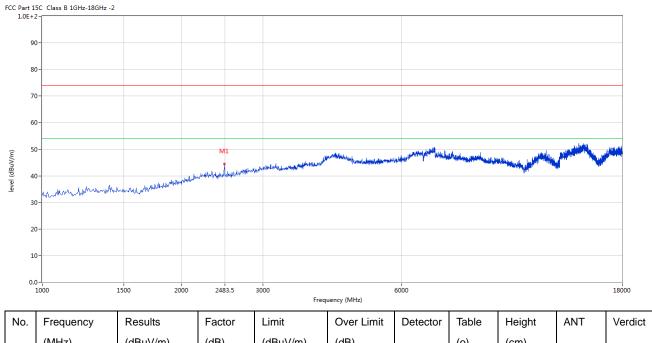

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2479.630	44.52	-3.57	74.0	-29.48	Peak	81.00	100	Vertical	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- 5. The peak value less than the AV limit, no necessary to take down the AV measurement result.
- 6. A 2.4G band-pass filter was used the radiated emissions test.

Page 23 of 50


Report No.: TW2203422-01E

Date: 2022-06-15



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 24 of 50 Report No.: TW2203422-01E

Date: 2022-06-15



6dB BW

ab b m							
EUT		S-Serial Sr	nart Gateway	Mod	lel		DSGW-034
Mode		Keep Tr	nsmitting Test Voltage		Transmitting Test Voltage DC5.0		DC5.0V
Temperati	ure	24 d	deg. C, Humi		dity		56% RH
Channel	Cha	annel Frequency (MHz)	* *		Minimum Limit (MHz)		Pass/ Fail
Low		2405	1413			0.5	Pass
Middle		2440	1433		0.5		Pass
High	•	2480	1413		0.5		Pass

Page 25 of 50


Report No.: TW2203422-01E

Date: 2022-06-15



Test Figure:

1. Condition: Low Channel

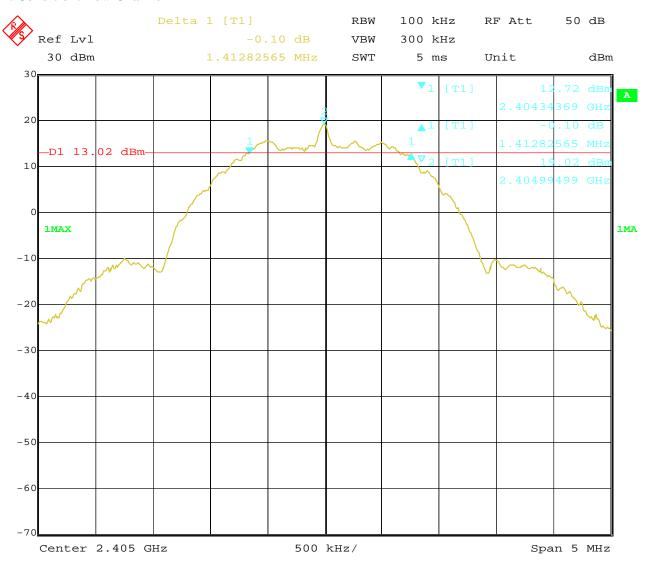

Date: 18.MAY.2022 17:21:46


Page 26 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



2. Condition: Middle Channel

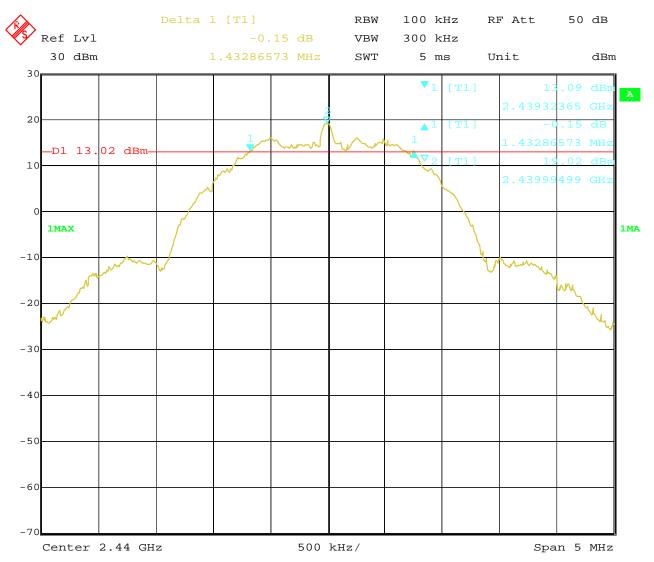


Date: 18.MAY.2022 16:54:31

Report No.: TW2203422-01E Page 27 of 50

Date: 2022-06-15



3. High Channel

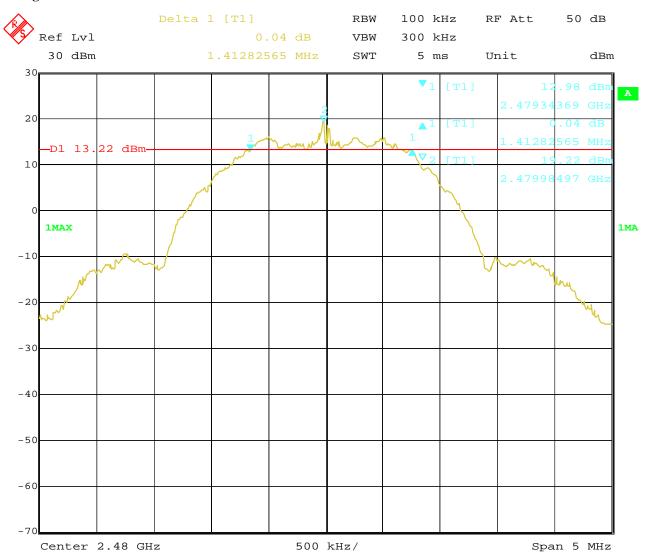

Date: 18.MAY.2022 16:59:58


Report No.: TW2203422-01E Page 28 of 50

Date: 2022-06-15



8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: TW2203422-01E Page 29 of 50

Date: 2022-06-15



8.4Test Results

EUT		S-Serial Si	mart Gateway	Model	DSG	W-034
Mode		Keep Tı	ransmitting	Test Voltage	DC	5.0V
Temperatu	re	24 (leg. C, Humidity		56%	6 RH
Channel	Ch	nannel Frequency	Max. Power O	Output (dBm)	Peak Power Limit	Pass/ Fail
Chamer		(MHz)	Pea	ık	(dBm)	
Low		2405	20.9	91	30	Pass
Middle		2440	20.9	93	30	Pass
High		2480	20.7	76	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

Page 30 of 50


Report No.: TW2203422-01E

Date: 2022-06-15



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 3 kHz.
- 3. Set the VBW =10 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2203422-01E Page 31 of 50

Date: 2022-06-15



9.4Test Result

EUT		S-Se	rial Smart G	ateway	Mode	el		DSGW-034
Mode		Keep Transmitting		tting	Test Vol	tage		DC5.0V
Temperat	ure		24 deg. C,	Humidit		lity		56% RH
Channel	Re	Power ading	Cable Loss (dB)	Final Power Spectral Density (dBm/3kHz)		Maxir Lim (dBm/3	nit	Pass/ Fail
Low	-	5.63	0.2	6	.83	8		Pass
Middle	`	5.64	0.2	_	.84	8		Pass
High	6	5.77	0.2	6	.97	8		Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Page 32 of 50


Report No.: TW2203422-01E

Date: 2022-06-15



Test Figure:

1. Condition: Low Channel

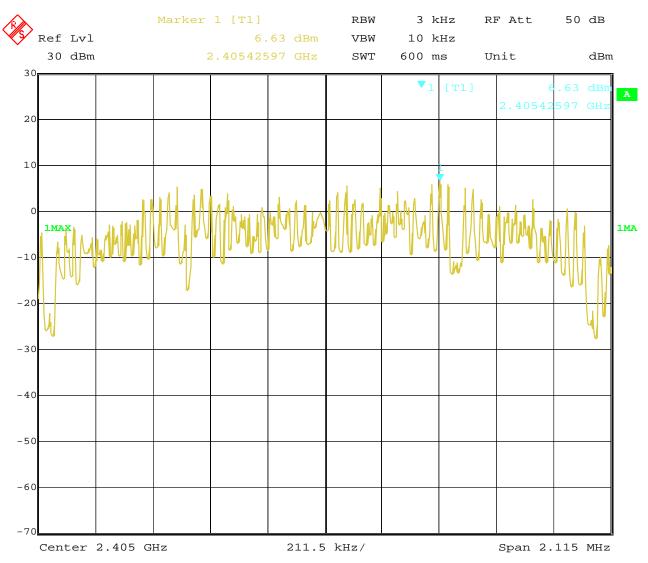

15.JUN.2022 11:14:19 Date:


Page 33 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



2. Condition: Middle Channel

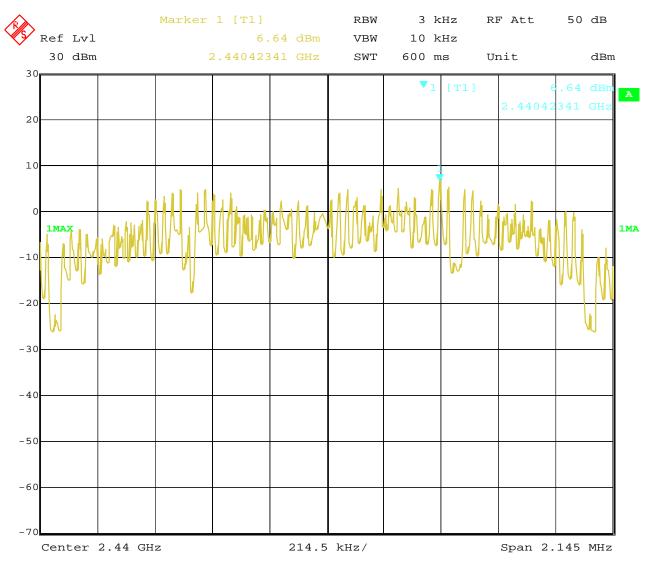

Date: 15.JUN.2022 11:20:50


Page 34 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



3. High Channel

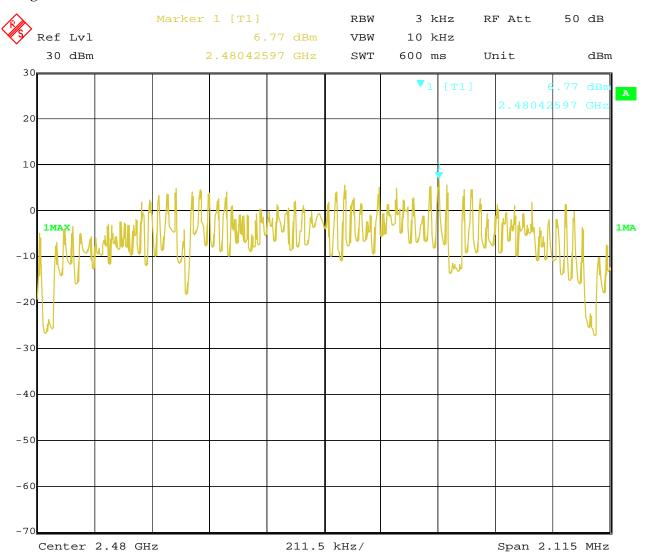

Date: 15.JUN.2022 11:30:49


Page 35 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 36 of 50

Report No.: TW2203422-01E


Date: 2022-06-15



10.4 Band-edge Measurement

EUT	S-Serial Smart Gateway	Model	DSGW-034
Mode	Keep Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

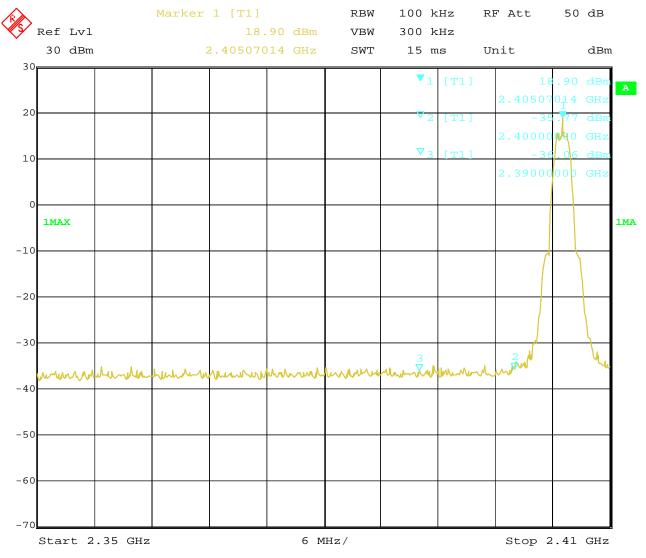

Date: 18.MAY.2022 17:36:29

Page 37 of 50

Report No.: TW2203422-01E


Date: 2022-06-15



10.4 Band-edge Measurement

EUT	S-Serial Smart Gateway	Model	DSGW-034
Mode	Keeping Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

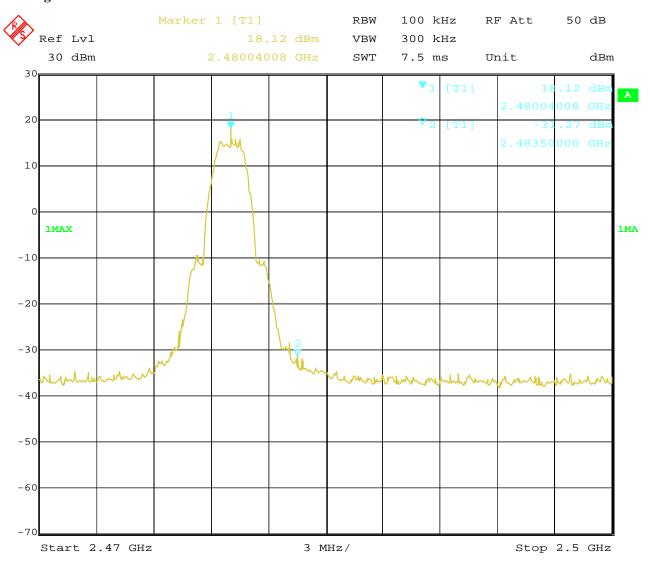

Date: 18.MAY.2022 17:38:29

Page 38 of 50

Report No.: TW2203422-01E Date: 2022-06-15



10.4 Restrict Band Measurement

	EUT S-Serial Smart Gateway					Model			DSGW-034		
	Mode	Kee	p Transmi	itting	Test Voltage DC5.0V				DC5.0V		
Temperature			24 deg. C,		Н	umidity			56% RH		
Te	est Result:		Pass								
CC Part 1	L5C Class B 1GHz-18GH:	z -2					-				
1.0E+	2-							//ww^			
9	0-										
8	0-							/	•		
								1			
7	0-							ſ	1		
	0-						/				
6							المسلف				
6	0-	trouble at a long a still of		Maritima beach Griffe of Morris and	an idkulmaaha italik	M1	All market and the second		Market Market		
6	0-	ther with the place of produces which are far	The state of the s	te essepateuritesse più chilosopaa, espi	400 del federación de de la constitución de de la constitución de la c	M1	ili alian kanada ka		NAME OF THE PARTY	A	
level (dBuV/m)	0-	tion the popular dynamic spiritum of the		t e esta parte parte por la dissa e en actual de la constanta	400 de februario estador estad	M1	distributed by		And the state of t	harman and a second	
level (αΒαΛ/ω) 3 2		nigovild in option of superior and proper superior and su		k Na estatura kapata kata kaka ka	400.0% february biocensisten ageis with fe	M1	i Hadaniya da karaka karak		Mark Market Justine	Armona	
6 (dBuV/m) 5 4 3 2 2 1		tiga ville tangli mendiya dan sebilik gar ^{an}	The state of the s	No college biography and december and	400 de la homos de la lacementa de lacementa de lacementa de la lacementa de la lacementa de la lacementa de la lacementa de lacementa de lacementa de lacementa de lacementa de la lacementa de lacementa del lacementa de lacementa del lacementa de lacementa de lacementa de lacementa de lacementa de lacementa del l	M1	dilatin de de la constitución de		Mark Water Mark Mark	A. Lawrence Market	
6 (\(\mu\)/\(\mu\)/\(\mu\) S S S S S S S S S		tigovish specificands values with an of the		No estatura de quadratura de la electronida de constitución de la estatura de la	Frequency (MHz)	M1	ditadiran di di		NAME OF THE PROPERTY OF THE PR	2420	
6 (\(\mu\)/\(\mu\)/\(\mu\) S S S S S S S S S		Results	Factor	Limit	Frequency (MHz)	M1 Detector	Table	Height	ANT		
(EL/\ngp) eval 3 2 1 0.	0-	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	1		Table (o)	Height (cm)		2420	

Note: The peak value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: TW2203422-01E Page 39 of 50

Date: 2022-06-15



10.4 Restrict Band Measurement

EUT Mode Temperature		S-Ser	rial Smar	t Gateway	I	Model		DS	GW-034		
		e Keep Transmitting			Tes	Test Voltage			DC5.0V		
		ure 24 deg. C,			Н	umidity		56% RH			
Tes	st Result:		Pass								
Part 15 1.0E+2	5C Class B 1GHz-18GHz	:-2									
2.02.12								/of Pacific			
90)-							/			
80)-							/			
70)-										
							/	,			
60)-								1		
50)-								<u> </u>		
			(max	والمعارض وال	الماسية والمساور والم	M1	STATE OF THE PERSON NAMED IN COLUMN TO THE PERSON NAMED IN COLUMN		No.		
40)		الزوينة فأندر بيتنا فكالأثاث		and the state of t	March Soft Aster al Phints of char	•				
	THE WAS ARREST TO THE PROPERTY OF THE PARTY	High apaperpart and the said billion	"Makin and Marid	Distriction of the state of the							
40 30	THE WAS ARREST TO THE PROPERTY OF THE PARTY	The second section is a second section of the		The prices and year by your and the survey						7	
		ner om generalistische		The processing and the section sections.							
30		er manifestaliste		The promises and passed on a service							
30 20 10		ner-renoviros postesidos		THE CONTROL OF THE CO							
30 20 10		Her compared place with a little of		THE CONTRACTOR OF THE CONTRACT	Frequency (MF	iz)				2420	
30 20 10 0.0 2		Results	Factor	Limit	Frequency (Mr	lz) Detector	Table (o)	Height	ANT		
30 20 10	2350	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)		ı	Table (o)	Height (cm)		2420	

Note: The peak value less than the AV limit, no necessary to take down the AV measurement result.


Report No.: TW2203422-01E Page 40 of 50

Date: 2022-06-15



10.4 Restrict Band Measurement

EUT	S-Serial Smart Gateway	Model	DSGW-034		
Mode	Keep Transmitting	Test Voltage	DC5.0V		
Temperature	24 deg. C,	Humidity	56% RH		
Test Result:	Pass				

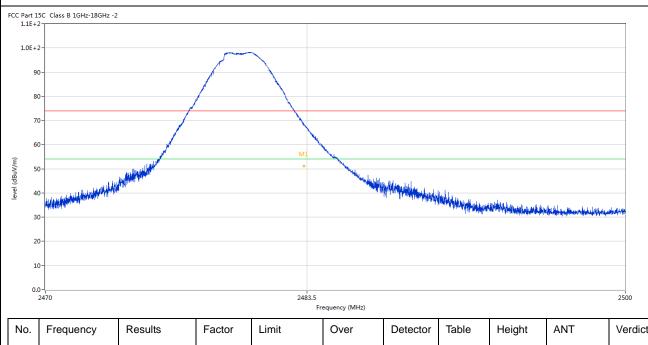

No.	Frequency	Results	Factor	Limit	Over	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)		(o)	(cm)		
1	2483.347	68.58	-3.57	74.0	-5.42	Peak	124.00	100	Horizontal	Pass
1**	2483.347	51.08	-3.57	54.0	-2.92	AV	124.00	100	Horizontal	Pass


Report No.: TW2203422-01E Page 41 of 50

Date: 2022-06-15



10.4 Restrict Band Measurement

EUT	S-Serial Smart Gateway	Model	DSGW-034
Mode	Keep Transmitting	Test Voltage	DC5.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

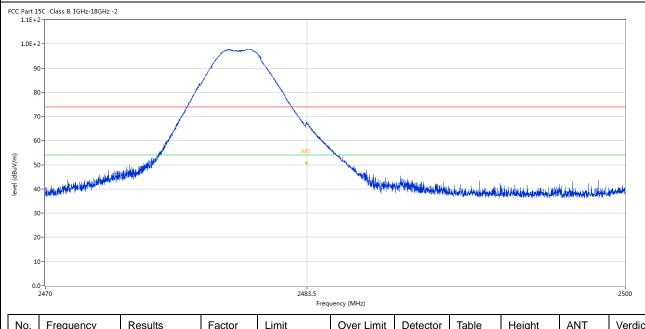

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2483.459	68.77	-3.57	74.0	-5.23	Peak	204.00	100	Vertical	Pass
1**	2483.459	50.66	-3.57	54.0	-3.34	AV	204.00	100	Vertical	Pass

Date: 2022-06-15



Page 42 of 50

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

PCB antennas used. The gain of the antennas is 1.5dBi. (Declared by the applicant)

Report No.: TW2203422-01E Page 43 of 50

Date: 2022-06-15




12.0 FCC ID Label

FCC ID: 2AUXBDSGW-034

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

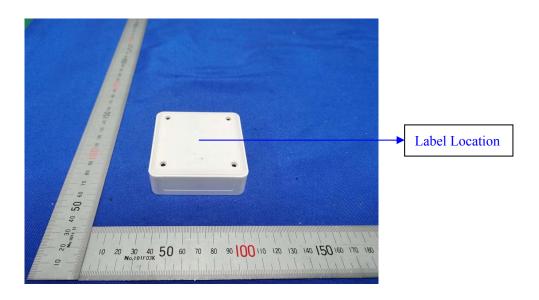

Page 44 of 50


Report No.: TW2203422-01E

Date: 2022-06-15



13.0 Photo of testing

Conducted Emission Test Setup:

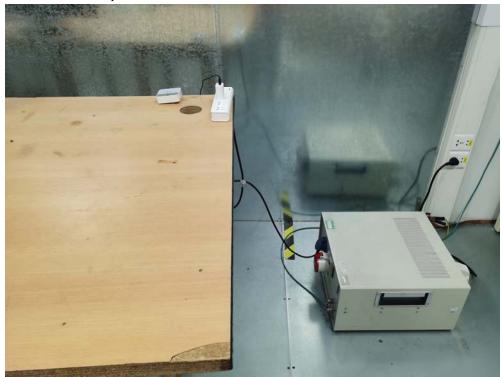


Page 45 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



Radiated Emission Test Setup:

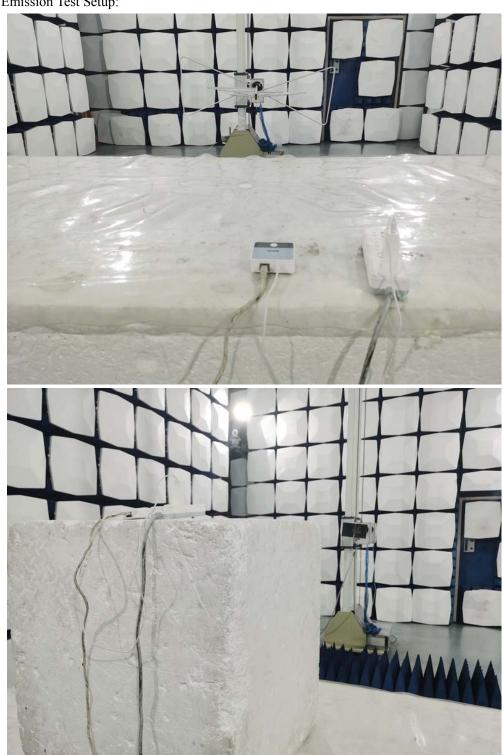

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any


discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-06-15



Photographs - EUT

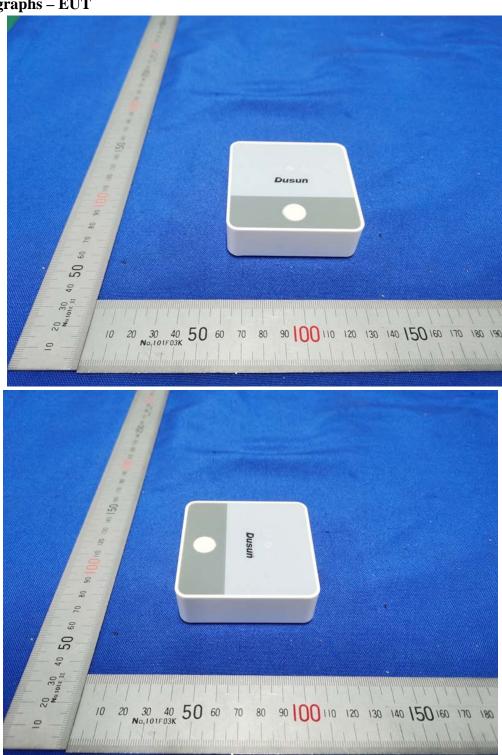

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2022-06-15



Photographs - EUT

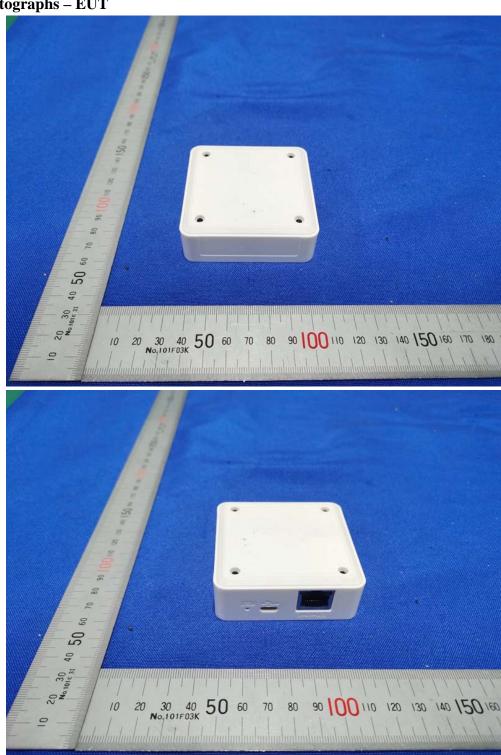

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Page 48 of 50

Report No.: TW2203422-01E

Date: 2022-06-15



Photographs - EUT

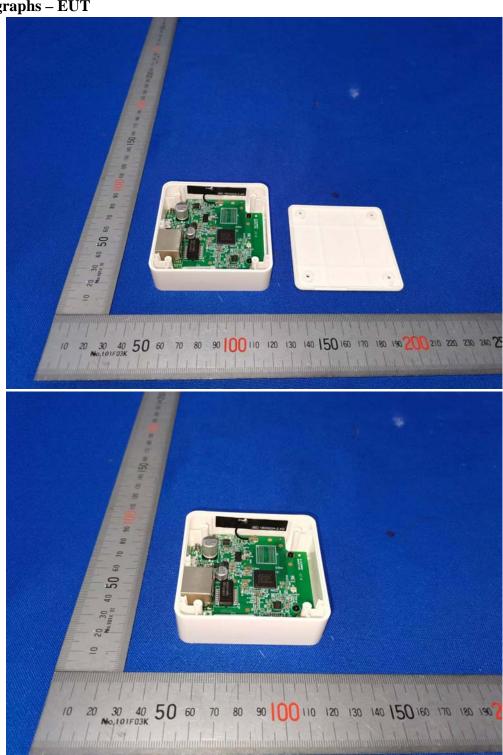

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2022-06-15



Photographs - EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2022-06-15



Photographs - EUT





End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.