

Design Specifications	Typical	Units
Antenna form	FPC	
Operating frequency	700-960,1710-2690	MHz
Gain	-2.55 ~ 2.89	dBi
Antenna efficiency	24.86 ~ 64.33	%
Voltage standing wave ratio (VSWR).	<5	
Polarization mode.	Line polarization	
Axial Ratio	When the antenna is circularly polarized, note the size of the axis ratio within the operating bandwidth	N/A
Radiation direction	Omnidirectional	
Feed-in impedance	50 ohm	
Power capacity	33	dBm
Antenna Interface.	Bullet foot contact	
Antenna size	See the drawings section	
Weight	No requirements	
Operating temperature (Operatin Temp).	-30 ----- 70	°C
Storage Temp	-30 ----- 70	°C

ShenZhen VLG Wireless Technology Co.,Ltd

www.vlg.com.cn

VLG has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

DSGW-090 4G antenna datasheet

1. **Specifications:** The report mainly provides the test status of various electrical performance parameters of DSGW-090 4G antenna. (Figure 1 below).



Figure 1 DSGW-090 4G antenna

2. Electrical performance

2.1 Specifications

The DSGW-090 4G antenna operates in **the 700-960, 1710-2690MHz bands.**

2.2 Antenna matching circuit

The DSGW-090 4G antenna matching motherboard comes with matching.

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

2.3 Testing of standing wave ratio (VSWR).

A. Setup for the test

The VSWR test rig is connected sequentially as the 8714ET Network Analyzer → 50 ohm coaxial Cable → 120mm copper tube → EUT

Handling of the test fixture: from the antenna 50 ohm test point, a cable leads out the SMA connector, connects it with a copper tube with a choke, and then connects the other devices in turn.

B. VSWR


The following table shows the VSWR values for the edge frequency points in the operating band of the DSGW-090 4G antenna. The VSWR obtained from the test, the correlation waveform is shown in the annex.

Band	Frequency (MHz)	VSWR
4G	700	4.71
	824	3.41
	960	4.07
	1710	3.45
	2690	3.57

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

2.3.1 S11 parameters

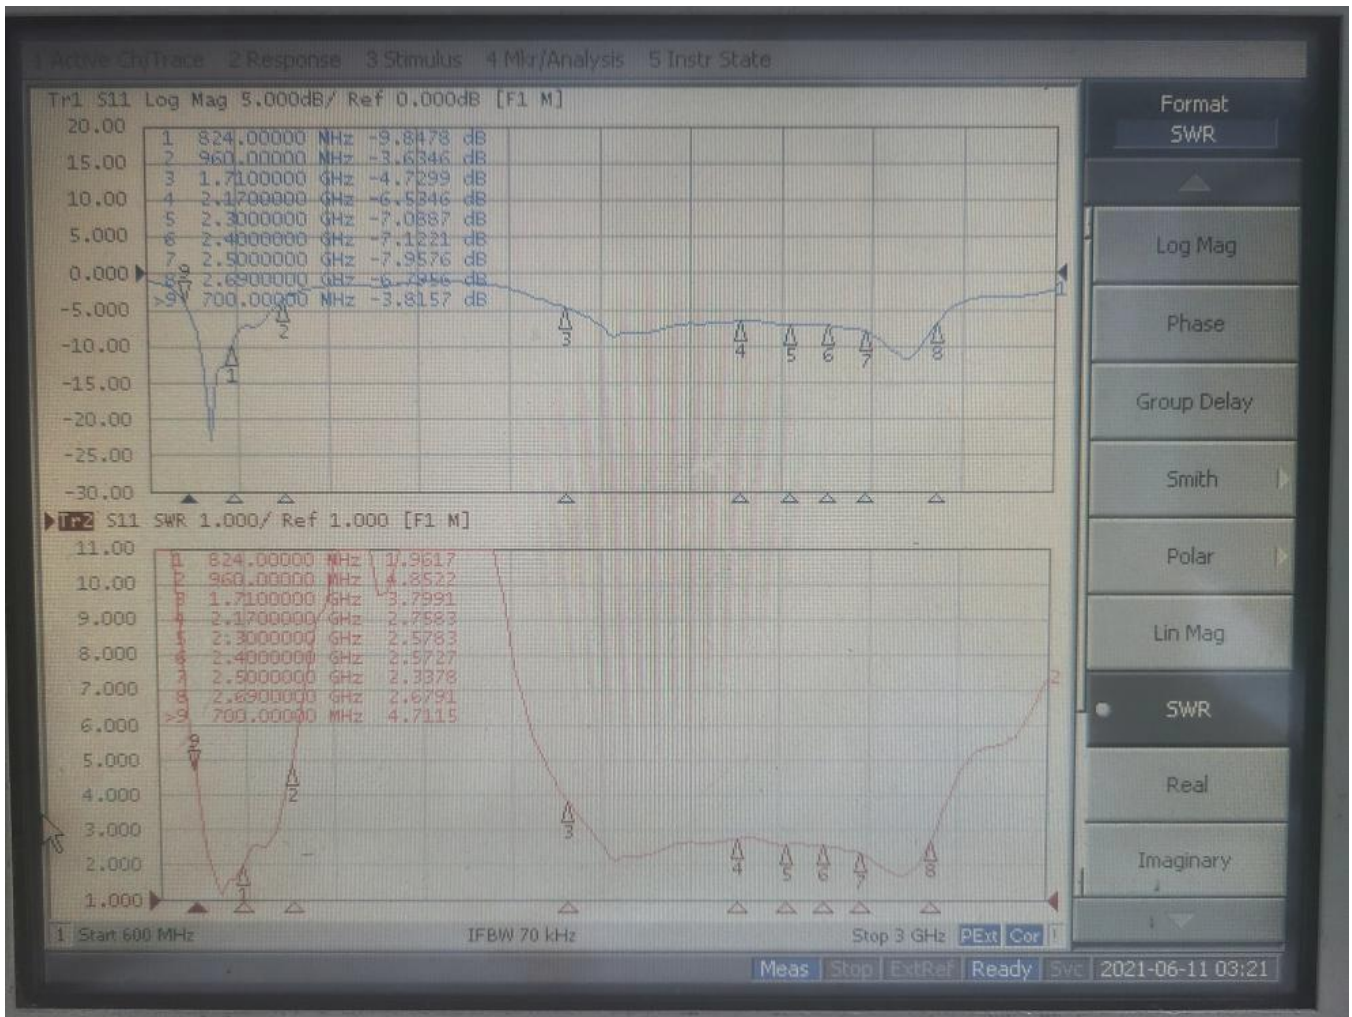

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.



2.3.2 Passive antenna efficiency

Freq(MHz)	Gain(dBi)	Efficiency(dB)	Efficiency(%)	Freq(MHz)	Gain(dBi)	Efficiency(dB)	Efficiency(%)
700	-1.86	-6.05	24.88	1710	0.68	-4.84	32.80
710	-0.87	-5.06	31.16	1745	1.56	-3.81	41.59
720	0.21	-4.18	38.21	1780	1.92	-3.31	46.71
730	0.61	-3.71	42.56	1815	2.59	-2.89	51.39
740	1.05	-3.21	47.79	1850	2.55	-2.73	53.32
750	1.40	-2.75	53.07	1885	2.68	-2.55	55.56
760	1.76	-2.39	57.69	1920	2.89	-2.31	58.71
770	1.95	-2.12	61.41	1955	2.61	-2.22	60.04
780	1.93	-1.92	64.33	1990	2.21	-2.40	57.56
790	1.28	-2.42	57.27	2025	1.75	-2.78	52.74
800	-0.43	-4.28	37.32	2060	1.32	-3.17	48.22
810	0.13	-3.61	43.53	2095	1.20	-3.38	45.94
820	1.13	-2.66	54.25	2130	1.00	-3.29	46.86
830	1.49	-2.48	56.45	2165	0.89	-3.15	48.37
840	1.63	-2.45	56.85	2200	1.30	-3.23	47.58
850	1.49	-2.69	53.84	2235	2.06	-3.08	49.19
860	1.18	-2.97	50.41	2270	2.40	-3.01	50.04
870	0.56	-3.55	44.14	2305	1.97	-3.16	48.35
880	-0.53	-4.30	37.15	2340	2.01	-3.11	48.92
890	-1.43	-4.90	32.38	2375	2.19	-3.01	49.96
900	-1.85	-5.11	30.85	2410	1.65	-3.02	49.90
910	-1.46	-4.68	34.03	2445	1.60	-2.72	53.51
920	-1.48	-4.82	32.95	2480	2.14	-2.16	60.86
930	-1.72	-4.97	31.85	2515	1.65	-2.11	61.46
940	-1.99	-5.19	30.30	2550	1.30	-2.66	54.19
950	-2.47	-5.59	27.58	2585	1.47	-3.00	50.16
960	-2.55	-5.72	26.76	2620	1.05	-3.30	46.75
				2655	0.38	-3.66	43.04
				2690	-0.03	-4.25	37.56

www.vlg.com.cn


VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

2.3.3 Directional diagram

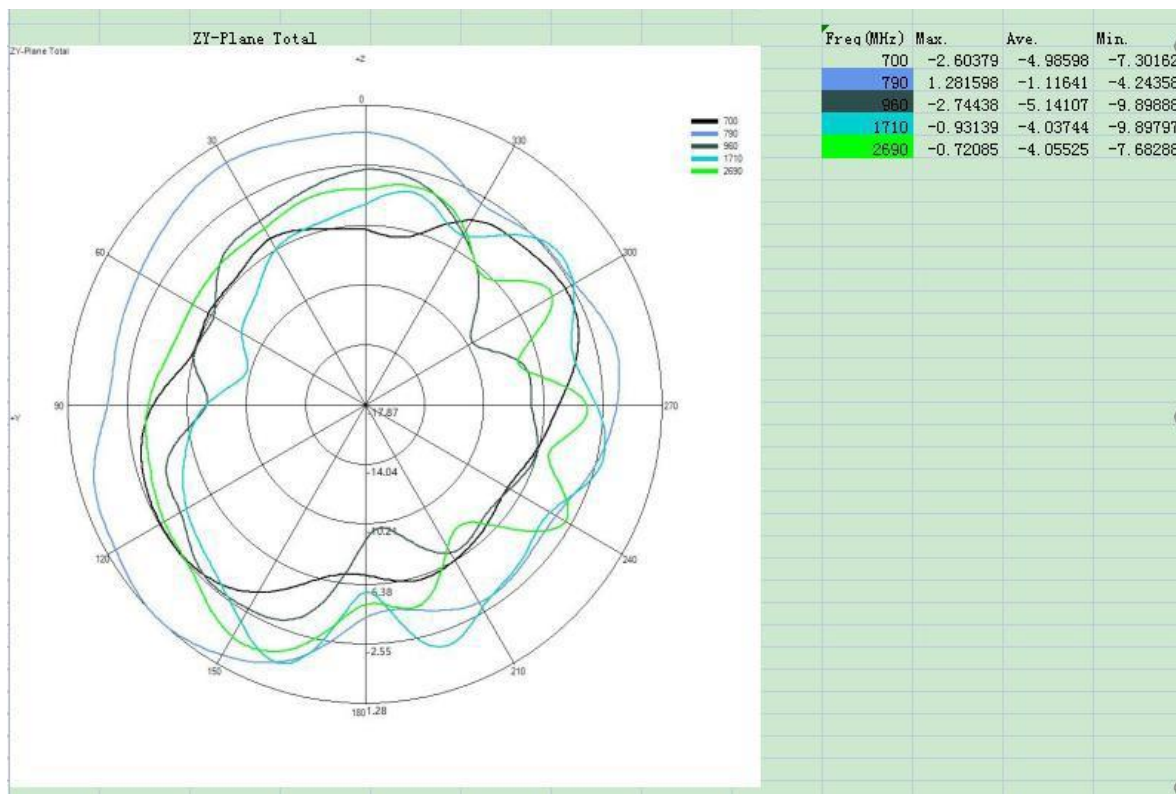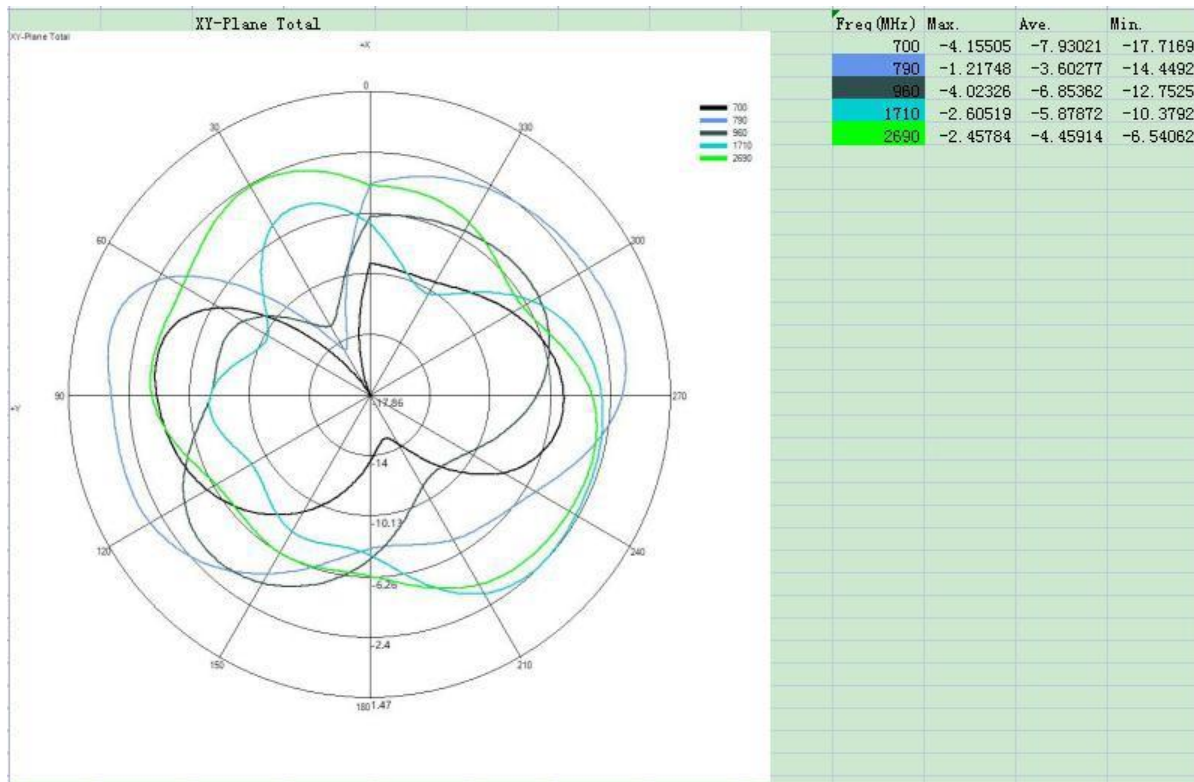

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

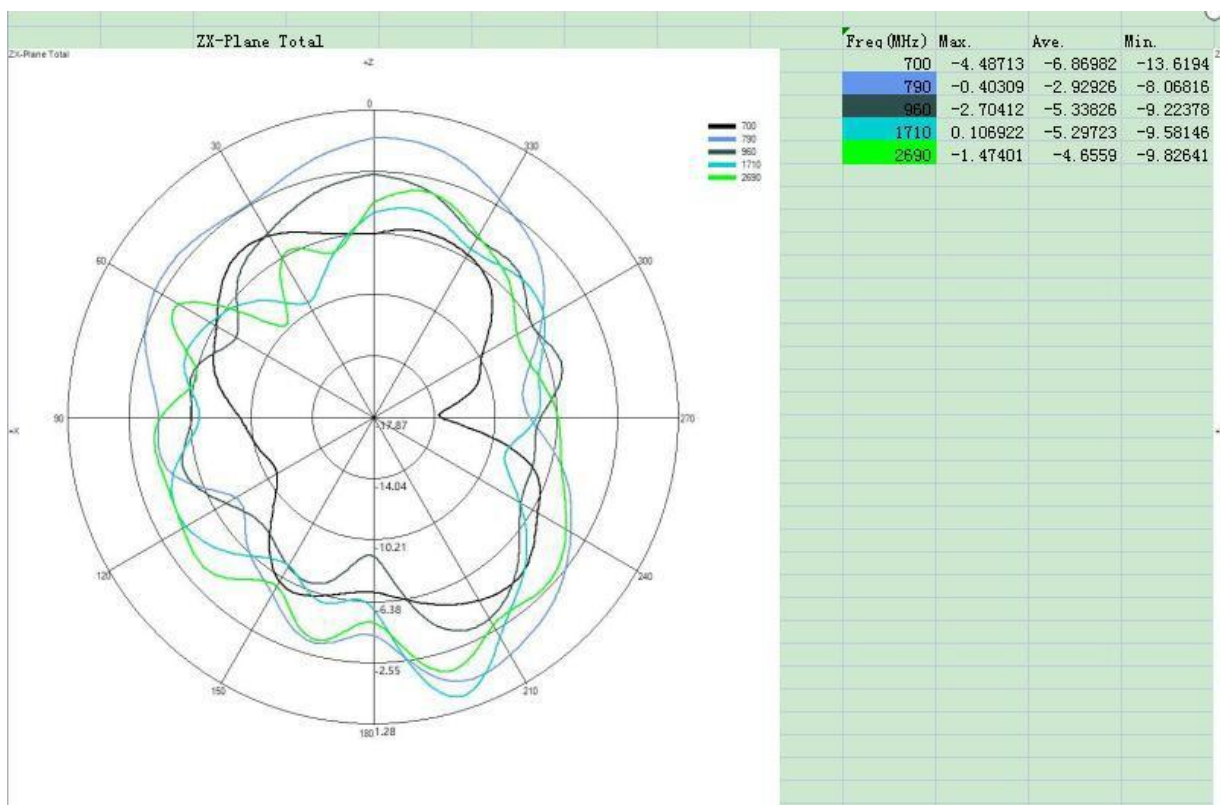

3. Recommendations and conclusions

This report is provided by customers DSGW-090 4G. The electrical performance of the antenna measured in the final version of the antenna. As can be seen from the above test data, this antenna provides good electrical performance. Weili Valley R&D looks forward to your confirmation, thank you for your cooperation!

4. See attached file for drawing samples and appearance

www.vlg.com.cn

VLG Communication has possession of proprietary information provided in this report and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of VLG Communication Technology.

