




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	16.053	30	Pass
NVNT	BLE	2442	Ant1	16.254	30	Pass
NVNT	BLE	2480	Ant1	16.143	30	Pass

Project No.: JYTSZR2209089



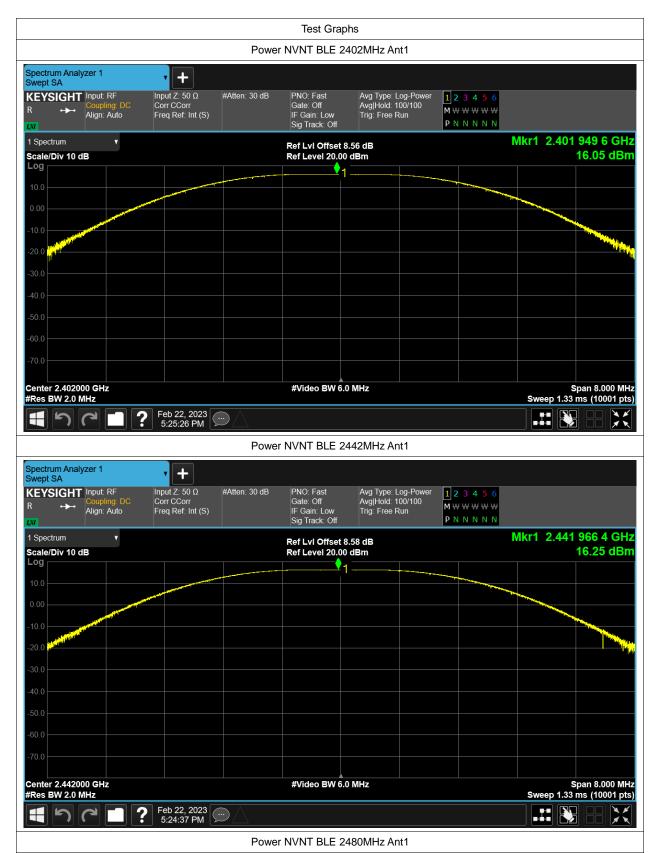









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.068	0.5	Pass
NVNT	BLE	2442	Ant1	1.068	0.5	Pass
NVNT	BLE	2480	Ant1	0.989	0.5	Pass

Project No.: JYTSZR2209089













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.03	
NVNT	BLE	2442	Ant1	2.029	
NVNT	BLE	2480	Ant1	2.037	

Project No.: JYTSZR2209089














Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-1.681	8	Pass
NVNT	BLE	2442	Ant1	-1.404	8	Pass
NVNT	BLE	2480	Ant1	1.399	8	Pass







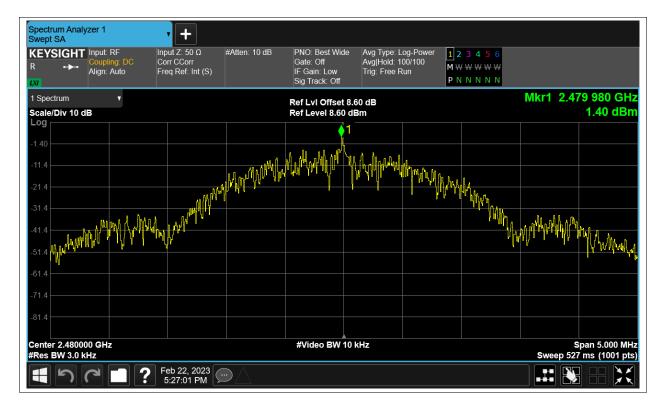





Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-60.04	-20	Pass
NVNT	BLE	2480	Ant1	-54.43	-20	Pass













Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-55.73	-20	Pass
NVNT	BLE	2442	Ant1	-55.86	-20	Pass
NVNT	BLE	2480	Ant1	-58.12	-20	Pass



