




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	13.076	30	Pass
NVNT	BLE	2442	Ant1	13.304	30	Pass
NVNT	BLE	2480	Ant1	13.204	30	Pass



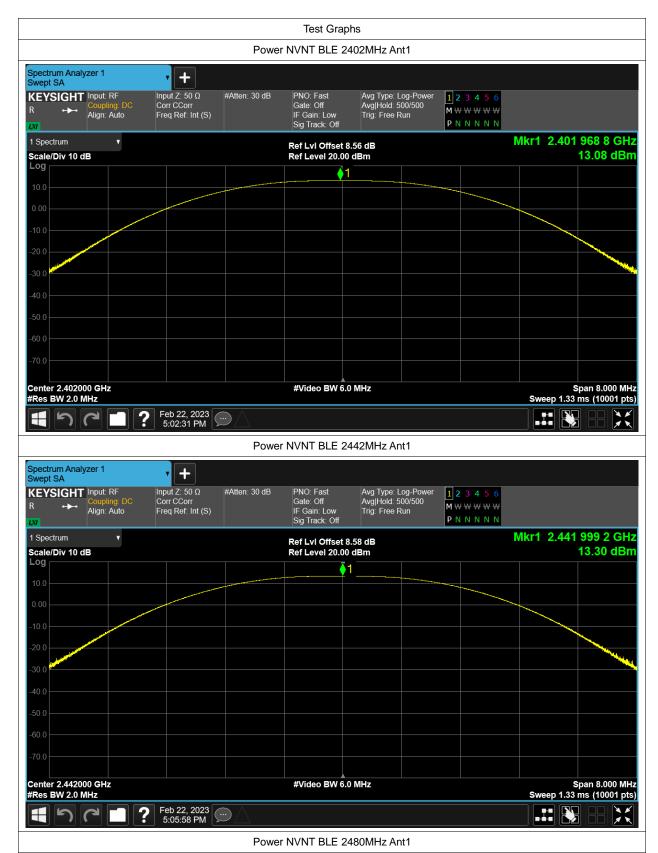









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.701	0.5	Pass
NVNT	BLE	2442	Ant1	0.706	0.5	Pass
NVNT	BLE	2480	Ant1	0.701	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.068	
NVNT	BLE	2442	Ant1	1.066	
NVNT	BLE	2480	Ant1	1.064	

Project No.: JYTSZR2209089















Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	7.401	8	Pass
NVNT	BLE	2442	Ant1	7.64	8	Pass
NVNT	BLE	2480	Ant1	7.546	8	Pass



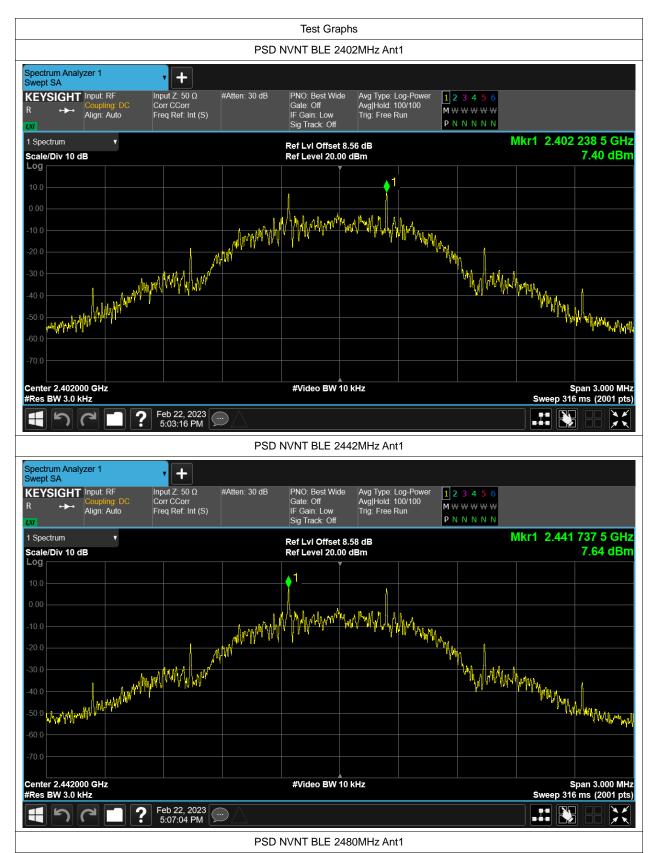



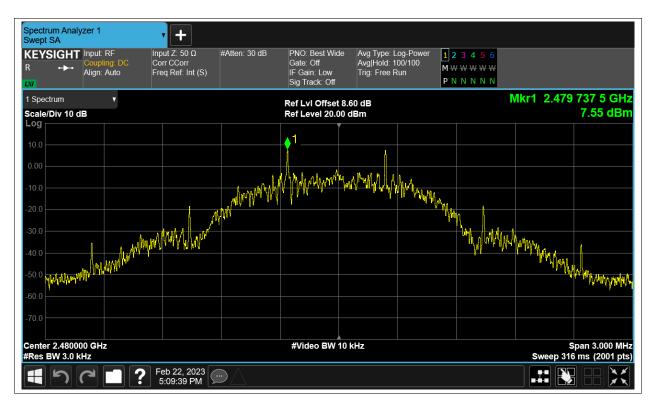







Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-59.6	-20	Pass
NVNT	BLE	2480	Ant1	-56.48	-20	Pass



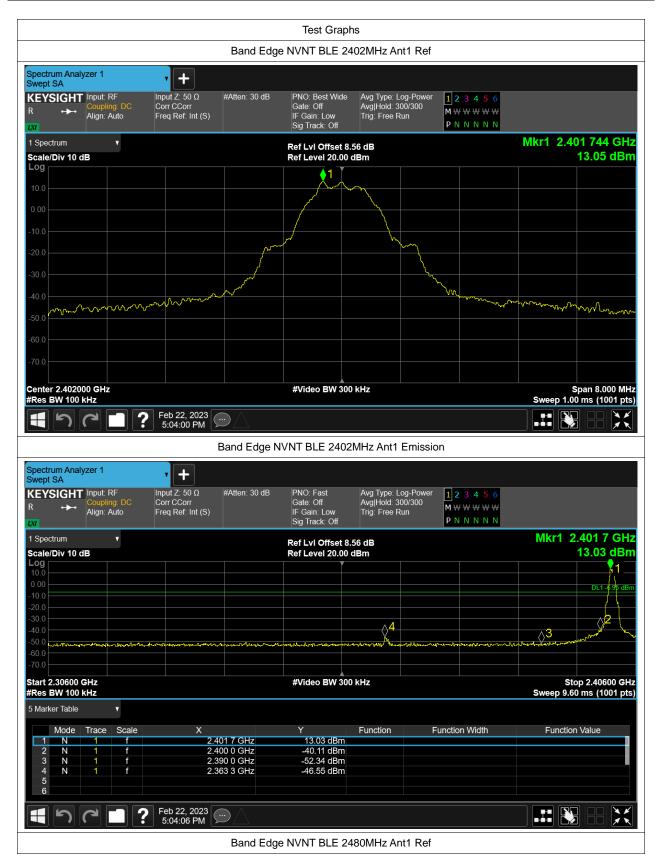



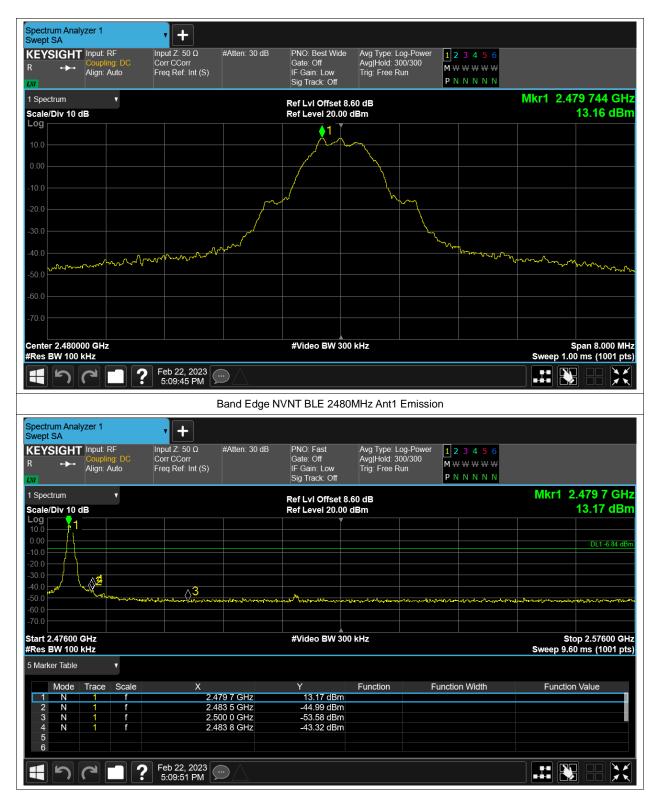





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-56.39	-20	Pass
NVNT	BLE	2442	Ant1	-57.07	-20	Pass
NVNT	BLE	2480	Ant1	-56.46	-20	Pass









Tx. Spurious NVNT BLE 2480MHz Ant1 Ref



