


# SPOT CHECK REPORT


## FCC PART 90

---

**FCC ID:** XMR2020RM500QAE  
**Application:** Quectel Wireless Solutions Company Limited

**Application Type:** Certification  
**Product:** 5G Sub-6 GHz M.2 Module  
**Model No.:** RM500Q-AE  
**Brand Name:** Quectel  
**FCC Rule Part(s):** Part 90 Subpart S  
**Test Procedure(s):** ANSI C63.26: 2015  
**Test Date:** December 09, 2020 ~ January 04, 2021

Reviewed By:   
Sunny Sun

Approved By:   
Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2011RSU077-U4	Rev. 01	Initial Report	01-10-2021	Valid

Note: This application for certification is leveraging the data reuse procedures from KDB 484596 based on reference FCC ID: XMR2020RM502QAE to cover variant FCC ID: XMR2020RM500QAE.

---

## CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Applicant .....	4
1.2. Manufacturer .....	4
1.3. Testing Facility.....	4
<b>2. PRODUCT INFORMATION .....</b>	<b>5</b>
2.1. Equipment Description .....	5
2.2. Product Specification Subjective to this Report .....	6
2.3. Description of Available Antennas.....	6
2.4. Test Methodology .....	7
2.5. EMI Suppression Device(s)/Modifications.....	7
2.6. Configuration of Tested System .....	7
2.7. Test Environment Condition.....	7
<b>3. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>8</b>
<b>4. MEASUREMENT UNCERTAINTY .....</b>	<b>9</b>
<b>5. TEST RESULT .....</b>	<b>10</b>
5.1. Summary.....	10
5.2. Conducted Output Power Measurement.....	11
5.2.1. Test Limit .....	11
5.2.2. Test Procedures Used .....	11
5.2.3. Test Setting.....	11
5.2.4. Test Setup .....	11
5.2.5. Test Result.....	12
5.3. Conducted Spurious Emissions.....	14
5.3.1. Test Limit .....	14
5.3.2. Test Procedure Used .....	14
5.3.3. Test Setting.....	14
5.3.4. Test Setup .....	15
5.3.5. Test Result.....	16
<b>6. CONCLUSION .....</b>	<b>17</b>
<b>Appendix A - Test Setup Photograph .....</b>	<b>18</b>
<b>Appendix B - EUT Photograph.....</b>	<b>19</b>
<b>Appendix C - Reference Test Report .....</b>	<b>20</b>

## 1. GENERAL INFORMATION

### 1.1. Applicant

Quectel Wireless Solutions Company Limited  
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,  
 Shanghai, China 200233

### 1.2. Manufacturer

Quectel Wireless Solutions Company Limited  
 Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District,  
 Shanghai, China 200233

### 1.3. Testing Facility

<input checked="" type="checkbox"/>	<b>Test Site - MRT Suzhou Laboratory</b>
	<b>Laboratory Location (Suzhou - Wuzhong)</b> D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	<b>Laboratory Location (Suzhou - SIP)</b> 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.01 <span style="float: right;">CNAS: L10551</span>
	FCC: CN1166 <span style="float: right;">ISED: CN0001</span>
	VCCI: R-20025, G-20034, C-20020, T-20020
<input type="checkbox"/>	<b>Test Site - MRT Shenzhen Laboratory</b>
	<b>Laboratory Location (Shenzhen)</b> 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	<b>Laboratory Accreditations</b>
	A2LA: 3628.02 <span style="float: right;">CNAS: L10551</span>
	FCC: CN1284 <span style="float: right;">ISED: CN0105</span>
<input type="checkbox"/>	<b>Test Site - MRT Taiwan Laboratory</b>
	<b>Laboratory Location (Taiwan)</b> No. 38, Fuxing 2 <sup>nd</sup> Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	<b>Laboratory Accreditations</b>
	TAF: L3261-190725
	FCC: 291082, TW3261 <span style="float: right;">ISED: TW3261</span>

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	5G Sub-6 GHz M.2 Module
Model No.:	RM500Q-AE
Brand Name:	Quectel
IMEI:	867197050003215
Operating Temperature:	-20 ~ 60 °C
Power Type:	3.135 ~ 4.4Vdc, typical 3.7Vdc
<b>UMTS Specification</b>	
Single Band:	Band 2, 4, 5
Modulation:	Uplink up to 16QAM, Downlink up to 64QAM
Category:	Category 6
<b>E-UTRA Specification</b>	
Single Band:	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
Intra-Band:	CA_2C, CA_5B, CA_7C, CA_38C, CA_41C, CA_66C
Modulation:	UL & DL up to 256QAM
Category:	Category 18
<b>5G NR Specification</b>	
SA Band:	n2, n5, n7, n12, n25, n41, n66, n71, n77
SA UL MIMO Band:	n41
EN-DC Band:	DC_5A_n2A, DC_12A_n2, DC_13A_n2A, DC_2A_n5A DC_30A_n5A, DC_66A_n5A, DC_5A_n7A, DC_12A_n7A DC_2A_n12A, DC_12A_n25A, DC_2A_n41A, DC_25A_n41A DC_26A_n41A, DC_66A_n41A, DC_5A_n66A, DC_12A_n66A DC_13A_n66A, DC_14A_n66A, DC_71A_n66A, DC_2A_n71A DC_7A_n71A, DC_66A_n71A
HPUE Band:	n41, n77 (SA & UL MIMO)
SCS for NR cell:	FDD Band: 15kHz; TDD Band: 30kHz
Modulation:	UL & DL up to 256QAM

## 2.2. Product Specification Subjective to this Report

FDD T <sub>x</sub> Frequency Range:	Band 26: 814 ~ 824 MHz
FDD R <sub>x</sub> Frequency Range:	Band 26: 859 ~ 869 MHz

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Note 3: LTE band 26 transmit frequency for part 90 rule is 814 ~ 824MHz and part 22 rule is 824 ~ 849MHz. ERP over 15MHz bandwidth complies the ERP limit line of part 22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.

## 2.3. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
LTE Band 2	1850 ~ 1910	Dipole	0.25
LTE Band 4	1710 ~ 1755		1.47
LTE Band 5	824 ~ 849		2.68
LTE Band 7	2500 ~ 2570		0.55
LTE Band 12	699 ~ 716		-0.20
LTE Band 13	777 ~ 787		1.54
LTE Band 14	788 ~ 798		2.42
LTE Band 17	704 ~ 716		-0.20
LTE Band 25	1850 ~ 1915		0.25
LTE Band 26	814 ~ 849		2.68
LTE Band 30	2305 ~ 2315		-3.06
LTE Band 38	2570 ~ 2620		0.78
LTE Band 41	2496 ~ 2690		0.78
LTE Band 48	3550 ~ 3700		-4.29
LTE Band 66	1710 ~ 1780		1.47
LTE Band 71	663 ~ 698		1.22

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

## 2.4. Test Methodology


According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP

## 2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.6. Configuration of Tested System

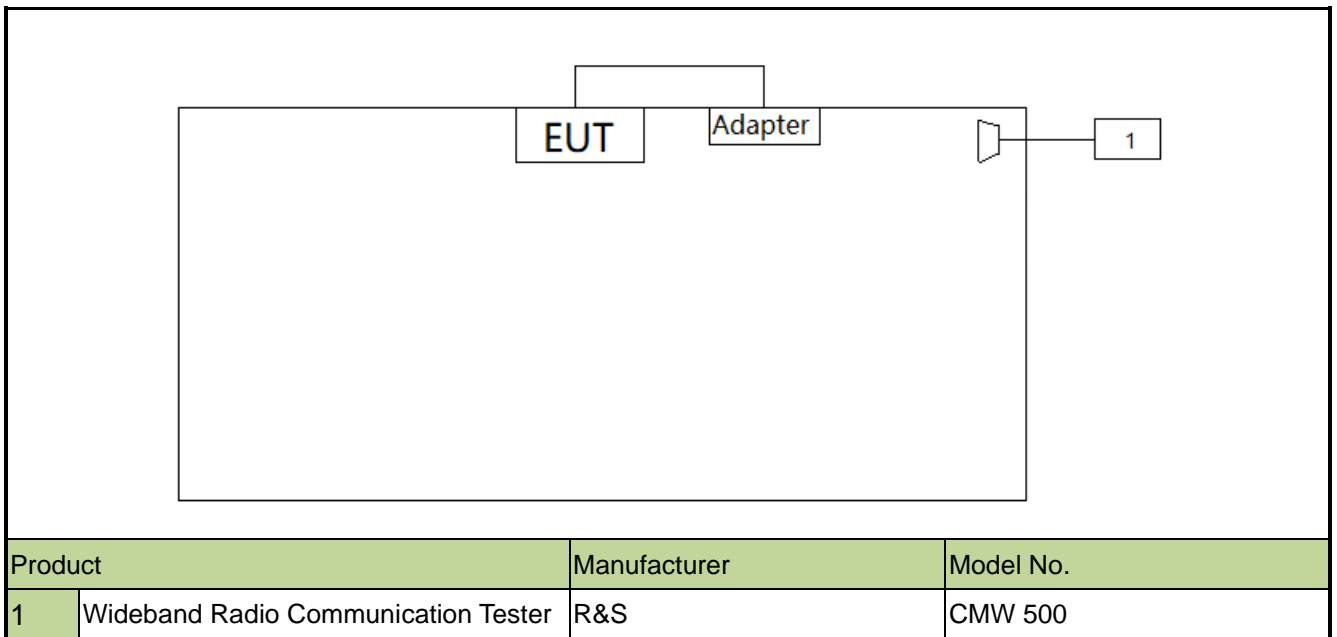

## 2.7. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

### 3. TEST EQUIPMENT CALIBRATION DATE

Conducted Test Equipment (WZ-SR6, WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2021/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/15
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/11/18
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
True RMS Clamp Meter	Fluke	319	MRTSUE06080	1 year	2021/05/06
Directional Coupler	Agilent	87301D	MRTSUE06082	1 year	2021/03/25
Dual Directional Coupler	Agilent	7778D	MRTSUE06083	1 year	2021/03/25
Attenuator	MVE	6dB	MRTSUE06534	1 year	2021/12/12
Attenuator	MVE	10dB	MRTSUE06543	1 year	2021/12/12
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2021/08/08



#### 4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Conducted Spurious Emissions</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB

## 5. TEST RESULT

### 5.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
90.635	Conducted Output Power	< 100W	Conducted	Pass	Section 5.2
2.1051, 90.691(a)	Spurious Emission	< 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )		Pass	Section 5.3

**Notes:**

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) The difference compared with the original report is only different DL CA bands. Output power and conducted spurious emissions verification worst test refer to original report.

## 5.2. Conducted Output Power Measurement

### 5.2.1. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).

### 5.2.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.2

### 5.2.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 5.2.4. Test Setup



**5.2.5.Test Result**

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Larry Yan	Test Date	2020/12/09 ~ 2020/12/30

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
QPSK							
26697	814.7	1.4	1	0	24.16	0.2606	< 100
26740	819.0				24.13	0.2588	< 100
26783	823.3				24.11	0.2576	< 100
26697	814.7	1.4	1	2	24.19	0.2624	< 100
26740	819.0				24.21	0.2636	< 100
26783	823.3				24.16	0.2606	< 100
26697	814.7	1.4	1	6	24.13	0.2588	< 100
26740	819.0				24.11	0.2576	< 100
26783	823.3				24.19	0.2624	< 100
26697	814.7	1.4	6	0	24.21	0.2636	< 100
26740	819.0				24.26	0.2667	< 100
26783	823.3				24.15	0.2600	< 100
26705	815.5	3	1	0	24.12	0.2582	< 100
26740	819.0				24.10	0.2570	< 100
26775	822.5				23.33	0.2153	< 100
26705	815.5	3	1	7	23.24	0.2109	< 100
26740	819.0				23.28	0.2128	< 100
26775	822.5				24.19	0.2624	< 100
26705	815.5	3	1	14	24.26	0.2667	< 100
26740	819.0				24.21	0.2636	< 100
26775	822.5				24.21	0.2636	< 100
26705	815.5	3	15	0	24.27	0.2673	< 100
26740	819.0				24.32	0.2704	< 100
26775	822.5				24.10	0.2570	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
QPSK							
26715	816.5	5	1	0	24.24	0.2655	< 100
26740	819.0				24.29	0.2685	< 100
26765	821.5				23.36	0.2168	< 100
26715	816.5	5	1	12	23.28	0.2128	< 100
26740	819.0				23.32	0.2148	< 100
26765	821.5				24.41	0.2761	< 100
26715	816.5	5	1	24	24.37	0.2735	< 100
26740	819.0				24.28	0.2679	< 100
26765	821.5				24.30	0.2692	< 100
26715	816.5	5	25	0	24.41	0.2761	< 100
26740	819.0				24.28	0.2679	< 100
26765	821.5				24.23	0.2649	< 100
26740	819.0	10	1	0	24.38	0.2742	< 100
			1	24	24.26	0.2667	< 100
			1	49	23.36	0.2168	< 100
			50	0	23.35	0.2163	< 100
26765	821.5	15	1	0	23.30	0.2138	< 100
			1	36	24.36	0.2729	< 100
			1	74	24.22	0.2642	< 100
			75	0	24.30	0.2692	< 100

## **5.3. Conducted Spurious Emissions**

### **5.3.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

### **5.3.2. Test Procedure Used**

ANSI C63.26-2015 - Section 5.7

### **5.3.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq 3 \cdot$ RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.  
To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.


### 5.3.4. Test Setup



### 5.3.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Edgar Ma	Test Date	2021/01/02

Channel	Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
QPSK						
26740	819.0	1.4	30 ~ 10000	-47.81	≤ -13.00	Pass

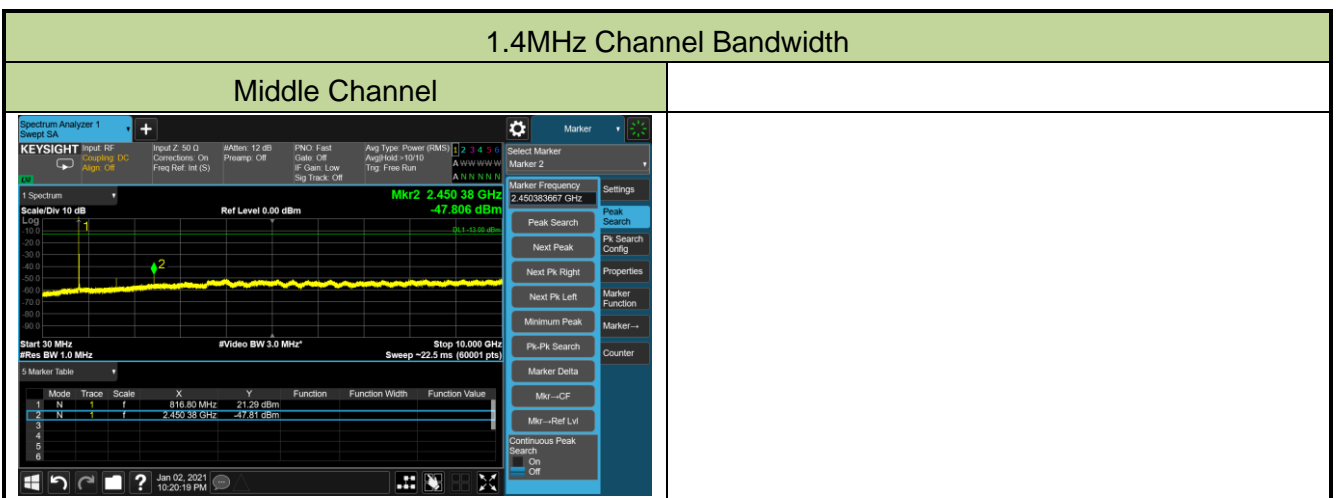



## 6. CONCLUSION

The data collected relate only the item(s) tested and show that unit is compliance with FCC Rules.

## **Appendix A - Test Setup Photograph**

Refer to "2011RSU077-UT" file.

## **Appendix B - EUT Photograph**

Refer to "2011RSU077-UE" file.

## Appendix C - Reference Test Report



# MEASUREMENT REPORT

## FCC PART 90

---

**FCC ID:** XMR2020RM502QAE  
**Application:** Quectel Wireless Solutions Company Limited  
  
**Application Type:** Certification  
**Product:** 5G Sub-6 GHz M.2 Module  
**Model No.:** RM502Q-AE  
**Brand Name:** Quectel  
**FCC Rule Part(s):** Part 90 Subpart S  
**Test Procedure(s):** ANSI C63.26: 2015  
**Test Date:** October 08 ~ November 15, 2020

Reviewed By: Sunny Sun  
( Sunny Sun )

Approved By: Robin Wu  
( Robin Wu )



The test results relate only to the samples tested.  
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.26-2015. Test results reported herein relate only to the item(s) tested.  
The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

---

---

## Revision History

Report No.	Version	Description	Issue Date	Note
2010RSU005-U4	Rev. 01	Initial Report	11-16-2020	Valid

---

## CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Applicant .....	5
1.2. Manufacturer .....	5
1.3. Testing Facility.....	5
<b>2. PRODUCT INFORMATION .....</b>	<b>6</b>
2.1. Equipment Description .....	6
2.2. Product Specification Subjective to this Report .....	7
2.3. Description of Available Antennas.....	7
2.4. Test Methodology .....	8
2.5. EMI Suppression Device(s)/Modifications.....	8
2.6. Maximum Power, Frequency Tolerance, and Emission Designator .....	8
2.7. Configuration of Tested System .....	9
2.8. Test Environment Condition.....	9
<b>3. TEST EQUIPMENT CALIBRATION DATE.....</b>	<b>10</b>
<b>4. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
<b>5. TEST RESULT .....</b>	<b>13</b>
5.1. Summary.....	13
5.2. Occupied Bandwidth .....	14
5.2.1. Test Limit .....	14
5.2.2. Test Procedure .....	14
5.2.3. Test Setting.....	14
5.2.4. Test Setup .....	14
5.2.5. Test Result.....	15
5.3. Frequency Stability Measurement .....	20
5.3.1. Test Limit .....	20
5.3.2. Test Procedures Used .....	20
5.3.3. Test Setting.....	20
5.3.4. Test Setup .....	21
5.3.5. Test Result.....	22
5.4. Conducted Output Power Measurement.....	23
5.4.1. Test Limit .....	23
5.4.2. Test Procedures Used .....	23
5.4.3. Test Setting.....	23
5.4.4. Test Setup .....	23

---

5.4.5.	Test Result.....	24
5.5.	Band Edge Measurement.....	32
5.5.1.	Test Limit .....	32
5.5.2.	Test Procedure Used .....	32
5.5.3.	Test Setting.....	32
5.5.4.	Test Setup .....	33
5.5.5.	Test Result.....	34
5.6.	Conducted Spurious Emissions.....	38
5.6.1.	Test Limit .....	38
5.6.2.	Test Procedure Used .....	38
5.6.3.	Test Setting.....	38
5.6.4.	Test Setup .....	39
5.6.5.	Test Result.....	40
5.7.	Radiated Spurious Emissions Measurements .....	44
5.7.1.	Test Limit .....	44
5.7.2.	Test Procedure Used .....	44
5.7.3.	Test Setting.....	44
5.7.4.	Test Setup .....	44
5.7.5.	Test Result.....	46
<b>6.</b>	<b>CONCLUSION .....</b>	<b>47</b>
	<b>Appendix A - Test Setup Photograph .....</b>	<b>48</b>
	<b>Appendix B - EUT Photograph.....</b>	<b>49</b>





## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	5G Sub-6 GHz M.2 Module
Model No.:	RM502Q-AE
Brand Name:	Quectel
IMEI:	Conducted Measurement: 867826050002666 Radiated Measurement: 867826050003060
Operating Temperature:	-20 ~ 60 °C
Power Type:	3.135 ~ 4.4Vdc, typical 3.7Vdc
UMTS Specification	
Single Band:	Band 2, 4, 5
Modulation:	Uplink up to 16QAM, Downlink up to 64QAM
Category:	Category 6
E-UTRA Specification	
Single Band:	Band 2, 4, 5, 7, 12, 13, 14, 17, 25, 26, 30, 38, 41, 48, 66, 71
Intra-Band:	CA_2C, CA_5B, CA_7C, CA_38C, CA_41C, CA_66C
Modulation:	UL & DL up to 256QAM
Category:	Category 18
5G NR Specification	
SA Band:	n2, n5, n7, n12, n25, n41, n66, n71, n77
SA UL MIMO Band:	n41
EN-DC Band:	DC_5A_n2A, DC_12A_n2, DC_13A_n2A, DC_2A_n5A DC_30A_n5A, DC_66A_n5A, DC_5A_n7A, DC_12A_n7A DC_2A_n12A, DC_12A_n25A, DC_2A_n41A, DC_25A_n41A DC_26A_n41A, DC_66A_n41A, DC_5A_n66A, DC_12A_n66A DC_13A_n66A, DC_14A_n66A, DC_71A_n66A, DC_2A_n71A DC_7A_n71A, DC_66A_n71A
HPUE Band:	n41, n77 (SA & UL MIMO)
SCS for NR cell:	FDD Band: 15kHz; TDD Band: 30kHz
Modulation:	UL & DL up to 256QAM

## 2.2. Product Specification Subjective to this Report

FDD T <sub>x</sub> Frequency Range:	Band 26: 814 ~ 824 MHz
FDD R <sub>x</sub> Frequency Range:	Band 26: 859 ~ 869 MHz

Note 1: For other features of this EUT, test report will be issued separately.

Note 2: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Note 3: LTE band 26 transmit frequency for part 90 rule is 814 ~ 824MHz and part 22 rule is 824 ~ 849MHz. ERP over 15MHz bandwidth complies the ERP limit line of part 22 rule, therefore ERP of the partial frequency spectrum which falls within part 22 also complies.

## 2.3. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)
LTE Band 2	1850 ~ 1910	Dipole	0.25
LTE Band 4	1710 ~ 1755		1.47
LTE Band 5	824 ~ 849		2.68
LTE Band 7	2500 ~ 2570		0.55
LTE Band 12	699 ~ 716		-0.20
LTE Band 13	777 ~ 787		1.54
LTE Band 14	788 ~ 798		2.42
LTE Band 17	704 ~ 716		-0.20
LTE Band 25	1850 ~ 1915		0.25
LTE Band 26	814 ~ 849		2.68
LTE Band 30	2305 ~ 2315		-3.06
LTE Band 38	2570 ~ 2620		0.78
LTE Band 41	2496 ~ 2690		0.78
LTE Band 48	3550 ~ 3700		-4.29
LTE Band 66	1710 ~ 1780		1.47
LTE Band 71	663 ~ 698		1.22

Note: All antenna information (Antenna type and Peak Gain) is provided by the manufacturer.

## 2.4. Test Methodology

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.26:2015
- FCC CFR 47 Part 90
- FCC KDB 971168 D01 v03r01: Power Meas License Digital Systems
- FCC KDB 971168 D02 v02r01: Misc Rev Approv License Devices
- FCC KDB 412172 D01 v01r01: Determining ERP and EIRP


## 2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.6. Maximum Power, Frequency Tolerance, and Emission Designator

LTE Band 26		QPSK			16QAM		
BW (MHz)	Feq. (MHz)	Designator	Tolerance (ppm)	Max Power (W)	Designator	Tolerance (ppm)	Max Power (W)
1.4	814.7 ~ 823.3	1M08G7D	-	0.2780	1M08W7D	-	0.2371
3	815.5 ~ 822.5	2M68G7D	-	0.2818	2M68W7D	-	0.2512
5	816.5 ~ 821.5	4M47G7D	-	0.2831	4M46W7D	-	0.2455
10	819.0	8M94G7D	0.0065	0.2825	8M94W7D	-	0.2612
15	821.5	13M4G7D	-	0.2767	13M4W7D	-	0.2541
LTE Band 26		64QAM			256QAM		
BW (MHz)	Feq. (MHz)	Designator	Tolerance (ppm)	Max Power (W)	Designator	Tolerance (ppm)	Max Power (W)
1.4	814.7 ~ 823.3	1M08W7D	-	0.1690	1M08W7D	-	0.1005
3	815.5 ~ 822.5	2M68W7D	-	0.1862	2M68W7D	-	0.1007
5	816.5 ~ 821.5	4M45W7D	-	0.1799	4M47W7D	-	0.0869
10	819.0	8M94W7D	-	0.1892	8M94W7D	-	0.0948
15	821.5	13M4W7D	-	0.1820	13M4W7D	-	0.0962

## 2.7. Configuration of Tested System

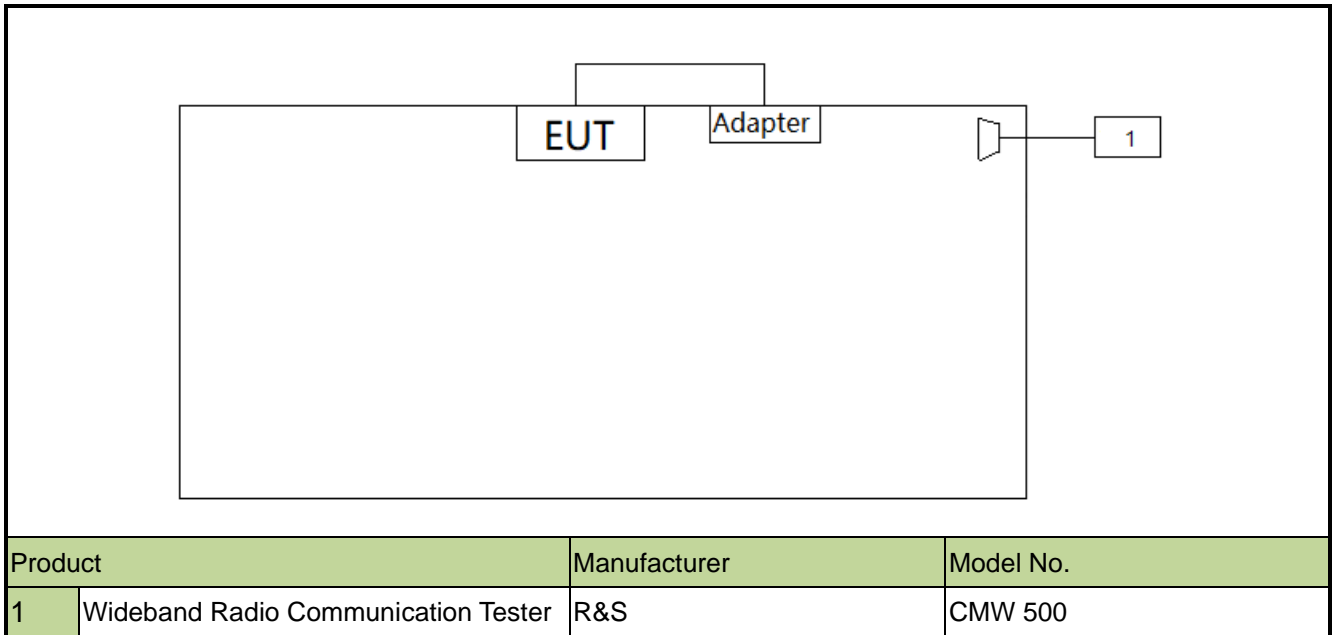

## 2.8. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20% ~ 75%RH

### 3. TEST EQUIPMENT CALIBRATION DATE

#### Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2021/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2021/02/23
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2021/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

#### Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2021/08/01
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/10
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2021/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2021/02/23
Broad band Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

## Conducted Test Equipment (WZ)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2021/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/15
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/11/07
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
True RMS Clamp Meter	Fluke	319	MRTSUE06080	1 year	2021/05/06
Directional Coupler	Agilent	87301D	MRTSUE06082	1 year	2021/03/25
Dual Directional Coupler	Agilent	7778D	MRTSUE06083	1 year	2021/03/25
Attenuator	MVE	6dB	MRTSUE06534	1 year	2020/12/12
Attenuator	MVE	10dB	MRTSUE06543	1 year	2020/12/12
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2021/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

#### 4. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

<b>Radiated Spurious Emissions</b>
Measurement Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): Horizontal: 9kHz ~ 300MHz: 5.04dB 300MHz ~ 1GHz: 4.95dB 1GHz ~ 40GHz: 6.40dB Vertical: 9kHz ~ 300MHz: 5.24dB 300MHz ~ 1GHz: 6.03dB 1GHz ~ 40GHz: 6.40dB
<b>Conducted Spurious Emissions</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.78dB
<b>Output Power</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 1.13dB
<b>Occupied Bandwidth</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 0.28%
<b>Frequency Stability</b>
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2Uc(y)$ ): 76.2Hz



## 5. TEST RESULT

### 5.1. Summary

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	Conducted	Pass	Section 5.2
2.1055, 90.213	Frequency Stability	< 2.5 ppm		Pass	Section 5.3
90.635	Conducted Output Power	< 100W		Pass	Section 5.4
2.1051, 90.691(a)	Band Edge	< 50 + 10log <sub>10</sub> (P <sub>[Watts]</sub> ) within 37.5kHz of Block Edge		Pass	Section 5.5, 5.6
2.1051, 90.691(a)	Spurious Emission	< 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )			
2.1053, 90.691(a)	Spurious Emissions	< 43 + 10log <sub>10</sub> (P <sub>[Watts]</sub> )	Radiated	Pass	Section 5.7

**Notes:**

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All supported modulation types were evaluated. The worst-case emission of modulation was selected. Therefore, the Frequency Stability, Channel Band Edge, Radiated & Conducted Spurious Emission were presented worst-case in the test report.

## 5.2. Occupied Bandwidth

### 5.2.1. Test Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


### 5.2.2. Test Procedure

ANSI C63.26-2015 - Section 5.4

### 5.2.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency
2. RBW = The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

### 5.2.4. Test Setup

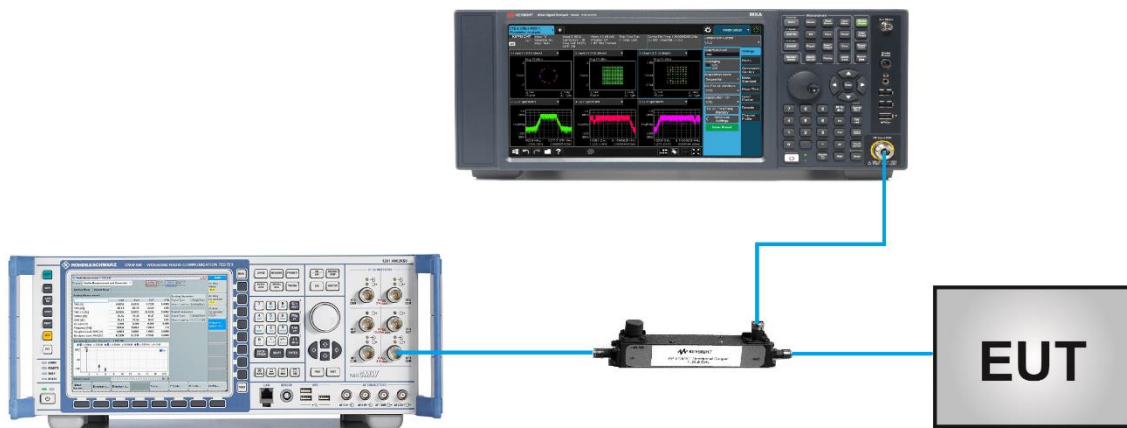


### 5.2.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/15 ~ 2020/11/15


Modulation	Frequency (MHz)	Bandwidth (MHz)	99% Bandwidth (MHz)
QPSK	819.0	1.4	1.08
		3	2.68
		5	4.47
		10	8.94
16QAM	819.0	1.4	1.08
		3	2.68
		5	4.46
		10	8.94
64QAM	819.0	1.4	1.08
		3	2.68
		5	4.45
		10	8.94
256QAM	819.0	1.4	1.08
		3	2.68
		5	4.47
		10	8.94
QPSK	821.5	15	13.40
16QAM			13.40
64QAM			13.39
256QAM			13.40

## 99% Bandwidth - QPSK


## 1.4MHz Channel Bandwidth

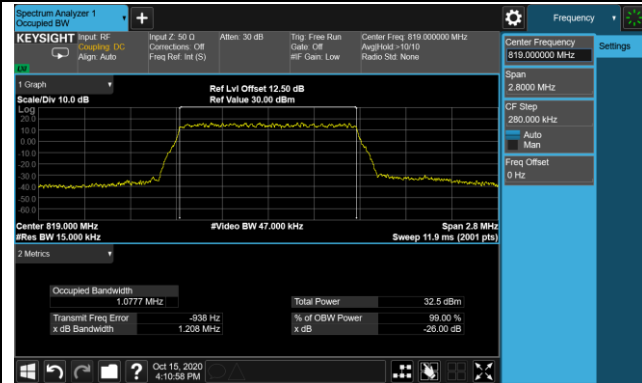


## 3MHz Channel Bandwidth

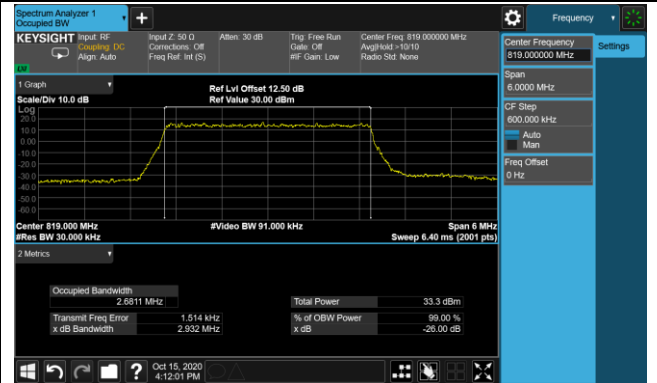


## 5MHz Channel Bandwidth

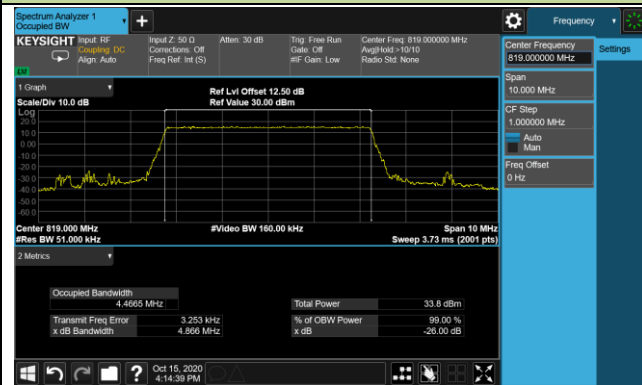

## 10MHz Channel Bandwidth

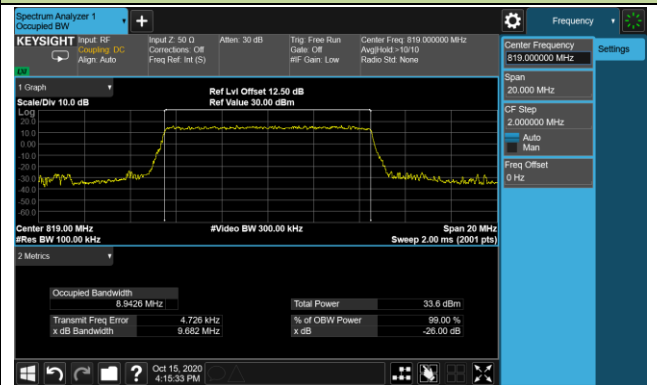


## 15MHz Channel Bandwidth

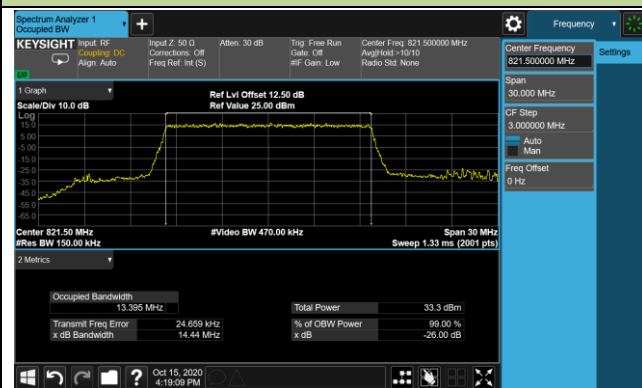


## 99% Bandwidth - 16QAM


## 1.4MHz Channel Bandwidth

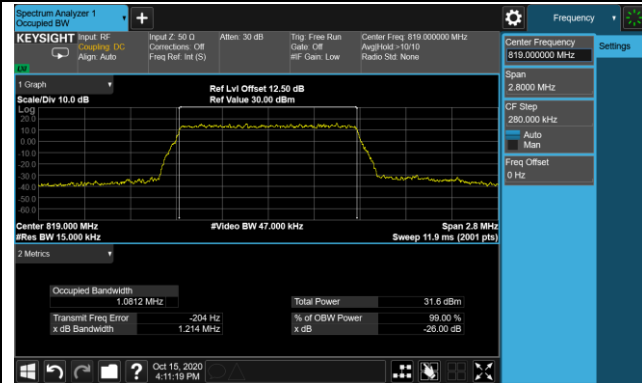


## 3MHz Channel Bandwidth

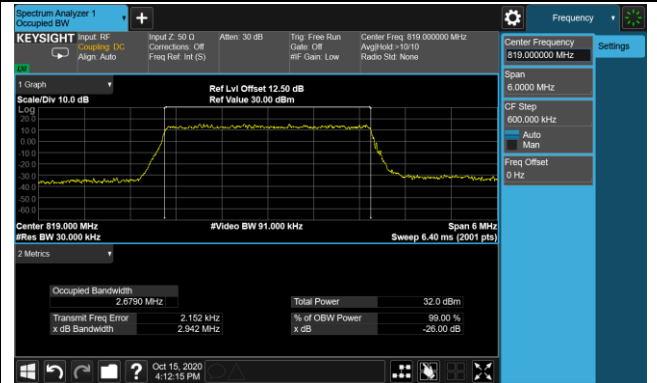


## 5MHz Channel Bandwidth

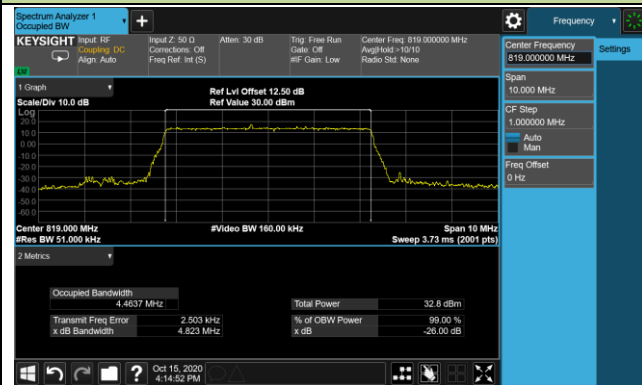

## 10MHz Channel Bandwidth

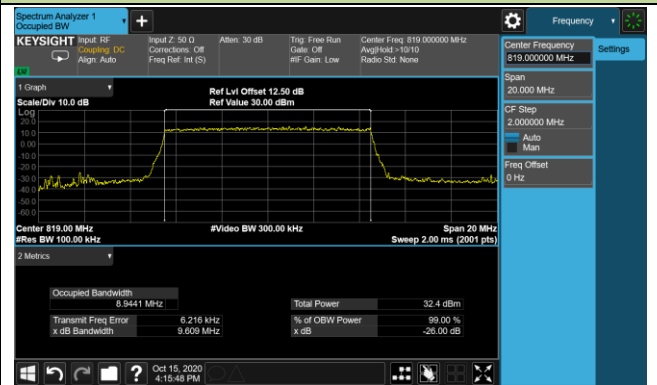


## 15MHz Channel Bandwidth

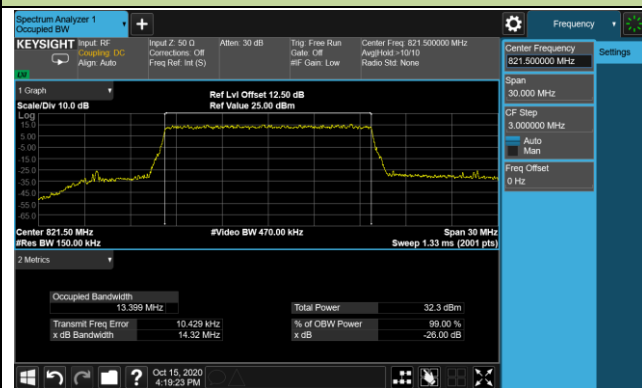


99% Bandwidth - 64QAM


1.4MHz Channel Bandwidth

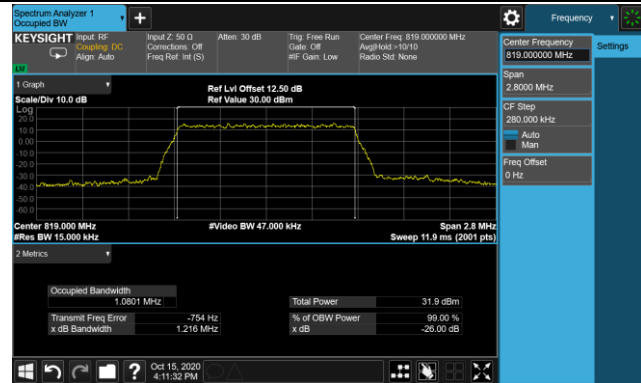


3MHz Channel Bandwidth

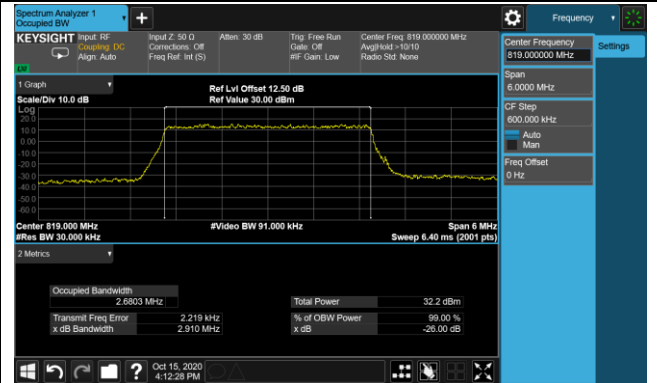


5MHz Channel Bandwidth

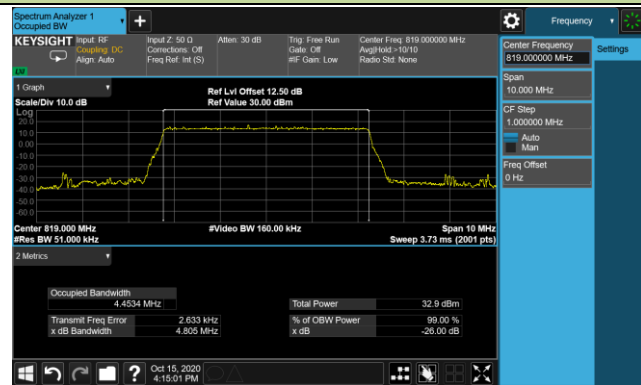

10MHz Channel Bandwidth

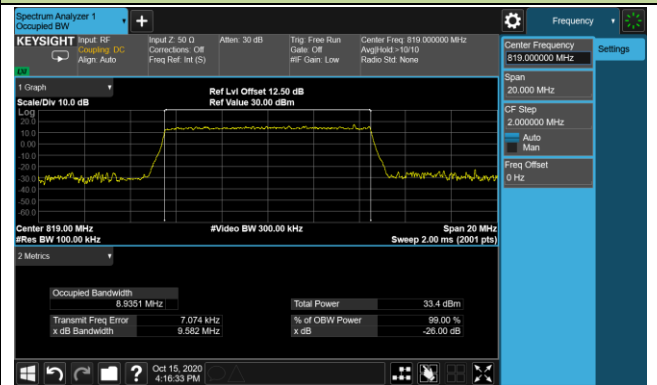


15MHz Channel Bandwidth

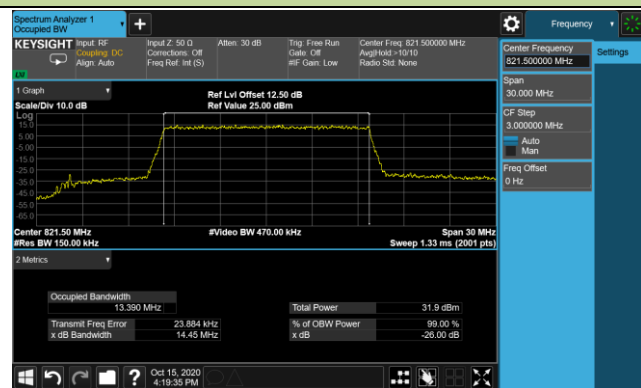


## 99% Bandwidth - 64QAM


## 1.4MHz Channel Bandwidth

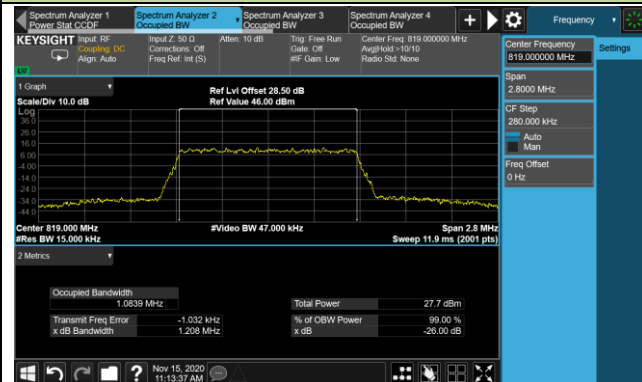


## 3MHz Channel Bandwidth

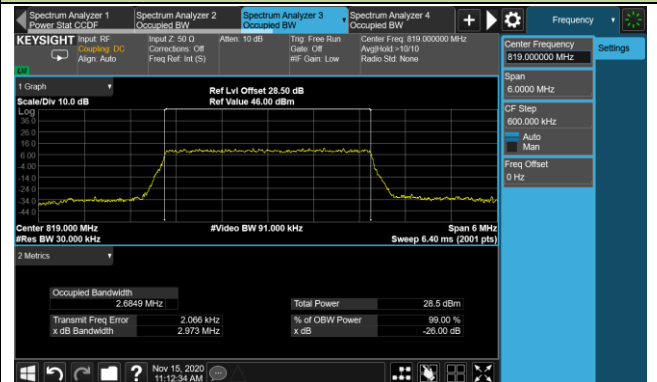


## 5MHz Channel Bandwidth

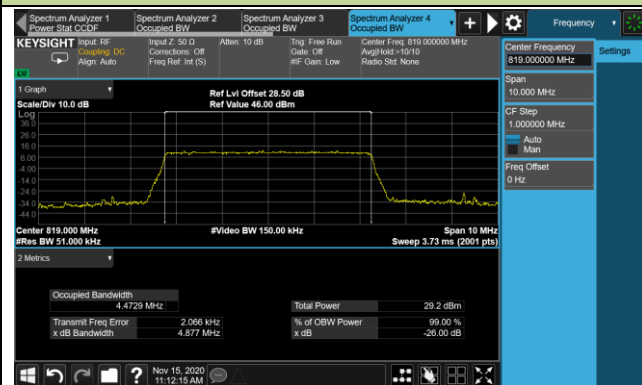

## 10MHz Channel Bandwidth

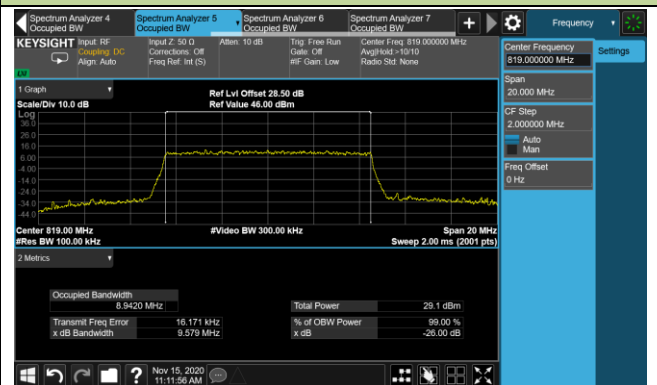

## 15MHz Channel Bandwidth

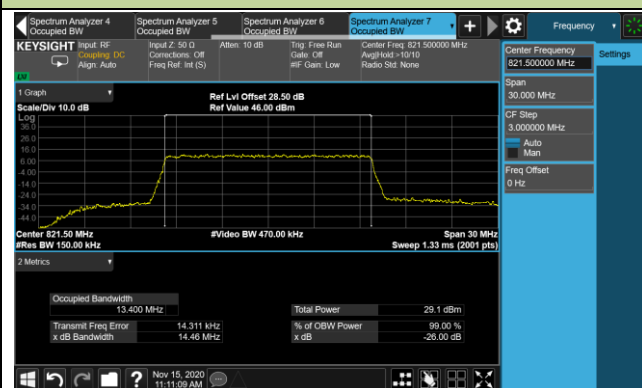

### **5.3. Frequency Stability Measurement**

#### **5.3.1. Test Limit**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### **5.3.2. Test Procedures Used**

ANSI C63.26-2015 - Section 5.6

#### **5.3.3. Test Setting**

##### **Frequency Stability Under Temperature Variations:**

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.


##### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.



### 5.3.4. Test Setup

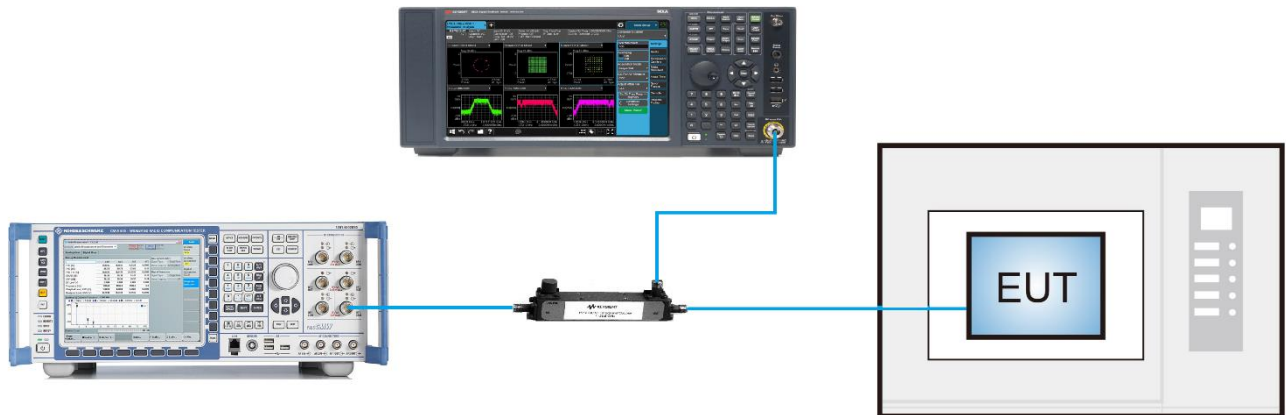

**5.3.5.Test Result**

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-TR3
Test Engineer	Candy Luo	Test Date	2020/10/14

Power (Vdc)	Temp. (°C)	Frequency Tolerance (ppm)
3.7	- 30	-0.0002
	- 20	0.0046
	- 10	0.0043
	0	0.0065
	+ 10	0.0060
	+ 20 (Ref)	0.0008
	+ 30	0.0052
	+ 40	0.0029
	+ 50	0.0026
4.4	+ 20	0.0017
3.135	+ 20	0.0019

## 5.4. Conducted Output Power Measurement

### 5.4.1. Test Limit

The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).

### 5.4.2. Test Procedures Used

ANSI C63.26-2015 - Section 5.2

### 5.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

### 5.4.4. Test Setup



**5.4.5. Test Result**

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/20 ~ 2020/11/15

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
<b>QPSK</b>							
26697	814.7	1.4	1	0	24.44	0.2780	< 100
26740	819.0				24.27	0.2673	< 100
26783	823.3				24.28	0.2679	< 100
26697	814.7	1.4	1	2	24.43	0.2773	< 100
26740	819.0				24.26	0.2667	< 100
26783	823.3				24.34	0.2716	< 100
26697	814.7	1.4	1	6	24.38	0.2742	< 100
26740	819.0				24.22	0.2642	< 100
26783	823.3				24.28	0.2679	< 100
26697	814.7	1.4	6	0	23.48	0.2228	< 100
26740	819.0				23.39	0.2183	< 100
26783	823.3				23.38	0.2178	< 100
26705	815.5	3	1	0	24.47	0.2799	< 100
26740	819.0				24.50	0.2818	< 100
26775	822.5				24.34	0.2716	< 100
26705	815.5	3	1	7	24.47	0.2799	< 100
26740	819.0				24.49	0.2812	< 100
26775	822.5				24.39	0.2748	< 100
26705	815.5	3	1	14	24.34	0.2716	< 100
26740	819.0				24.42	0.2767	< 100
26775	822.5				24.33	0.2710	< 100
26705	815.5	3	15	0	23.57	0.2275	< 100
26740	819.0				23.47	0.2223	< 100
26775	822.5				23.45	0.2213	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
QPSK							
26715	816.5	5	1	0	24.52	0.2831	< 100
26740	819.0				24.44	0.2780	< 100
26765	821.5				24.36	0.2729	< 100
26715	816.5	5	1	12	24.47	0.2799	< 100
26740	819.0				24.41	0.2761	< 100
26765	821.5				24.43	0.2773	< 100
26715	816.5	5	1	24	24.39	0.2748	< 100
26740	819.0				24.42	0.2767	< 100
26765	821.5				24.39	0.2748	< 100
26715	816.5	5	25	0	23.55	0.2265	< 100
26740	819.0				23.51	0.2244	< 100
26765	821.5				23.49	0.2234	< 100
26740	819.0	10	1	0	24.51	0.2825	< 100
			1	24	24.33	0.2710	< 100
			1	49	24.37	0.2735	< 100
			50	0	23.51	0.2244	< 100
26765	821.5	15	1	0	24.42	0.2767	< 100
			1	36	24.24	0.2655	< 100
			1	74	24.26	0.2667	< 100
			75	0	23.43	0.2203	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
16QAM							
26697	814.7	1.4	1	0	23.66	0.2323	< 100
26740	819.0				23.49	0.2234	< 100
26783	823.3				23.38	0.2178	< 100
26697	814.7	1.4	1	2	23.75	0.2371	< 100
26740	819.0				23.40	0.2188	< 100
26783	823.3				23.48	0.2228	< 100
26697	814.7	1.4	1	6	23.57	0.2275	< 100
26740	819.0				23.34	0.2158	< 100
26783	823.3				23.37	0.2173	< 100
26697	814.7	1.4	6	0	22.53	0.1791	< 100
26740	819.0				22.43	0.1750	< 100
26783	823.3				22.32	0.1706	< 100
26705	815.5	3	1	0	23.72	0.2355	< 100
26740	819.0				23.57	0.2275	< 100
26775	822.5				23.91	0.2460	< 100
26705	815.5	3	1	7	23.75	0.2371	< 100
26740	819.0				23.55	0.2265	< 100
26775	822.5				24.00	0.2512	< 100
26705	815.5	3	1	14	23.60	0.2291	< 100
26740	819.0				23.51	0.2244	< 100
26775	822.5				23.93	0.2472	< 100
26705	815.5	3	15	0	22.53	0.1791	< 100
26740	819.0				22.58	0.1811	< 100
26775	822.5				22.53	0.1791	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
16QAM							
26715	816.5	5	1	0	23.90	0.2455	< 100
26740	819.0				23.67	0.2328	< 100
26765	821.5				23.31	0.2143	< 100
26715	816.5	5	1	12	23.86	0.2432	< 100
26740	819.0				23.65	0.2317	< 100
26765	821.5				23.36	0.2168	< 100
26715	816.5	5	1	24	23.72	0.2355	< 100
26740	819.0				23.61	0.2296	< 100
26765	821.5				23.36	0.2168	< 100
26715	816.5	5	25	0	22.51	0.1782	< 100
26740	819.0				22.54	0.1795	< 100
26765	821.5				22.48	0.1770	< 100
26740	819.0	10	1	0	24.17	0.2612	< 100
			1	24	23.99	0.2506	< 100
			1	49	23.99	0.2506	< 100
			50	0	22.51	0.1782	< 100
26765	821.5	15	1	0	24.05	0.2541	< 100
			1	36	23.87	0.2438	< 100
			1	74	23.85	0.2427	< 100
			75	0	22.46	0.1762	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
64QAM							
26697	814.7	1.4	1	0	22.15	0.1641	< 100
26740	819.0				21.93	0.1560	< 100
26783	823.3				22.20	0.1660	< 100
26697	814.7	1.4	1	2	22.20	0.1660	< 100
26740	819.0				22.26	0.1683	< 100
26783	823.3				22.28	0.1690	< 100
26697	814.7	1.4	1	6	22.15	0.1641	< 100
26740	819.0				22.21	0.1663	< 100
26783	823.3				22.26	0.1683	< 100
26697	814.7	1.4	6	0	21.31	0.1352	< 100
26740	819.0				20.94	0.1242	< 100
26783	823.3				21.46	0.1400	< 100
26705	815.5	3	1	0	22.19	0.1656	< 100
26740	819.0				21.69	0.1476	< 100
26775	822.5				22.63	0.1832	< 100
26705	815.5	3	1	7	22.28	0.1690	< 100
26740	819.0				21.86	0.1535	< 100
26775	822.5				22.70	0.1862	< 100
26705	815.5	3	1	14	22.06	0.1607	< 100
26740	819.0				22.05	0.1603	< 100
26775	822.5				22.62	0.1828	< 100
26705	815.5	3	15	0	21.05	0.1274	< 100
26740	819.0				21.00	0.1259	< 100
26775	822.5				21.52	0.1419	< 100



Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
64QAM							
26715	816.5	5	1	0	22.25	0.1679	< 100
26740	819.0				21.91	0.1552	< 100
26765	821.5				22.37	0.1726	< 100
26715	816.5	5	1	12	22.31	0.1702	< 100
26740	819.0				22.16	0.1644	< 100
26765	821.5				22.47	0.1766	< 100
26715	816.5	5	1	24	22.25	0.1679	< 100
26740	819.0				22.55	0.1799	< 100
26765	821.5				22.38	0.1730	< 100
26715	816.5	5	25	0	20.84	0.1213	< 100
26740	819.0				20.92	0.1236	< 100
26765	821.5				21.39	0.1377	< 100
26740	819.0	10	1	0	22.02	0.1592	< 100
			1	24	22.08	0.1614	< 100
			1	49	22.77	0.1892	< 100
			50	0	21.04	0.1271	< 100
26765	821.5	15	1	0	22.09	0.1618	< 100
			1	36	22.60	0.1820	< 100
			1	74	22.56	0.1803	< 100
			75	0	21.47	0.1403	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
256QAM							
26697	814.7	1.4	1	0	20.02	0.1005	< 100
26740	819.0				19.45	0.0881	< 100
26783	823.3				19.76	0.0946	< 100
26697	814.7	1.4	1	2	19.90	0.0977	< 100
26740	819.0				19.44	0.0879	< 100
26783	823.3				19.87	0.0971	< 100
26697	814.7	1.4	1	6	19.66	0.0925	< 100
26740	819.0				19.44	0.0879	< 100
26783	823.3				19.62	0.0916	< 100
26697	814.7	1.4	6	0	18.85	0.0767	< 100
26740	819.0				18.60	0.0724	< 100
26783	823.3				19.45	0.0881	< 100
26705	815.5	3	1	0	19.85	0.0966	< 100
26740	819.0				18.88	0.0773	< 100
26775	822.5				19.83	0.0962	< 100
26705	815.5	3	1	7	19.20	0.0832	< 100
26740	819.0				18.95	0.0785	< 100
26775	822.5				20.03	0.1007	< 100
26705	815.5	3	1	14	19.18	0.0828	< 100
26740	819.0				18.79	0.0757	< 100
26775	822.5				19.93	0.0984	< 100
26705	815.5	3	15	0	18.88	0.0773	< 100
26740	819.0				18.83	0.0764	< 100
26775	822.5				19.51	0.0893	< 100

Channel No.	Frequency (MHz)	Channel Bandwidth (MHz)	RB Size	RB Offset	Output Power (dBm)	Output Power (W)	Limit (W)
256QAM							
26715	816.5	5	1	0	19.24	0.0839	< 100
26740	819.0				18.23	0.0665	< 100
26765	821.5				19.22	0.0836	< 100
26715	816.5	5	1	12	19.34	0.0859	< 100
26740	819.0				18.86	0.0769	< 100
26765	821.5				19.39	0.0869	< 100
26715	816.5	5	1	24	19.34	0.0859	< 100
26740	819.0				18.84	0.0766	< 100
26765	821.5				19.37	0.0865	< 100
26715	816.5	5	25	0	19.32	0.0855	< 100
26740	819.0				18.83	0.0764	< 100
26765	821.5				18.79	0.0757	< 100
26740	819.0	10	1	0	19.77	0.0948	< 100
			1	24	19.56	0.0904	< 100
			1	49	19.52	0.0895	< 100
			50	0	19.38	0.0867	< 100
26765	821.5	15	1	0	19.80	0.0955	< 100
			1	36	19.66	0.0925	< 100
			1	74	19.83	0.0962	< 100
			75	0	19.52	0.0895	< 100

## **5.5. Band Edge Measurement**

### **5.5.1. Test Limit**

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}(f/6.1)$  decibels or  $50 + 10 \text{ Log}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

### **5.5.2. Test Procedure Used**

ANSI C63.26-2015 - Section 5.7


### **5.5.3. Test Setting**

1. Set the analyzer frequency to low or high channel
2.  $\text{RBW} \geq$  The nominal RBW shall be in the range of 1% of the anticipated OBW (in the 1MHz band immediately outside and adjacent to the band edge). For improvement of the accuracy in the measurement of the average power of a noise-like emission, a RBW narrower than the specified reference bandwidth can be used (generally limited to no less than 1% of the OBW), provided that a subsequent integration is performed over the full required measurement bandwidth. This integration should be performed using the spectrum analyzer's band power functions.
3.  $\text{VBW} \geq 3 * \text{RBW}$
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to “free run.”
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full

power

- Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

#### 5.5.4. Test Setup

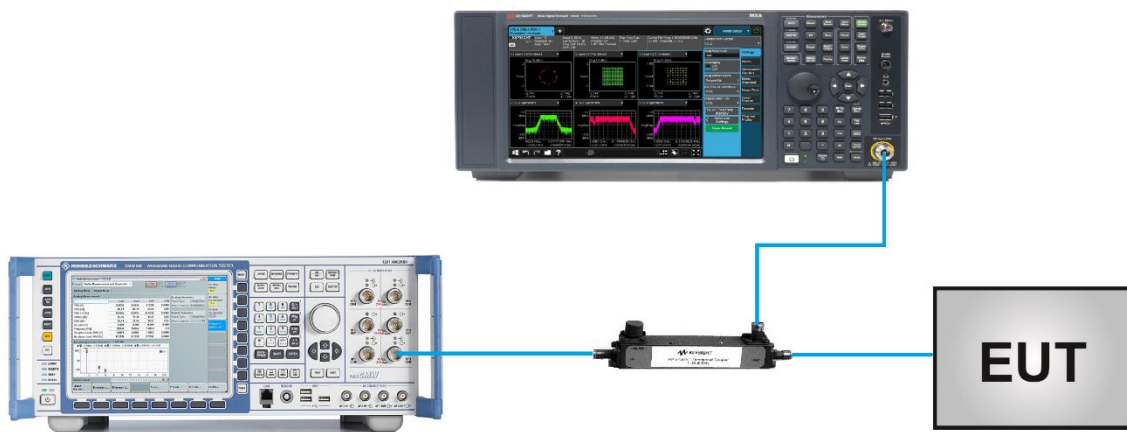


### 5.5.5. Test Result


Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Gordon Qi	Test Date	2020/10/17

#### 1.4MHz Channel Bandwidth - 1RB

##### Lower Band Edge

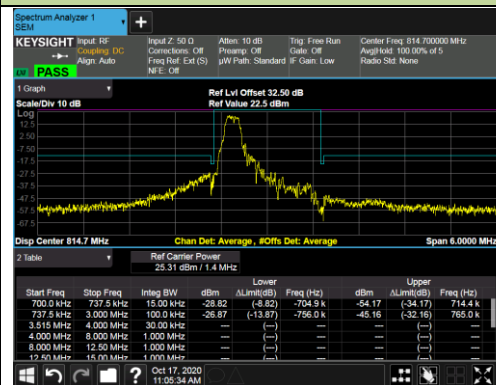


##### Upper Band Edge

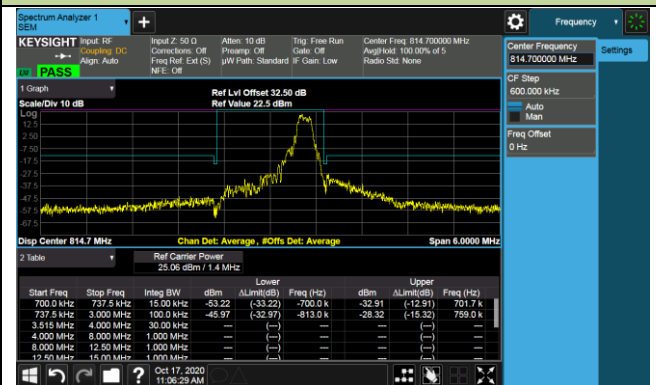


#### 3MHz Channel Bandwidth - 1RB

##### Lower Band Edge

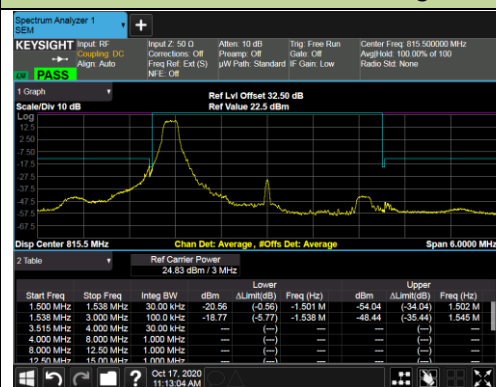


##### Upper Band Edge

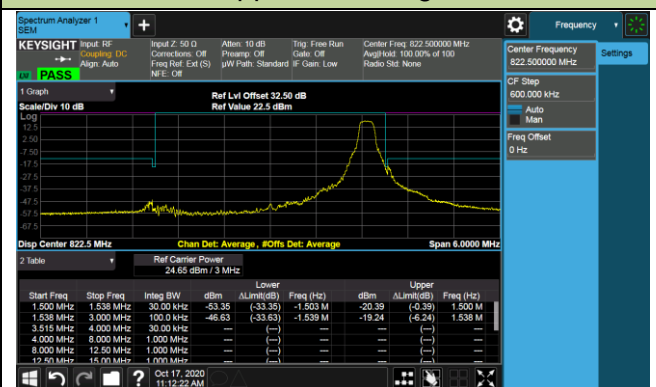


#### 5MHz Channel Bandwidth - 1RB

##### Lower Band Edge

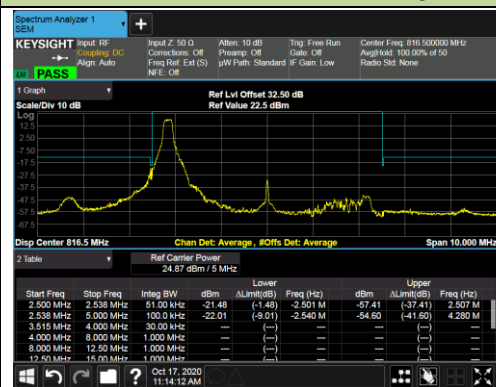


##### Upper Band Edge

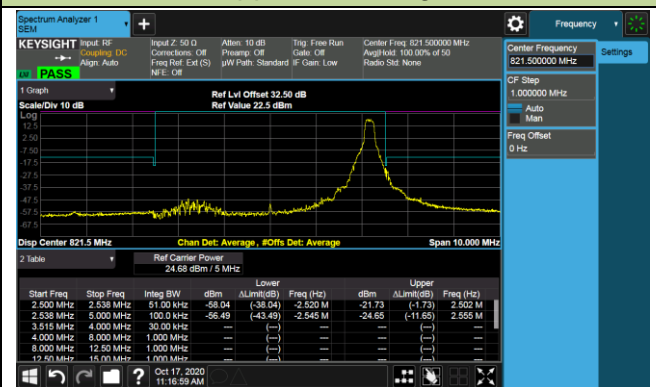


## 10MHz Channel Bandwidth - 1RB

## Lower Band Edge

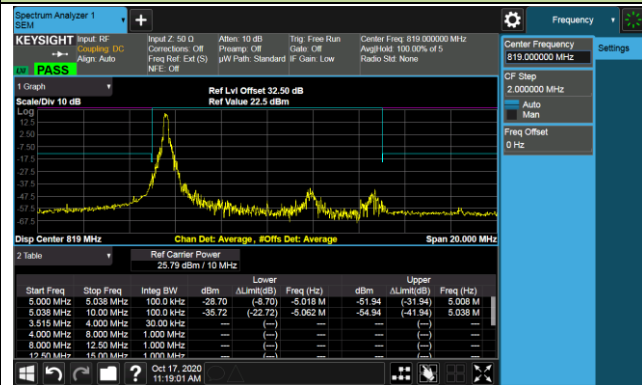


## Upper Band Edge

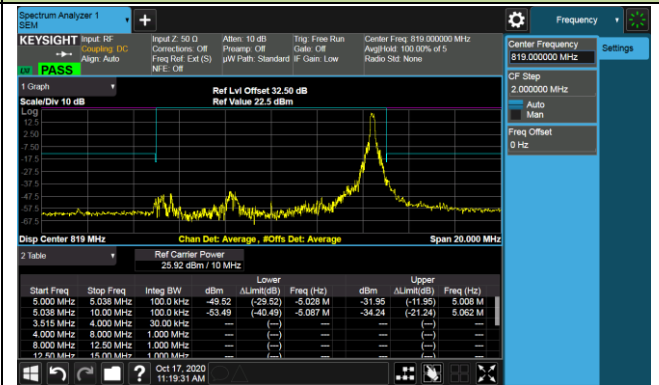


## 15MHz Channel Bandwidth - 1RB

## Lower Band Edge

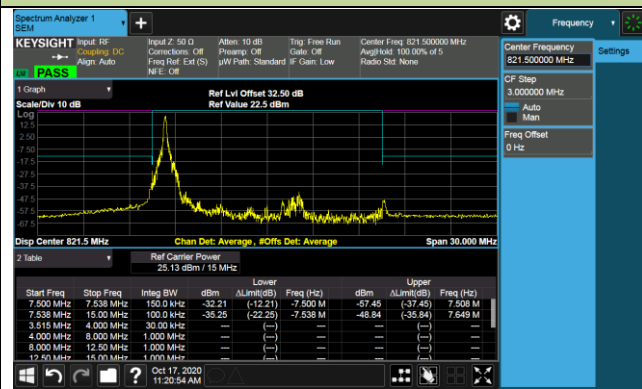


## Upper Band Edge

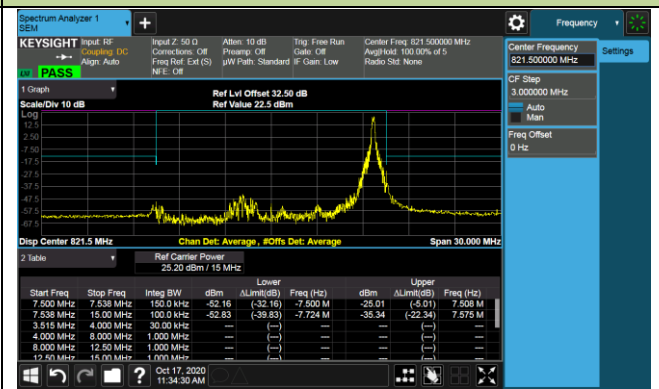


## 1.4MHz Channel Bandwidth - Full RB

## Lower Band Edge

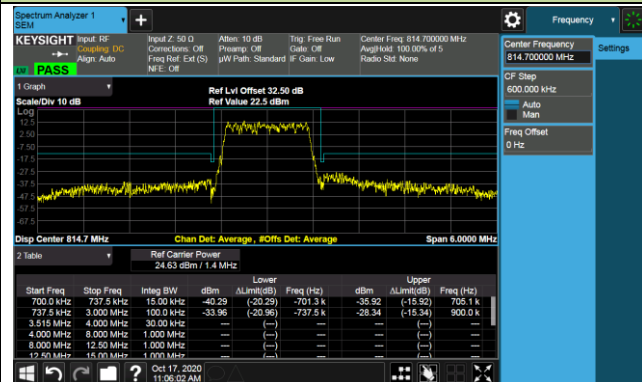


## Upper Band Edge

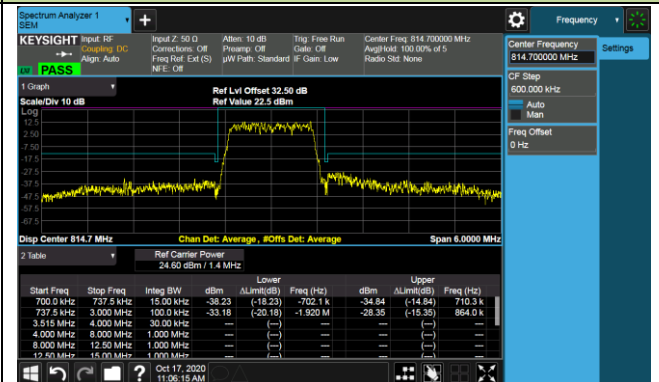


## 3MHz Channel Bandwidth - Full RB

## Lower Band Edge

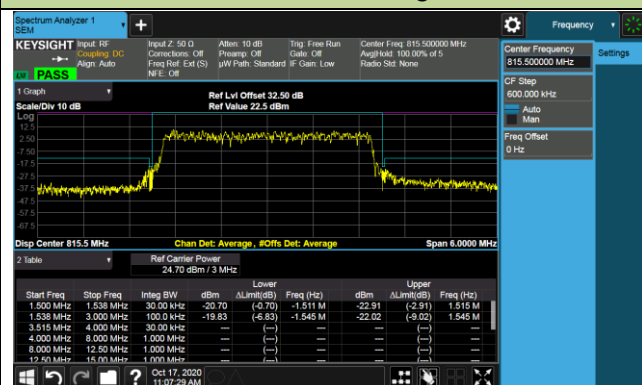


## Upper Band Edge

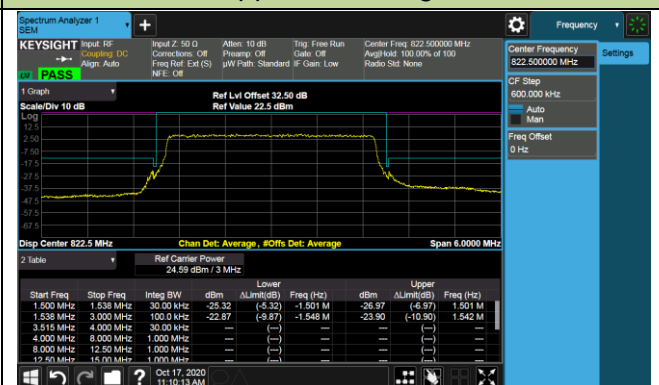


## 5MHz Channel Bandwidth - Full RB

## Lower Band Edge

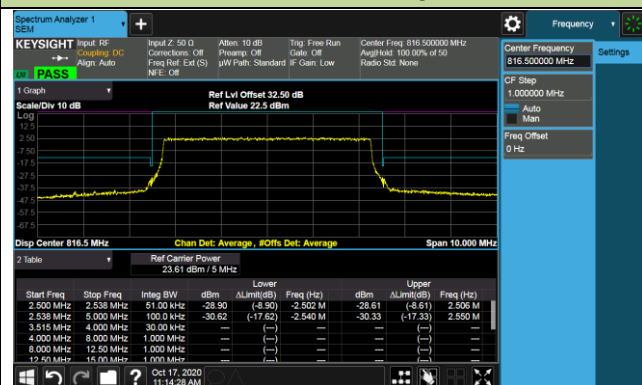


## Upper Band Edge

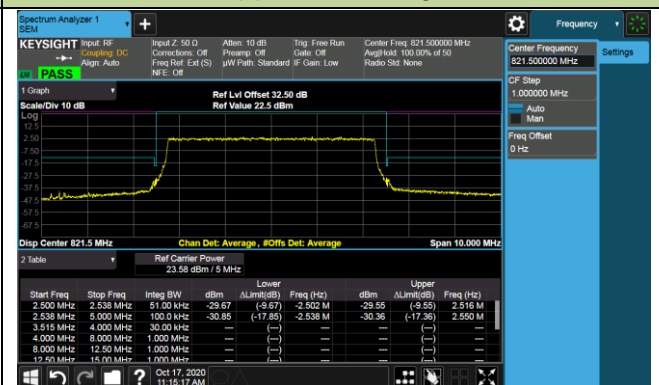




### 10MHz Channel Bandwidth - Full RB

#### Band Edge

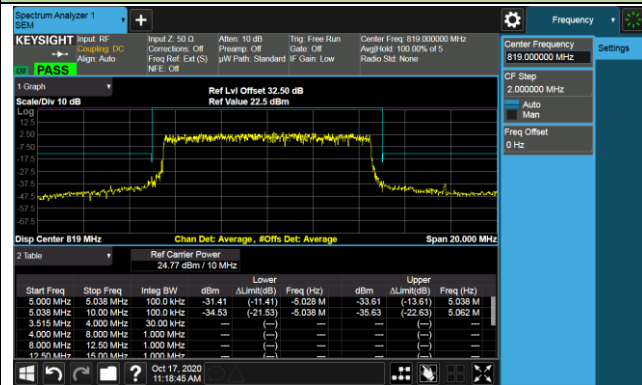

### 15MHz Channel Bandwidth - Full RB

#### Band Edge

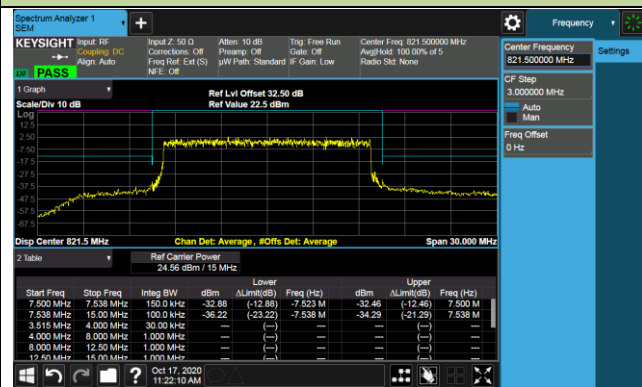

## **5.6. Conducted Spurious Emissions**

### **5.6.1. Test Limit**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10\text{Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

### **5.6.2. Test Procedure Used**

ANSI C63.26-2015 - Section 5.7

### **5.6.3. Test Setting**

1. Set the analyzer frequency to low, mid, high channel.
2. RBW = 1MHz
3. VBW  $\geq$  3\*RBW
4. Sweep time = auto
5. Detector = power averaging (rms)
6. Set sweep trigger to "free run."
7. User gate triggered such that the analyzer only sweeps when the device is transmitting at full power.
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple.  
To accurately determine the average power over the on and off time of the transmitter, it can be necessary to increase the number of traces to be averaged above 100, or if using a manually configured sweep time, increase the sweep time.

### 5.6.4. Test Setup




**5.6.5.Test Result**

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-SR6
Test Engineer	Candy Luo	Test Date	2020/10/15

Channel	Frequency (MHz)	Channel Bandwidth (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
<b>QPSK</b>						
26697	814.7	1.4	30 ~ 10000	-43.33	≤ -13.00	Pass
26740	819.0	1.4	30 ~ 10000	-42.98	≤ -13.00	Pass
26783	823.3	1.4	30 ~ 10000	-42.77	≤ -13.00	Pass
26705	815.5	3	30 ~ 10000	-42.32	≤ -13.00	Pass
26740	819.0	3	30 ~ 10000	-43.43	≤ -13.00	Pass
26775	822.5	3	30 ~ 10000	-43.19	≤ -13.00	Pass
26715	816.5	5	30 ~ 10000	-43.59	≤ -13.00	Pass
26740	819.0	5	30 ~ 10000	-43.03	≤ -13.00	Pass
26765	821.5	5	30 ~ 10000	-41.97	≤ -13.00	Pass
26740	819.0	10	30 ~ 10000	-43.37	≤ -13.00	Pass
26745	821.5	15	30 ~ 10000	-43.43	≤ -13.00	Pass

### 1.4MHz Channel Bandwidth


#### Low Channel

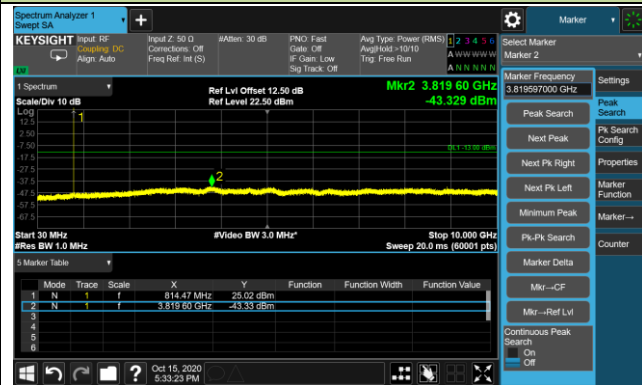

#### Middle Channel



#### High Channel

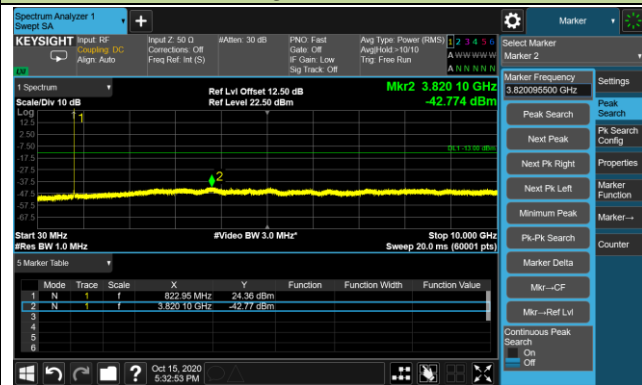


### 3MHz Channel Bandwidth

#### Low Channel



#### Middle Channel

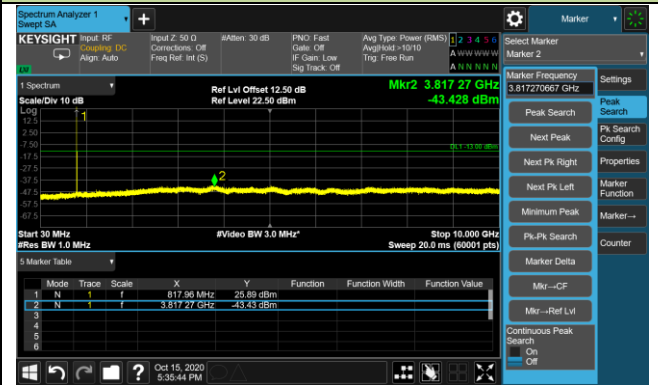


#### High Channel




## 5MHz Channel Bandwidth

## Low Channel

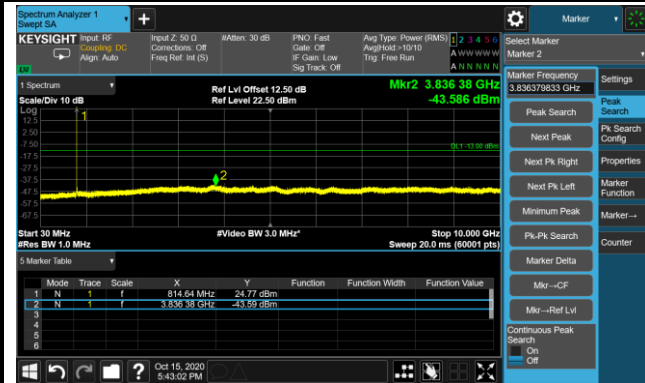

## Middle Channel

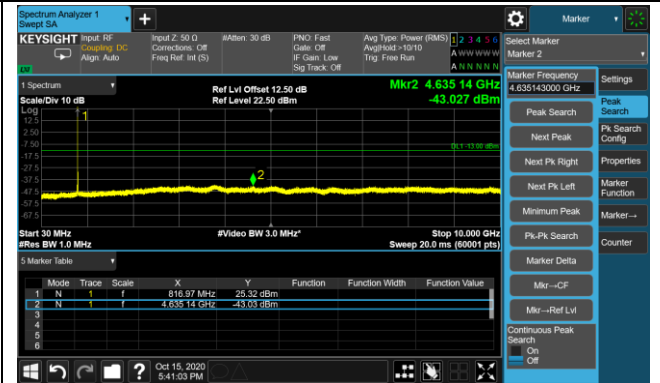


## High Channel



**10MHz Channel Bandwidth**

**Middle Channel**

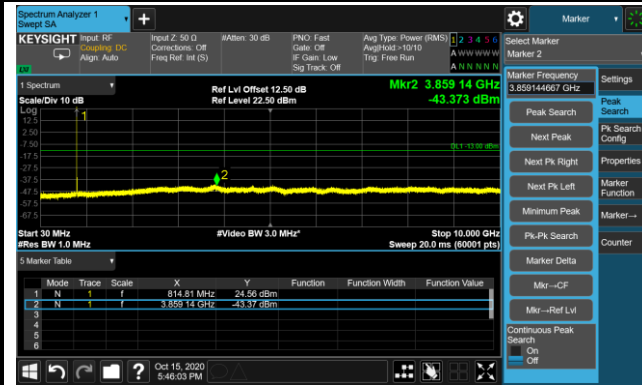

**15MHz Channel Bandwidth**

**Middle Channel**



## 5.7. Radiated Spurious Emissions Measurements

### 5.7.1. Test Limit

Out of band emissions: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13dBm.

$E$  (dB $\mu$ V/m) = EIRP (dBm) -  $20 \log D$  + 104.8; where D is the measurement distance in meters. The emission limit equal to 82.3dB $\mu$ V/m.

### 5.7.2. Test Procedure Used


ANSI C63.26-2015 - Section 5.2.7 & 5.5

### 5.7.3. Test Setting

1. RBW = 1MHz
2. VBW  $\geq 3 \times$  RBW
3. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period)
4. Detector = Peak
5. Trace mode = max hold
6. The trace was allowed to stabilize


### 5.7.4. Test Setup

Below 1GHz Test Setup:

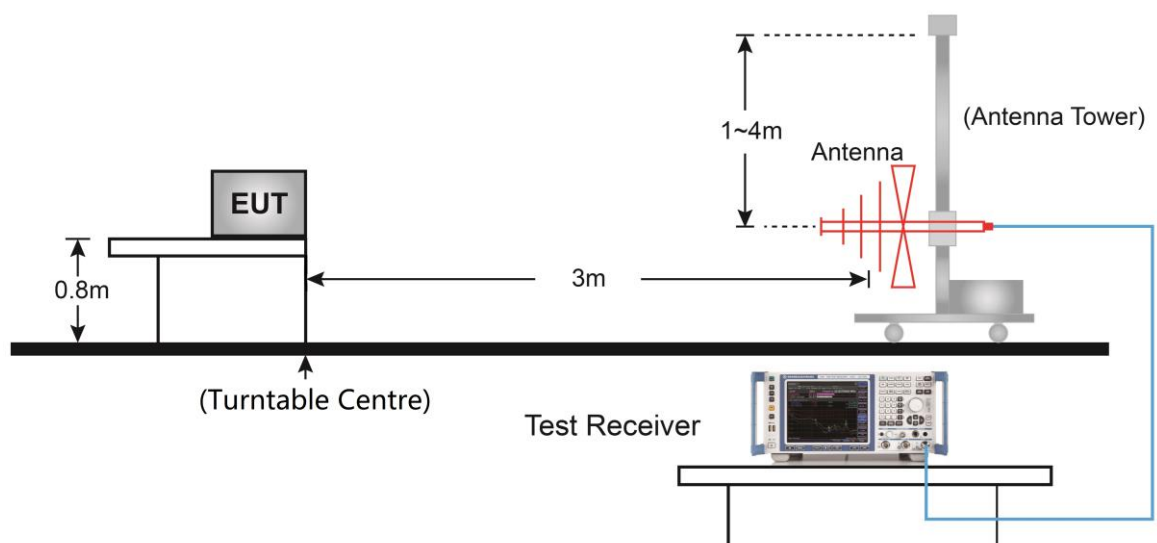



Above 1GHz Test Setup:

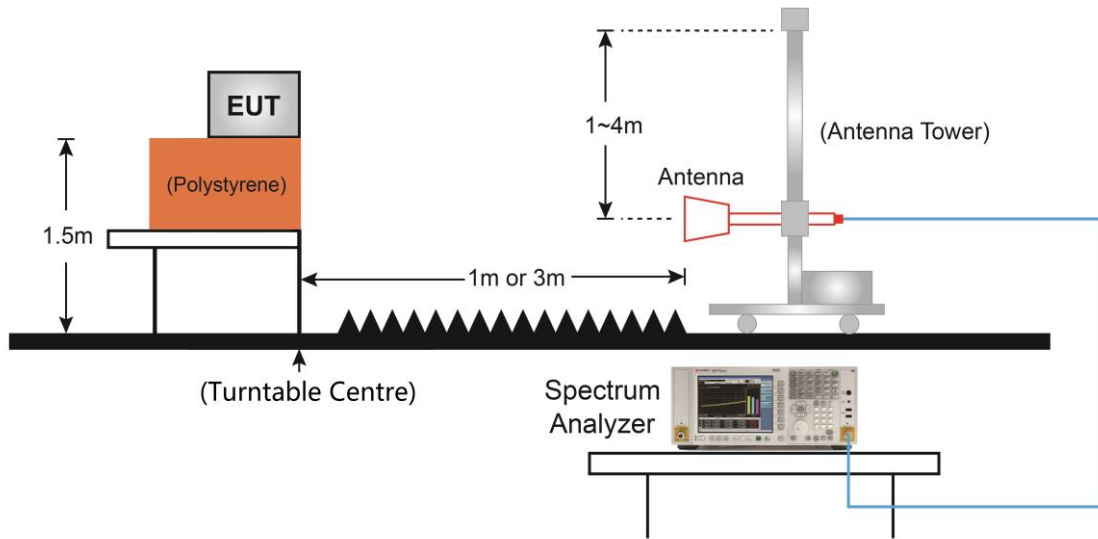

### 5.7.5. Test Result

Product	5G Sub-6 GHz M.2 Module	Test Site	WZ-AC2
Test Engineer	Jason Gao	Test Date	2020/10/15
Test Band	LTE Band 26, 1.4MHz, 1RB		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level(dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
<b>Low Channel</b>							
308.9	36.9	21.1	58.0	82.3	-24.3	Peak	Horizontal
355.9	32.1	22.3	54.4	82.3	-27.9	Peak	Horizontal
306.0	33.0	21.1	54.1	82.3	-28.2	Peak	Vertical
353.0	29.4	22.7	52.1	82.3	-30.2	Peak	Vertical
4383.0	37.0	2.1	39.1	82.3	-43.2	Peak	Horizontal
10681.5	31.6	16.2	47.8	82.3	-34.5	Peak	Horizontal
4102.5	36.7	1.0	37.7	82.3	-44.6	Peak	Vertical
5530.5	35.5	3.9	39.4	82.3	-42.9	Peak	Vertical
<b>Middle Channel</b>							
308.9	36.7	21.1	57.8	82.3	-24.5	Peak	Horizontal
354.0	31.8	22.6	54.4	82.3	-27.9	Peak	Horizontal
309.9	32.3	21.2	53.5	82.3	-28.8	Peak	Vertical
351.6	28.2	22.9	51.1	82.3	-31.2	Peak	Vertical
2538.5	38.5	-1.7	36.8	82.3	-45.5	Peak	Horizontal
6576.0	33.6	7.8	41.4	82.3	-40.9	Peak	Horizontal
2479.0	39.5	-1.6	37.9	82.3	-44.4	Peak	Vertical
7298.5	33.0	10.6	43.6	82.3	-38.7	Peak	Vertical
<b>High Channel</b>							
306.0	35.9	21.1	57.0	82.3	-25.3	Peak	Horizontal
355.4	31.3	22.4	53.7	82.3	-28.6	Peak	Horizontal
309.9	32.6	21.2	53.8	82.3	-28.5	Peak	Vertical
352.0	28.6	22.8	51.4	82.3	-30.9	Peak	Vertical
4706.0	35.6	3.5	39.1	82.3	-43.2	Peak	Horizontal
9755.0	32.9	13.3	46.2	82.3	-36.1	Peak	Horizontal
2419.5	39.5	-1.3	38.2	82.3	-44.1	Peak	Vertical
7604.5	32.1	10.7	42.8	82.3	-39.5	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB).

## 6. CONCLUSION

The data collected relate only the item(s) tested and show that unit is compliance with FCC Rules.

## **Appendix A - Test Setup Photograph**

Refer to "2010RSU005-UT" file.

## **Appendix B - EUT Photograph**

Refer to "2010RSU005-UE" file.