




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	6.194	30	Pass
NVNT	BLE	2442	Ant1	6.246	30	Pass
NVNT	BLE	2480	Ant1	6.178	30	Pass



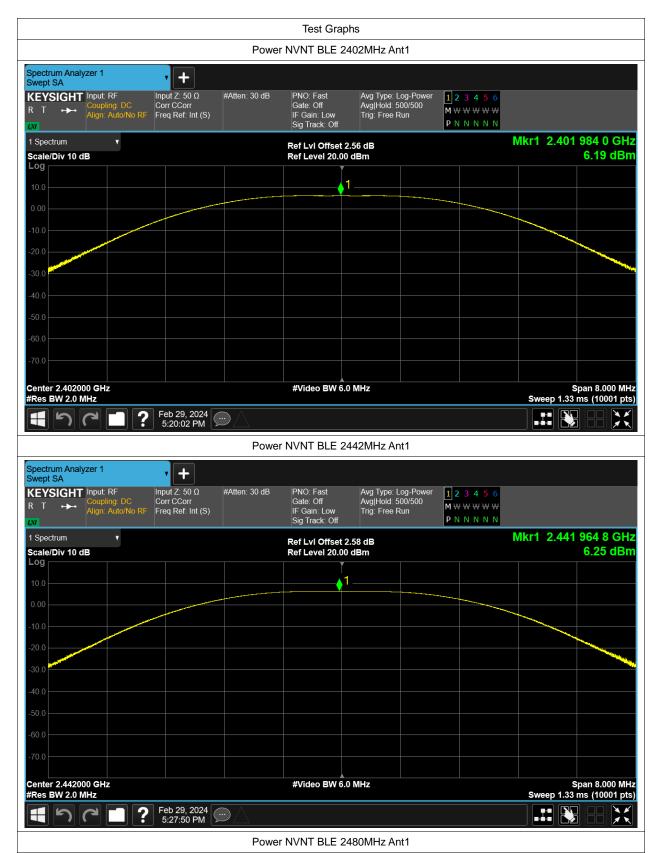



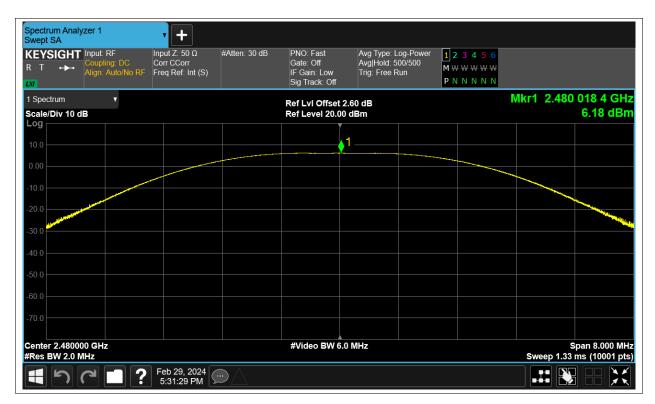





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.09	0.5	Pass
NVNT	BLE	2442	Ant1	1.094	0.5	Pass
NVNT	BLE	2480	Ant1	1.092	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.061	
NVNT	BLE	2442	Ant1	2.067	
NVNT	BLE	2480	Ant1	2.071	

Project No.: JYTSZR2402032















Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-9.022	8	Pass
NVNT	BLE	2442	Ant1	-8.965	8	Pass
NVNT	BLE	2480	Ant1	-9.035	8	Pass



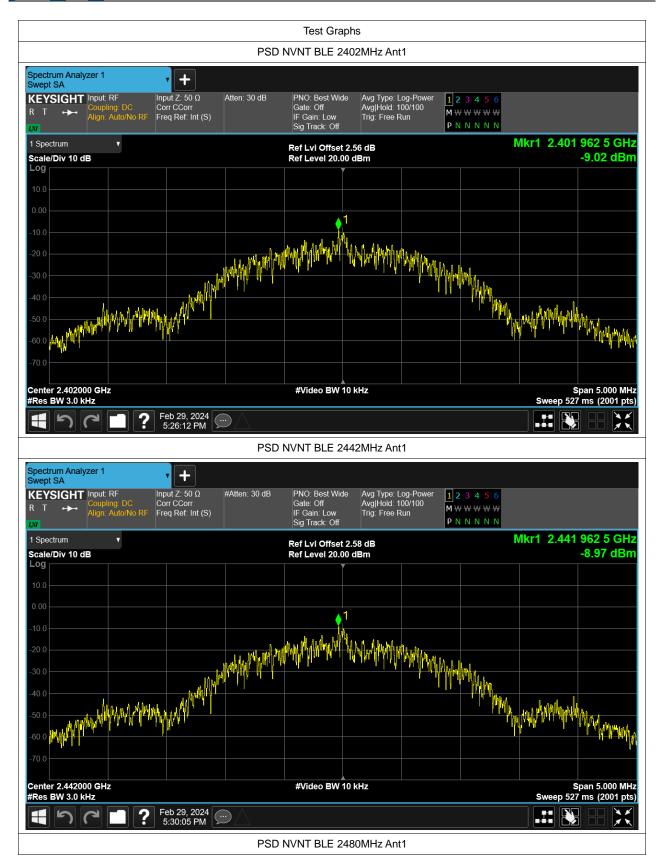



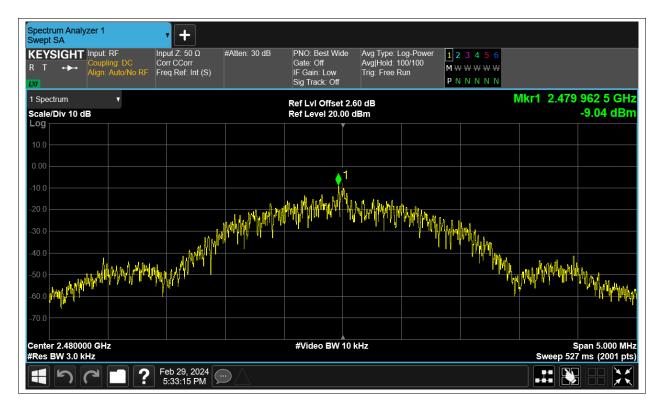






Band Edge

	Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
	NVNT	BLE	2402	Ant1	-60.26	-20	Pass
Ī	NVNT	BLE	2480	Ant1	-55.46	-20	Pass







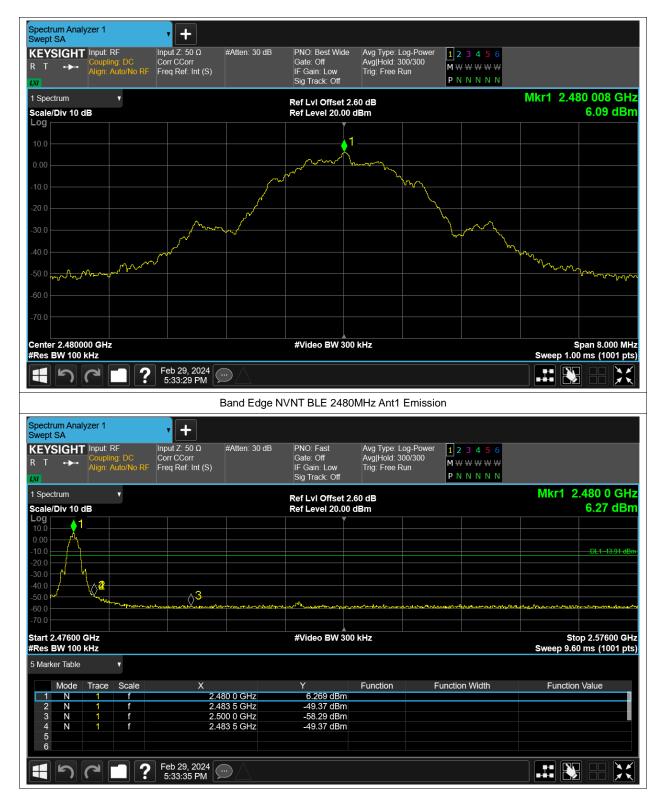





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-55.36	-20	Pass
NVNT	BLE	2442	Ant1	-56.15	-20	Pass
NVNT	BLE	2480	Ant1	-55.75	-20	Pass











