

Report No.: TW2311206E

Applicant: Hangzhou Roombanker Technology Co., Ltd

Product: Panic Button

Model No.: RBSS-EB1-915, RBSS-EBx-915:(X:0~9 or X: A~Z),

RBSS-EBx-915(YY)/ZZZ:(X:0~9 or X: A~Z), (Y:0~9 or Y:

 $A\sim Z$ )/( $Z:0\sim 9$  or  $Z:A\sim Z$ )

Trademark: Roombanker

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 & FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation o

electromagnetic compatibility

Approved By

Terry Tang

Manager

Dated: January 06, 2024


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

### SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2311206E Page 2 of 41

Date: 2024-01-06



## **Special Statement:**

### FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

### Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

### A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Report No.: TW2311206E

Date: 2024-01-06



# Test Report Conclusion

#### Content 1.0 General Details..... 1.1 Test Lab Details. 1.2 Applicant Details. 4 1.3 Description of EUT .... 4 1.4 Submitted Sample.... 4 1.5 Test Duration. 5 1.6 Test Uncertainty. 5 1.7 Test By..... 5 List of Measurement Equipment..... 2.0 7 3.0 Technical Details..... 3.1 Summary of Test Results.... 7 3.2 7 Test Standards.... 4.0 EUT Modification.... 7 Power Line Conducted Emission Test.... 5.0 8 5.1 Schematics of the Test. 8 5.2 Test Method and Test Procedure. 8 5.3 Configuration of the EUT..... 5.4 EUT Operating Condition. 5.5 Conducted Emission Limit. 9 5.6 Test Result. 6.0 Radiated Emission test..... 10 Test Method and Test Procedure. 6.1 10 6.2 Configuration of the EUT..... 11 6.3 EUT Operation Condition. 11 6.4 Radiated Emission Limit. 11 6.5 Test Result. 13 7.0 Band Edge.... 25 7.1 Test Method and Test Procedure. 25 7.2 Radiated Test Setup. 25 7.3 Configuration of the EUT.... 25 7.4 EUT Operating Condition. 25 7.5 Band Edge Limit.... 25 7.6 Band Edge Test Result. 26 8.0 Antenna Requirement. 30 20dB bandwidth measurement.... 9.0 31 10.0 35 FCC ID Label.... Photo of Test Setup and EUT View.... 11.0 36

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2024-01-06



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

### 1.2 Applicant Details

Applicant: Hangzhou Roombanker Technology Co., Ltd

Address: A#801 Wantongcenter, Hangzhou, Zhejiang, China

Telephone: -Fax: --

### 1.3 Description of EUT

Product: Panic Button

Manufacturer: Zhejiang Dusun Electron Co., Ltd.

Address: No. 640 FengQing Street, Deqing, Huzhou, Zhejiang, China

Trademark: Roombanker
Model Number: RBSS-EB1-915

Additional Model Name RBSS-EBx-915:(X:0~9 or X: A~Z),

RBSS-EBx-915(YY)/ZZZ:(X:0 $\sim$ 9 or X: A $\sim$ Z), (Y:0 $\sim$ 9 or Y: A $\sim$ Z)/(Z:0 $\sim$ 9 or

 $Z:A\sim Z$ 

Rating: DC3.0V

Battery: 1pc DC3.0V CR2032 button battery

Hardware Version: V1.0 Software Version: V1.0.0

Serial No.: 89011703278624839026

Operation Frequency: 903MHz-927MHz

Channel Number: 241
Channel Separation: 0.1MHz
Modulation Type: FSK

Antenna Designation FPC antenna with gain 1.08dB maximum (Get from the antenna specification)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2311206E Page 5 of 41

Date: 2024-01-06



1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2023-11-17 to 2024-01-06

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty = 6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Conducted Emissions Uncertainty = 3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Page 6 of 41

Report No.: TW2311206E

Date: 2024-01-06



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100253	2023-07-14	2024-07-13
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2023-07-14	2024-07-13
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17
Spectrum	R&S	FSIQ26	100292	2023-07-14	2024-07-13
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2024-07-17
Power meter	Anritsu	ML2487A	6K00003613	2023-07-14	2024-07-13
Power sensor	Anritsu	MA2491A	32263	2023-07-14	2024-07-13
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17
9*6*6 Anechoic			N/A	2022-07-26	2025-07-25
EMI Test Receiver	RS	ESVB	826156/011	2023-07-14	2024-07-13
EMI Test Receiver	RS	ESCS 30	834115/006	2023-07-14	2024-07-13
Spectrum	HP/Agilent	E4407B	MY50441392	2023-07-14	2024-07-13
Spectrum	RS	FSP	1164.4391.38	2023-07-14	2024-07-13
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA		2023-07-14	2024-07-13
RF Cable	Zhengdi	7m		2023-07-14	2024-07-13
Pre-Amplifier	Schwarebeck	BBV9743	#218	2023-07-14	2024-07-13
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2023-07-14	2024-07-13
LISN	SCHAFFNER	NNB42	00012	2023-07-14	2024-07-13
ESPI Test Receiver	R&S	ESPI 3	100379	2023-07-14	2024-07-13
LISN	R&S	EZH3-Z5	100294	2023-07-14	2024-07-13

### 2.2 Automation Test Software

## For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

### For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 41

Report No.: TW2311206E

Date: 2024-01-06



#### 3.0 Technical Details

### 3.1 Summary of test results

The E	UT has	been	tested	accord	ling to	o the	following	specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	N/A	N/A
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies
FCC Part 15.215(c)	20dB bandwidth	Pass	Complies

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

### 4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: TW2311206E

Date: 2024-01-06



#### 5.0 Power Line Conducted Emission Test

#### 5.1 Schematics of the test

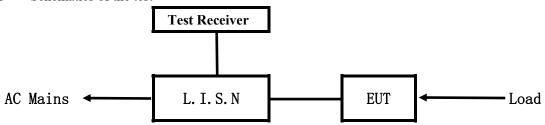


**EUT: Equipment Under Test** 

### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: N/A

Block diagram of Test setup

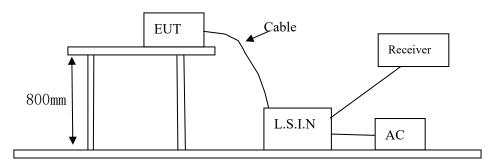

### 5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

241 channels are provided to the EUT

#### A. EUT

Device	Manufacturer	Model	FCC ID
		RBSS-EB1-915,	
		RBSS-EBx-915:(X:0~9 or X:	
Panic Button	Zhejiang Dusun Electron	A~Z),	2AUXBRBSS-EB1
Panic Button	Co., Ltd.	RBSS-EBx-915(YY)/ZZZ:(X:0~9	915
		or X: A~Z), (Y:0~9 or Y:	
		$A\sim Z$ )/(Z:0~9 or Z:A~Z)	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2311206E Page 9 of 41

Date: 2024-01-06



#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

### C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	56.0	46.0	
5.00 ~ 30.00	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

#### 5.6 Test Results: N/A

Note: EUT powered by CR2032 button battery, this test item not applicable.

Page 10 of 41

Report No.: TW2311206E

Date: 2024-01-06



#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9kHz to 25 GHz was investigated. The frequency spectrum is set as follows:


Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
ADOVE IGHZ	Peak	1MHz	10Hz	Average

(Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.

- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

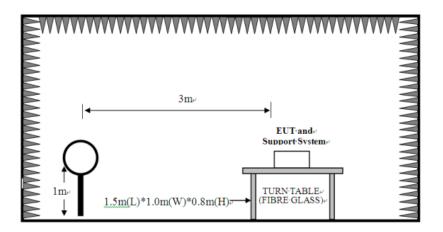


Report No.: TW2311206E


Date: 2024-01-06



For radiated emissions from 30MHz to1GHz

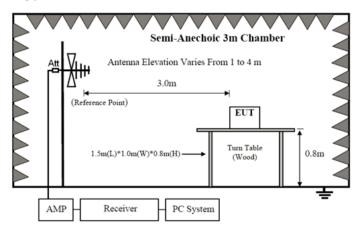

For radiated emissions above 1GHz

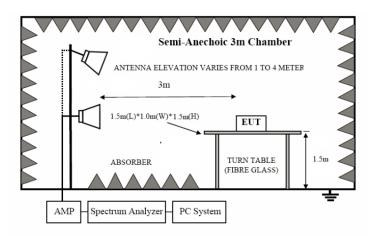

- 6.2 Configuration of the EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

### A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)		Field Strength of Harmonics (3m)		
(MHz)	mV/m	dBuV/m	uV/m	dBuV/m	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2311206E Page 12 of 41

Date: 2024-01-06



903-927 50	94 (Average)	114 (Peak) 500	54 (Average)	74 (Peak)
------------	--------------	----------------	--------------	-----------

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

### B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-80	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. New battery was used during the test.

Report No.: TW2311206E Page 13 of 41

Date: 2024-01-06




### 6.5 Test result

### A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-903MHz

#### Horizontal

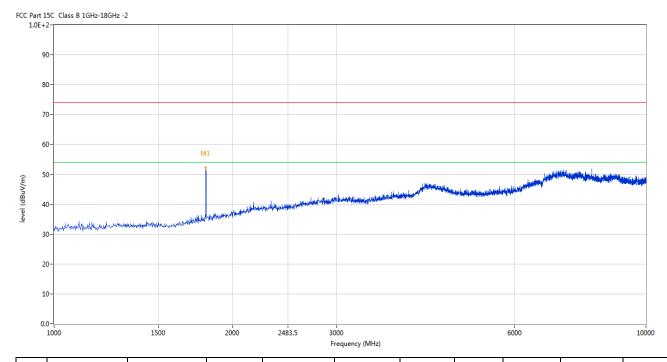


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	1805.299	52.24	-6.78	74.0	-21.76	Peak	31.00	100	Horizontal	Pass

Report No.: TW2311206E Page 14 of 41

Date: 2024-01-06



### Vertical

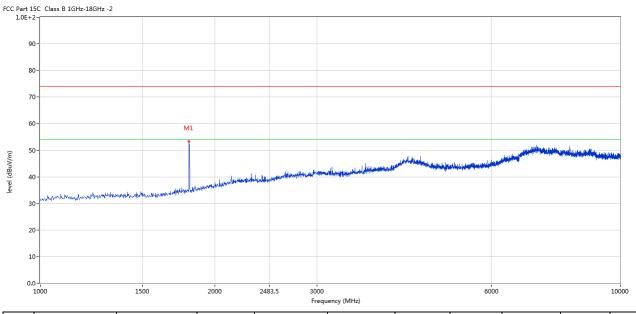

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	1805.299	53.33	-6.78	74.0	-20.67	Peak	301.00	100	Vertical	Pass


Report No.: TW2311206E Page 15 of 41

Date: 2024-01-06



Please refer to the following test plots for details: Middle Channel-915MHz

#### Horizontal

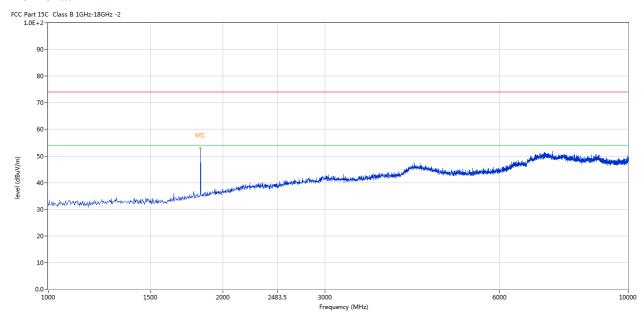


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	1830.042	52.99	-6.55	74.0	-21.01	Peak	32.00	100	Horizontal	Pass

Report No.: TW2311206E Page 16 of 41

Date: 2024-01-06



### Vertical

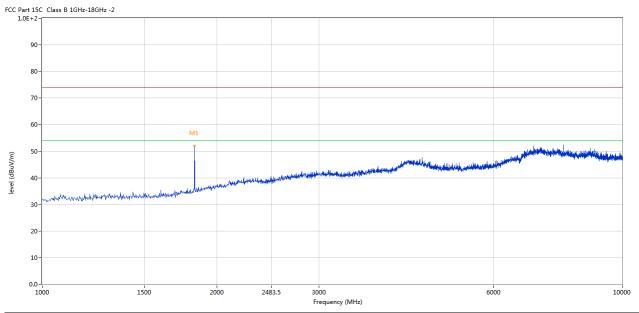

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	1830.042	51.91	-6.55	74.0	-22.09	Peak	296.00	100	Vertical	Pass


Report No.: TW2311206E Page 17 of 41

Date: 2024-01-06



Please refer to the following test plots for details: High Channel-927MHz

#### Horizontal

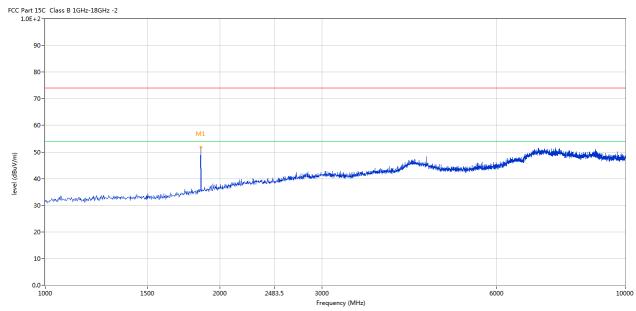

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	1854.786	51.81	-6.33	74.0	-22.19	Peak	30.00	100	Horizontal	Pass


Page 18 of 41

Report No.: TW2311206E

Date: 2024-01-06



#### Vertical

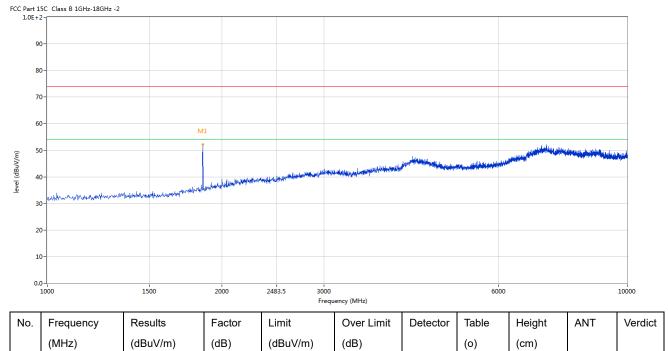

1 1854.786 52.25 -6.33 74.0 -21.75 Peak 302.00 100 Vertical Pass

Note: (1) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (2) Margin=Emission-Limits
- (3) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (4) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2311206E Page 19 of 41

Date: 2024-01-06



#### A: General Radiated Emission Data

## Radiated Emission In Horizontal (30MHz----1000MHz)


Project Number: CASE2 Test Time: 2024-01-03\_10.11.39

EUT Name: Panic Button Test Engineer: JERRY

Manufacturer: Zhejiang Dusun Electron Co., Ltd. Test Standard: FCC

Model: RBSS-EB1-915 Work Addition: TX-903M

Temp.( $^{\circ}$ C): 25 Load:

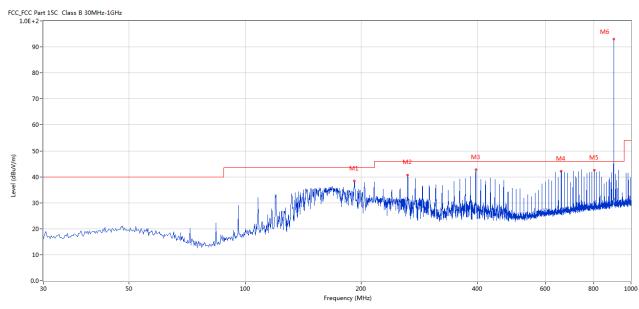

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	191.950	38.47	-14.07	43.5	5.03	Peak	322.00	100	Horizontal	Pass
2	263.954	41.65	-11.79	46.0	4.35	Peak	212.00	100	Horizontal	Pass
3	396.083	43.78	-8.72	46.0	2.22	Peak	0.00	100	Horizontal	Pass
4	659.858	42.26	-4.64	46.0	3.74	Peak	322.00	100	Horizontal	Pass
5	804.109	42.61	-3.08	46.0	3.39	Peak	88.00	100	Horizontal	Pass
6	902.997	93.02	-1.91	114.0	20.98	Peak	102.00	100	Horizontal	Pass

Report No.: TW2311206E Page 20 of 41

Date: 2024-01-06



### **B:** General Radiated Emission Data

#### Radiated Emission In Vertical (30MHz----1000MHz)


Project Number: CASE2 Test Time: 2024-01-03\_10.04.47

EUT Name: Panic Button Test Engineer: JERRY

Manufacturer: Zhejiang Dusun Electron Co., Ltd. Test Standard: FCC

Model: RBSS-EB1-915 Work Addition: TX-903M

Temp.( $^{\circ}$ C): 25 Load:

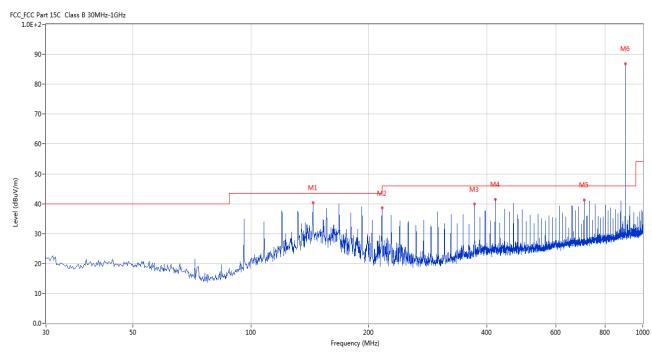

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m	(dB)		(Degree)	(cm)		
1	143.947	40.36	-17.10	43.5	3.14	Peak	283.00	100	Vertical	Pass
2	215.951	38.57	-13.60	43.5	4.93	Peak	292.00	100	Vertical	Pass
3	372.082	39.91	-9.49	46.0	6.09	Peak	221.00	100	Vertical	Pass
4	420.085	42.38	-8.21	46.0	3.62	Peak	261.00	100	Vertical	Pass
5	707.861	42.16	-3.84	46.0	3.84	Peak	291.00	100	Vertical	Pass
6	903.006	86.82	-1.87	114.0	27.18	Peak	171.00	100	Vertical	Pass

Report No.: TW2311206E Page 21 of 41

Date: 2024-01-06



### C: General Radiated Emission Data

### Radiated Emission In Horizontal (30MHz----1000MHz)


Project Number: CASE2 Test Time: 2023-12-29\_09.22.09

EUT Name: Panic Button Test Engineer: JERRY

Manufacturer: Zhejiang Dusun Electron Co., Ltd. Test Standard: FCC

Model: RBSS-EB1-915 Work Addition: TX-915M

Temp.( $^{\circ}$ C): 25 Load:

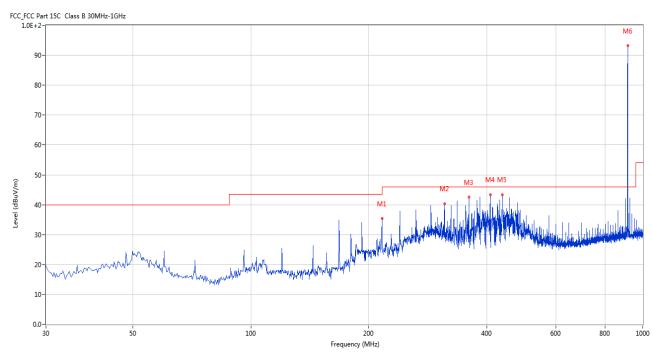

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	215.951	35.45	-13.60	43.5	8.05	Peak	190.00	100	Horizontal	Pass
2	311.957	40.37	-10.76	46.0	5.63	Peak	325.00	100	Horizontal	Pass
3	359.960	42.56	-9.46	46.0	3.44	Peak	58.00	100	Horizontal	Pass
4	407.963	43.41	-8.47	46.0	2.59	Peak	344.00	100	Horizontal	Pass
5	438.025	43.40	-8.02	46.0	2.60	Peak	344.00	100	Horizontal	Pass
6	914.994	93.19	-1.75	114.0	20.81	Peak	34.00	100	Horizontal	Pass

Report No.: TW2311206E Page 22 of 41

Date: 2024-01-06



### D: General Radiated Emission Data

#### Radiated Emission In Vertical (30MHz----1000MHz)


Project Number: CASE2 Test Time: 2023-12-29\_09.19.09

EUT Name: Panic Button Test Engineer: JERRY

Manufacturer: Zhejiang Dusun Electron Co., Ltd. Test Standard: FCC

Model: RBSS-EB1-915 Work Addition: TX-915M

Temp.( $^{\circ}$ C): 25 Load:

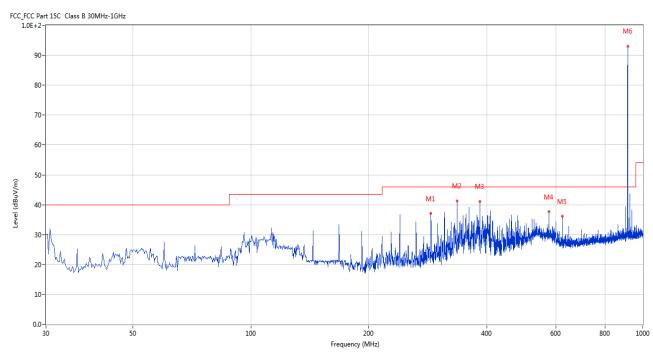

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV m)	(dB)		(Degree)	(cm)		
1	287.956	37.19	-11.27	46.0	8.81	Peak	107.00	100	Vertical	Pass
2	335.959	41.32	-9.91	46.0	4.68	Peak	90.00	100	Vertical	Pass
3	383.962	41.10	-9.16	46.0	4.90	Peak	83.00	100	Vertical	Pass
4	575.974	37.63	-5.83	46.0	8.37	Peak	257.00	100	Vertical	Pass
5	623.977	36.11	-4.89	46.0	9.89	Peak	309.00	100	Vertical	Pass
6	914.994	93.12	-1.75	114.0	20.88	Peak	179.00	100	Vertical	Pass

Report No.: TW2311206E Page 23 of 41

Date: 2024-01-06



### E: General Radiated Emission Data

## Radiated Emission In Horizontal (30MHz----1000MHz)


Project Number: CASE2 Test Time: 2024-01-03\_10.43.12

EUT Name: Panic Button Test Engineer: JERRY

Manufacturer: Zhejiang Dusun Electron Co., Ltd. Test Standard: FCC

Model: RBSS-EB1-915 Work Addition: TX-927M

Temp.( $^{\circ}$ C): 25 Load:

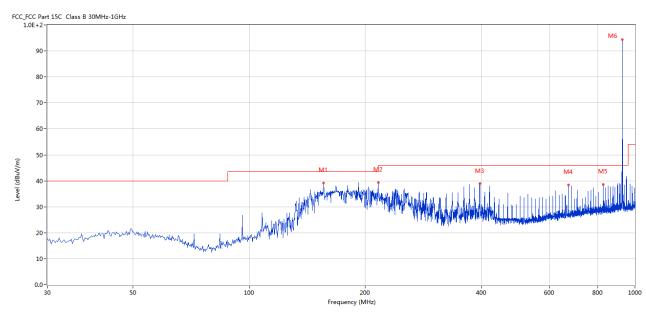

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	156.068	39.10	-16.62	43.5	4.40	Peak	334.00	100	Horizontal	Pass
2	215.951	39.37	-13.60	43.5	4.13	Peak	334.00	100	Horizontal	Pass
3	396.083	38.96	-8.72	46.0	7.04	Peak	349.00	100	Horizontal	Pass
4	671.980	38.50	-4.48	46.0	7.50	Peak	333.00	100	Horizontal	Pass
5	827.868	38.57	-2.90	46.0	7.43	Peak	20.00	100	Horizontal	Pass
6	926.993	94.29	-1.65	114	19.7	Peak	126.00	100	Horizontal	Pass
6**	926.993	87.35	-1.65	94	6.65	AV	126.00	100	Horizontal	Pass

Report No.: TW2311206E Page 24 of 41

Date: 2024-01-06



### F: General Radiated Emission Data

#### Radiated Emission In Vertical (30MHz----1000MHz)


Project Number: CASE2 Test Time: 2024-01-03\_10.46.33

EUT Name: Panic Button Test Engineer: JERRY

Manufacturer: Zhejiang Dusun Electron Co., Ltd. Test Standard: FCC

Model: RBSS-EB1-915 Work Addition: TX-927M

Temp.( $^{\circ}$ ): 25 Load:

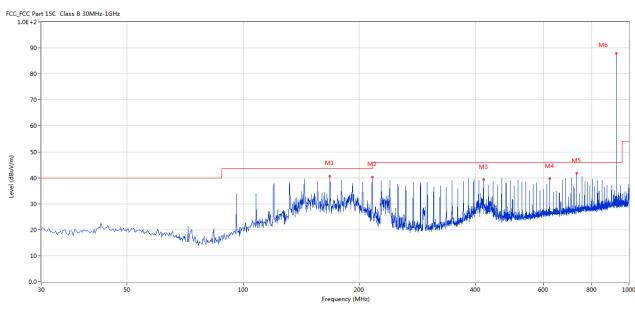

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	167.948	40.75	-16.14	43.5	2.75	Peak	336.00	100	Vertical	Pass
2	215.951	40.30	-13.60	43.5	3.20	Peak	301.00	100	Vertical	Pass
3	419.843	39.31	-8.23	46.0	6.69	Peak	249.00	100	Vertical	Pass
4	623.977	39.72	-4.89	46.0	6.28	Peak	313.00	100	Vertical	Pass
5	732.104	42.74	-3.66	46.0	3.26	Peak	298.00	100	Vertical	Pass
6	926.993	87.88	-1.65	114.0	26.14	Peak	320.00	100	Vertical	Pass

Report No.: TW2311206E

Date: 2024-01-06




#### 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

### 7. 2 Radiated Test Setup

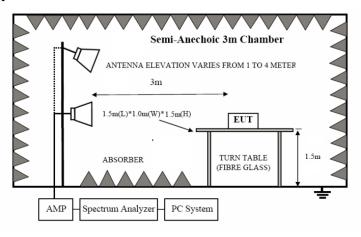

For the actual test configuration, please refer to the related items – Photos of Testing

### 7.3 Configuration of the EUT

Same as section 5.3 of this report

### 7.4 EUT Operating Condition

Same as section 5.4 of this report.

### 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.


Report No.: TW2311206E Page 26 of 41

Date: 2024-01-06



#### 7.6 Test Result

Product:	Panic Button	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Channel	903MHz

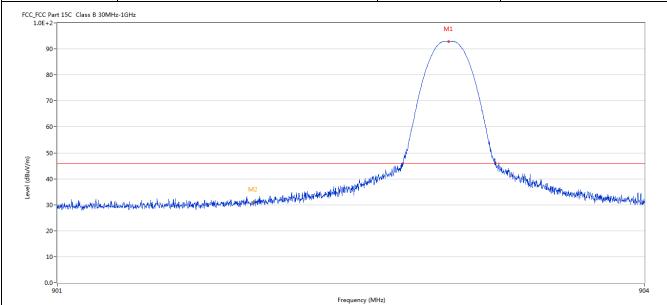

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	902.998	92.90	-1.88	46.0	-46.90	Peak	309.00	100	Horizontal	Pass
2	902.000	31.00	-2.02	46.0	15.00	Peak	191.00	100	Horizontal	Pass

Report No.: TW2311206E Page 27 of 41

Date: 2024-01-06



	Product:		Par	nic Button		D	etector		Vertical	
	Mode		Keeping Transmitting		ng	Test Voltage		DC3.0V		7
	Temperature	;	2.	4 deg. C,		H	umidity 56% RH			I
	Test Result:			Pass		C	hannel	el 903MHz		
_FCC F	Part 15C Class B 30MHz-	1GHz								
LULT										
9	0-						M1			
8	0-					/				
-						/	\			
7	J-									
6	0-									
5	0-									
						_/_				
4	0-		N	12	. 4	Michigan	\ \	Moderate		
3	D-Hold whomist party a	100 de jajoholyskisson dagtiliser skradersjorders	and programmed by a flow	photography and history has been been been been been been been bee	Makan Marka Balanda	W		WWW.AWW.	Market and and and the free for	Manufildi
2										
1	0-									
0.	901									
	201				Frequency (MF	łz)				
No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdi
	(MHz)	(dBu\//m)	(dB)	(dBu\//m)	(dB)		(Degree)	(cm)		l

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	902.998	86.11	-1.88	46.0	-40.11	Peak	123.00	100	Vertical	N/A
2	902.000	29.91	-2.02	46.0	16.09	Peak	309.20	100	Vertical	Pass

Page 28 of 41

Report No.: TW2311206E Date: 2024-01-06

	Product:		Pani	c Button			Polarity		Horizont	al	
	Mode Keeping Transmitting				Т	est Voltage		DC3.0V	7		
Te	Temperature 24 deg. C,				Humidity 56%		56% RI	Ŧ			
To	Test Result: Pass					Channel		927MH	Z		
CC_FC0	Part 15C Class B 30MHz	-1GHz									
	90 -		M1								
	70-										
	60-										
Ē	50-										
Level (abuv/m)	40-	at at a ballifield of the ball	. House	WAY MANAGER LANGE			tal aphorage dispersive an aphorage between the sarrine with a between the six beautiful and a sarrine with design and				
leve	30 - Walter State of the land	Mar.		MANAGEMENT OF THE PROPERTY OF	WHAT HAT THE PARTY OF THE PARTY	helmone tradicipal colonia que el lega	Here have been been been been been been been be	Physiatherical Holescope	when the second property thanks the second	hiphodological the latest	
	20-										
	10-										
	0.0										
	926				Frequency (M	ИHz)				93	
No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdi	
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)	_		
							404.00	400			
1	926.980	93.33	-1.65	46.0	-47.33	Peak	131.00	100	Horizontal	Pass	

Page 29 of 41 Report No.: TW2311206E

Date: 2024-01-06



1	Product:		Panic	Button		De	etector		Vertical	
Mode Keeping Transmitti						Test	Voltage		DC3.0V	
Te	mperature		24 deg. C,			Humidity	56% RH			
Test Result:			P	ass		Cl	nannel		927MHz	
CC_FCC	Part 15C Class B 30MHz	z-1GHz								
			M1							
	90-		~~~							
	80-	/	-							
	70-		-							
	60-									
	50-									
(m/ano	50-									
(mouv) is	40-	Marie de	N <sub>IA</sub> ,	wull i	M2					
(iii/angn) ia		anne parte and the state of the	Why.	Mary Hickory and the Barthelia	M2	manus despetablishment	naishalan na bhfhalan bailt	ahoviat <b>al</b> amik kalaba hest	ahoonaahloonahahahahahah	noninadibledh
(mi/angn) least	40-	armondomer sands folklighted	M.	of Marianan was now of the profity of	M2 Minatalinian, allappa	ace, att-failth the age. L	rresint all secured filly beginning the all st	adorphistophedomikk fordom dogst	shirung sabblumji philishi mjedin	, pink di kandh kide pilik
(iii/angn) isasi	30 - MANAY M	in market of the first of the f	h <sub>u</sub>	P of bedreen was not of the stiffing	M2 Nikanijajikijenijajaja	arinath-baith-baineach	registration, and philodographically	adrivirtudamikloridirada, d	theory-soldblow/th/Villia/th/th	rominimantholophia
revel (douy) in	30	sampulanin sasili delikili de	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	of the hannes of the planting	M2 Notinadjalkinjeta, si Lajgjad	aring the desired and the second	nnetrobustum, n diskforfervetrolls	ghviri talangk balabada, d	takenny-siiribbbloogtykho <sup>t</sup> hiliseepol <mark>d</mark> a	rankilyanihkilapik
revel (douy) in	30- <b></b>	an angaleum angalik di kalik d	<b>V</b>	of Mahanen were on the property of the property of	M2		nnishedau, n diikhafandinilli	ghviri who with a dead of the	takener-scirbbalomytykottallimpadet	930
revel (douy) in	30- 20- 10-	Results	Factor	Holdenwerner (1/6) Apply			Table	Height	Antenna	
(uu/Angn) isaan	30 - 20 - 10 - 0.0 - 926				Frequency (M	Hz)				930
(uu/Angn) isaan	30- 20- 10- 0.0- 926	Results	Factor	Limit	Frequency (M	Hz)	Table	Height		930

Note: The PK emission level less than the AV limit. No necessary to record the AV emission level.

Report No.: TW2311206E Page 30 of 41

Date: 2024-01-06



### 8.0 Antenna Requirement

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a FPC antenna with gain 1.08dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Report No.: TW2311206E

Date: 2024-01-06



Page 31 of 41

#### 9.0 20dB Bandwidth Measurement

### **Test Configuration**



### **Test Procedure**

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 10kHz RBW and 30kHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### Limit

N/A


Report No.: TW2311206E Page 32 of 41

Date: 2024-01-06



#### **Test Result**

Product:	Panic Button	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	84.00kHz	Work Addition	TX 903

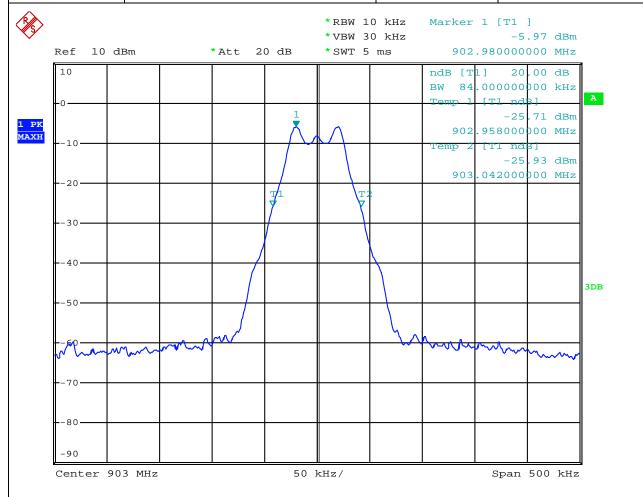

Date: 27.DEC.2023 15:30:13


Page 33 of 41

Report No.: TW2311206E

Date: 2024-01-06



Product:	Panic Button	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	85.00kHz	Work Addition	TX 915

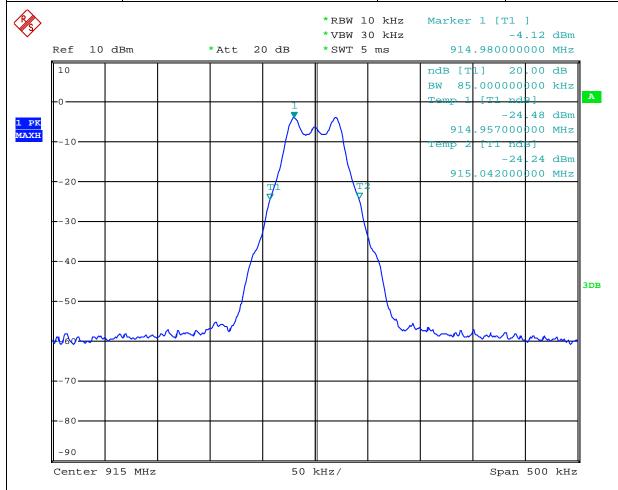

Date: 27.DEC.2023 15:35:49


Page 34 of 41

Report No.: TW2311206E

Date: 2024-01-06



Product:	Panic Button	Test Mode:	Keep transmitting
Mode	Keeping Transmitting	Test Voltage	DC3.0V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	85.00kHz	Work Addition	TX 927

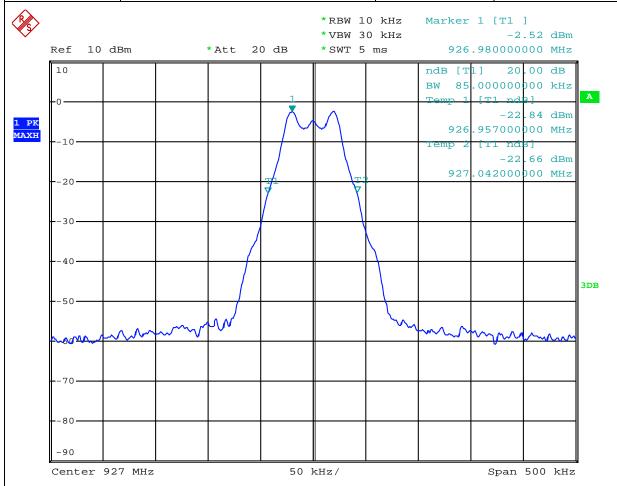

Date: 27.DEC.2023 15:36:28

Report No.: TW2311206E Page 35 of 41

Date: 2024-01-06




#### 10.0 FCC ID Label

#### FCC ID: 2AUXBRBSS-EB1915

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### Mark Location:

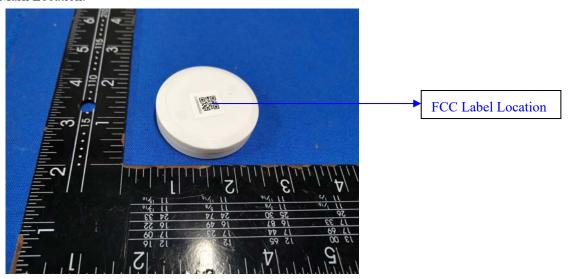

Report No.: TW2311206E

Date: 2024-01-06



11.0 Photo of testing

11.1 Conducted test View

N/A

Radiated emission test view




Report No.: TW2311206E

Date: 2024-01-06



#### 11.2 Photographs-EUT

Outside View

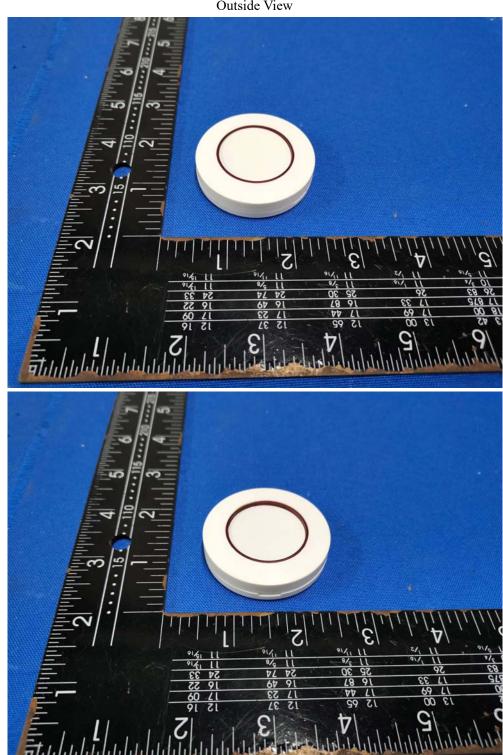

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 38 of 41

Report No.: TW2311206E

Date: 2024-01-06



Outside View

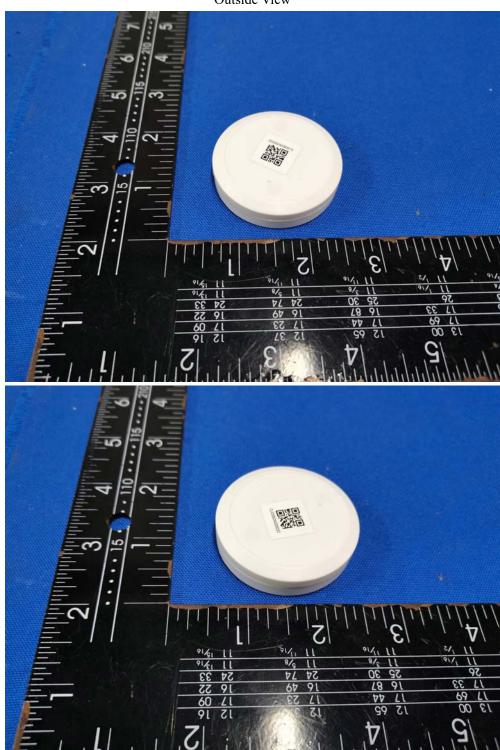

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 39 of 41

Report No.: TW2311206E

Date: 2024-01-06



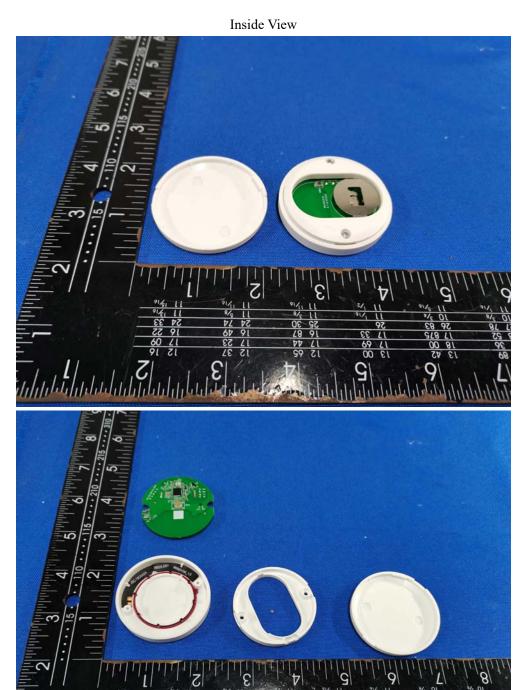

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 40 of 41

Report No.: TW2311206E

Date: 2024-01-06



Inside View

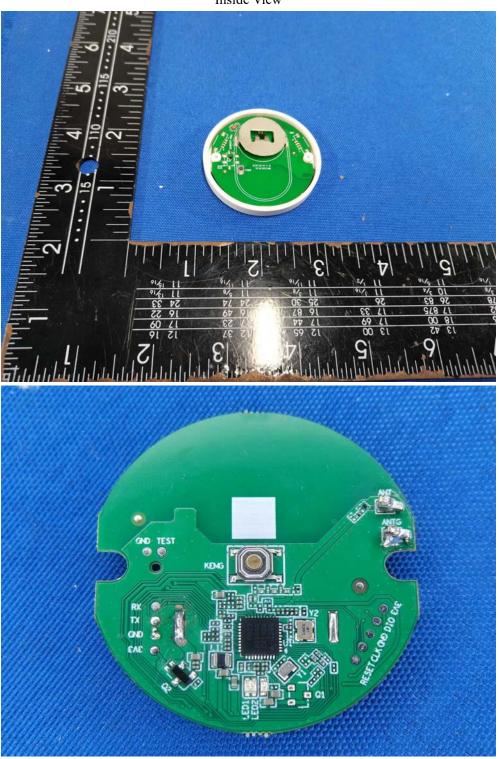

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 41 of 41 Report No.: TW2311206E

Date: 2024-01-06



Inside View

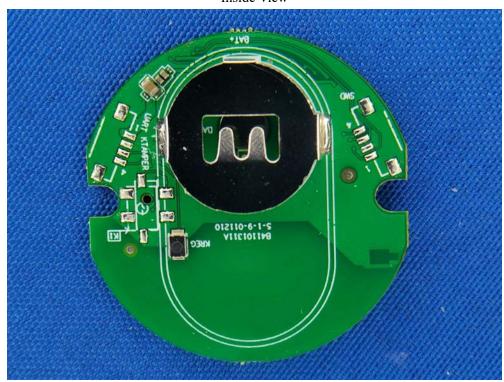

-- End of the report--