



Solutions

# TEST REPORT

**Test Report No.: UL-RPT-RP-14978163-116-FCC-BT**

**Applicant \*** : Robert Bosch GmbH  
**Model No. \*** : CTP3NA  
**FCC ID \*** : 2AUXS-CTP3NA  
**Technology \*** : Bluetooth – Basic Rate (BR) & Enhanced Data Rate (EDR)  
**Test Standard(s)** : **FCC Parts 15.209(a) & 15.247**

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. Test Report Version 1.0
5. Result of the tested sample: **PASS**
6. All information marked with a (\*) were provided by customer / applicant or authorized representative

Prepared by: Muhammad Faiq Khan  
Title: Project Engineer  
Date: 09 November 2023

Approved by: Rachid, Acharkaoui  
Title: Operations Manager  
Date: 09 November 2023



Deutsche  
Akkreditierungsstelle  
D-PL-19381-02-00

This laboratory is accredited by DAkkS.  
The tests reported herein have been performed in accordance with its' terms of accreditation.

This page has been left intentionally blank.

## **Table of Contents**

<b>1. Customer Information *</b> .....	<b>4</b>
1.1. Applicant Information	4
1.2. Manufacturer Information	4
<b>2. Summary of Testing</b> .....	<b>5</b>
2.1. General Information	5
Applied FCC Rule Part(s)	5
Location	5
Date Information	5
2.2. Summary of Test Results	6
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
<b>3. Equipment Under Test (EUT)</b> .....	<b>7</b>
3.1. Identification of Equipment Under Test (EUT) *	7
3.2. Description of EUT *	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing *	8
3.5. Support Equipment	8
A. Support Equipment (In-house)	8
B. Support Equipment (Manufacturer supplied)	8
<b>4. Operation and Monitoring of the EUT during Testing</b> .....	<b>9</b>
4.1. Operating Modes	9
4.2. Configuration and Peripherals	9
<b>5. Measurements, Examinations and Derived Results</b> .....	<b>10</b>
5.1. General Comments	10
5.2. Test Results	11
5.2.1. Transmitter Duty Cycle	11
5.2.2. Transmitter Radiated Emissions	13
5.2.3. Transmitter Band Edge Radiated Emissions	22
<b>6. Measurement Uncertainty</b> .....	<b>26</b>
<b>7. Used equipment</b> .....	<b>27</b>
<b>8. Report Revision History</b> .....	<b>28</b>

## **1. Customer Information \***

### **1.1.Applicant Information**

<b>Company Name:</b>	Robert Bosch GmbH
<b>Company Address:</b>	Robert-Bosch-Platz 1 70839 Gerlingen GERMANY
<b>Contact Person:</b>	Karin Silberhorn
<b>Contact E-Mail Address:</b>	karin.silberhorn@de.bosch.com
<b>Contact Phone No.:</b>	+49 5121-49-7662

### **1.2.Manufacturer Information**

<b>Company Name:</b>	Robert Bosch GmbH
<b>Company Address:</b>	Robert-Bosch-Platz 1 70839 Gerlingen GERMANY
<b>Contact Person:</b>	Karin Silberhorn
<b>Contact E-Mail Address:</b>	karin.silberhorn@de.bosch.com
<b>Contact Phone No.:</b>	+49 5121-49-7662

## **2. Summary of Testing**

### **2.1. General Information**

#### **Applied FCC Rule Part(s)**

<b>Specification Reference:</b>	47CFR15.247
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
<b>Specification Reference:</b>	47CFR15.209
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.209

#### **Location**

<b>Location of Testing:</b>	UL International Germany GmbH Hedelfinger Strasse. 61, 70327 Stuttgart, GERMANY
<b>Registration Number:</b>	399704

#### **Date Information**

<b>Order Date:</b>	19 September 2023
<b>EUT Arrived:</b>	20 September 2023
<b>Test Dates:</b>	20 September 2023 to 28 September 2023
<b>EUT Returned:</b>	-/-

## 2.2. Summary of Test Results

Frequency Hopping Spread Spectrum (FHSS): 2400-2483.5 MHz					
FCC Part 15 Clause	Compliance Test Description	Test Result			
		C	N.C.	N.P.	N.A.
15.207	Transmitter AC Conducted Emissions <sup>(1)</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
15.247(a)(1)	Transmitter Minimum 20 dB Bandwidth <sup>(3)</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.35(c)	Transmitter Duty Cycle <sup>(2)</sup>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(a)(1)	Transmitter Carrier Frequency Separation <sup>(3)</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.247(a)(1)(iii)	Transmitter Number of Hopping Frequencies and Average Time of Occupancy <sup>(3)</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.247(b)(1)	Transmitter Maximum Peak Output Power <sup>(3)</sup>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
15.247(d) & 15.209(a)	Transmitter Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.247(d) & 15.209(a)	Transmitter Band Edge Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>C: COMPLIED   N.C.: NOT COMPLIED   N.P.: NOT PERFORMED   N.A.: NOT APPLICABLE</b>					
<p><b>Decision rule:</b>                      If the decision rule is not included in the applied customer specification or testing standard, the binary statement for simple acceptance, as defined in ILAC G8: 2019 Section 4.2.1, is applied as the decision rule for a pass/ fail statement.                      If the measured value is on the limit, the result is defined as a pass. In this case the risk of a false positive is 50%. For further information regarding risk assessment refer to ILAC G8: 2019.</p>					

### Note(s):

1. The EUT is vehicular equipment and will be powered by the battery of the vehicle, therefore no AC conducted emission tests are required.
2. The measurement was performed to assist the other average measurements.
3. At the client's request, only partial testing was performed for the radiated spurious emissions and the band edge radiated emissions as the EUT is a host product that contains a pre-certified radio module (Model: ATC6NPL002C)

## 2.3. Methods and Procedures

<b>Reference:</b>	ANSI C63.10-2013
<b>Title:</b>	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
<b>Reference:</b>	FCC KDB 558074 D01 DTS Meas Guidance v05r02 April 2, 2019
<b>Title:</b>	Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC rules

## 2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT) \***

<b>Brand Name:</b>	Bosch
<b>Model Name:</b>	CTP3NA
<b>Model Number:</b>	CTP3NA Ext
<b>Test Sample Serial Number:</b>	1150003350
<b>Hardware Version:</b>	C2
<b>Software Version:</b>	DAIMLER_CTP3_ISTANBUL_RC2_HF2_S.010
<b>FCC ID:</b>	2AUXS-CTP3NA

#### **3.2. Description of EUT \***

The equipment under test was an In-Vehicle-Telematic-Unit, contains Model Name: CTP3NA, supporting WLAN 2.4 GHz, WLAN 5 GHz, Bluetooth LE and Bluetooth BR/EDR technologies.

While testing Bluetooth LE EUT were operating in 2400-2483.5 MHz ISM band. All other supported radio technologies were either switched off or were in idle mode.

#### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

**3.4. Additional Information Related to Testing \***

<b>Technology Tested:</b>	Bluetooth – BR/EDR		
<b>FCC Equipment Classification:</b>	Frequency hopping spread spectrum (FHSS)		
<b>Type of Unit:</b>	Transceiver		
<b>Power Supply Requirement(s):</b>	12 – 24 V DC		
<b>Operating Frequency Range:</b>	2402 MHz to 2480 MHz		
<b>Channel Spacing:</b>	1 MHz		
<b>Mode(s):</b>	Basic Rate (BR)	Enhanced Data Rate (EDR)	
<b>Modulation(s):</b>	GFSK (Note 1)	DQPSK	8DPSK (Note 1)
<b>Active Packet Type (s):</b>	DH1, DH3, DH5 (Note 1)	2DH1, 2DH3, 2DH5	3DH1, 3DH3, 3DH5 (Note 2)
<b>Data Rate (Mbit/s):</b>	1 (Note 1)	2	3 (Note 2)
<b>Antenna Type:</b>	combinatorial Antenna		
<b>Antenna Details:</b>	A 006 820 39 75		
<b>Declared Antenna Gain:</b>	6.2 dBi		
<b>Transmit Channels Tested:</b>	<b>Channel ID</b>	<b>RF Channel</b>	<b>Frequency (MHz)</b>
	Bottom	0 (Note 2)	2402
	Middle	39 (Note 1)	2441
	Top	78 (Note 2)	2480
<b>Highest internally generated clock and/ or oscillator frequency:</b>	radio frequency: WiFi 5GHz: 5825 MHz internal clock frequency: 125MHz		
(Note 1) At the client’s request, only partial testing was performed for the radiated spurious emissions.			
(Note 2) At the client’s request, only partial testing was performed for the band edge radiated emissions.			

**3.5. Support Equipment**

The following support equipment was used to exercise the EUT during testing:

**A. Support Equipment (In-house)**

Item	Description	Brand Name	Model Name or Number	Serial Number
1	-/-	-/-	-/-	-/-

**B. Support Equipment (Manufacturer supplied)**

Item	Description	Brand Name	Model Name or Number	Serial Number
1	Laptop	Fujitsu	H770	DS1U006875



## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

- Continuous Transmitting Fixed Channel Frequency Mode (Hopping OFF) with Modulated Carrier
  - Maximum Power: MAX PWR
  - Test Channels: Bottom | Middle <sup>(1)</sup> | Top
  - BT-Mode & Packet Type: As required
    - BT-BR Mode: (DH5) & PRBS9 <sup>(1)</sup>
    - BT-EDR Mode: (3DH5) & PRBS9 <sup>(2)</sup>

<sup>(1)</sup> According to customer declaration the unwanted (spurious) radiated emissions measurement was performed on this mode.

<sup>(2)</sup> According to customer declaration this mode was used for Band edge measurements.

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

#### **EUT Power Supply:**

- The EUT was powered with 24V DC.

#### **Test Mode Activation:**

- The EUT can be connected to the Test laptop via USB supplied by the customer.
- The test modes were activated by the terminal software "Kitty". The commands to setup the respective modes and power were defined by the customer.

#### **Radiated Measurements:**

- The worst case position was declared by the customer.
- Radiated measurements below 30 MHz were performed with the EUT positioned on the turn table and rotating 360 degrees while the loop antenna height was set at 100 cm.
- Radiated measurements above 30 MHz were performed with the EUT positioned on the turn table and rotating 360° while the antenna height varies from 1 to 4 m over the measurement frequency range.
- R&S® EMC32 V11.30 Software was used for the Radiated spurious emission measurements.

#### **Duty Cycle Correction Details:**

- As the continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and EUT was transmitting continuously at Duty Cycles of 76.59 % (duty cycle variations are less than  $\pm 2\%$  at the respective data rate) for EDR. Therefore, Duty Cycle Correction Factor of 1.16 dB was added to all average measurements, to compute the corrected average values of the emissions that would have been measured had the test been performed at 100% Duty Cycle.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

**5.2. Test Results**

**5.2.1. Transmitter Duty Cycle**

**Test Summary:**

<b>Test Engineer:</b>	Muhammad Faiq Khan	<b>Test Date:</b>	21 September 2023
<b>Test Sample Serial Number:</b>	1150003350		
<b>Test Site Identification</b>	SR 1/2		

<b>FCC Reference:</b>	Part 15.35(c)
<b>Test Method Used:</b>	FCC KDB 558074 Section 9.b) referencing ANSI C63.10 Section 7.5

**Environmental Conditions:**

<b>Temperature (°C):</b>	24.7
<b>Relative Humidity (%):</b>	45.6


**Note:**

- The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

$$Duty\ Cycle\ (\%) = 100 \times [On\ Time\ (T_{ON})] / [Period(T_{ON} + T_{OFF})\ or\ 100ms\ whichever\ is\ the\ lesser]$$

$$Duty\ Cycle\ Correction\ Factor = 10 \log\ 1 / [On\ Time\ (T_{ON})] / [Period(T_{ON} + T_{OFF})\ or\ 100ms\ whichever\ is\ the\ lesser]$$


**Test Setup:**

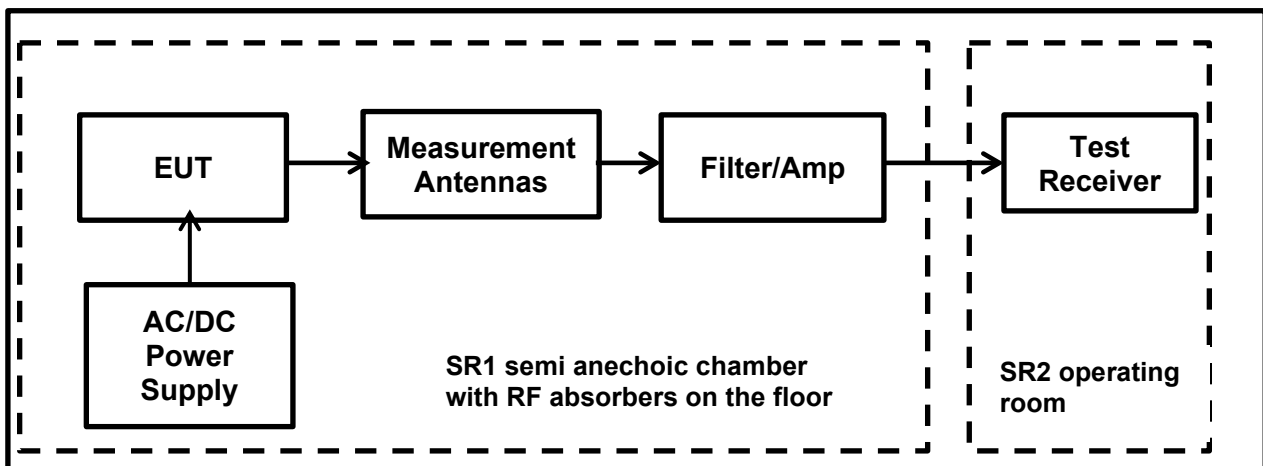

**Transmitter Duty Cycle (continued)**

**Results: BT-EDR Mode / Packet Type: 3DH5 / Hopping OFF/ Top Channel / MAX PWR**

Pulse On Time (T <sub>ON</sub> ) (ms)	Pulse Period (T <sub>ON</sub> +T <sub>OFF</sub> ) (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
2.88	3.76	76.59	1.16

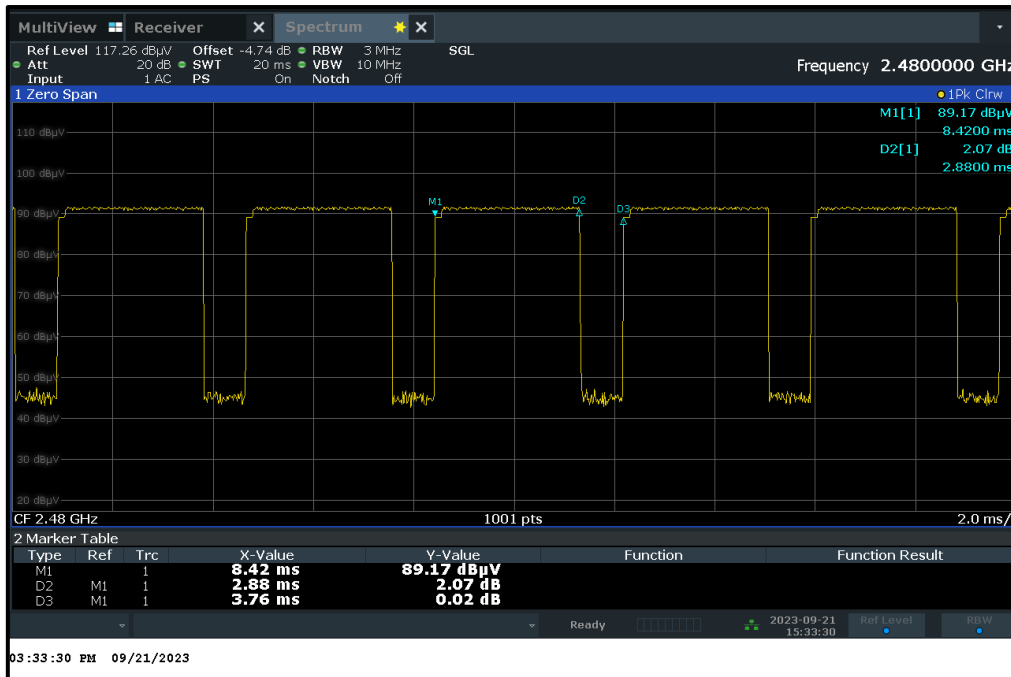

**5.2.2. Transmitter Radiated Emissions****Test Summary:**

<b>Test Engineer:</b>	Muhammad Faiq Khan	<b>Test Date:</b>	26 September 2023
<b>Test Sample Serial Number:</b>	1150003350		
<b>Test Site Identification</b>	SR 1/2		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	ANSI C63.10:2013 Sections 6.3 and 6.4
<b>Frequency Range</b>	9 kHz to 30 MHz

**Environmental Conditions:**


<b>Temperature (°C):</b>	23.7
<b>Relative Humidity (%):</b>	45.7

**Notes:**

- In accordance with FCC KDB 414788 D01 Radiated Test Site & ANSI C63.10 clause 5.2 an alternative test site that can demonstrate equivalence to a open area test site may be used. Therefore, the measurement was performed in a Semi Anechoic Chamber. (The OATS / SAC comparison data is available upon request).
- The limits are specified at a test distances of 30 and 300 meters. However, as specified in FCC Section 15.31 (f)(2) & ANSI C63.10 clause 6.4.3, measurements may be performed at a closer distance and the measured level extrapolated to the specified measurement distance using the method described in clauses 6.4.4, specifically sub-clause 6.4.4.1 which specifies that the measured level shall be extrapolated to the specified distance by conservatively presuming that the field strength decays at 40 dB/decade.  
Therefore, measurements were performed at a measurement distance of 3 m.
- Therefore, the limit values are extrapolated to a measurement distance of 3 m.
  - 9 kHz- 490 kHz: limits extrapolated from 300 m to 3 m by adding 80 dB at 40 dB /decade.
  - 490 kHz-1705 kHz: limits extrapolated from 30 m to 3 m by adding 40 dB at 40 dB /decade.
- Measurements below 30 MHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) at a distance of 3 m. The EUT was placed at a height of 80 cm above the reference ground plane in the center of the chamber turntable. The measurement loop antenna height was 100 cm.
- The radiated emissions measurements were performed with the EUT set to the following worst-case mode.
  - BT-BR Mode | Packet Type: DH5 | Hopping OFF | Middle channel | PRBS9 | MAX PWR
- The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
- All other emissions shown on the pre-scan plot were investigated and found to be below the measurement system noise floor.
- Pre-scans were performed, and markers placed on the highest measured levels. The test receiver was set to:
  - Frequency range: 9 kHz-150 kHz: RBW: 1 kHz /VBW: 3 kHz
  - Frequency range: 150 kHz – 30 MHz: RBW: 10 kHz /VBW: 30 kHz
  - Detector: Max-Peak detector
  - Trace Mode: Max Hold

**Transmitter Radiated Emissions (continued)**

**Test Setup:**

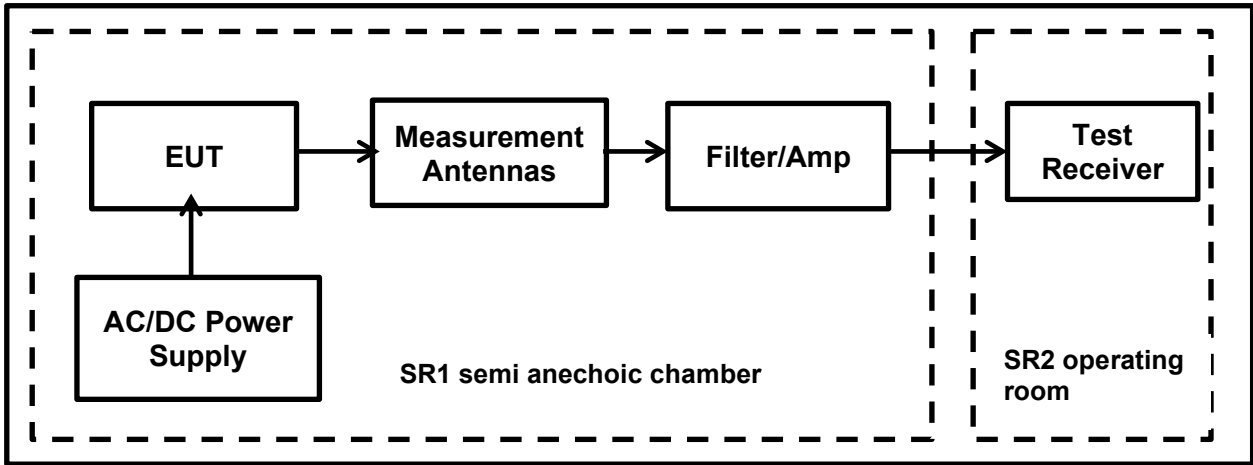


**Transmitter Radiated Emissions (continued)**

**Results: BT-BR Mode / Packet Type: DH5 / Hopping OFF/ Middle Channel / PRBS9 /MAX PWR**

Frequency (MHz)	Loop Antenna Orientation	MaxPeak Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
0.027894	90° to the EUT	65.80	117.55	51.75	Complied
0.101567	90° to the EUT	29.34	106.18	76.83	Complied
0.145559	0° to the EUT	34.61	103.21	68.60	Complied
2.197343	90° to the EUT	32.20	70.00	37.80	Complied
5.954663	0° to the EUT	31.95	70.00	38.05	Complied

**Plot: 9 kHz – 30 MHz:  
BT-BR Mode / Packet Type: DH5 / Hopping OFF/ Middle Channel / MAX PWR**

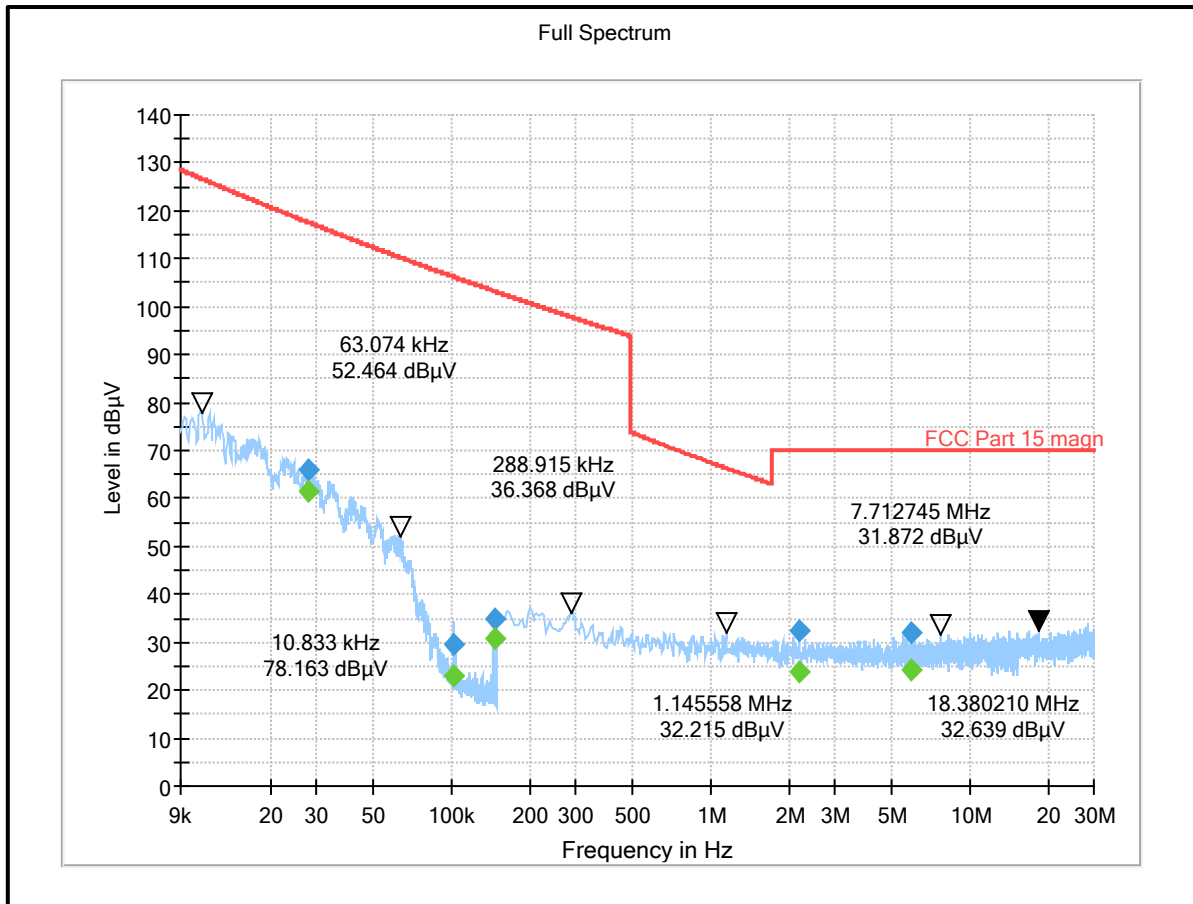

**Result: Pass**

**Transmitter Radiated Emissions (continued)**

**Test Summary:**

<b>Test Engineer:</b>	Muhammad Faiq Khan	<b>Test Date:</b>	22 September 2023
<b>Test Sample Serial Number:</b>	1150003350		
<b>Test Site Identification</b>	SR 1/2		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	ANSI C63.10:2013 Sections 6.3 and 6.5
<b>Frequency Range</b>	30 MHz to 1000 MHz


**Environmental Conditions:**

<b>Temperature (°C):</b>	23.8
<b>Relative Humidity (%):</b>	53.0

**Note(s):**

1. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 meters. The EUT was placed at a height of 80 cm above the reference ground plane in the center of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 meter to 4 meters.
2. Pre-scans were performed, and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.
3. The radiated emissions measurements were performed with the EUT set to the following worst-case mode.
  - BT-BR Mode | Packet Type: DH5 | Hopping OFF | Middle channel | MAX PWR
4. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
5. All other emissions shown on the pre-scan plot were investigated and found to be below the measurement system noise floor.

**Test Setup:**

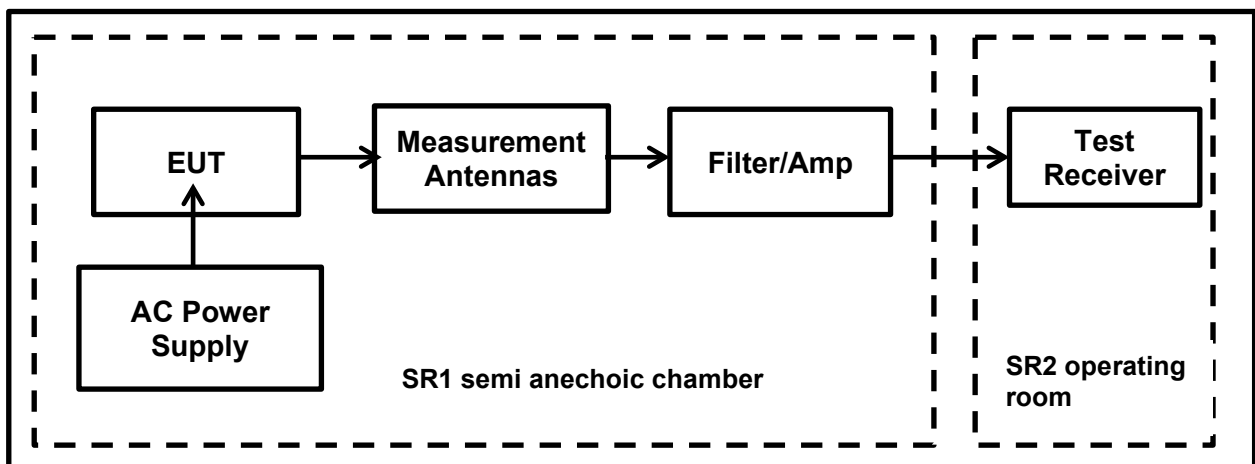




**Transmitter Radiated Emissions (continued)**

**Results: BT-BR Mode / Packet Type: DH5 / Hopping OFF/ Middle Channel / MAX PWR**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
No critical spurious emissions were detected					

**Plot: 30 MHz – 1 GHz:  
BT-BR Mode / Packet Type: DH5 / Hopping OFF/ Middle Channel / MAX PWR**

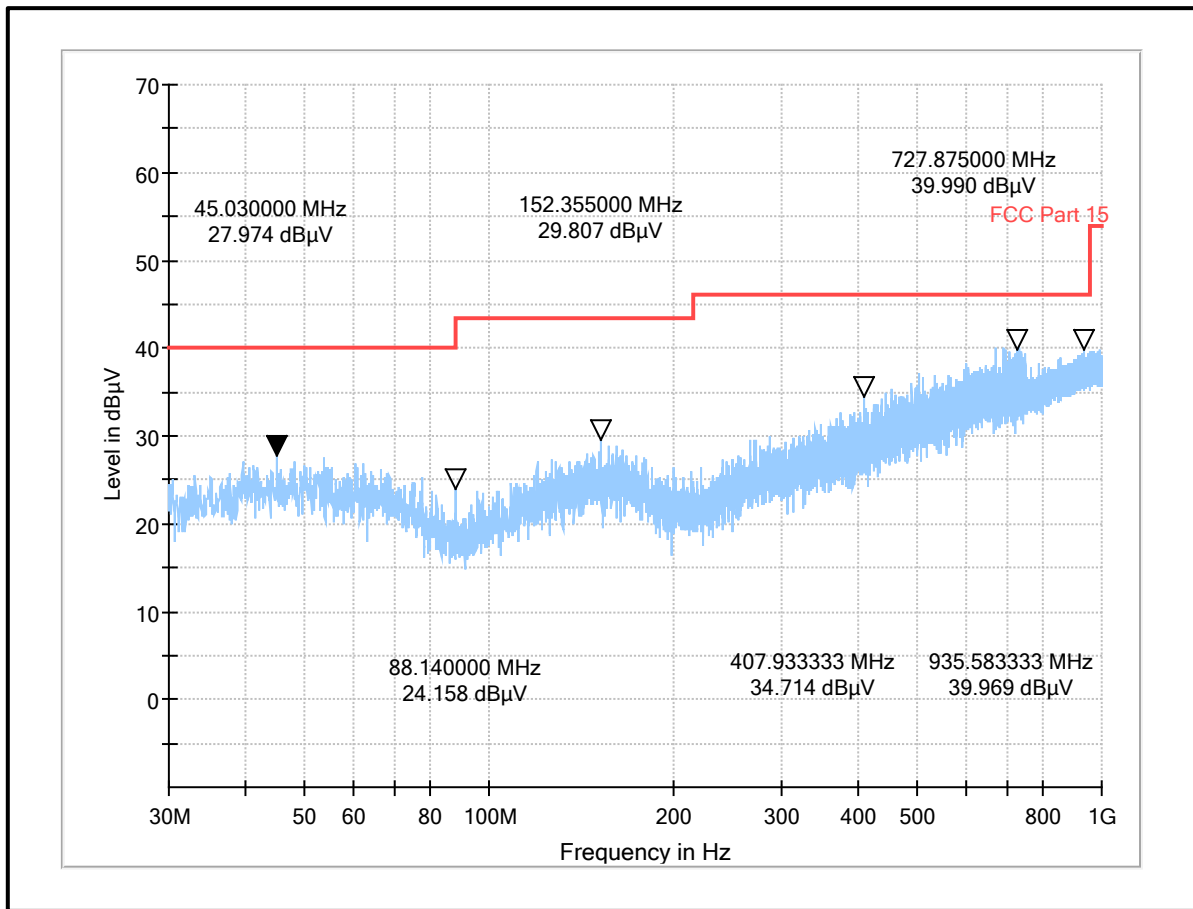

**Result: Pass**

**Transmitter Radiated Emissions (continued)****Test Summary:**

<b>Test Engineer:</b>	Muhammad Faiq Khan	<b>Test Date:</b>	20 September 2023 & 27 September 2023
<b>Test Sample Serial Number:</b>	1150003350		
<b>Test Site Identification</b>	SR 1/2		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	ANSI C63.10:2013 Sections 6.3 and 6.5
<b>Frequency Range</b>	1 GHz to 26.5 GHz

**Environmental Conditions:**


<b>Temperature (°C):</b>	23.2 to 24.0
<b>Relative Humidity (%):</b>	47.4 to 50.0

**Note(s):**

- Pre-scans above 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with RF absorbers on the floor at a distance of 3 m. The EUT was placed at a height of 1.5 m above the test chamber floor in the center of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 m above the test chamber floor, in line with the EUT. Final measurements above 1 GHz were performed in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with absorber on the floor at a distance of 3 m. The EUT was placed at a height of 1.5 m above the reference ground plane in the center of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m.
- The emissions shown at frequencies approximately 2.4 GHz to 2.4835 GHz on the 1 GHz to 18 GHz plots are the EUT fundamental for the tested channels.
- Pre-scans were performed, and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. The sweep time was set to auto.
- The radiated emissions measurements from 1 GHz to 26.5 GHz were performed with the following worst-case mode.
  - BT-EDR Mode | Packet Type: DH5 | Hopping OFF | Middle channel | MAX PWR
- For frequency range 1 GHz to 18 GHz, all other emissions shown on the pre-scan plots were investigated and found to be below system noise floor.
- In accordance with ANSI C63.10-2013 Section 5.3.3 & 6.5.3 measurements above 18 GHz were performed at closer distance (1 m); because at specified measurement distance (3m) for compliance the instrumentation noise floor was typically close to the radiated emission limit.
- For frequency range between 18 GHz and 26.5 GHz, no critical emissions were found. All emissions shown on the pre-scans were investigated and found to be below the noise floor of the measurement system.

**Transmitter Radiated Emissions (continued)**

**Test Setup:**

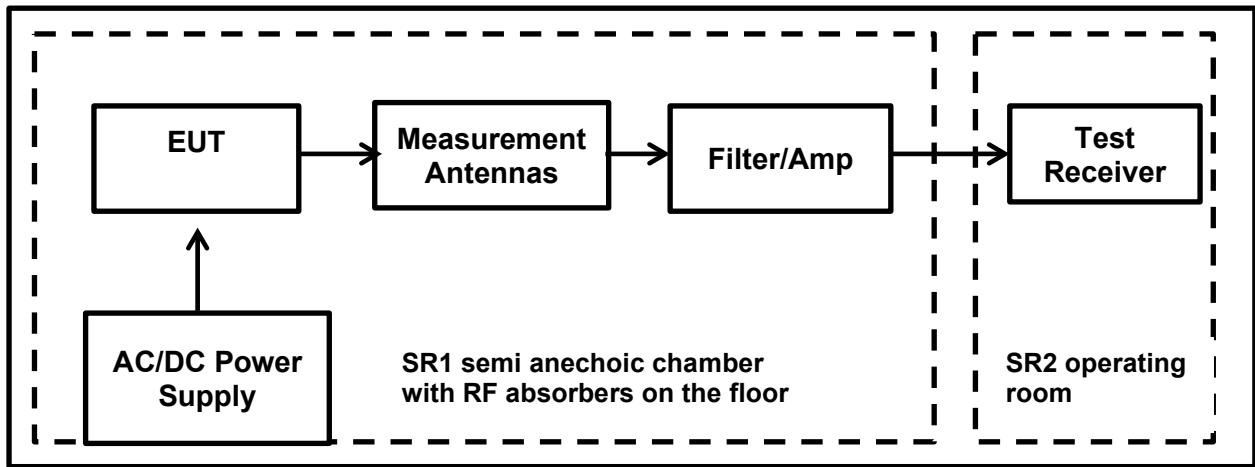


**Transmitter Radiated Emissions (continued)**

**Results: BT-BR Mode / Packet Type: DH5 / Hopping OFF/ Middle Channel / PRBS9 / MAX PWR**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
9035.666667	Horizontal	50.15	54.00	3.85	Complied
12689.500000	Vertical	50.74	54.00	3.26	Complied

**Plot: 1 GHz – 18 GHz:  
BT-BR Mode / Packet Type: DH5 / Hopping OFF/ Middle Channel / MAX PWR**

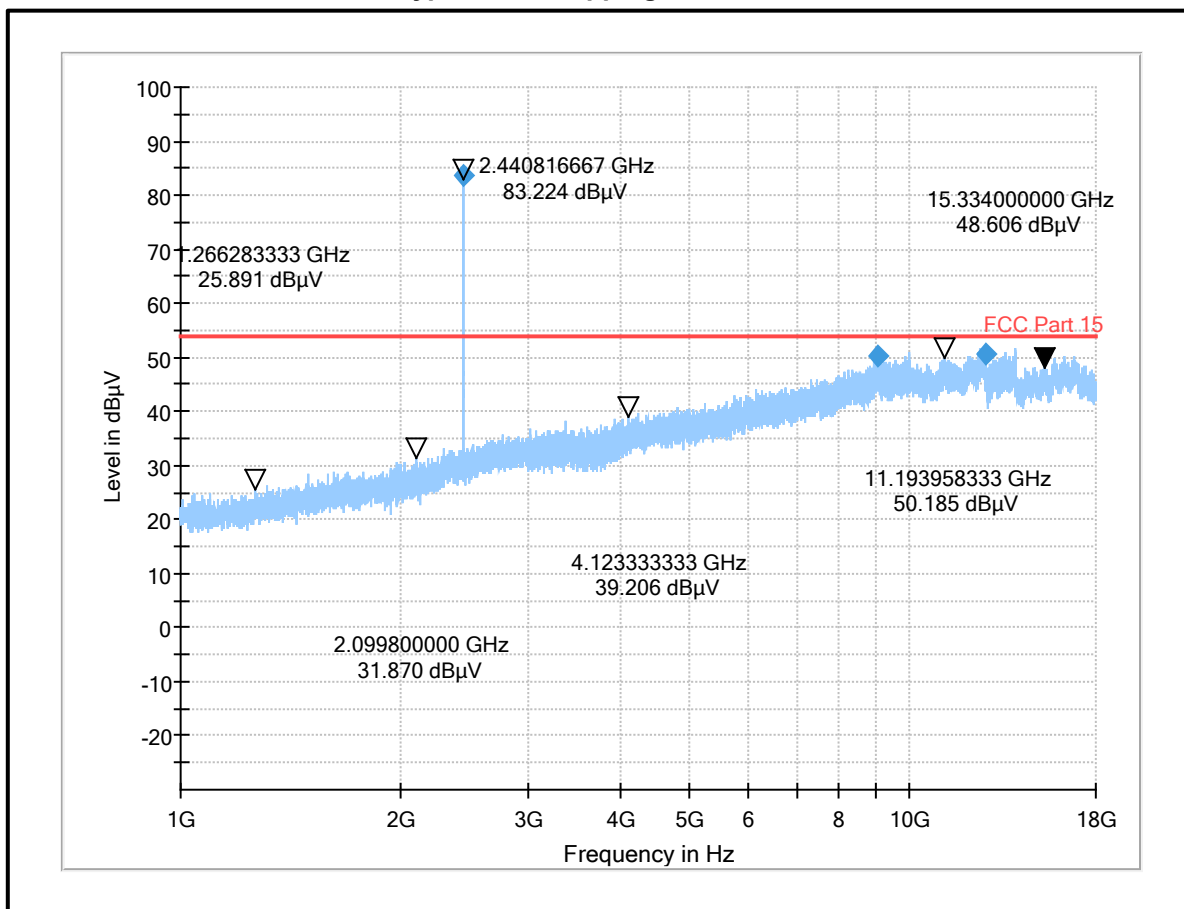


**Result: Pass**

**Transmitter Radiated Emissions (continued)**

**Results: BT-BR Mode / Packet Type: DH5 / Hopping OFF/ Middle Channel / PRBS9 / MAX PWR**

Frequency (MHz)	Antenna Polarization	MaxPeak Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
No critical spurious emissions were found					

**Plot: 18 GHz – 26.5 GHz:  
BT-BR Mode / Packet Type: DH5 / Hopping OFF/ Middle Channel / MAX PWR**

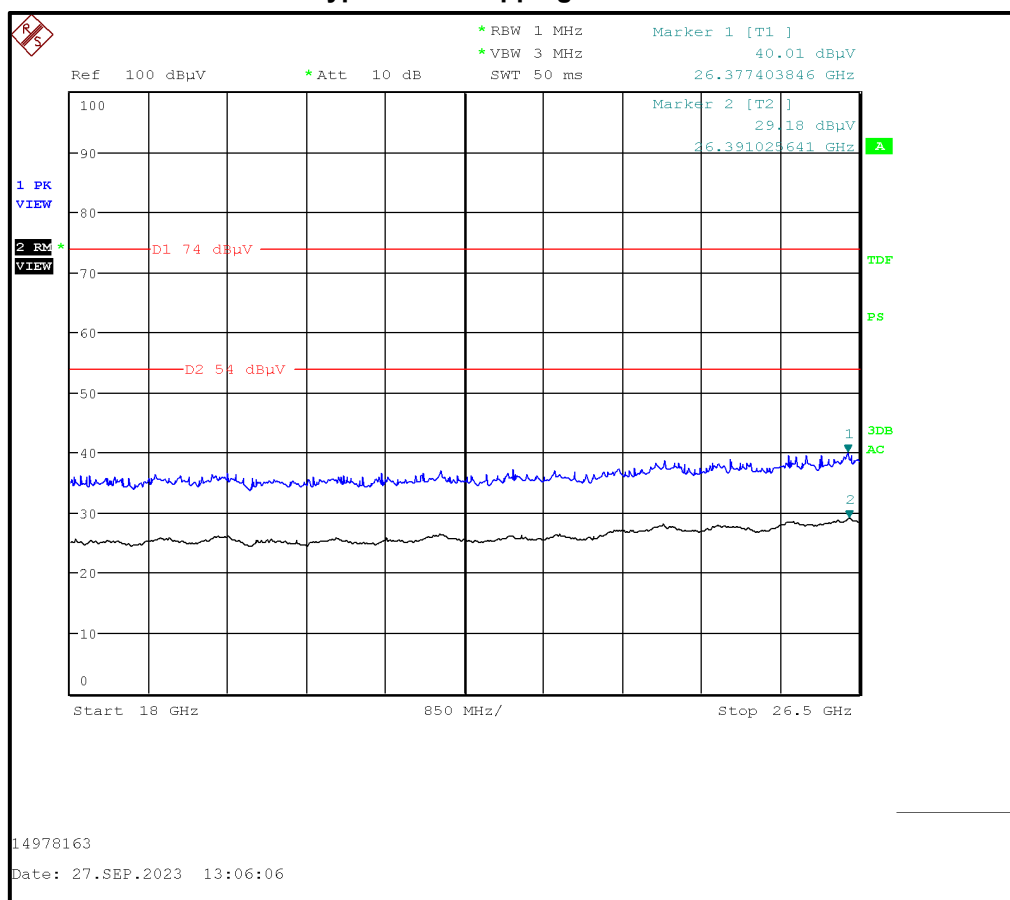

**Result: Pass**

**5.2.3. Transmitter Band Edge Radiated Emissions****Test Summary:**

<b>Test Engineer:</b>	Muhammad Faiq Khan	<b>Test Date:</b>	21 September 2023
<b>Test Sample Serial Number:</b>	1150003350		
<b>Test Site Identification</b>	SR 1/2		

<b>FCC Reference:</b>	Parts 15.247(d), 15.209(a) & 15.205(a)
<b>Test Method Used:</b>	FCC KDB 558074 Section 9
	ANSI C63.10:2013 Section 7.8.6 referencing Section 6.10
	Emissions in Authorized-band / non-restricted frequency bands: ANSI C63.10:2013 Section 6.10.4
	Emissions in restricted frequency bands: ANSI C63.10:2013 Section 6.10.5

**Environmental Conditions:**

<b>Temperature (°C):</b>	24.7
<b>Relative Humidity (%):</b>	45.6

**Note(s):**


1. The measurements were in a semi-anechoic chamber SR1/ 2 (Asset Number 1603665) with RF absorbers on the floor at a distance of 3 m. The EUT was placed at a height of 1.5 m above the test chamber floor in the center of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 m to 4 m
2. As the lower band edge falls within a non-restricted band, measurements were performed in accordance with ANSI C63.10:2013 Section 6.10.4. As the maximum peak conducted output power was previously measured, in accordance with FCC Part 15.247(d) lower band edge measurement was performed with a peak detector and the -20 dBc limit applied.
3. As the lower band edge falls within a non-restricted band, only peak measurements are required. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximize the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. Marker frequencies and levels were recorded.
4. The restricted band peak measurements were performed in accordance with ANSI C63.10:2013 Section 6.10.5
5. As the upper band edge falls within a restricted band both peak and average measurements were recorded by placing a marker at the edge of the band. For peak measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz A peak detector was used, sweep time was set to auto and trace mode was Max Hold. For average measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz and Average detector was used, the trace mode was Max hold. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent restricted band of operation (where a higher-level emission was present). Marker frequencies and levels were recorded.

**Transmitter Band Edge Radiated Emissions (continued)**

**Note(s):**

6. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with their respective detectors. Markers were placed on the highest point on each trace.
7. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
8. The final radiated emissions measurements were performed with the EUT set to the following worst-case mode with highest output power and on the mode with the widest bandwidth.
  - BT-EDR Mode | Packet Type: 3DH5 | Hopping OFF | MAX PWR
9. As the continuous transmission of the EUT ( $D \geq 98\%$ ) cannot be achieved and EUT was transmitting continuously at Duty Cycles of 76.59 % (duty cycle variations are less than  $\pm 2\%$  at the respective data rate) for EDR. Therefore, Duty Cycle Correction Factor of 1.16 dB was added to all average measurements, to compute the corrected average values of the emissions that would have been measured had the test been performed at 100% Duty Cycle.

**Test Setup:**

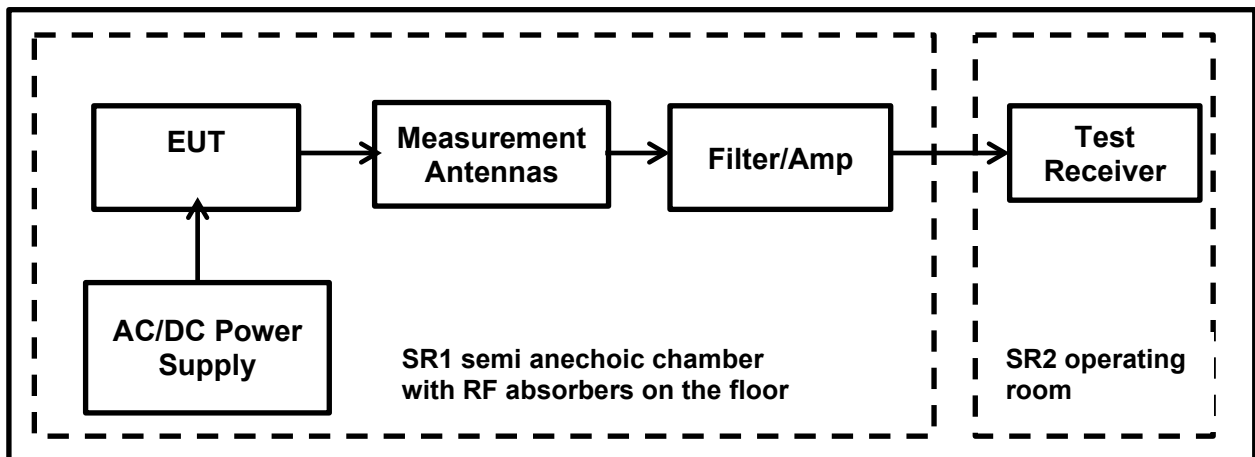

**Transmitter Band Edge Radiated Emissions (continued)**

**Results: BT-EDR Mode / Packet Type: 3DH5 / Hopping OFF / PRBS9 / MAX PWR**

**Results: Lower Band Edge / Peak**

Frequency (MHz)	Peak Level (dBµV/m)	-20 dBc Limit (dBµV/m)	Margin (dB)	Result
2399.55	49.25	68.70	19.45	Complied
2400.00	41.39	68.70	27.31	Complied

**Results: 2310 to 2390 MHz Restricted Band / Peak**

Frequency (MHz)	Peak Level (dBµV/m)	Peak Limit (dBµV/m)	Margin (dB)	Result
2334.26	43.39	74.00	30.61	Complied

**Results: 2310 to 2390 MHz Restricted Band / Average**

Frequency (MHz)	Average Level (dBµV/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
2365.43	41.08	1.16	42.24	54.00	11.76	Complied

**Results: Upper Band Edge / Peak**

Frequency (MHz)	Peak Level (dBµV/m)	Peak Limit (dBµV/m)	Margin (dB)	Result
2483.50	47.19	74.00	26.81	Complied
2498.85	47.25	74.00	26.75	Complied

**Results: Upper Band Edge / Average**


Frequency (MHz)	Average Level (dBµV/m)	Duty Cycle Correction Factor (dB)	Corrected Average Level (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
2483.50	44.22	1.16	45.38	54.00	8.62	Complied
2484.66	44.73	1.16	45.89	54.00	8.11	Complied

**Result: Pass**




**Transmitter Band Edge Radiated Emissions (continued)**


**Results: BT-EDR Mode / Packet Type: 3DH5 / Hopping OFF/ PRBS9 / MAX PWR**

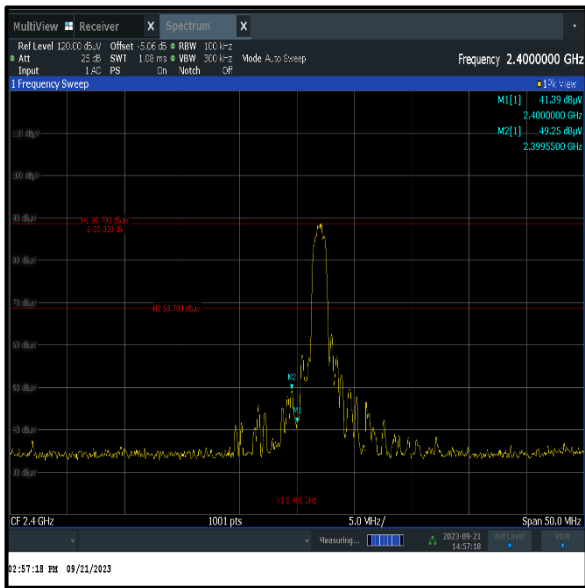

Lower Band Edge Peak Measurement

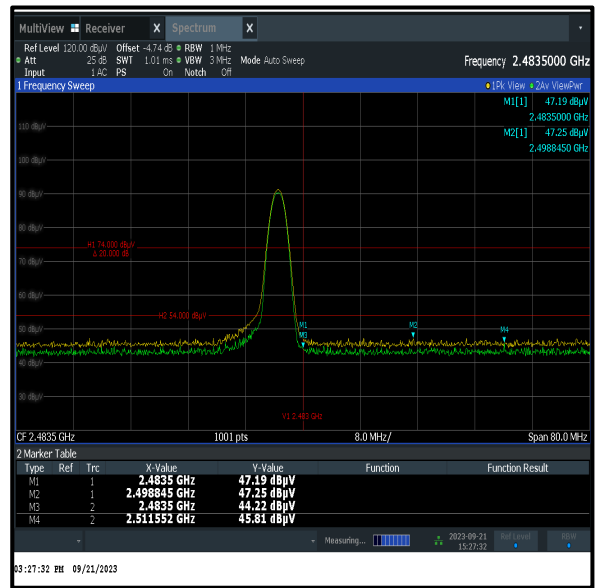

Upper Band Edge Peak & Average Measurement

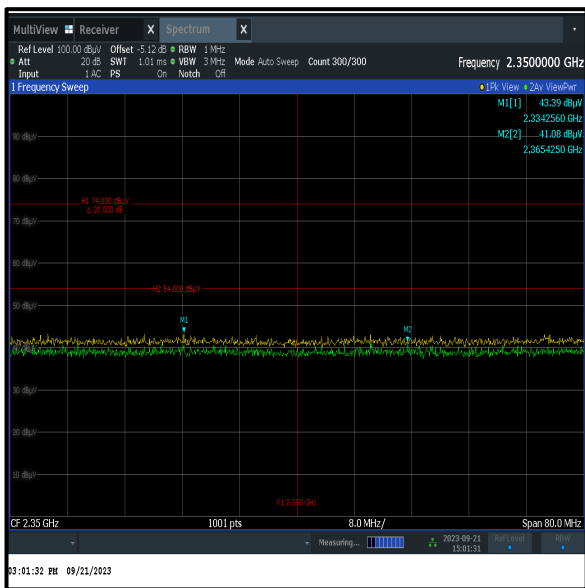

2310 MHz to 2390 MHz Restricted Band

**Result: Pass**

## **6. Measurement Uncertainty**

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

<b>Measurement Type</b>	<b>Confidence Level (%)</b>	<b>Calculated Uncertainty</b>
Transmitter Duty Cycle	95%	±3.4%
Radiated Spurious Emissions	95%	±3.10 dB
Band Edge Radiated Emissions	95%	±3.10 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## 7. Used equipment

Test site: SR 1/2

ID	Manufacturer	Type	Model	Serial	Calibration Date	Cal. Cycle (months)
1	Rohde & Schwarz	Antenna, Loop	HFH2-Z2	831247/012	18/07/2023	36
377	BONN Elektronik	Amplifier, Low Noise Pre	BLMA 0118-1A	025294B	18/07/2023	12
423	Bonn Elektronik	Amplifier, Low Noise Pre	BLMA 1840-1A	55929	18/07/2023	12
460	Deisel	Turntable	DT 4250 S	n/a	n/a	n/a
465	Schwarzbeck	Antenna, Trilog Broadband	VULB 9168	9168-240	02/09/2020	42
496	Rohde & Schwarz	Antenna, log. - periodical	HL050	100297	22/08/2022	24
588	Maturo	Controller	NCD	029/7180311	n/a	n/a
591	Rohde & Schwarz	Receiver	ESU 40	100244/040	13/07/2023	12
669	Rohde & Schwarz	EMI Test Receiver	ESW 44	103087	13/07/2023	18
607	Schwarzbeck	Antenna broadband horn antenna	BBHA 9170	9170-561	15/10/2019	48
608	Rohde & Schwarz	Switch Matrix	OSP 120	101227	lab verification	n/a
628	Maturo	Antenna mast	CAM 4.0-P	224/19590716	n/a	n/a
629	Maturo	Kippeinrichtung	KE 2.5-R-M	MAT002	n/a	n/a
-/-	Testo	Thermo-Hygrometer	608-H1	01	lab verification	n/a
328	SPS	AC/DC power distribution system	PAS 5000	A2464 00/2 0200	lab verification	n/a
1603665	Siemens Matsushita Components	semi-anechoic chamber SR1/ 2	-/-	B83117-A1421-T161	n/a	n/a
681	Maturo	Antenna mast, tilting	BAM4.5-P	402/0718.1	n/a	n/a

## 8. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	29	-	Initial Version

--- END OF REPORT ---