

Conducted test results

No.1-6579/23-01-13_TR1-A201-R1

February 22, 2024

Test Standard(s) FCC 15.407, ISED RSS247 - NI
 ISED RSS247 - NI
 FCC 15.407 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Michael Dorongovski
Lab Manager
Radio Labs

Table of Content

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-3	6
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-3	10
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-1	14
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-1	18
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-3	22
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-3	26
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-3	30
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-3	34
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-1	38
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-1	42
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-1	46
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-1	50
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3	54
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3	58
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3	62
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3	66
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3	70
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3	74
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1	78
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1	82
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1	86
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1	90
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1	94
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1	98
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	102
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	106
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	110
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	114
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	118
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3	122
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	126
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	130
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	134
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	138
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	142
FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1	146
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx ac-VHT80 mode U-NII-3	150
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx ac-VHT80 mode U-NII-3	153
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT40 mode U-NII-3	156
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT40 mode U-NII-3	159
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT40 mode U-NII-3	162

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT40 mode U-NII-3	165
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3	168
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3	171
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3	174
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3	177
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3	180
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3	183
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3	186
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3	189
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3	192
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3	195
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3	198
FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3	201
ISED RSS247 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3	204
ISED RSS247 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3	209
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3	214
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3	219
ISED RSS247 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1	224
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1	228
ISED RSS247 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1	232
FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1	236
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	240
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	245
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	250
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	255
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	260
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	265
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	270
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3	275
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1	280
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1	284
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1	288
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1	292
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1	296
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1	300
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1	304
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1	308
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	312
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	317
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	322
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	327
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	332
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	337
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	342

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	347
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	352
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	357
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	362
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3	367
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	372
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	376
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	380
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	384
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	388
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	392
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	396
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	400
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	404
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	408
ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	412
FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1	416
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	420
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	424
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	429
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	434
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	439
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	444
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	449
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	454
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	459
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	464
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	469
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	474
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3	479
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	484
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	488
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	492
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	496
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	500
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	504
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	508
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	512
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	516
ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	520
FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1	524
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT80 mode U-NII-3	528
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT80 mode U-NII-3	530
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3	532

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3	534
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3	536
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3	538
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3	540
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3	542
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3	544
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3	546
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3	548
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3	550
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	552
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	554
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	556
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	558
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	560
FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3	562

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 19:00:41
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5775 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-7.83	dBm	INFO
Ref. frequency	--	--	5766.010	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	0.17 10.41 5
Start [MHz] Stop [MHz]	5675.000 5875.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

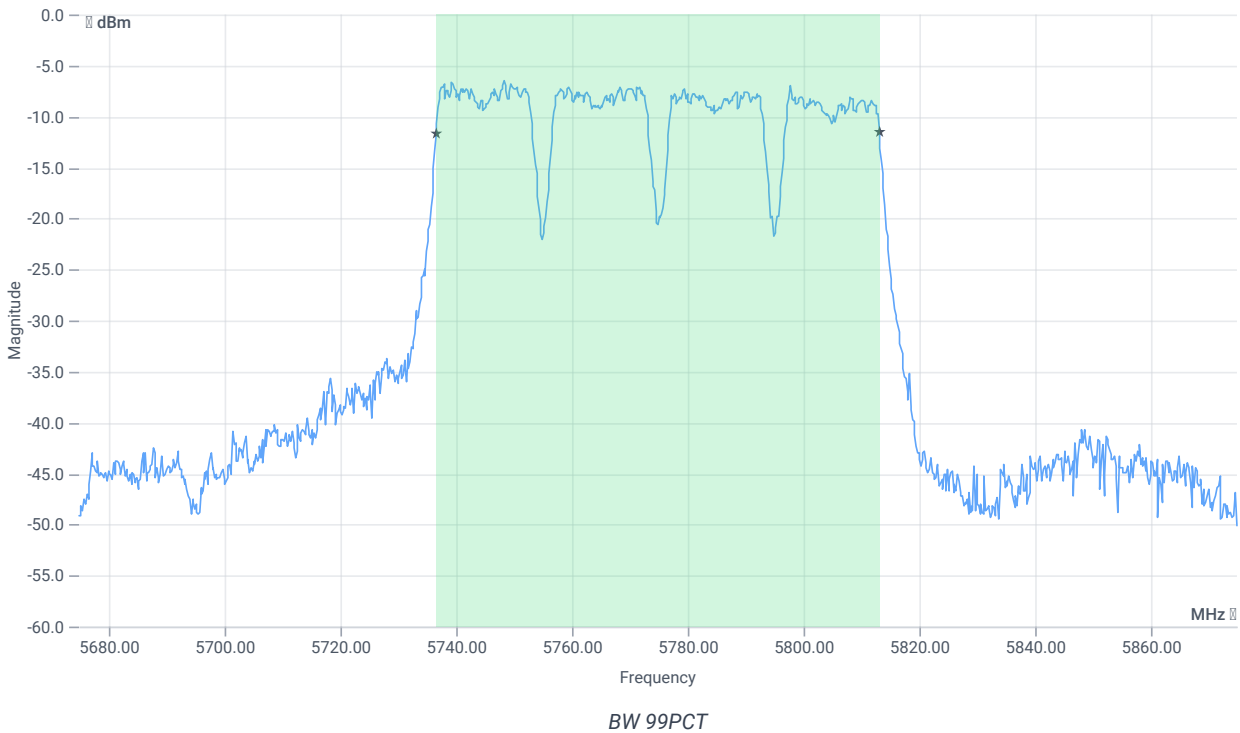


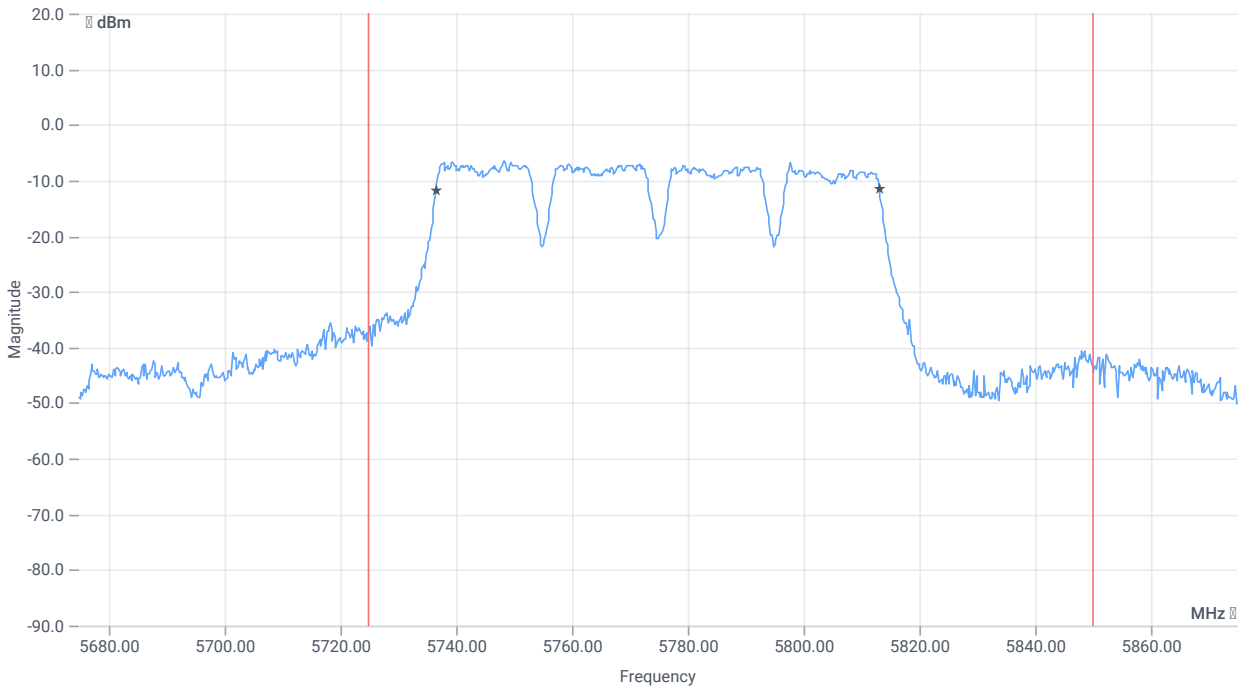


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	76.523	MHz	INFO
T1 99%	5725.000000	--	5736.6384	MHz	PASS
T2 99%	--	5850.000000	5813.1618	MHz	PASS

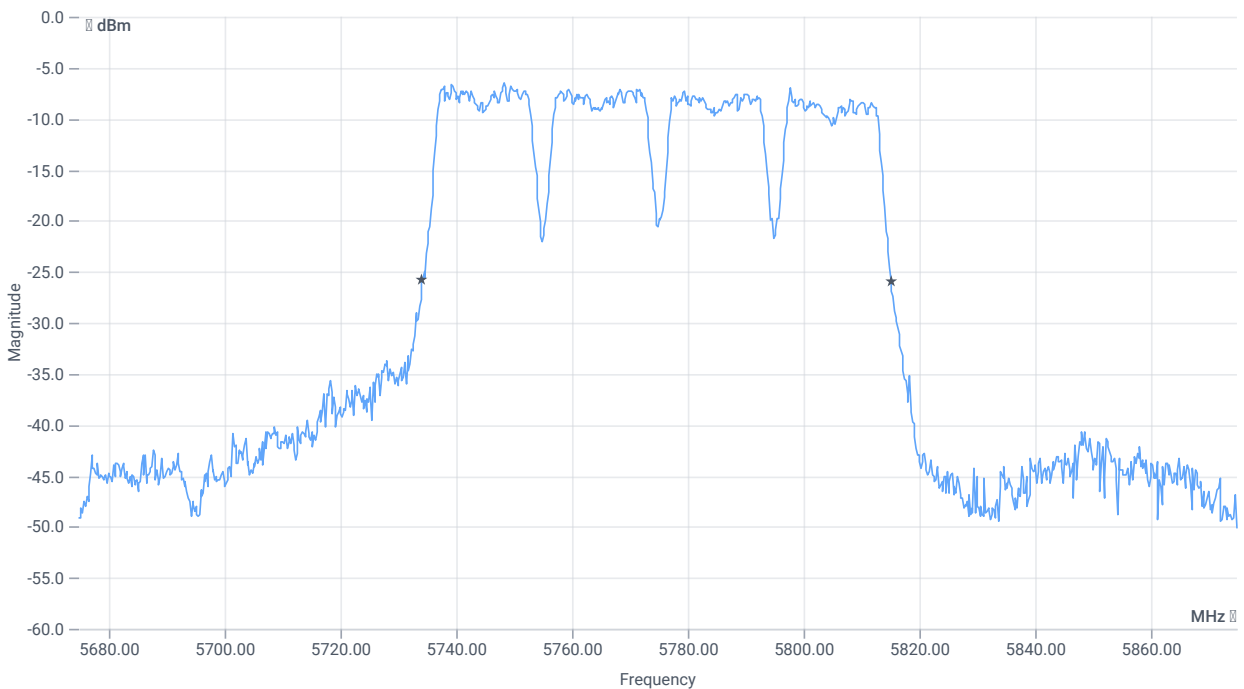

BW 20dB

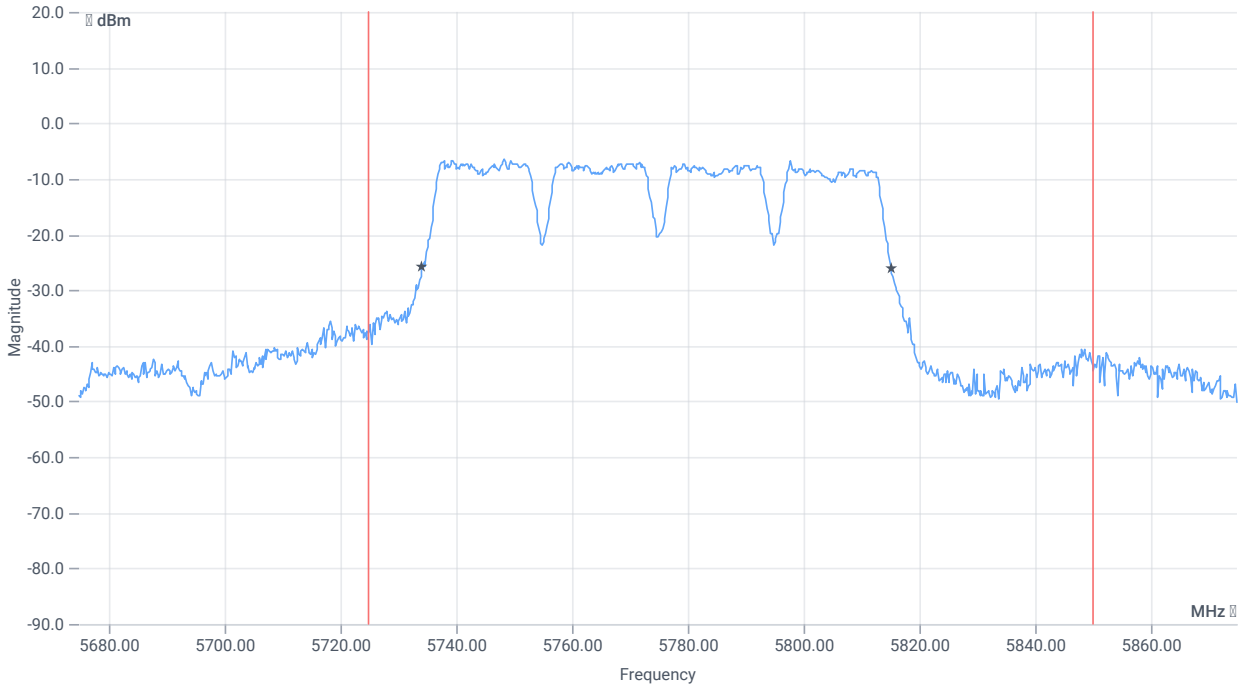

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	81	MHz	INFO
T1 20dB	5725.000000	--	5734.2000	MHz	PASS
T2 20dB	--	5850.000000	5815.2000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 18:49:39
Ambit temp [°C] humidity [rel%]	26.7 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5775 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-6.59	dBm	INFO
Ref. frequency	--	--	5790.780	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	1.41 10.38 10
Start [MHz] Stop [MHz]	5675.000 5875.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

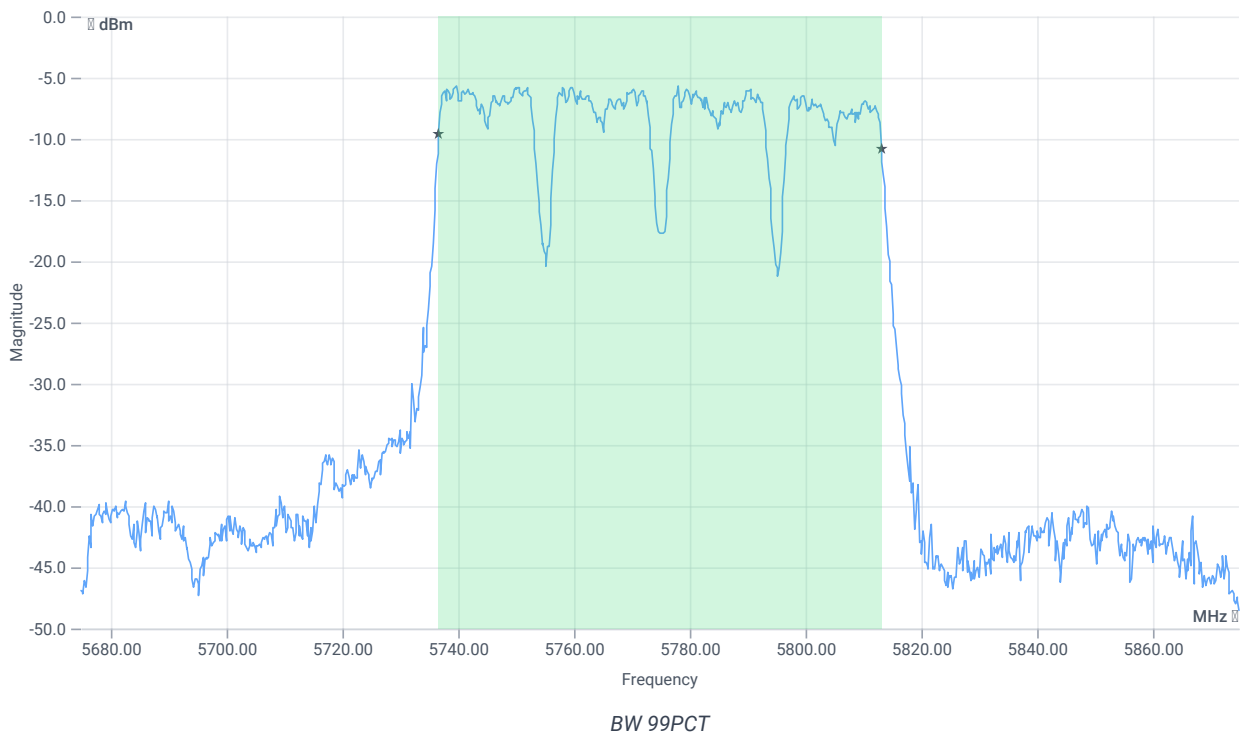


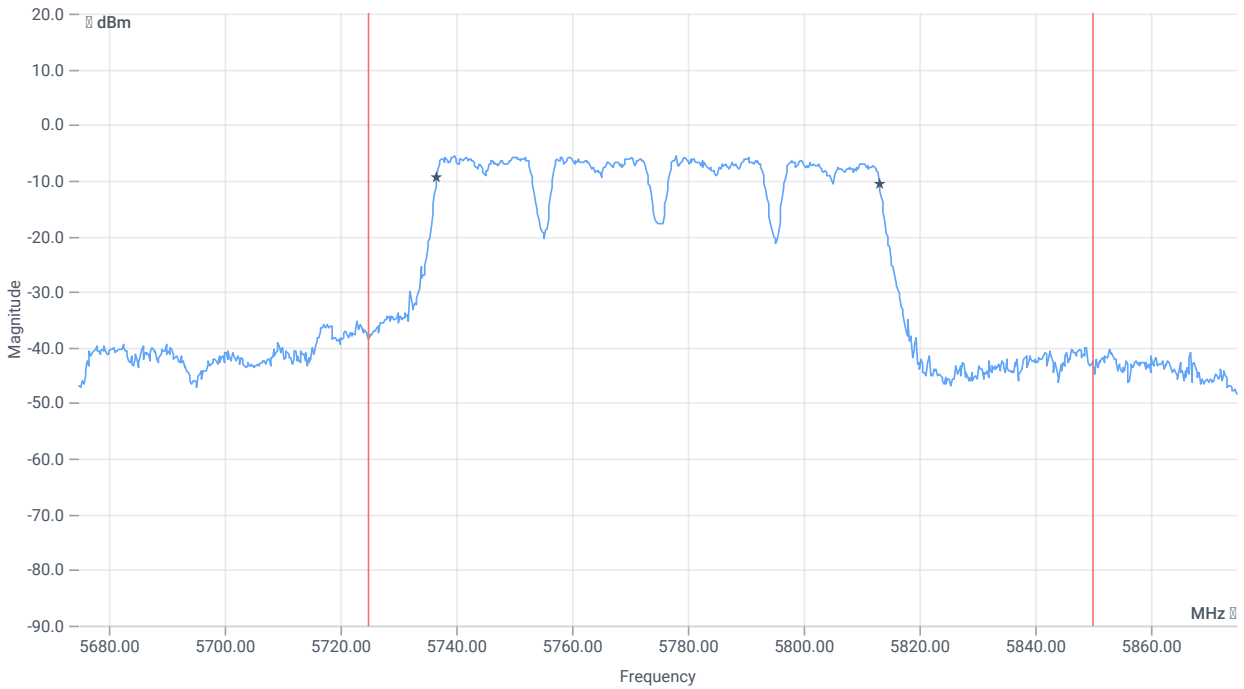


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	76.324	MHz	INFO
T1 99%	5725.000000	--	5736.8382	MHz	PASS
T2 99%	--	5850.000000	5813.1618	MHz	PASS

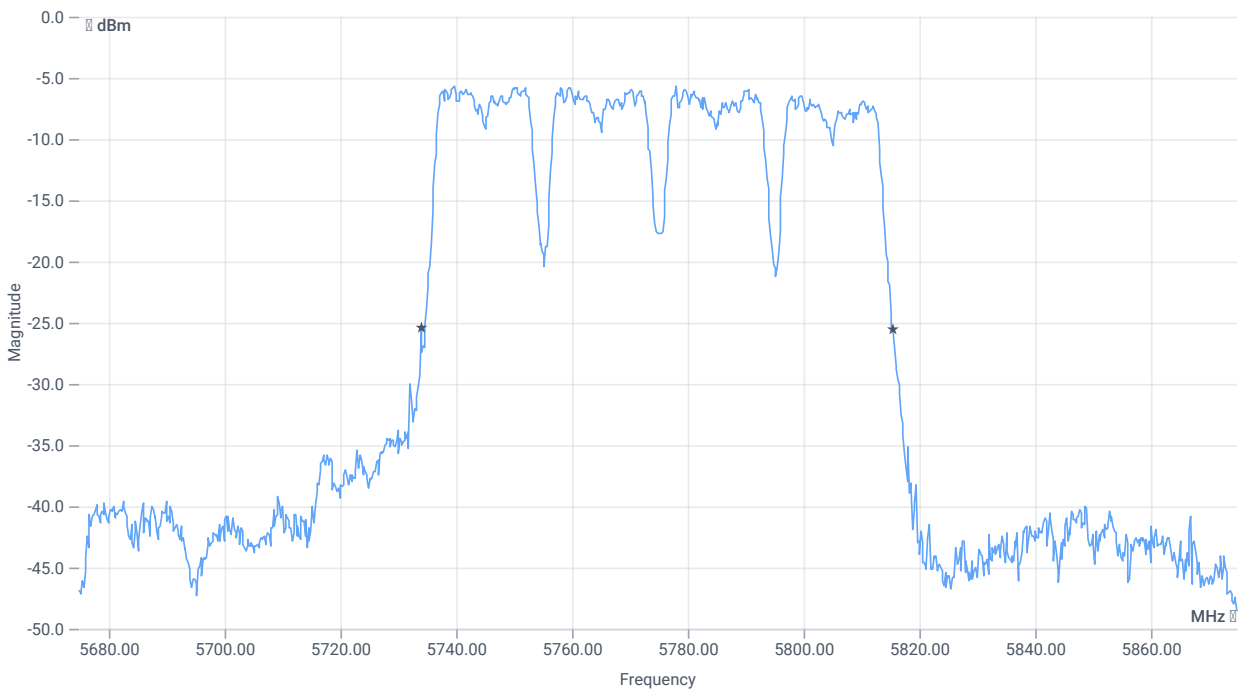

BW 20dB

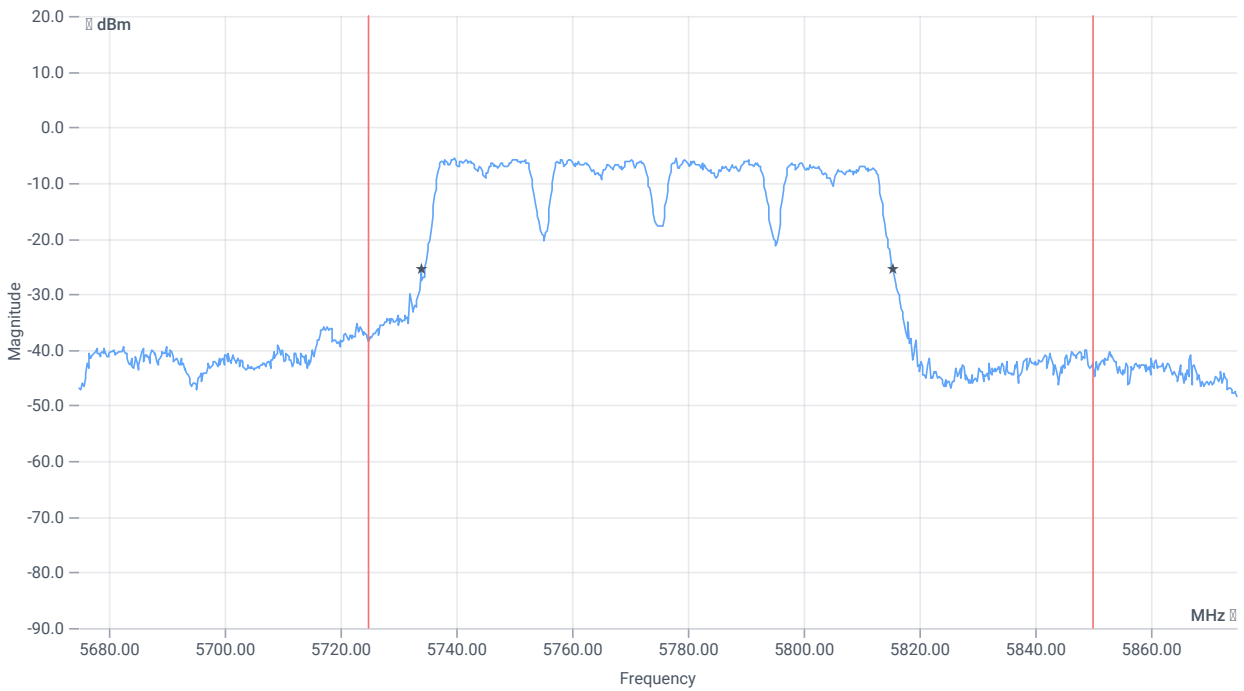

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	81.6	MHz	INFO
T1 20dB	5725.000000	---	5734.0000	MHz	PASS
T2 20dB	---	5850.000000	5815.6000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	26.01.2024 18:38:15
Ambit temp [°C] humidity [rel%]	26.8 34
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-5.79	dBm	INFO
Ref. frequency	--	--	5224.990	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.21 10.05 10
Start [MHz] Stop [MHz]	5110.000 5310.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

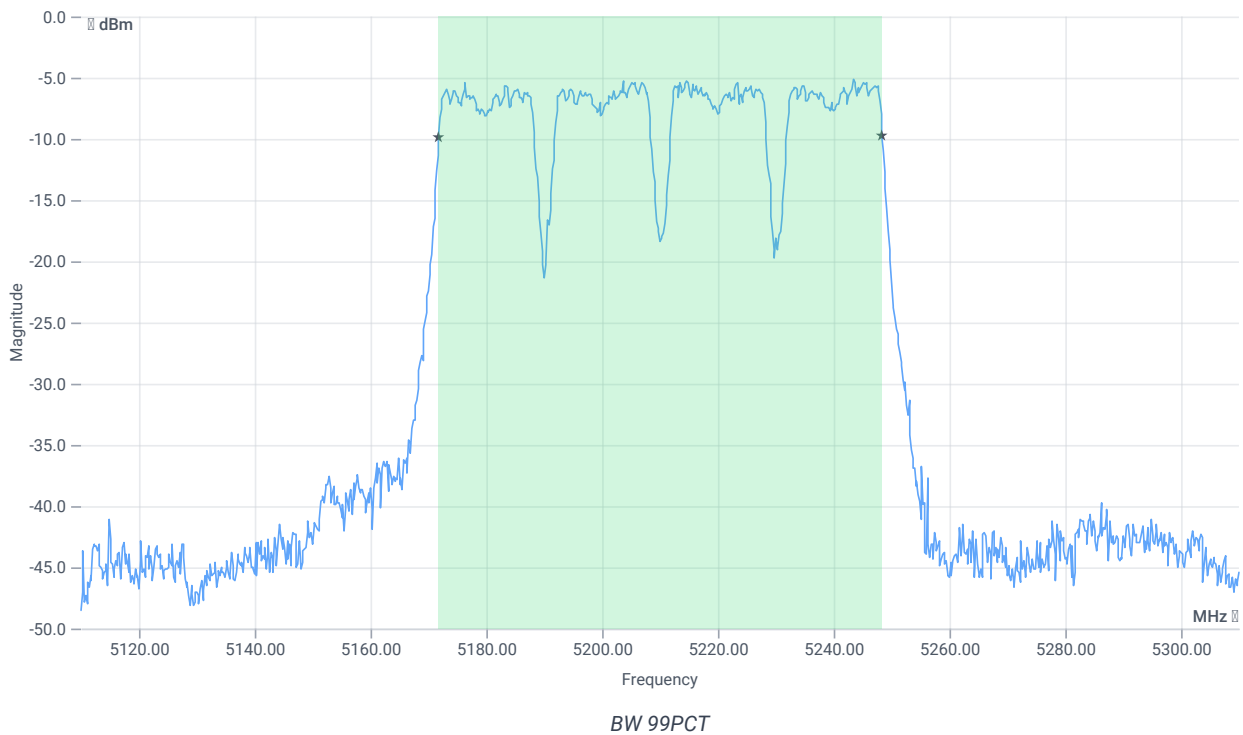


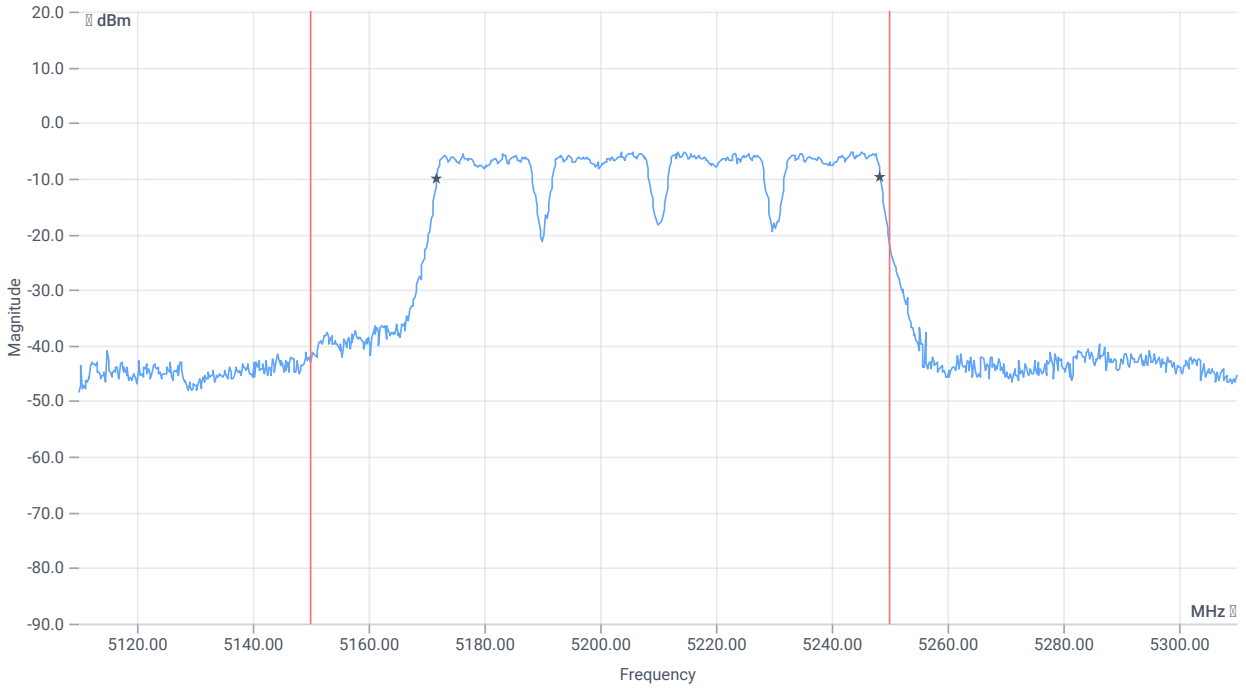


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	76.523	MHz	INFO
T1 99%	5150.000000	--	5171.8382	MHz	PASS
T2 99%	--	5250.000000	5248.3616	MHz	PASS

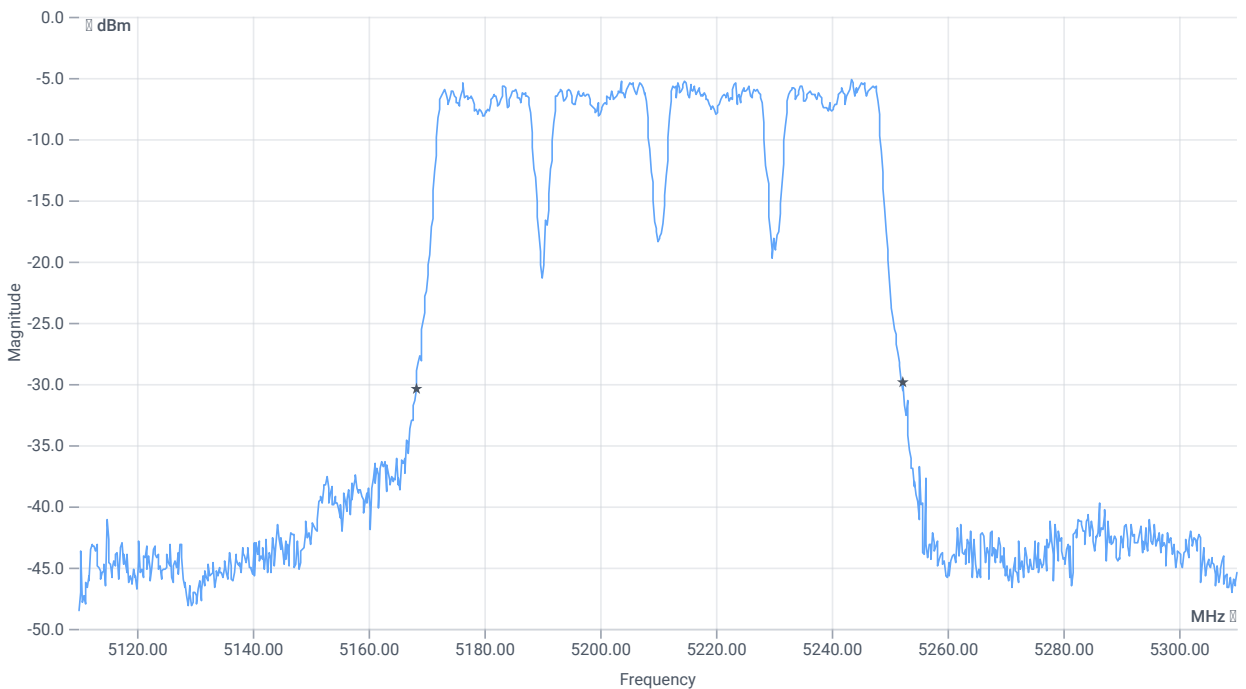

BW 26dB

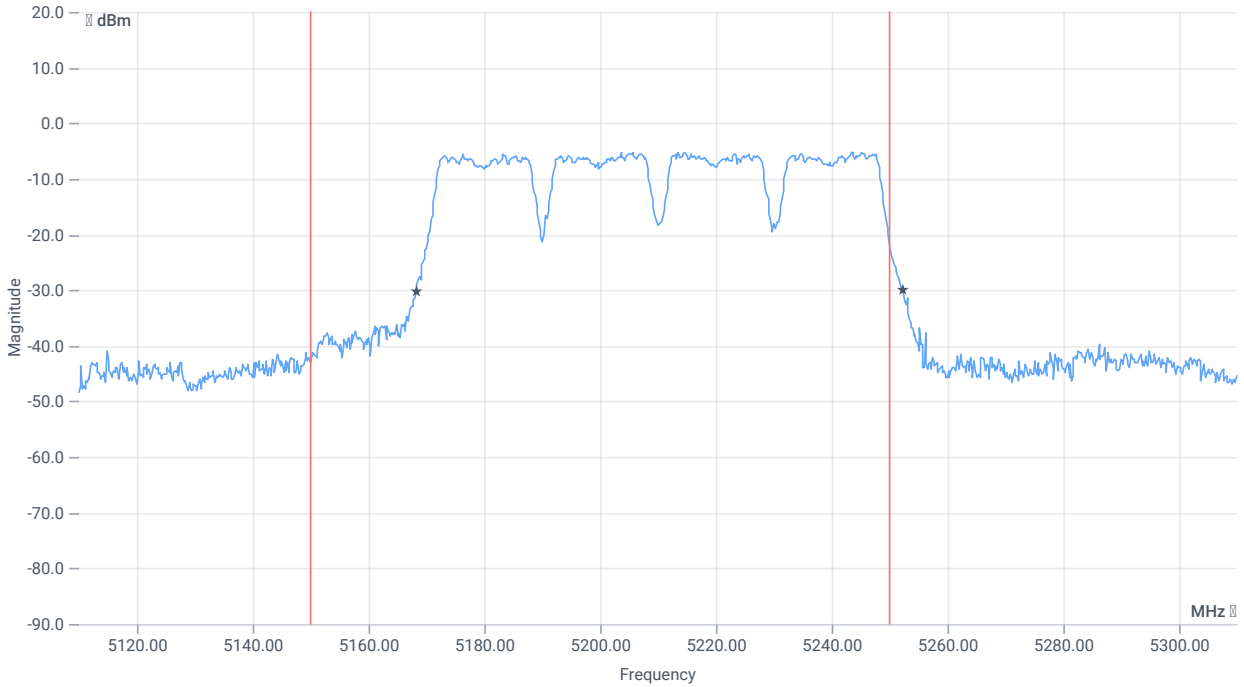

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	84.2	MHz	INFO
T1 26dB	5150.000000	--	5168.2000	MHz	PASS
T2 26dB	--	5250.000000	5252.4000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	26.01.2024 18:31:59
Ambit temp [°C] humidity [rel%]	26.8 30
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-5.34	dBm	INFO
Ref. frequency	--	--	5244.970	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.66 10.02 10
Start [MHz] Stop [MHz]	5110.000 5310.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

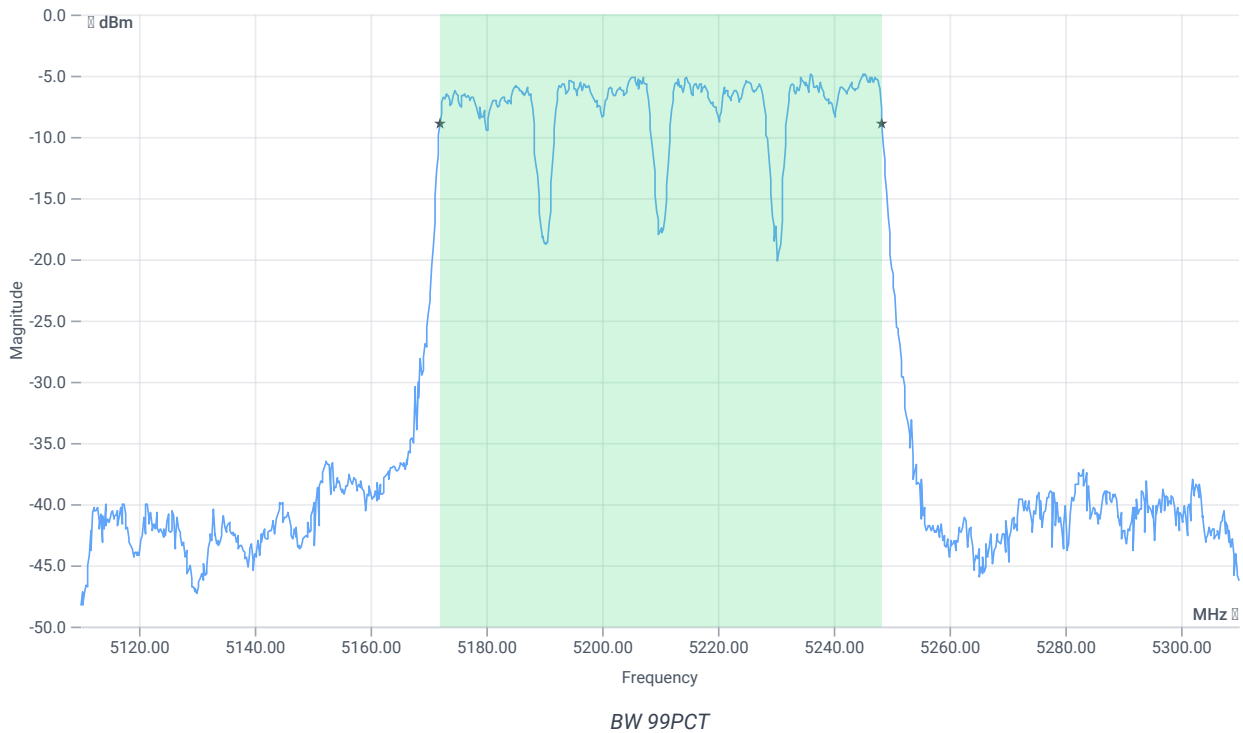


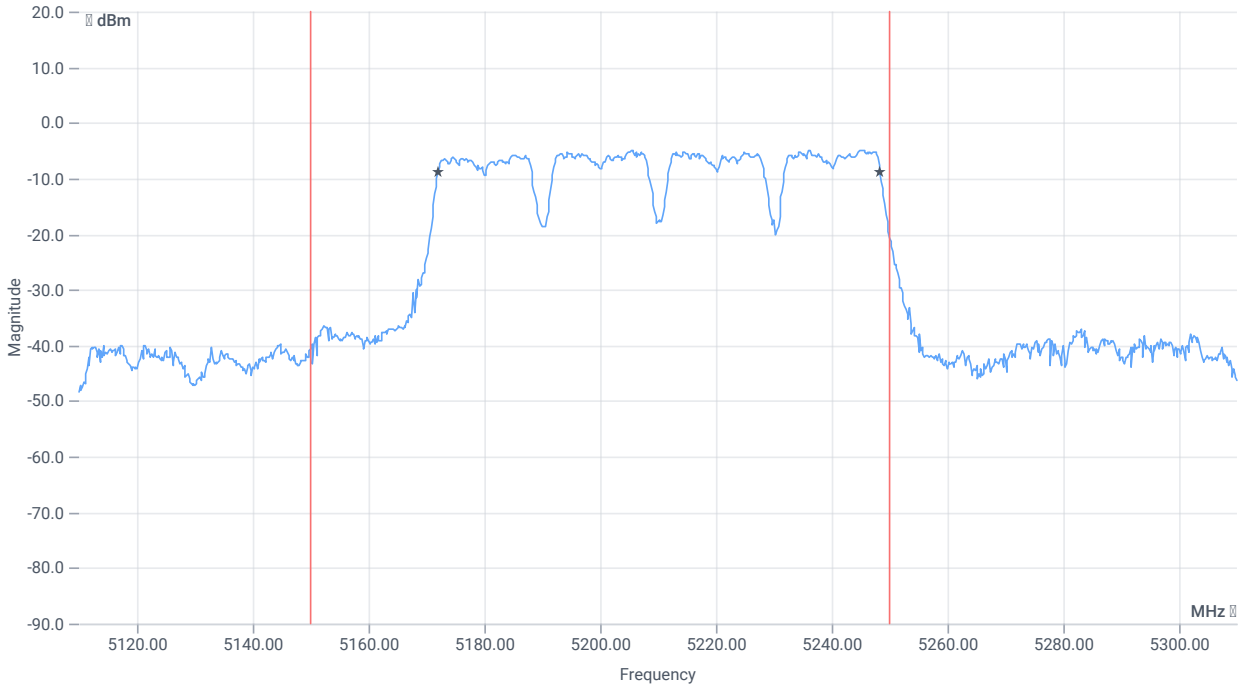


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	76.324	MHz	INFO
T1 99%	5150.000000	--	5172.0380	MHz	PASS
T2 99%	--	5250.000000	5248.3616	MHz	PASS

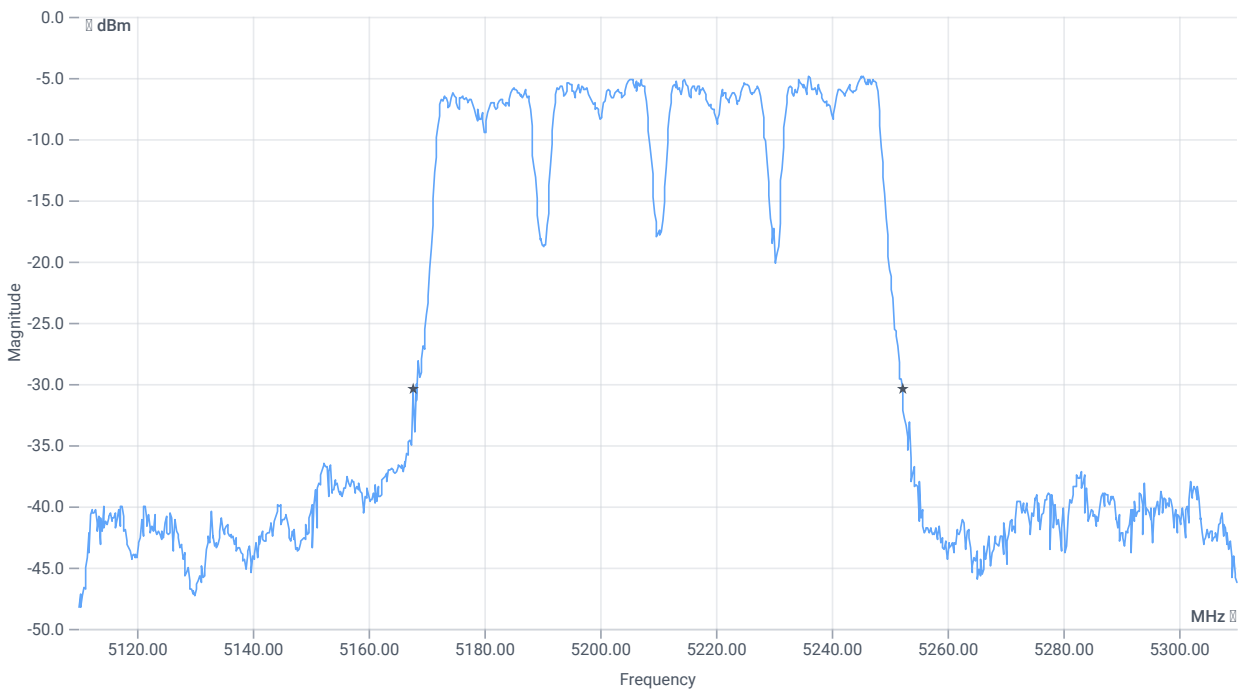

BW 26dB

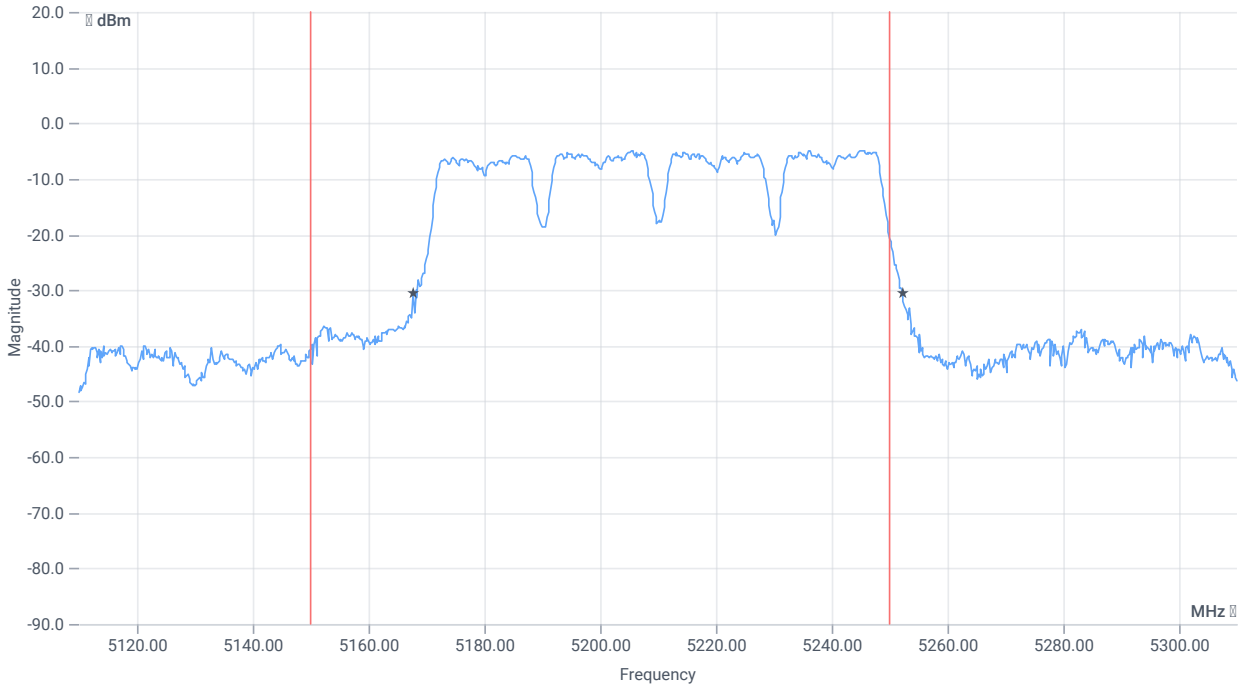

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	84.6	MHz	INFO
T1 26dB	5150.000000	--	5167.6000	MHz	PASS
T2 26dB	--	5250.000000	5252.2000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:20:41
Ambit temp [°C] humidity [rel%]	26.8 32
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5795 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.72	dBm	INFO
Ref. frequency	--	--	5781.810	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.28 10.41 10
Start [MHz] Stop [MHz]	5745.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

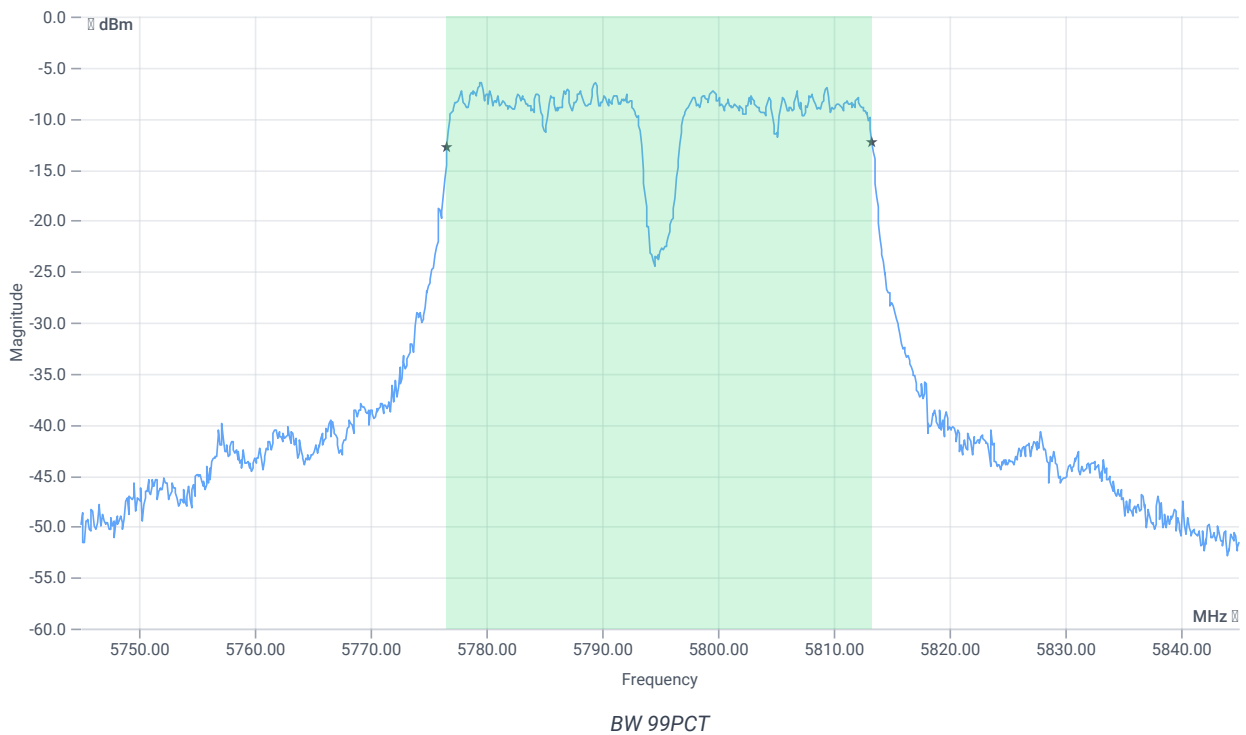


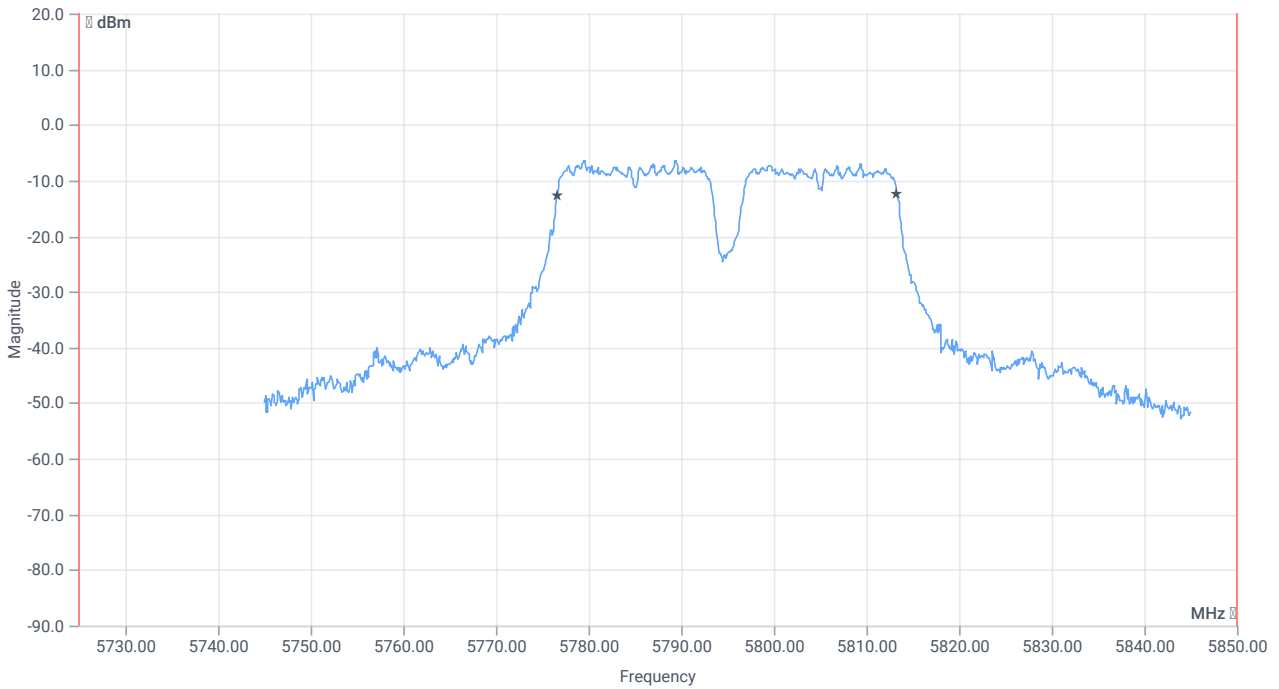


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.663	MHz	INFO
T1 99%	5725.000000	--	5776.6184	MHz	PASS
T2 99%	--	5850.000000	5813.2817	MHz	PASS

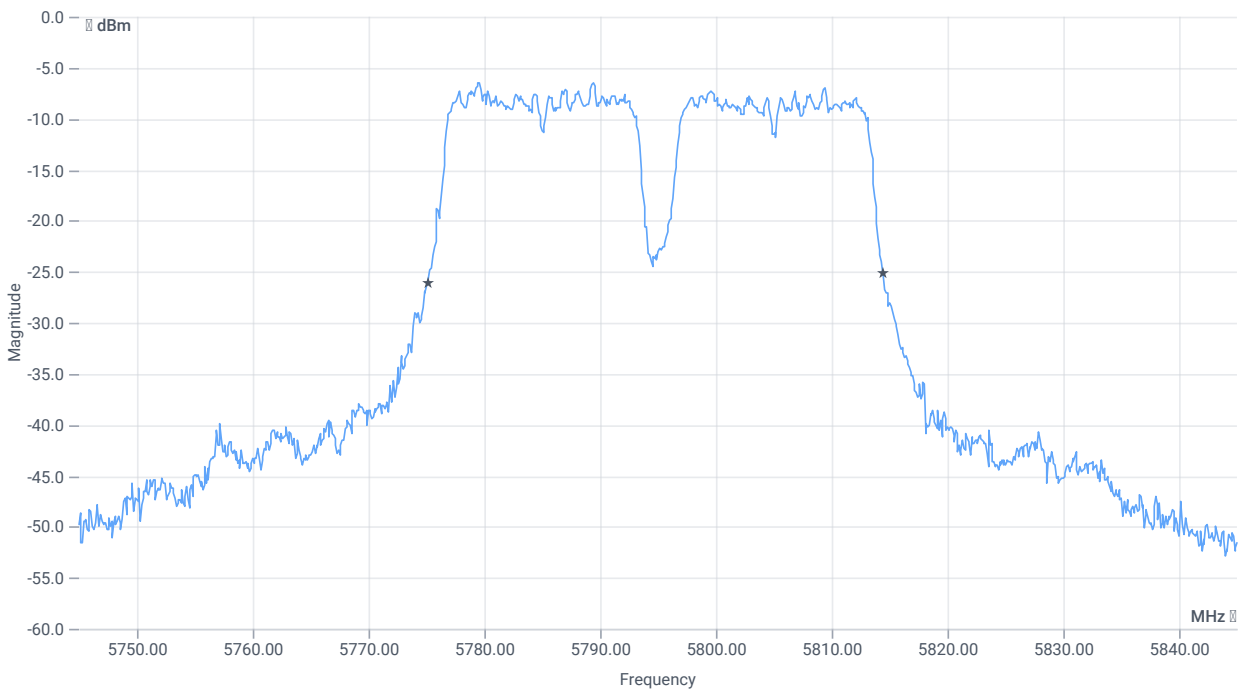

BW 20dB

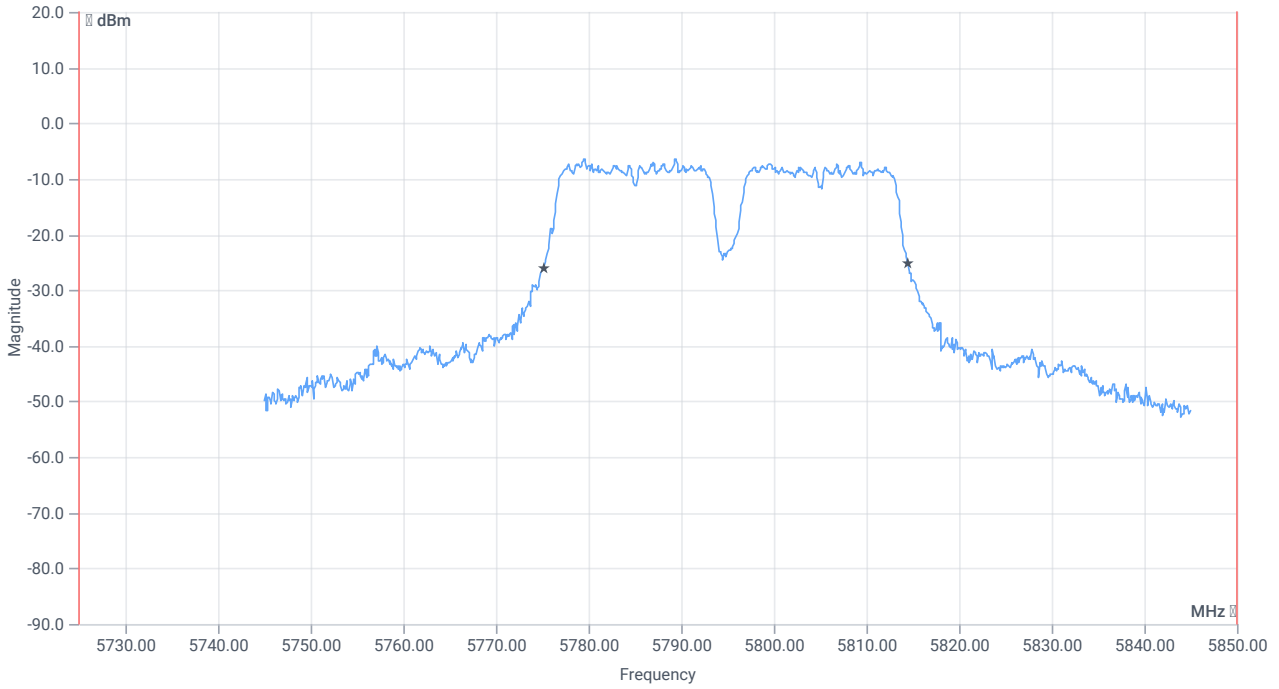

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	39.4	MHz	INFO
T1 20dB	5725.000000	--	5775.1000	MHz	PASS
T2 20dB	--	5850.000000	5814.5000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:13:42
Ambit temp [°C] humidity [rel%]	26.8 33
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5795 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.52	dBm	INFO
Ref. frequency	--	--	5790.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.48 10.37 10
Start [MHz] Stop [MHz]	5745.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

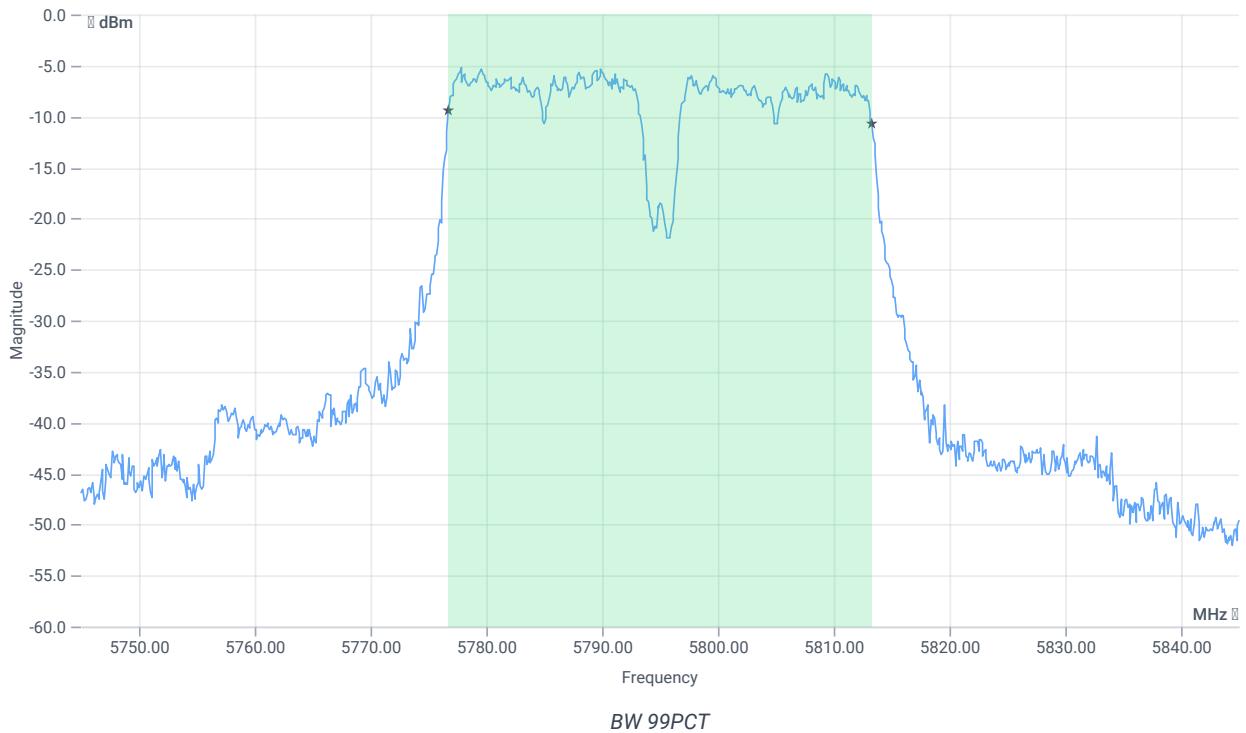


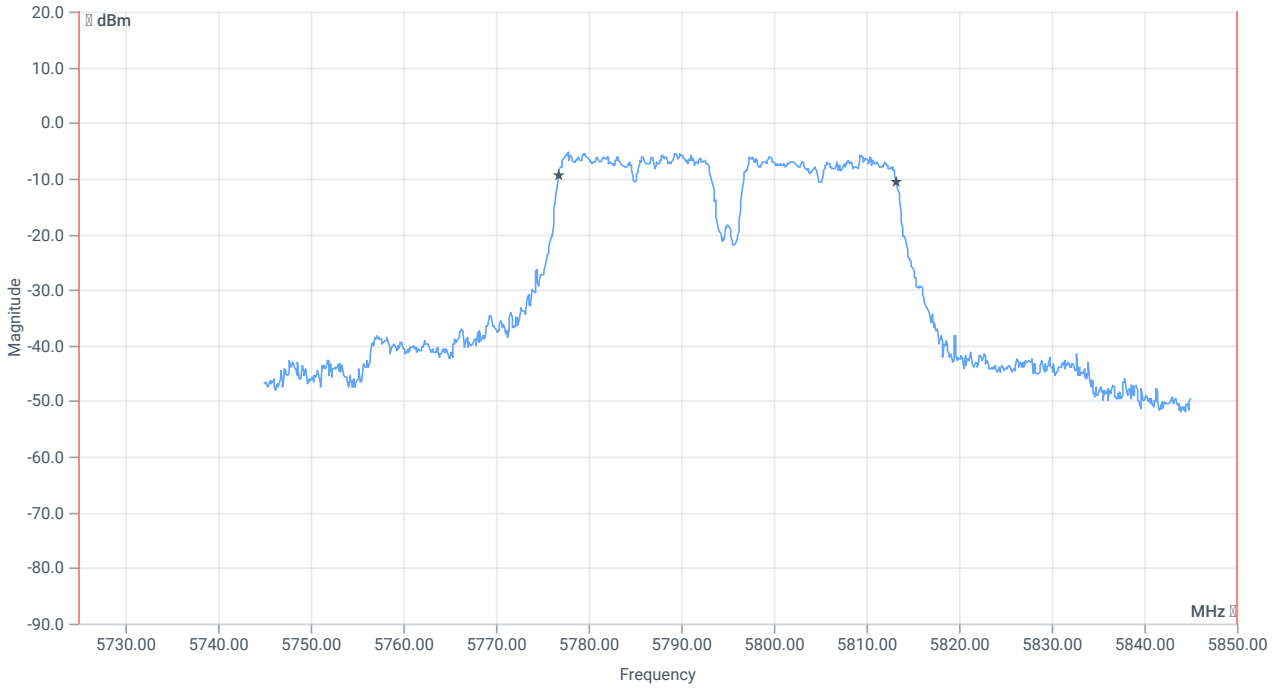


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.563	MHz	INFO
T1 99%	5725.000000	--	5776.7183	MHz	PASS
T2 99%	--	5850.000000	5813.2817	MHz	PASS

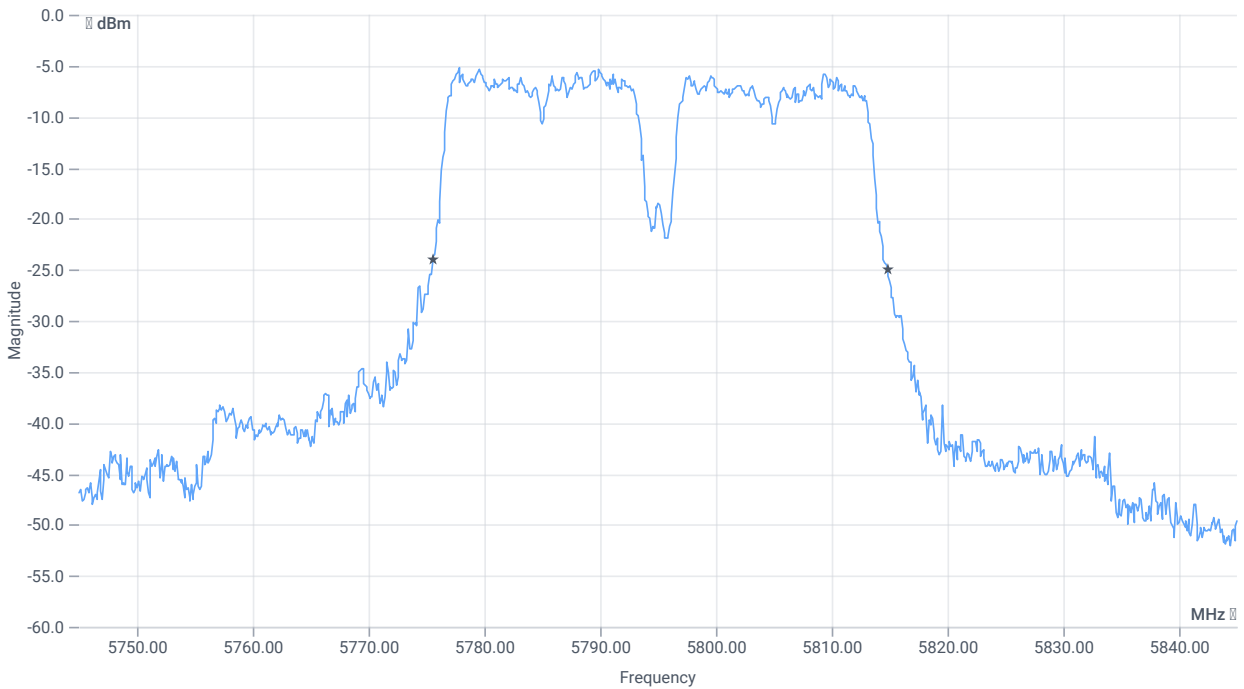

BW 20dB

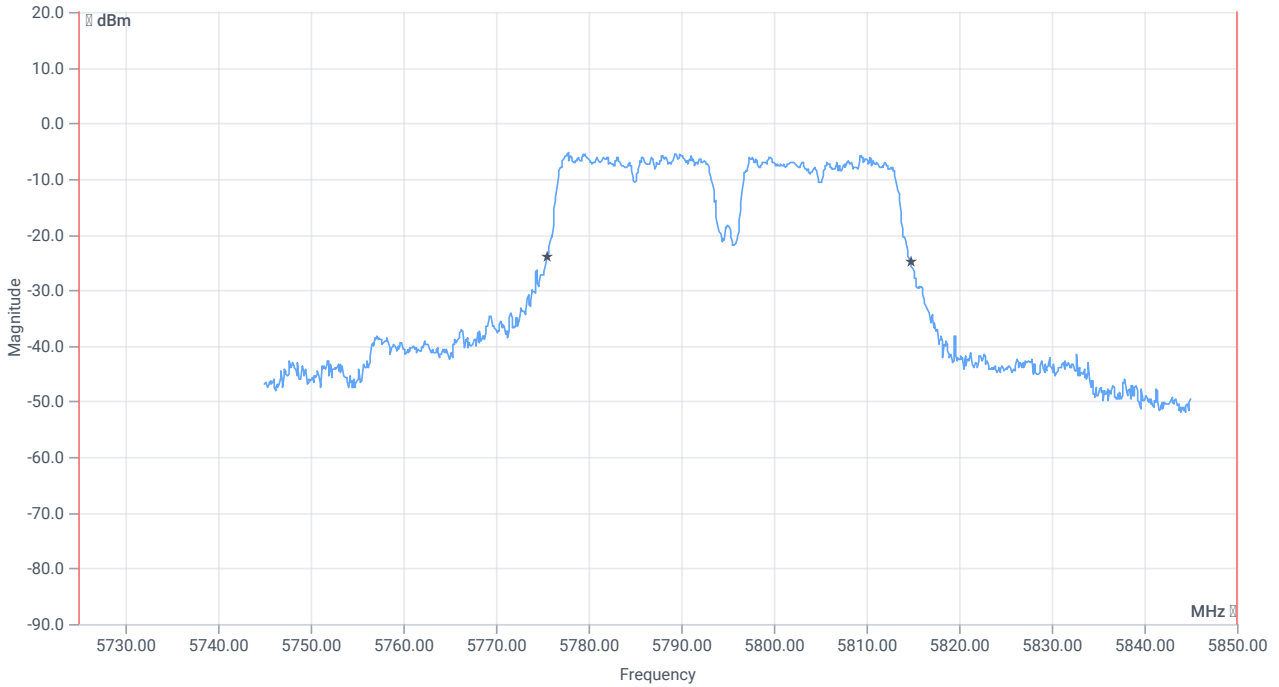

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	39.3	MHz	INFO
T1 20dB	5725.000000	---	5775.5000	MHz	PASS
T2 20dB	---	5850.000000	5814.8000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:02:12
Ambit temp [°C] humidity [rel%]	26.8 33
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5755 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-4.23	dBm	INFO
Ref. frequency	--	--	5751.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.77 10.41 10
Start [MHz] Stop [MHz]	5705.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

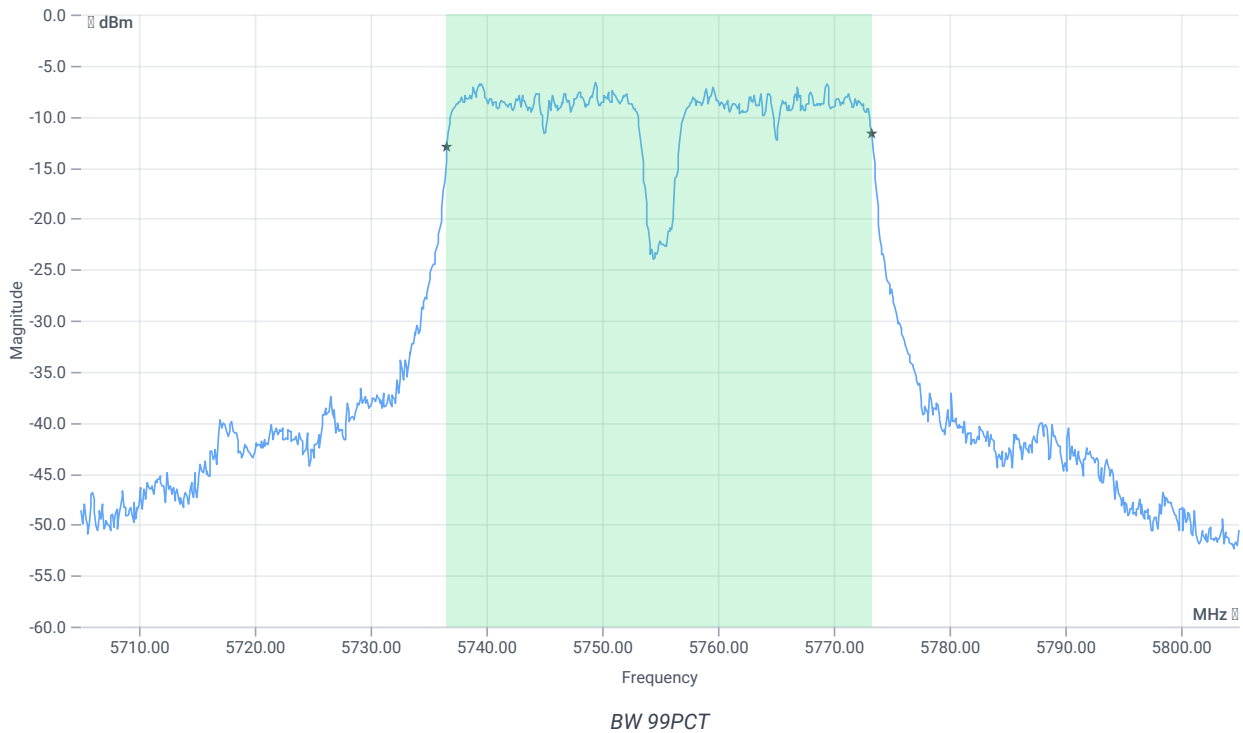


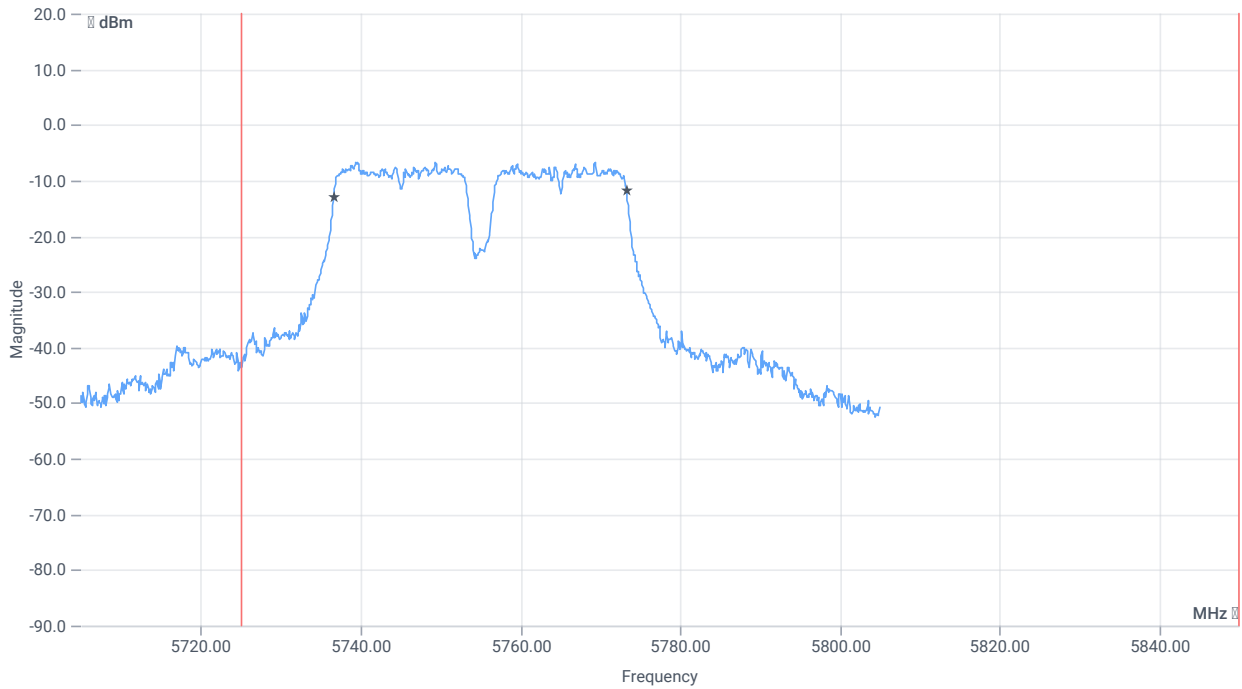


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.663	MHz	INFO
T1 99%	5725.000000	--	5736.6184	MHz	PASS
T2 99%	--	5850.000000	5773.2817	MHz	PASS

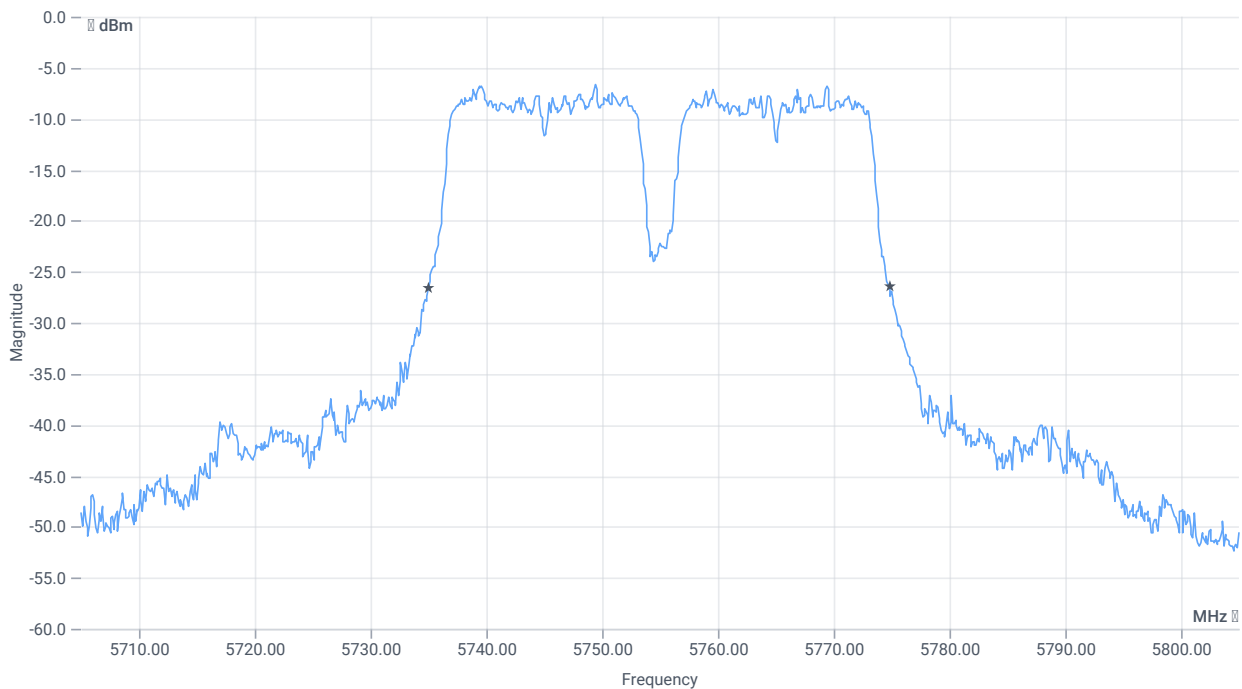

BW 20dB

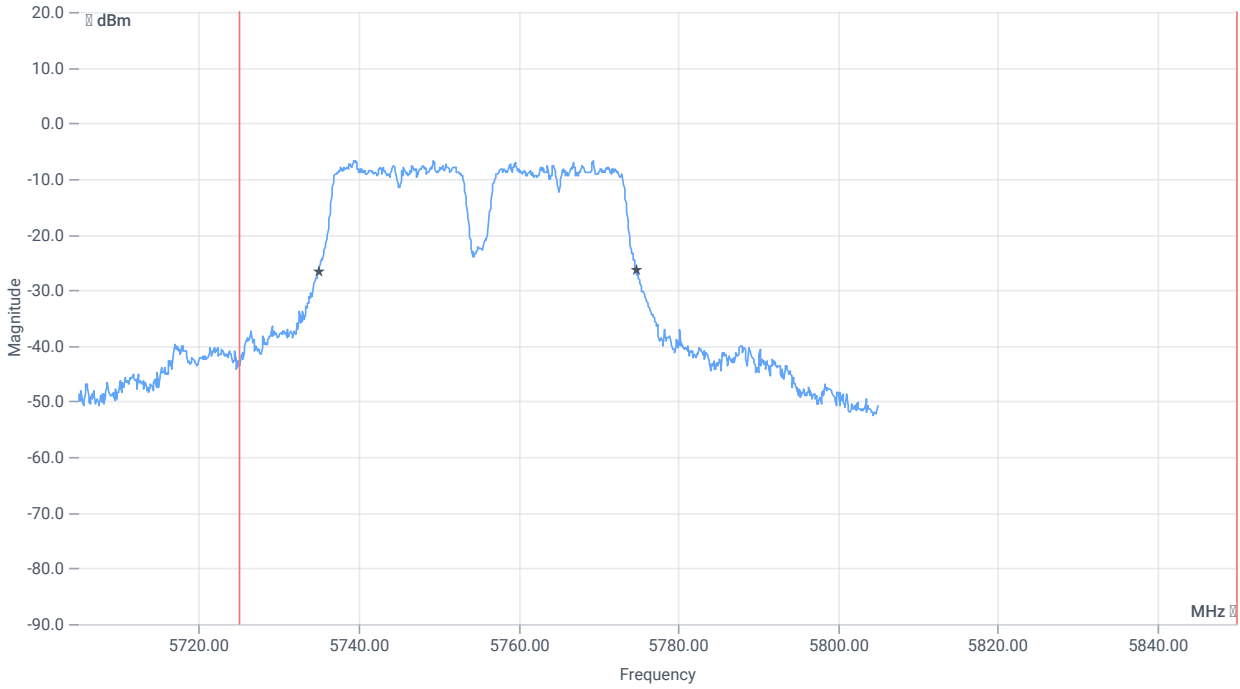

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	39.8	MHz	INFO
T1 20dB	5725.000000	--	5735.0000	MHz	PASS
T2 20dB	--	5850.000000	5774.8000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 17:55:13
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5755 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.44	dBm	INFO
Ref. frequency	--	--	5769.790	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.56 10.39 15
Start [MHz] Stop [MHz]	5705.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

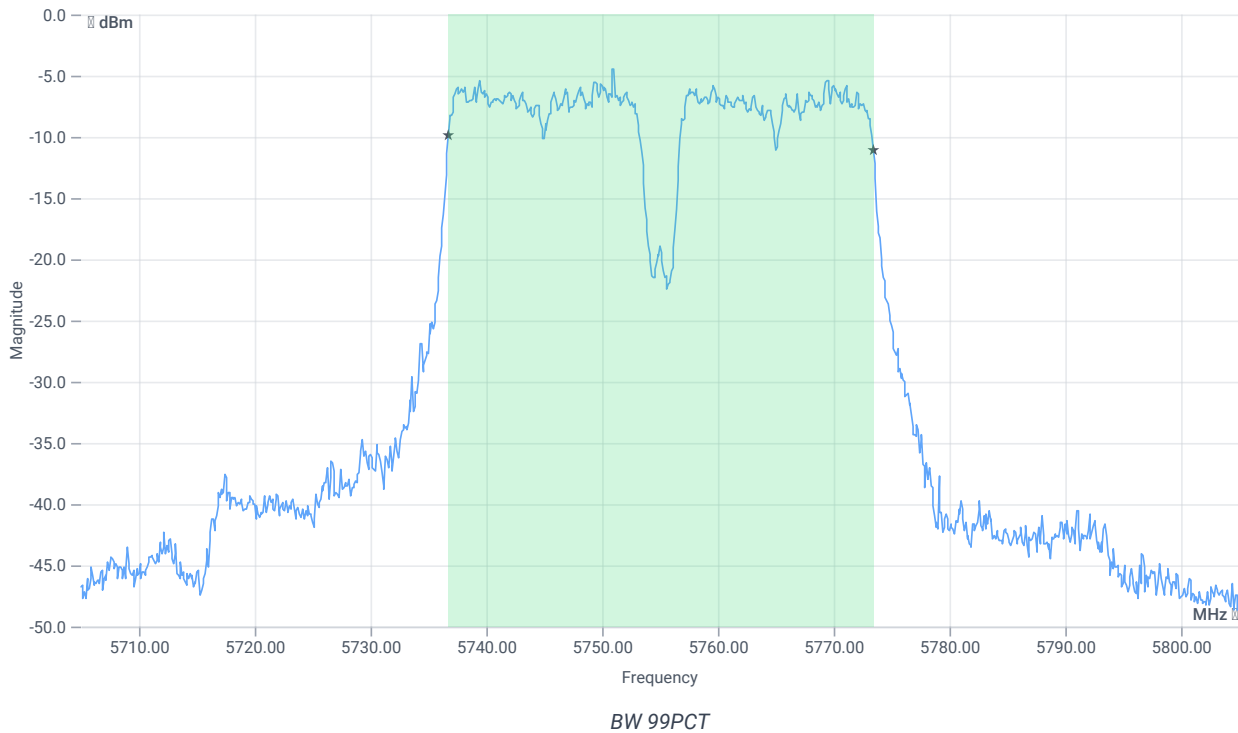


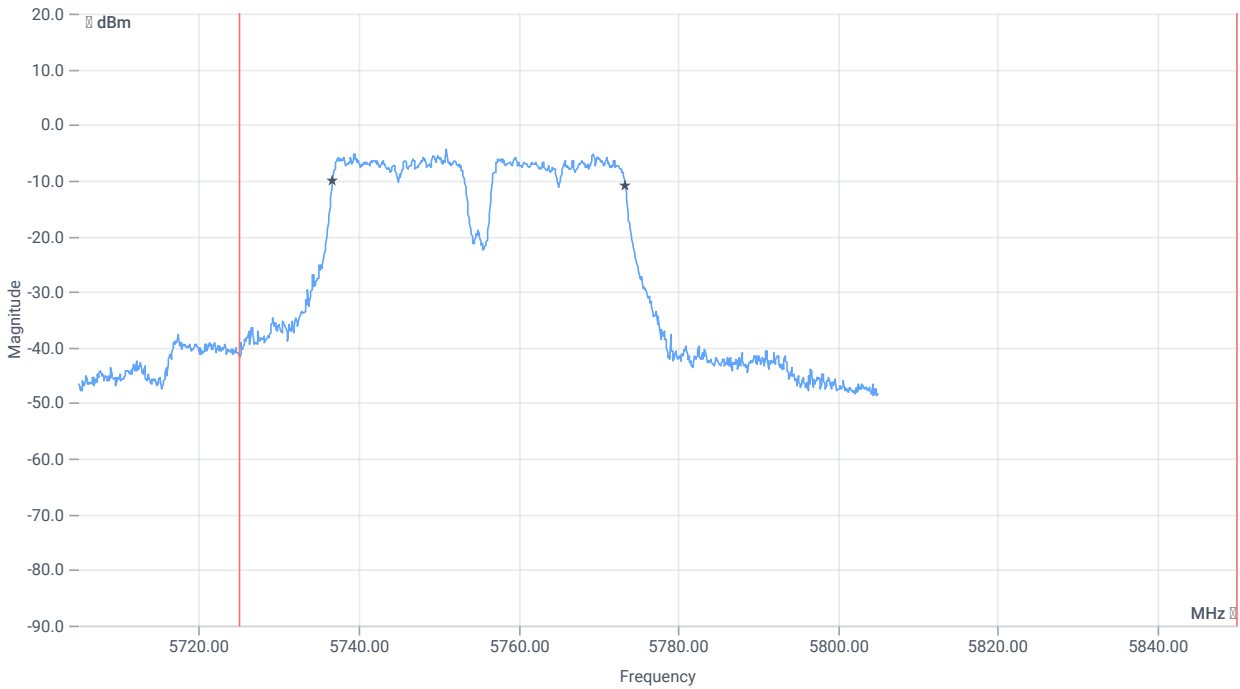


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.663	MHz	INFO
T1 99%	5725.000000	--	5736.7183	MHz	PASS
T2 99%	--	5850.000000	5773.3816	MHz	PASS

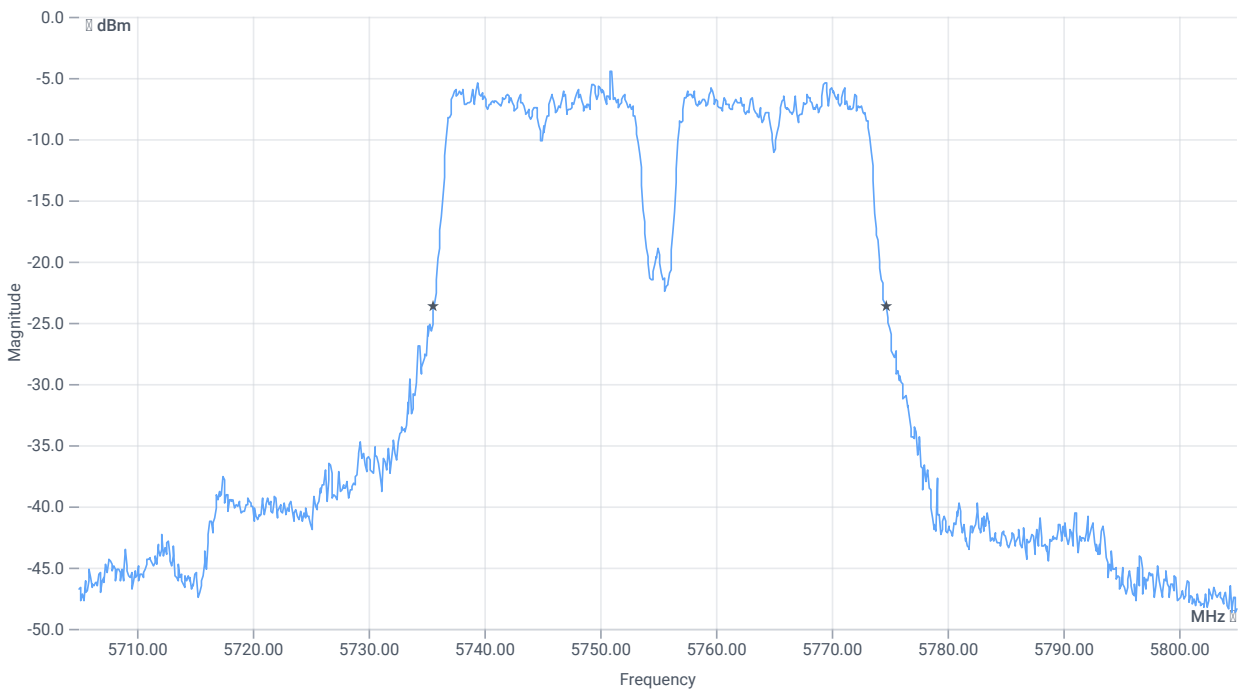

BW 20dB

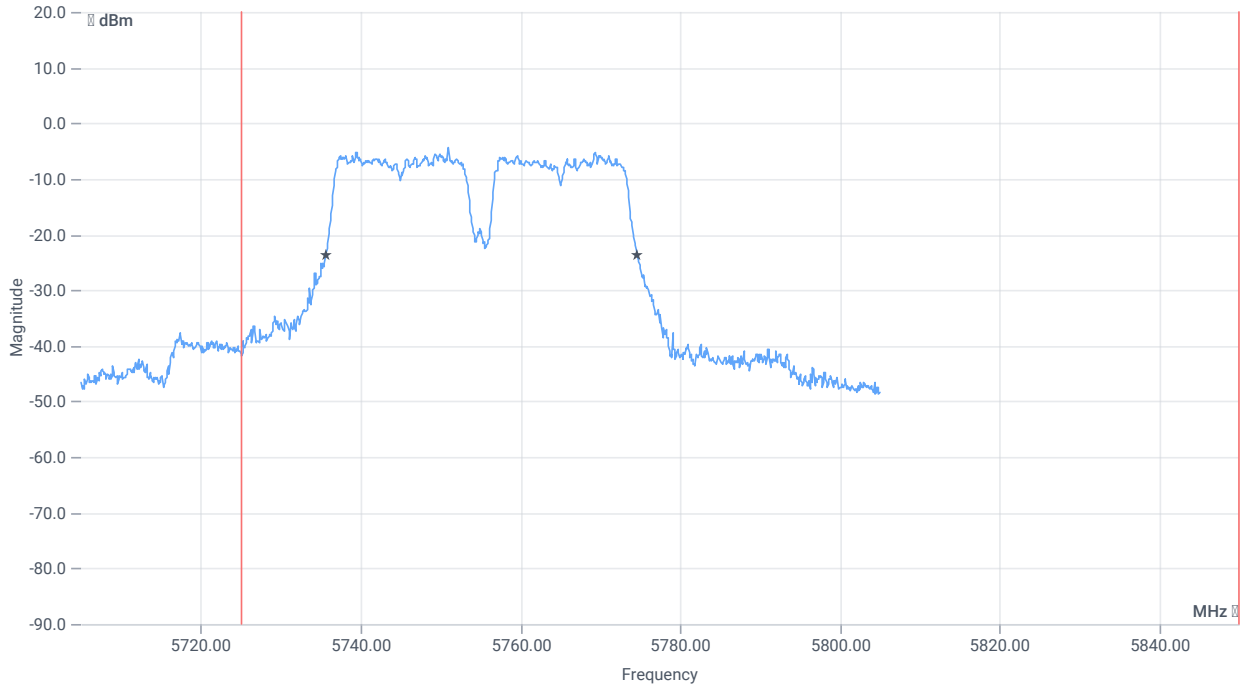

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	39.1	MHz	INFO
T1 20dB	5725.000000	--	5735.6000	MHz	PASS
T2 20dB	--	5850.000000	5774.7000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:47:37
Ambit temp [°C] humidity [rel%]	26.9 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5230 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.94	dBm	INFO
Ref. frequency	--	--	5225.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.06 9.97 15
Start [MHz] Stop [MHz]	5180.000 5280.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

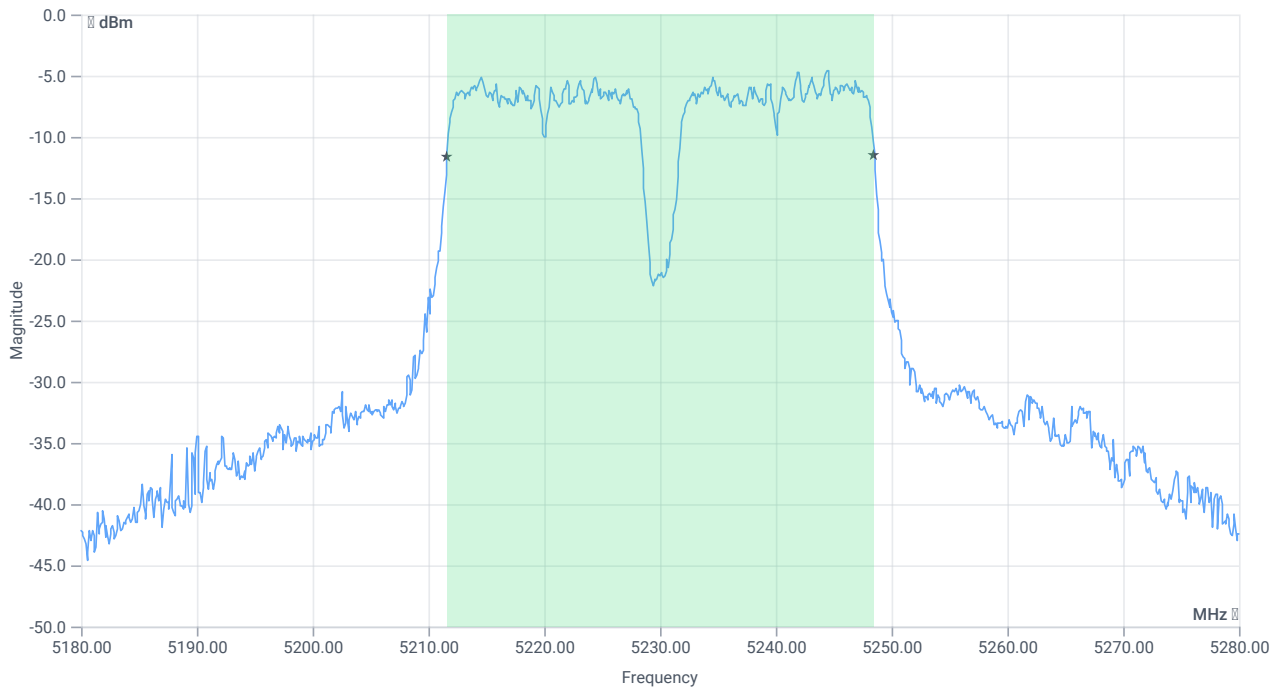


BW 99PCT

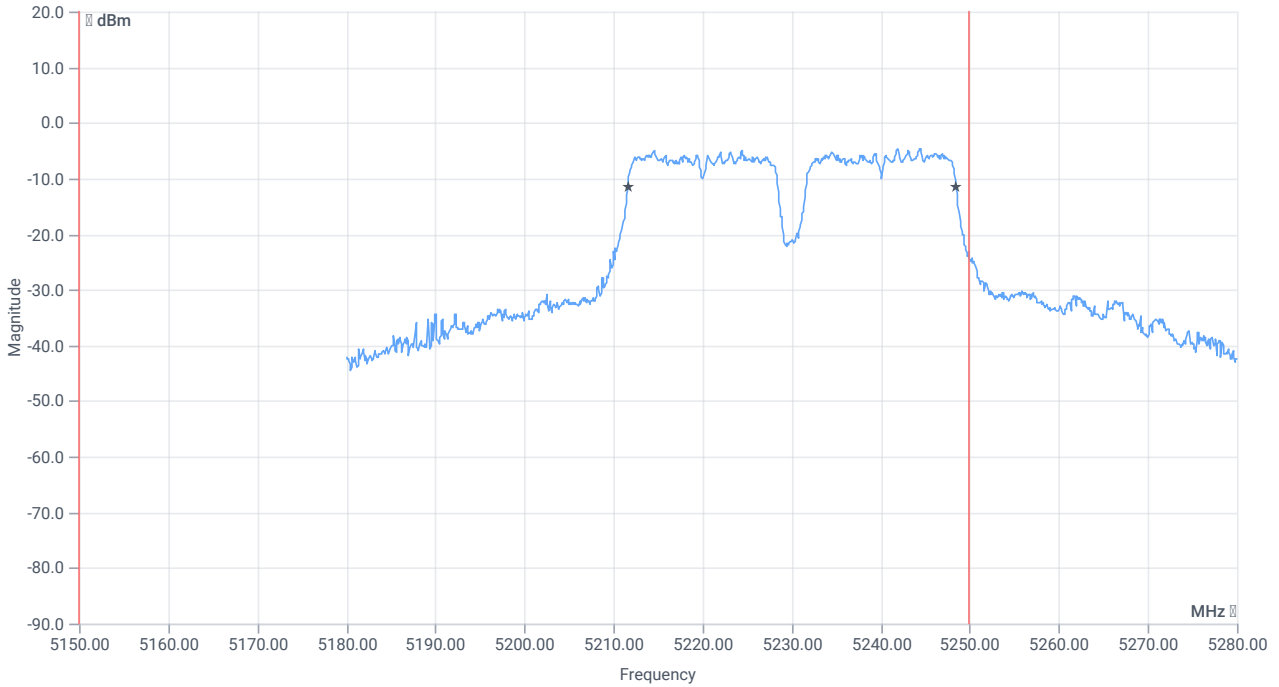


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.863	MHz	INFO
T1 99%	5150.000000	--	5211.6184	MHz	PASS
T2 99%	--	5250.000000	5248.4815	MHz	PASS

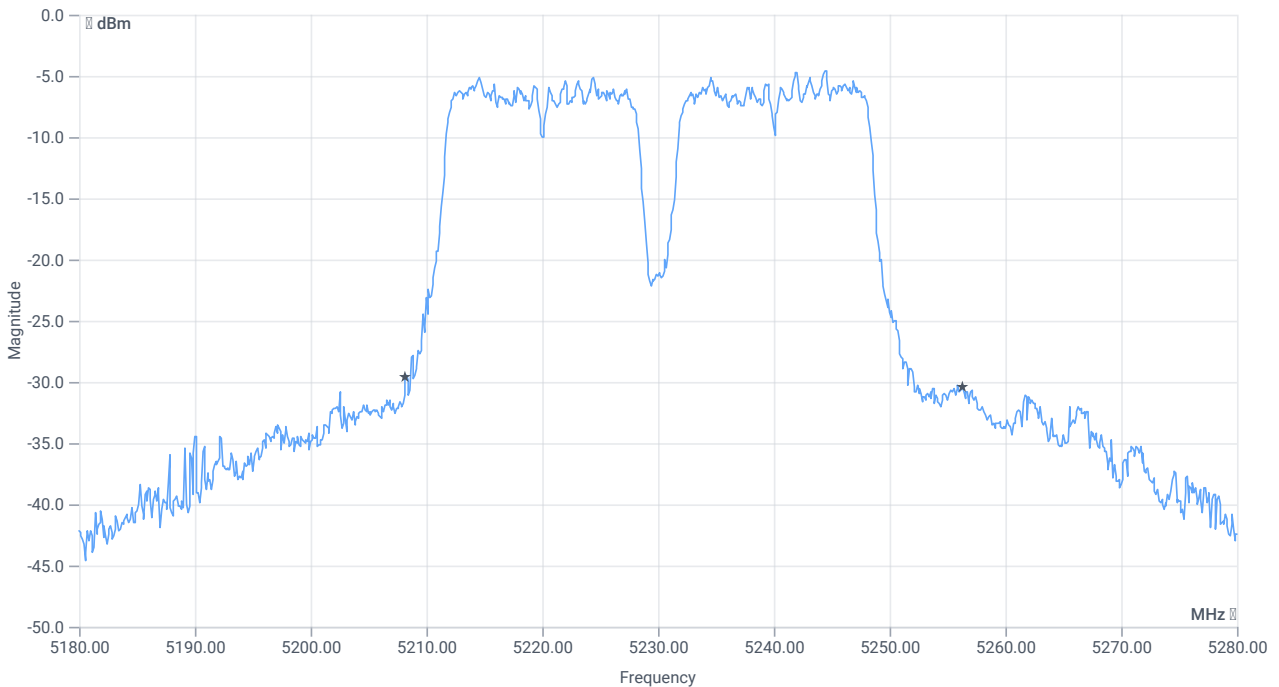

BW 26dB

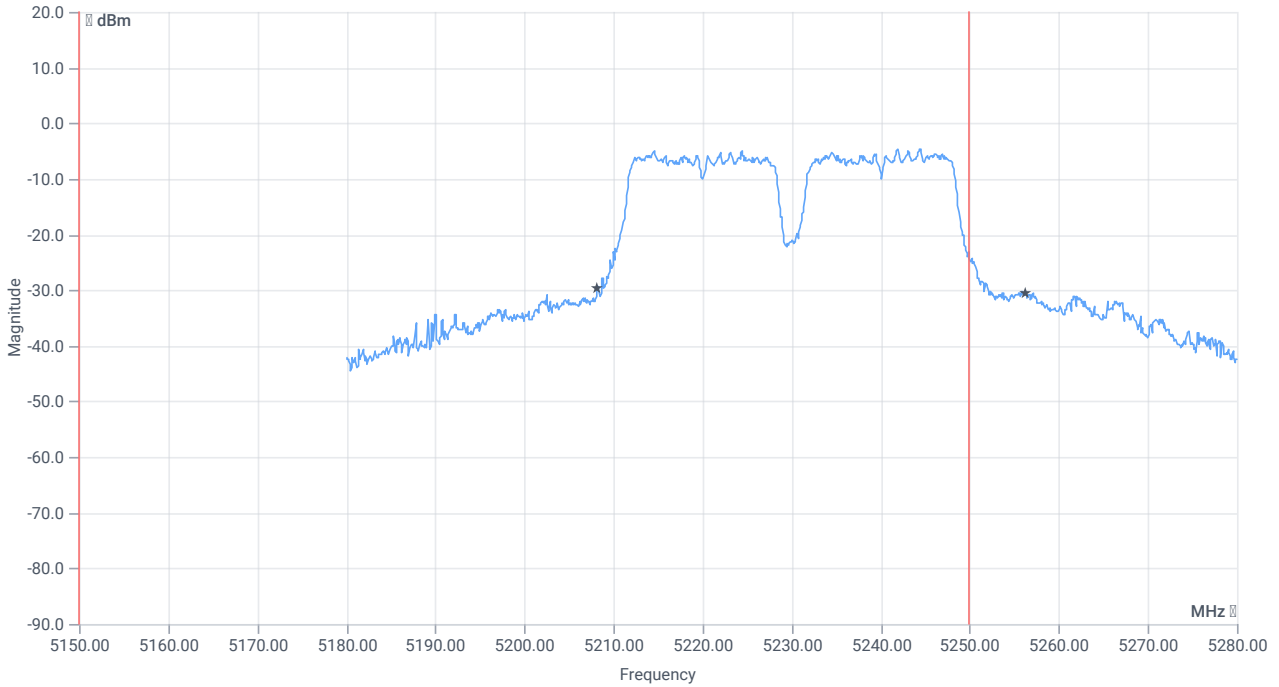

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	48.1	MHz	INFO
T1 26dB	5150.000000	--	5208.2000	MHz	PASS
T2 26dB	--	5250.000000	5256.3000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:43:25
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.72	dBm	INFO
Ref. frequency	--	--	5212.620	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.28 9.95 15
Start [MHz] Stop [MHz]	5180.000 5280.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

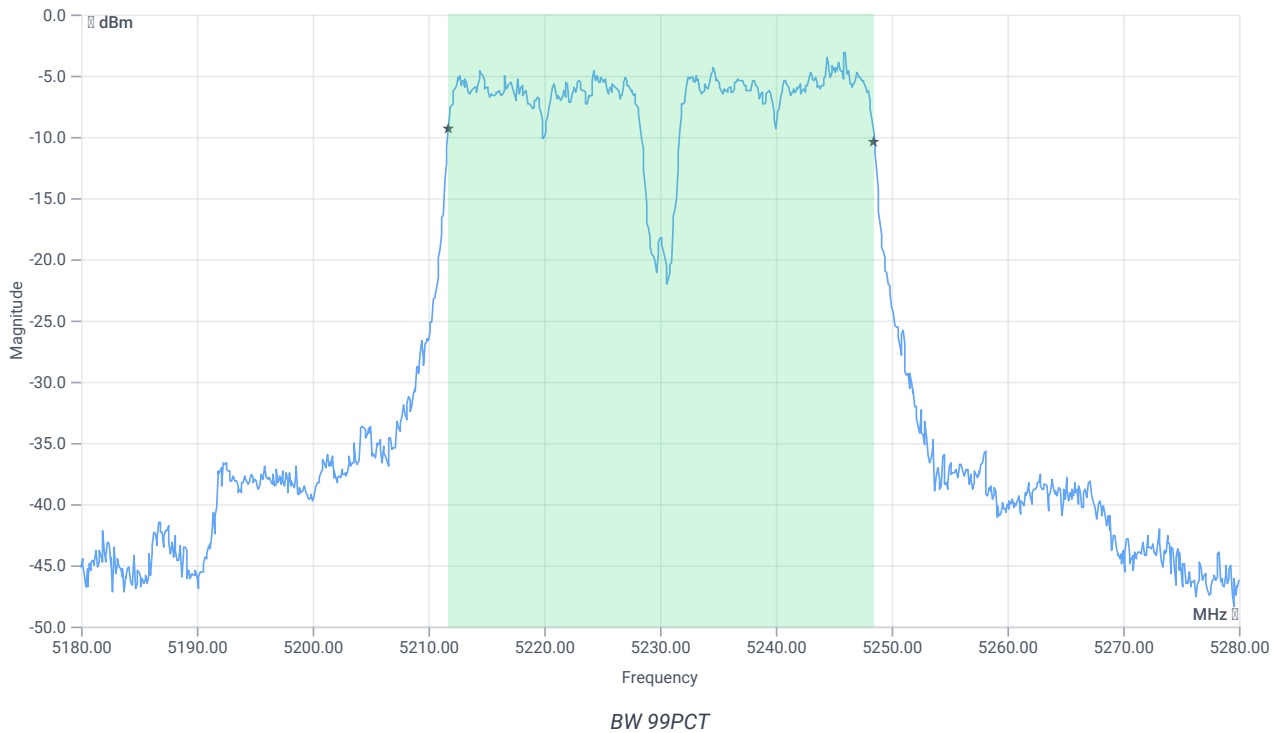


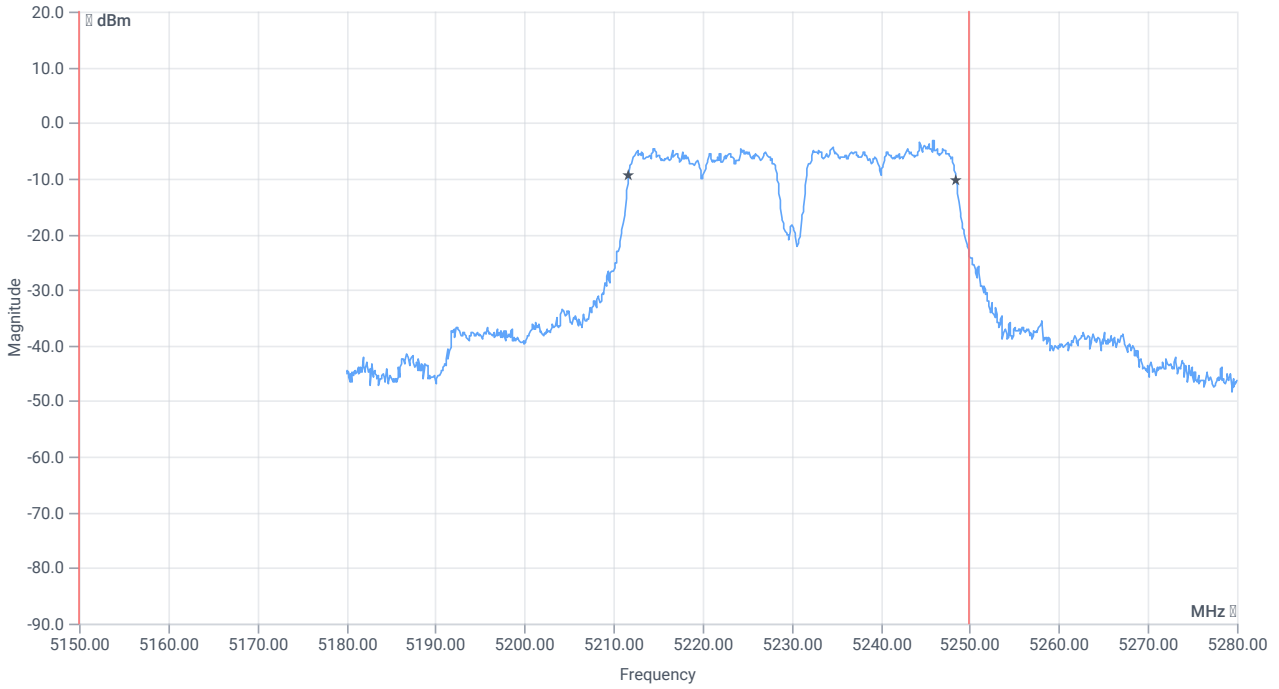


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.763	MHz	INFO
T1 99%	5150.000000	--	5211.7183	MHz	PASS
T2 99%	--	5250.000000	5248.4815	MHz	PASS

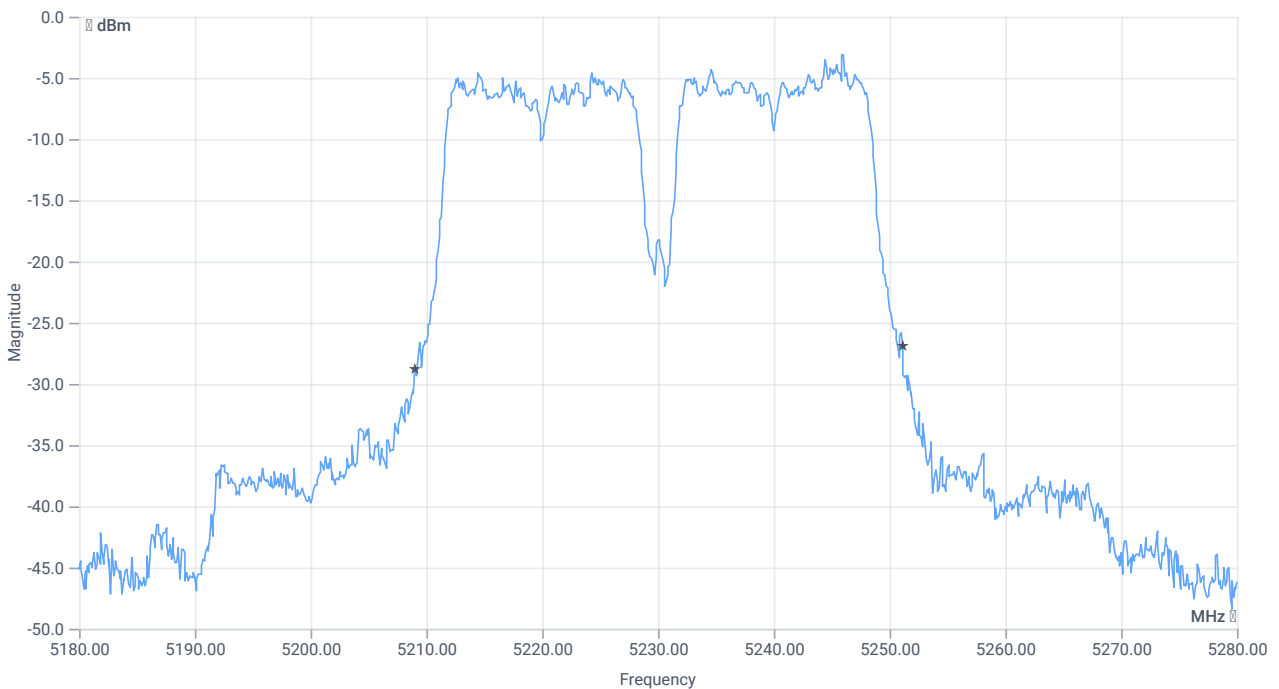

BW 26dB

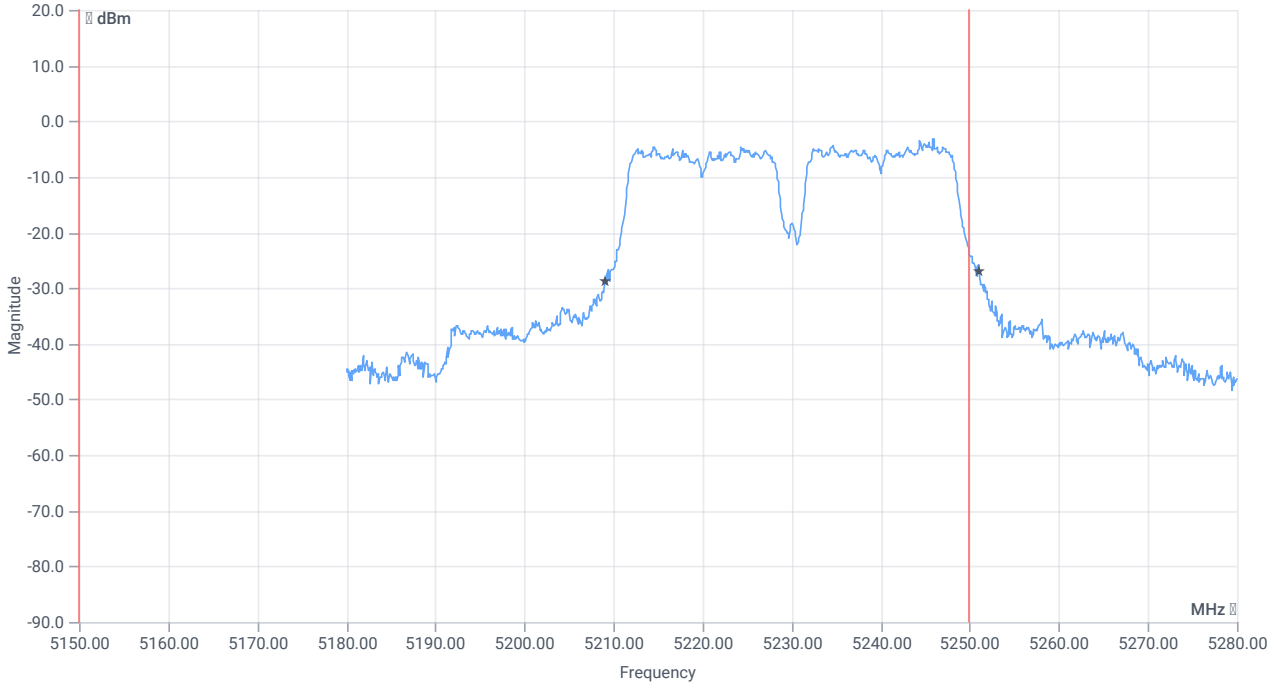

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	42.1	MHz	INFO
T1 26dB	5150.000000	--	5209.0000	MHz	PASS
T2 26dB	--	5250.000000	5251.1000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:38:11
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.57	dBm	INFO
Ref. frequency	--	--	5172.820	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.43 10.04 15
Start [MHz] Stop [MHz]	5140.000 5240.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

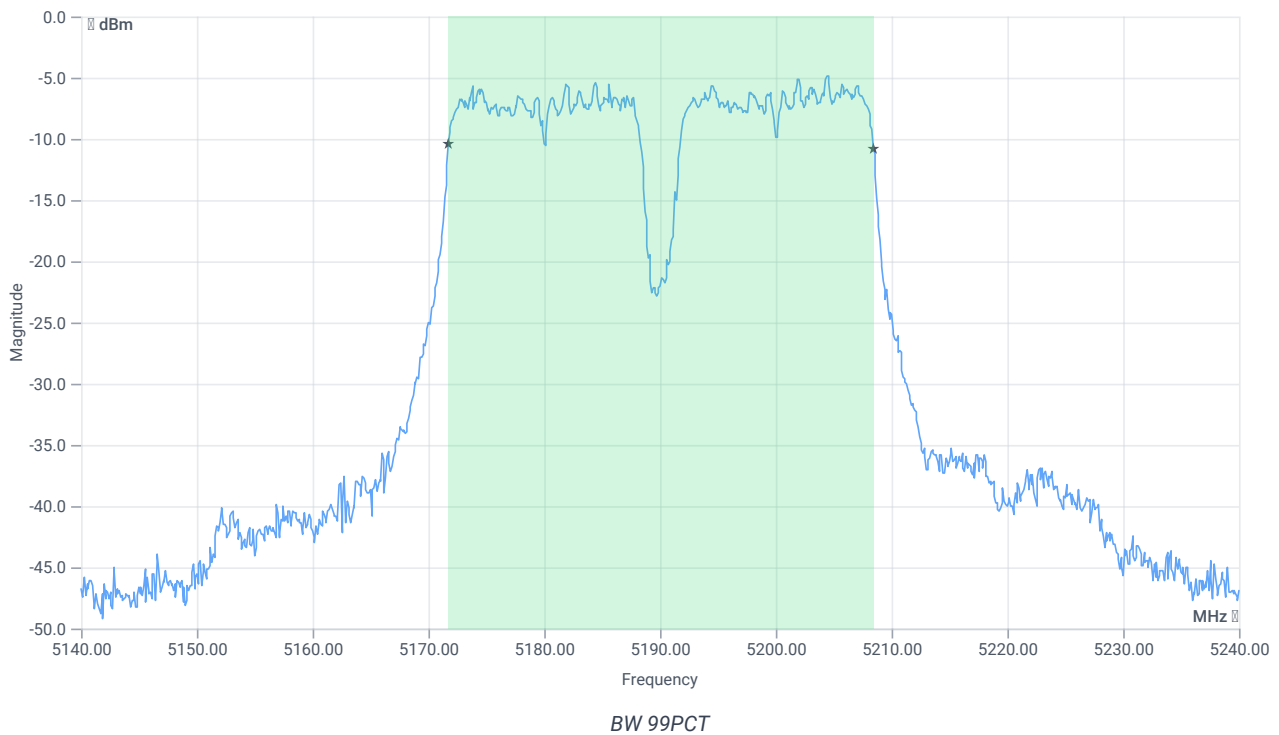


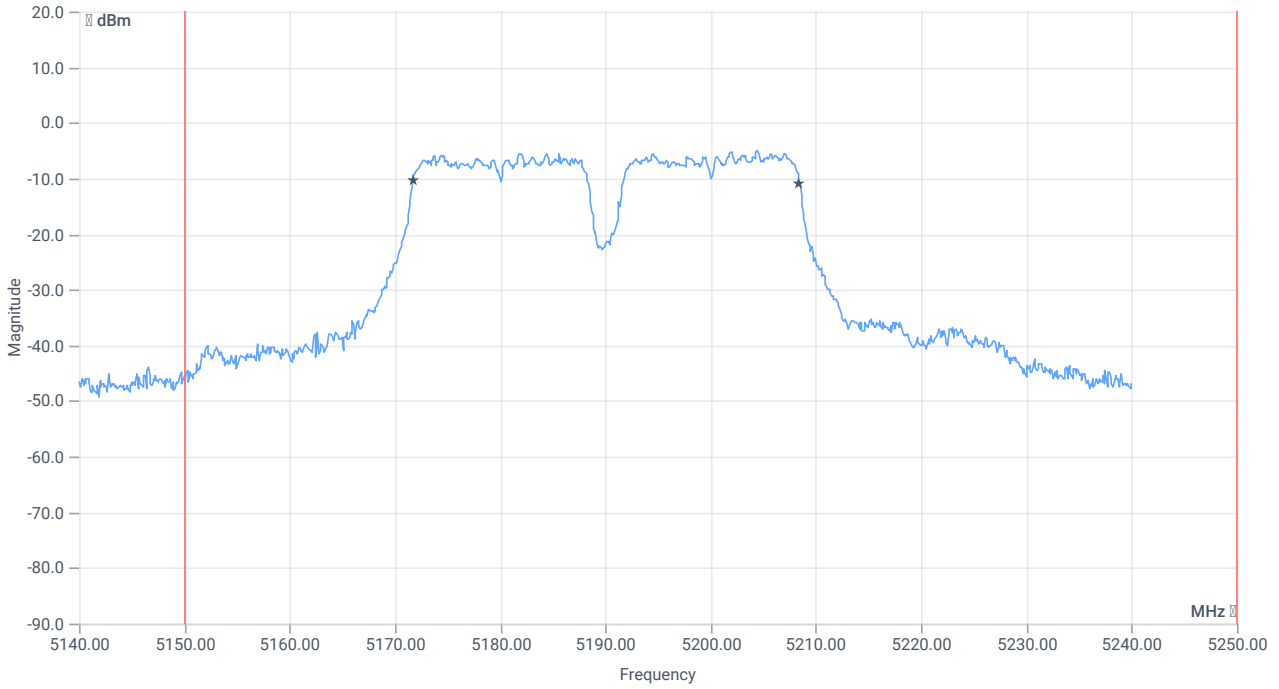


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.663	MHz	INFO
T1 99%	5150.000000	--	5171.7183	MHz	PASS
T2 99%	--	5250.000000	5208.3816	MHz	PASS

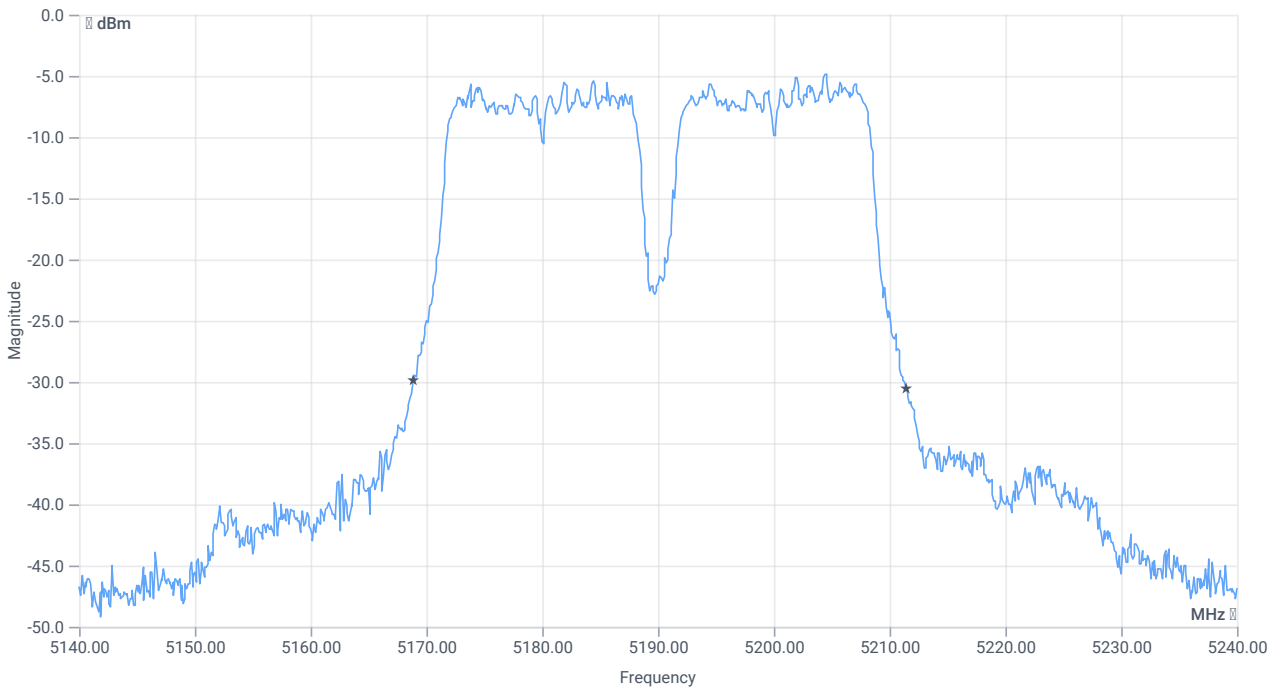

BW 26dB

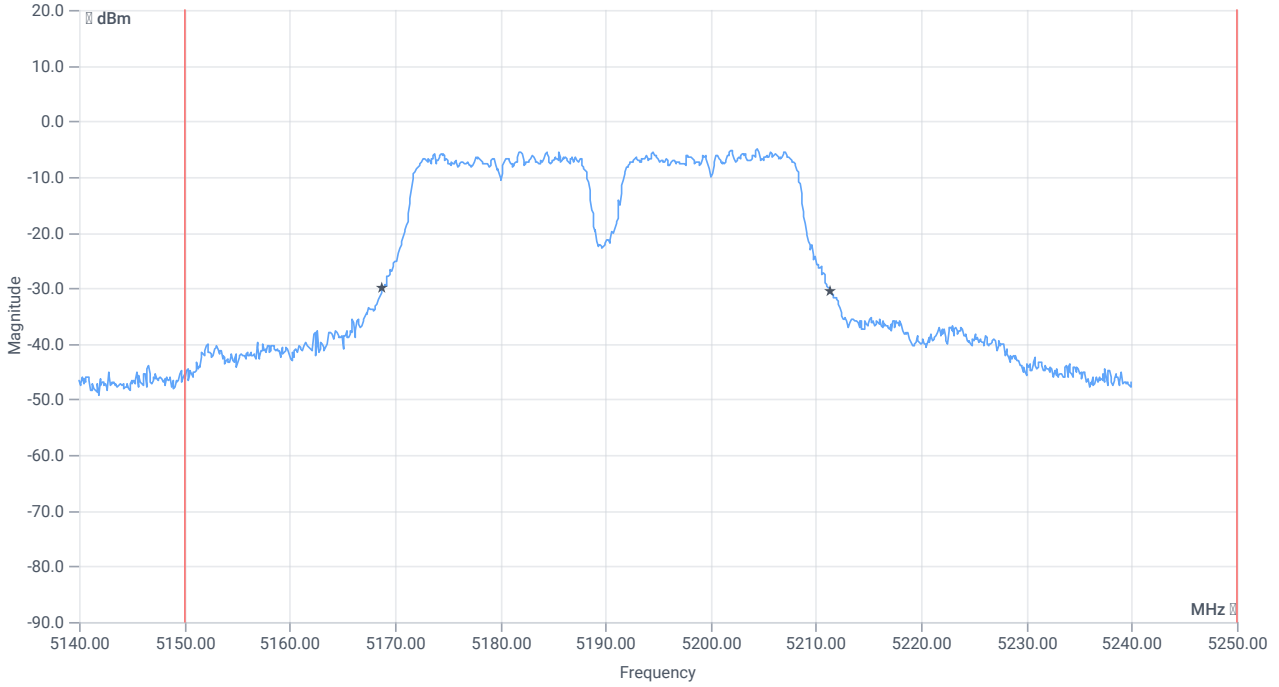

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.6	MHz	INFO
T1 26dB	5150.000000	---	5168.8000	MHz	PASS
T2 26dB	---	5250.000000	5211.4000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:34:00
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.09	dBm	INFO
Ref. frequency	--	--	5185.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.91 10.02 15
Start [MHz] Stop [MHz]	5140.000 5240.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

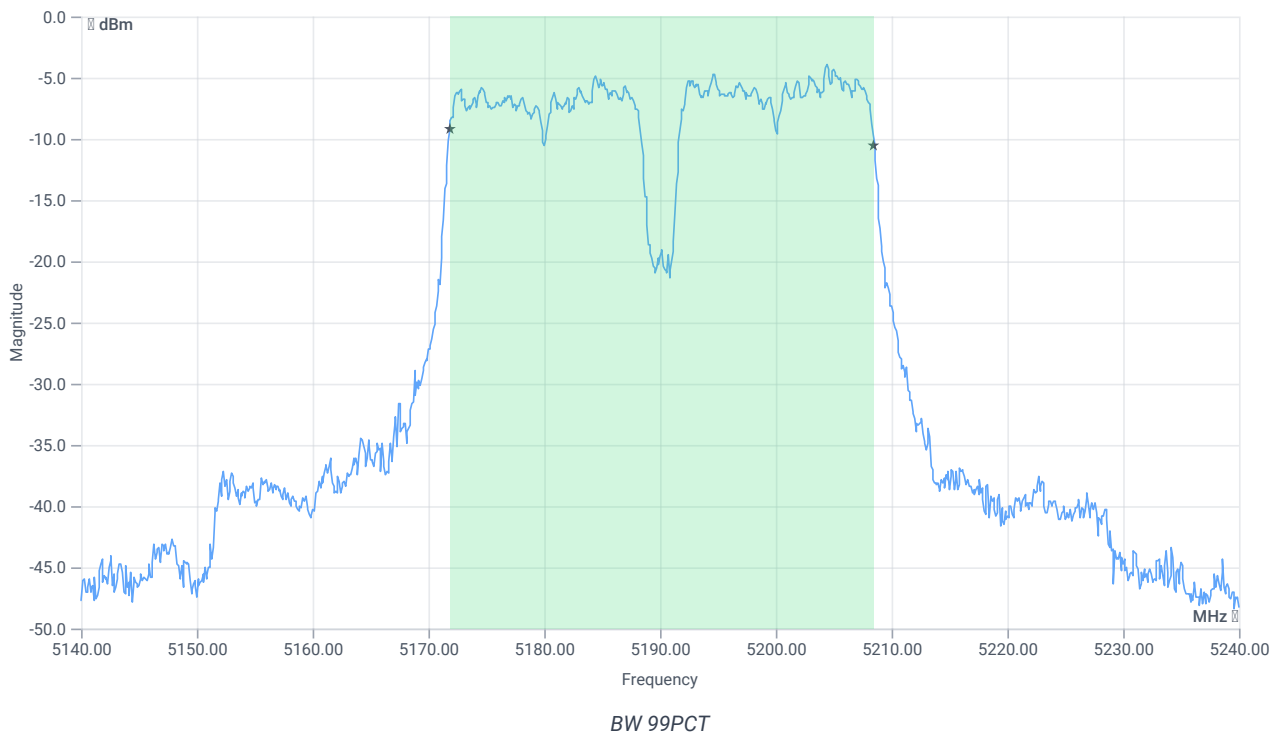


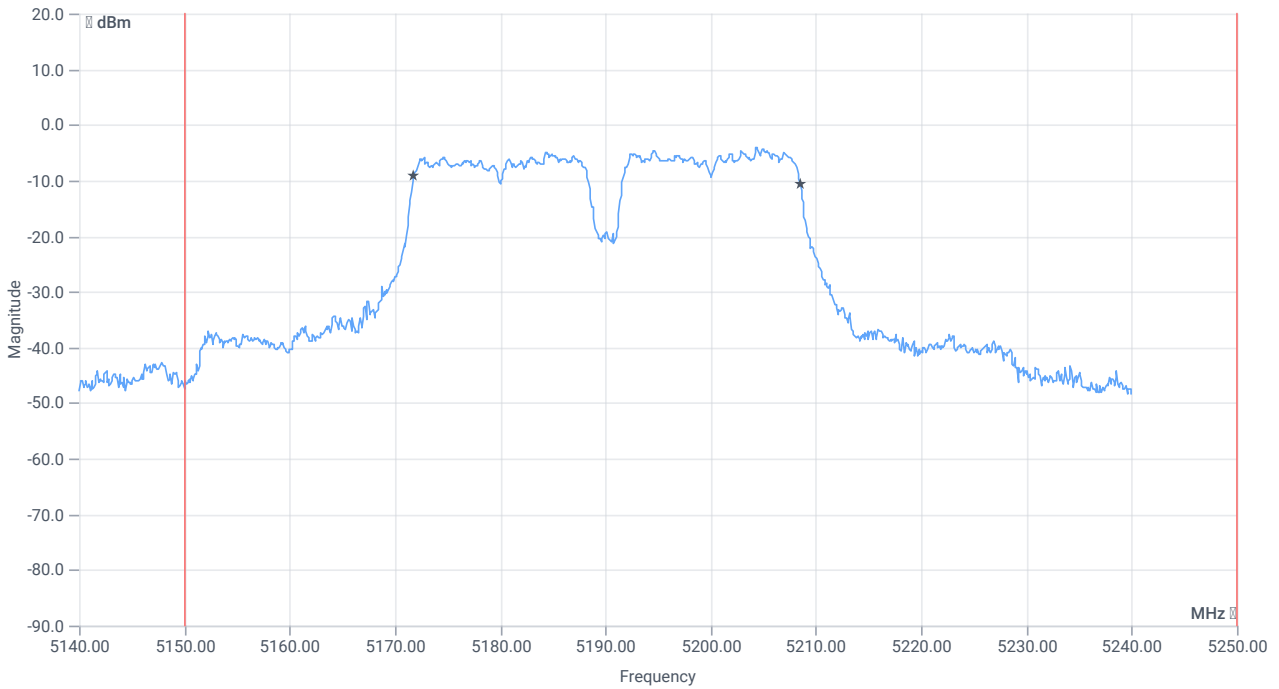


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.663	MHz	INFO
T1 99%	5150.000000	--	5171.8182	MHz	PASS
T2 99%	--	5250.000000	5208.4815	MHz	PASS

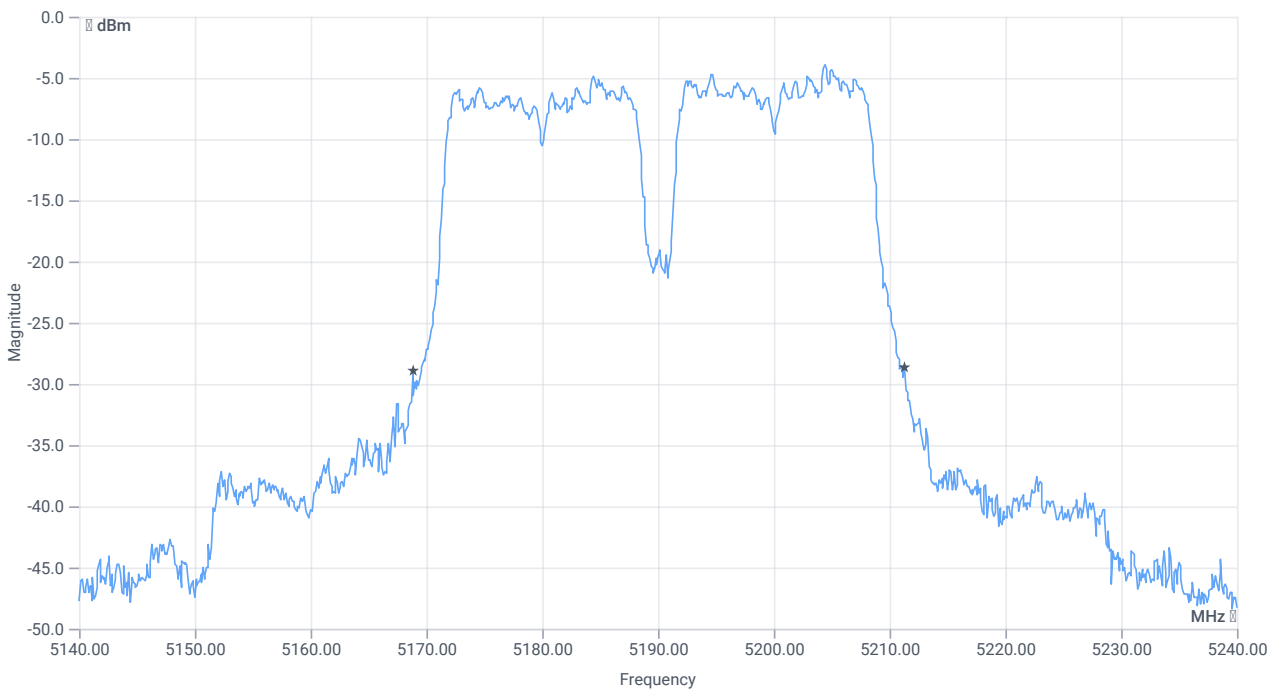

BW 26dB

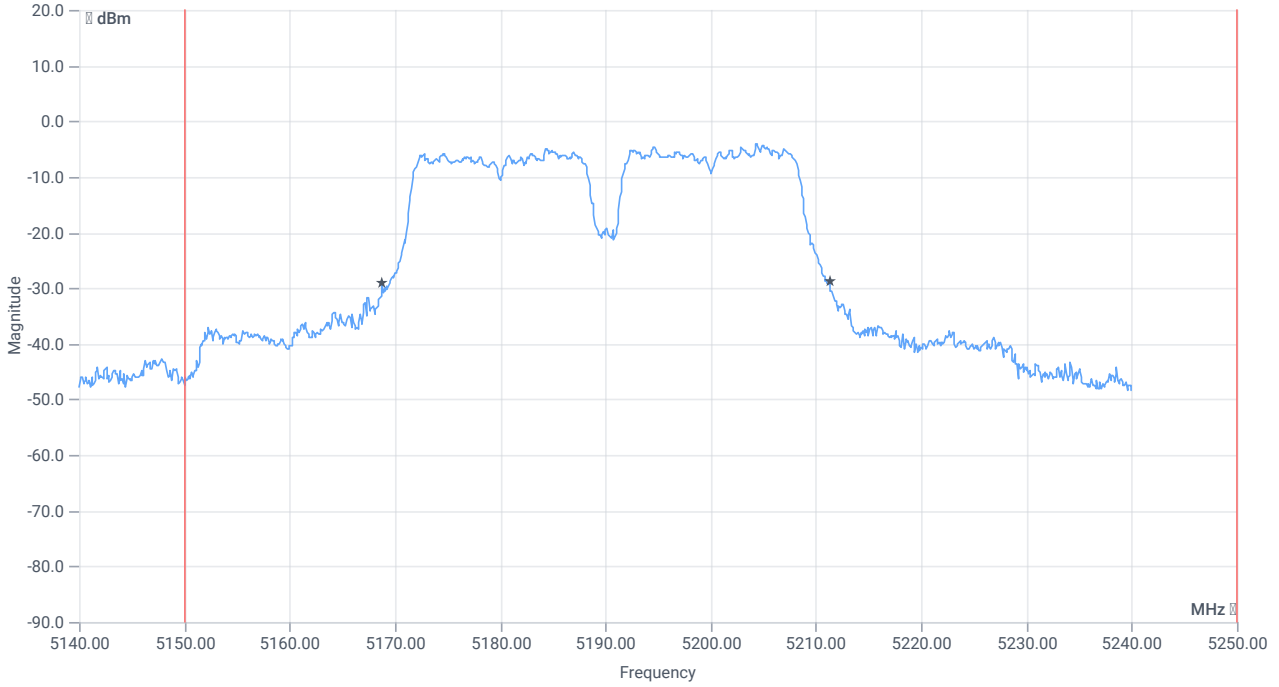

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.5	MHz	INFO
T1 26dB	5150.000000	---	5168.8000	MHz	PASS
T2 26dB	---	5250.000000	5211.3000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:23:31
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.10	dBm	INFO
Ref. frequency	--	--	5819.010	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.90 10.44 15
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

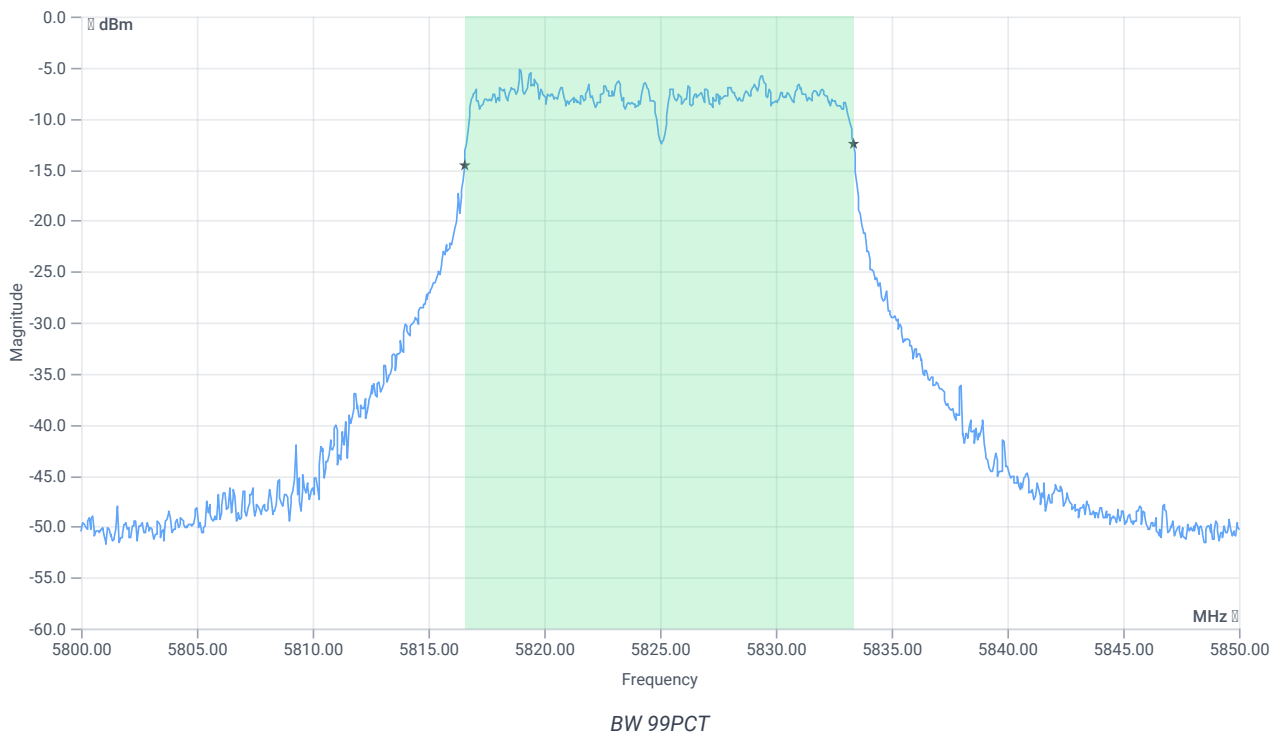


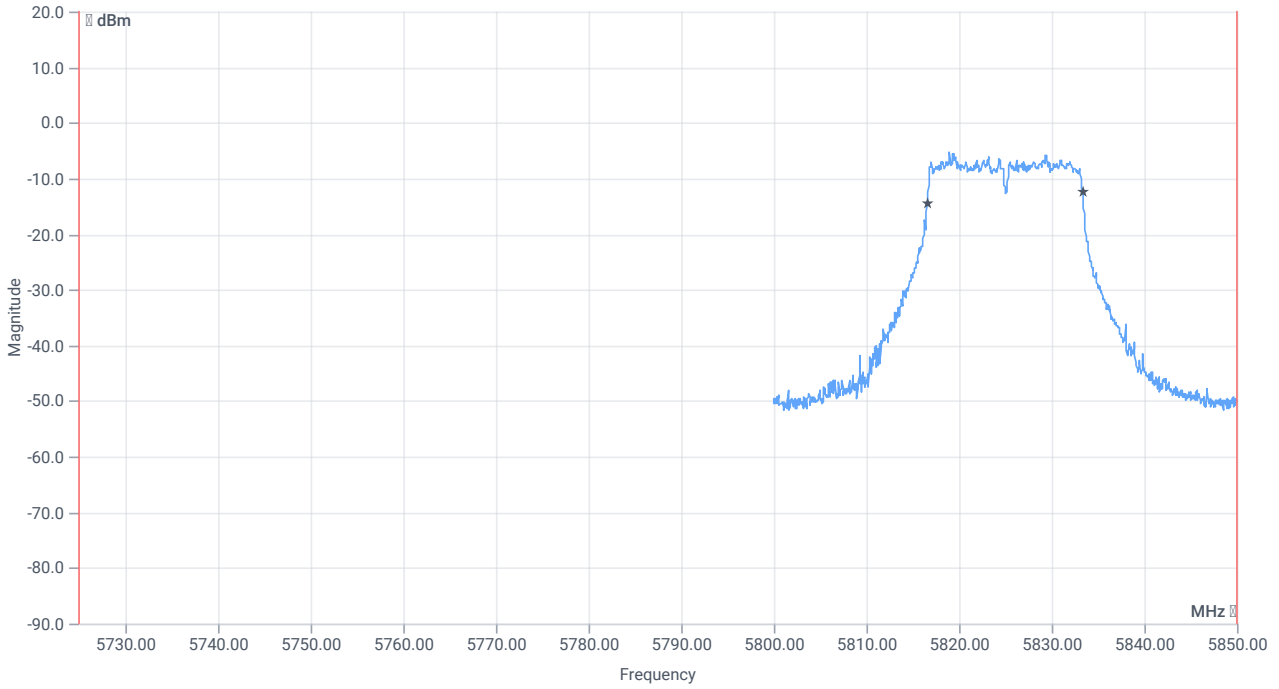


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	5725.000000	--	5816.5584	MHz	PASS
T2 99%	--	5850.000000	5833.3417	MHz	PASS

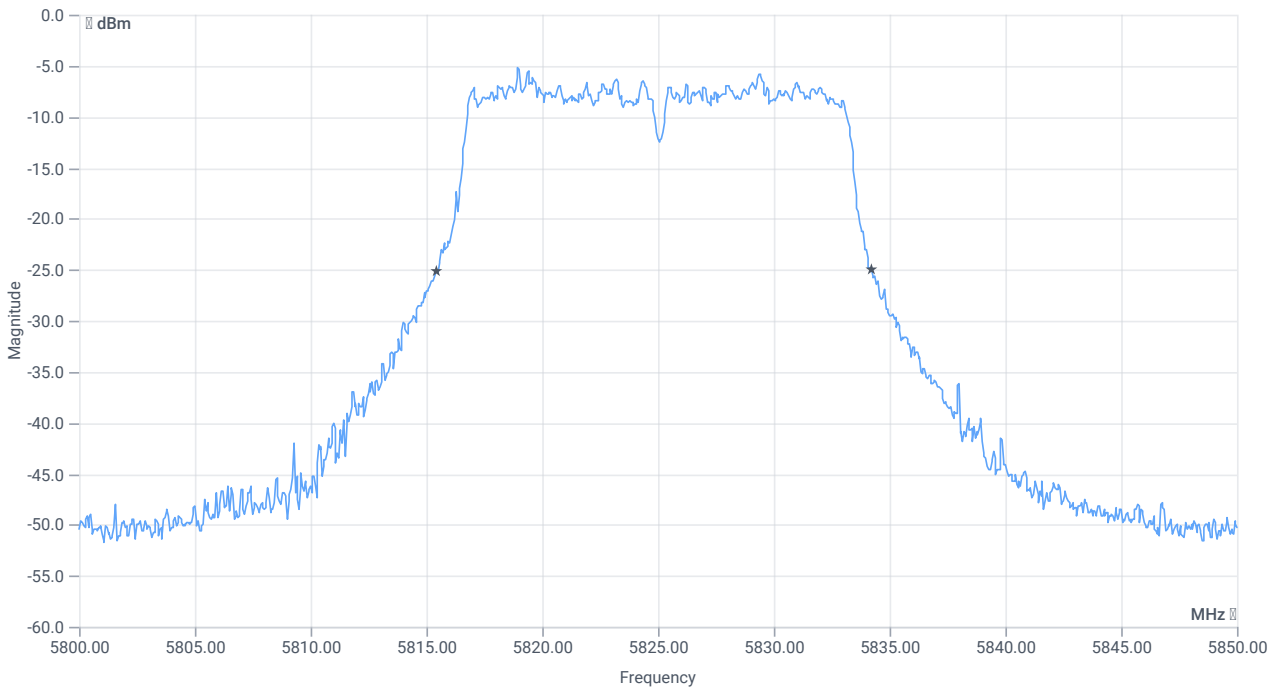

BW 20dB

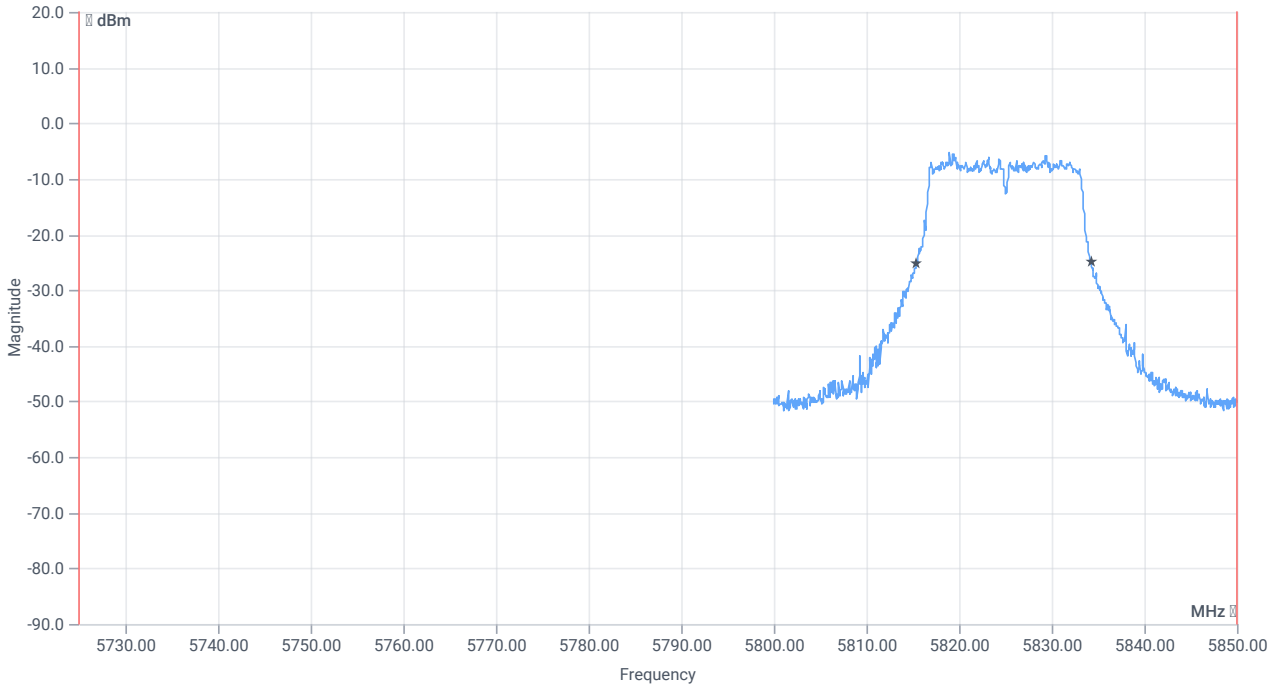

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	18.8	MHz	INFO
T1 20dB	5725.000000	--	5815.4000	MHz	PASS
T2 20dB	--	5850.000000	5834.2000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:16:14
Ambit temp [°C] humidity [rel%]	26.9 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.30	dBm	INFO
Ref. frequency	--	--	5817.810	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.30 10.45 15
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

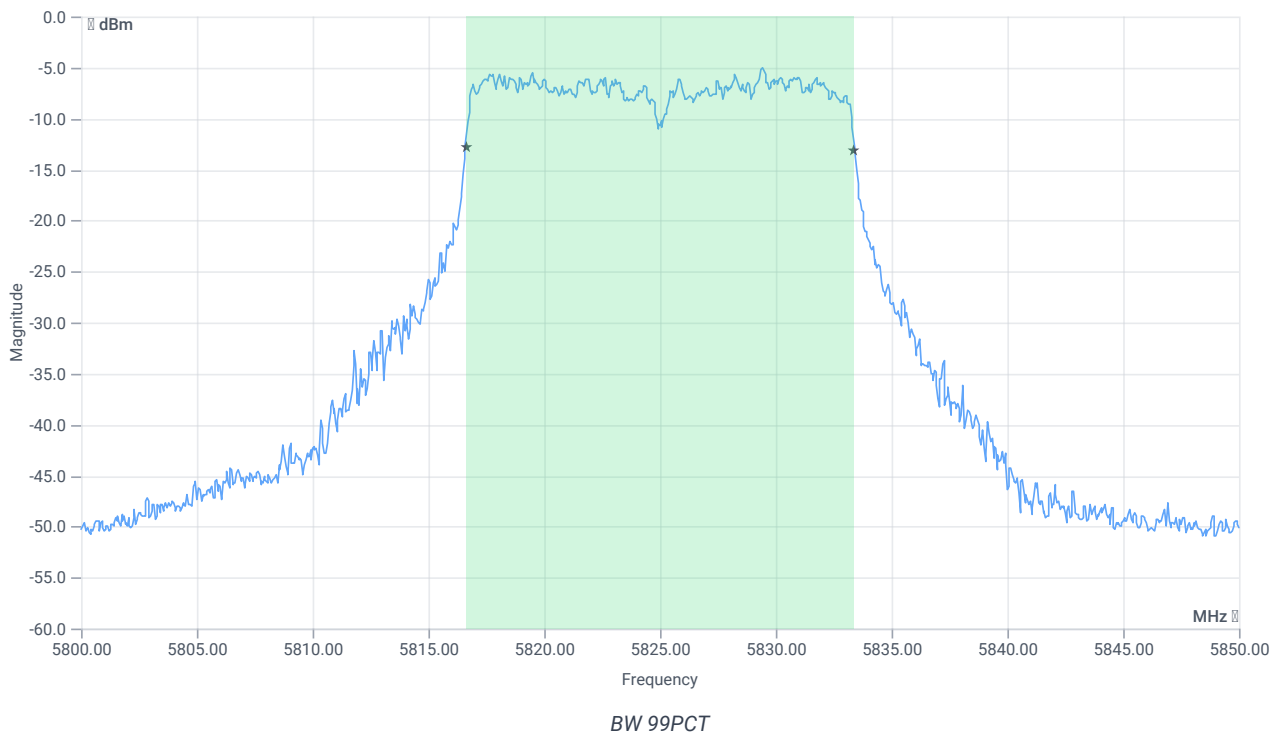


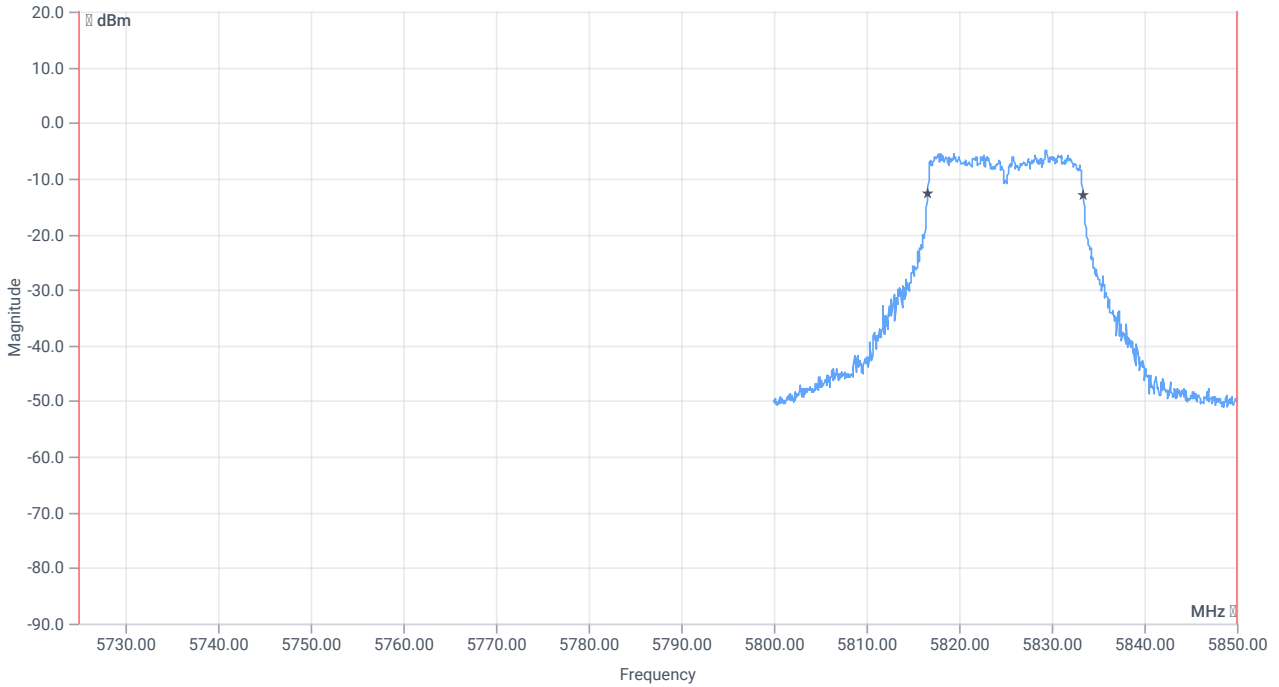


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	5725.000000	--	5816.6084	MHz	PASS
T2 99%	--	5850.000000	5833.3916	MHz	PASS

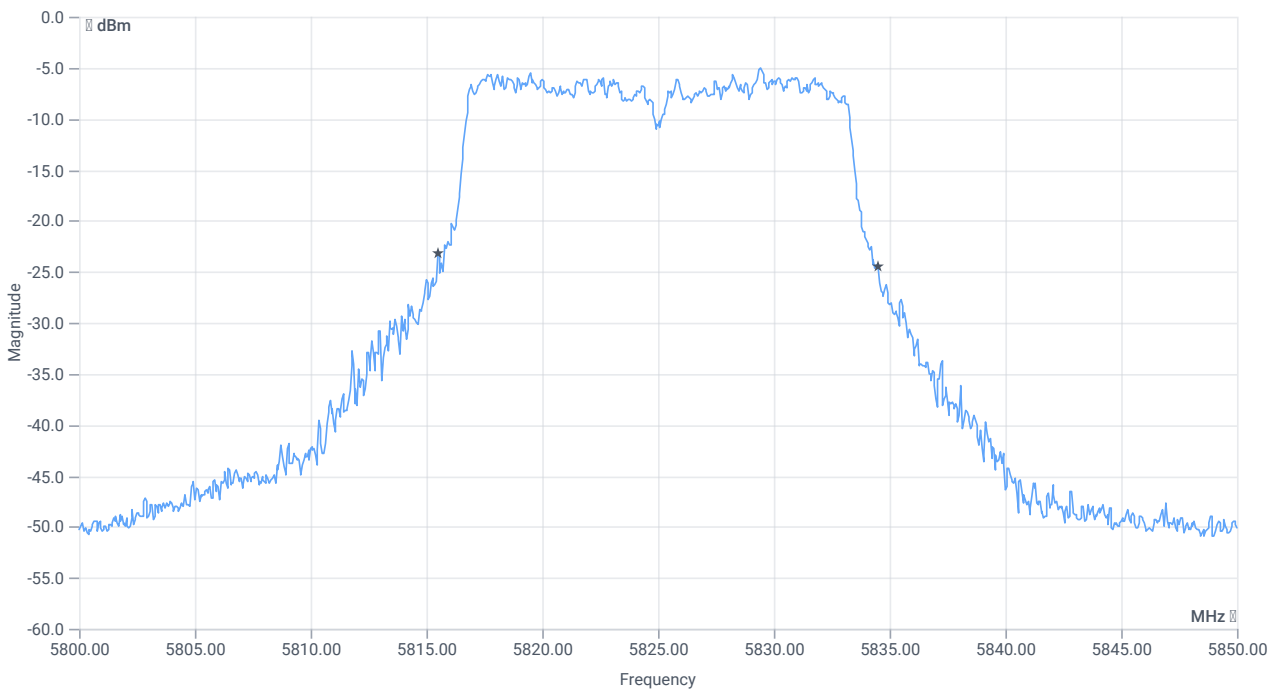

BW 20dB

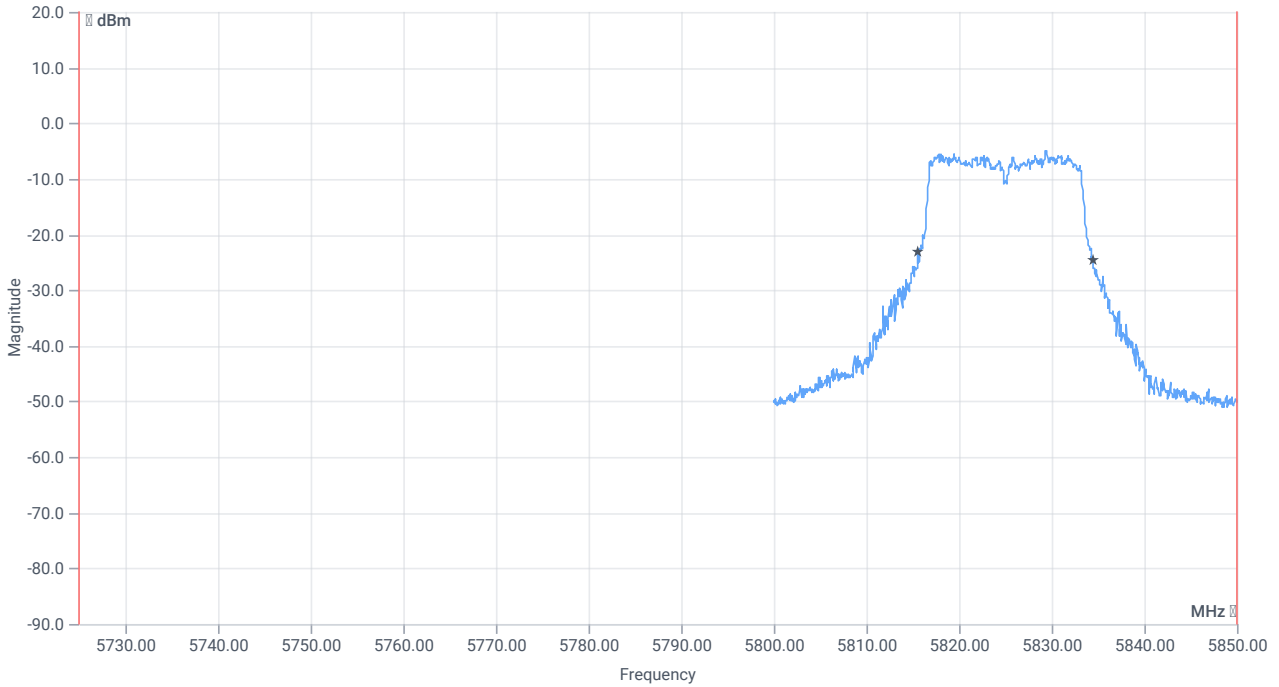

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19	MHz	INFO
T1 20dB	5725.000000	--	5815.5000	MHz	PASS
T2 20dB	--	5850.000000	5834.5000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:07:01
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.34	dBm	INFO
Ref. frequency	--	--	5781.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.66 10.41 15
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

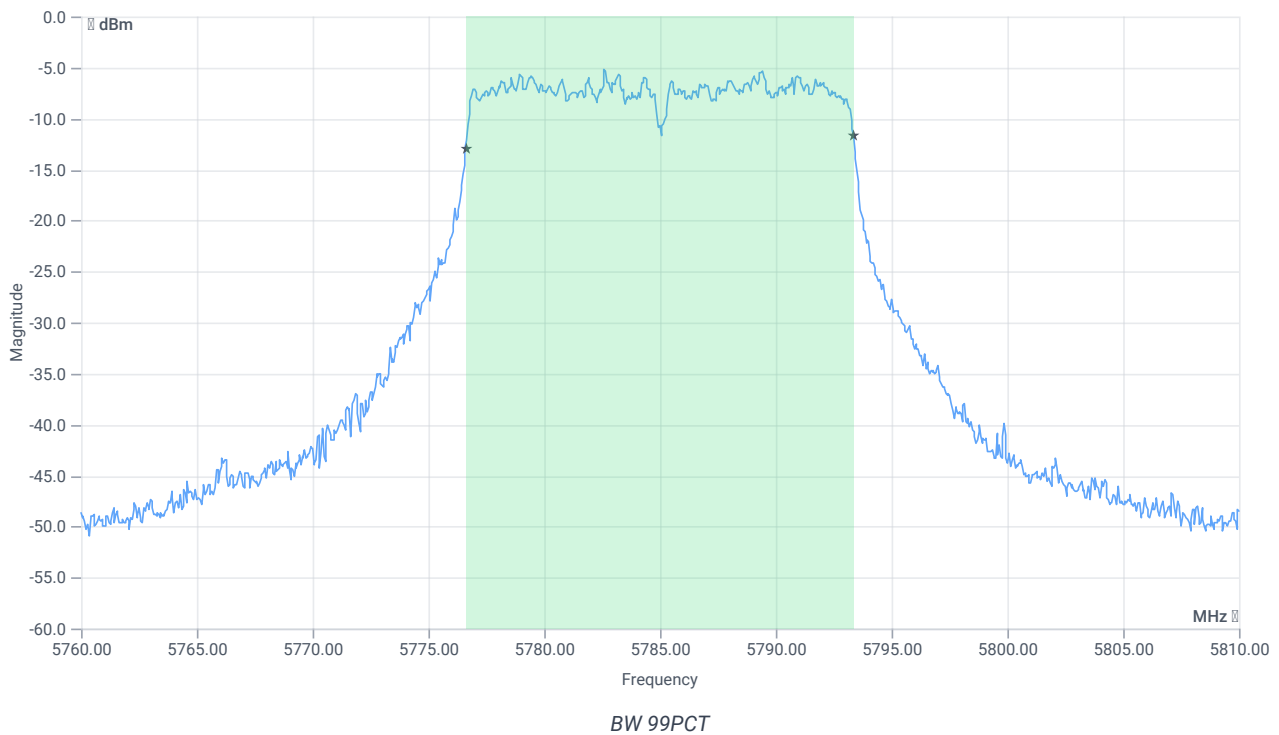


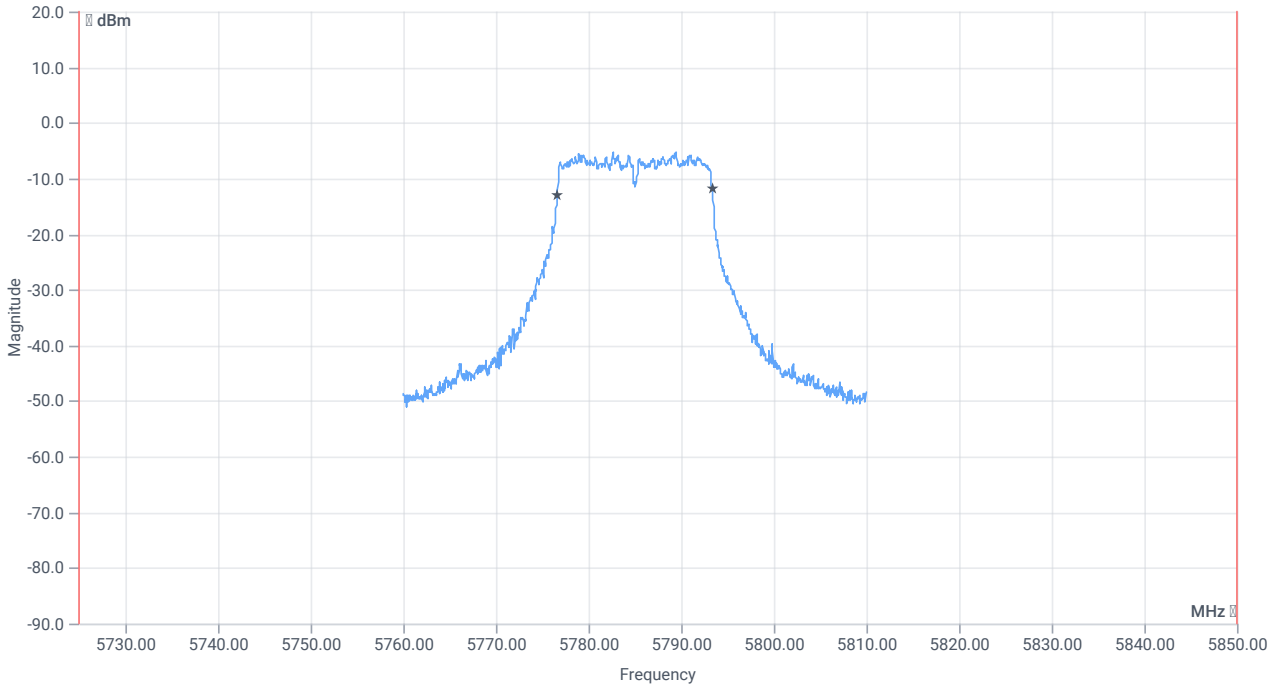


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.733	MHz	INFO
T1 99%	5725.000000	--	5776.6084	MHz	PASS
T2 99%	--	5850.000000	5793.3417	MHz	PASS

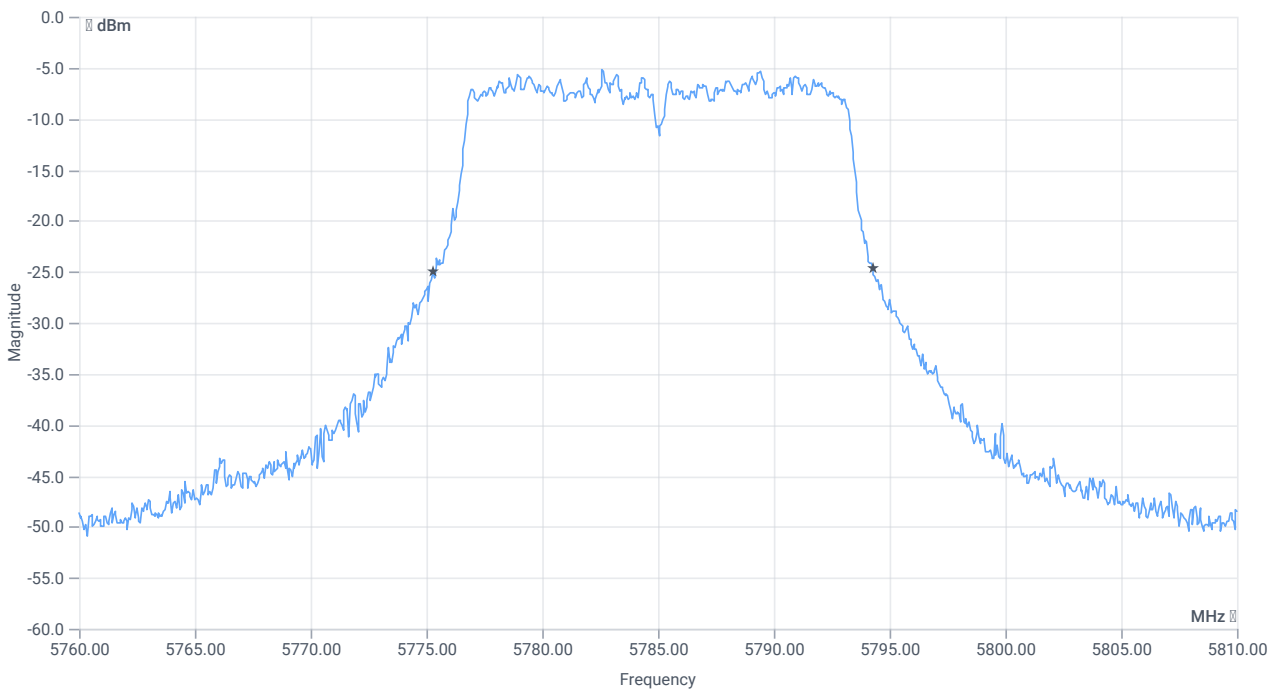

BW 20dB

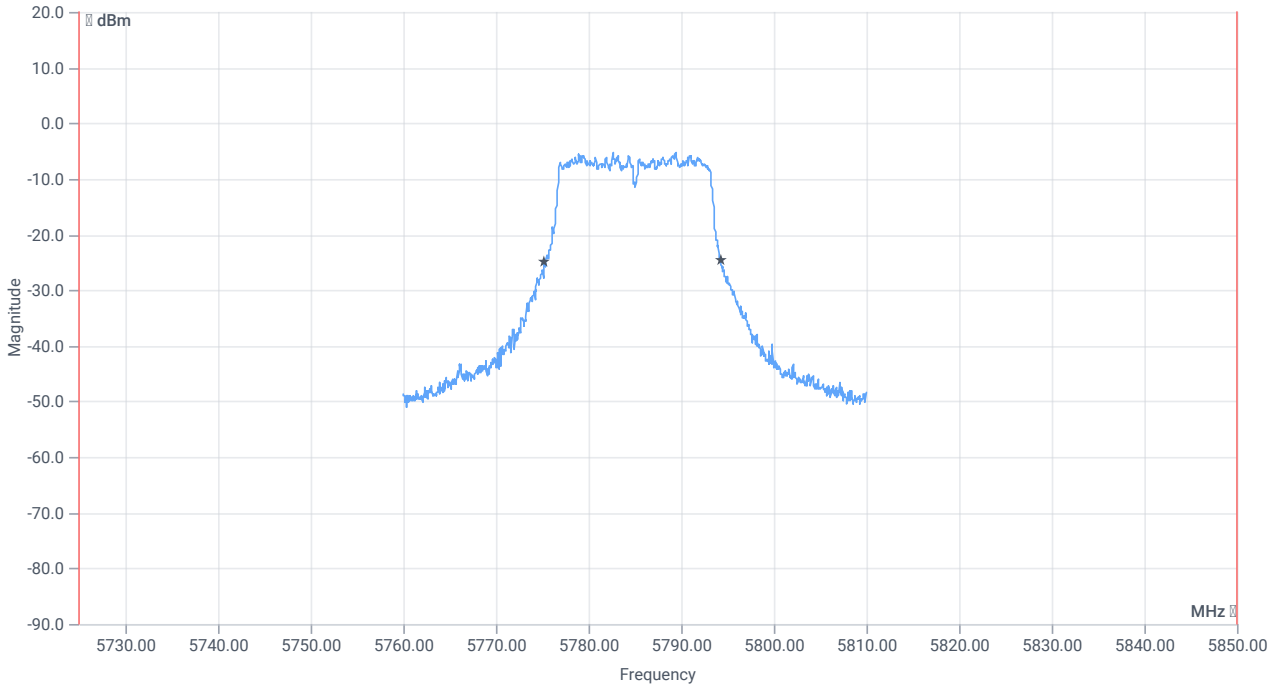

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19	MHz	INFO
T1 20dB	5725.000000	--	5775.2500	MHz	PASS
T2 20dB	--	5850.000000	5794.2500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:59:38
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.74	dBm	INFO
Ref. frequency	--	--	5780.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.74 10.38 15
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

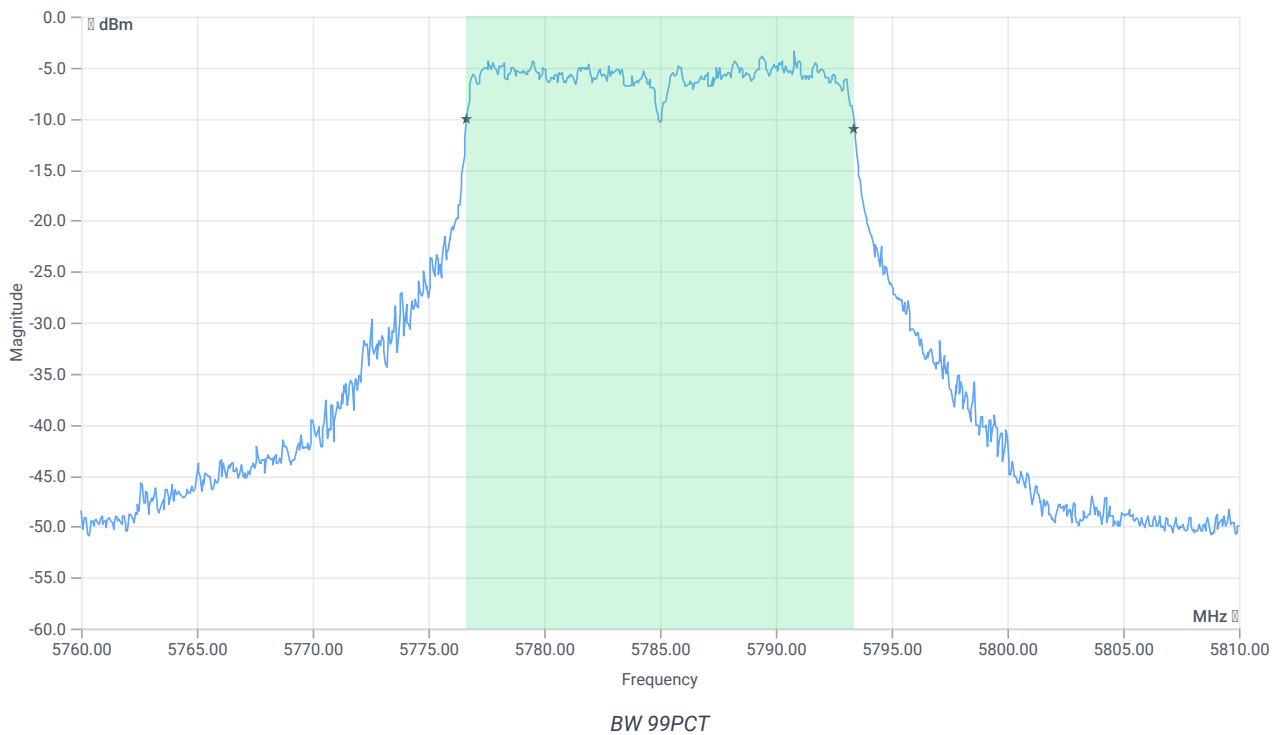


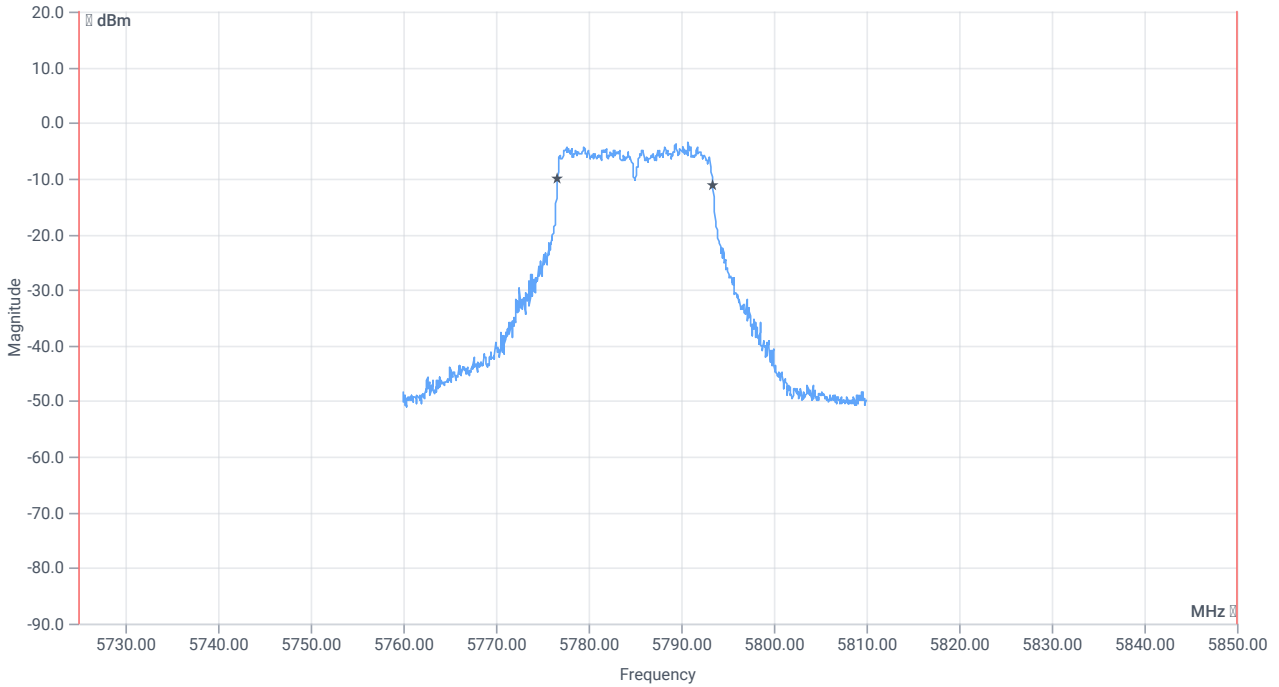


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.733	MHz	INFO
T1 99%	5725.000000	--	5776.6583	MHz	PASS
T2 99%	--	5850.000000	5793.3916	MHz	PASS

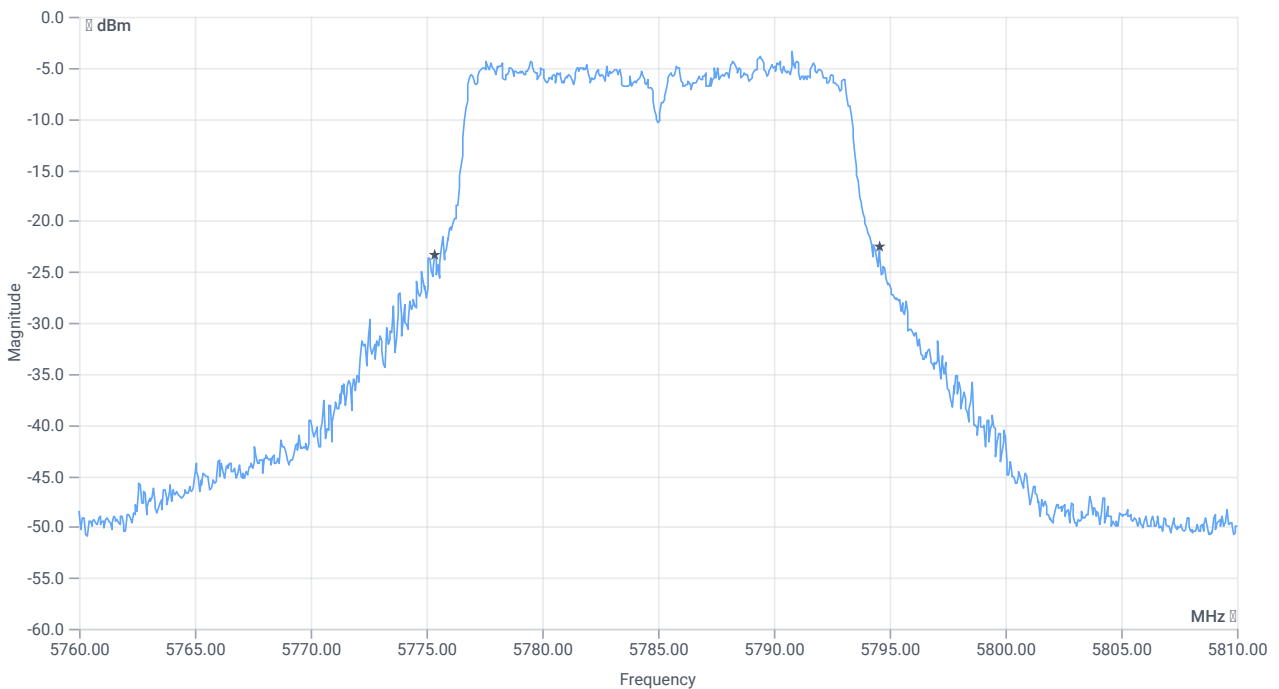

BW 20dB

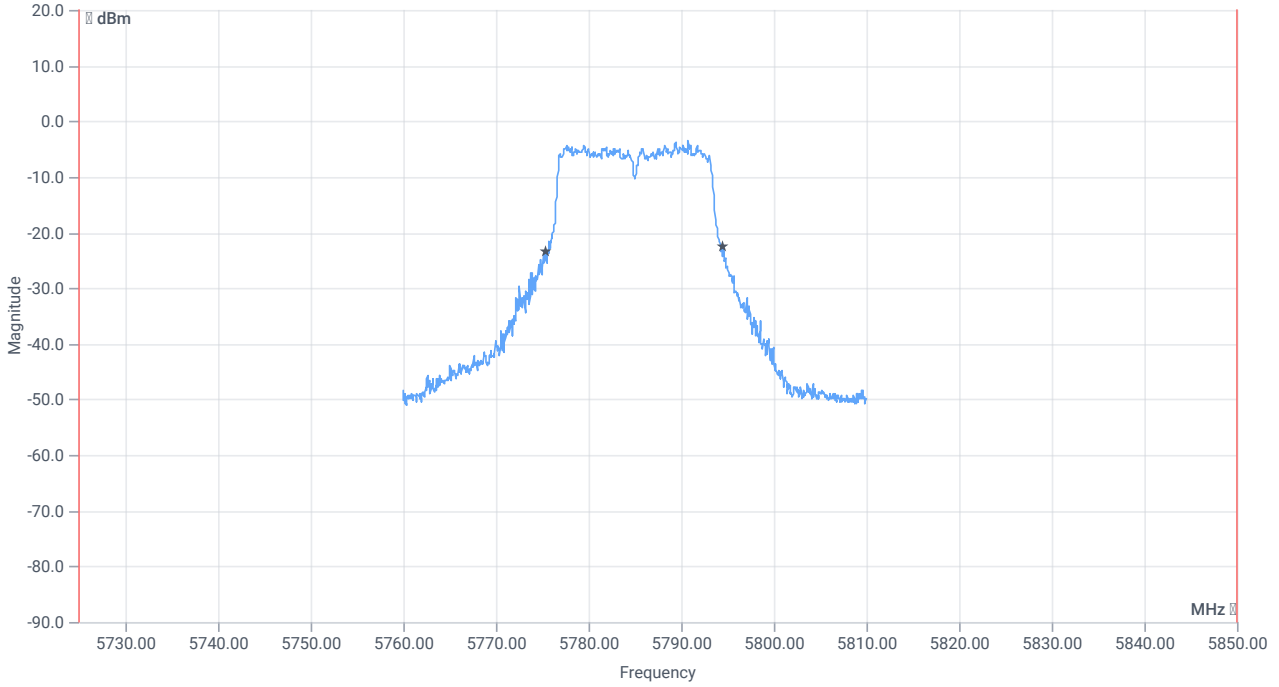

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	19.2	MHz	INFO
T1 20dB	5725.000000	--	5775.3500	MHz	PASS
T2 20dB	--	5850.000000	5794.5500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:50:54
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.27	dBm	INFO
Ref. frequency	--	--	5739.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.73 10.38 15
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

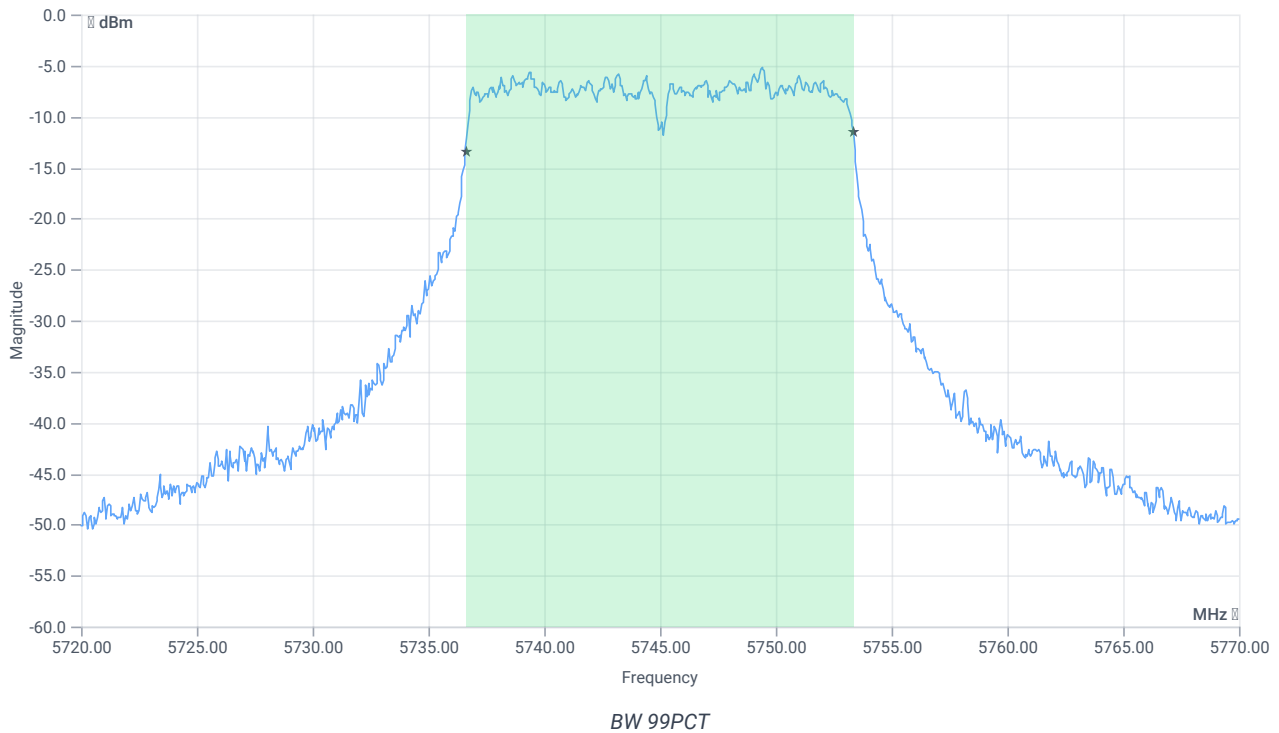


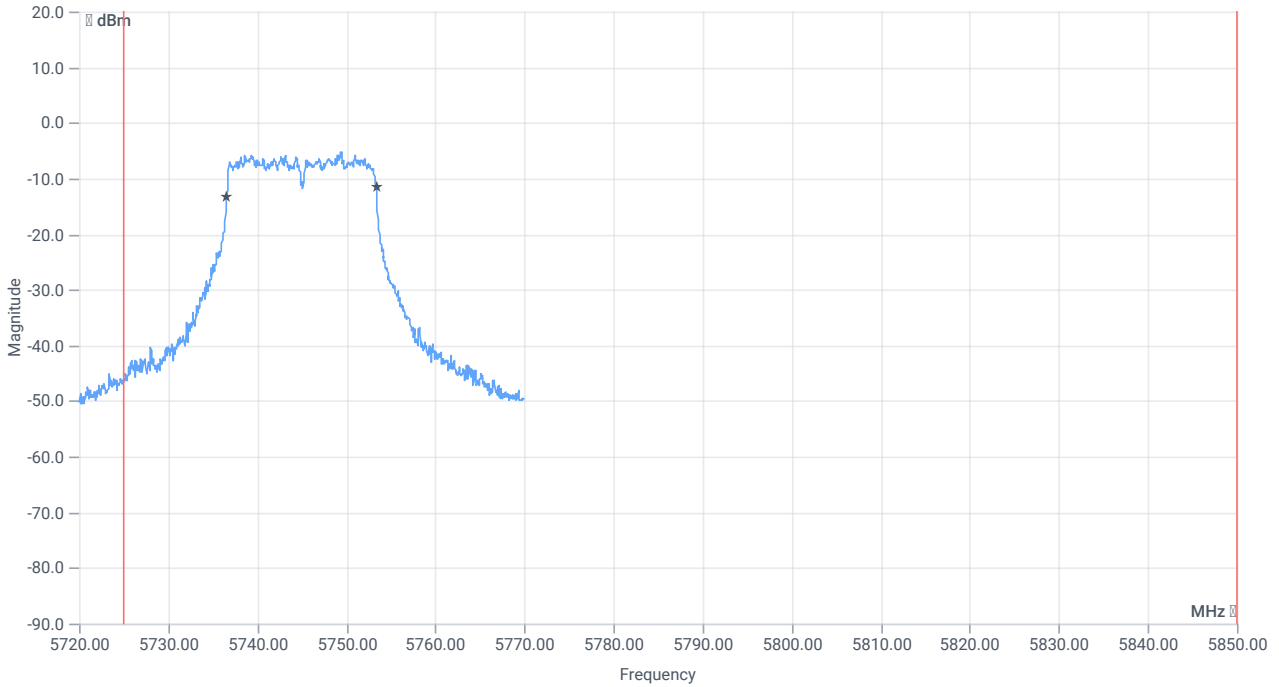


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.733	MHz	INFO
T1 99%	5725.000000	--	5736.6084	MHz	PASS
T2 99%	--	5850.000000	5753.3417	MHz	PASS

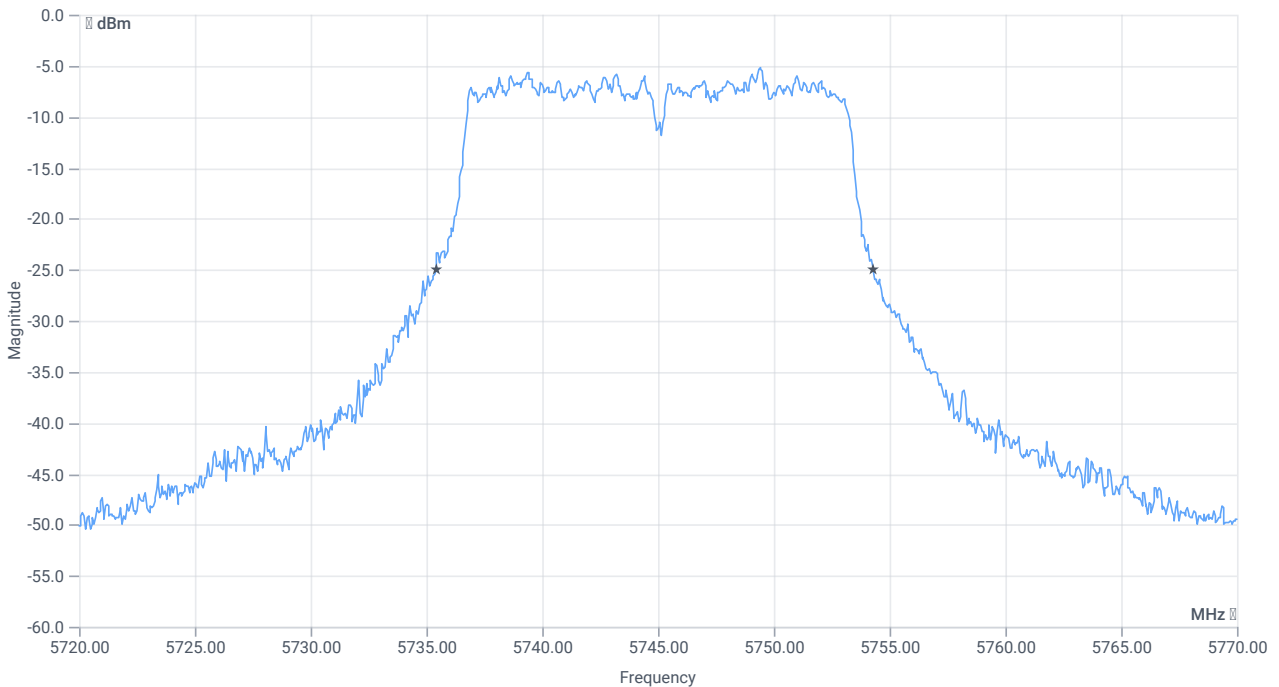

BW 20dB

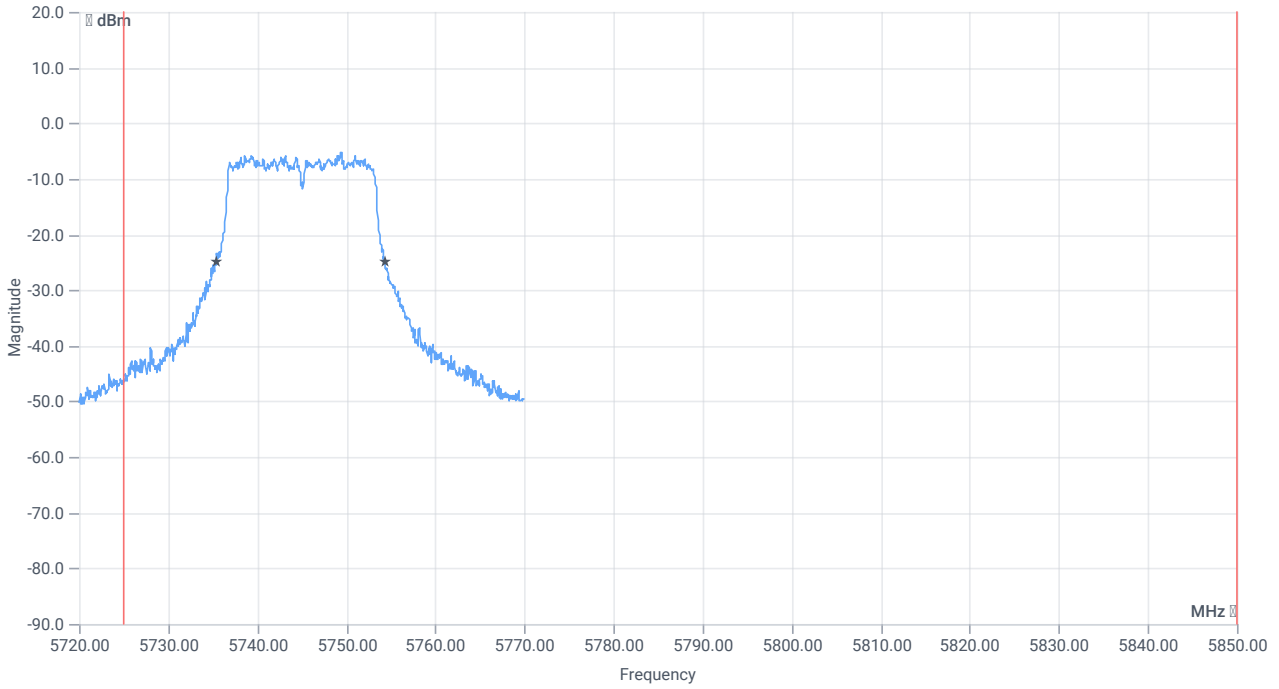

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	18.9	MHz	INFO
T1 20dB	5725.000000	---	5735.4000	MHz	PASS
T2 20dB	---	5850.000000	5754.3000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:43:36
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.26	dBm	INFO
Ref. frequency	--	--	5742.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.26 10.36 15
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

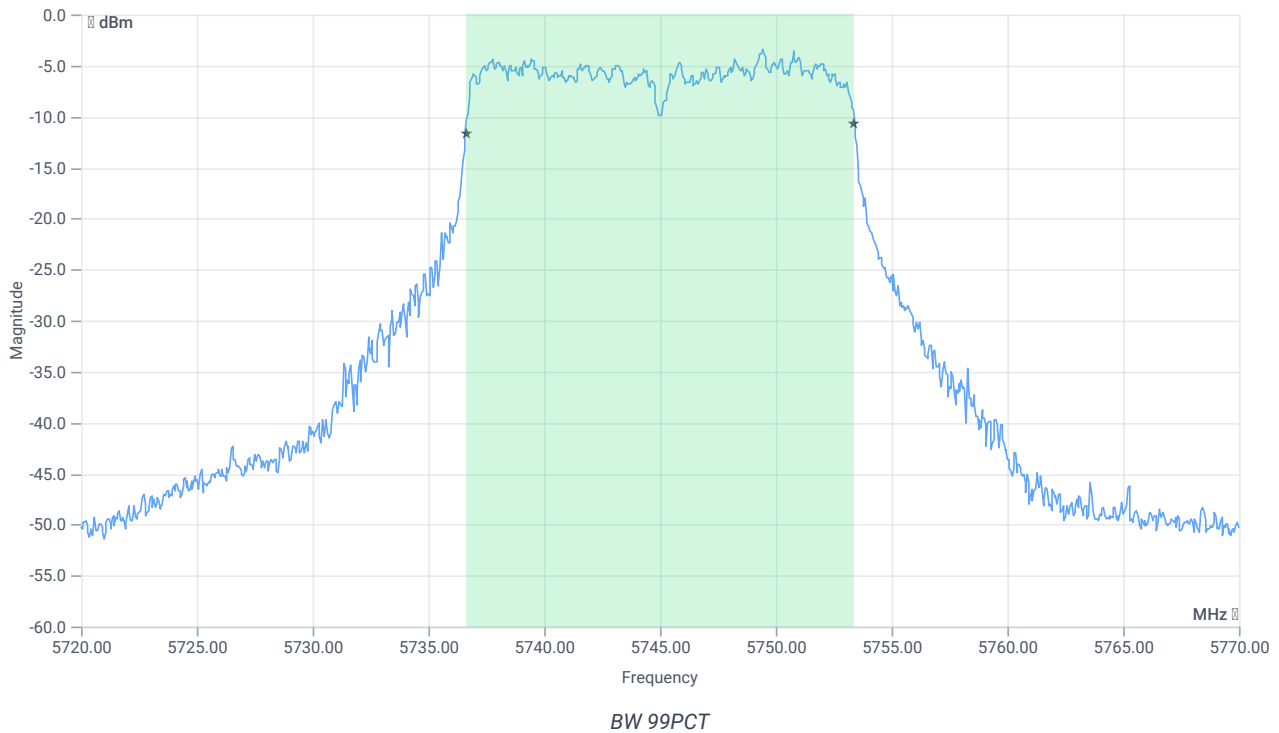


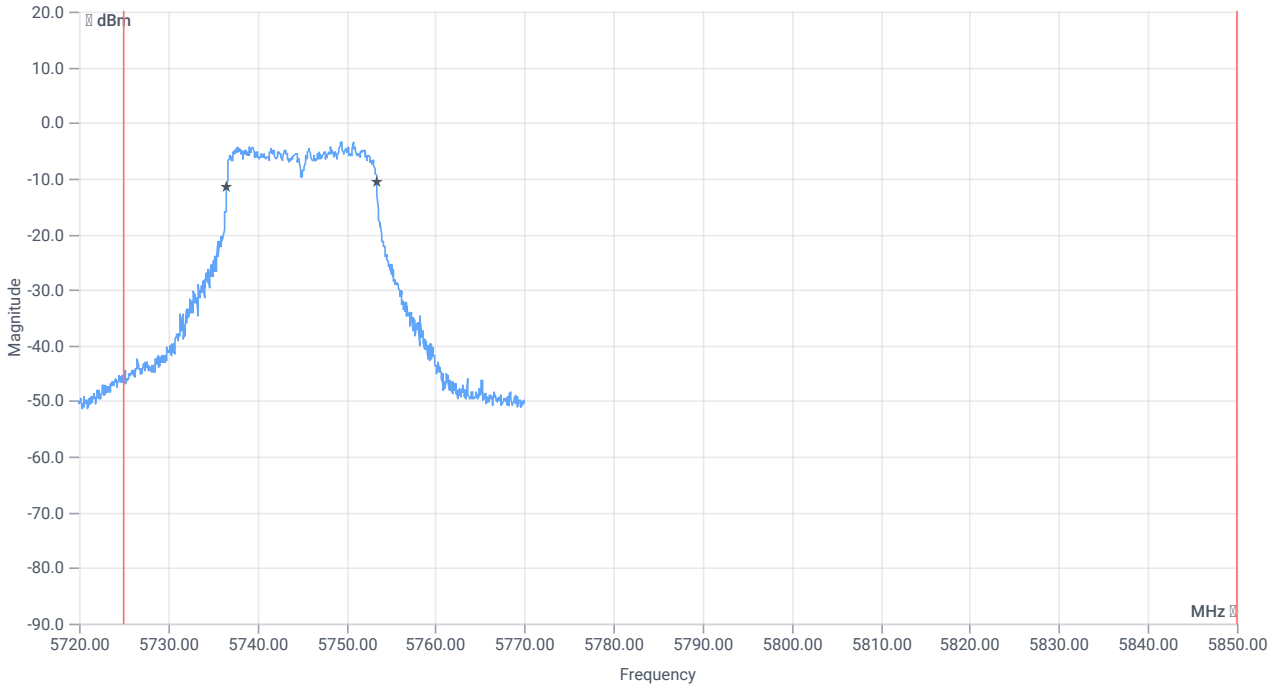


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	5725.000000	--	5736.6084	MHz	PASS
T2 99%	--	5850.000000	5753.3916	MHz	PASS

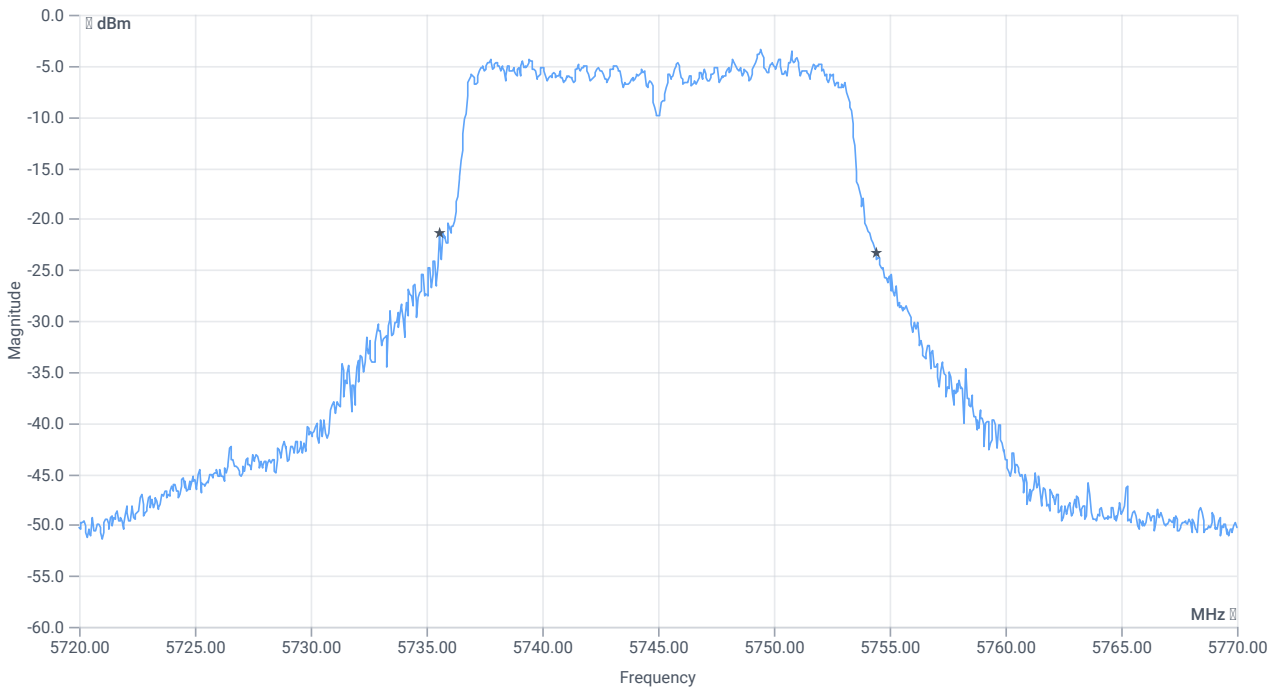

BW 20dB

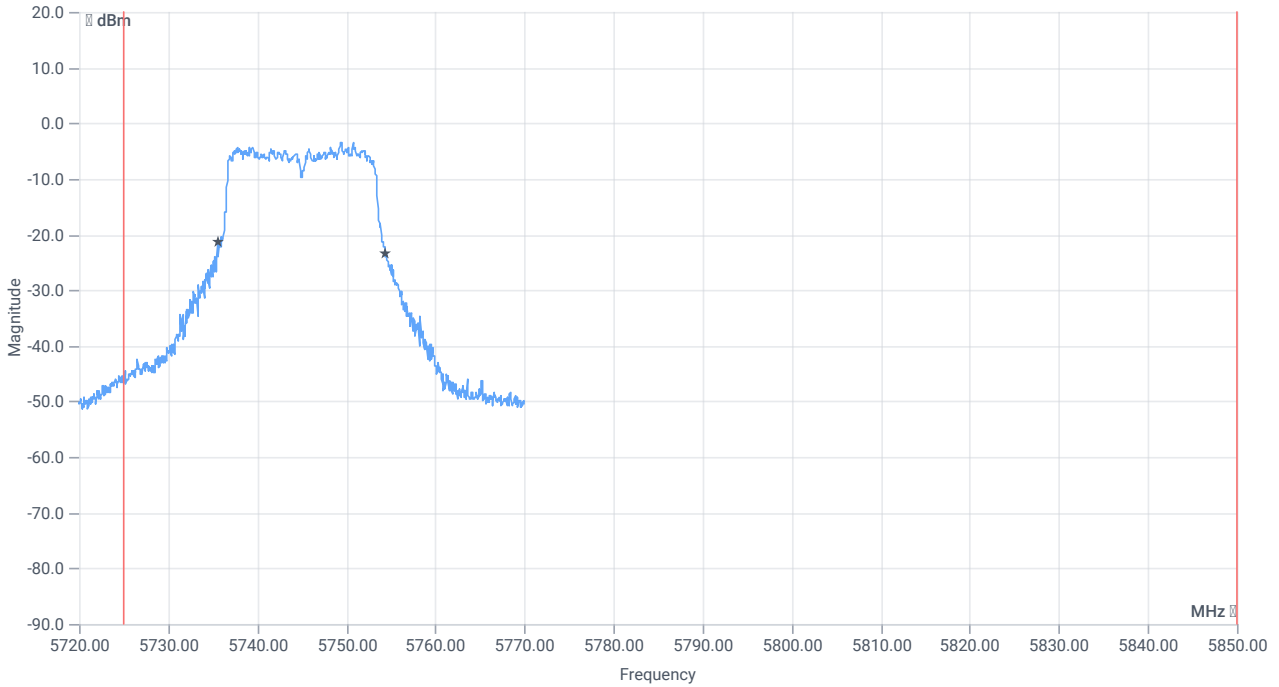

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	18.85	MHz	INFO
T1 20dB	5725.000000	---	5735.5500	MHz	PASS
T2 20dB	---	5850.000000	5754.4000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:36:15
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.63	dBm	INFO
Ref. frequency	--	--	5243.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.63 9.93 20
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

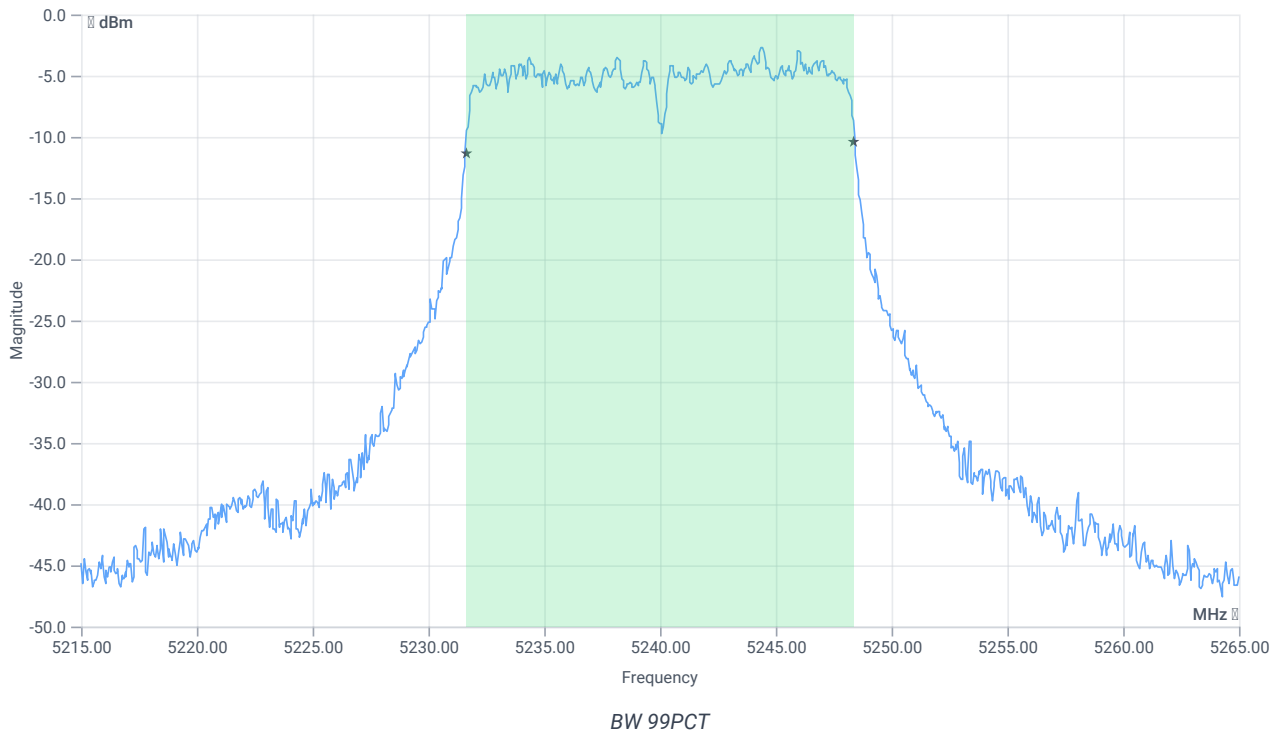


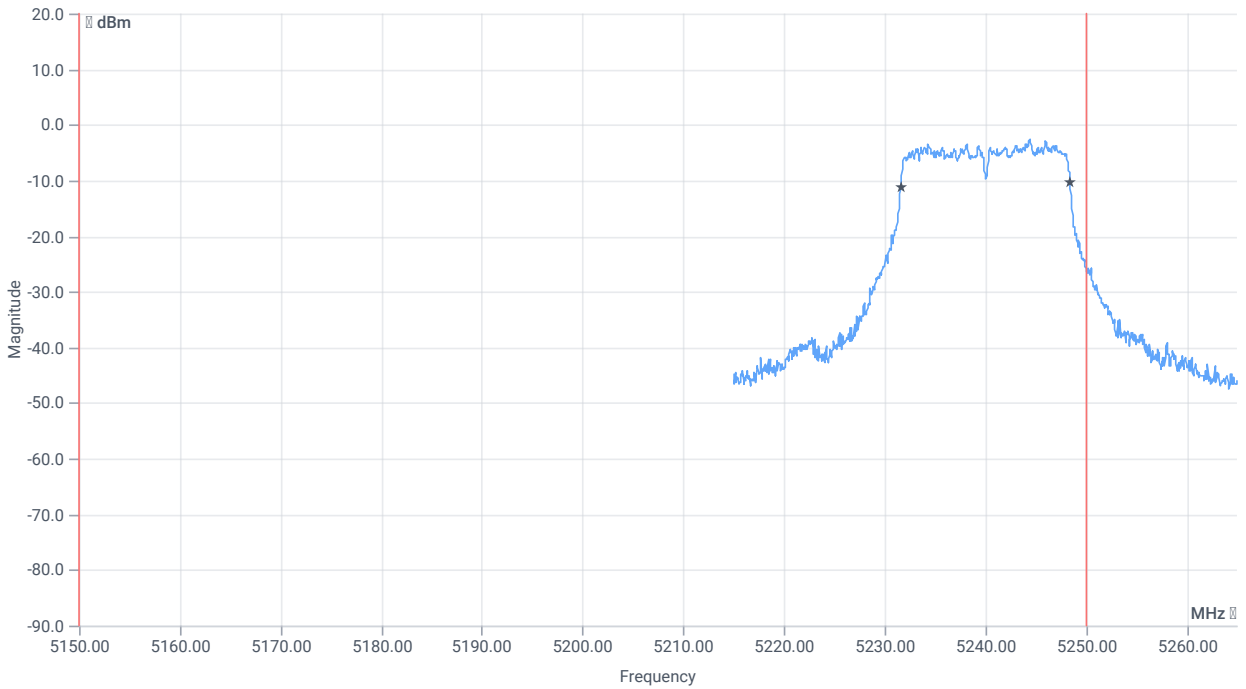


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	5150.000000	--	5231.6084	MHz	PASS
T2 99%	--	5250.000000	5248.3916	MHz	PASS

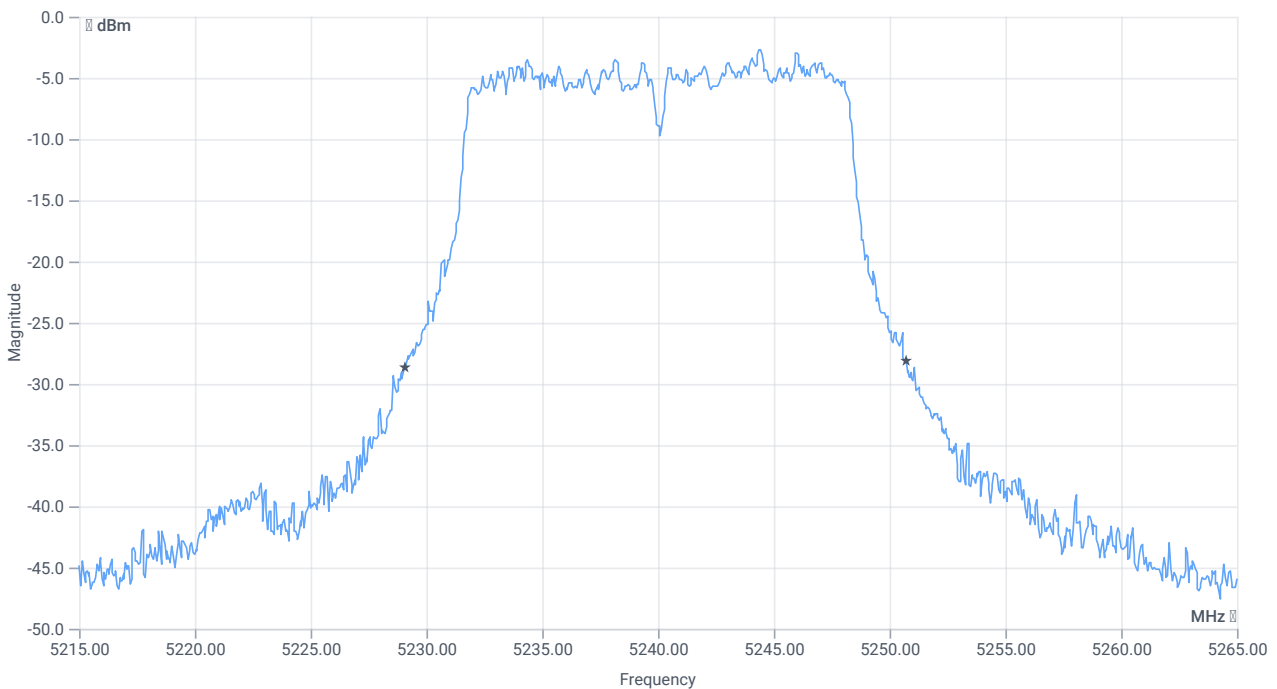

BW 26dB

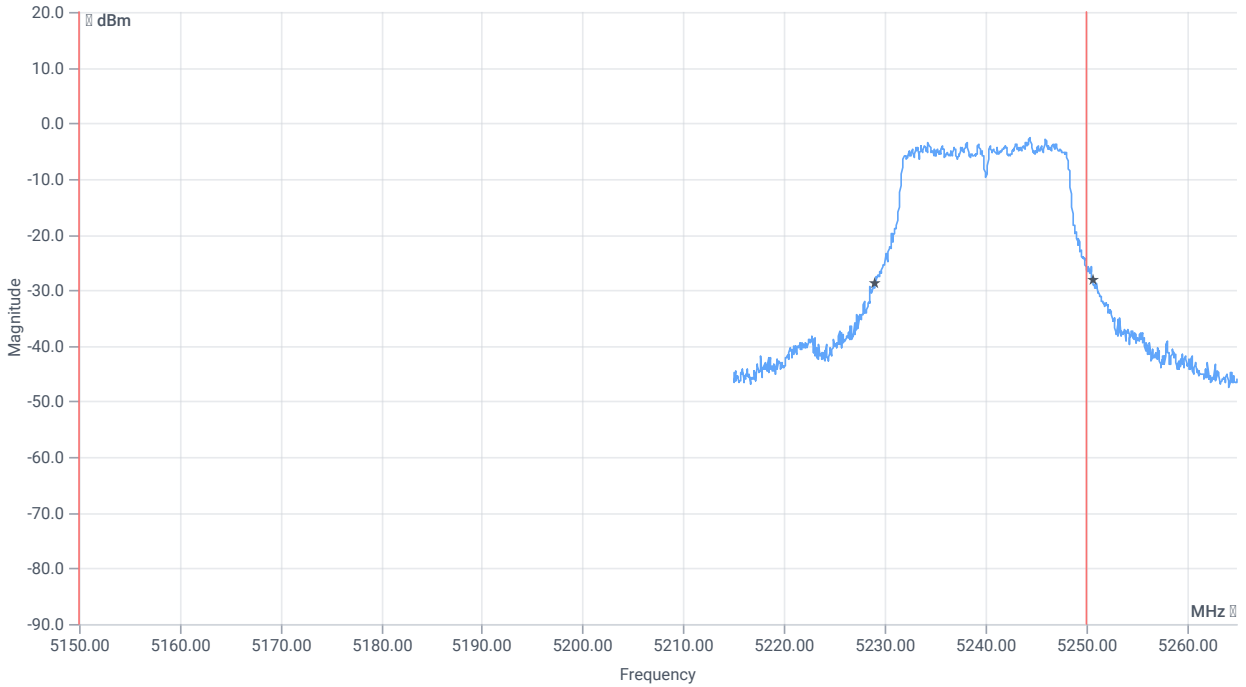

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.65	MHz	INFO
T1 26dB	5150.000000	---	5229.0500	MHz	PASS
T2 26dB	---	5250.000000	5250.7000	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:32:18
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.50	dBm	INFO
Ref. frequency	--	--	5234.410	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.50 9.92 20
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

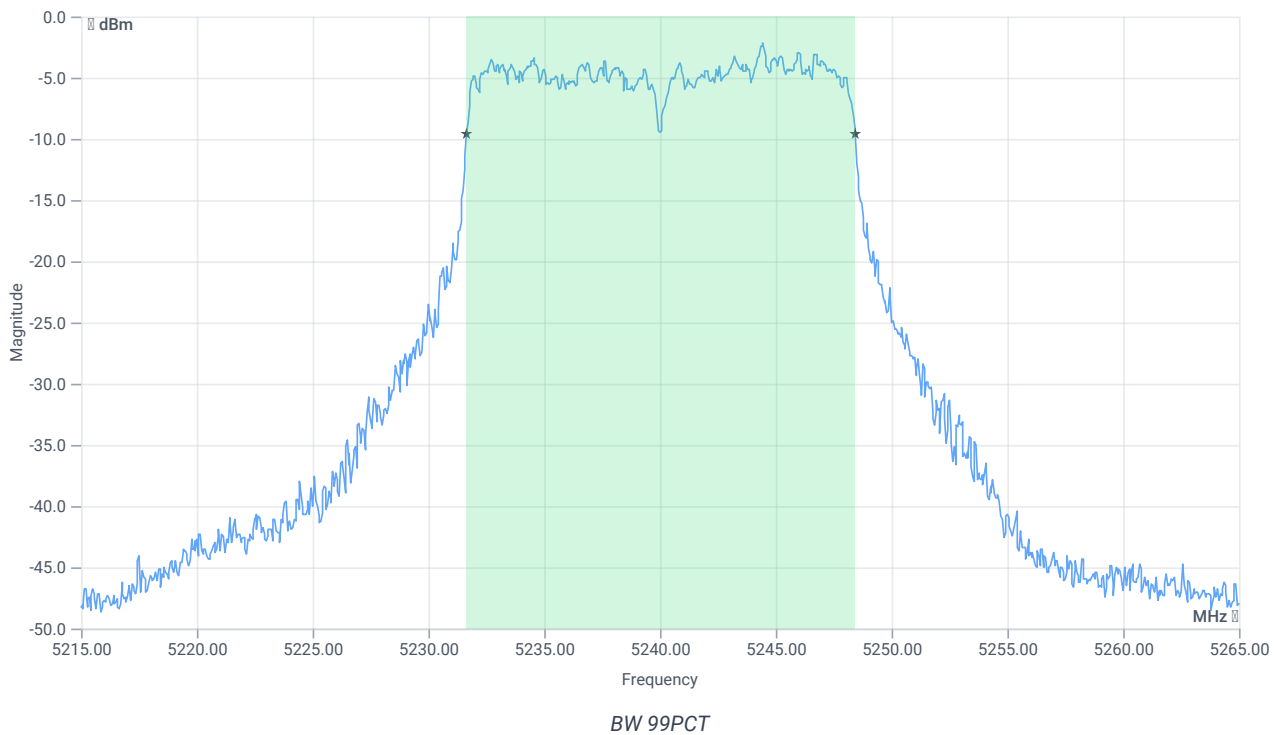


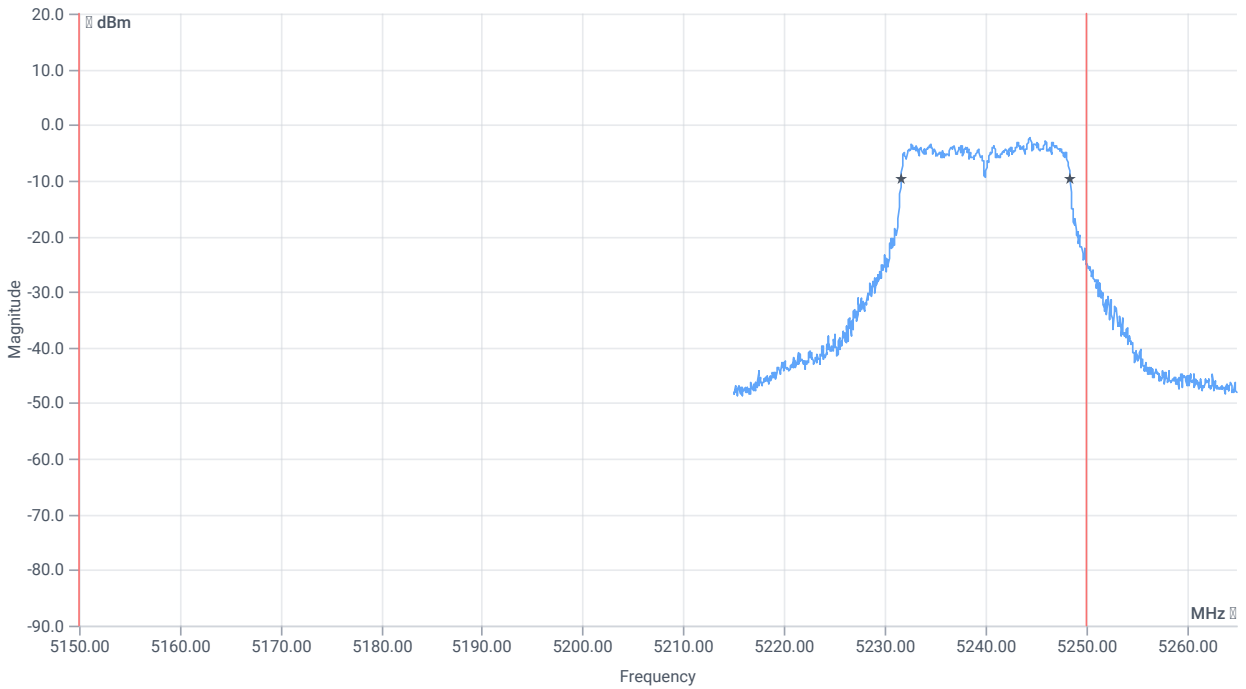


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	5150.000000	--	5231.6583	MHz	PASS
T2 99%	--	5250.000000	5248.4416	MHz	PASS

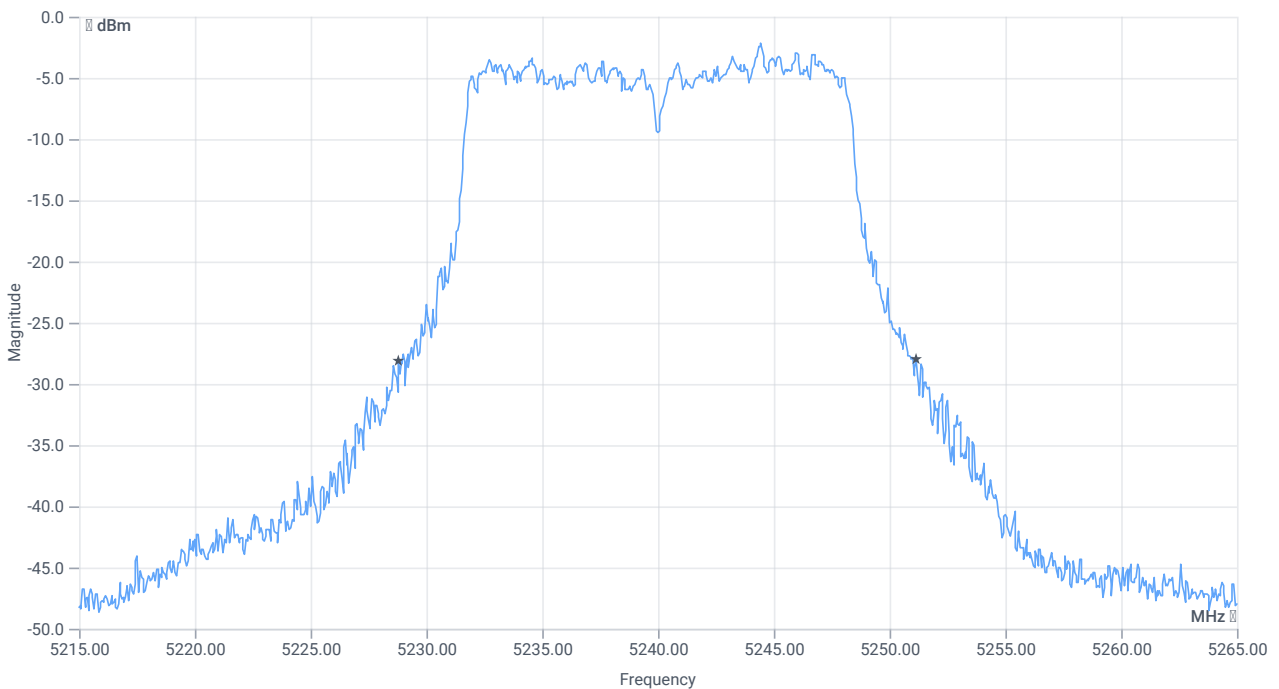

BW 26dB

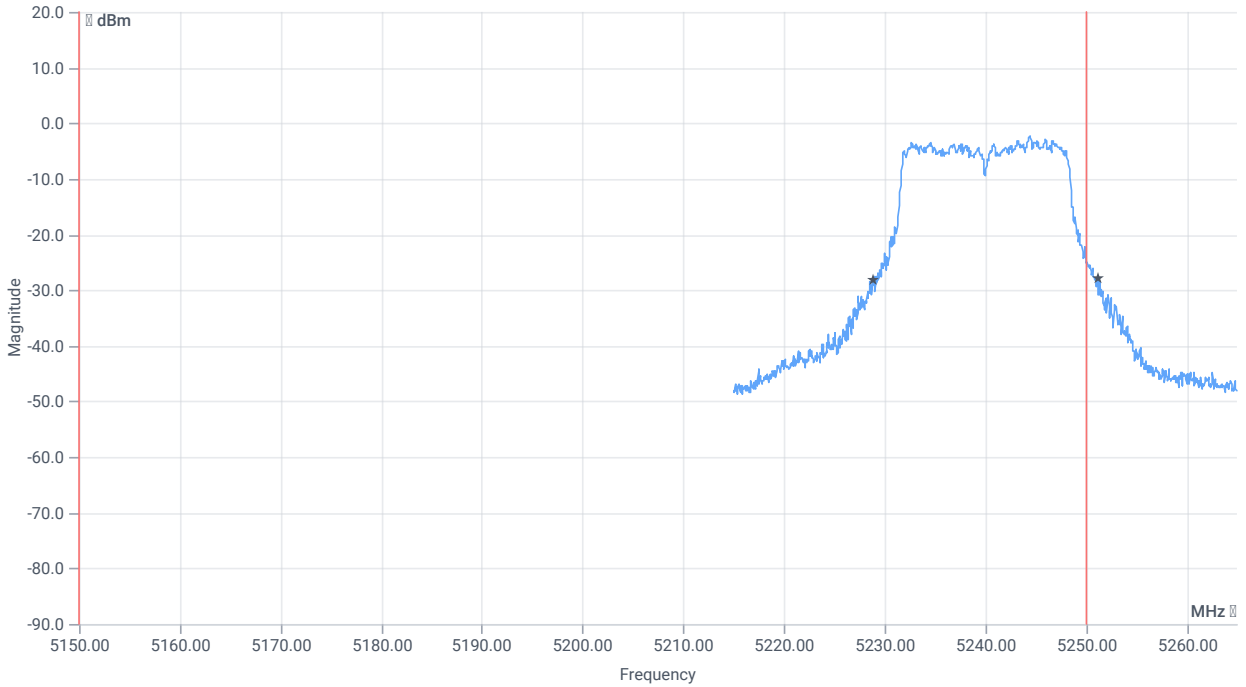

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.35	MHz	INFO
T1 26dB	5150.000000	---	5228.8000	MHz	PASS
T2 26dB	---	5250.000000	5251.1500	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:26:51
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.20	dBm	INFO
Ref. frequency	--	--	5196.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.20 10.08 15
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

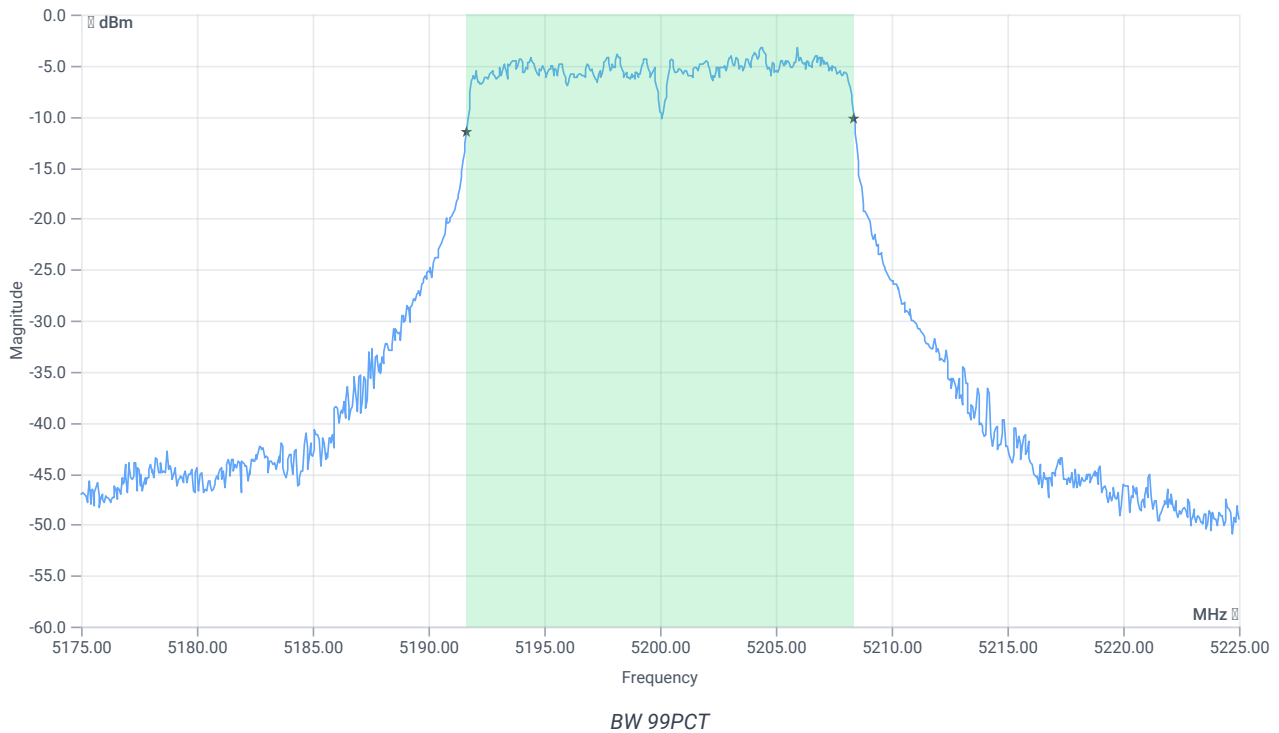


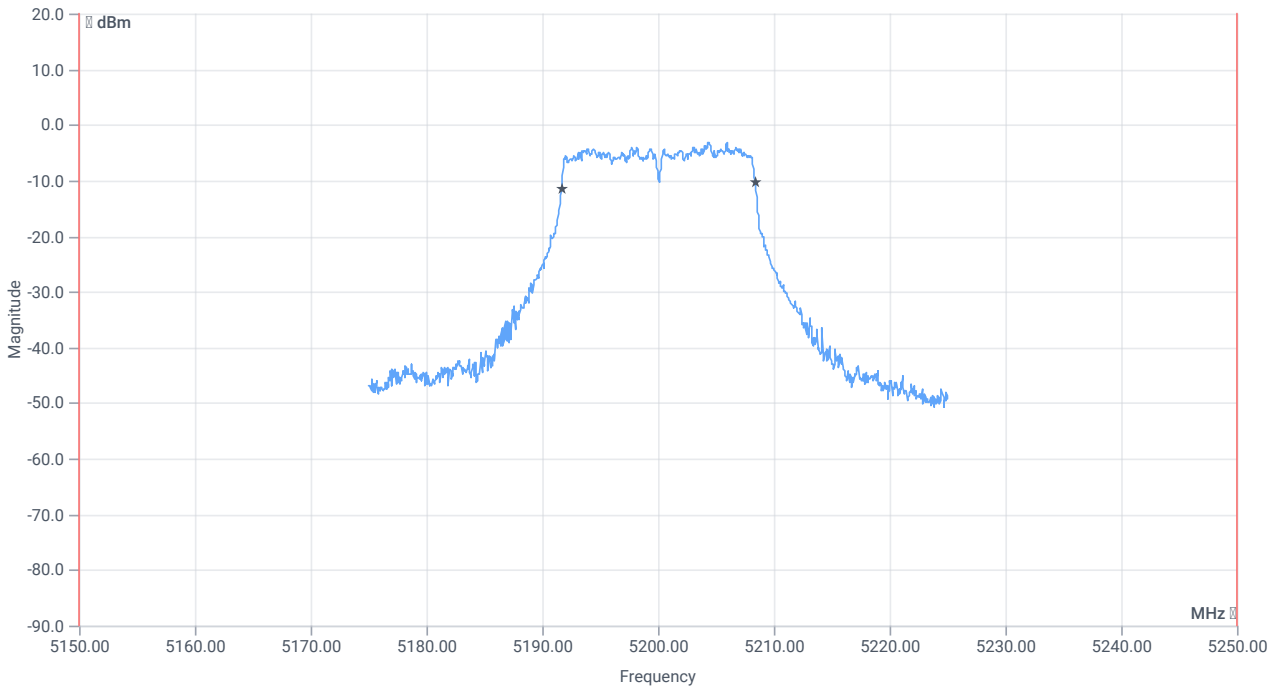


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.733	MHz	INFO
T1 99%	5150.000000	--	5191.6583	MHz	PASS
T2 99%	--	5250.000000	5208.3916	MHz	PASS

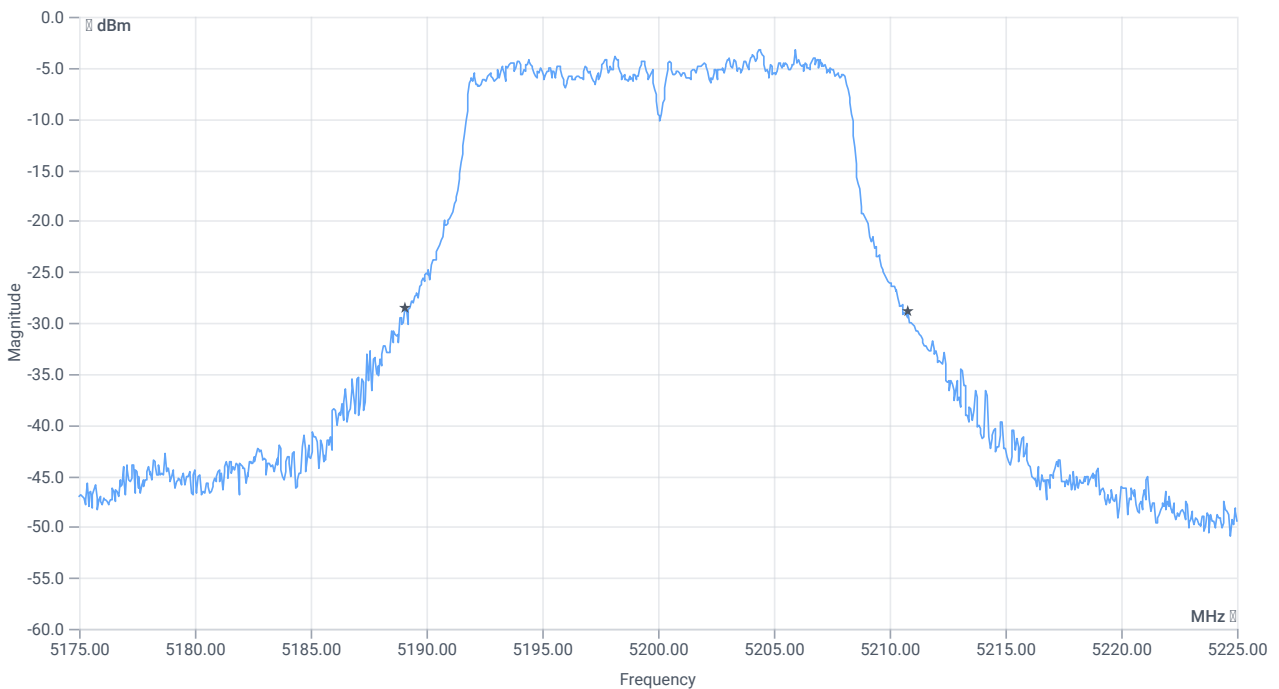

BW 26dB

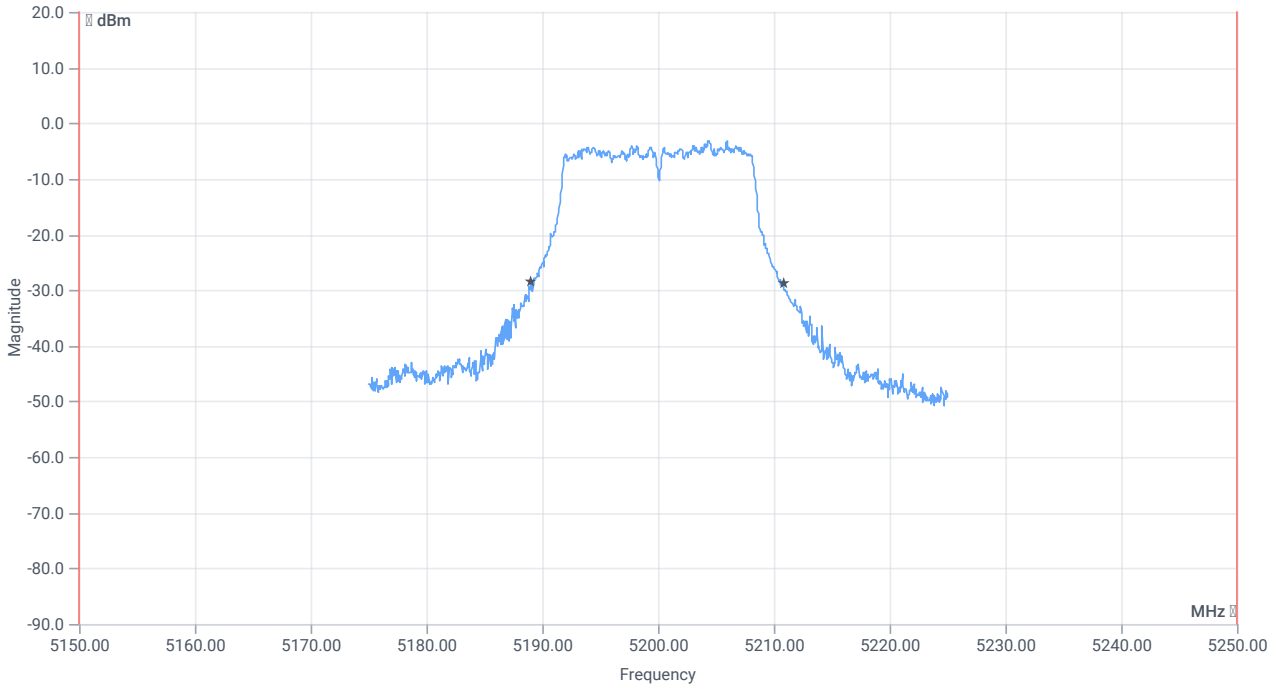

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	21.75	MHz	INFO
T1 26dB	5150.000000	--	5189.0500	MHz	PASS
T2 26dB	--	5250.000000	5210.8000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:22:45
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.49	dBm	INFO
Ref. frequency	--	--	5207.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.49 10.05 20
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

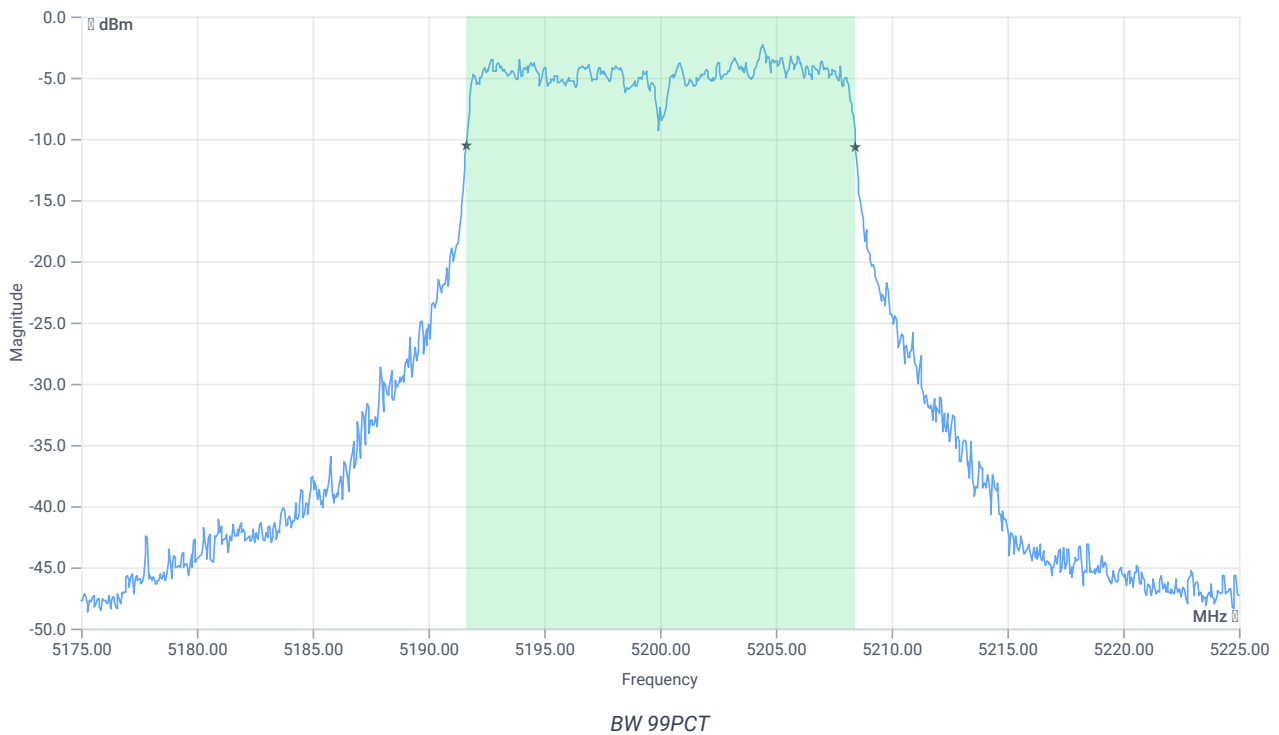


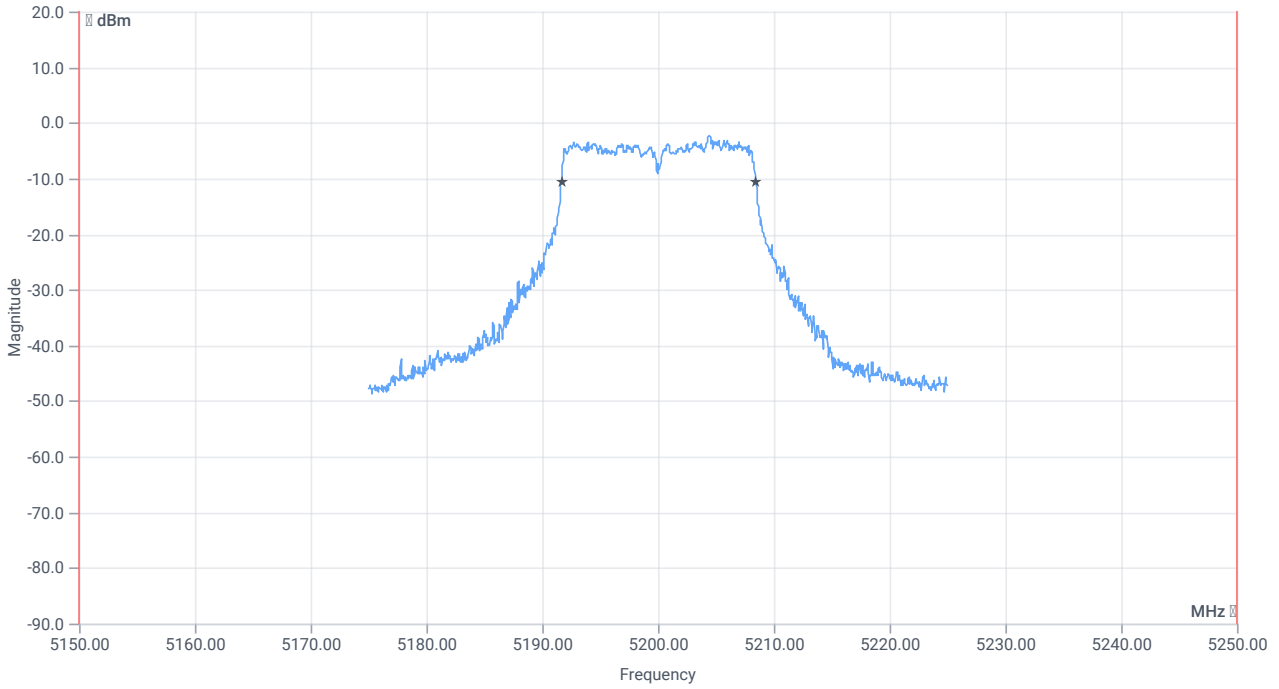


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	5150.000000	--	5191.6583	MHz	PASS
T2 99%	--	5250.000000	5208.4416	MHz	PASS

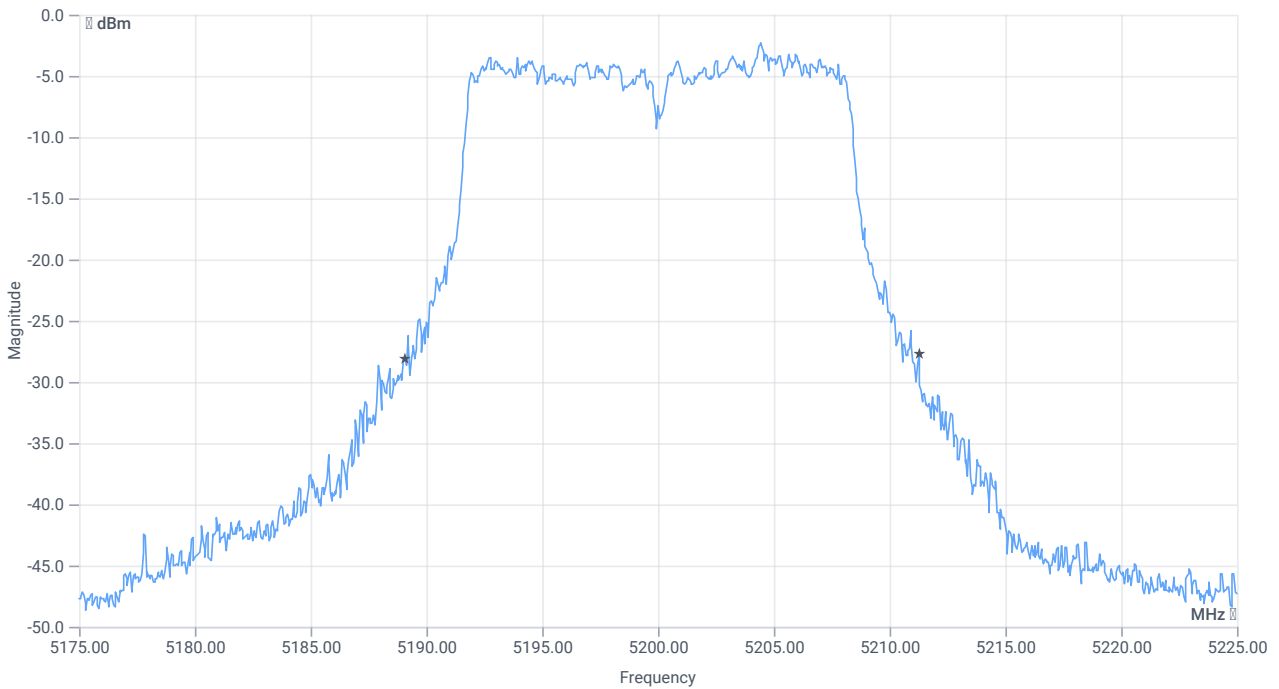

BW 26dB

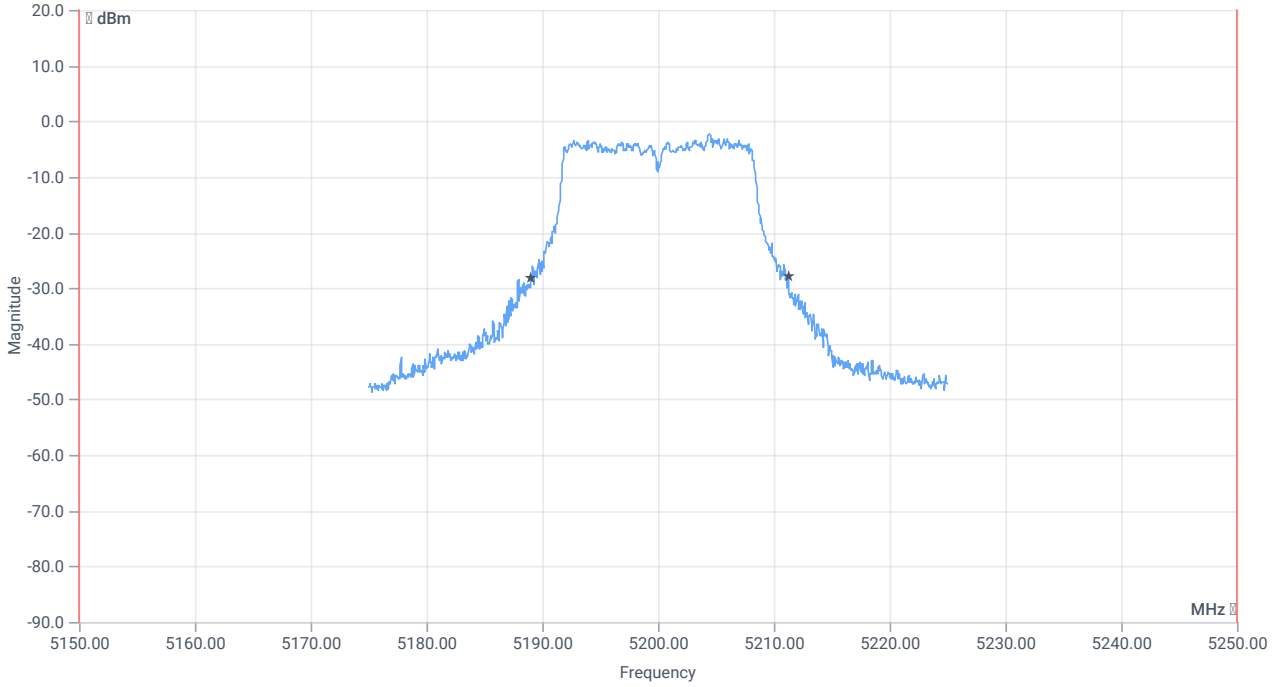

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	22.2	MHz	INFO
T1 26dB	5150.000000	--	5189.0500	MHz	PASS
T2 26dB	--	5250.000000	5211.2500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:17:38
Ambit temp [°C] humidity [rel%]	26.7 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5180 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.80	dBm	INFO
Ref. frequency	--	--	5187.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.80 10.01 15
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

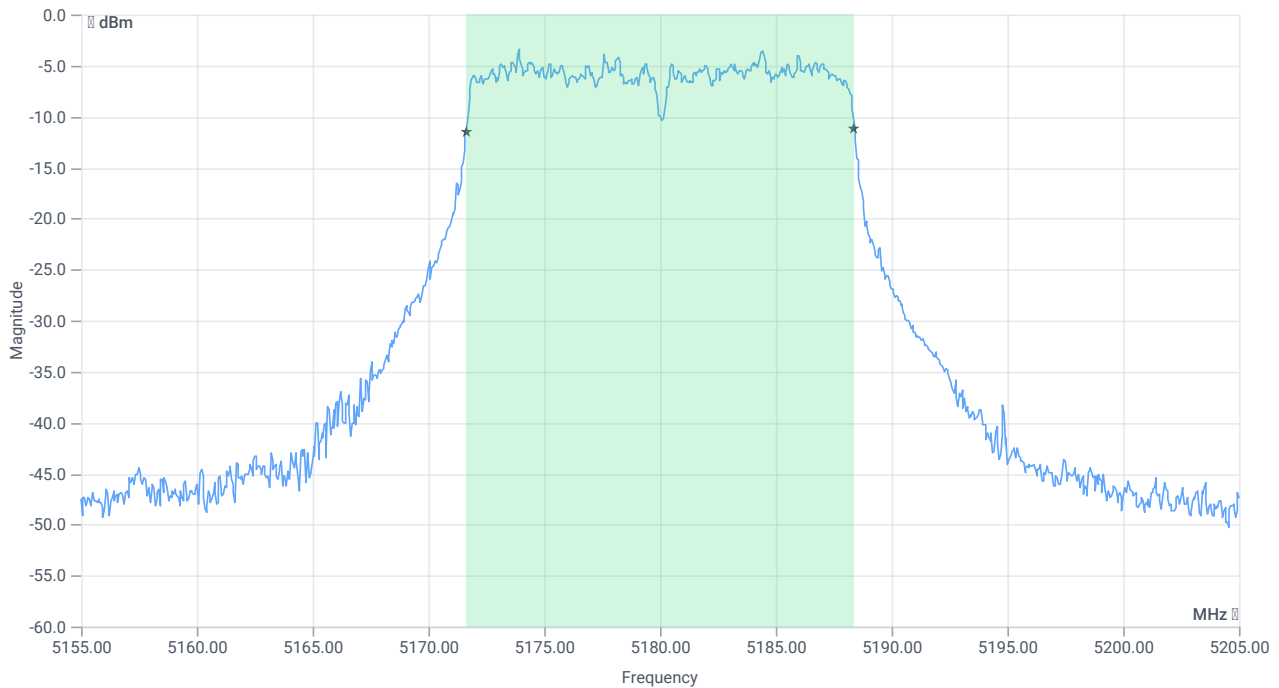


BW 99PCT

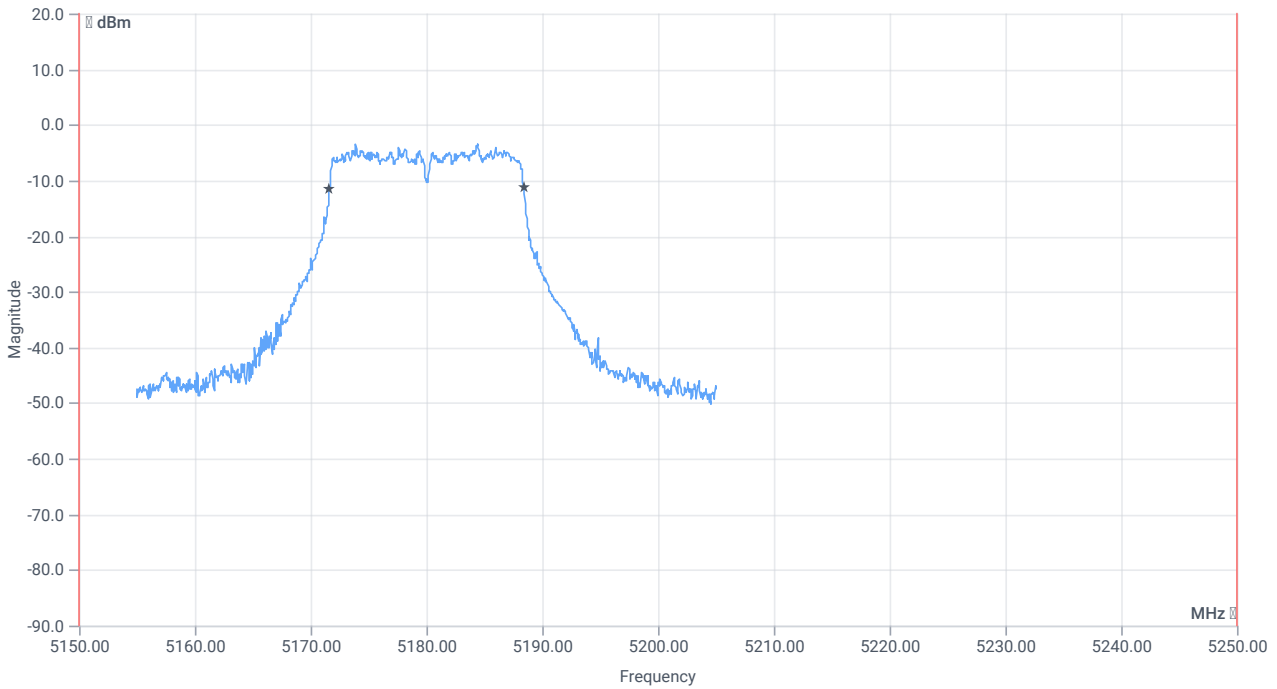


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	5150.000000	--	5171.6084	MHz	PASS
T2 99%	--	5250.000000	5188.3916	MHz	PASS

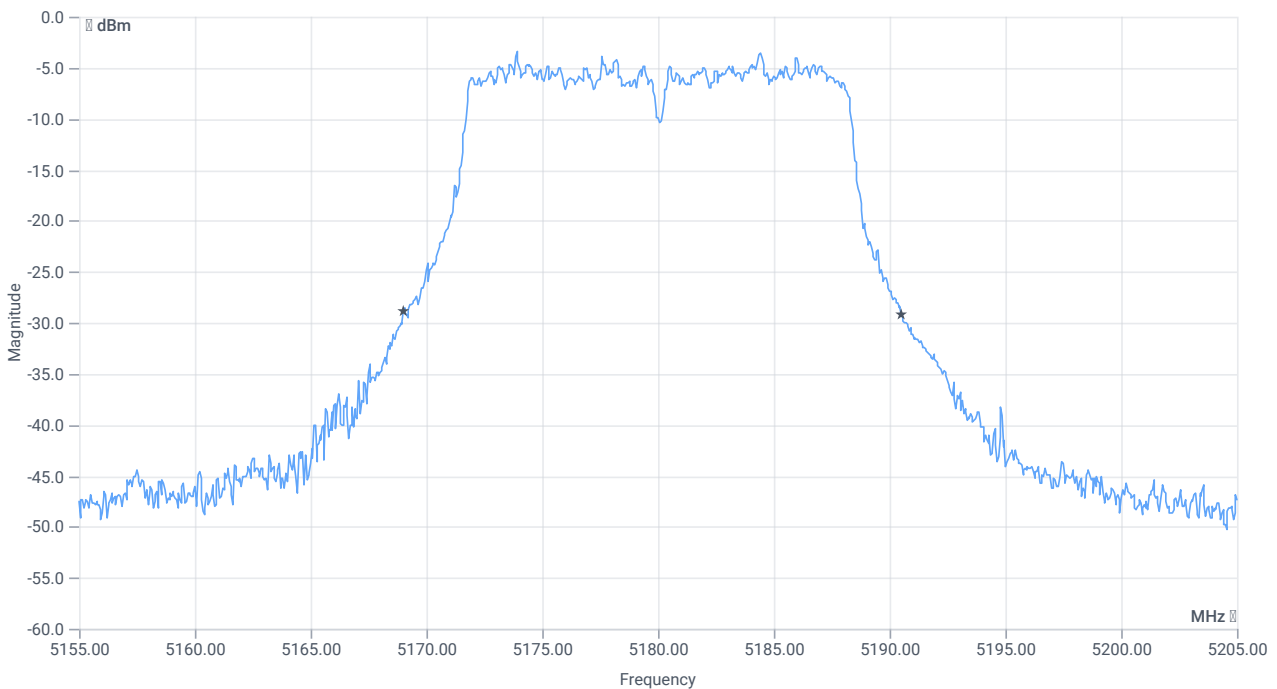

BW 26dB

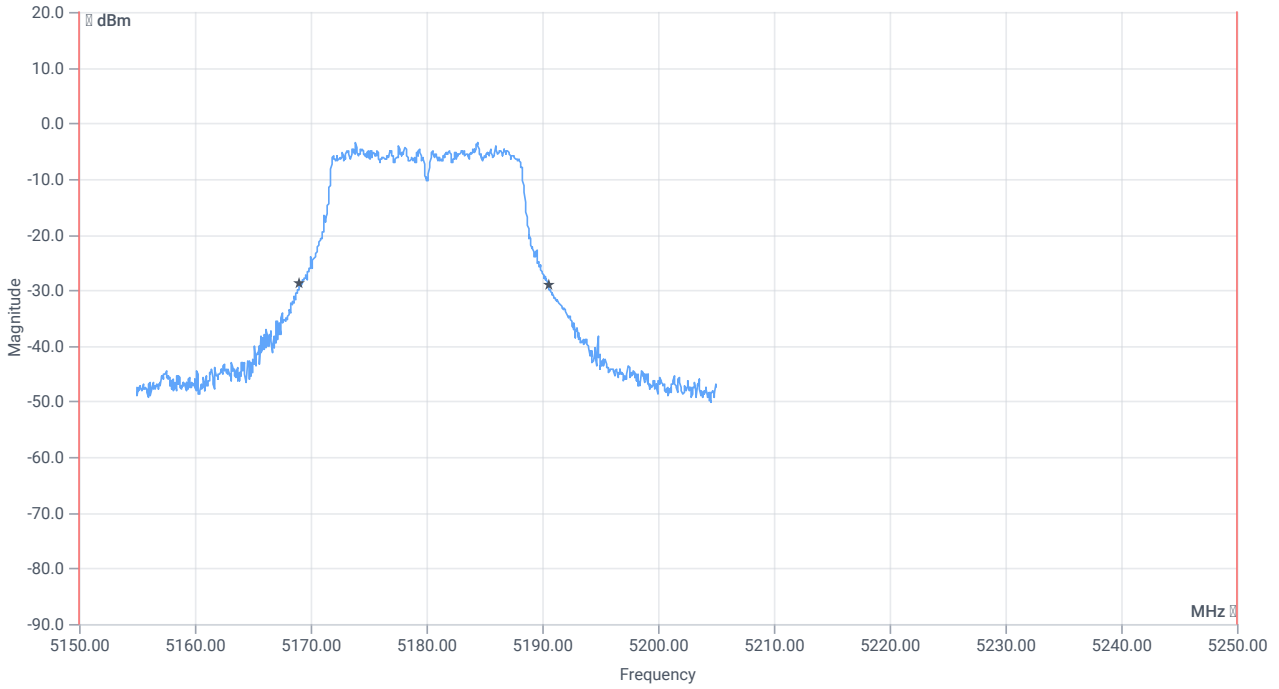

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	21.5	MHz	INFO
T1 26dB	5150.000000	--	5169.0000	MHz	PASS
T2 26dB	--	5250.000000	5190.5000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:13:25
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.30	dBm	INFO
Ref. frequency	--	--	5174.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.30 9.99 15
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

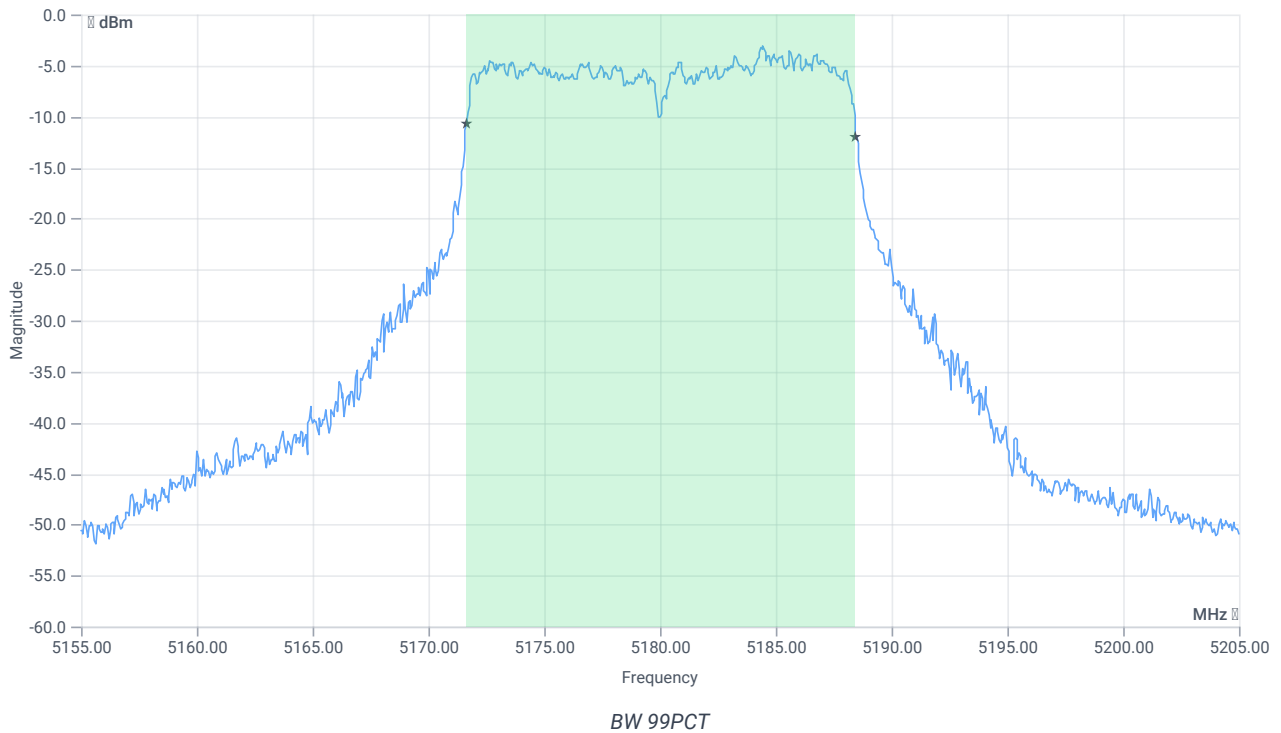


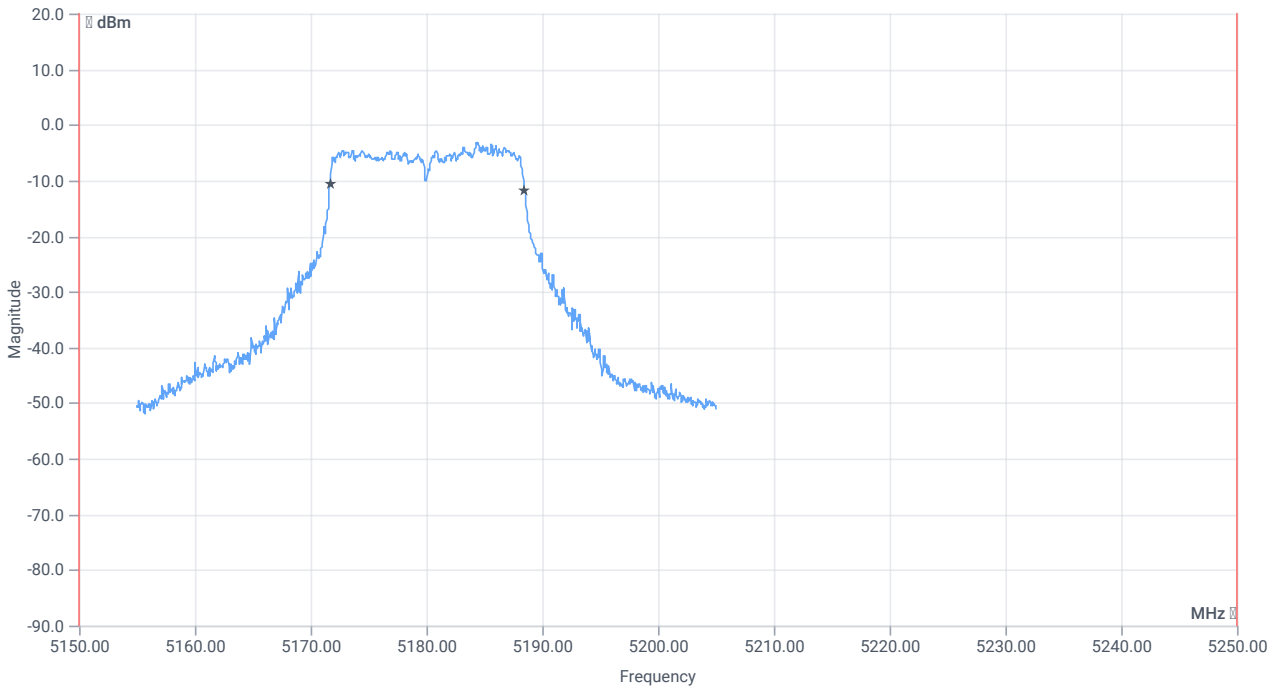


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	5150.000000	--	5171.6583	MHz	PASS
T2 99%	--	5250.000000	5188.4416	MHz	PASS

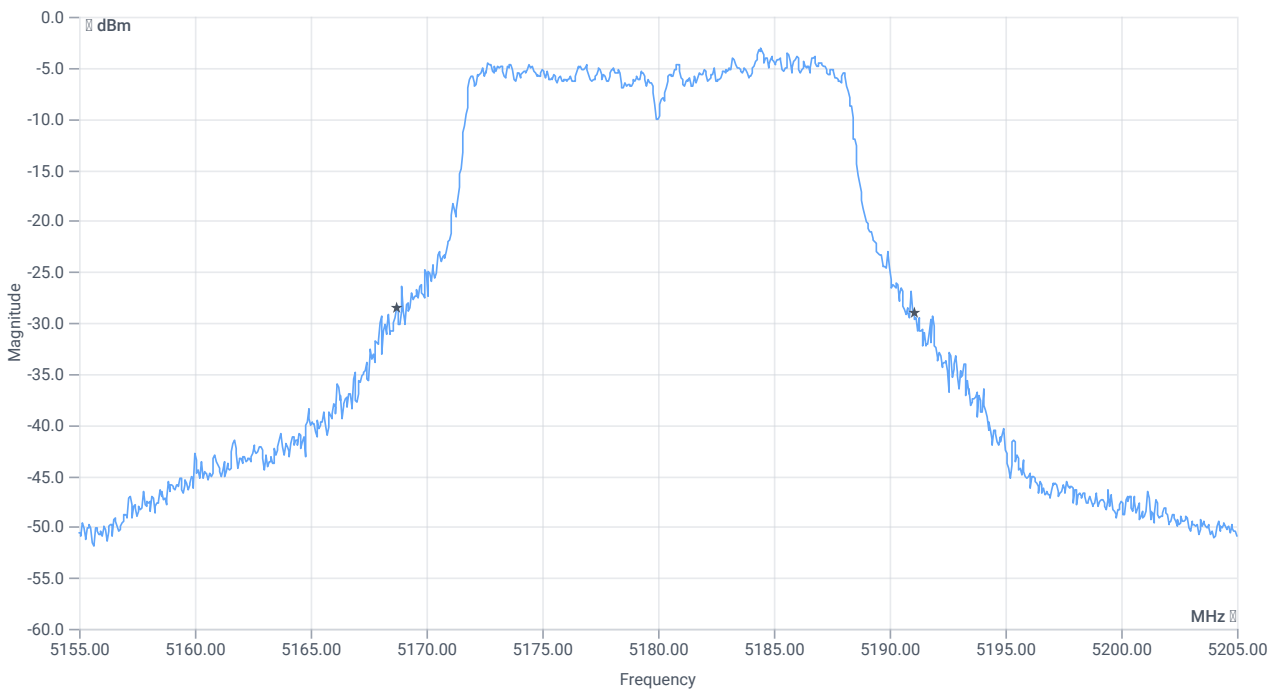

BW 26dB

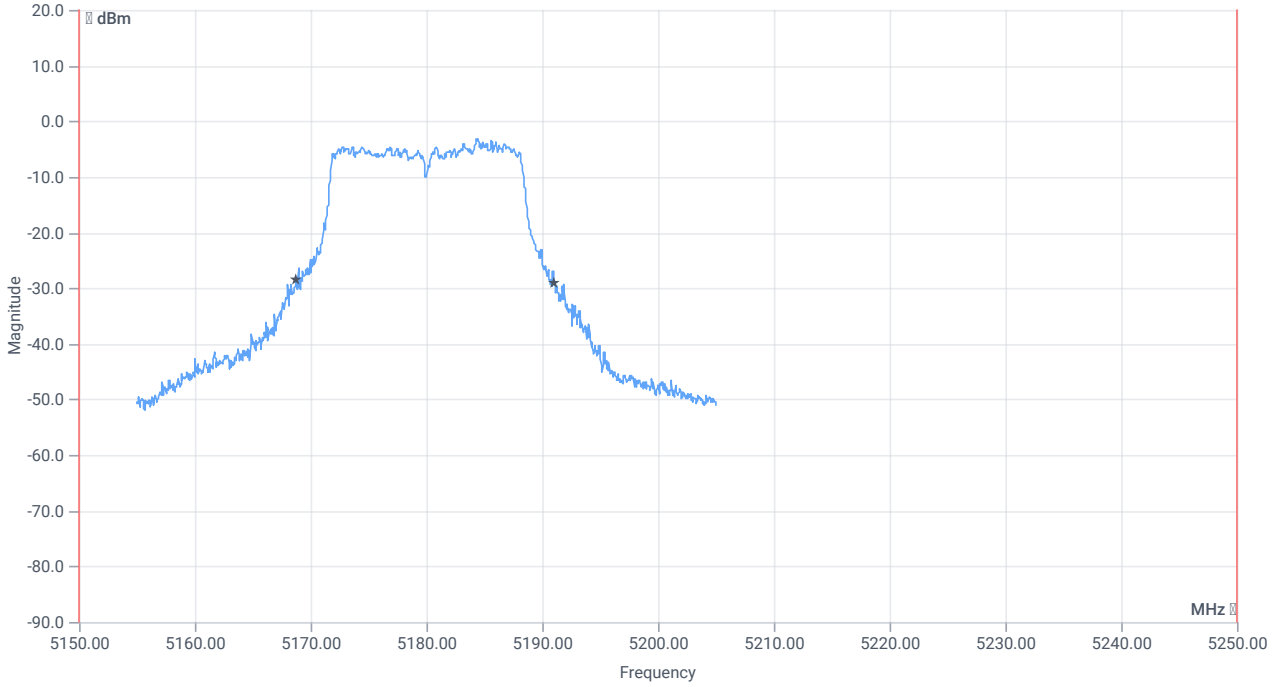

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	22.35	MHz	INFO
T1 26dB	5150.000000	--	5168.7000	MHz	PASS
T2 26dB	--	5250.000000	5191.0500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:49:45
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.27	dBm	INFO
Ref. frequency	--	--	5827.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.27 10.44 15
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

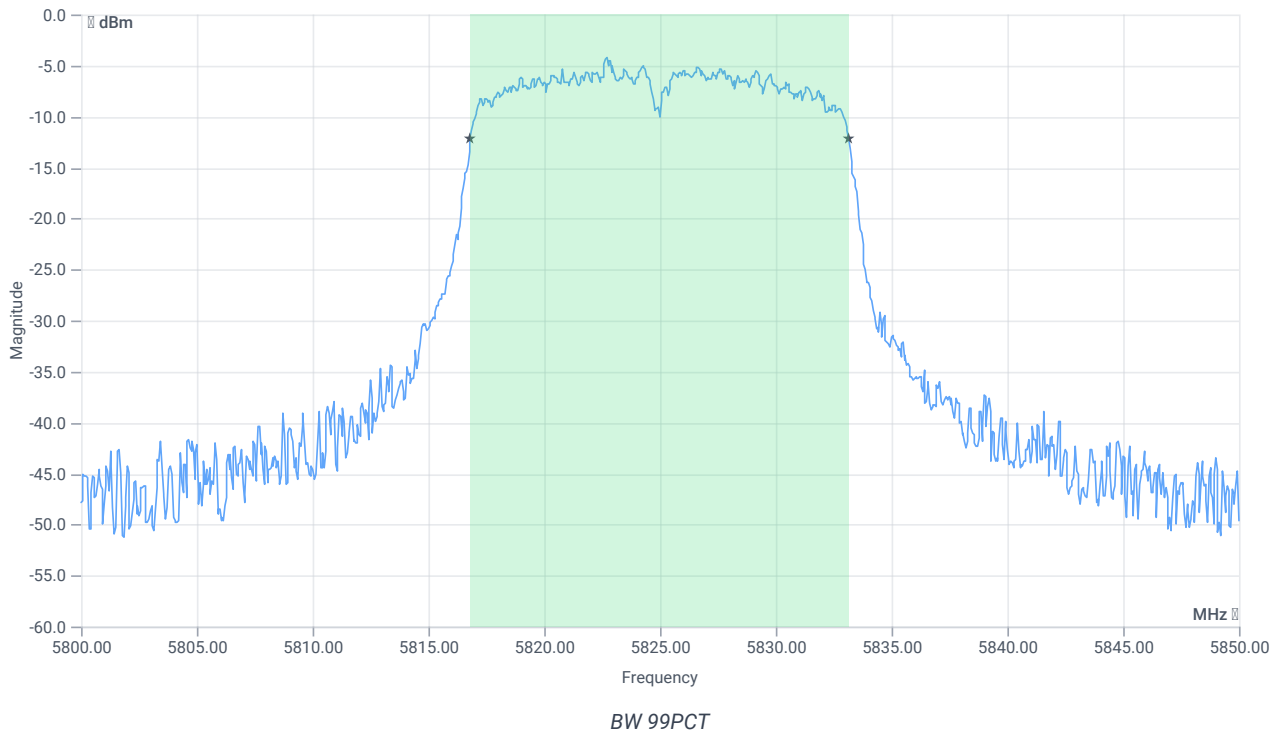


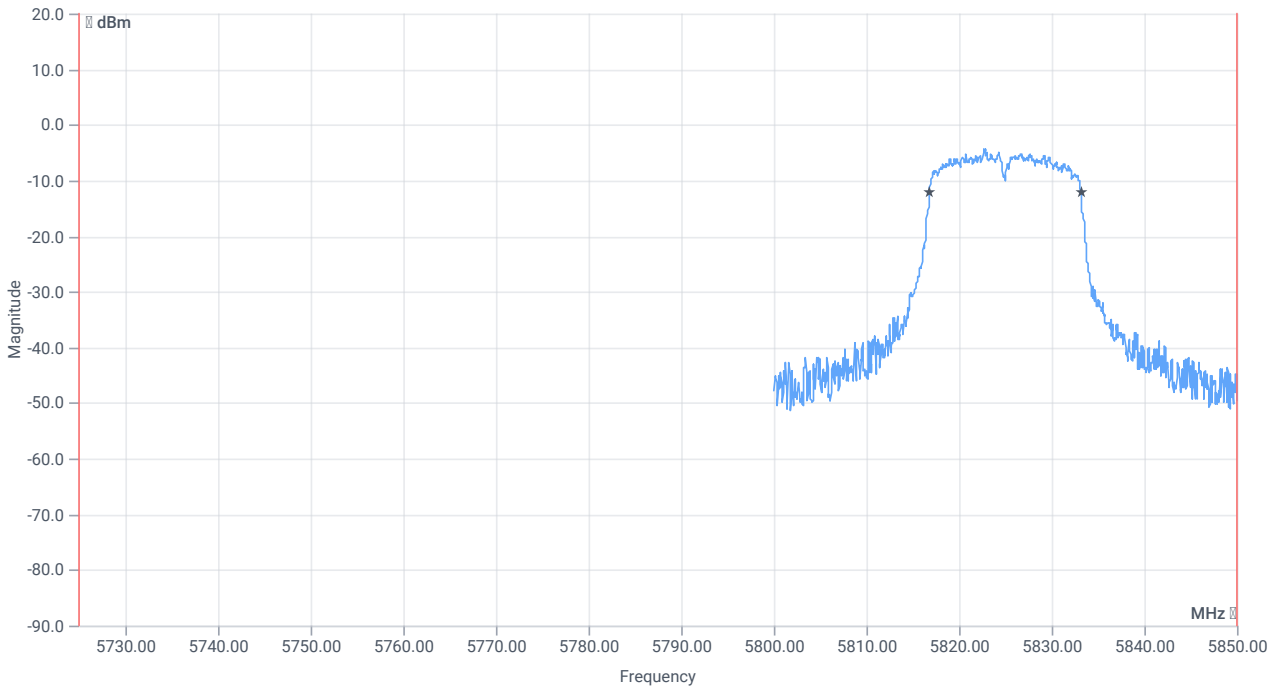


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.334	MHz	INFO
T1 99%	5725.000000	--	5816.8082	MHz	PASS
T2 99%	--	5850.000000	5833.1419	MHz	PASS

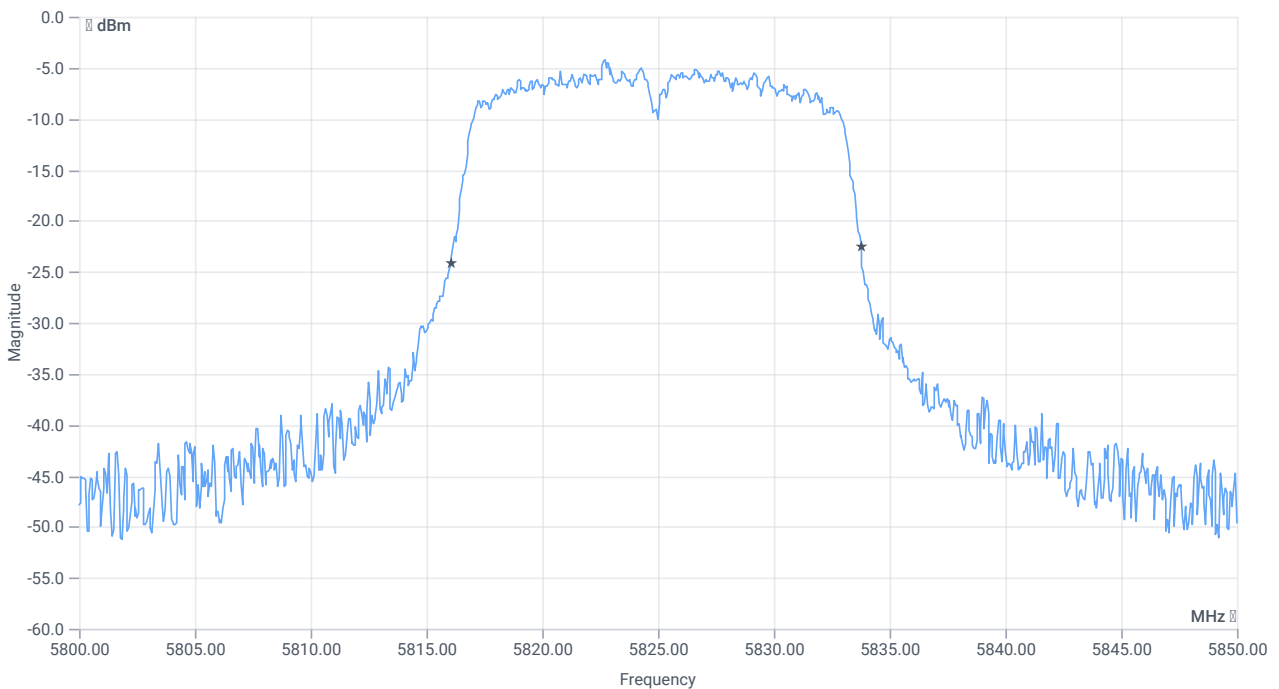

BW 20dB

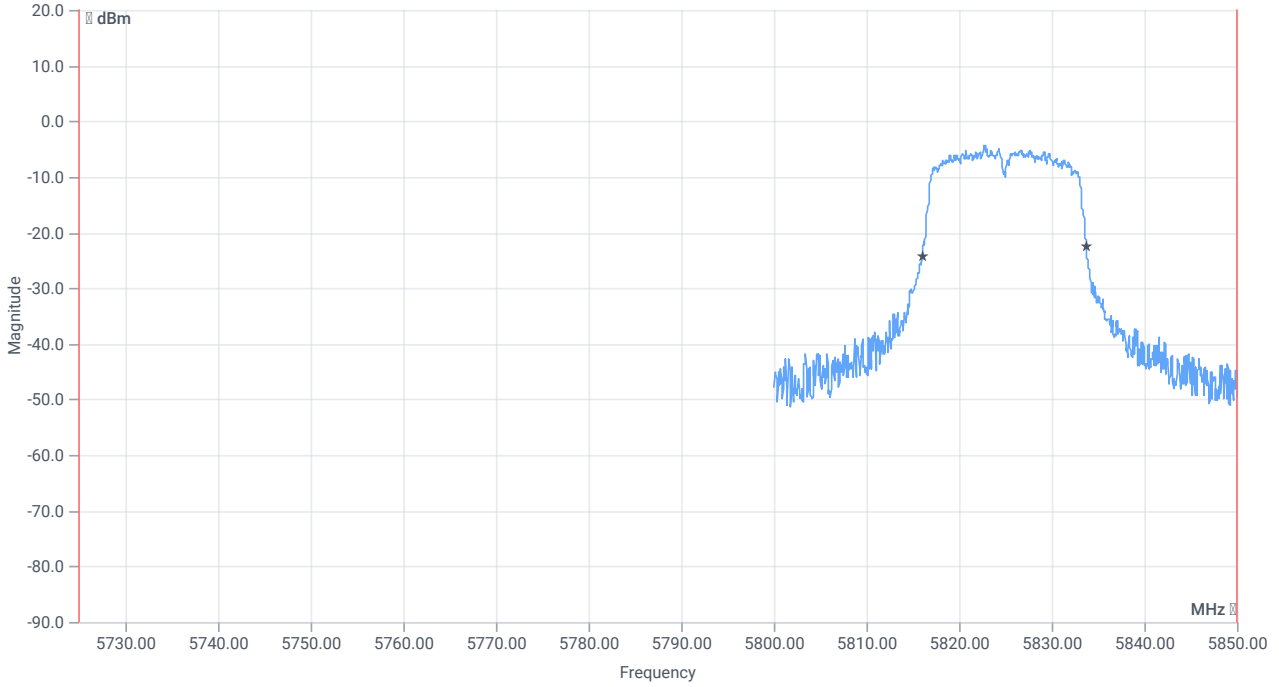

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	17.7	MHz	INFO
T1 20dB	5725.000000	--	5816.0500	MHz	PASS
T2 20dB	--	5850.000000	5833.7500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:42:29
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.35	dBm	INFO
Ref. frequency	--	--	5826.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.35 10.45 15
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

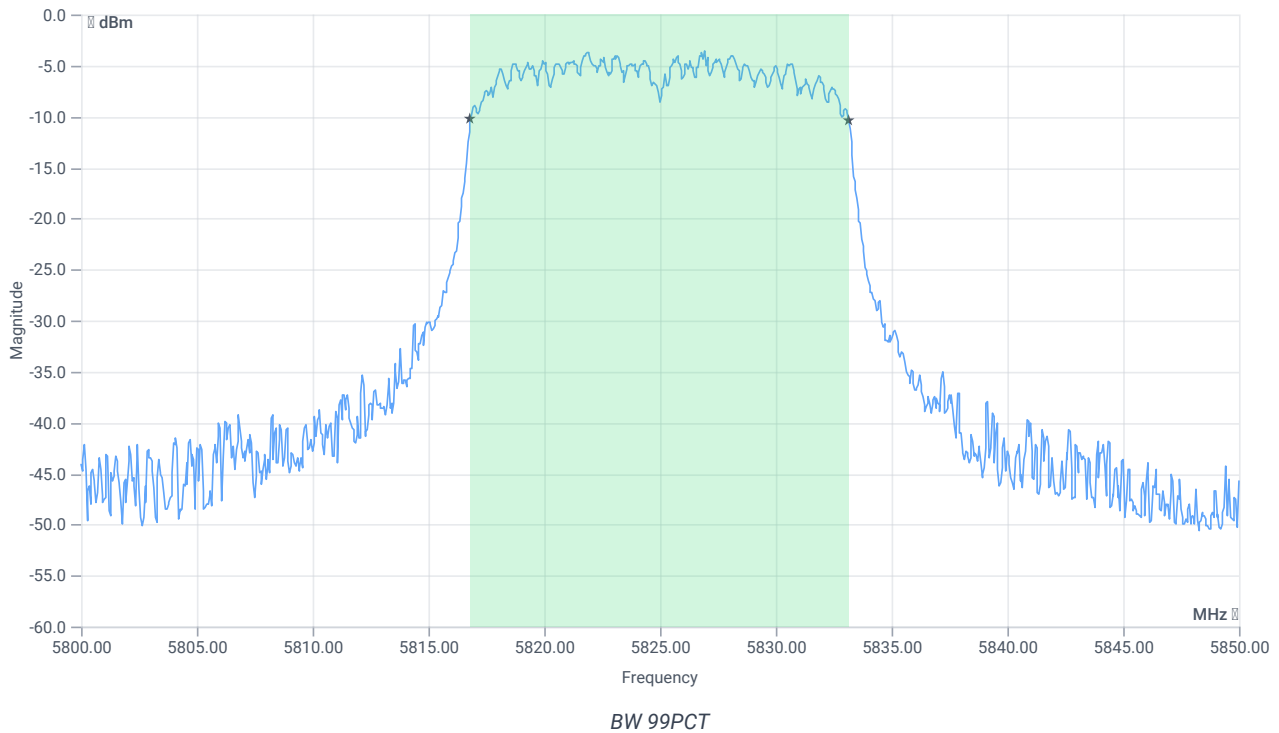


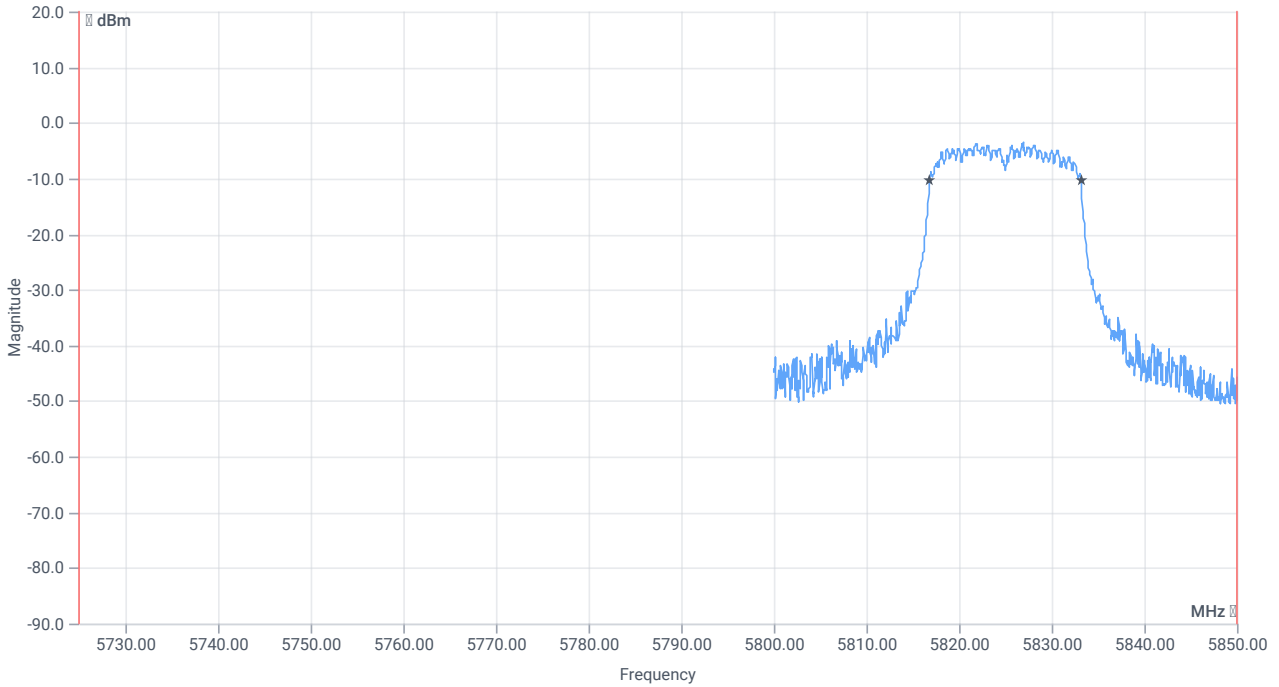


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.334	MHz	INFO
T1 99%	5725.000000	--	5816.8082	MHz	PASS
T2 99%	--	5850.000000	5833.1419	MHz	PASS

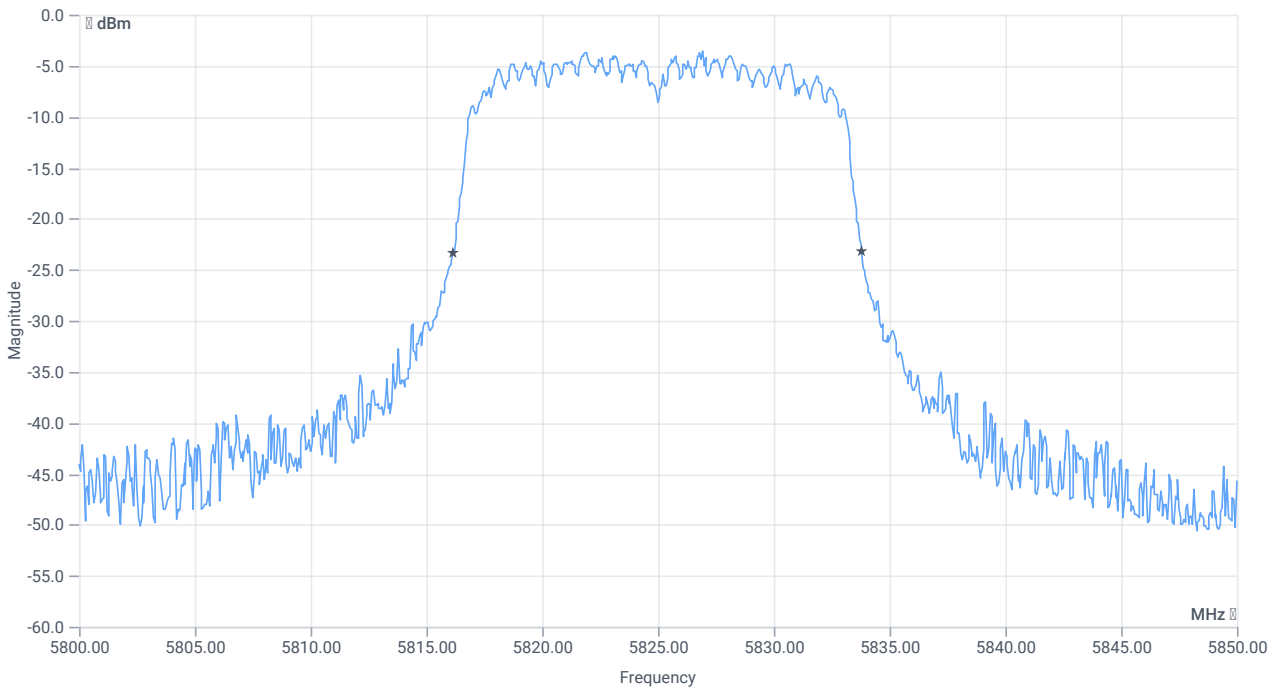

BW 20dB

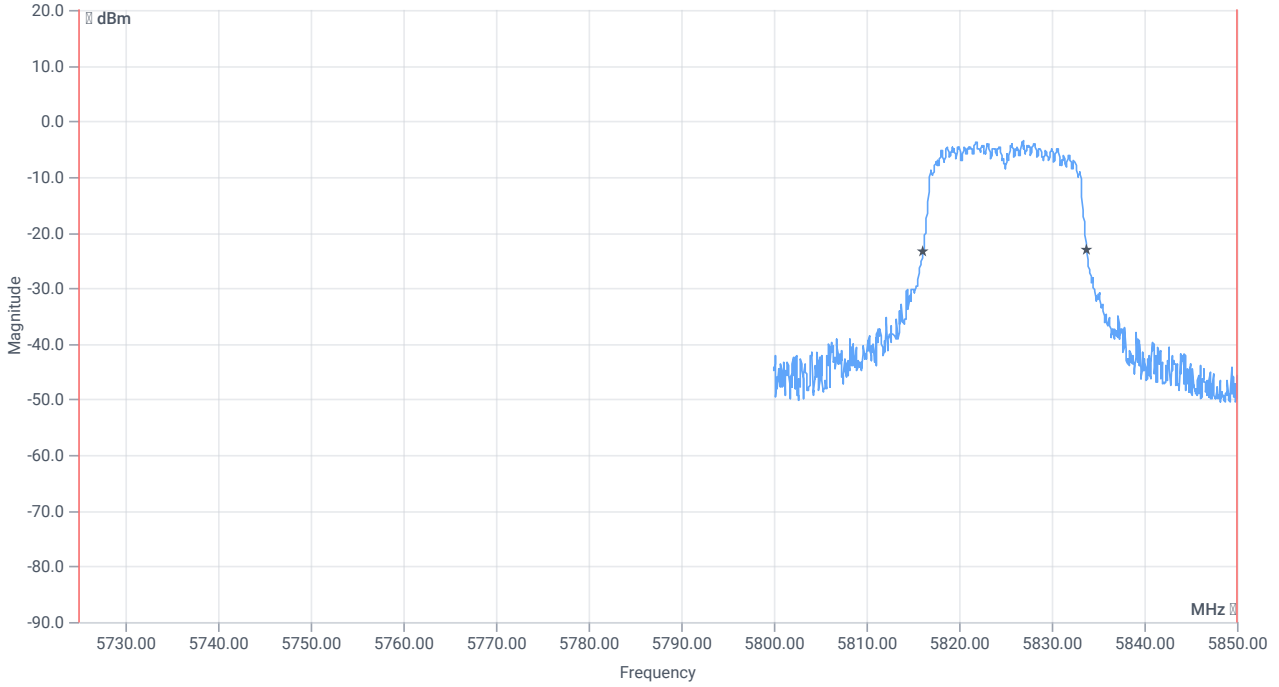

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	17.65	MHz	INFO
T1 20dB	5725.000000	--	5816.1500	MHz	PASS
T2 20dB	--	5850.000000	5833.8000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:33:55
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.23	dBm	INFO
Ref. frequency	--	--	5780.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.23 10.41 15
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

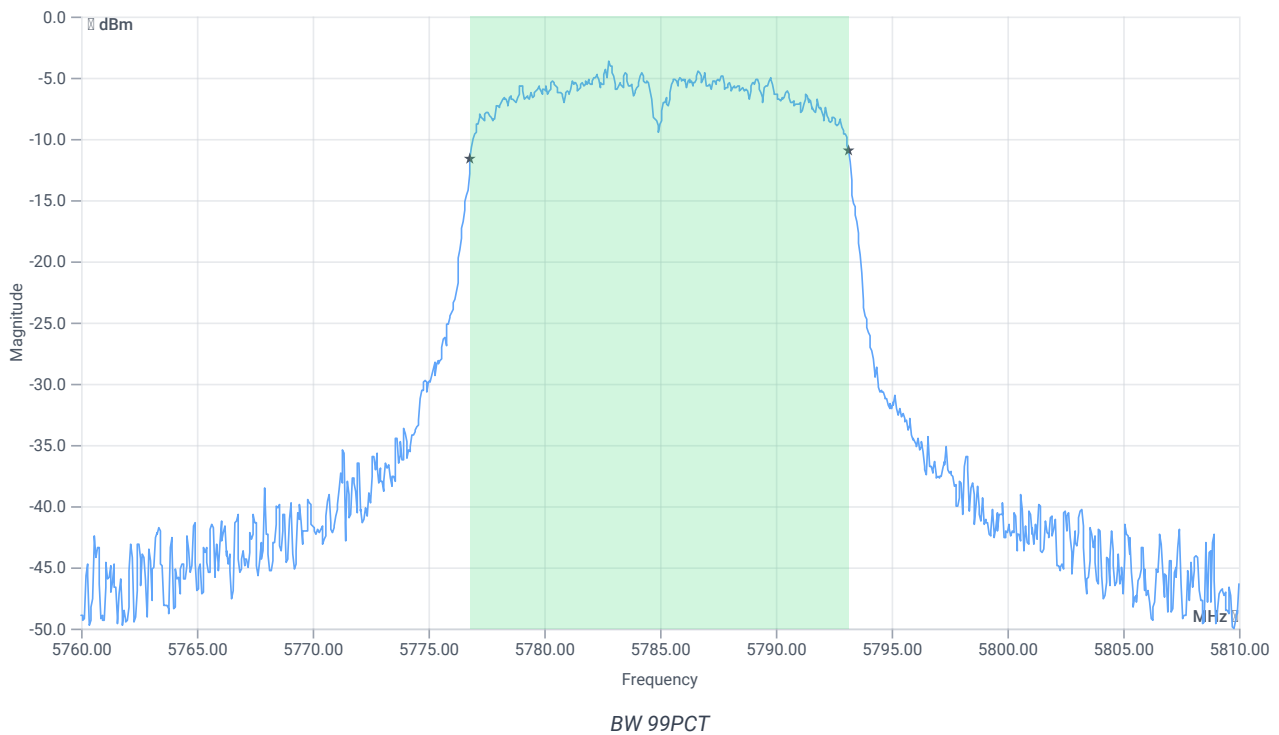


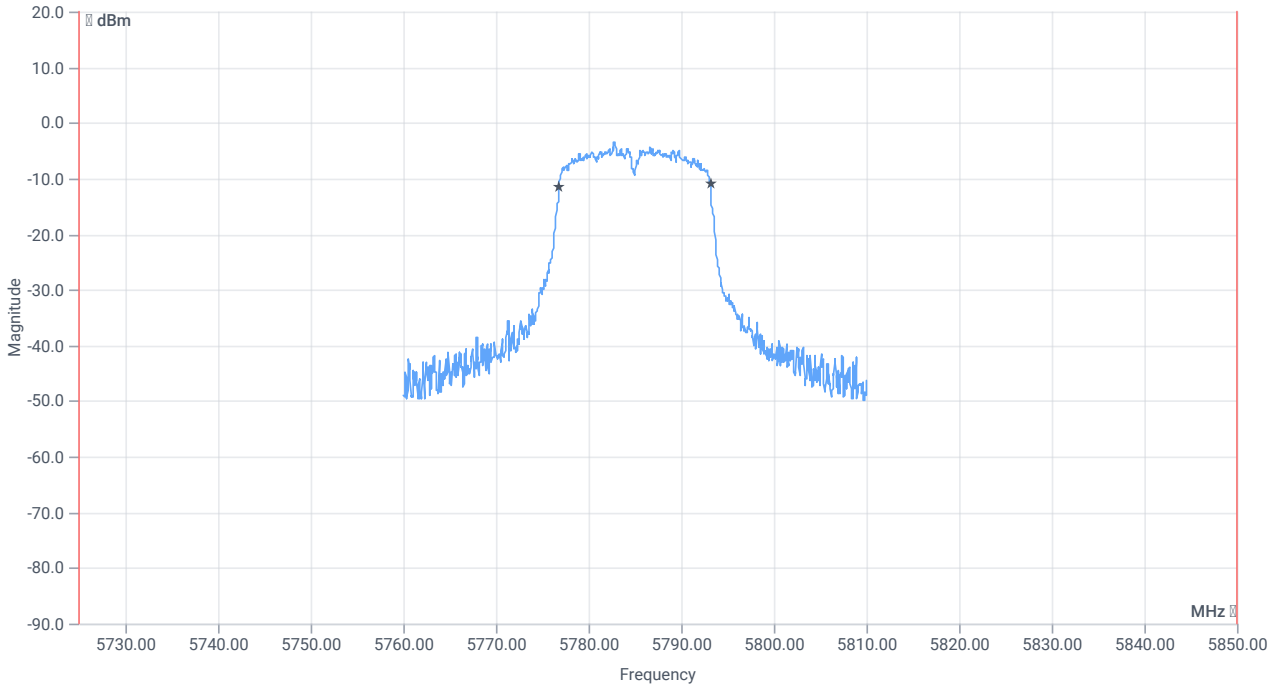


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.334	MHz	INFO
T1 99%	5725.000000	--	5776.8082	MHz	PASS
T2 99%	--	5850.000000	5793.1419	MHz	PASS

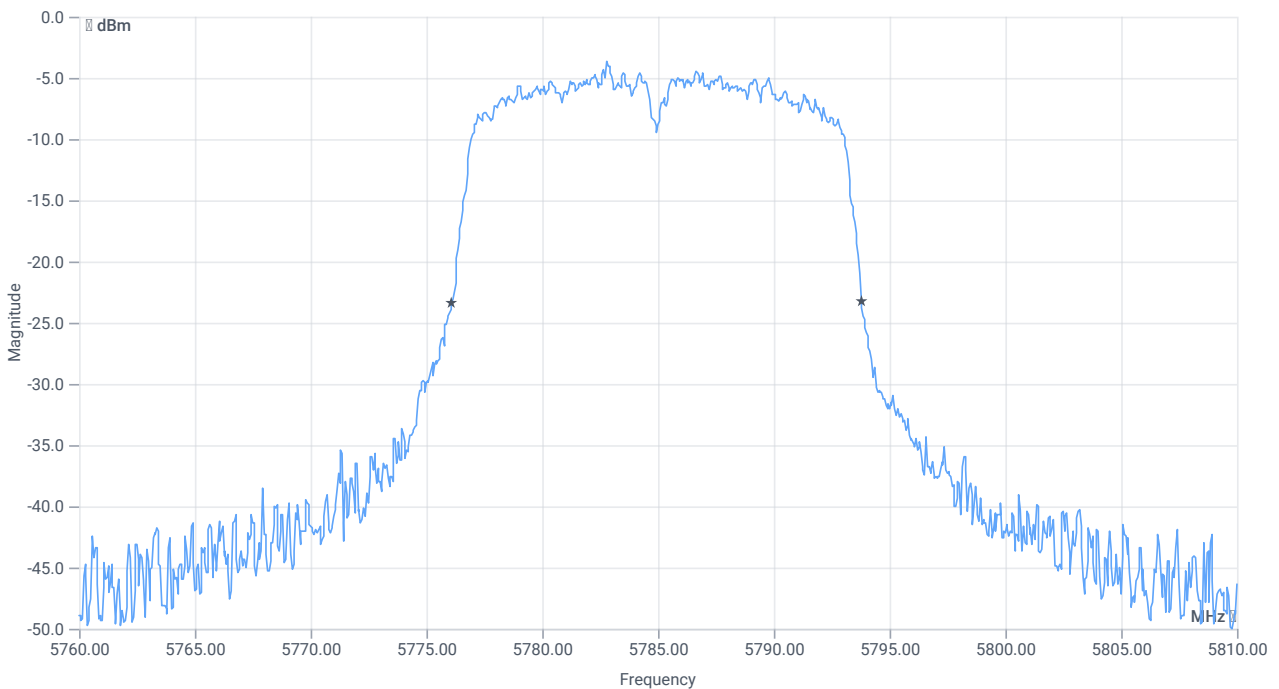

BW 20dB

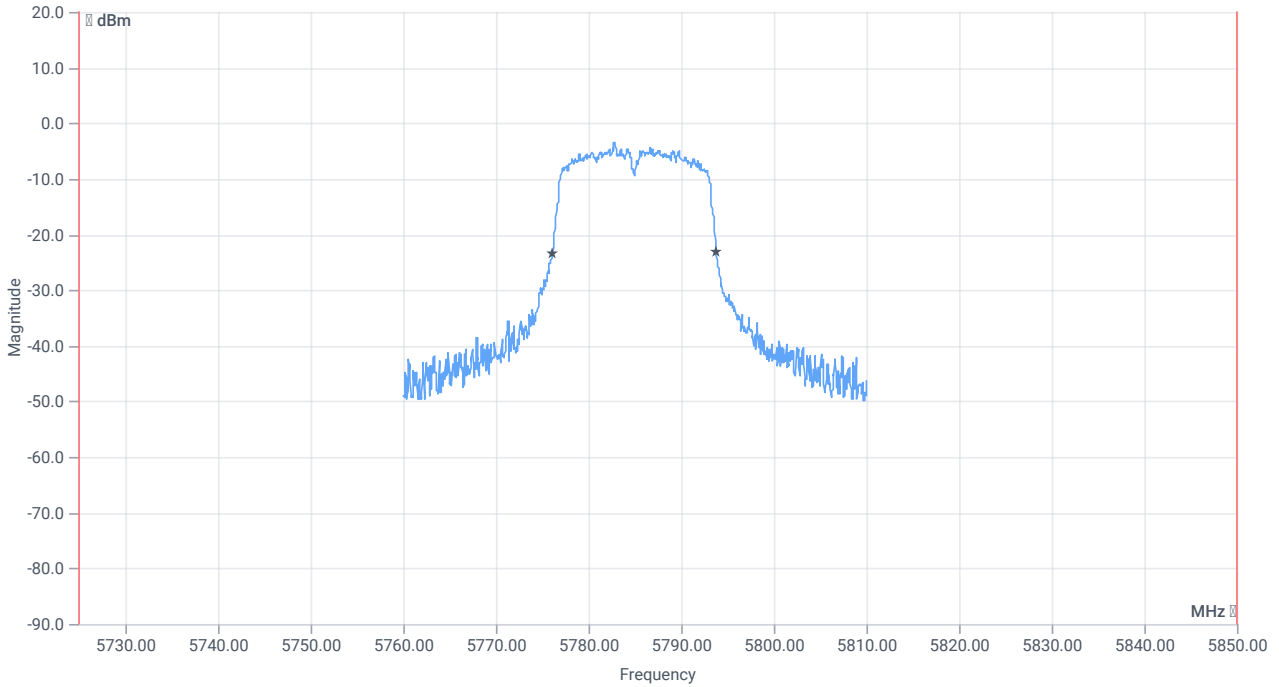

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	17.65	MHz	INFO
T1 20dB	5725.000000	--	5776.1000	MHz	PASS
T2 20dB	--	5850.000000	5793.7500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:26:33
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.60	dBm	INFO
Ref. frequency	--	--	5783.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.60 10.38 20
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

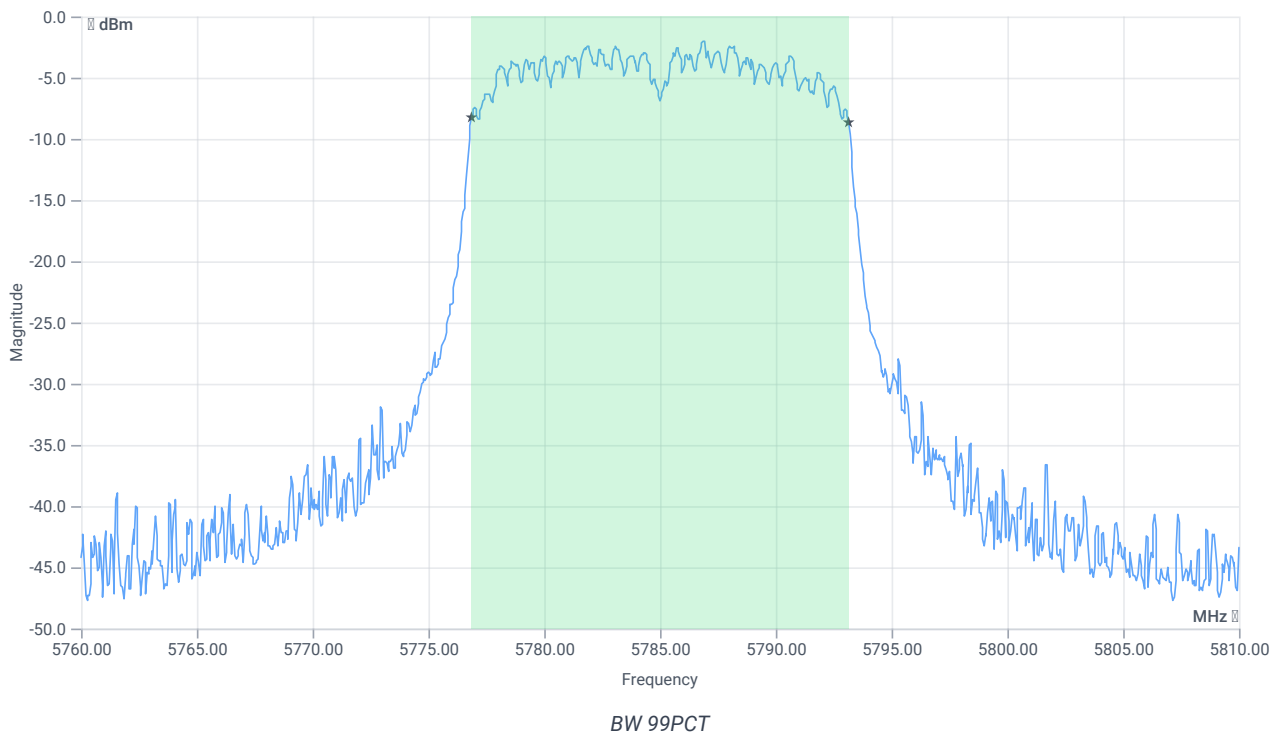


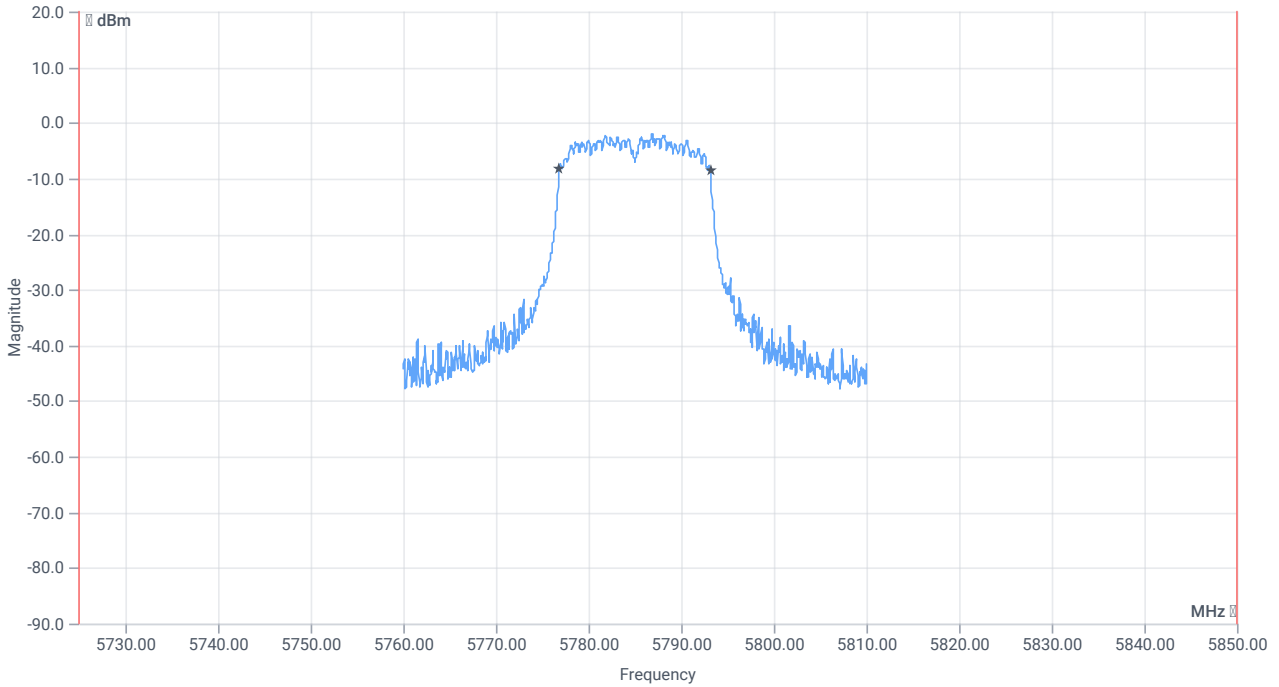


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.284	MHz	INFO
T1 99%	5725.000000	--	5776.8581	MHz	PASS
T2 99%	--	5850.000000	5793.1419	MHz	PASS

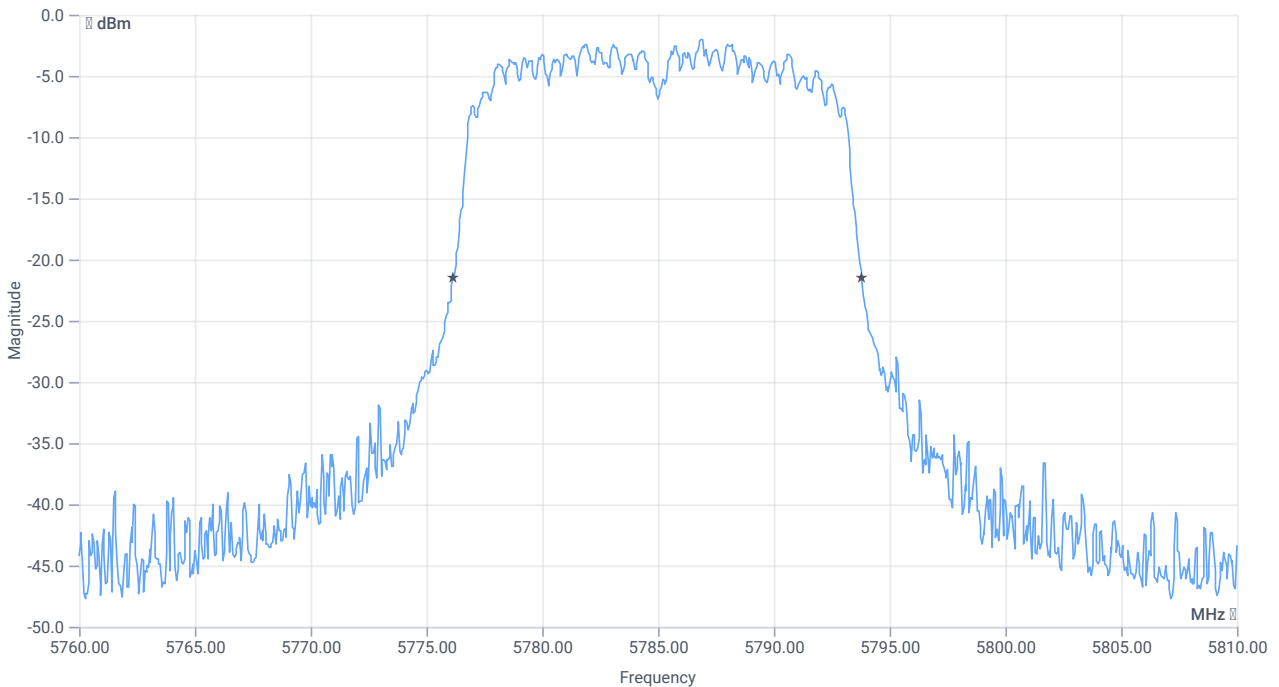

BW 20dB

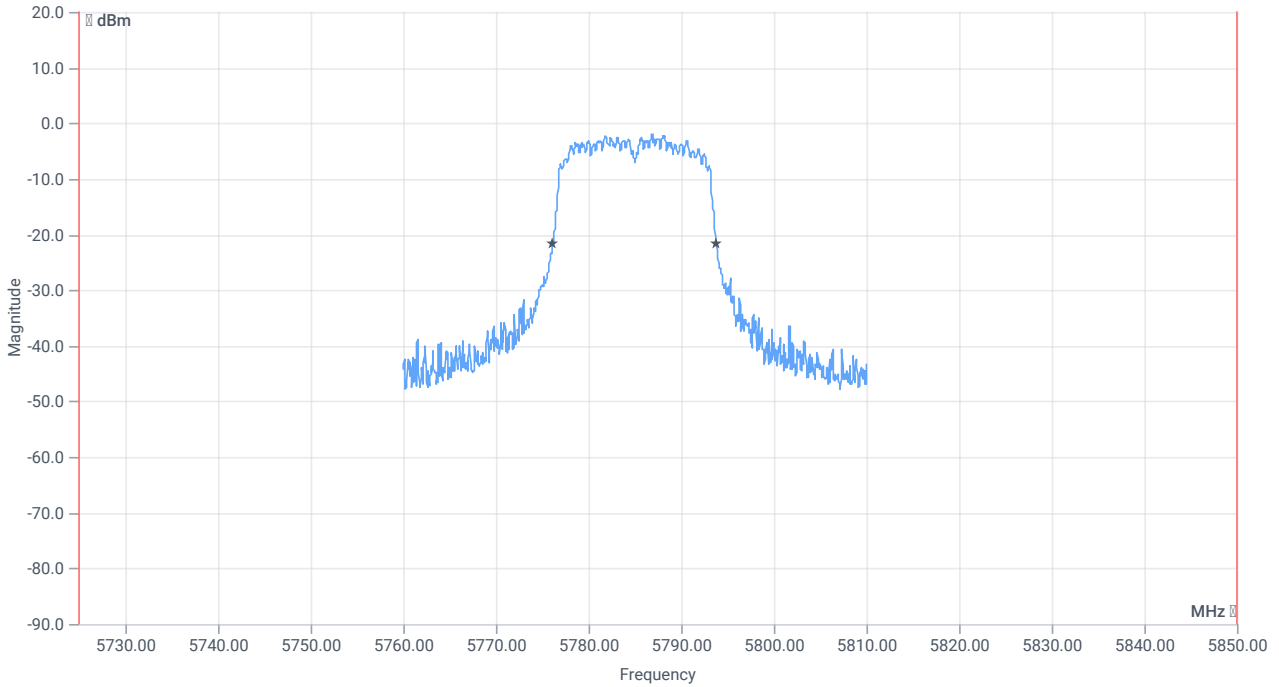

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	17.65	MHz	INFO
T1 20dB	5725.000000	--	5776.1500	MHz	PASS
T2 20dB	--	5850.000000	5793.8000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:18:10
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.41	dBm	INFO
Ref. frequency	--	--	5742.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.41 10.38 20
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

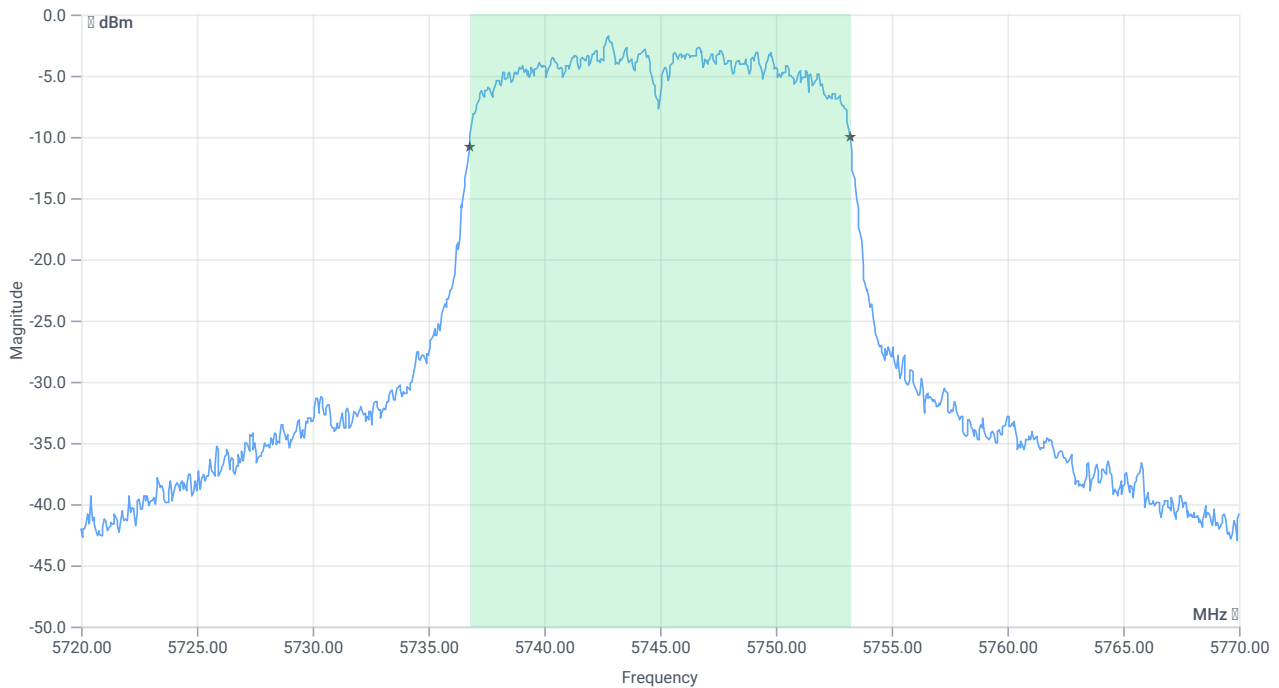


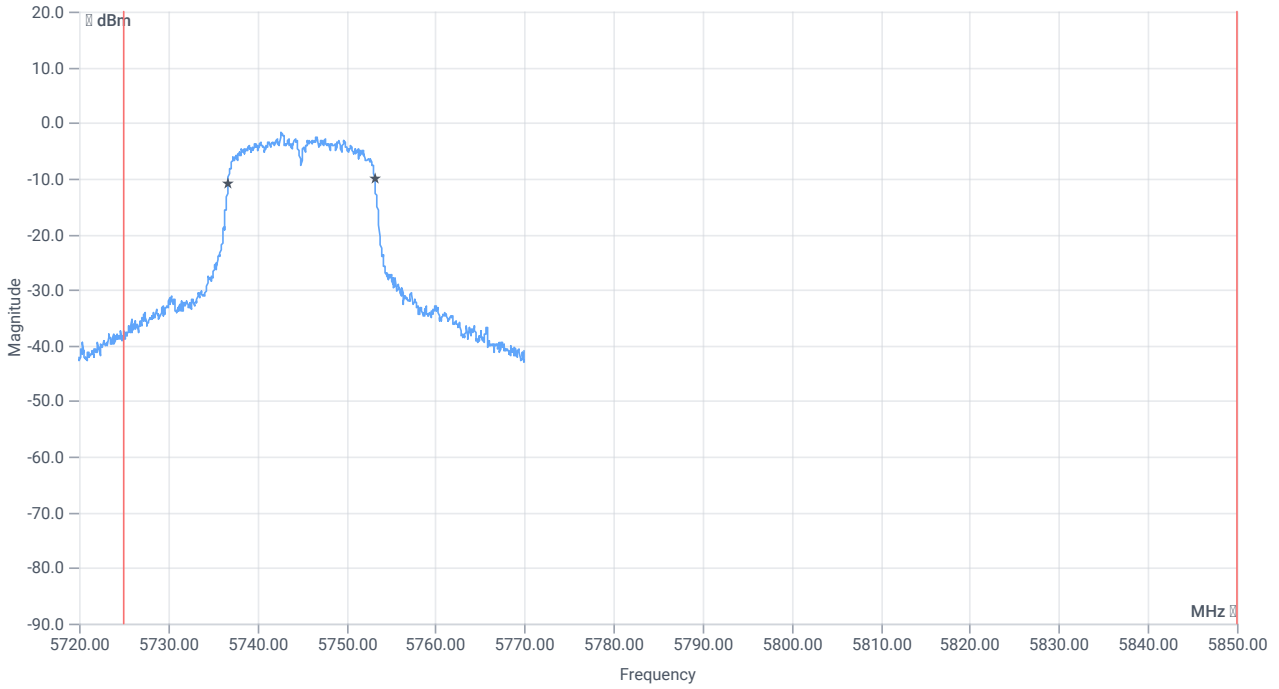


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.434	MHz	INFO
T1 99%	5725.000000	--	5736.7582	MHz	PASS
T2 99%	--	5850.000000	5753.1918	MHz	PASS

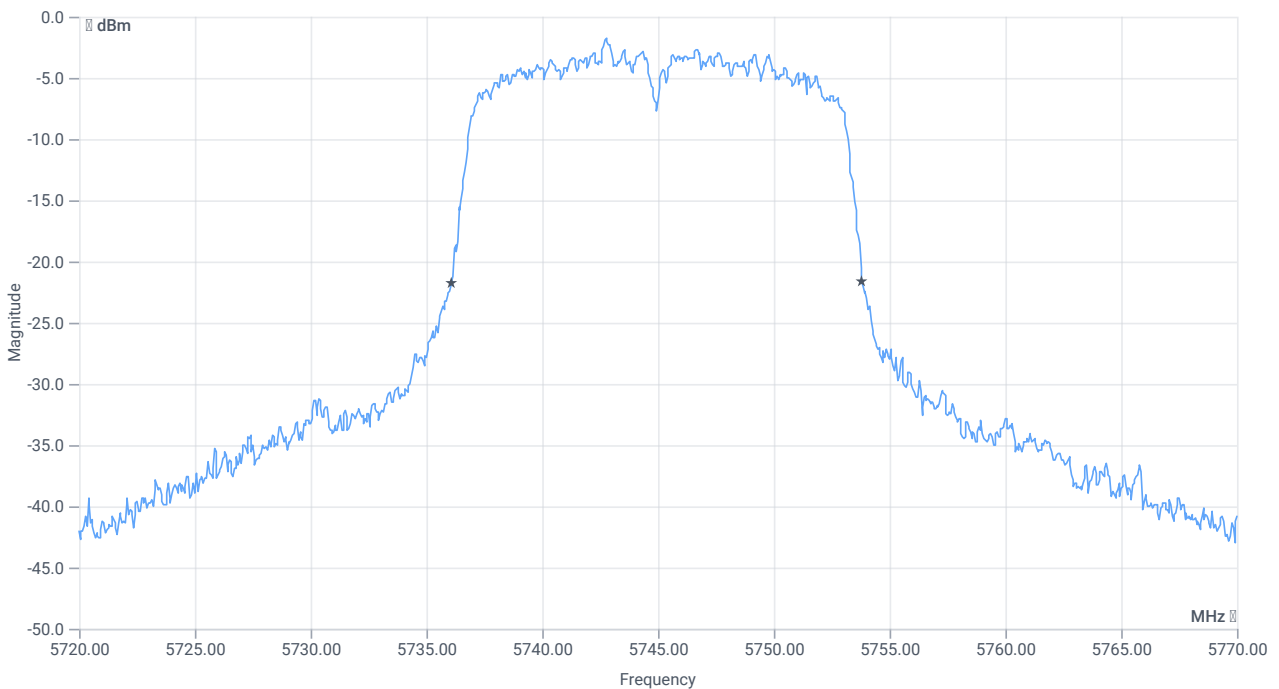

BW 20dB

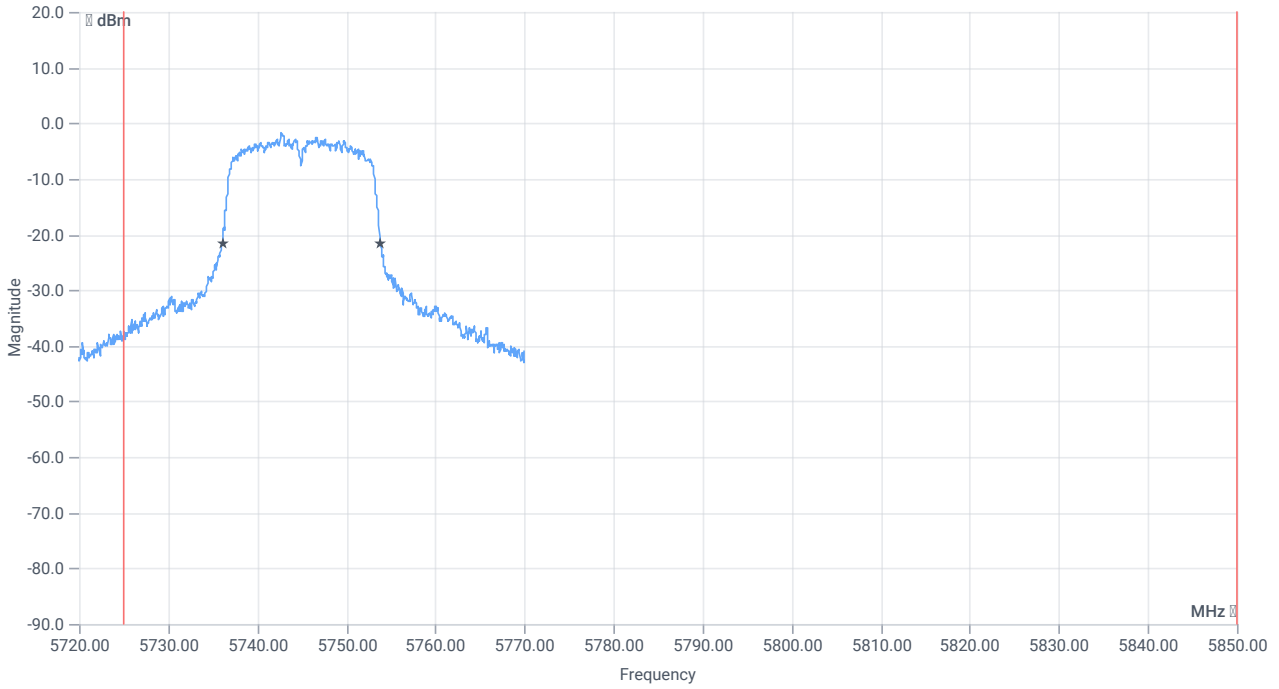

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	--	--	17.7	MHz	INFO
T1 20dB	5725.000000	--	5736.1000	MHz	PASS
T2 20dB	--	5850.000000	5753.8000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:10:53
Ambit temp [°C] humidity [rel%]	26.6 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.15	dBm	INFO
Ref. frequency	--	--	5750.390	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.15 10.36 15
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

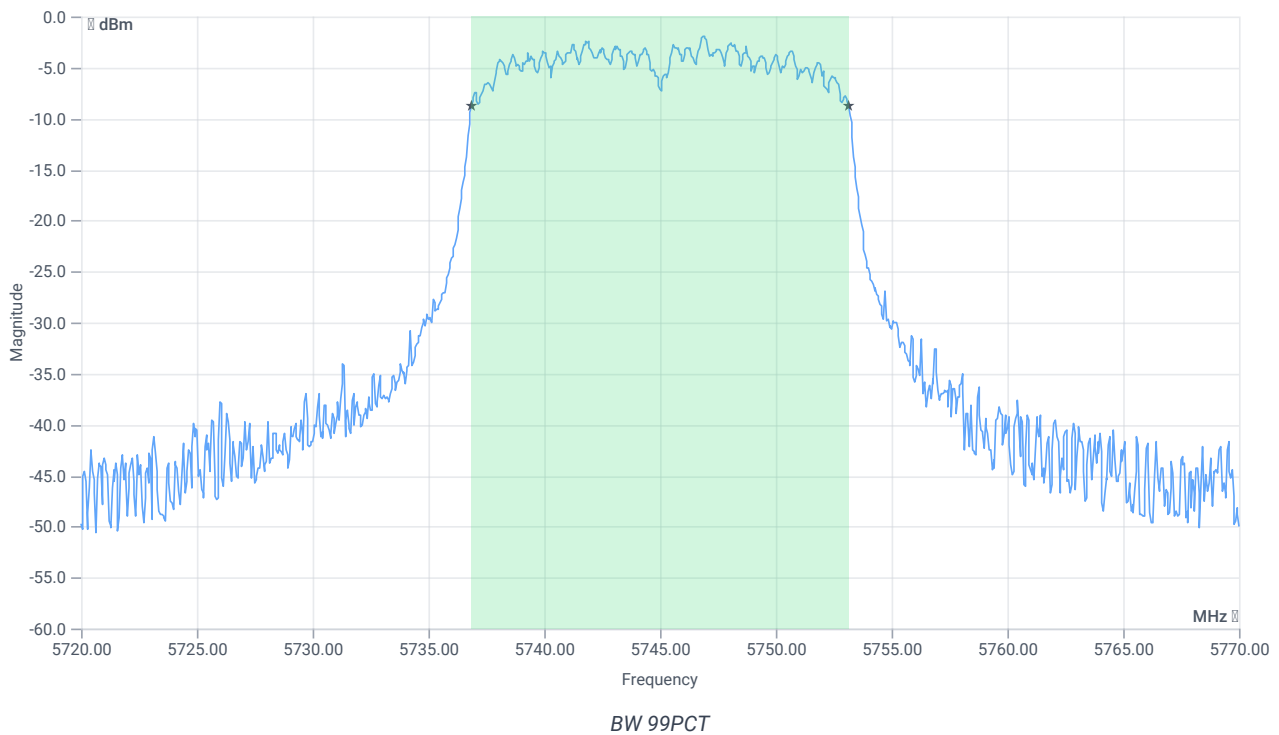


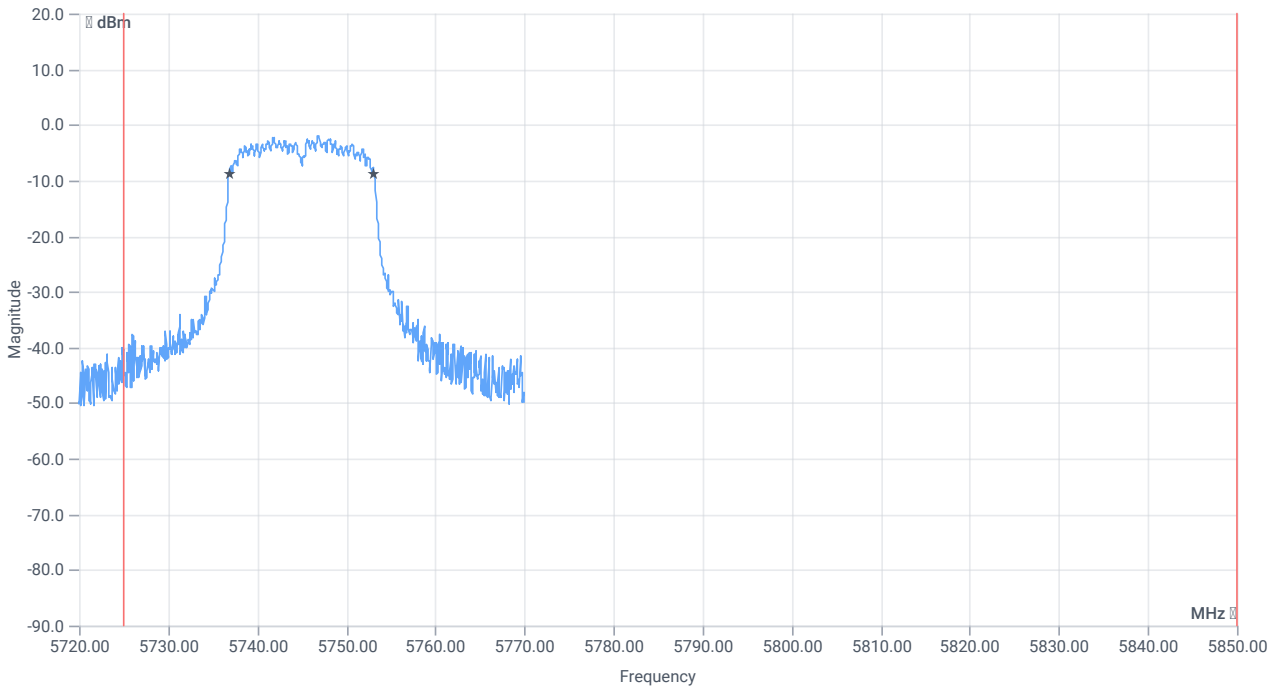


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.284	MHz	INFO
T1 99%	5725.000000	--	5736.8581	MHz	PASS
T2 99%	--	5850.000000	5753.1419	MHz	PASS

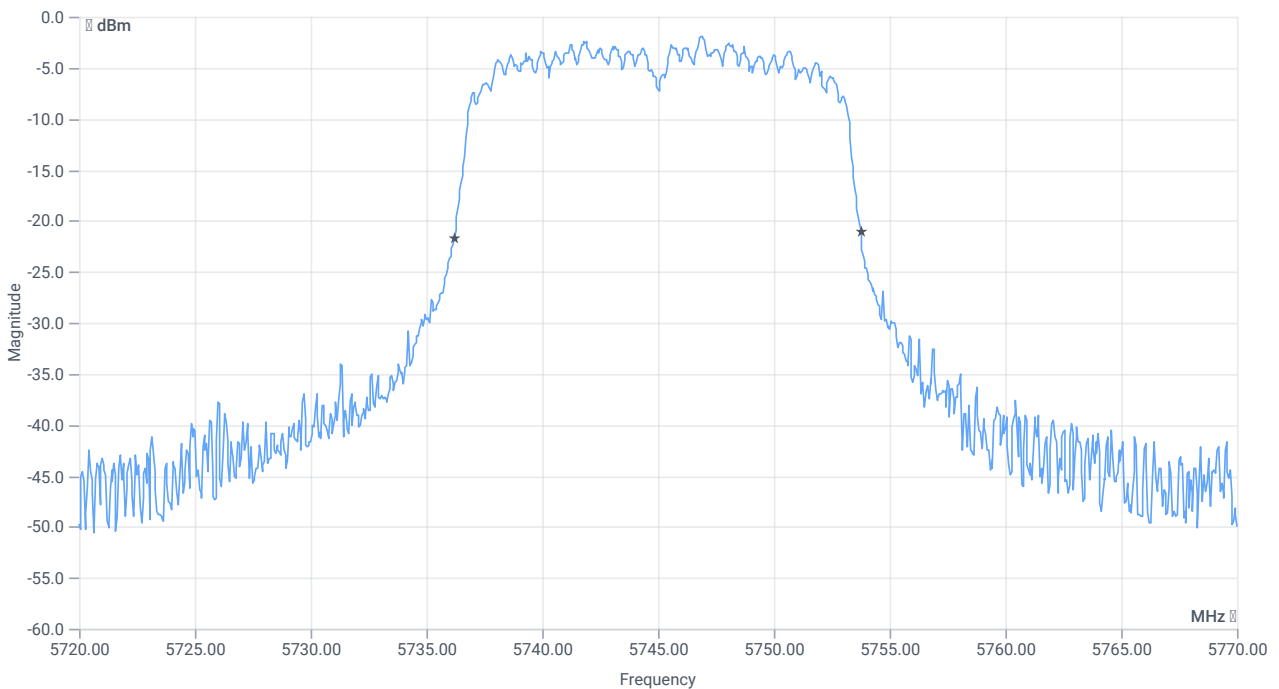

BW 20dB

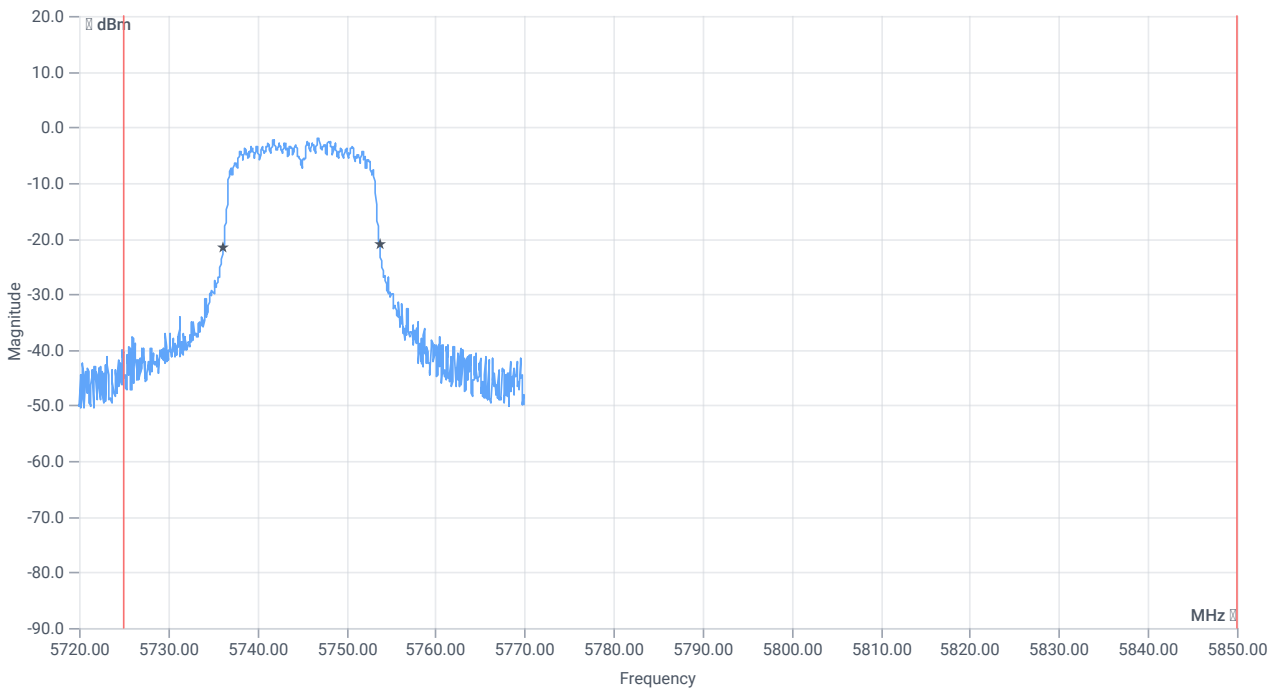

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	17.55	MHz	INFO
T1 20dB	5725.000000	---	5736.2000	MHz	PASS
T2 20dB	---	5850.000000	5753.7500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 15:03:34
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5240 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	4.19	dBm	INFO
Ref. frequency	--	--	5238.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.19 9.93 20
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

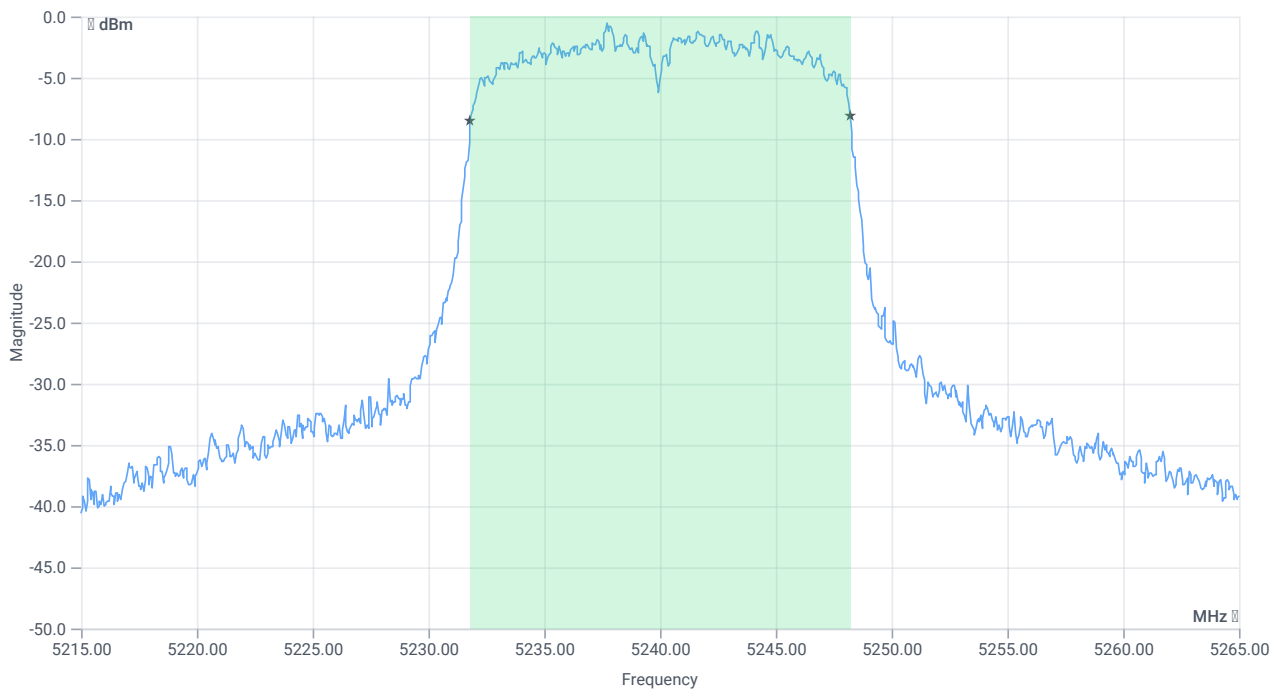


BW 99PCT

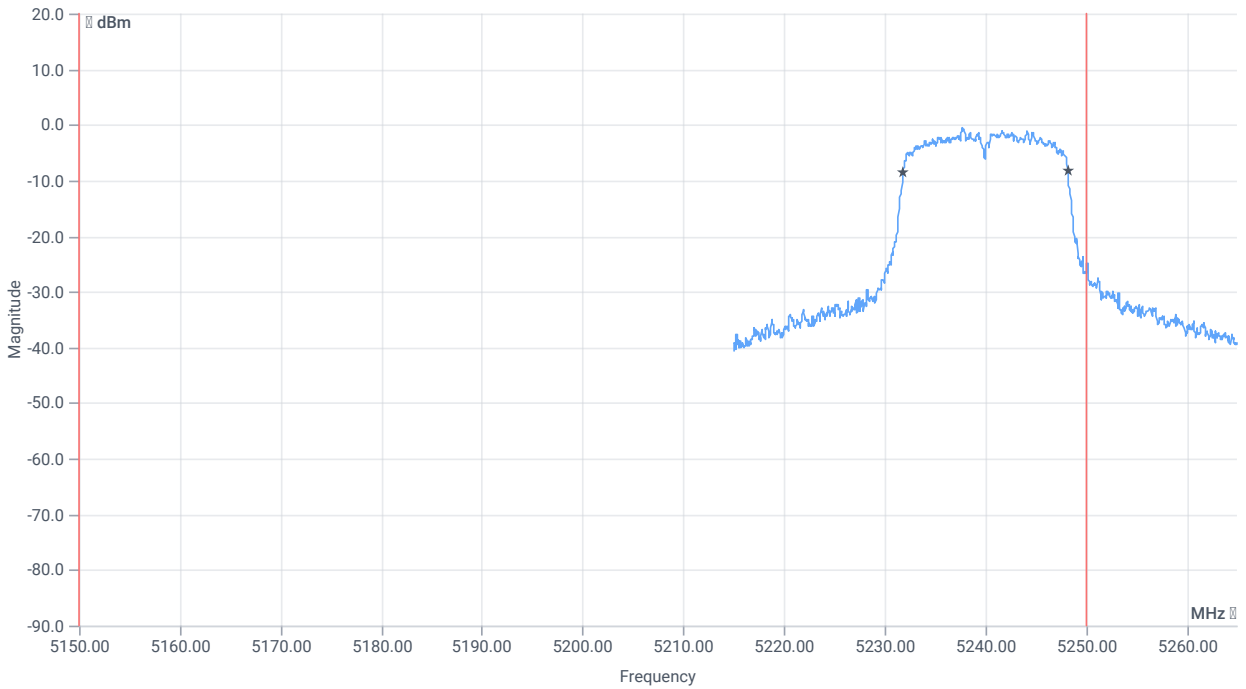


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.384	MHz	INFO
T1 99%	5150.000000	--	5231.8082	MHz	PASS
T2 99%	--	5250.000000	5248.1918	MHz	PASS

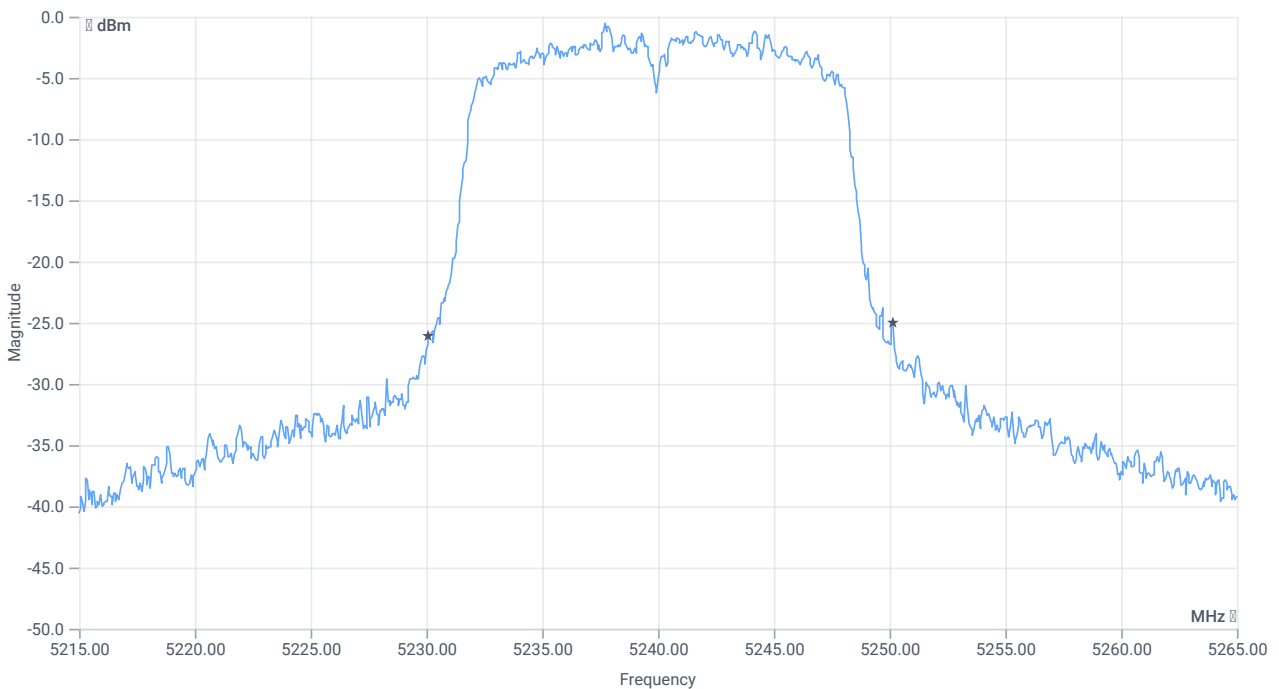

BW 26dB

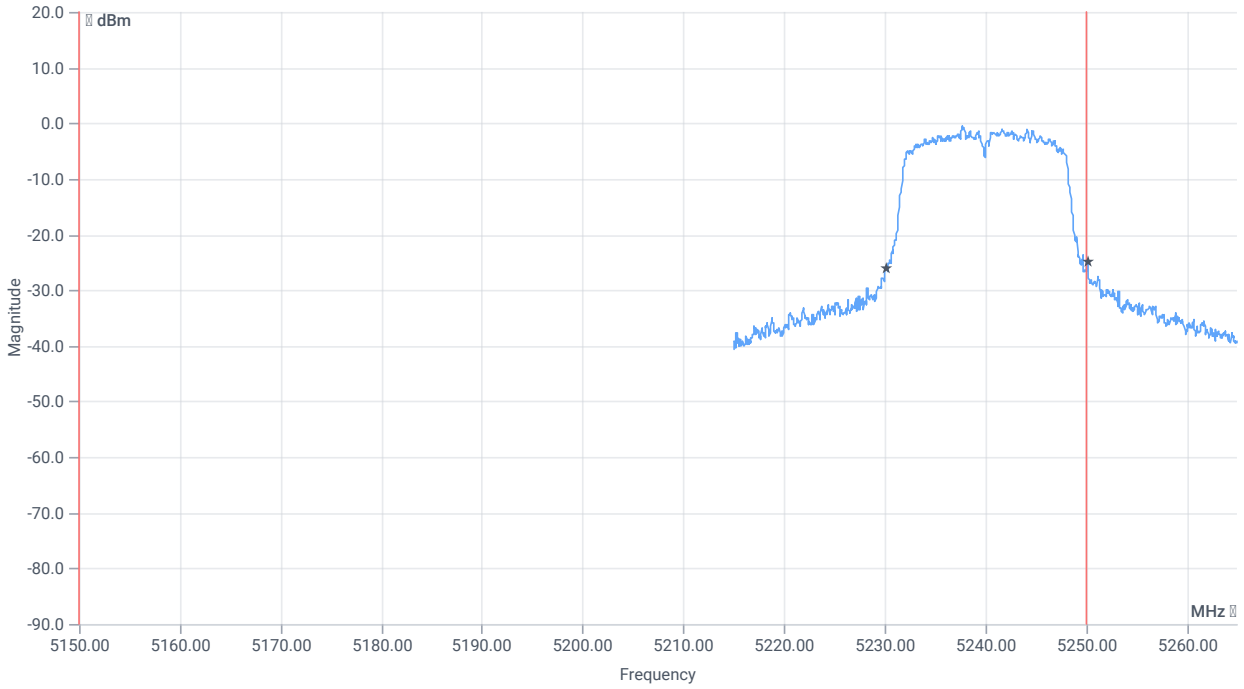

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20.05	MHz	INFO
T1 26dB	5150.000000	---	5230.1000	MHz	PASS
T2 26dB	---	5250.000000	5250.1500	MHz	DFS required

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:59:37
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.44	dBm	INFO
Ref. frequency	--	--	5245.590	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.44 9.92 20
Start [MHz] Stop [MHz]	5215.000 5265.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

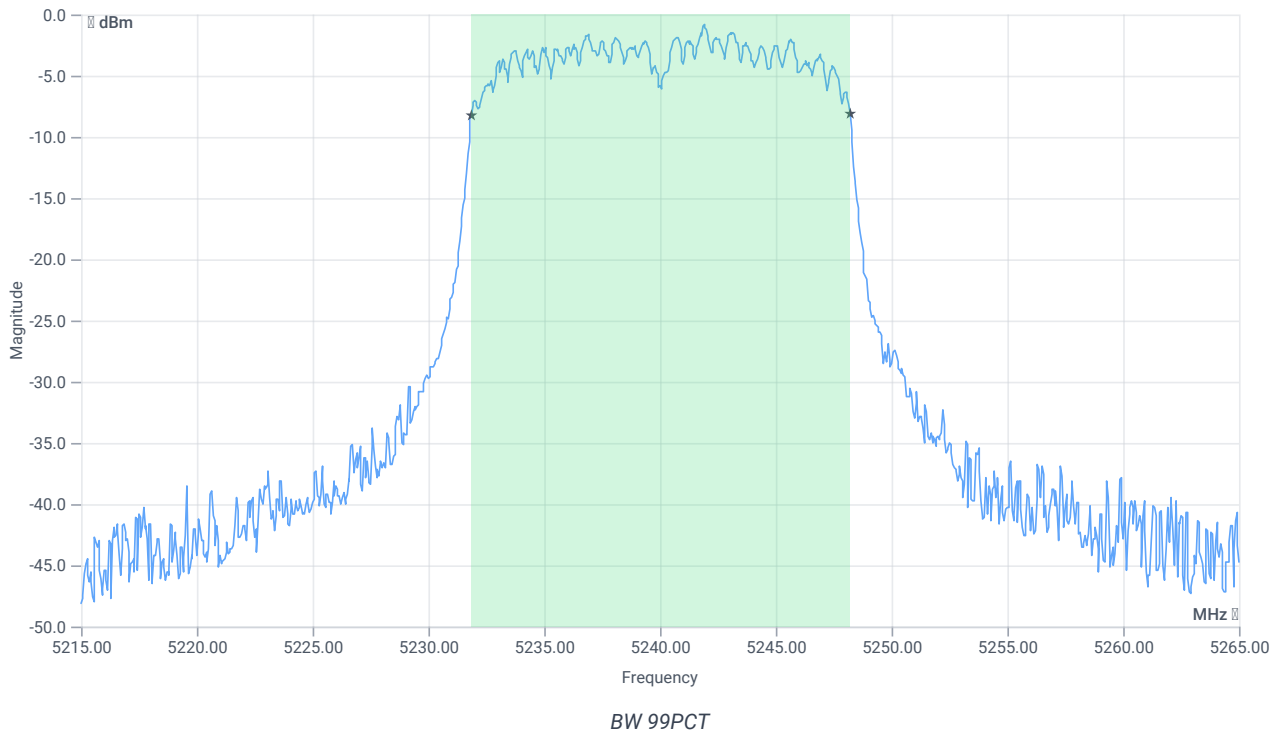


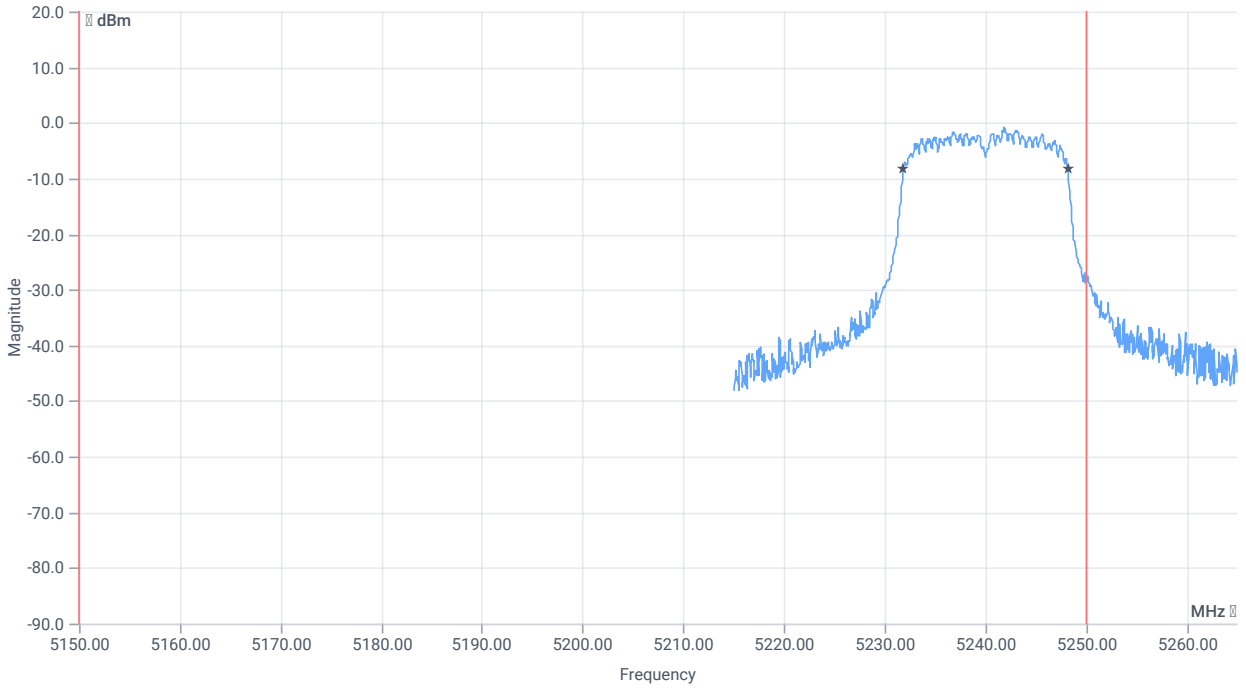


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.334	MHz	INFO
T1 99%	5150.000000	--	5231.8581	MHz	PASS
T2 99%	--	5250.000000	5248.1918	MHz	PASS

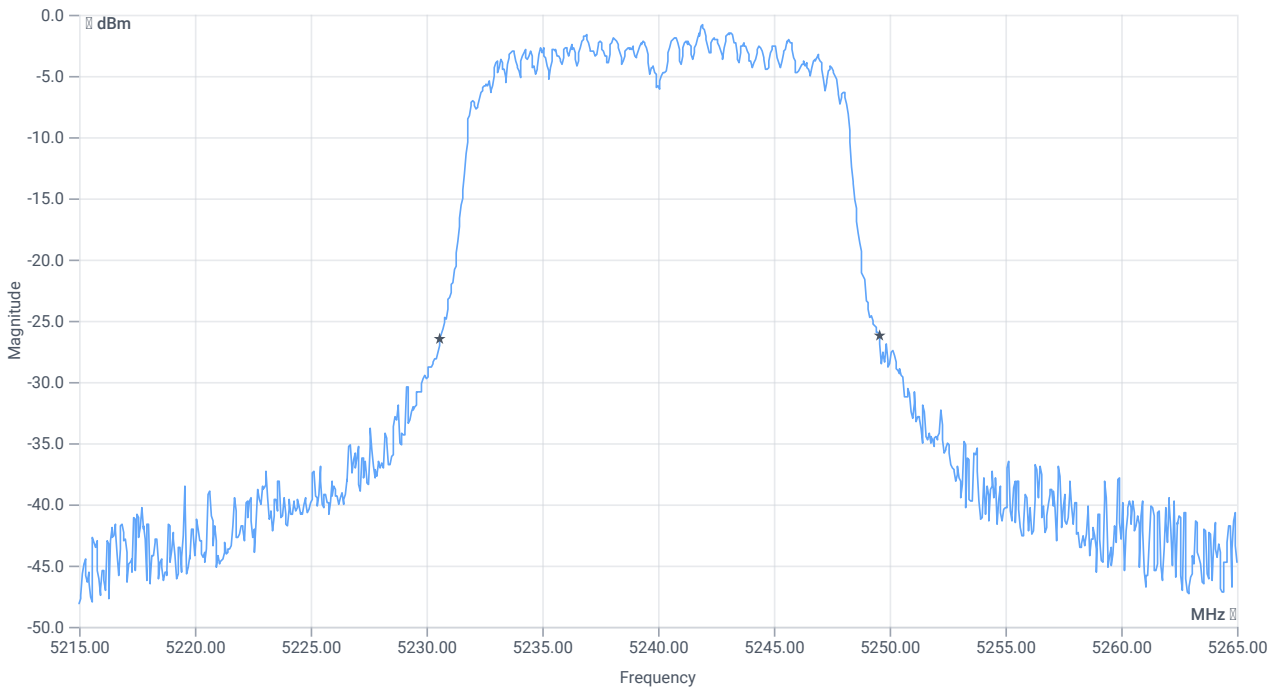

BW 26dB

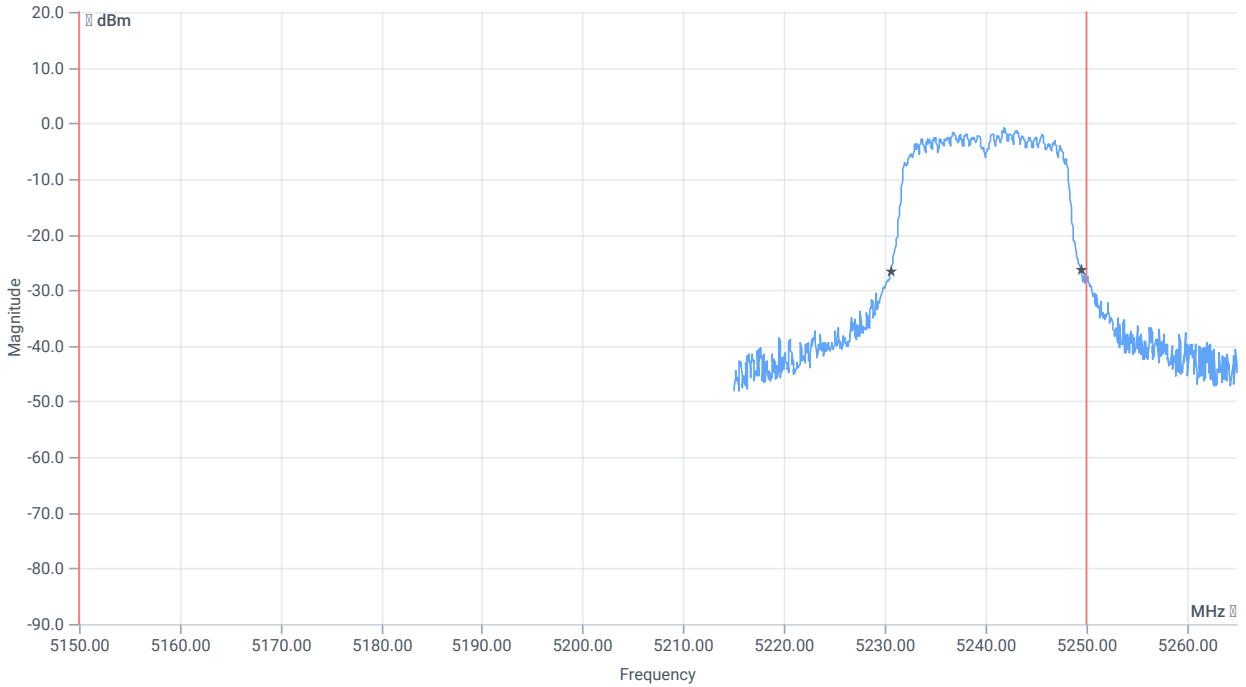

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	18.95	MHz	INFO
T1 26dB	5150.000000	---	5230.6000	MHz	PASS
T2 26dB	---	5250.000000	5249.5500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:54:25
Ambit temp [°C] humidity [rel%]	26.4 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.31	dBm	INFO
Ref. frequency	--	--	5196.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.31 10.08 20
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

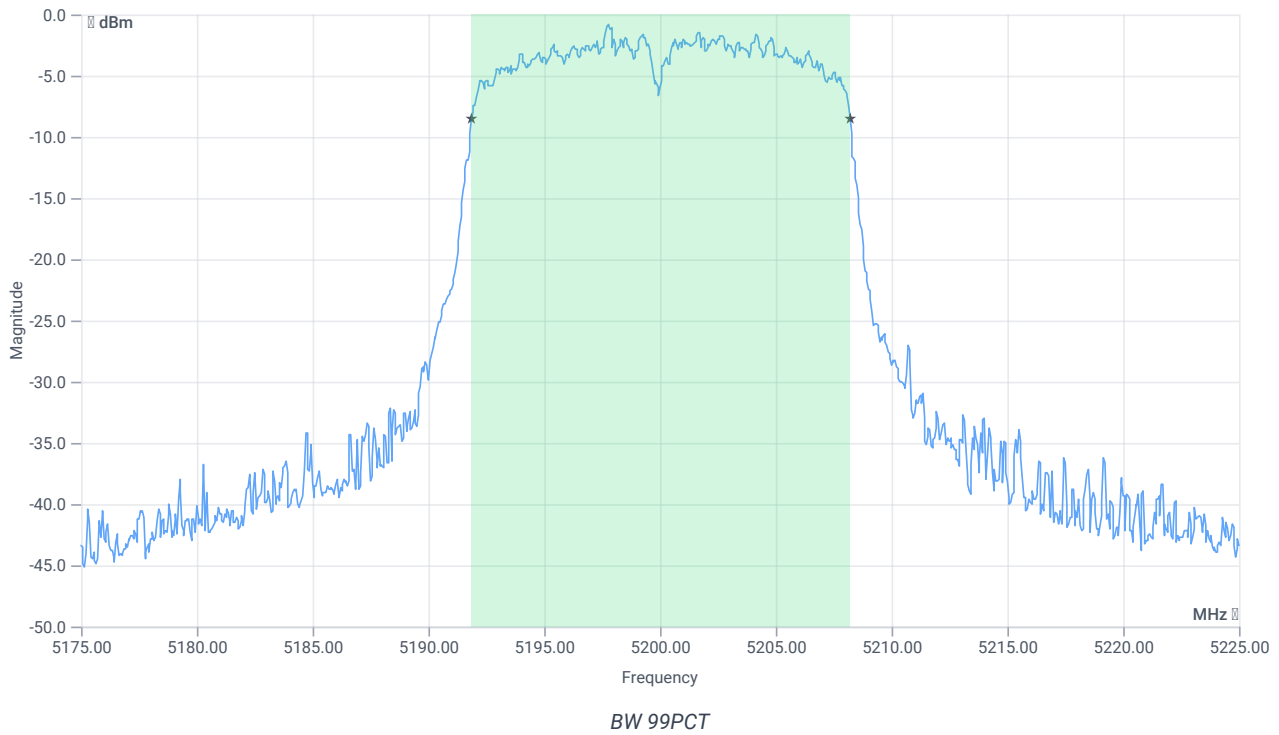


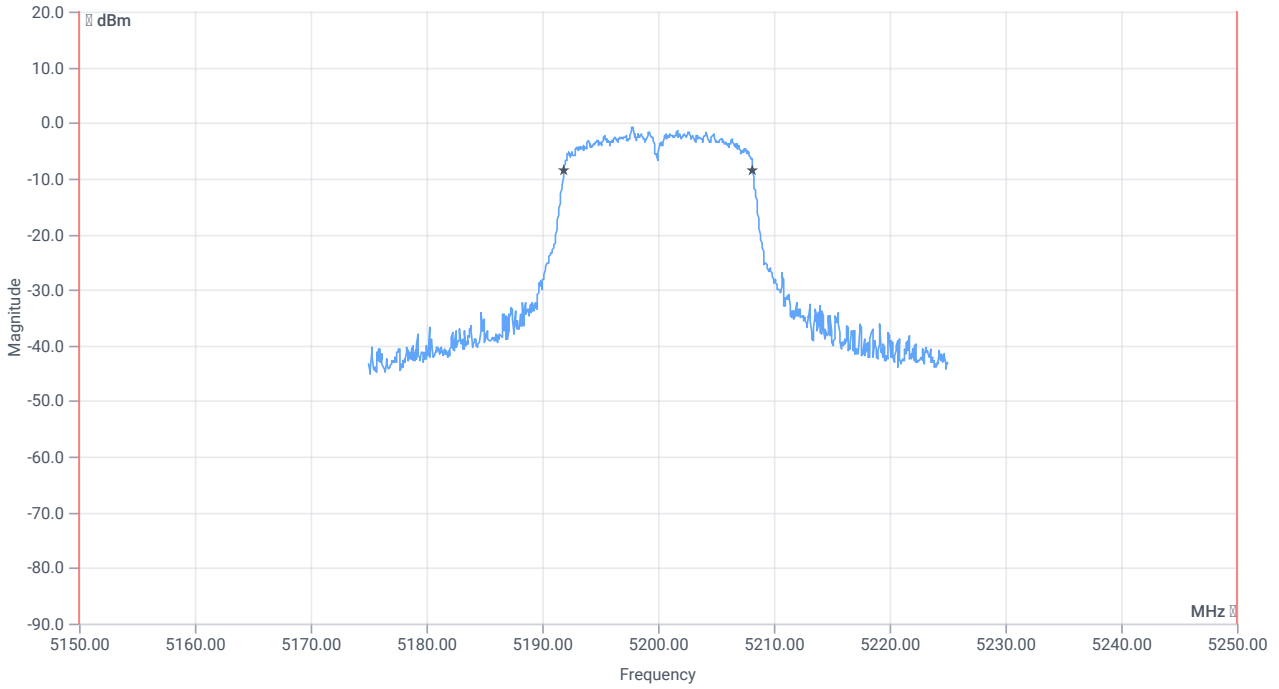


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.334	MHz	INFO
T1 99%	5150.000000	--	5191.8581	MHz	PASS
T2 99%	--	5250.000000	5208.1918	MHz	PASS

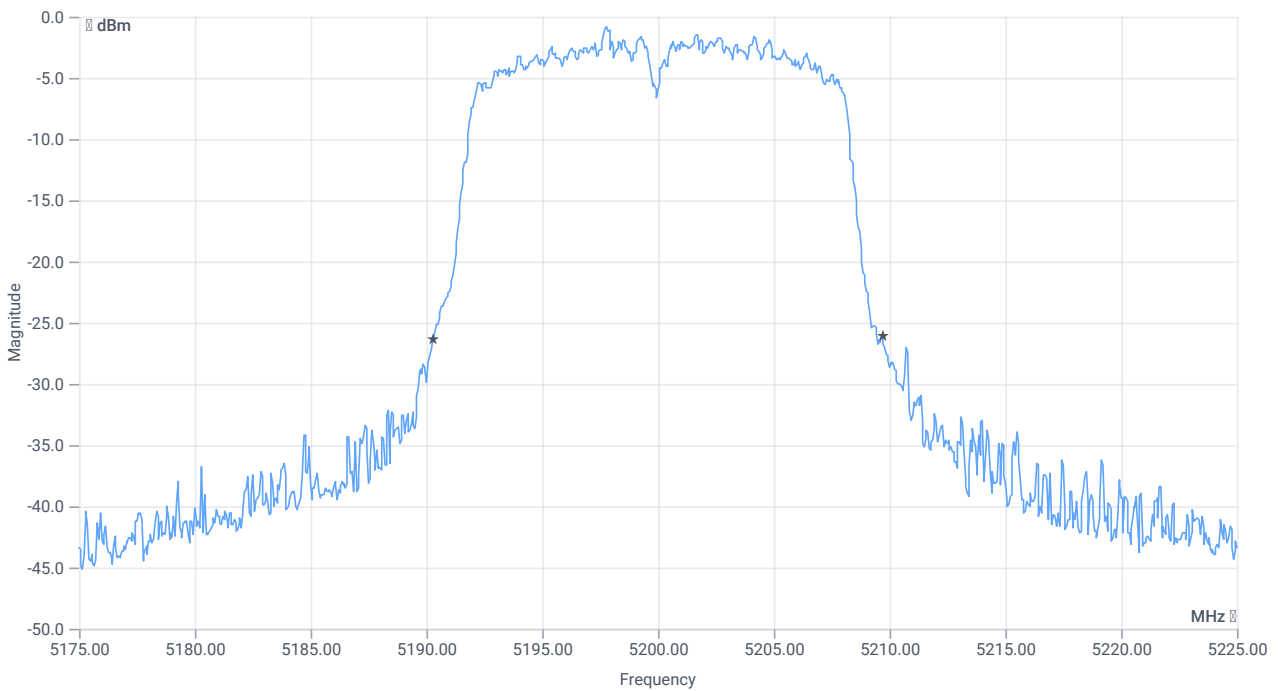

BW 26dB

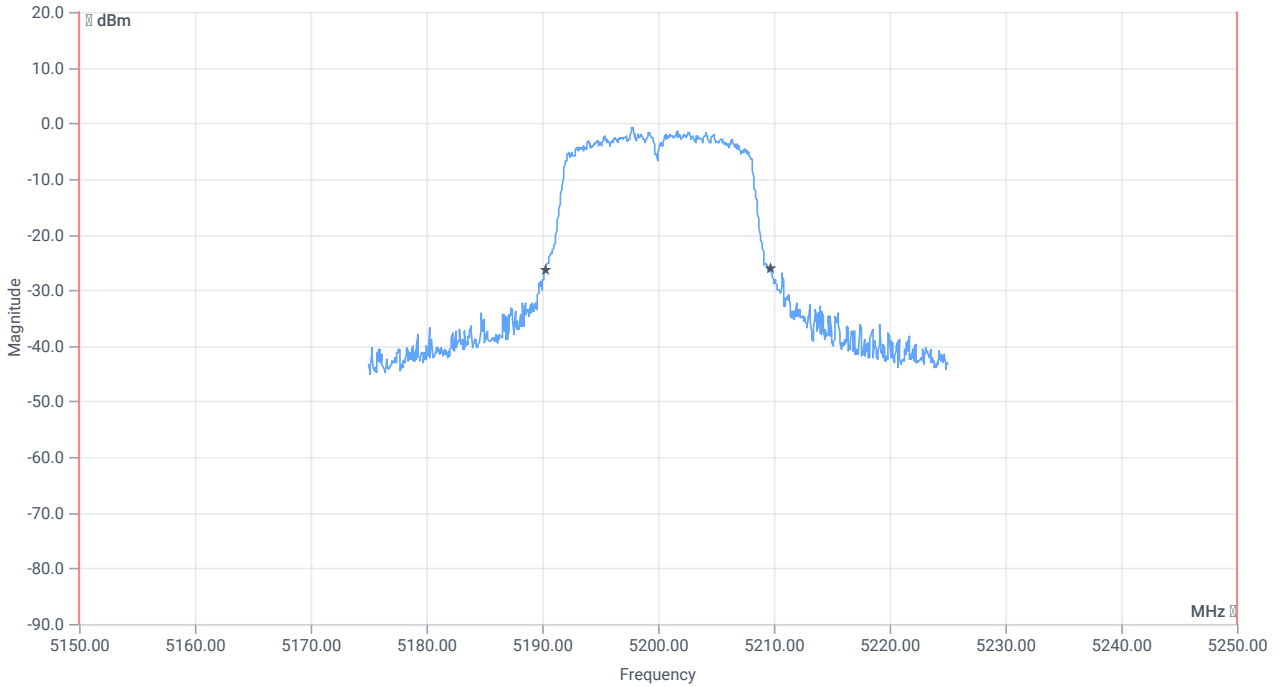

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.45	MHz	INFO
T1 26dB	5150.000000	---	5190.2500	MHz	PASS
T2 26dB	---	5250.000000	5209.7000	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:50:18
Ambit temp [°C] humidity [rel%]	26.4 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.68	dBm	INFO
Ref. frequency	--	--	5196.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.68 10.05 20
Start [MHz] Stop [MHz]	5175.000 5225.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

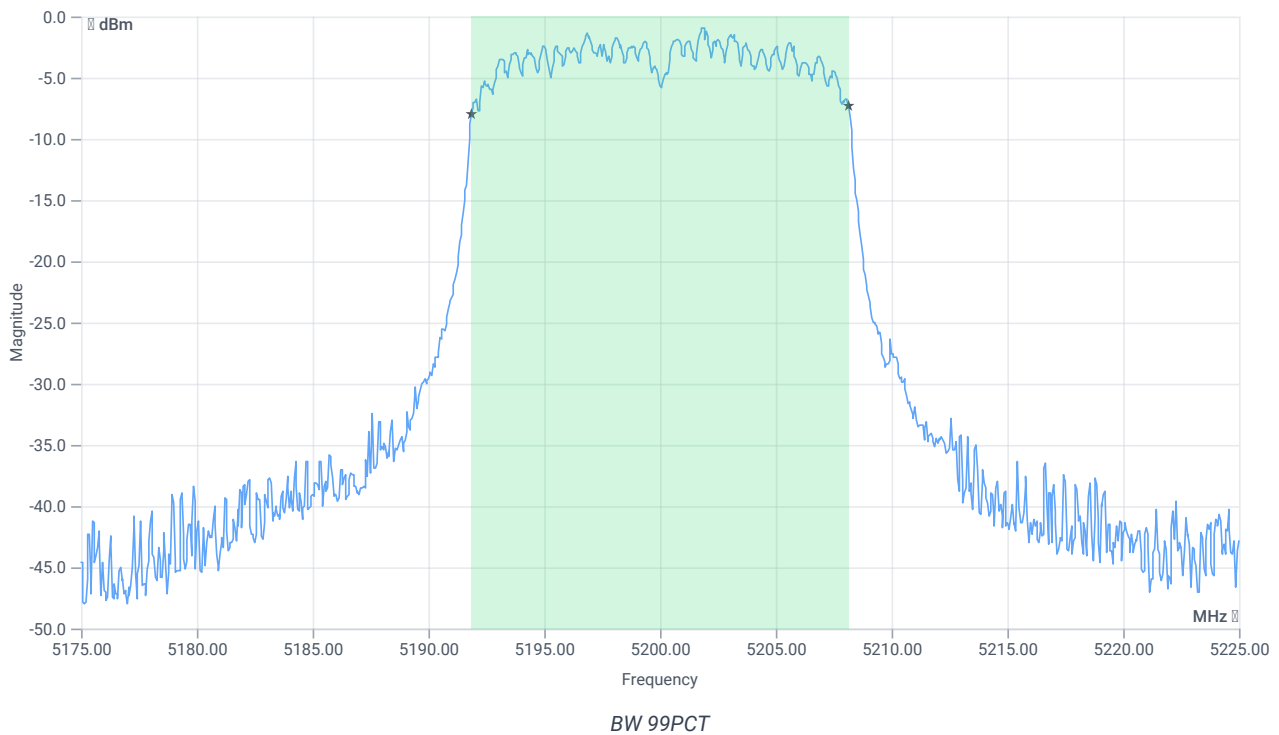


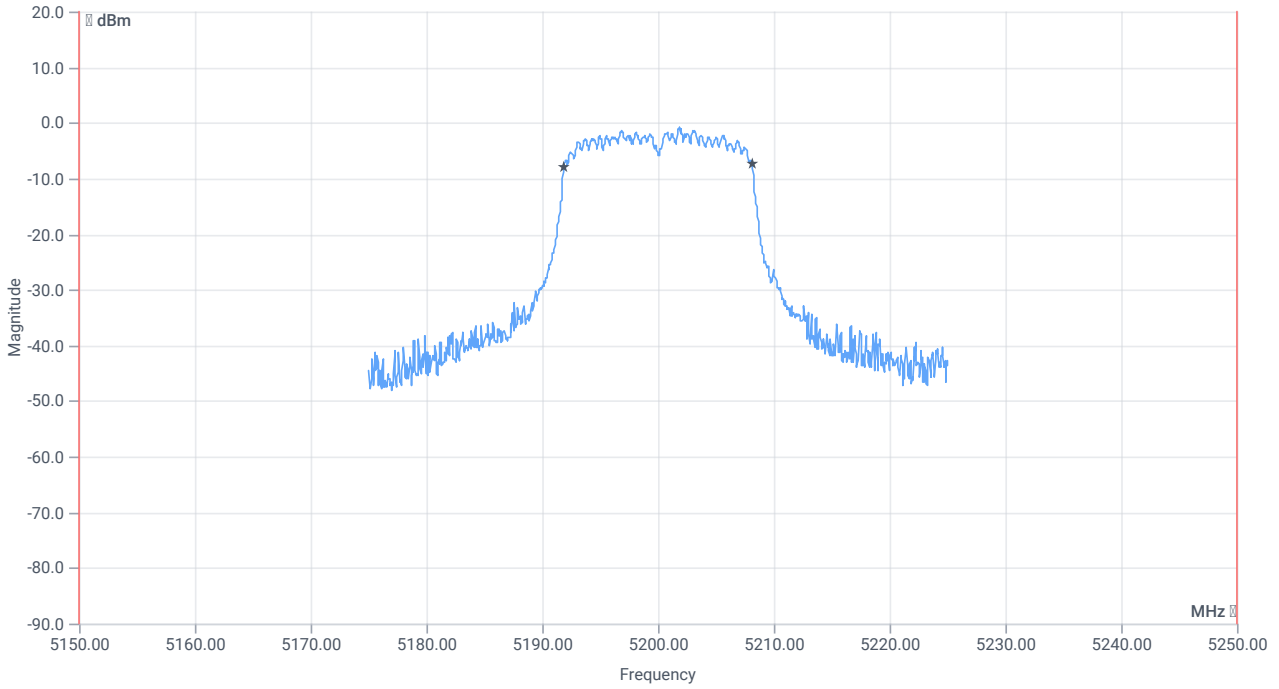


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.284	MHz	INFO
T1 99%	5150.000000	--	5191.8581	MHz	PASS
T2 99%	--	5250.000000	5208.1419	MHz	PASS

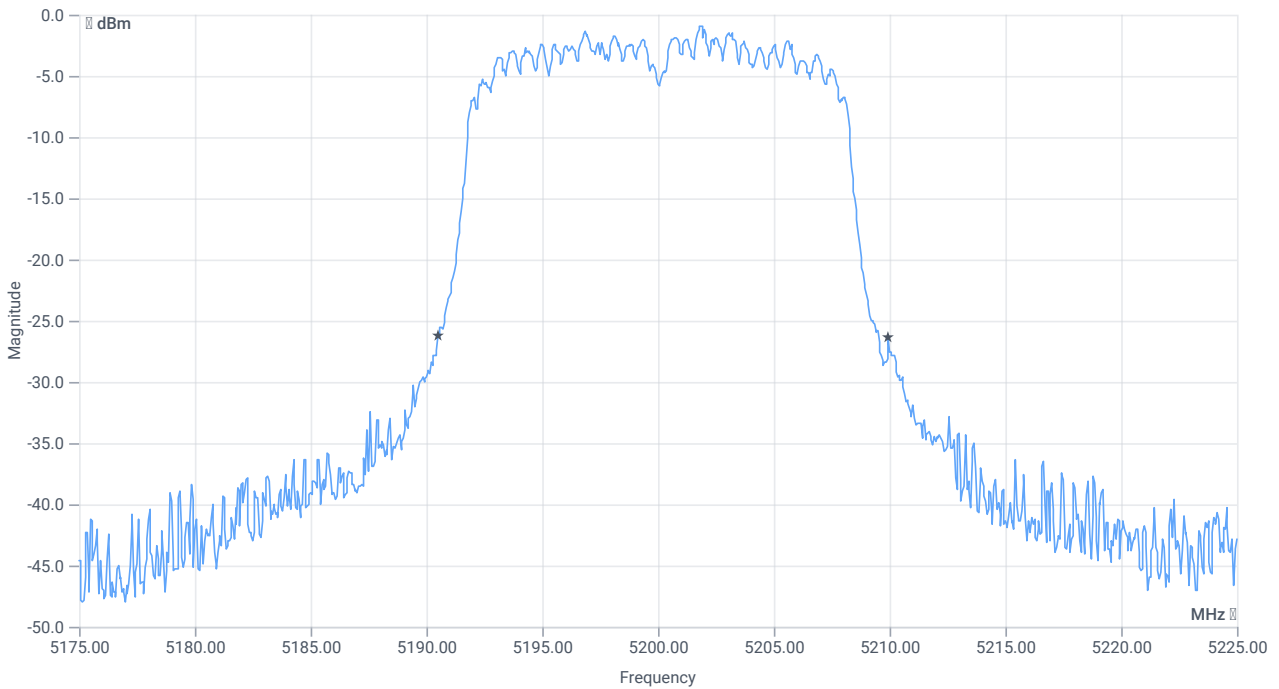

BW 26dB

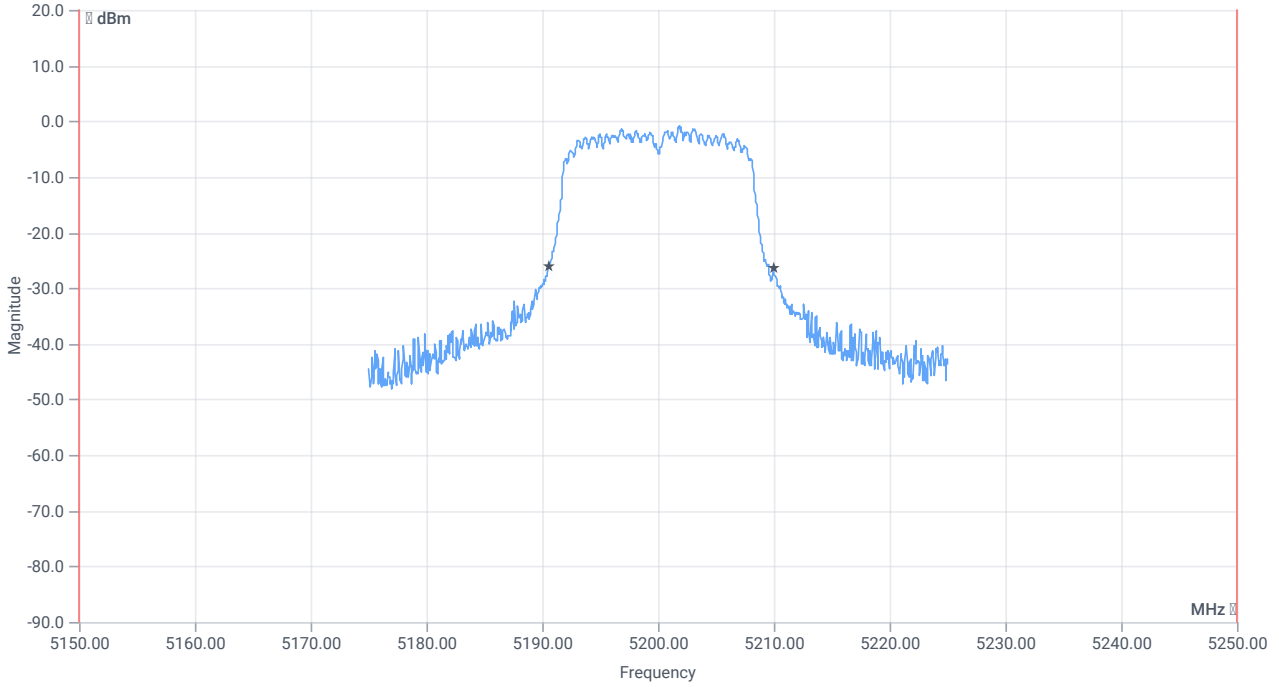

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.45	MHz	INFO
T1 26dB	5150.000000	---	5190.5000	MHz	PASS
T2 26dB	---	5250.000000	5209.9500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:43:00
Ambit temp [°C] humidity [rel%]	26.3 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.08	dBm	INFO
Ref. frequency	--	--	5183.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.08 10.01 20
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

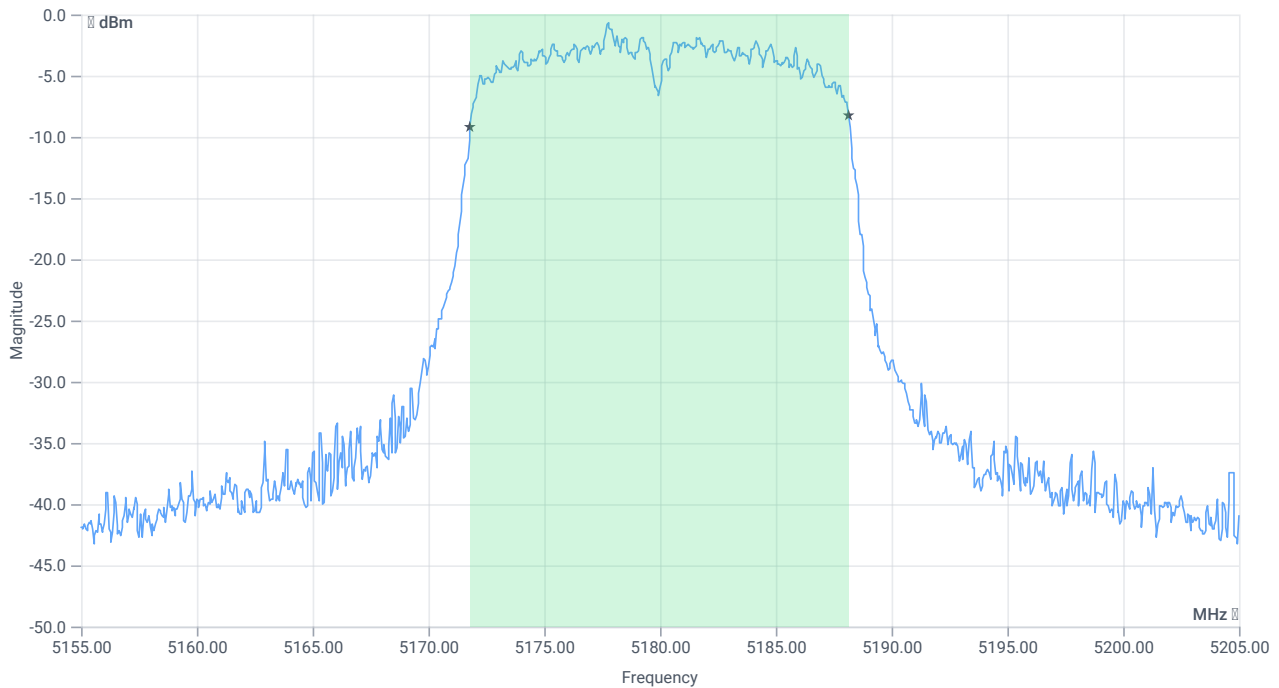


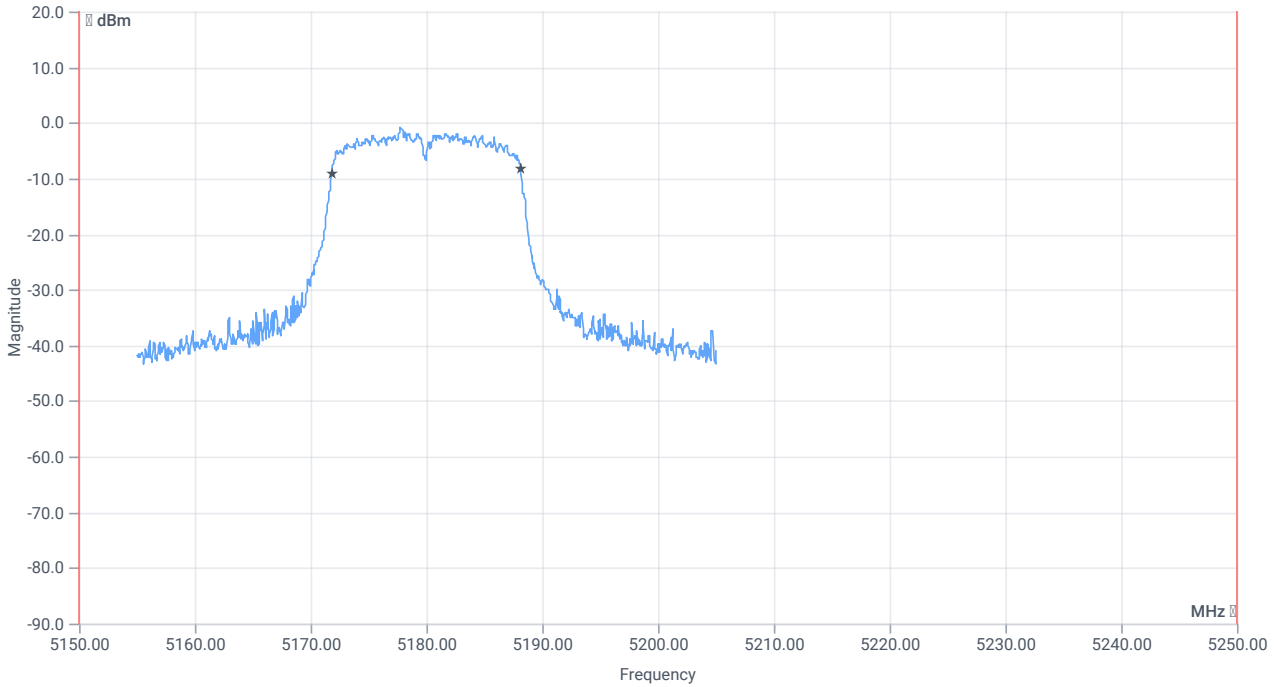


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.334	MHz	INFO
T1 99%	5150.000000	--	5171.8082	MHz	PASS
T2 99%	--	5250.000000	5188.1419	MHz	PASS

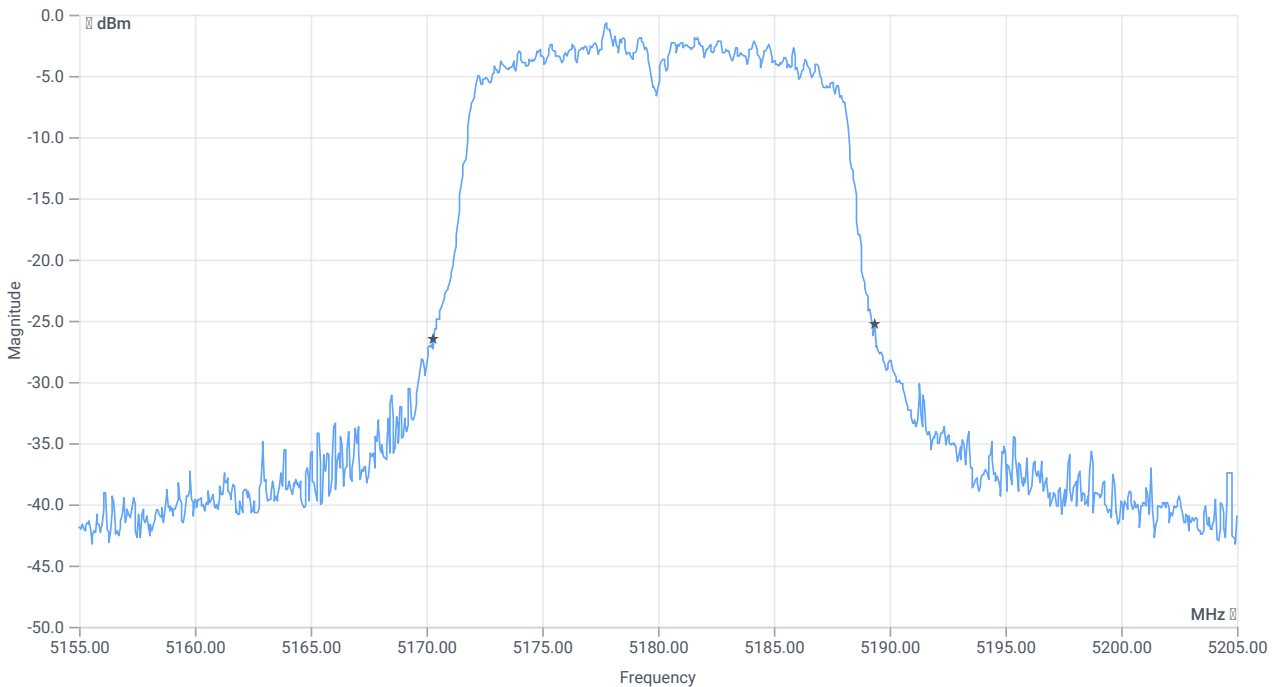

BW 26dB

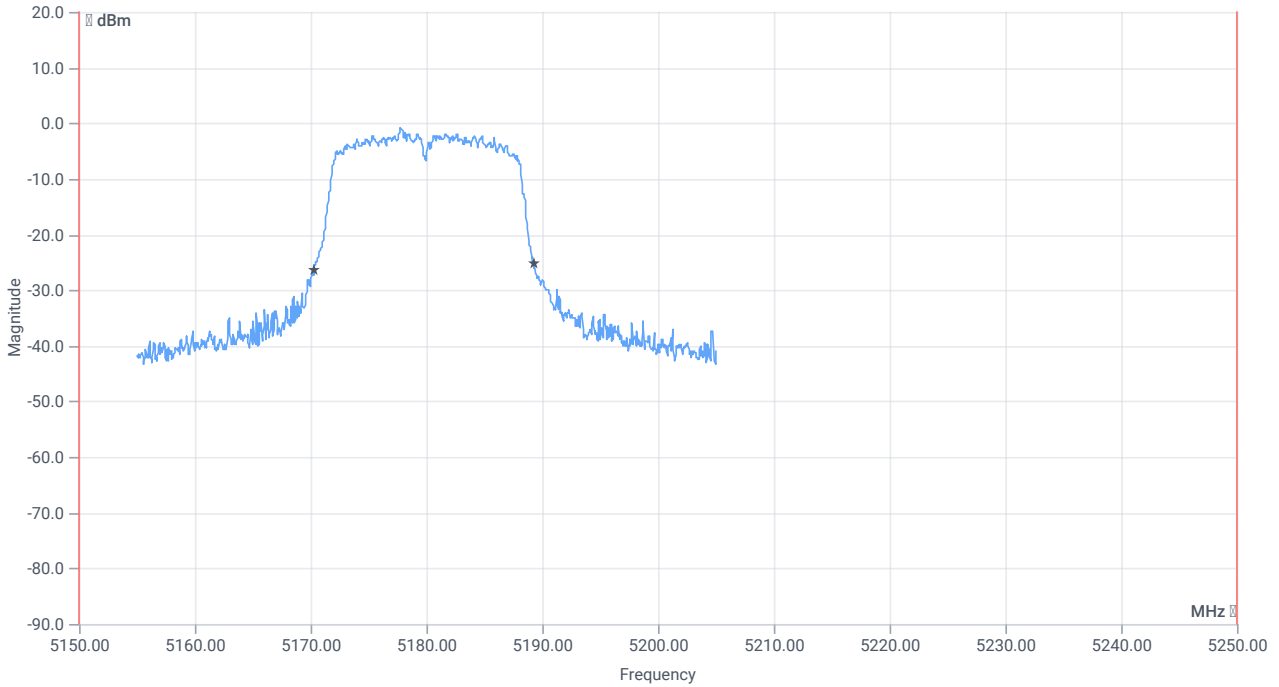

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	19.1	MHz	INFO
T1 26dB	5150.000000	--	5170.2500	MHz	PASS
T2 26dB	--	5250.000000	5189.3500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Bandwidths 99PCT and 20dB ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:38:47
Ambit temp [°C] humidity [rel%]	26.3 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	26dB Bandwidth KDB789033 D02, C.1 / ISED RSS-GEN
Description	FCC 15.407 Bandwidths - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.01	dBm	INFO
Ref. frequency	--	--	5182.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.01 9.99 20
Start [MHz] Stop [MHz]	5155.000 5205.000
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

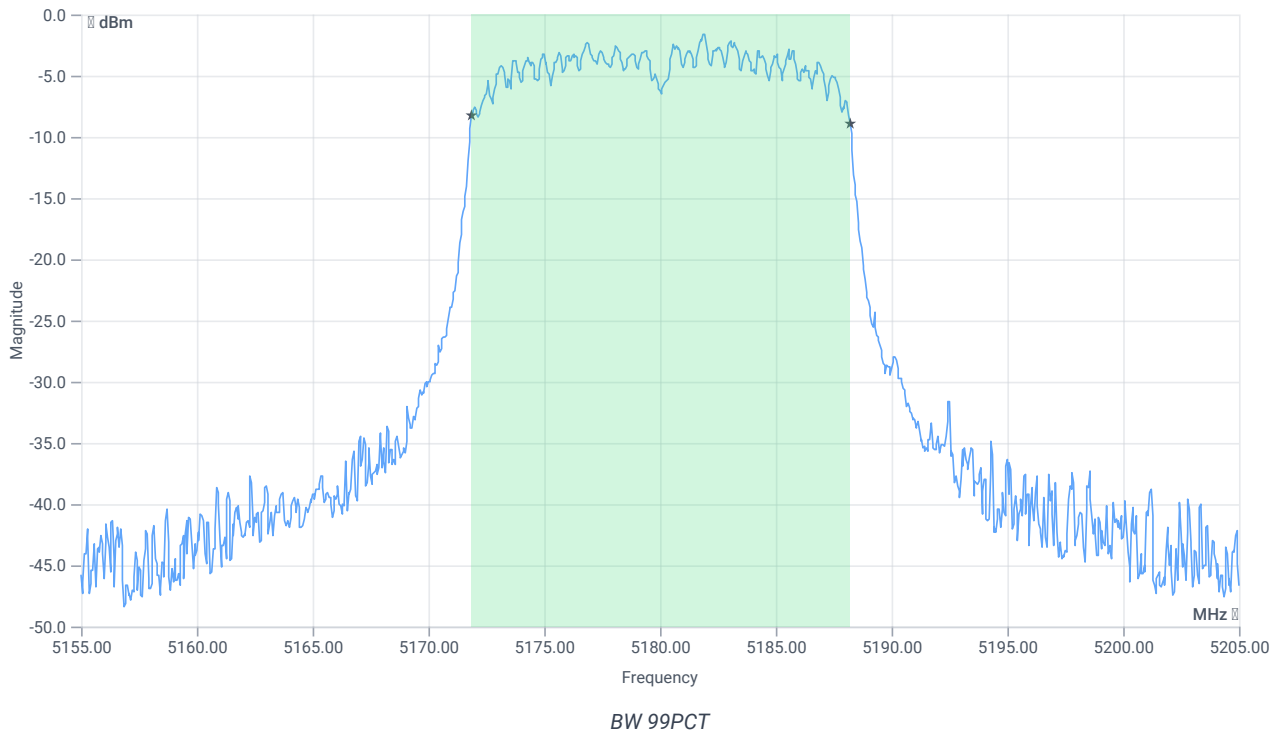


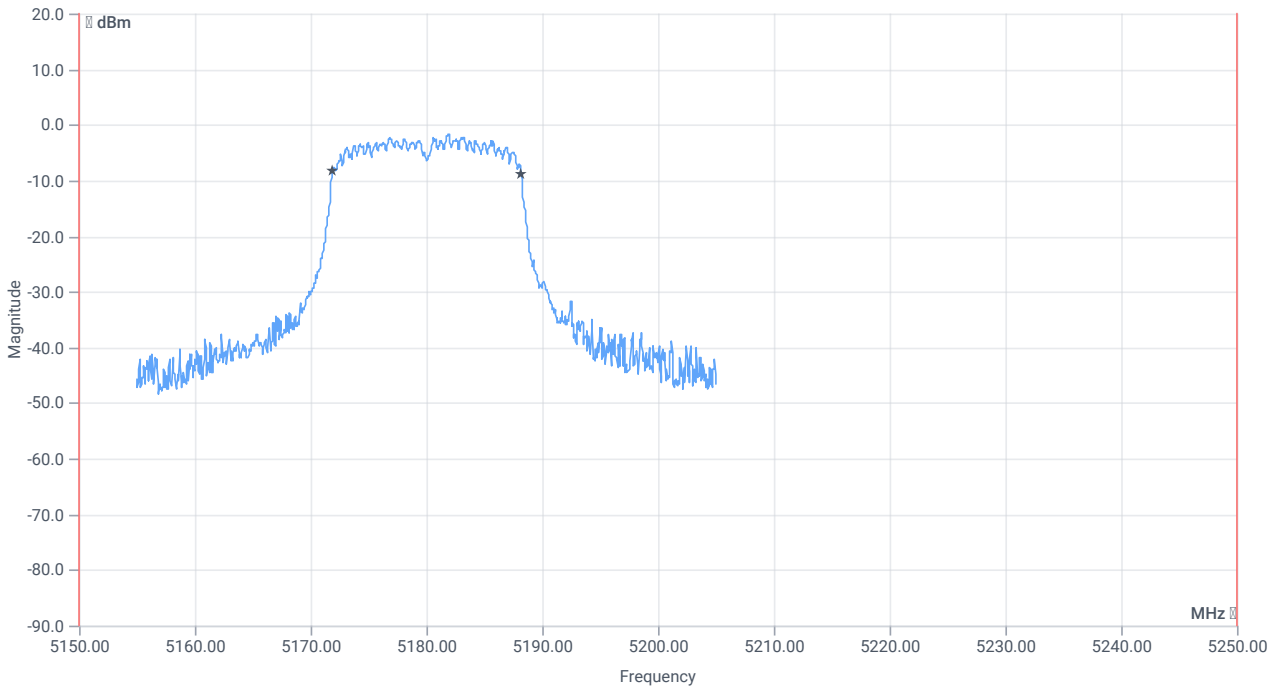


BW within band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.334	MHz	INFO
T1 99%	5150.000000	--	5171.8581	MHz	PASS
T2 99%	--	5250.000000	5188.1918	MHz	PASS

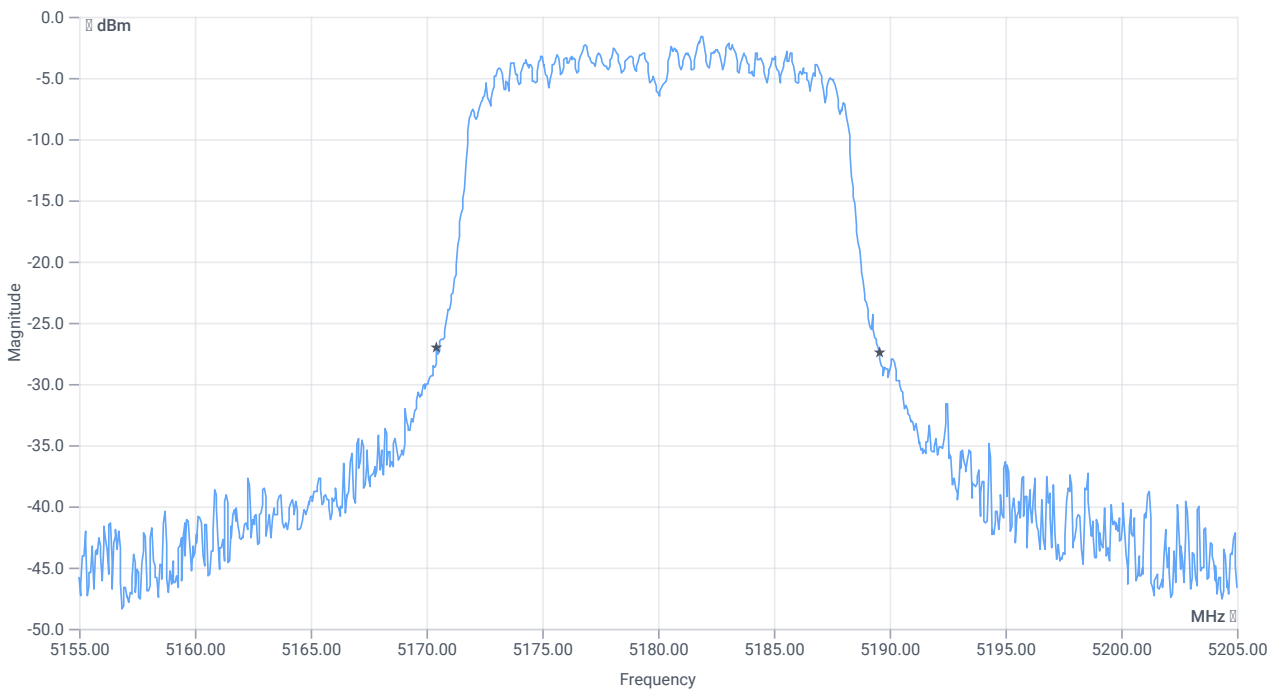

BW 26dB

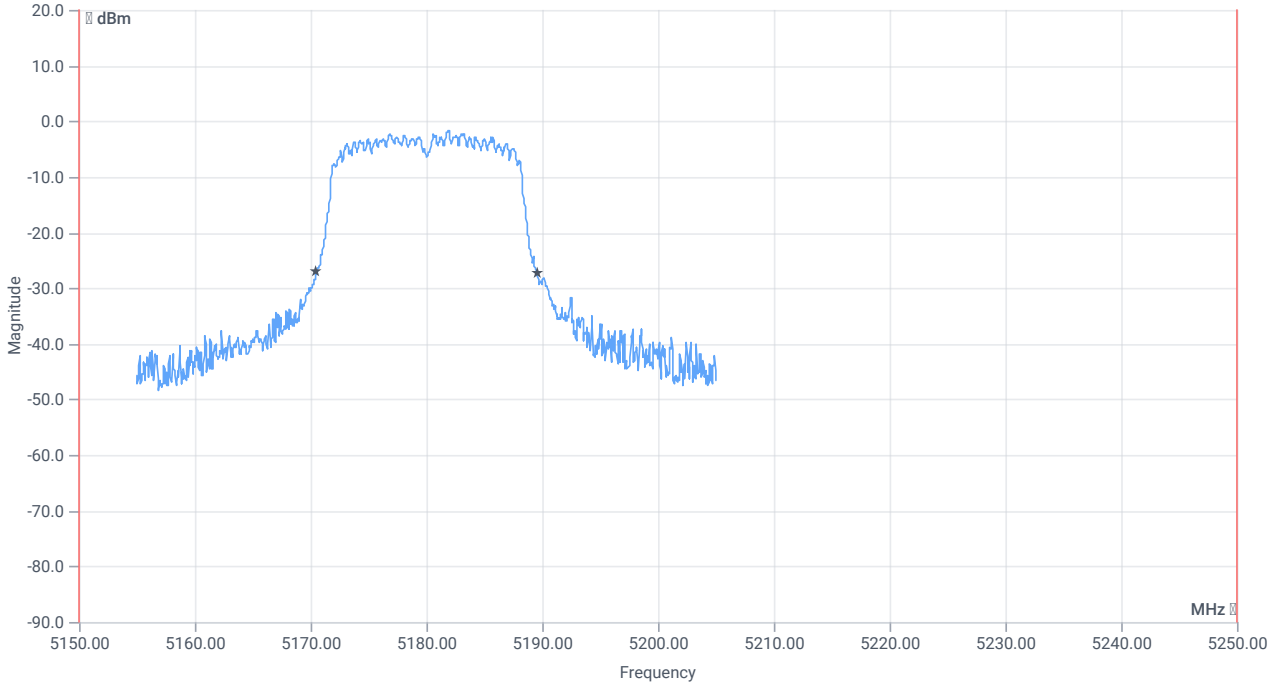

BW within band 26dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	--	--	19.1	MHz	INFO
T1 26dB	5150.000000	--	5170.4500	MHz	PASS
T2 26dB	--	5250.000000	5189.5500	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 19:01:47
Ambit temp [°C] humidity [rel%]	26.7 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5775 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-6.81	dBm	INFO
Ref. frequency	--	--	5739.440	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-3.81 10.41 5
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

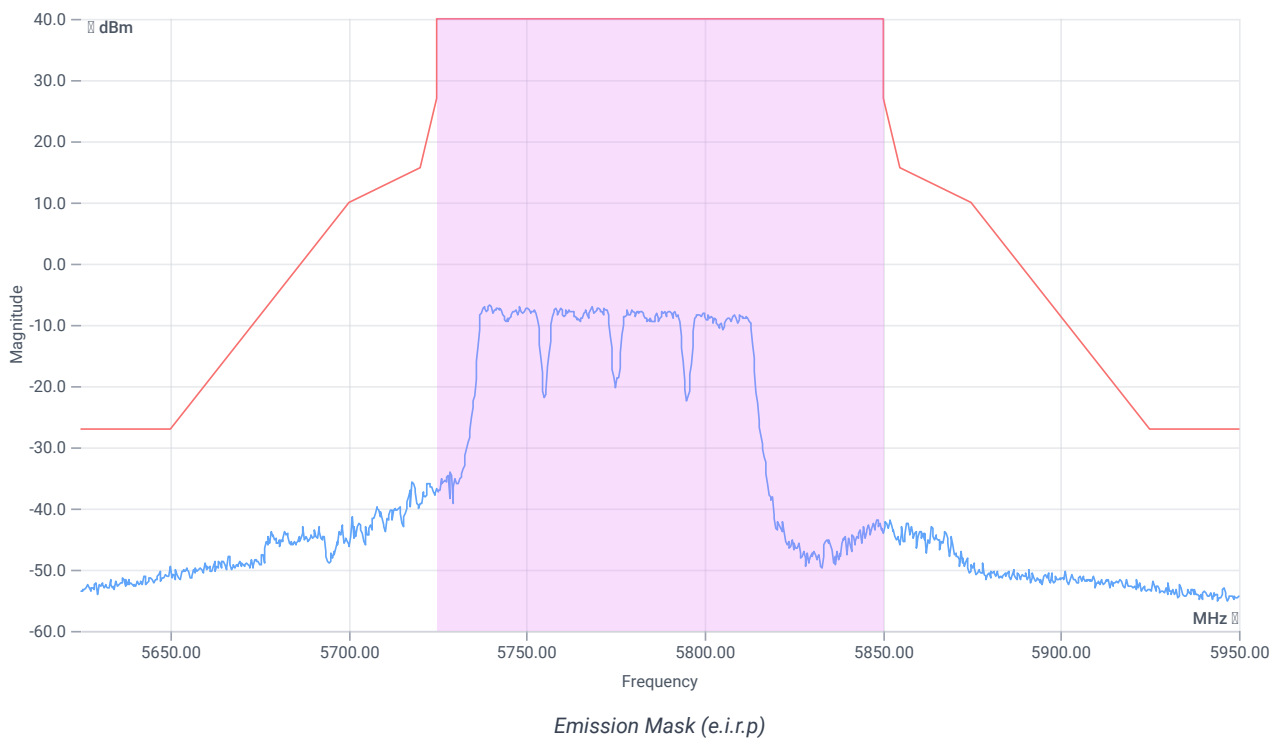

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 18:50:46
Ambit temp [°C] humidity [rel%]	26.7 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5775 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-6.08	dBm	INFO
Ref. frequency	--	--	5739.440	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-3.08 10.38 5
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

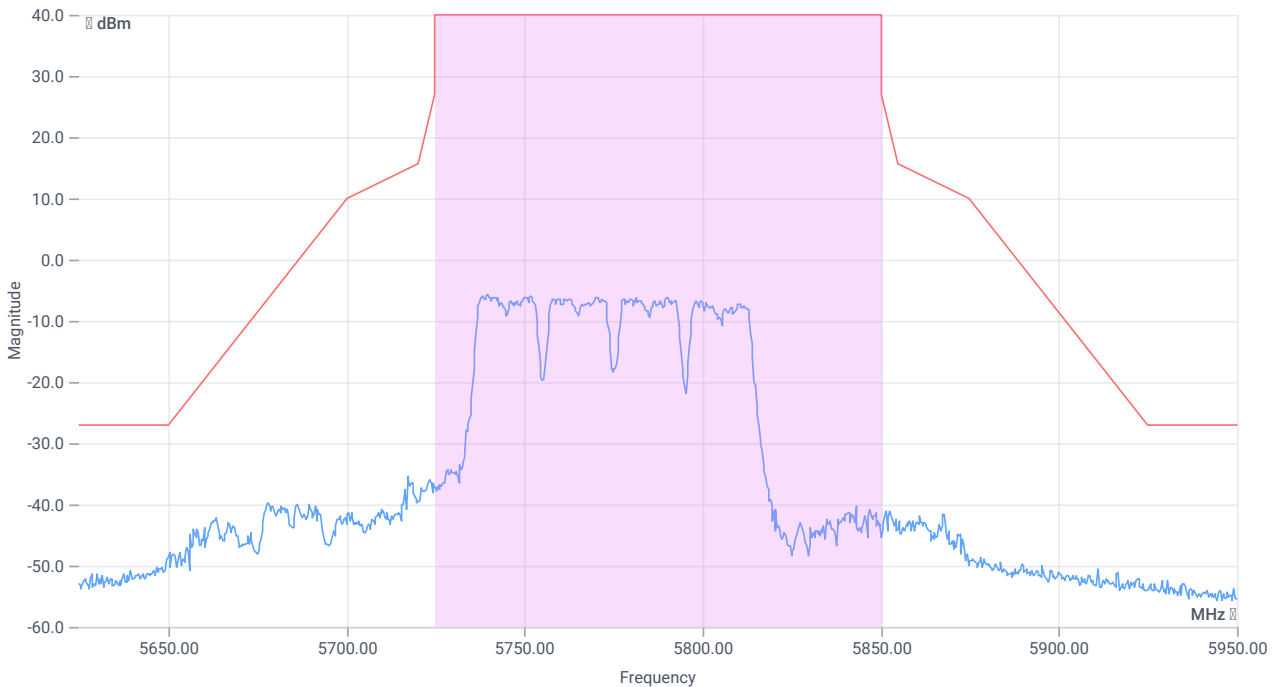

Emission Mask (e.i.r.p)

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:21:38
Ambit temp [°C] humidity [rel%]	26.8 31
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5795 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.42	dBm	INFO
Ref. frequency	--	--	5779.420	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-0.42 10.41 5
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

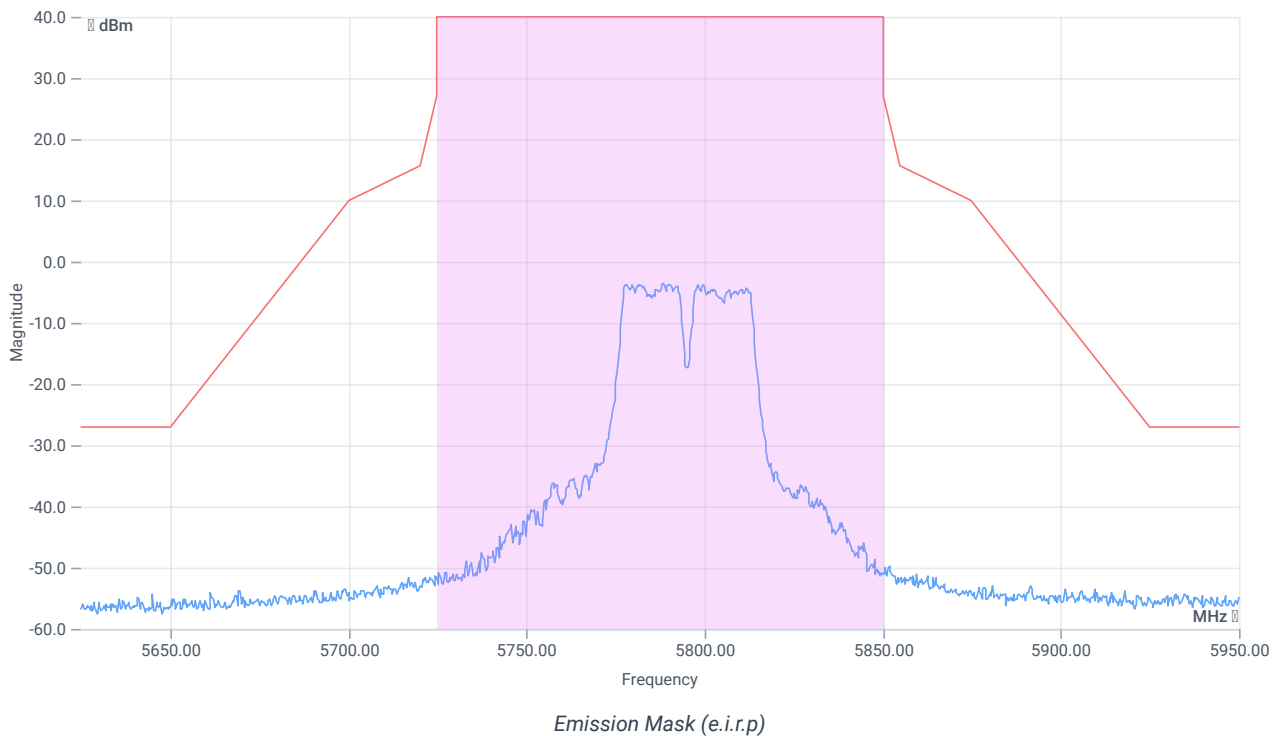

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:14:39
Ambit temp [°C] humidity [rel%]	26.7 33
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5795 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.93	dBm	INFO
Ref. frequency	--	--	5782.410	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	0.07 10.37 5
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

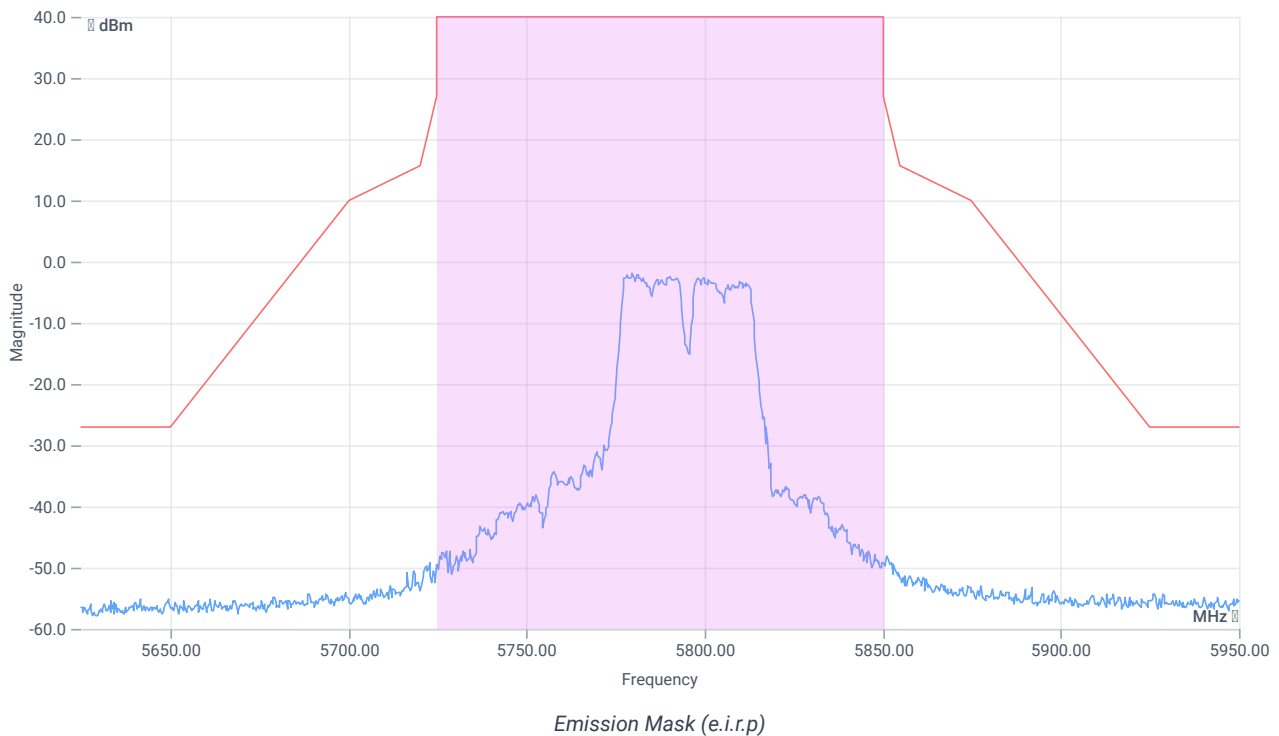

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:03:08
Ambit temp [°C] humidity [rel%]	26.8 33
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5755 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-4.14	dBm	INFO
Ref. frequency	--	--	5759.400	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-1.14 10.41 5
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

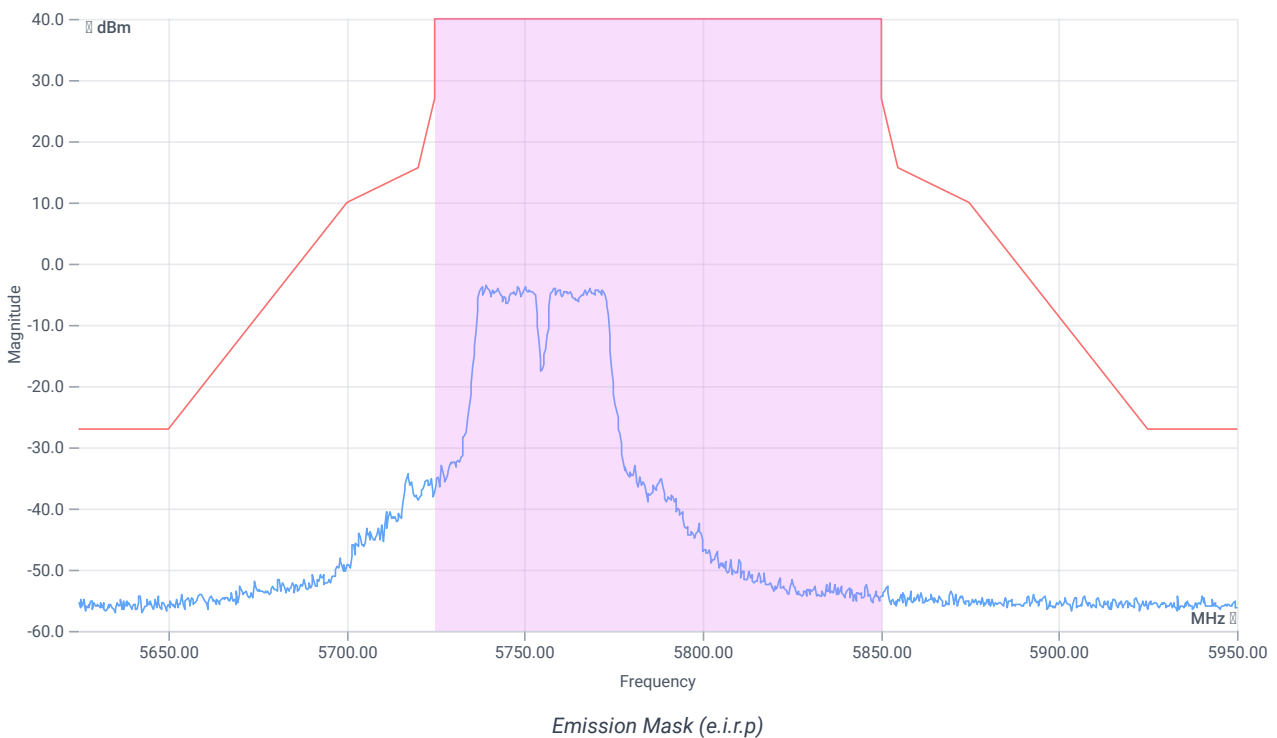

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 17:56:10
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5755 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.86	dBm	INFO
Ref. frequency	--	--	5750.000	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	0.14 10.39 5
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

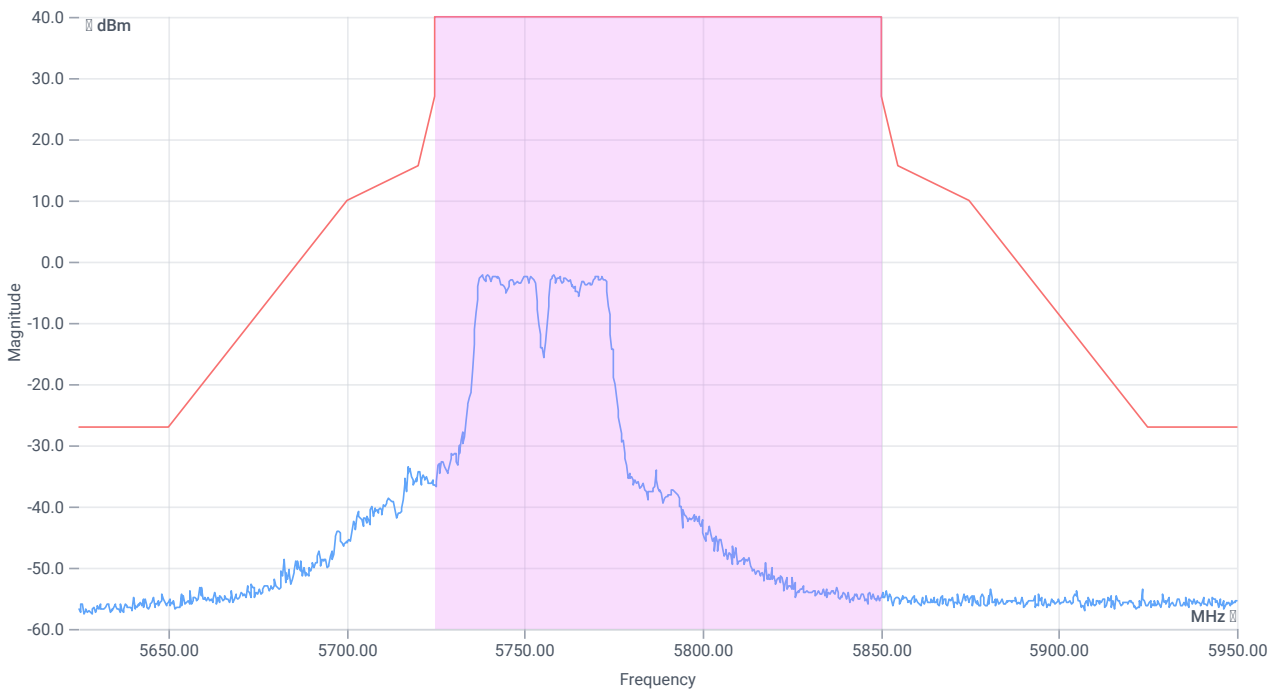

Emission Mask (e.i.r.p)

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:24:46
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5825 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.87	dBm	INFO
Ref. frequency	--	--	5821.800	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.13 10.44 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

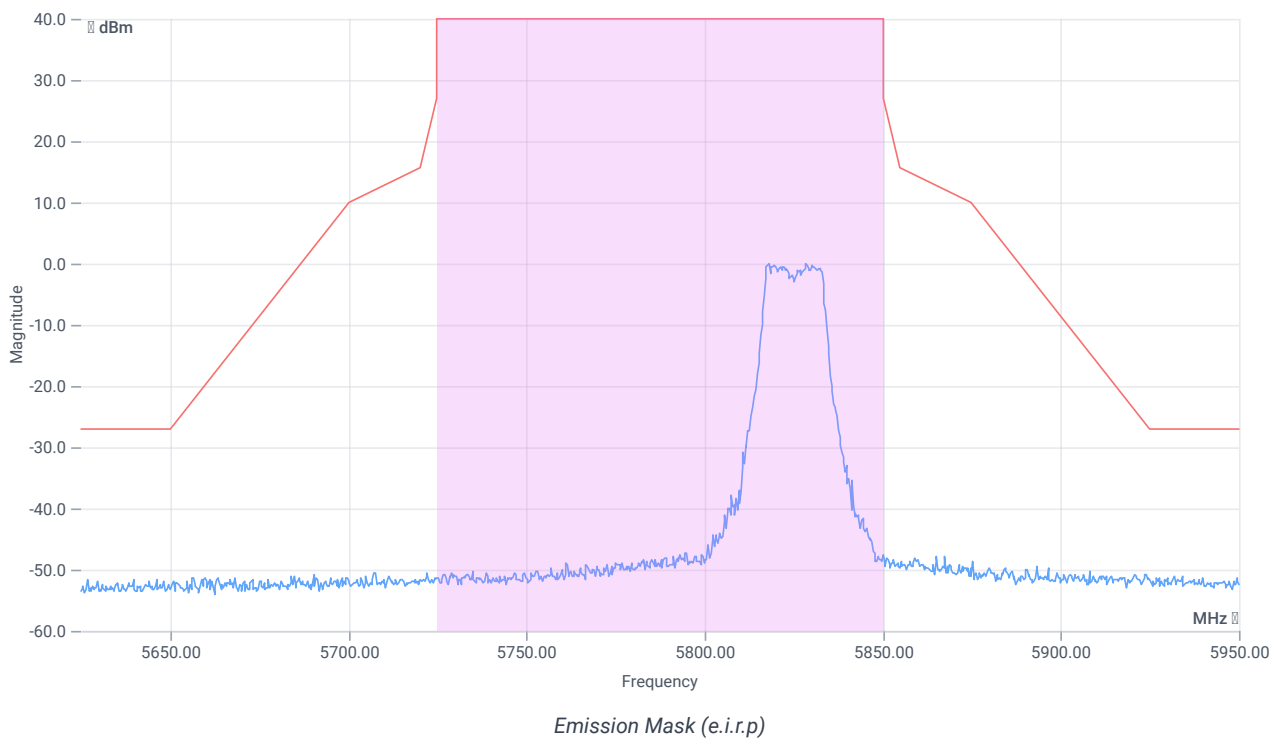

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:17:28
Ambit temp [°C] humidity [rel%]	26.9 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5825 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.25	dBm	INFO
Ref. frequency	--	--	5830.000	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.75 10.45 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

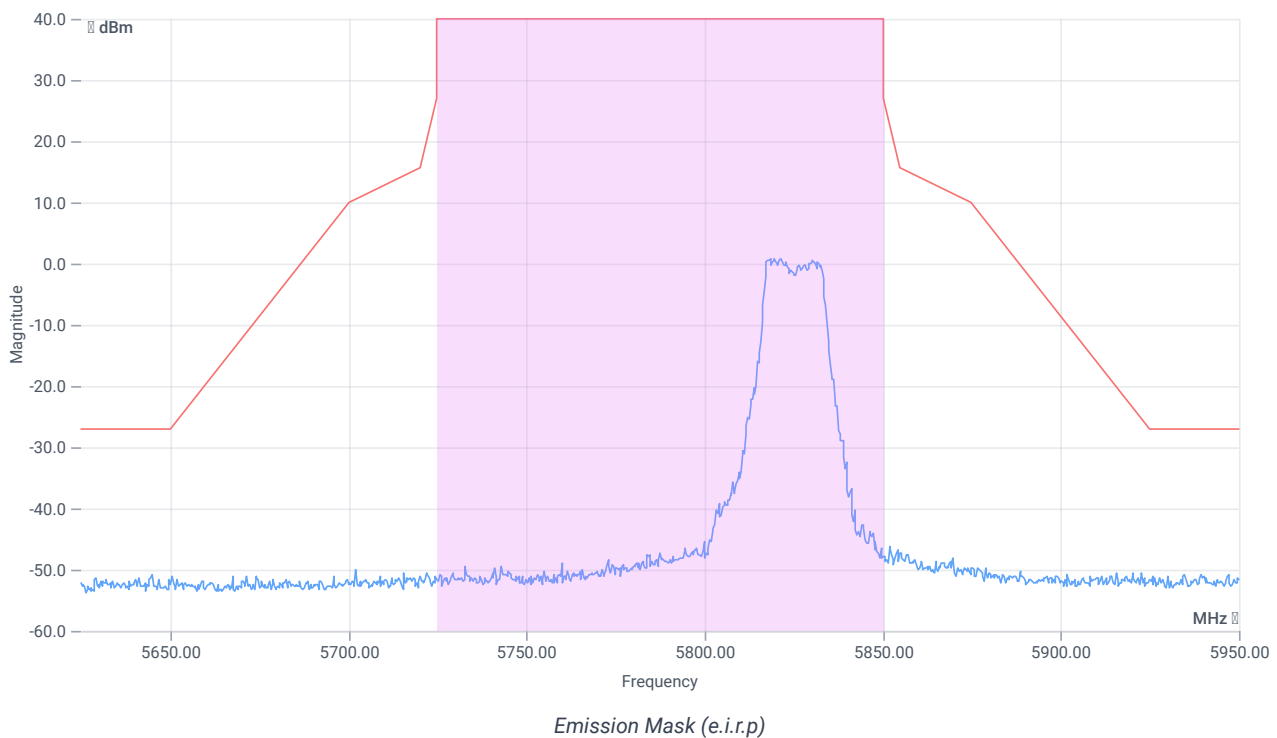

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:08:21
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5785 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.03	dBm	INFO
Ref. frequency	--	--	5790.190	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.03 10.41 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

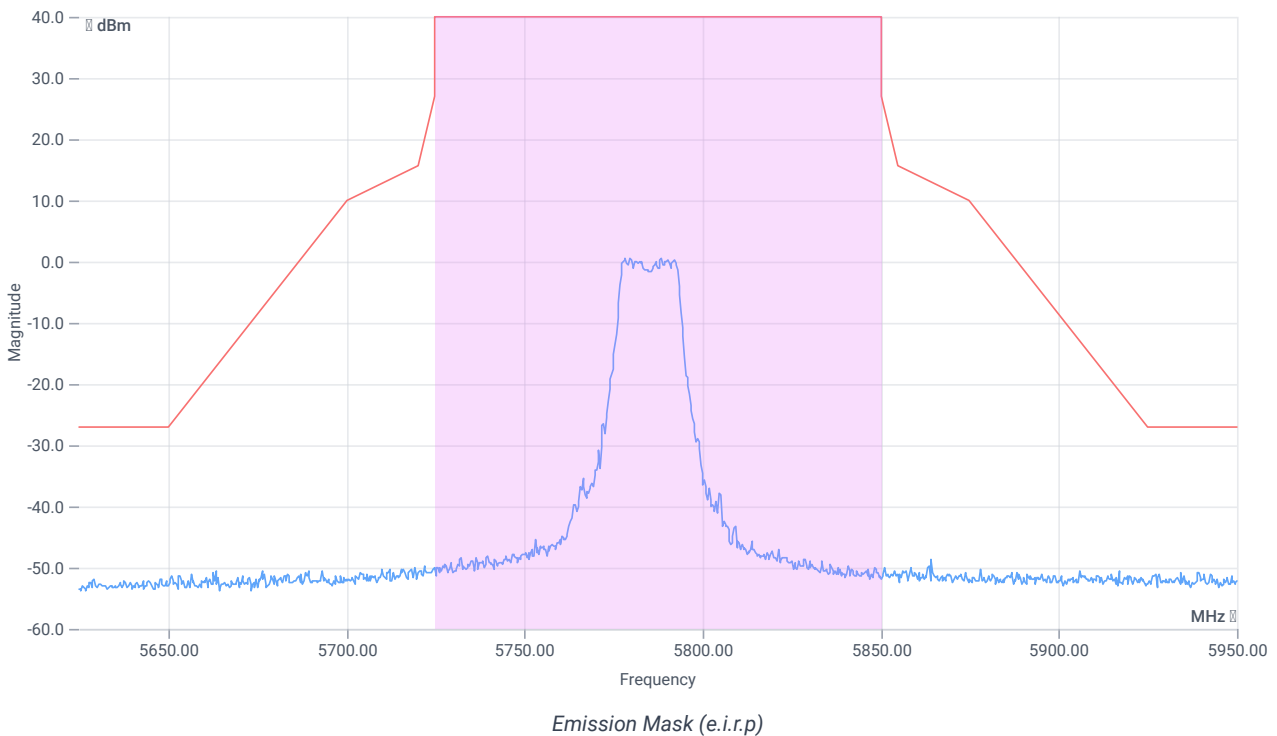

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:00:58
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5785 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.31	dBm	INFO
Ref. frequency	--	--	5786.400	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.31 10.38 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

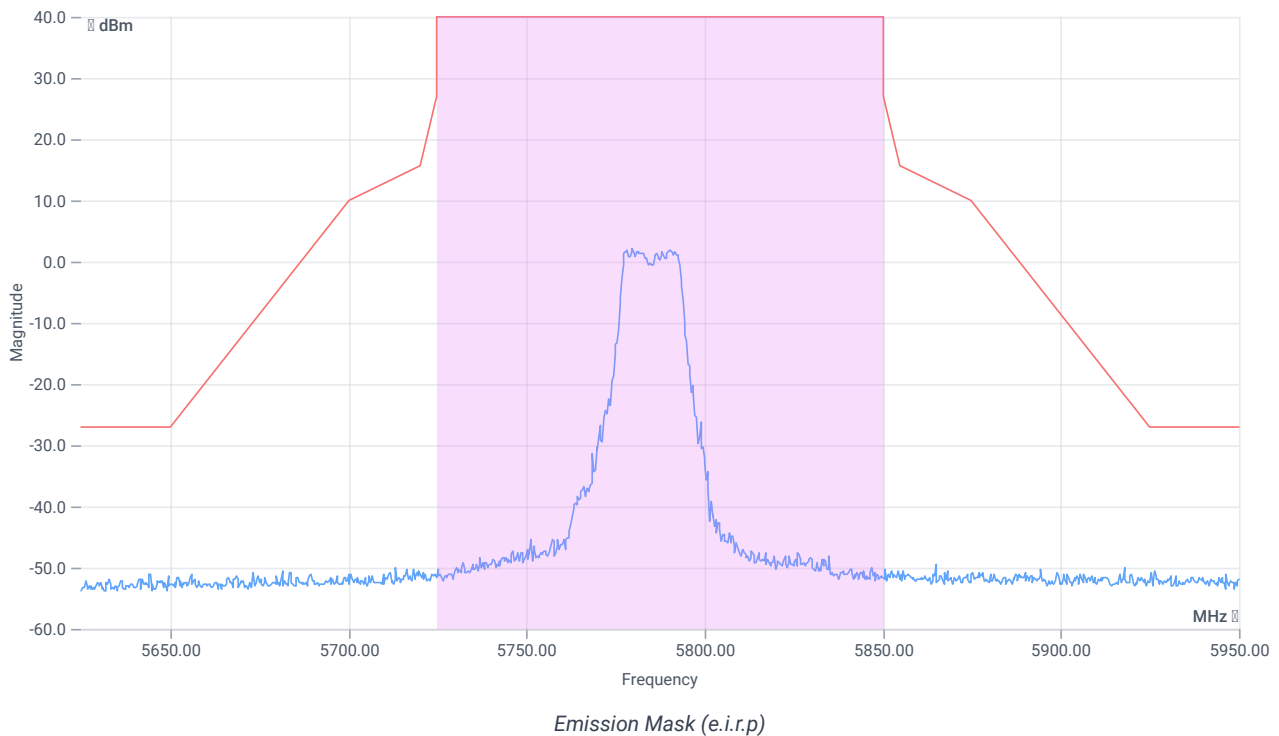

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:52:10
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5745 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.22	dBm	INFO
Ref. frequency	--	--	5746.800	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.78 10.38 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

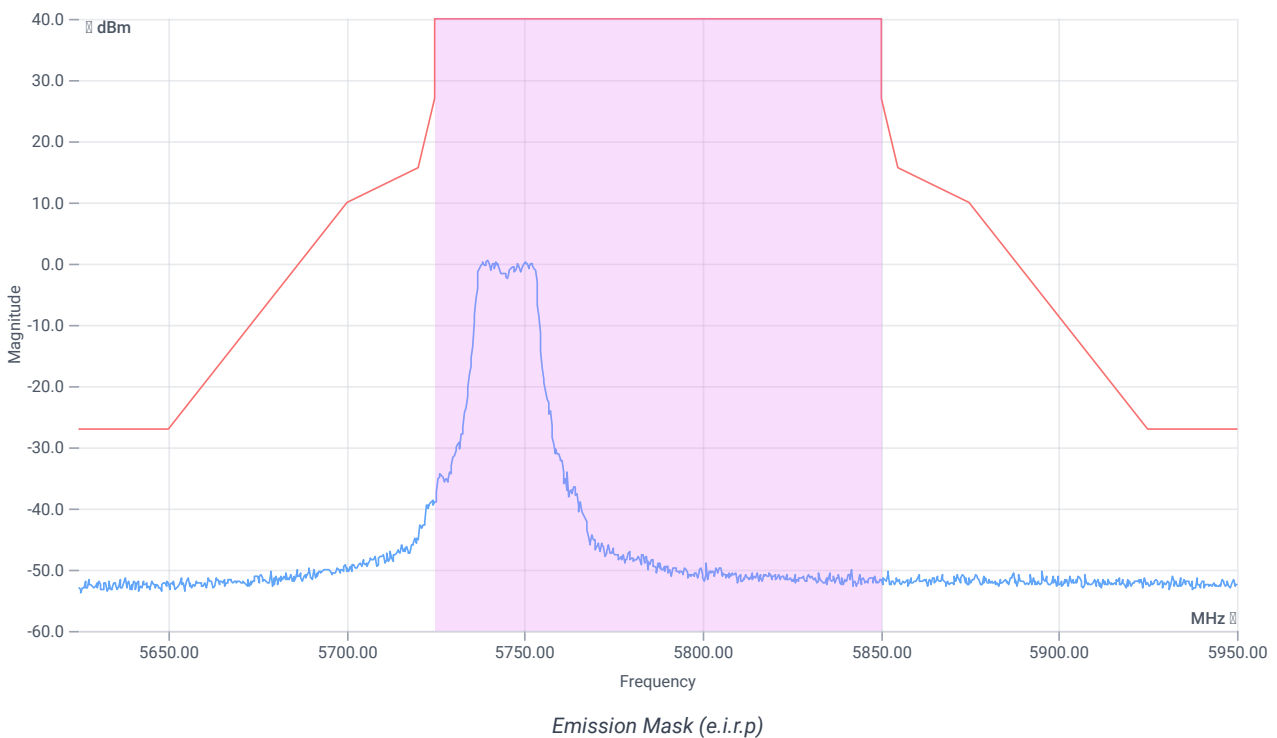

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:44:51
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5745 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.64	dBm	INFO
Ref. frequency	--	--	5741.800	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.64 10.36 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

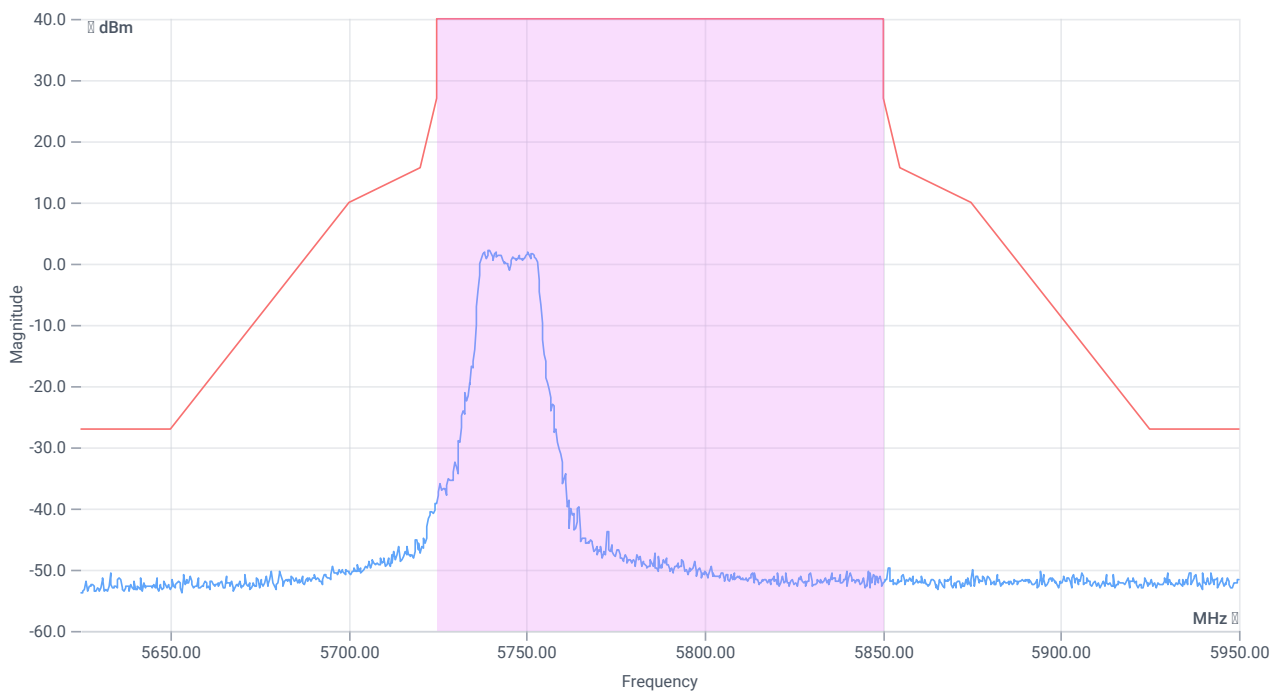

Emission Mask (e.i.r.p)

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:51:00
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5825 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.24	dBm	INFO
Ref. frequency	--	--	5826.400	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.24 10.44 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

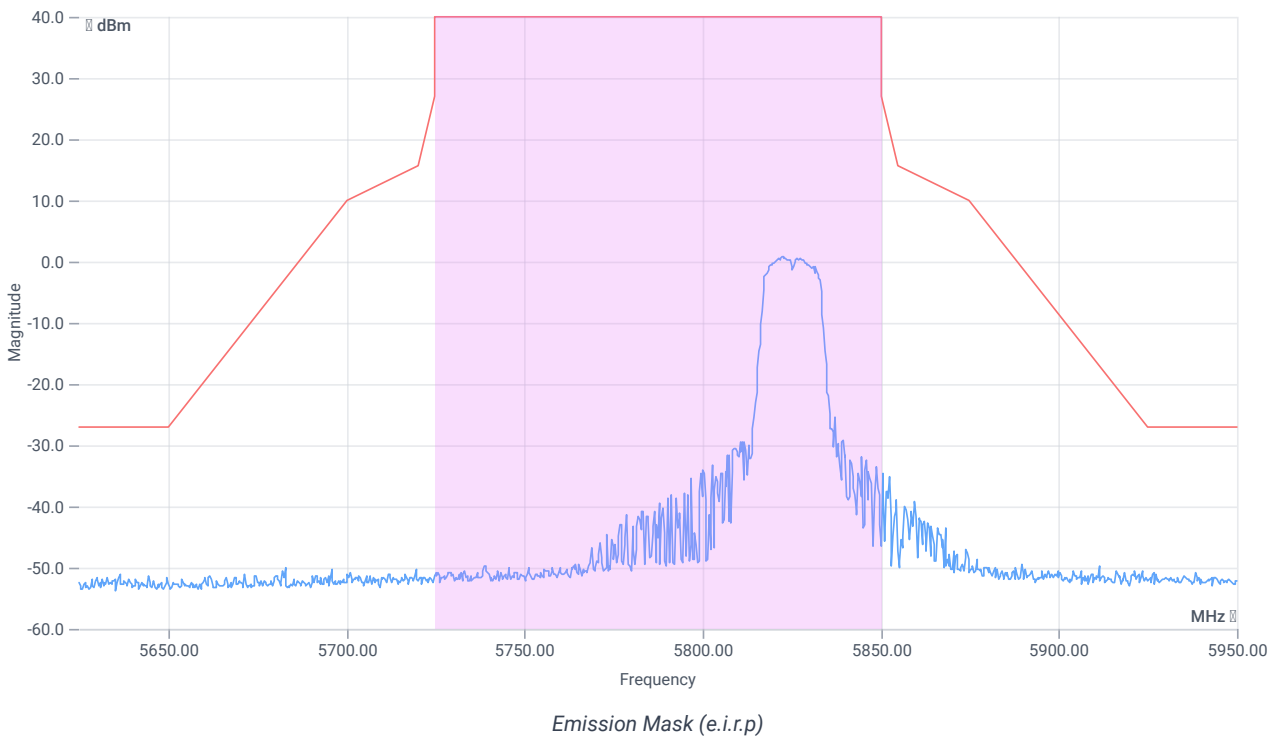

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:43:43
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5825 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.26	dBm	INFO
Ref. frequency	--	--	5822.200	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.26 10.45 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

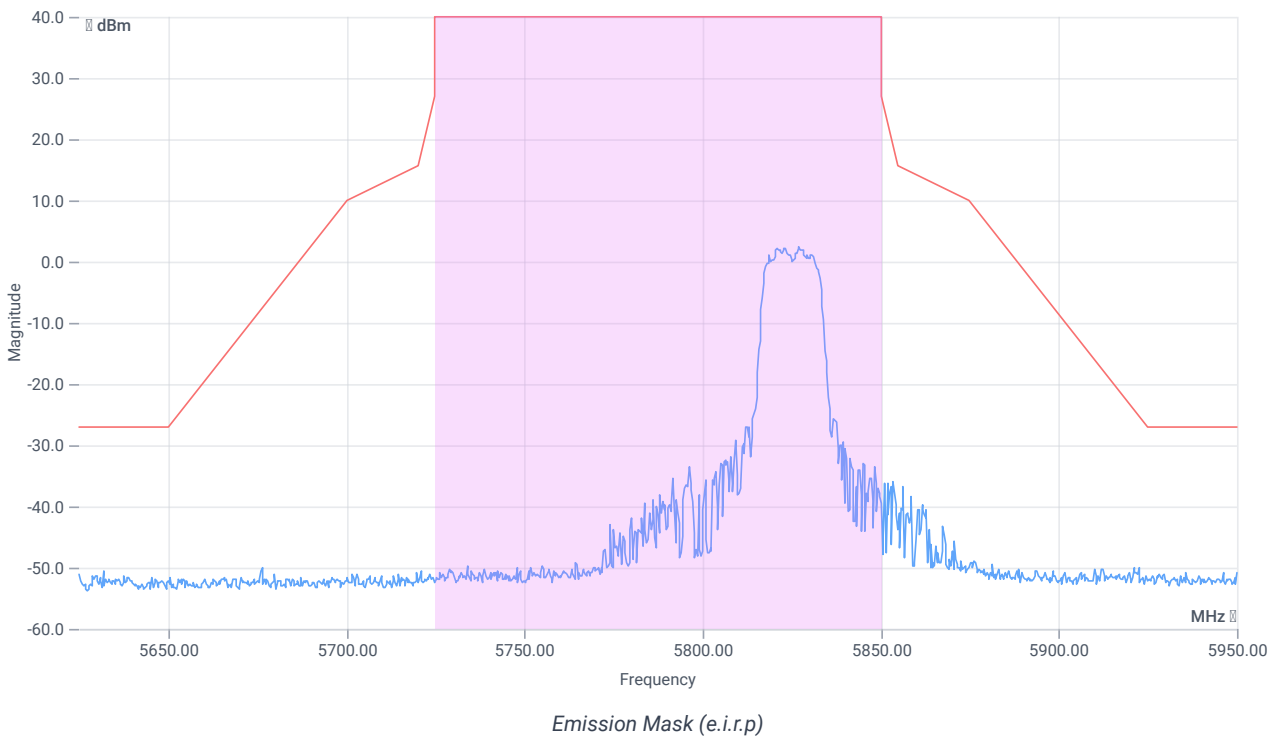

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:35:17
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5785 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.17	dBm	INFO
Ref. frequency	--	--	5788.000	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.17 10.41 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

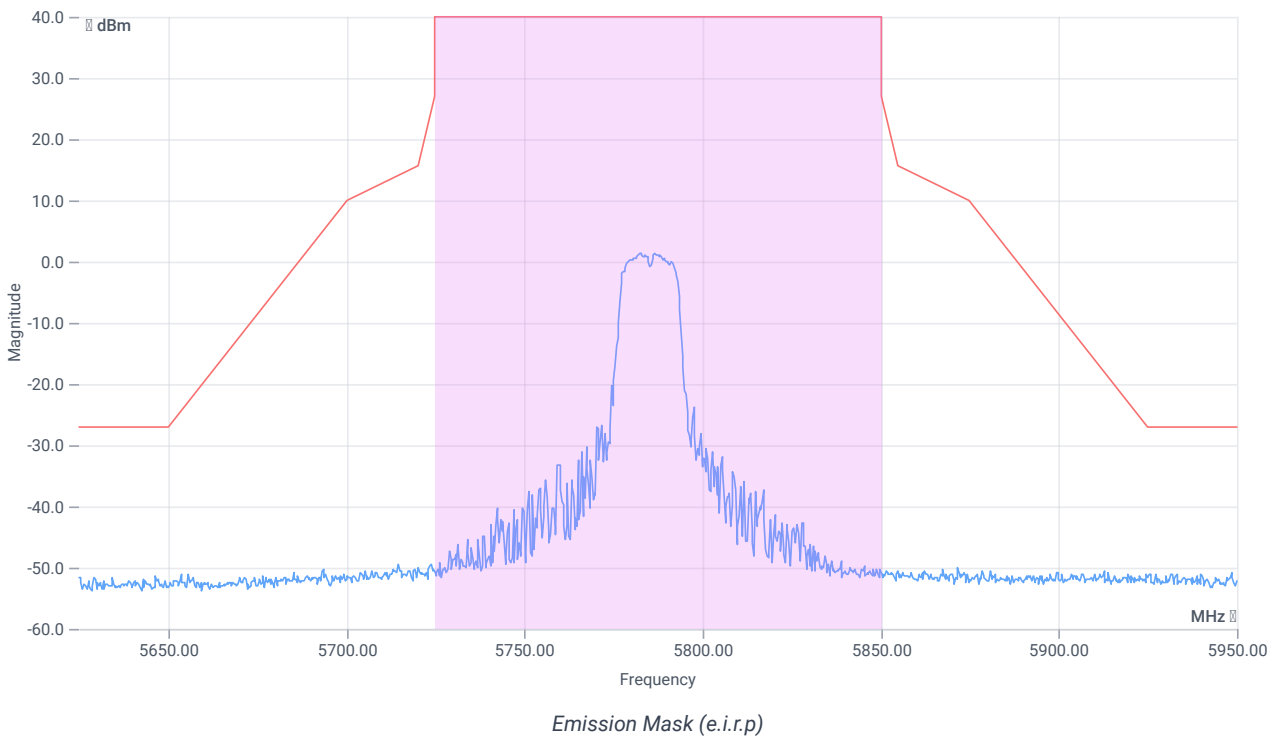

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:27:55
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5785 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.16	dBm	INFO
Ref. frequency	--	--	5780.800	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.16 10.38 10
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

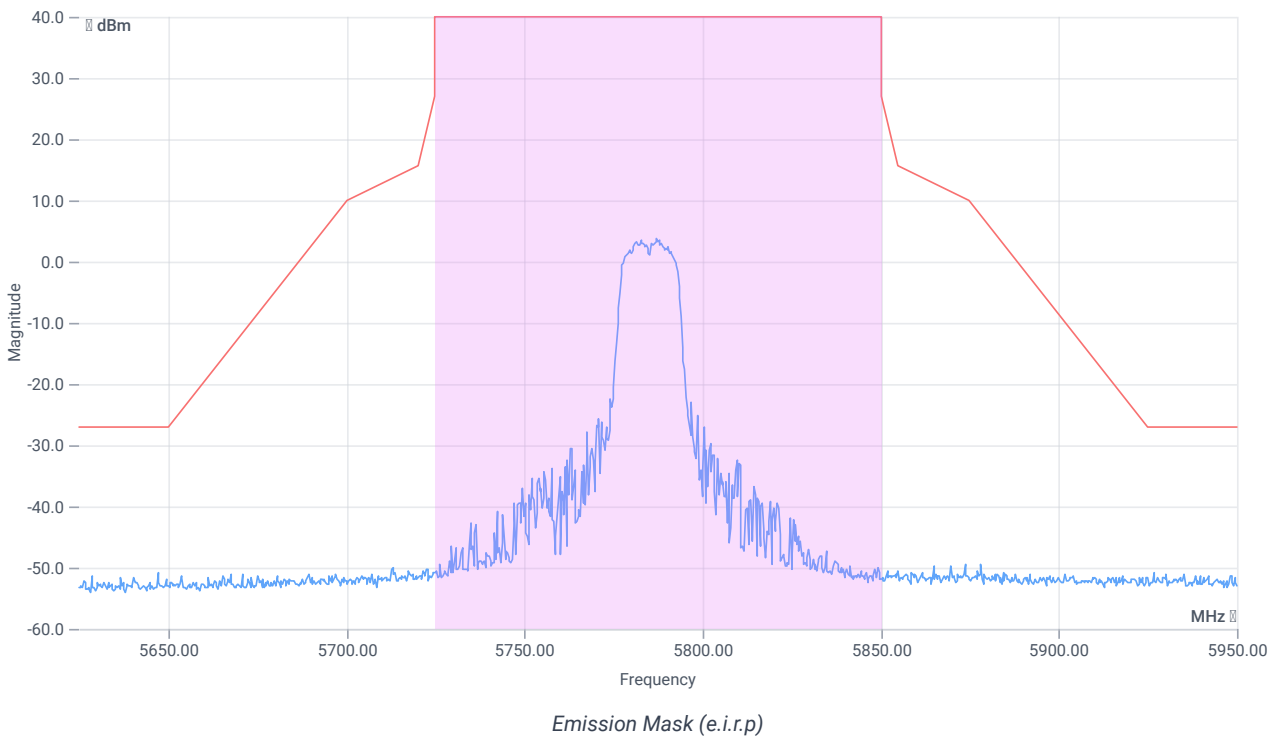

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:19:25
Ambit temp [°C] humidity [rel%]	26.6 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5745 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.48	dBm	INFO
Ref. frequency	--	--	5747.600	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.48 10.38 15
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

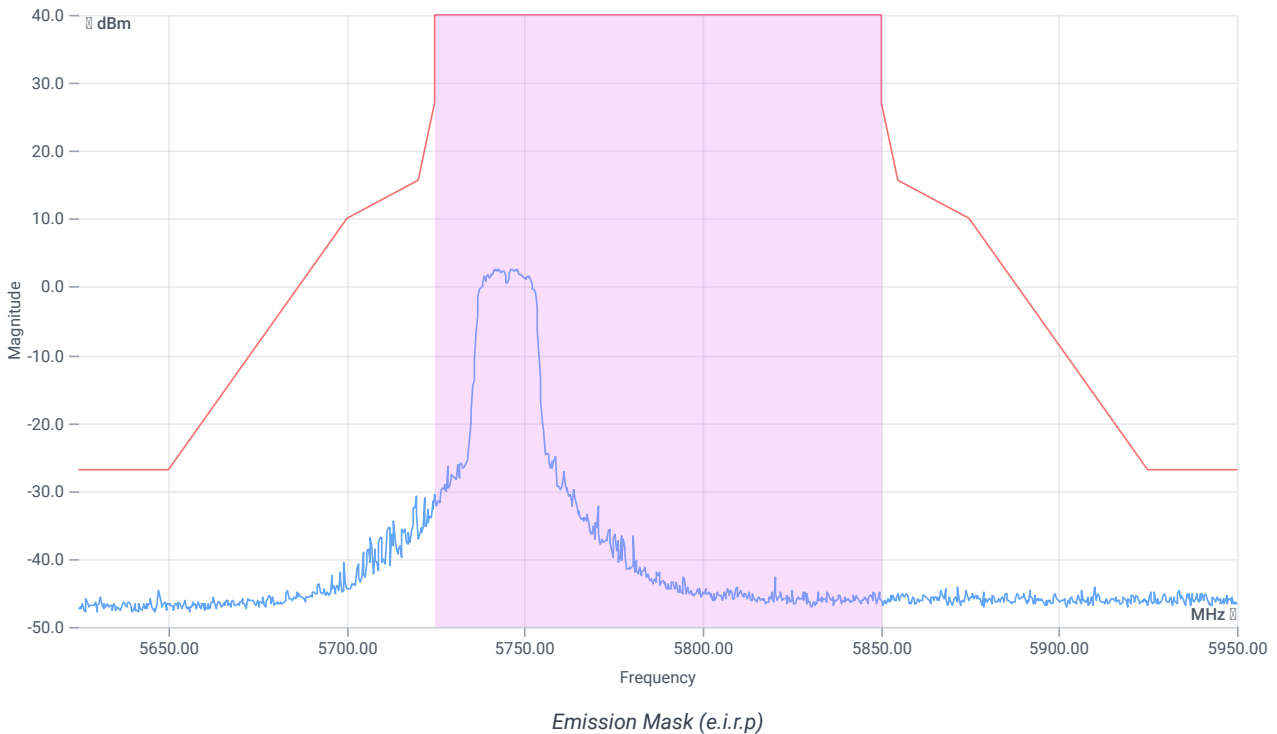

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

FCC 15.407, ISED RSS247 # Emission mask (cond) ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:12:08
Ambit temp [°C] humidity [rel%]	26.6 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	NI
Description	FCC 15.407 Emission mask - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5745 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.66	dBm	INFO
Ref. frequency	--	--	5746.400	MHz	INFO

Antenna gain

Considered antenna gain [dBi]:	0
--------------------------------	---

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.66 10.36 15
Start [MHz] Stop [MHz]	5625.000 5950.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1 2500 1001 SWE

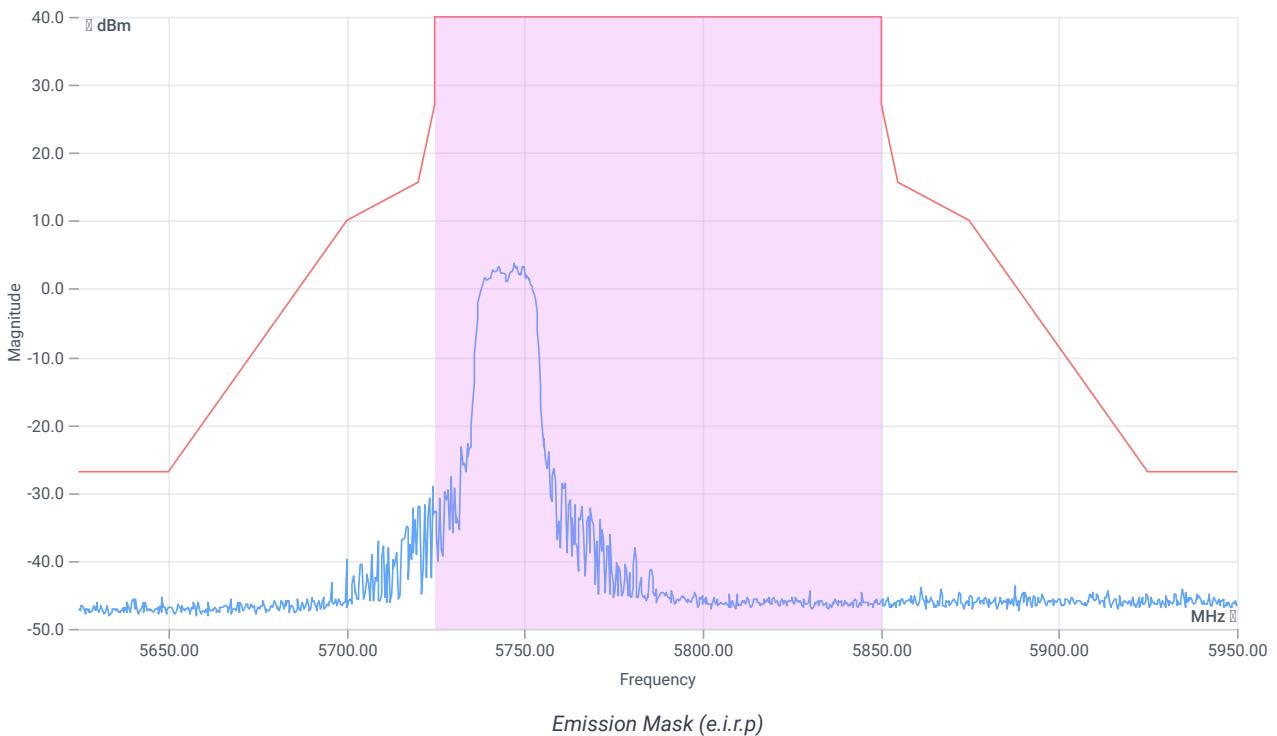

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
-------------	-------------	-------------	----------	------	---------

Verdict

INCON

ISED RSS247 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 19:05:12
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5775 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-5.90	dBm	INFO
Ref. frequency	--	--	5739.640	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 258					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.421	--	INFO
Duty cycle min	--	--	3.757	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

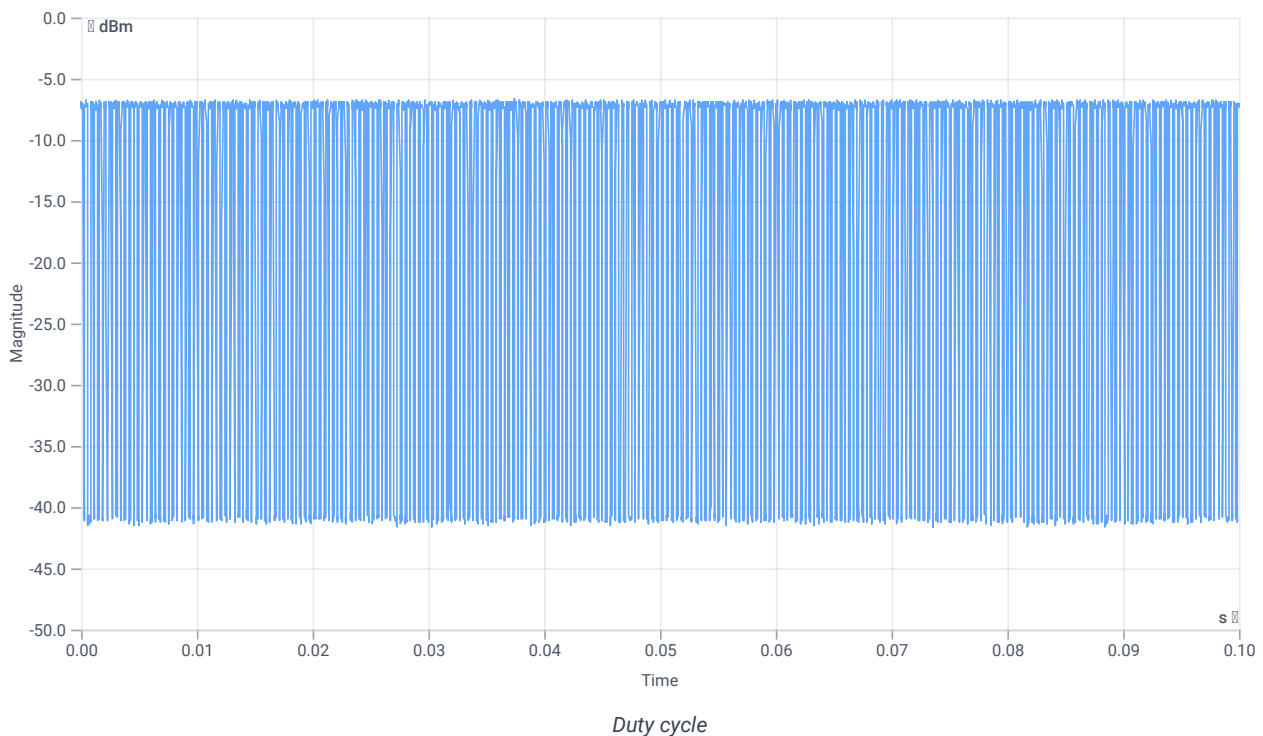

Evaluation bandwidth

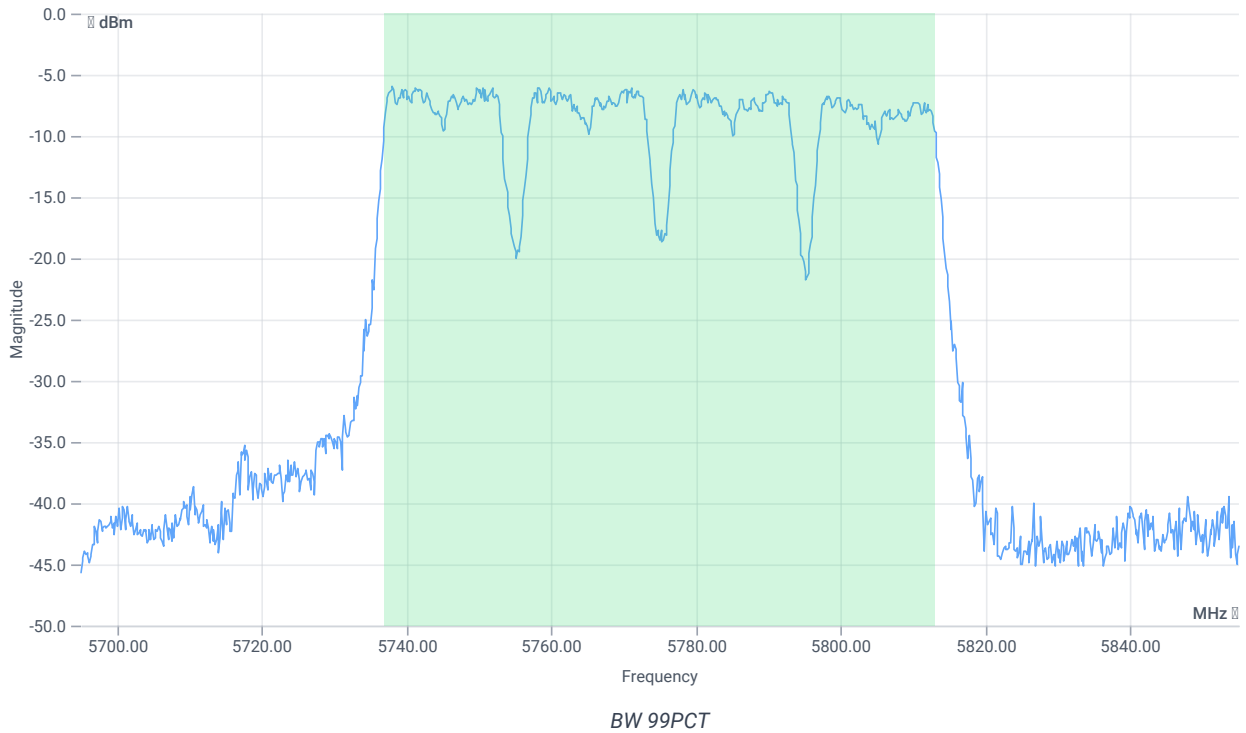


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.244	MHz	INFO
T1 99%	---	---	5736.7982	MHz	INFO
T2 99%	---	---	5813.0420	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.10 10.38 10
Start [MHz] Stop [MHz]	5695.000 5855.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

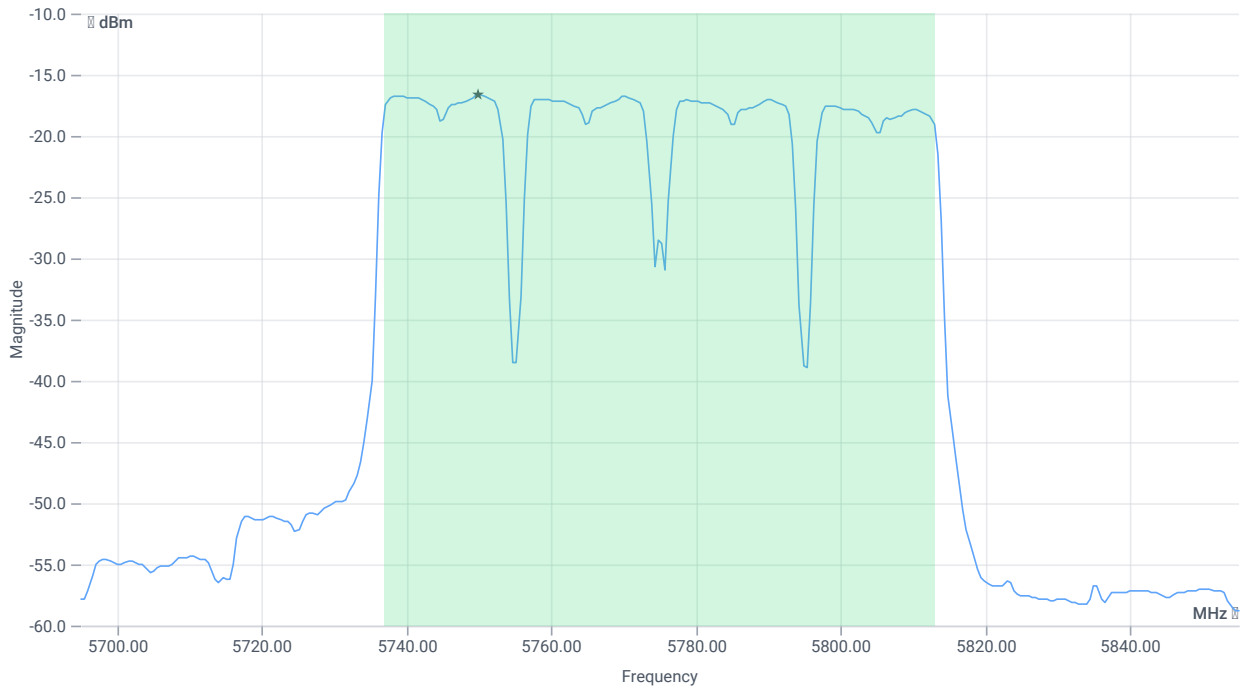

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.38	dBm	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.14	dBm	PASS
Limit: 11 dBm + 10 log 76.244					
Max output power DC corrected	--	29.82	4.14	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.10 10.38 15
Start [MHz] Stop [MHz]	5695.000 5855.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

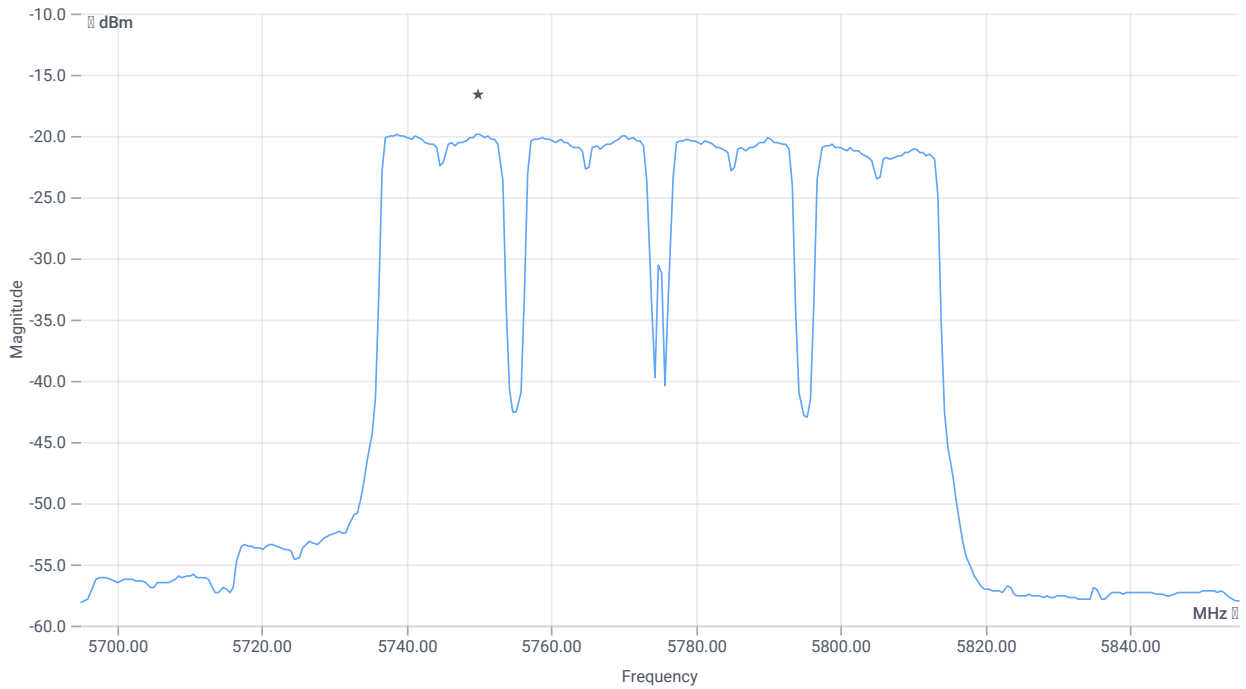

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-19.81	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Power spectral density DC corrected	--	30	-16.05	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 18:56:17
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5775 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-6.77	dBm	INFO
Ref. frequency	--	--	5769.810	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 256					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.421	--	INFO
Duty cycle min	--	--	3.757	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.275	ms	INFO

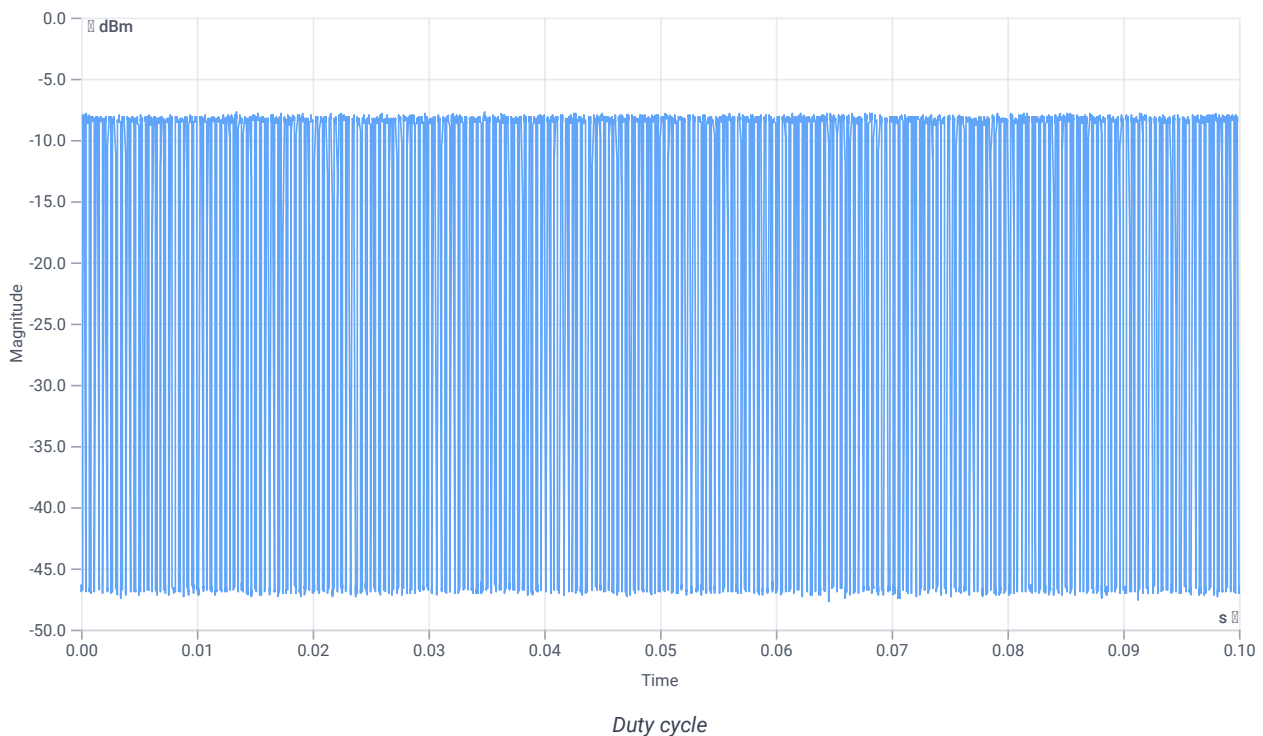

Evaluation bandwidth

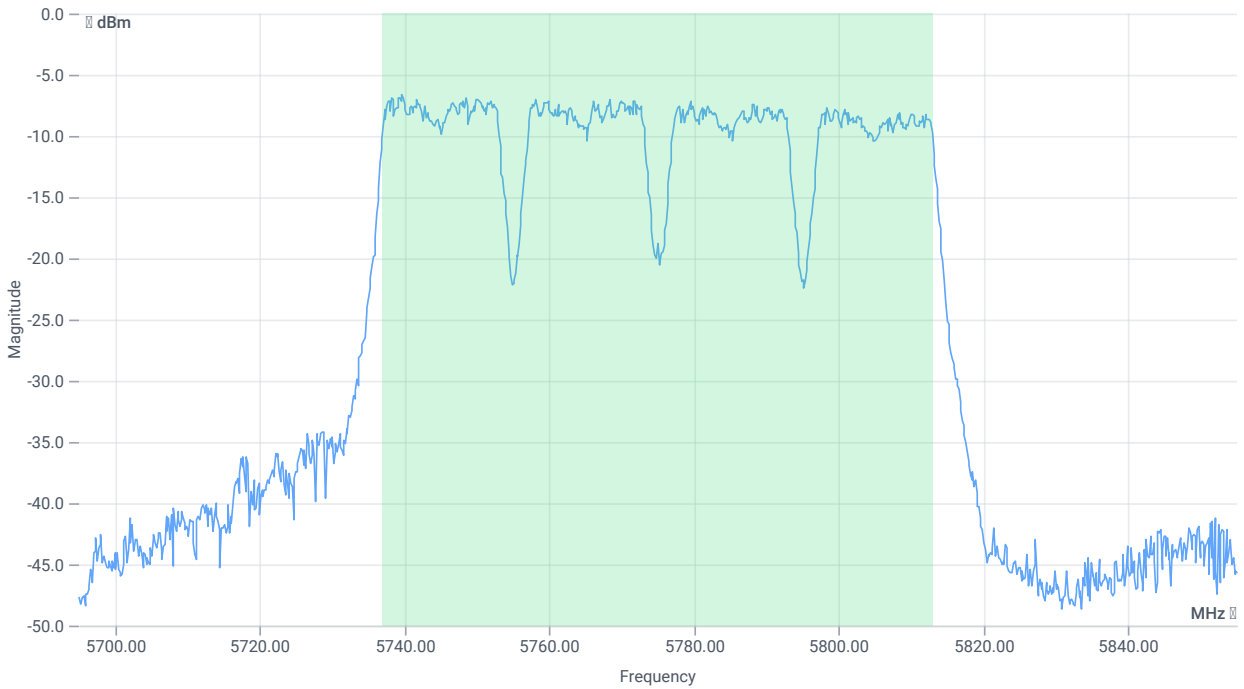

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.244	MHz	INFO
T1 99%	---	---	5736.7982	MHz	INFO
T2 99%	---	---	5813.0420	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.23 10.41 10
Start [MHz] Stop [MHz]	5695.000 5855.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

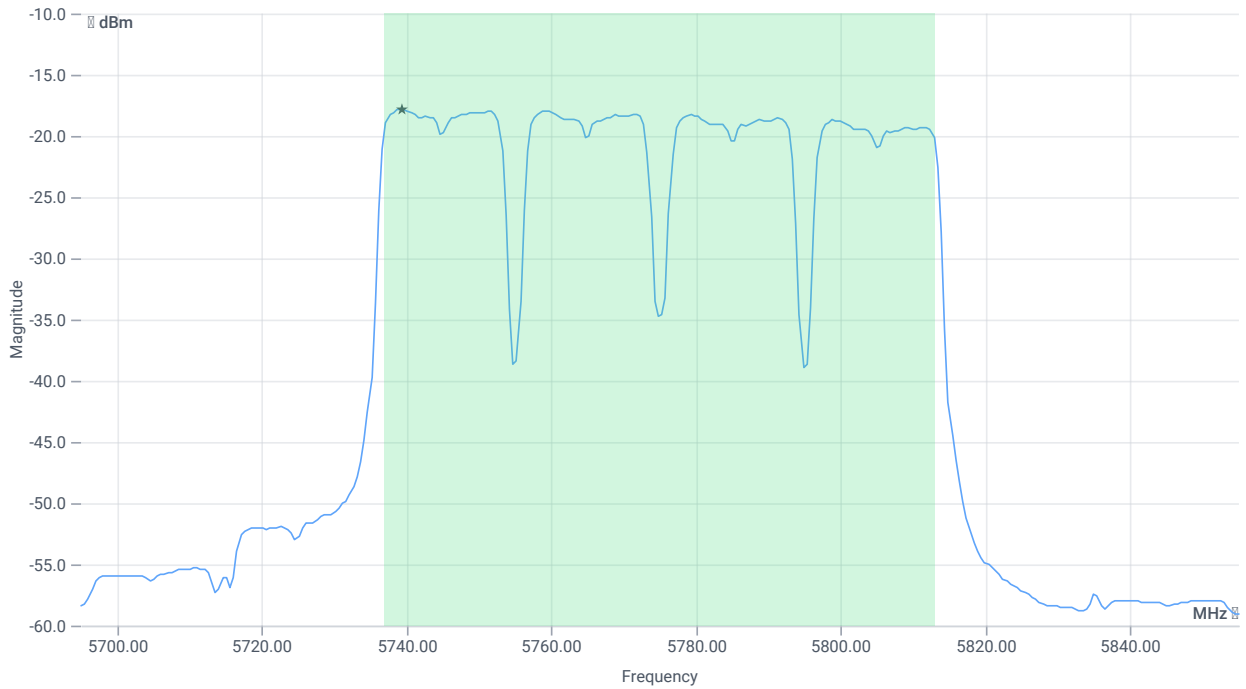

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	-0.87	dBm	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	2.89	dBm	PASS
Limit: 11 dBm + 10 log 76.244					
Max output power DC corrected	--	29.82	2.89	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.23 10.41 10
Start [MHz] Stop [MHz]	5695.000 5855.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

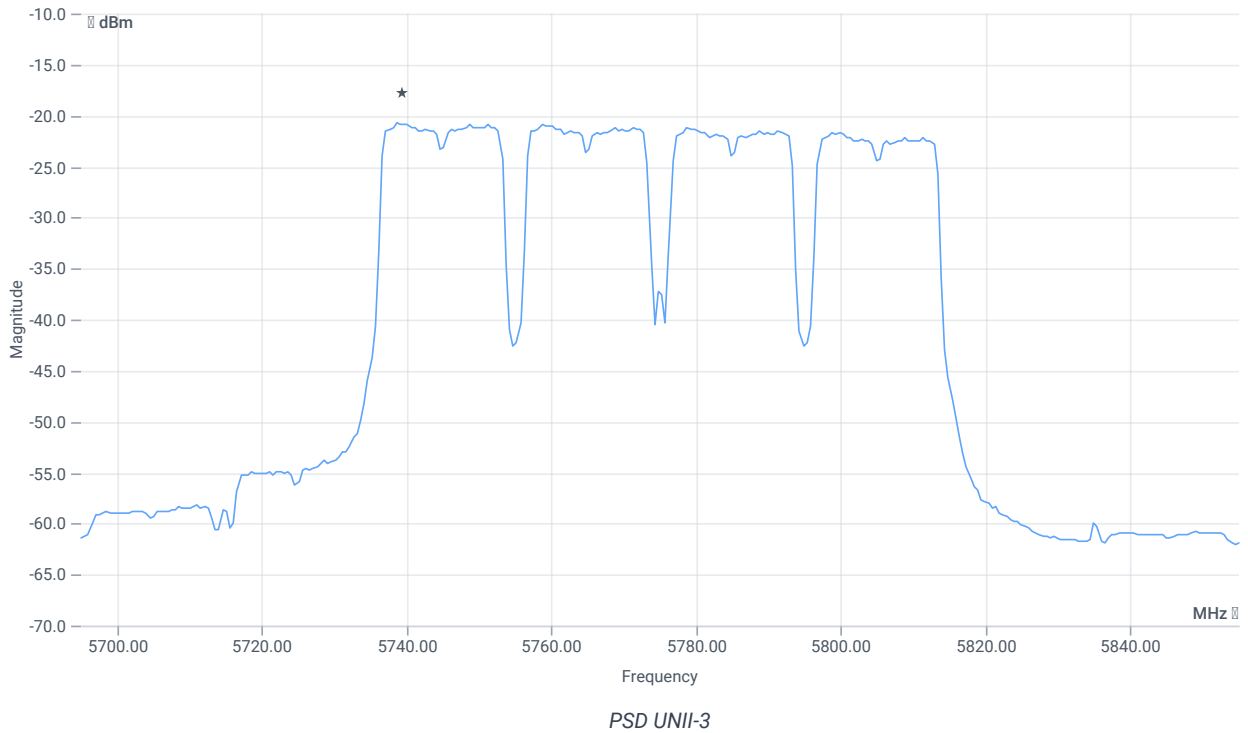

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-20.74	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Power spectral density DC corrected	--	30	-16.98	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 18:51:53
Ambit temp [°C] humidity [rel%]	26.7 35
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5775 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-7.53	dBm	INFO
Ref. frequency	--	--	5770.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 256					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.391	--	INFO
Duty cycle min	--	--	4.078	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.35	ms	INFO

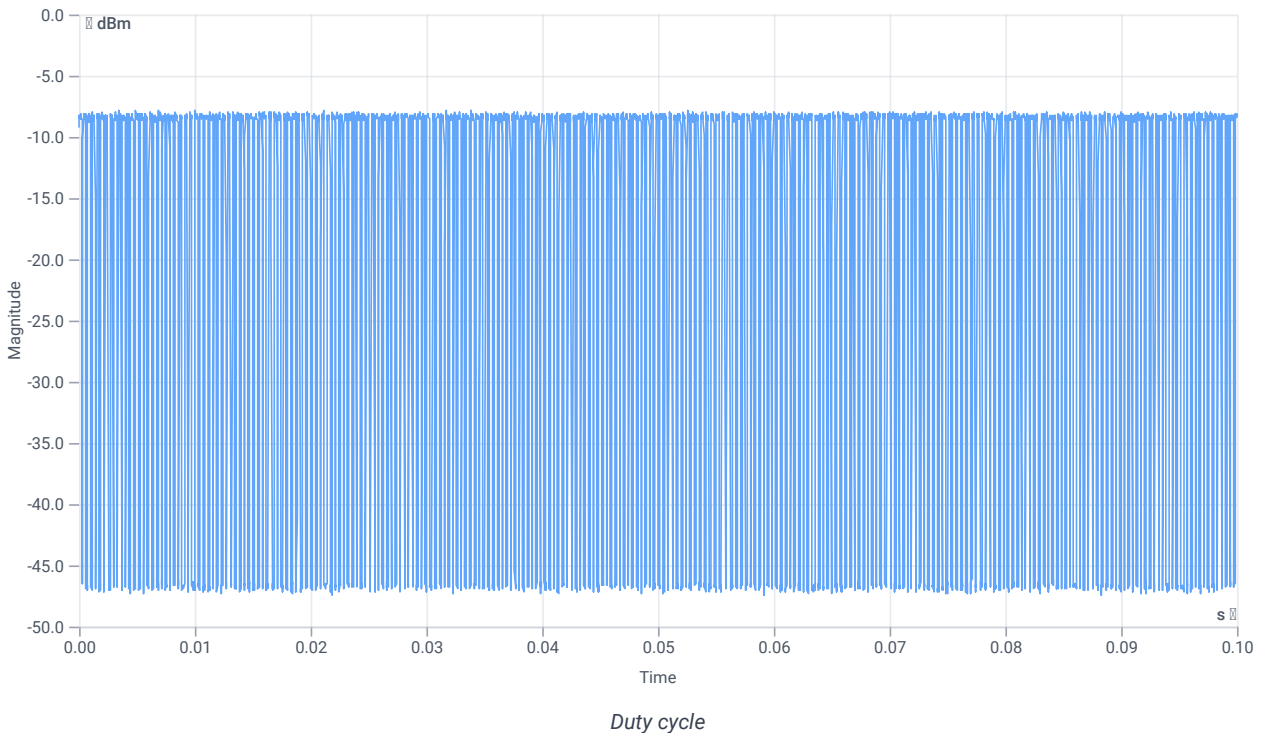

Evaluation bandwidth

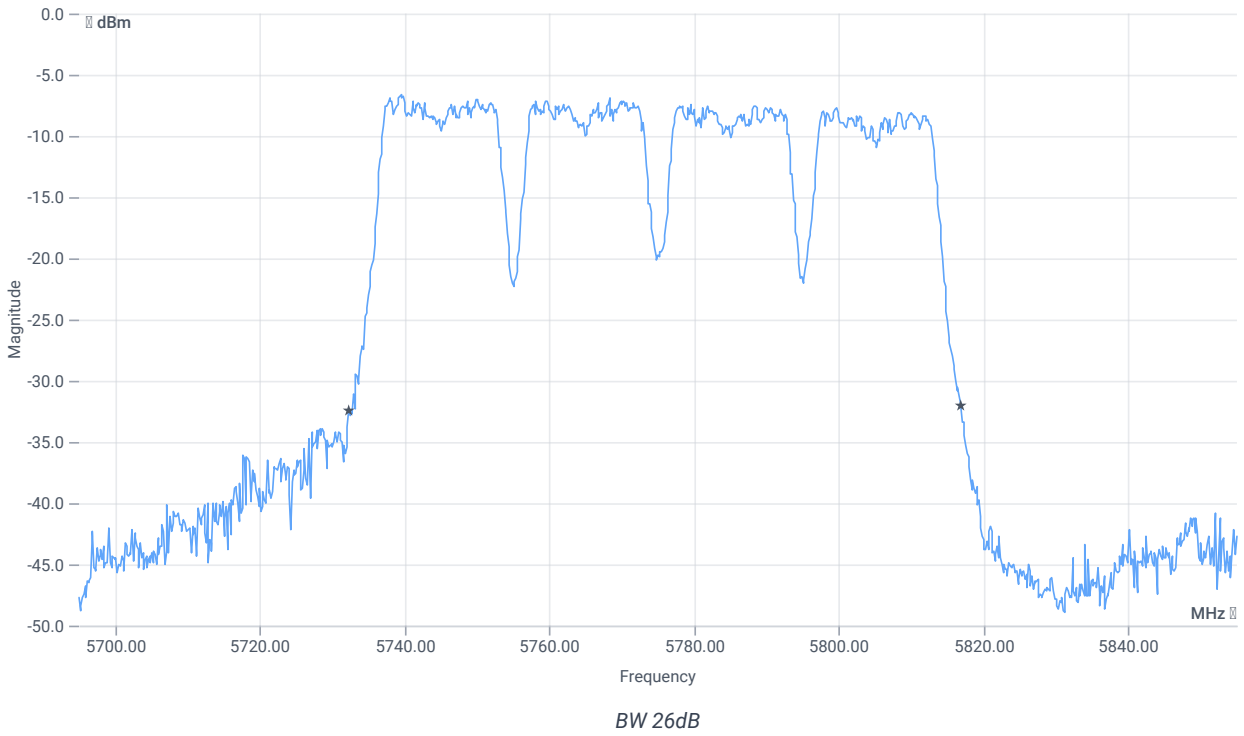


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	84.64	MHz	INFO
T1 26dB	---	---	5732.2800	MHz	INFO
T2 26dB	---	---	5816.9200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.47 10.41 10
Start [MHz] Stop [MHz]	5695.000 5855.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

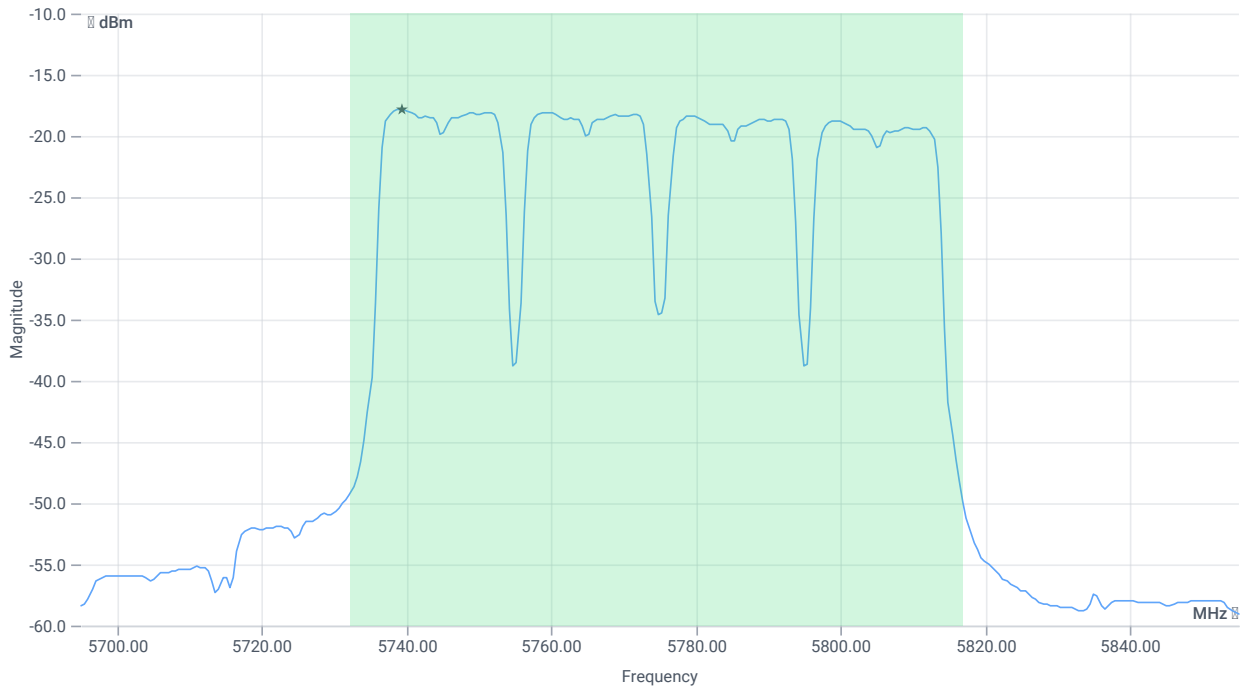

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	-0.84	dBm	INFO
Duty cycle correction	--	--	4.08	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	3.24	dBm	PASS
Limit: 11 dBm + 10 log 84.64					
Max output power DC corrected	--	30.28	3.24	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.47 10.41 10
Start [MHz] Stop [MHz]	5695.000 5855.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

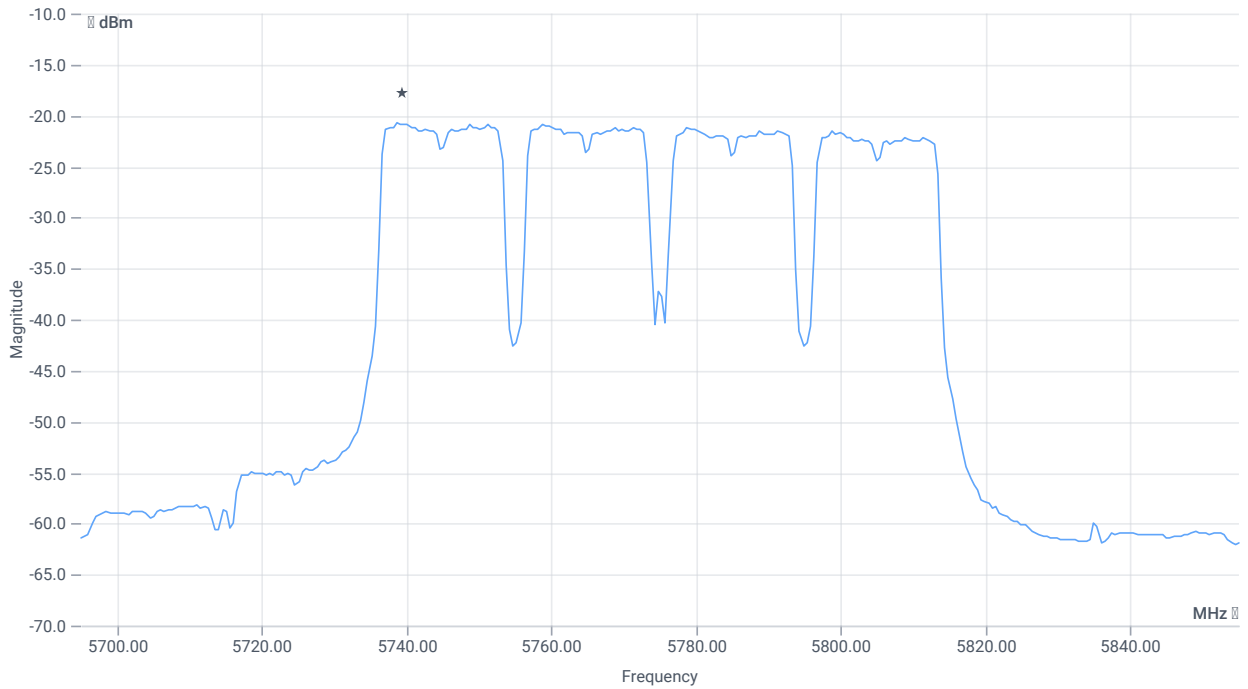

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-20.68	dBm/0.5MHz	INFO
Duty cycle correction	--	--	4.08	dB	INFO
Power spectral density DC corrected	--	30	-16.6	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 18:40:51
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5775 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-5.99	dBm	INFO
Ref. frequency	--	--	5757.620	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 263					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.444	--	INFO
Duty cycle min	--	--	3.526	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.275	ms	INFO

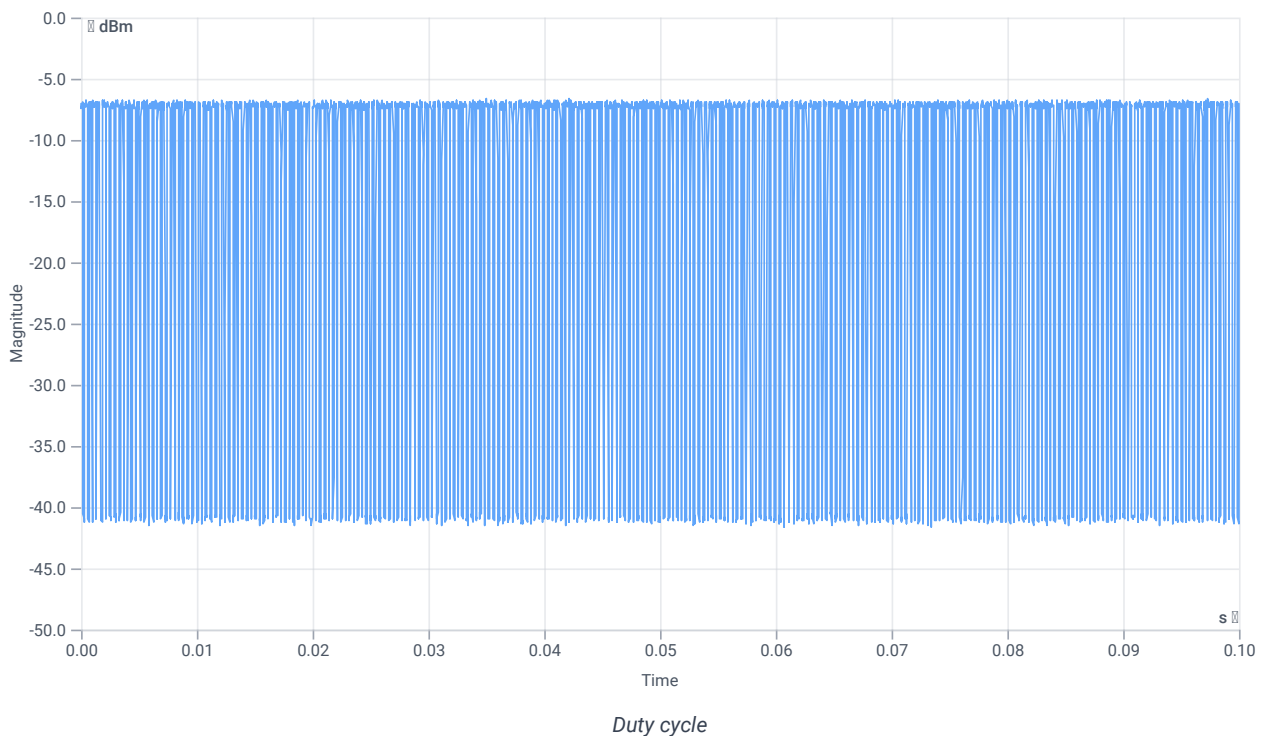

Evaluation bandwidth

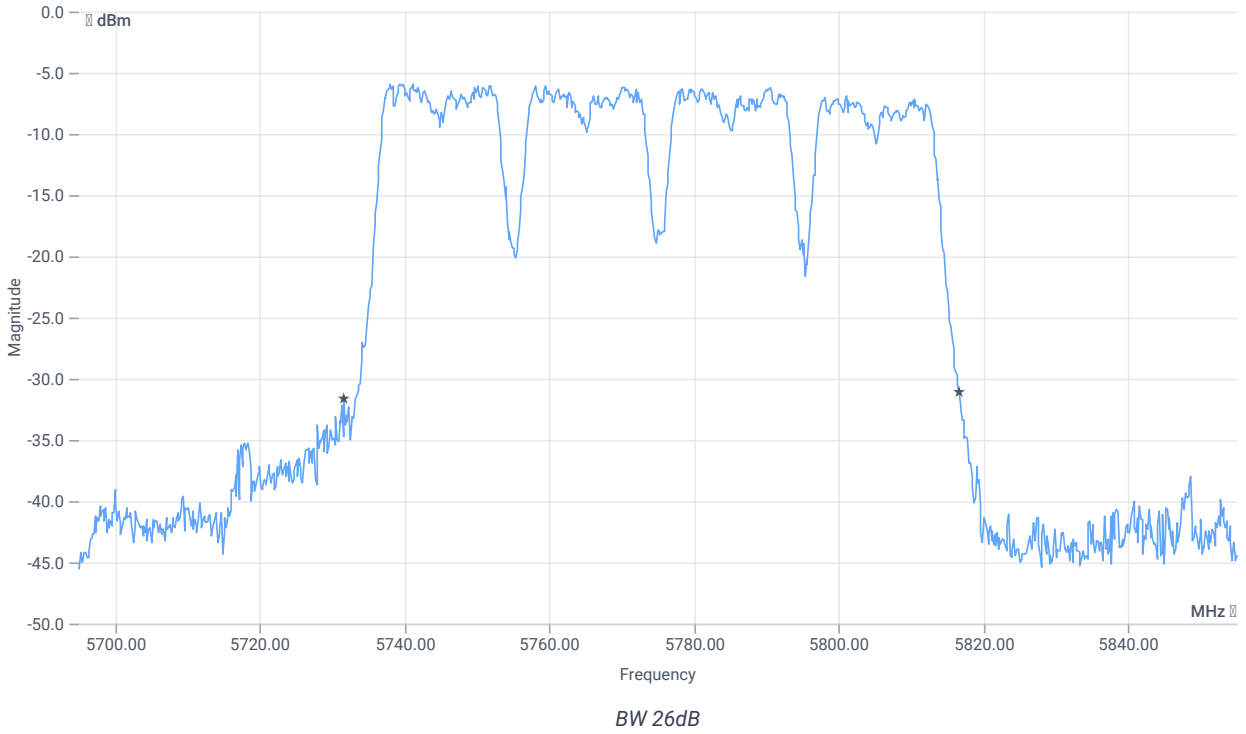


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	84.96	MHz	INFO
T1 26dB	---	---	5731.6400	MHz	INFO
T2 26dB	---	---	5816.6000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.01 10.38 10
Start [MHz] Stop [MHz]	5695.000 5855.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

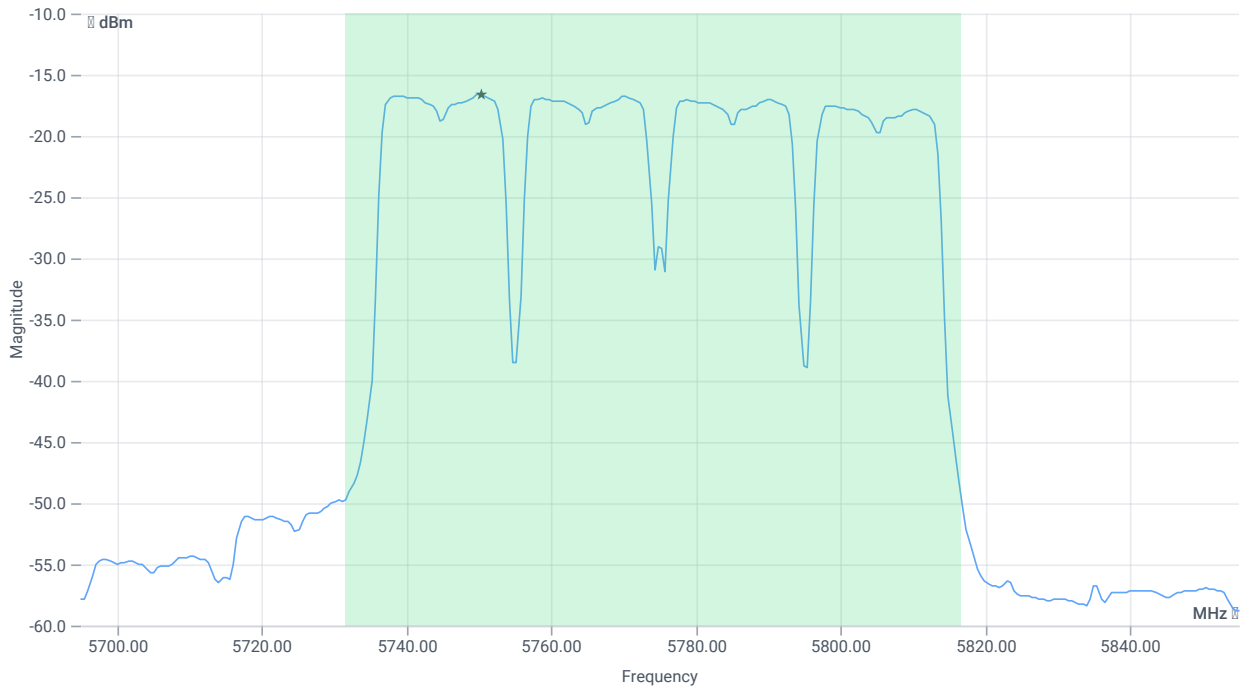

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.42	dBm	INFO
Duty cycle correction	--	--	3.53	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	3.95	dBm	PASS
Limit: 11 dBm + 10 log 84.96					
Max output power DC corrected	--	30.29	3.95	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.01 10.38 15
Start [MHz] Stop [MHz]	5695.000 5855.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

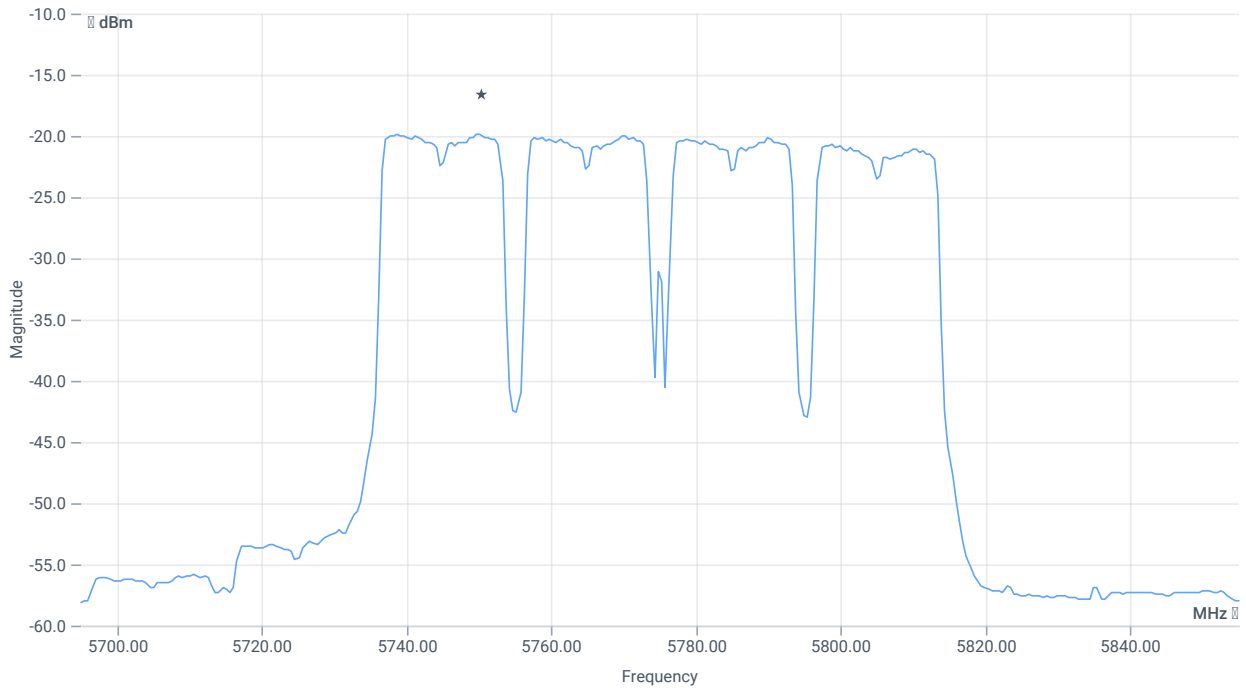

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-19.81	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.53	dB	INFO
Power spectral density DC corrected	--	30	-16.28	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	26.01.2024 18:35:43
Ambit temp [°C] humidity [rel%]	26.8 34
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-5.96	dBm	INFO
Ref. frequency	--	--	5205.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 264					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

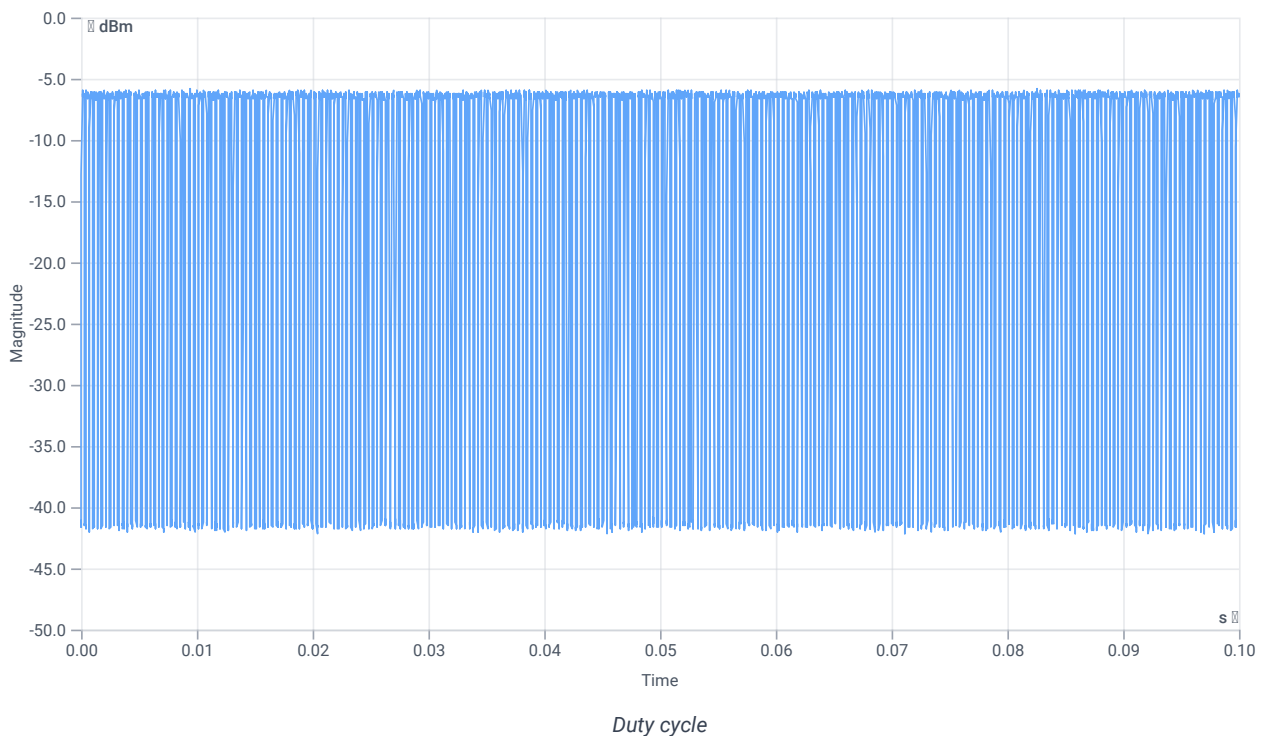

Evaluation bandwidth

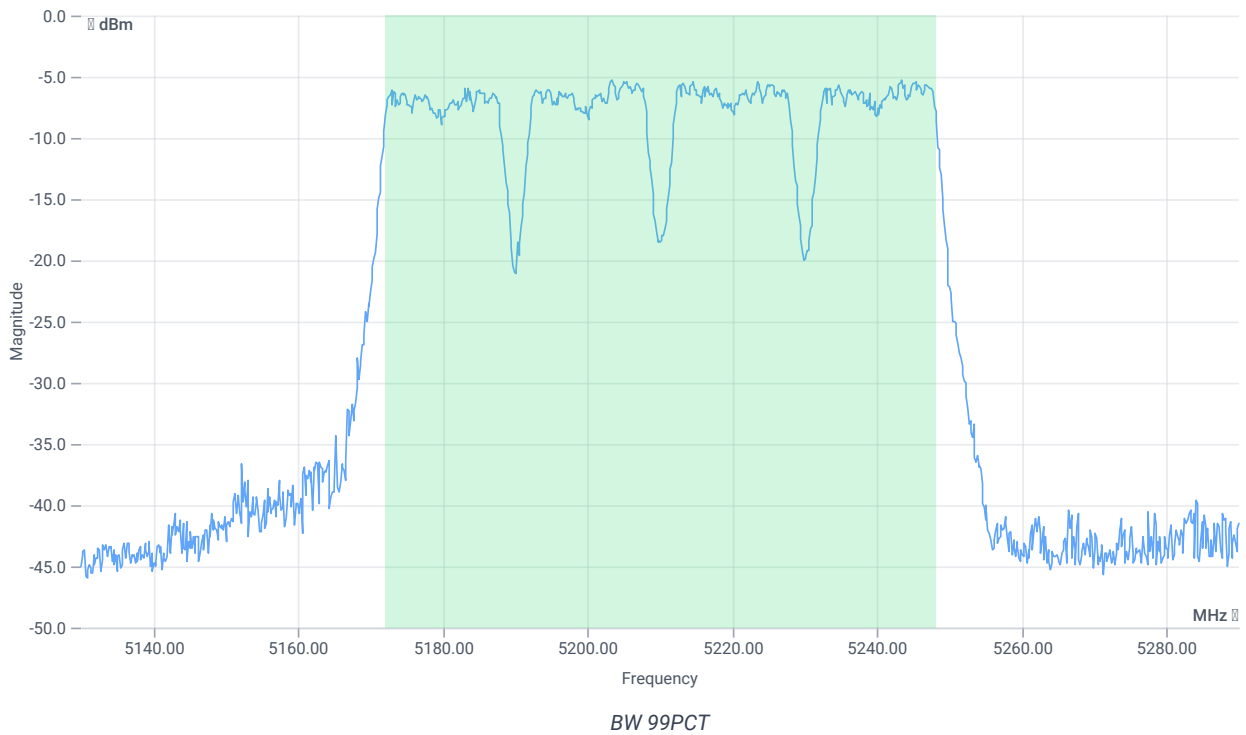


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.244	MHz	INFO
T1 99%	---	---	5171.9580	MHz	INFO
T2 99%	---	---	5248.2018	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.04 10.05 10
Start [MHz] Stop [MHz]	5130.000 5290.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

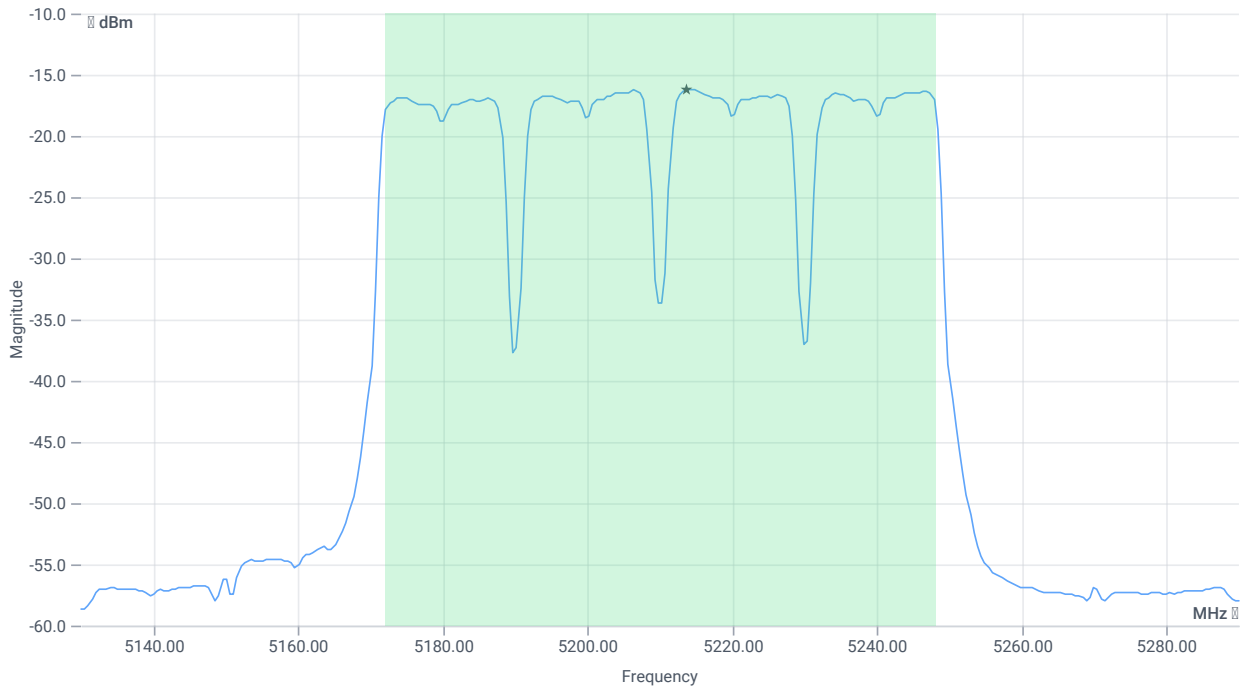

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.93	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	4.2	dBm	na
Limit: 11 dBm + 10 log 76.244					
Max output power DC corrected	--	29.82	4.2	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-16.16	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-12.89	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	26.01.2024 18:33:11
Ambit temp [°C] humidity [rel%]	26.8 32
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-5.75	dBm	INFO
Ref. frequency	--	--	5214.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 266					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

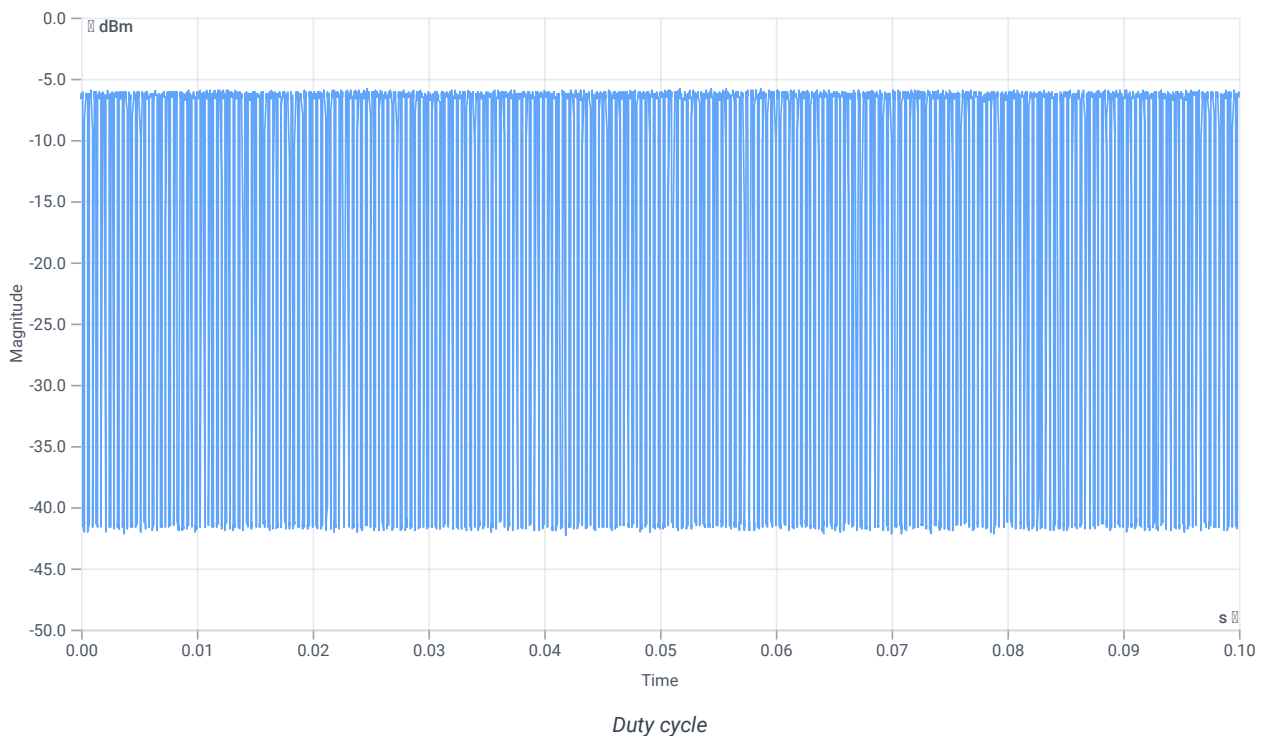

Evaluation bandwidth

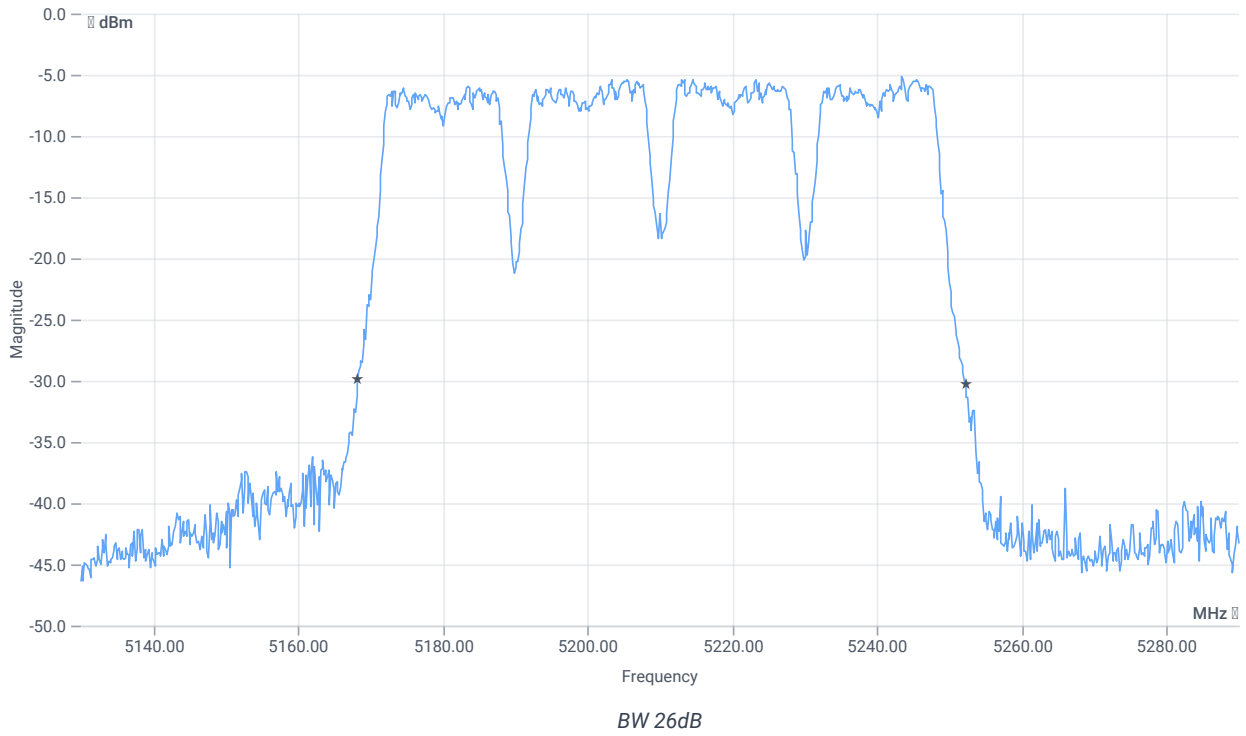


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	84	MHz	INFO
T1 26dB	---	---	5168.2400	MHz	INFO
T2 26dB	---	---	5252.2400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.25 10.05 15
Start [MHz] Stop [MHz]	5130.000 5290.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

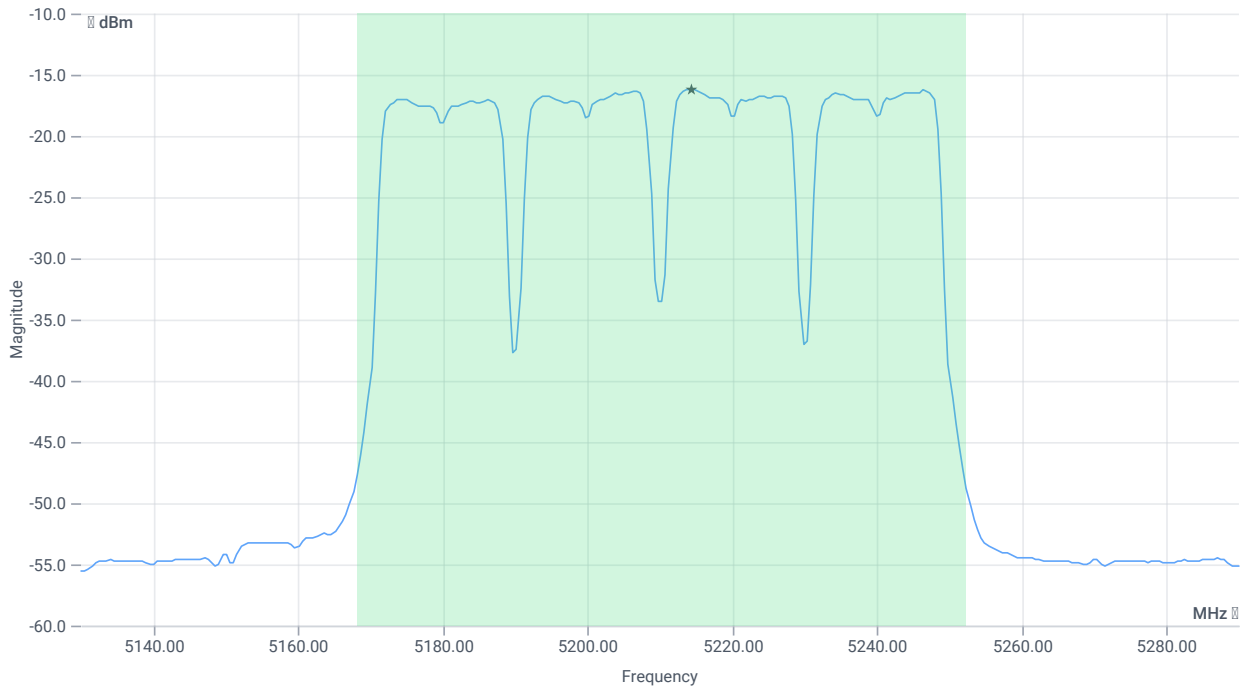

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.92	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	4.19	dBm	PASS
Limit: 11 dBm + 10 log 84					
Max output power DC corrected	--	30.24	4.19	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-16.19	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-12.92	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	26.01.2024 18:29:27
Ambit temp [°C] humidity [rel%]	26.8 30
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-5.18	dBm	INFO
Ref. frequency	--	--	5205.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 267					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

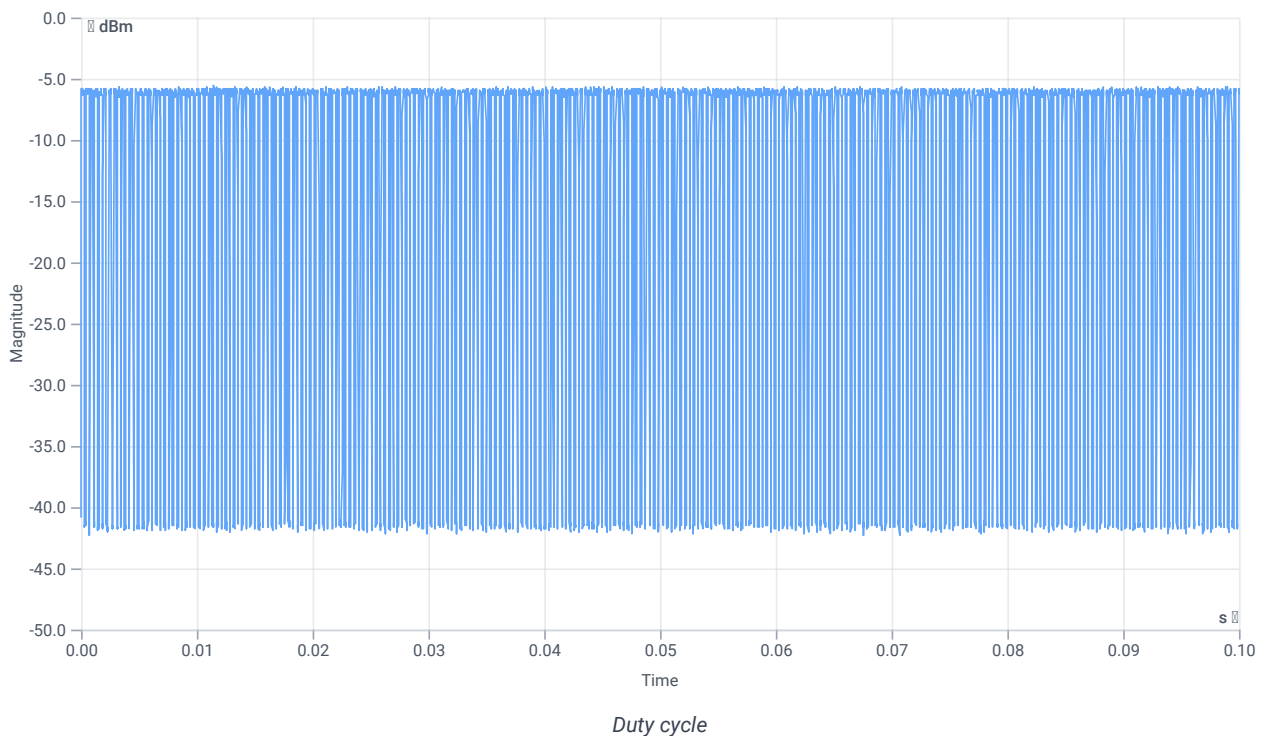

Evaluation bandwidth

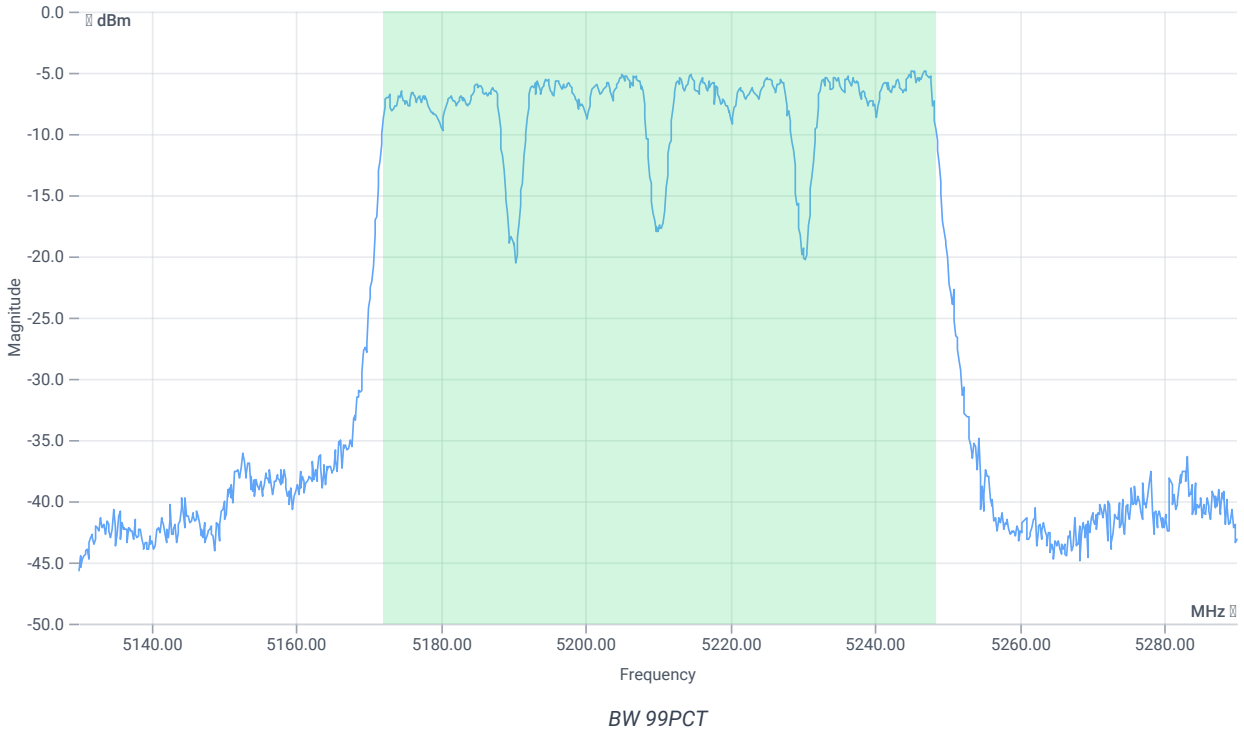


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	76.244	MHz	INFO
T1 99%	---	---	5172.1179	MHz	INFO
T2 99%	---	---	5248.3616	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.82 10.02 15
Start [MHz] Stop [MHz]	5130.000 5290.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

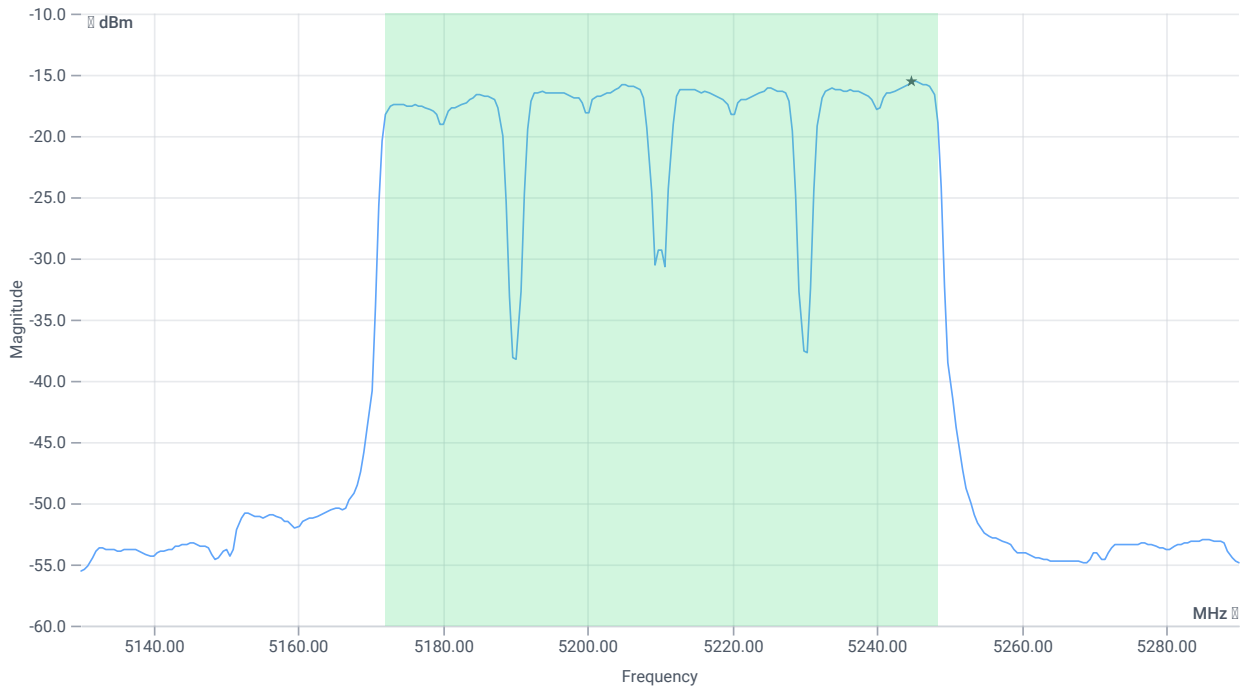

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.21	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	4.48	dBm	na
Limit: 11 dBm + 10 log 76.244					
Max output power DC corrected	--	29.82	4.48	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-15.58	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-12.31	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx ac-VHT80 mode U-NII-1

References

TC start	26.01.2024 18:26:54
Ambit temp [°C] humidity [rel%]	26.8 30
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx ac-VHT80 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5210
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5210 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-5.75	dBm	INFO
Ref. frequency	--	--	5244.970	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 265					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

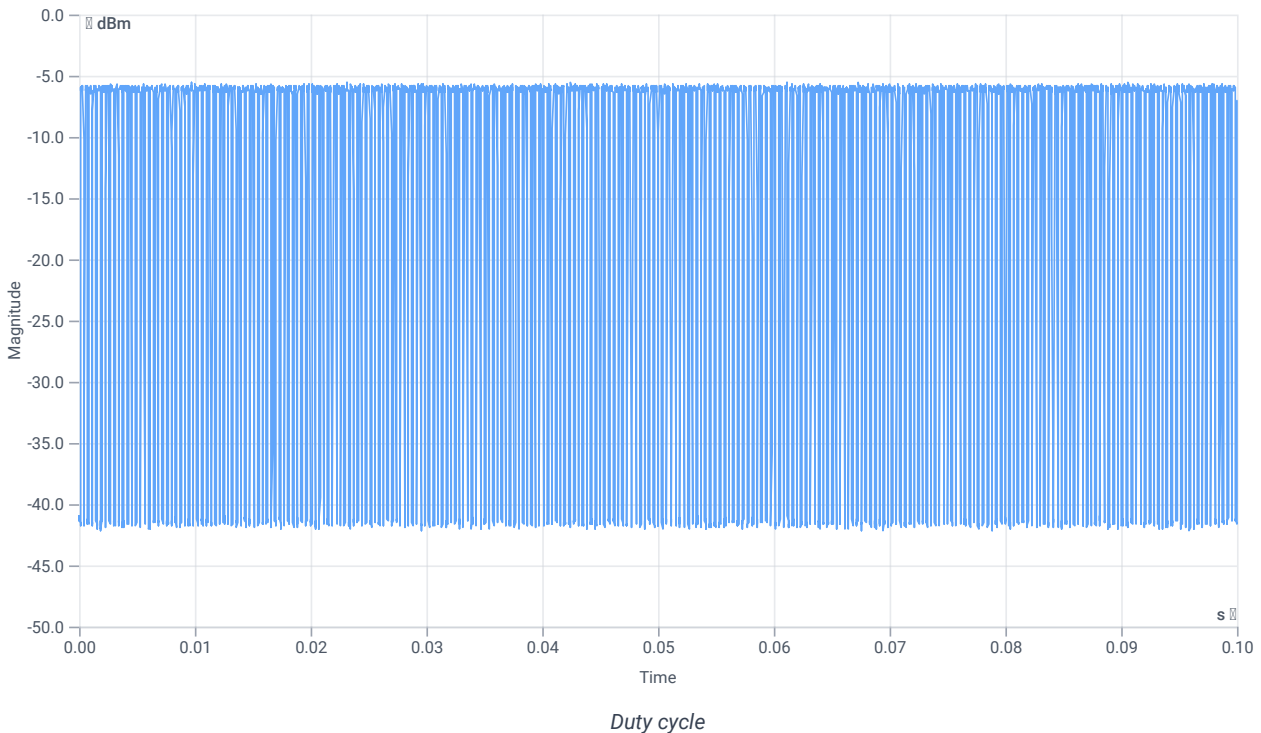

Evaluation bandwidth

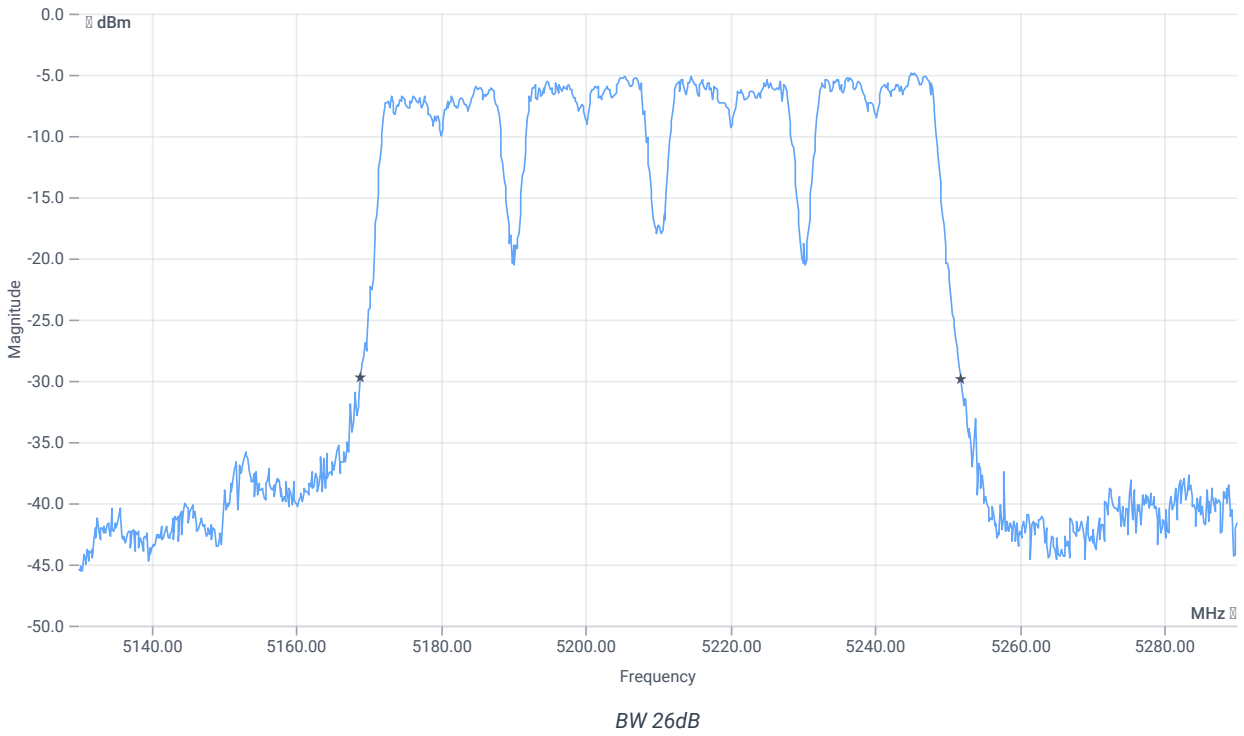


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	83.04	MHz	INFO
T1 26dB	---	---	5168.8800	MHz	INFO
T2 26dB	---	---	5251.9200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.25 10.02 15
Start [MHz] Stop [MHz]	5130.000 5290.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	107000 1 320 SWE

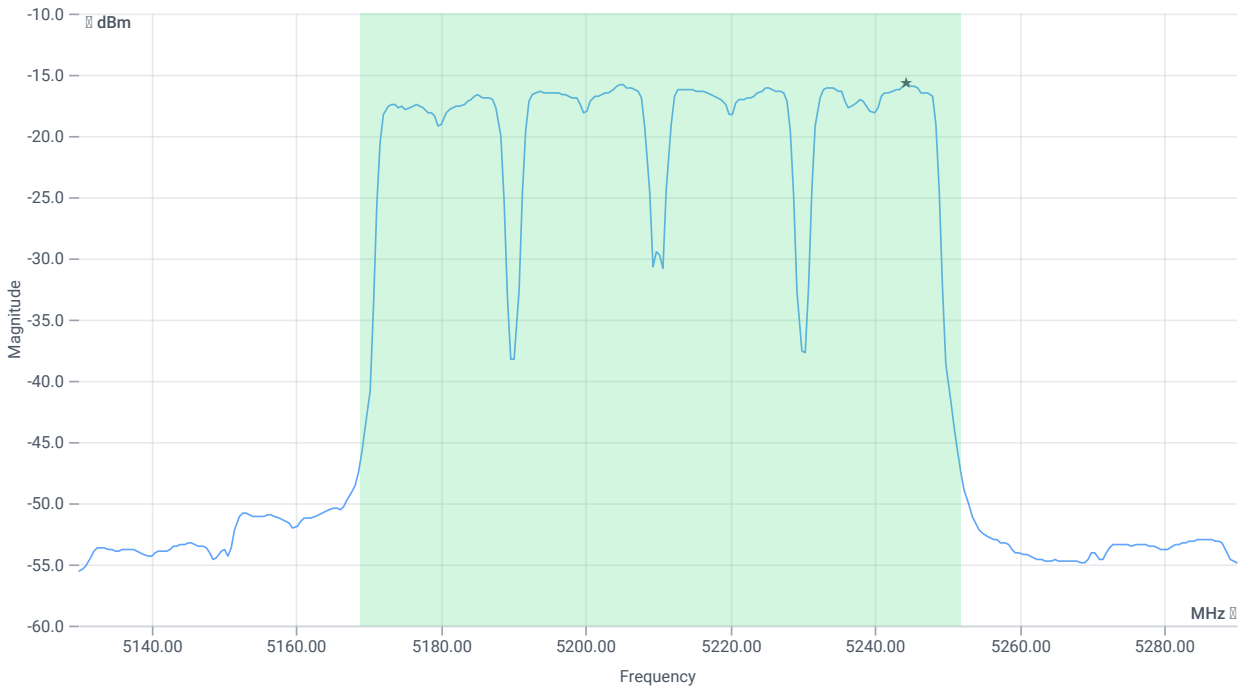

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.14	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	4.41	dBm	PASS
Limit: 11 dBm + 10 log 83.04					
Max output power DC corrected	--	30.19	4.41	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-15.7	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-12.43	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:18:14
Ambit temp [°C] humidity [rel%]	26.7 33
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5795 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.89	dBm	INFO
Ref. frequency	--	--	5779.420	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 256					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.375	--	INFO
Duty cycle min	--	--	4.26	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.375	ms	INFO

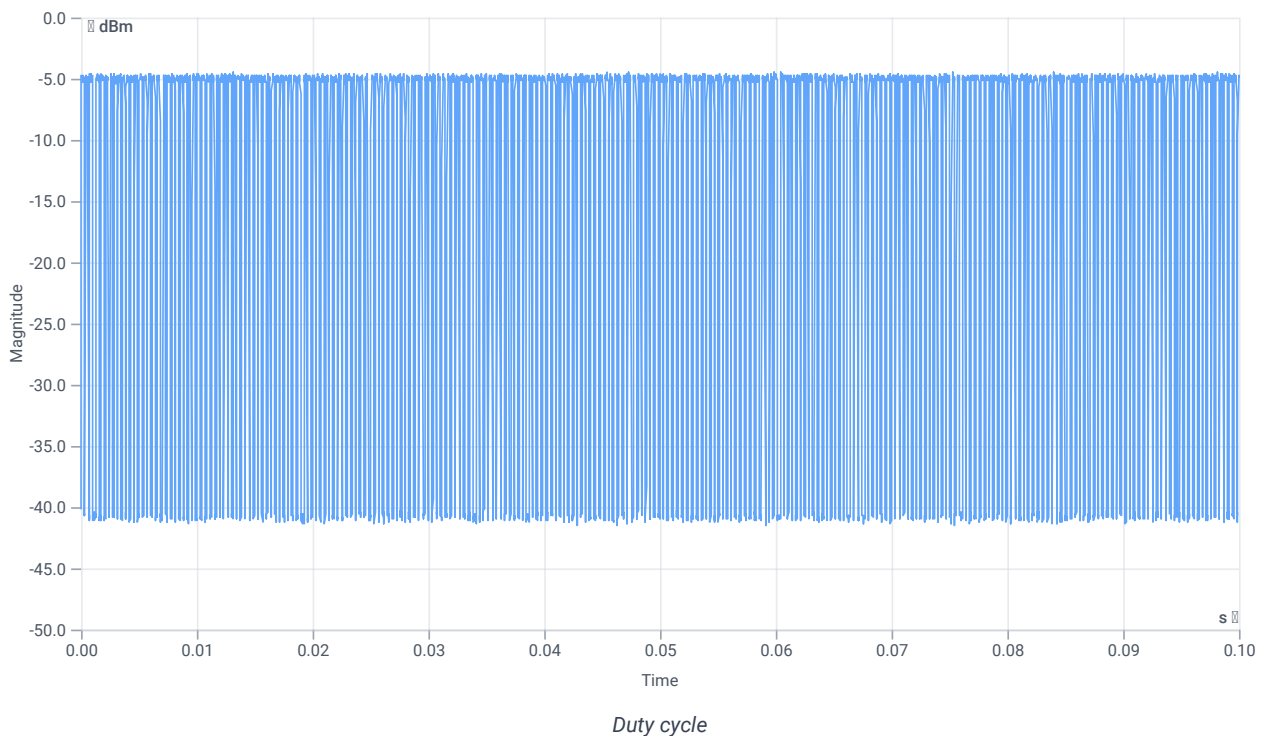

Evaluation bandwidth

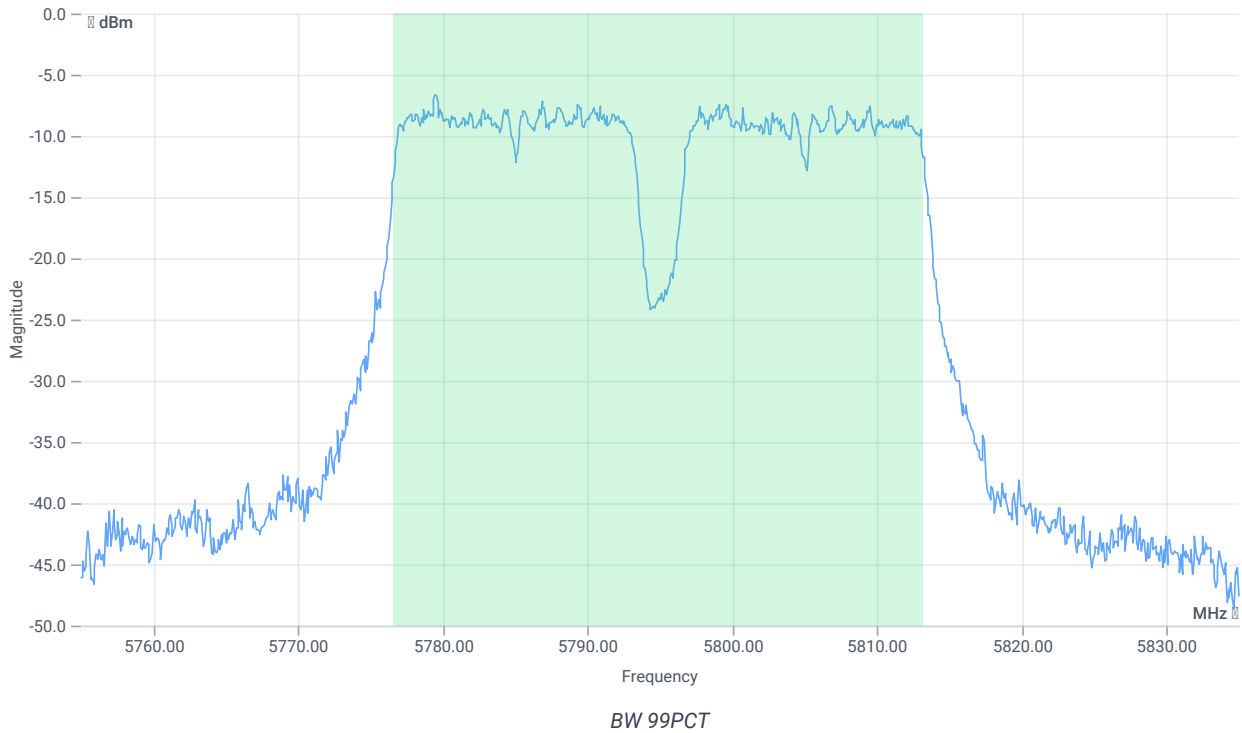


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.603	MHz	INFO
T1 99%	---	---	5776.6184	MHz	INFO
T2 99%	---	---	5813.2218	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.11 10.41 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

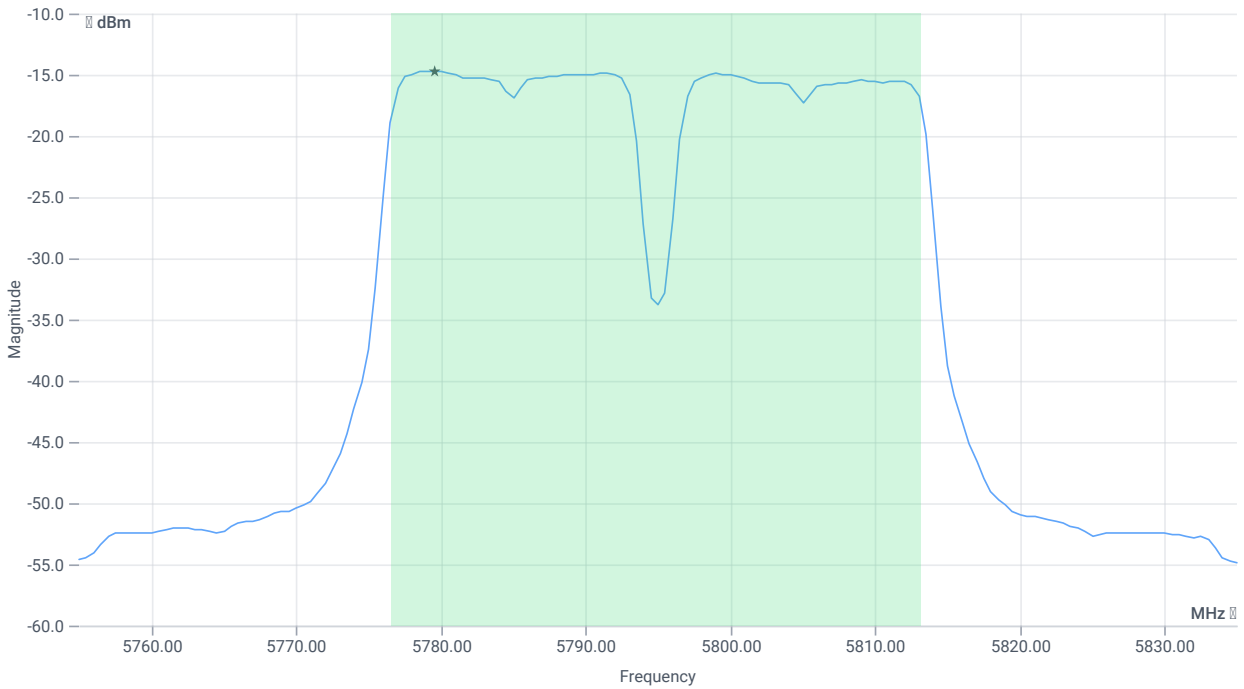

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	-0.5	dBm	INFO
Duty cycle correction	--	--	4.26	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	3.76	dBm	PASS
Limit: 11 dBm + 10 log 36.603					
Max output power DC corrected	--	26.64	3.76	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.11 10.41 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

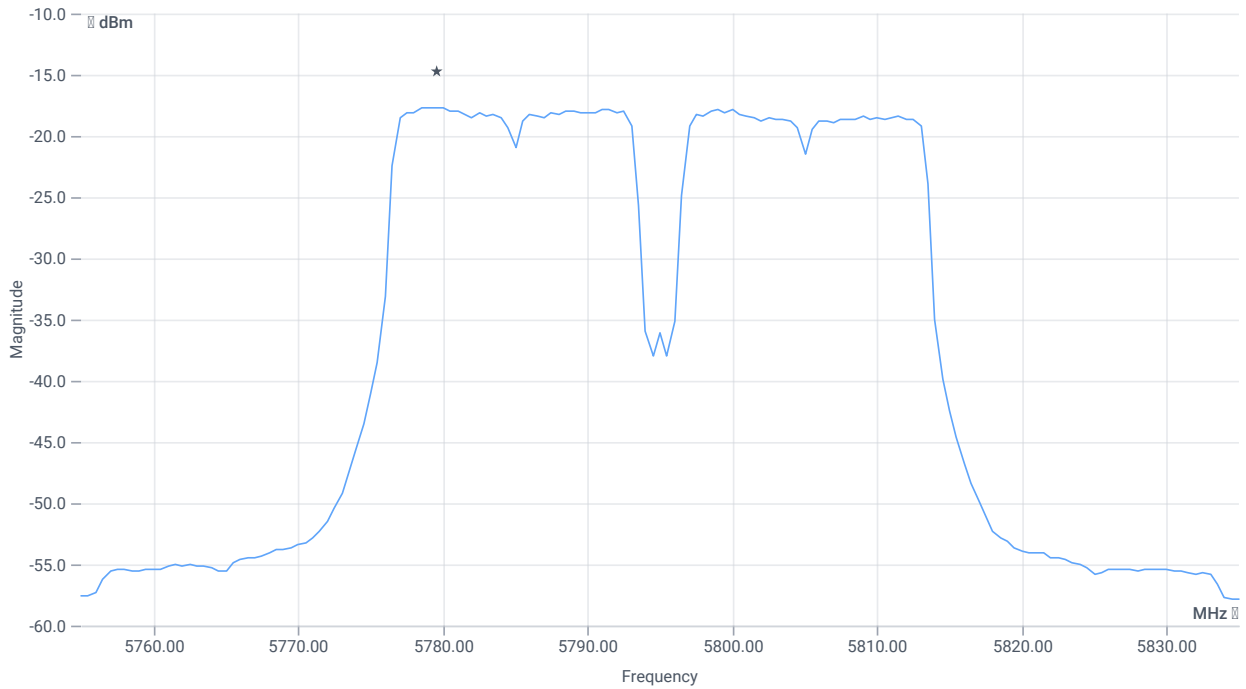

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-17.65	dBm/0.5MHz	INFO
Duty cycle correction	--	--	4.26	dB	INFO
Power spectral density DC corrected	--	30	-13.39	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:15:47
Ambit temp [°C] humidity [rel%]	26.7 33
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5795 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-4.34	dBm	INFO
Ref. frequency	--	--	5809.990	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 255					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.429	--	INFO
Duty cycle min	--	--	3.675	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

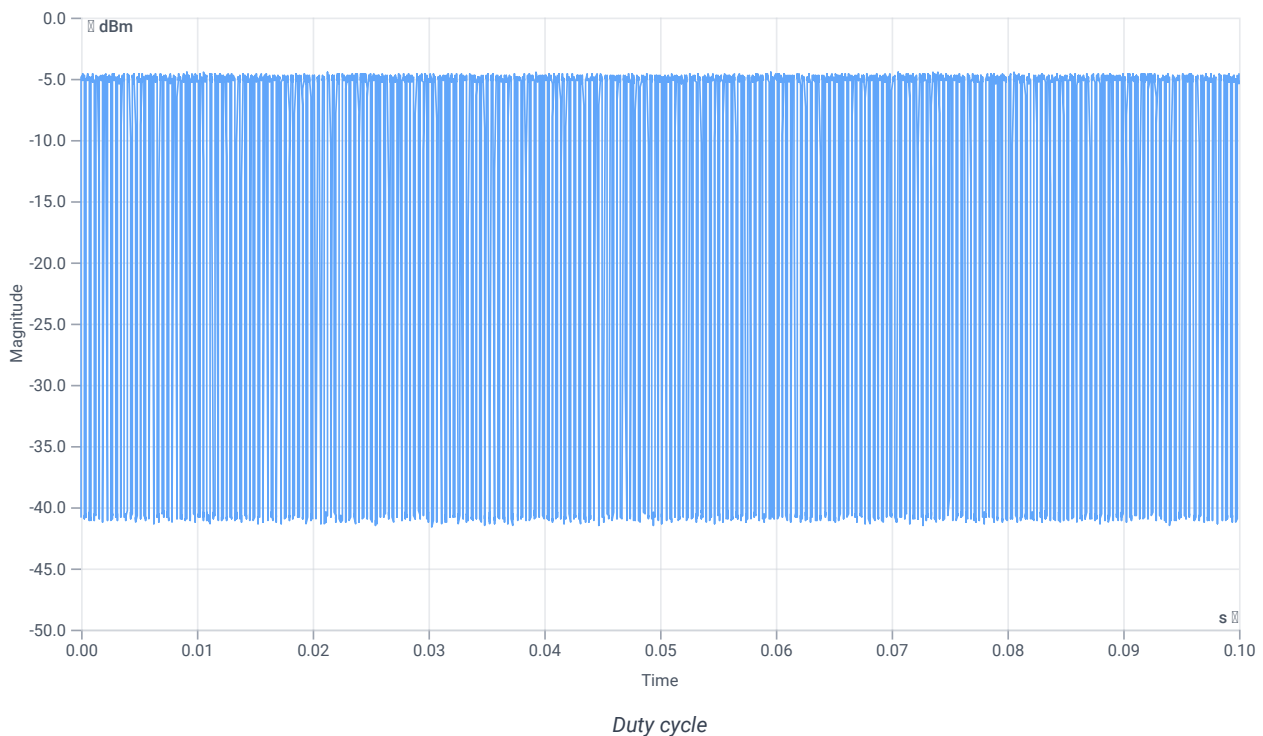

Evaluation bandwidth

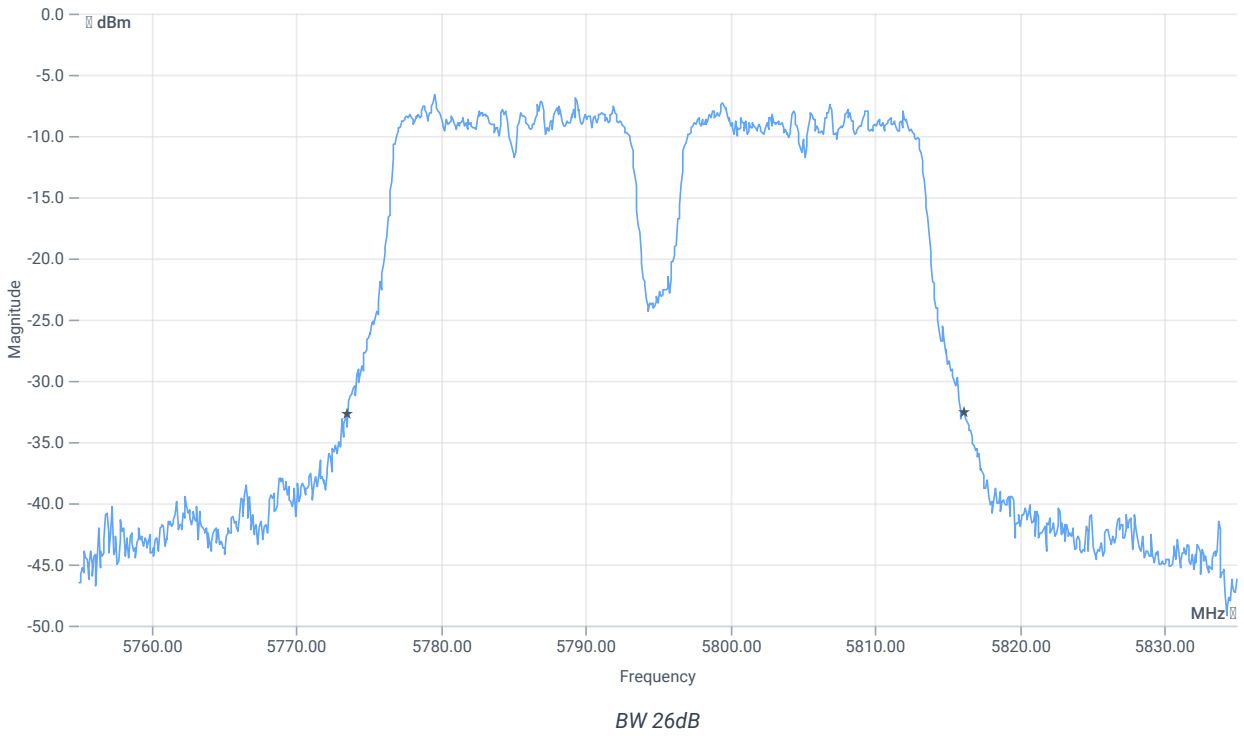


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.72	MHz	INFO
T1 26dB	---	---	5773.4800	MHz	INFO
T2 26dB	---	---	5816.2000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.66 10.41 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

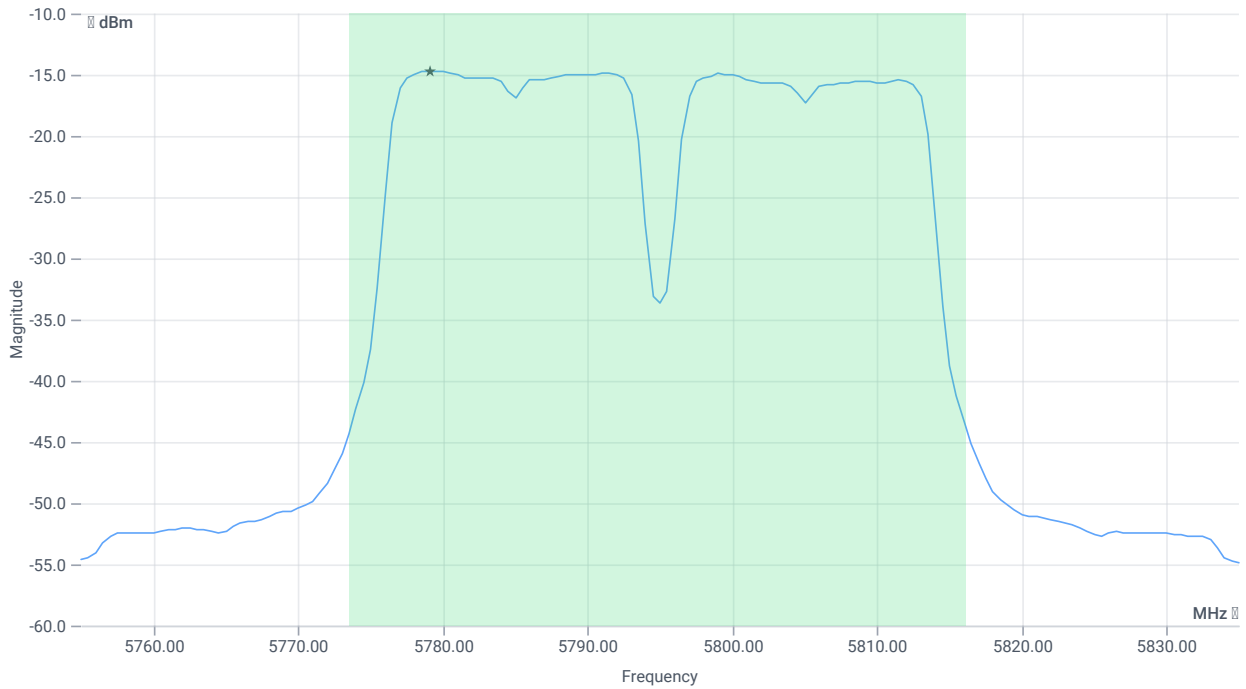

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	-0.46	dBm	INFO
Duty cycle correction	--	--	3.68	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	3.22	dBm	PASS
Limit: 11 dBm + 10 log 42.72					
Max output power DC corrected	--	27.31	3.22	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.66 10.41 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

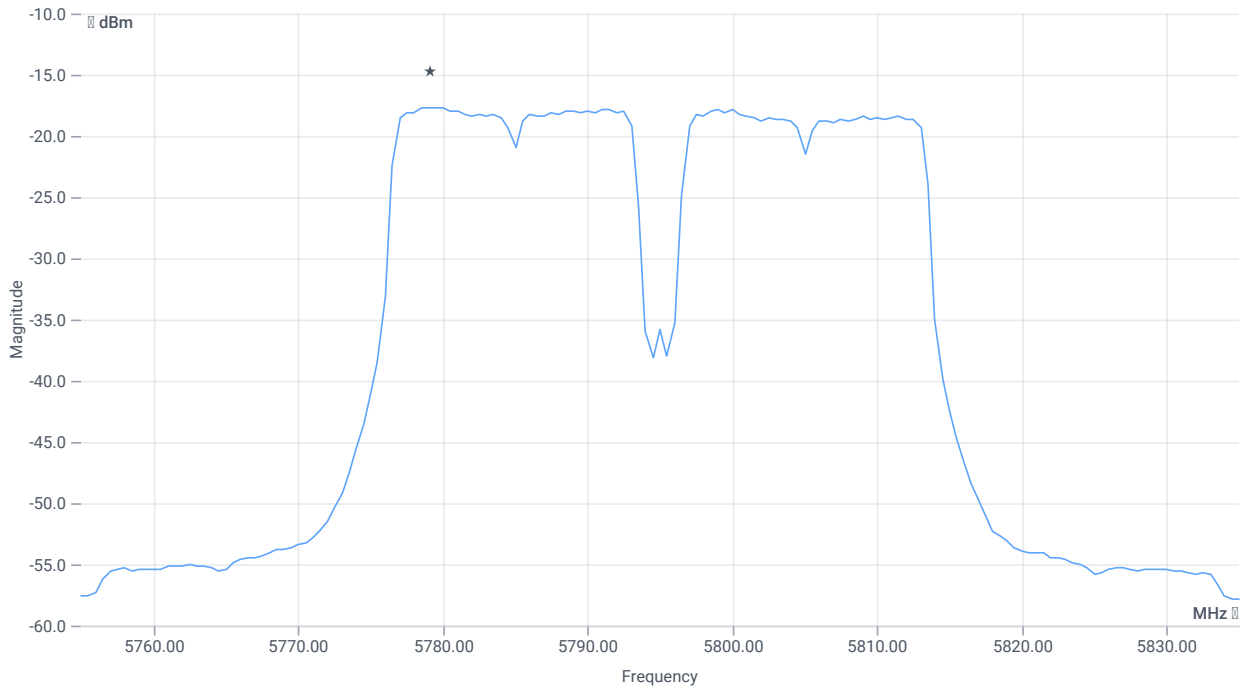

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-17.65	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.68	dB	INFO
Power spectral density DC corrected	--	30	-13.97	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:11:15
Ambit temp [°C] humidity [rel%]	26.7 33
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5795 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.07	dBm	INFO
Ref. frequency	--	--	5778.020	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 257					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.421	--	INFO
Duty cycle min	--	--	3.757	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

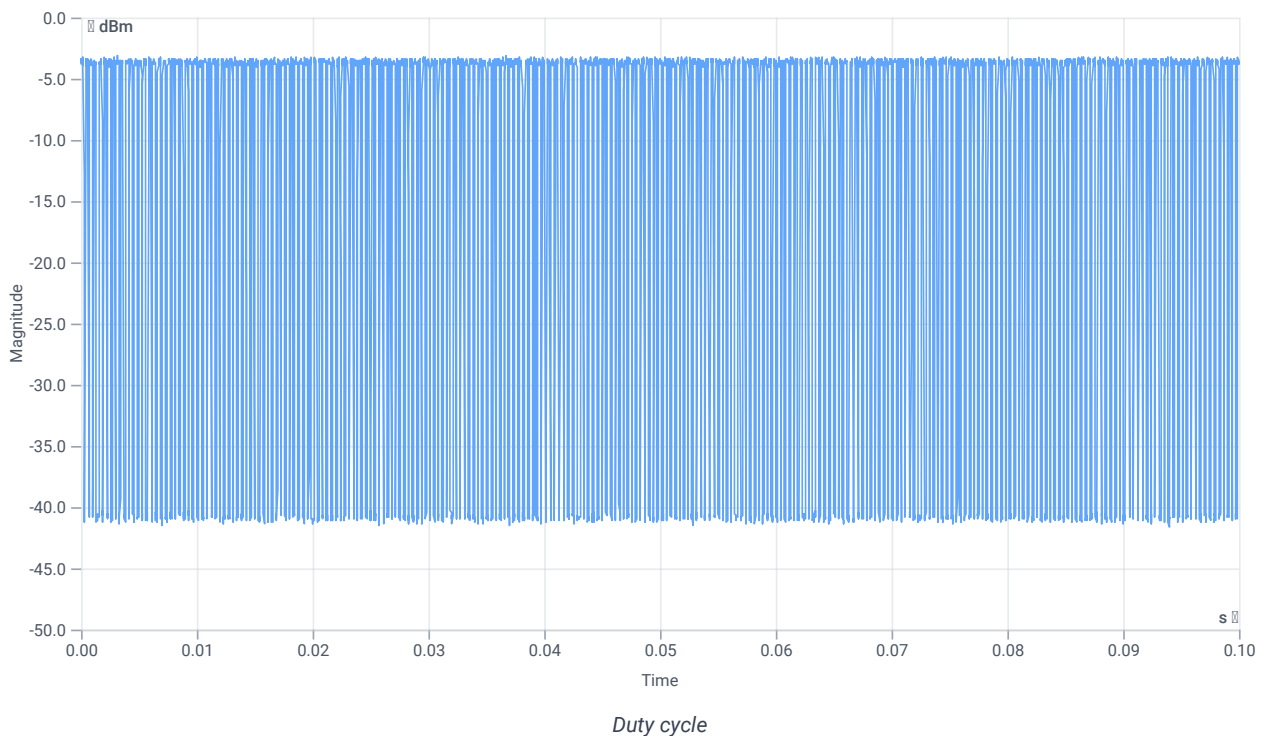

Evaluation bandwidth

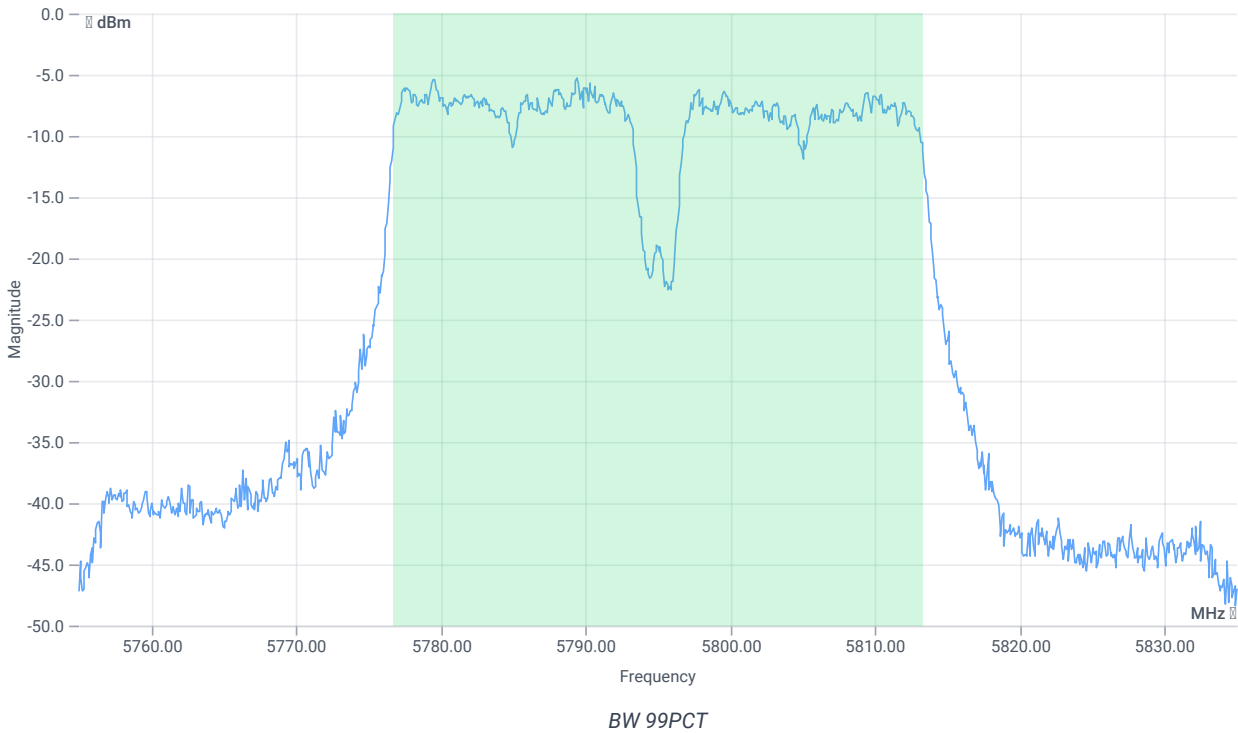


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.603	MHz	INFO
T1 99%	---	---	5776.6983	MHz	INFO
T2 99%	---	---	5813.3017	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.93 10.37 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

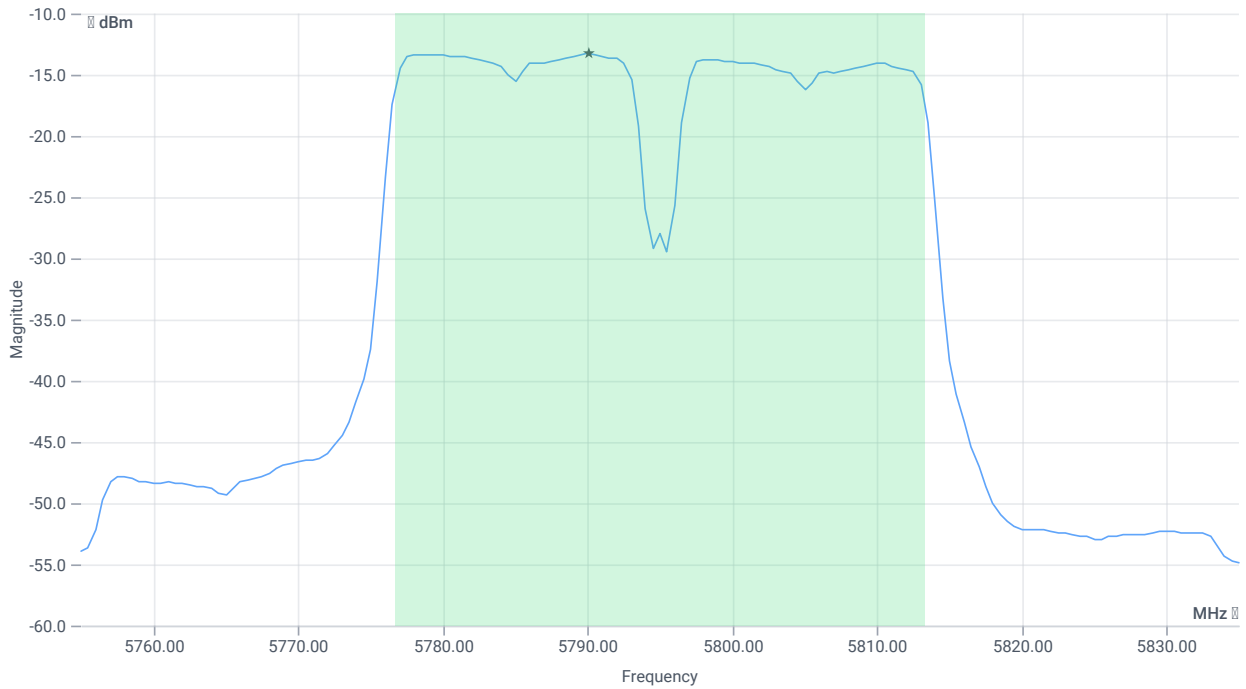

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.81	dBm	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.57	dBm	PASS
Limit: 11 dBm + 10 log 36.603					
Max output power DC corrected	--	26.64	4.57	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.93 10.37 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

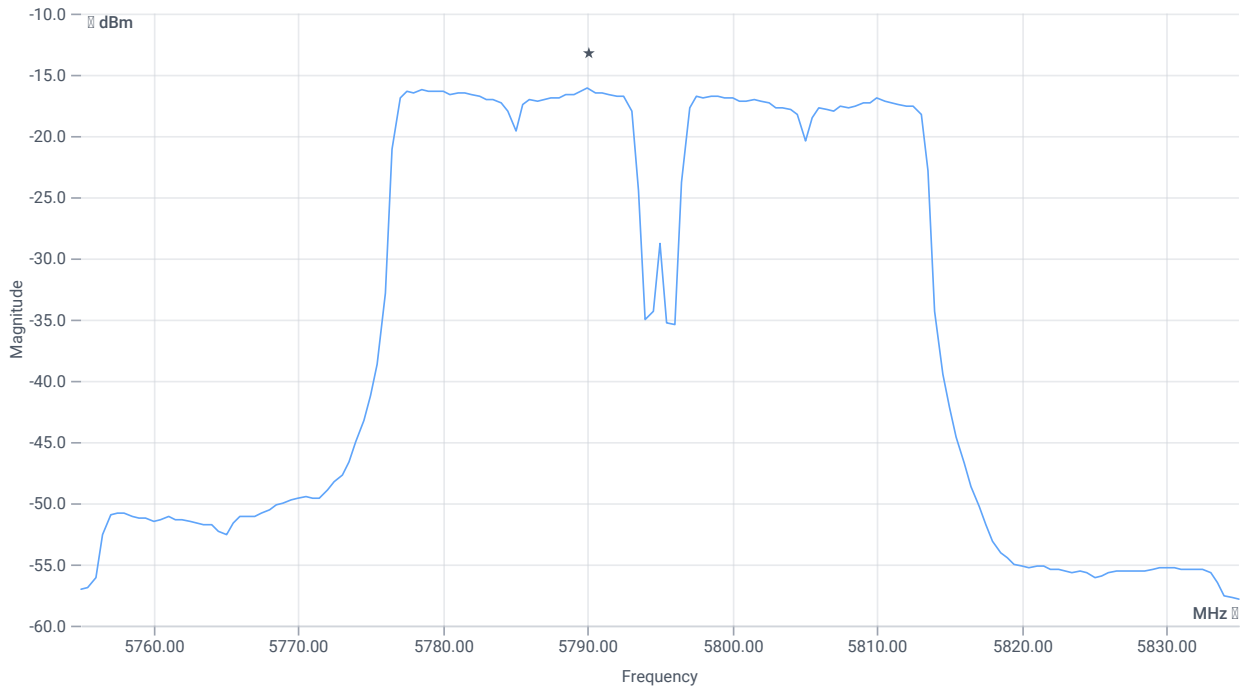

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-16.11	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Power spectral density DC corrected	--	30	-12.35	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:08:48
Ambit temp [°C] humidity [rel%]	26.8 33
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5795 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.67	dBm	INFO
Ref. frequency	--	--	5779.820	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 262					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.4	--	INFO
Duty cycle min	--	--	3.979	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

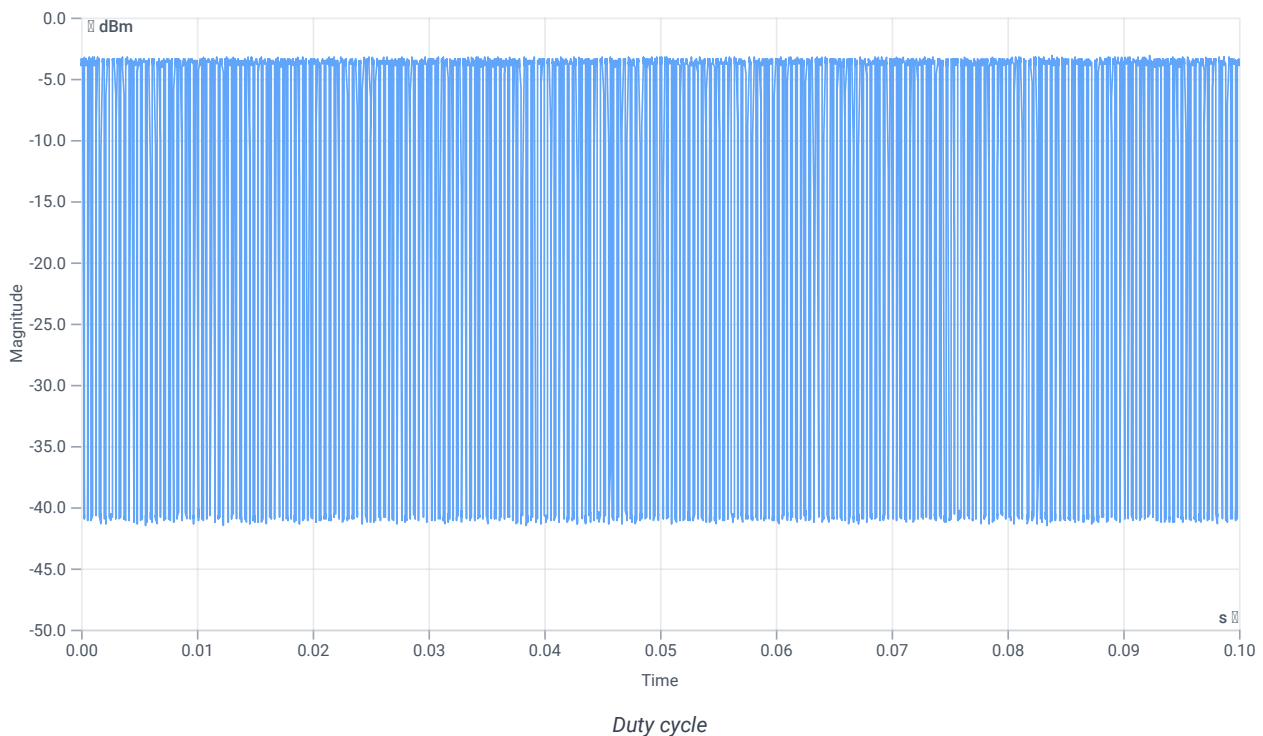

Evaluation bandwidth

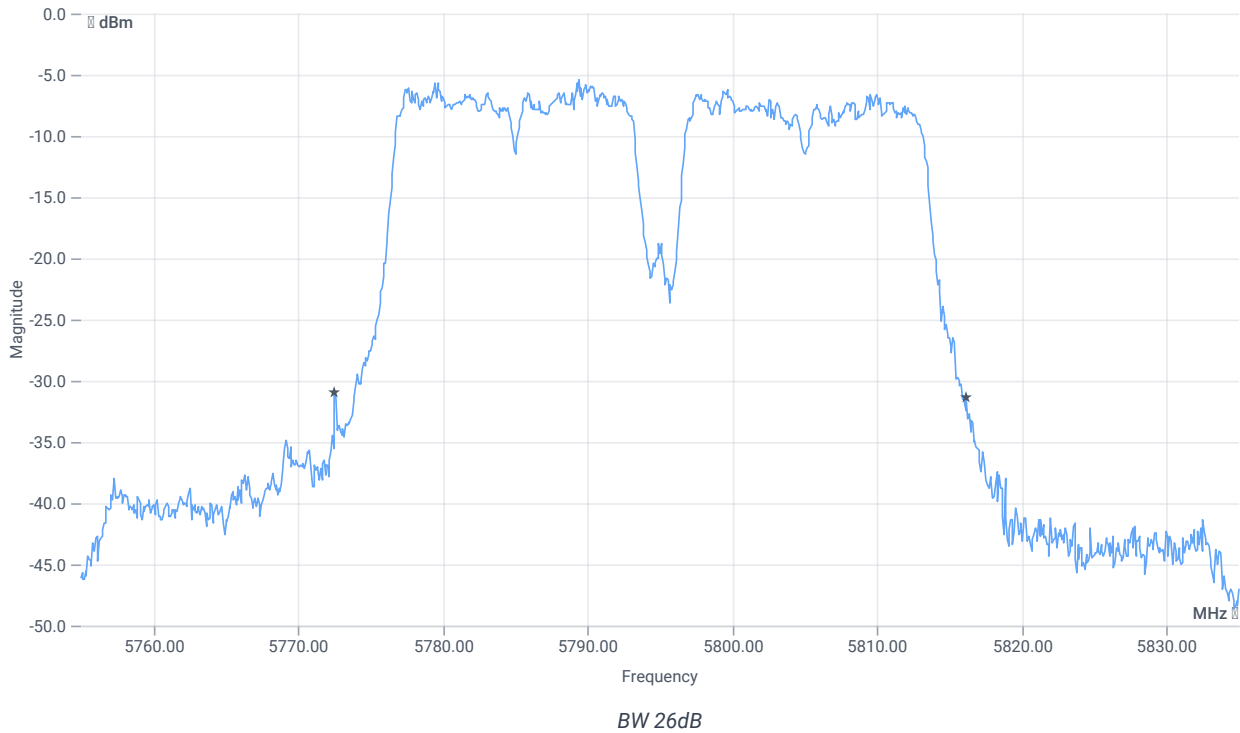


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	43.68	MHz	INFO
T1 26dB	---	---	5772.5200	MHz	INFO
T2 26dB	---	---	5816.2000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.33 10.37 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

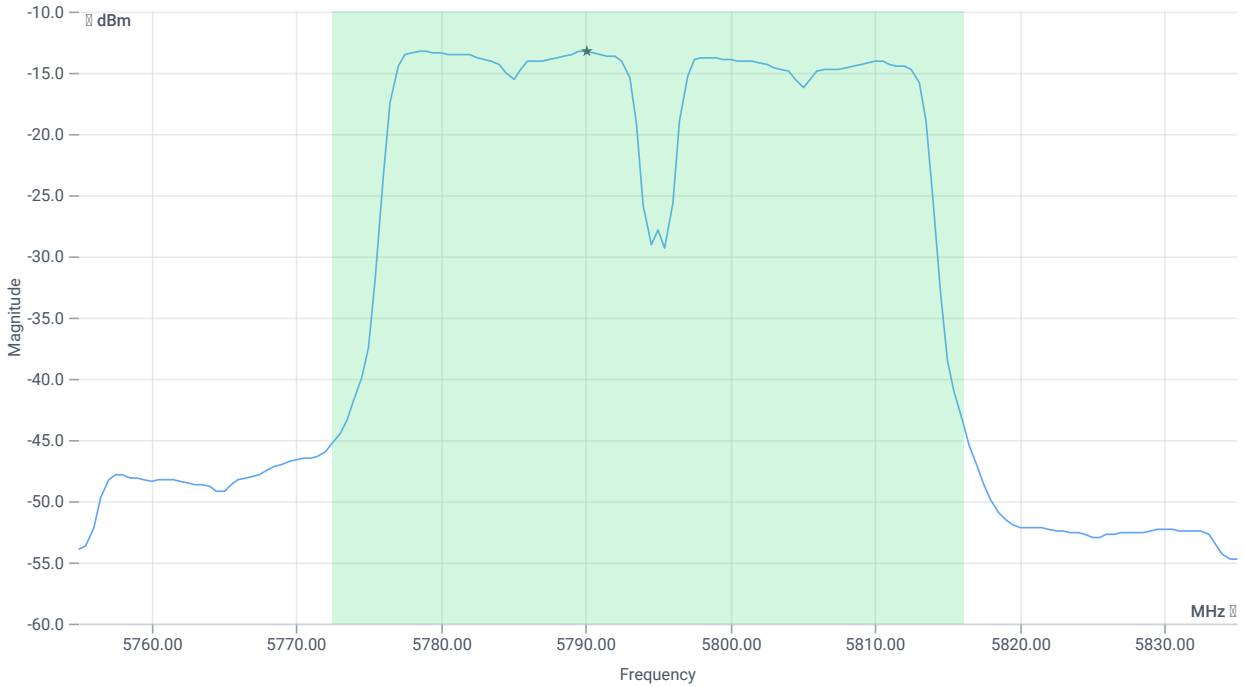

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.88	dBm	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.86	dBm	PASS
Limit: 11 dBm + 10 log 43.68					
Max output power DC corrected	--	27.4	4.86	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.33 10.37 15
Start [MHz] Stop [MHz]	5755.000 5835.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

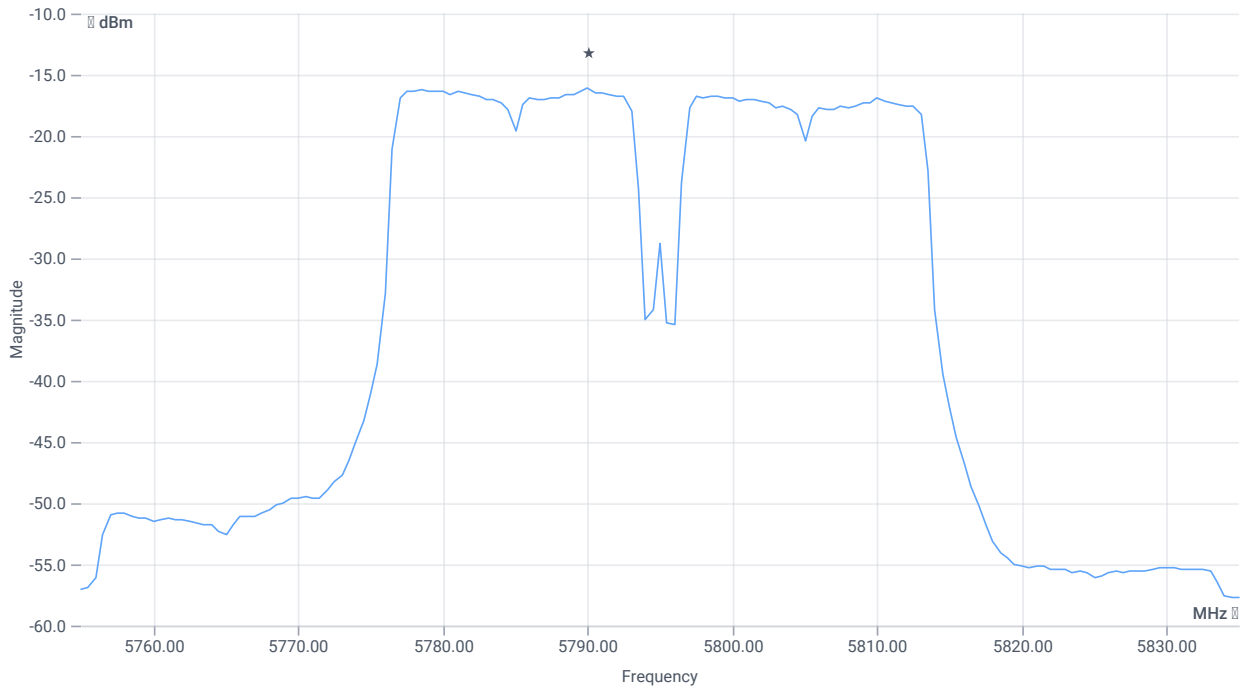

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-16.1	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Power spectral density DC corrected	--	30	-12.12	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 17:59:45
Ambit temp [°C] humidity [rel%]	26.8 34
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5755 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-4.13	dBm	INFO
Ref. frequency	--	--	5770.380	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 258					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.4	--	INFO
Duty cycle min	--	--	3.979	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

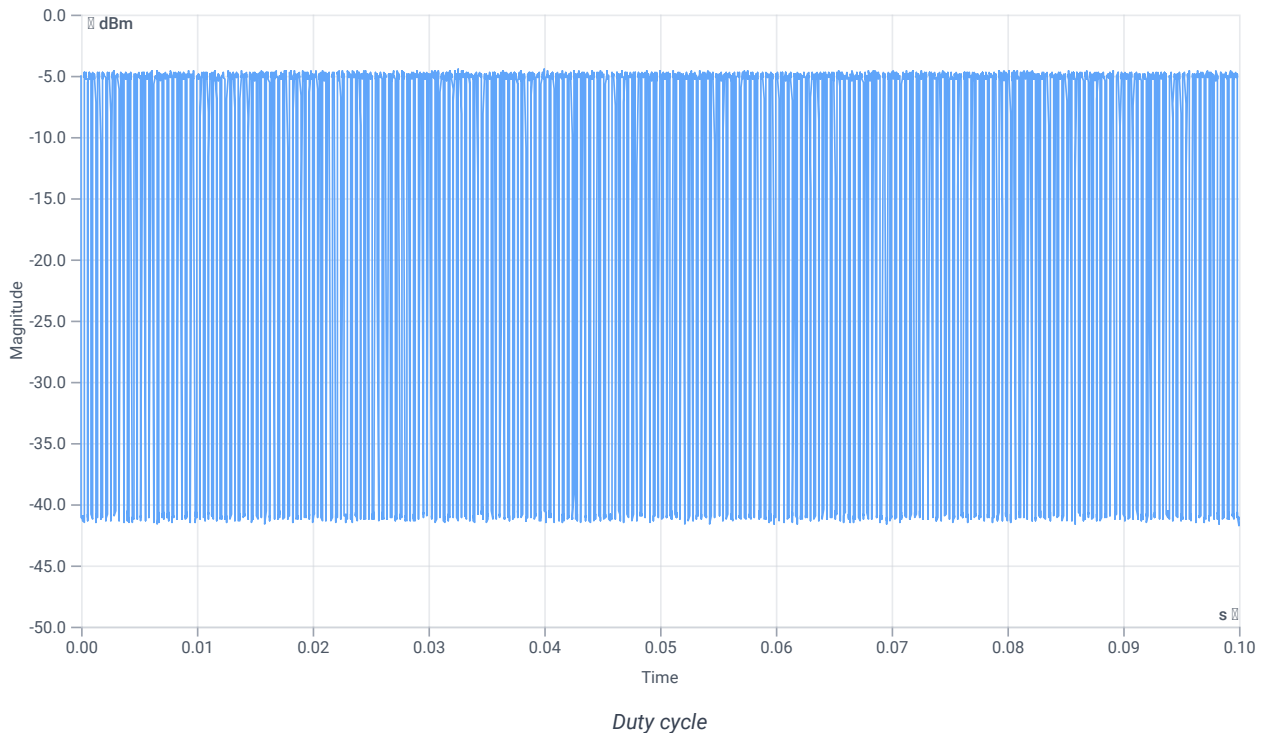

Evaluation bandwidth

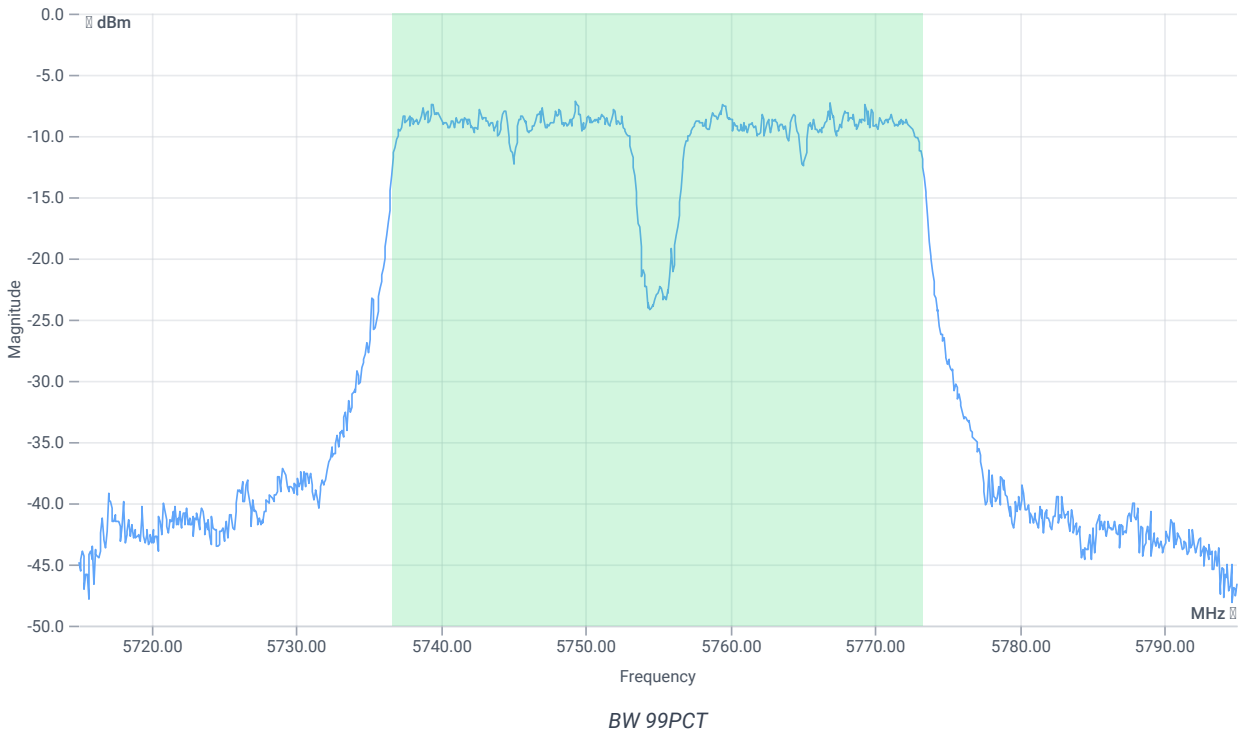


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.683	MHz	INFO
T1 99%	---	---	5736.6184	MHz	INFO
T2 99%	---	---	5773.3017	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.87 10.41 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

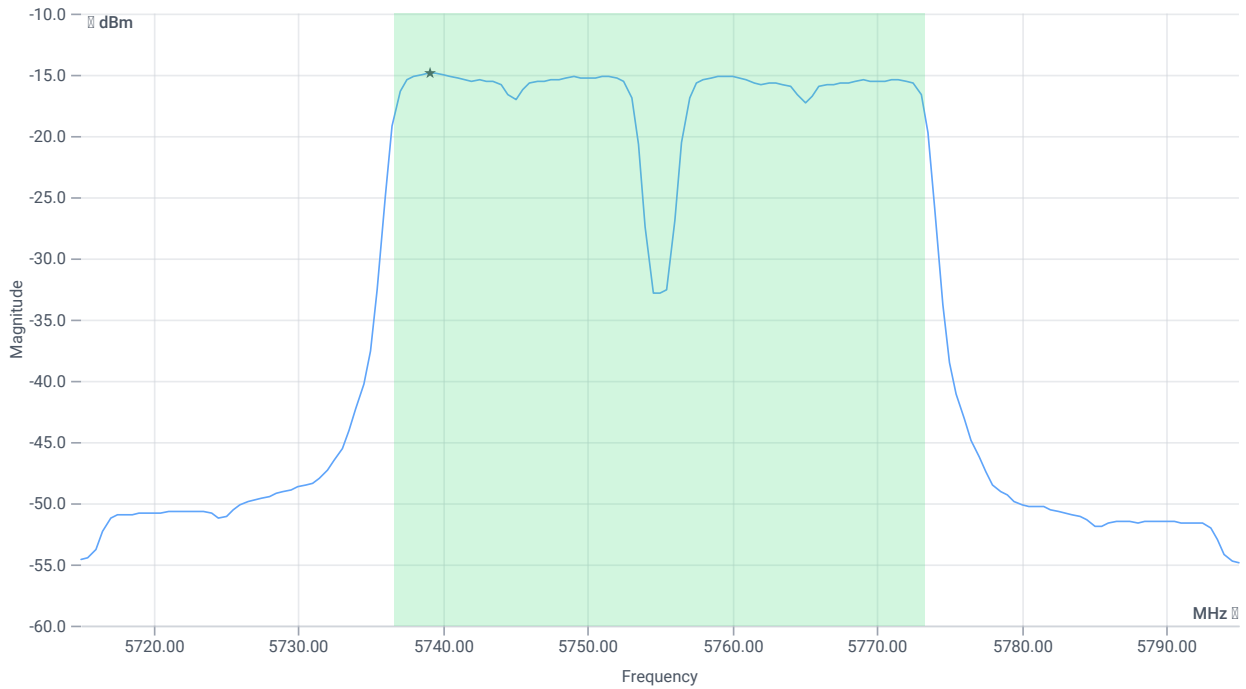

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	-0.64	dBm	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	3.34	dBm	PASS
Limit: 11 dBm + 10 log 36.683					
Max output power DC corrected	--	26.64	3.34	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.87 10.41 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

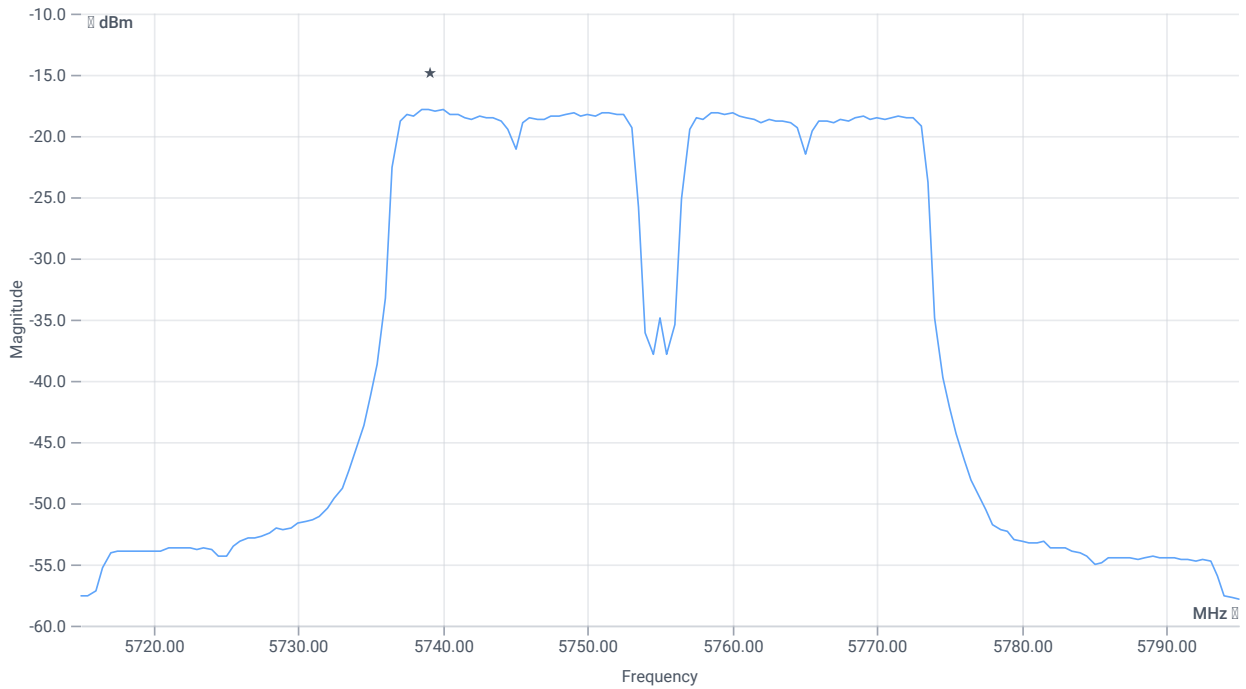

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-17.83	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Power spectral density DC corrected	--	30	-13.85	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 17:57:17
Ambit temp [°C] humidity [rel%]	26.8 34
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5755 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.58	dBm	INFO
Ref. frequency	--	--	5739.420	MHz	INFO

Evaluation max. duty cycle


DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 255					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.381	--	INFO
Duty cycle min	--	--	4.191	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.325	ms	INFO

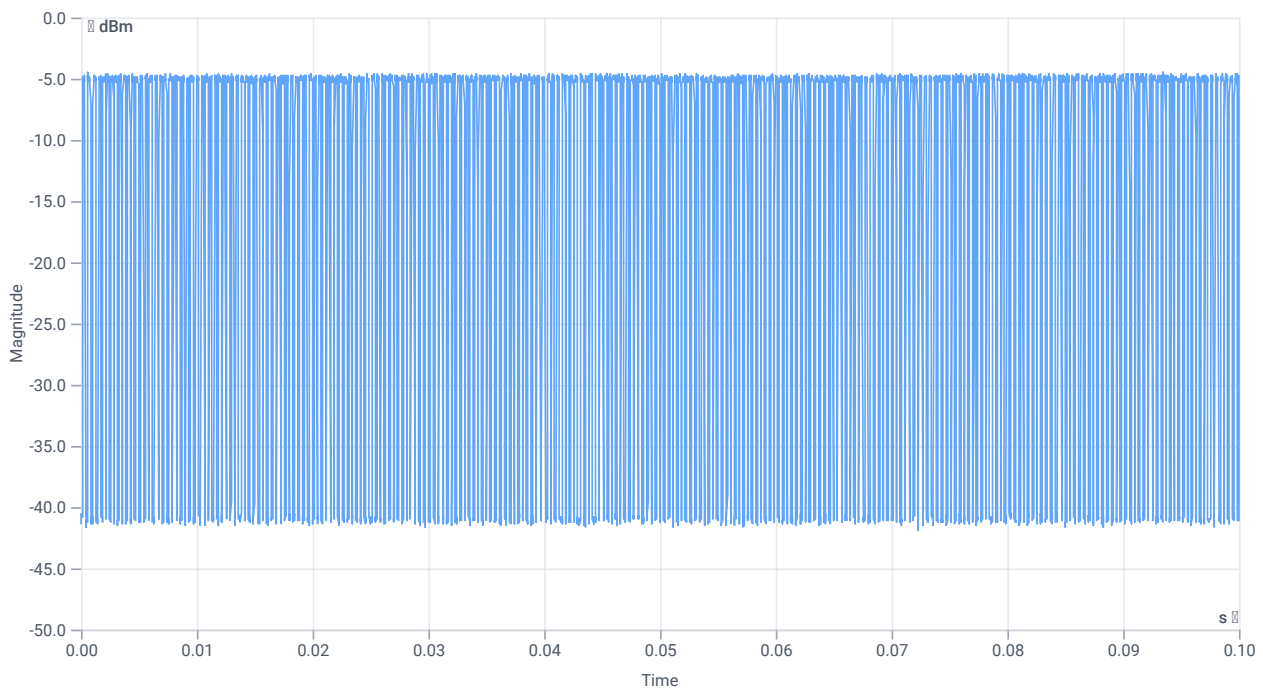

Duty cycle

Evaluation bandwidth

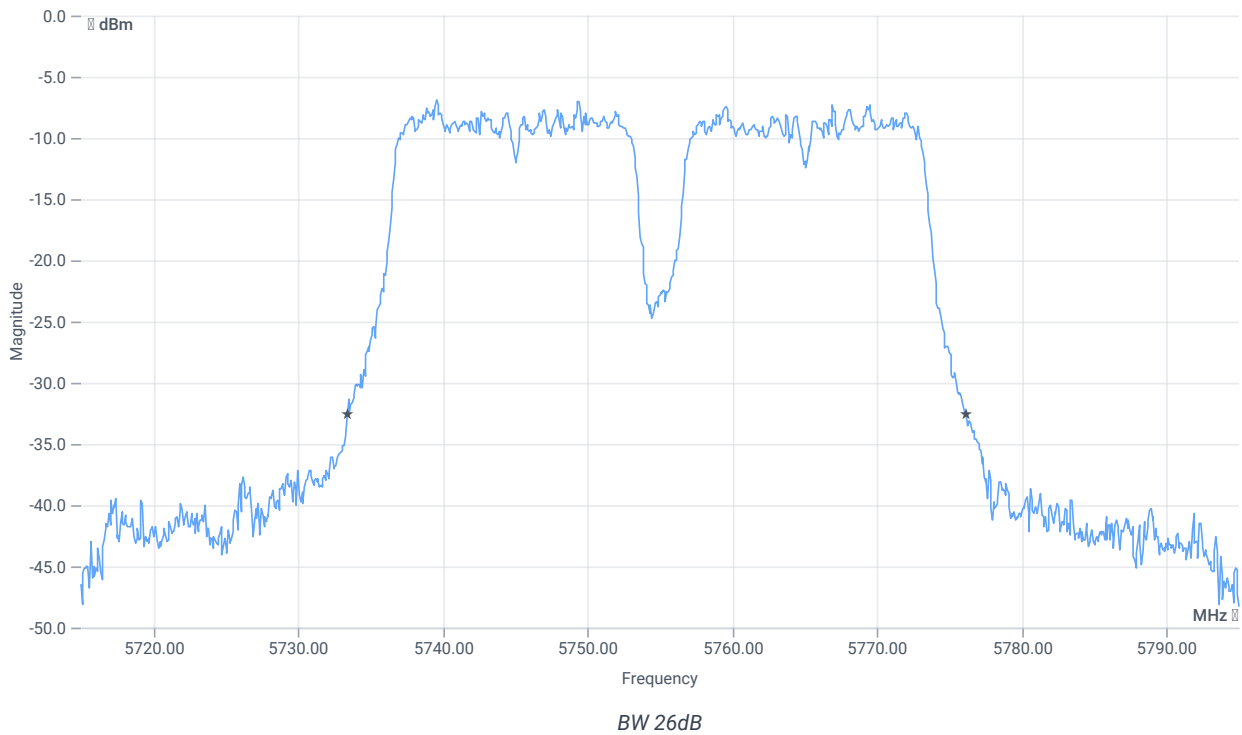


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42.8	MHz	INFO
T1 26dB	---	---	5733.4000	MHz	INFO
T2 26dB	---	---	5776.2000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.42 10.41 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

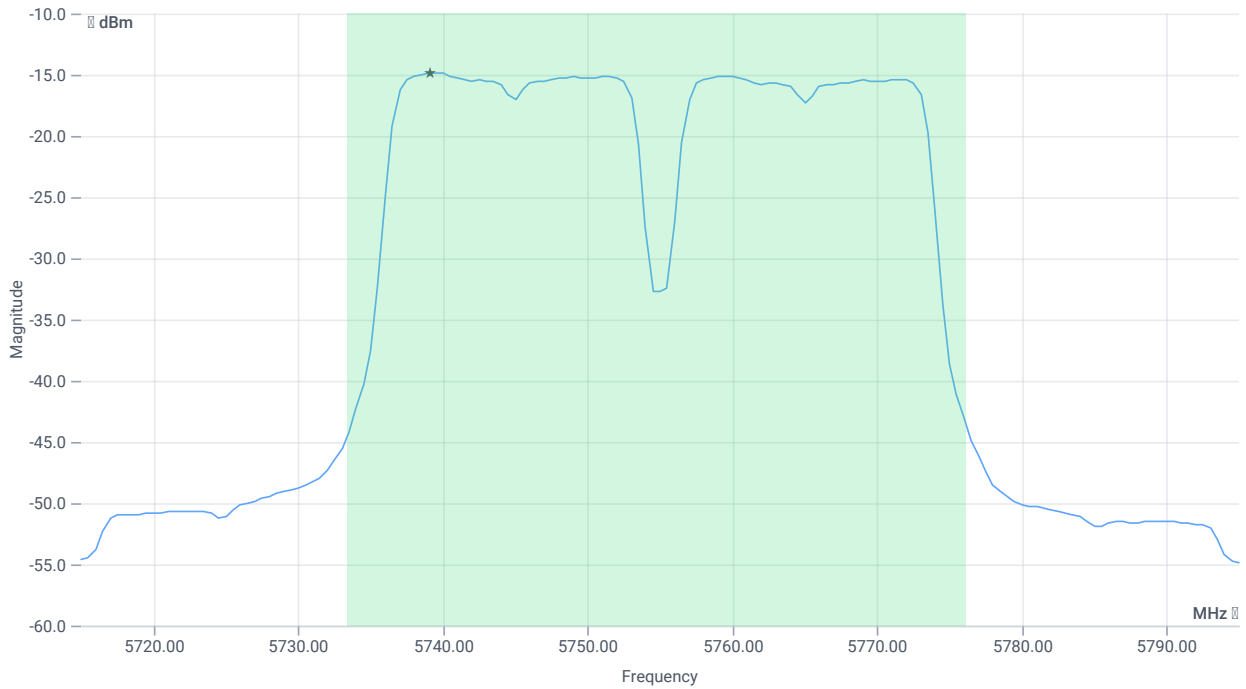

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	-0.59	dBm	INFO
Duty cycle correction	--	--	4.19	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	3.6	dBm	PASS
Limit: 11 dBm + 10 log 42.8					
Max output power DC corrected	--	27.31	3.6	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.42 10.41 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

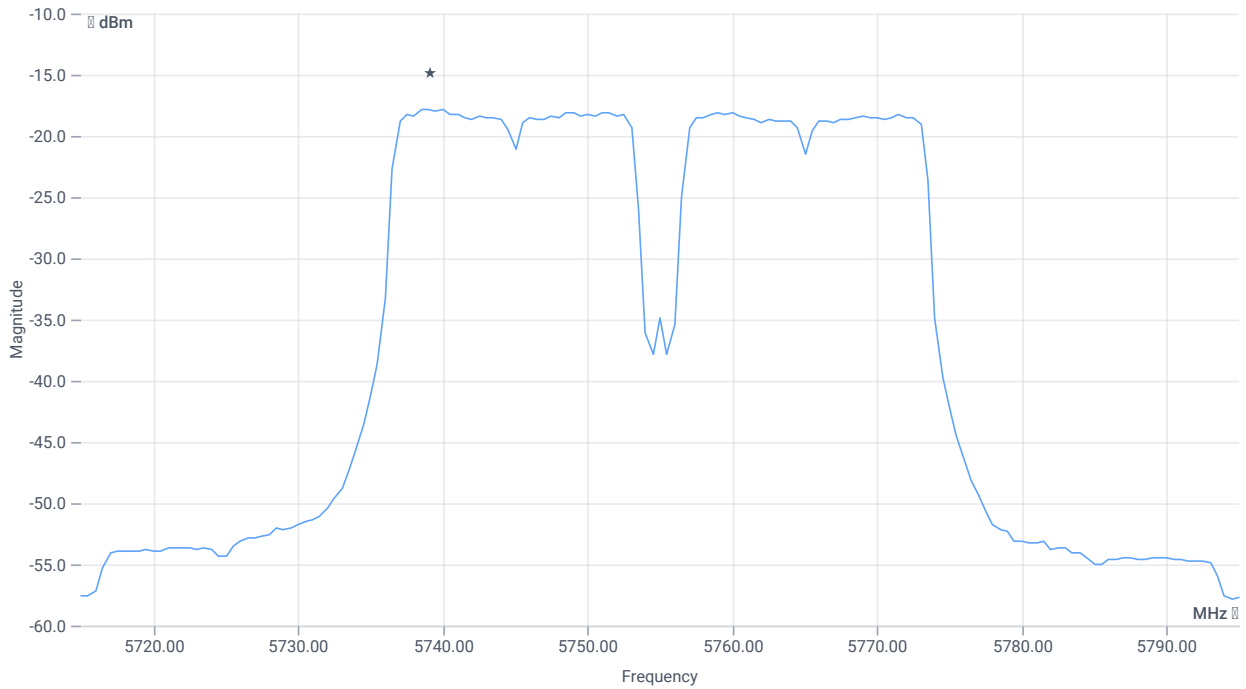

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-17.86	dBm/0.5MHz	INFO
Duty cycle correction	--	--	4.19	dB	INFO
Power spectral density DC corrected	--	30	-13.67	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 17:52:46
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5755 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.41	dBm	INFO
Ref. frequency	--	--	5769.990	MHz	INFO

Evaluation max. duty cycle


DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 259					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.364	--	INFO
Duty cycle min	--	--	4.389	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.35	ms	INFO

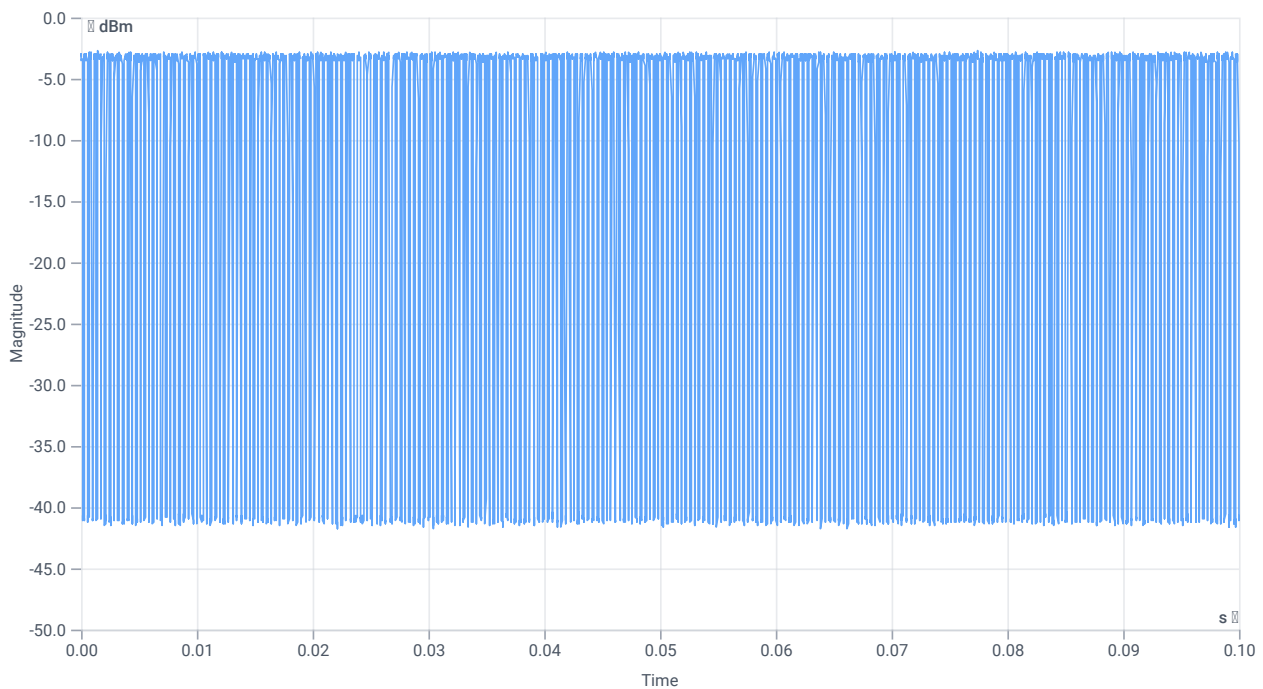

Duty cycle

Evaluation bandwidth

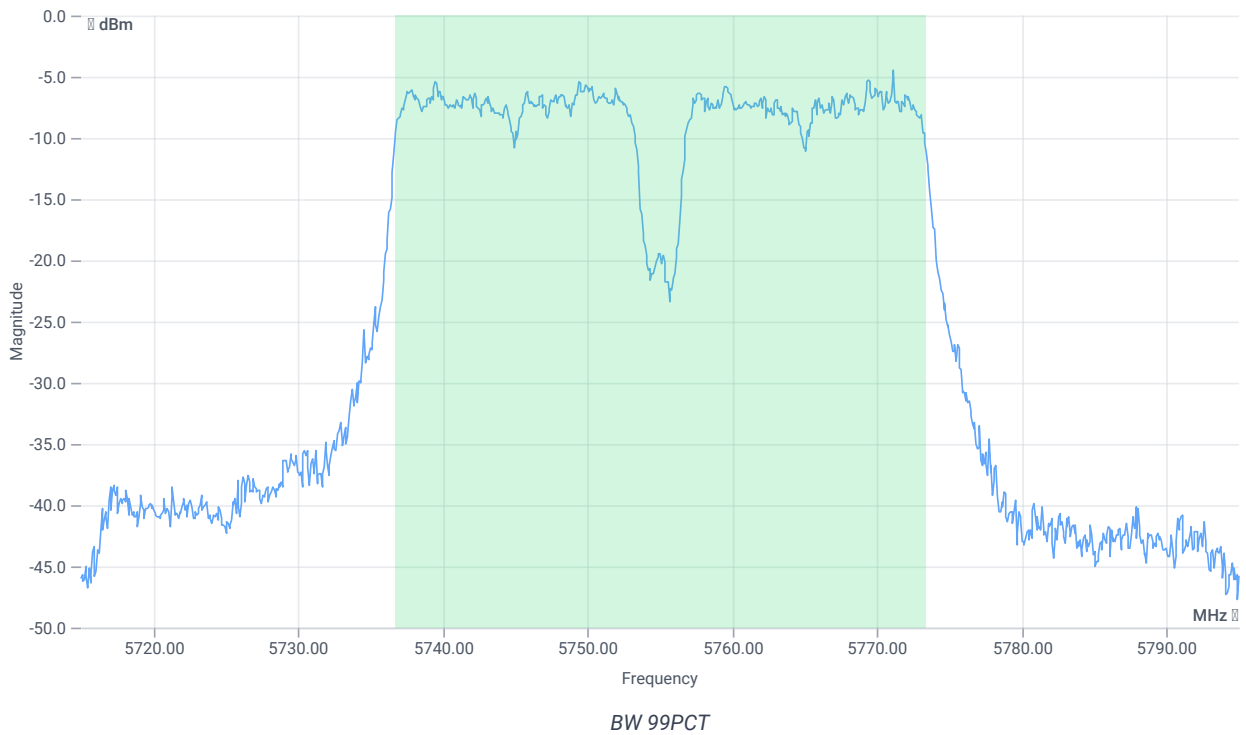


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.683	MHz	INFO
T1 99%	---	---	5736.6983	MHz	INFO
T2 99%	---	---	5773.3816	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.59 10.39 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

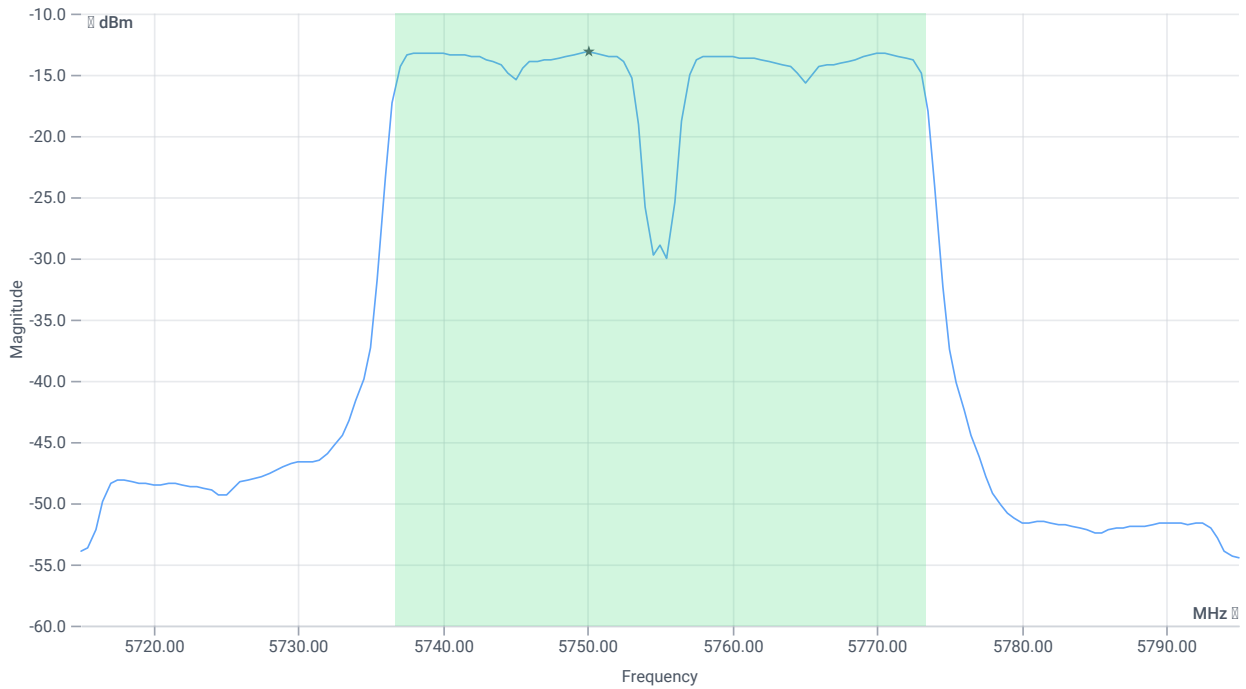

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.16	dBm	INFO
Duty cycle correction	--	--	4.39	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.55	dBm	PASS
Limit: 11 dBm + 10 log 36.683					
Max output power DC corrected	--	26.64	5.55	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.59 10.39 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

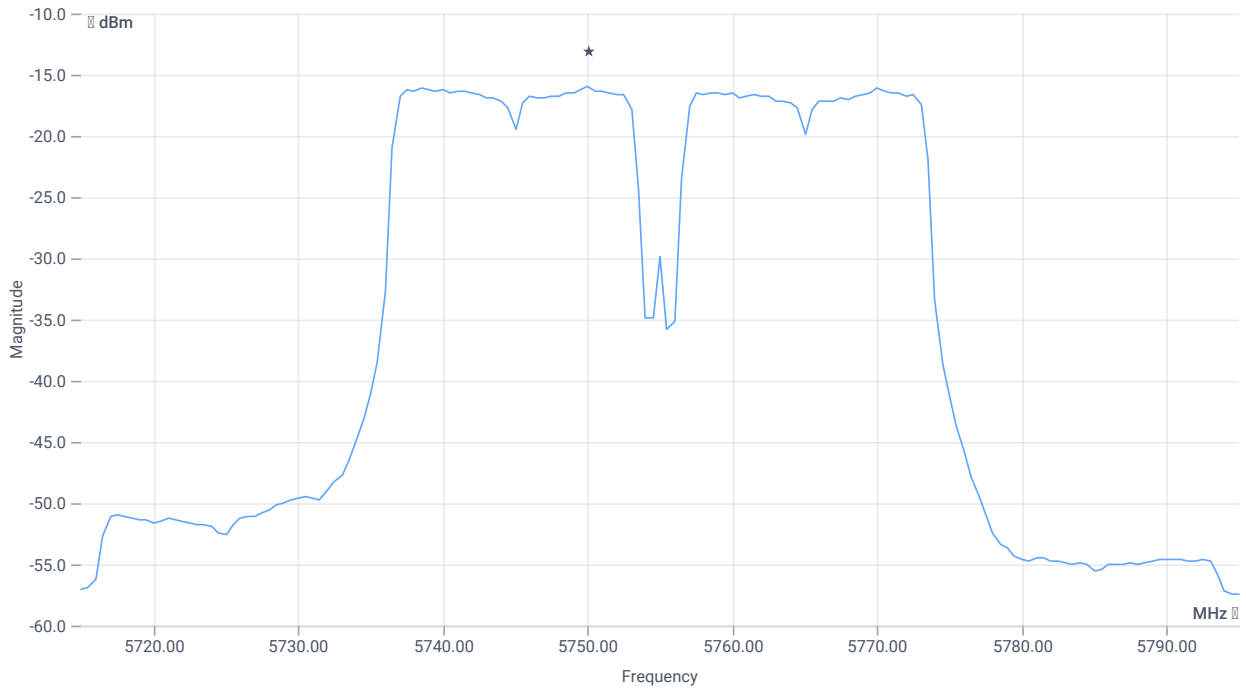

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-15.99	dBm/0.5MHz	INFO
Duty cycle correction	--	--	4.39	dB	INFO
Power spectral density DC corrected	--	30	-11.6	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 17:50:19
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5755 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.67	dBm	INFO
Ref. frequency	--	--	5750.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 255					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.409	--	INFO
Duty cycle min	--	--	3.883	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.325	ms	INFO

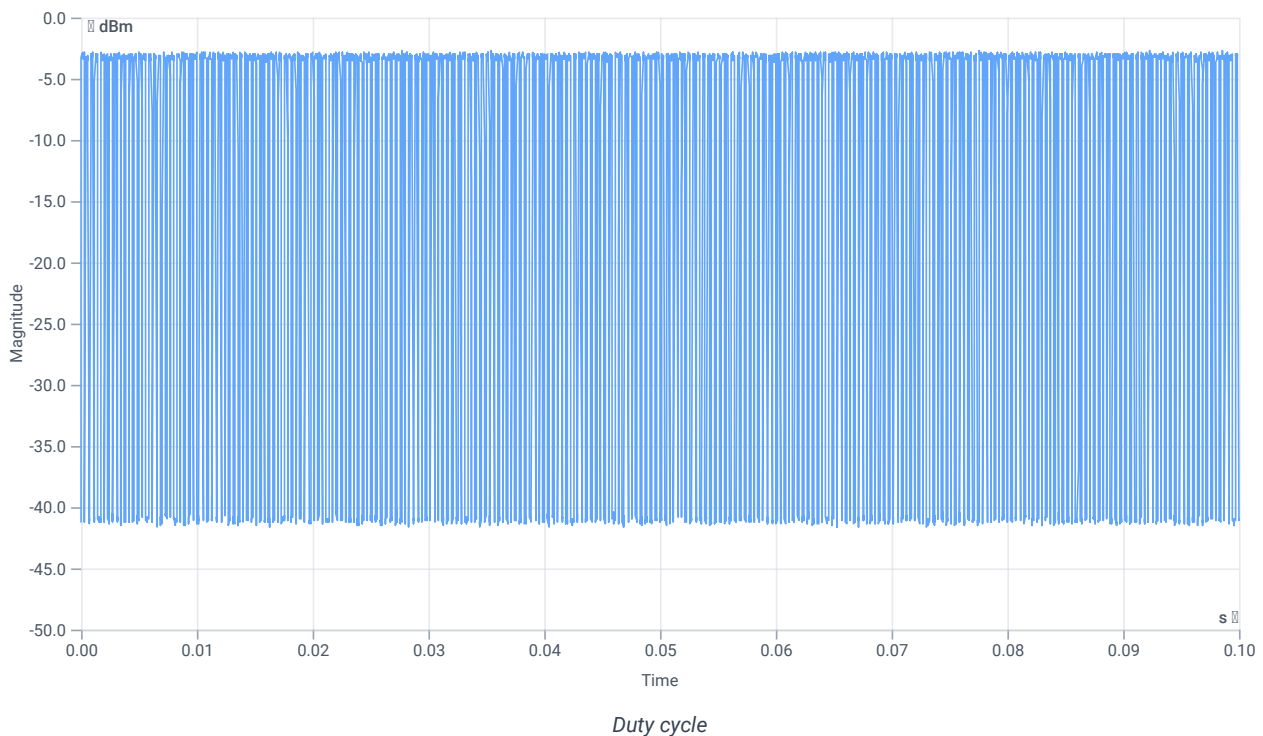

Evaluation bandwidth

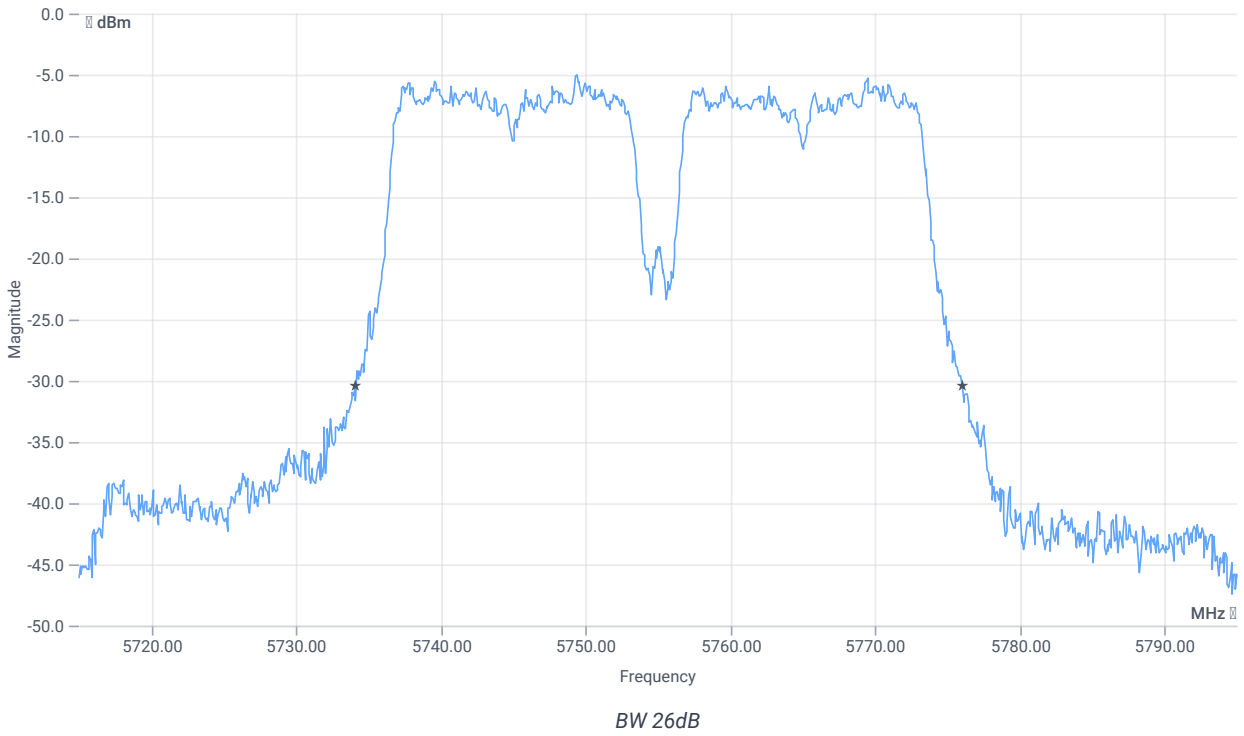


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	42	MHz	INFO
T1 26dB	---	---	5734.0400	MHz	INFO
T2 26dB	---	---	5776.0400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.33 10.39 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

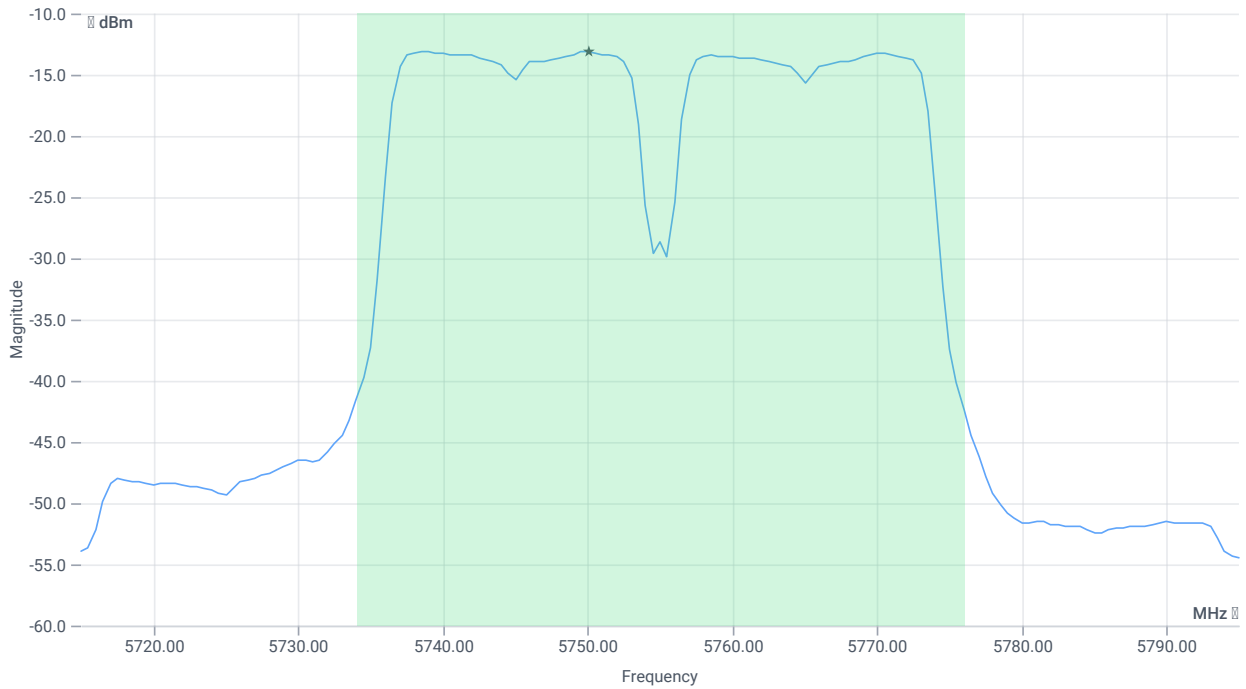

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.23	dBm	INFO
Duty cycle correction	--	--	3.88	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.11	dBm	PASS
Limit: 11 dBm + 10 log 42					
Max output power DC corrected	--	27.23	5.11	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.33 10.39 15
Start [MHz] Stop [MHz]	5715.000 5795.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

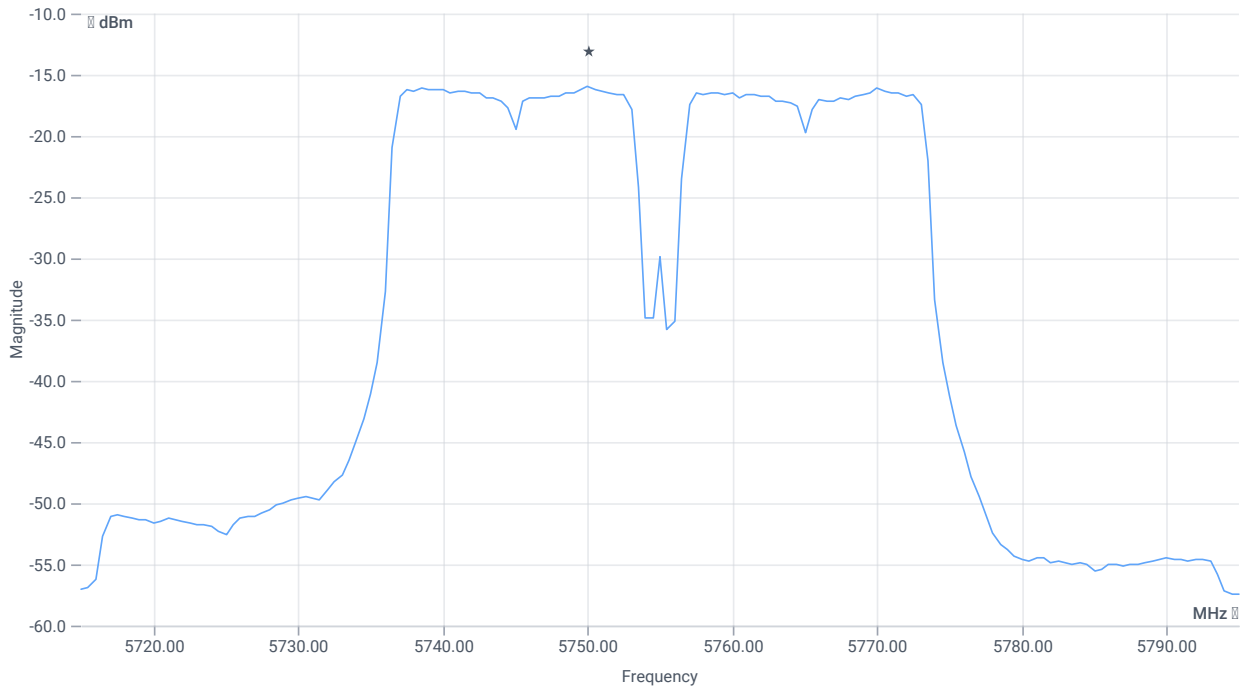

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-15.95	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.88	dB	INFO
Power spectral density DC corrected	--	30	-12.07	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:46:04
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.75	dBm	INFO
Ref. frequency	--	--	5244.990	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 266					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

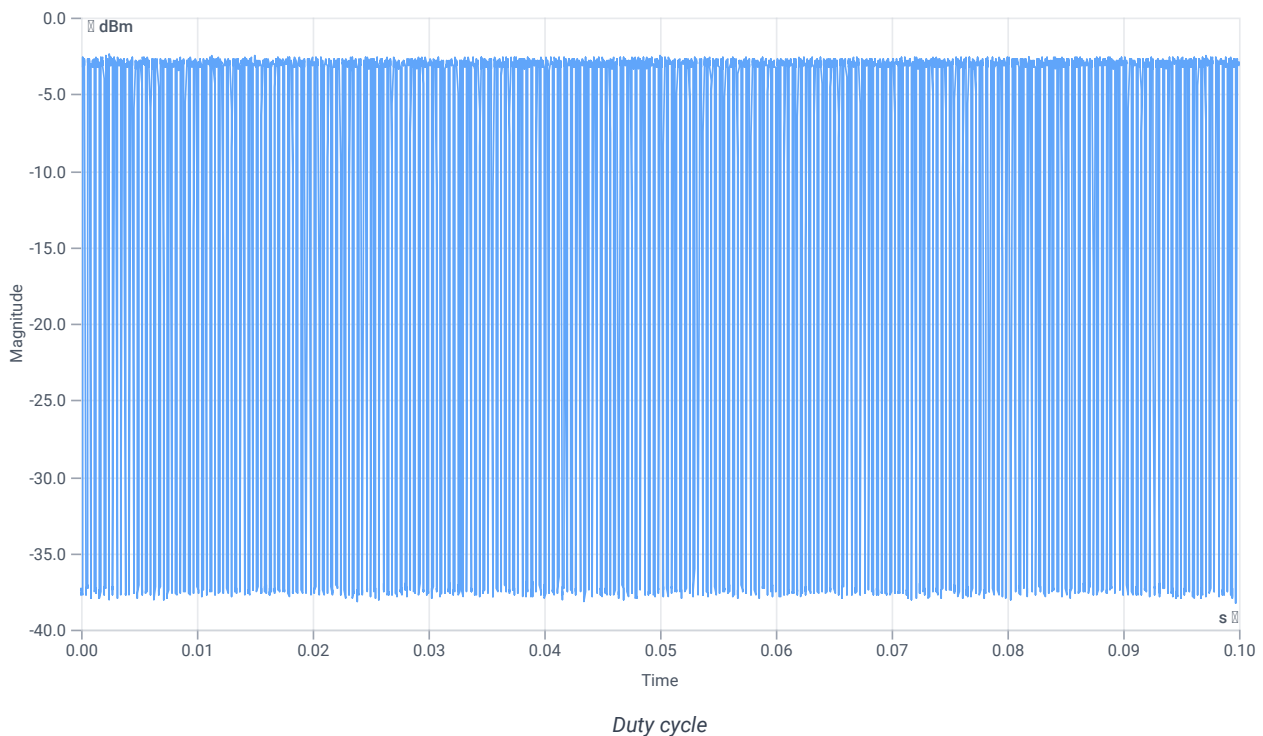

Evaluation bandwidth

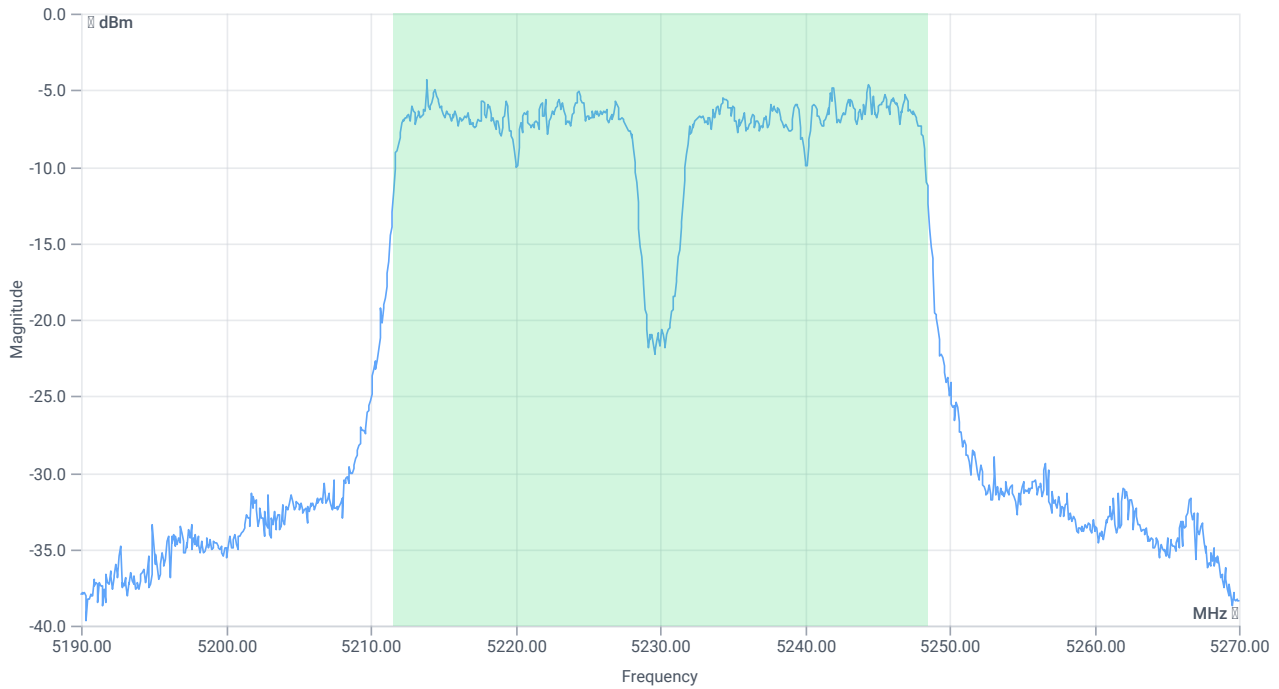

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.843	MHz	INFO
T1 99%	---	---	5211.6184	MHz	INFO
T2 99%	---	---	5248.4615	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.25 9.97 15
Start [MHz] Stop [MHz]	5190.000 5270.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

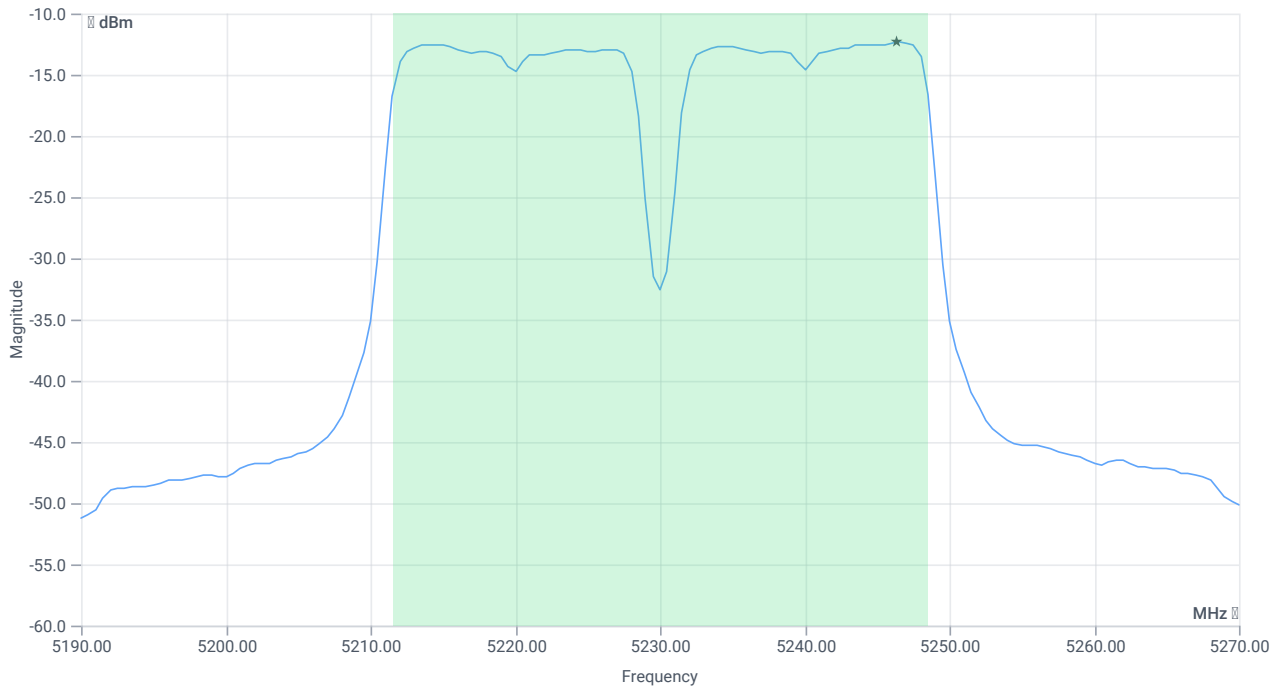

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.86	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.13	dBm	na
Limit: 11 dBm + 10 log 36.843					
Max output power DC corrected	--	26.66	5.13	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-12.32	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-9.05	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:44:30
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.90	dBm	INFO
Ref. frequency	--	--	5247.180	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 263					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

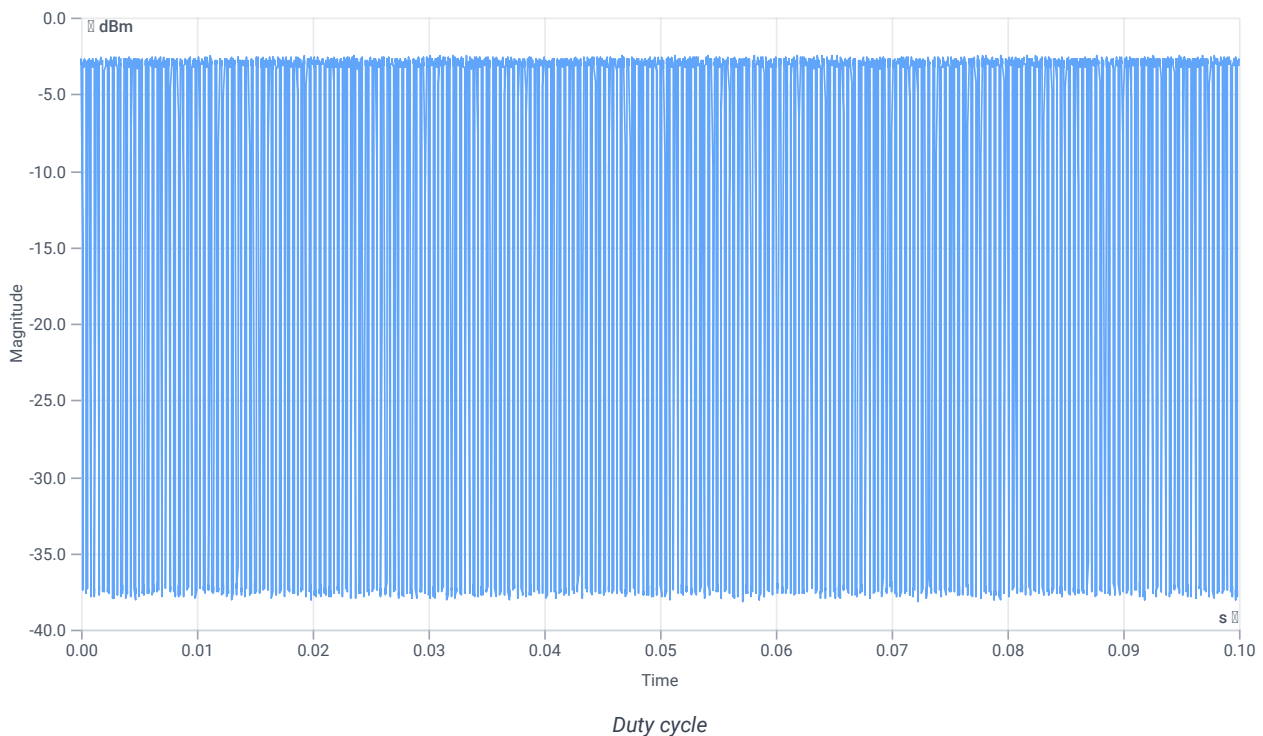

Evaluation bandwidth

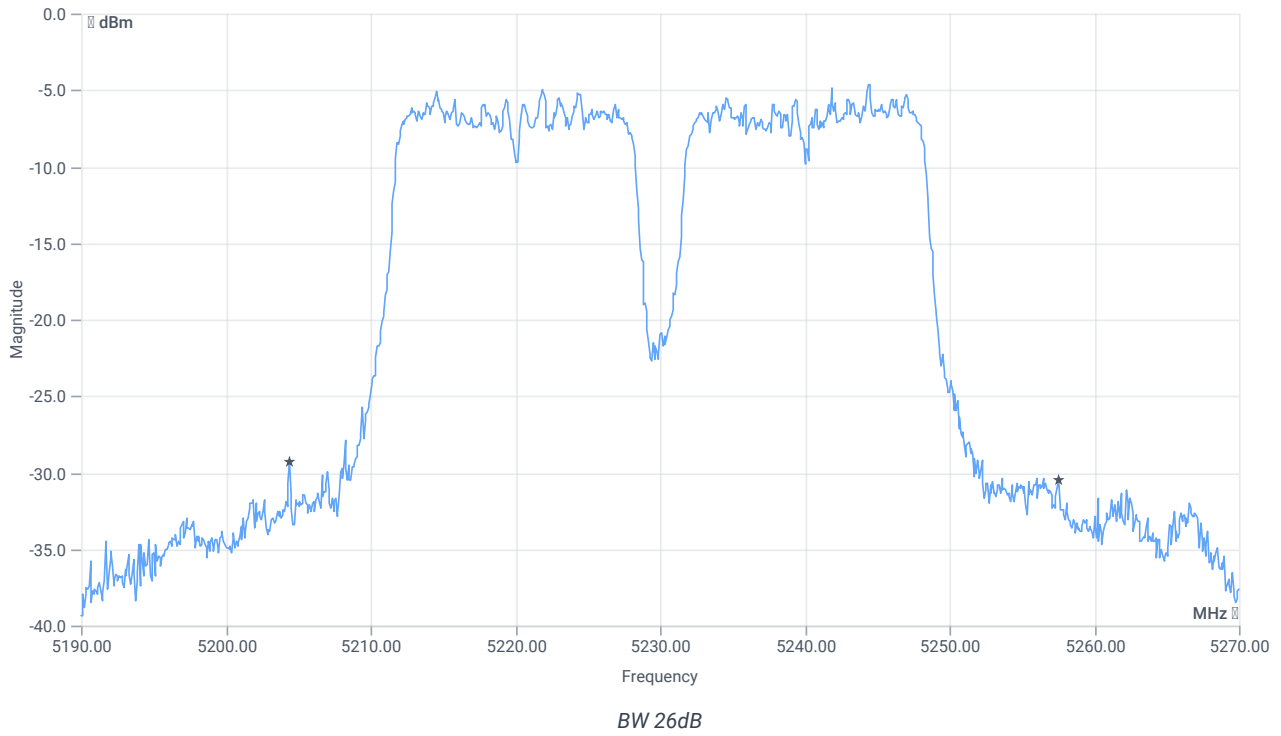


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	53.12	MHz	INFO
T1 26dB	---	---	5204.4000	MHz	INFO
T2 26dB	---	---	5257.5200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.10 9.97 15
Start [MHz] Stop [MHz]	5190.000 5270.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

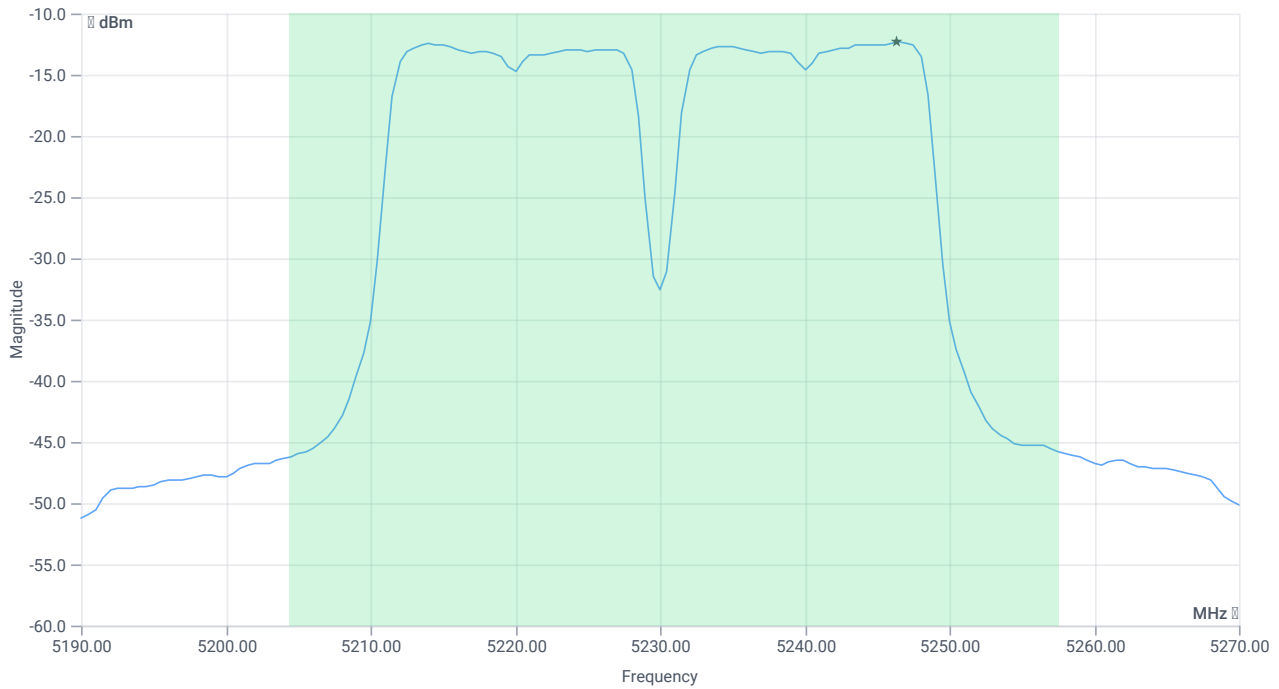

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.92	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.19	dBm	PASS
Limit: 11 dBm + 10 log 53.12					
Max output power DC corrected	--	28.25	5.19	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-12.33	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-9.06	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:41:51
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.76	dBm	INFO
Ref. frequency	--	--	5244.990	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 265					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

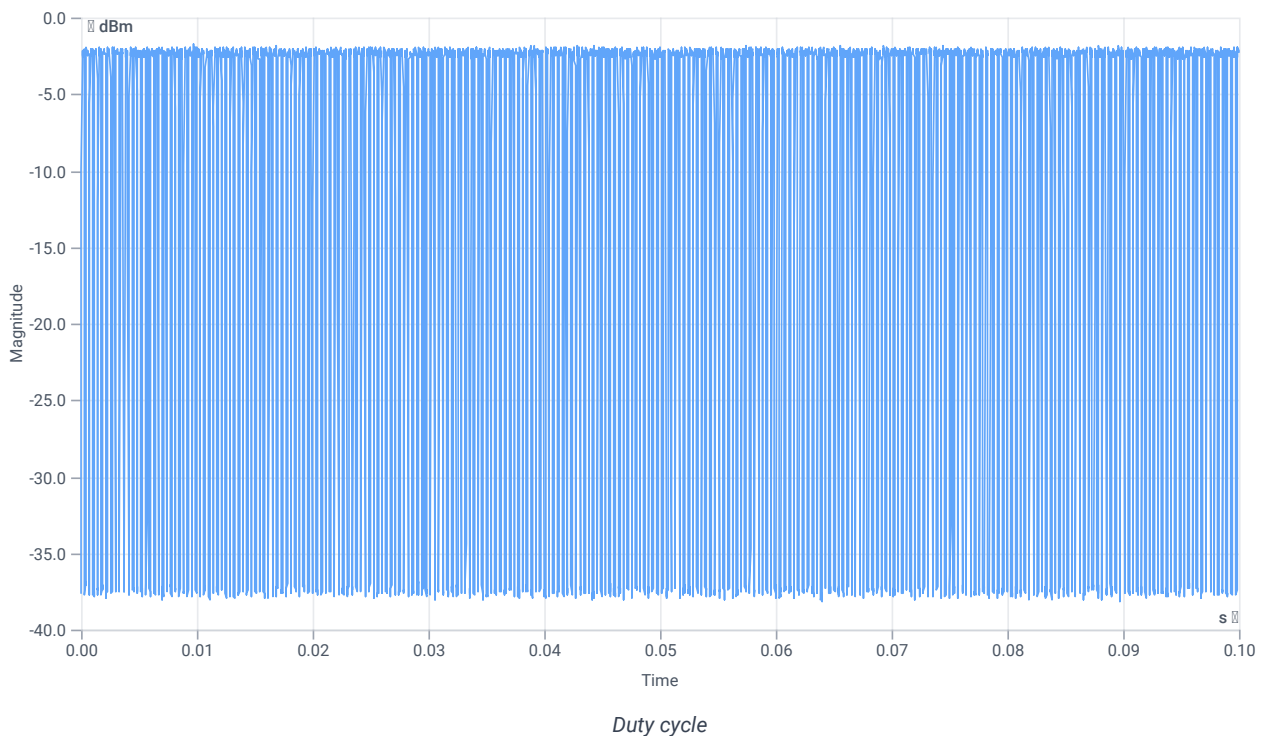

Evaluation bandwidth

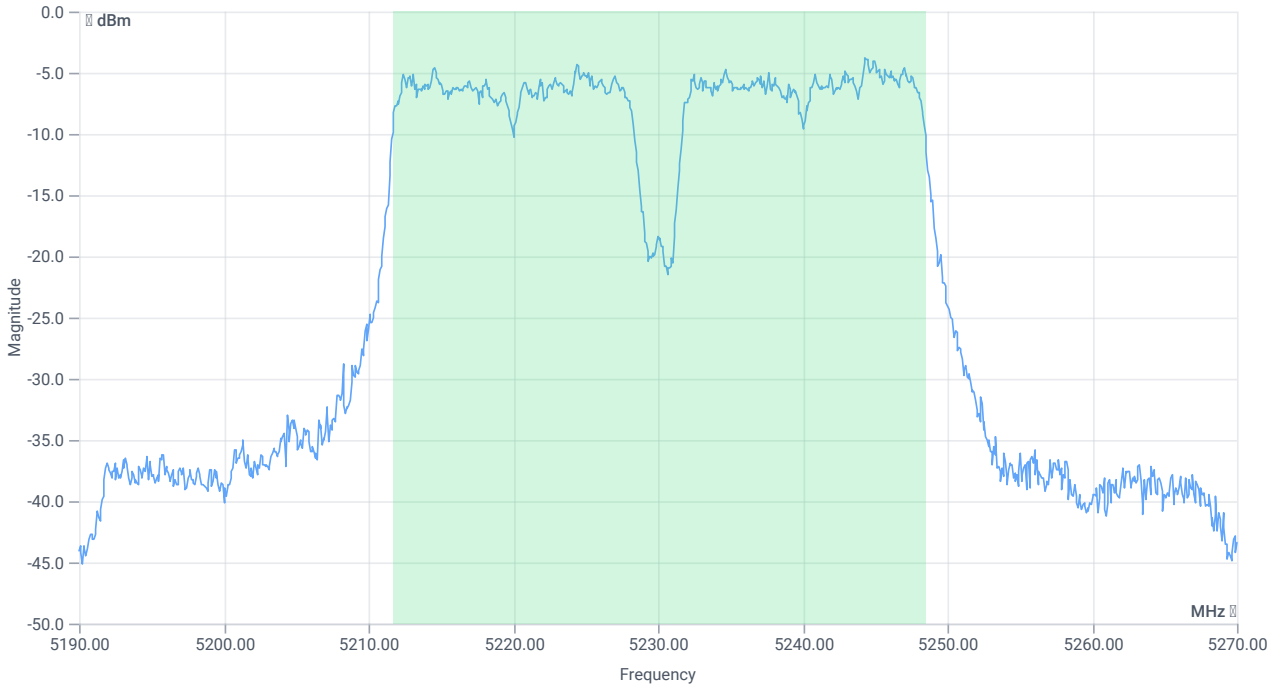

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	36.763	MHz	INFO
T1 99%	--	--	5211.6983	MHz	INFO
T2 99%	--	--	5248.4615	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.24 9.95 20
Start [MHz] Stop [MHz]	5190.000 5270.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

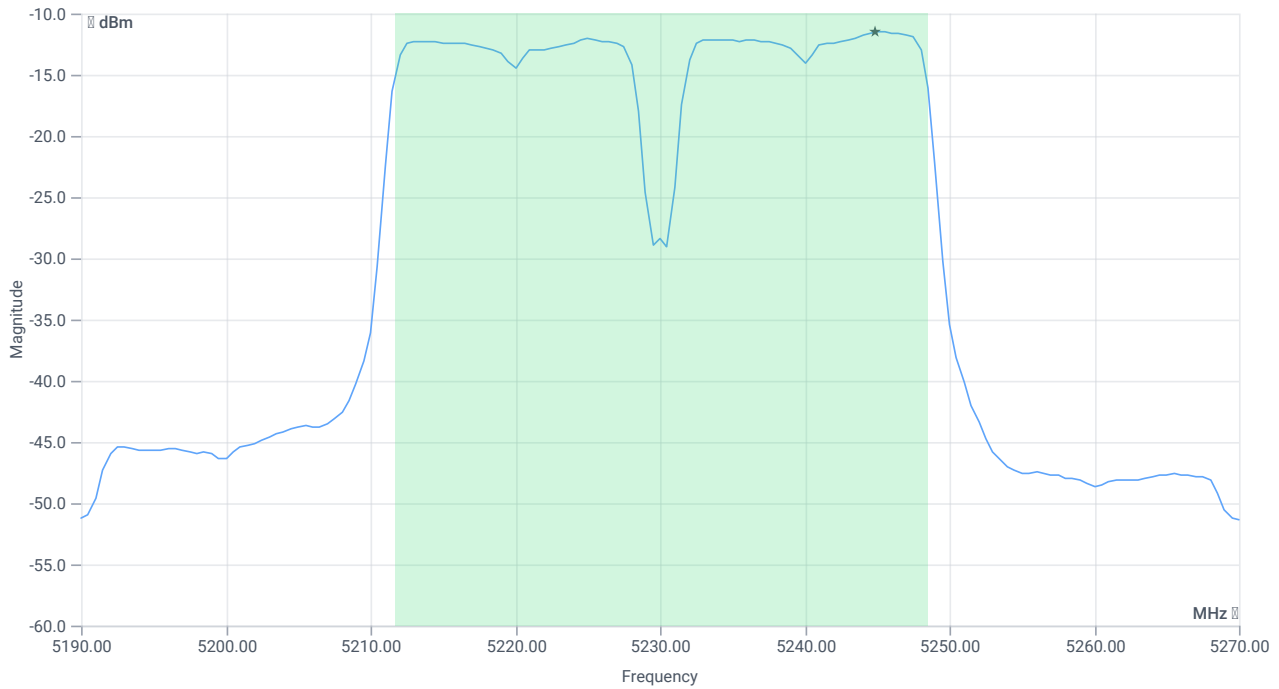

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.47	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.74	dBm	na
Limit: 11 dBm + 10 log 36.763					
Max output power DC corrected	--	26.65	5.74	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-11.43	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-8.16	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:40:16
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5230 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.53	dBm	INFO
Ref. frequency	--	--	5246.980	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 265					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

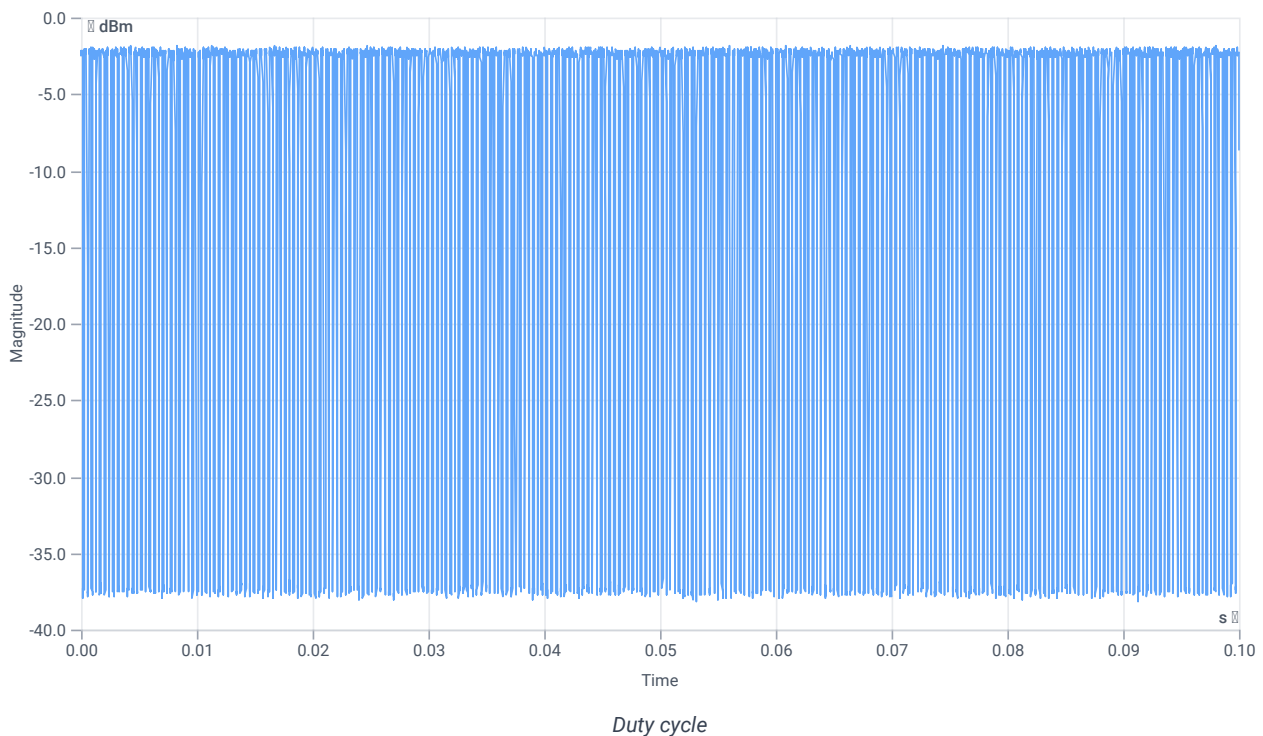

Evaluation bandwidth

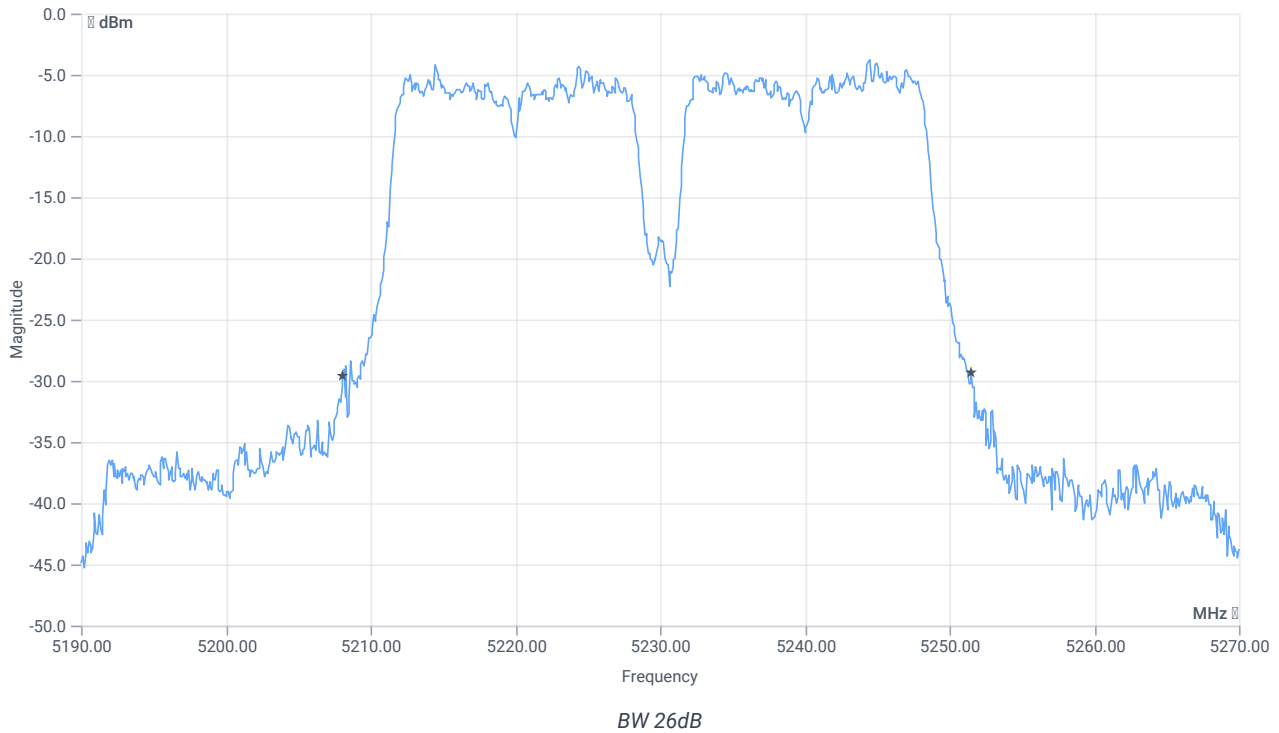


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	43.44	MHz	INFO
T1 26dB	---	---	5208.0800	MHz	INFO
T2 26dB	---	---	5251.5200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.47 9.95 15
Start [MHz] Stop [MHz]	5190.000 5270.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

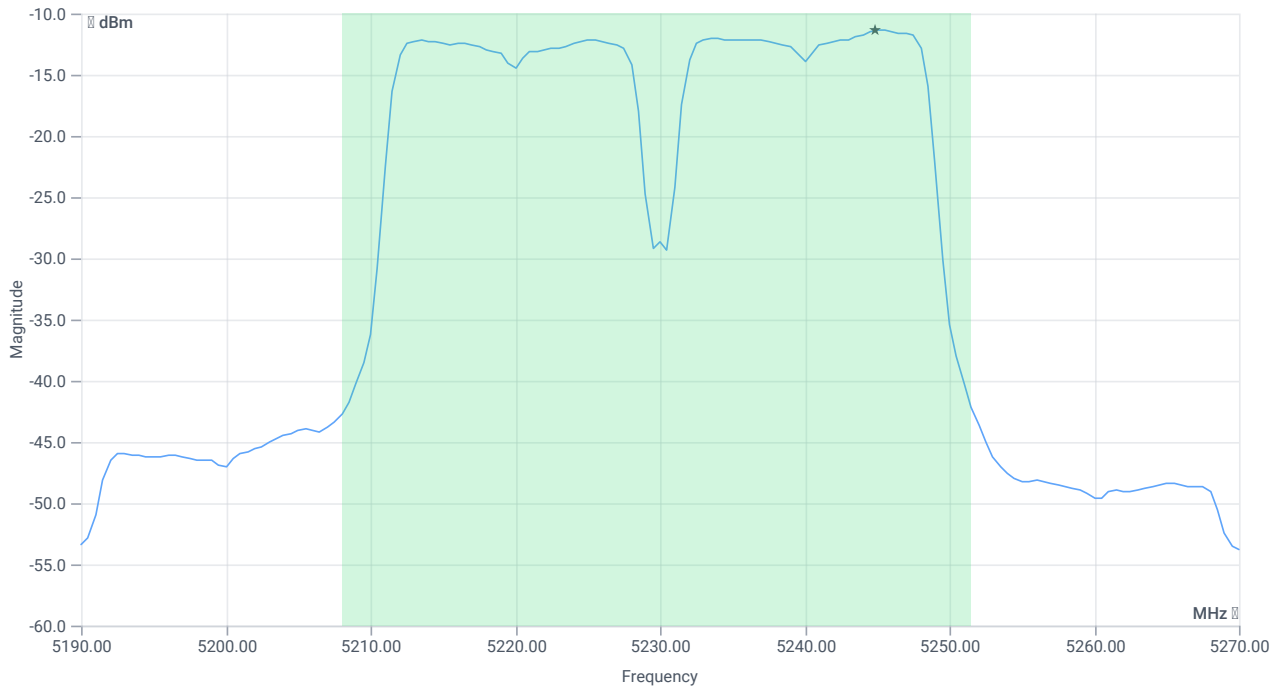

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.52	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.79	dBm	PASS
Limit: 11 dBm + 10 log 43.44					
Max output power DC corrected	--	27.38	5.79	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-11.34	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-8.07	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:36:39
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.18	dBm	INFO
Ref. frequency	--	--	5205.180	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 264					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

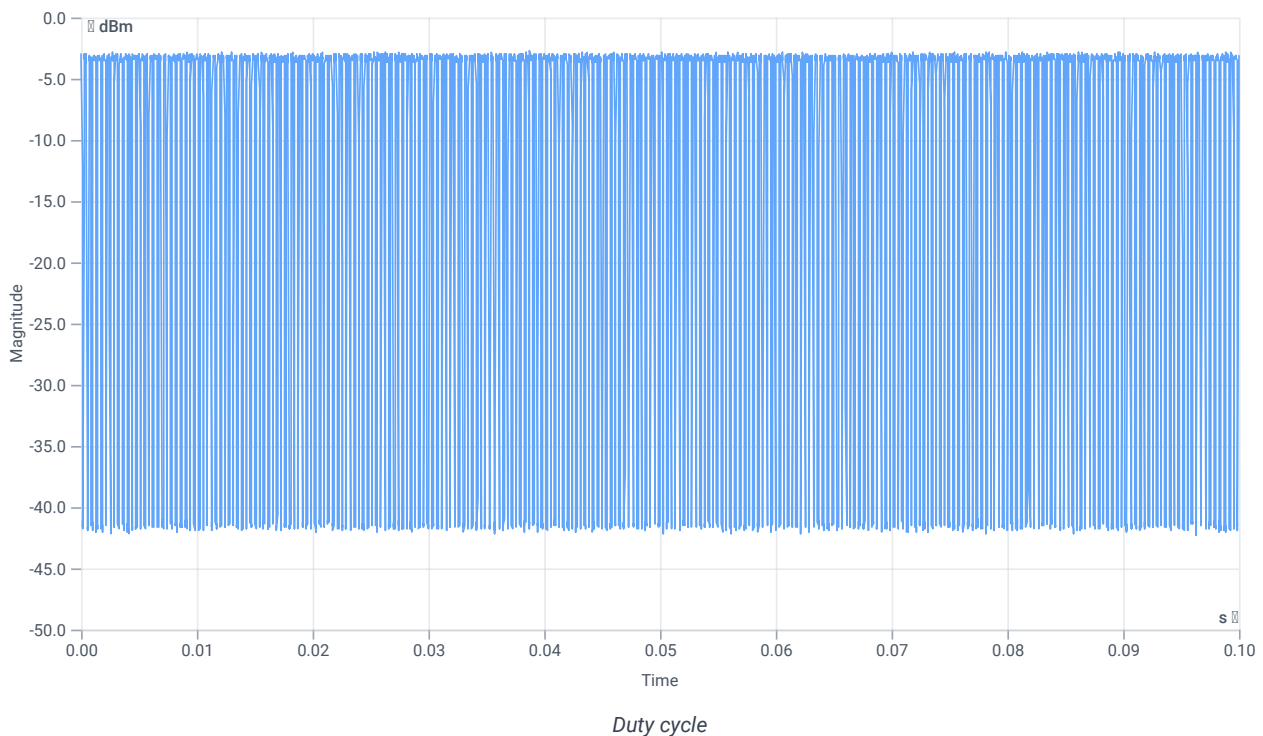

Evaluation bandwidth

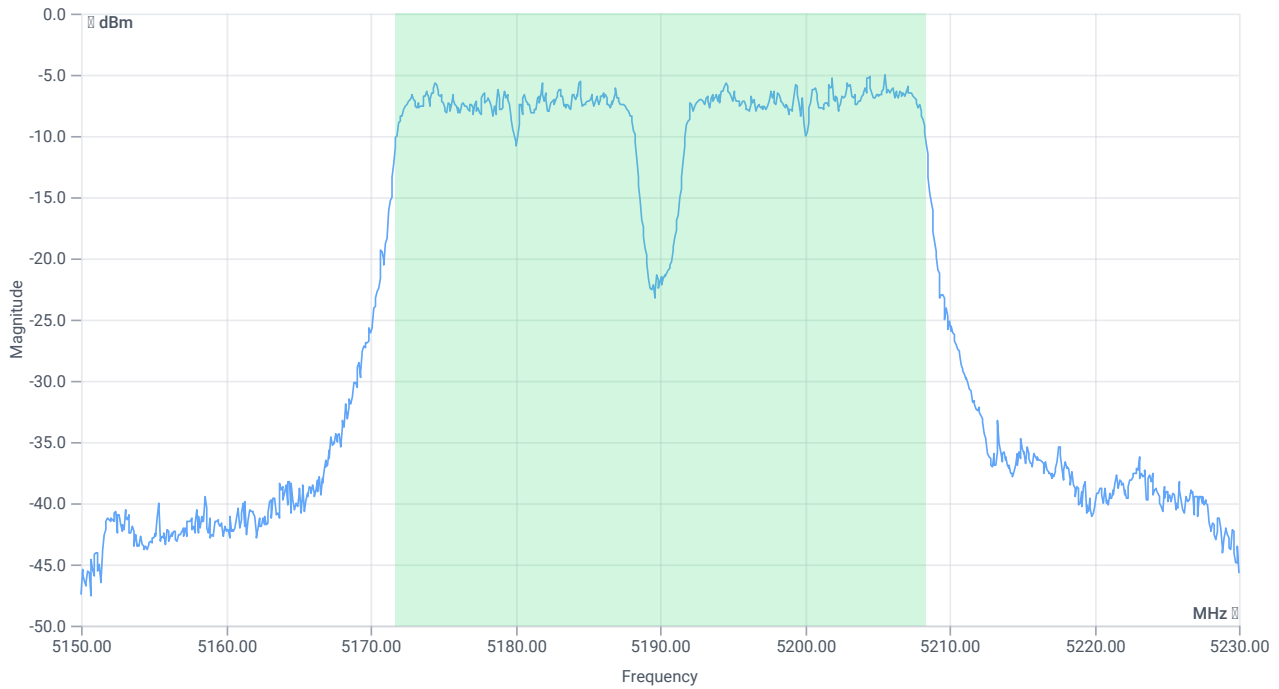

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.683	MHz	INFO
T1 99%	---	---	5171.6983	MHz	INFO
T2 99%	---	---	5208.3816	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.82 10.04 15
Start [MHz] Stop [MHz]	5150.000 5230.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

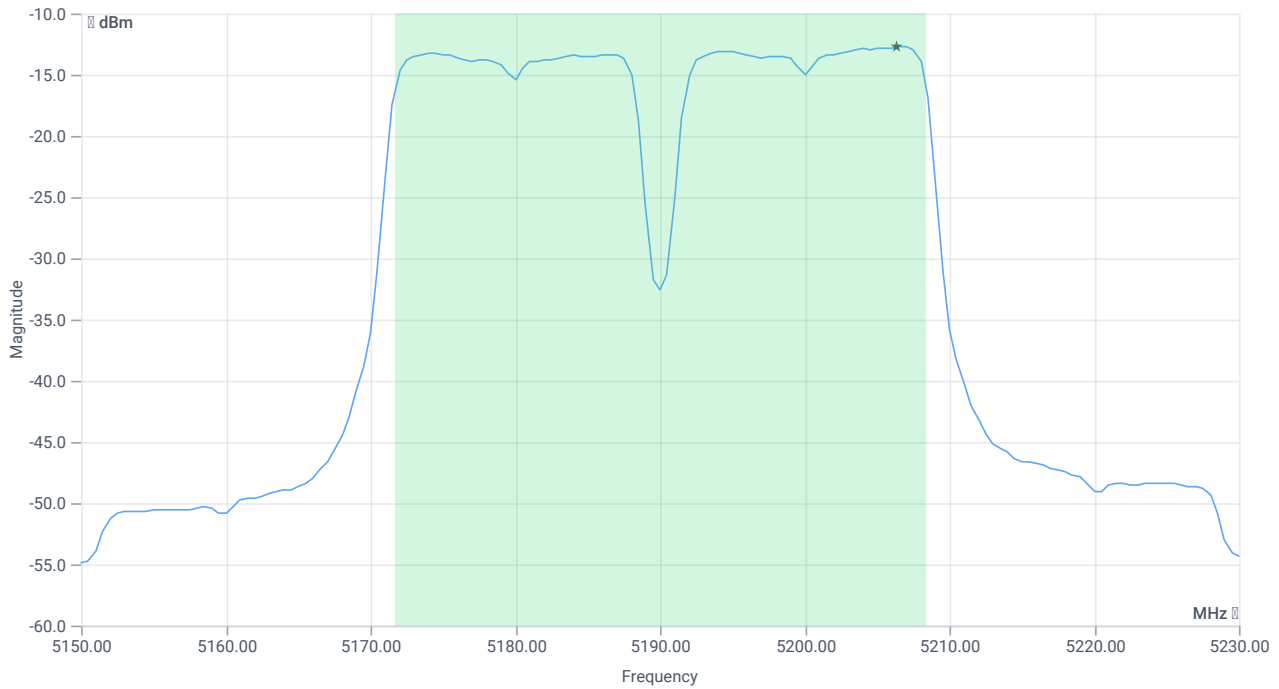

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.39	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	4.66	dBm	na
Limit: 11 dBm + 10 log 36.683					
Max output power DC corrected	--	26.64	4.66	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-12.71	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-9.44	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:35:05
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.82	dBm	INFO
Ref. frequency	--	--	5205.580	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 267					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

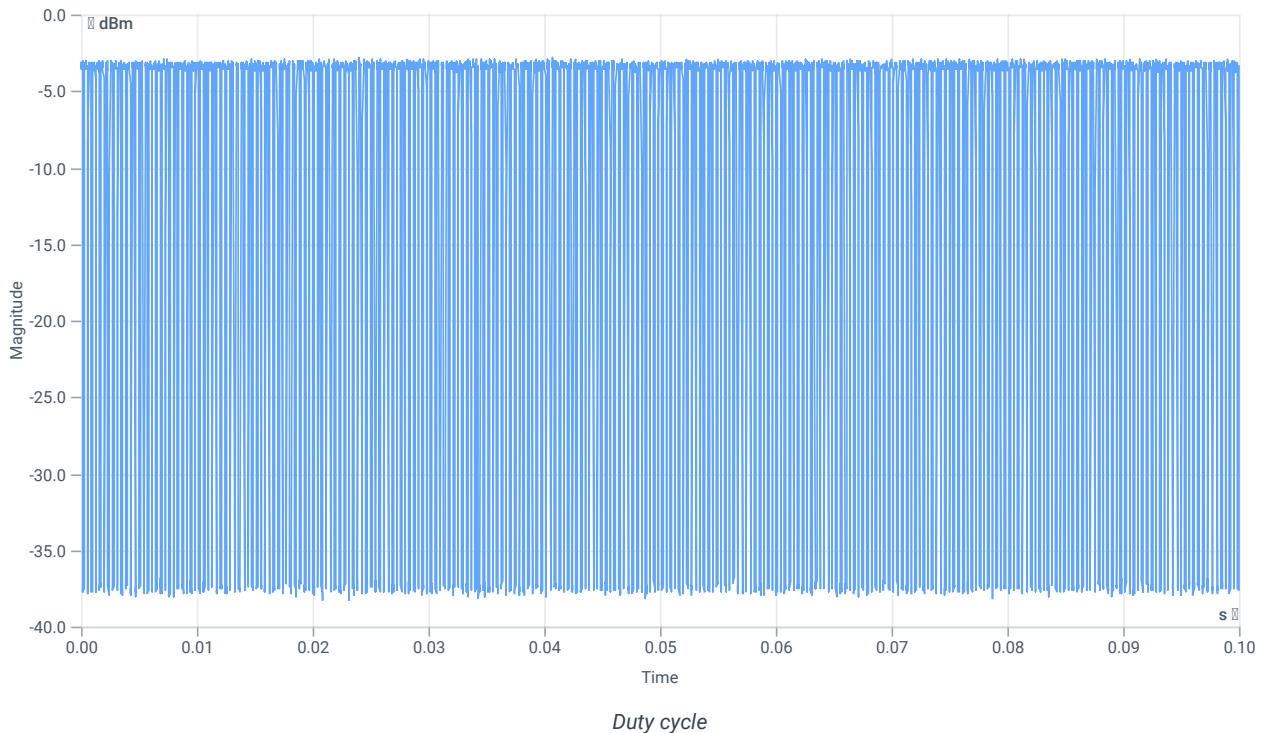

Evaluation bandwidth

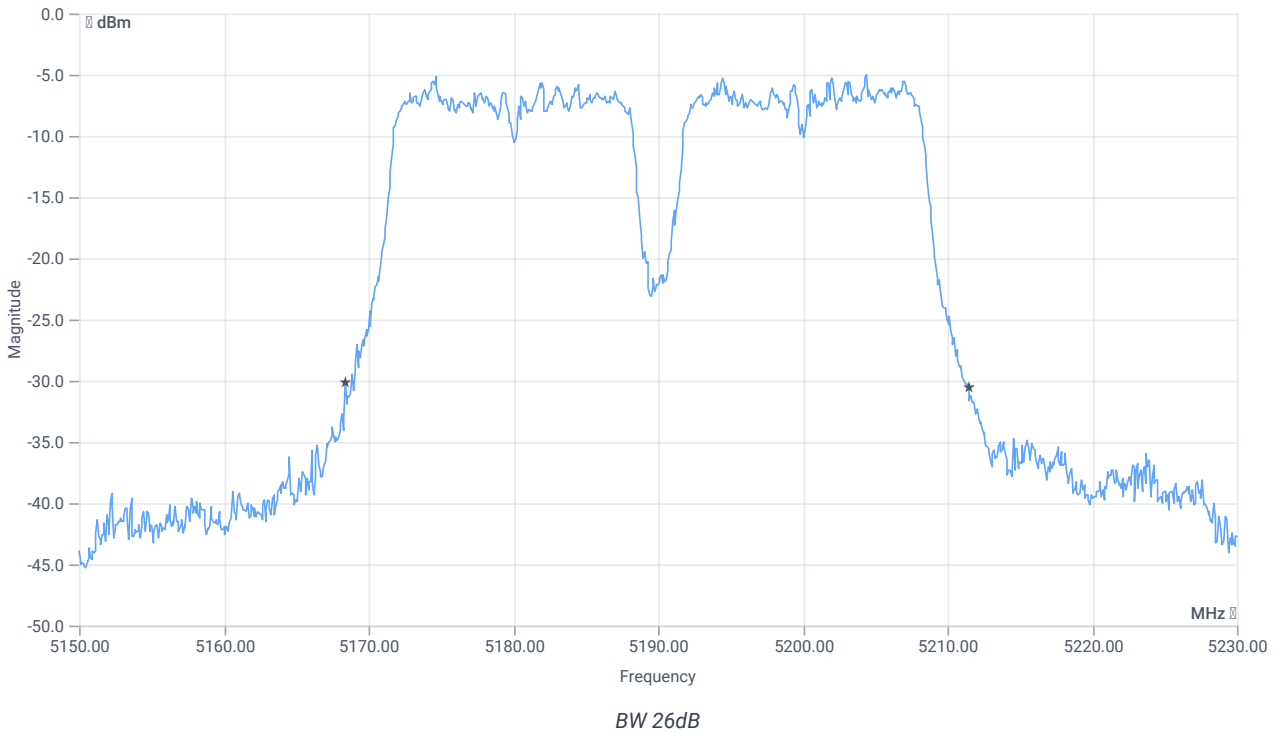


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	43.04	MHz	INFO
T1 26dB	---	---	5168.4000	MHz	INFO
T2 26dB	---	---	5211.4400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.18 10.04 15
Start [MHz] Stop [MHz]	5150.000 5230.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

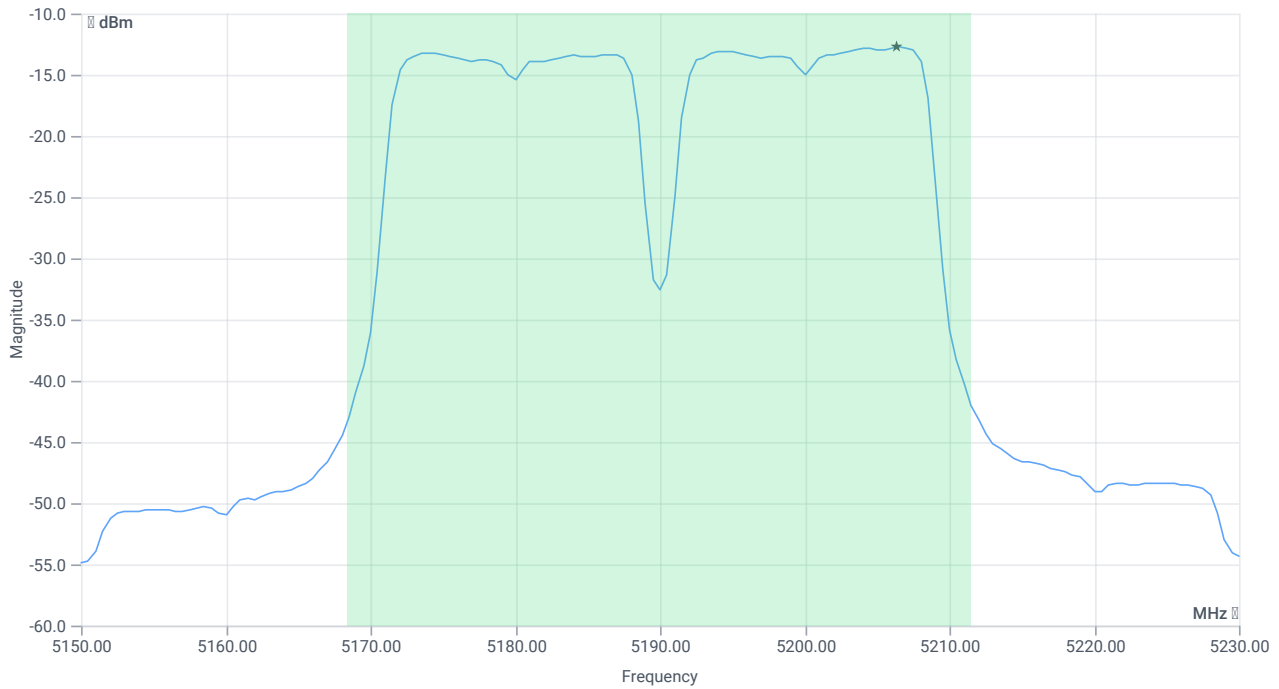

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.43	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	4.7	dBm	PASS
Limit: 11 dBm + 10 log 43.04					
Max output power DC corrected	--	27.34	4.7	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-12.69	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-9.42	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:32:27
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.34	dBm	INFO
Ref. frequency	--	--	5204.990	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 264					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.32	--	INFO
Duty cycle min	--	--	4.949	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.425	ms	INFO

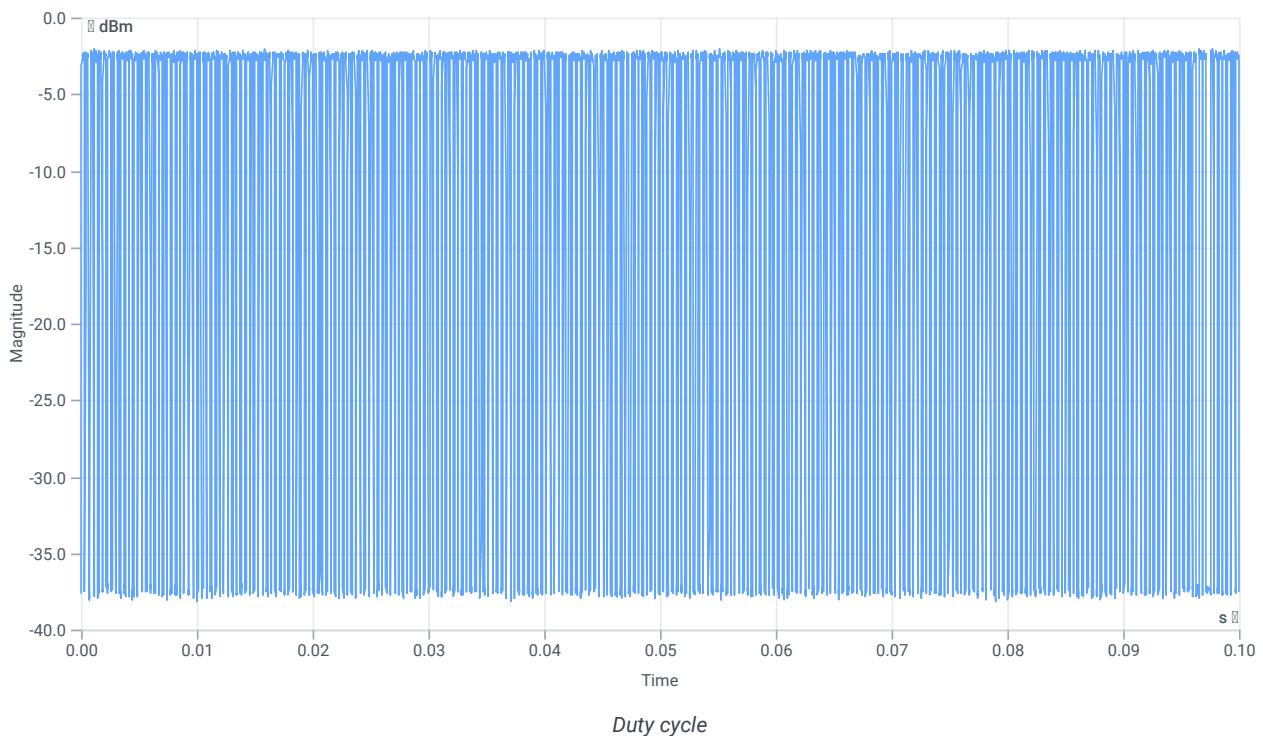

Evaluation bandwidth

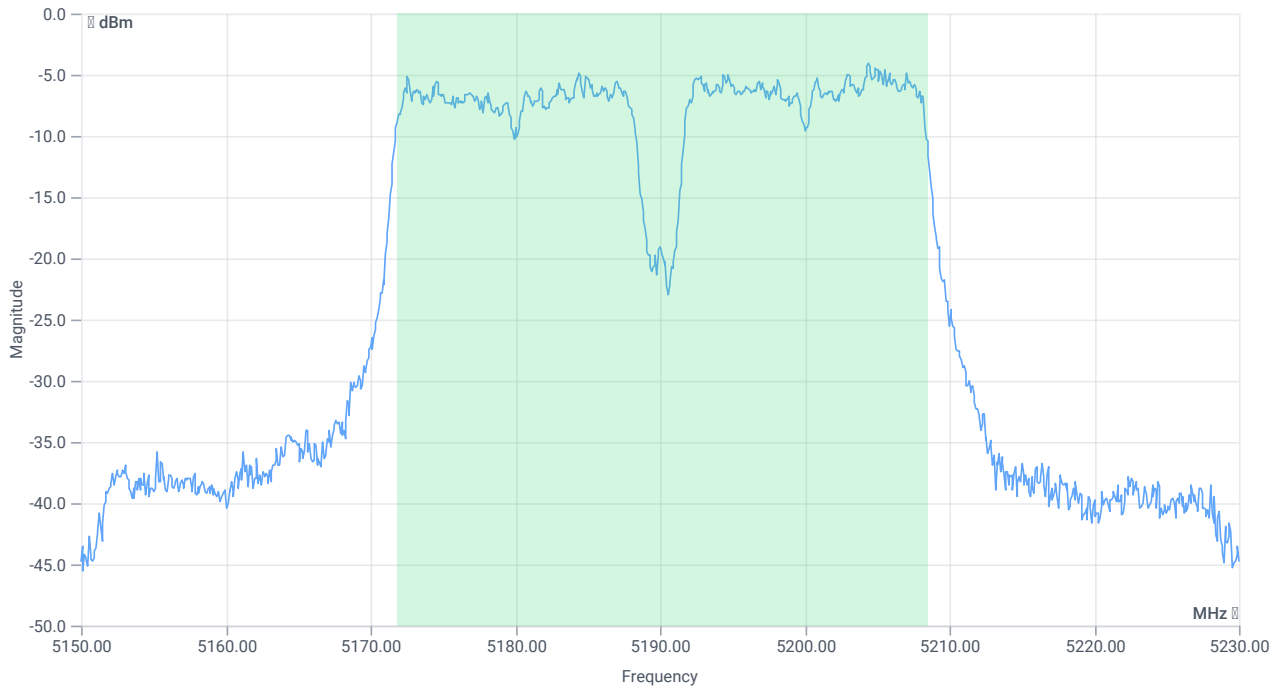

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	36.683	MHz	INFO
T1 99%	---	---	5171.7782	MHz	INFO
T2 99%	---	---	5208.4615	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.66 10.02 15
Start [MHz] Stop [MHz]	5150.000 5230.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

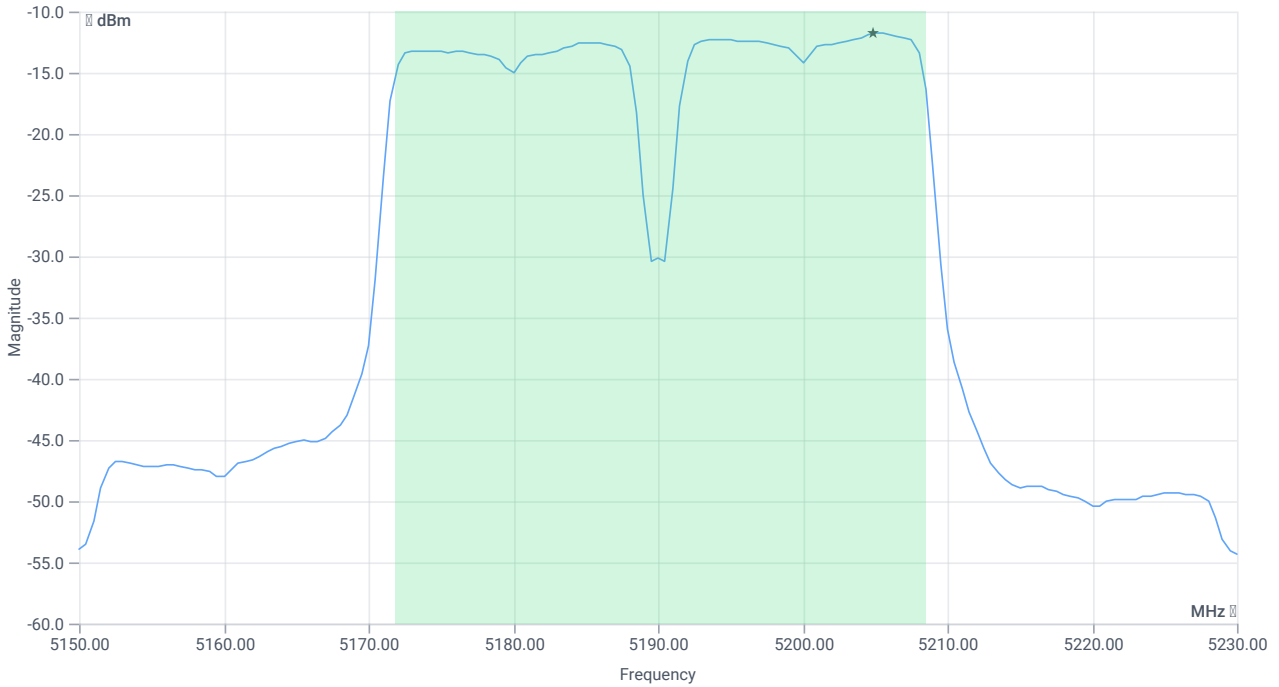

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.02	dBm	INFO
Duty cycle correction	--	--	4.95	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.97	dBm	na
Limit: 11 dBm + 10 log 36.683					
Max output power DC corrected	--	26.64	6.97	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-11.71	dBm/1MHz	INFO
Duty cycle correction	--	--	4.95	dB	INFO
Power spectral density DC corrected	--	11	-6.76	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT40 mode U-NII-1

References

TC start	26.01.2024 17:30:53
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT40 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5190
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5230
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5190 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-1.94	dBm	INFO
Ref. frequency	--	--	5194.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 265					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

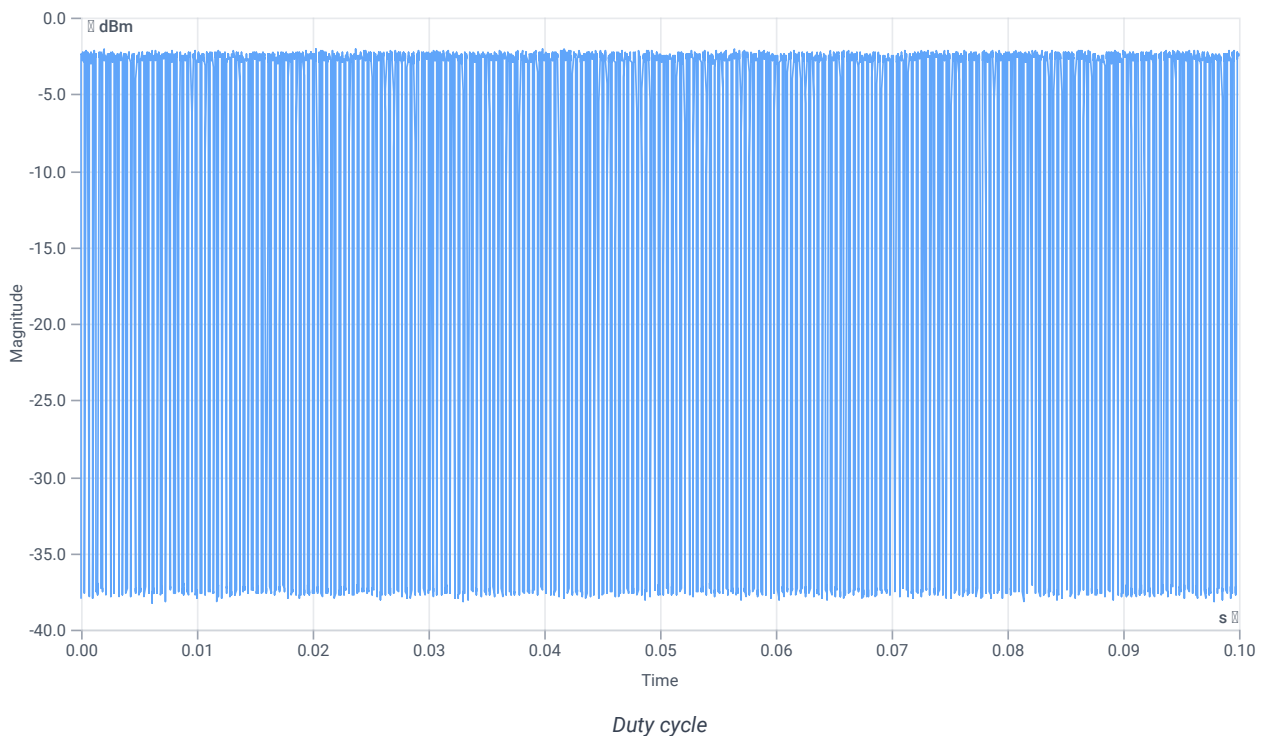

Evaluation bandwidth

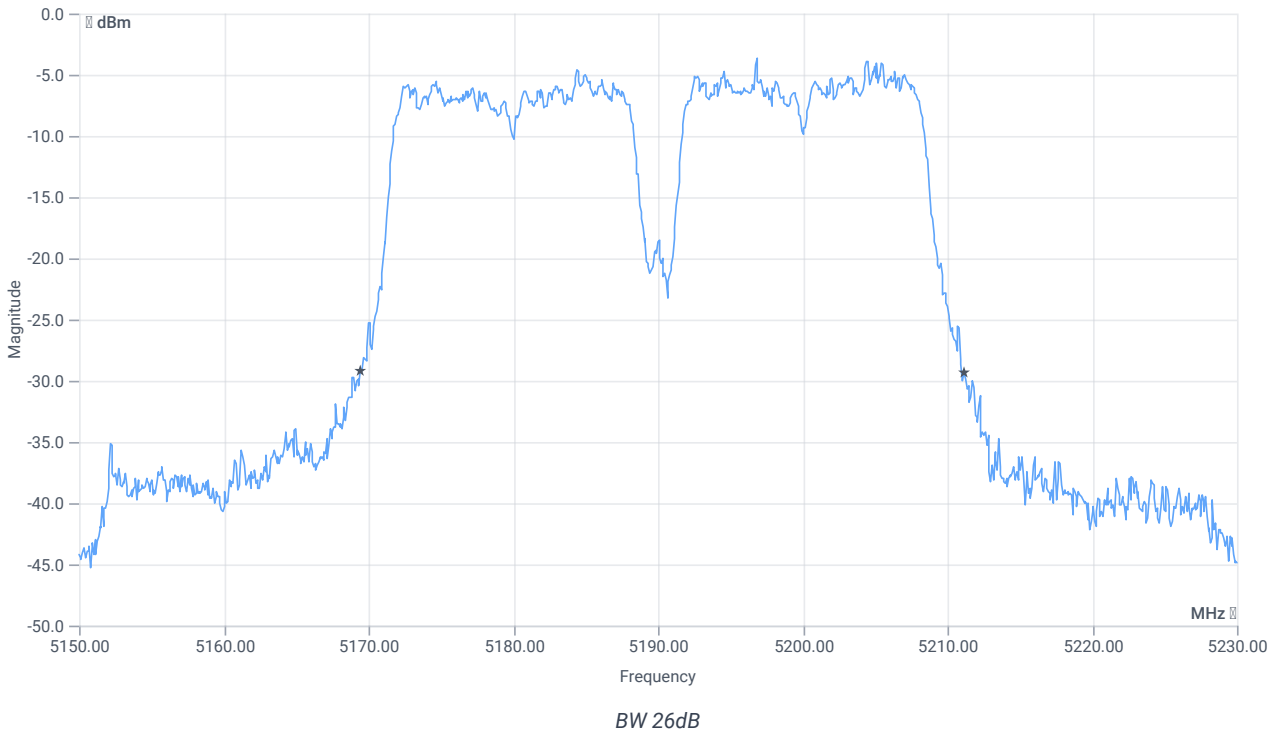


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	41.76	MHz	INFO
T1 26dB	---	---	5169.4400	MHz	INFO
T2 26dB	---	---	5211.2000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.06 10.02 15
Start [MHz] Stop [MHz]	5150.000 5230.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

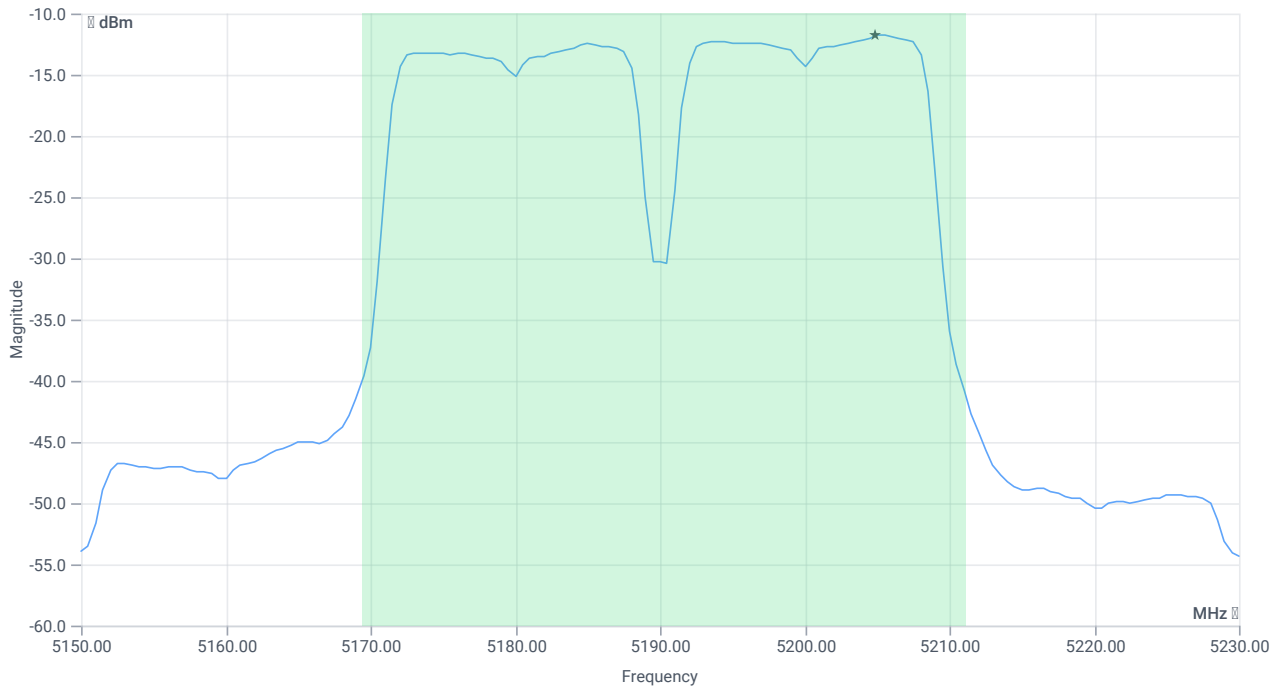

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.06	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.33	dBm	PASS
Limit: 11 dBm + 10 log 41.76					
Max output power DC corrected	--	27.21	5.33	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-11.73	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-8.46	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:21:04
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.71	dBm	INFO
Ref. frequency	--	--	5830.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 265					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.4	--	INFO
Duty cycle min	--	--	3.979	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

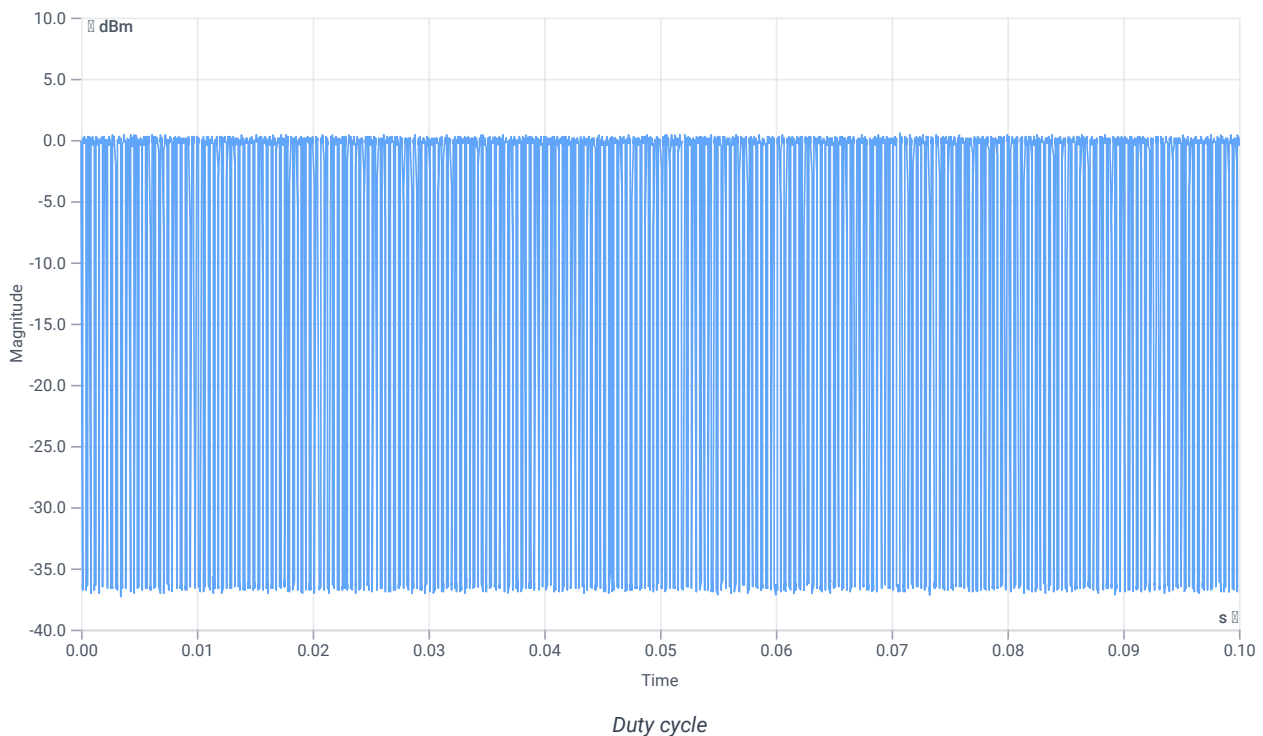

Evaluation bandwidth

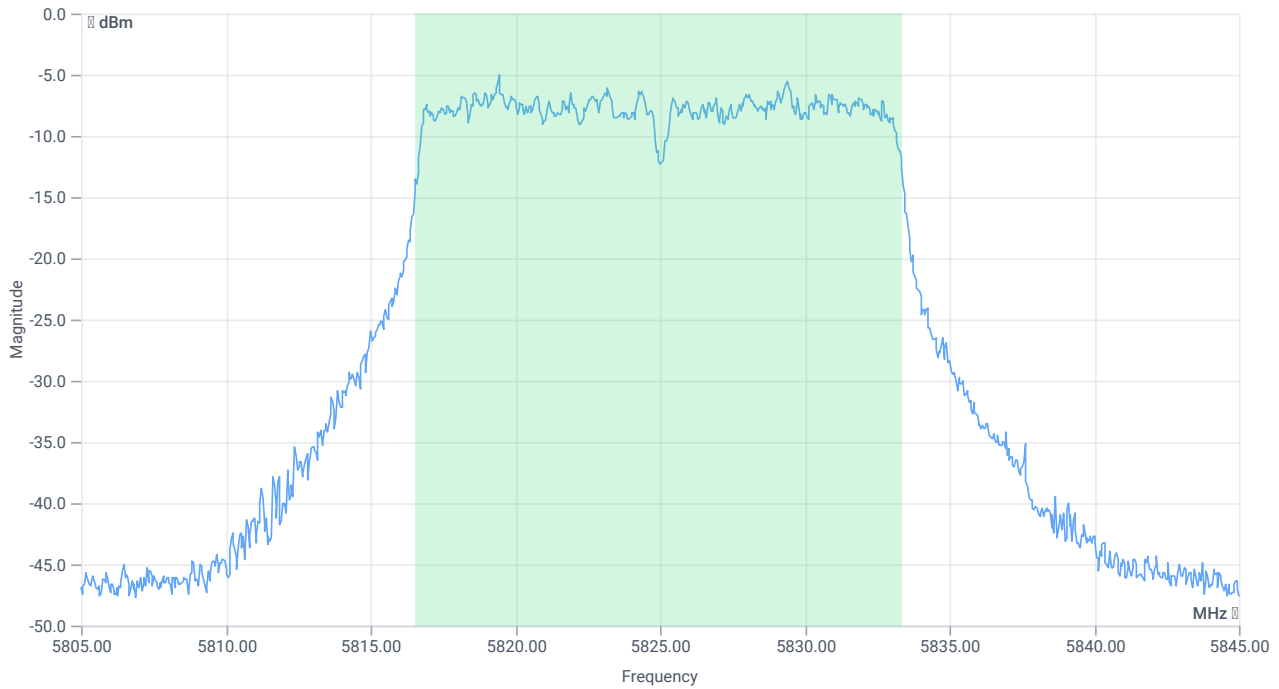

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	---	---	5816.5684	MHz	INFO
T2 99%	---	---	5833.3516	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.29 10.44 15
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

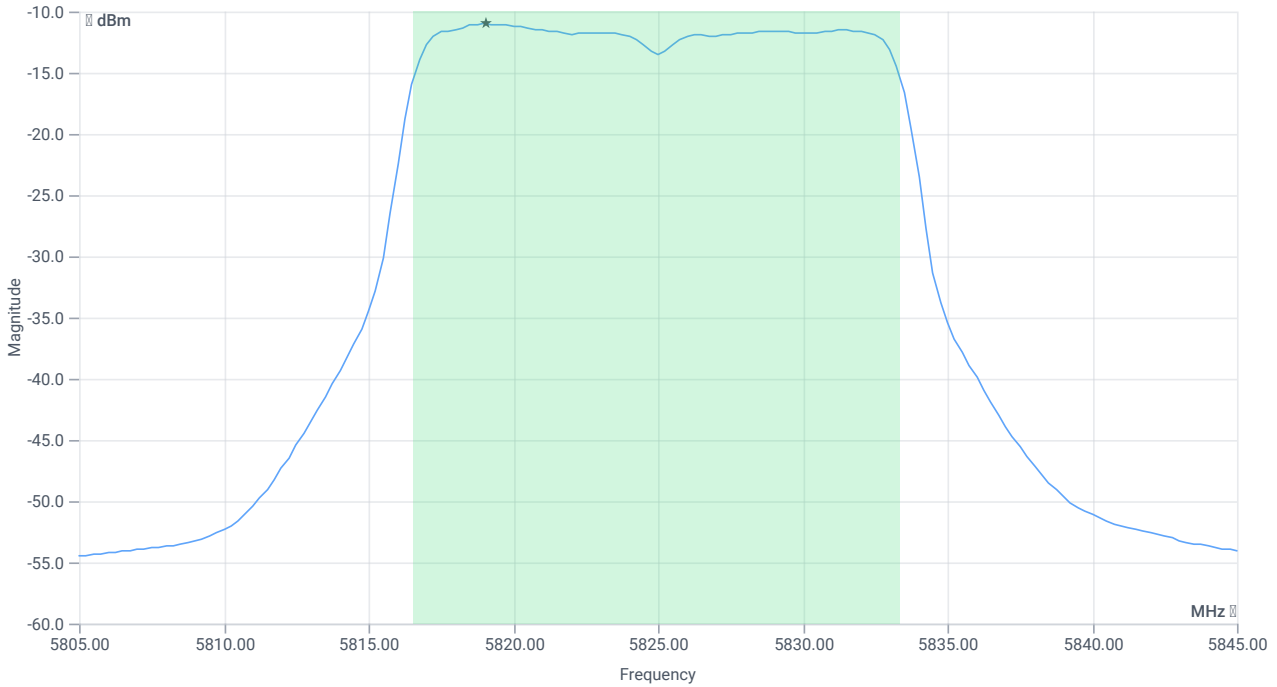

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.12	dBm	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.1	dBm	PASS
Limit: 11 dBm + 10 log 16.783					
Max output power DC corrected	--	23.25	4.1	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.29 10.44 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

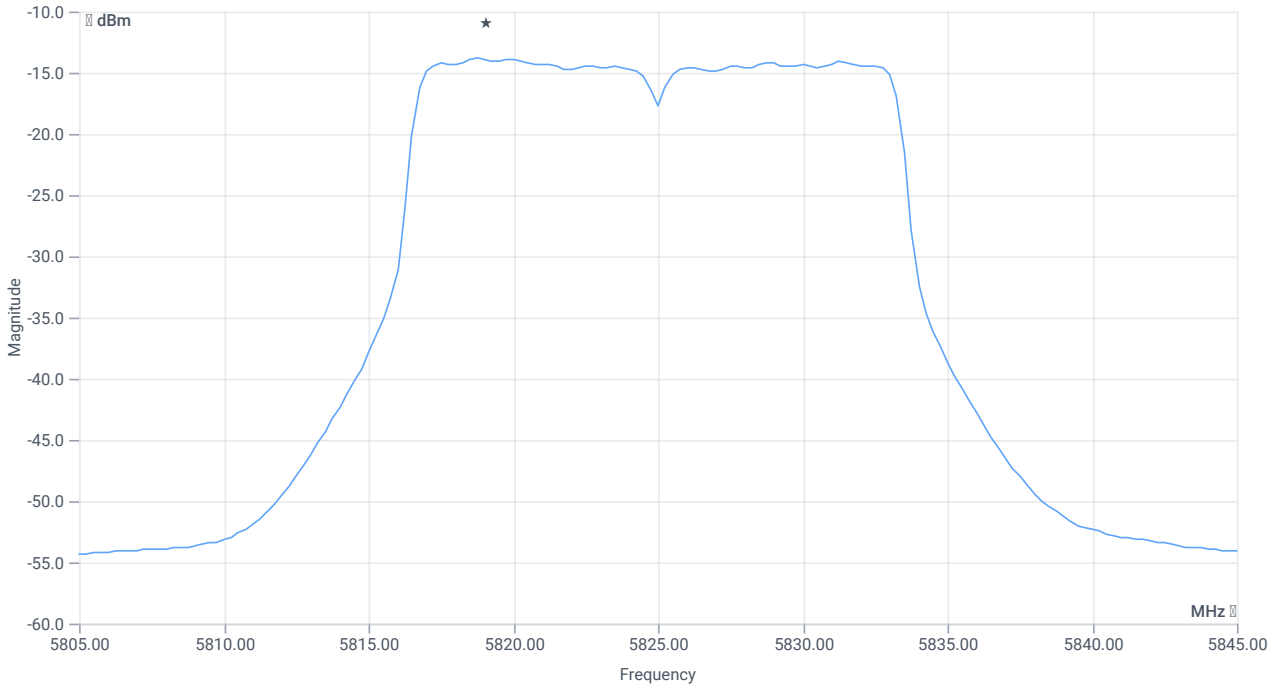

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-13.76	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Power spectral density DC corrected	--	30	-9.78	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:18:37
Ambit temp [°C] humidity [rel%]	26.9 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.76	dBm	INFO
Ref. frequency	--	--	5830.390	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 257					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.4	--	INFO
Duty cycle min	--	--	3.979	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

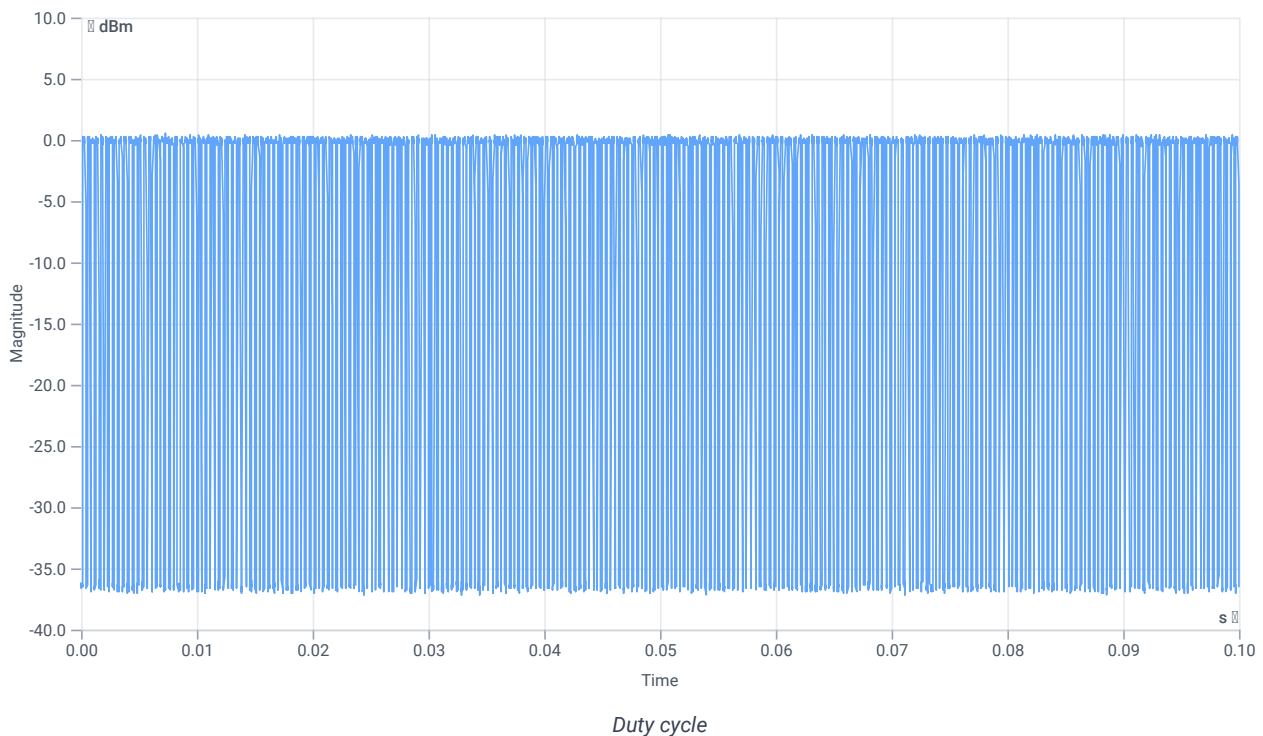

Evaluation bandwidth

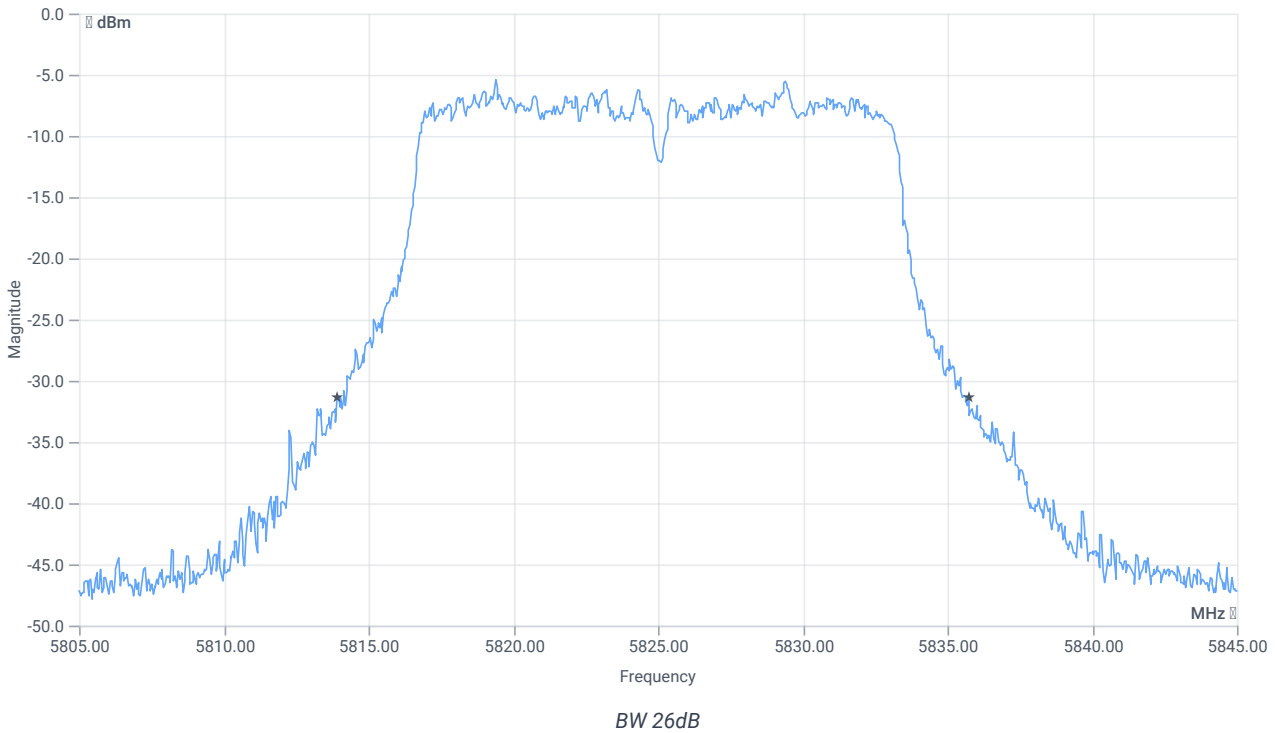


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.8	MHz	INFO
T1 26dB	---	---	5813.9200	MHz	INFO
T2 26dB	---	---	5835.7200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.24 10.44 15
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

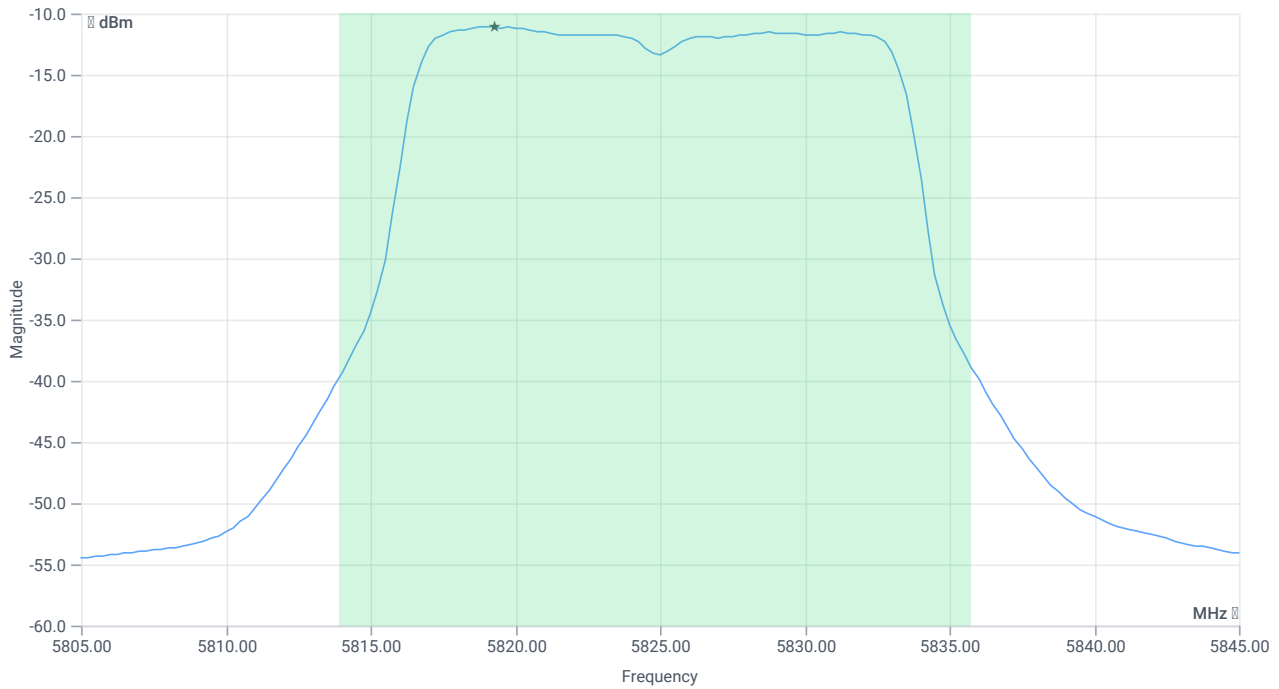

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.19	dBm	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.17	dBm	PASS
Limit: 11 dBm + 10 log 21.8					
Max output power DC corrected	--	24.38	4.17	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.24 10.44 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

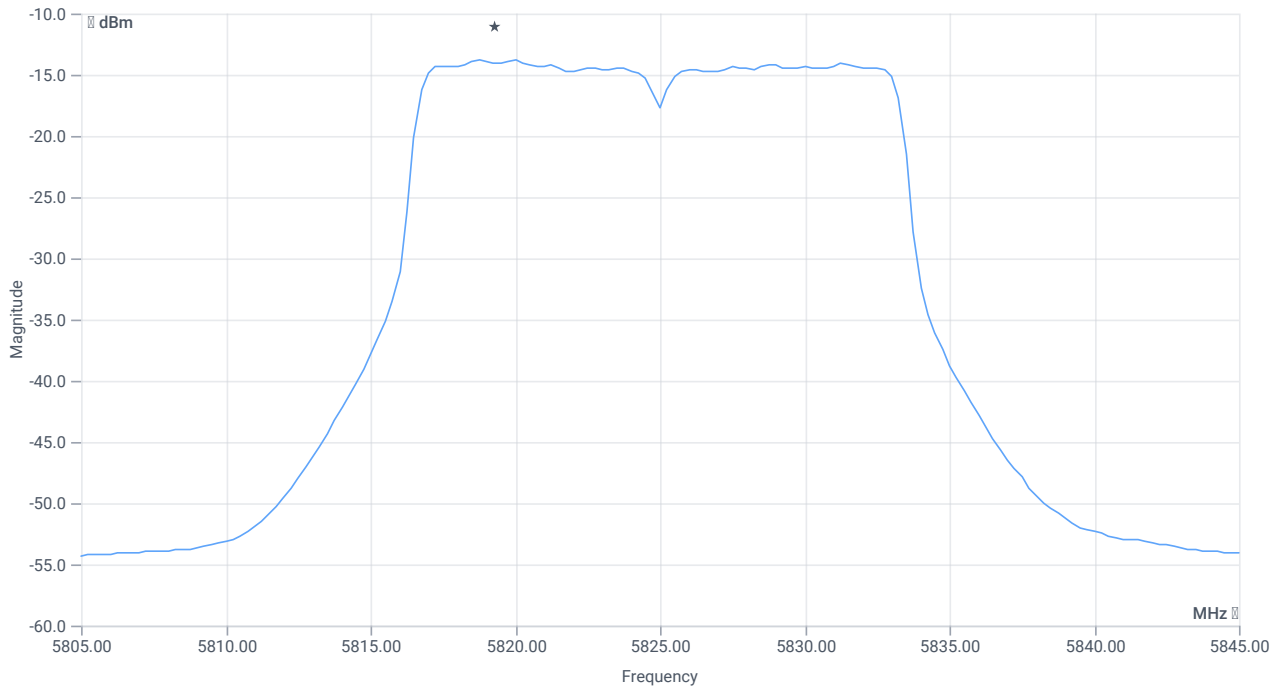

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-13.72	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Power spectral density DC corrected	--	30	-9.74	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:13:47
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.35	dBm	INFO
Ref. frequency	--	--	5830.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 264					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.421	--	INFO
Duty cycle min	--	--	3.757	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.275	ms	INFO

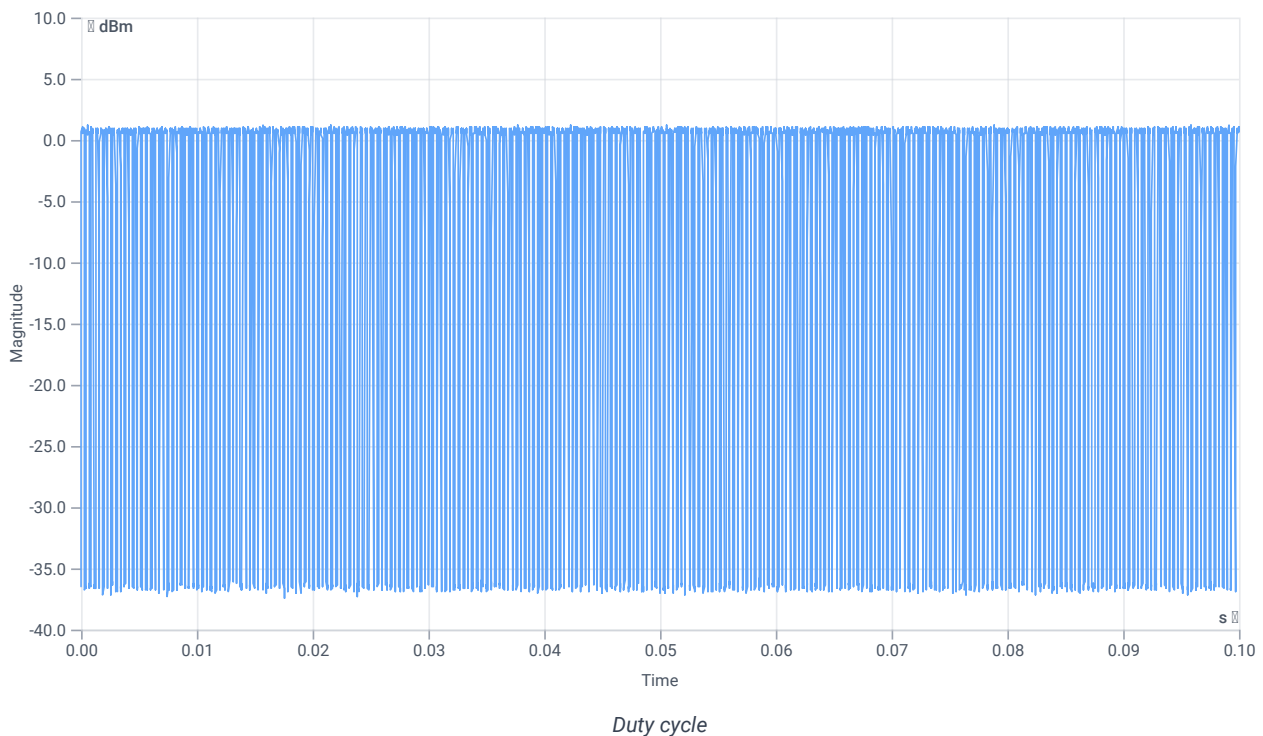

Evaluation bandwidth

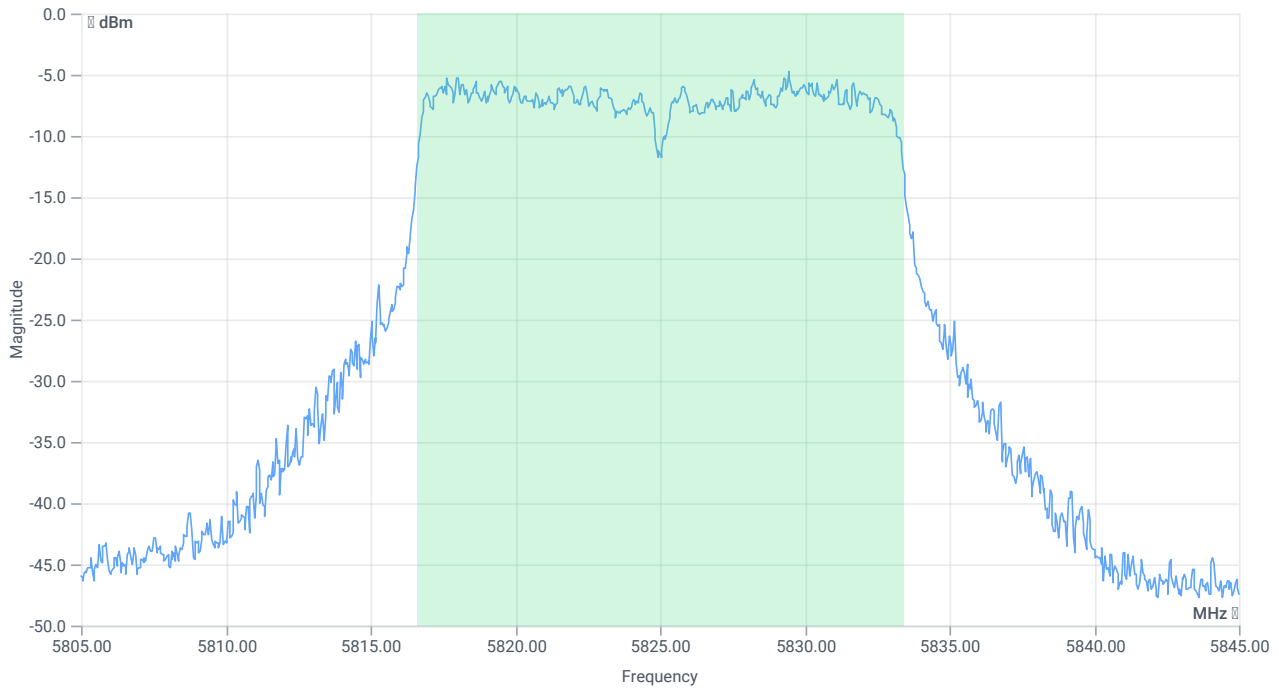

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	---	---	5816.6084	MHz	INFO
T2 99%	---	---	5833.3916	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.35 10.45 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

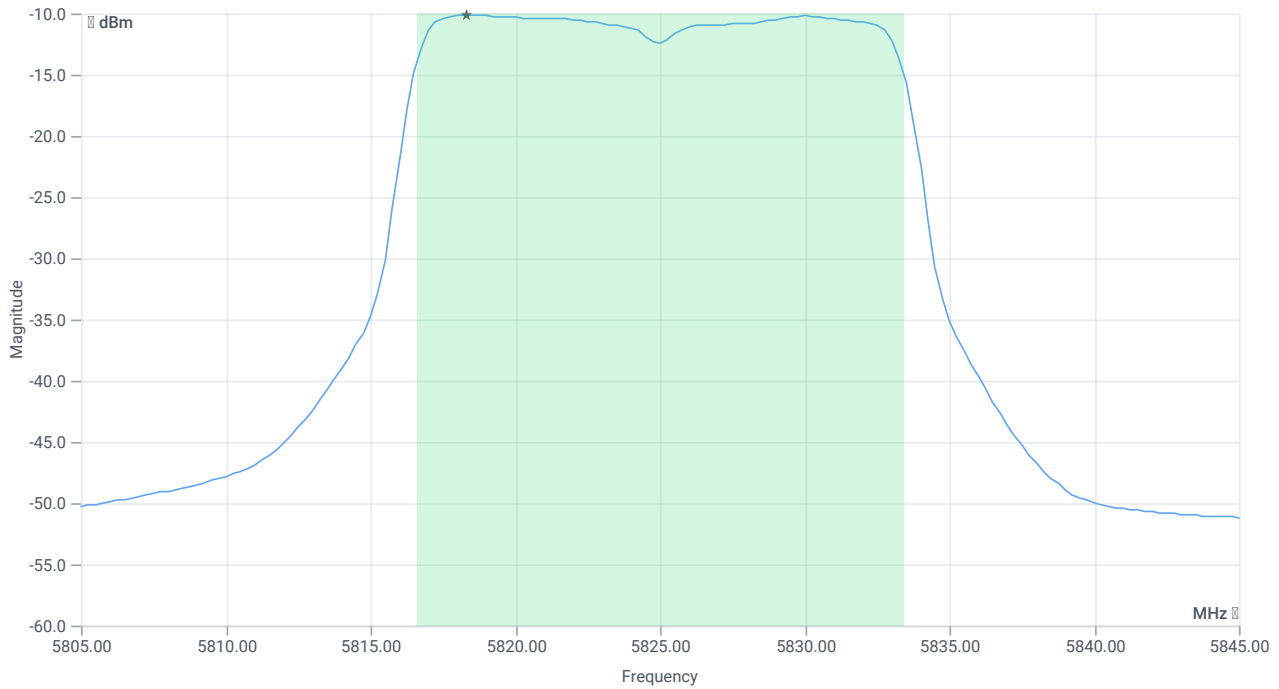

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.19	dBm	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.95	dBm	PASS
Limit: 11 dBm + 10 log 16.783					
Max output power DC corrected	--	23.25	4.95	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.35 10.45 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

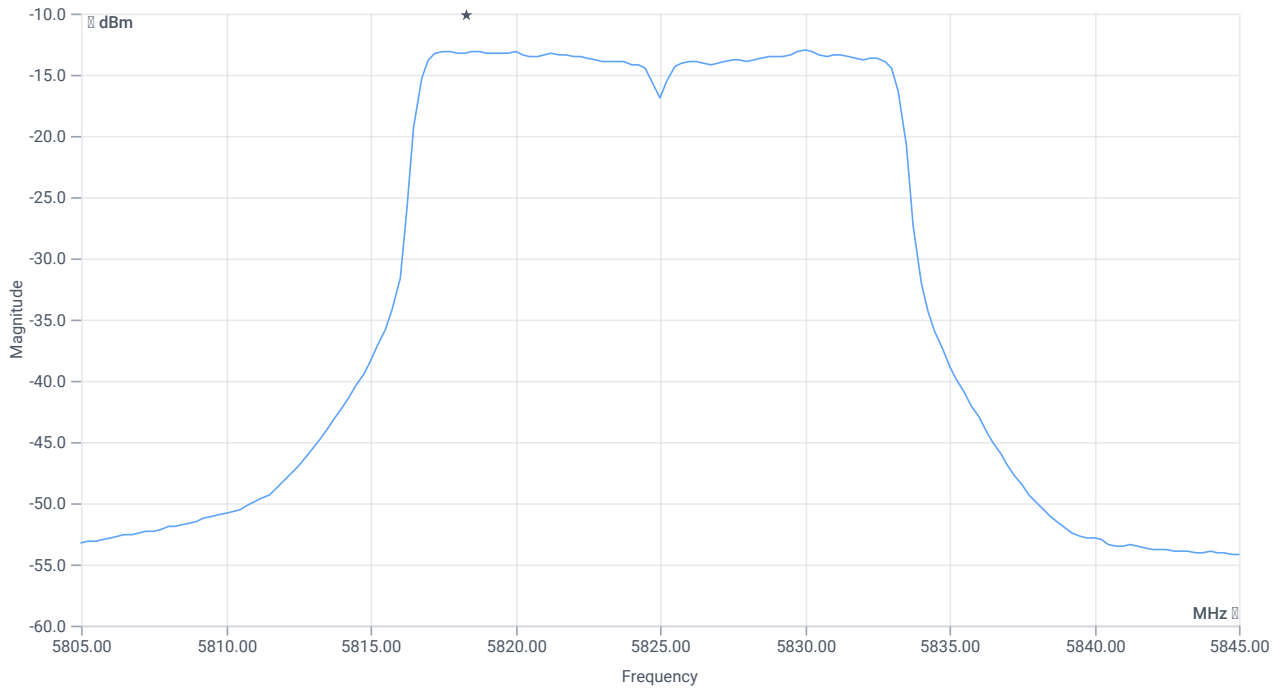

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-12.99	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Power spectral density DC corrected	--	30	-9.23	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:11:20
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.59	dBm	INFO
Ref. frequency	--	--	5819.810	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 260					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.4	--	INFO
Duty cycle min	--	--	3.979	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

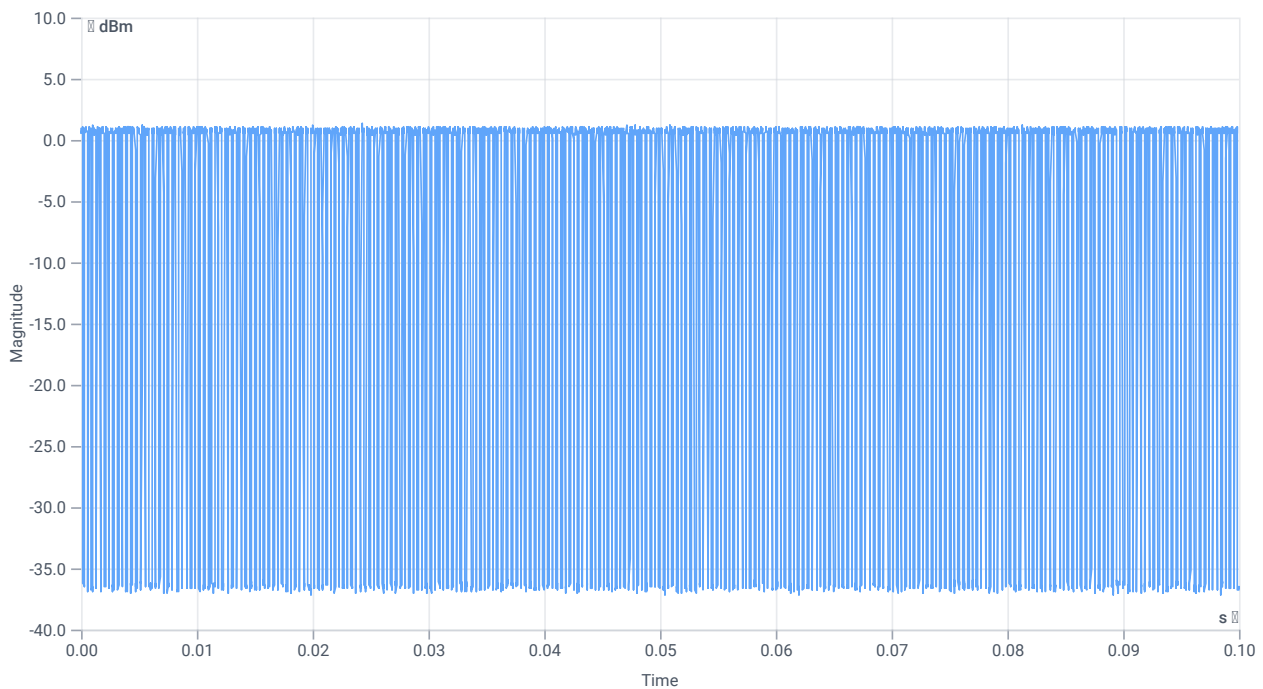

Evaluation bandwidth

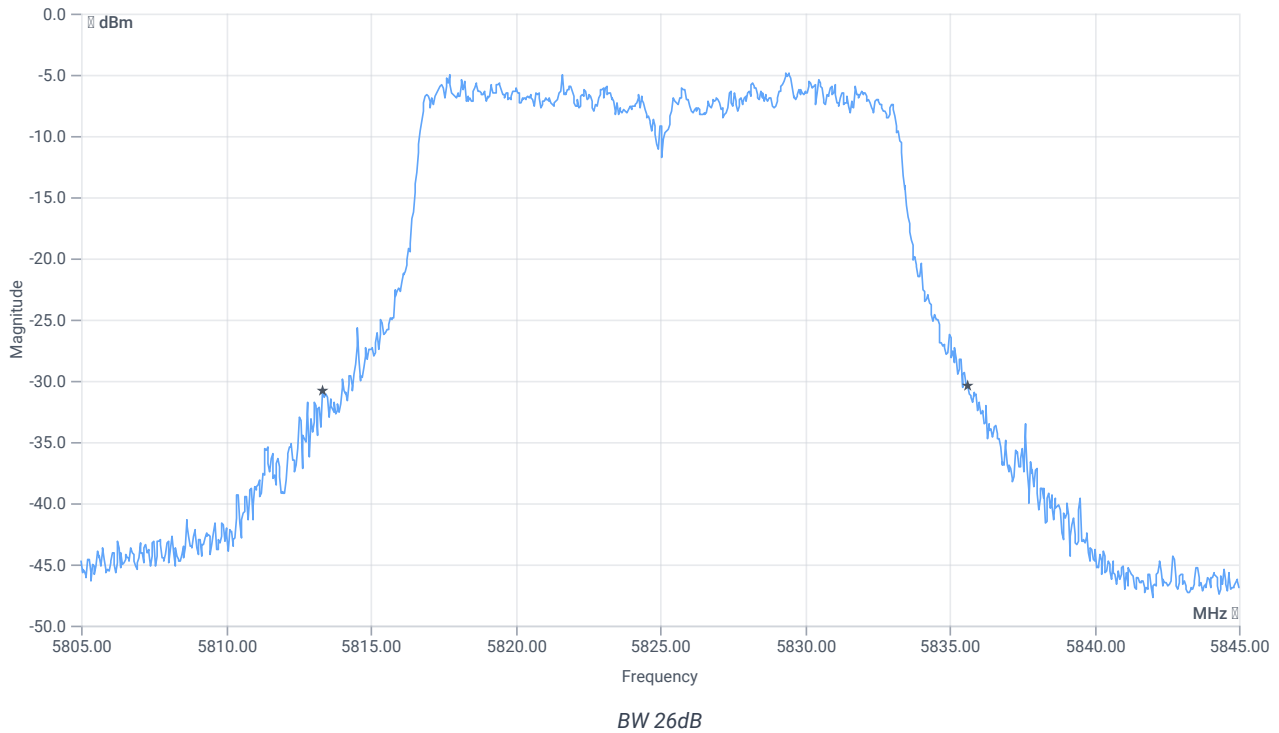


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.32	MHz	INFO
T1 26dB	---	---	5813.3200	MHz	INFO
T2 26dB	---	---	5835.6400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.41 10.45 15
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

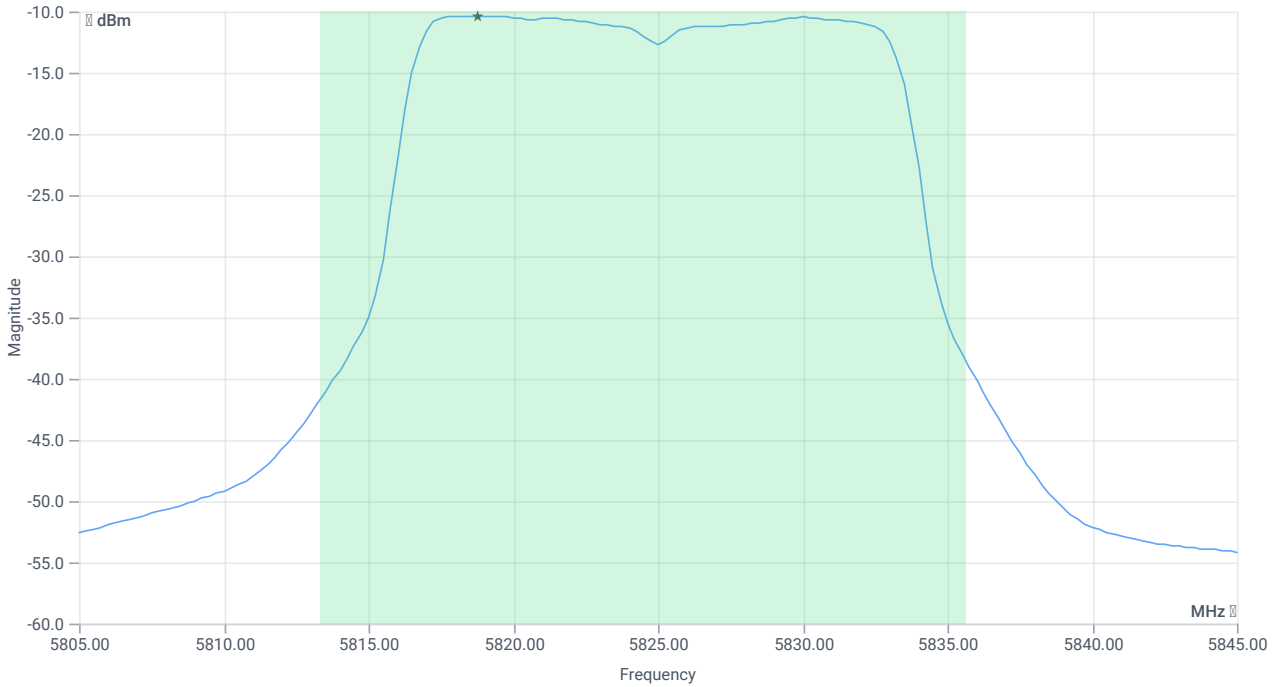

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	1.03	dBm	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.01	dBm	PASS
Limit: 11 dBm + 10 log 22.32					
Max output power DC corrected	--	24.49	5.01	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.41 10.45 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

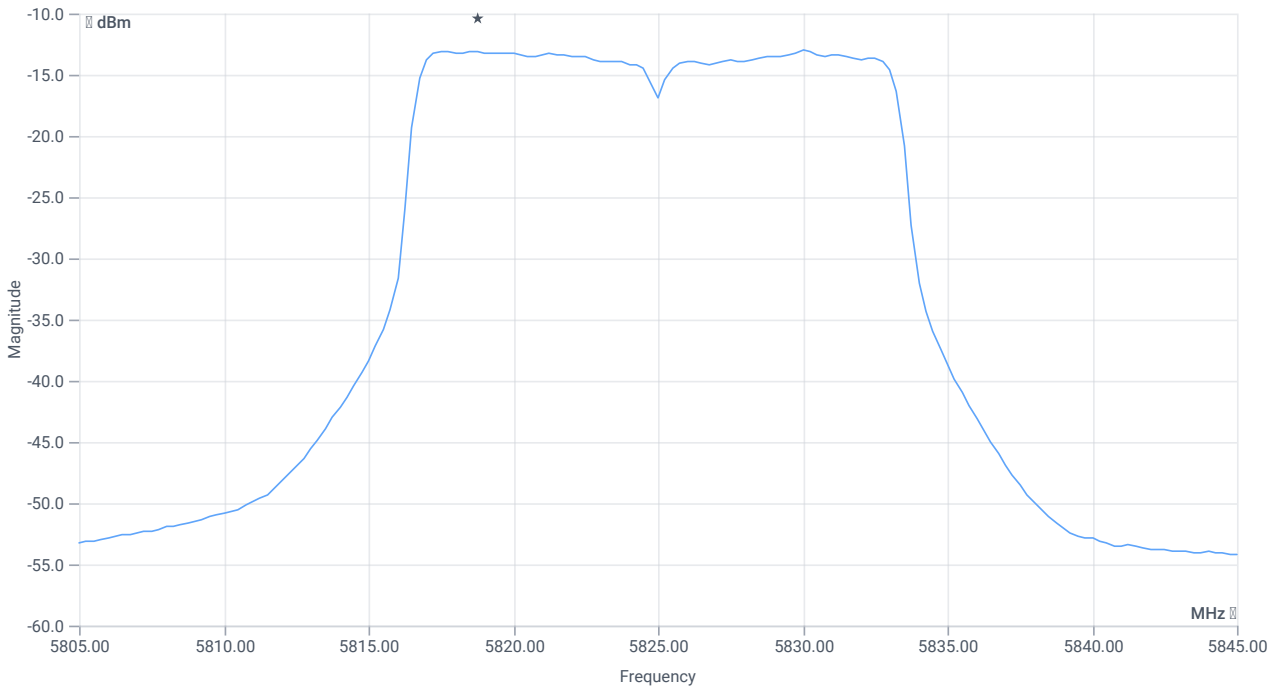

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-13.01	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.98	dB	INFO
Power spectral density DC corrected	--	30	-9.03	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:04:33
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.01	dBm	INFO
Ref. frequency	--	--	5790.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 258					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.381	--	INFO
Duty cycle min	--	--	4.191	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.325	ms	INFO

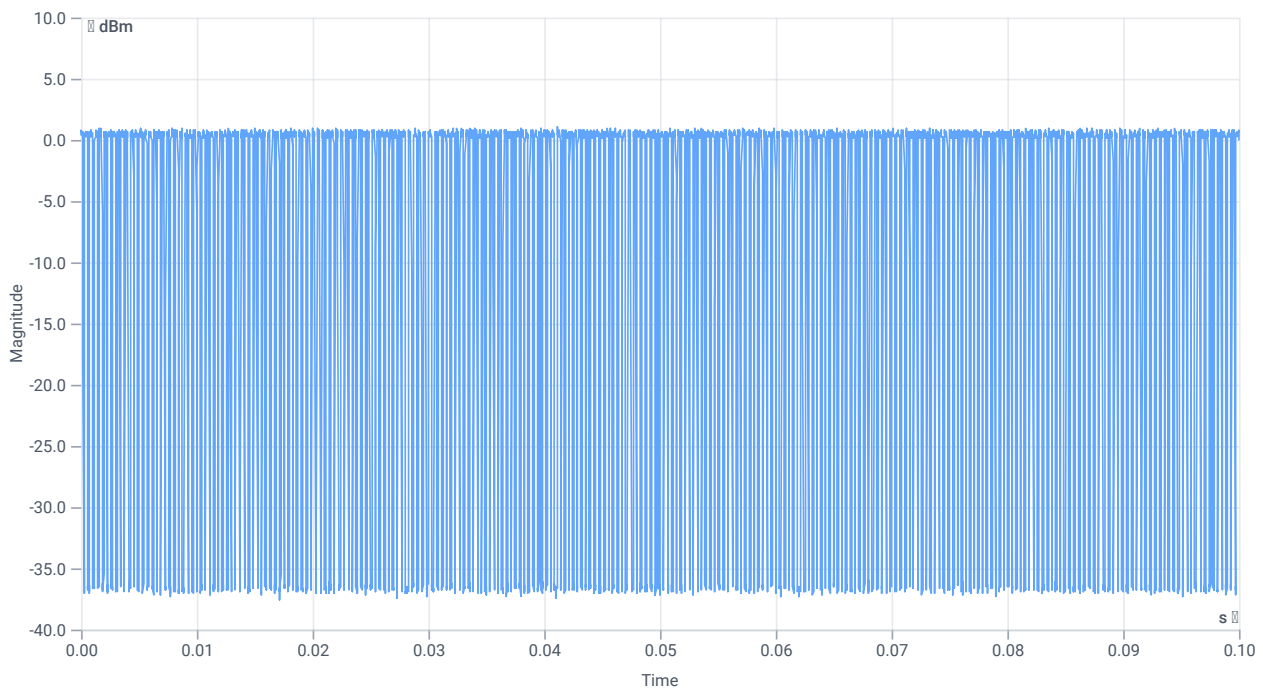

Evaluation bandwidth

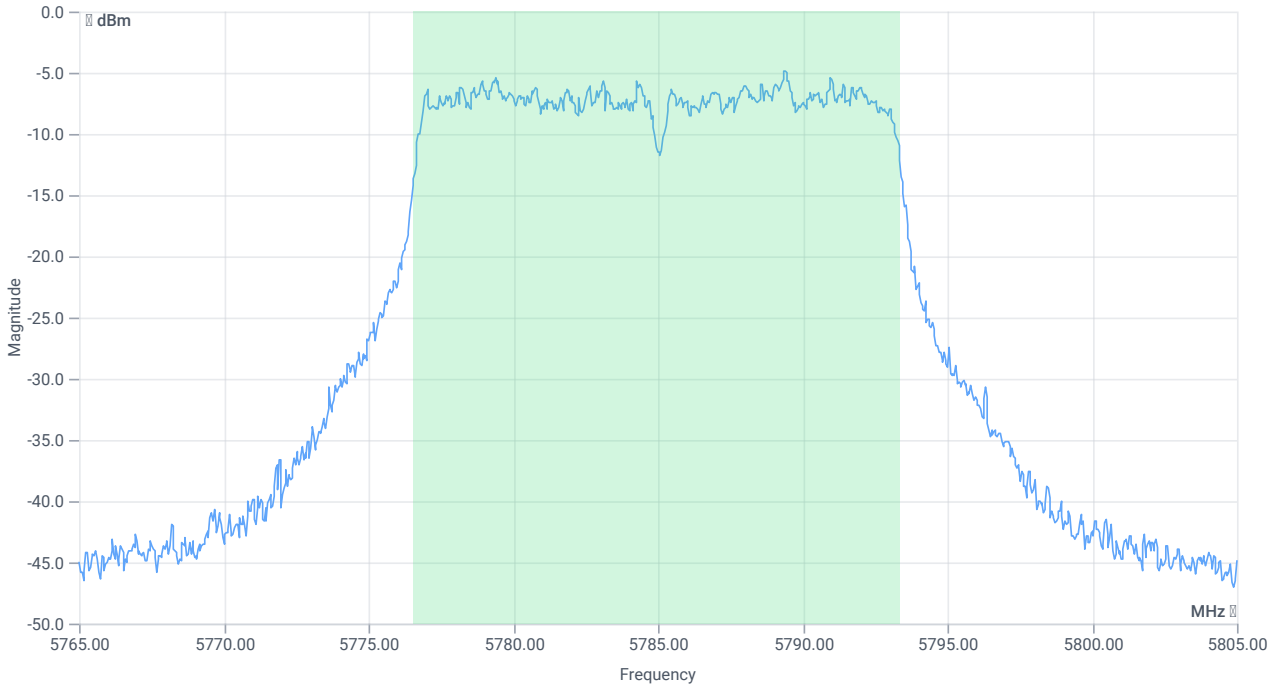

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	--	--	5776.5684	MHz	INFO
T2 99%	--	--	5793.3516	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.99 10.41 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

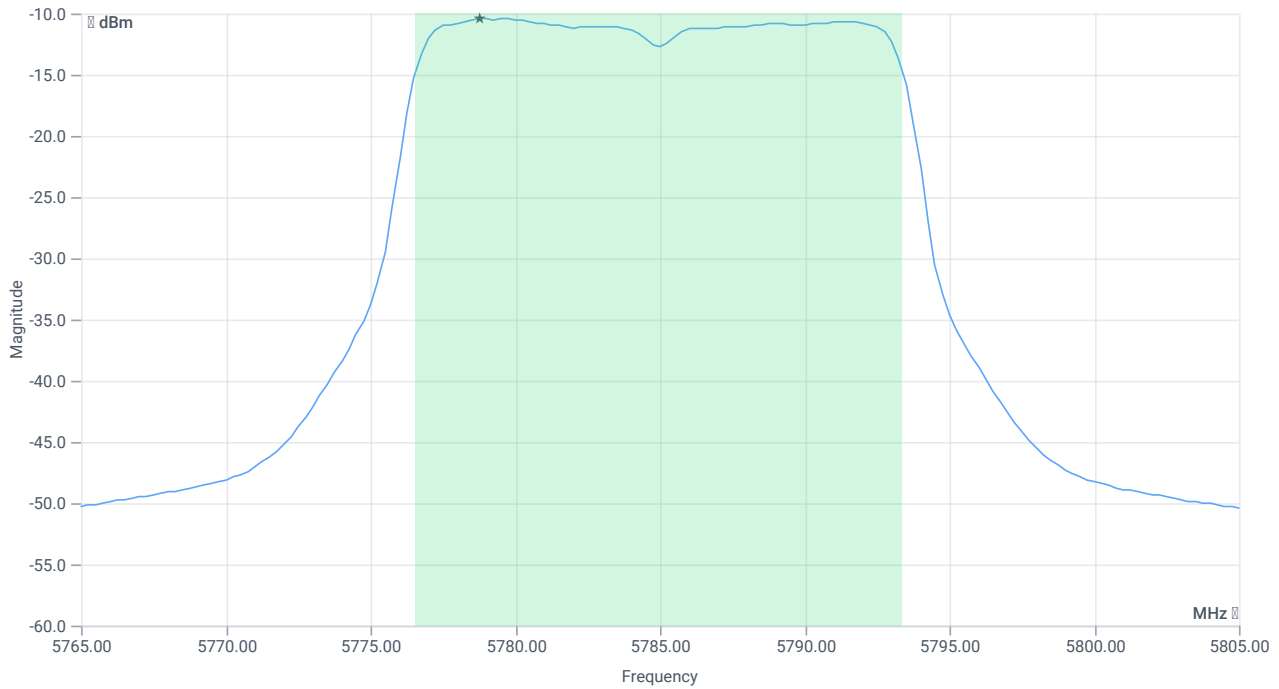

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.85	dBm	INFO
Duty cycle correction	--	--	4.19	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.04	dBm	PASS
Limit: 11 dBm + 10 log 16.783					
Max output power DC corrected	--	23.25	5.04	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.99 10.41 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

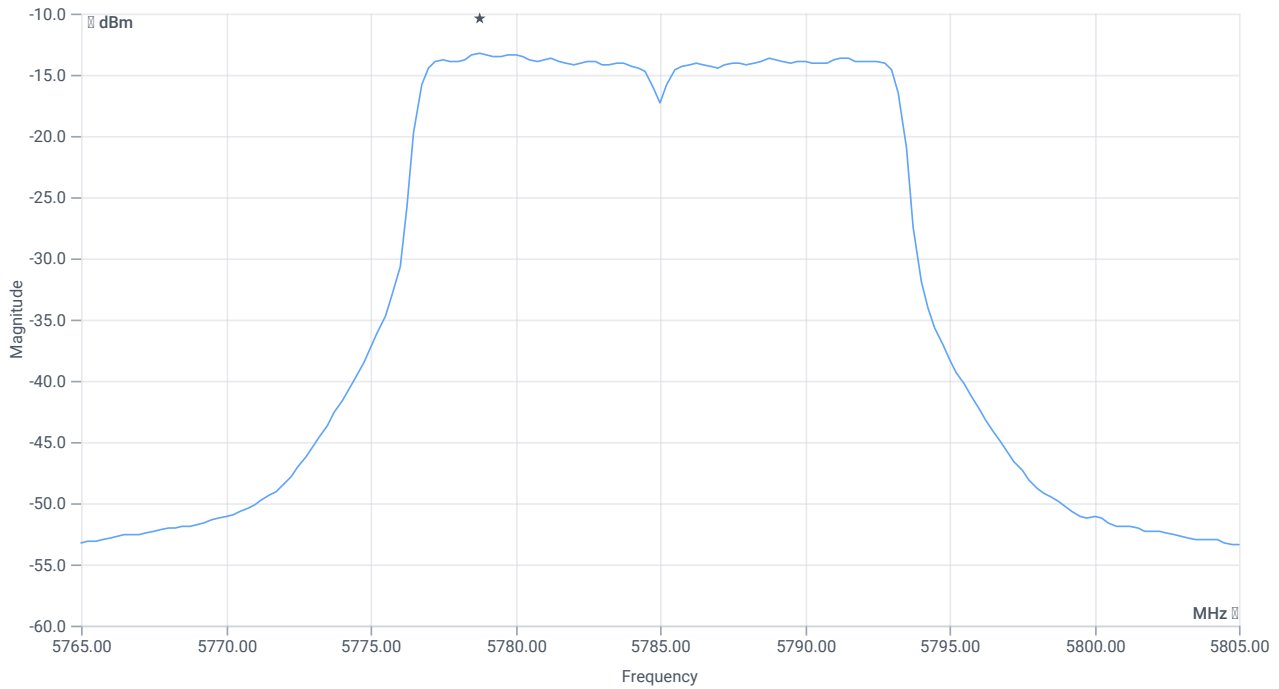

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-13.3	dBm/0.5MHz	INFO
Duty cycle correction	--	--	4.19	dB	INFO
Power spectral density DC corrected	--	30	-9.11	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:02:06
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.01	dBm	INFO
Ref. frequency	--	--	5779.410	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 254					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.421	--	INFO
Duty cycle min	--	--	3.757	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

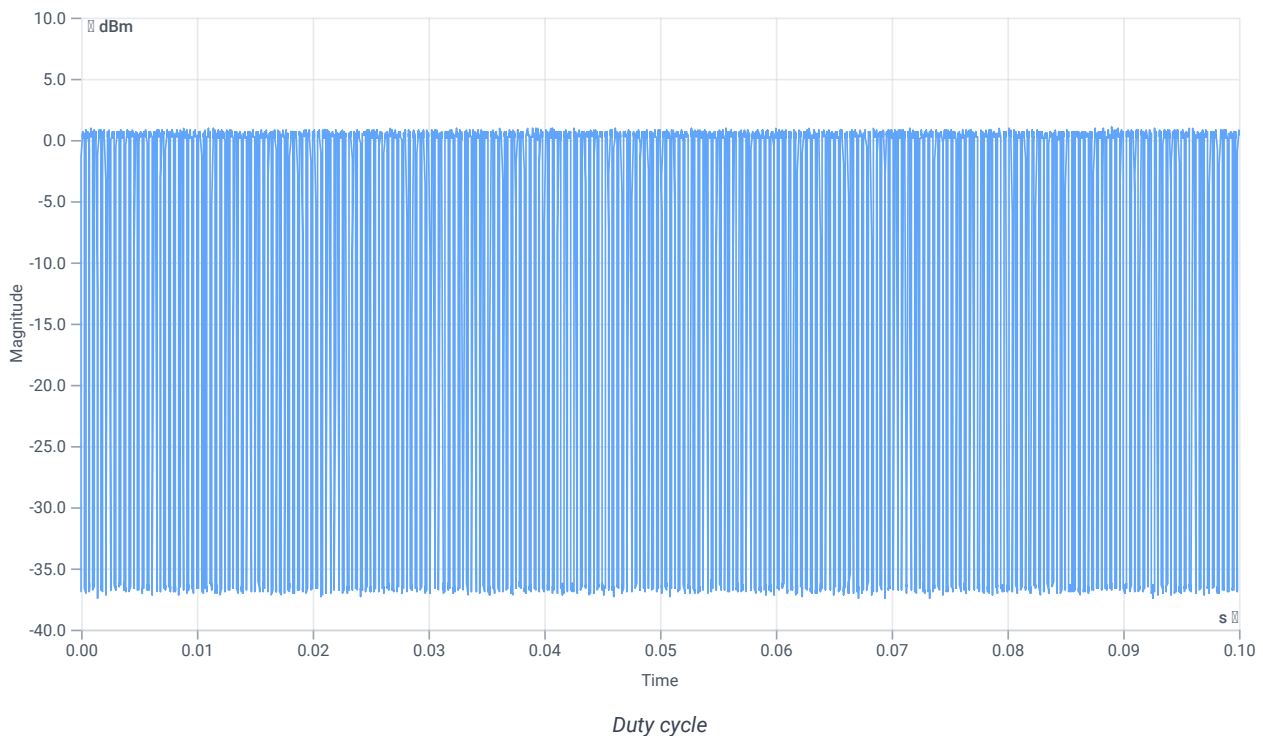

Evaluation bandwidth

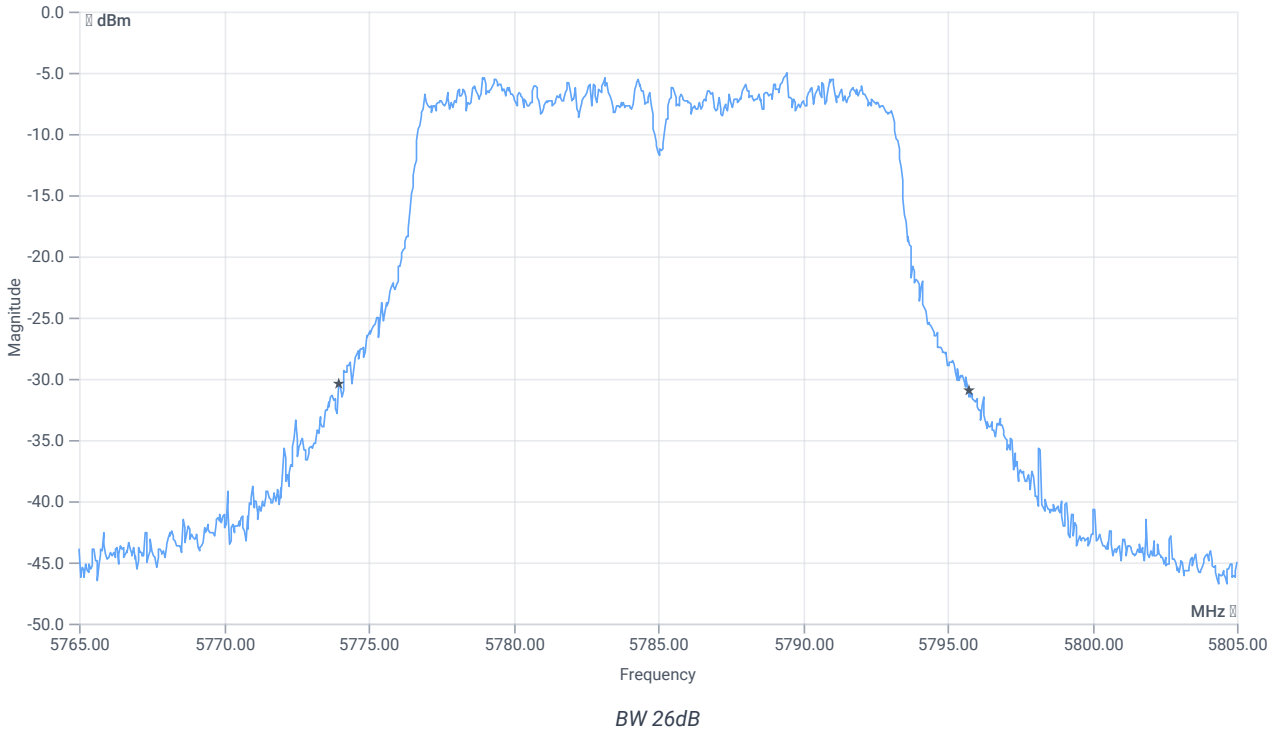


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.8	MHz	INFO
T1 26dB	---	---	5773.9600	MHz	INFO
T2 26dB	---	---	5795.7600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.99 10.41 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

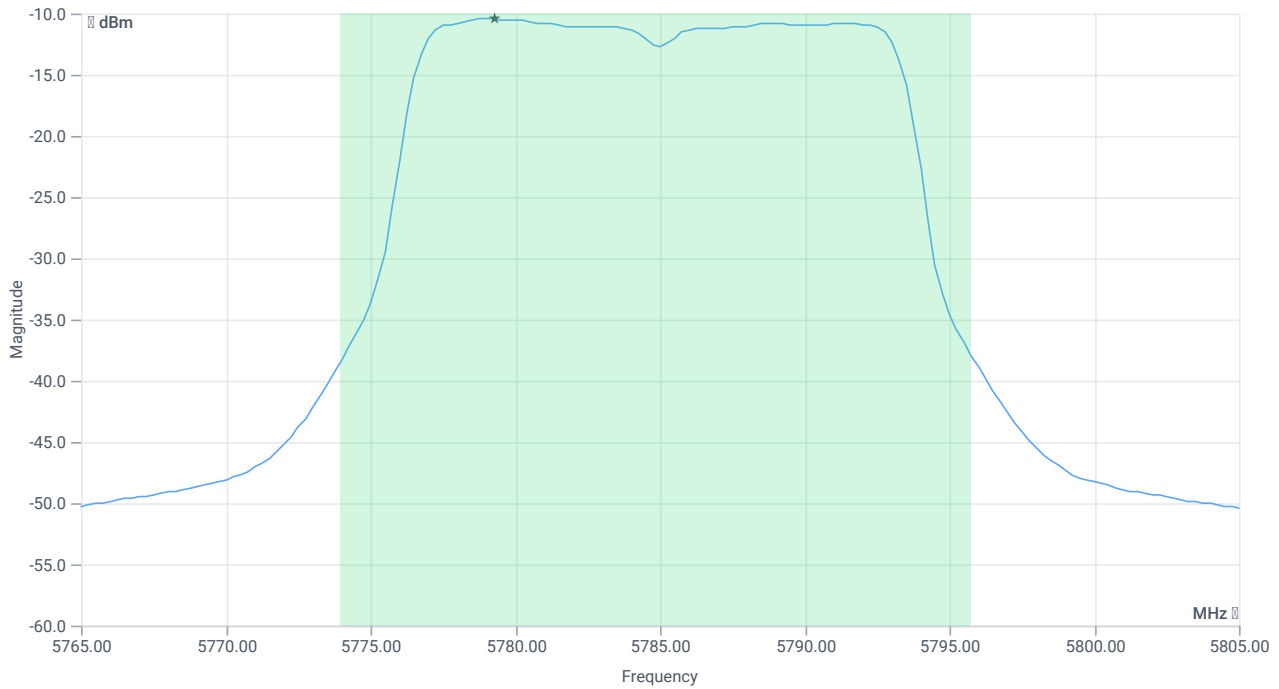

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.9	dBm	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.66	dBm	PASS
Limit: 11 dBm + 10 log 21.8					
Max output power DC corrected	--	24.38	4.66	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.99 10.41 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

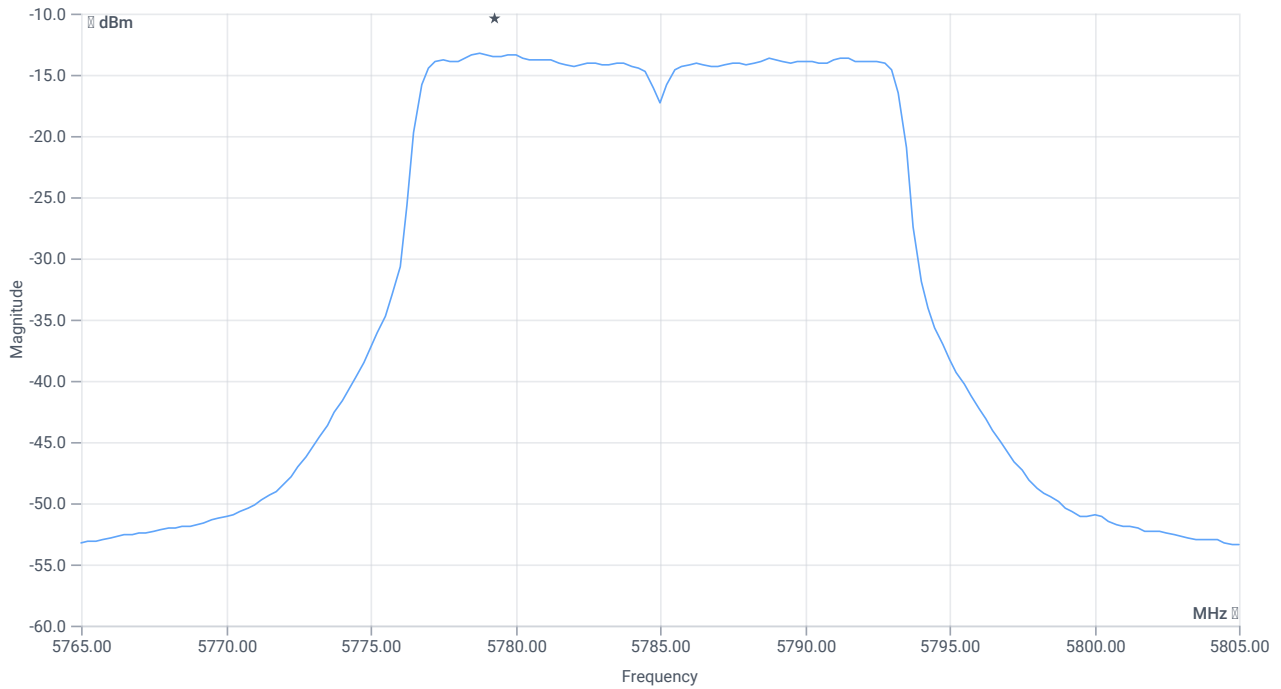

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-13.29	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Power spectral density DC corrected	--	30	-9.53	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:57:10
Ambit temp [°C] humidity [rel%]	26.9 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.89	dBm	INFO
Ref. frequency	--	--	5782.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 259					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.391	--	INFO
Duty cycle min	--	--	4.078	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.35	ms	INFO

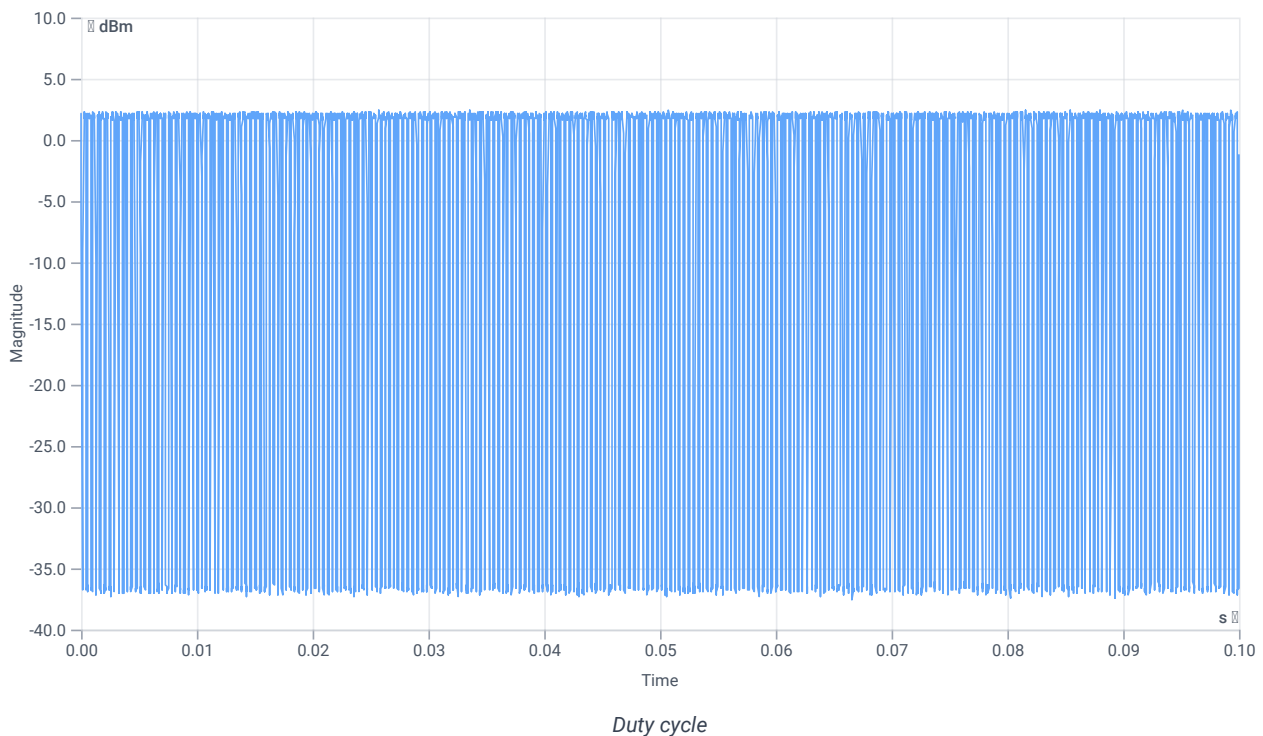

Evaluation bandwidth

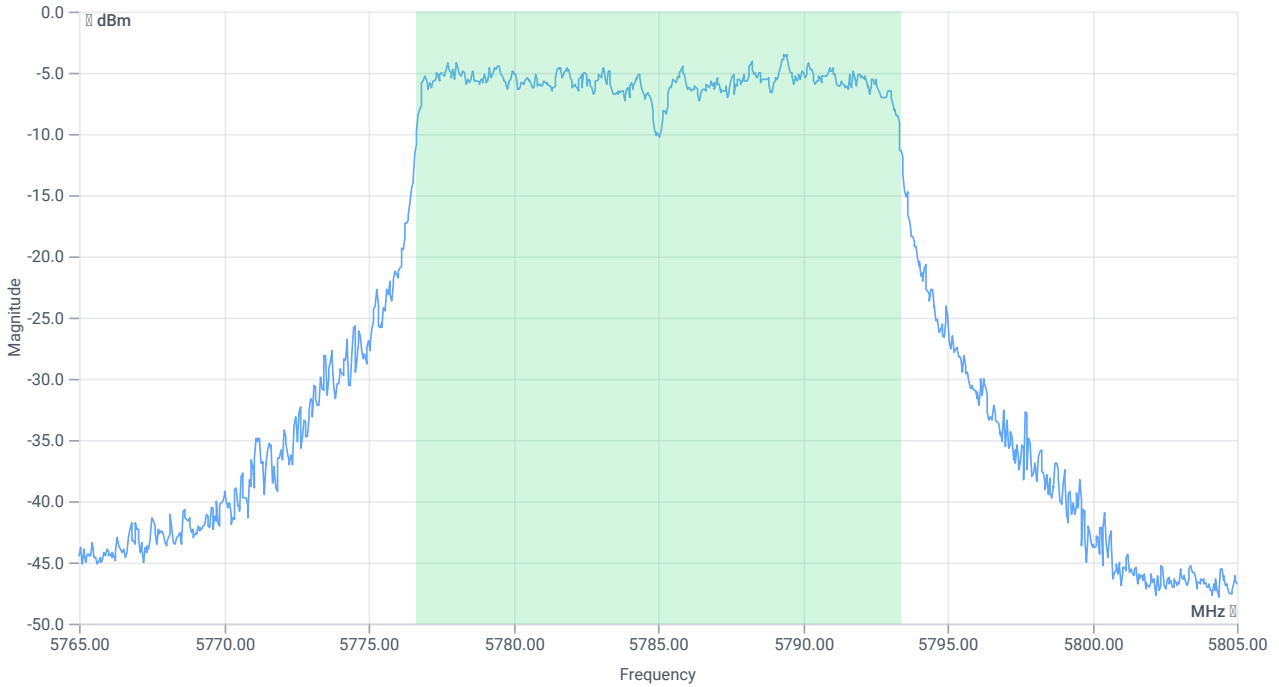

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.743	MHz	INFO
T1 99%	---	---	5776.6484	MHz	INFO
T2 99%	---	---	5793.3916	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.89 10.38 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

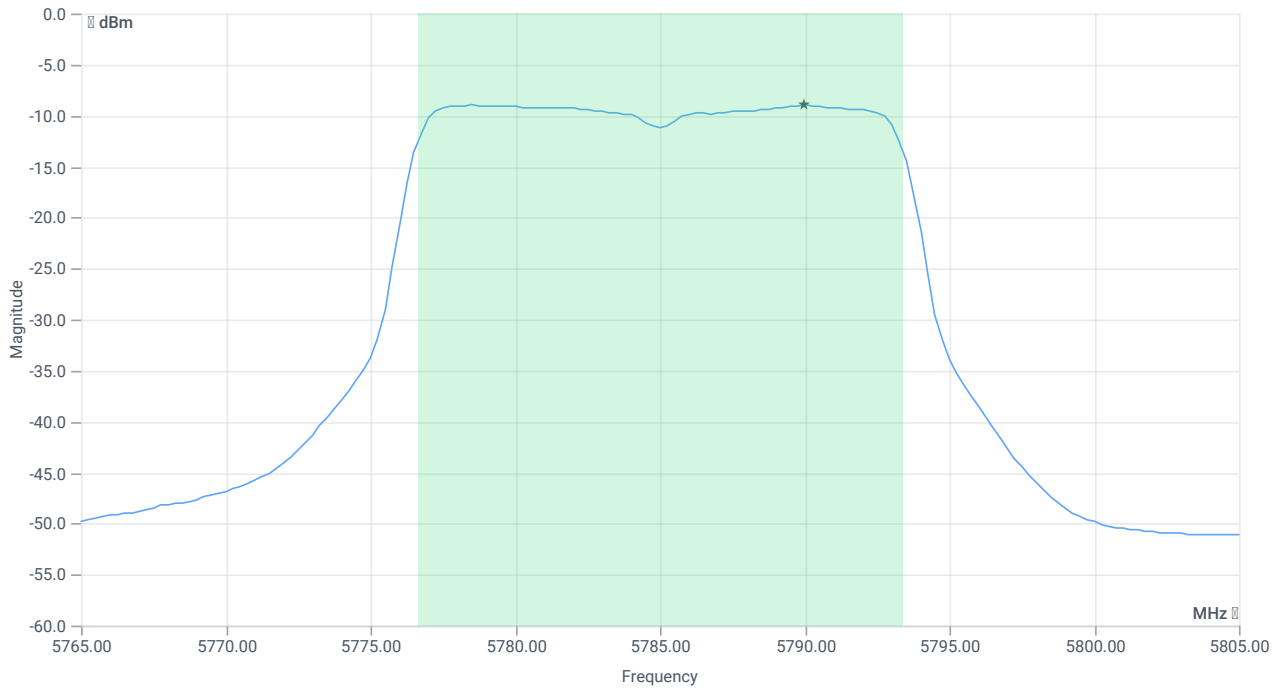

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.36	dBm	INFO
Duty cycle correction	--	--	4.08	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	6.44	dBm	PASS
Limit: 11 dBm + 10 log 16.743					
Max output power DC corrected	--	23.24	6.44	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.89 10.38 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

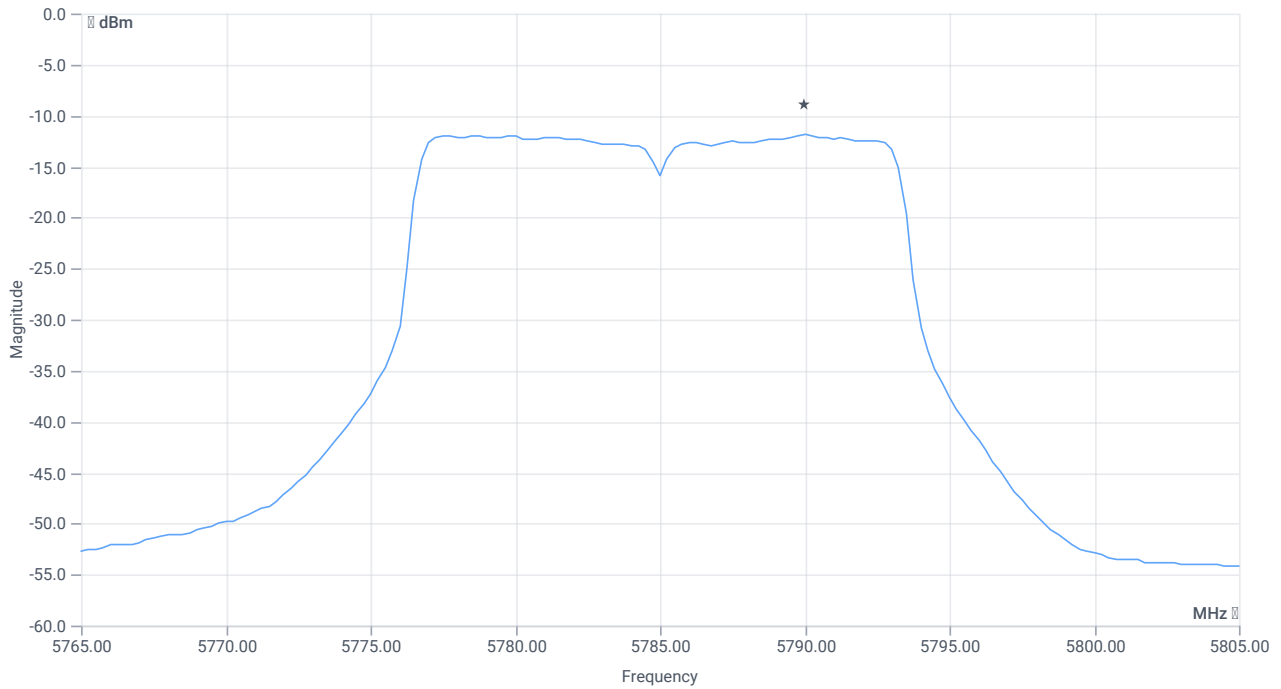

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-11.81	dBm/0.5MHz	INFO
Duty cycle correction	--	--	4.08	dB	INFO
Power spectral density DC corrected	--	30	-7.73	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:54:41
Ambit temp [°C] humidity [rel%]	26.9 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.71	dBm	INFO
Ref. frequency	--	--	5781.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 262					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.429	--	INFO
Duty cycle min	--	--	3.675	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

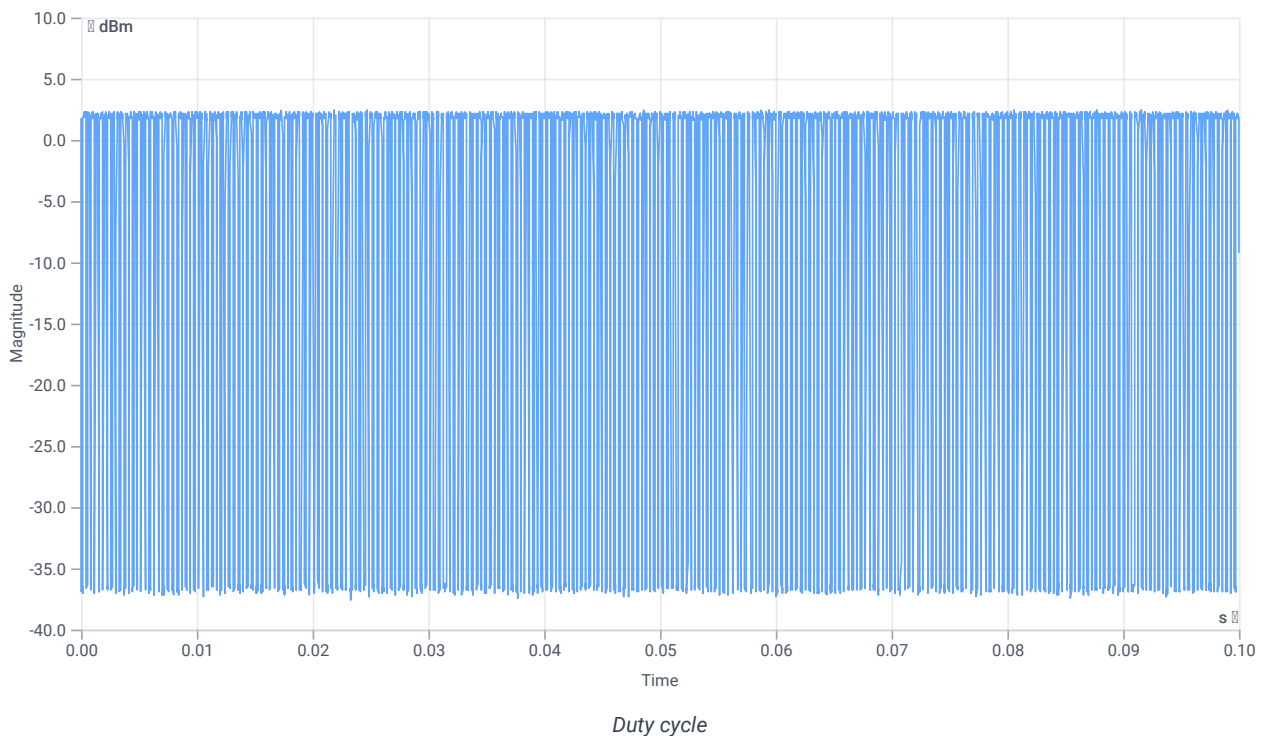

Evaluation bandwidth

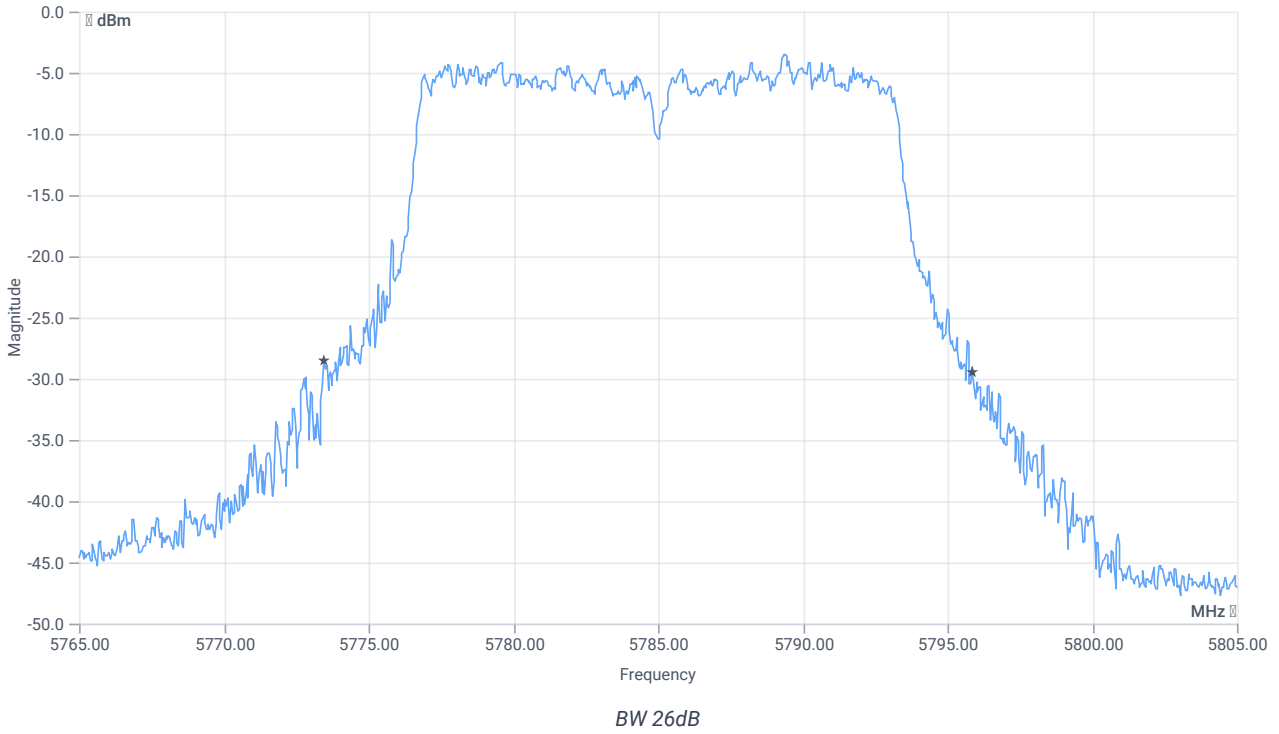


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.44	MHz	INFO
T1 26dB	---	---	5773.4400	MHz	INFO
T2 26dB	---	---	5795.8800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.71 10.38 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

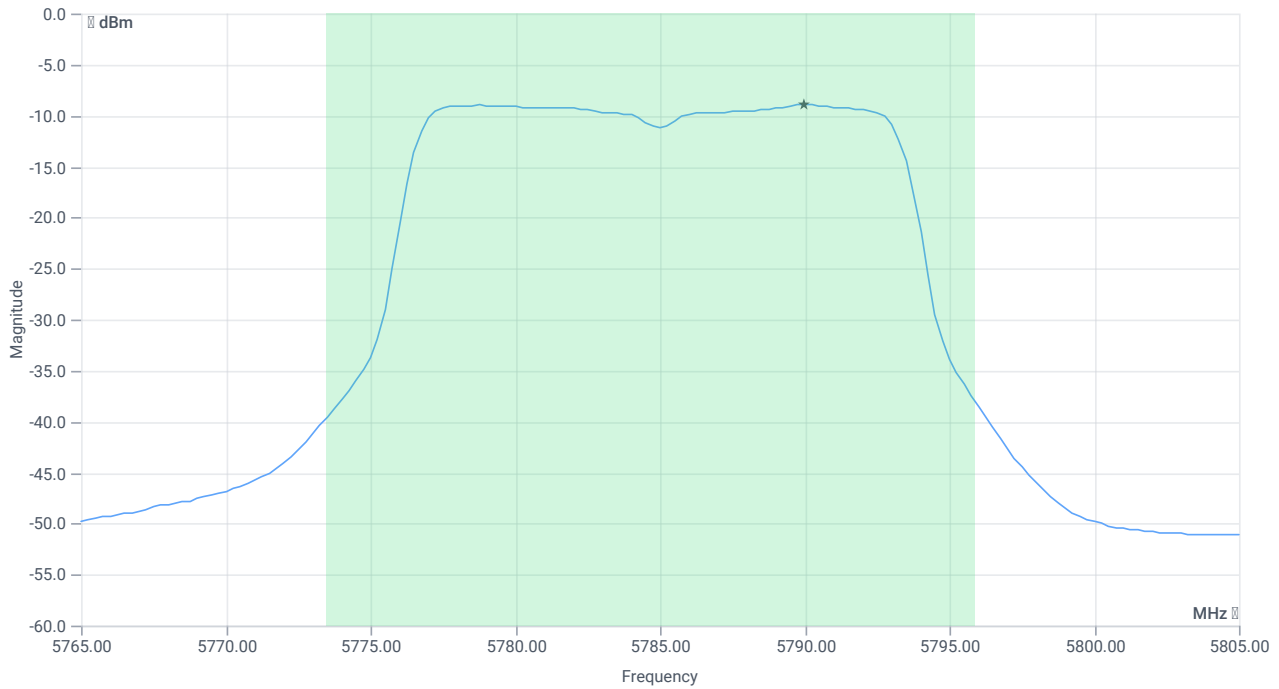

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.46	dBm	INFO
Duty cycle correction	--	--	3.68	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	6.14	dBm	PASS
Limit: 11 dBm + 10 log 22.44					
Max output power DC corrected	--	24.51	6.14	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.71 10.38 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

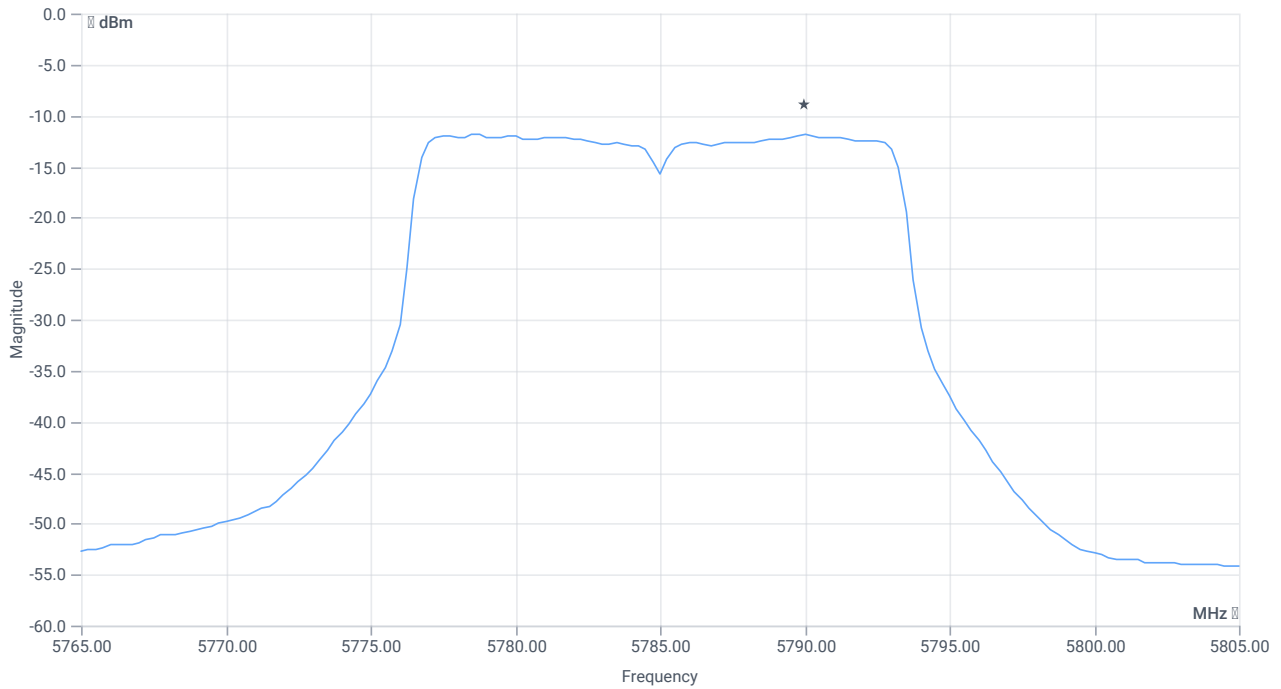

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-11.8	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.68	dB	INFO
Power spectral density DC corrected	--	30	-8.12	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:48:27
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.31	dBm	INFO
Ref. frequency	--	--	5739.610	MHz	INFO

Evaluation max. duty cycle


DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 256					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.409	--	INFO
Duty cycle min	--	--	3.883	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.325	ms	INFO

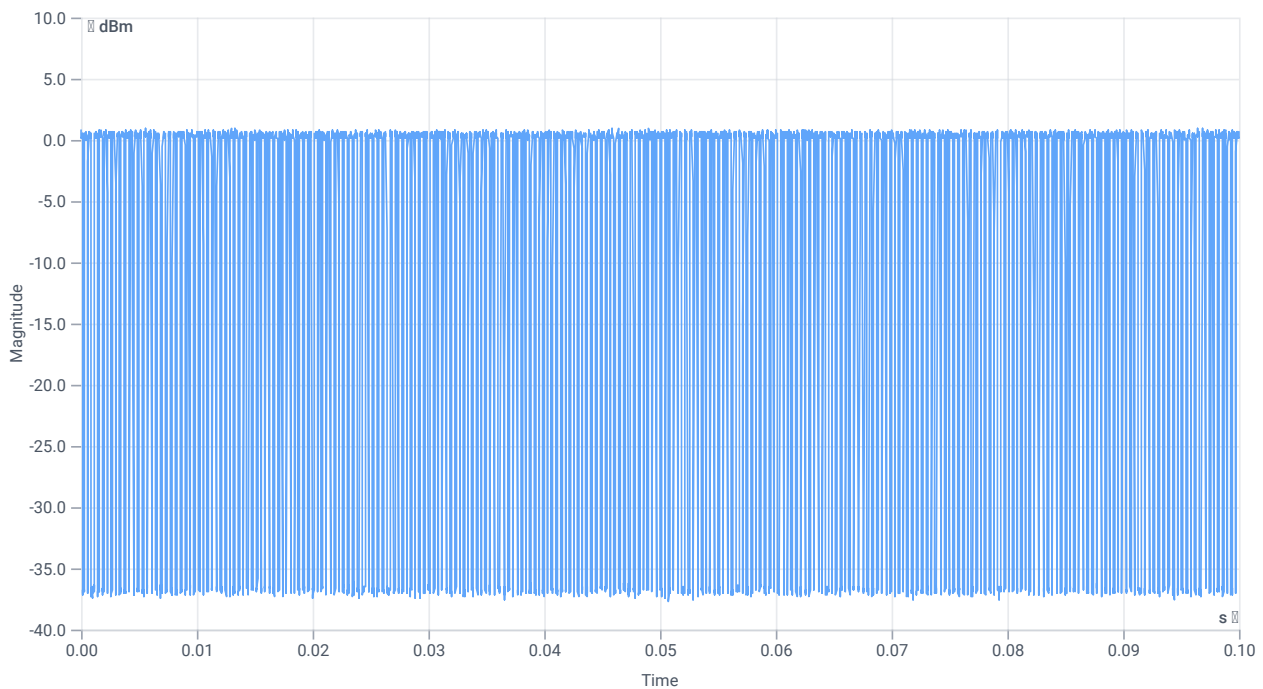

Duty cycle

Evaluation bandwidth

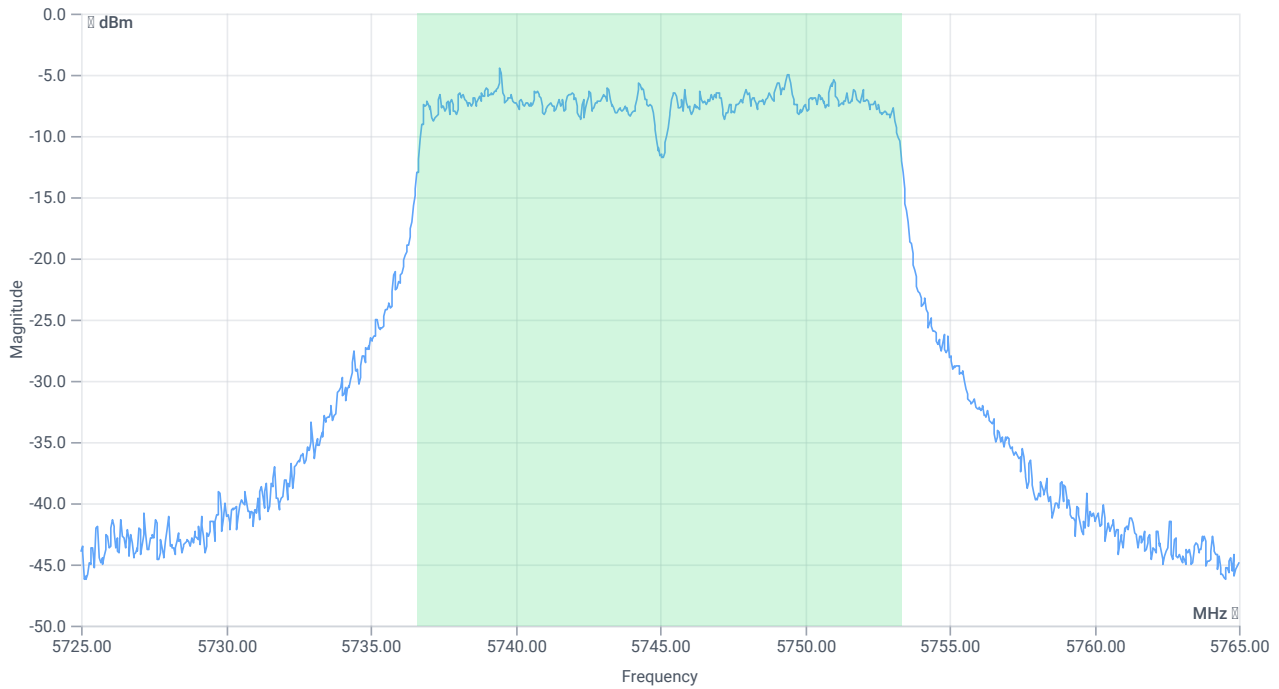

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.743	MHz	INFO
T1 99%	---	---	5736.6084	MHz	INFO
T2 99%	---	---	5753.3516	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.31 10.38 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

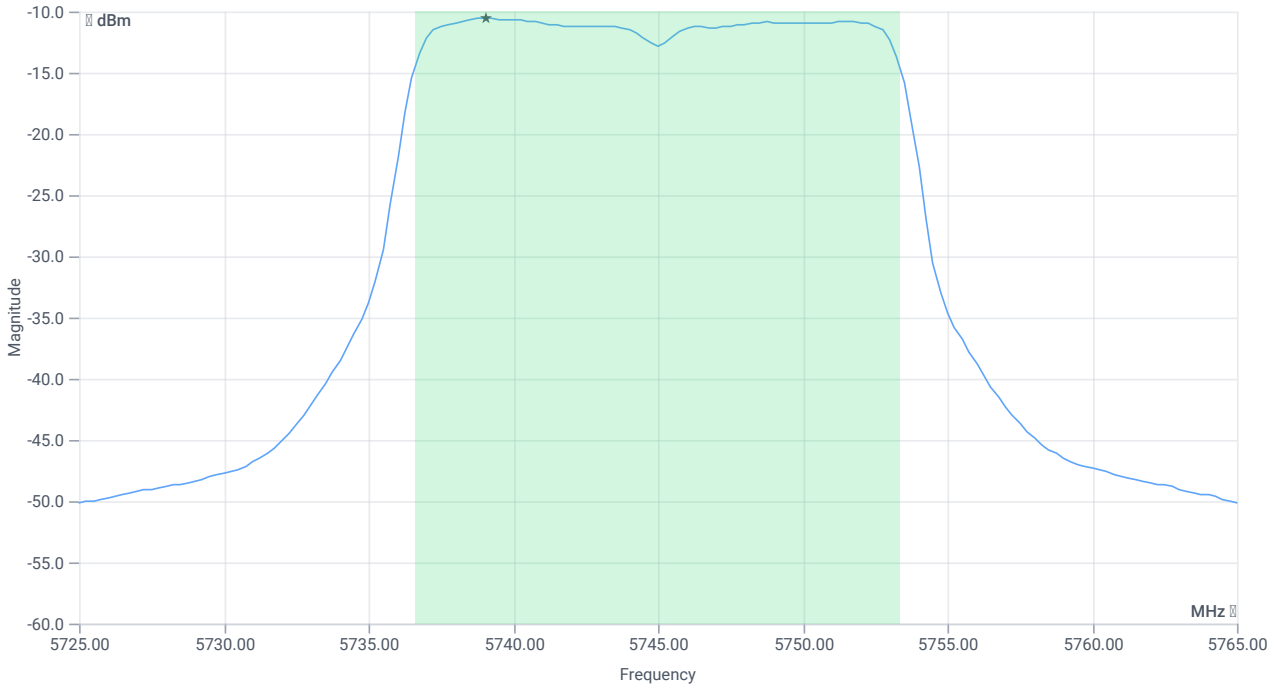

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.73	dBm	INFO
Duty cycle correction	--	--	3.88	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.61	dBm	PASS
Limit: 11 dBm + 10 log 16.743					
Max output power DC corrected	--	23.24	4.61	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.31 10.38 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

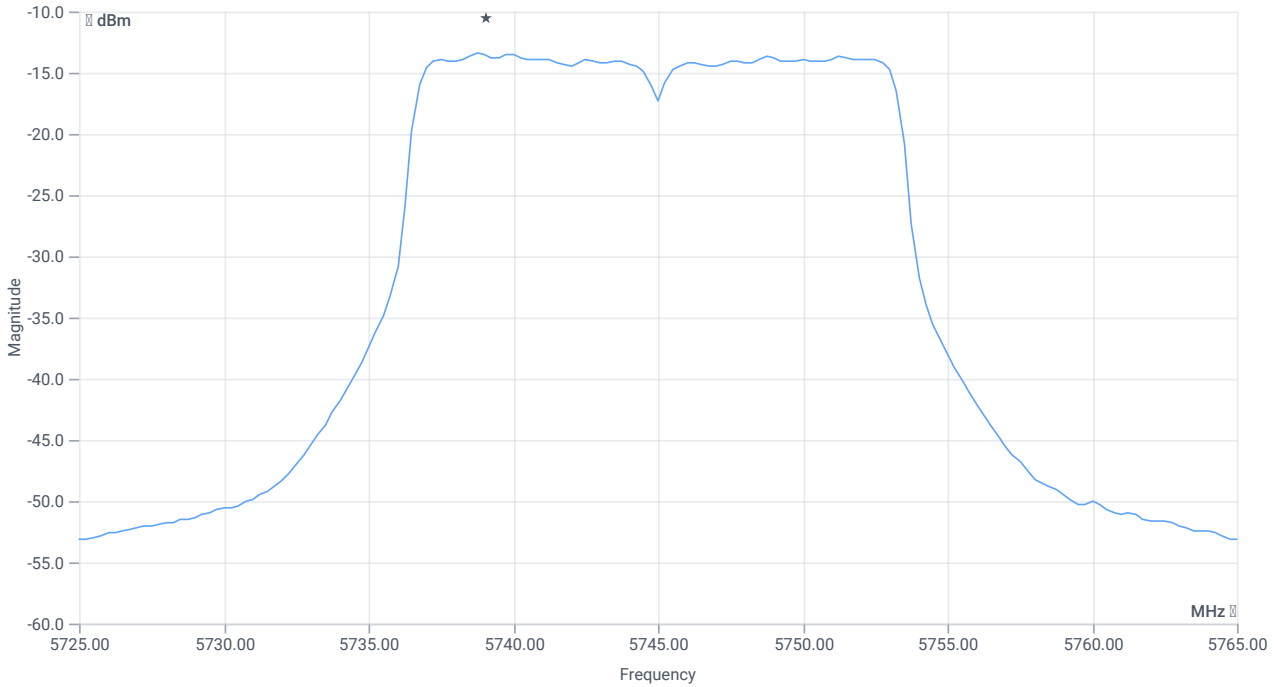

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-13.4	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.88	dB	INFO
Power spectral density DC corrected	--	30	-9.52	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:45:59
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.08	dBm	INFO
Ref. frequency	--	--	5739.410	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 260					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.381	--	INFO
Duty cycle min	--	--	4.191	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.325	ms	INFO

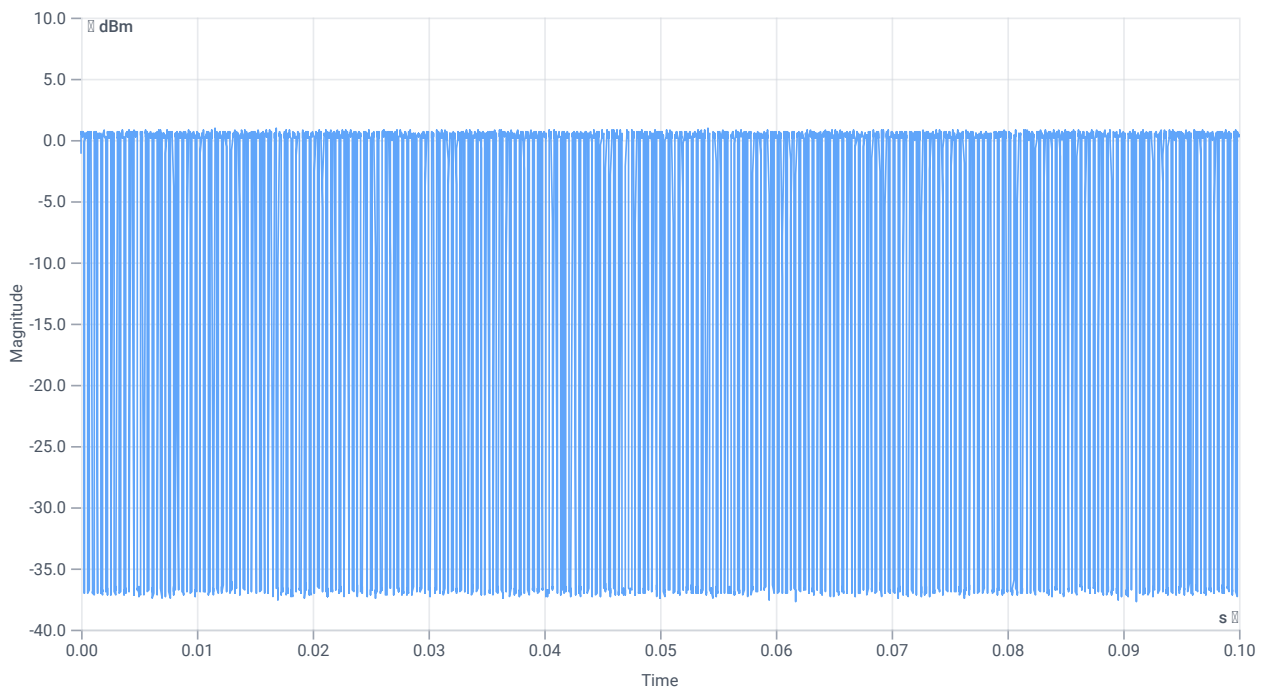

Evaluation bandwidth

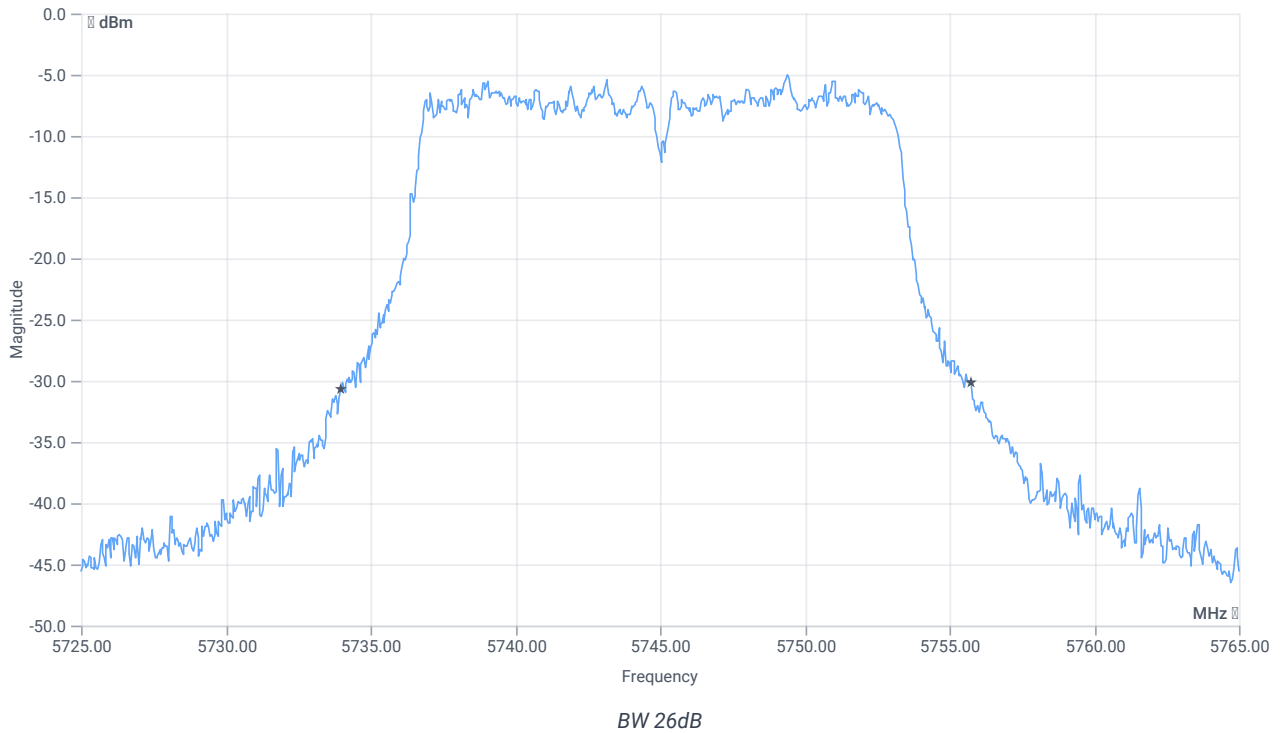


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.8	MHz	INFO
T1 26dB	---	---	5733.9600	MHz	INFO
T2 26dB	---	---	5755.7600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.92 10.38 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

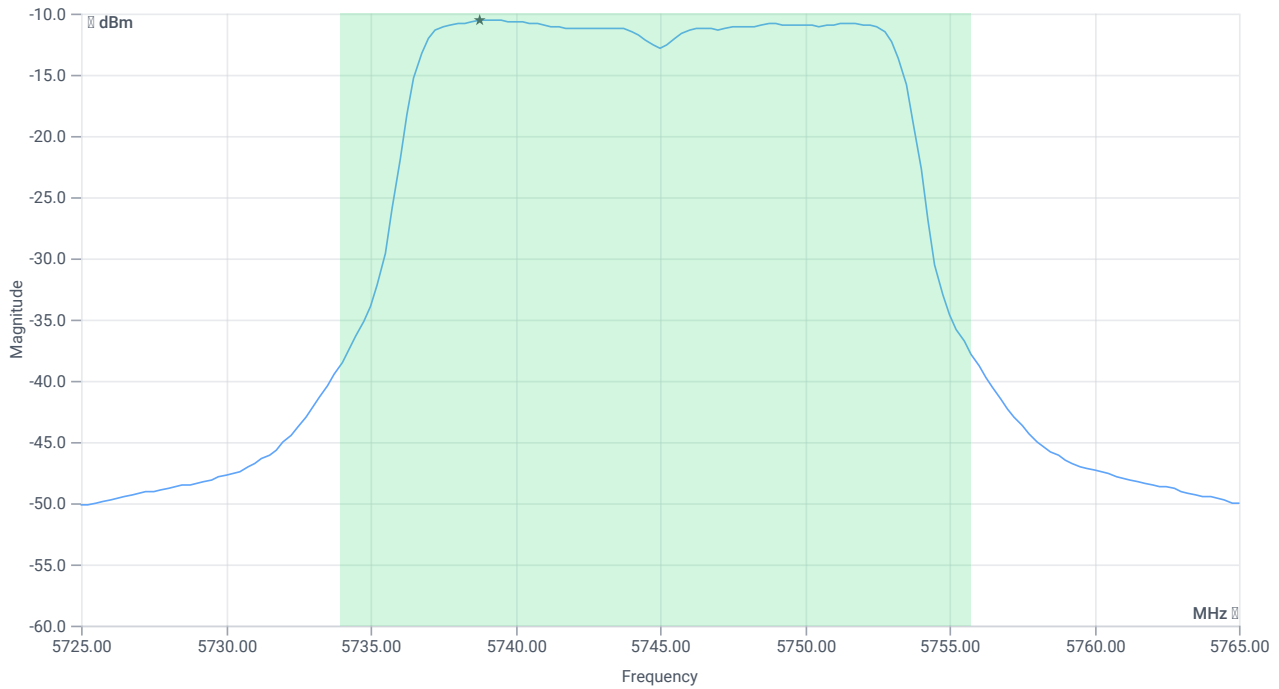

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	0.82	dBm	INFO
Duty cycle correction	--	--	4.19	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.01	dBm	PASS
Limit: 11 dBm + 10 log 21.8					
Max output power DC corrected	--	24.38	5.01	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.92 10.38 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

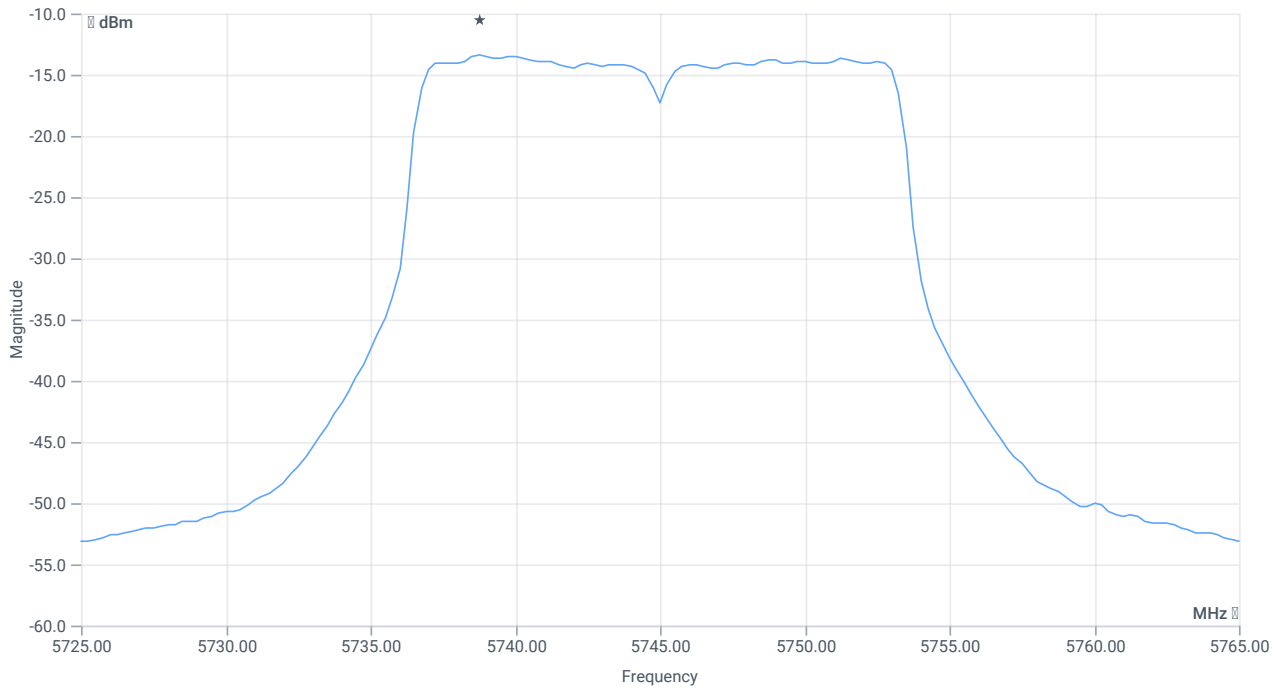

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-13.41	dBm/0.5MHz	INFO
Duty cycle correction	--	--	4.19	dB	INFO
Power spectral density DC corrected	--	30	-9.22	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:41:09
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.86	dBm	INFO
Ref. frequency	--	--	5752.190	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 261					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.421	--	INFO
Duty cycle min	--	--	3.757	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.275	ms	INFO

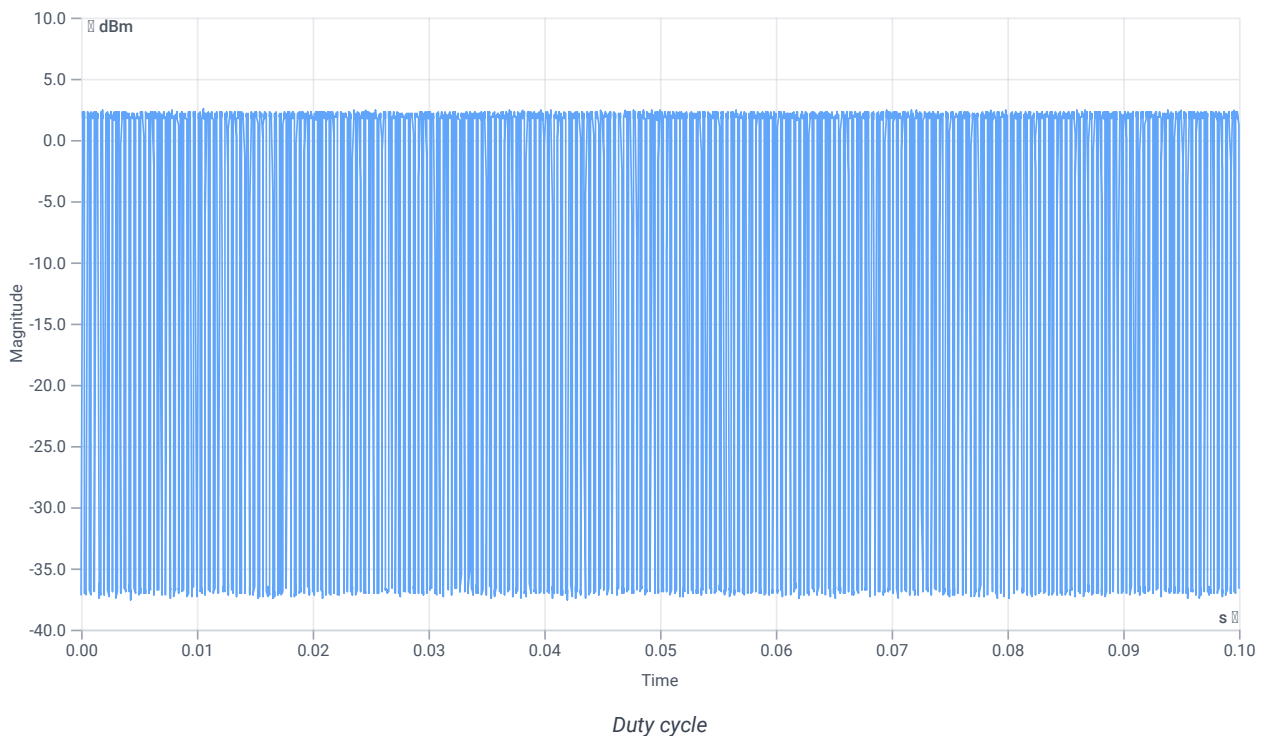

Evaluation bandwidth

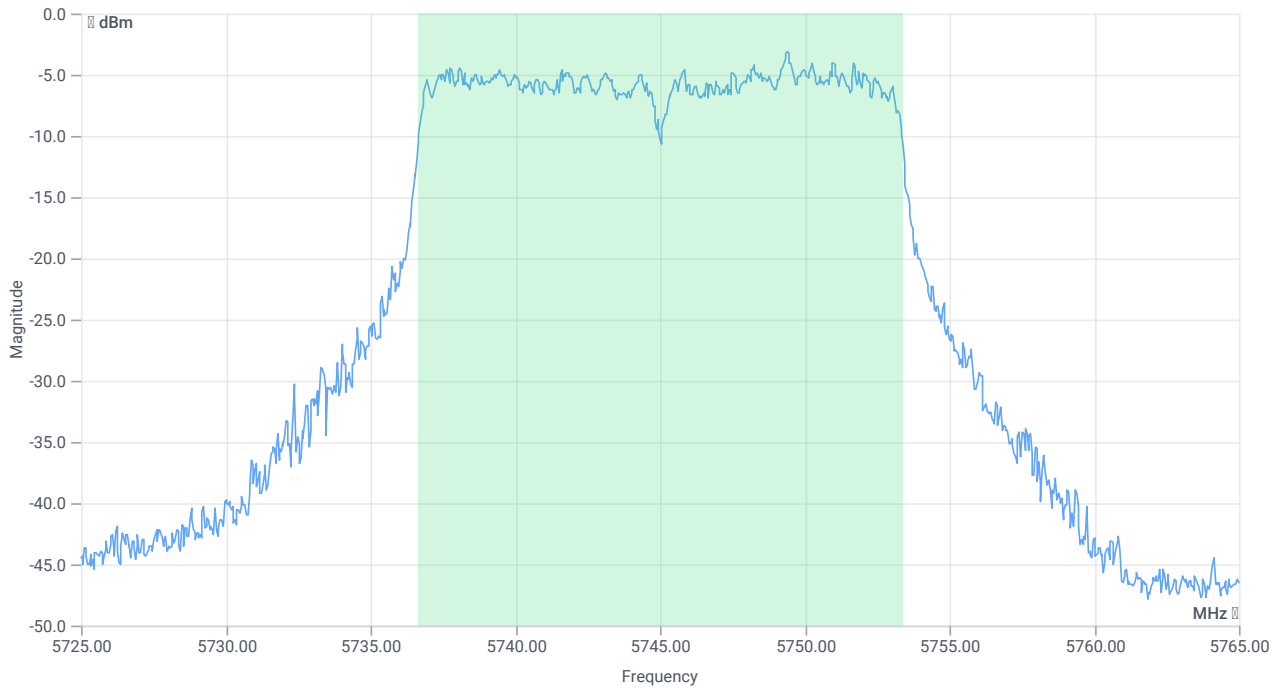

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.743	MHz	INFO
T1 99%	---	---	5736.6484	MHz	INFO
T2 99%	---	---	5753.3916	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.86 10.36 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

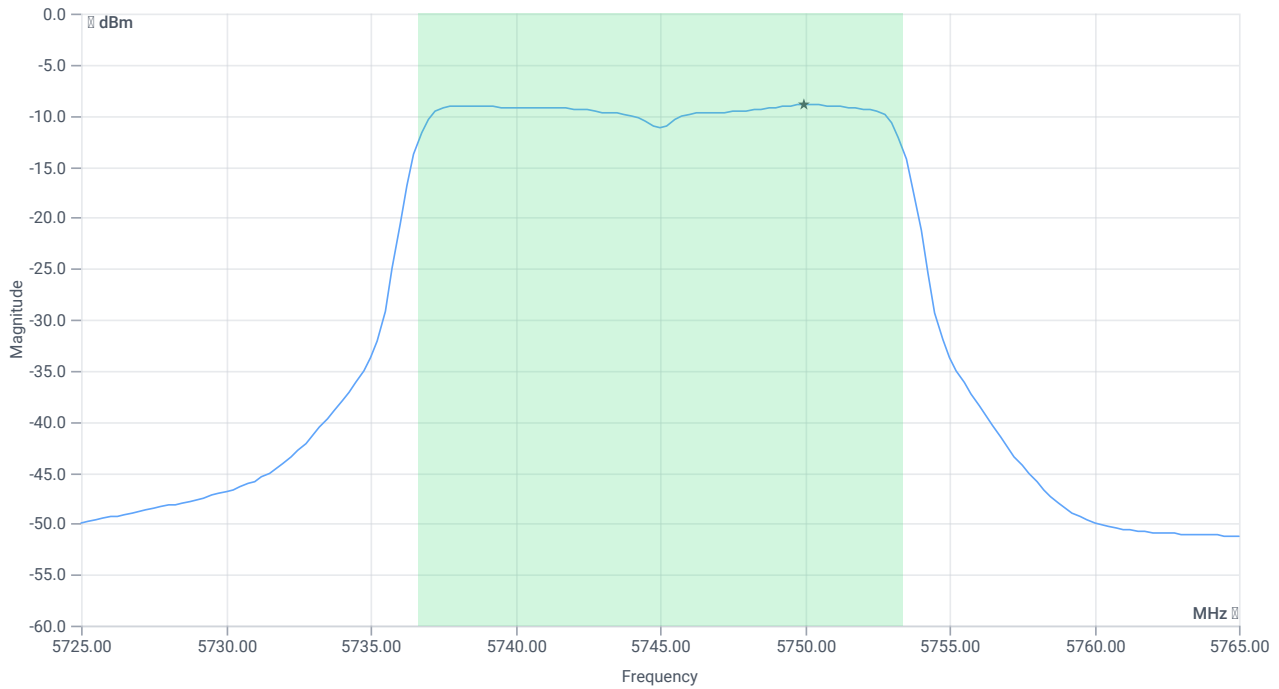

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.38	dBm	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	6.14	dBm	PASS
Limit: 11 dBm + 10 log 16.743					
Max output power DC corrected	--	23.24	6.14	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.86 10.36 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

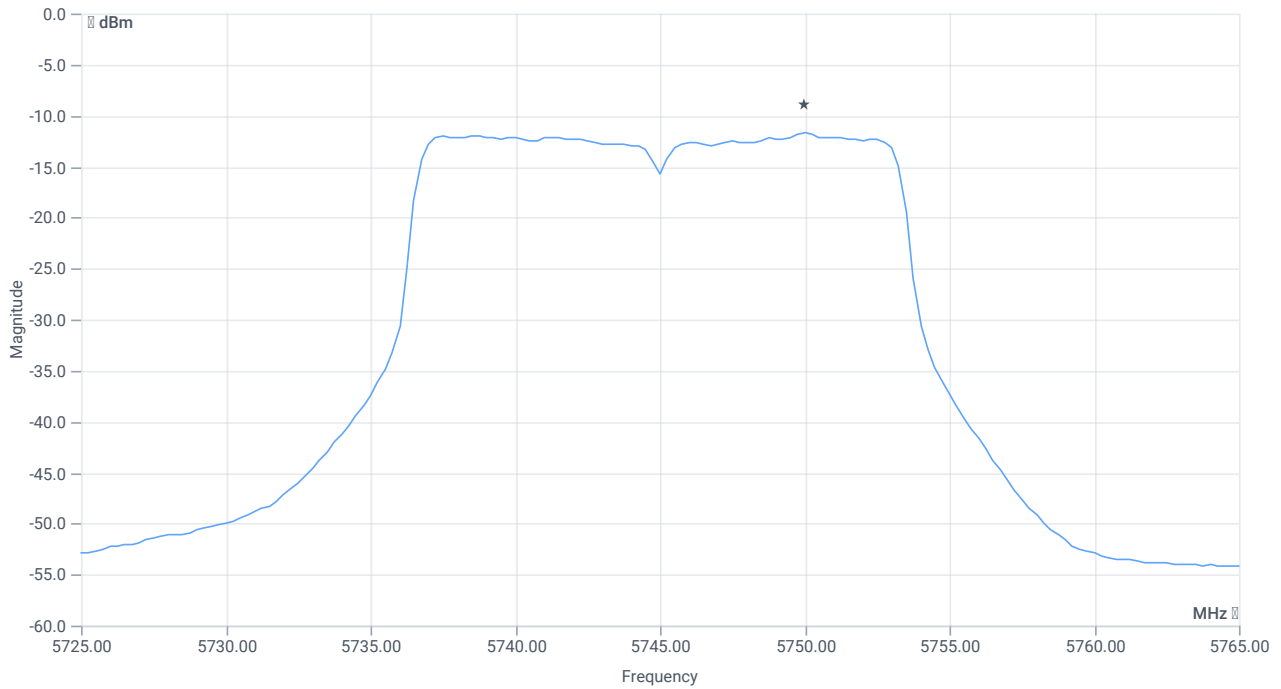

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-11.71	dBm/0.5MHz	INFO
Duty cycle correction	--	--	3.76	dB	INFO
Power spectral density DC corrected	--	30	-7.95	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:38:41
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.83	dBm	INFO
Ref. frequency	--	--	5741.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 259					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.364	--	INFO
Duty cycle min	--	--	4.389	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.35	ms	INFO

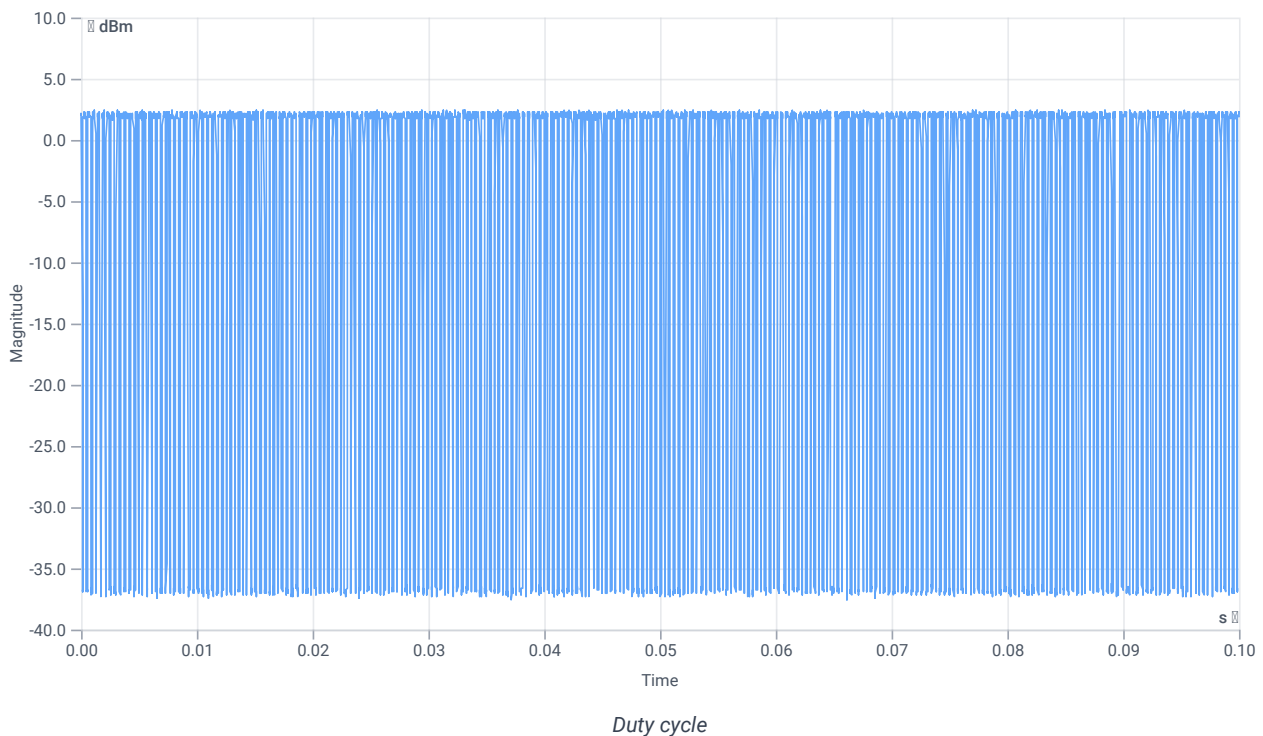

Evaluation bandwidth

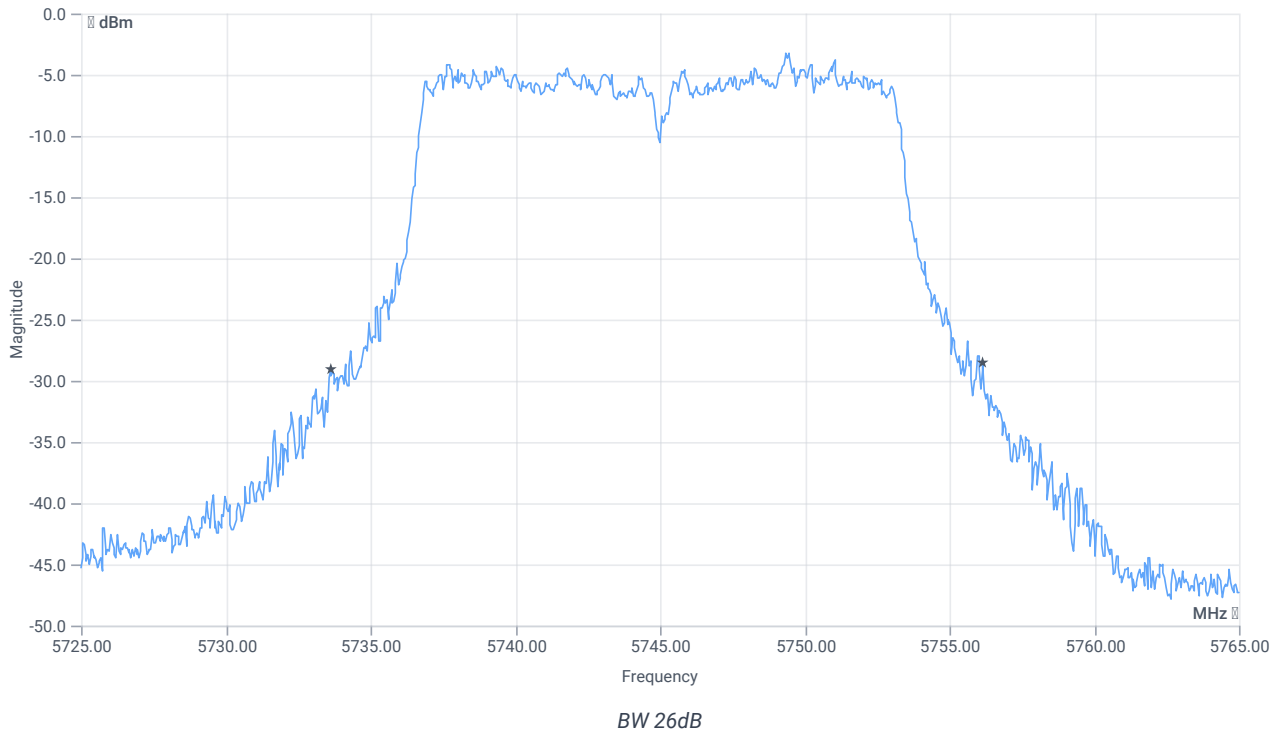


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.56	MHz	INFO
T1 26dB	---	---	5733.6000	MHz	INFO
T2 26dB	---	---	5756.1600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.83 10.36 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

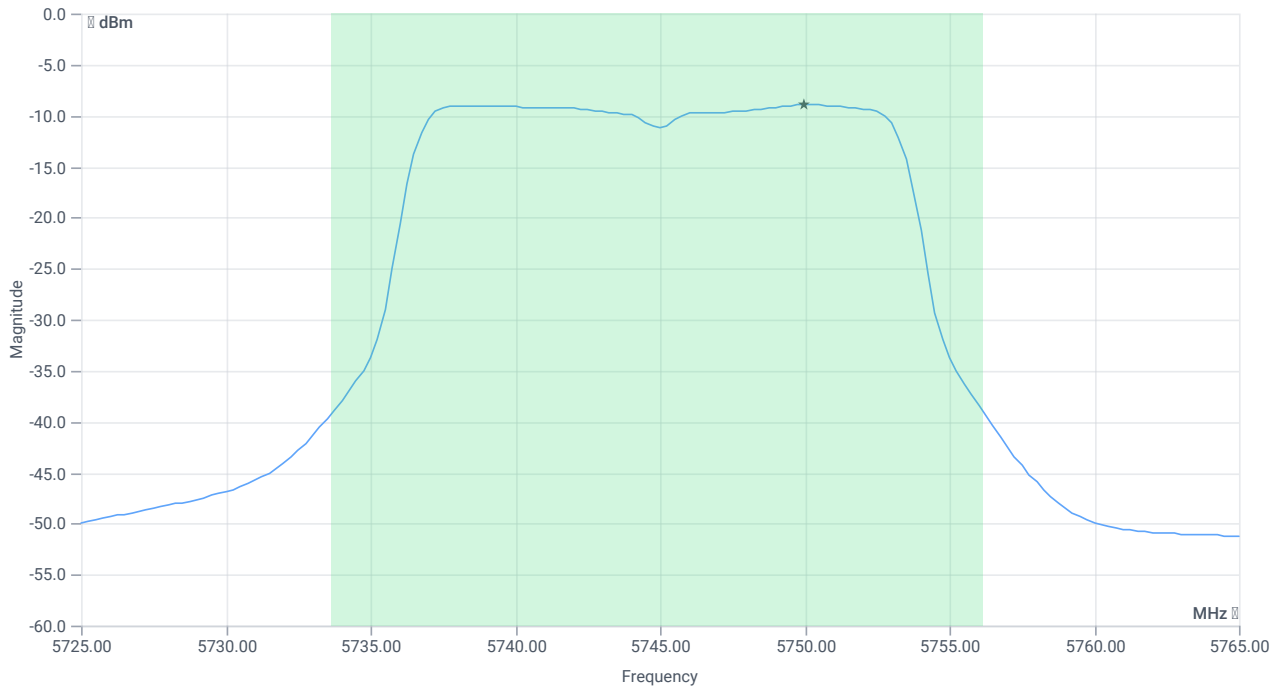

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.47	dBm	INFO
Duty cycle correction	--	--	4.39	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	6.86	dBm	PASS
Limit: 11 dBm + 10 log 22.56					
Max output power DC corrected	--	24.53	6.86	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.83 10.36 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

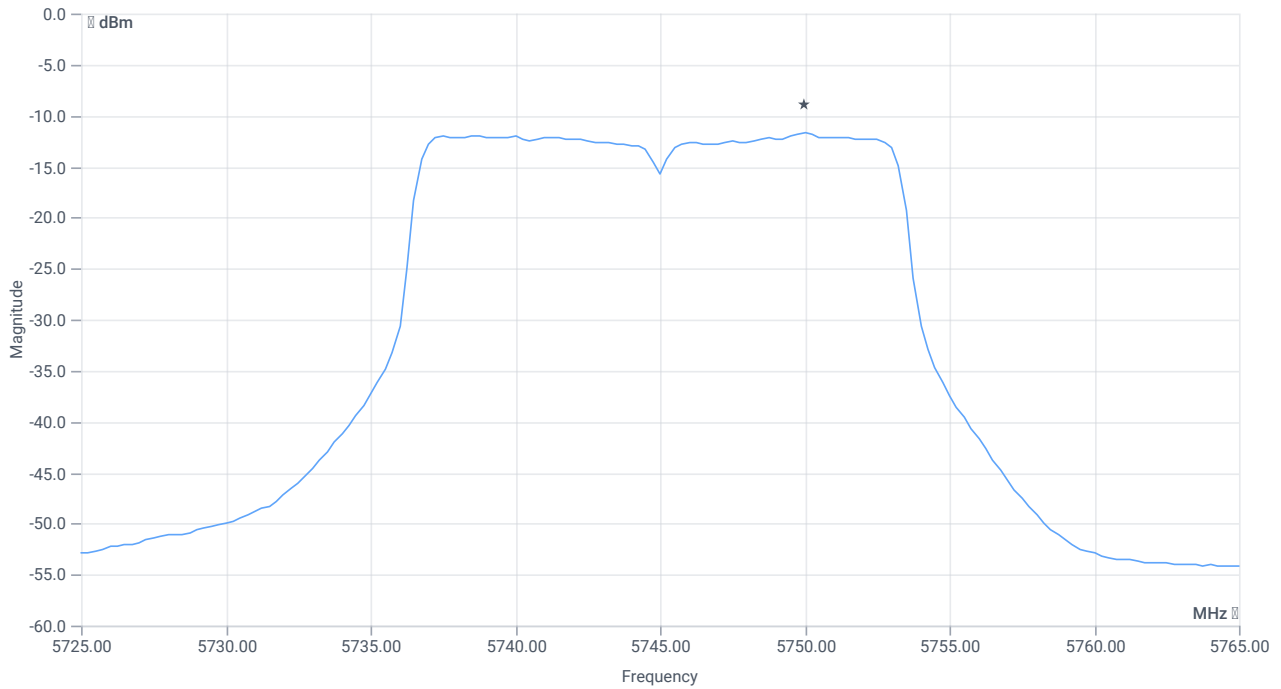

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-11.7	dBm/0.5MHz	INFO
Duty cycle correction	--	--	4.39	dB	INFO
Power spectral density DC corrected	--	30	-7.31	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:34:46
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.82	dBm	INFO
Ref. frequency	--	--	5237.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 265					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

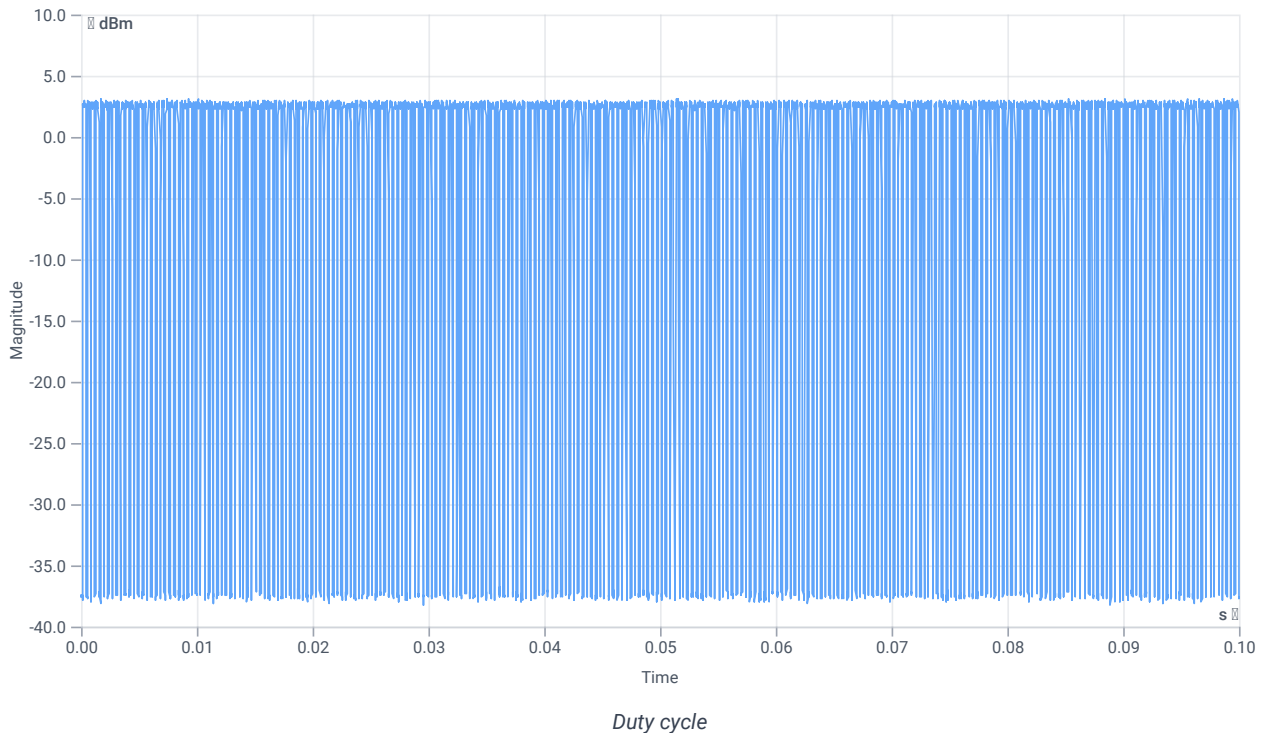

Evaluation bandwidth

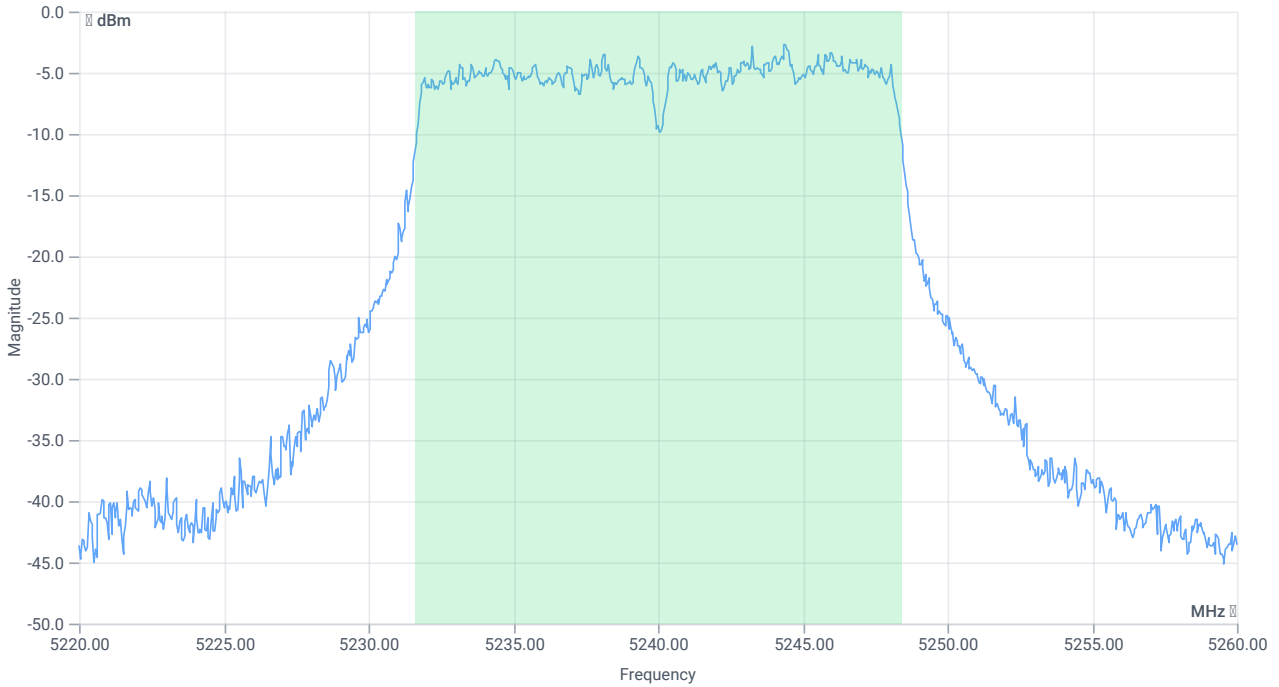

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	---	---	5231.6084	MHz	INFO
T2 99%	---	---	5248.3916	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.82 9.93 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

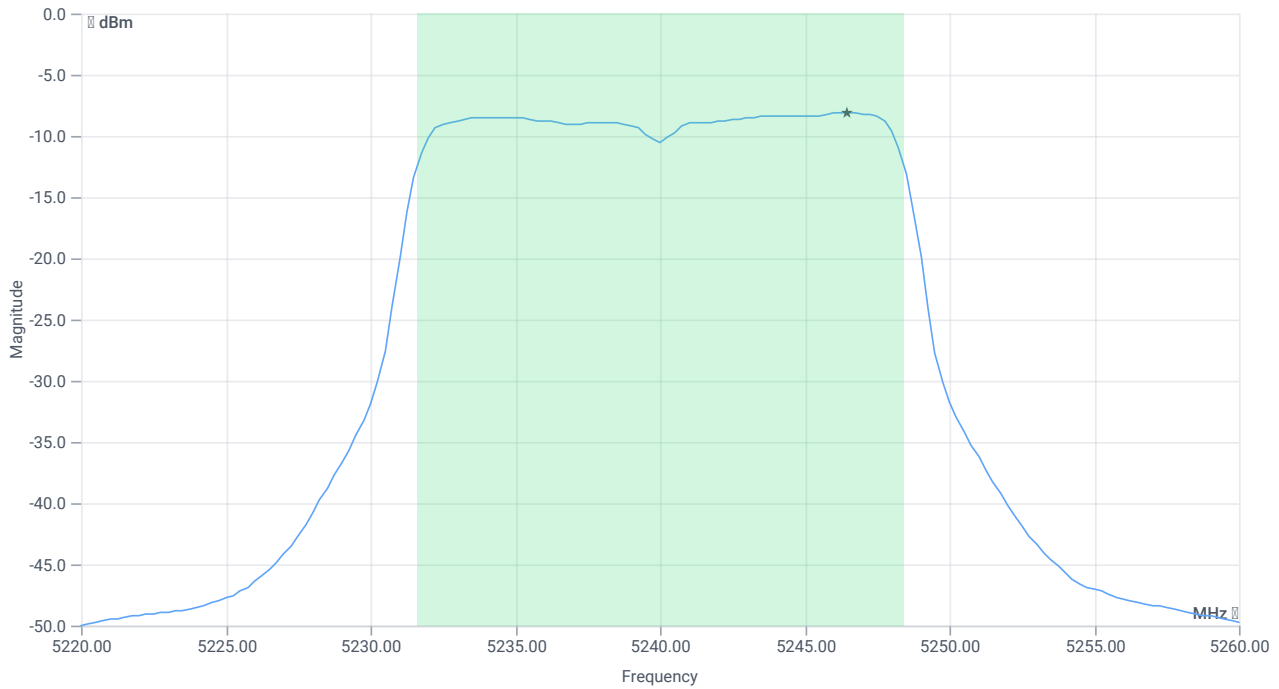

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.12	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.39	dBm	na
Limit: 11 dBm + 10 log 16.783					
Max output power DC corrected	--	23.25	6.39	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.1	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-4.83	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:33:16
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.43	dBm	INFO
Ref. frequency	--	--	5245.590	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 267					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

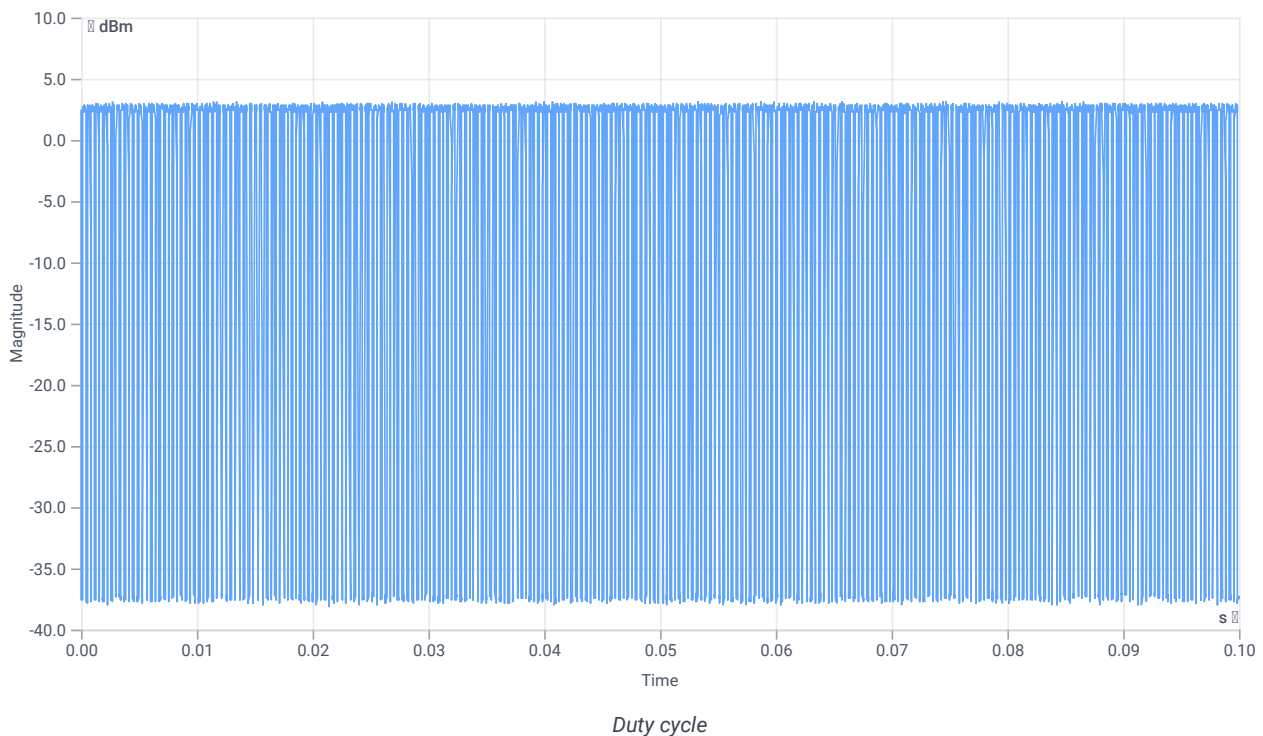

Evaluation bandwidth

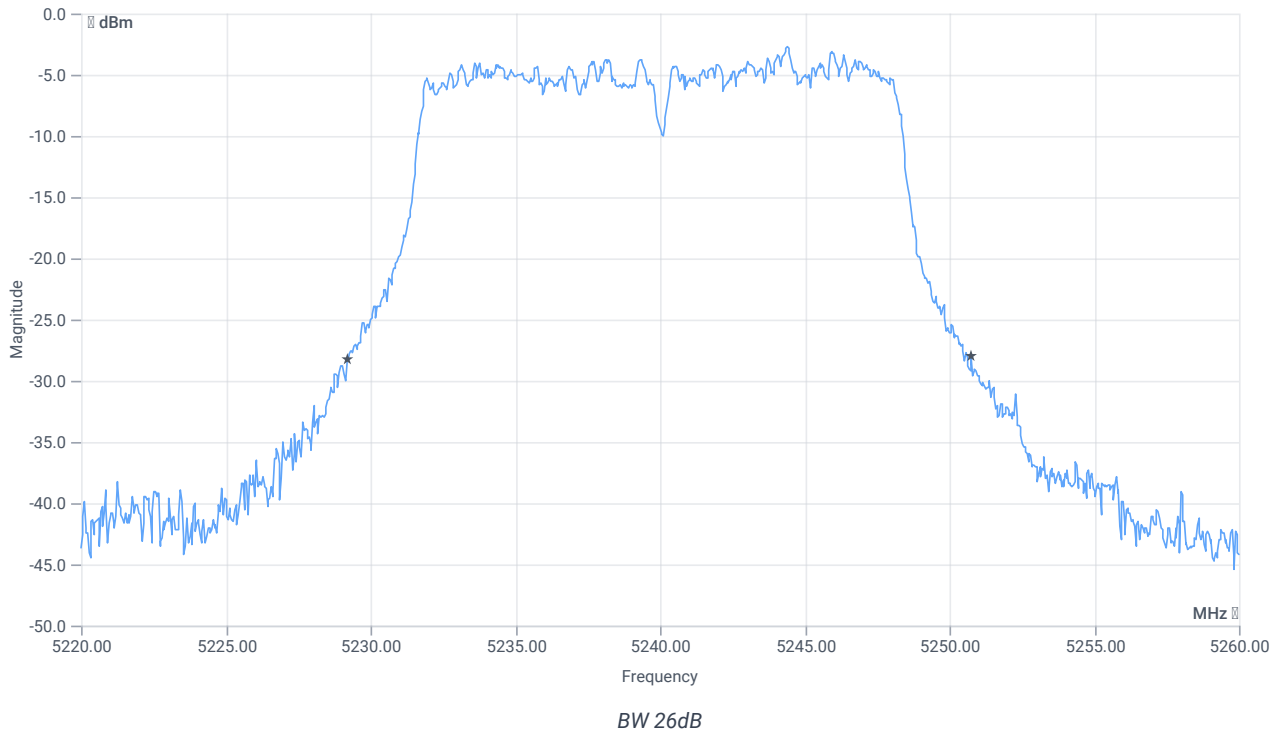


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.56	MHz	INFO
T1 26dB	---	---	5229.2000	MHz	INFO
T2 26dB	---	---	5250.7600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.43 9.93 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

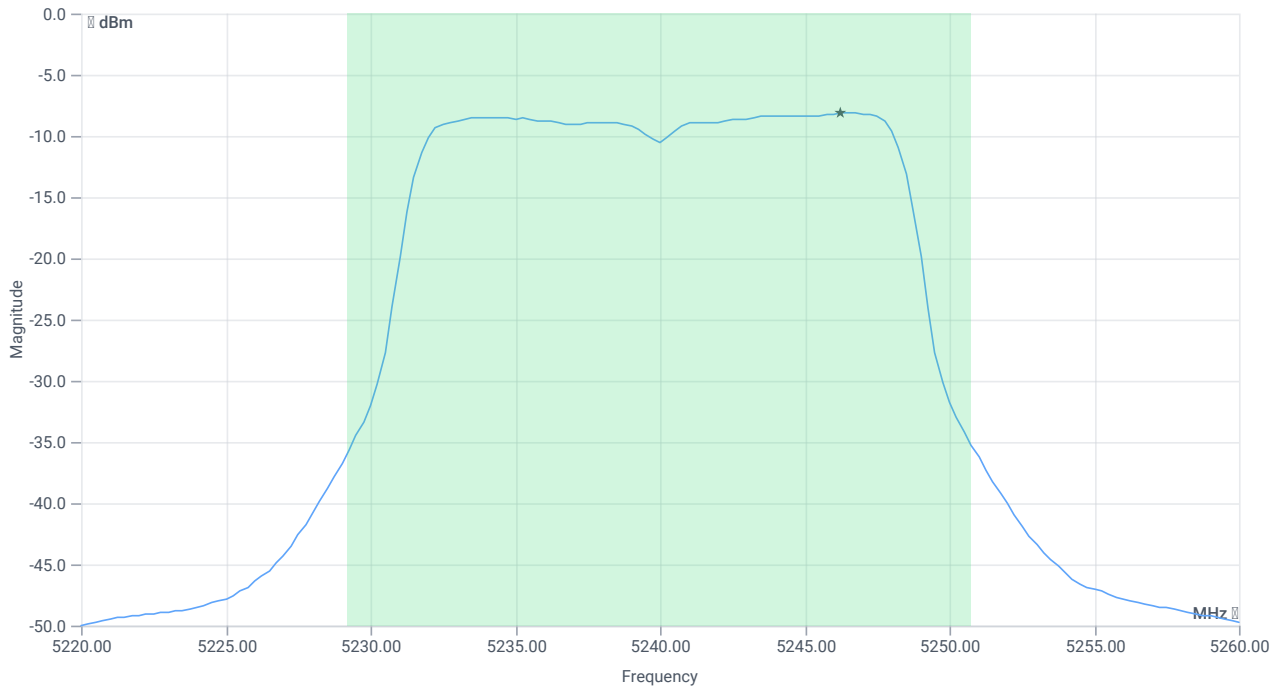

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.19	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.46	dBm	PASS
Limit: 11 dBm + 10 log 21.56					
Max output power DC corrected	--	24.34	6.46	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.1	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-4.83	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:30:47
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.57	dBm	INFO
Ref. frequency	--	--	5245.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 264					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

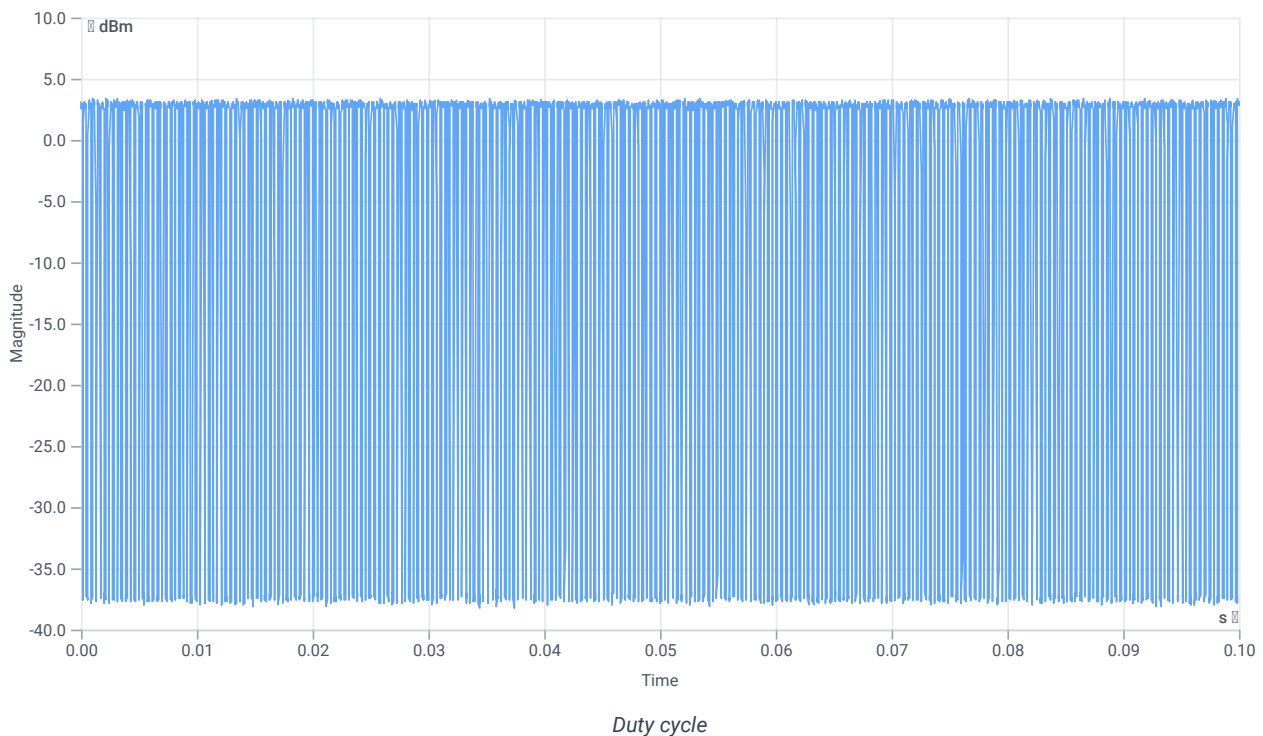

Evaluation bandwidth

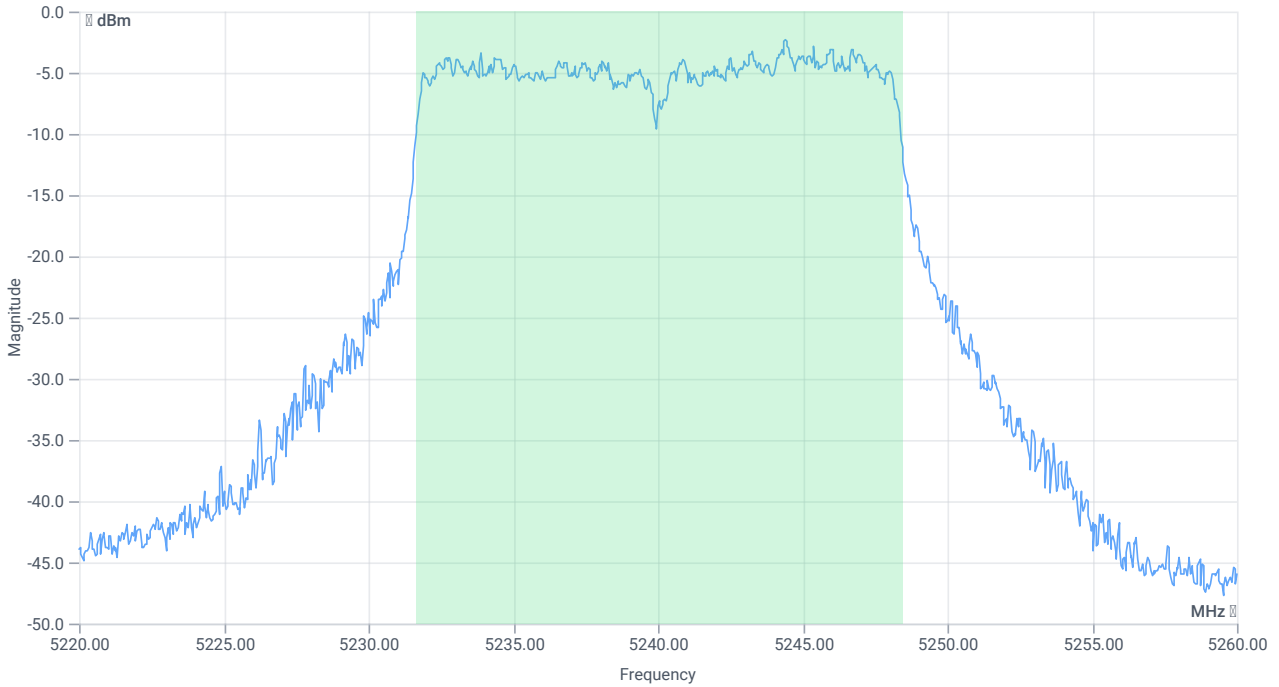

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.783	MHz	INFO
T1 99%	---	---	5231.6484	MHz	INFO
T2 99%	---	---	5248.4316	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.57 9.92 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

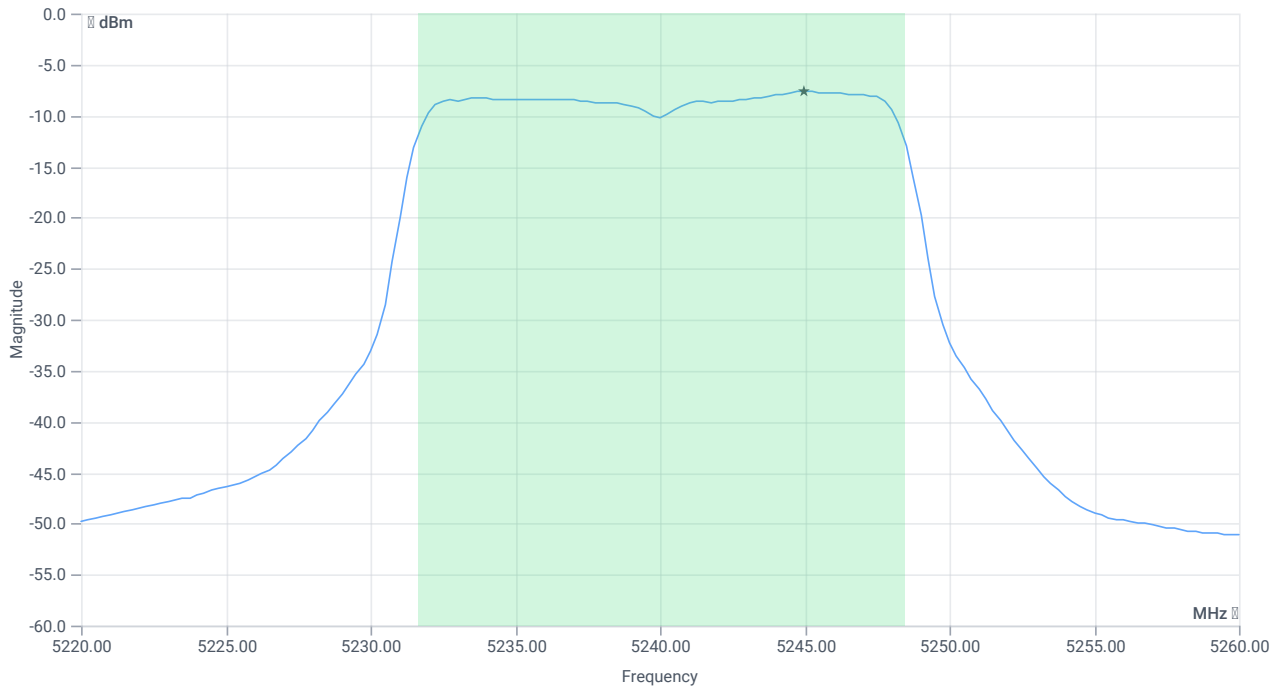

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.4	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.67	dBm	na
Limit: 11 dBm + 10 log 16.783					
Max output power DC corrected	--	23.25	6.67	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-7.63	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-4.36	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:29:19
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.89	dBm	INFO
Ref. frequency	--	--	5234.410	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 267					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

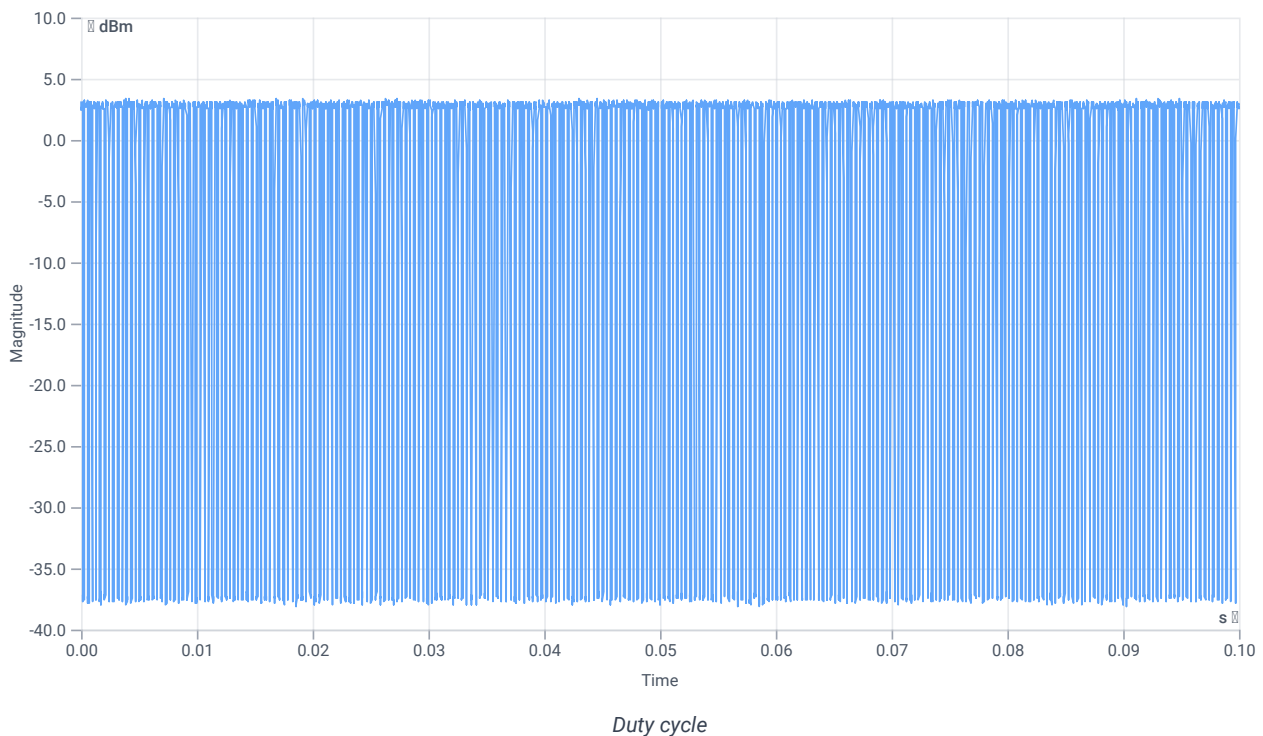

Evaluation bandwidth

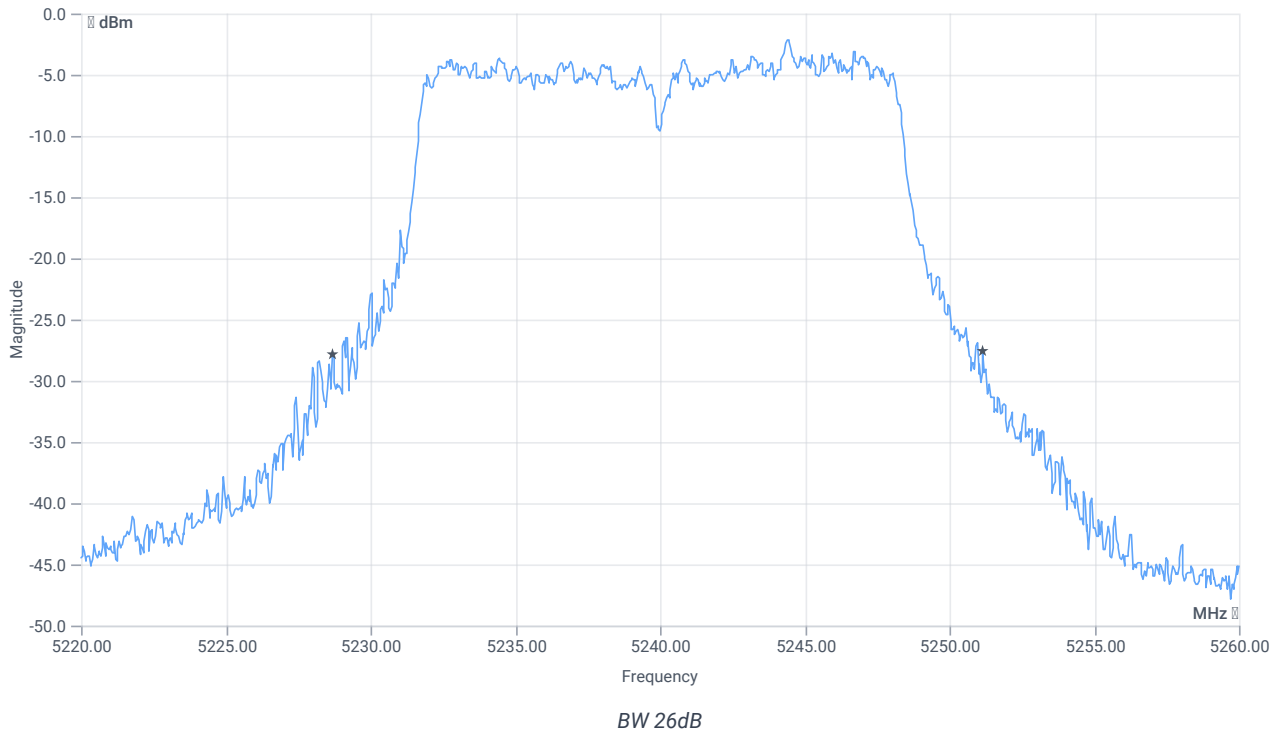


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.48	MHz	INFO
T1 26dB	---	---	5228.6800	MHz	INFO
T2 26dB	---	---	5251.1600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.89 9.92 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

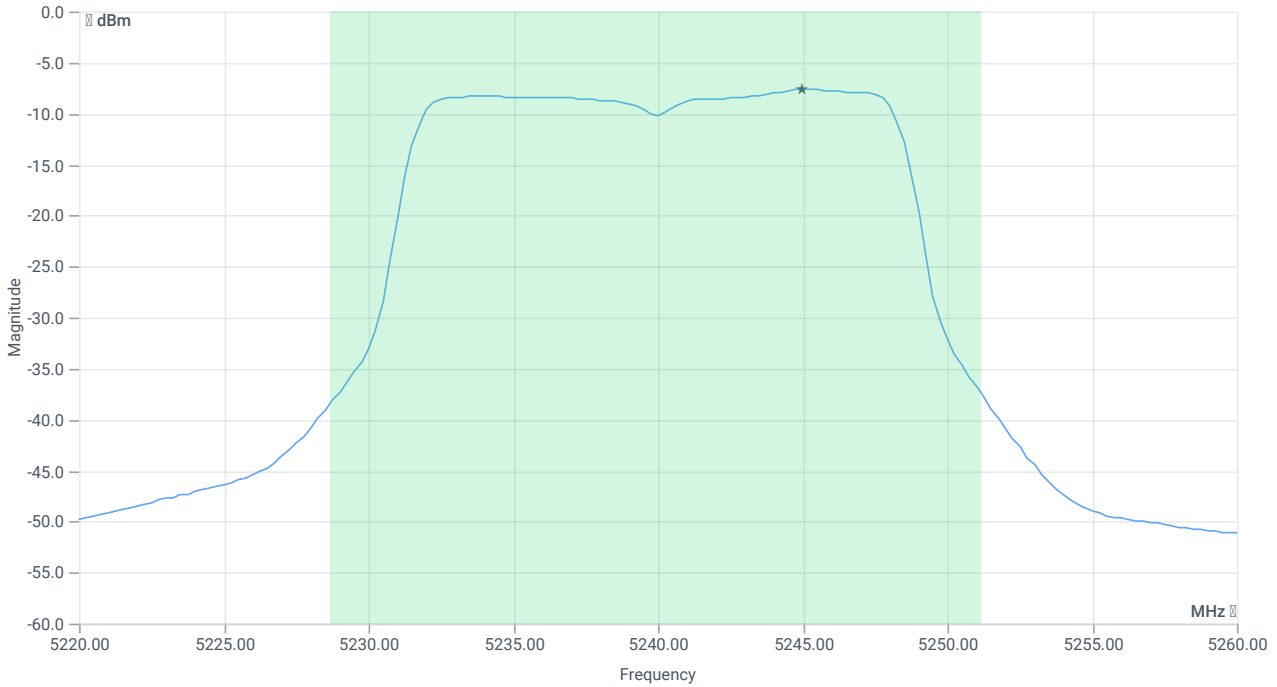

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.51	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.78	dBm	PASS
Limit: 11 dBm + 10 log 22.48					
Max output power DC corrected	--	24.52	6.78	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-7.59	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-4.32	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:25:23
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.16	dBm	INFO
Ref. frequency	--	--	5192.610	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 267					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

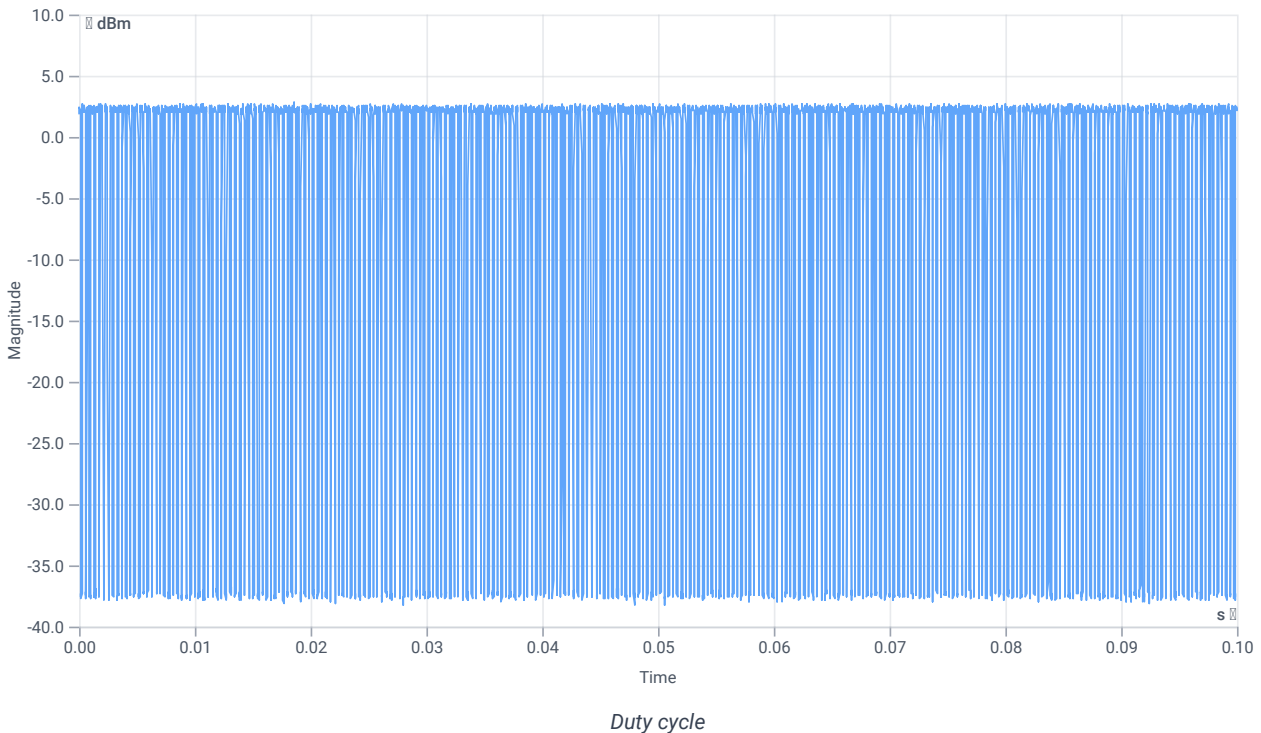

Evaluation bandwidth

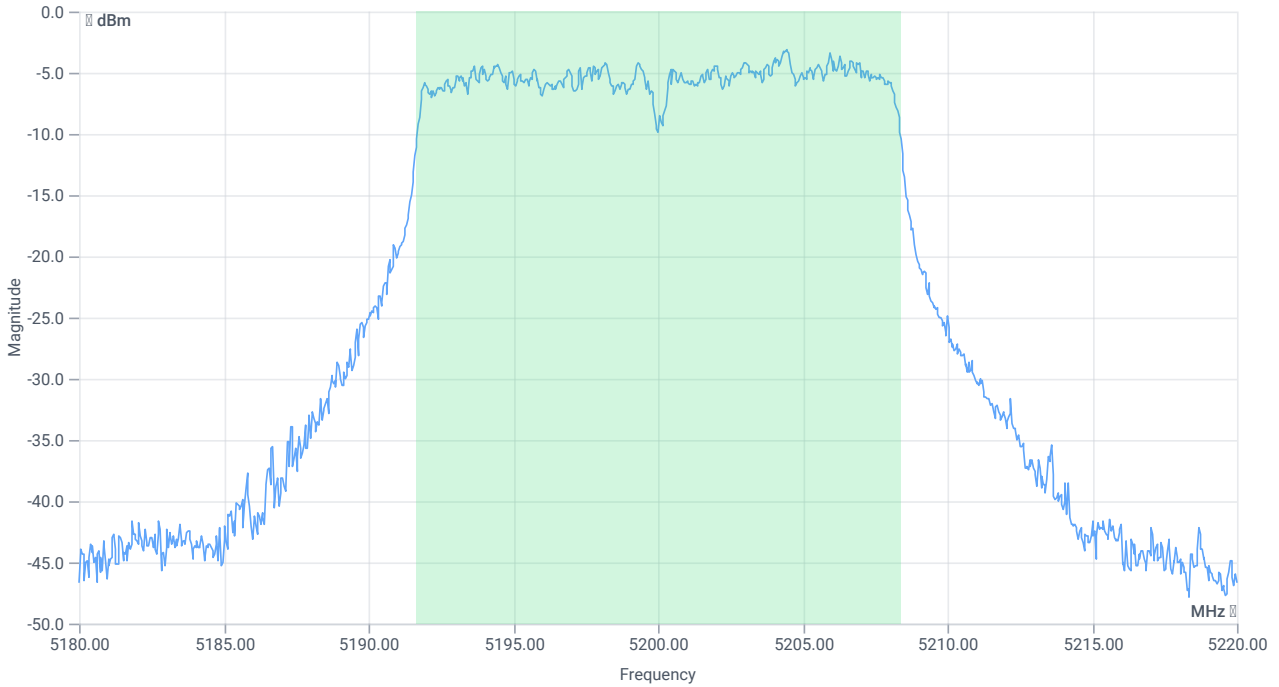

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.743	MHz	INFO
T1 99%	---	---	5191.6484	MHz	INFO
T2 99%	---	---	5208.3916	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.16 10.08 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

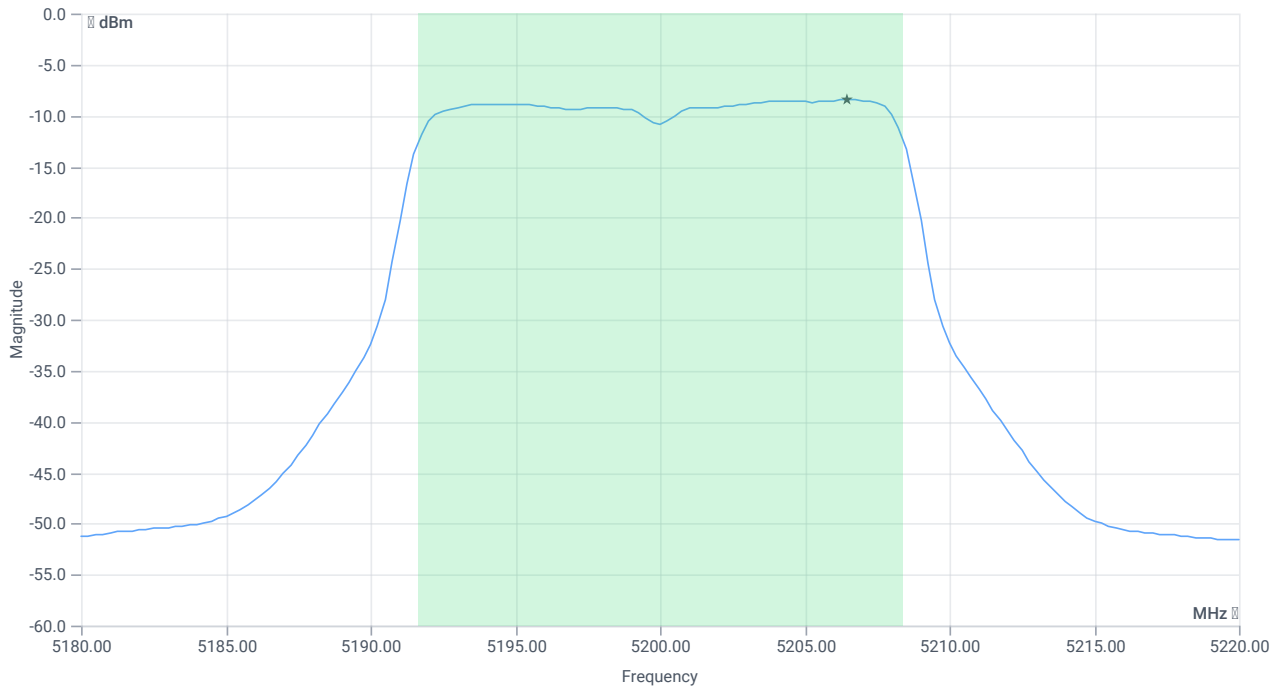

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.76	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.03	dBm	na
Limit: 11 dBm + 10 log 16.743					
Max output power DC corrected	--	23.24	6.03	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.42	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-5.15	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:23:52
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.36	dBm	INFO
Ref. frequency	--	--	5196.800	MHz	INFO

Evaluation max. duty cycle


DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 265					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

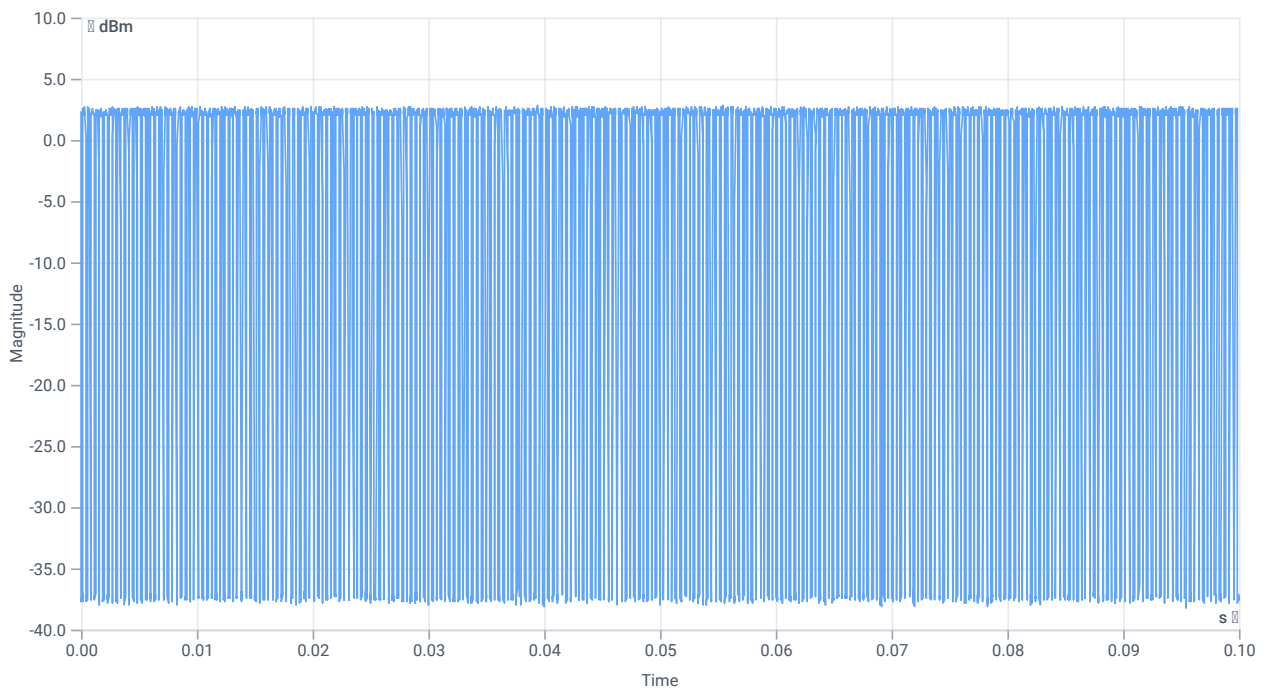

Duty cycle

Evaluation bandwidth

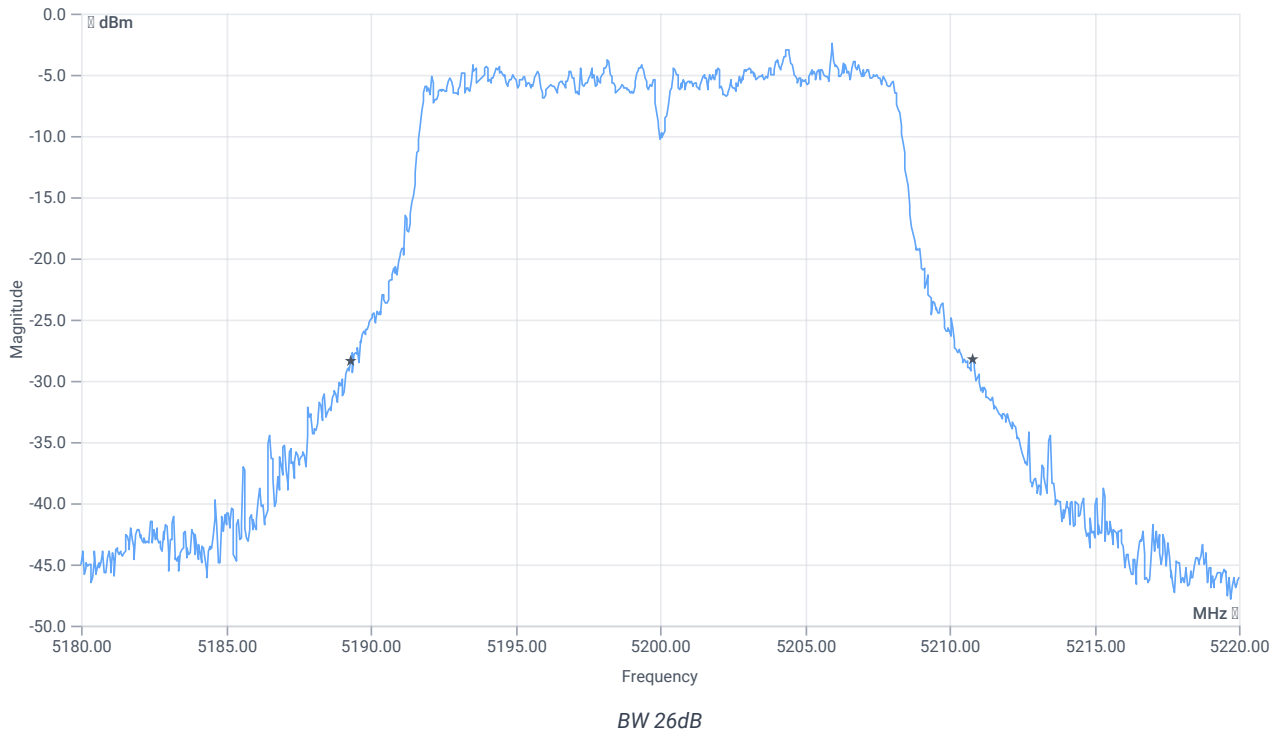


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.48	MHz	INFO
T1 26dB	---	---	5189.3200	MHz	INFO
T2 26dB	---	---	5210.8000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.36 10.08 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

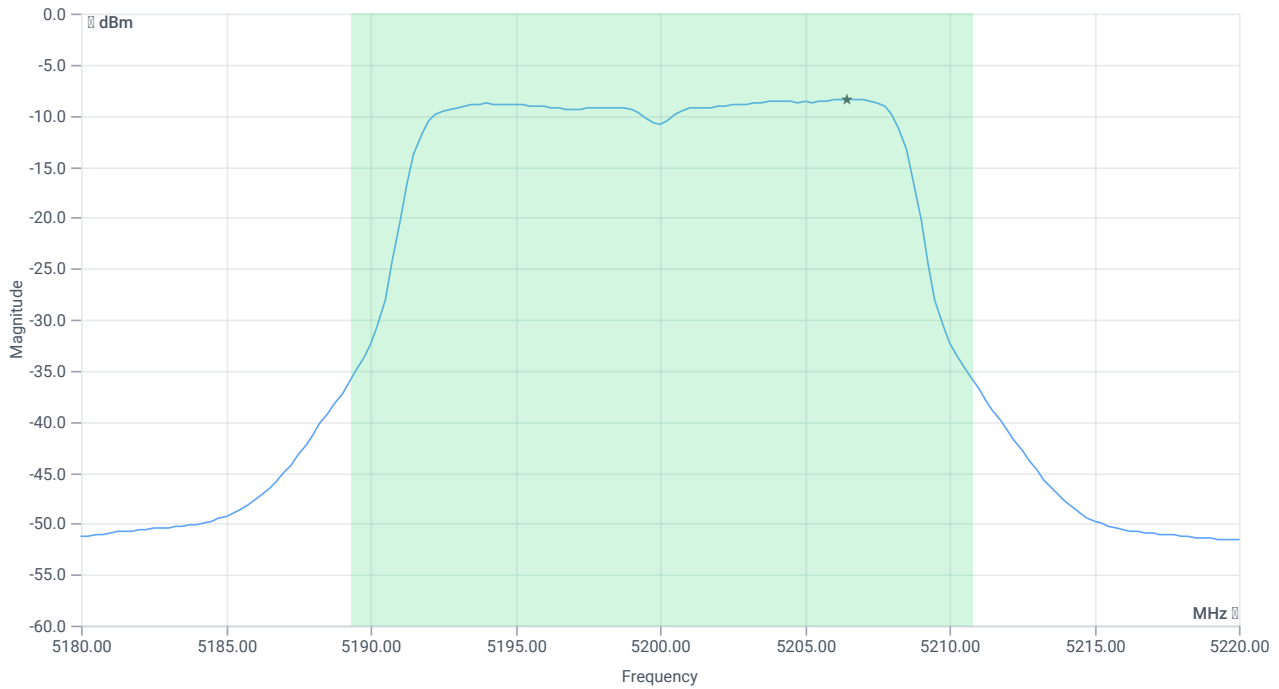

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.85	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.12	dBm	PASS
Limit: 11 dBm + 10 log 21.48					
Max output power DC corrected	--	24.32	6.12	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.4	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-5.13	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:21:16
Ambit temp [°C] humidity [rel%]	26.7 35
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.18	dBm	INFO
Ref. frequency	--	--	5204.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 268					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

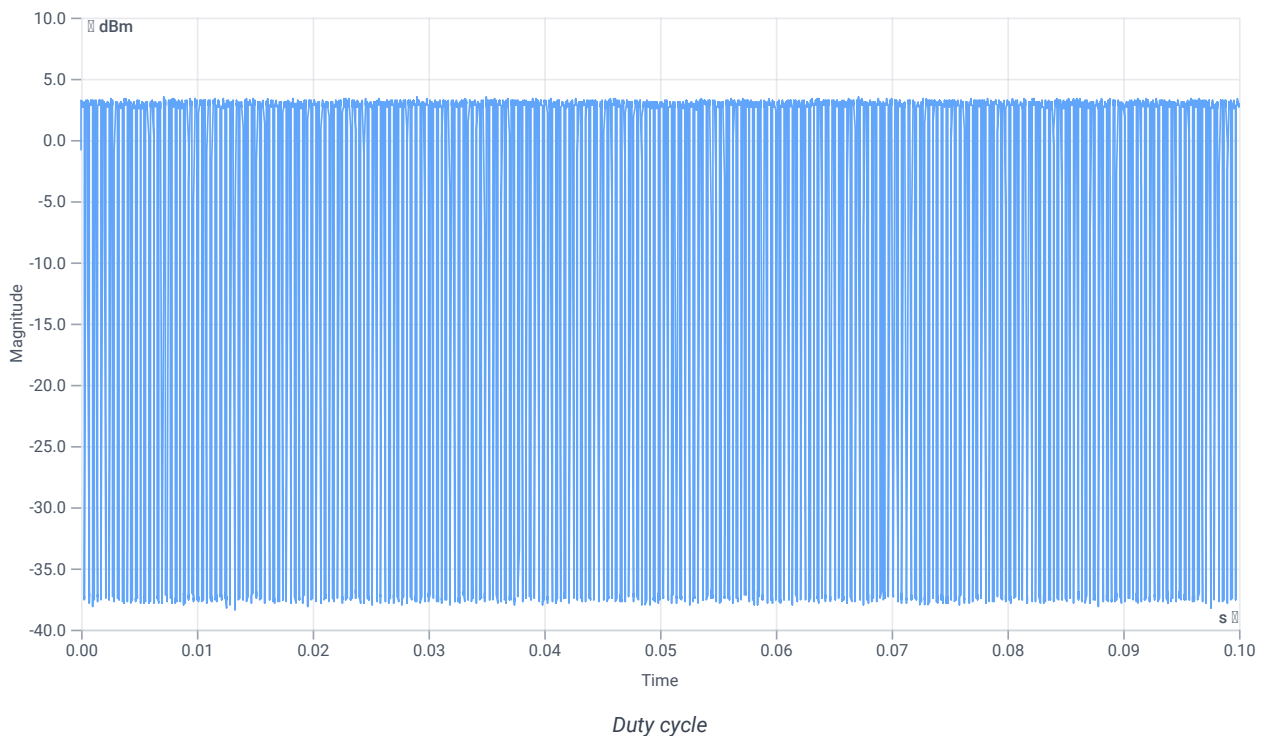

Evaluation bandwidth

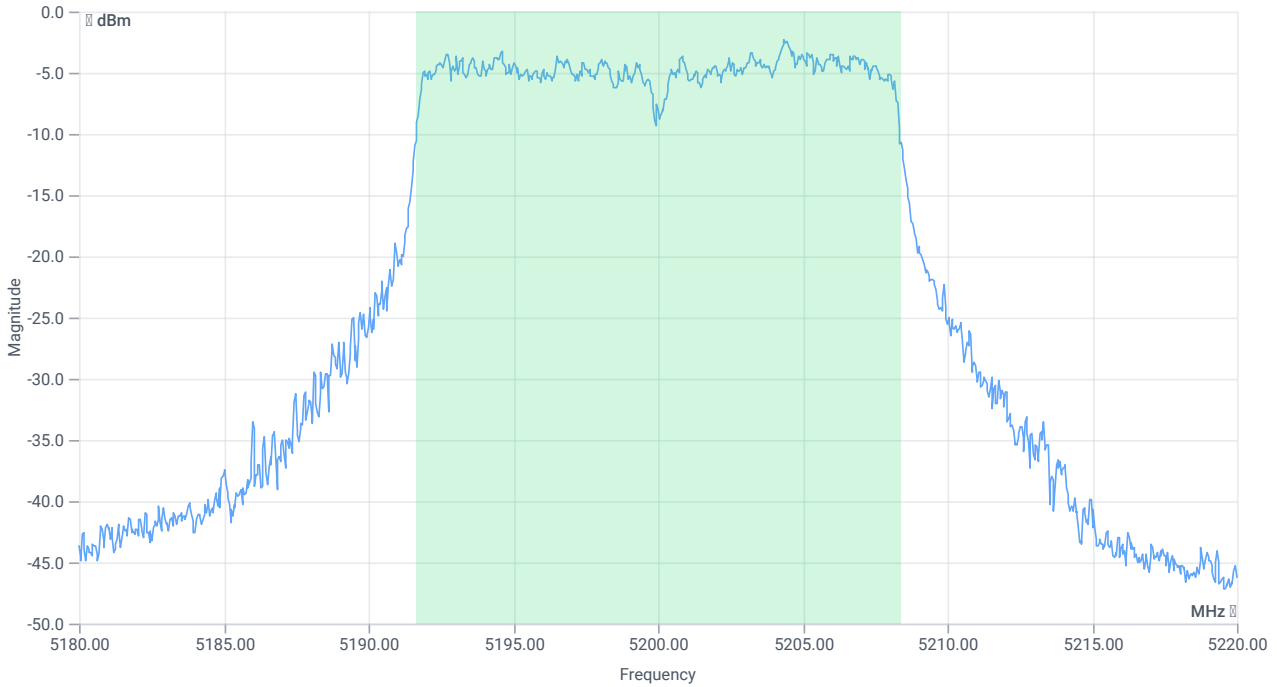

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.743	MHz	INFO
T1 99%	---	---	5191.6484	MHz	INFO
T2 99%	---	---	5208.3916	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.18 10.05 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

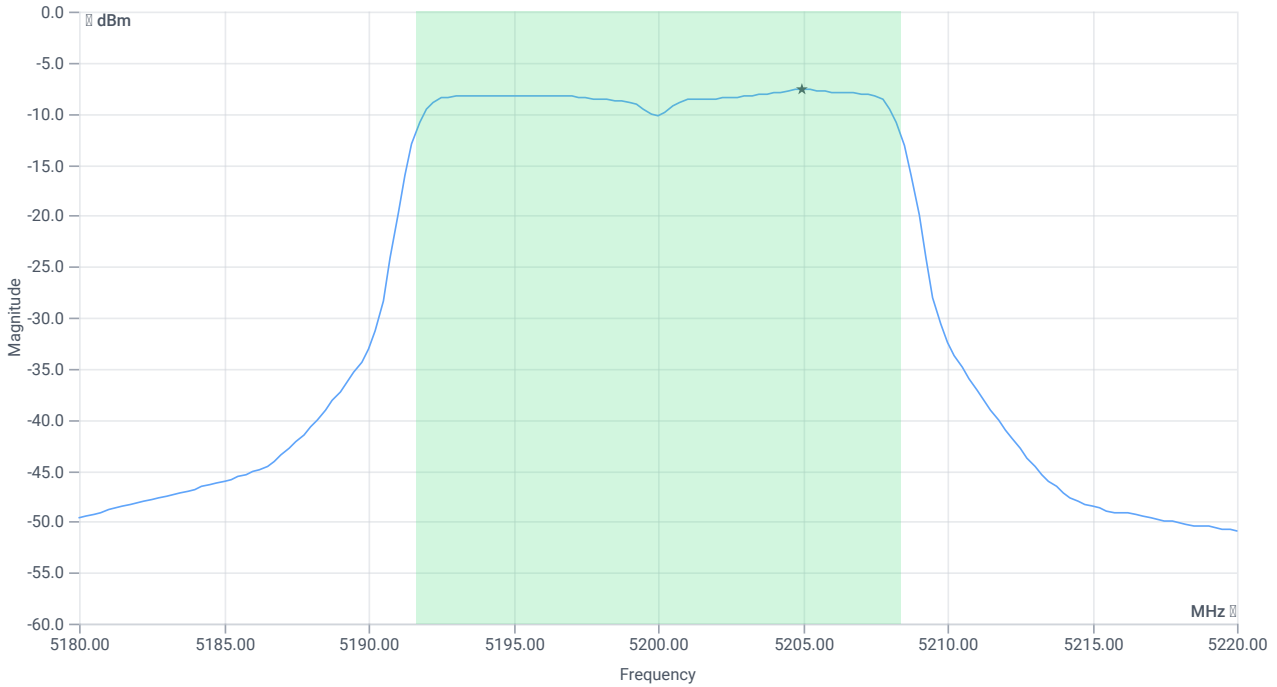

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.48	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.75	dBm	na
Limit: 11 dBm + 10 log 16.743					
Max output power DC corrected	--	23.24	6.75	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-7.61	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-4.34	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:19:45
Ambit temp [°C] humidity [rel%]	26.7 35
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.34	dBm	INFO
Ref. frequency	--	--	5196.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 267					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

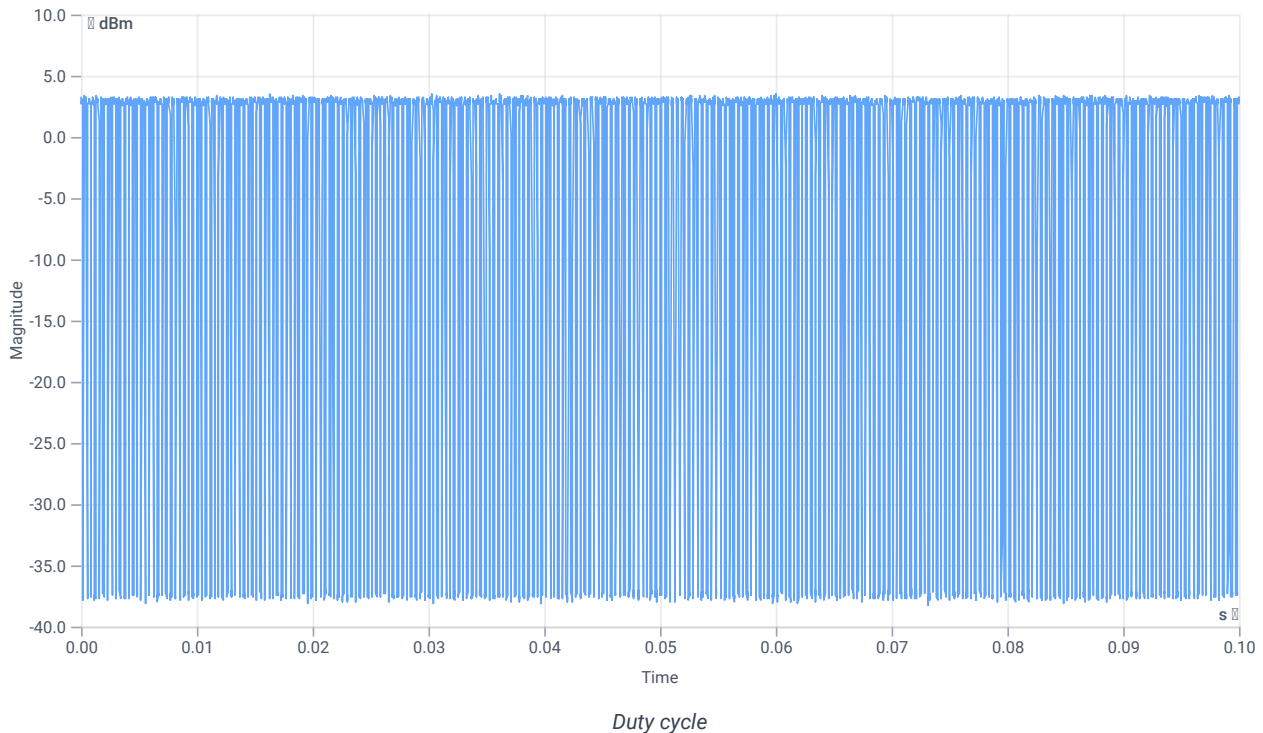

Evaluation bandwidth

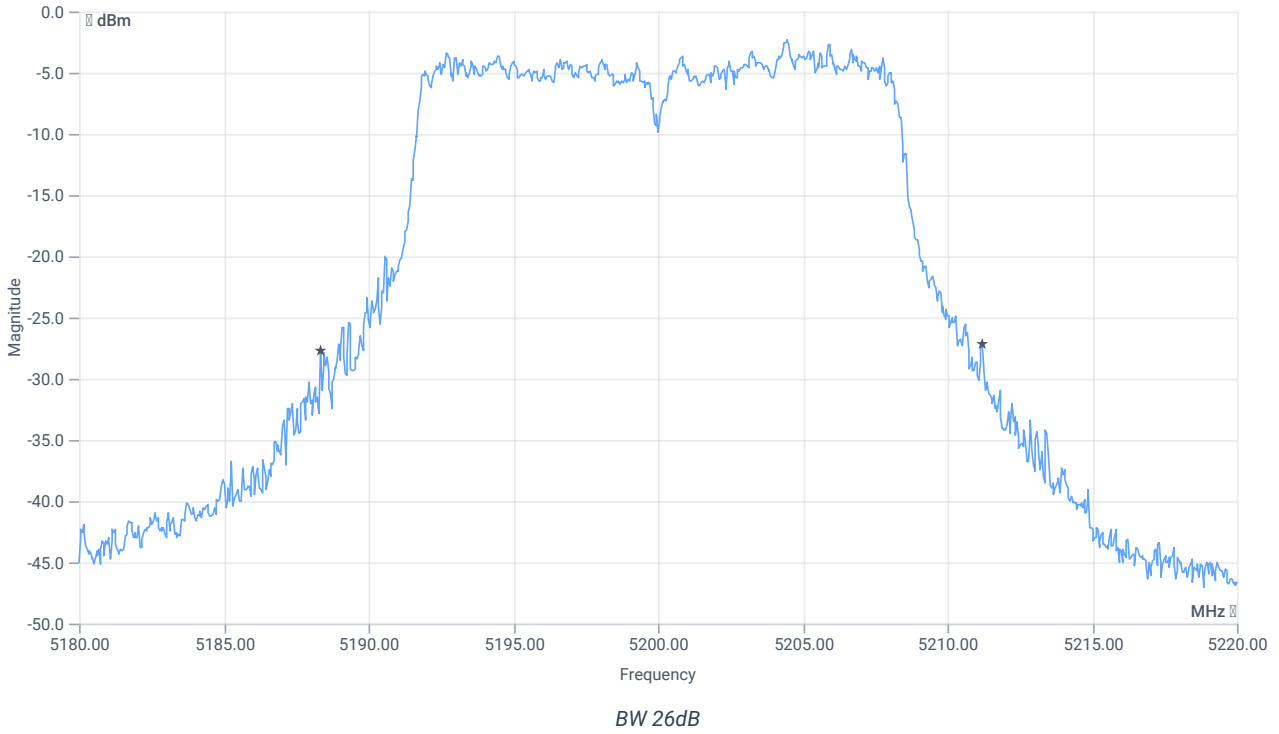


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.88	MHz	INFO
T1 26dB	---	---	5188.3200	MHz	INFO
T2 26dB	---	---	5211.2000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.34 10.05 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

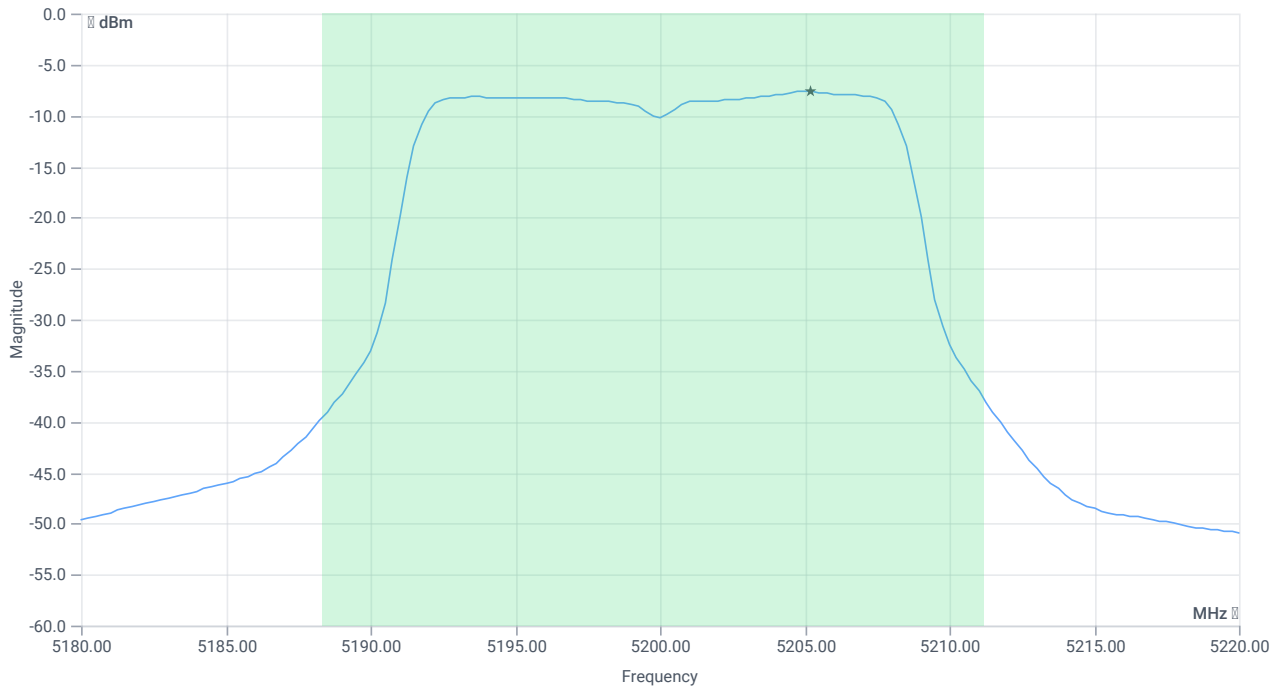

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.54	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.81	dBm	PASS
Limit: 11 dBm + 10 log 22.88					
Max output power DC corrected	--	24.59	6.81	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-7.64	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-4.37	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:16:04
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.22	dBm	INFO
Ref. frequency	--	--	5176.000	MHz	INFO

Evaluation max. duty cycle


DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 267					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

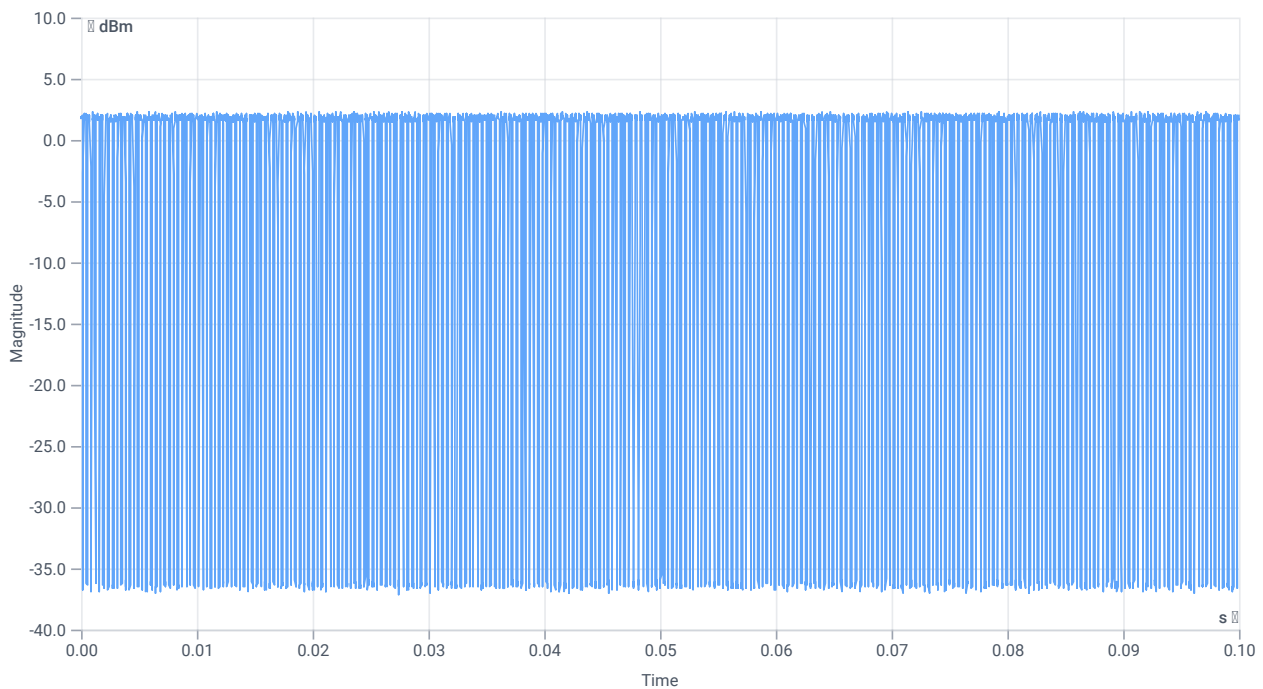

Duty cycle

Evaluation bandwidth

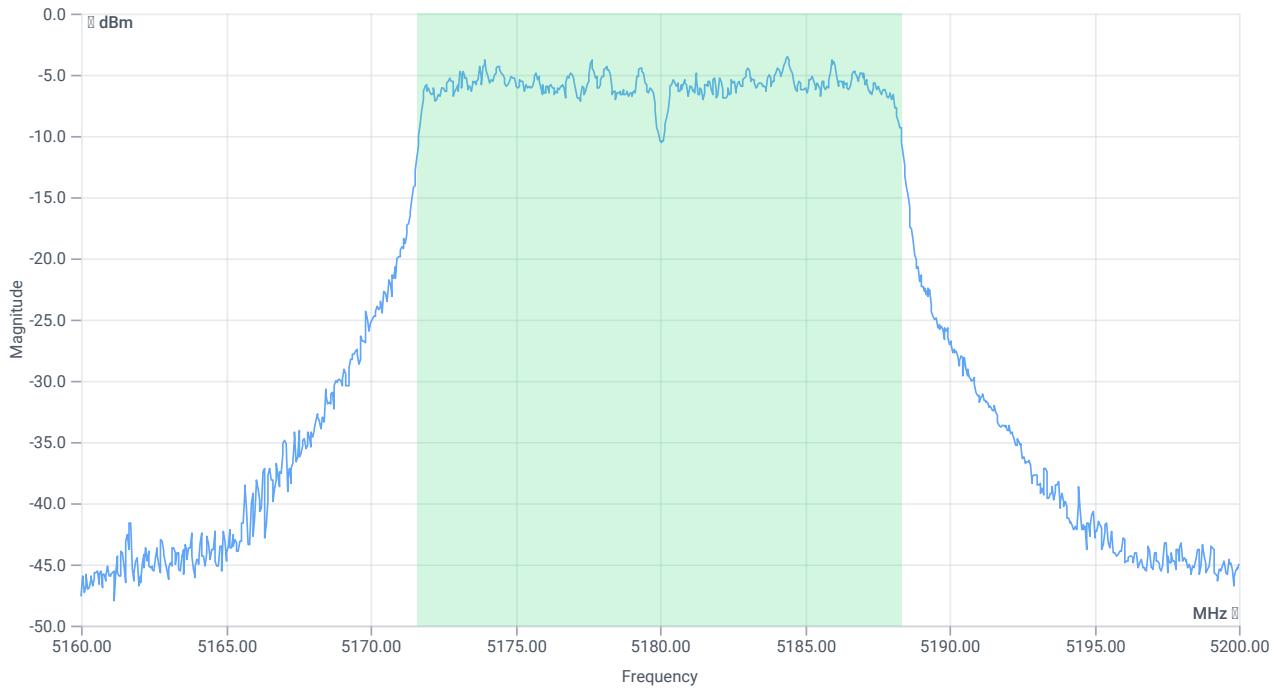

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.743	MHz	INFO
T1 99%	--	--	5171.6084	MHz	INFO
T2 99%	--	--	5188.3516	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.22 10.01 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

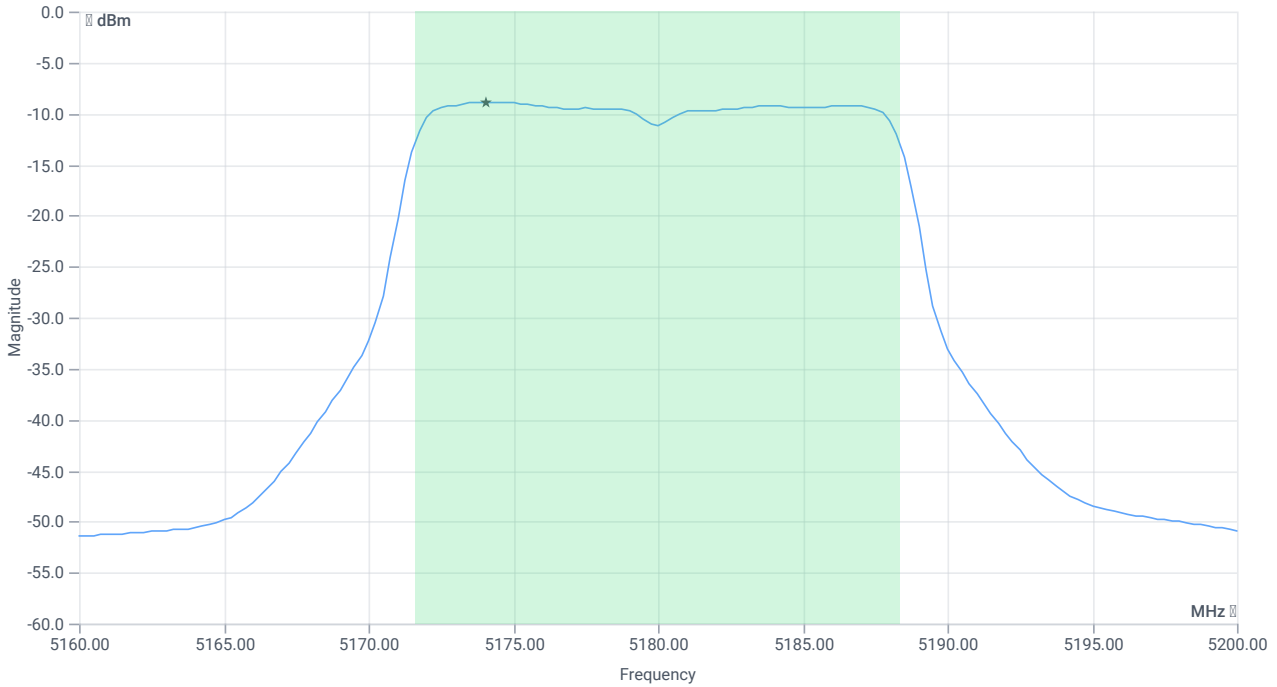

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.38	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.65	dBm	na
Limit: 11 dBm + 10 log 16.743					
Max output power DC corrected	--	23.24	5.65	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.88	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-5.61	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:14:32
Ambit temp [°C] humidity [rel%]	26.7 37
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.50	dBm	INFO
Ref. frequency	--	--	5174.610	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 267					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

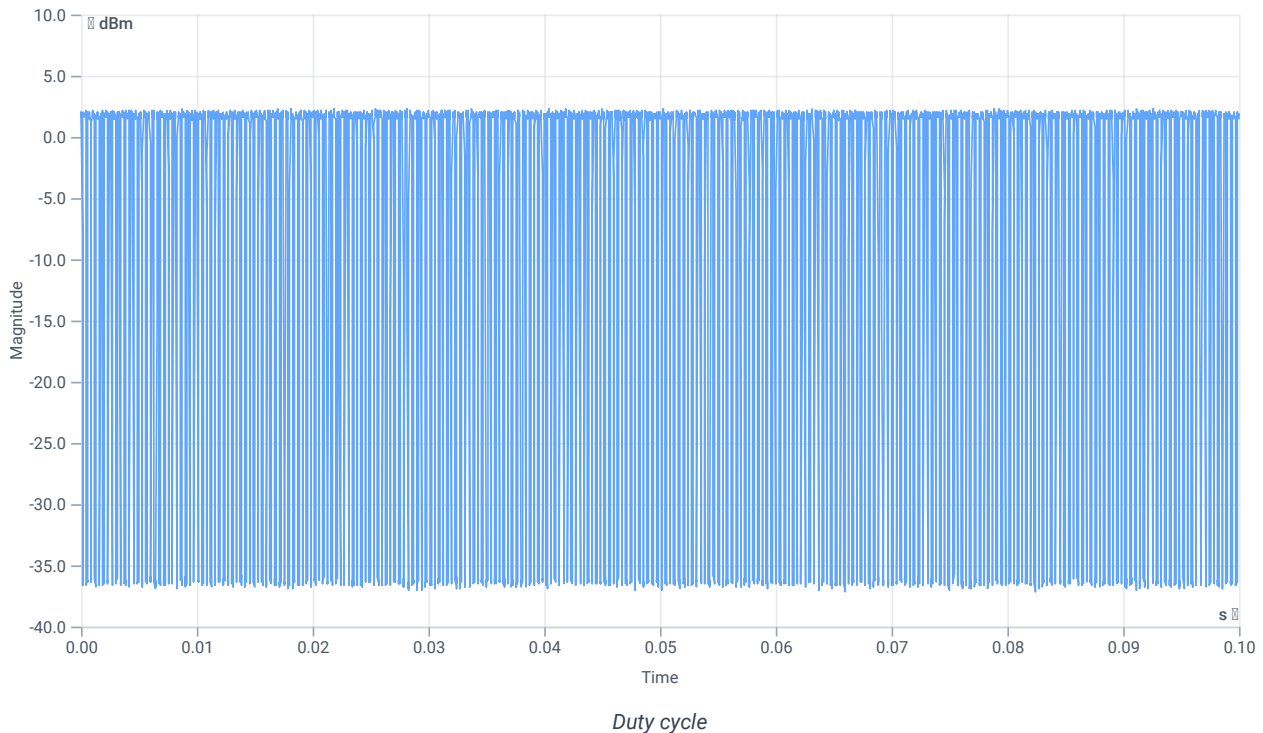

Evaluation bandwidth

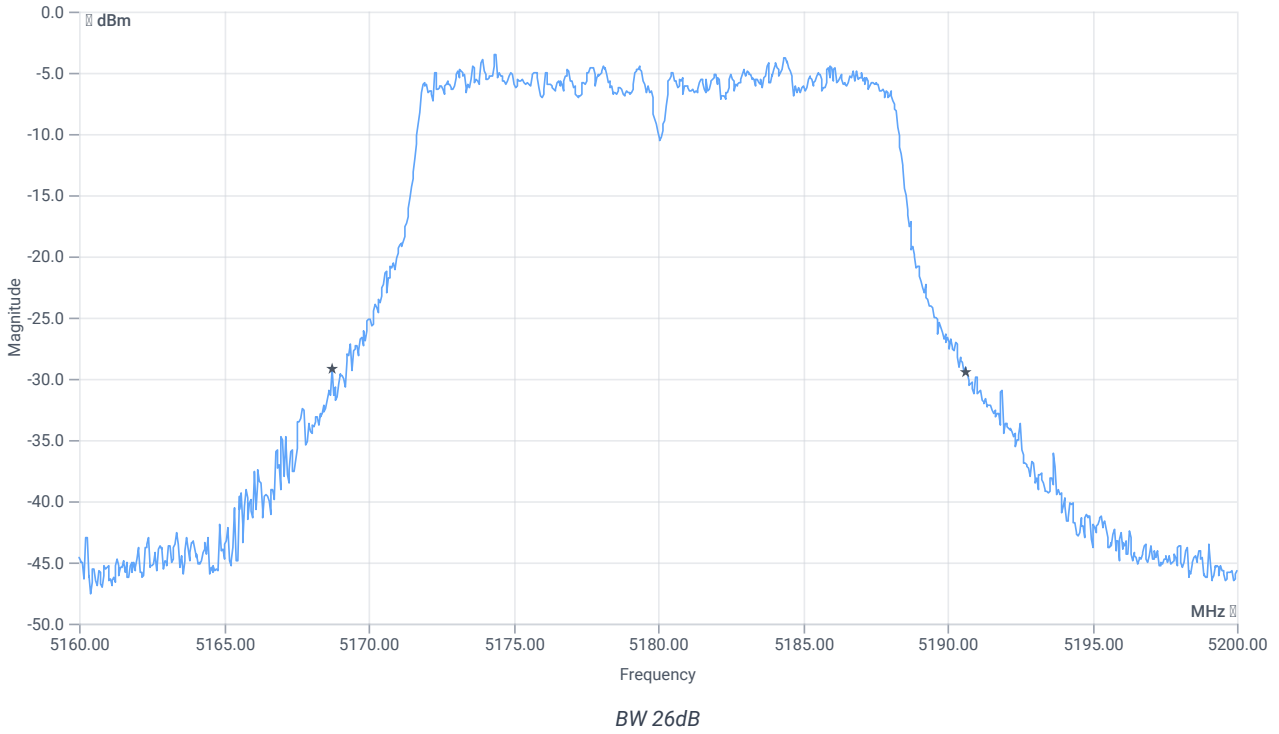


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	21.92	MHz	INFO
T1 26dB	---	---	5168.7200	MHz	INFO
T2 26dB	---	---	5190.6400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.50 10.01 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

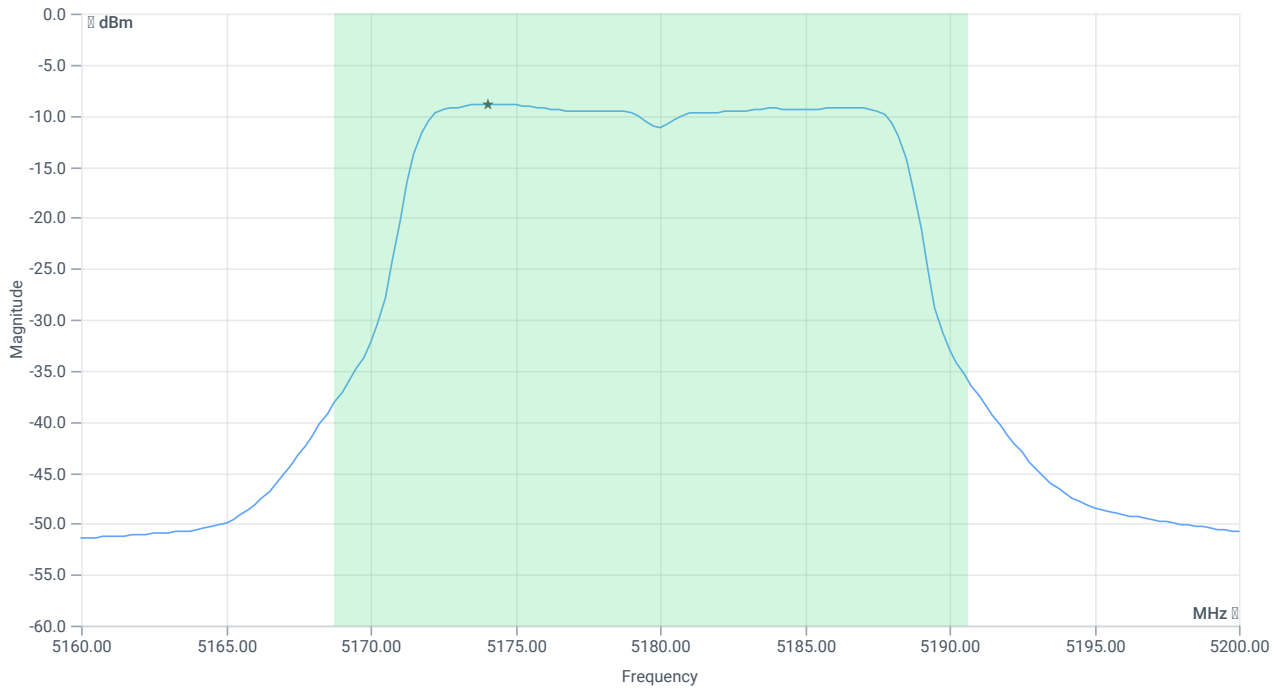

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.45	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.72	dBm	PASS
Limit: 11 dBm + 10 log 21.92					
Max output power DC corrected	--	24.41	5.72	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.9	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-5.63	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:11:51
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.54	dBm	INFO
Ref. frequency	--	--	5187.190	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 266					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

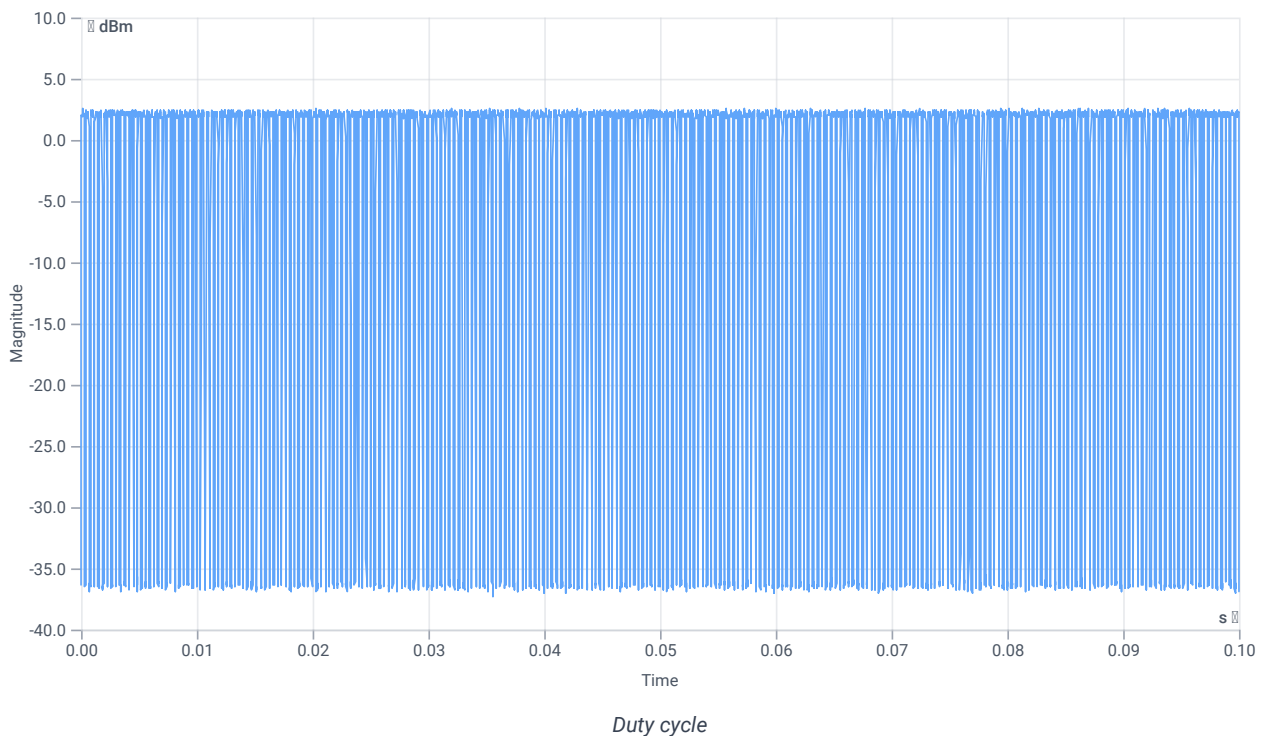

Evaluation bandwidth

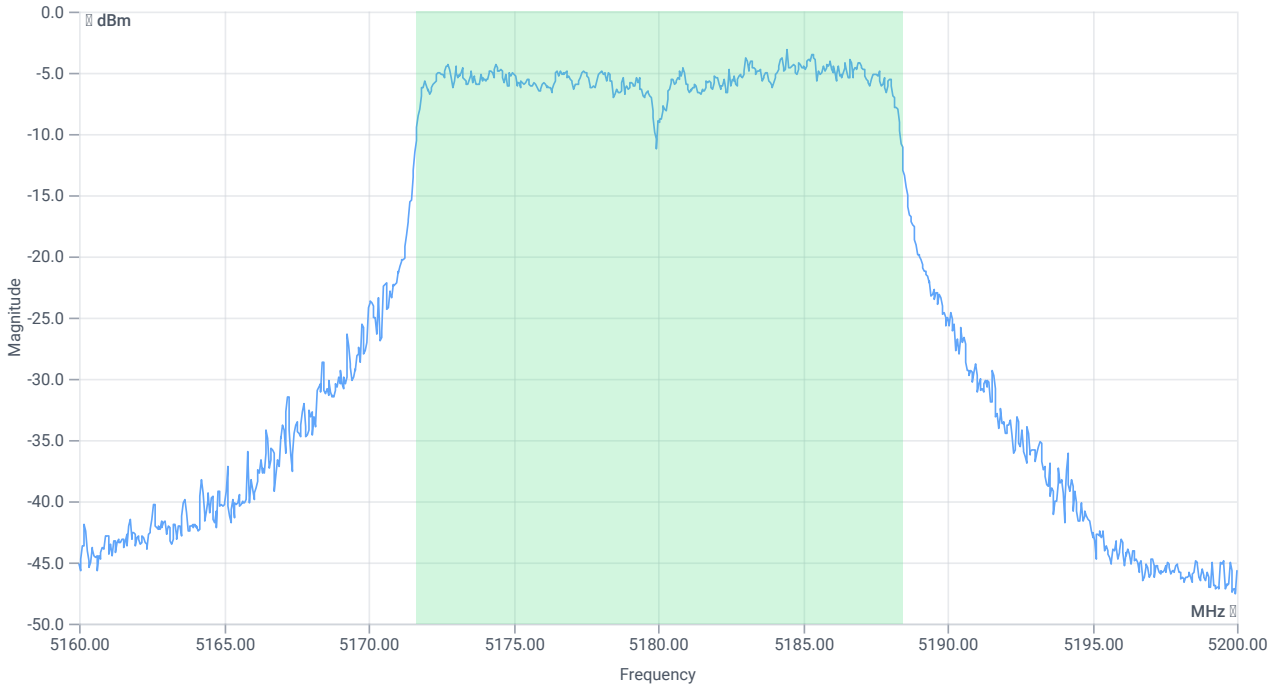

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.783	MHz	INFO
T1 99%	--	--	5171.6484	MHz	INFO
T2 99%	--	--	5188.4316	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.54 9.99 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

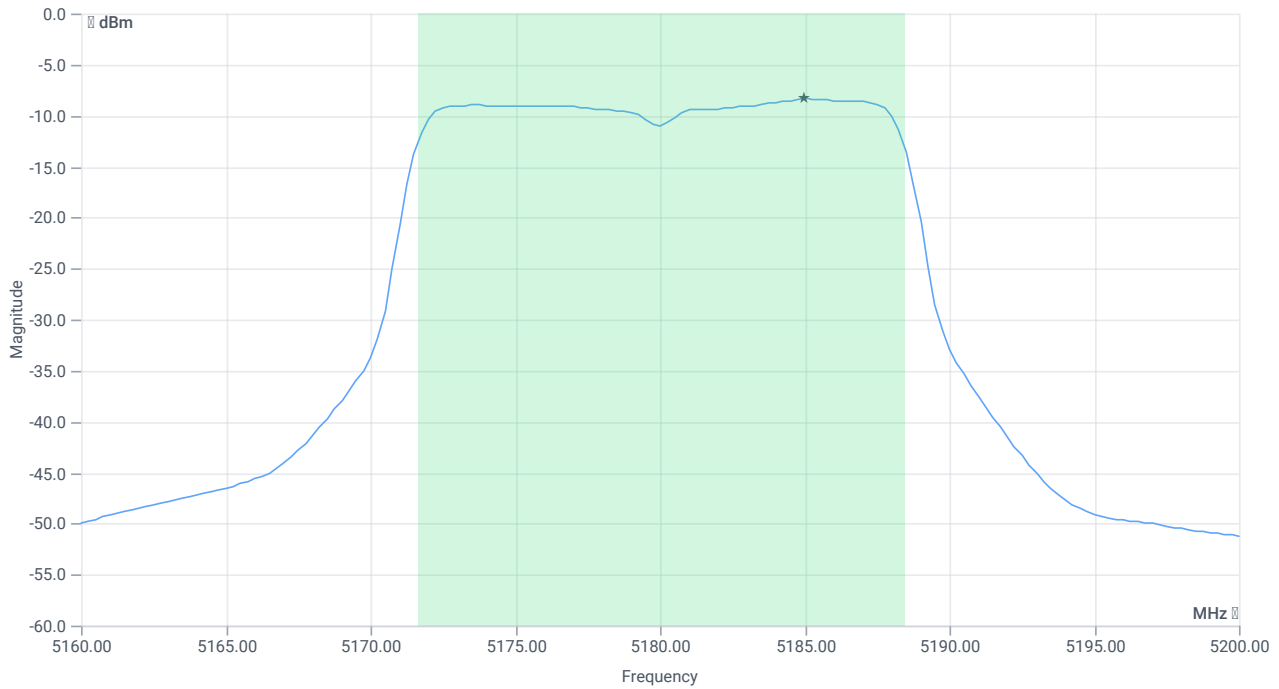

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.72	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.99	dBm	na
Limit: 11 dBm + 10 log 16.783					
Max output power DC corrected	--	23.25	5.99	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.34	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-5.07	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx n-HT20 mode U-NII-1

References

TC start	26.01.2024 16:10:19
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx n-HT20 mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.89	dBm	INFO
Ref. frequency	--	--	5184.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 268					
Duty cycle (burst Ratio) max	--	--	0.643	--	INFO
Duty cycle max	--	--	1.918	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.471	--	INFO
Duty cycle min	--	--	3.27	dB	INFO
Max TX burst length	--	--	0.225	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

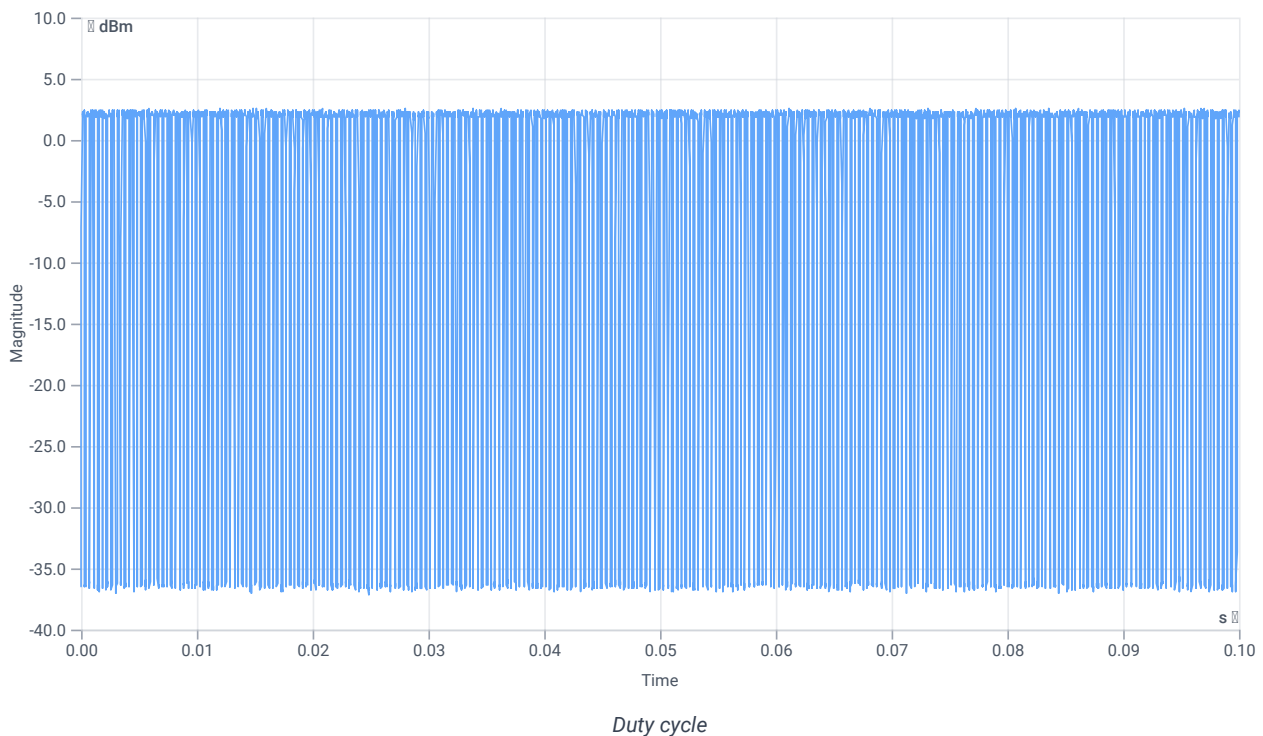

Evaluation bandwidth

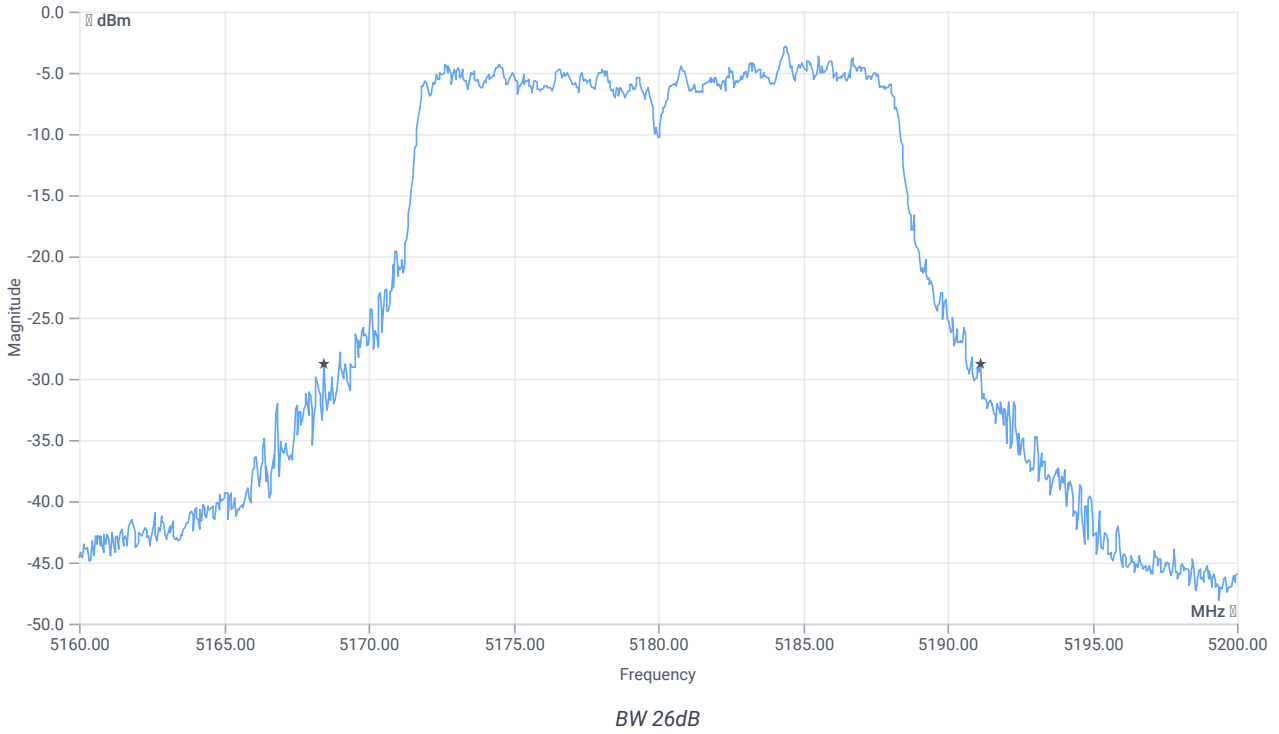


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	22.72	MHz	INFO
T1 26dB	---	---	5168.4400	MHz	INFO
T2 26dB	---	---	5191.1600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.89 9.99 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

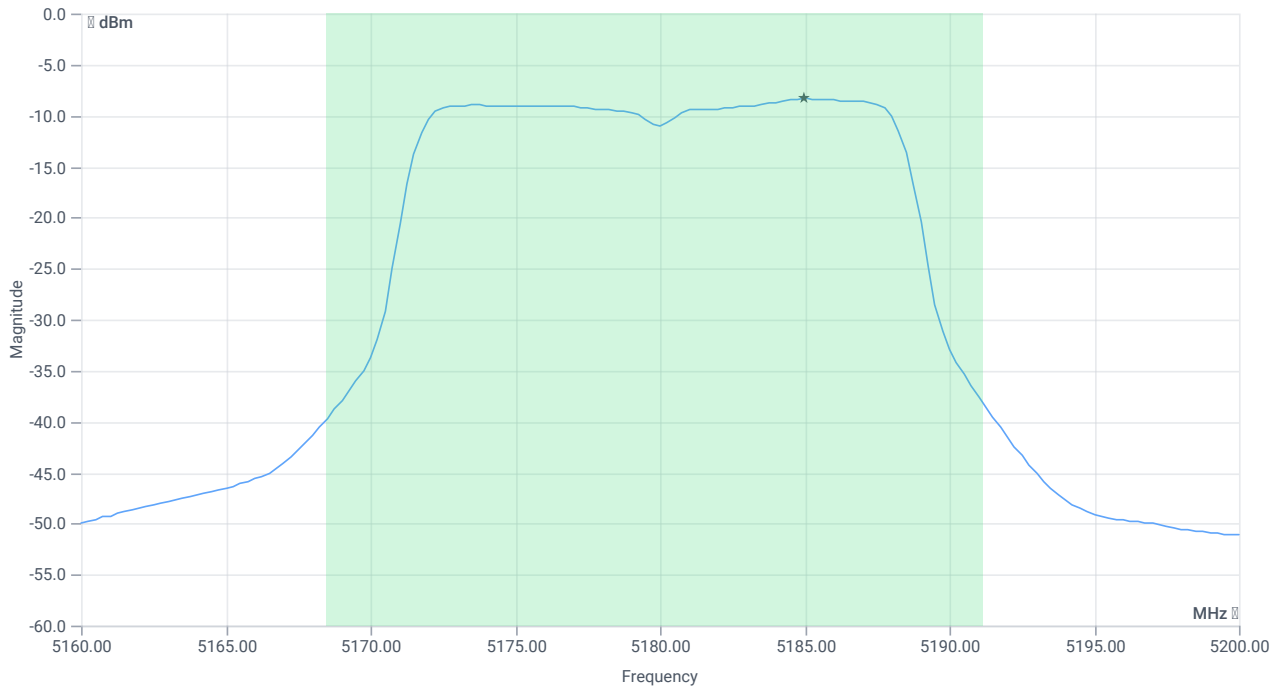

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	2.79	dBm	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.06	dBm	PASS
Limit: 11 dBm + 10 log 22.72					
Max output power DC corrected	--	24.56	6.06	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.35	dBm/1MHz	INFO
Duty cycle correction	--	--	3.27	dB	INFO
Power spectral density DC corrected	--	11	-5.08	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 15:53:08
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.52	dBm	INFO
Ref. frequency	--	--	5182.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.91	--	INFO
Duty cycle min	--	--	0.41	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.2	ms	INFO

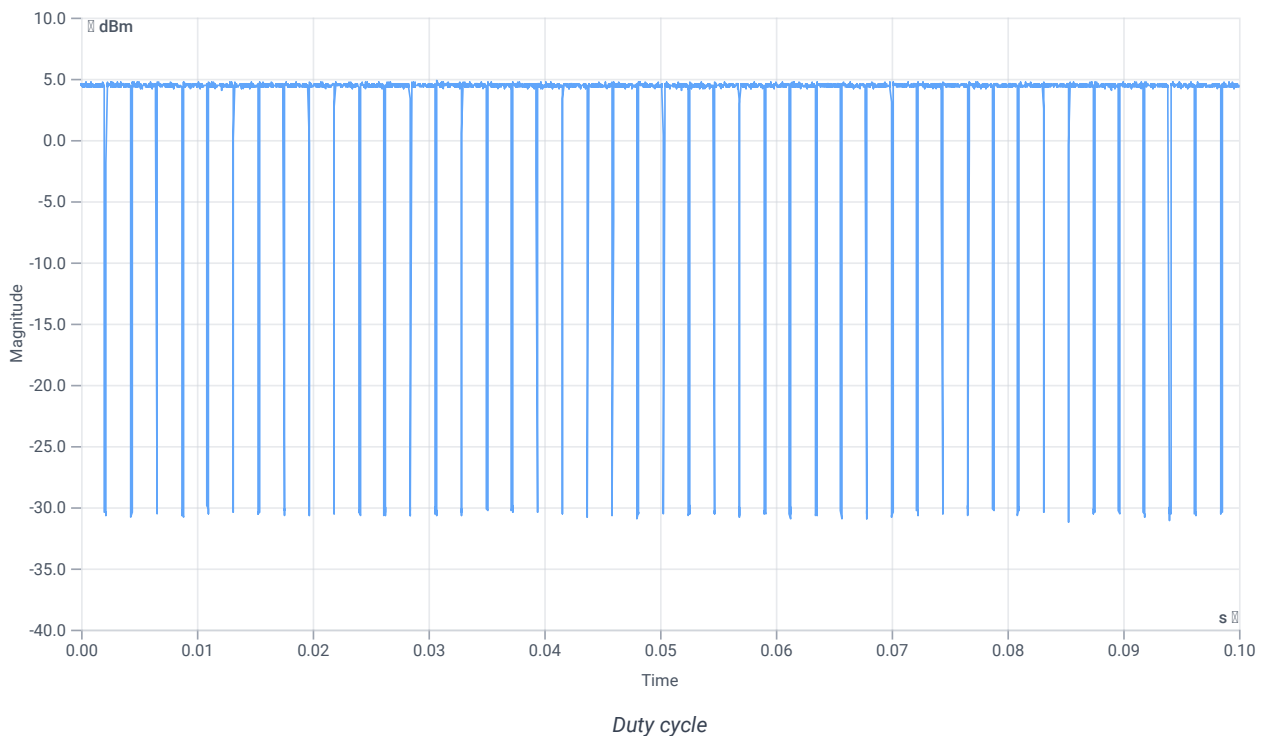

Evaluation bandwidth

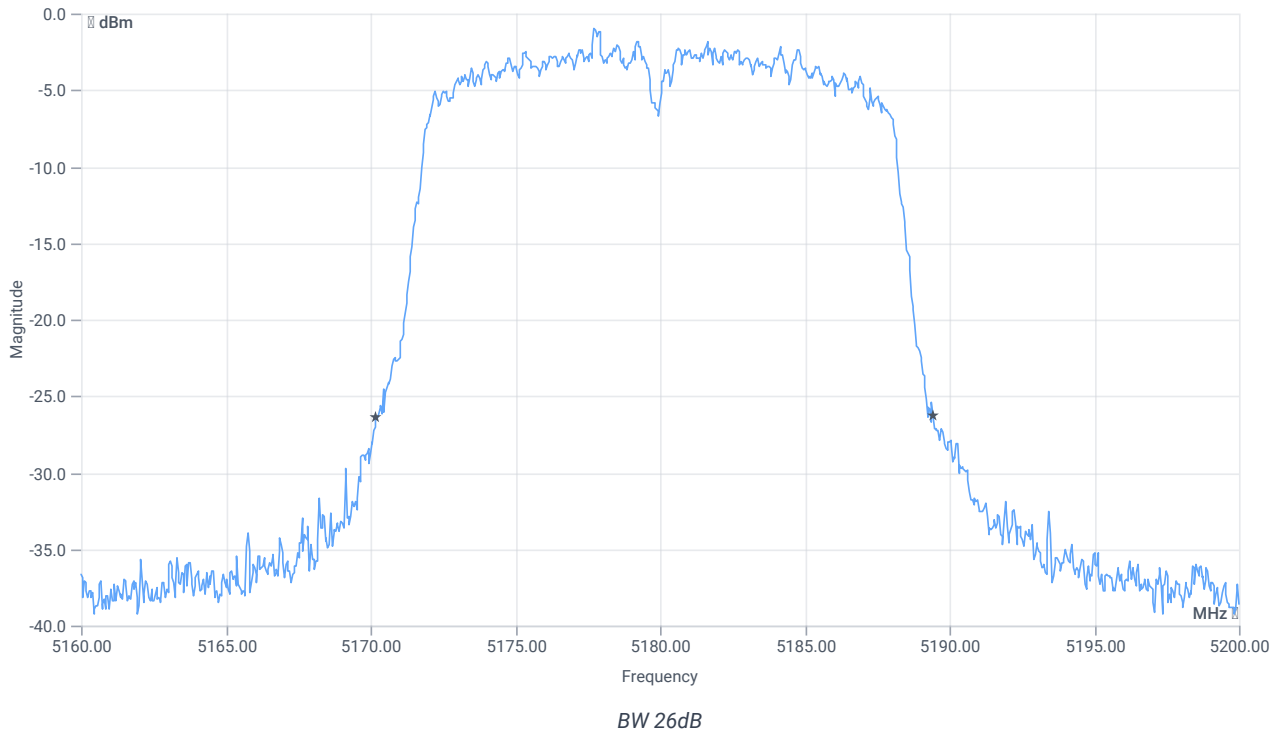


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.24	MHz	INFO
T1 26dB	---	---	5170.2000	MHz	INFO
T2 26dB	---	---	5189.4400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.52 10.01 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

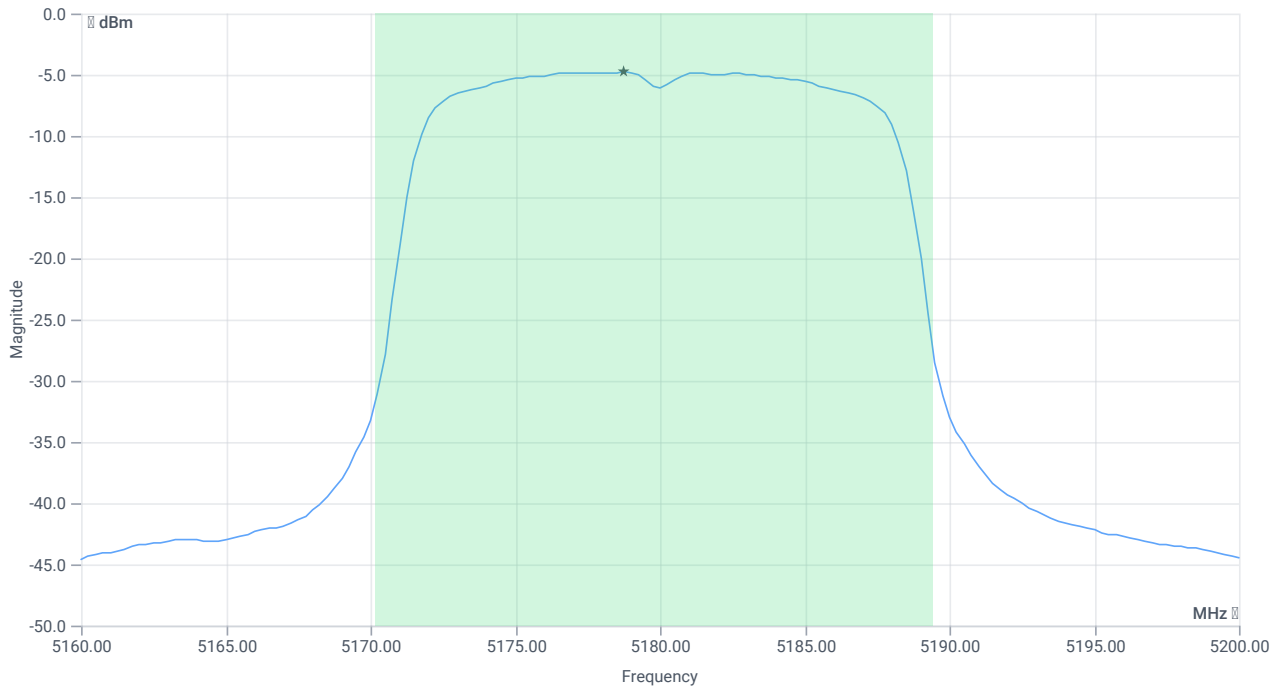

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.32	dBm	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.73	dBm	PASS
Limit: 11 dBm + 10 log 19.24					
Max output power DC corrected	--	23.84	6.73	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.79	dBm/1MHz	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Power spectral density DC corrected	--	11	-4.38	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:47:19
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.34	dBm	INFO
Ref. frequency	--	--	5826.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.863	--	INFO
Duty cycle min	--	--	0.64	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.325	ms	INFO

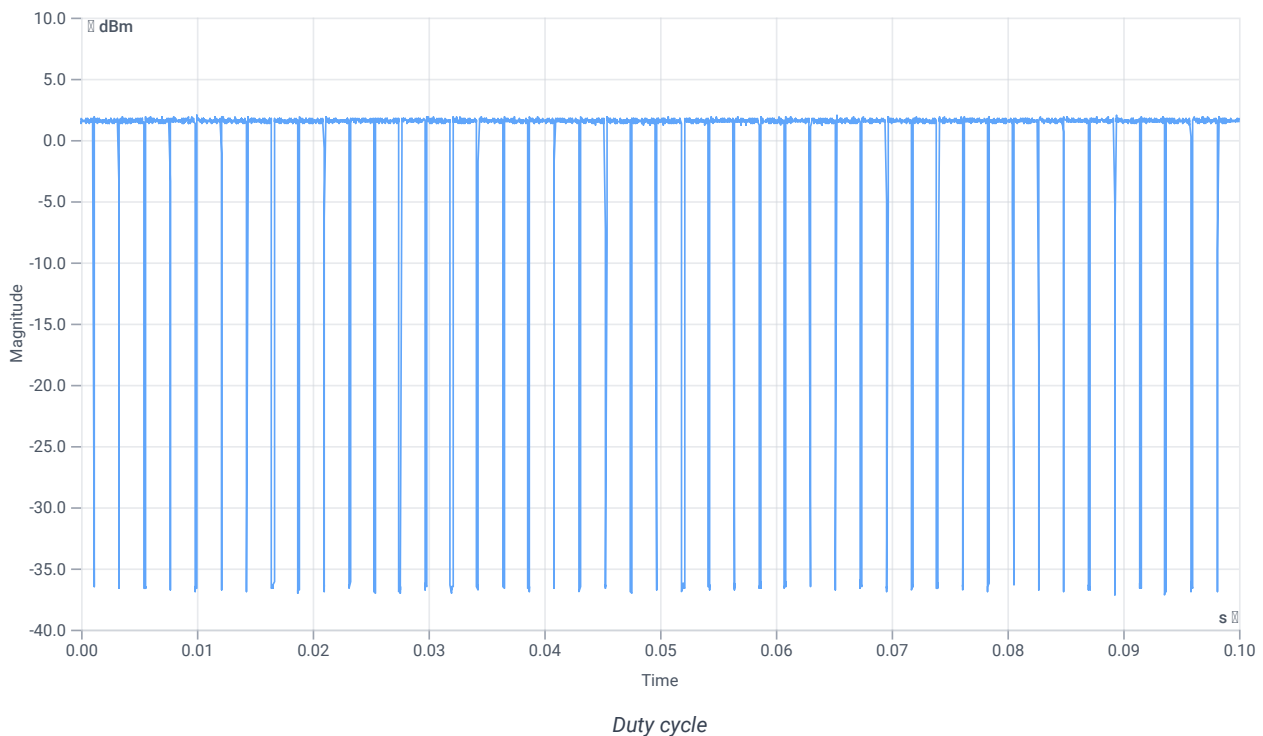

Evaluation bandwidth

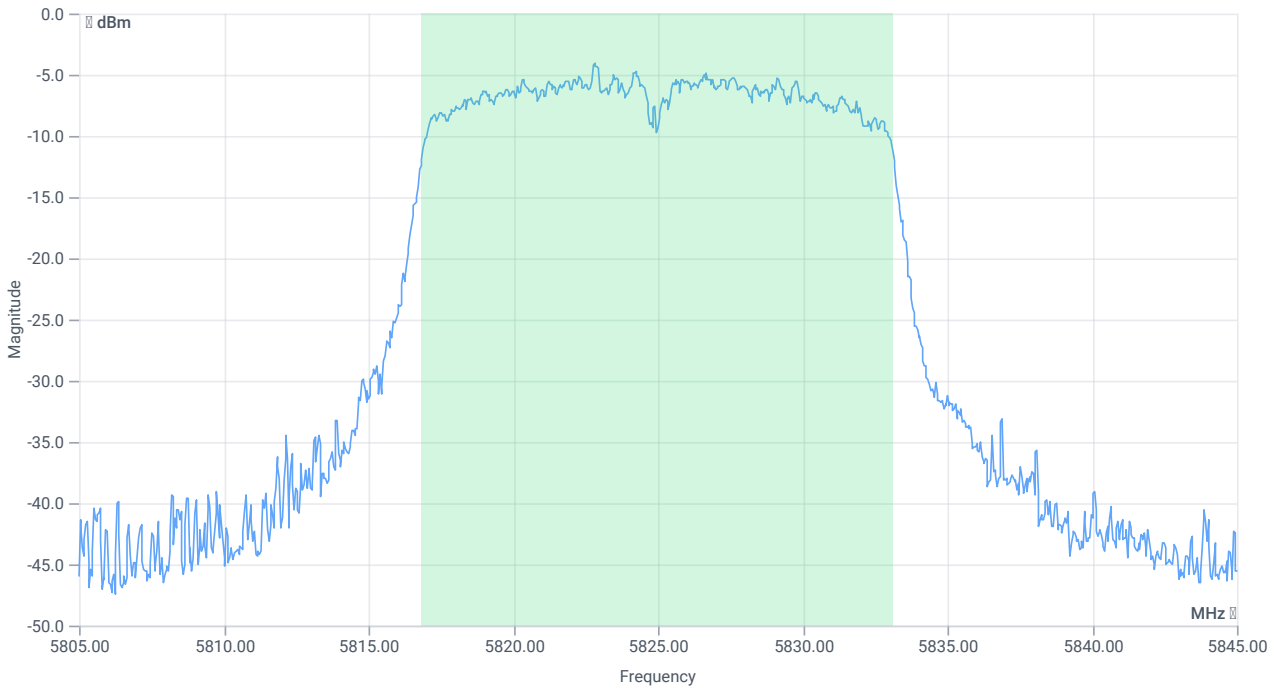

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.304	MHz	INFO
T1 99%	---	---	5816.8082	MHz	INFO
T2 99%	---	---	5833.1119	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.34 10.44 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

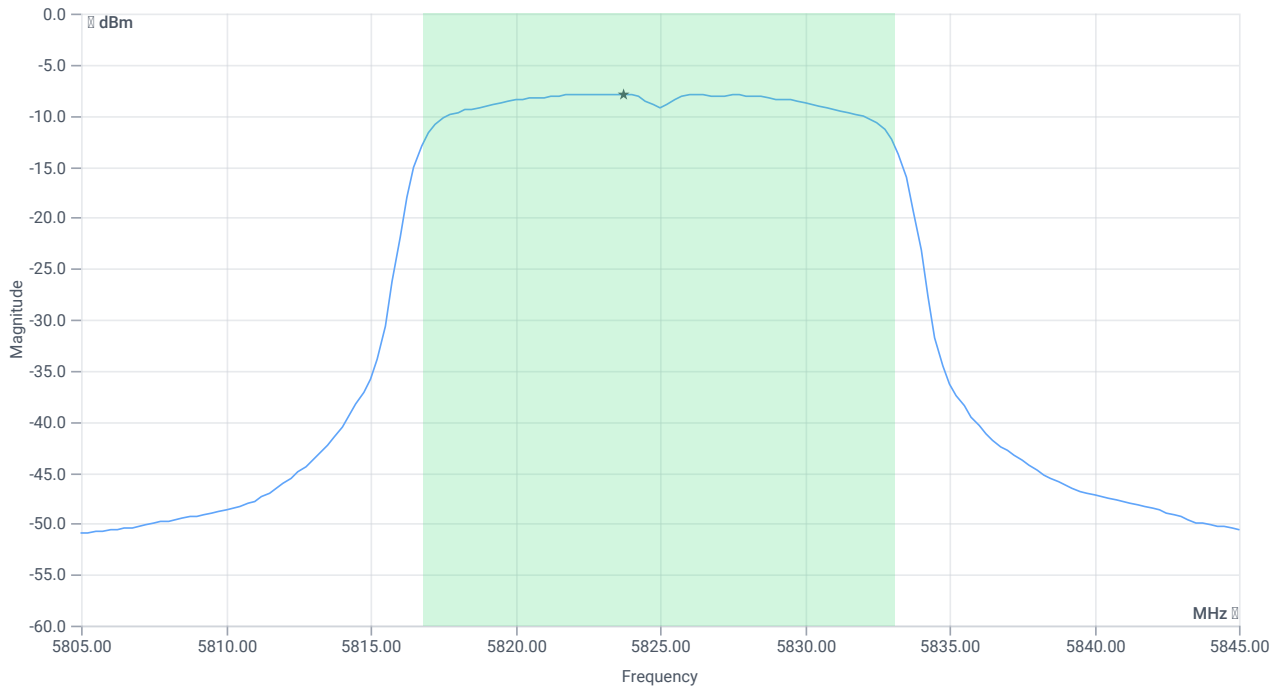

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.11	dBm	INFO
Duty cycle correction	--	--	0.64	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	3.75	dBm	PASS
Limit: 11 dBm + 10 log 16.304					
Max output power DC corrected	--	23.12	3.75	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.34 10.44 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

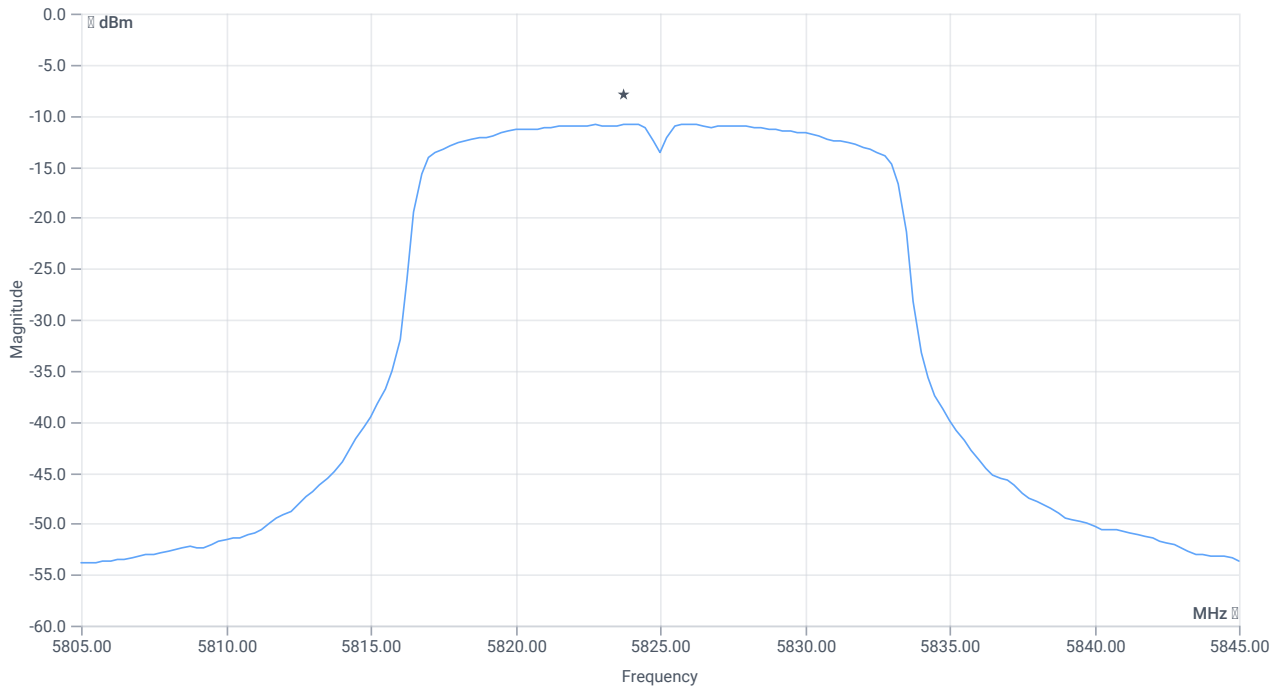

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-10.83	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.64	dB	INFO
Power spectral density DC corrected	--	30	-10.19	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:44:51
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.39	dBm	INFO
Ref. frequency	--	--	5822.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.882	--	INFO
Duty cycle min	--	--	0.545	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.275	ms	INFO

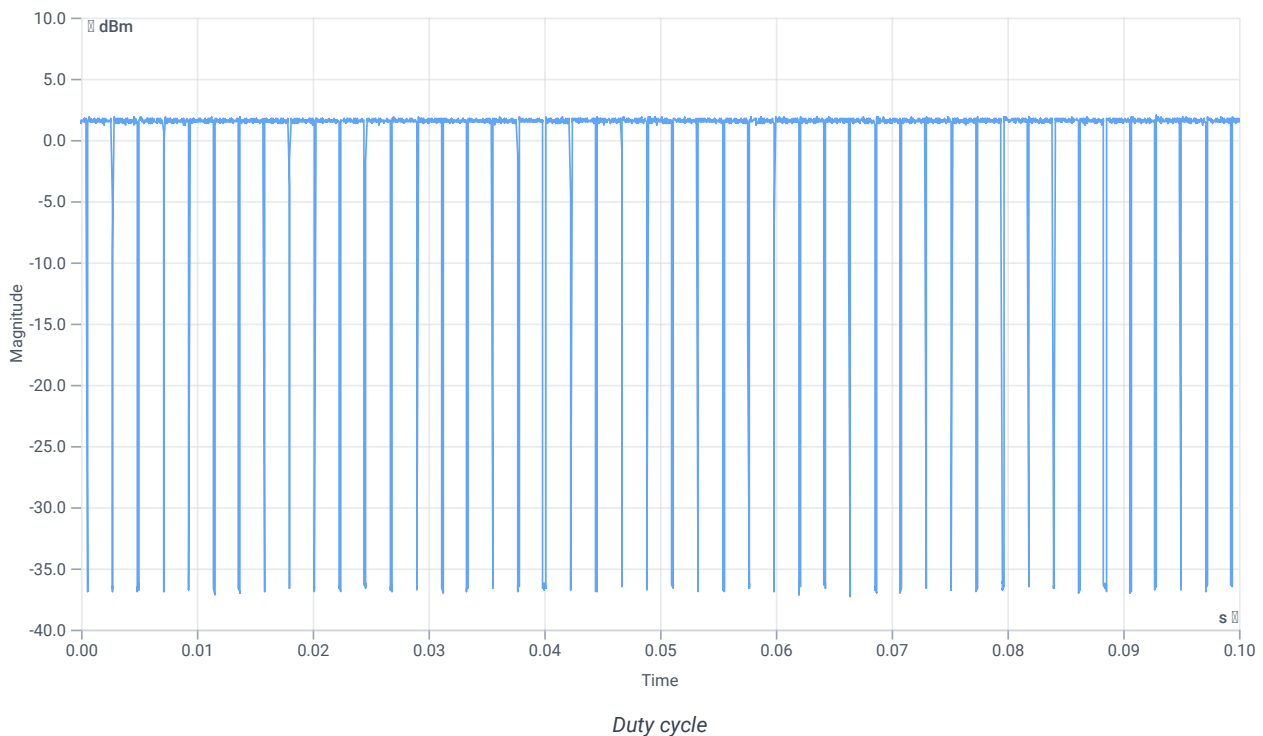

Evaluation bandwidth

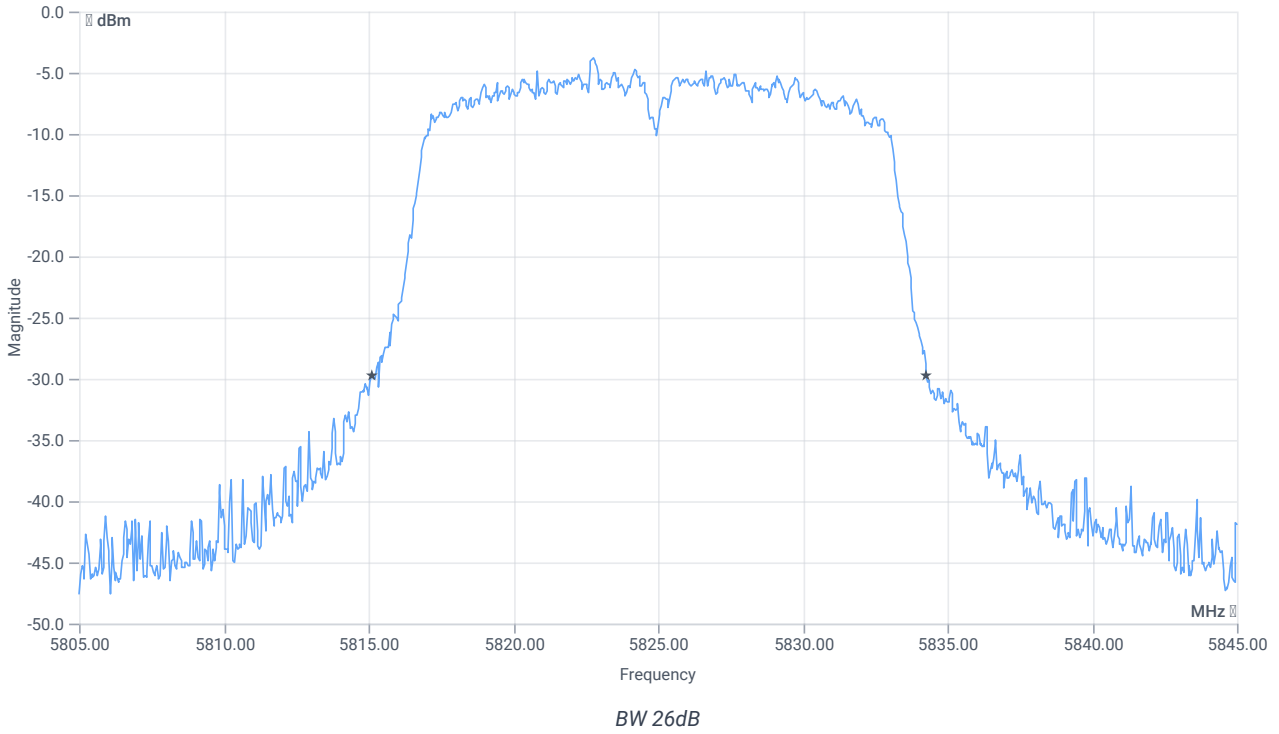


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.16	MHz	INFO
T1 26dB	---	---	5815.1200	MHz	INFO
T2 26dB	---	---	5834.2800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.39 10.44 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

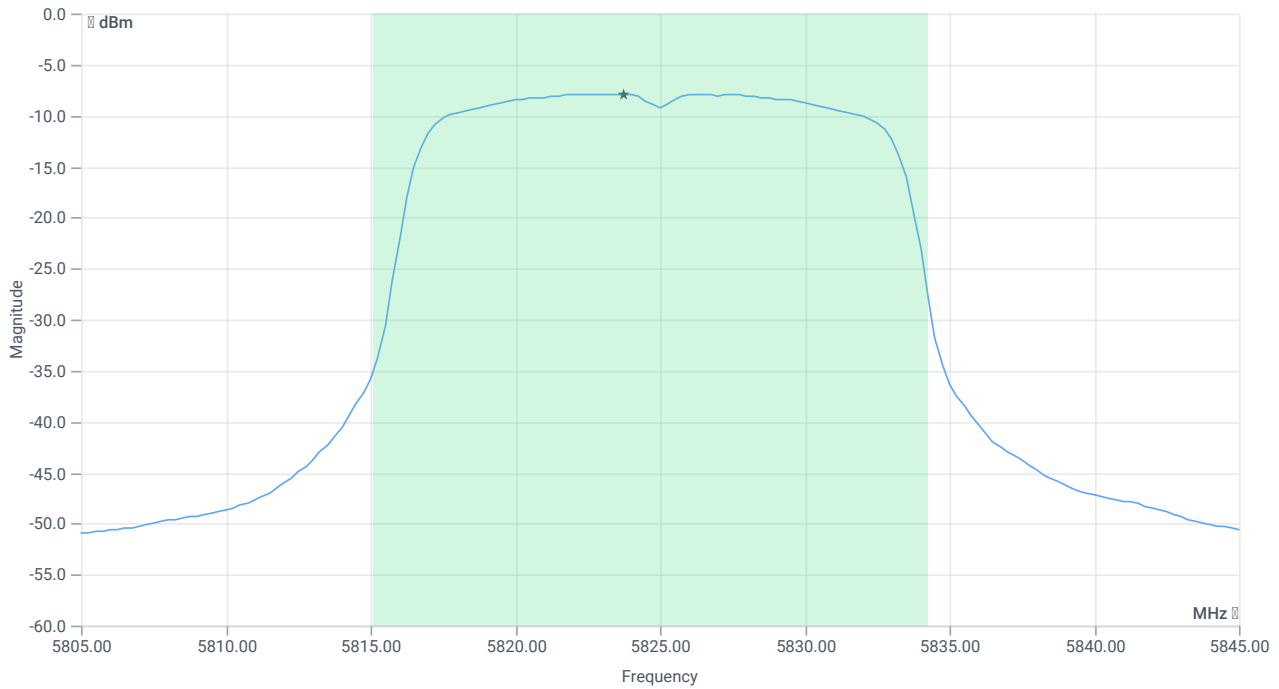

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.2	dBm	INFO
Duty cycle correction	--	--	0.55	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	3.75	dBm	PASS
Limit: 11 dBm + 10 log 19.16					
Max output power DC corrected	--	23.82	3.75	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.39 10.44 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

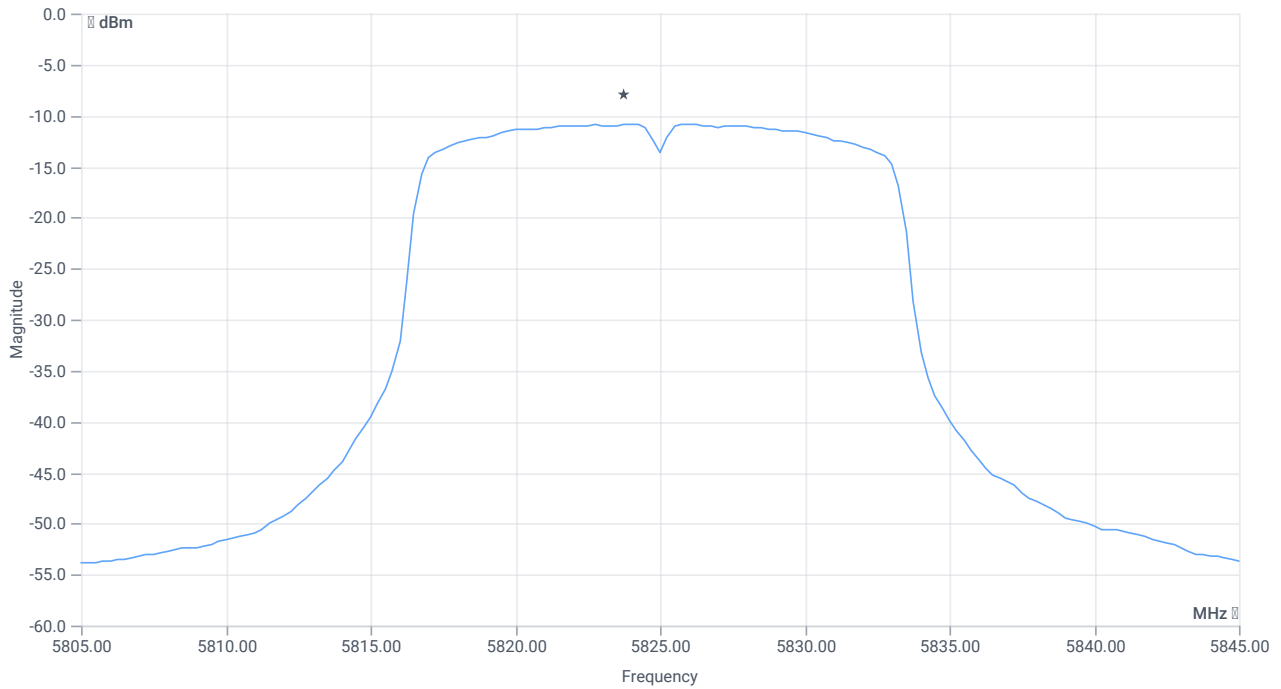

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-10.84	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.55	dB	INFO
Power spectral density DC corrected	--	30	-10.29	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:40:01
Ambit temp [°C] humidity [rel%]	26.7 37
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.20	dBm	INFO
Ref. frequency	--	--	5828.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.89	--	INFO
Duty cycle min	--	--	0.506	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.25	ms	INFO

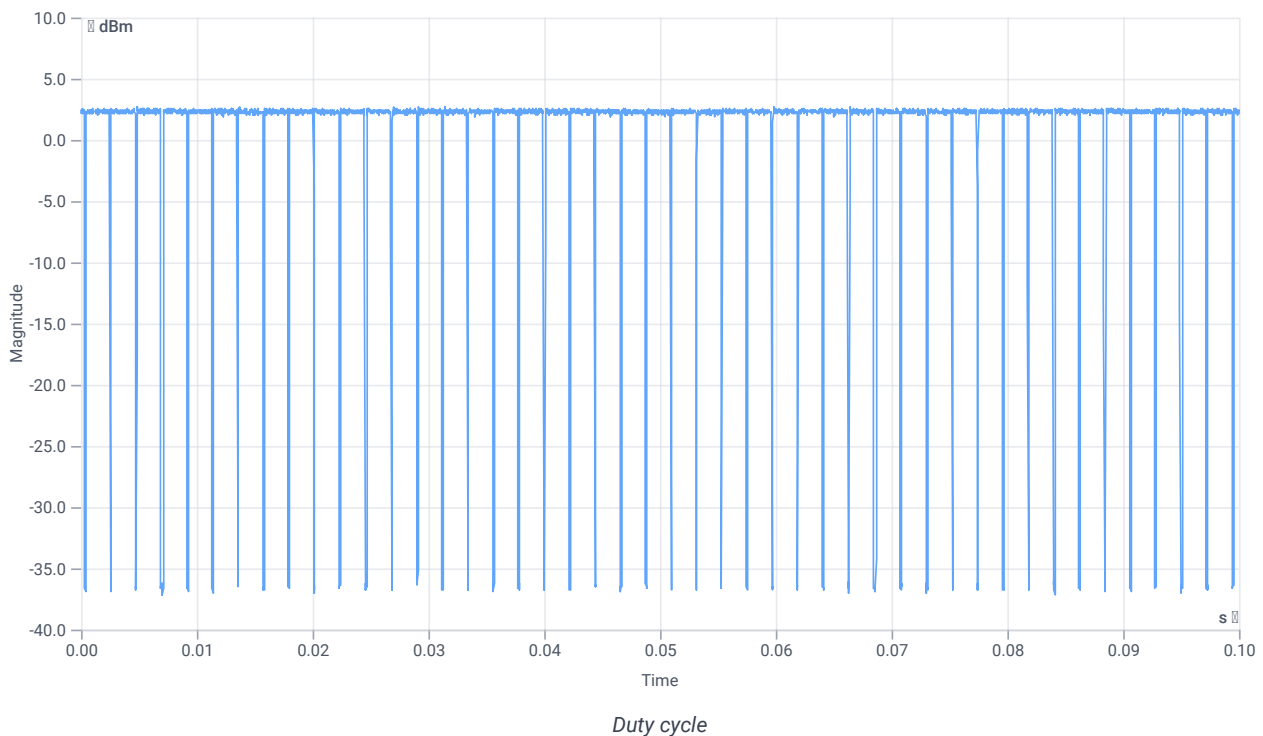

Evaluation bandwidth

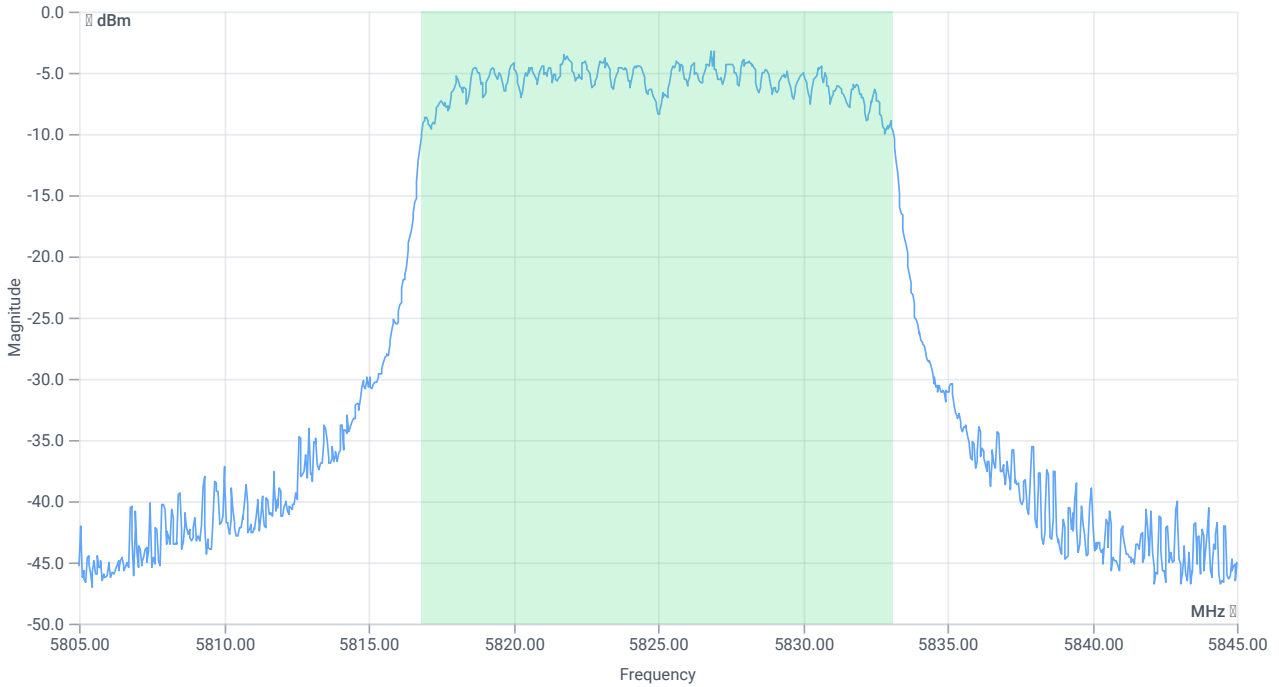

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.264	MHz	INFO
T1 99%	---	---	5816.8482	MHz	INFO
T2 99%	---	---	5833.1119	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.20 10.45 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

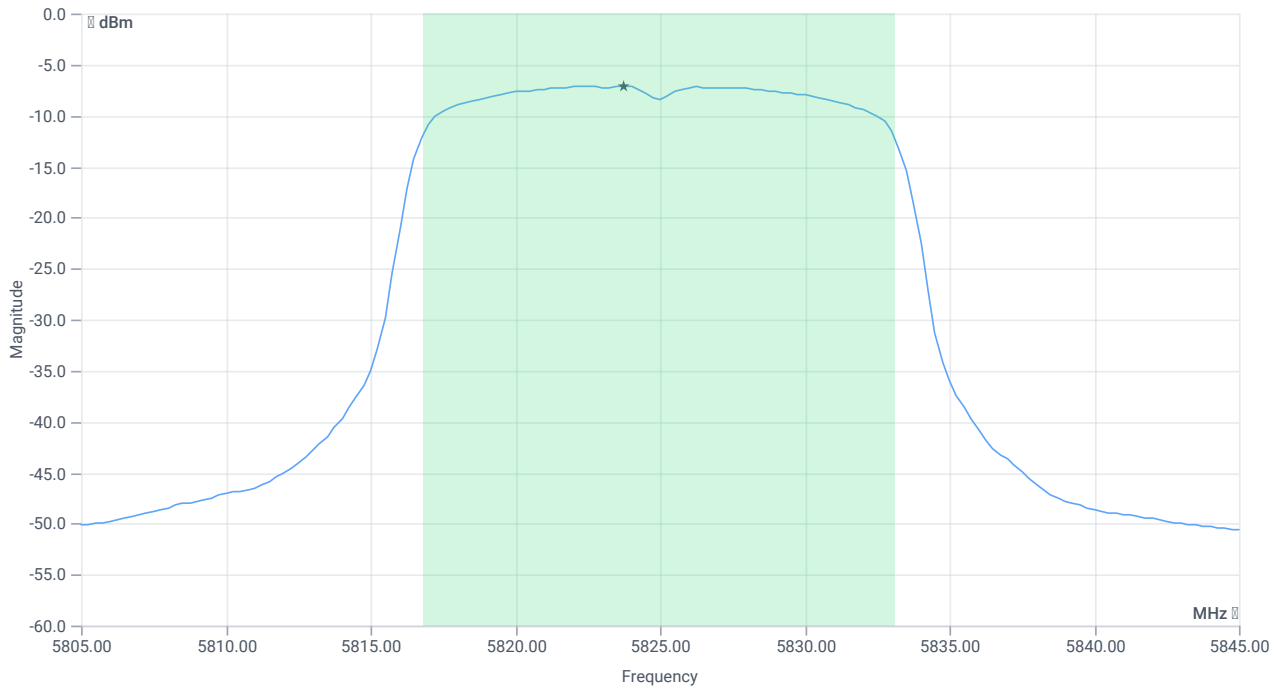

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.85	dBm	INFO
Duty cycle correction	--	--	0.51	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.36	dBm	PASS
Limit: 11 dBm + 10 log 16.264					
Max output power DC corrected	--	23.11	4.36	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.20 10.45 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

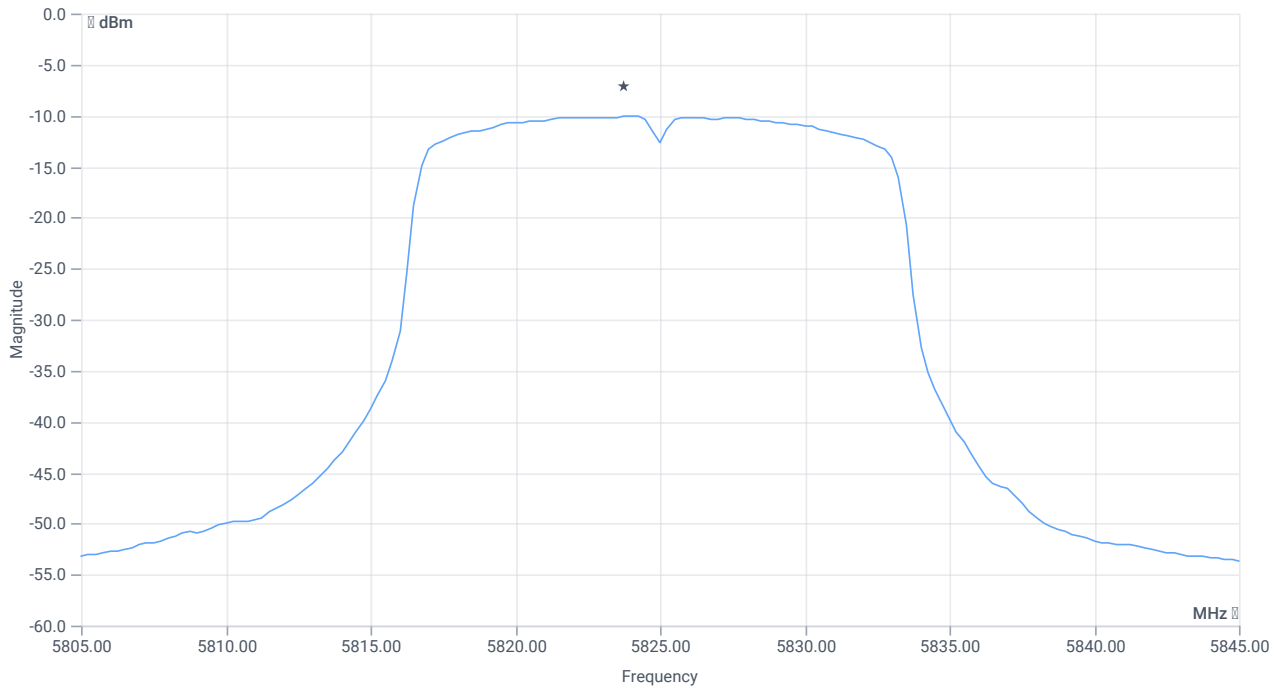

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-10.07	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.51	dB	INFO
Power spectral density DC corrected	--	30	-9.56	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:37:34
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5825 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.88	dBm	INFO
Ref. frequency	--	--	5821.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.89	--	INFO
Duty cycle min	--	--	0.506	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.25	ms	INFO

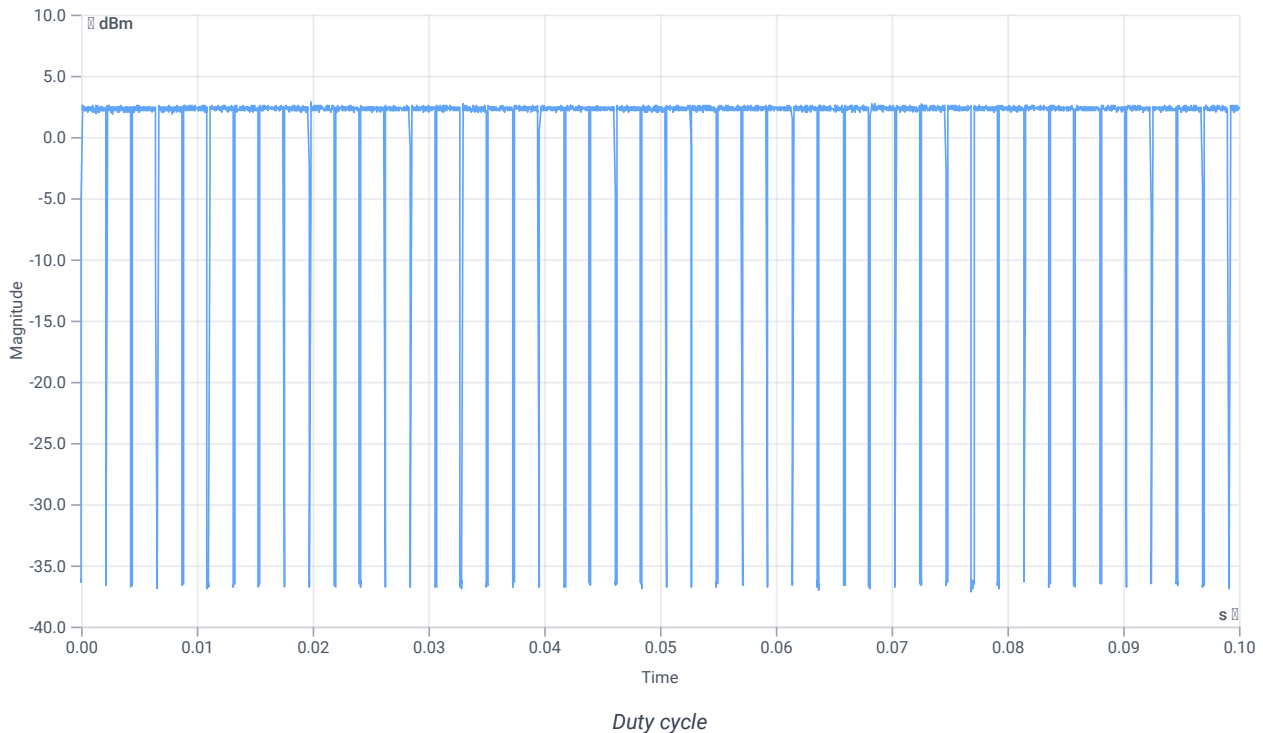

Evaluation bandwidth

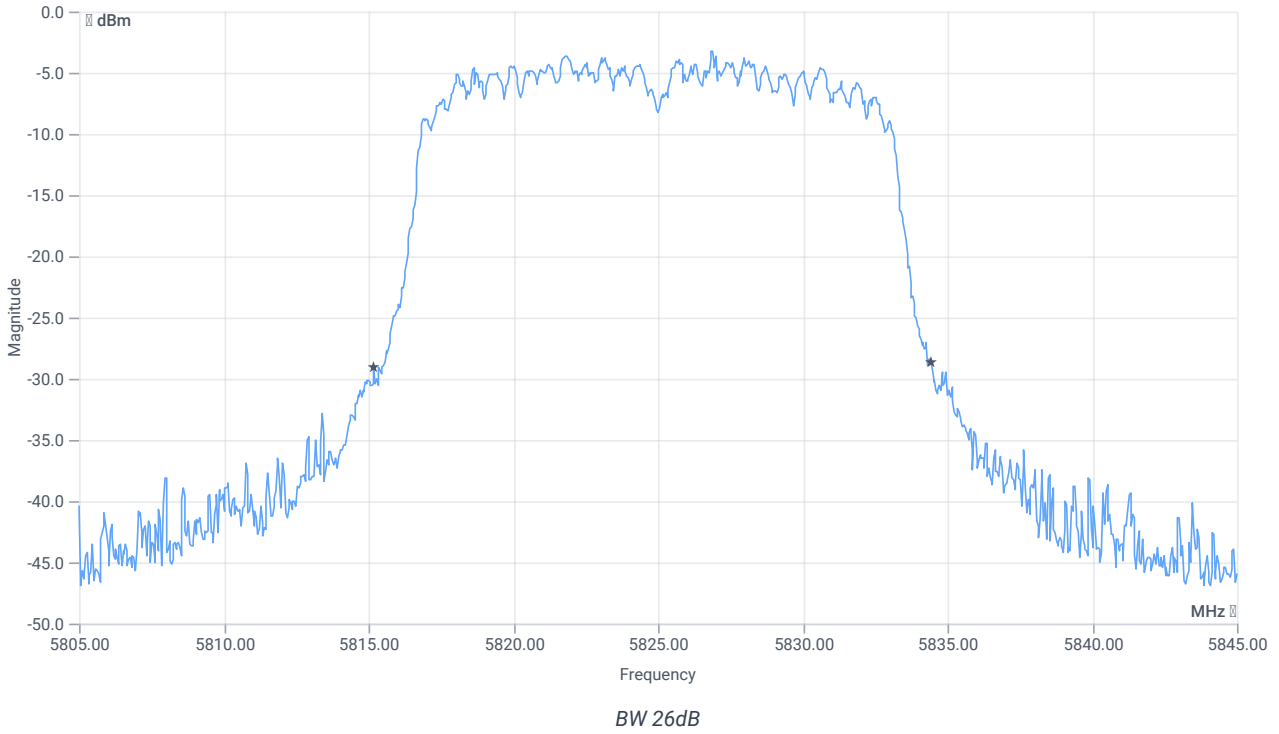


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.24	MHz	INFO
T1 26dB	---	---	5815.2000	MHz	INFO
T2 26dB	---	---	5834.4400	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.88 10.45 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

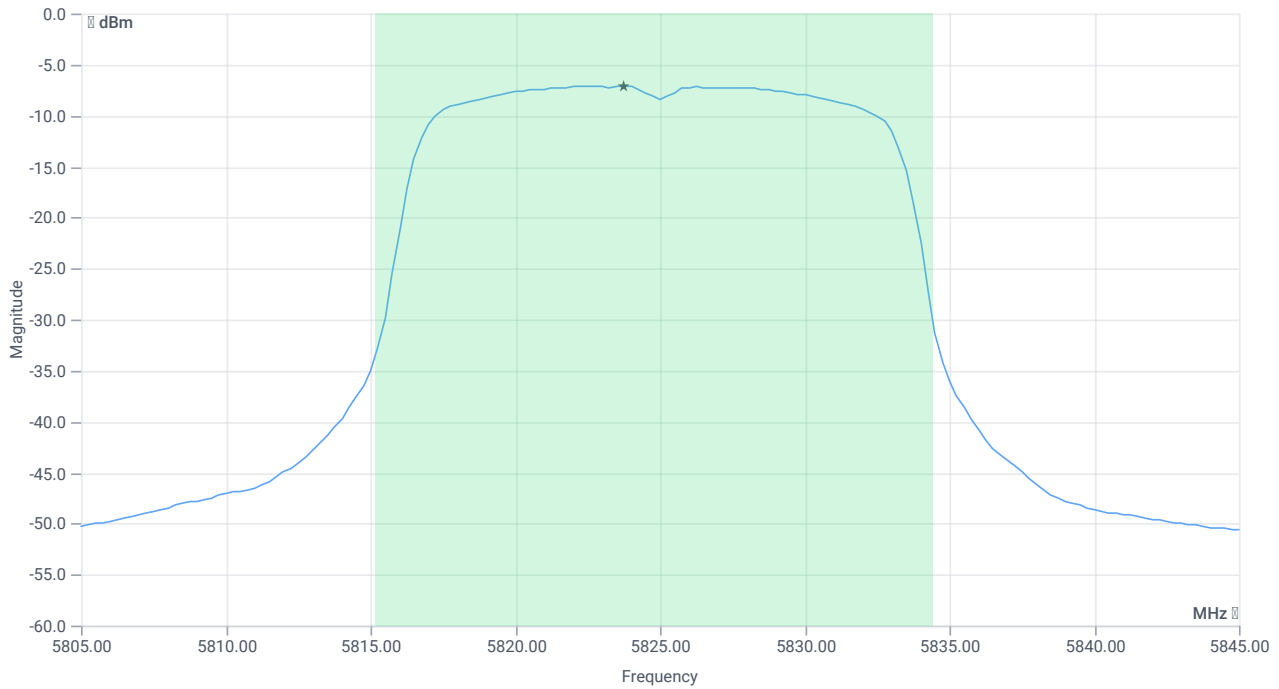

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.95	dBm	INFO
Duty cycle correction	--	--	0.51	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.46	dBm	PASS
Limit: 11 dBm + 10 log 19.24					
Max output power DC corrected	--	23.84	4.46	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.88 10.45 20
Start [MHz] Stop [MHz]	5805.000 5845.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

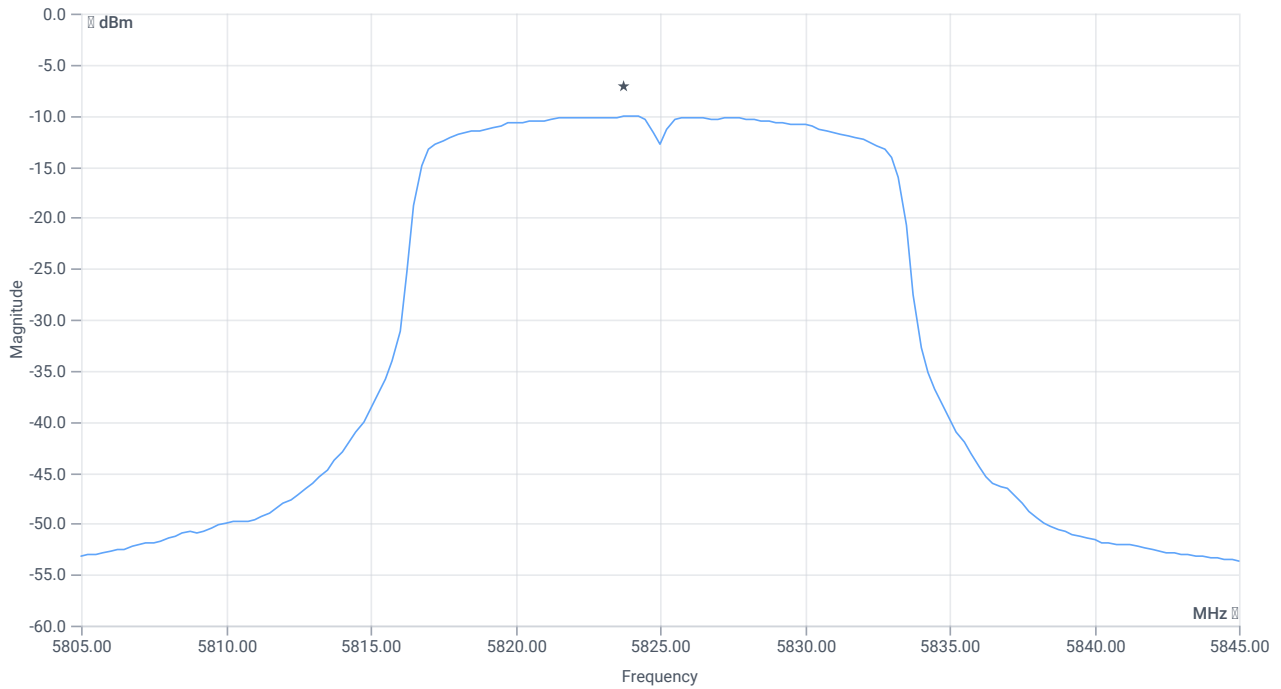

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-10.06	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.51	dB	INFO
Power spectral density DC corrected	--	30	-9.55	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:31:28
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.66	dBm	INFO
Ref. frequency	--	--	5780.400	MHz	INFO

Evaluation max. duty cycle


DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.91	--	INFO
Duty cycle min	--	--	0.41	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.2	ms	INFO

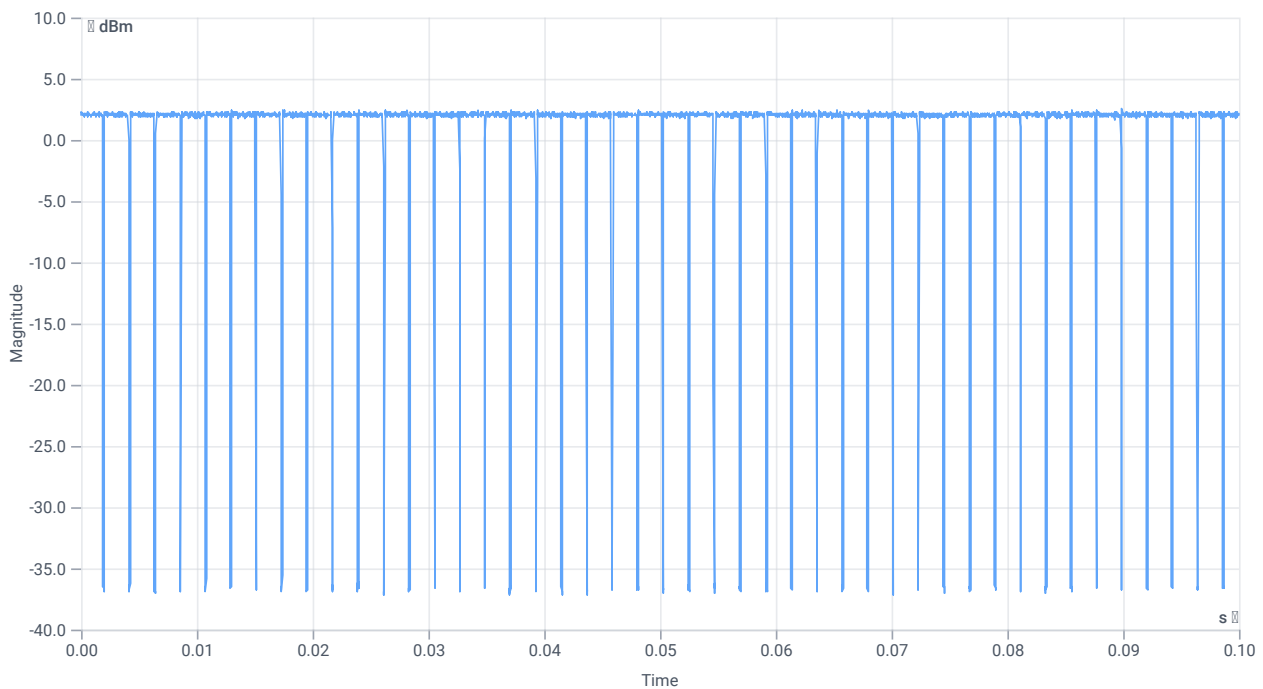

Duty cycle

Evaluation bandwidth

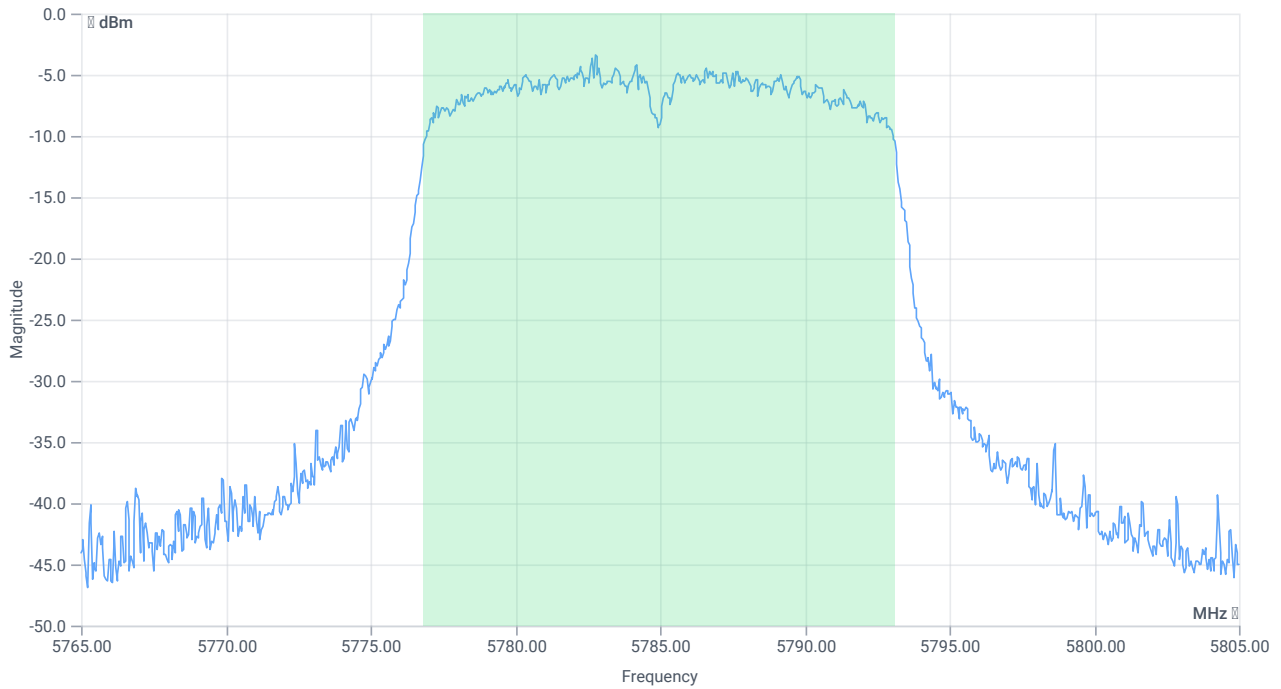

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.304	MHz	INFO
T1 99%	---	---	5776.8082	MHz	INFO
T2 99%	---	---	5793.1119	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.66 10.41 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

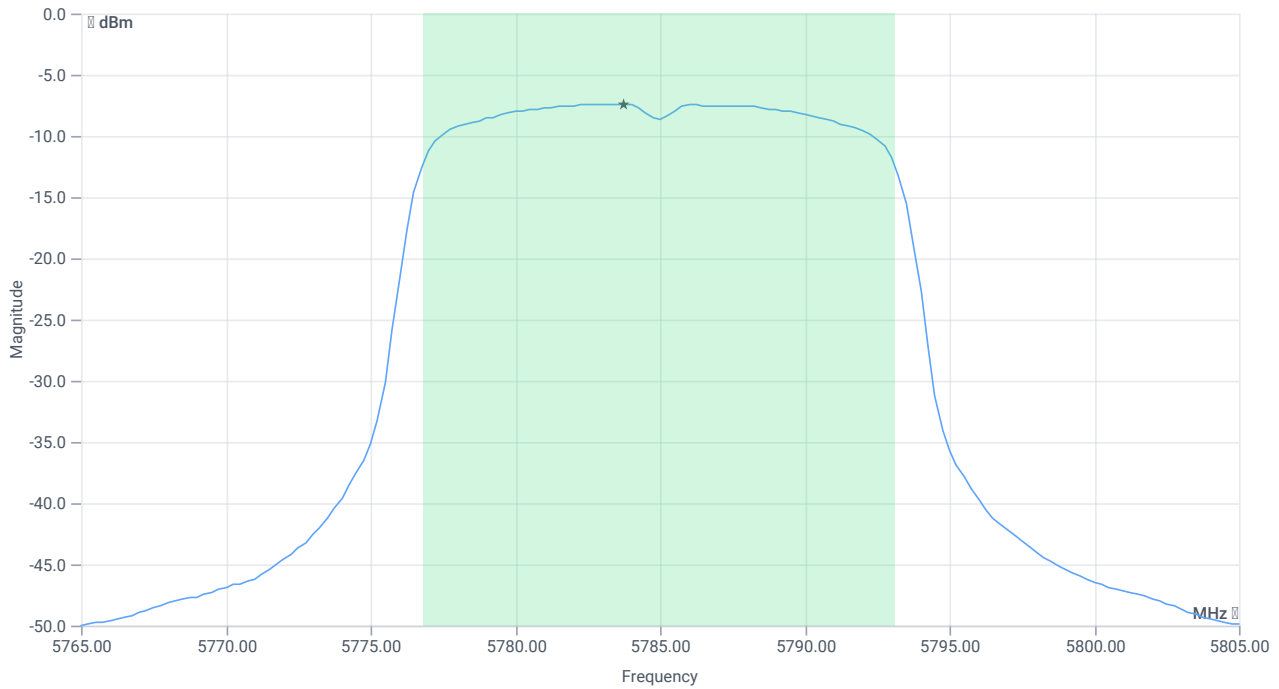

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.59	dBm	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4	dBm	PASS
Limit: 11 dBm + 10 log 16.304					
Max output power DC corrected	--	23.12	4	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.66 10.41 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

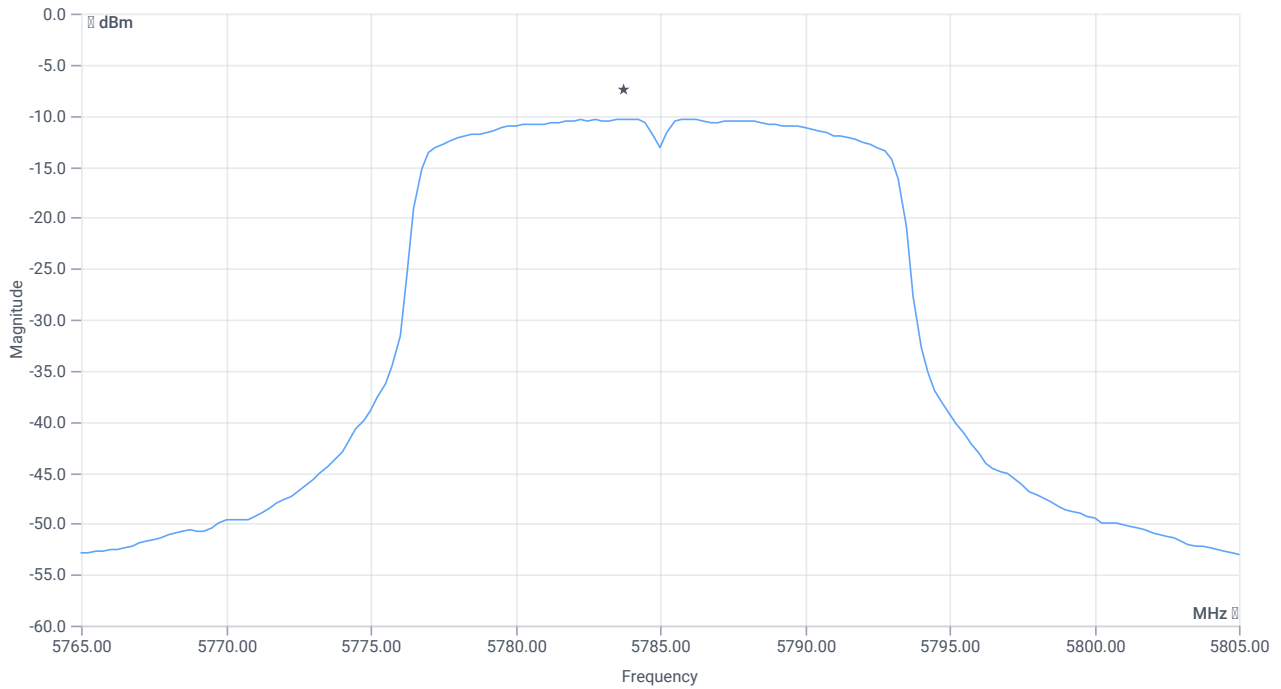

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-10.32	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Power spectral density DC corrected	--	30	-9.91	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:29:01
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.71	dBm	INFO
Ref. frequency	--	--	5784.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

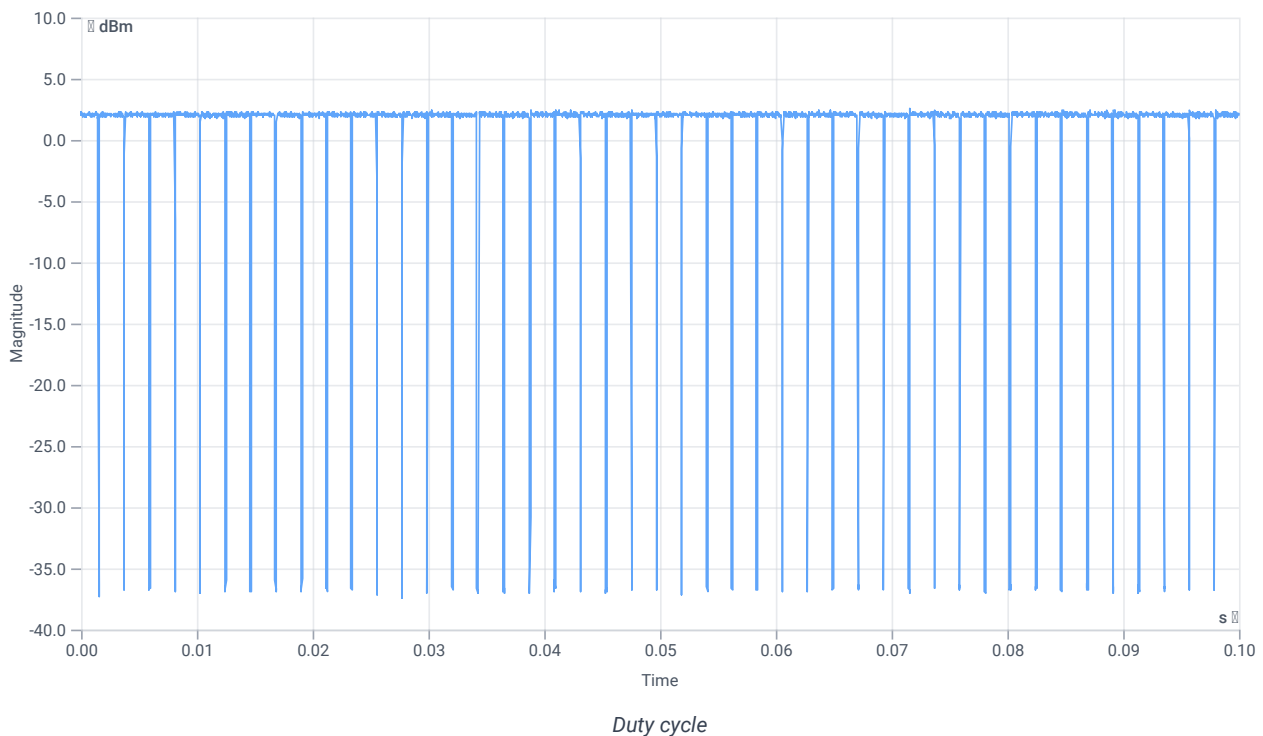

Evaluation bandwidth

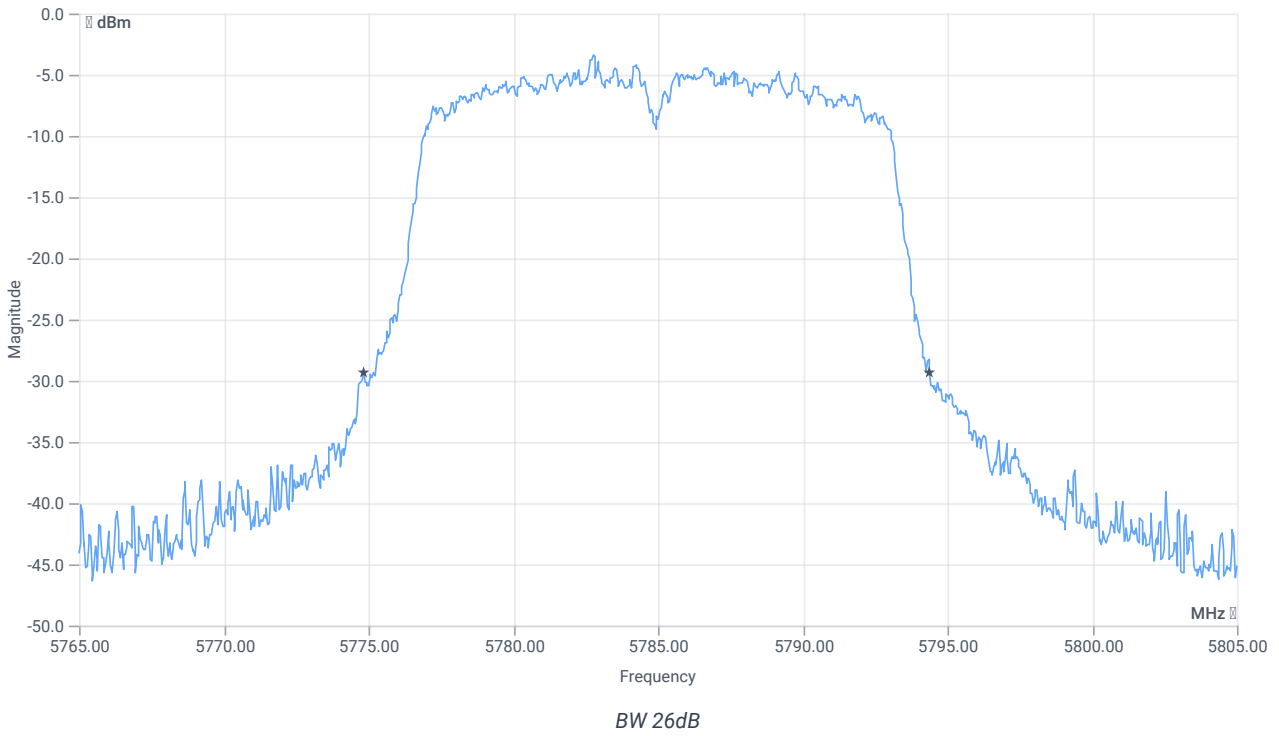


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.6	MHz	INFO
T1 26dB	---	---	5774.8000	MHz	INFO
T2 26dB	---	---	5794.4000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.71 10.41 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

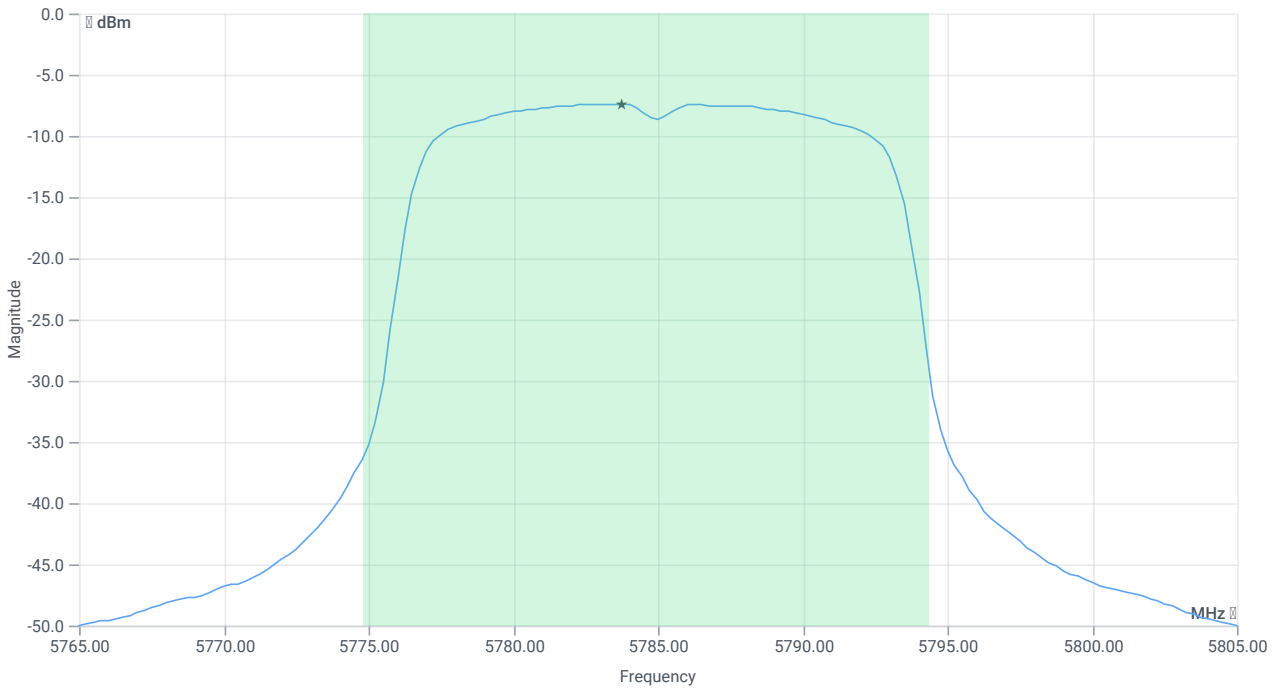

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	3.67	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	4.13	dBm	PASS
Limit: 11 dBm + 10 log 19.6					
Max output power DC corrected	--	23.92	4.13	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.71 10.41 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

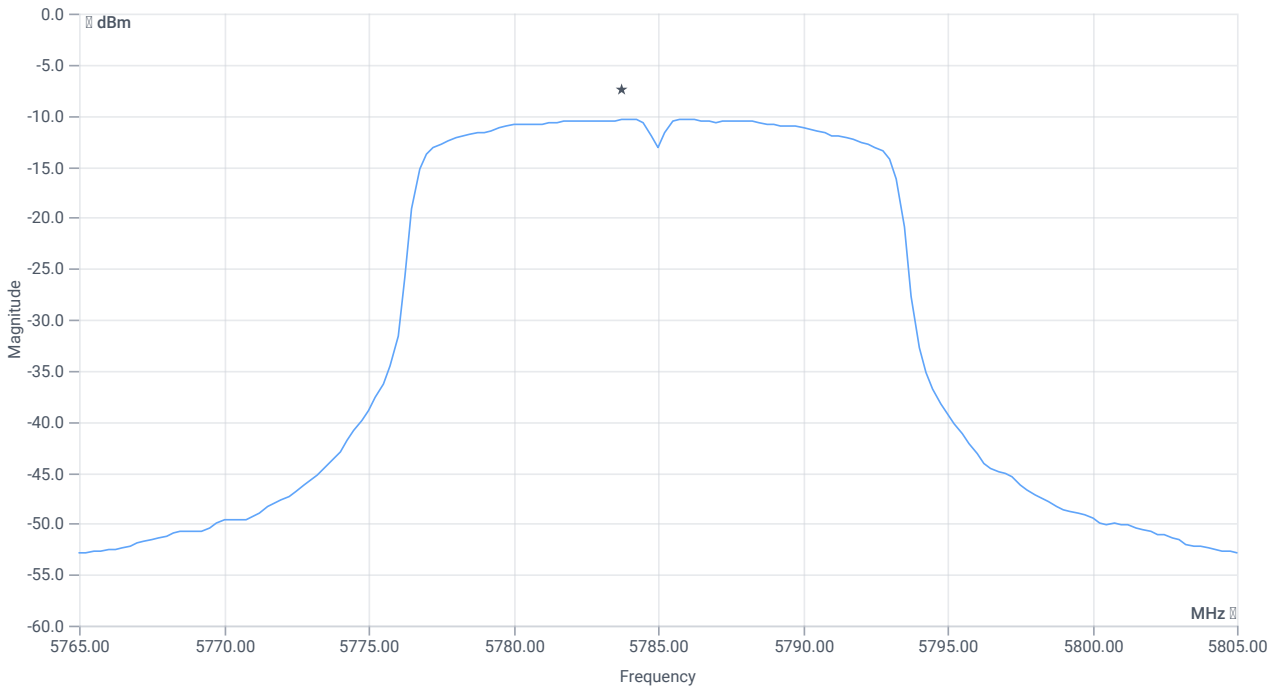

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-10.36	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	30	-9.9	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:24:06
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.19	dBm	INFO
Ref. frequency	--	--	5787.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

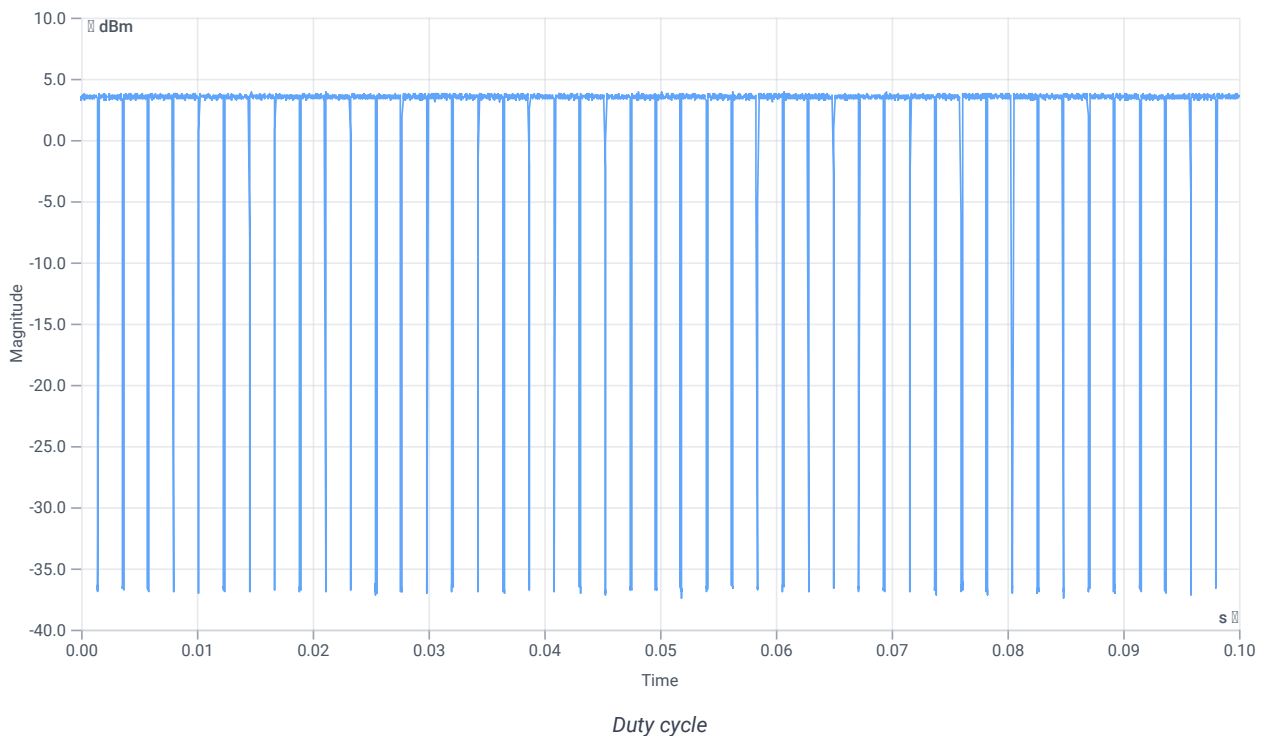

Evaluation bandwidth

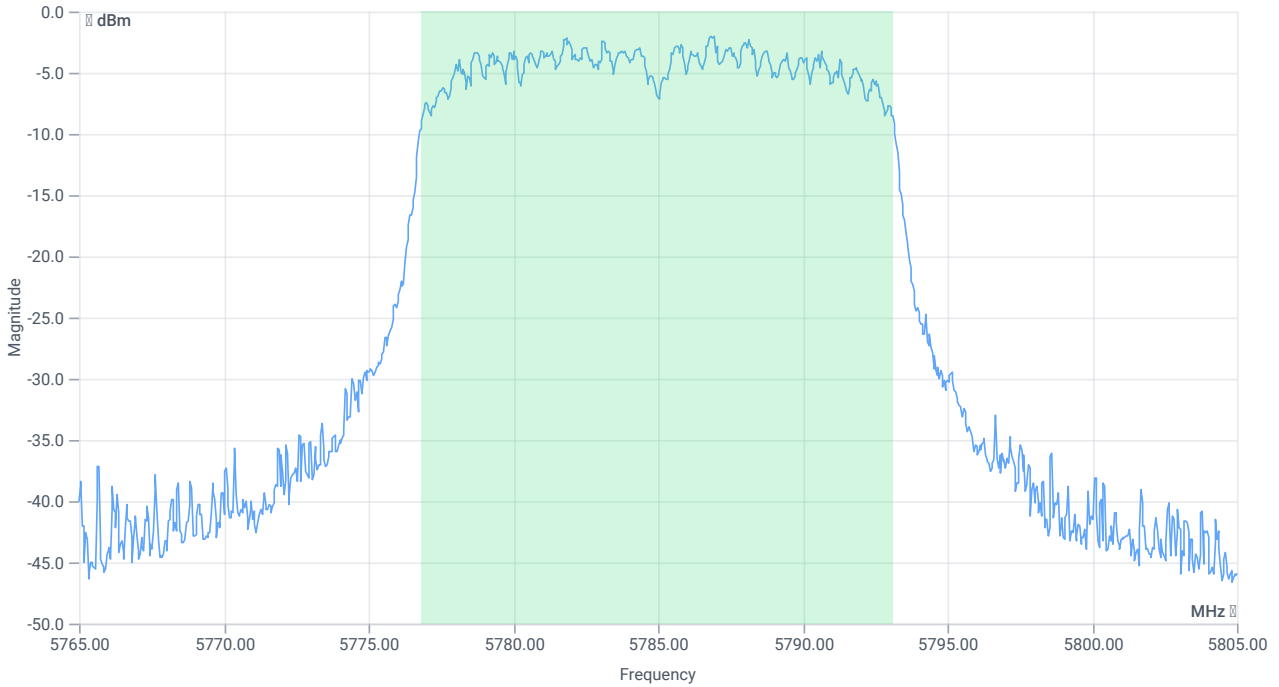

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.264	MHz	INFO
T1 99%	---	---	5776.8482	MHz	INFO
T2 99%	---	---	5793.1119	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.19 10.38 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

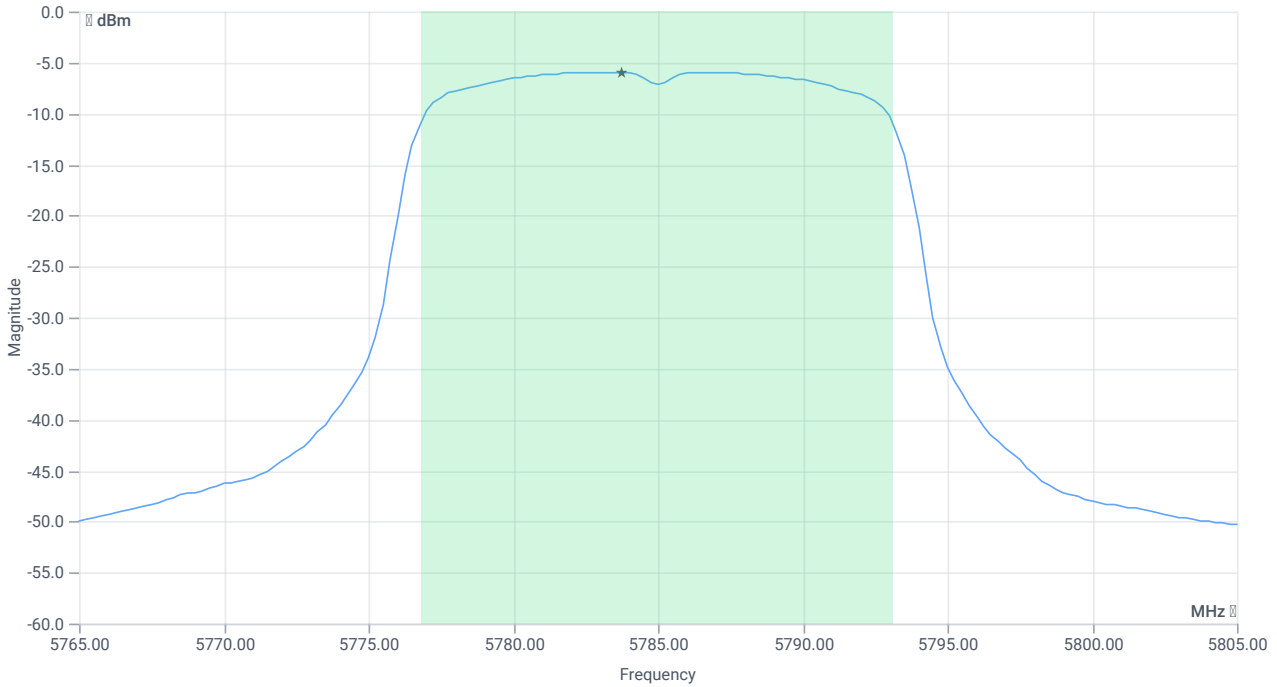

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	5.07	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.53	dBm	PASS
Limit: 11 dBm + 10 log 16.264					
Max output power DC corrected	--	23.11	5.53	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.19 10.38 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

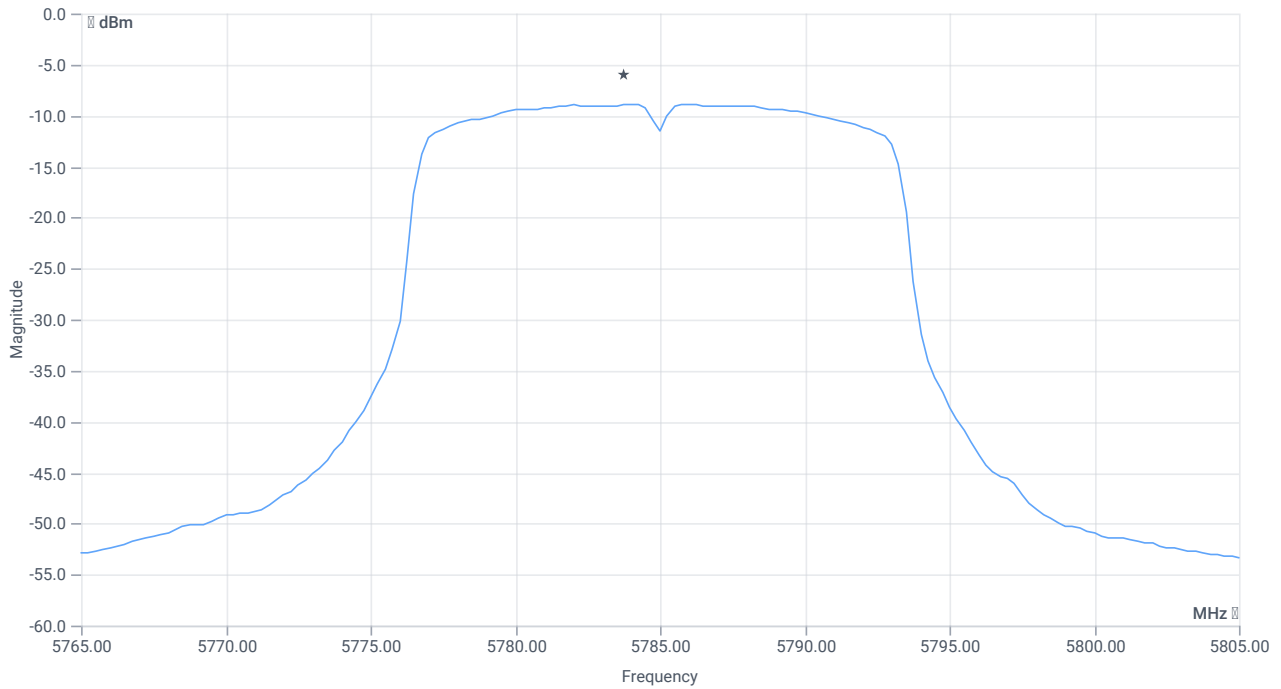

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.84	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	30	-8.38	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:21:38
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5785 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.36	dBm	INFO
Ref. frequency	--	--	5787.800	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

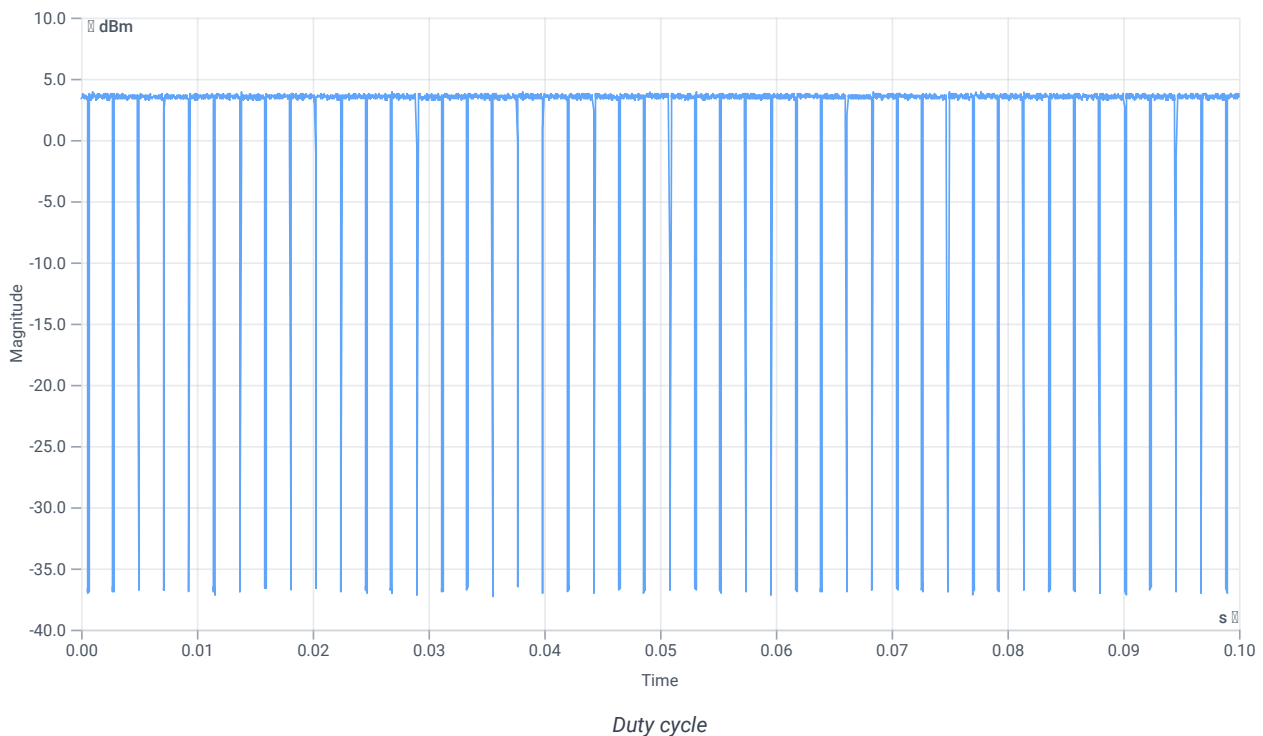

Evaluation bandwidth

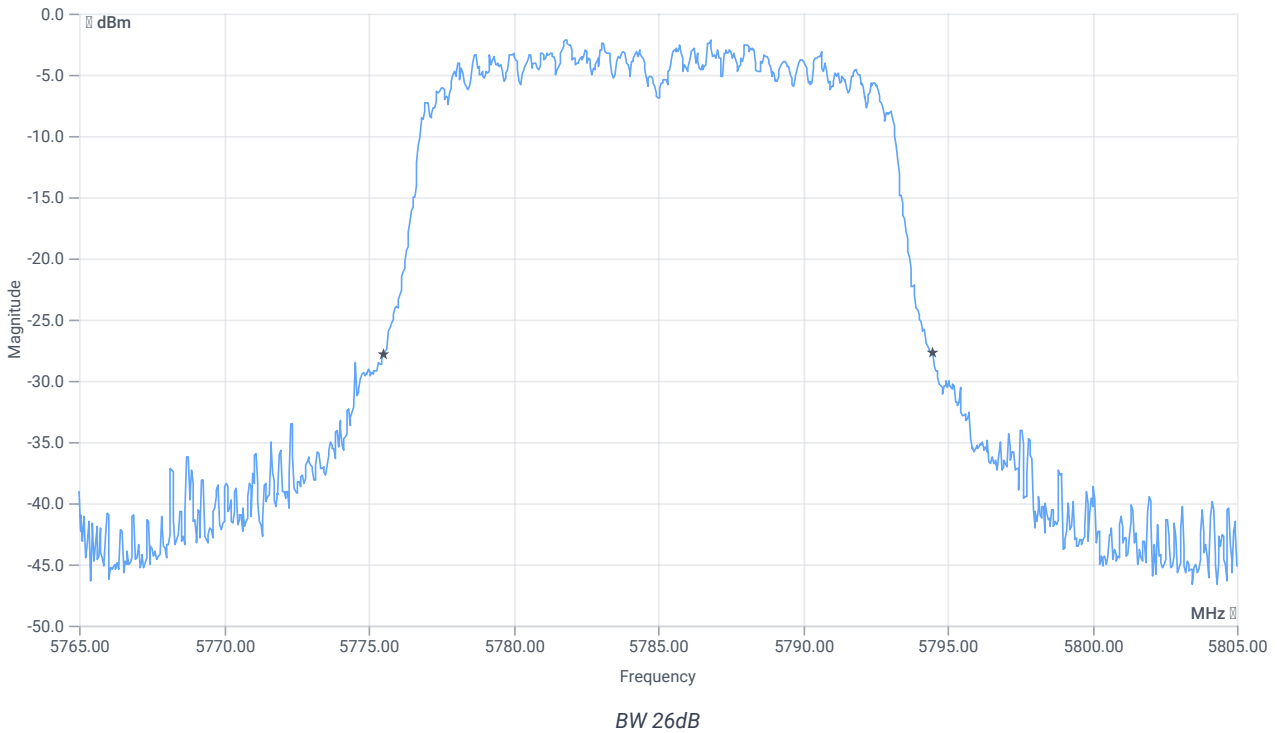


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	18.96	MHz	INFO
T1 26dB	---	---	5775.5200	MHz	INFO
T2 26dB	---	---	5794.4800	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.36 10.38 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

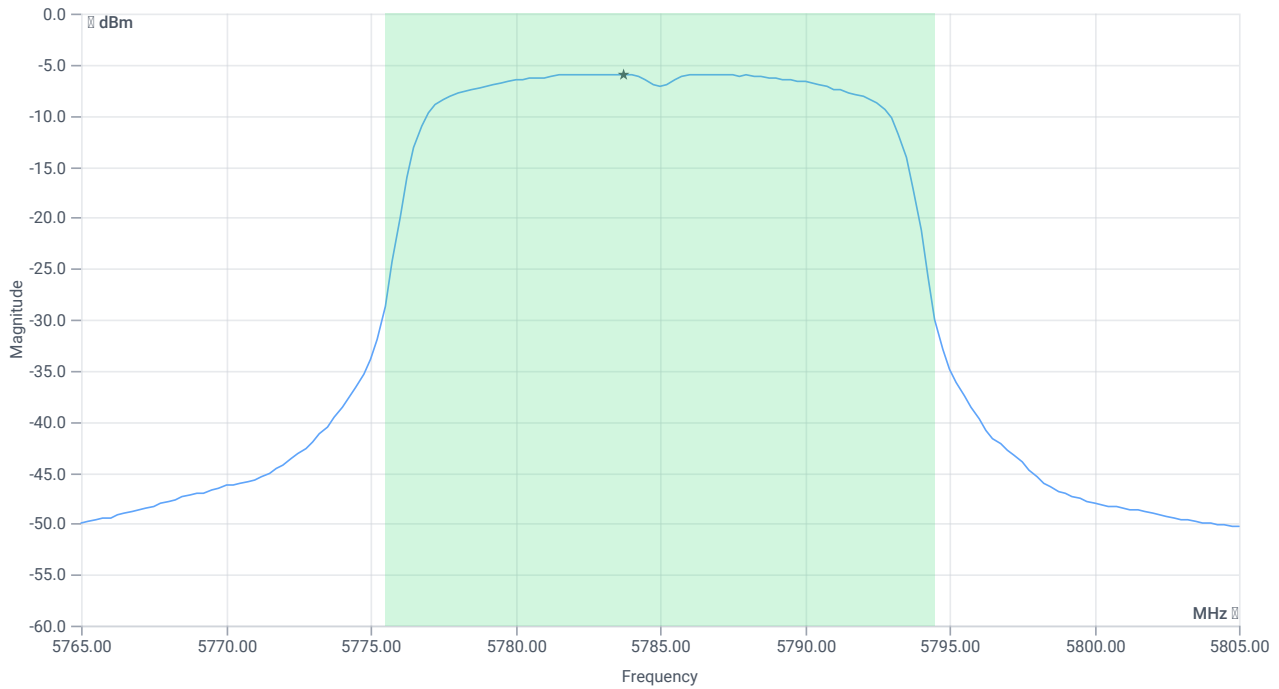

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	5.15	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.61	dBm	PASS
Limit: 11 dBm + 10 log 18.96					
Max output power DC corrected	--	23.78	5.61	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.36 10.38 20
Start [MHz] Stop [MHz]	5765.000 5805.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

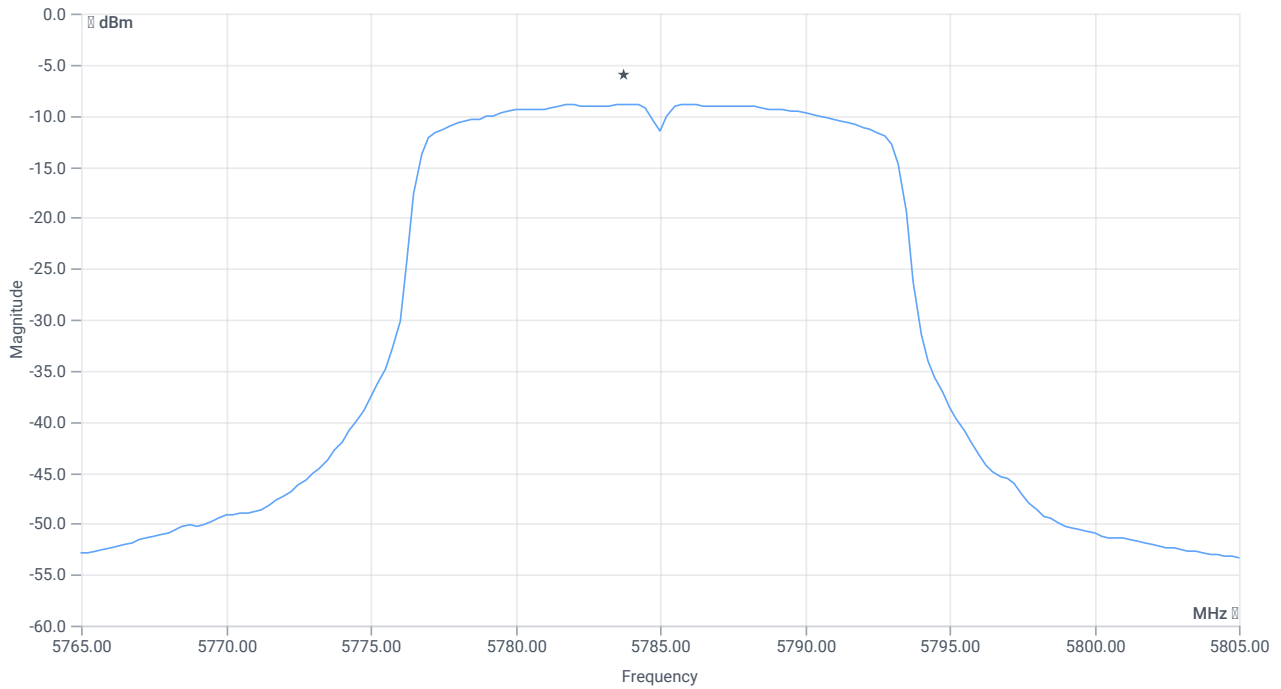

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.85	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	30	-8.39	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:15:43
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.51	dBm	INFO
Ref. frequency	--	--	5741.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.862	--	INFO
Duty cycle min	--	--	0.645	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.325	ms	INFO

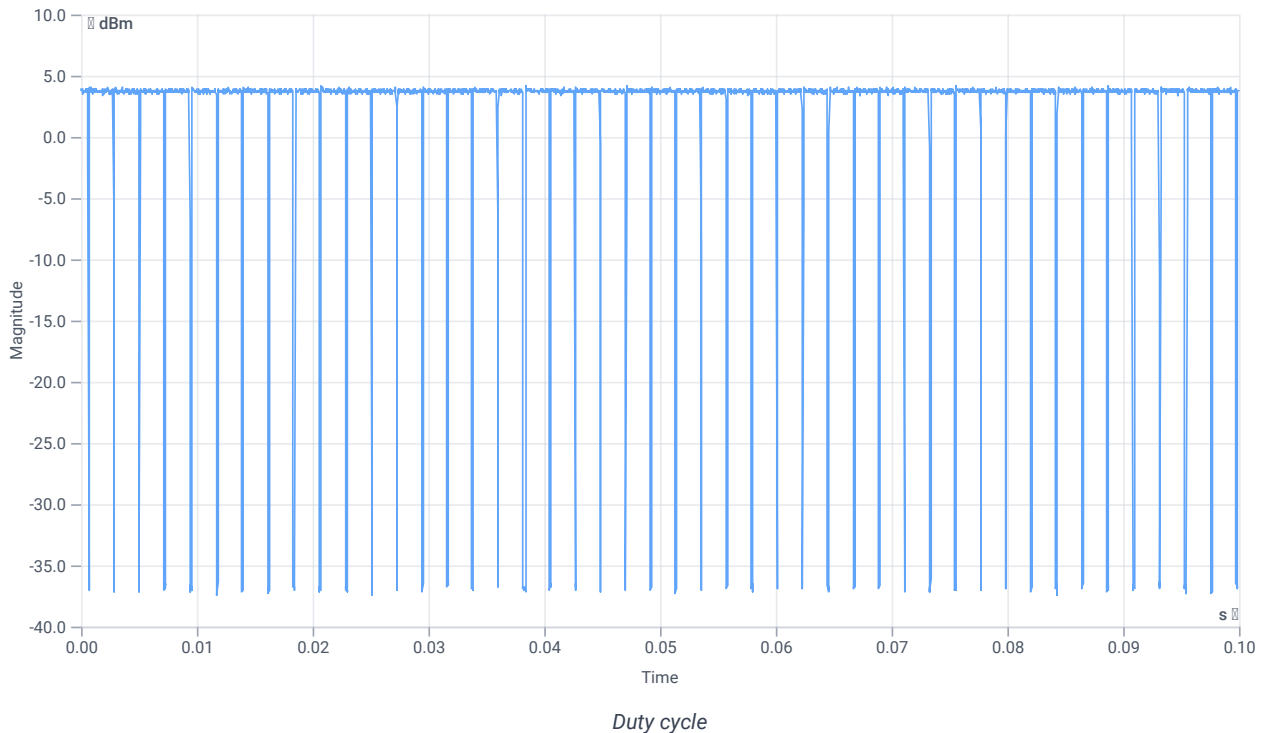

Evaluation bandwidth

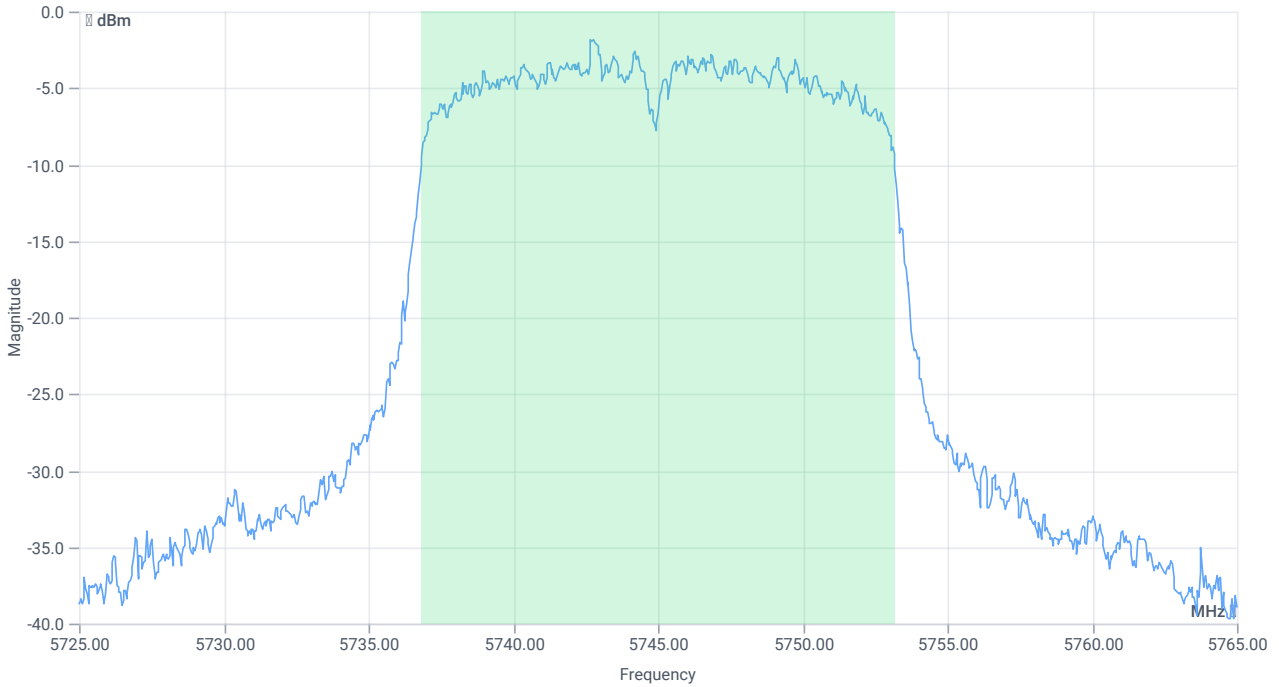

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.344	MHz	INFO
T1 99%	---	---	5736.8082	MHz	INFO
T2 99%	---	---	5753.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.51 10.38 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

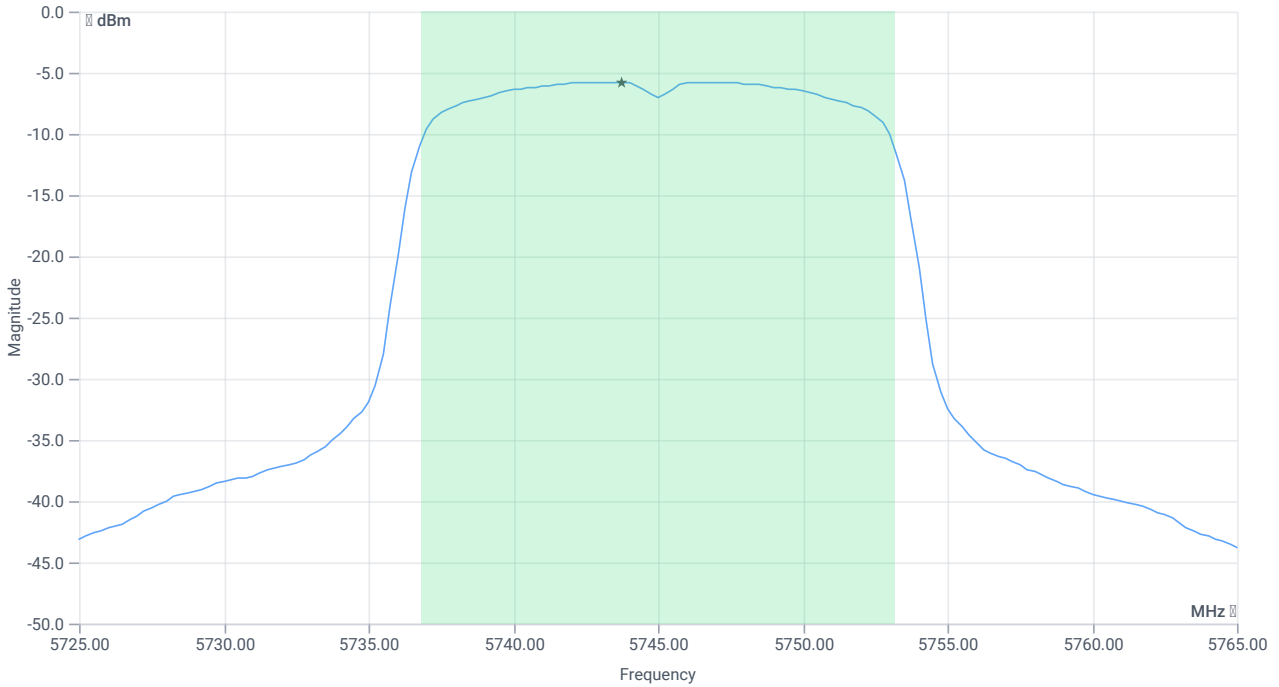

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	5.25	dBm	INFO
Duty cycle correction	--	--	0.64	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.89	dBm	PASS
Limit: 11 dBm + 10 log 16.344					
Max output power DC corrected	--	23.13	5.89	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.51 10.38 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

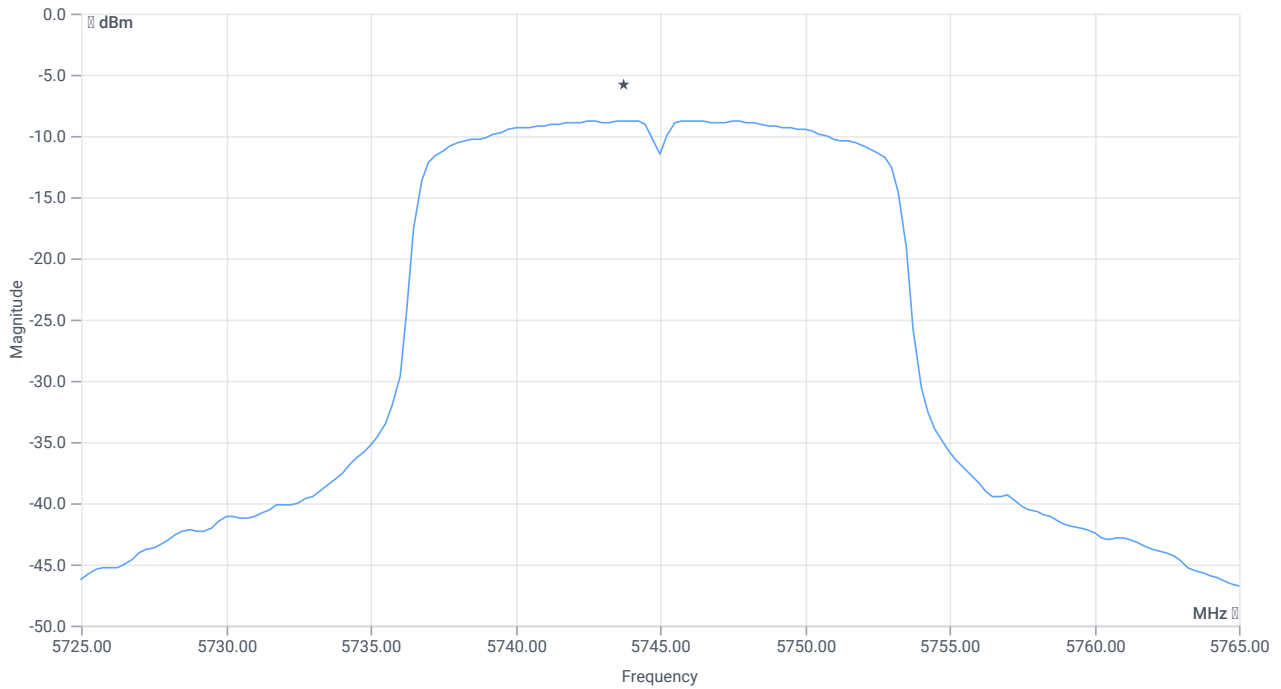

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.72	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.64	dB	INFO
Power spectral density DC corrected	--	30	-8.08	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:13:16
Ambit temp [°C] humidity [rel%]	26.6 36
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.15	dBm	INFO
Ref. frequency	--	--	5747.000	MHz	INFO

Evaluation max. duty cycle


DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.88	--	INFO
Duty cycle min	--	--	0.555	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.275	ms	INFO

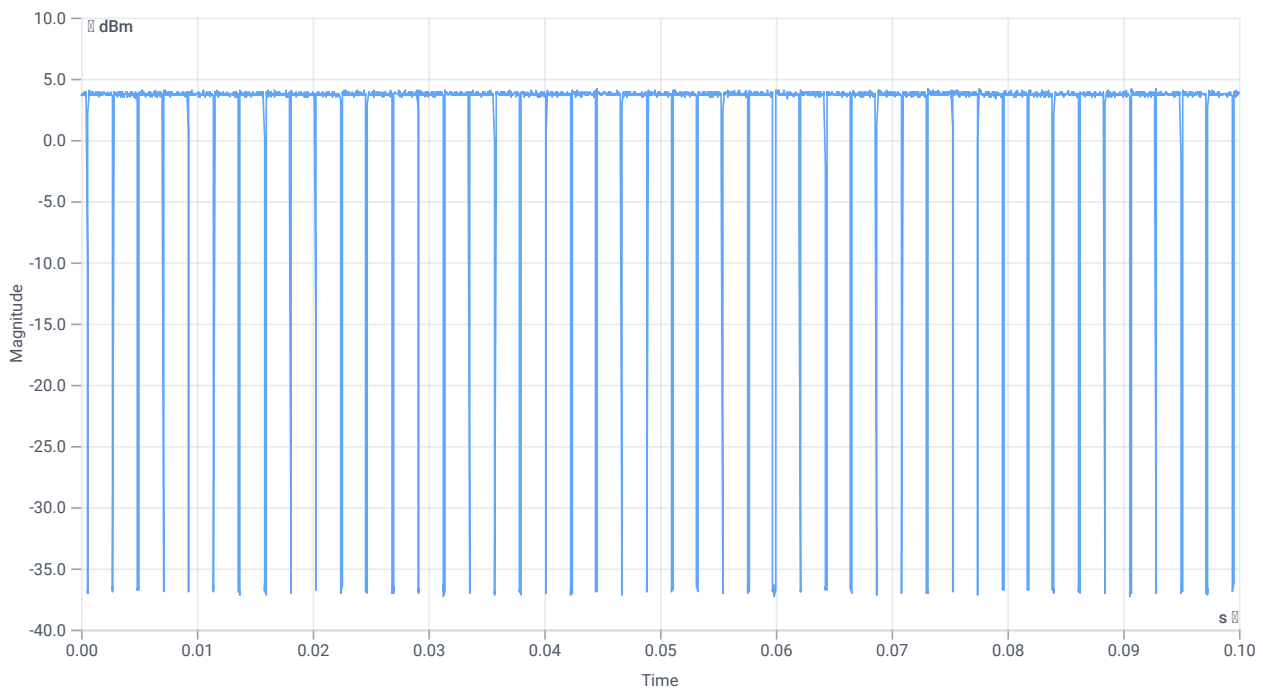

Duty cycle

Evaluation bandwidth

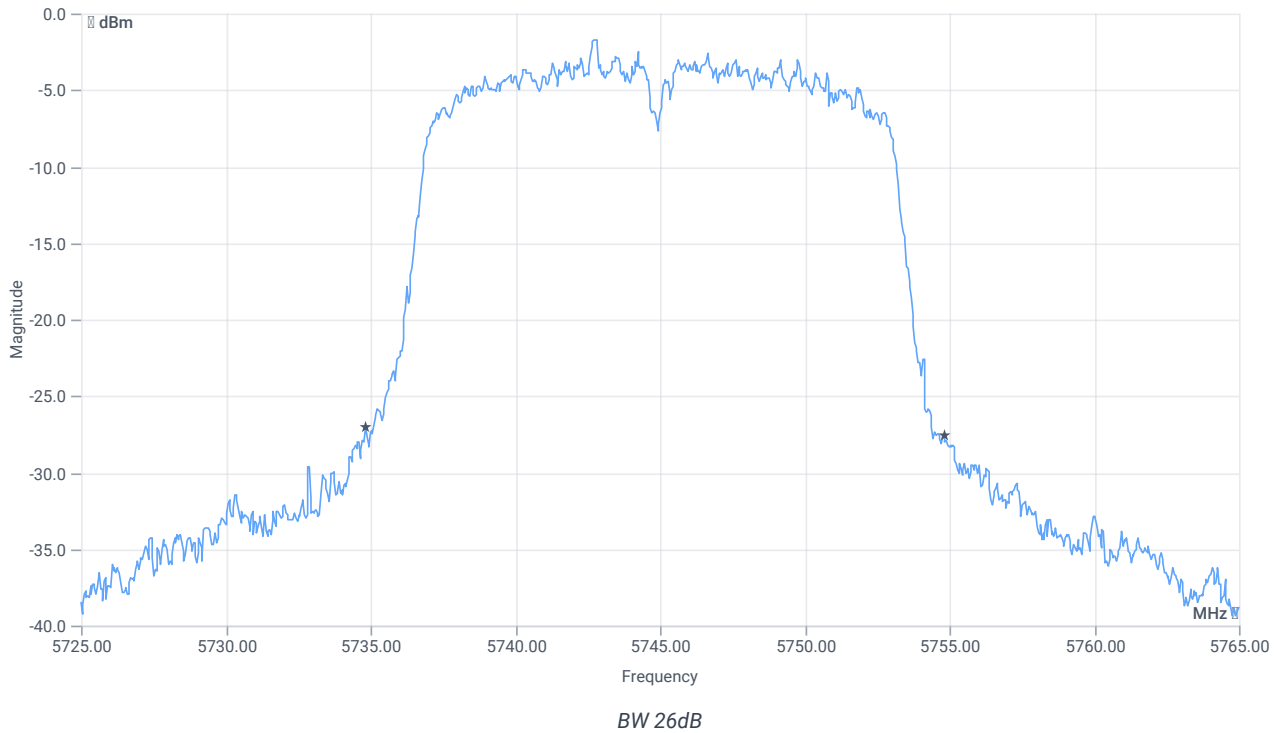


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	20	MHz	INFO
T1 26dB	---	---	5734.8000	MHz	INFO
T2 26dB	---	---	5754.8000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.15 10.38 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

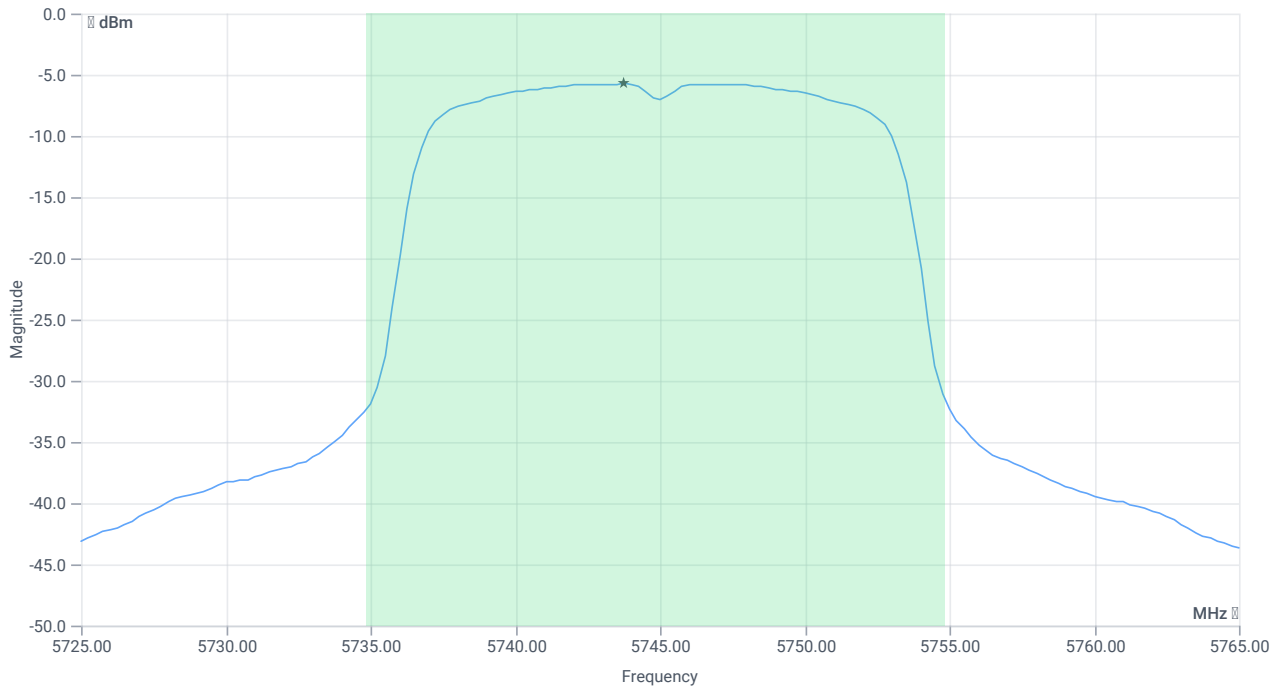

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	5.35	dBm	INFO
Duty cycle correction	--	--	0.56	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.91	dBm	PASS
Limit: 11 dBm + 10 log 20					
Max output power DC corrected	--	24.01	5.91	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.15 10.38 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

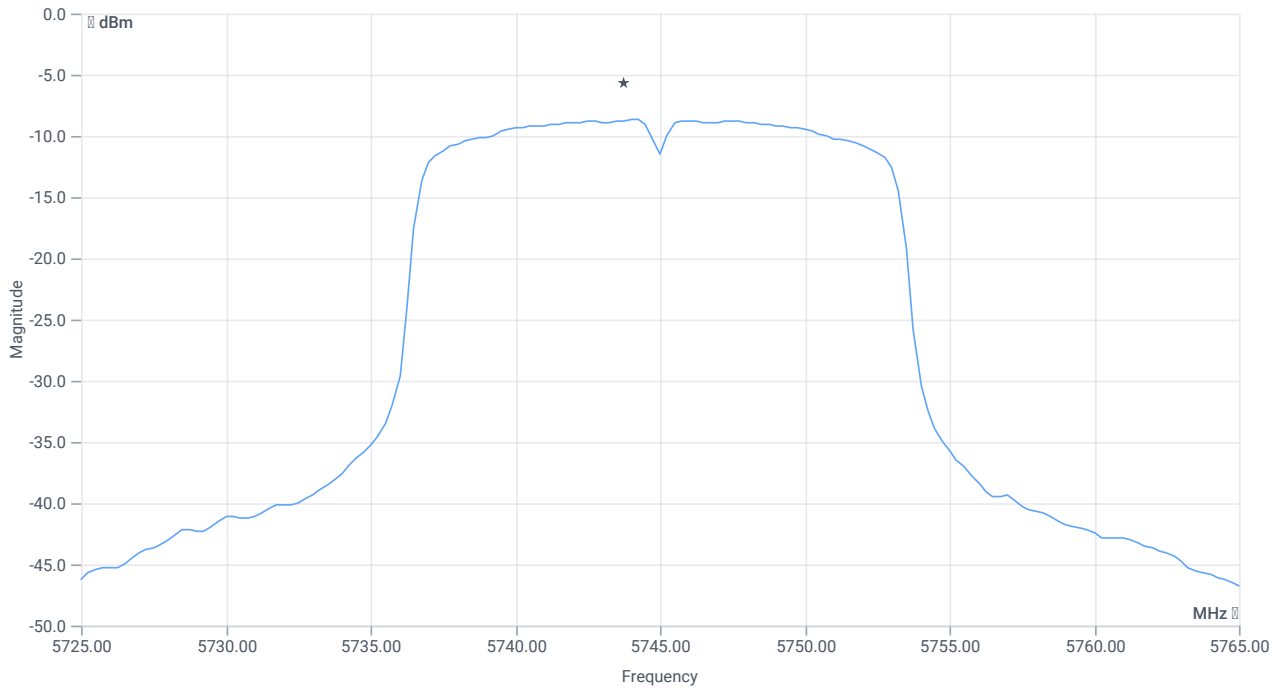

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.68	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.56	dB	INFO
Power spectral density DC corrected	--	30	-8.12	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:08:26
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.23	dBm	INFO
Ref. frequency	--	--	5742.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

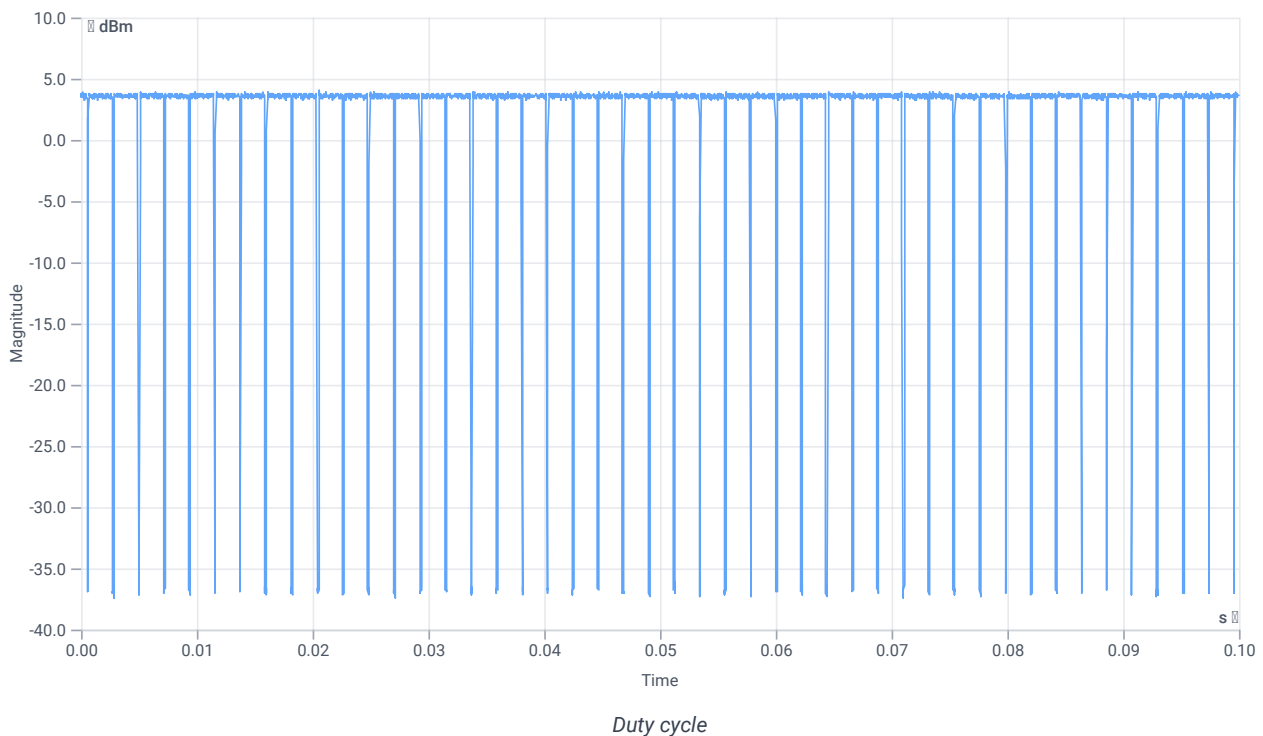

Evaluation bandwidth

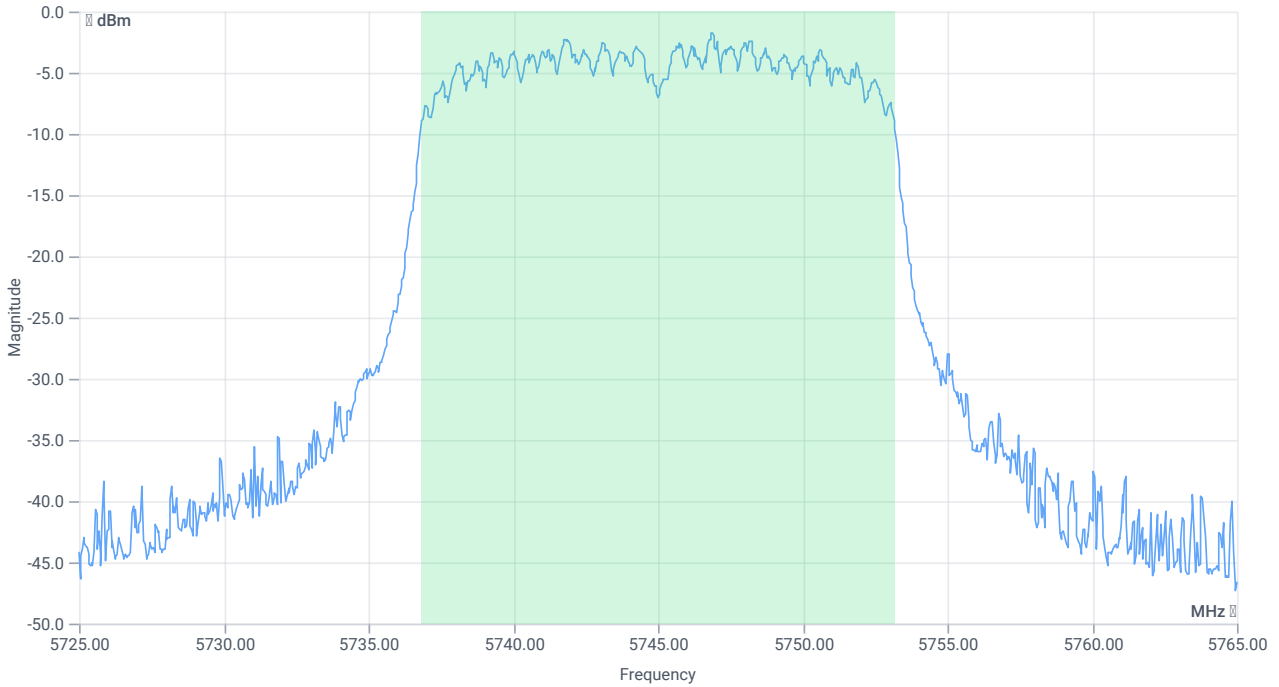

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.304	MHz	INFO
T1 99%	---	---	5736.8482	MHz	INFO
T2 99%	---	---	5753.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.23 10.36 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

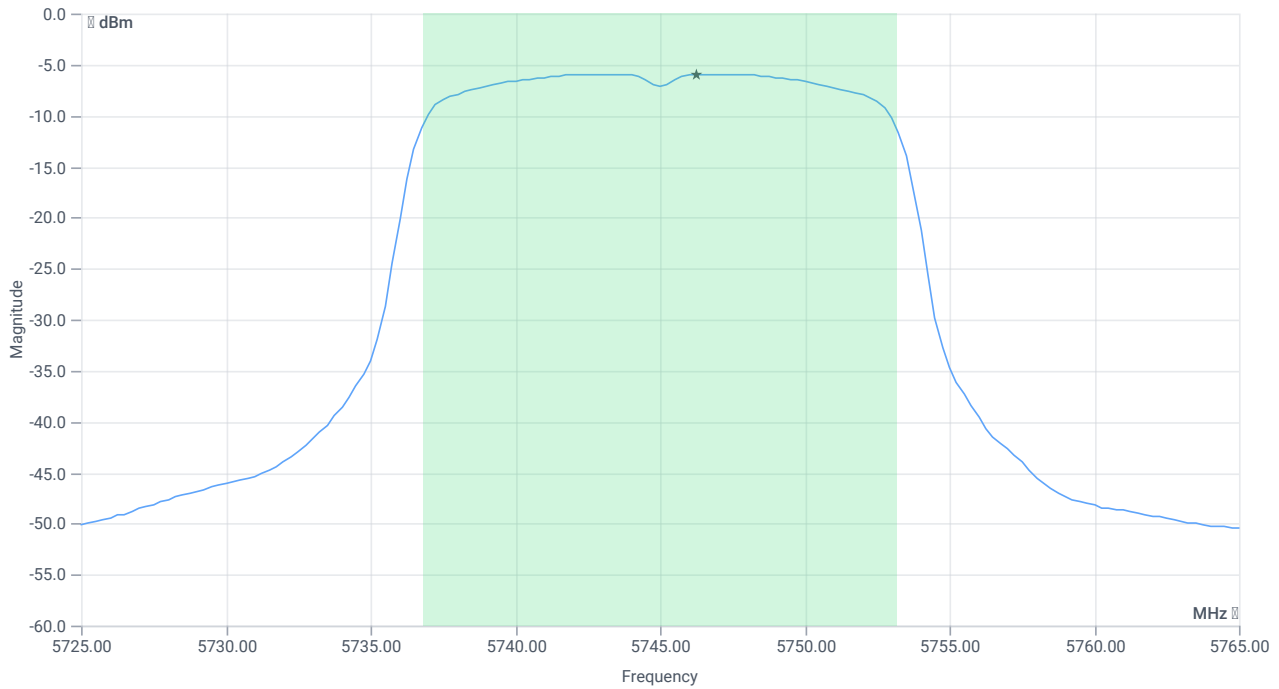

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	5.09	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.55	dBm	PASS
Limit: 11 dBm + 10 log 16.304					
Max output power DC corrected	--	23.12	5.55	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.23 10.36 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

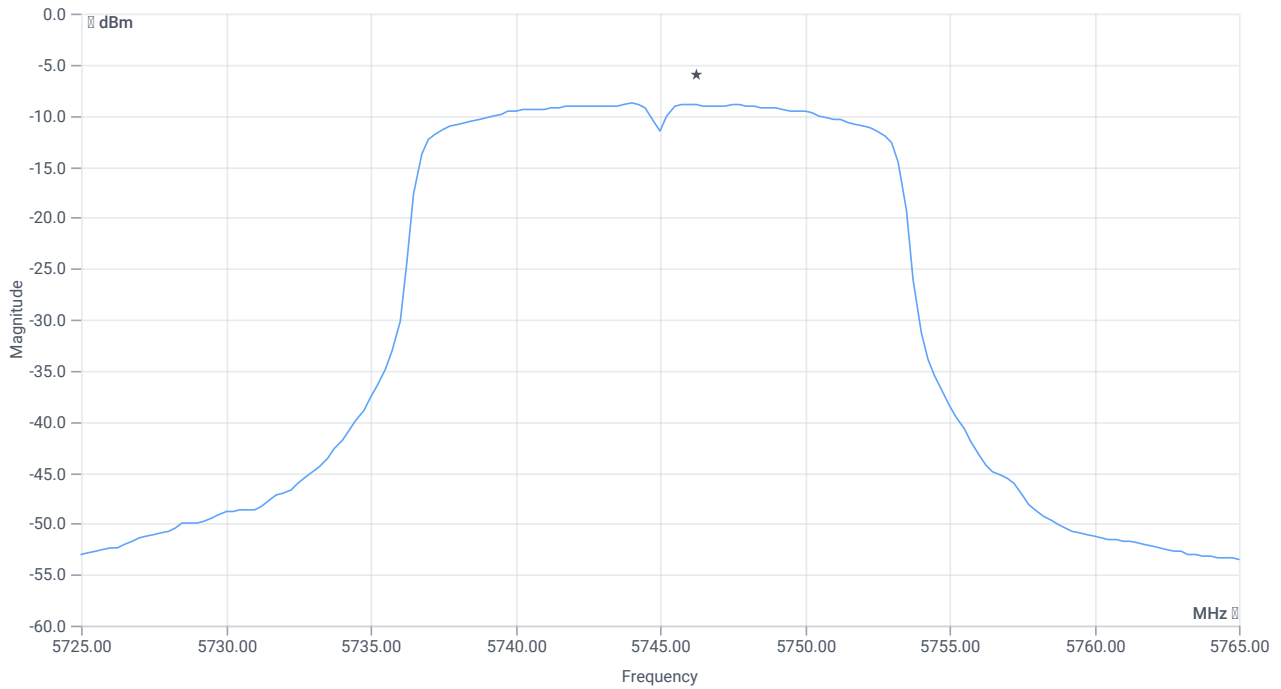

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.81	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	30	-8.35	dBm/0.5MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:05:59
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5745 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.78	dBm	INFO
Ref. frequency	--	--	5741.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.871	--	INFO
Duty cycle min	--	--	0.6	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.3	ms	INFO

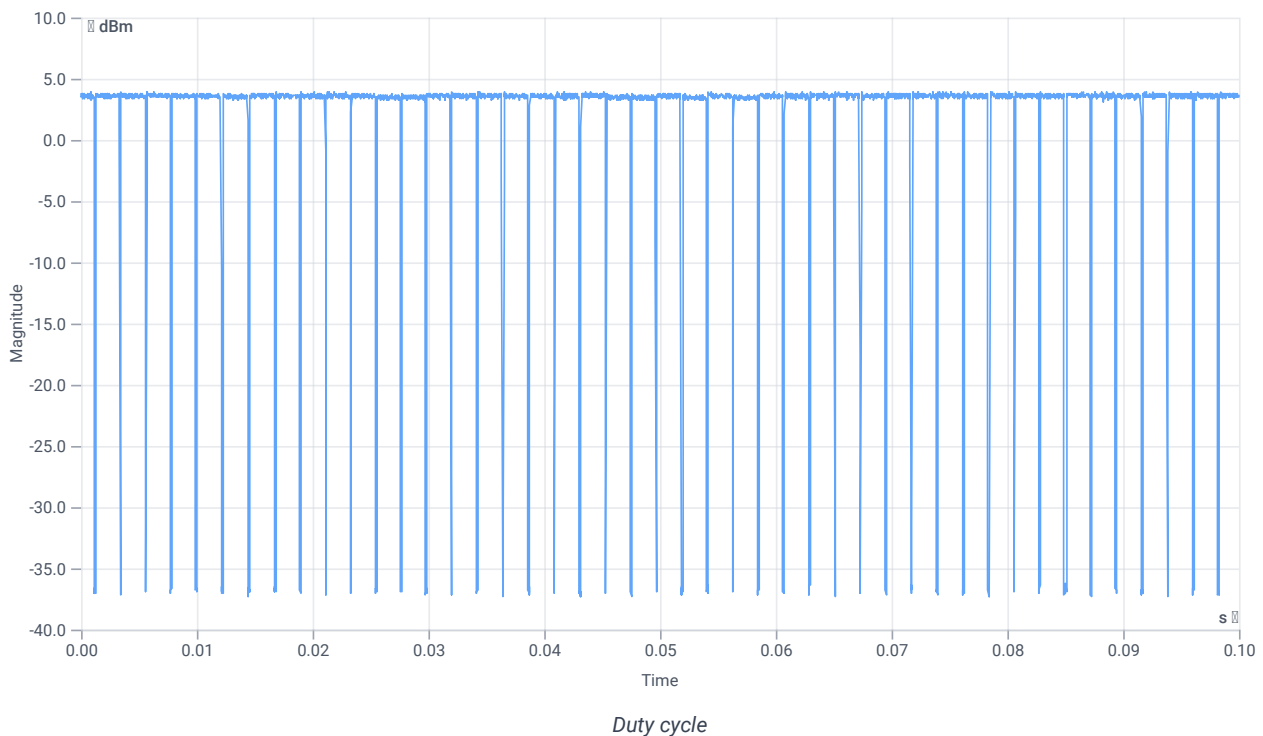

Evaluation bandwidth

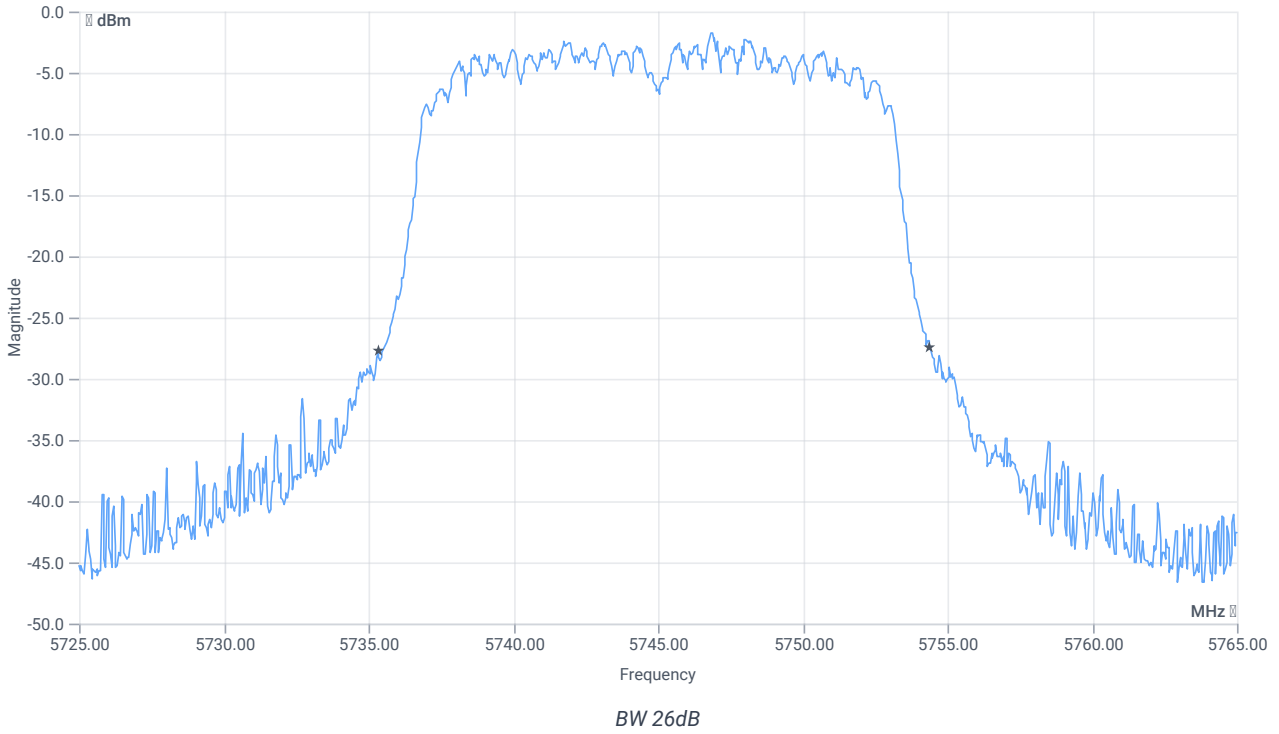


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.08	MHz	INFO
T1 26dB	---	---	5735.3200	MHz	INFO
T2 26dB	---	---	5754.4000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.78 10.36 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

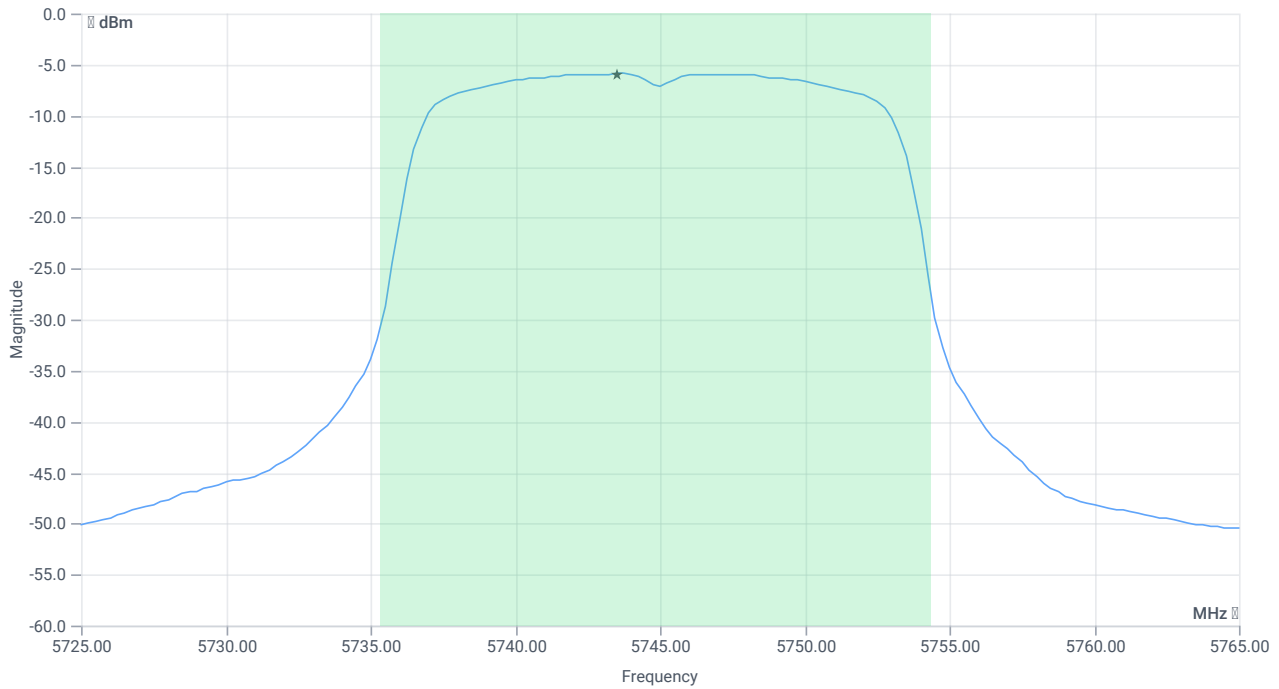

Max OP and PSD


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	5.18	dBm	INFO
Duty cycle correction	--	--	0.6	dB	INFO
Limit absolute					
Max output power DC corrected	--	30	5.78	dBm	PASS
Limit: 11 dBm + 10 log 19.08					
Max output power DC corrected	--	23.81	5.78	dBm	na

Power Spectral Density U-NII-3

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.78 10.36 20
Start [MHz] Stop [MHz]	5725.000 5765.000
RBW [MHz] VBW [MHz]	0.500000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

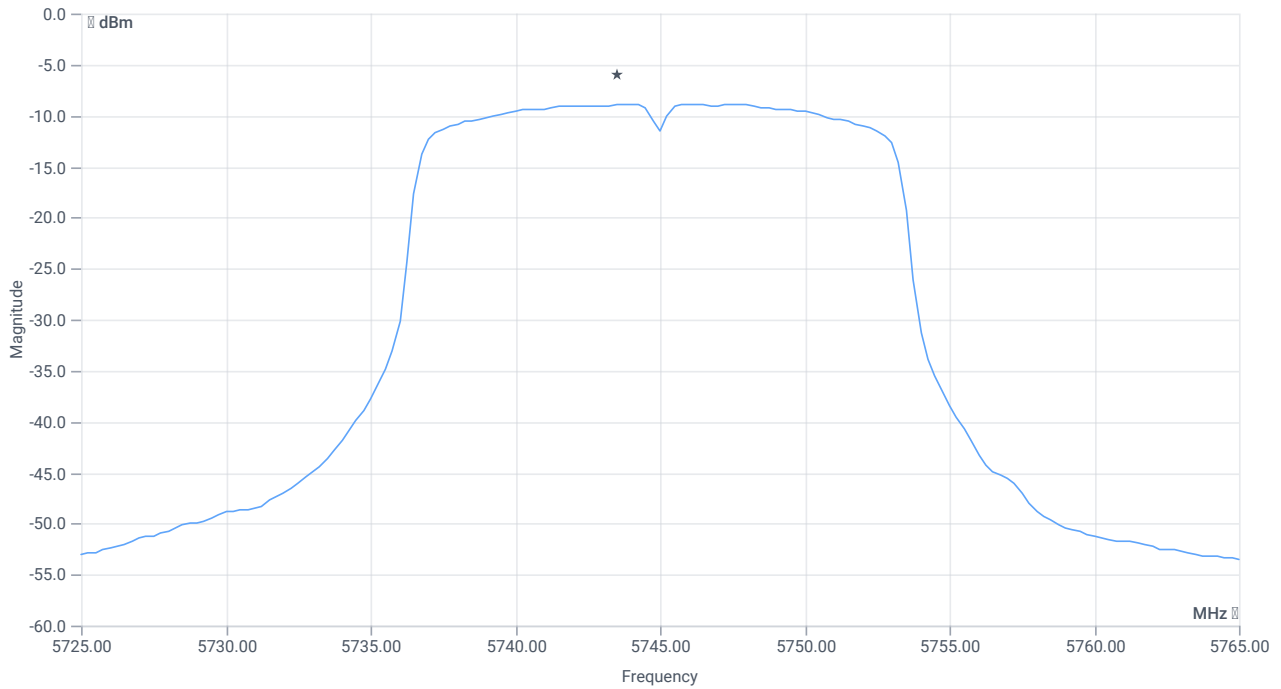

PSD UNII-3

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-8.84	dBm/0.5MHz	INFO
Duty cycle correction	--	--	0.6	dB	INFO
Power spectral density DC corrected	--	30	-8.24	dBm/0.5MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 15:02:05
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.85	dBm	INFO
Ref. frequency	--	--	5242.800	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

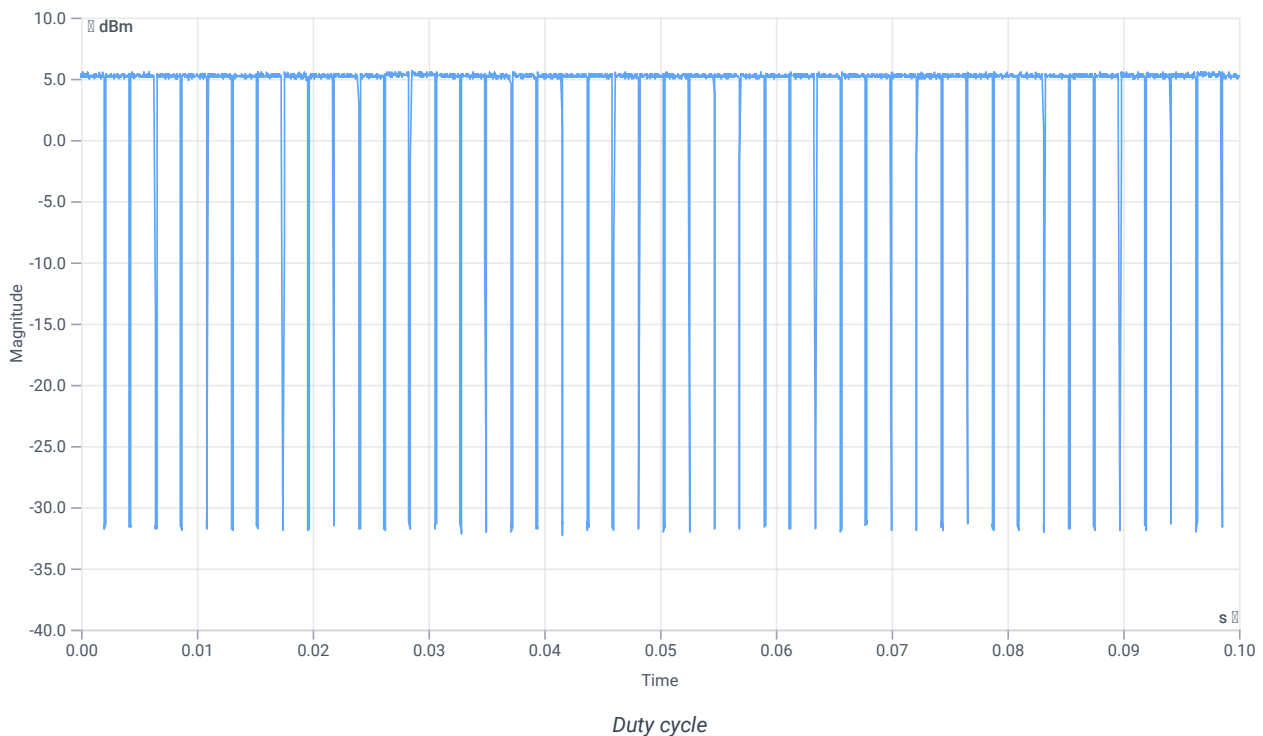

Evaluation bandwidth

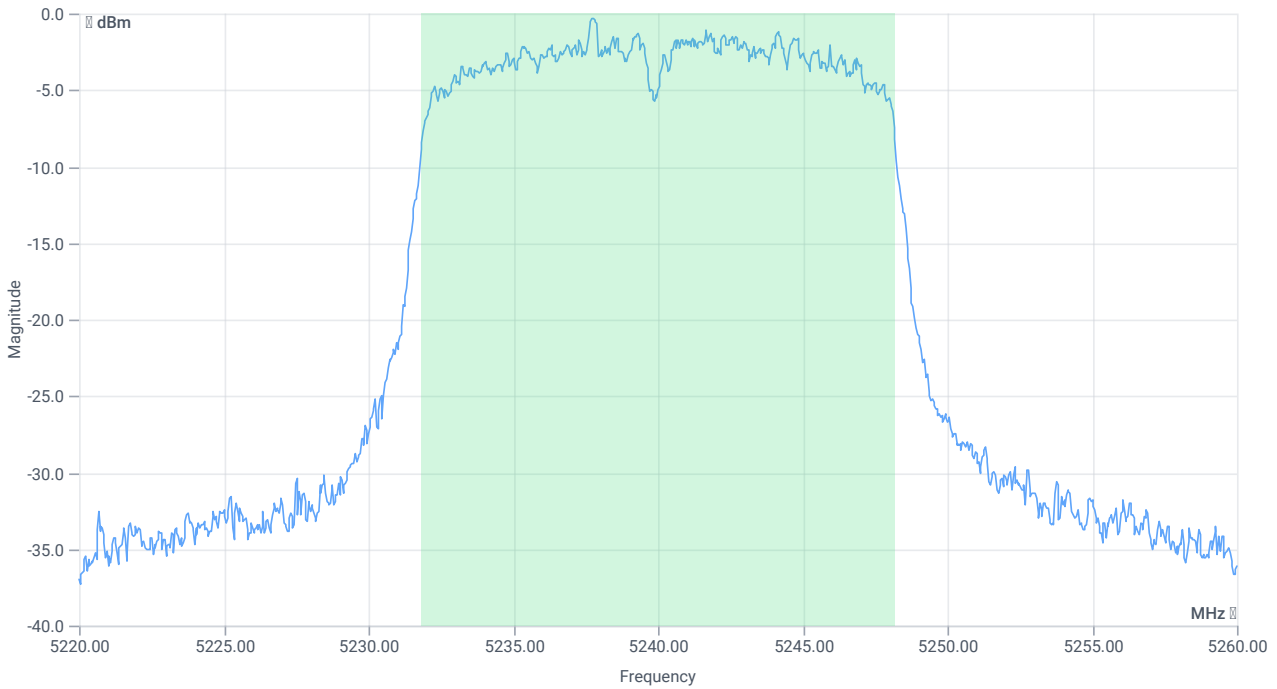

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.344	MHz	INFO
T1 99%	--	--	5231.8482	MHz	INFO
T2 99%	--	--	5248.1918	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.85 9.93 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

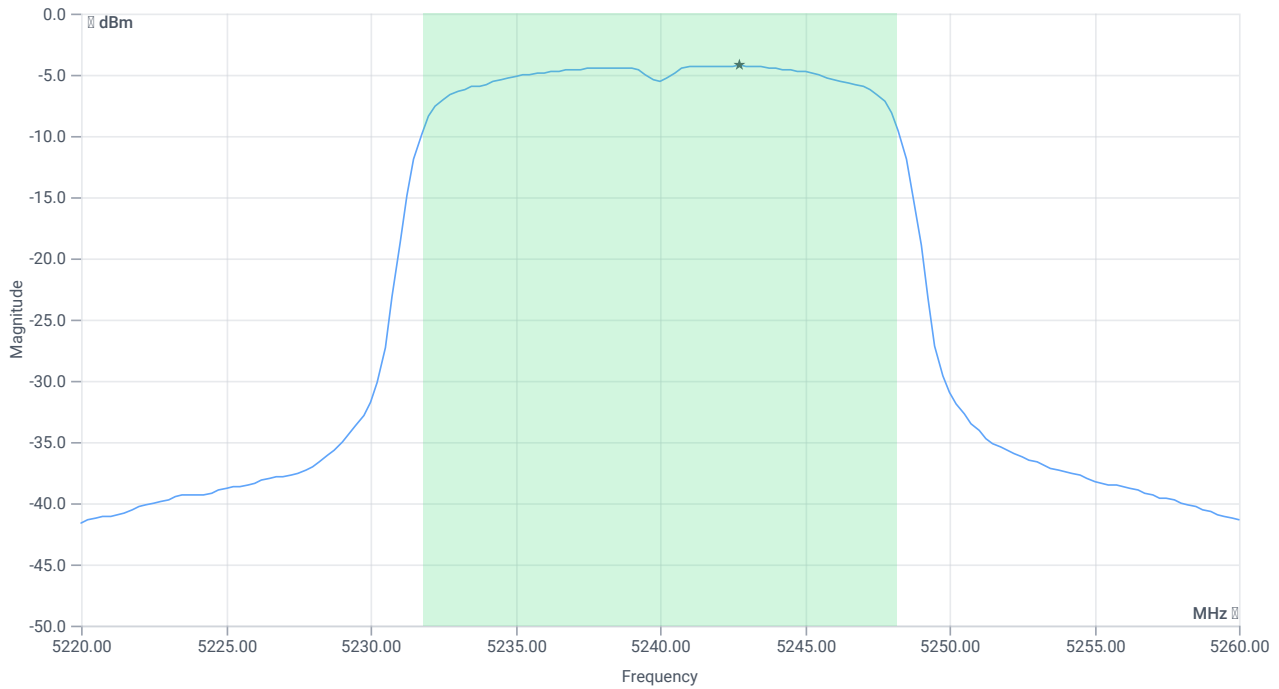

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.73	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	7.19	dBm	na
Limit: 11 dBm + 10 log 16.344					
Max output power DC corrected	--	23.13	7.19	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.25	dBm/1MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	11	-3.79	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 15:00:35
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.88	dBm	INFO
Ref. frequency	--	--	5241.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.91	--	INFO
Duty cycle min	--	--	0.41	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.2	ms	INFO

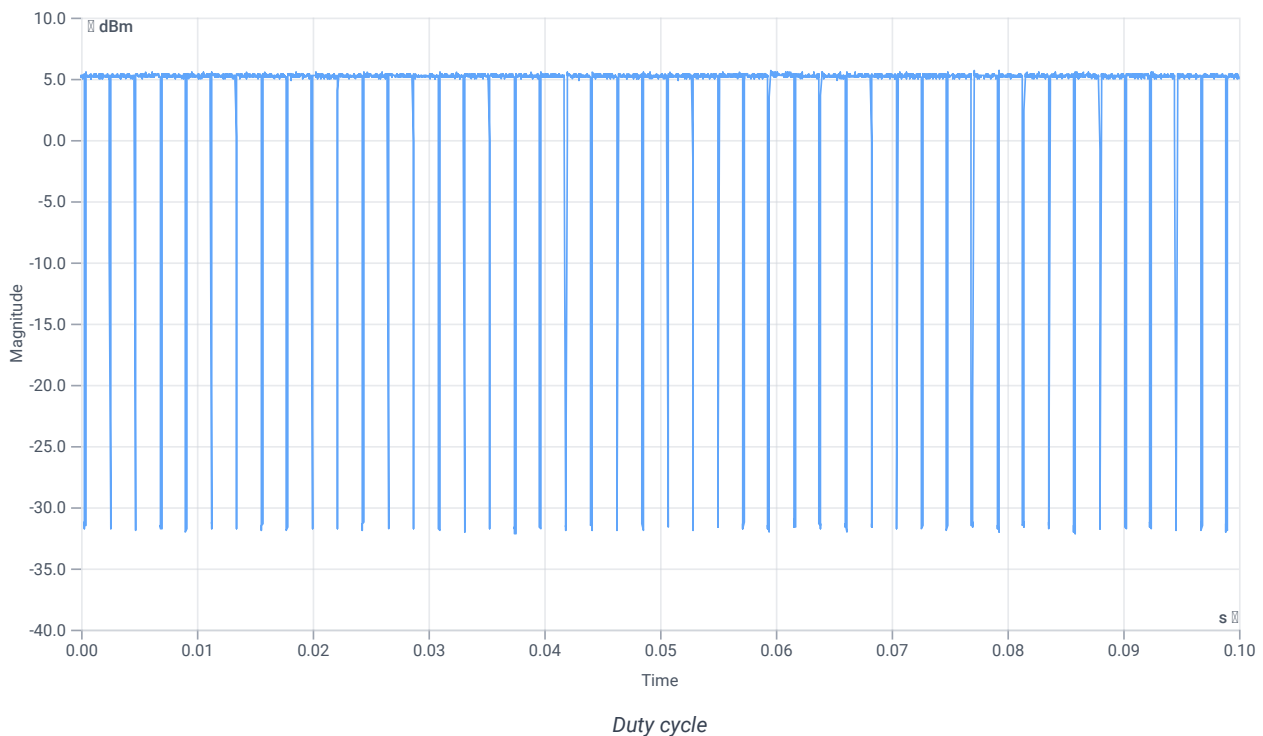

Evaluation bandwidth

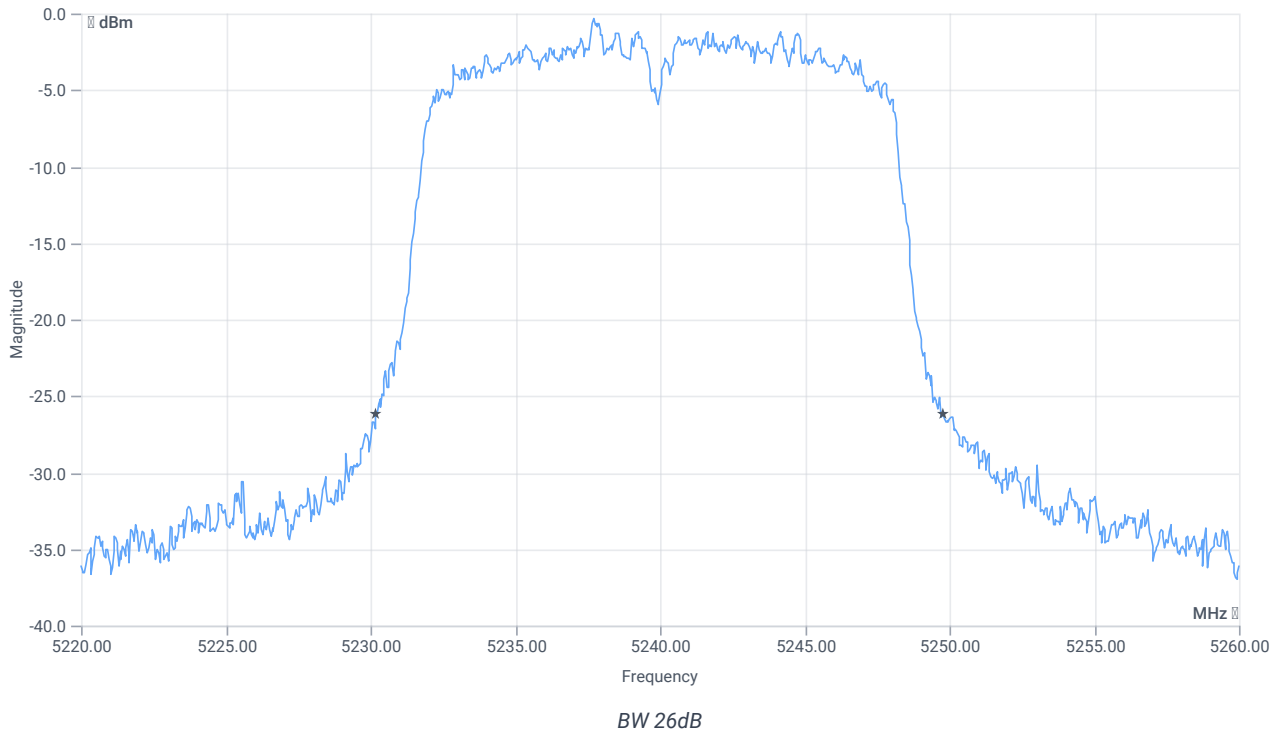


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.56	MHz	INFO
T1 26dB	---	---	5230.2000	MHz	INFO
T2 26dB	---	---	5249.7600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.88 9.93 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

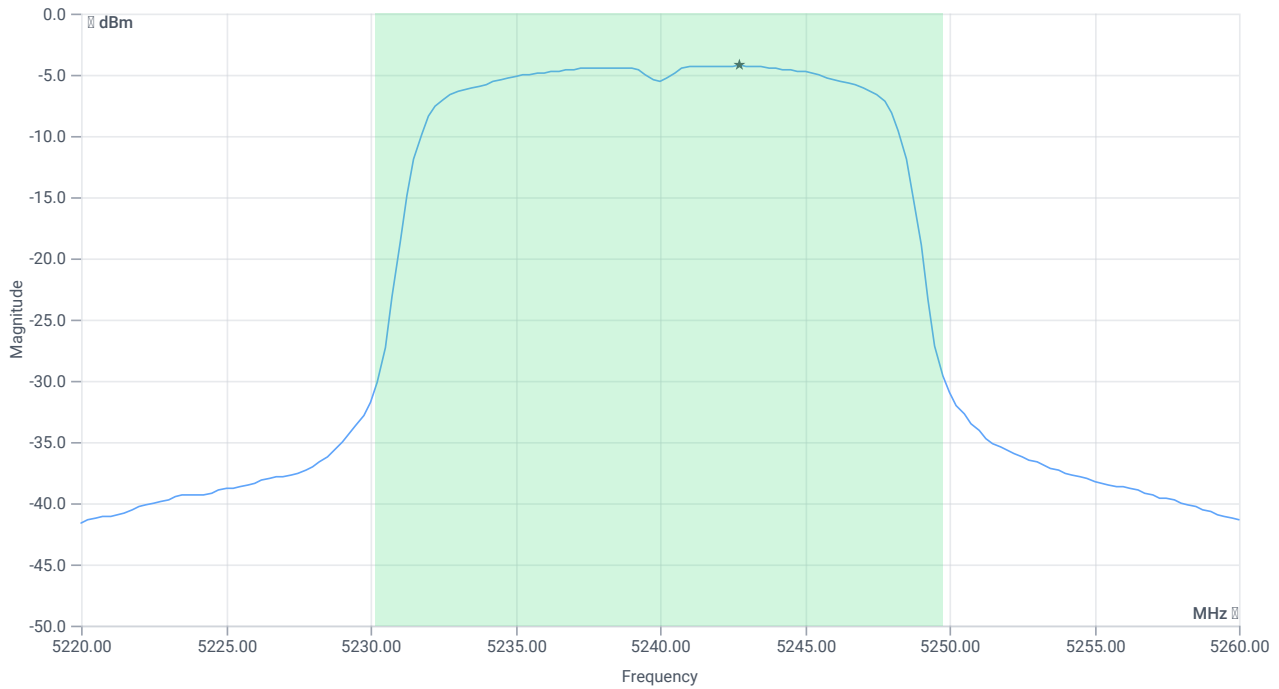

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.81	dBm	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	7.22	dBm	PASS
Limit: 11 dBm + 10 log 19.56					
Max output power DC corrected	--	23.91	7.22	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.25	dBm/1MHz	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Power spectral density DC corrected	--	11	-3.84	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:58:06
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.59	dBm	INFO
Ref. frequency	--	--	5236.400	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.91	--	INFO
Duty cycle min	--	--	0.41	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.2	ms	INFO

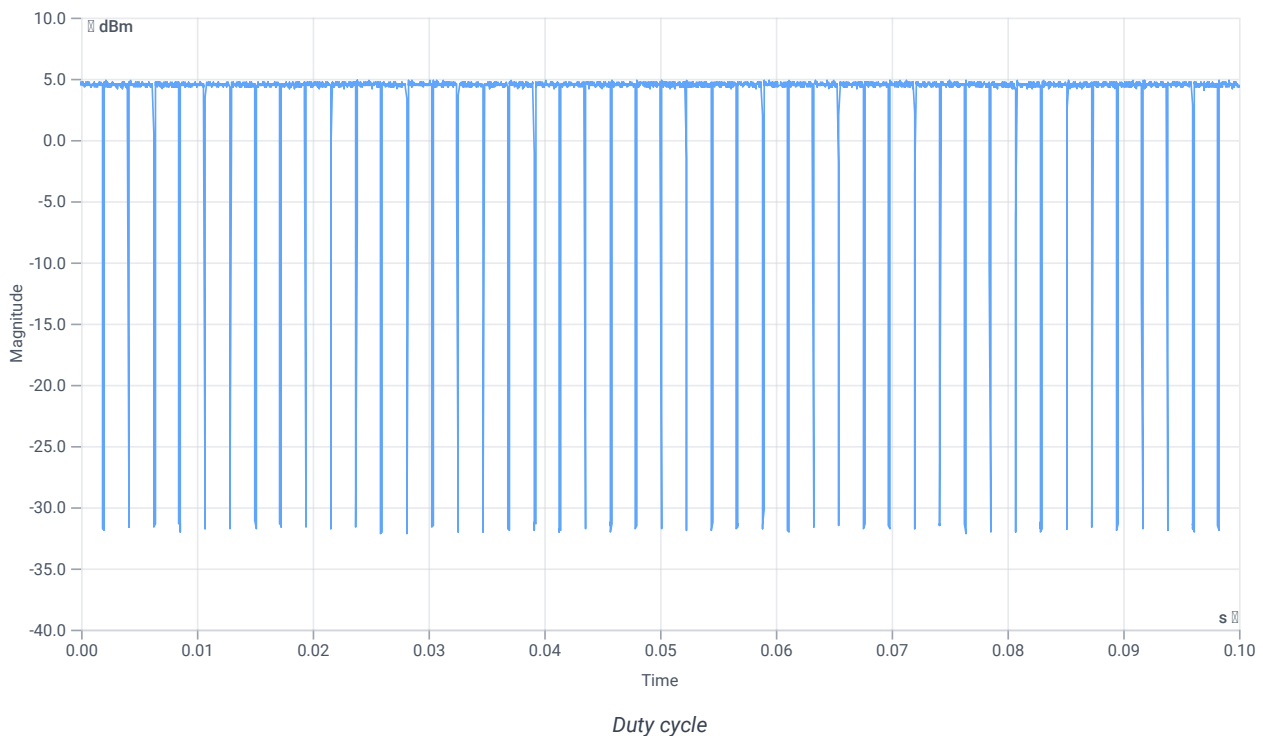

Evaluation bandwidth

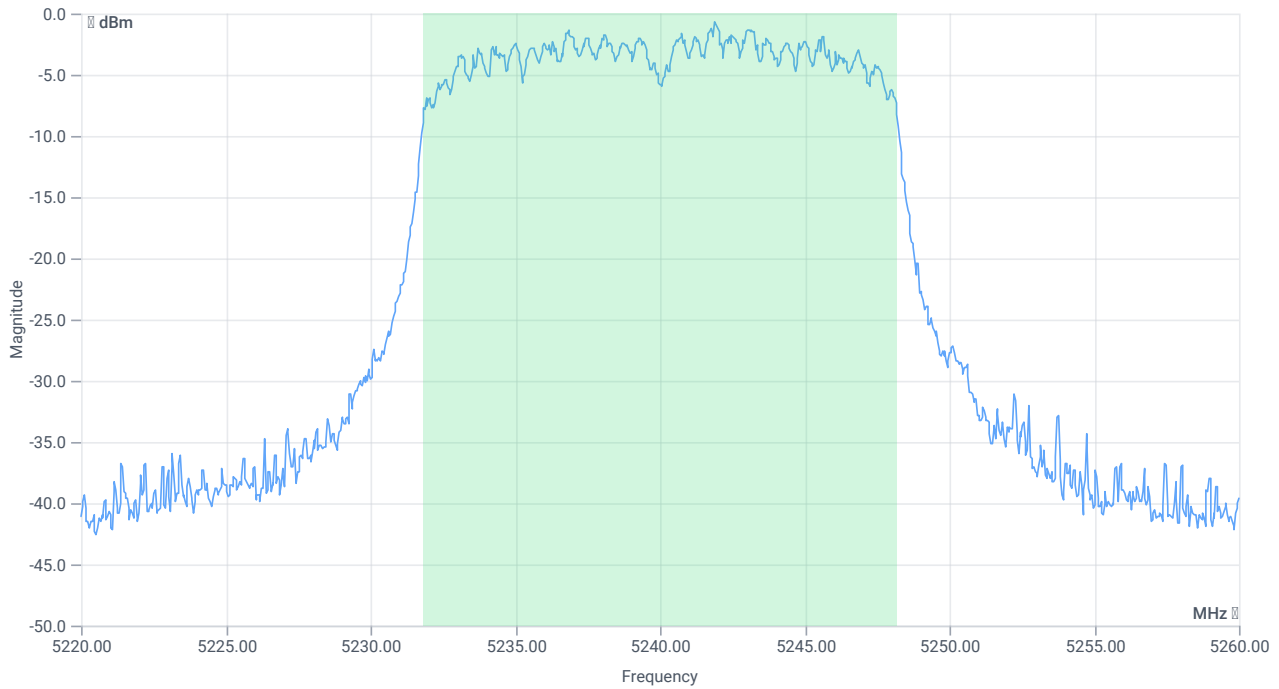

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.304	MHz	INFO
T1 99%	--	--	5231.8482	MHz	INFO
T2 99%	--	--	5248.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.59 9.92 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

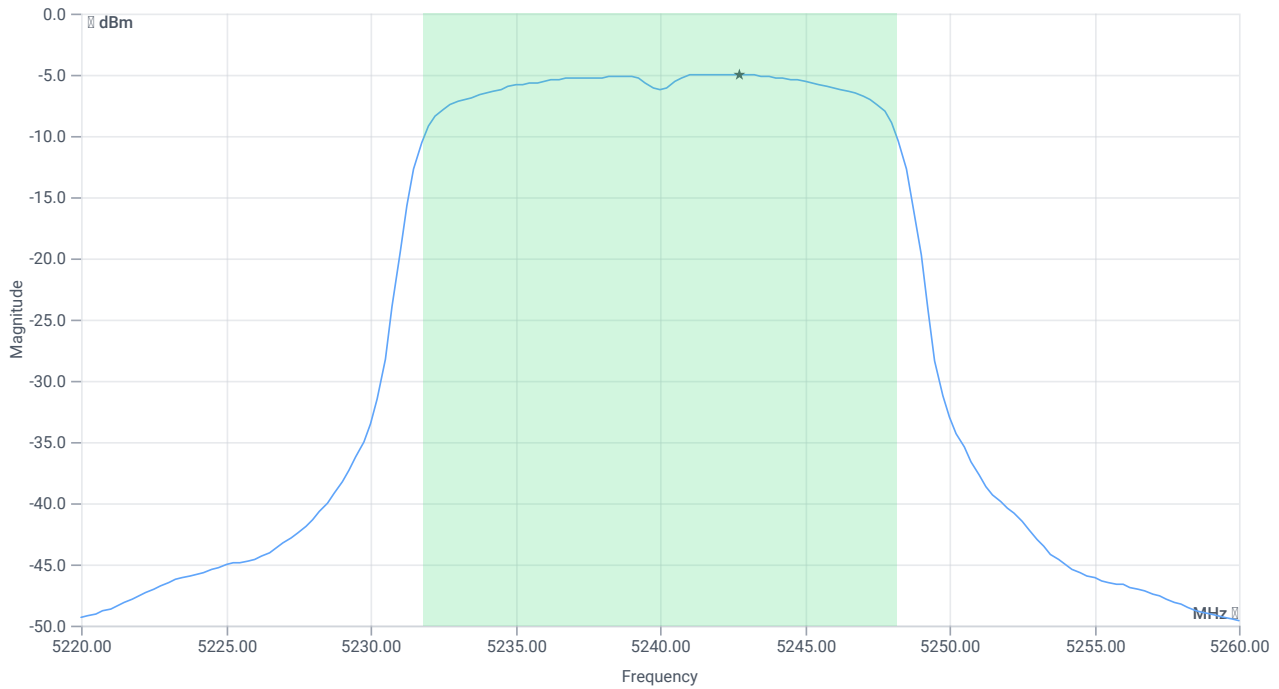

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6	dBm	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.41	dBm	na
Limit: 11 dBm + 10 log 16.304					
Max output power DC corrected	--	23.12	6.41	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.97	dBm/1MHz	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Power spectral density DC corrected	--	11	-4.56	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:56:36
Ambit temp [°C] humidity [rel%]	26.5 37
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	True Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5240 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.63	dBm	INFO
Ref. frequency	--	--	5245.390	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

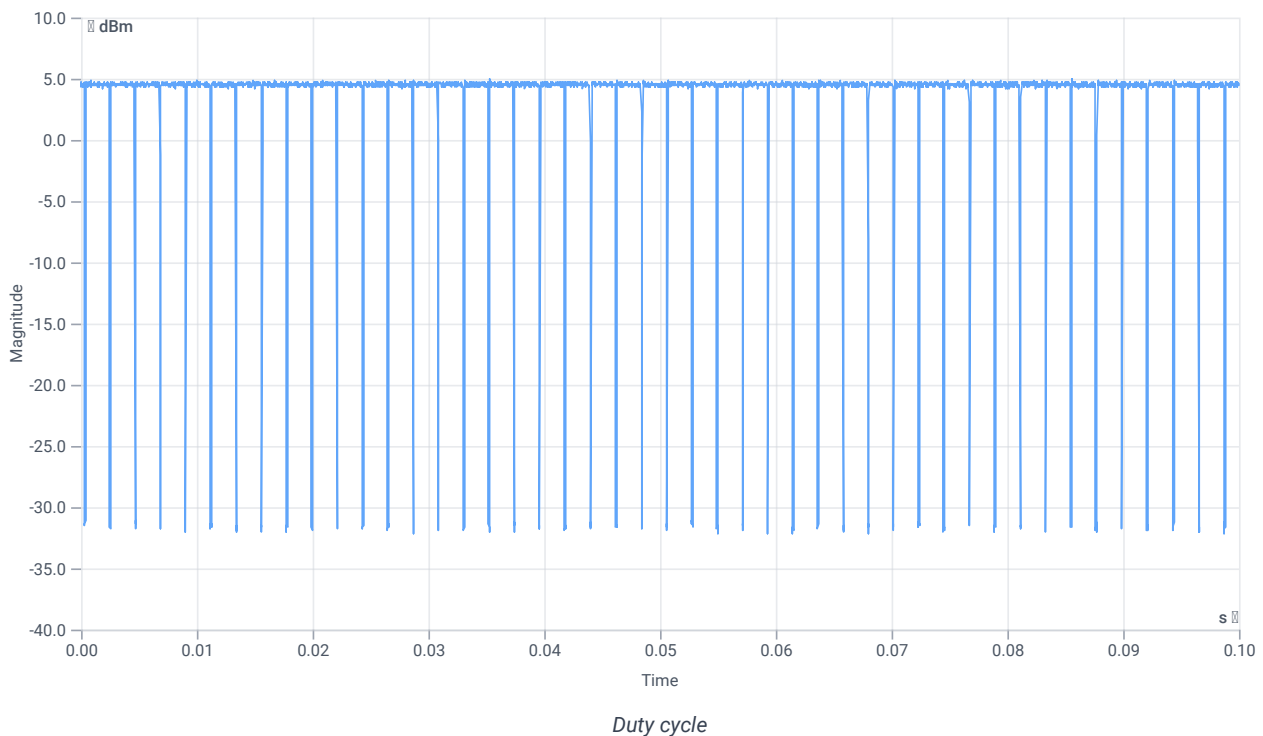

Evaluation bandwidth

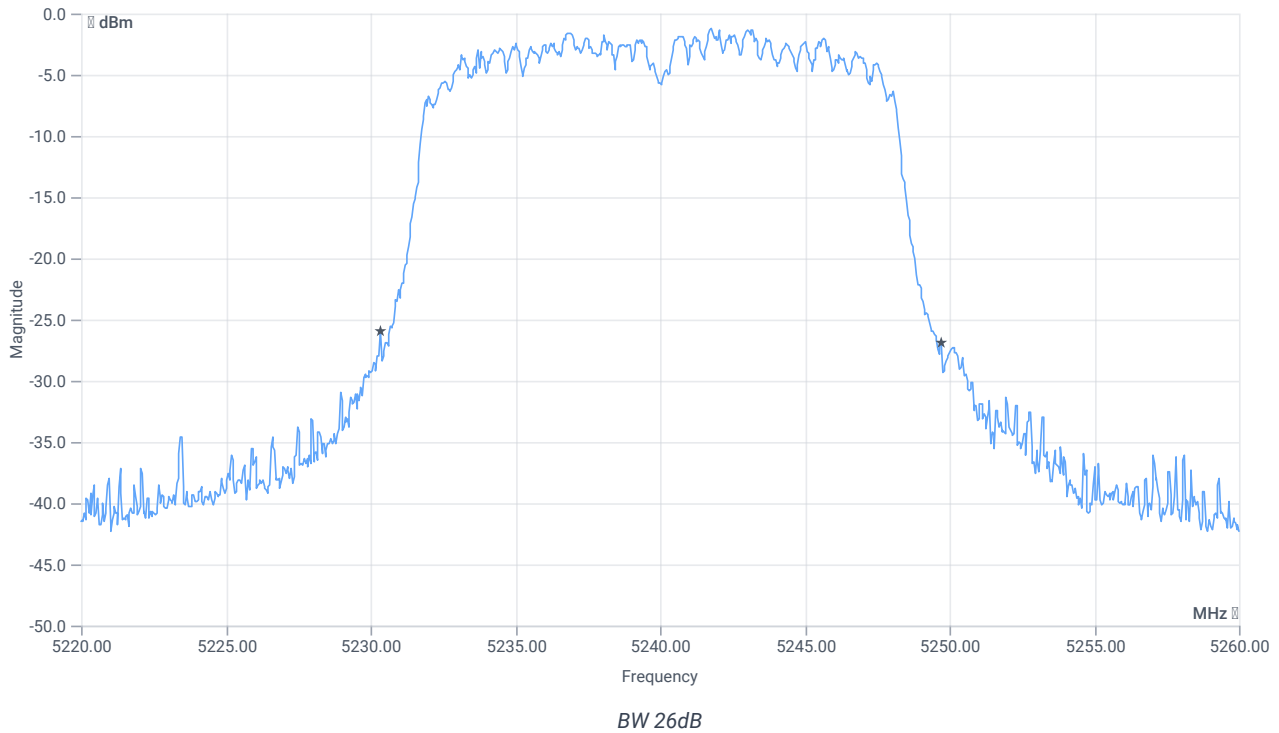


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.4	MHz	INFO
T1 26dB	---	---	5230.3200	MHz	INFO
T2 26dB	---	---	5249.7200	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.63 9.92 20
Start [MHz] Stop [MHz]	5220.000 5260.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

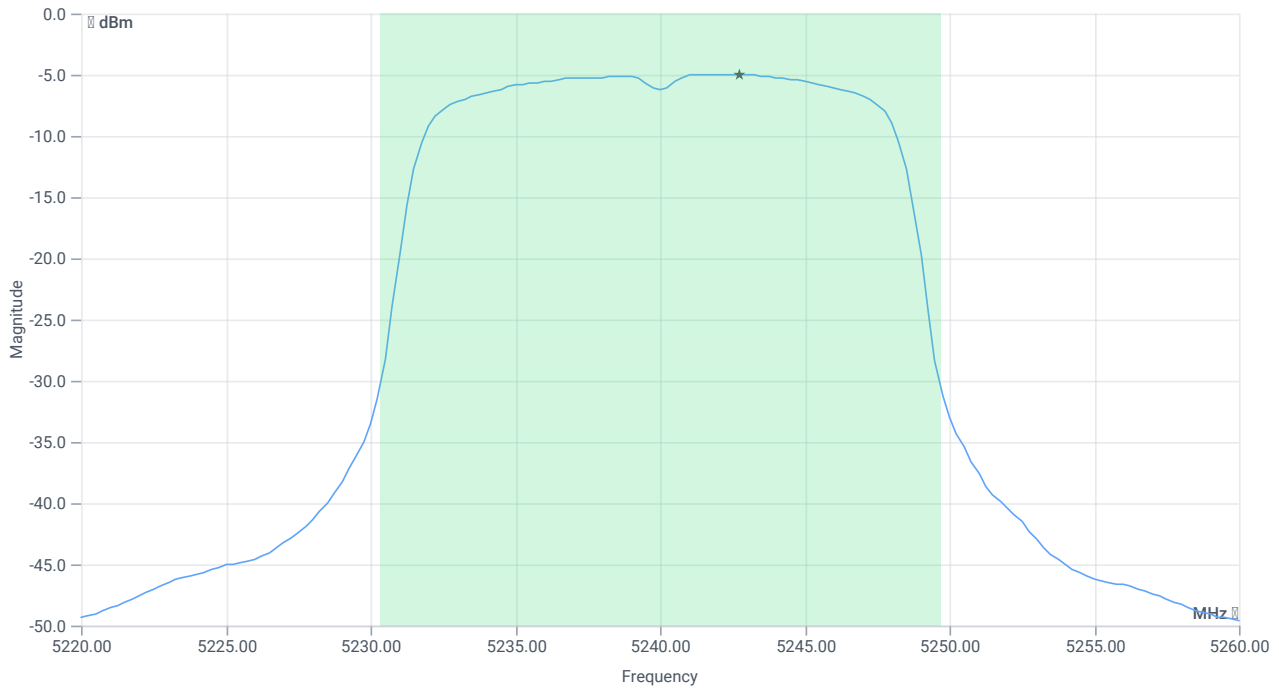

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.09	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.55	dBm	PASS
Limit: 11 dBm + 10 log 19.4					
Max output power DC corrected	--	23.88	6.55	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.97	dBm/1MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	11	-4.51	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:52:56
Ambit temp [°C] humidity [rel%]	26.4 37
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.38	dBm	INFO
Ref. frequency	--	--	5196.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

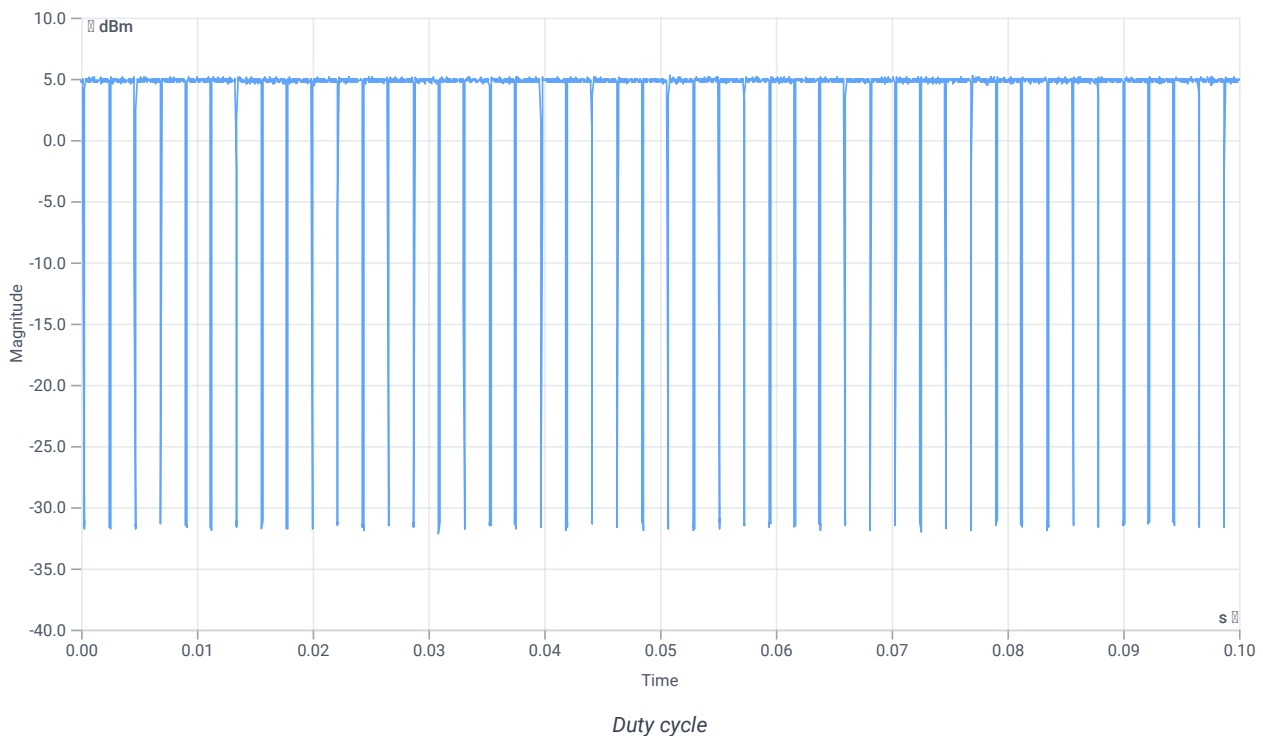

Evaluation bandwidth

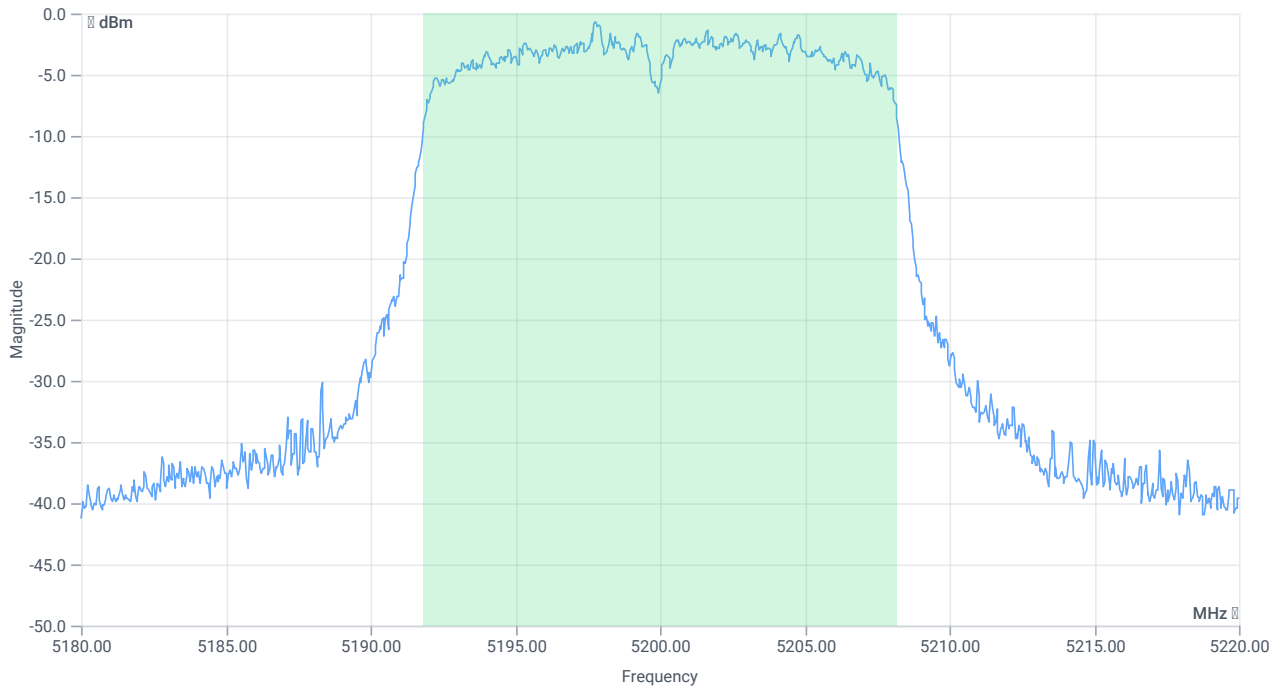

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.344	MHz	INFO
T1 99%	--	--	5191.8482	MHz	INFO
T2 99%	--	--	5208.1918	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.38 10.08 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

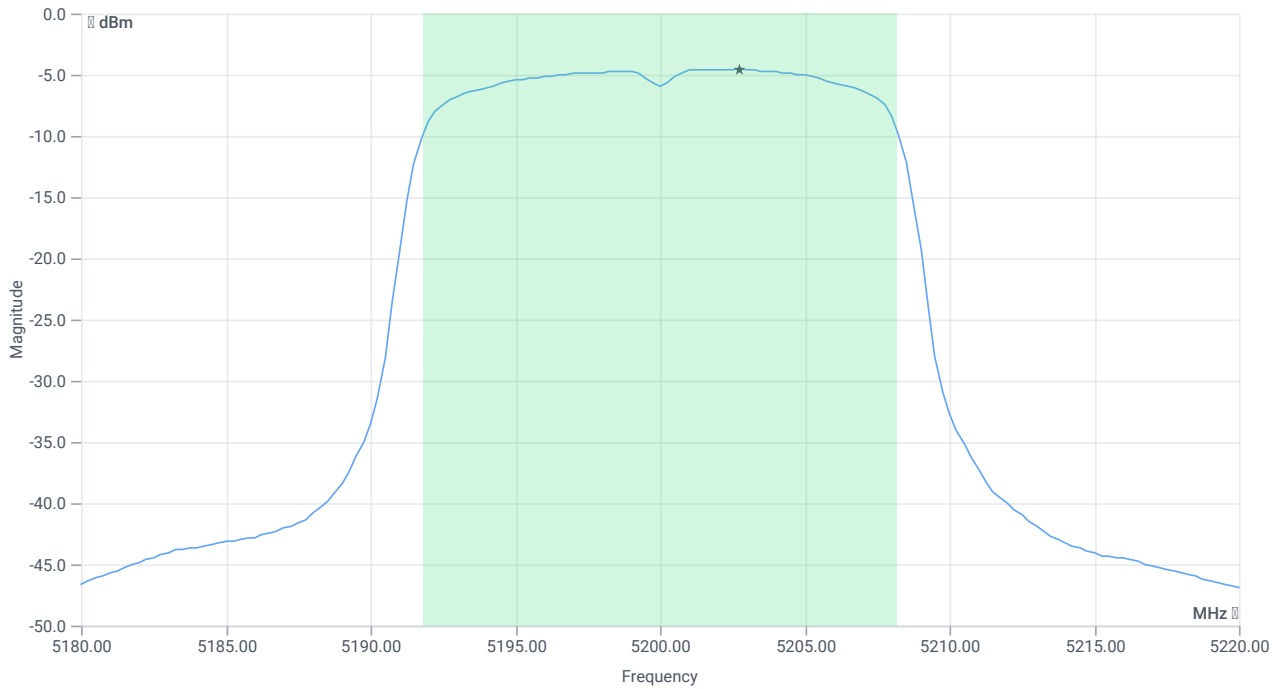

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.42	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.88	dBm	na
Limit: 11 dBm + 10 log 16.344					
Max output power DC corrected	--	23.13	6.88	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.53	dBm/1MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	11	-4.07	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:51:25
Ambit temp [°C] humidity [rel%]	26.4 37
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F., E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.50	dBm	INFO
Ref. frequency	--	--	5202.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.91	--	INFO
Duty cycle min	--	--	0.41	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.2	ms	INFO

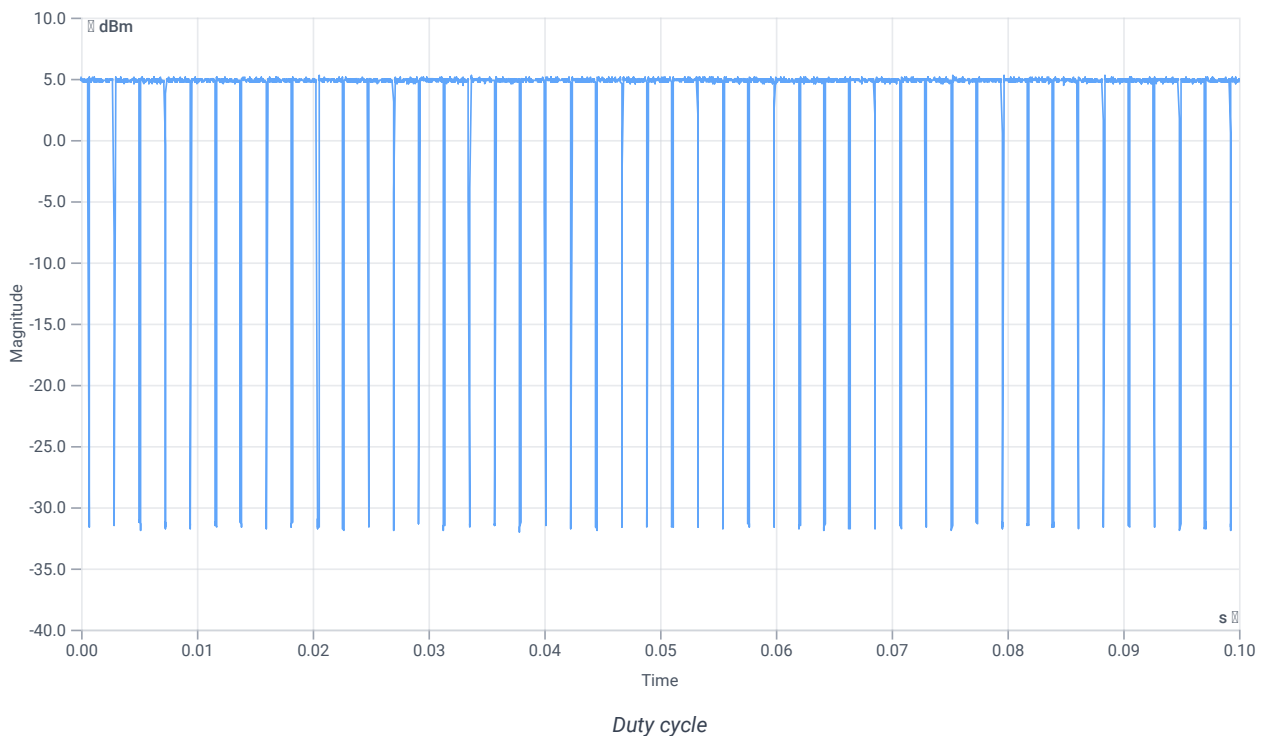

Evaluation bandwidth

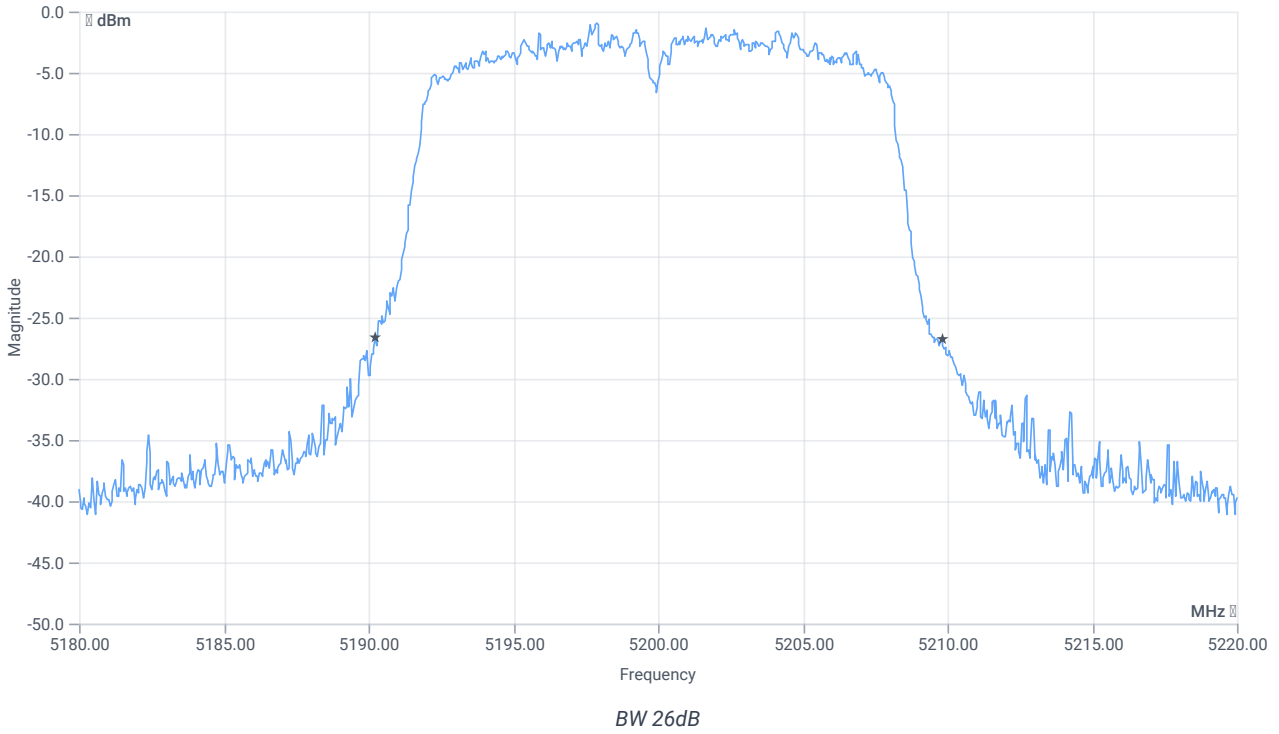


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.56	MHz	INFO
T1 26dB	---	---	5190.2400	MHz	INFO
T2 26dB	---	---	5209.8000	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.50 10.08 20
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

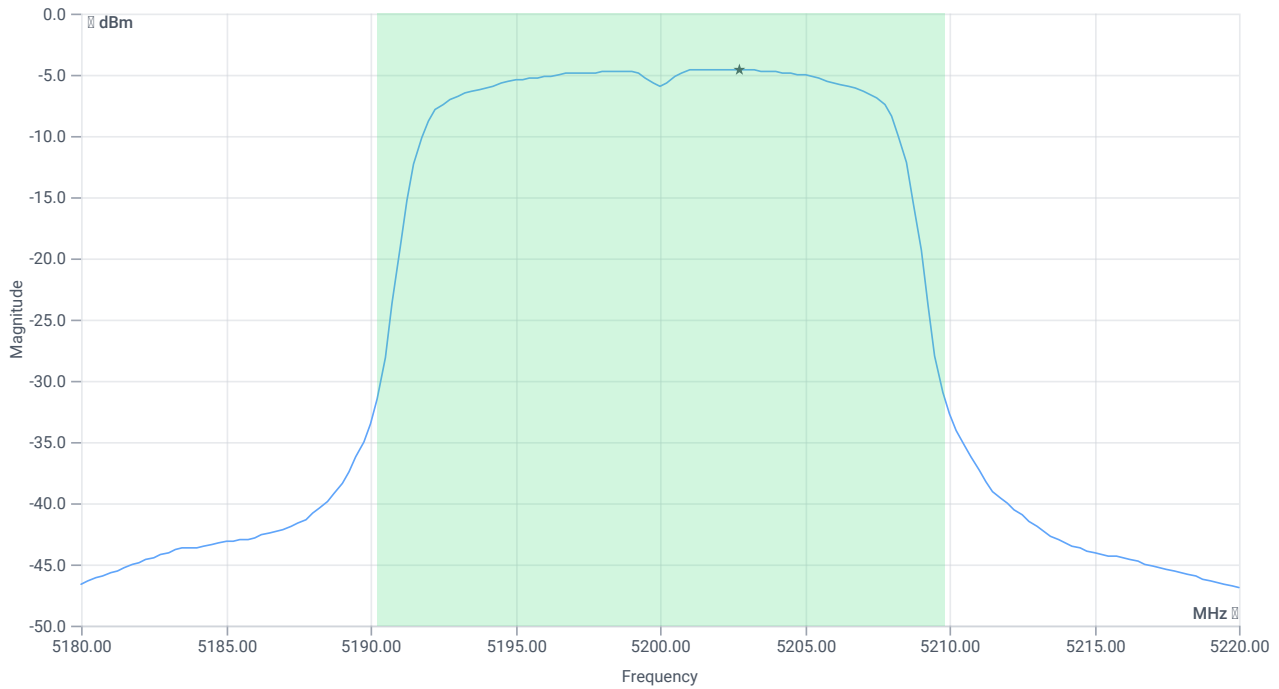

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.51	dBm	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.92	dBm	PASS
Limit: 11 dBm + 10 log 19.56					
Max output power DC corrected	--	23.91	6.92	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.55	dBm/1MHz	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Power spectral density DC corrected	--	11	-4.14	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:48:50
Ambit temp [°C] humidity [rel%]	26.4 37
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	4.82	dBm	INFO
Ref. frequency	--	--	5202.000	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

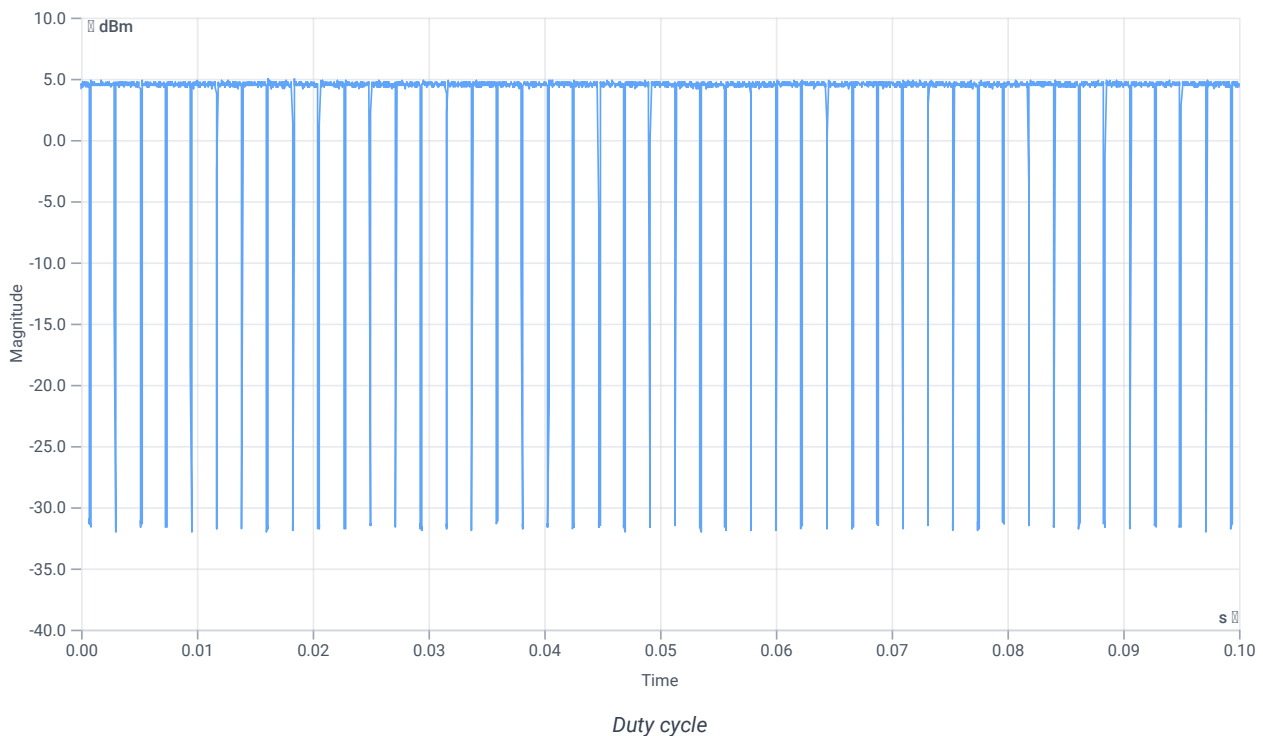

Evaluation bandwidth

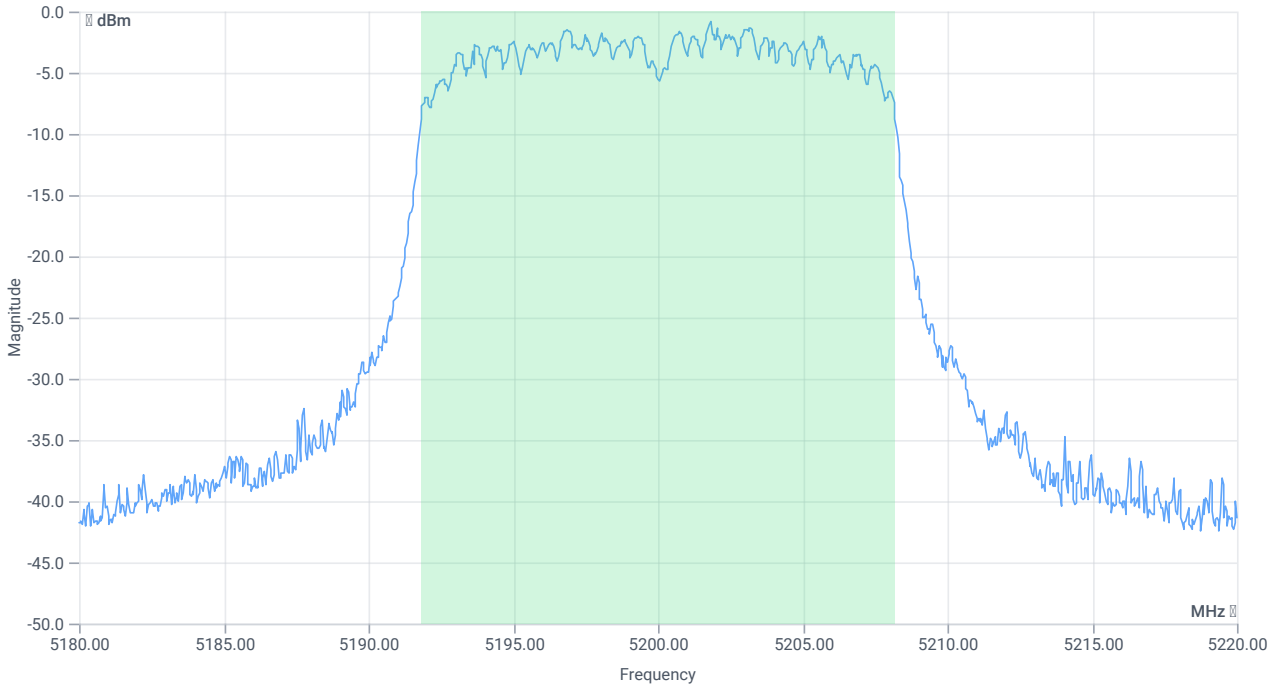

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	16.304	MHz	INFO
T1 99%	---	---	5191.8482	MHz	INFO
T2 99%	---	---	5208.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.82 10.05 25
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

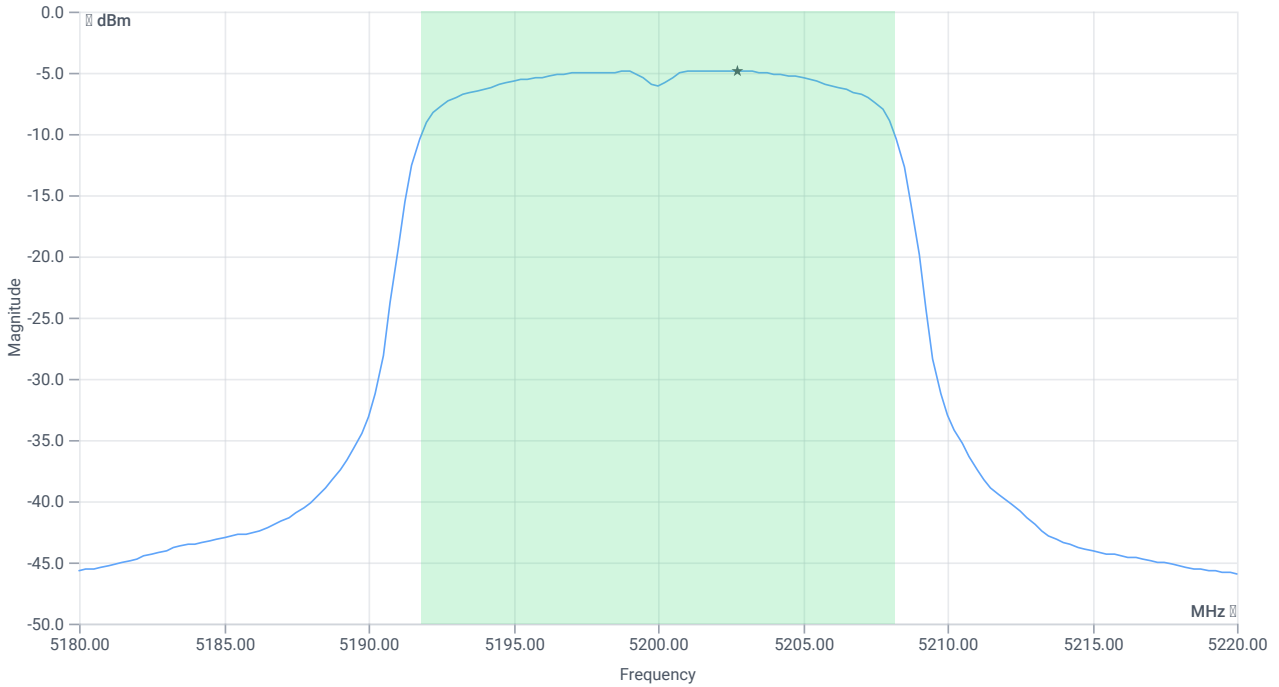

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.15	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.61	dBm	na
Limit: 11 dBm + 10 log 16.304					
Max output power DC corrected	--	23.12	6.61	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.83	dBm/1MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	11	-4.37	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:47:19
Ambit temp [°C] humidity [rel%]	26.3 37
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5180
Frequency mid to test	True Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5200 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	4.47	dBm	INFO
Ref. frequency	--	--	5201.800	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

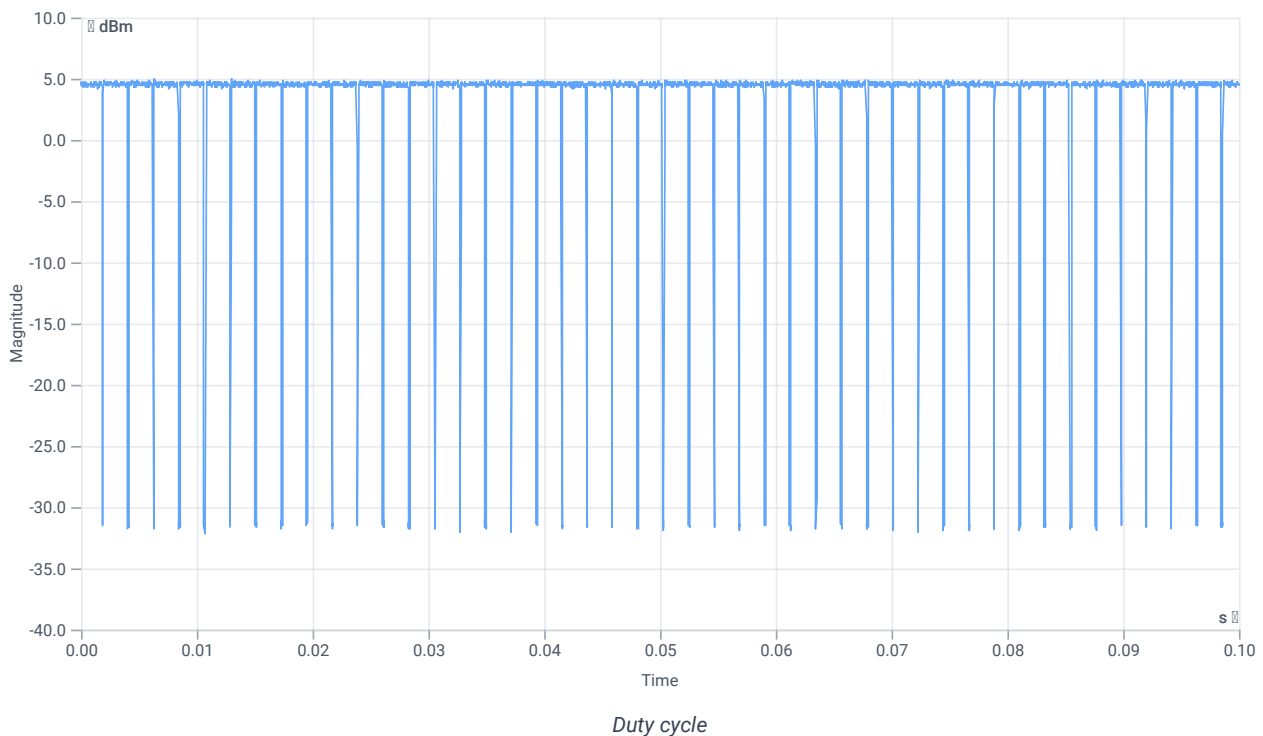

Evaluation bandwidth

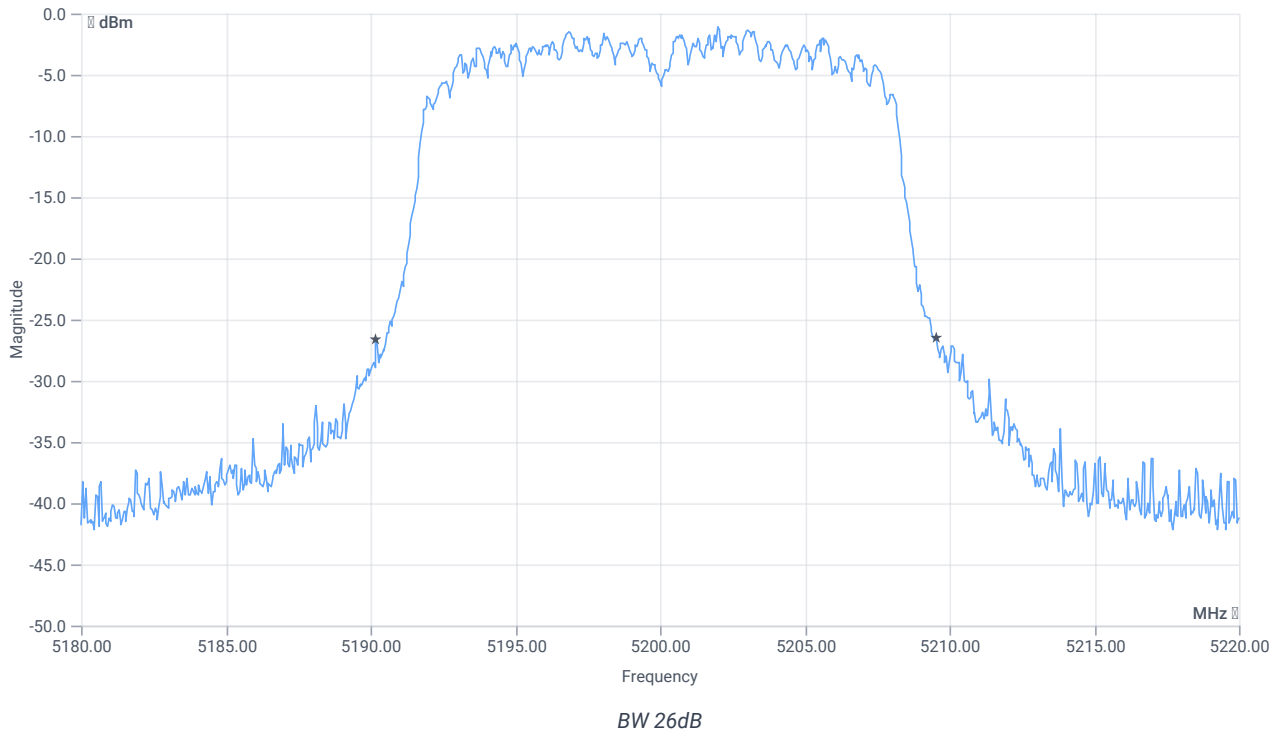


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.36	MHz	INFO
T1 26dB	---	---	5190.2000	MHz	INFO
T2 26dB	---	---	5209.5600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.47 10.05 25
Start [MHz] Stop [MHz]	5180.000 5220.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

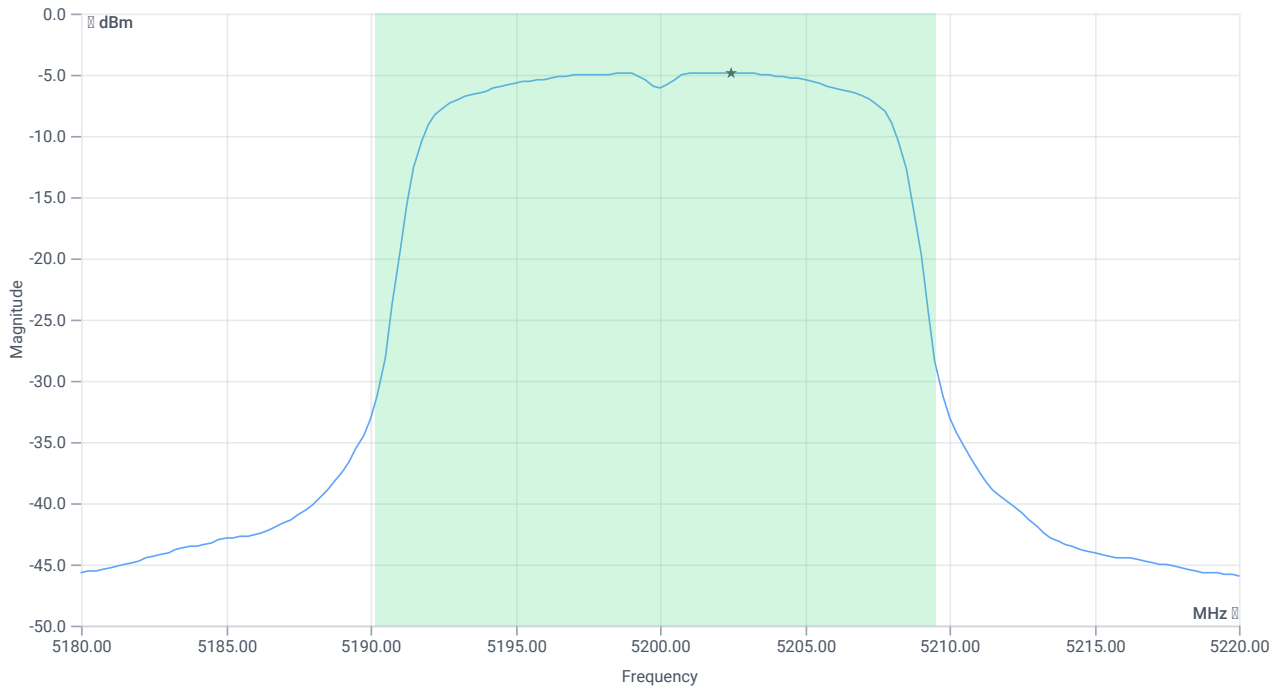

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.24	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.7	dBm	PASS
Limit: 11 dBm + 10 log 19.36					
Max output power DC corrected	--	23.87	6.7	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.82	dBm/1MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	11	-4.36	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:41:28
Ambit temp [°C] humidity [rel%]	26.3 37
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	3.53	dBm	INFO
Ref. frequency	--	--	5176.600	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

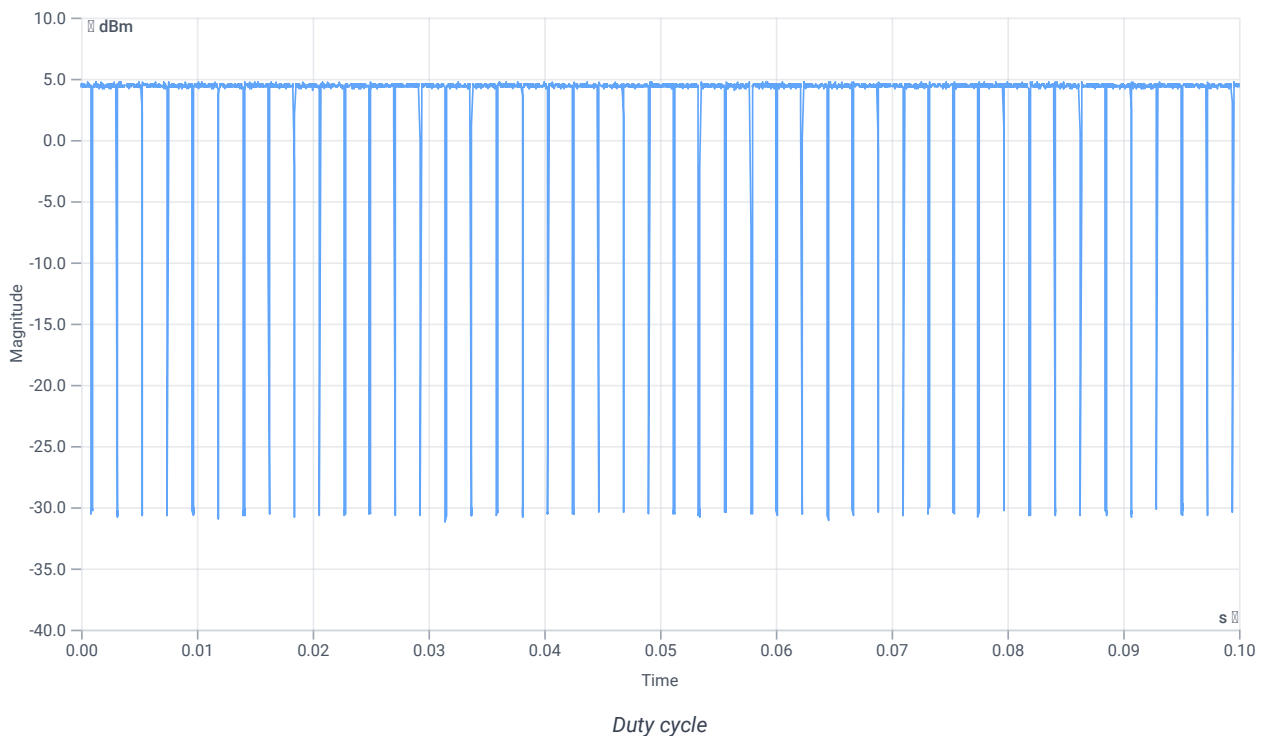

Evaluation bandwidth

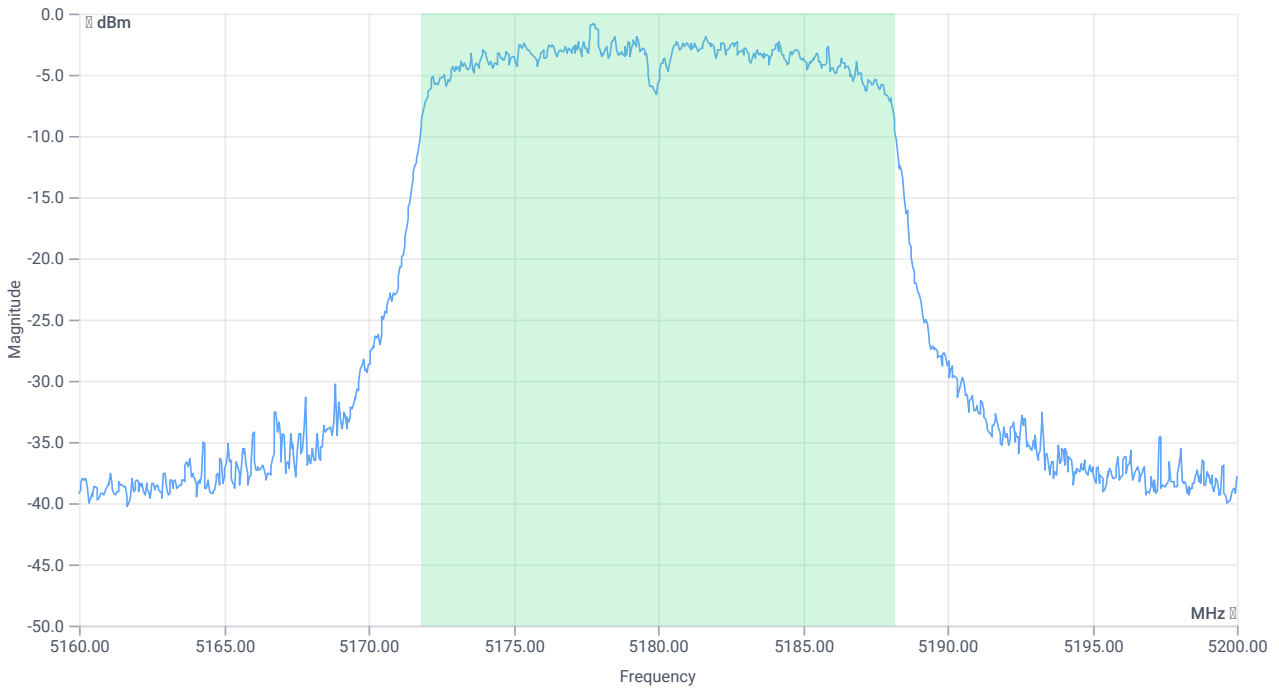

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.344	MHz	INFO
T1 99%	--	--	5171.8082	MHz	INFO
T2 99%	--	--	5188.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.53 10.01 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

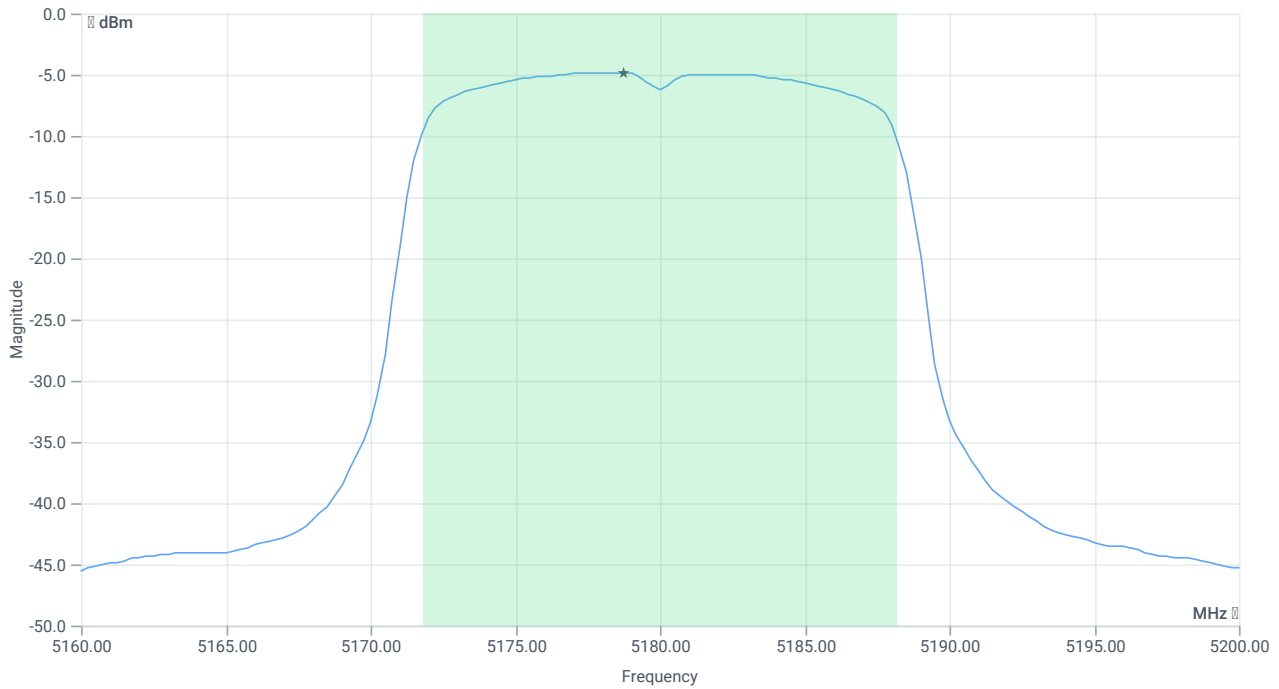

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	6.18	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	6.64	dBm	na
Limit: 11 dBm + 10 log 16.344					
Max output power DC corrected	--	23.13	6.64	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-4.85	dBm/1MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	11	-4.39	dBm/1MHz	PASS

Verdict

PASS

ISED RSS247 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:37:16
Ambit temp [°C] humidity [rel%]	26.2 38
System version	5.0.1.0
Standard Version	ISED RSS247 NI
Method	
Description	ISED Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.44	dBm	INFO
Ref. frequency	--	--	5176.200	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 44					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.9	--	INFO
Duty cycle min	--	--	0.458	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.225	ms	INFO

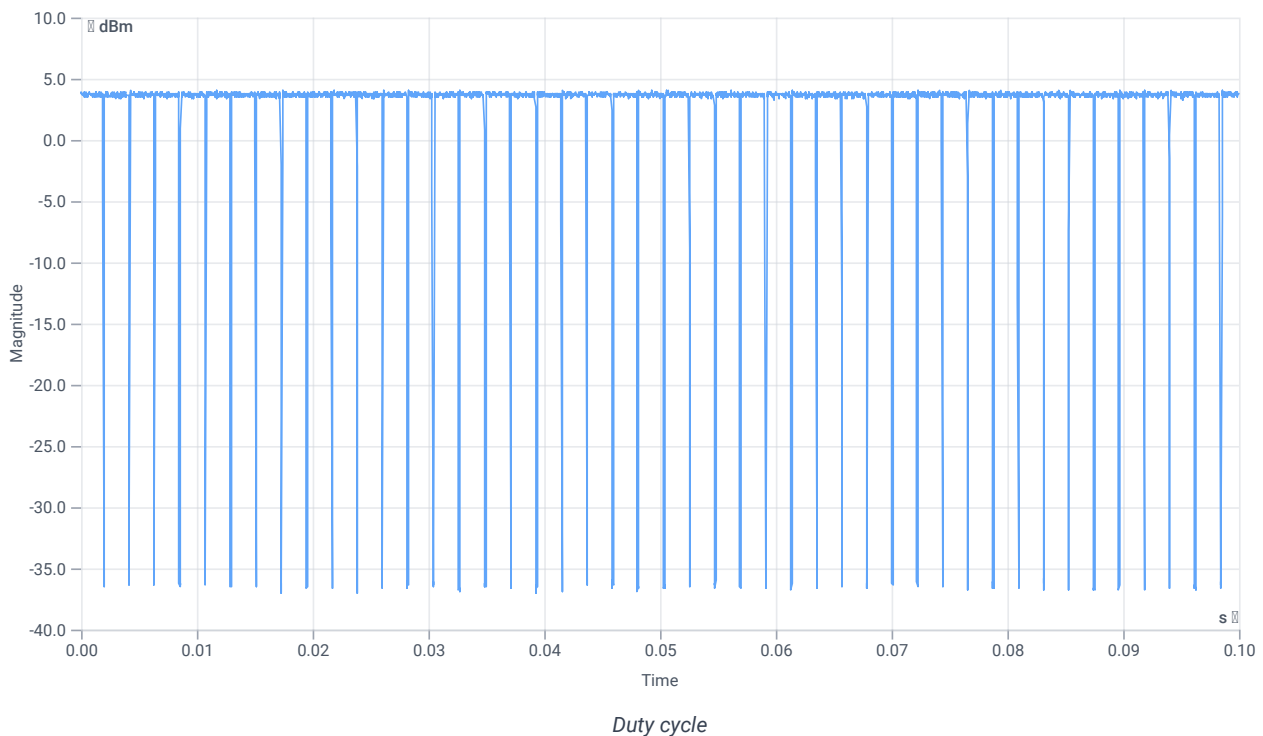

Evaluation bandwidth

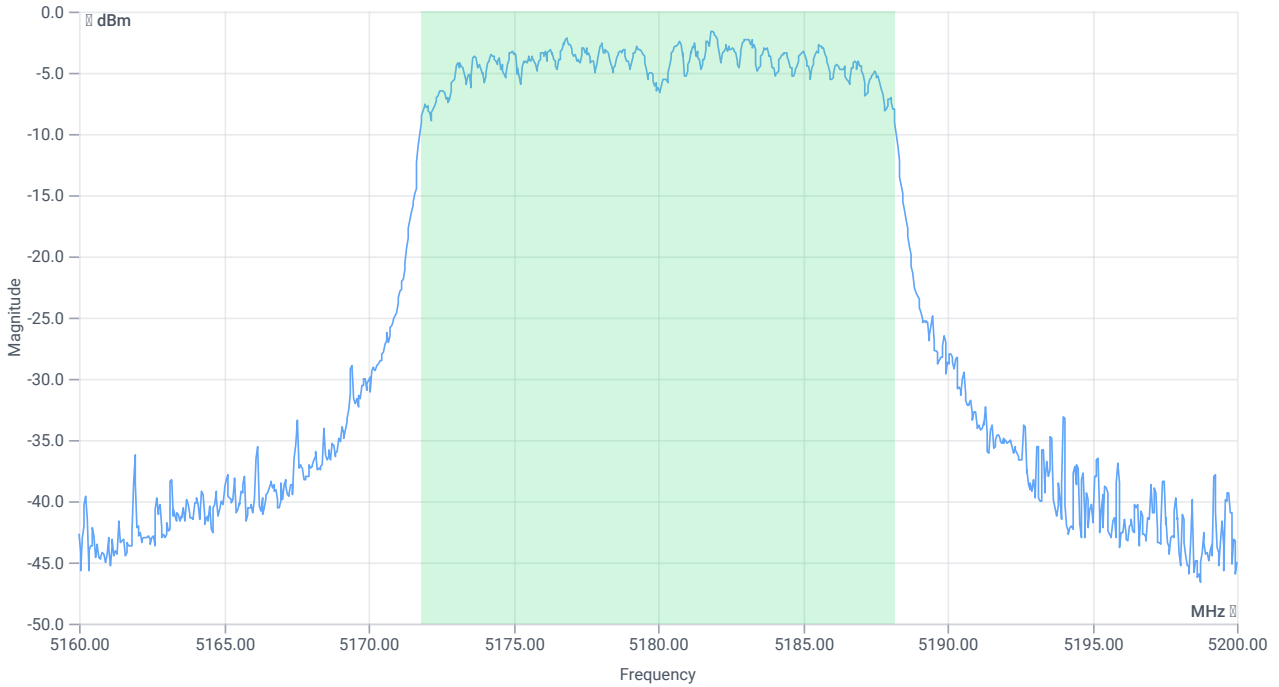

BW 99PCT


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	--	--	16.304	MHz	INFO
T1 99%	--	--	5171.8482	MHz	INFO
T2 99%	--	--	5188.1518	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.44 9.99 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

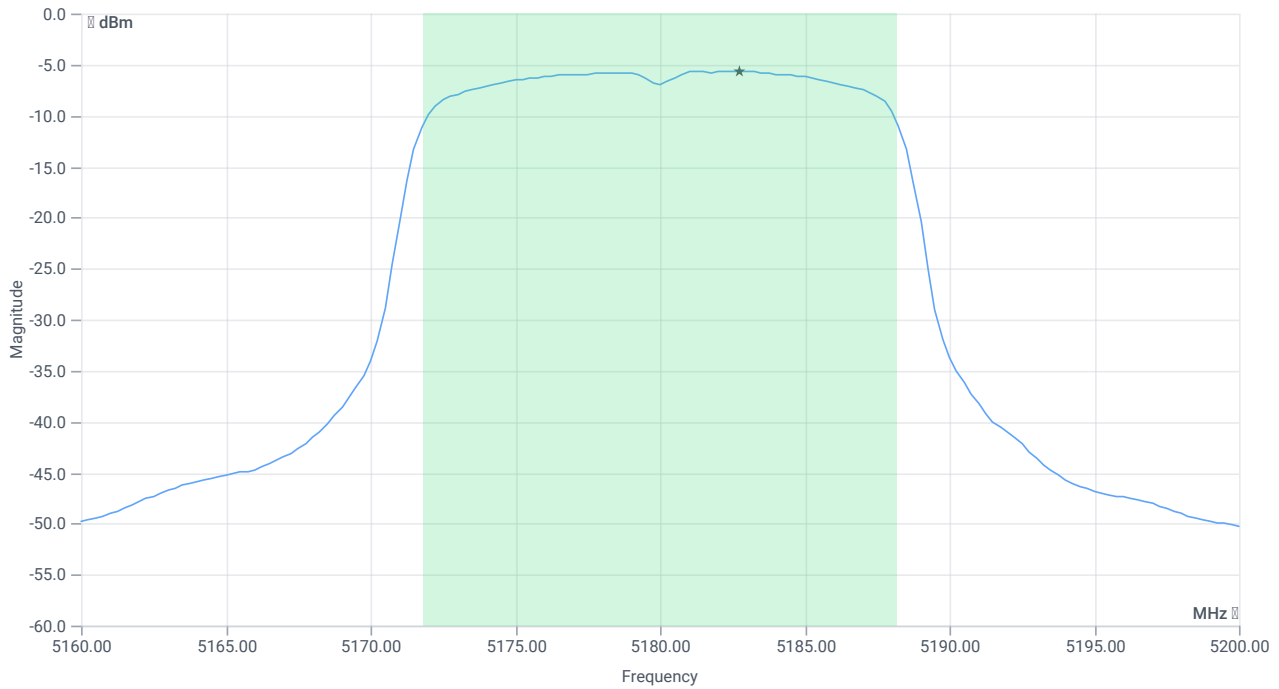

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	5.31	dBm	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.77	dBm	na
Limit: 11 dBm + 10 log 16.304					
Max output power DC corrected	--	23.12	5.77	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-5.68	dBm/1MHz	INFO
Duty cycle correction	--	--	0.46	dB	INFO
Power spectral density DC corrected	--	11	-5.22	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407 # Max output power and psd ~ WLAN5Gx a mode U-NII-1

References

TC start	26.01.2024 14:35:41
Ambit temp [°C] humidity [rel%]	26.2 37
System version	5.0.1.0
Standard Version	FCC 15.407 NI
Method	KDB789033 D02, F, E.2.e.
Description	FCC 15.407 Max Output Power & PSD - WLAN5Gx a mode U-NII-1
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5180
Frequency mid to test	False Freq [MHz] 5200
Frequency high to test	False Freq [MHz] 5240
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 5180 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.56	dBm	INFO
Ref. frequency	--	--	5185.390	MHz	INFO


Evaluation max. duty cycle

DUTY CYCLE EVALUATION

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Result summary					
Number of detected bursts: 45					
Duty cycle (burst Ratio) max	--	--	0.943	--	INFO
Duty cycle max	--	--	0.255	dB	INFO
Duty cycle (burst Ratio) min	--	--	0.91	--	INFO
Duty cycle min	--	--	0.41	dB	INFO
Max TX burst length	--	--	2.05	ms	INFO
Min gap length	--	--	0.125	ms	INFO
Max gap length	--	--	0.2	ms	INFO

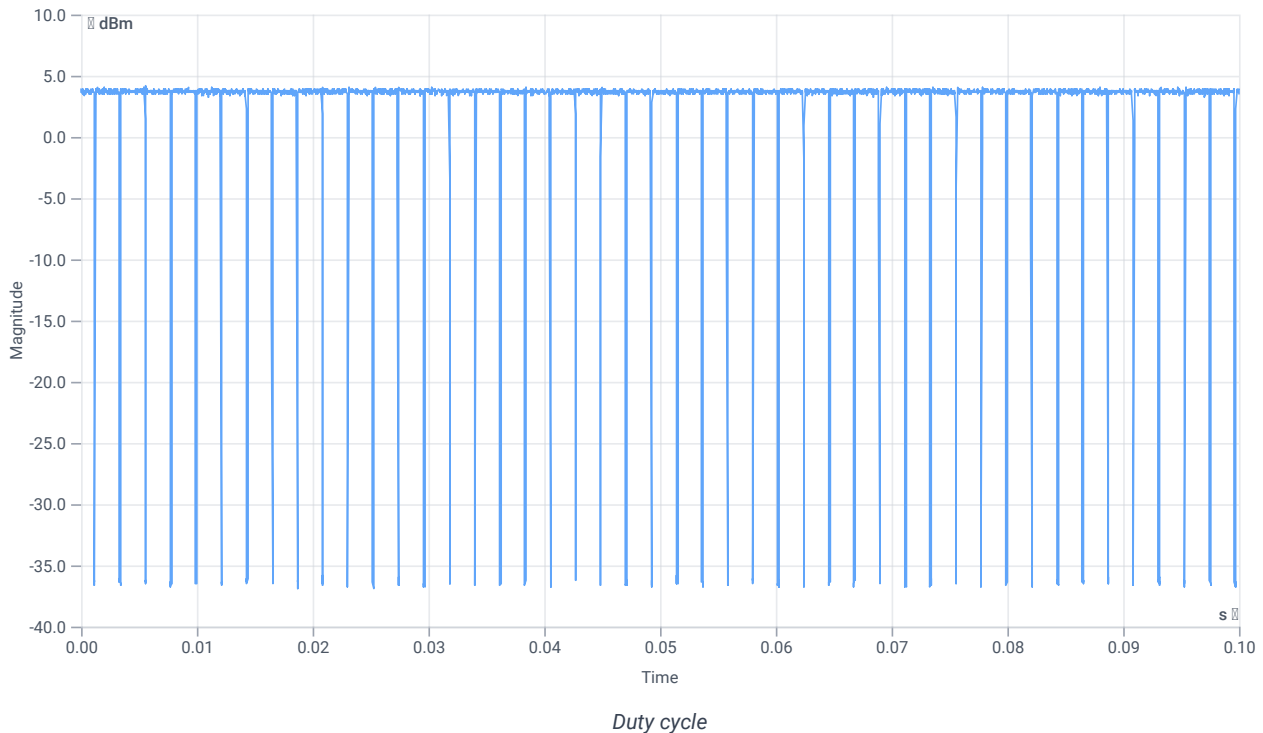

Evaluation bandwidth

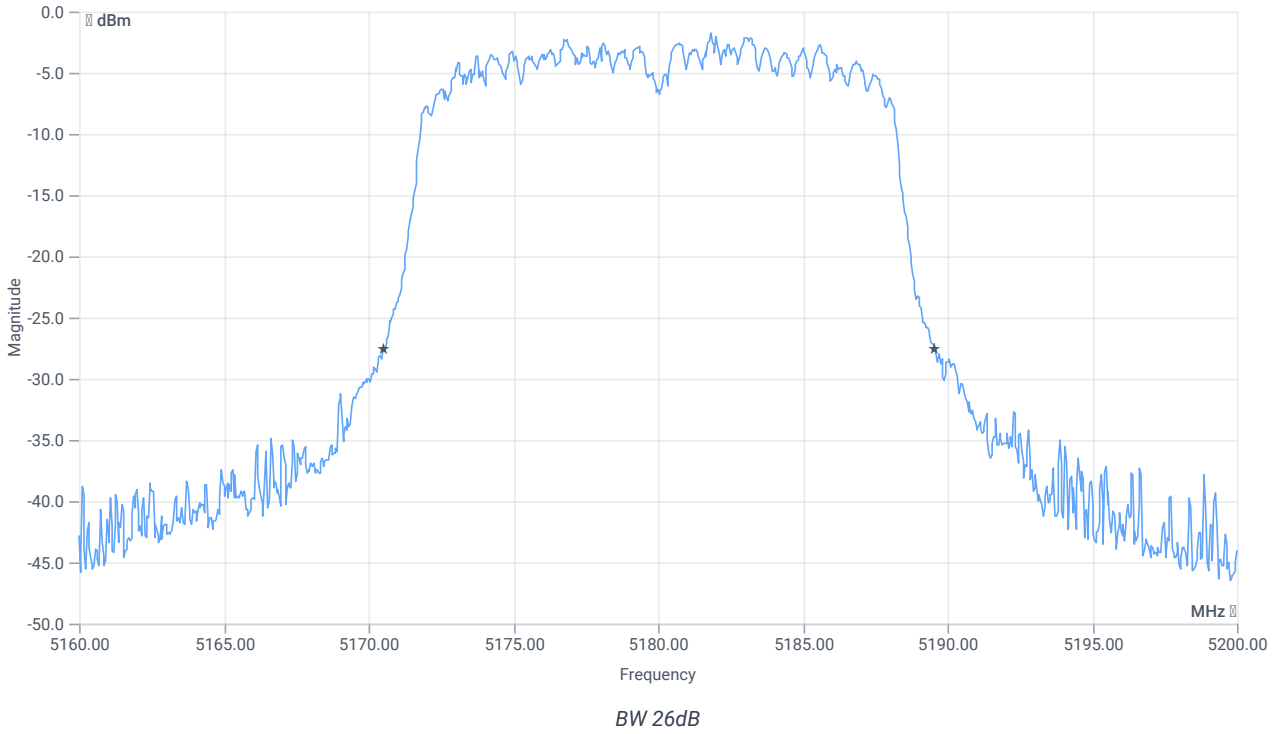


RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 26dB	---	---	19.04	MHz	INFO
T1 26dB	---	---	5170.5200	MHz	INFO
T2 26dB	---	---	5189.5600	MHz	INFO

Maximum Output Power

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.56 9.99 20
Start [MHz] Stop [MHz]	5160.000 5200.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	RMS MAXH
Sweep: time [ms] count points per Section type	53700 1 161 SWE

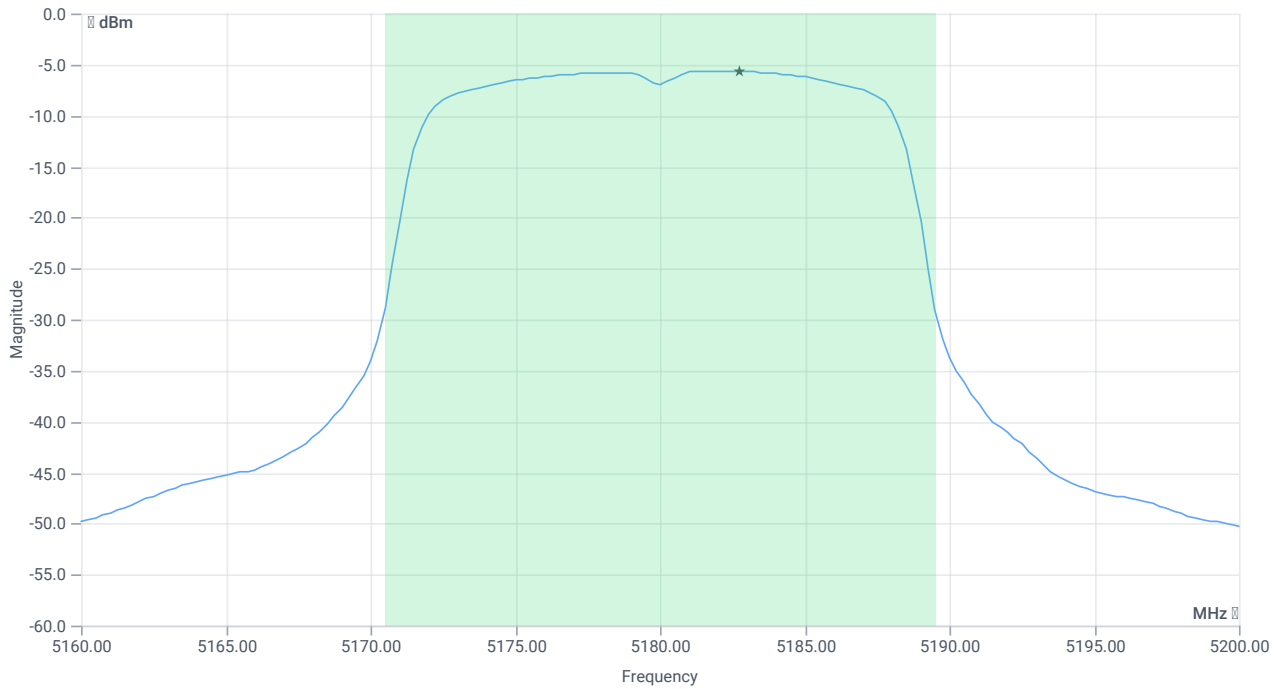

Max OP and PSD

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Max output power	--	--	5.39	dBm	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Limit absolute					
Max output power DC corrected	--	24	5.8	dBm	PASS
Limit: 11 dBm + 10 log 19.04					
Max output power DC corrected	--	23.8	5.8	dBm	na

Power spectral density

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Power spectral density	--	--	-5.67	dBm/1MHz	INFO
Duty cycle correction	--	--	0.41	dB	INFO
Power spectral density DC corrected	--	11	-5.26	dBm/1MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 19:01:19
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5775 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-7.63	dBm	INFO
Ref. frequency	--	--	5750.420	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.37 10.41 10
Start [MHz] Stop [MHz]	5675.000 5875.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

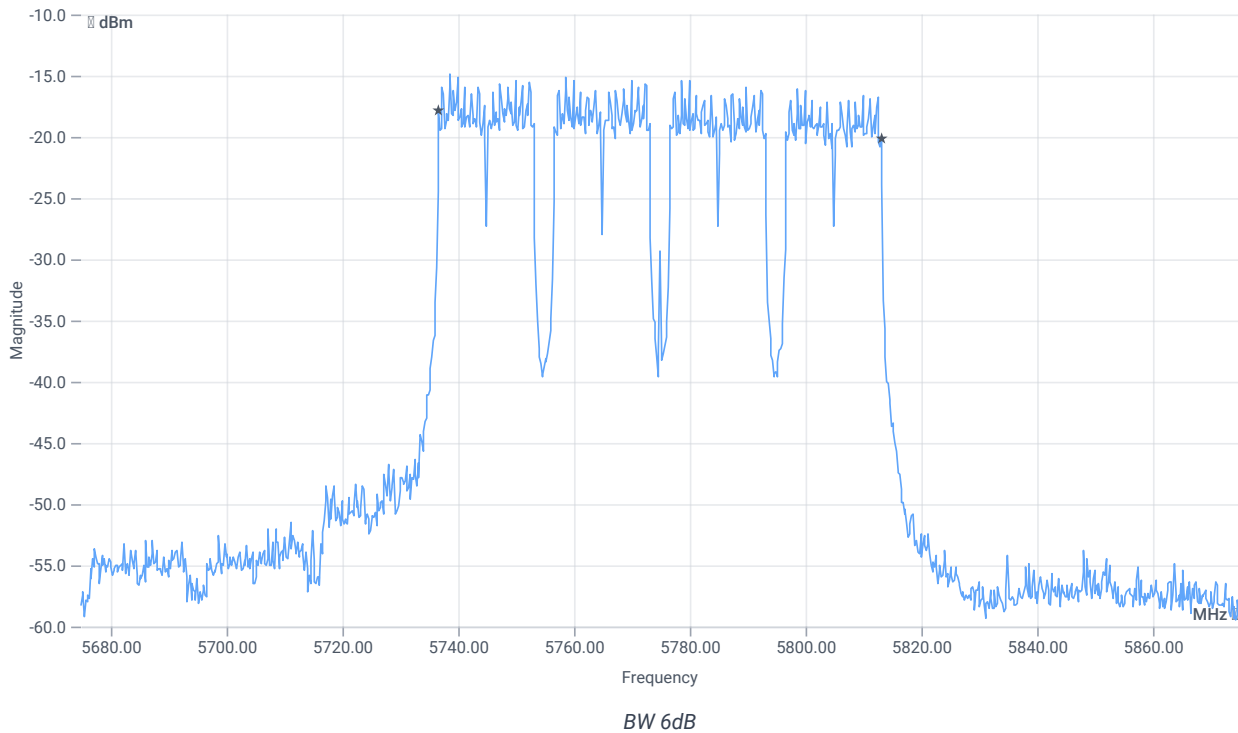

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	76.4	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx ac-VHT80 mode U-NII-3

References

TC start	26.01.2024 18:50:17
Ambit temp [°C] humidity [rel%]	26.7 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx ac-VHT80 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx ac-VHT80 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 0
Frequency mid to test	True Freq [MHz] 5775
Frequency high to test	False Freq [MHz] 0
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5775 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-6.62	dBm	INFO
Ref. frequency	--	--	5782.790	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.38 10.38 10
Start [MHz] Stop [MHz]	5675.000 5875.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

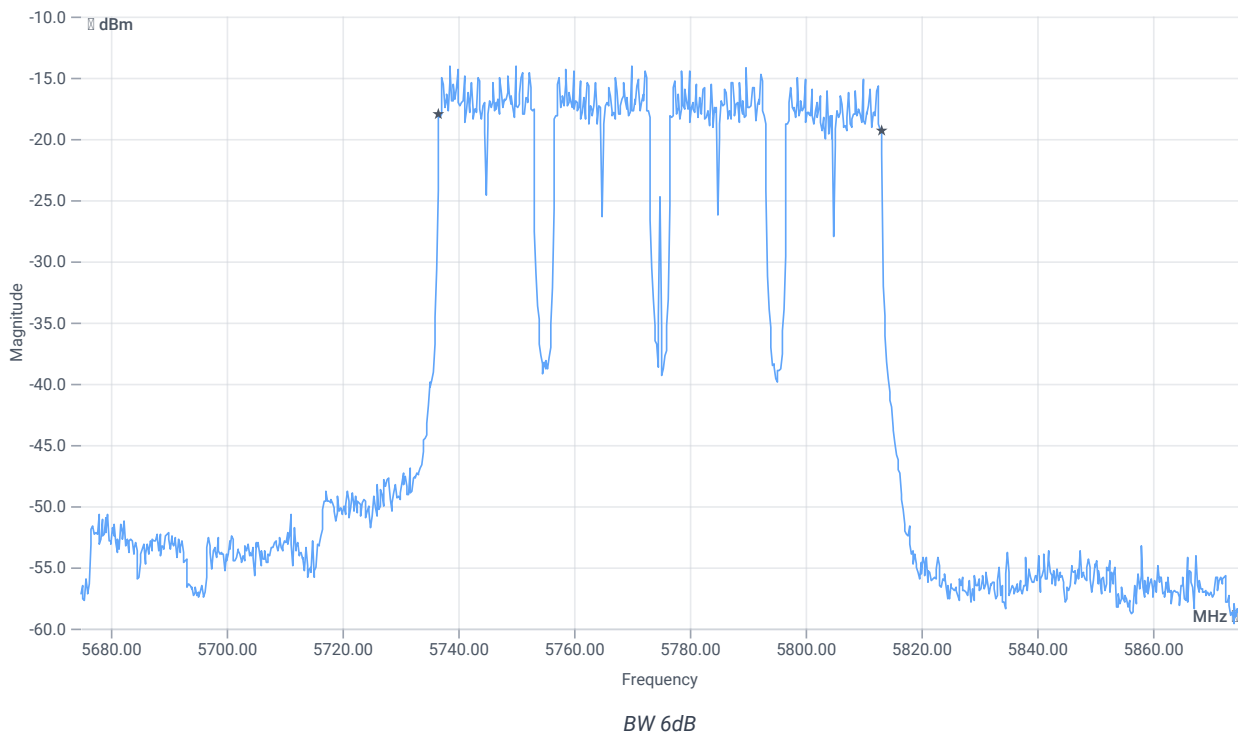

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	76.4	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:21:13
Ambit temp [°C] humidity [rel%]	26.8 32
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5795 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.98	dBm	INFO
Ref. frequency	--	--	5809.790	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.02 10.41 15
Start [MHz] Stop [MHz]	5745.000 5845.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

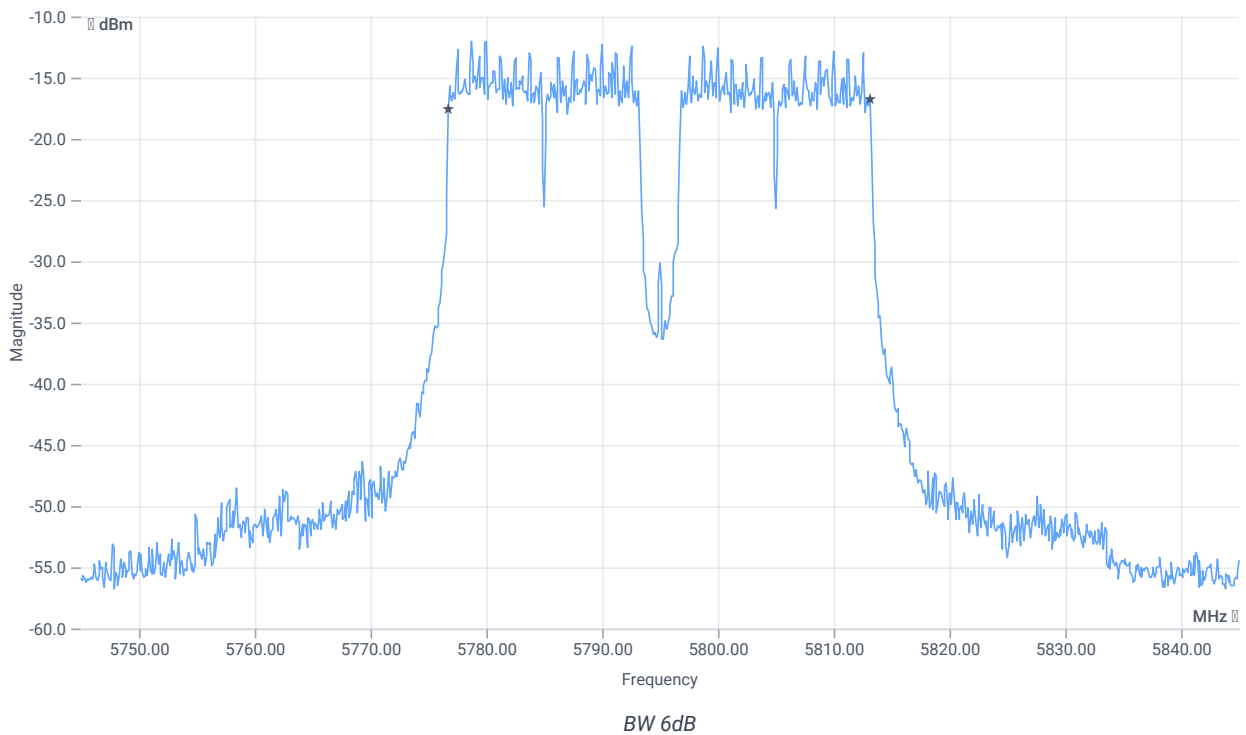

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	36.5	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:14:14
Ambit temp [°C] humidity [rel%]	26.7 33
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	True Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5795 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.04	dBm	INFO
Ref. frequency	--	--	5781.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.96 10.37 15
Start [MHz] Stop [MHz]	5745.000 5845.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

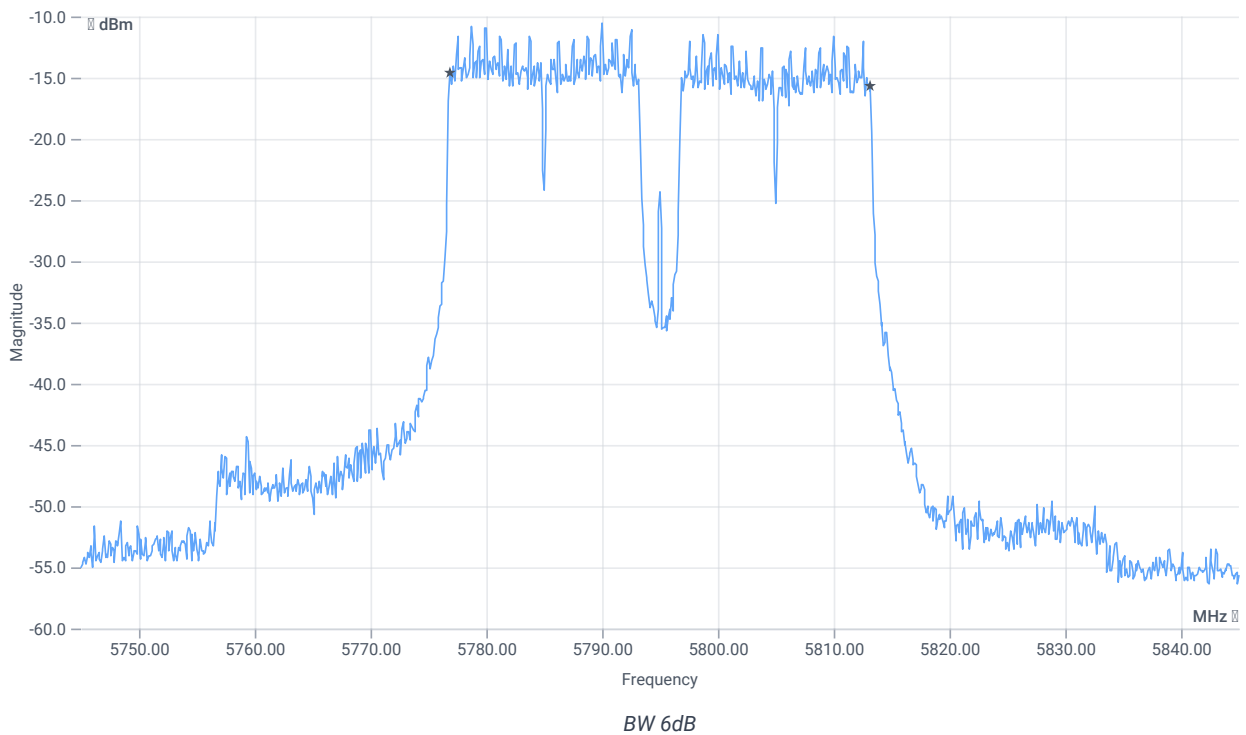

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	36.4	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 18:02:44
Ambit temp [°C] humidity [rel%]	26.8 33
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5755 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-3.77	dBm	INFO
Ref. frequency	--	--	5739.420	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.23 10.41 15
Start [MHz] Stop [MHz]	5705.000 5805.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

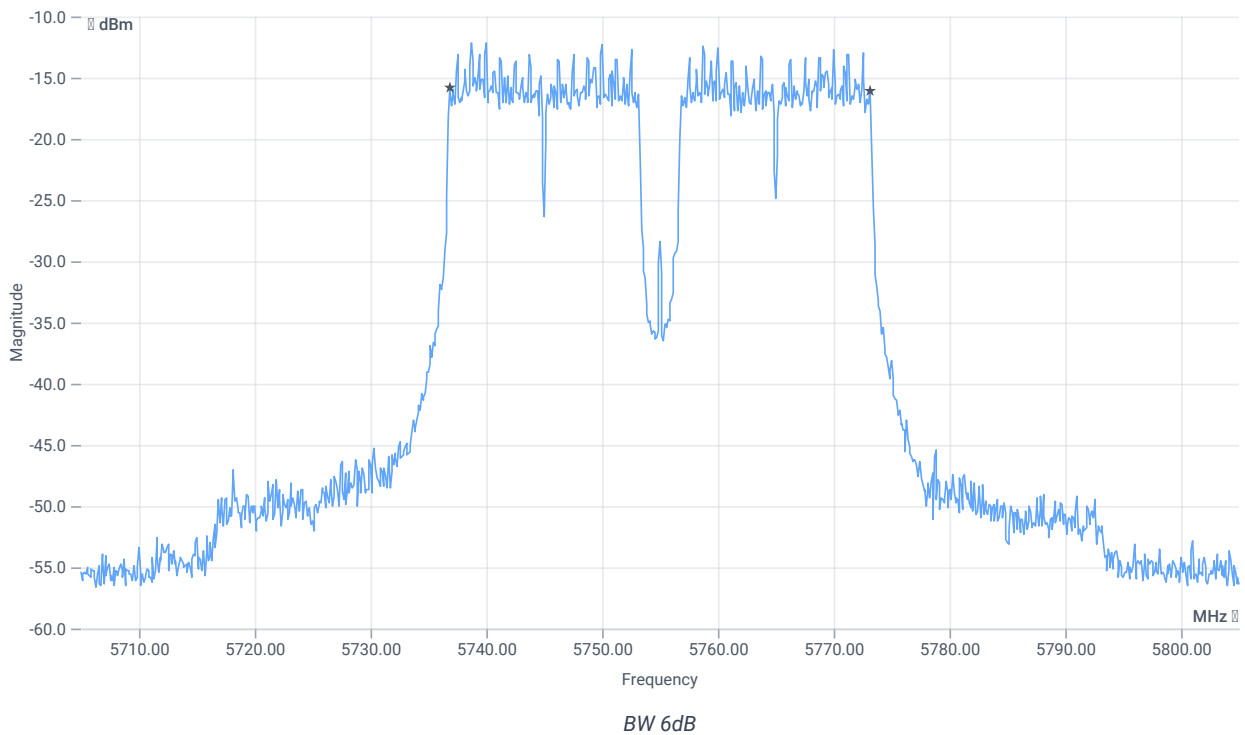

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	36.4	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT40 mode U-NII-3

References

TC start	26.01.2024 17:55:45
Ambit temp [°C] humidity [rel%]	26.8 35
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT40 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT40 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5755
Frequency mid to test	False Freq [MHz] 0
Frequency high to test	False Freq [MHz] 5795
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5755 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-2.10	dBm	INFO
Ref. frequency	--	--	5738.020	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.90 10.39 15
Start [MHz] Stop [MHz]	5705.000 5805.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

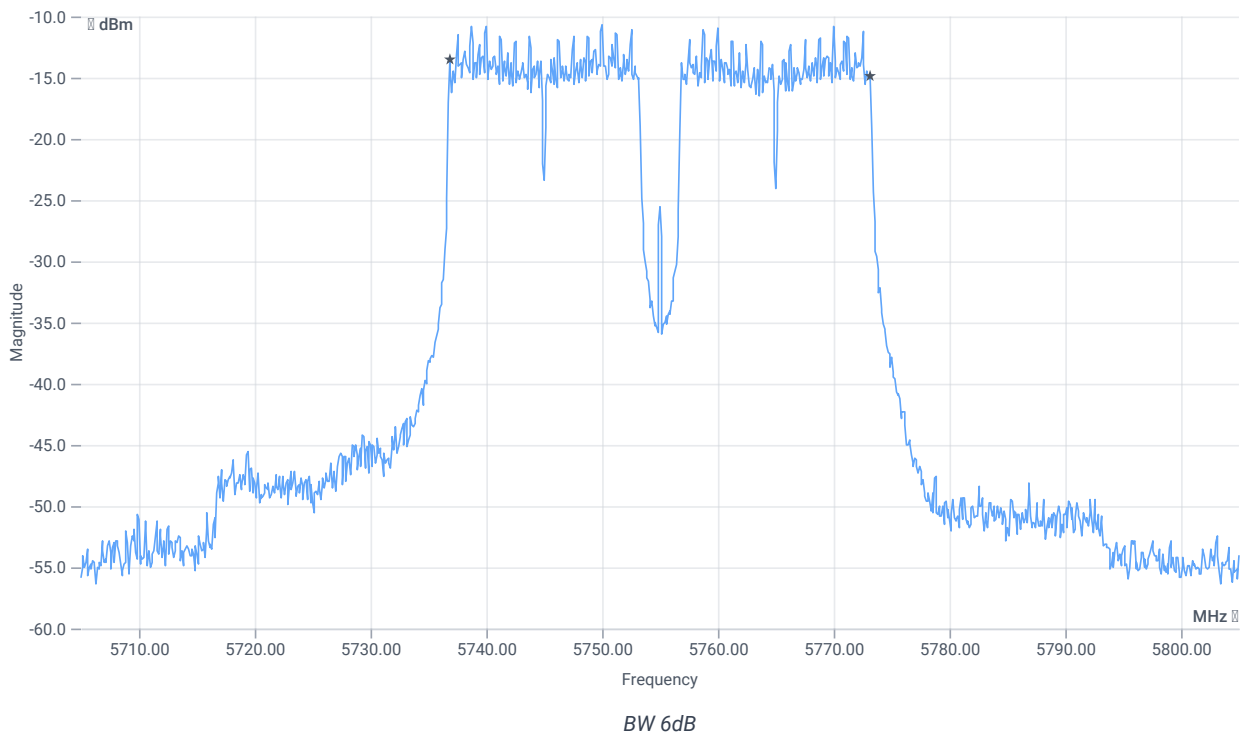

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	36.4	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:24:10
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5825 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.77	dBm	INFO
Ref. frequency	--	--	5819.410	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.23 10.44 20
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

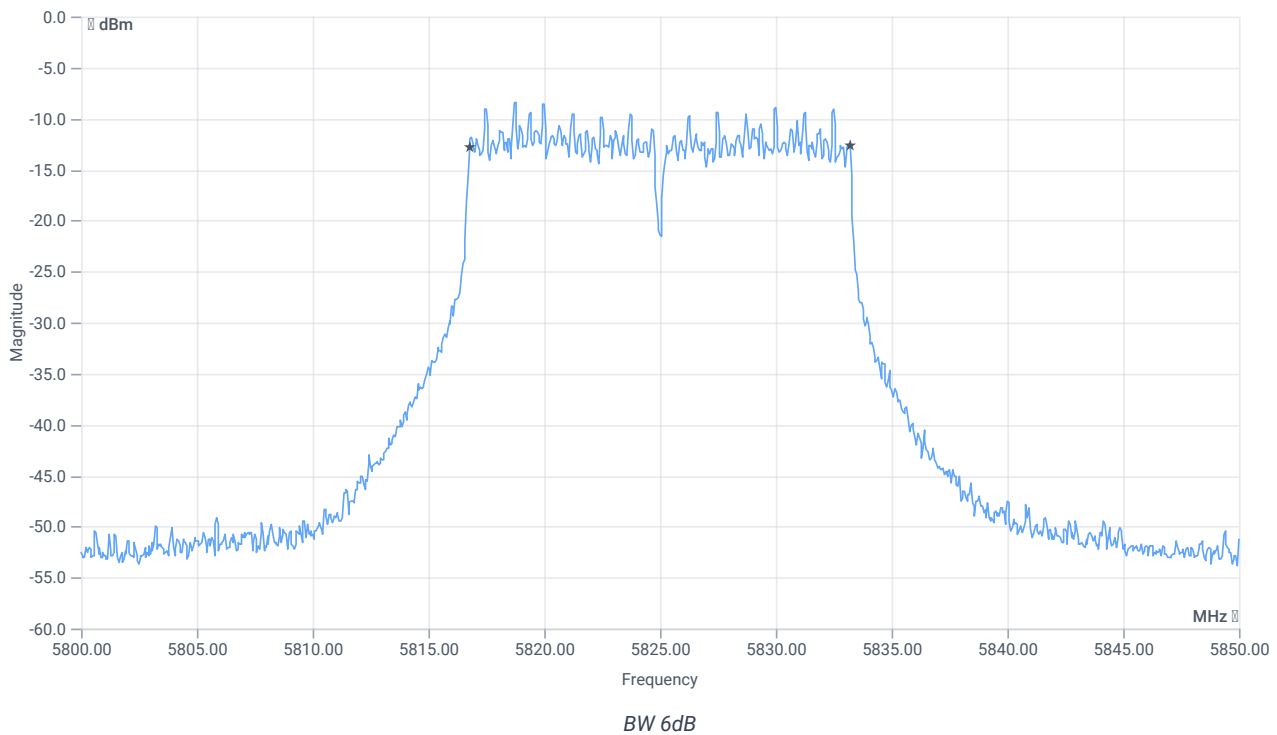

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	16.45	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:16:52
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5825 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.08	dBm	INFO
Ref. frequency	--	--	5821.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.92 10.45 20
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

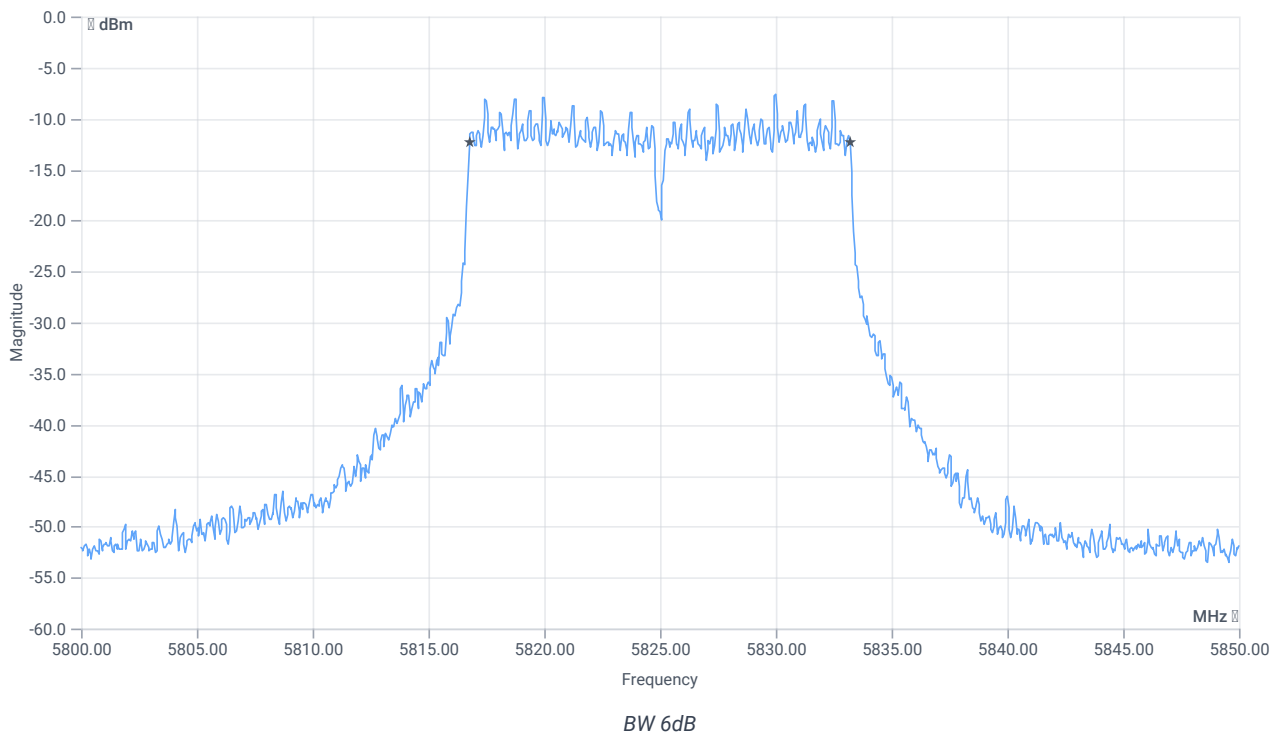

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	16.45	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:07:33
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5785 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	-0.25	dBm	INFO
Ref. frequency	--	--	5779.610	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	11.75 10.41 20
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

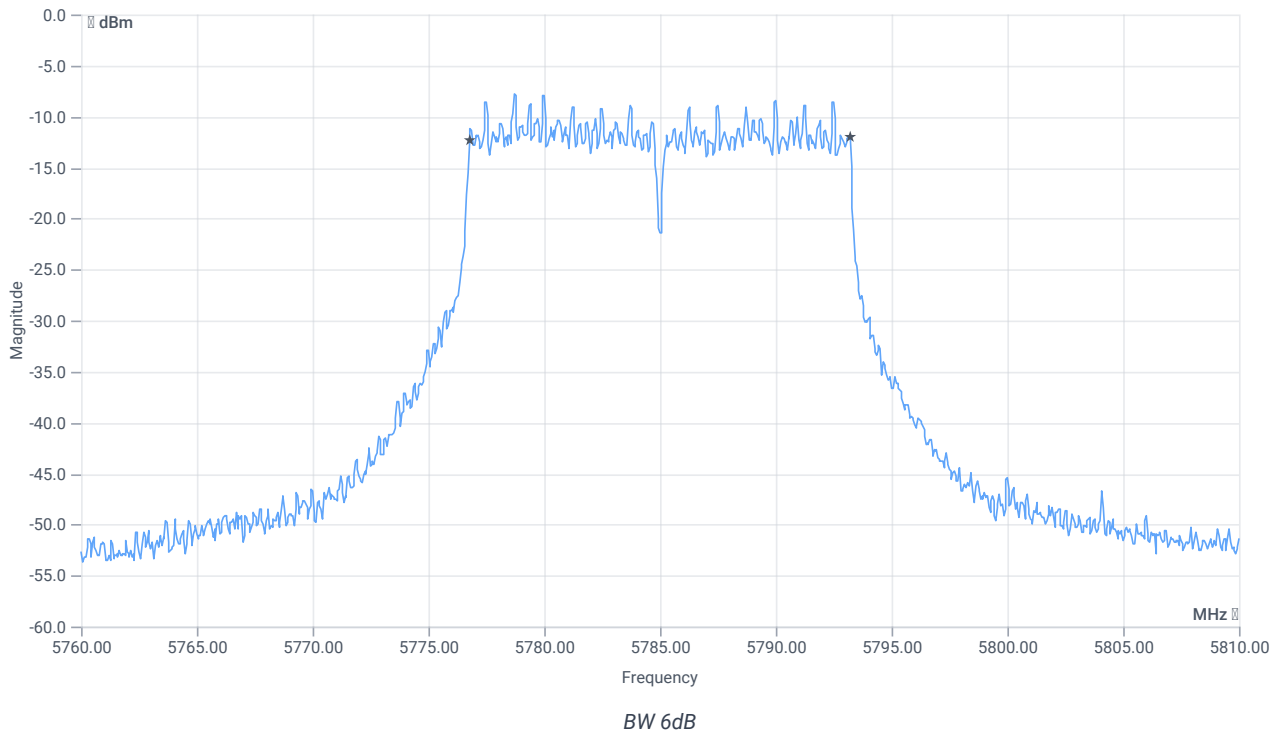

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	16.45	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 17:00:10
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5785 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.53	dBm	INFO
Ref. frequency	--	--	5779.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.53 10.38 20
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

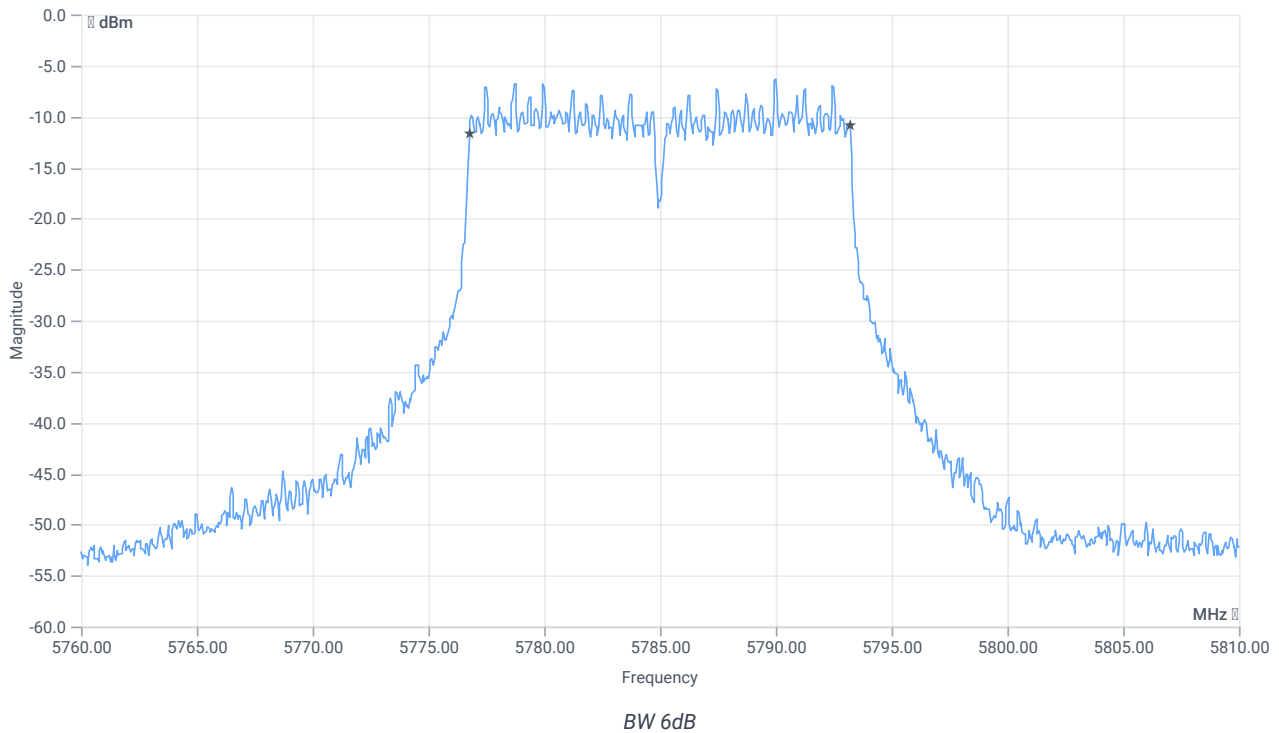

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	16.45	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:51:26
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5745 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.30	dBm	INFO
Ref. frequency	--	--	5748.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.30 10.38 20
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

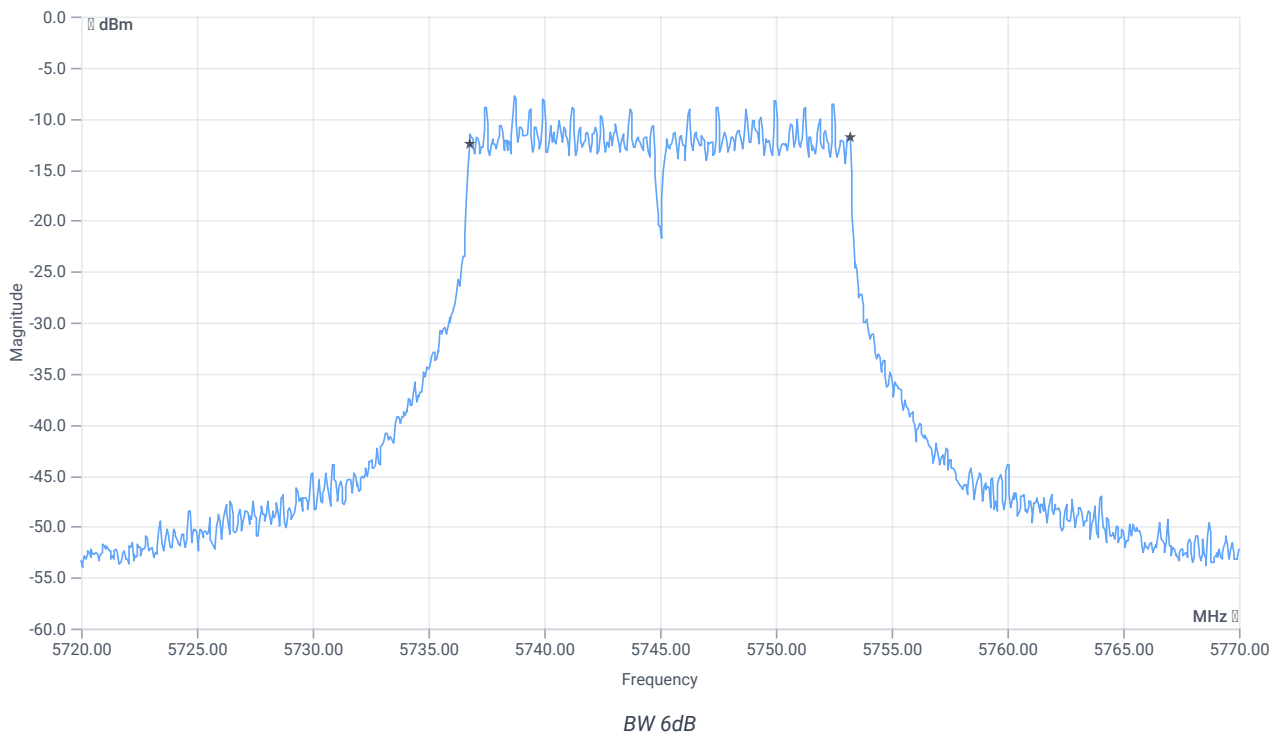

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	16.45	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx n-HT20 mode U-NII-3

References

TC start	26.01.2024 16:44:08
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx n-HT20 mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNIL_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx n-HT20 mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5745 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.99	dBm	INFO
Ref. frequency	--	--	5739.210	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.99 10.36 20
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

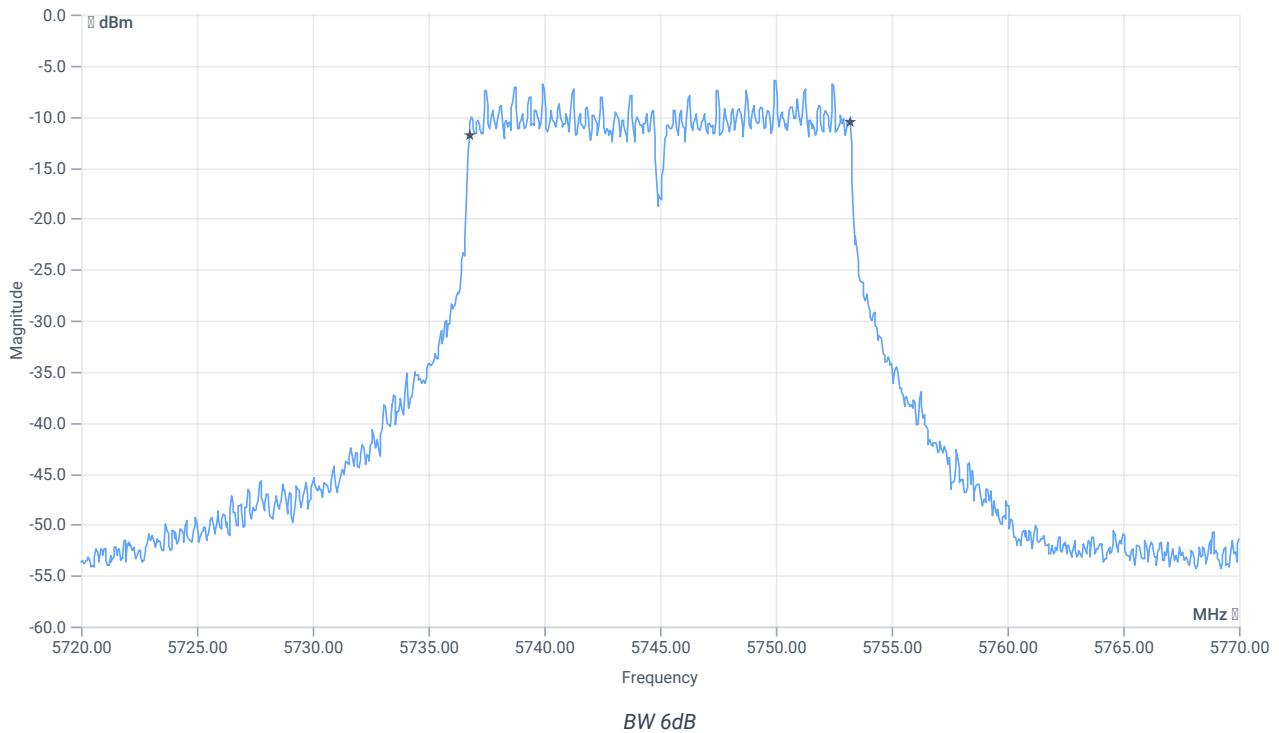

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	16.45	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:50:23
Ambit temp [°C] humidity [rel%]	26.8 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5825 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.33	dBm	INFO
Ref. frequency	--	--	5822.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.33 10.44 20
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

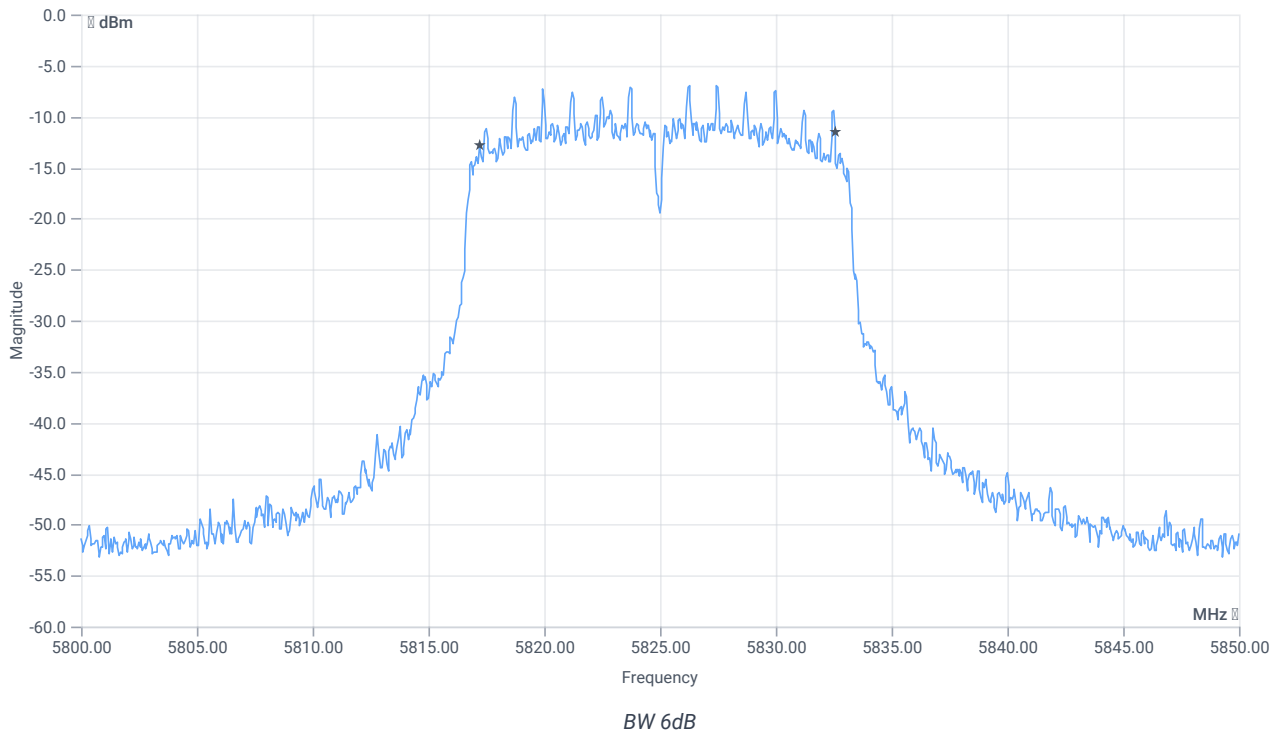

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	15.35	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:43:07
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	True Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5825 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	0.67	dBm	INFO
Ref. frequency	--	--	5824.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.67 10.45 20
Start [MHz] Stop [MHz]	5800.000 5850.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

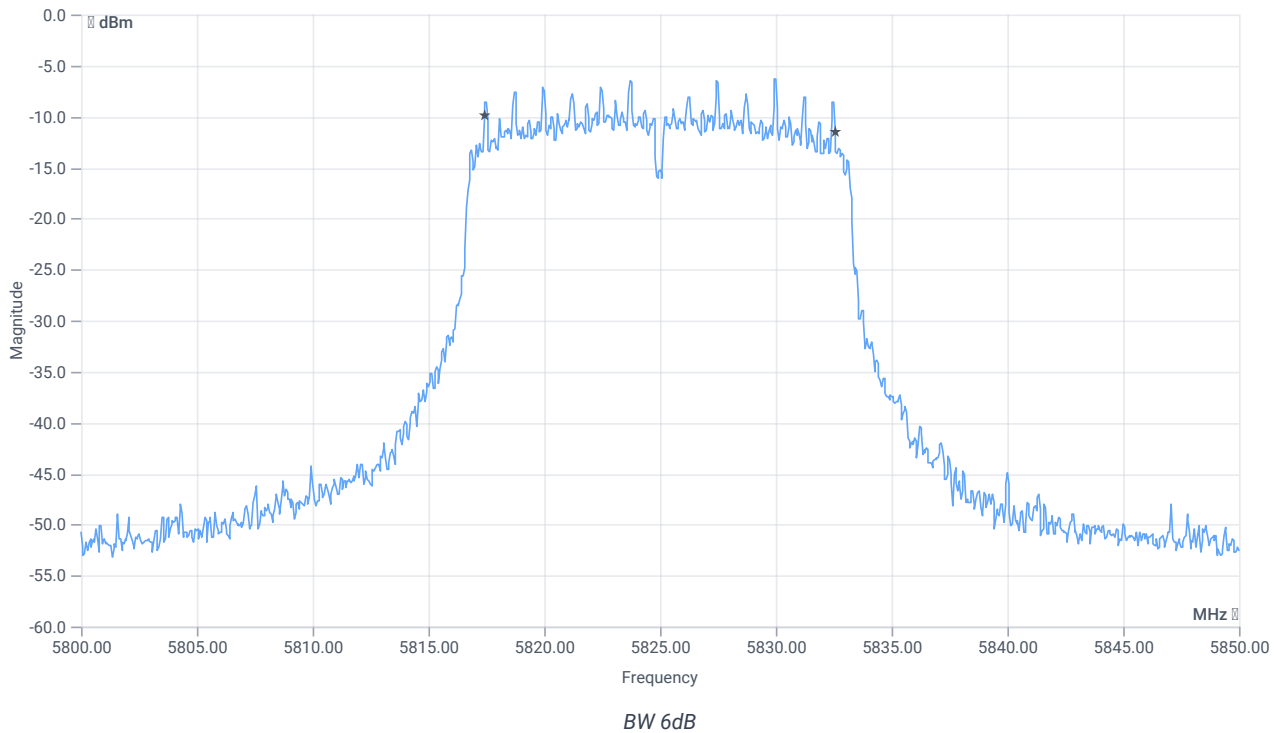

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	15.15	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:34:27
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5785 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.00	dBm	INFO
Ref. frequency	--	--	5786.400	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.00 10.41 20
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

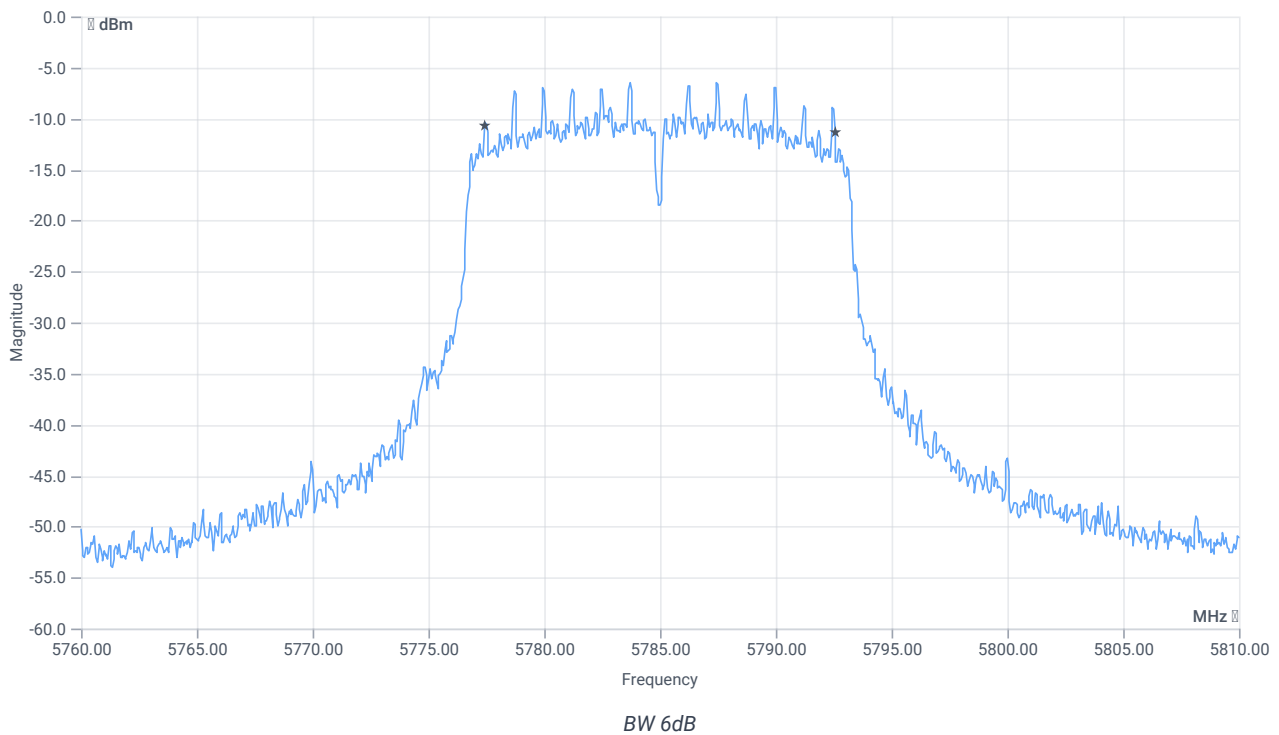

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	15.15	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:27:05
Ambit temp [°C] humidity [rel%]	26.7 36
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 5745
Frequency mid to test	True Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5785 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.37	dBm	INFO
Ref. frequency	--	--	5783.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.37 10.38 20
Start [MHz] Stop [MHz]	5760.000 5810.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

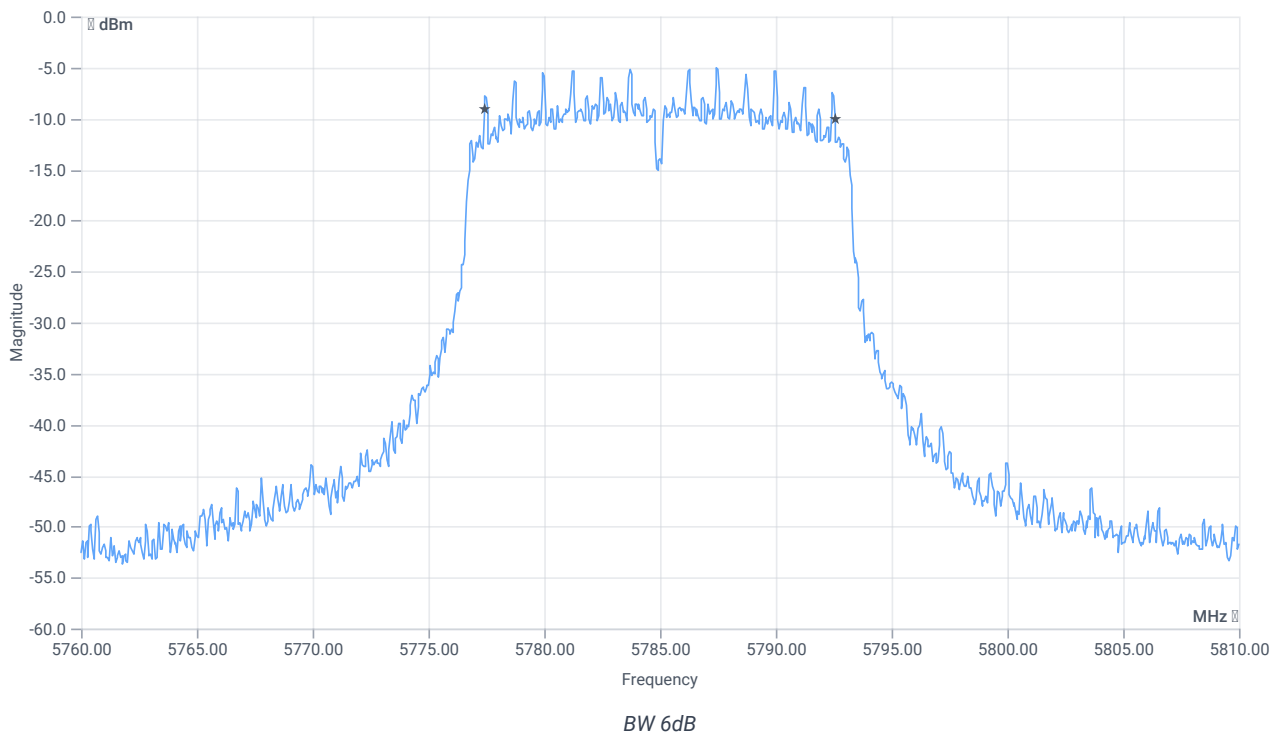

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	15.15	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:18:42
Ambit temp [°C] humidity [rel%]	26.6 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT2
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT2.SIG1/EUT2.SA/EUT2.GEN1/EUT2.GEN2/
Switch bits	00100010:00010001:00000000:00000001


Test at TX 5745 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	1.96	dBm	INFO
Ref. frequency	--	--	5746.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.96 10.38 20
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

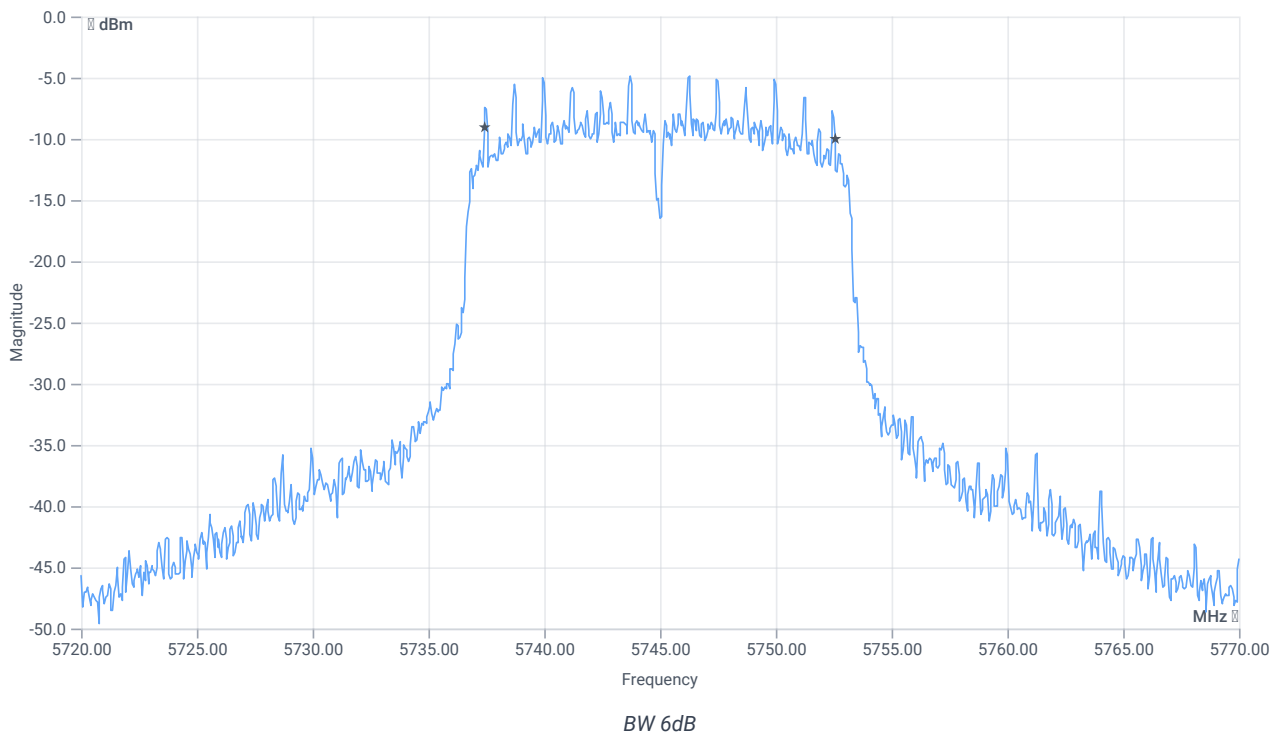

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	15.15	MHz	PASS

Verdict

PASS

FCC 15.407, ISED RSS247 # Minimum emission bandwidth ~ WLAN5Gx a mode U-NII-3

References

TC start	26.01.2024 15:11:25
Ambit temp [°C] humidity [rel%]	26.6 37
System version	5.0.1.0
Standard Version	FCC 15.407, ISED RSS247 NI
Method	KDB789033 D02, C.2.
Description	FCC 15.407 Min Emission Bandwidth - WLAN5Gx a mode U-NII-3
Information	

EUT Common Settings WLAN5Gx

Number of antenna ports	1
User Interaction	No
Device class UNII_1	Client
Limit W52 japan	Standard

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	WLAN5Gx a mode
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 5745
Frequency mid to test	False Freq [MHz] 5785
Frequency high to test	False Freq [MHz] 5825
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.5
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 5745 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	--	--	2.56	dBm	INFO
Ref. frequency	--	--	5747.000	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.56 10.36 20
Start [MHz] Stop [MHz]	5720.000 5770.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	2 1500 1001 SWE

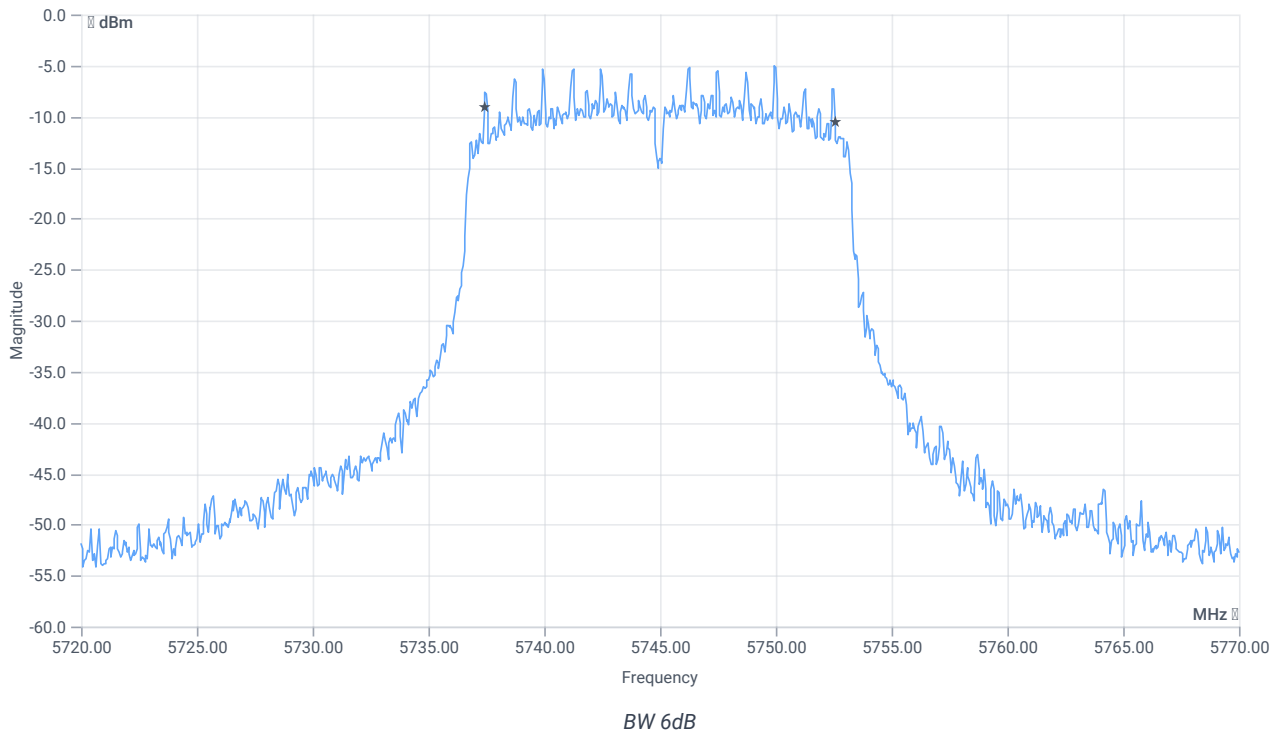

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth (6dB)	0.500	--	15.15	MHz	PASS

Verdict

PASS

- END OF DOCUMENT -