



TEST REPORT

No.24T04N000881-004-EMC

for

Realme Chongqing Mobile Telecommunications Corp., Ltd.

Smart watch

Model Name: RMW2401

With

Hardware Version: V1.1

Software Version: TBD

FCC ID: 2AUYFRMW2401

Issued Date: 2024-05-28

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

SAICT, Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen,
Guangdong, P. R. China. 518000.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04N000881-004-EMC	Rev.0	1st edition	2024-05-28

Note: the latest revision of the test report supersedes all previous version.



CONTENTS

1. SUMMARY OF TEST REPORT.....	4
1.1. TEST ITEMS	4
1.2. TEST STANDARDS	4
1.3. TEST RESULT	4
1.4. TESTING LOCATION	4
1.5. PROJECT DATA	4
1.6. SIGNATURE	4
2. CLIENT INFORMATION.....	5
2.1. APPLICANT INFORMATION	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE	6
3.4. EUT SET-UPS.....	7
3.5. GENERAL DESCRIPTION	8
4. REFERENCE DOCUMENTS.....	9
4.1. REFERENCE DOCUMENTS FOR TESTING.....	9
5. LABORATORY ENVIRONMENT	10
6. SUMMARY OF TEST RESULTS	11
6.1. TESTING ENVIRONMENT	11
6.2. SUMMARY OF MEASUREMENT RESULTS.....	11
6.3. STATEMENT	11
7. MEASUREMENT UNCERTAINTY	12
ANNEX A: MEASUREMENT RESULTS.....	13
A.1 RADIATED EMISSION (§15.109(A)).....	13
A.2 CONDUCTED EMISSION (§15.107(A)).....	21



1. SUMMARY OF TEST REPORT

1.1. Test Items

Description	Smart watch
Model Name	RMW2401
Applicant's name	Realme Chongqing Mobile Telecommunications Corp., Ltd.
Manufacturer's Name	Realme Chongqing Mobile Telecommunications Corp., Ltd.

1.2. Test Standards

FCC Part 15, Subpart B (10-1-2021 Edition); ANSI C63.4-2014.

1.3. Test Result

Total test 2 items, pass 2 items. Please refer to "6.2 Test Results".

1.4. Testing Location

Address: EMC Lab,Building G, Shenzhen International Innovation Center,
No.1006 Shennan Road, Futian District, Shenzhen, Guangdong,
China

1.5. Project data

Testing Start Date: 2024-04-25

Testing End Date: 2024-05-12

1.6. Signature

Huang Kaiyang

(Prepared this test report)

Liang Yong

(Reviewed this test report)

Cao Junfei

(Approved this test report)



2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address: No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China
Contact: Chunyu Feng
Email: fengchunyu@realme.com
Tel: (86)13823232013
Fax: /

2.2. Manufacturer Information

Company Name: Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address: No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China
Contact: Chunyu Feng
Email: fengchunyu@realme.com
Tel: (86)13823232013
Fax: /



3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT

(AE)

3.1. About EUT

Description	Smart watch
Model Name	RMW2401
FCC ID	HLERMW2401BWN
Condition of EUT as received	No obvious damage in appearance

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

3.2. Internal Identification of EUT

EUT ID*	SN or IMEI	HW Version	SW Version	Receive Date
UT03aa	/	V1.1	TBD	2024-04-25

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description
AE1	Battery
AE2	Charger
AE3	Charging Cable

AE1

Model	632225V
Manufacturer	ZHONGSHAN ZHONGWANGDE NEW ENERGY TECHNOLOGY Co., LTD
Capacity	380mAh
Nominal Voltage	3.8 V

AE2

Model	A152A-090200U-CN1
Manufacturer	Aohai Technology Co., Ltd.

AE3

Model	IDW13
Manufacturer	Shenzhen Pomagtor Precision Electronics Co., Ltd

*AE ID and AE Label: is used to identify the test sample in the lab internally.

*AE Label: To distinguish the type and number of AE

AE: ancillary equipment



3.4. EUT Set-ups

EUT set-up No.

Set.1

Combination of EUT and AE

EUT+AE1+AE2+AE3

Remarks



3.5. General Description

The Equipment Under Test (EUT) is a model of Smart watch with internal antenna.

It has Bluetooth and Video Player functions.

It consists of normal options: Battery, Charging Cable.

Manual and specifications of the EUT were provided to fulfill the test.

Samples (EUT+AE) undergoing test were selected by the Client. Relevant information is provided by the client.



4. REFERENCE DOCUMENTS

4.1. Reference Documents for Testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	(10-1-2021 Edition)
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

5. LABORATORY ENVIRONMENT

Anechoic chamber (FACT3-2.0) did not exceed following limits along the EMC testing:

9.10m×6.10m×5.60m (L×W×H)

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3 m distance, from 30 to 1000 MHz
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4Ω

6. SUMMARY OF TEST RESULTS

6.1. Testing Environment

Normal Temperature: 15~35°C
Relative Humidity: 20~75%
Atmospheric pressure 86~106kPa

6.2. Summary of Measurement Results

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Items	Test Name	Clause in FCC/IC rules	Section in this report	Verdict
1	Radiated Emission	15.109(a)/ Section 6.2	A.1	P
2	Conducted Emission	15.107(a)/ Section 6.1	A.2	P

6.3. Statement

6.3.1 Statements of conformity

This report takes measured values as criterion of test conclusion. The test conclusion meets the limit requirements.

7. MEASUREMENT UNCERTAINTY

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.80dB(k=2)
	1GHz-18GHz	4.62dB(k=2)
Conducted Emission	150kHz-30MHz	2.68dB(k=2)

8. MEASURING APPARATUS UTILIZED

No.	Name	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1.	Test Receiver	ESR7	101676	R&S	2024.11.22	1 year
2.	Test Receiver	ESCI	100702	R&S	2025.01.10	1 year
3.	Spectrum Analyzer	FSV40	101192	R&S	2025.01.10	1 year
4.	BiLog Antenna	3142E	0224831	ETS-Lindgren	2024.05.27	3 years
5.	Horn Antenna	3117	00066577	ETS-Lindgren	2025.04.17	3 years
6.	LISN	ENV216	102067	R&S	2024.09.05	1 year
7.	Anechoic Chamber	FACT3-2.0	1285	ETS-Lindgren	2025.05.28	2 years
8.	Software	EMC32	V10.50.40	R&S	/	/



ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

Reference

FCC: Part 15.109(a)

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator at a distance of 3 meters or 1 meter is tested. Tested in accordance with the procedures of ANSI C63.4 -2014, section 8.3. The EUT was placed on a non-conductive table. Below 18GHz the measurement antenna was placed at a distance of 3 meters from the EUT. Above 18GHz the measurement antenna was placed at a distance of 1 meters from the EUT. (According to Part 15.31(f)(1), 1m limit is calculated by extrapolation factor of 20 dB/decade) During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

Video Player: The EUT is connected to a charger for charging and keeping on playing mp3.

Bluetooth:

The EUT is connected to a charger for charging. The EUT is connected to a mobile phone for transmitting data by Bluetooth function. The model of the phone is RMX3888.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions. For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

A.1.3 Measurement Limit

Limit from Part 15.109(a)

Frequency range (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000


*Note: The original limit is defined at 10m test distance. This limit is calculated according to CISPR requirements.

A.1.4 Test Condition


Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz (IF bandwidth)	5
Above 1000	1MHz/3MHz	15

A.1.5 Test set-up:

30MHz-1GHz

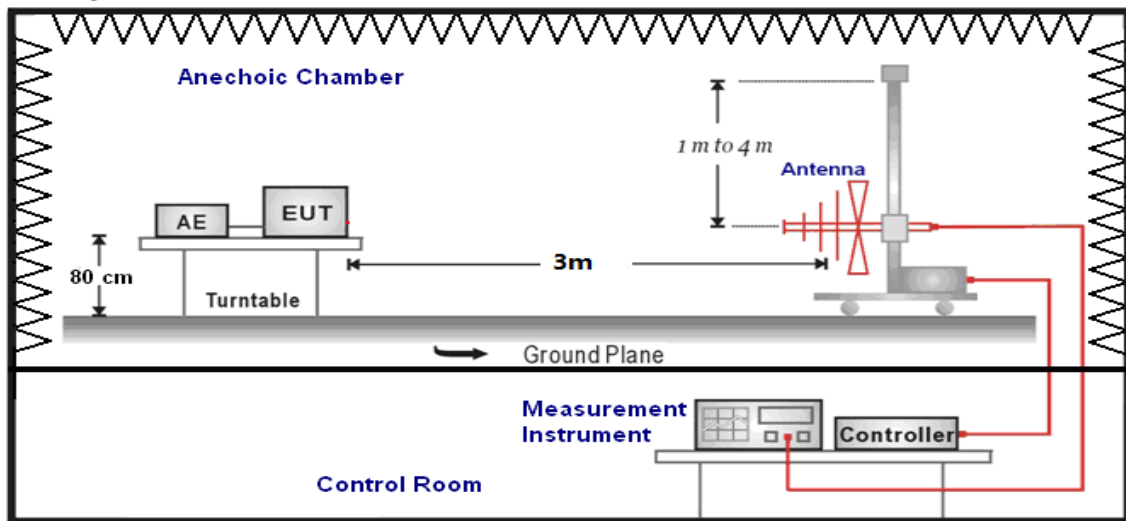

1GHz-40GHz

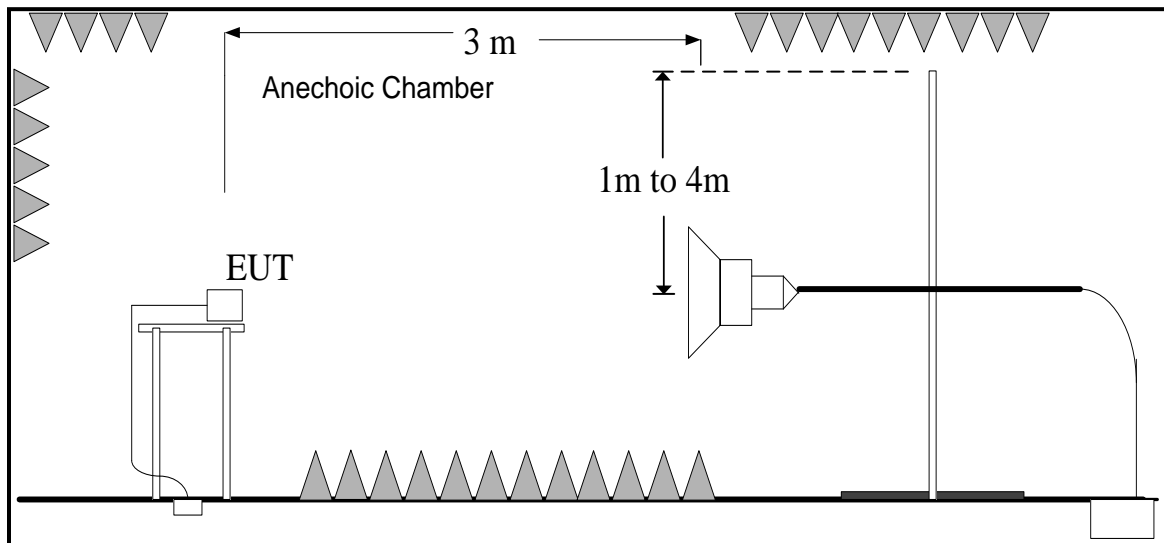

A.1.6 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Result: Quasi-Peak (dB μ V/m) / Average (dB μ V/m) / Peak (dB μ V/m)

Note: the result contains vertical part and Horizontal part

Bluetooth

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT03aa/Set.1	
30-88	40.00	See Figure A.1.1.	P
88-216	43.52		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT03aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.1.2.	P



Video Player

Frequency range (MHz)	Quasi-Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
		UT03aa/Set.1	
30-88	40.00	See Figure A.1.3.	P
88-216	43.52		
216-960	46.02		
960-1000	54.00		

Frequency range (MHz)	Average Limit (dB μ V/m)	Peak Limit (dB μ V/m)	Result (dB μ V/m)	Conclusion
			UT03aa/Set.1	
1000 to 18000	54.00	74.00	See Figure A.1.4.	P

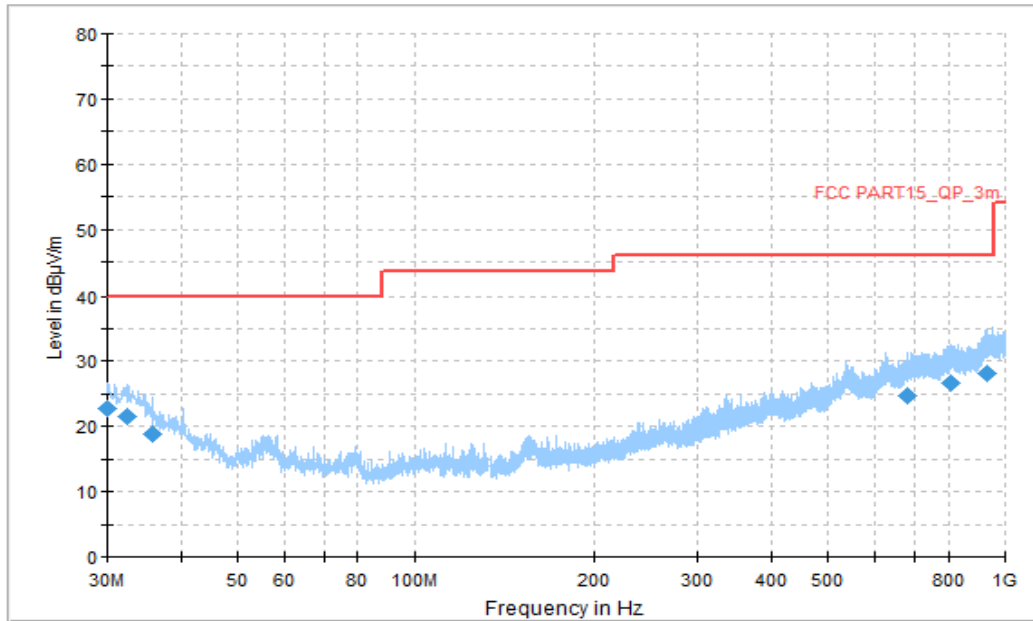


Figure A.1.1. Radiated Emission (Bluetooth, 30MHz to 1GHz)

Final_Results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
30.053889	22.73	40.00	17.27	H	-11	33.73
32.425000	21.55	40.00	18.45	H	-13	34.55
35.873889	18.92	40.00	21.08	H	-15	33.92
682.163333	24.76	46.02	21.26	V	-1	25.76
807.616667	26.60	46.02	19.42	V	1	25.6
934.471111	28.17	46.02	17.85	H	3	25.17

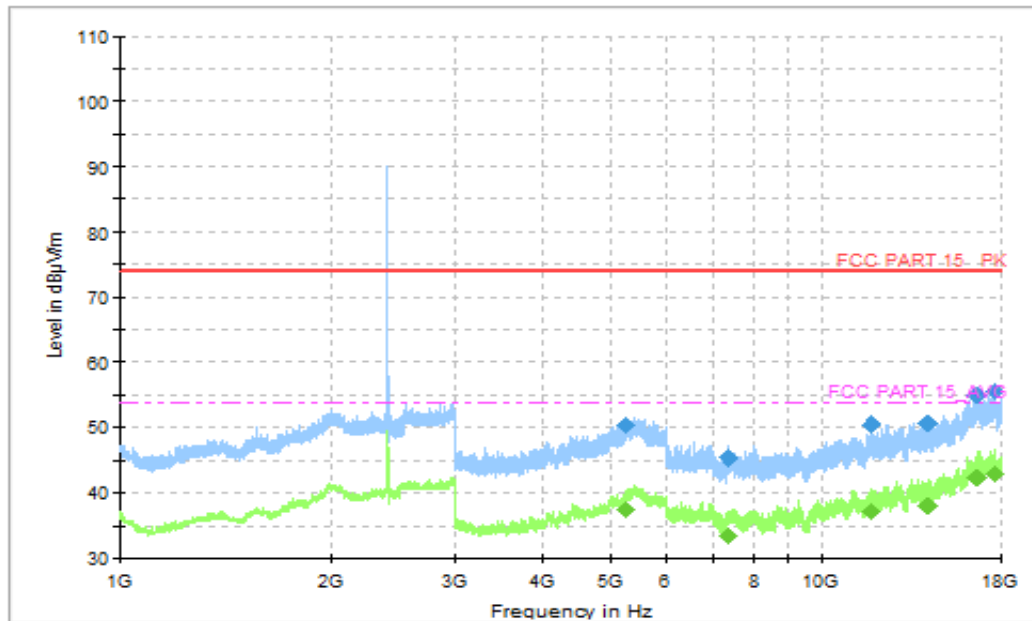


Figure A.1.2. Radiated Emission (Bluetooth, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
5257.500000	50.30	74.00	23.70	H	7.2	43.10
7386.000000	45.38	74.00	28.62	H	7.0	38.38
11797.285714	50.51	74.00	23.49	H	12.3	38.21
14179.285714	50.69	74.00	23.31	H	13.3	37.39
16692.428571	54.94	74.00	19.06	H	19.0	35.94
17687.142857	55.63	74.00	18.37	V	20.6	35.03

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
5257.500000	37.66	54.00	16.34	H	7.2	30.46
7386.000000	33.41	54.00	20.59	H	7.0	26.41
11797.285714	37.04	54.00	16.96	H	12.3	24.74
14179.285714	38.03	54.00	15.97	H	13.3	24.73
16692.428571	42.43	54.00	11.57	H	19.0	23.43
17687.142857	43.07	54.00	10.93	V	20.6	22.47

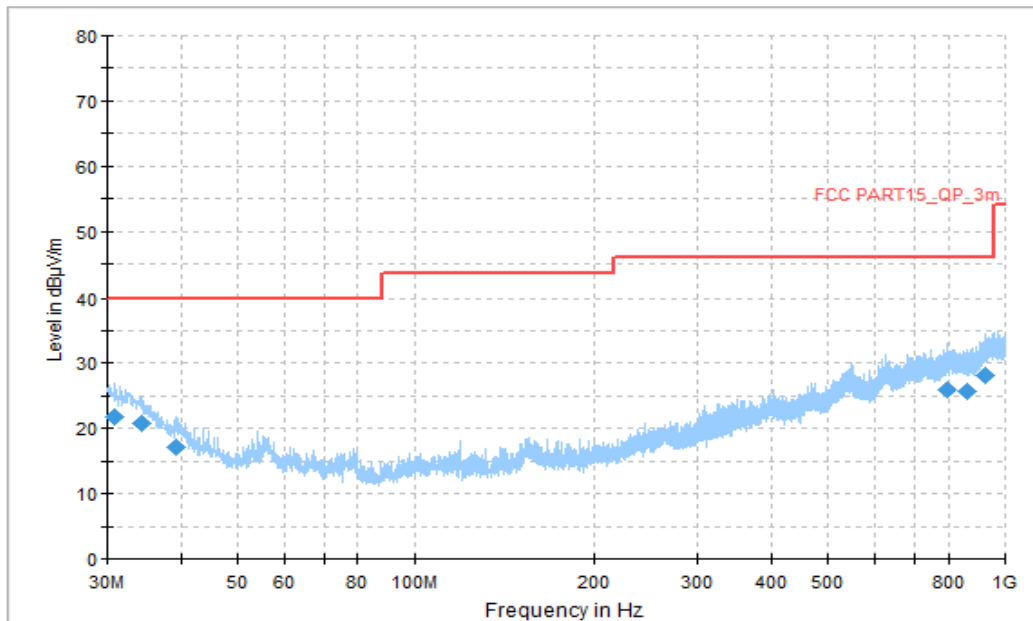


Figure A.1.3. Radiated Emission (Video Player, 30MHz to 1GHz)

Final_Results

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	ARpl (dB/m)	PMea (dBµV)
30.862222	21.72	40.00	18.28	V	-12	33.72
34.257222	20.70	40.00	19.30	V	-14	34.7
39.215000	17.16	40.00	22.84	H	-17	34.16
795.922778	25.89	46.02	20.13	H	1	24.89
861.775000	25.75	46.02	20.27	V	1	24.75
926.064444	28.15	46.02	17.87	H	3	25.15

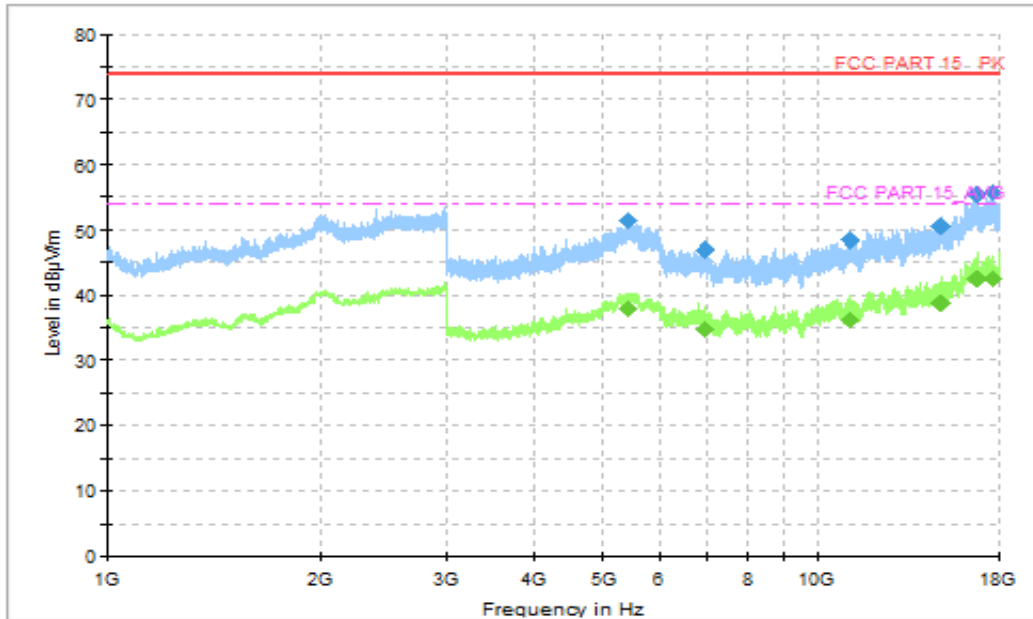


Figure A.1.4. Radiated Emission (Video Player, 1GHz to 18GHz)

Final_Results_PK

Frequency(MHz)	Peak (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
5424.900000	51.29	74.00	22.71	H	7.5	43.79
6942.857143	46.98	74.00	27.02	H	8.9	38.08
11112.000000	48.40	74.00	25.60	H	10.8	37.60
14938.714286	50.54	74.00	23.46	V	15.0	35.54
16736.142857	55.50	74.00	18.50	V	18.8	36.7
17670.857143	55.77	74.00	18.23	H	20.6	35.17

Final_Results_AVG

Frequency(MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin(dB)	Polarity	ARpl (dB/m)	PMea (dBµV)
5424.900000	38.03	54.00	15.97	H	7.5	30.53
6942.857143	34.84	54.00	19.16	H	8.9	25.94
11112.000000	36.17	54.00	17.83	H	10.8	25.37
14938.714286	38.81	54.00	15.19	V	15.0	23.81
16736.142857	42.62	54.00	11.38	V	18.8	23.82
17670.857143	42.68	54.00	11.32	H	20.6	22.08

**A.2 Conducted Emission (§15.107(a))****Reference**

FCC: Part 15.107(a)

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 -2014, section 7.3.

A.2.2 EUT Operating Mode:

Video Player: The EUT is connected to a charger for charging and keeping on playing mp3.

Bluetooth:


The EUT is connected to a charger for charging. The EUT is connected to a mobile phone for transmitting data by Bluetooth function. The model of the phone is RMX3888.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test set-up:

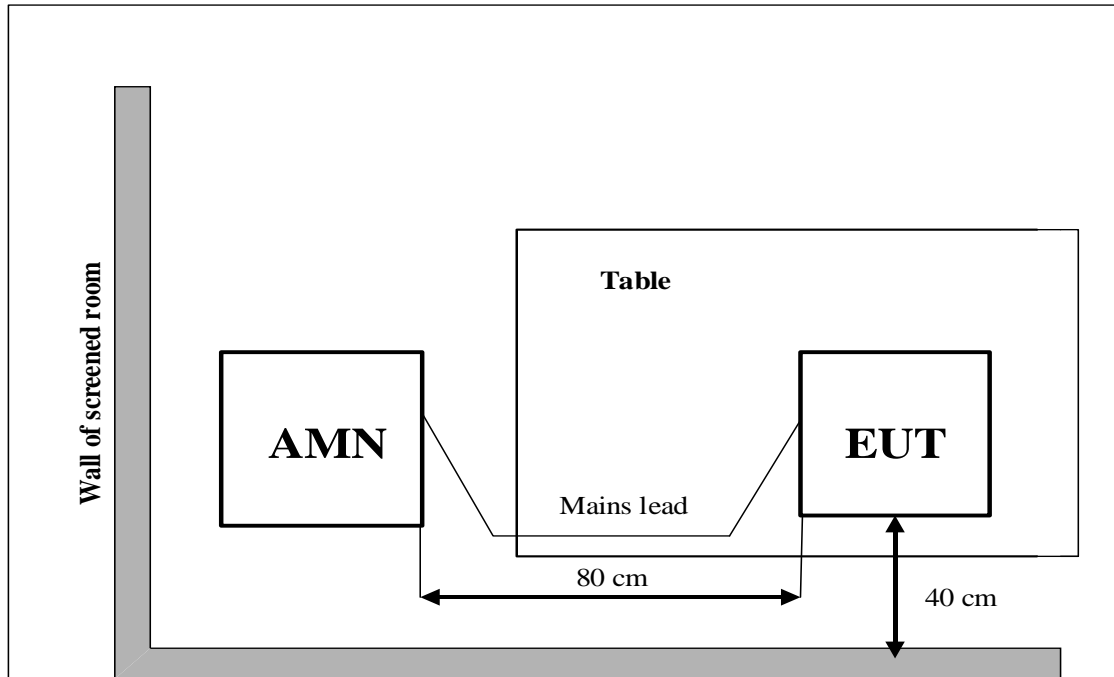

A.2.5 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60
240	60

RBW	Sweep Time(s)
9kHz	1

A.2.6 Measurement Results

$$\text{QuasiPeak(dB}\mu\text{V) /Average(dB}\mu\text{V) =PMea+Corr}$$

Where

Corr: PathLoss + Voltage Division Factor

PMea: Measurement result on receiver.

Bluetooth

AC Input Port/ Voltage: 120V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Result (dBμV)	Conclusion
			UT03aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.2.1.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.



Bluetooth

AC Input Port/ Voltage: 240V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average Limit (dB μ V)	Result (dB μ V)	Conclusion
			UT03aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.2.2.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Video Player

AC Input Port/ Voltage: 120V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average Limit (dB μ V)	Result (dB μ V)	Conclusion
			UT03aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.2.3.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Video Player

AC Input Port/ Voltage: 240V/60Hz

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average Limit (dB μ V)	Result (dB μ V)	Conclusion
			UT03aa/Set.1	
0.15 to 0.5	66 to 56	56 to 46	See Figure A.2.4.	P
0.5 to 5	56	46		
5 to 30	60	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

AC Input Port/ Voltage: 120V/60Hz

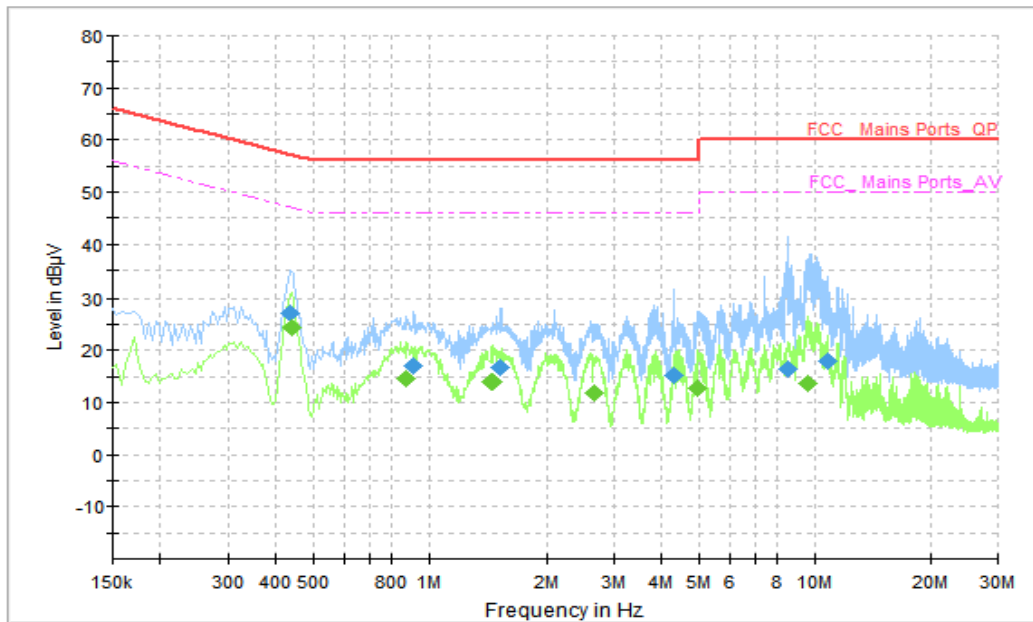


Figure A.2.1. Conducted Emission 120V/60Hz(Bluetooth)

Final_Result_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.434000	27.21	57.18	29.96	L1	10	17.21
0.910000	17.10	56.00	38.90	L1	10	7.1
1.522000	16.75	56.00	39.25	L1	10	6.75
4.286000	15.02	56.00	40.98	L1	10	5.02
8.506000	16.37	60.00	43.63	N	10	6.37
10.790000	17.91	60.00	42.09	N	10	7.91

Final_Result_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.438000	24.41	47.10	22.69	L1	10	14.41
0.874000	14.66	46.00	31.34	L1	10	4.66
1.454000	13.84	46.00	32.16	L1	10	3.84
2.670000	11.90	46.00	34.10	L1	10	1.90
4.962000	12.76	46.00	33.24	L1	10	2.76
9.578000	13.77	50.00	36.23	N	10	3.77

AC Input Port/ Voltage: 240V/60Hz

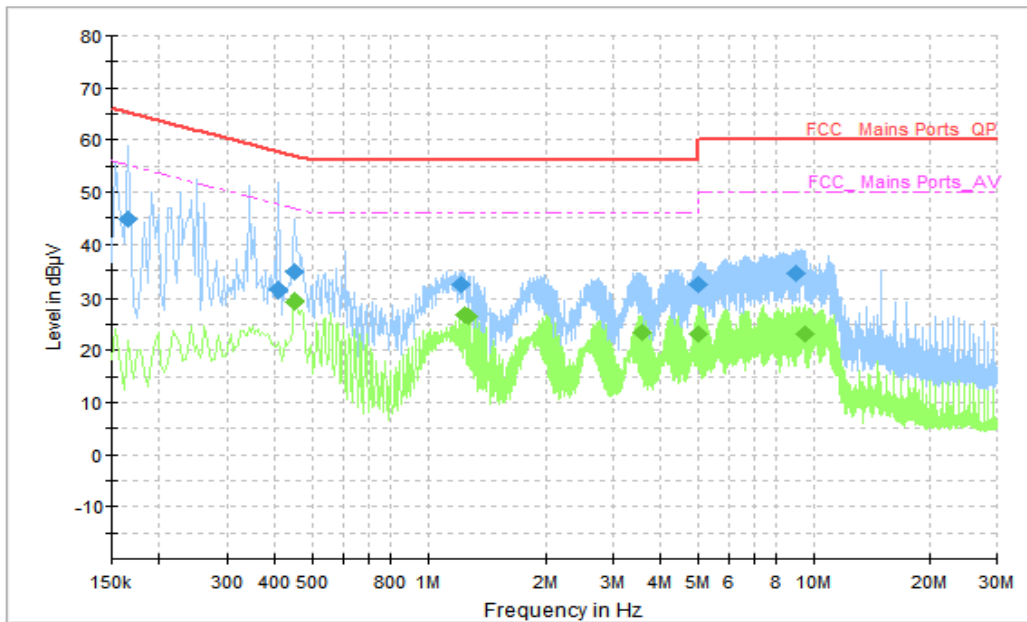


Figure A.2.2. Conducted Emission 240V/60Hz(Bluetooth)

Final_Result_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.166000	44.78	65.16	20.38	L1	10	34.78
0.406000	31.52	57.73	26.21	N	10	21.52
0.450000	34.62	56.88	22.25	L1	10	24.62
1.222000	32.24	56.00	23.76	N	10	22.24
4.998000	32.23	56.00	23.77	N	10	22.23
9.018000	34.47	60.00	25.53	N	10	24.47

Final_Result_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.450000	29.24	46.88	17.63	L1	10	19.24
1.246000	26.84	46.00	19.16	L1	10	16.84
1.270000	26.37	46.00	19.63	L1	10	16.37
3.578000	23.53	46.00	22.47	N	10	13.53
4.998000	23.18	46.00	22.82	N	10	13.18
9.530000	22.99	50.00	27.01	N	10	12.99

AC Input Port/ Voltage: 120V/60Hz

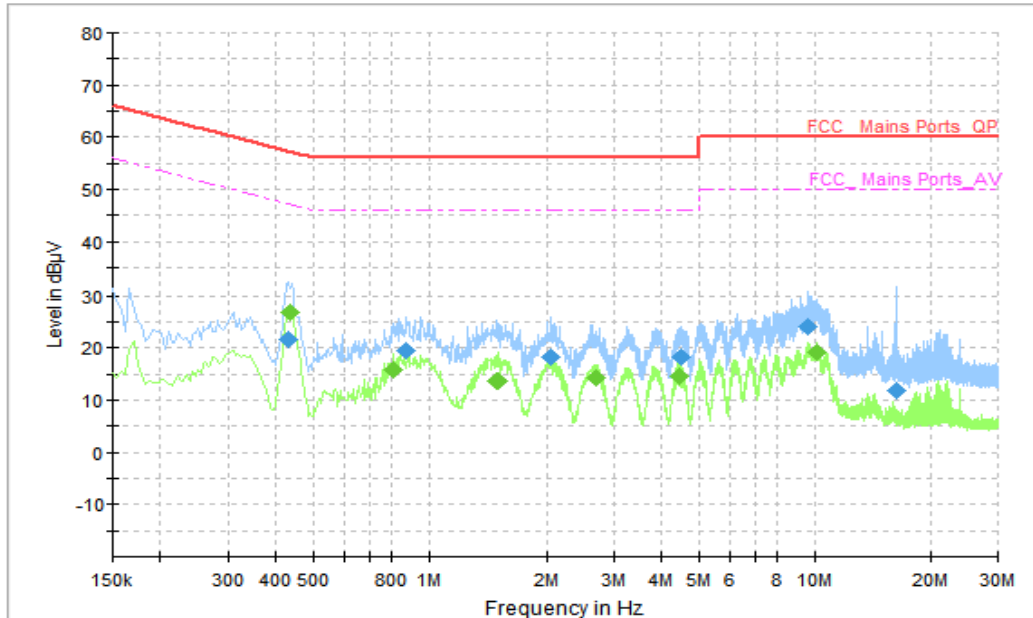


Figure A.2.3. Conducted Emission 120V/60Hz(Video Player)

Final_Result_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.430000	21.64	57.25	35.61	N	10	11.64
0.874000	19.47	56.00	36.53	L1	10	9.47
2.054000	18.32	56.00	37.68	L1	10	8.32
4.502000	18.32	56.00	37.68	L1	10	8.32
9.622000	23.97	60.00	36.03	L1	10	13.97
16.246000	11.65	60.00	48.35	L1	10	1.65

Final_Result_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.434000	26.82	47.18	20.35	L1	10	16.82
0.806000	15.79	46.00	30.21	L1	10	5.79
1.494000	13.52	46.00	32.48	L1	10	3.52
2.698000	14.31	46.00	31.69	L1	10	4.31
4.454000	14.49	46.00	31.51	L1	10	4.49
10.126000	19.18	50.00	30.82	L1	10	9.18

AC Input Port/ Voltage: 240V/60Hz

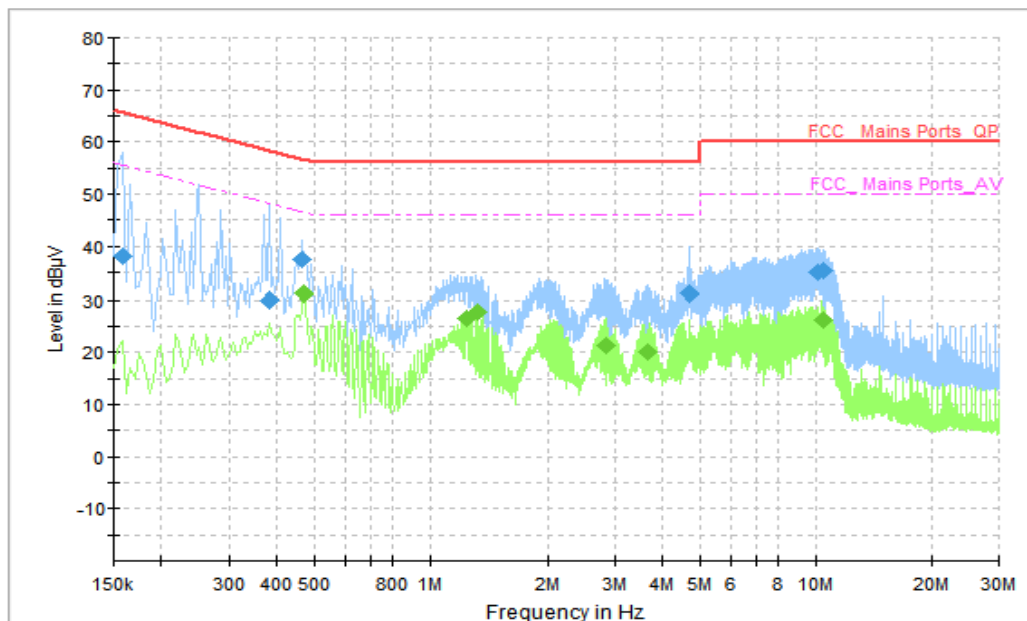


Figure A.2.4. Conducted Emission 240V/60Hz(Video Player)

Final_Result_QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.158000	38.09	65.57	27.48	L1	10	28.09
0.382000	29.70	58.24	28.54	L1	10	19.7
0.466000	37.56	56.59	19.03	N	10	27.56
4.662000	31.13	56.00	24.87	N	10	21.13
10.098000	35.12	60.00	24.88	N	10	25.12
10.410000	35.37	60.00	24.63	N	10	25.37

Final_Result_AVG

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)	PMea (dBµV)
0.470000	31.11	46.51	15.41	L1	10	21.11
1.246000	26.48	46.00	19.52	L1	10	16.48
1.334000	27.65	46.00	18.35	L1	10	17.65
2.842000	21.40	46.00	24.60	N	10	11.40
3.662000	20.09	46.00	25.91	L1	10	10.09
10.474000	26.07	50.00	23.93	N	10	16.07

****END OF REPORT****