

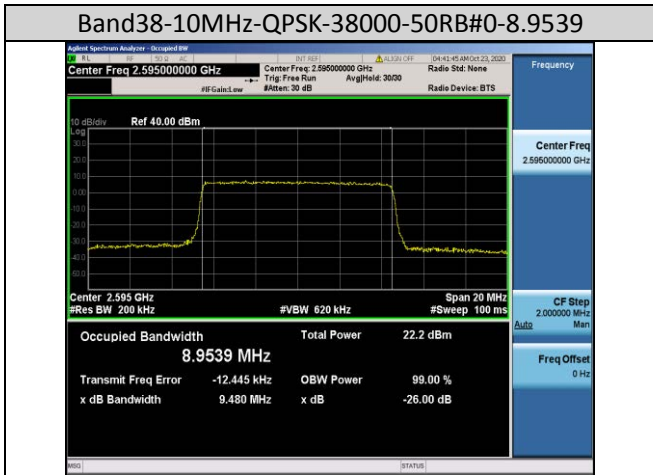


Band38-10MHz-QPSK-38000-50RB#0-8.9539

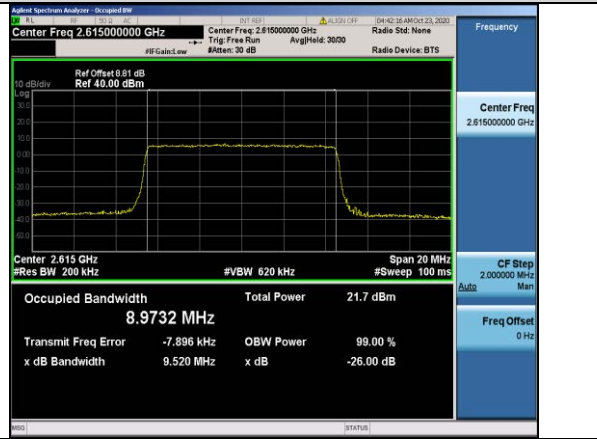


Band38-10MHz-16QAM-38200-50RB#0-8.9732


Band38-10MHz-QPSK-38200-50RB#0-8.9698

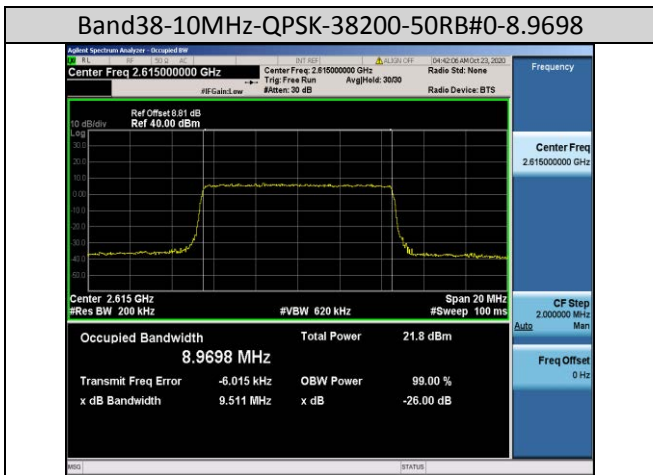

Band38-10MHz-16QAM-37800-50RB#0-8.9667


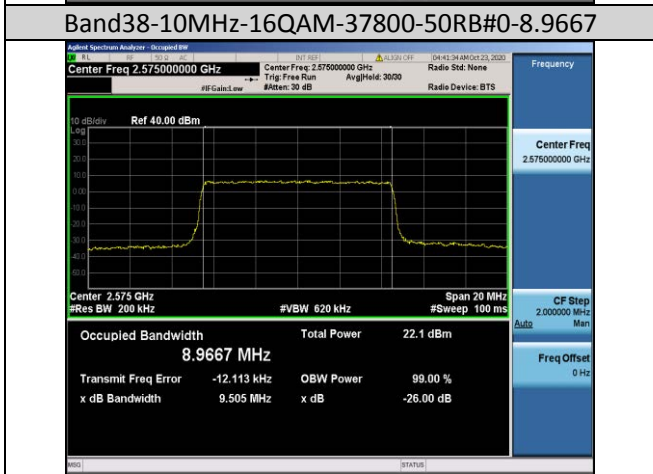


Band38-15MHz-QPSK-37825-75RB#0-13.458

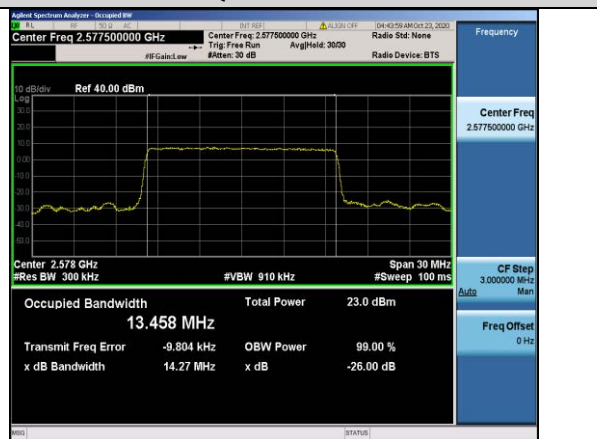


Band38-10MHz-16QAM-38000-50RB#0-8.9575

Band38-15MHz-QPSK-38000-75RB#0-13.463

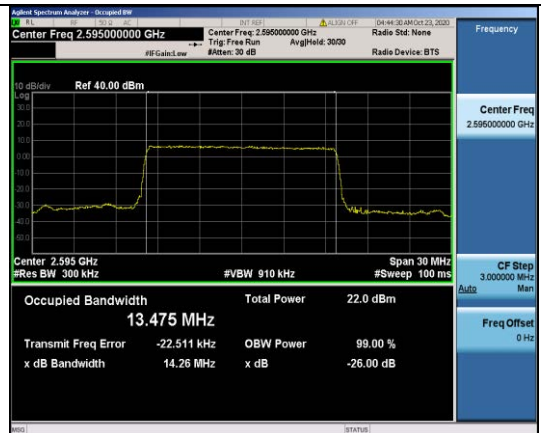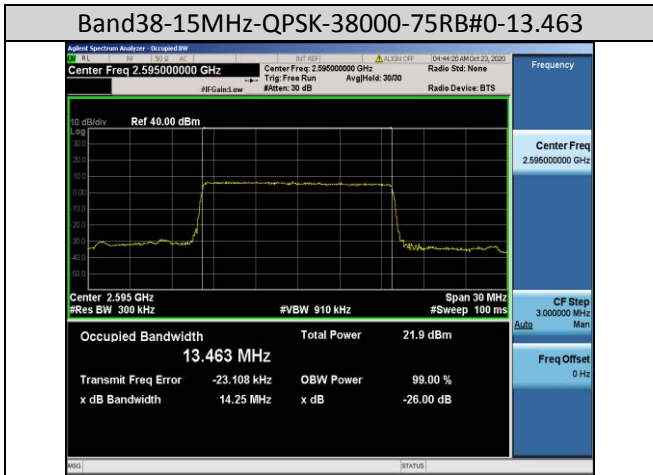

Band38-15MHz-16QAM-38175-75RB#0-13.464


Band38-15MHz-QPSK-38175-75RB#0-13.467

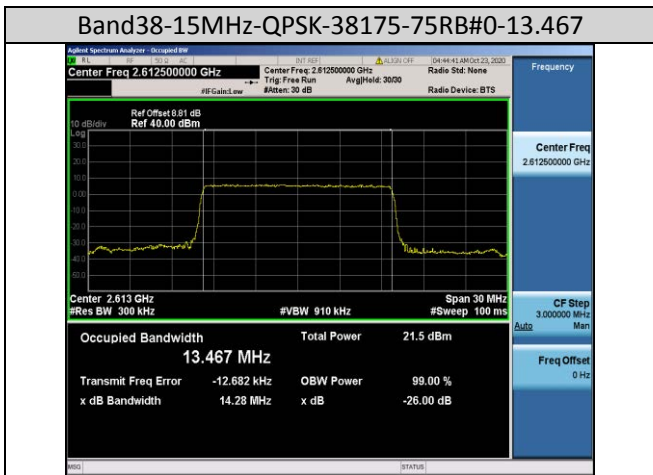


Band38-15MHz-16QAM-38175-75RB#0-13.464



Band38-15MHz-16QAM-37825-75RB#0-13.441

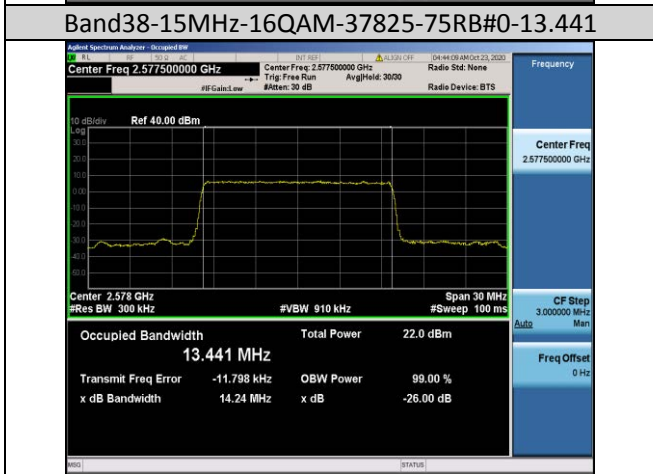


Band38-20MHz-QPSK-37850-100RB#0-17.922

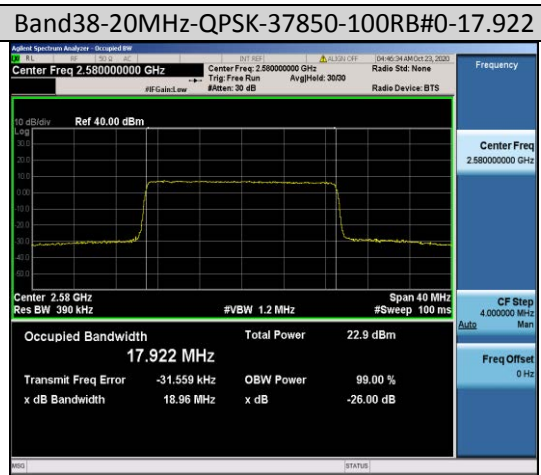


Band38-15MHz-16QAM-38000-75RB#0-13.475

Band38-20MHz-QPSK-38000-100RB#0-17.939

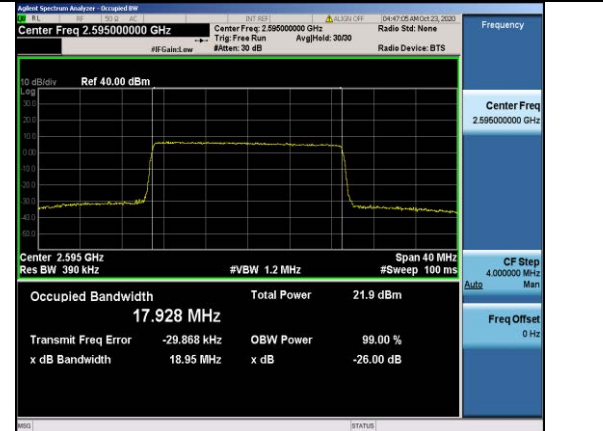


Band38-20MHz-16QAM-38150-100RB#0-17.937

Band38-20MHz-QPSK-38150-100RB#0-17.938


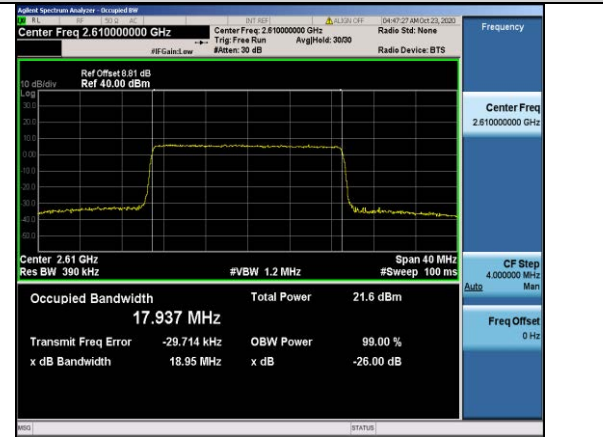


Band38-20MHz-16QAM-37850-100RB#0-17.925

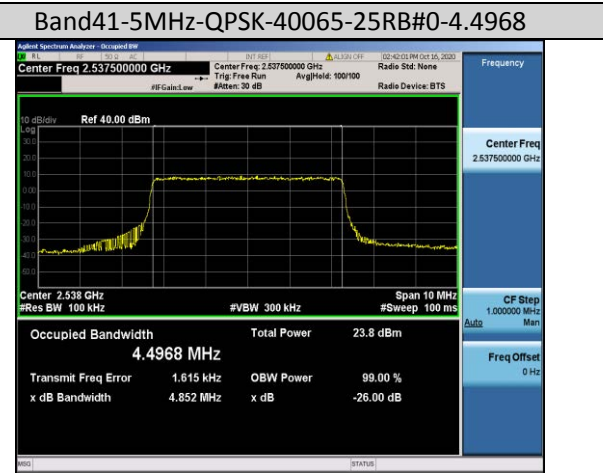


Band38-20MHz-16QAM-38000-100RB#0-17.928



Band41-5MHz-QPSK-40590-25RB#0-4.4899

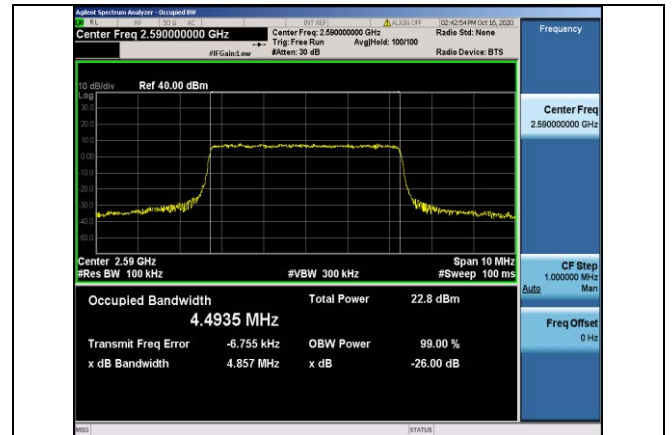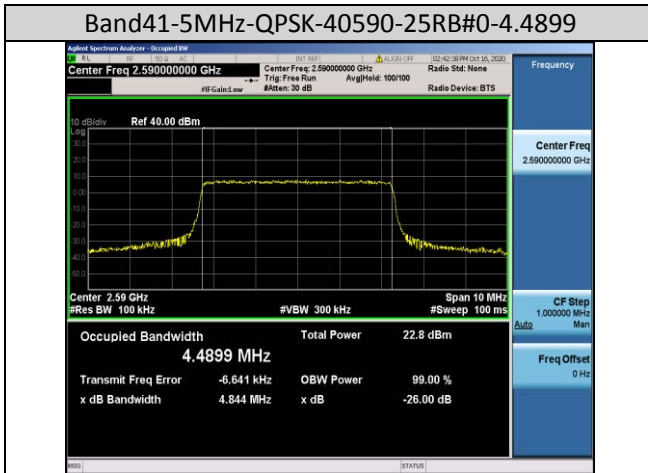


Band41-5MHz-16QAM-41215-25RB#0-4.4857

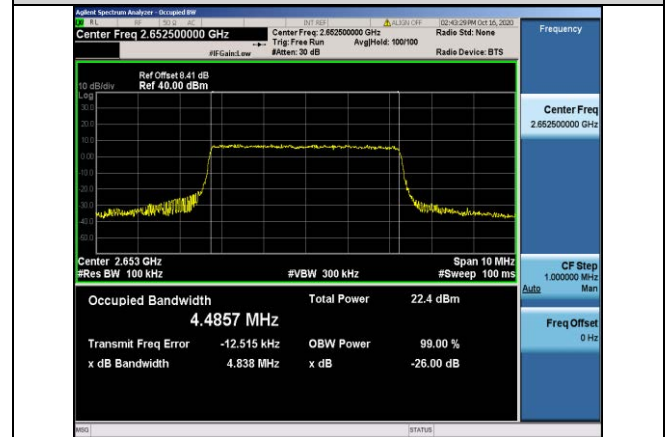

Band41-5MHz-QPSK-41215-25RB#0-4.4916

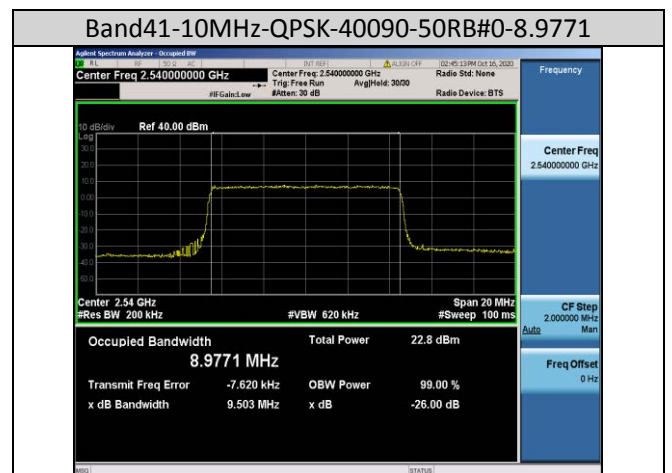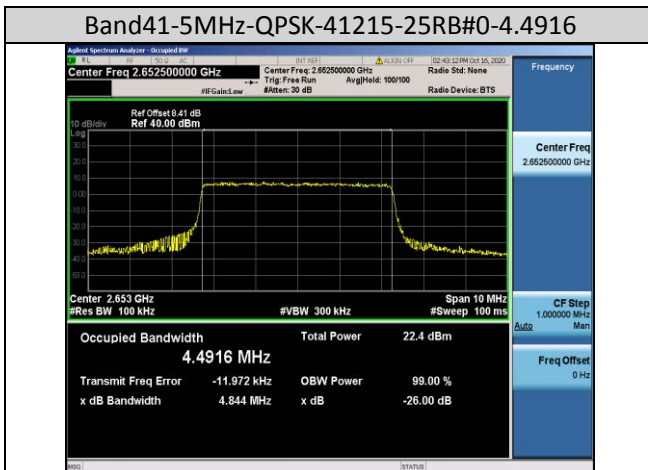


Band41-5MHz-16QAM-40065-25RB#0-4.4886

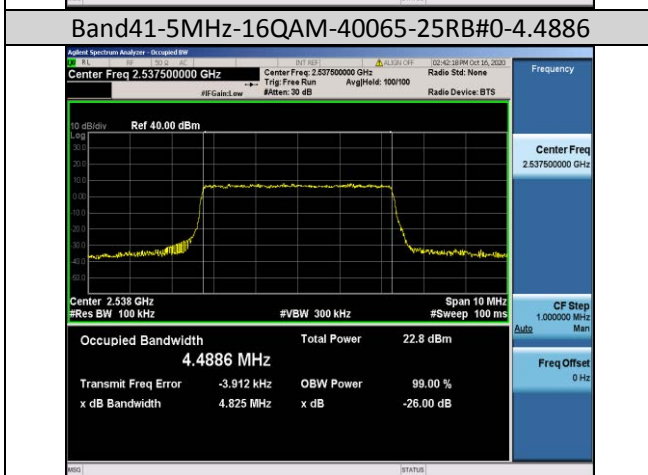


Band41-5MHz-16QAM-40590-25RB#0-4.4935

Band41-10MHz-QPSK-40590-50RB#0-8.9613

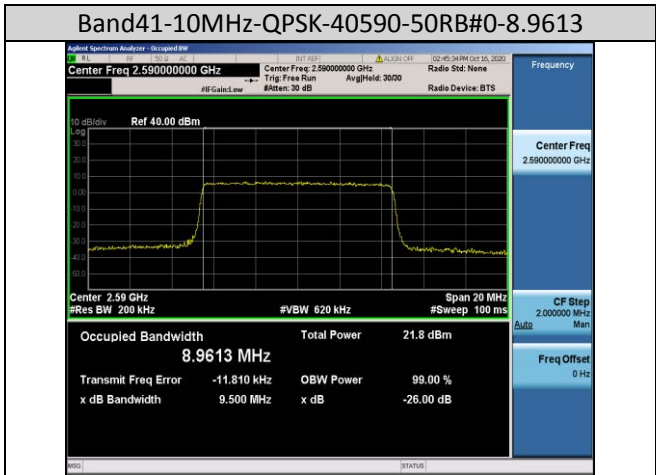


Band41-10MHz-16QAM-41190-50RB#0-8.9662


Band41-10MHz-QPSK-41190-50RB#0-8.9592

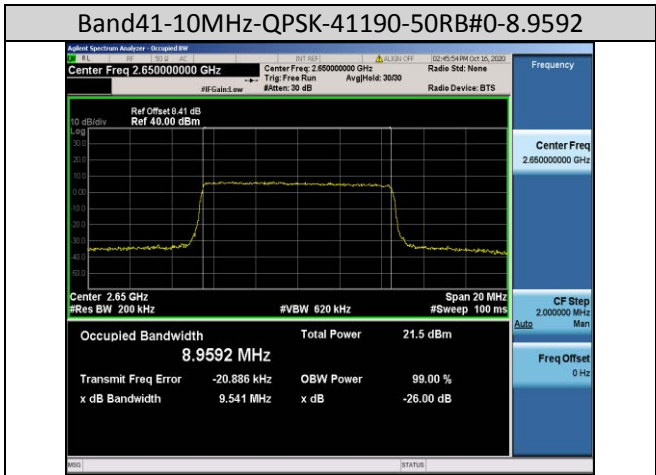


Band41-10MHz-16QAM-40090-50RB#0-8.9683

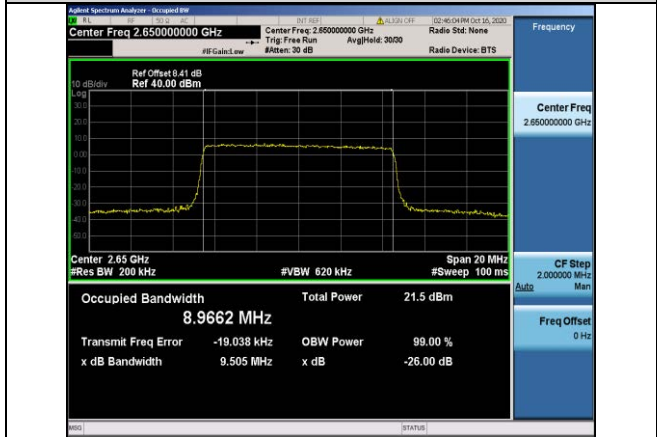

Band41-10MHz-16QAM-40090-50RB#0-8.9683

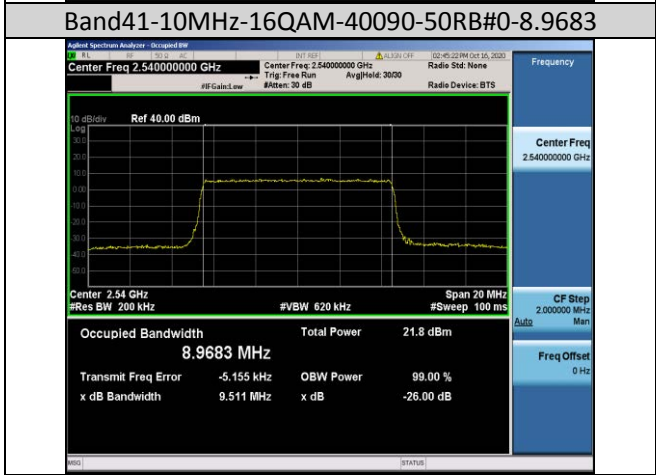


Band41-15MHz-QPSK-40115-75RB#0-13.443


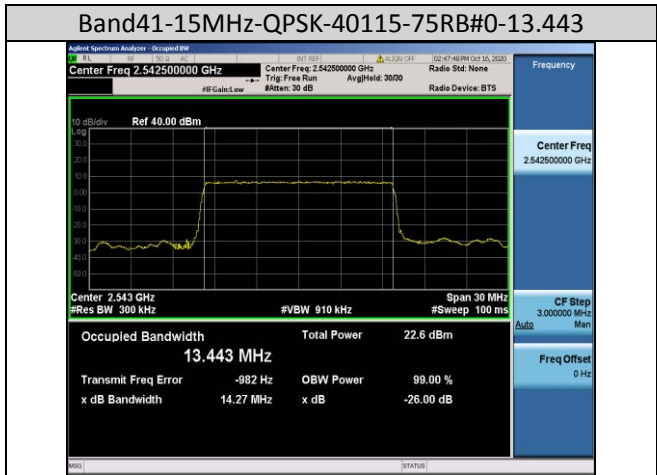


Band41-10MHz-16QAM-40590-50RB#0-8.9538



Band41-15MHz-QPSK-40590-75RB#0-13.462

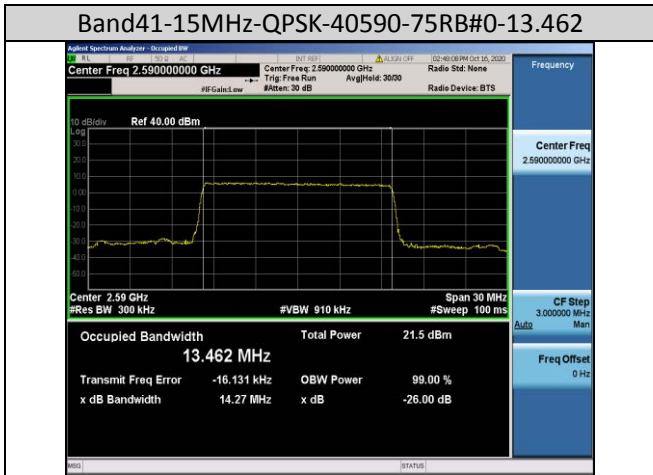

Band41-15MHz-16QAM-41165-75RB#0-13.436

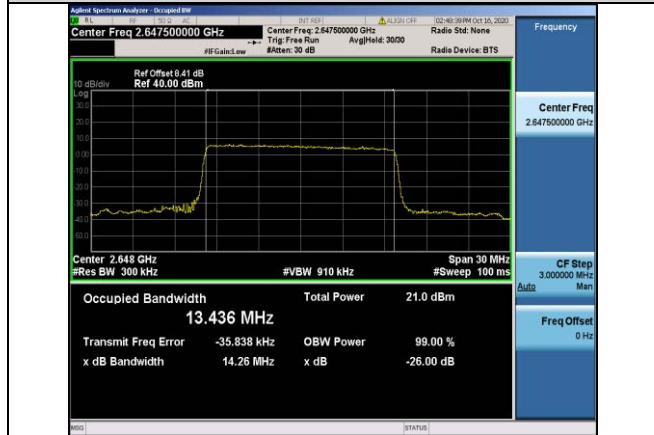
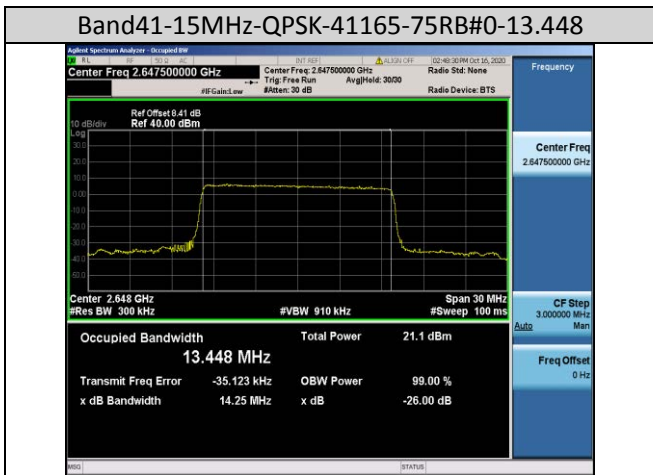


Band41-15MHz-16QAM-40115-75RB#0-13.453

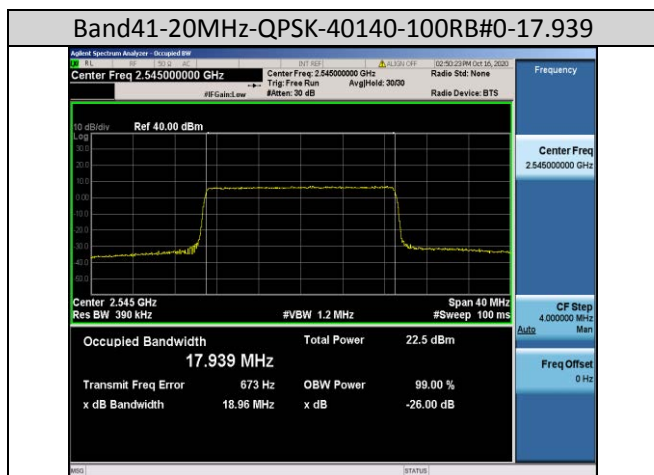
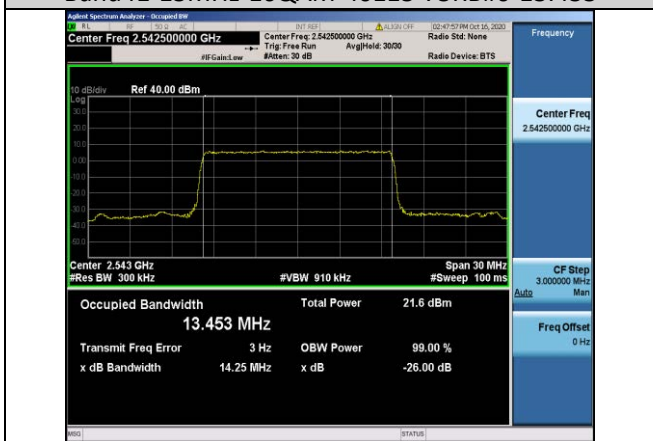


Band41-15MHz-16QAM-40590-75RB#0-13.471



Band41-20MHz-QPSK-40590-100RB#0-17.931

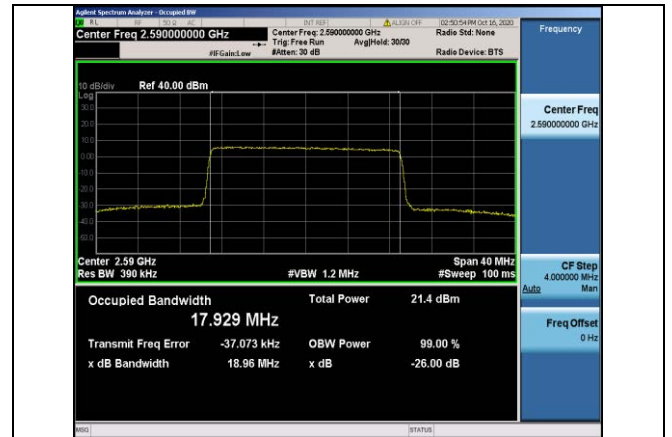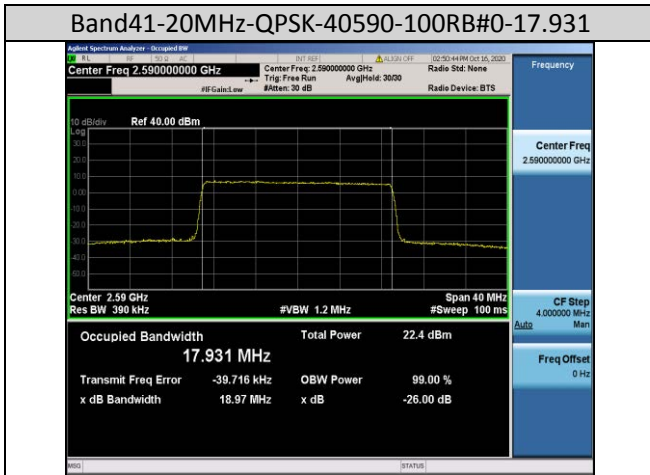

Band41-20MHz-16QAM-41140-100RB#0-17.887

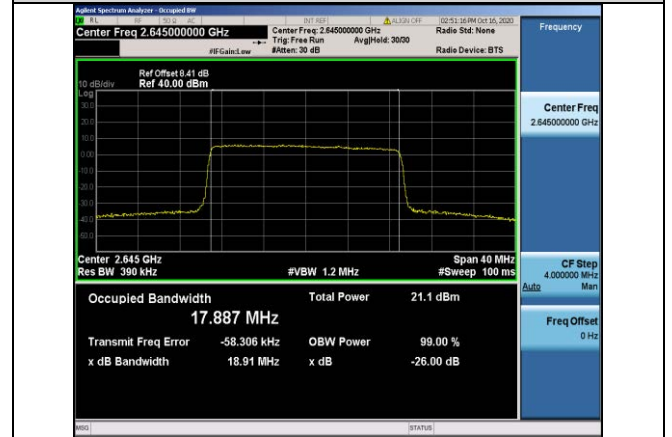
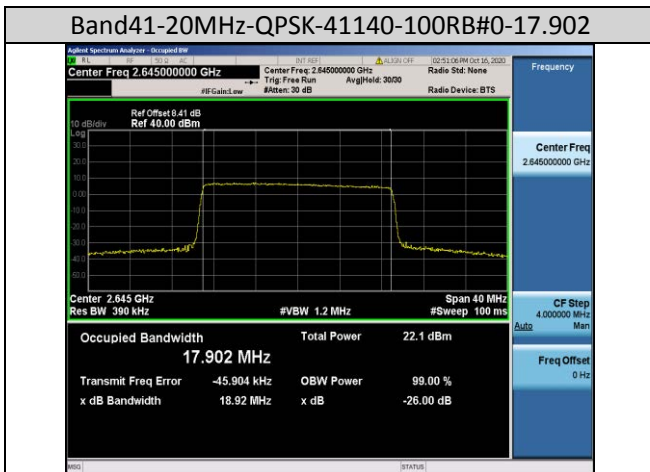


Band41-20MHz-16QAM-40140-100RB#0-17.937

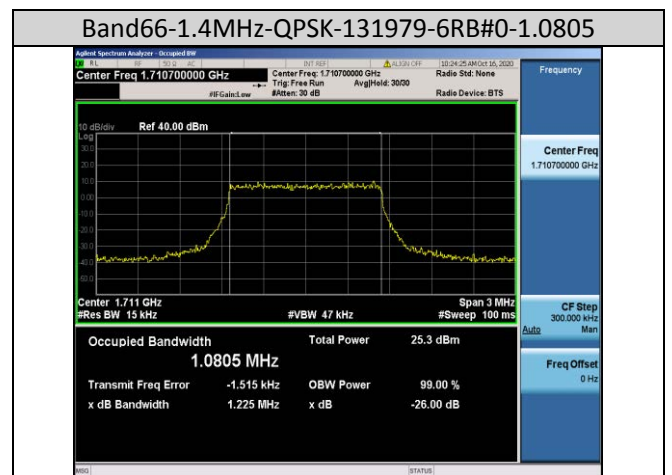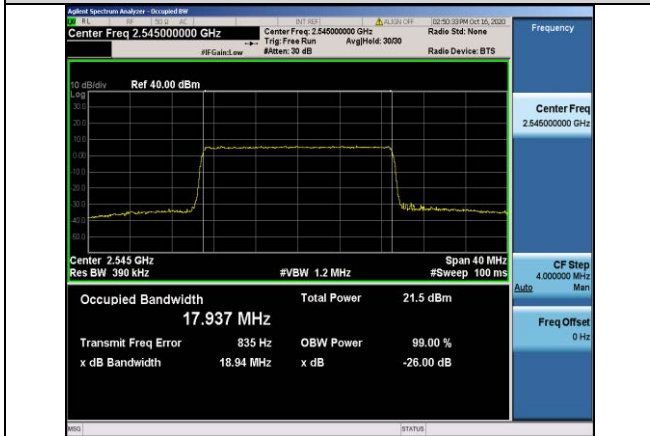


Band41-20MHz-16QAM-40590-100RB#0-17.929


Band66-1.4MHz-QPSK-132322-6RB#0-1.0777

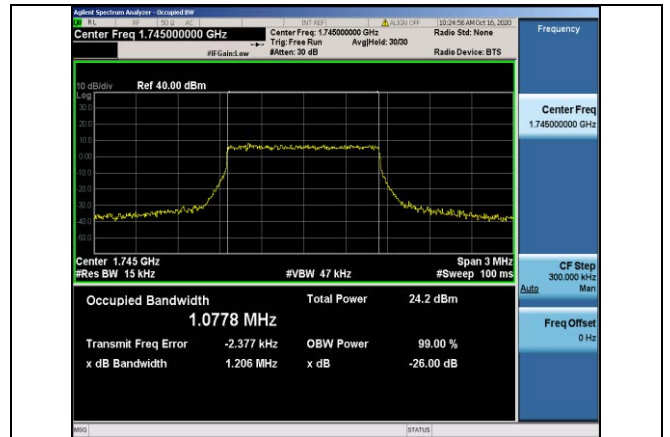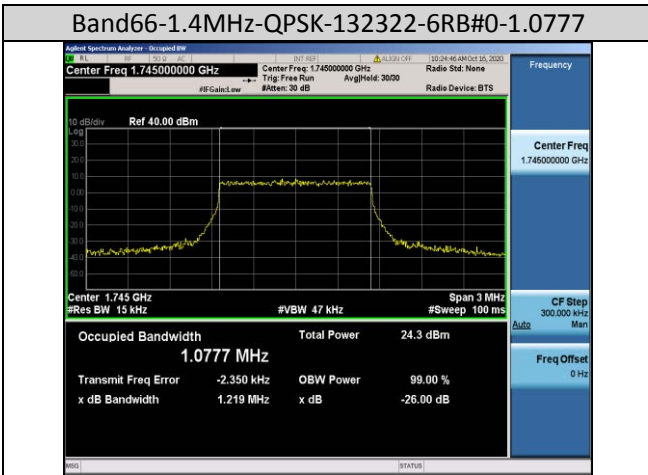


Band66-1.4MHz-16QAM-132665-6RB#0-1.0796

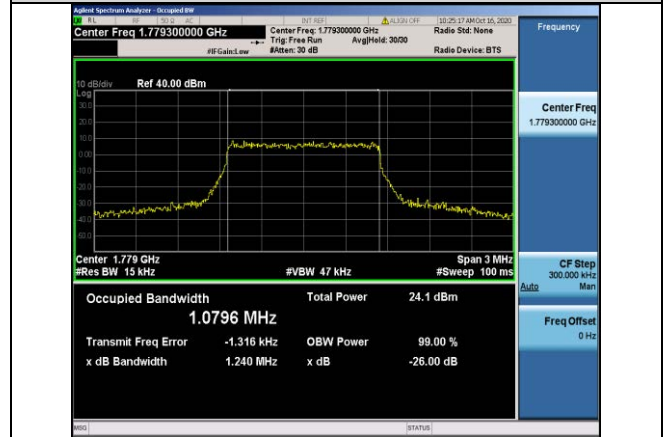


Band66-1.4MHz-QPSK-132665-6RB#0-1.0773

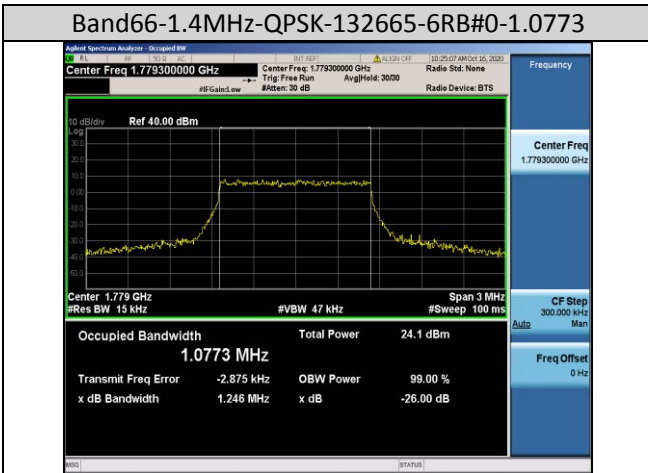

Band66-1.4MHz-16QAM-131979-6RB#0-1.0783


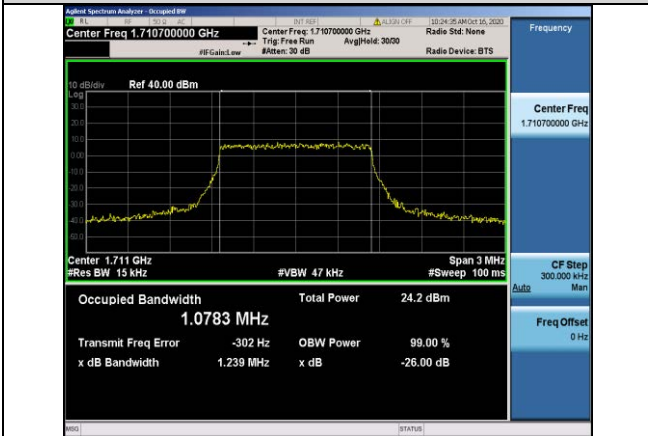


Band66-3MHz-QPSK-131987-15RB#0-2.6864

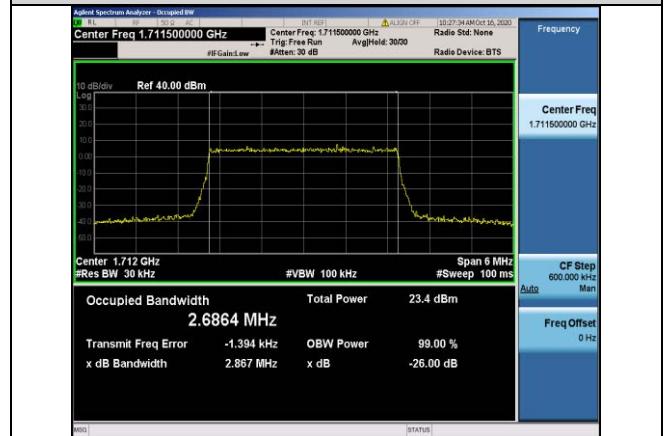



Band66-1.4MHz-16QAM-132322-6RB#0-1.0778

Band66-3MHz-QPSK-132322-15RB#0-2.6799

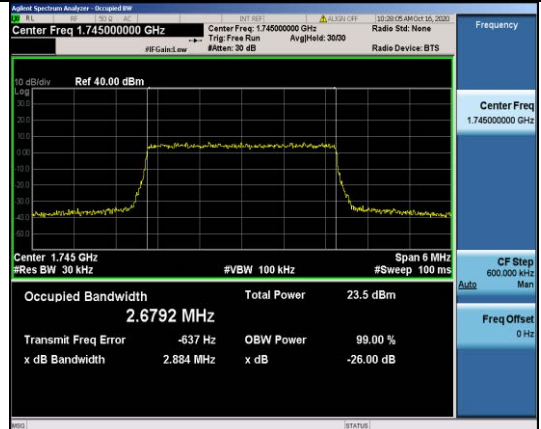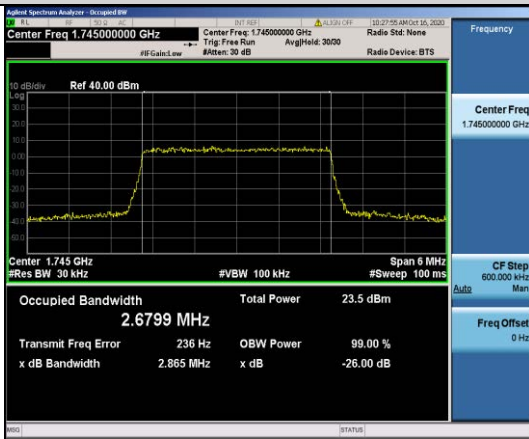


Band66-3MHz-16QAM-132657-15RB#0-2.6820


Band66-3MHz-QPSK-132657-15RB#0-2.6817

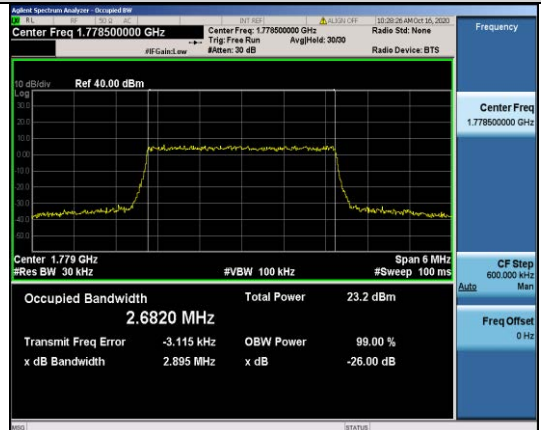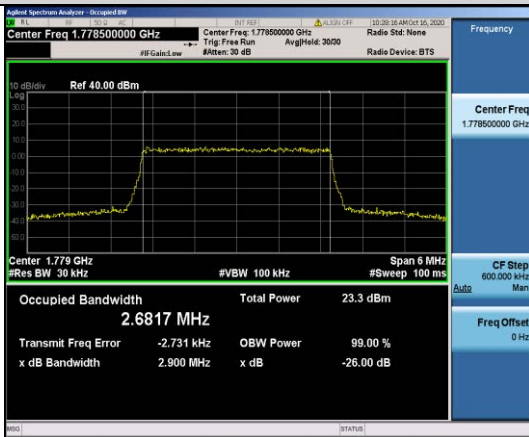

Band66-3MHz-16QAM-131987-15RB#0-2.6856


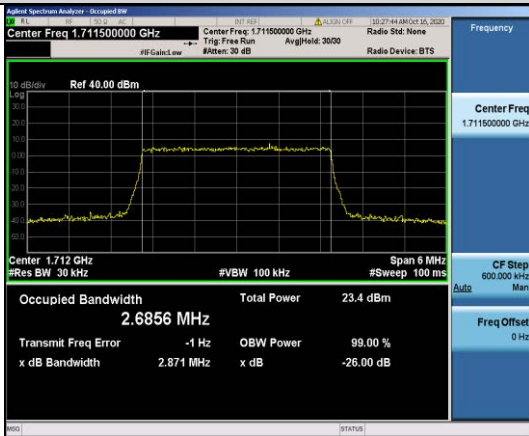


Band66-5MHz-QPSK-131997-25RB#0-4.4684


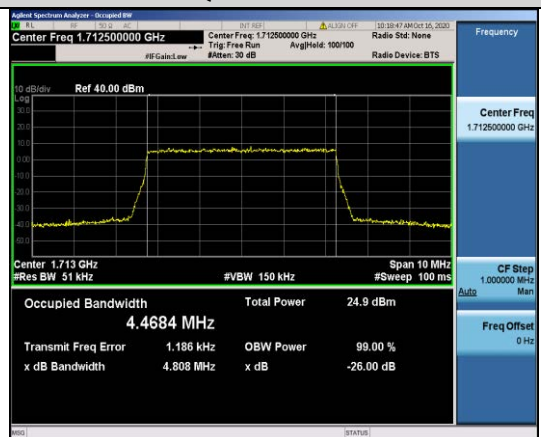


Band66-3MHz-16QAM-132322-15RB#0-2.6792



Band66-5MHz-QPSK-132322-25RB#0-4.4743

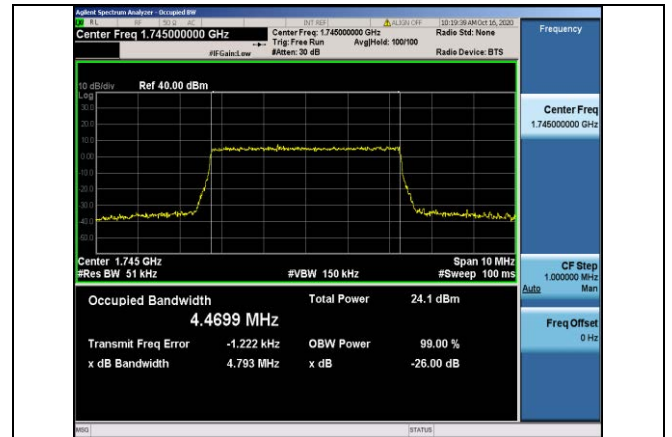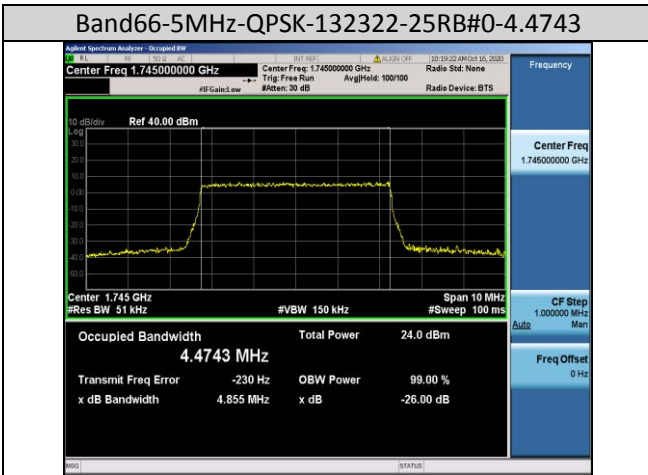

Band66-5MHz-16QAM-132647-25RB#0-4.4764

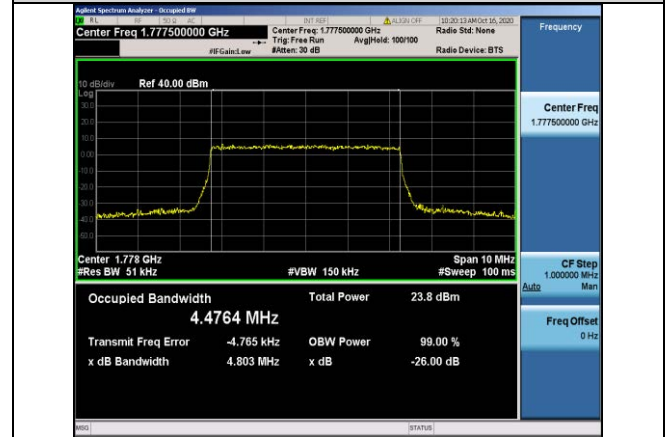
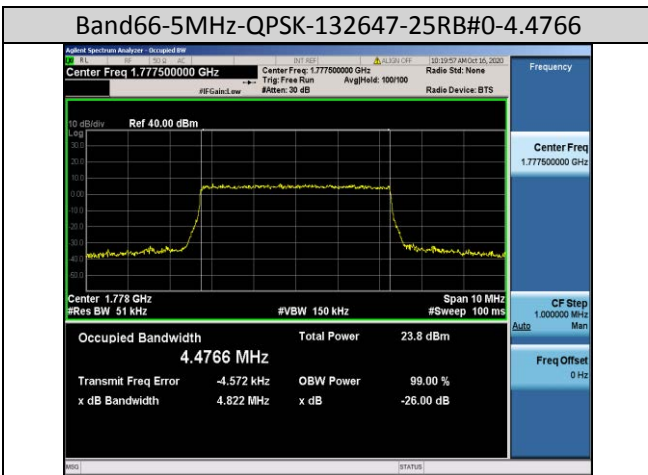


Band66-5MHz-16QAM-131997-25RB#0-4.4717

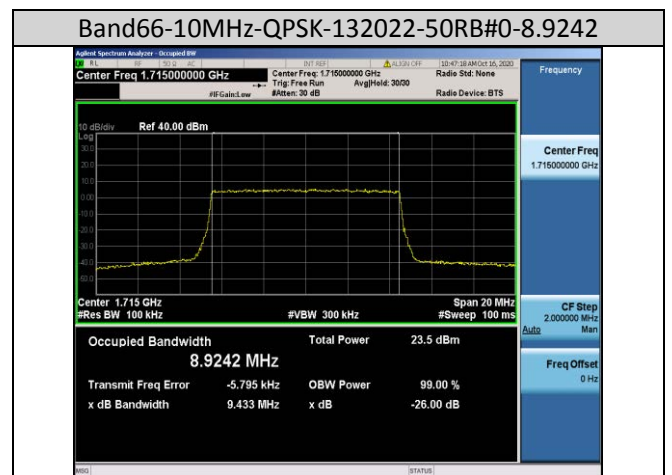
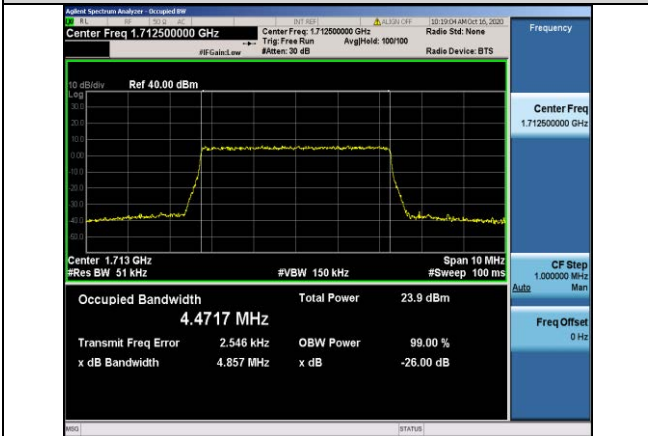


Band66-5MHz-16QAM-132322-25RB#0-4.4699



Band66-10MHz-QPSK-132322-50RB#0-8.9320

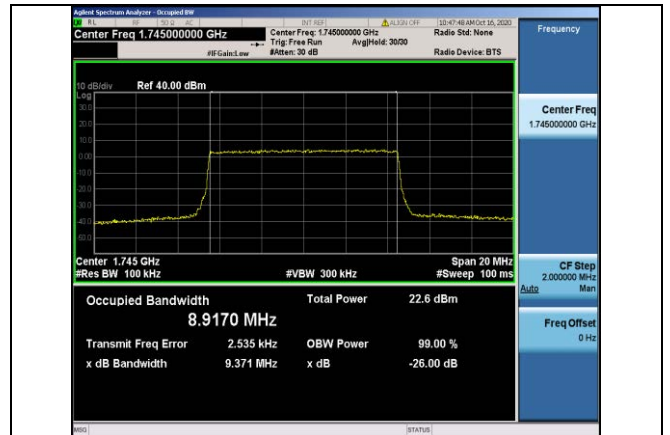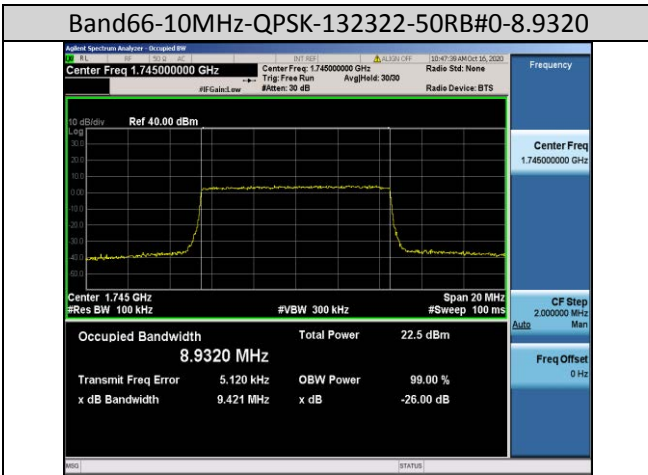

Band66-10MHz-16QAM-132622-50RB#0-8.9234

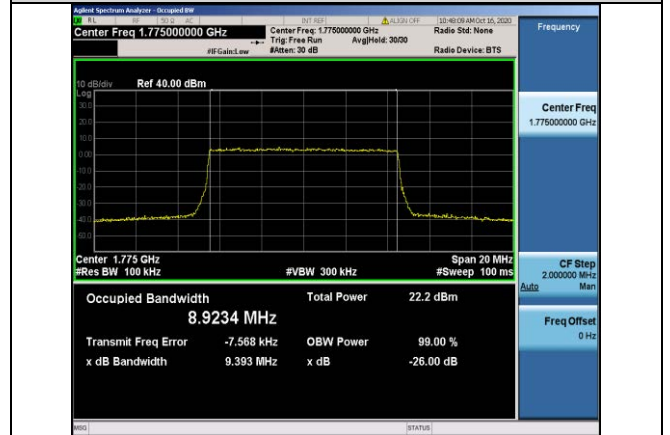
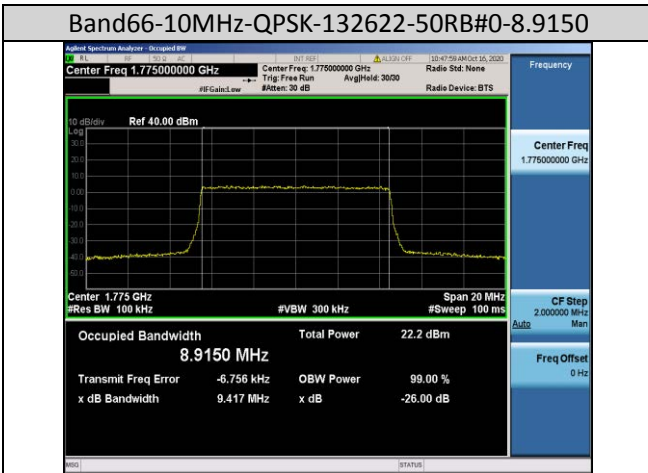


Band66-10MHz-16QAM-132022-50RB#0-8.9260

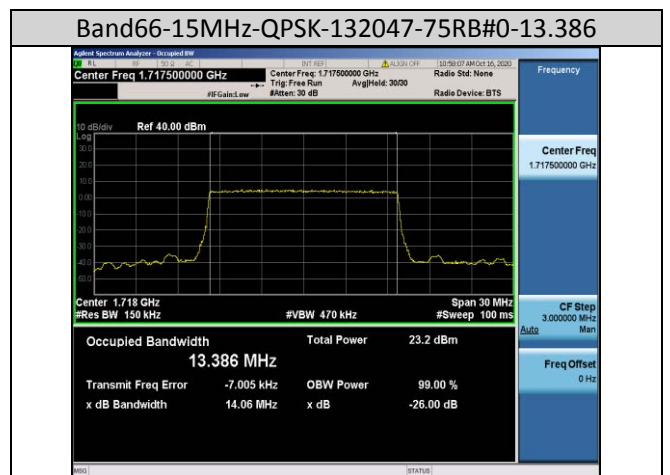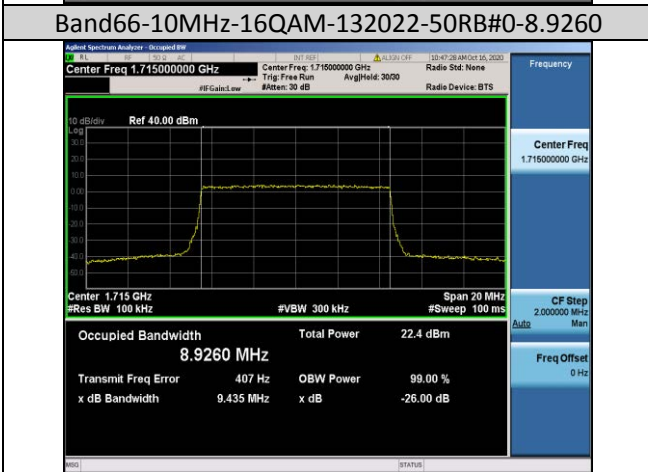


Band66-10MHz-16QAM-132322-50RB#0-8.9170


Band66-15MHz-QPSK-132322-75RB#0-13.389

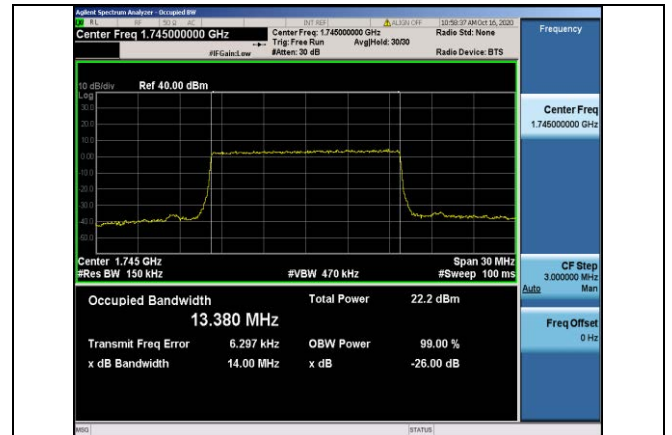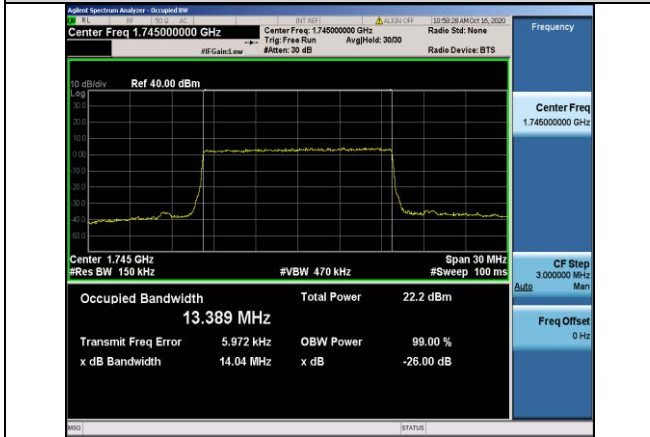


Band66-15MHz-16QAM-132597-75RB#0-13.374

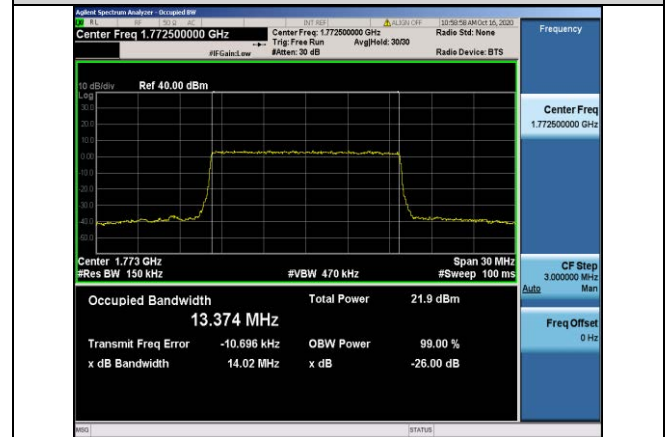


Band66-15MHz-QPSK-132597-75RB#0-13.378

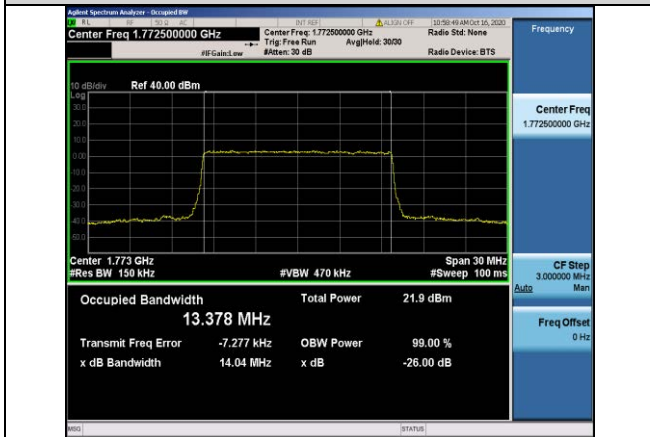

Band66-15MHz-16QAM-132047-75RB#0-13.374


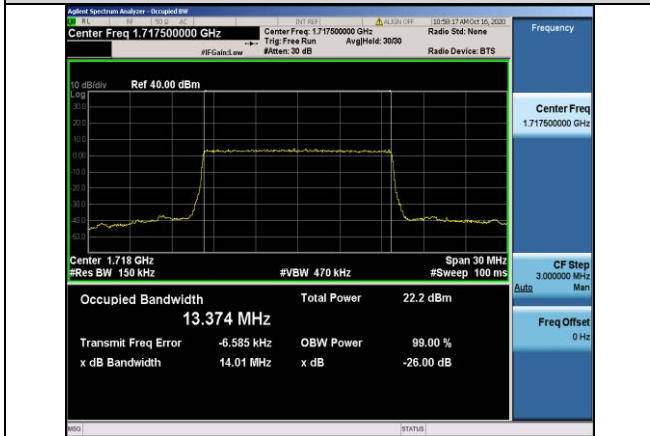


Band66-20MHz-QPSK-132072-100RB#0-17.825


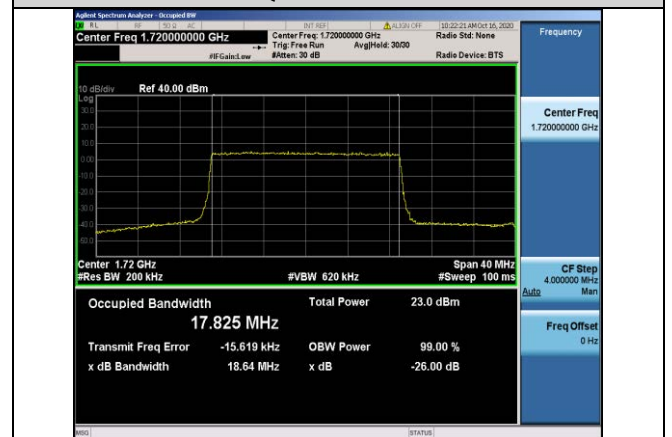


Band66-15MHz-16QAM-132322-75RB#0-13.380


Band66-20MHz-QPSK-132322-100RB#0-17.862

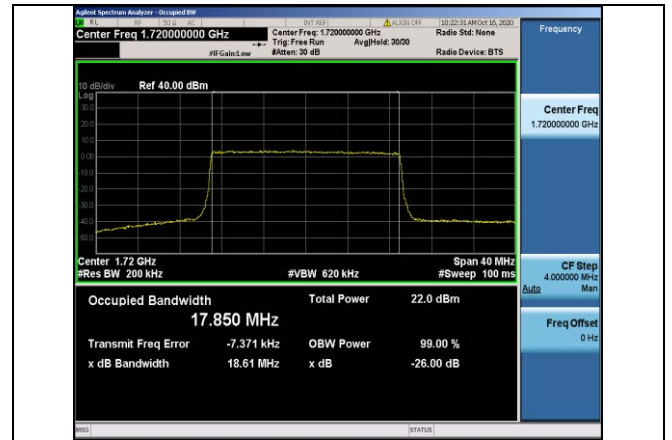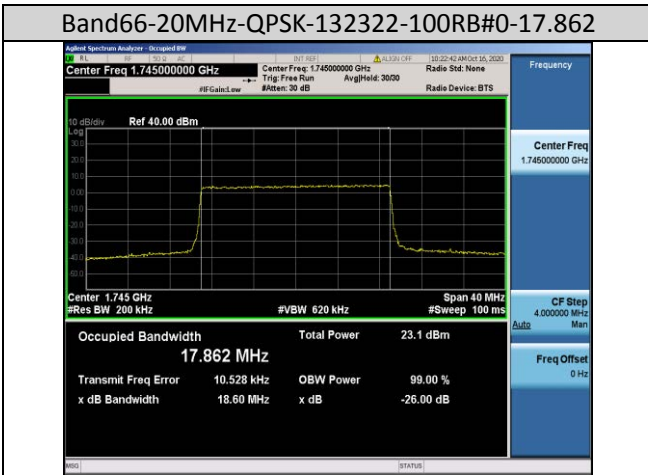

Band66-20MHz-QPSK-132572-100RB#0-17.845

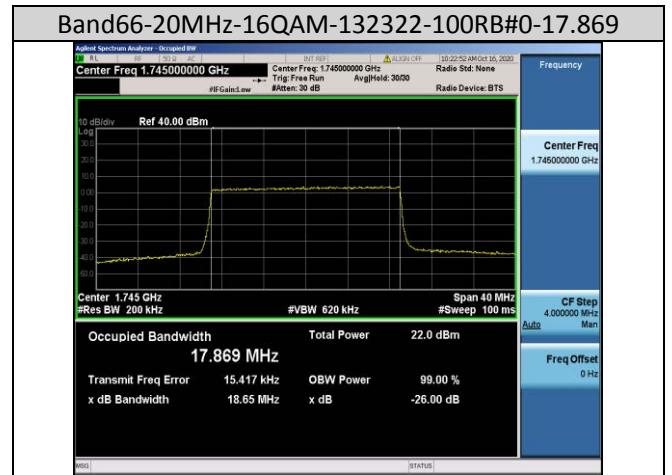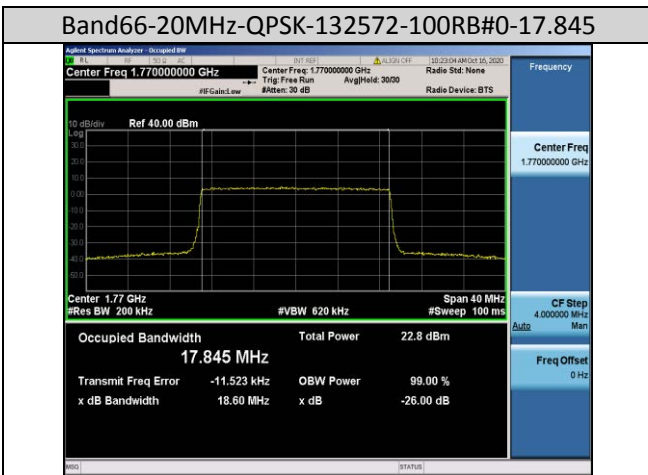

Band66-20MHz-16QAM-132072-100RB#0-17.850

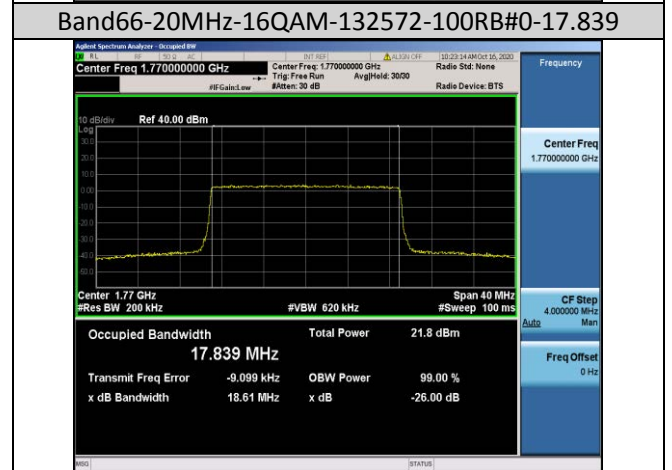

5.4. Spurious Emission at Antenna Terminal

5.4.1. Test Standard

FCC: CFR Part 2.1051, CFR Part 22.917, CFR Part 24.238, CFR Part 27.53

5.4.2. Test Limit

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

FCC 22.917 Emission limitations for cellular equipment.

The rules in this section govern the spectral characteristics of emissions in the Cellular Radio telephone Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC 24.238 Emission limitations for Broadband PCS equipment.

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC: §27.53

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $43 + 10 \log(P)$ dB at the channel edge and $55 + 10 \log(P)$ dB at 5.5 megahertz from the channel edges. (Channel edges are defined under

§27.5 (i) Frequency assignment for the BRS/EBS band)

(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC 90.691

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and

including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


The power of any emission shall be attenuated below the mean output power P (dBW) by at least $43 + 10 \text{ log}_{10}(p)$, measured in a 100 kHz bandwidth for frequencies less than or equal to 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.

5.4.3. Test Procedure



1. Connect the equipment as shown in the above diagram.
 2. Set the spectrum analyzer to measure peak hold with the required settings.
 3. Set the signal generator to a known output power and record the path loss in dB (LOSS) for frequencies up to the tenth harmonic of the EUT's carrier frequency.
 $\text{LOSS} = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$.
 4. Replace the signal generator with the EUT.
 5. Adjust the settings of the Universal Radio Communication Tester (CMU) to set the EUT to its maximum power at the required channel.
 6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
 7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
 8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
 9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.
- (Note: Step 3 above is performed prior to testing and LOSS is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

5.4.4. Test Data


For GSM
 Test Band=GSM850
 Test Mode=GSM/TM1
 Test Channel=LCH

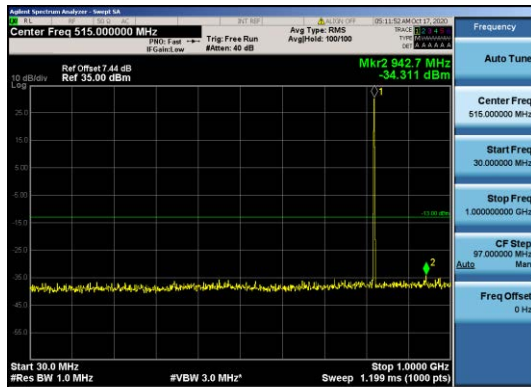


Test Channel=MCH

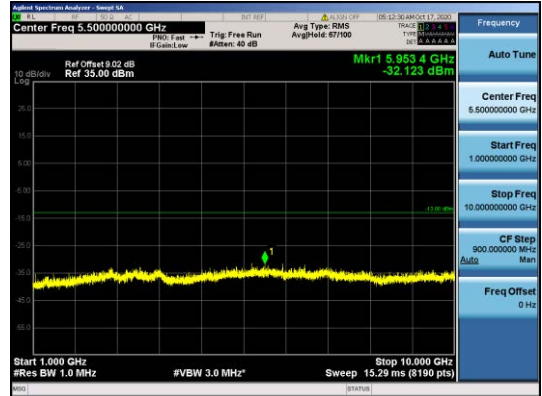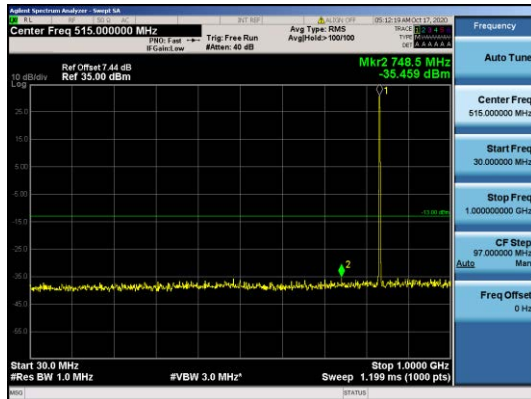


Test Channel=HCH

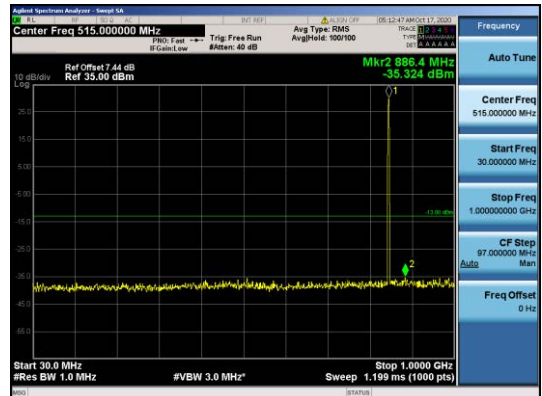


**Test Mode=GSM/TM2
Test Channel=LCH**

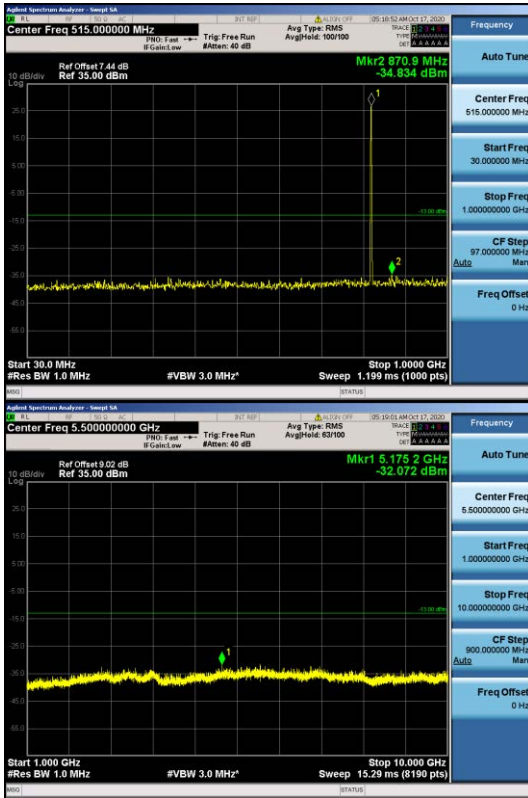


Test Channel=HCH

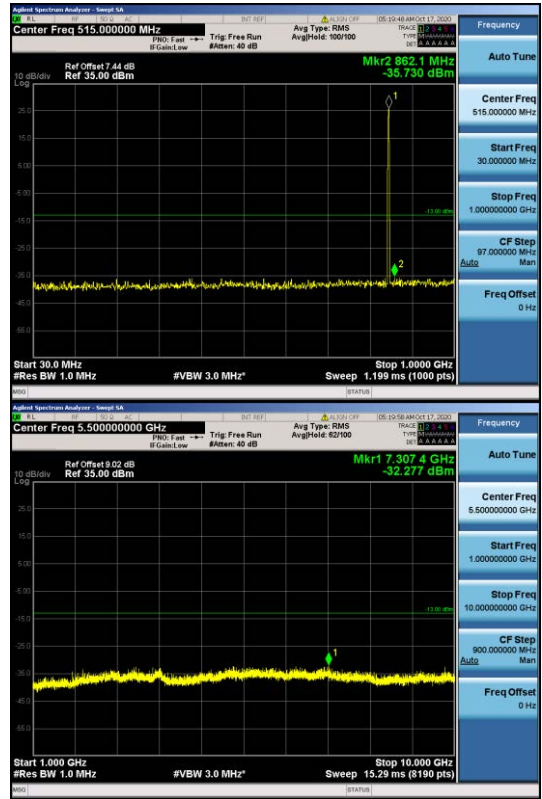

Test Channel=MCH

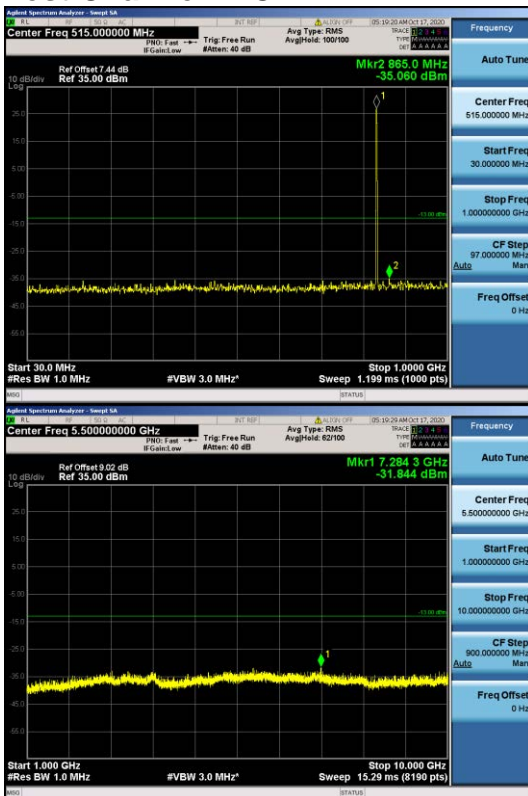


Test Band=GSM1900
Test Mode=GSM/TM1

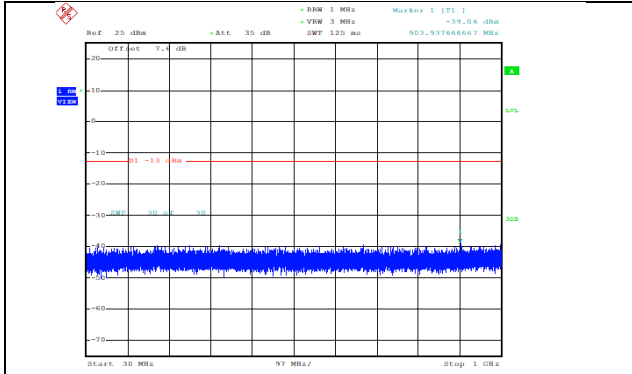


Date: 19.OCT.2020 10:27:49

GSM1900-512-0-30~1000MHz-903.94--39.06--13-PASS

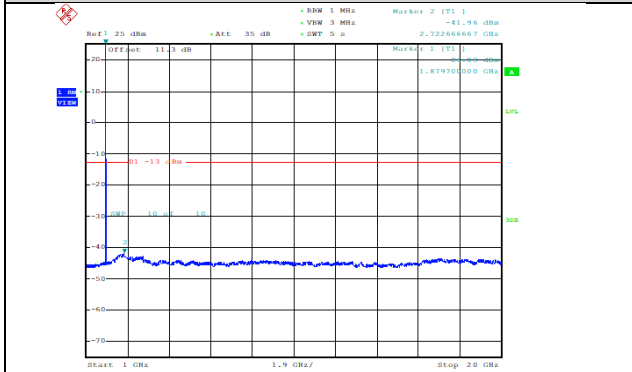


Date: 19.OCT.2020 10:29:10

GSM1900-512-0-1000~20000MHz-2722.67--41.96--13-PASS

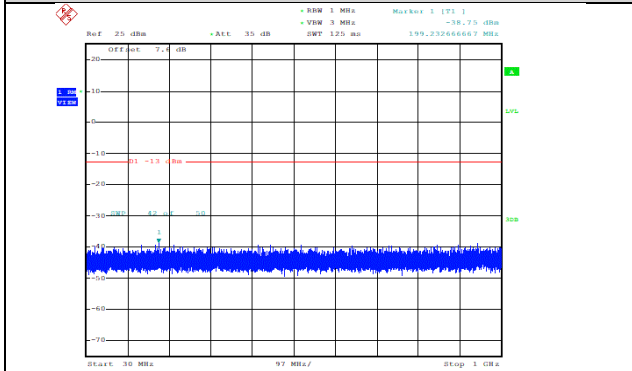


Date: 19.OCT.2020 10:29:30

GSM1900-661-0-30~1000MHz-199.23--38.75--13-PASS

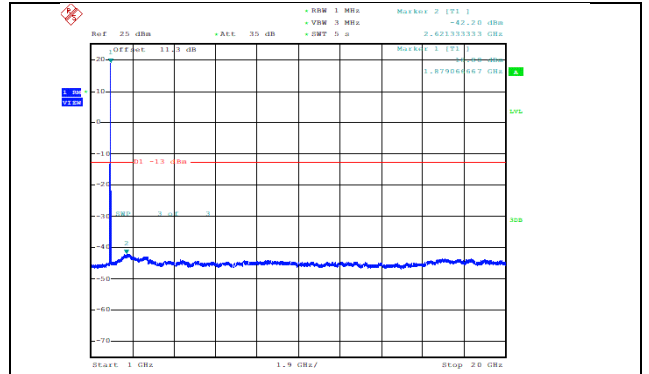


Date: 19.OCT.2020 10:29:55

GSM1900-661-0-1000~20000MHz-2621.33--42.2--13-PASS

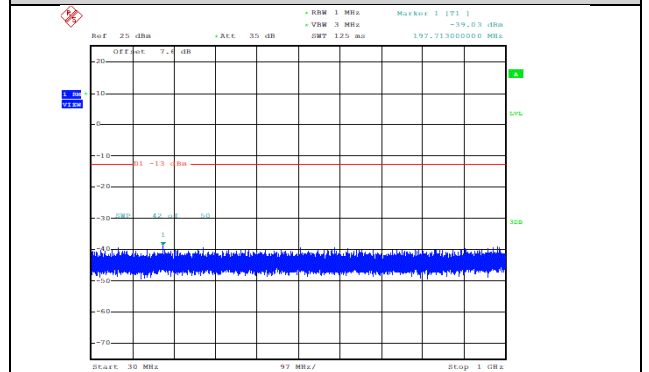

Date: 19.OCT.2020 10:30:07


GSM1900-810-0-30~1000MHz-197.71--39.03--13-PASS

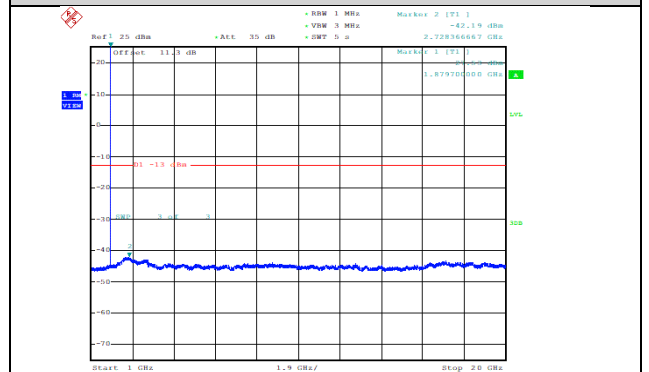

Date: 19.OCT.2020 10:30:32


GSM1900-810-0-1000~20000MHz-2728.37--42.19--13-PASS

Test Band=GSM1900
Test Mode=GSM/TM2

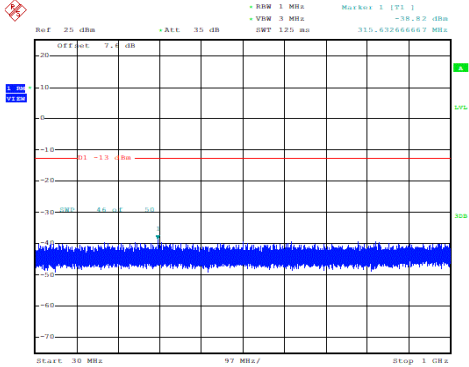


Date: 19.OCT.2020 10:34:10

EGPRS1900-512-2-30~1000MHz-315.63--38.82--13-PASS

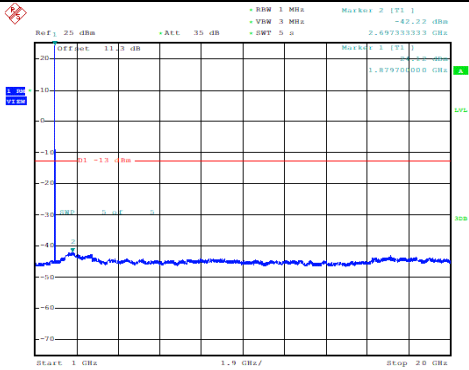


Date: 19.OCT.2020 10:34:46

EGPRS1900-512-2-1000~2000MHz-2697.33--42.22--13-PASS

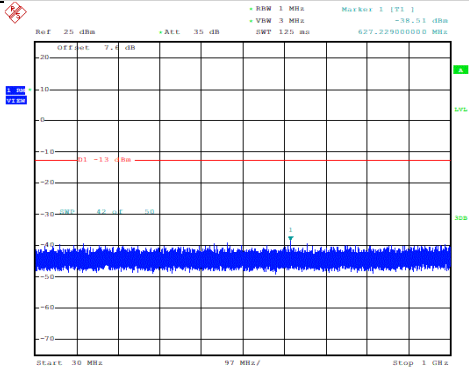


Date: 19.OCT.2020 10:35:00

EGPRS1900-661-2-30~1000MHz-627.23--38.51--13-PASS

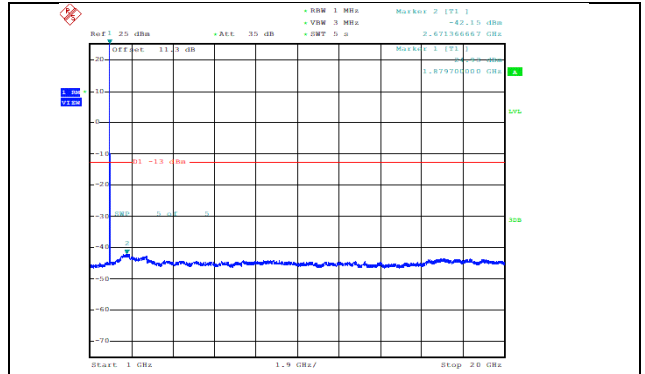


Date: 19.OCT.2020 10:35:37

EGPRS1900-661-2-1000~2000MHz-2671.37--42.15--13-PASS

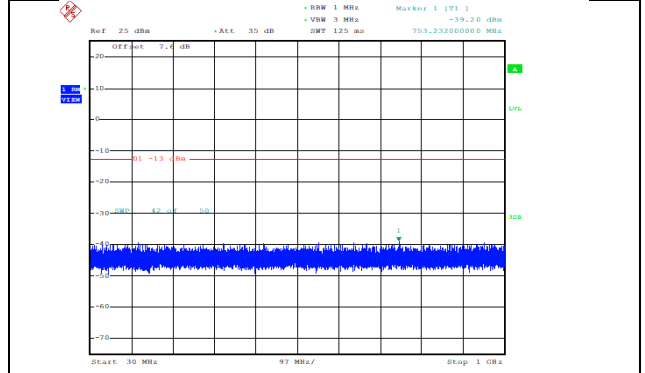

Date: 19.OCT.2020 10:35:51


EGPRS1900-810-2-30~1000MHz-753.23--39.2--13-PASS

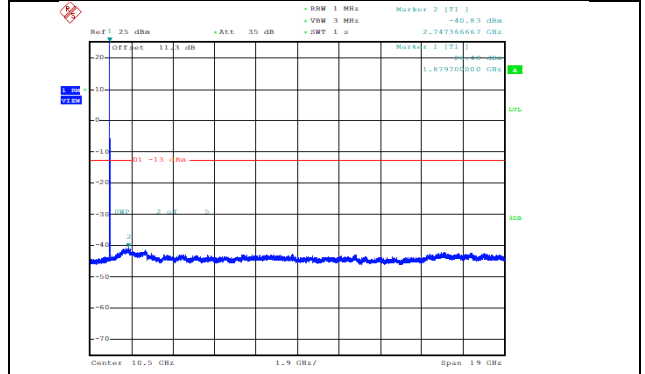



Date: 19.OCT.2020 10:37:31

EGPRS1900-810-2-1000~2000MHz-2747.37--40.83--13-PASS



For WCDMA
 Test Band=WCDMA850
 Test Mode=UMTS/TM3
 Test Channel=LCH

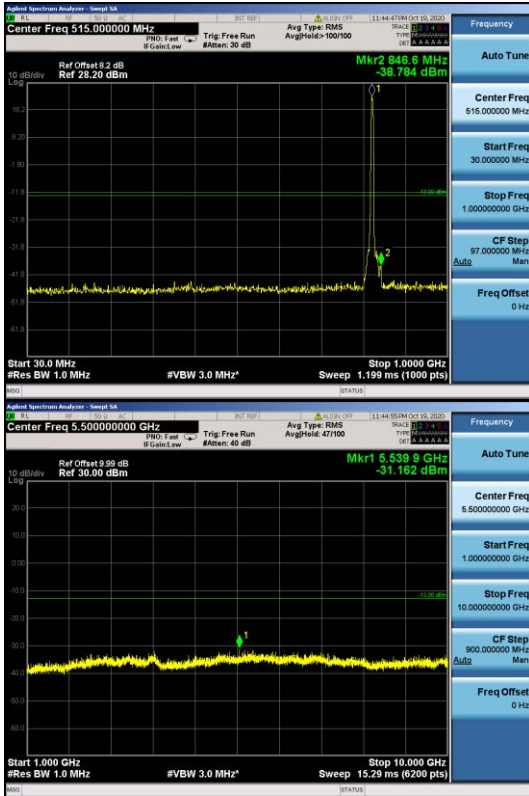


Test Channel=MCH

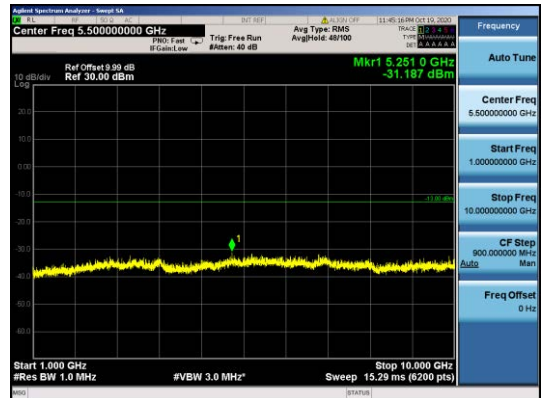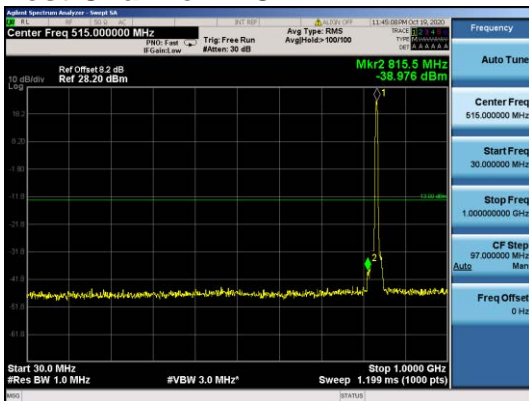

Test Channel=HCH

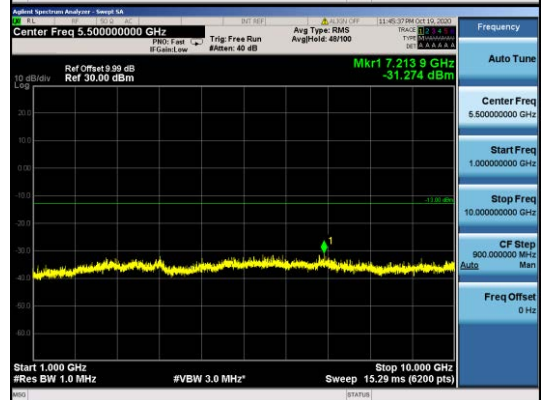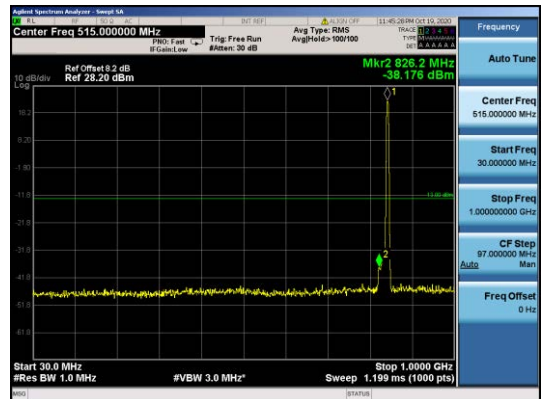


Test Band=WCDMA1900
Test Mode=UMTS/TM3

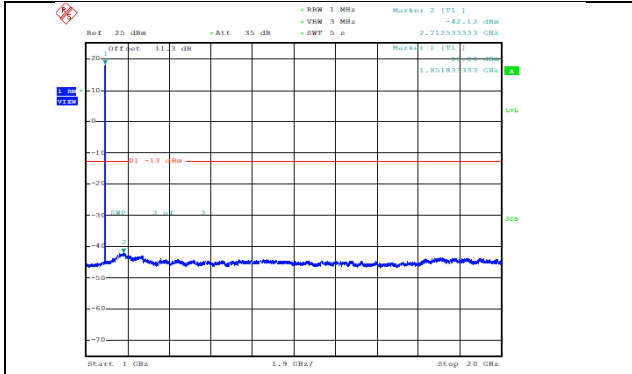


Date: 19.OCT.2020 10:21:18

WCDMA1900-9262-1000~20000MHz-2712.53--42.12--13-PASS

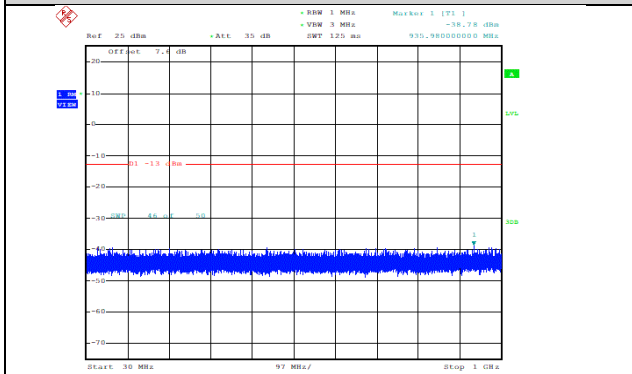


Date: 19.OCT.2020 10:22:02

WCDMA1900-9262-30~1000MHz-935.98--38.78--13-PASS

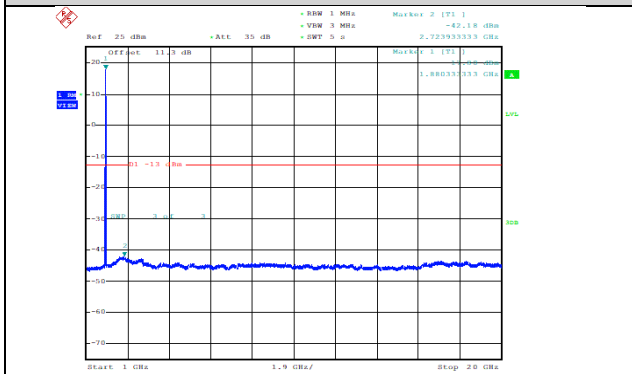


Date: 19.OCT.2020 10:21:55

WCDMA1900-9400-1000~20000MHz-2723.93--42.18--13-PASS

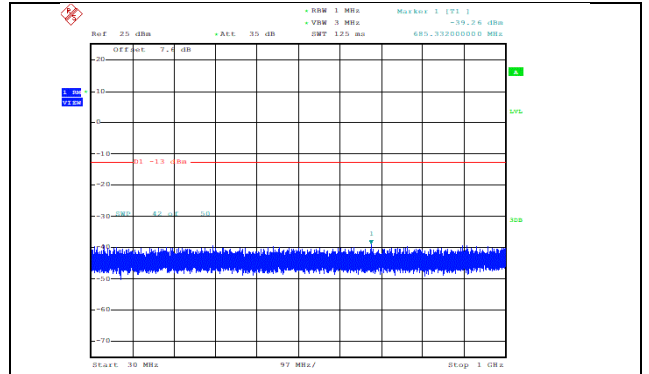


Date: 19.OCT.2020 10:21:52

WCDMA1900-9400-30~1000MHz-685.33--39.26--13-PASS

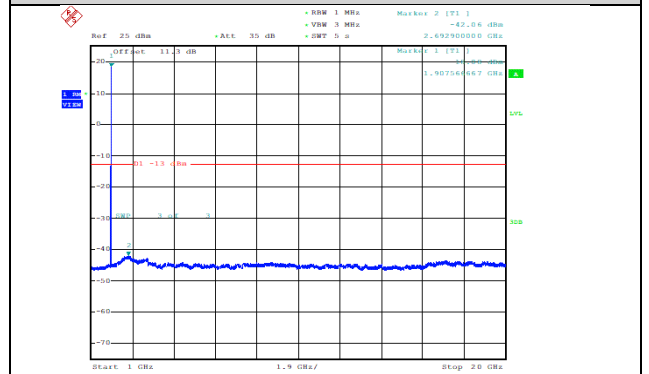

Date: 19.OCT.2020 10:22:05


WCDMA1900-9538-1000~20000MHz-2692.9--42.06--13-PASS

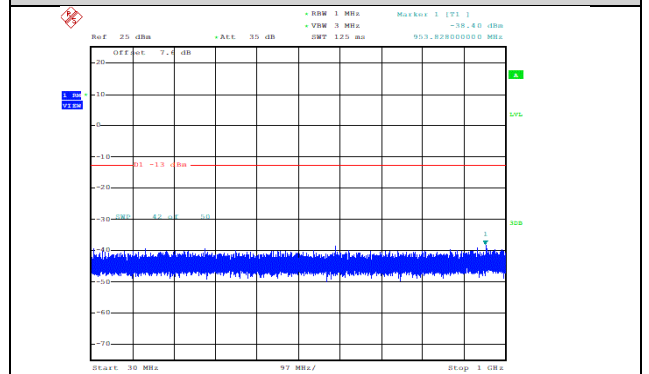

Date: 19.OCT.2020 10:22:12


WCDMA1900-9538-30~1000MHz-953.83--38.4--13-PASS

Test Band=WCDMA1700
Test Mode=UMTS/TM3

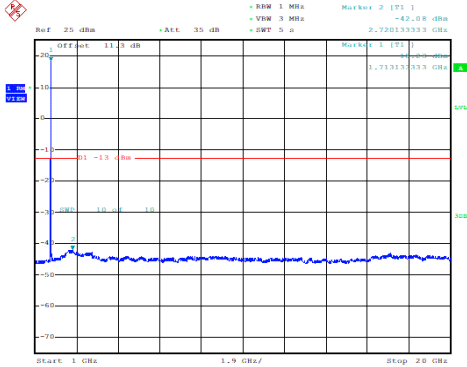


Date: 19.OCT.2020 10:25:09

WCDMA1700-1312-1000~20000MHz-2720.13--42.08--13-PASS

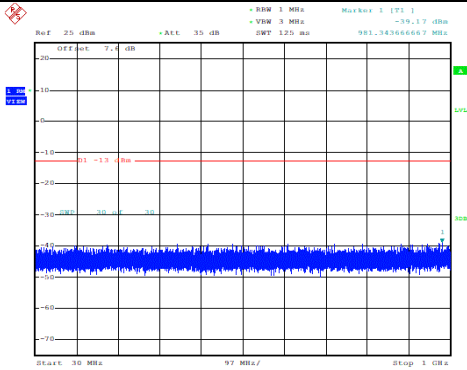


Date: 19.OCT.2020 10:25:52

WCDMA1700-1312-30~1000MHz-981.34--39.17--13-PASS

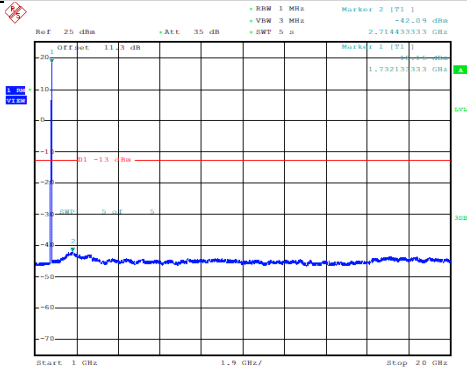


Date: 19.OCT.2020 10:26:01

WCDMA1700-1413-1000~20000MHz-2714.43--42.09--13-PASS

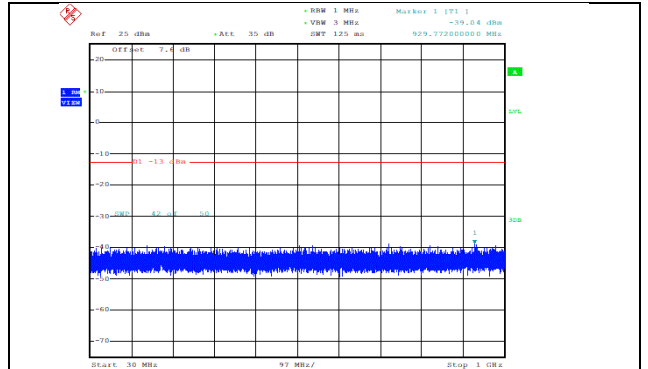


Date: 19.OCT.2020 10:25:26

WCDMA1700-1413-30~1000MHz-929.77--39.04--13-PASS

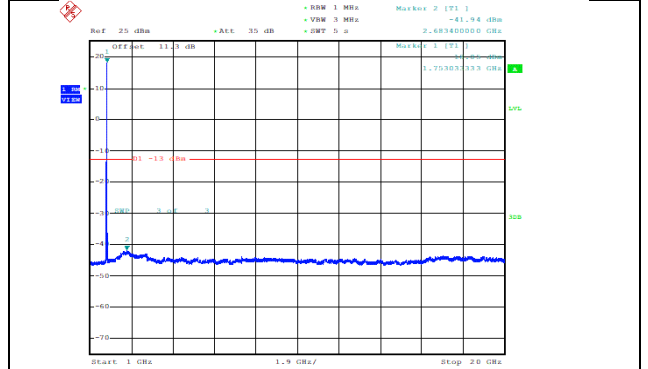

Date: 19.OCT.2020 10:27:01

WCDMA1700-1513-1000~20000MHz-2683.4--41.94--13-PASS

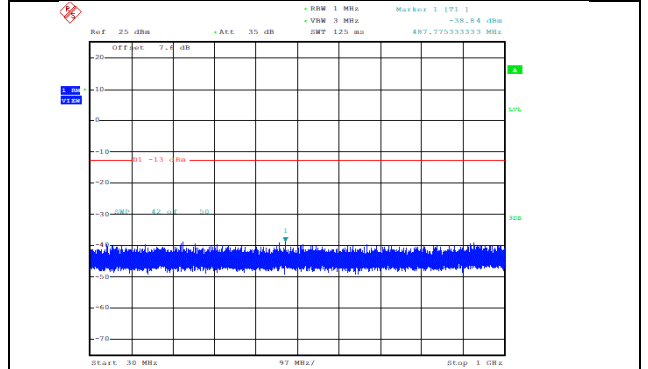


Date: 19.OCT.2020 10:26:37

WCDMA1700-1513-30~1000MHz-487.78--38.84--13-PASS

LTE Mode with QPSK Modulation(TM4) & LTE Mode with 16QAM Modulation(TM5)


Band5-1.4MHz-QPSK-20407-1RB#0-Range1:30~1000MHz

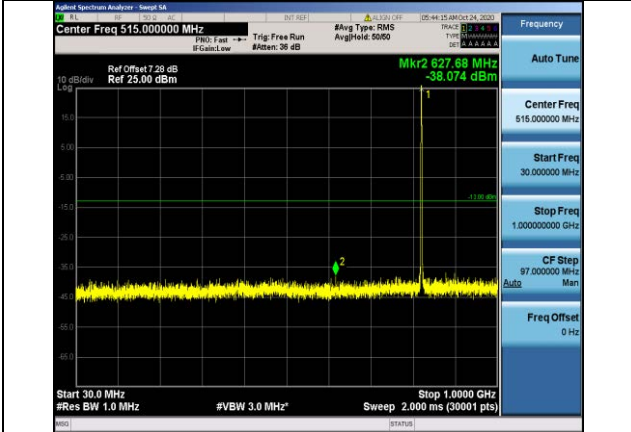


Band5-1.4MHz-QPSK-20407-1RB#0-Range2:1000~10000MHz




Band5-1.4MHz-QPSK-20525-1RB#0-Range1:30~1000MHz

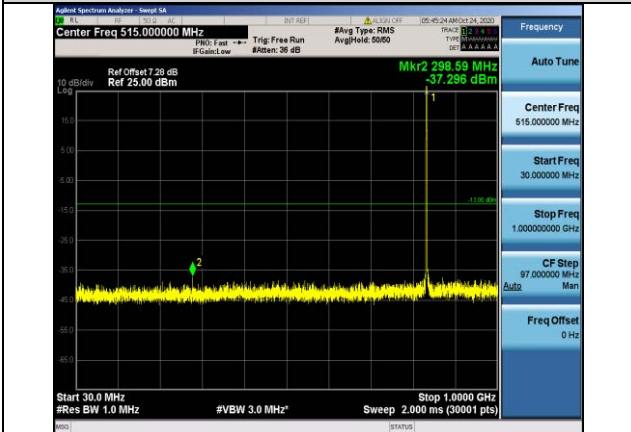

Band5-1.4MHz-QPSK-20525-1RB#0-Range2:1000~10000MHz

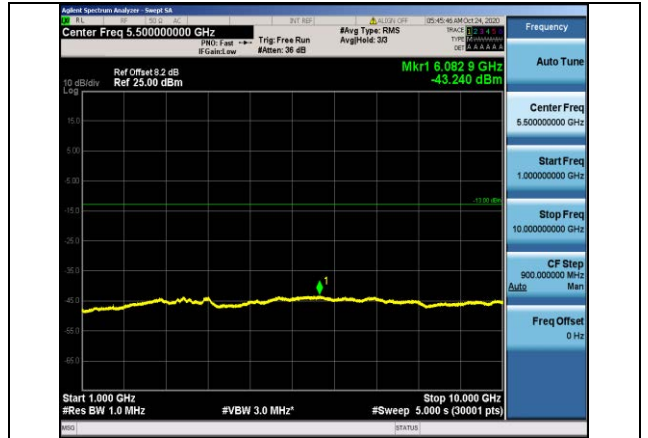

Band5-1.4MHz-QPSK-20643-1RB#0-Range1:30~1000MHz

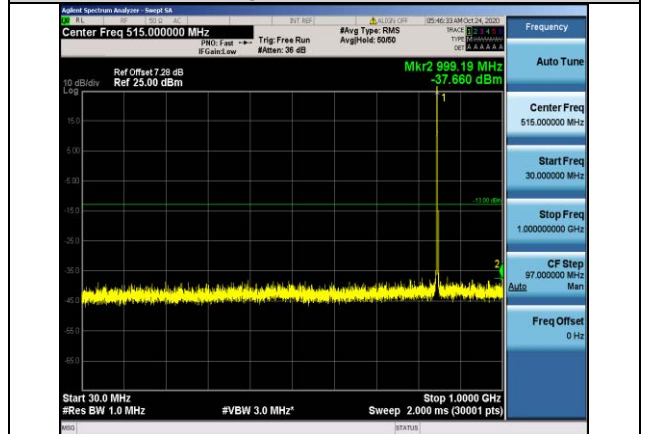

Band5-1.4MHz-QPSK-20643-1RB#0-Range2:1000~10000MHz

