

FCC TEST REPORT

For

Mobile Phone

Model Number: RMX3061

FCC ID: 2AUYFRMX3061

Report Number : WT208002541

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

TEST REPORT DECLARATION

Applicant : Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address : No.178 Yulong Avenue, Yufengshan, Yubei District,
Chongqing, China.
Manufacturer : Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address : No.178 Yulong Avenue, Yufengshan, Yubei District,
Chongqing, China.
EUT Description : Mobile Phone
Model No. : RMX3061
Trade mark : realme
Serial Number : /
FCC ID : 2AUYFRMX3061

Test Standards:

FCC Part 15 Subpart B (2019)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:	 _____ (Zhou Fangai 周芳媛)	Date:	Nov.24, 2020 _____
Checked by:	 _____ (Lin Yixiang 林奕翔)	Date:	Nov.24, 2020 _____
Approved by:	 _____ (Lin Bin 林斌)	Date:	Nov.24, 2020 _____

TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Report information	5
2.2. Laboratory Accreditation and Relationship to Customer	5
2.3. Measurement Uncertainty	6
3. PRODUCT DESCRIPTION	7
3.1. EUT Description	7
3.2. Block Diagram of EUT Configuration.....	8
3.3. Operating Condition of EUT	8
3.4. Support Equipment List	8
3.5. Test Conditions	9
3.6. Modifications	9
4. TEST EQUIPMENT USED	10
4.1. Test Equipment Used to Measure Conducted Emission	10
4.2. Test Equipment Used to Measure Radiated Emission	10
5. CONDUCTED EMISSION TEST	11
5.1. Test Standard and Limit	11
5.2. Test Procedure.....	11
5.3. Test Arrangement.....	11
5.4. Test Data.....	11
6. RADIATION DISTURBANCE TEST	14
6.1. Test Standard and Limit	14
6.2. Test Procedure.....	14
6.3. Test Arrangement.....	15
6.4. Test Data.....	15

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Emission	15.107	Pass
Radiation Emission	15.109	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacture.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

2.3.Measurement Uncertainty

Conducted Emission

9 kHz~150 kHz 3.7dB

150 kHz~30MHz 3.3dB

Radiated Emission

30MHz~1000MHz 4.3dB

1GHz~6GHz 4.6 dB

6GHz~18GHz 5.1dB

3. PRODUCT DESCRIPTION

NOTE: The extreme test conditions for temperature and antenna gain were declared by the manufacturer.


3.1. EUT Description

Description : Mobile Phone
Manufacturer : Realme Chongqing Mobile Telecommunications Corp., Ltd.
Model Number : RMX3061
Operating voltage : 3.6V (Low)/3.87V (Nominal)/ 4.45V (Max)
Test voltage : AC 120V/60Hz
Software Version : relame UI V1.0
Hardware Version : 11
Frequency : GSM850:TX 824MHz~849MHz
RX 869MHz~894MHz
PCS1900: TX 1850MHz~1910MHz
RX 1930MHz~1990MHz
WCDMA 850: TX 824MHz~849MHz
RX 869MHz~894MHz
WCDMA 1700: TX 1710MHz~1755MHz
RX 2110MHz~2155MHz
WCDMA 1900:TX 1850MHz~1910MHz
RX 1930MHz~1990MHz
LTE Band 2: TX 1850MHz~1910MHz
RX 1930MHz~1990MHz
LTE Band 4: TX 1710MHz~1755MHz
RX 2110MHz~2155MHz
LTE Band 5:TX 824MHz~849MHz
RX 869MHz~894MHz
LTE Band 7:TX 2500MHz~2570MHz
RX 2620MHz~2690MHz
LTE Band 12:TX 699MHz~716MHz
RX 729MHz~746MHz
LTE Band 17:TX 704MHz~716MHz
RX 734MHz~746MHz
LTE Band 26: TX 814MHz ~ 849MHz
RX 859MHz ~ 894MHz
LTE Band 38:TX 2570MHz~2620MHz
RX 2570MHz~2620MHz
LTE Band 41:TX 2535MHz~2655MHz
RX 2535MHz~2655MHz
LTE Band 66: TX 1710MHz~1780MHz

		RX 2110MHz~2200MHz
		WiFi:2412MHz~2462MHz
		BT:2402MHz~2480MHz
Type(s) of Modulation	:	GSM850/PCS1900:GMSK 8PSK
		WCDMA:QPSK
		LTE:QPSK, 16QAM
		DSSS (DBPSK, DQPSK, CCK) for 802.11b
		OFDM (BPSK, QPSK, 16QAM, 64QAM) for 802.11g/n
		Bluetooth: GFSK, pi/4-DQPSK, 8DPSK
Antenna Type	:	GSM/WCDMA/LTE: PIFA ANTENNA
		699MHz~716MHz: 0.5 dBi
		777MHz~787MHz: 0.5 dBi
		814MHz~849MHz: 0.5 dBi
		1710MHz~1780MHz: 1.1 dBi
		1850MHz~1910MHz: 1.1 dBi
		2500MHz~2655MHz: 1.1 dBi
		WiFi: PIFA ANTENNA -3dBi
		BT: PIFA ANTENNA -3dBi

Remark:--

3.2. Block Diagram of EUT Configuration

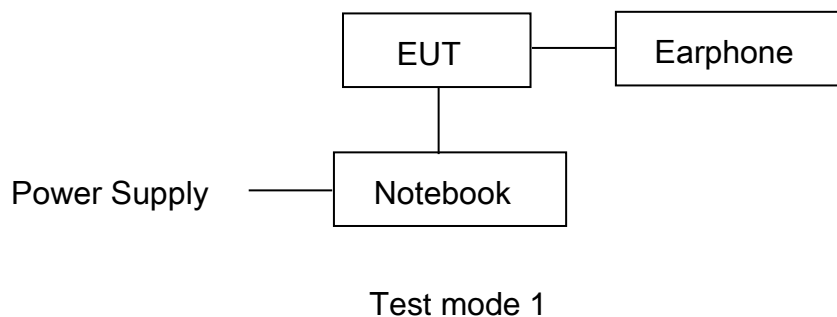

3.3. Operating Condition of EUT

Test mode 1: Connected to a pc and data transmission.

Test mode 2: Adapter+ GSM 850 Idle

Test mode 3: Adapter+ WCDMA 850 Idle

Test mode 4: Adapter+ LTE band 5 Idle

Test mode 5: Adapter+ LTE band 12 Idle

Test mode 6: Adapter+ LTE band 17 Idle

Test mode 7: Adapter+ LTE band 26 Idle

EUT has more than one typical operation, only the worst test mode will be recorded in this report.

The Radiated emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (X plane).

3.4. Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
Adaptor 1# for EUT	OP52YAUH	--	Jiangsu Chenyang Electron Co., Ltd.
Adaptor 2# for EUT	OP52KAUH	--	ShenZhen KunXing Technology Co., Ltd
Adaptor 3# for EUT	OP52JAUH	--	Ten Pao Industrial Co., Ltd.
Adaptor 4# for EUT	OP52CAEH	--	Dongguan YOHO Electronic Technology Co., Limited
Adaptor 5# for EUT	OP52KAEH	--	ShenZhen KunXing Technology Co., Ltd
Adaptor 6# for EUT	OP52JAEH	--	Ten Pao Industrial Co., Ltd.
Adaptor 7# for EUT	OP52KAYH	--	ShenZhen KunXing Technology Co., Ltd
Adaptor 8# for EUT	OP52JAYH	--	Ten Pao Industrial Co., Ltd.
Battery 1# for EUT	BLP729	--	Huizhou Desay Battery Co., Ltd.
Battery 2# for EUT	BLP729	--	Sunwoda Electronic Co., Ltd.
USB for EUT	DL122	--	--
Earphone for EUT	MH156	--	--
Notebook	HP ProBook 440 G6	--	HP

3.5. Test Conditions

Date of test : Oct.22, 2020- Nov.18, 2020

Date of EUT Receive : Oct.19, 2020

Temperature: 23°C-24 °C

Relative Humidity: 44%-48%

3.6. Modifications

No modification was made.

4. TEST EQUIPMENT USED

4.1. Test Equipment Used to Measure Conducted Emission

Table 3 Conducted Emission Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB9058/05	Test Receiver	R&S	ESCI 3	Sep.25,2020	1 Year
SB4357	AMN	R&S	ENN216	Aug.26,2020	1 Year

4.2. Test Equipment Used to Measure Radiated Emission

Table 4 Radiated Emission Test Equipment

No.	Equipment	Manufacturer	Model No.	LAST CALIB	Period
SB13956	Test Receiver	R&S	ESR26	Feb.14,2020	1 Year
SB3955	Broadband Antenna	Schwarzbeck	VULB9163	Jan.10,2020	1 Year
SB13958	Horn Antenna	R&S	HF907	Apr.15,2020	1 Year

5. CONDUCTED EMISSION TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15: Section 15.107

5.1.2. Test Limit

Table 5 Conducted Emission Test Limit (Class B)

Frequency	Power Port limits (dB μ V)	
	Quasi-peak	Average
0.15MHz ~ 0.5MHz	66~56*	56~46*
0.5MHz ~ 5 MHz	56	46
5 MHz ~ 30MHz	60	50

* Decreasing linearly with logarithm of the frequency

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions from both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data


The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 6 Conducted Emission Test Data at mains Port


Test mode: 1								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limits (dB μ V)
Line	0.150	9.7	36.5	46.2	66	17.3	27.0	56
	0.177	9.7	41.6	51.3	64.6	27.5	37.2	54.6
	0.231	9.7	32.5	42.2	62.4	22.9	32.6	52.4
	0.289	9.7	28.0	37.7	60.6	18.2	27.9	50.6
	4.213	9.9	21.7	31.6	56	9.8	19.7	46
	15.198	9.9	23.2	33.1	60	16.9	26.8	50
Neutral	0.150	9.7	41.8	51.5	66	20.9	30.6	56
	0.163	9.7	40.0	49.7	65.3	24.0	33.7	55.3
	0.181	9.7	39.0	48.7	64.4	21.2	30.9	54.4
	0.204	9.7	32.6	42.3	63.4	17.2	26.9	53.4
	3.939	9.9	19.9	29.8	56	7.4	17.3	46
	4.380	9.9	19.7	29.6	56	6.9	16.8	46

- REMARKS: 1. Emission level (dB μ V) =Read Value (dB μ V) + Correction Factor (dB)
 2. Correction Factor (dB) =LISN Factor (dB) + Cable Factor (dB) +Limiter Factor (dB)
 3. The other emission levels were more than 20dB below the limits.

Line

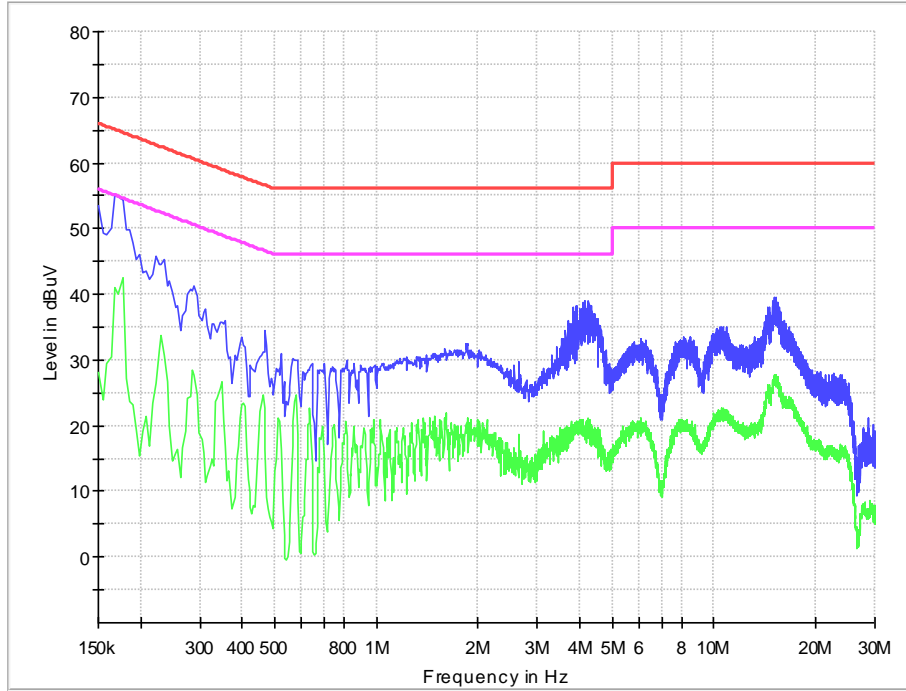

Neutral

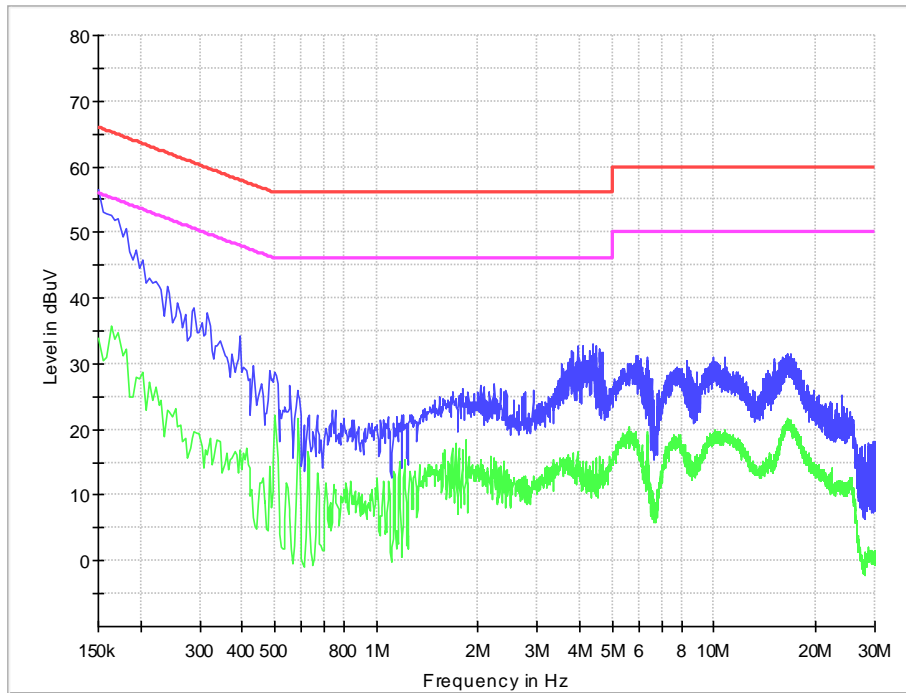

6. RADIATION EMISSION TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15: Section 15.109

6.1.2. Test Limit

Table 7 Radiation Emission Test Limit for FCC (Class B)

Frequency	Test distance	Limit dB(μ V/m)		
		Quasi-peak	Average	Peak
30MHz~88MHz	3m	40	/	/
88MHz~216MHz	3m	43.5		
216MHz~960MHz	3m	46		
960MHz~1000MHz	3m	54		
>1000MHz	3m		54	74
Conditional testing procedure for above 1 GHz :				
Highest frequency generated or used in the device or on which the device operates or tunes (MHz)		Upper frequency of measurement range (MHz)		
Below 1.705		30		
1.705~108		1000		
108~500		2000		
500~1000		5000		
Above 1000		5th harmonic of the highest frequency or 40 GHz, whichever is lower.		

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set **3 meters** away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna is used as a receiving antenna. Both horizontal and vertical polarization of the antenna is set on test.

RBW = 100 kHz (less than or equal to 1 GHz); 1 MHz (above 1 GHz)

VBW \geq 3 x RBW

Detector = Peak & Quasi-Peak (frequency range 30 MHz to 1 GHz);

Peak & Average (frequency range above 1 GHz);

Changing VBW to 10 Hz for average measurement

The use of a higher-than-specified video bandwidth produces a conservative measurement result.

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

6.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 8 Radiated Emission Test Data

Test mode: 1								
Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Reading (dB μ V/m)	Level (dB μ V/m)	Polarity (Horizontal/Vertical)	Limits (dB μ V/m)	Margin (dB)	Note
162.211	1.5	8.7	10.2	20.4	Horizontal	43.5	23.1	QP
188.692	1.6	9.7	14.8	26.1	Horizontal	43.5	17.4	QP
237.192	1.8	11.2	15.7	28.7	Horizontal	46	17.3	QP
257.077	1.9	12.1	15.4	29.4	Horizontal	46	16.6	QP
331.864	2.2	13.3	17.2	32.7	Horizontal	46	13.3	QP
799.986	3.6	18.8	8.1	30.5	Horizontal	46	15.5	QP
45.714	0.8	13.6	6.2	20.6	Vertical	40	19.4	QP
76.560	1.0	7.8	18.5	27.3	Vertical	40	12.7	QP
163.181	1.5	8.7	14.2	24.4	Vertical	43.5	19.1	QP
236.901	1.8	11.2	13.7	26.7	Vertical	46	19.3	QP
499.577	2.7	16.1	11.3	30.1	Vertical	46	15.9	QP
830.541	3.6	20.1	6.1	29.8	Vertical	46	16.2	QP
1195.500	-41.0	24.4	46.0	29.4	Horizontal	74	44.6	PK
1919.700	-40.4	26.9	49.6	36.1	Horizontal	74	37.9	PK
4228.300	-39.2	33.6	41.9	36.3	Horizontal	74	37.7	PK
7293.400	-38.2	35.6	40.7	38.1	Horizontal	74	35.9	PK
11914.000	-35.6	37.5	40.1	42.0	Horizontal	74	32.0	PK
15482.300	-33.9	40.8	40.4	47.3	Horizontal	74	26.7	PK
1326.400	-40.8	24.3	41.8	25.3	Vertical	74	48.7	PK
1821.100	-40.5	26.9	43.3	29.7	Vertical	74	44.3	PK
4175.600	-39.3	32.9	41.8	35.4	Vertical	74	38.6	PK
7771.100	-37.6	36.0	41.1	39.5	Vertical	74	34.5	PK
11797.100	-35.6	37.4	39.5	41.3	Vertical	74	32.7	PK
16143.600	-33.5	41.3	41.4	49.2	Vertical	74	24.8	PK
1195.500	-41.0	24.4	36.5	19.9	Horizontal	54	34.1	AV
1919.700	-40.4	26.9	42.2	28.7	Horizontal	54	25.3	AV
4228.300	-39.2	33.6	31.0	25.4	Horizontal	54	28.6	AV
7293.400	-38.2	35.6	26.9	24.3	Horizontal	54	29.7	AV


11914.000	-35.6	37.5	25.4	27.3	Horizontal	54	26.7	AV
15482.300	-33.9	40.8	21.7	28.6	Horizontal	54	25.4	AV
1326.400	-40.8	24.3	35.2	18.7	Vertical	54	35.3	AV
1821.100	-40.5	26.9	33.9	20.3	Vertical	54	33.7	AV
4175.600	-39.3	32.9	27.8	21.4	Vertical	54	32.6	AV
7771.100	-37.6	36.0	25.2	23.6	Vertical	54	30.4	AV
11797.100	-35.6	37.4	23.6	25.4	Vertical	54	28.6	AV
16143.600	-33.5	41.3	17.1	24.9	Vertical	54	29.1	AV

Emission level (dBuV)=Read Value(dBuV/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

30MHz-1GHz


Horizontal

Copy of Field strength 30M-1GHz

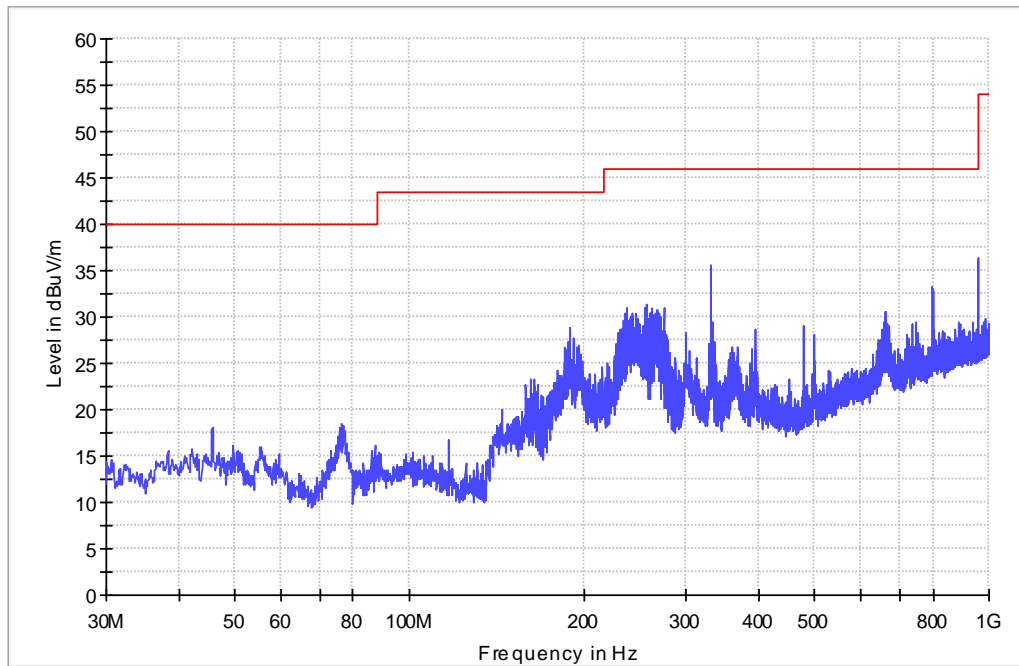

Vertical


Copy of Field strength 30M-1GHz

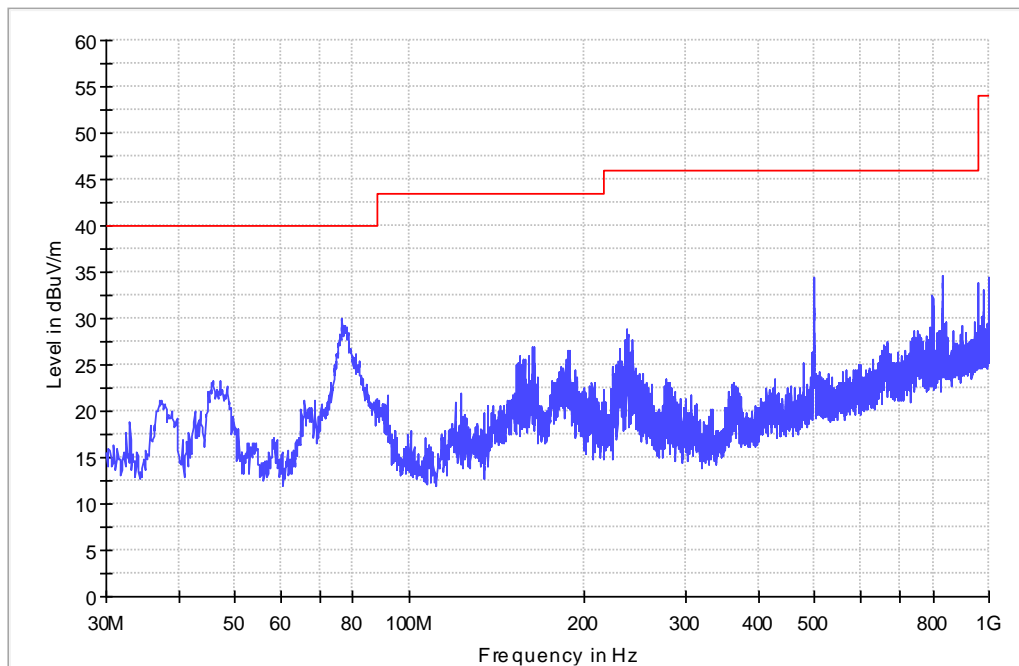

1GHz-18GHz


Horizontal

Copy of Field strength 1-18GHz

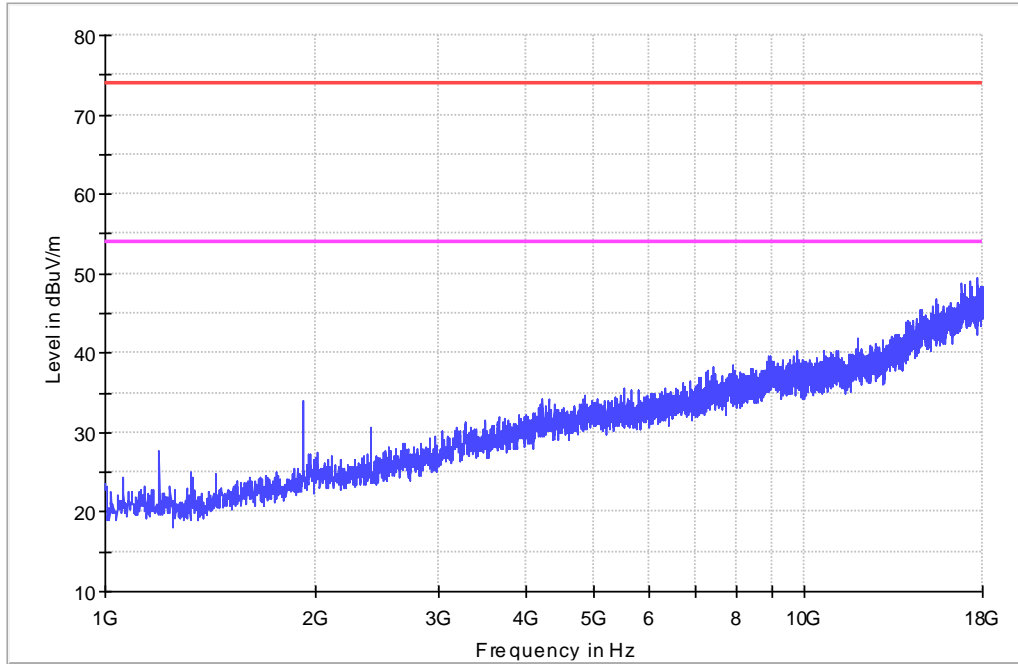

Vertical

Copy of Field strength 1-18GHz

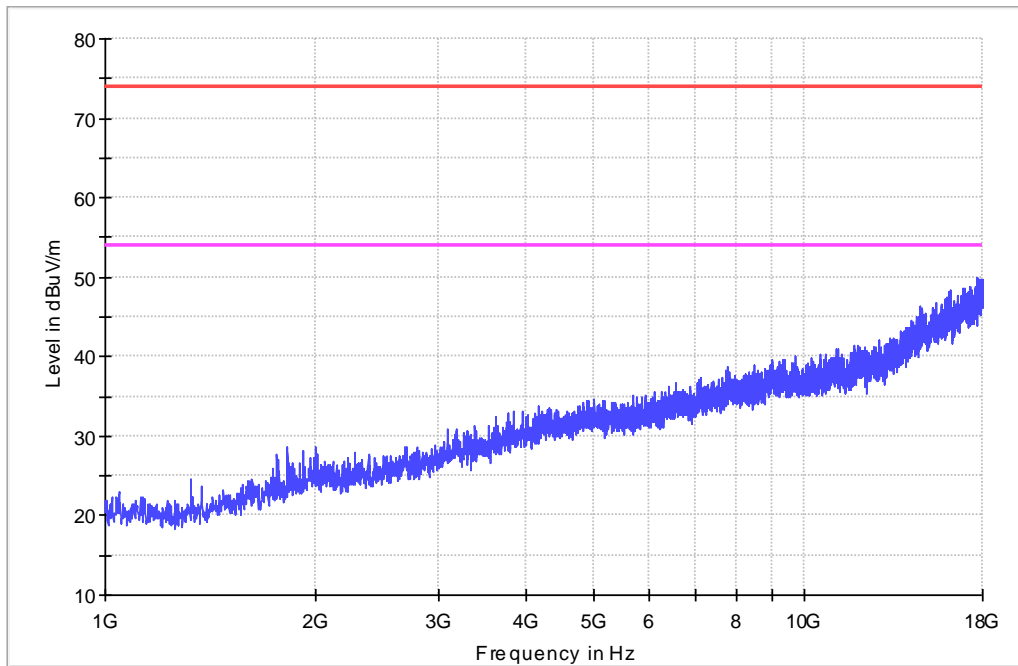

-----End of Report -----