

SAR TEST REPORT

For

Mobile Phone
Model Number: RMX3061
FCC ID: 2AUYFRMX3061

Report Number: WT208002542

Test Laboratory : Shenzhen Academy of Metrology and Quality
Inspection
National Digital Electronic Product Testing Center
Site Location : NETC Building, No.4 Tongfa Road, Xili Town,
Nanshan District, Shenzhen, Guangdong, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
Email : emcrf@smq.com.cn

Test report declaration

Applicant : Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address : No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China.
Manufacturer : Realme Chongqing Mobile Telecommunications Corp., Ltd.
Address : No.178 Yulong Avenue, Yufengshan, Yubei District, Chongqing, China.
EUT Description : Mobile Phone
Model No : **RMX3061**
Trade mark : realme

FCC ID: 2AUYFRMX3061;

Test Standards:

IEEE Std 1528-2013, KDB941225 D01, KDB941225 D05, KDB941225 D06, KDB447498


D01, KDB648474 D04, KDB248227 D01, KDB 865664 D01, KDB865664 D02, KDB690783 D01

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the compliance of the applicable standards stated above. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The results documented in this report only apply to the tested sample, under the conditions and modes of operation as described herein.

The test report shall not be reproduced in part without written approval of the laboratory.


Project Engineer:



Date: Nov.24,2020

(Liu Zheng)


Checked by:



Date: Nov.24,2020

(Lin Yixiang)

Approved by:



Date: Nov.24,2020

(Lin Bin)

TABLE OF CONTENTS

1.	REPORTED SAR SUMMARY.....	5
1.1.	Statement of Compliance.....	5
1.2.	RF exposure limits.....	6
1.3	Ratings and System Details	8
1.4	Product Function and Intended Use	9
1.4	Power Reduction Description.....	9
1.5	Test specification(s).....	9
1.6	List of Test and Measurement Instruments.....	11
2.	GENERAL INFORMATION.....	13
2.1.	Report information.....	13
2.2.	Laboratory Accreditation and Relationship to Customer	13
3.	SAR MEASUREMENT SYSTEM CONFIGURATION	14
3.1.	SAR Measurement Set-up	14
3.2.	Probe description.....	15
3.3.	Phantom description	16
3.4.	Device holder description.....	17
4.	SAR MEASUREMENT PROCEDURE.....	18
4.1.	Scanning procedure.....	18
5.	SYSTEM VERIFICATION PROCEDURE.....	24
5.1.	Tissue Verification	24
6.	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	28
6.1.	SAR measurement variability	28
6.2.	SAR measurement uncertainty	28
7.	TEST CONFIGURATION.....	29
8.	TUNE-UP LIMIT.....	37
9.	MEASUREMENT RESULTS	45
9.1.	Conducted Power.....	45
9.2.	SAR measurement Results	90
9.3.	GSM850 SAR results.....	93

9.4.	PCS1900 SAR results	95
9.5.	WCDMA II SAR results.....	97
9.6.	WCDMA IV SAR results	99
9.7.	WCDMA V SAR results	101
9.8.	LTE Band 2 SAR results	103
9.9.	LTE Band 4 SAR results	105
9.10.	LTE Band 5 SAR results	107
9.11.	LTE Band 7 SAR results	109
9.12.	LTE Band12 SAR results	111
9.13.	LTE Band17 SAR results	113
9.14.	LTE Band26 SAR results	115
9.15.	LTE Band 38 SAR results	117
9.16.	LTE Band 41 SAR results	119
9.17.	LTE Band66 SAR results	121
9.18.	Wi-Fi 2.4G SAR results	123
9.19.	BT SAR results	125
9.20.	Repeated SAR results	127
10.	EXPOSURE POSITIONS CONSIDERATION	128
10.1.	Multiple Transmitter Evaluation.....	128
10.2.	Simultaneous Transmission Possibilities	129
10.3.	SAR Summation Scenario	130
10.4.	Simultaneous Transmission Conclusion.....	133
11.	PHOTOGRAPHS OF THE TEST SET-UP.....	134

1. REPORTED SAR SUMMARY

1.1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

Band	Max Reported SAR(W/kg)	Max Reported SAR(W/kg)	Max Reported SAR(W/kg)	Max Reported SAR(W/kg)
	1-g head	1-g Hotspot Body(10mm)	10-g Extremity Hotspot Body(0mm)	1-g Body Worn(15mm)
GSM850	0.185	0.341	0.936	0.134
PCS1900	0.161	0.132	--	0.150
WCDMA Band 2	0.174	0.089	--	0.056
WCDMA Band 4	0.324	0.080	--	0.085
WCDMA Band 5	0.202	0.307	1.653	0.141
LTE Band 2	0.098	0.279	--	0.124
LTE Band 4	0.026	0.101	--	0.038
LTE Band 5	0.216	0.337	--	0.154
LTE Band 7	0.075	0.644	1.730	0.131
LTE Band 12	0.156	0.242	--	0.211
LTE Band 17	0.163	0.243	--	0.214
LTE Band 26	0.205	0.257	--	0.121
LTE Band 38	0.022	0.167	--	0.081
LTE Band 41	0.042	0.151	--	0.167
LTE Band 66	0.022	0.137	--	0.066
Wi-Fi 2.4G	0.547	0.162	0.931	0.043
BT	0.027	0.016	0.113	0.005

	Maximum Report SAR (W/kg)	Limit (W/kg)	Verdict
Head	0.547	1.6	Pass
Hotspot Body	0.644	1.6	Pass
Body Worn	0.214	1.6	Pass
Extremity Hotspot Body	1.730	4.0	Pass

Highest Simultaneous SAR				
Position	Simultaneous Configuration	Simultaneous SAR (W/kg)	Limit (W/kg)	Verdict
Head	WCDMA Band V+2.4G WLAN	0.538	1.6	Pass
Hotspot Body	LTE Band 7 +2.4G WLAN	0.718	1.6	Pass
Body Worn	LTE Band 17 +2.4G WLAN	0.252	1.6	Pass
Extremity Hotspot Body	LTE Band 7 +2.4G WLAN	2.539	4.0	Pass

Table 1: Summary of test result

Note:

*For body-worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population/ uncontrolled exposure limits according to the FCC rule 2.1093 , the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/ Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013& IEEE Std 1528a-2005.

1.2. RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR*(Brain/Body)	1.60mW/g	8.00mW/g

Spatial Average SAR** (Whole Body)	0.08mW/g	0.40mW/g
Spatial Peak SAR*** (Limbs)	4.00mW/g	20.00mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 1 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time. Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

1.3 Ratings and System Details

Product Name:	Mobile Phone
Model No.(EUT):	RMX3061
Trade mark:	realme
EUT Supports Radios application:	<p>BT4.2, 2.1+EDR: 2402MHz to 2480MHz</p> <p>Wi-Fi : IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz</p> <p>GPS: 1559MHz to 1610MHz</p> <p>GSM/GPRS/EDGE 850:</p> <p>Tx:824.20 -848.80MHz; Rx: 869.20 – 893.80MHz</p> <p>GSM/GPRS/EDGE 1900:</p> <p>Tx:1850.20 – 1909.80MHz; Rx:1930.20 – 1989.80MHz</p> <p>WCDMA/HSDPA/HSUPA/HSPA+(Down Link) Band V:</p> <p>Tx:826.40 -846.60MHz; Rx: 871.40 – 891.60MHz</p> <p>WCDMA/HSDPA/HSUPA/HSPA+(Down Link) Band II:</p> <p>Tx:1852.40 – 1907.60MHz; Rx:1932.40 – 1987.60MHz</p> <p>LTE Band 2:TX:1850MHz to 1910MHz RX:1930MHz to 1990MHz.</p> <p>LTE Band 4:TX:1710MHz to 1755MHz RX:2110MHz to 2155MHz.</p> <p>LTE Band 5:TX:824MHz to 849MHz RX:869MHz to 894MHz.</p> <p>LTE Band 7:TX:2500MHz to 2570MHz RX: 2620MHz to 2690MHz.</p> <p>LTE Band 12:TX:698MHz to 716MHz RX:729MHz to 746MHz.</p> <p>LTE Band 17:TX:704MHz to 716MHz RX:734MHz to 746MHz.</p> <p>LTE Band 26:TX:814MHz to 849MHz RX:860MHz to 892MHz.</p> <p>LTE Band 38: TX:2570MHz to 2620MHz RX: 2575MHz to 2620MHz</p> <p>LTE Band 41:TX:2535MHz to 2655 MHz RX: 2555MHz to 2655 MHz</p> <p>LTE Band 66:TX:1710MHz to 1780 MHz RX: 2111MHz to 2170 MHz</p>
Battery Model	BLP729
Battery Specification	3.87Vdc, 4880mAh 18.89Wh Lithium Battery
Battery Applicant 1#	Huizhou Desay Battery Co., Ltd.
Battery Applicant 2#	Sunwoda Electronic Co., Ltd.
Hardware version:	11
Software version:	realme UI V1.0

1.4 Product Function and Intended Use

RMX3061 is subscriber equipment in the GSM/UMTS/LTE system.

The GSM frequency band is 850MHz, 900MHz,1800MHz and 1900MHz , only 850MHz and 1900MHz can be used in this report. The UMTS frequency band is Band1, Band2, Band4, Band5 and Band 8 , only Band2, Band4 and Band5 can be used in this report. The LTE frequency band is Band 1, Band 2, Band 3, Band 4, Band 5, Band 7, Band 8, Band 12, Band 17, Band 20,Band 26, Band 28,Band 38, Band 40,Band 41, Band 66, only Band 2,4,5,7,12,17,26,38,41,66 can be used in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSUPA/HSDPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and Micro USIM card interface.

1.5 Power Reduction Description

This device uses the hotspot function status as indicator of power reduction.

When the hotspot indicator is set to on, which indicating the device is in hotspot mode and the software will trigger to reduced the power.

Body exposure conditions

Once the device is set to hotspot mode, Power reduction will be enabled for -GSM1900, WCDMA B2/4, LTE B2/4/7/38/41/66 and Wi-Fi 2.4G.

1.6 Test specification(s)

IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB941225 D01 SAR test for 3G devices v03r01	3G SAR MEAUREMENT PROCEDURES
KDB941225 D05 SAR for LTE Devices v02r05	SAR Evaluation Considerations for LTE Devices
KDB941225 D06 Hotspot Mode v02r01	SAR Evaluation Procedures for portable Devices with Wireless Router Capabilities
KDB447498 D01 General RF	Mobile and Portable Device

Exposure Guidance v06	RF Exposure Procedures and Equipment Authorization Policies
KDB 648474 D04 Handset SAR v01r03	SAR Evaluation Considerations for Wireless Handsets.
KDB 248227 D01 802.11 Wi-Fi SAR v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting v01r02	RF Exposure Compliance Reporting and Documentation Considerations
KDB 690783 D01 SAR Listings on Grants v01r03	SAR Listings on Equipment Authorization Grants

1.7 List of Test and Measurement Instruments

	Equipment	Model No.	Serial No.	Manufacturer	Last Calibration Date	Period
<input checked="" type="checkbox"/>	SAR test system	TX60L	F08/5AY8A1/A/01+F08/	SPEAG	NCR	NCR
<input checked="" type="checkbox"/>	Electronic Data Transmitter	DAE4	876	SPEAG	2020.03.03	1year
<input checked="" type="checkbox"/>	SAR Probe	EX3DV4	3881	SPEAG	2020.06.16	1year
<input checked="" type="checkbox"/>	Software	85070	--	Agilent	--	--
<input checked="" type="checkbox"/>	Software	DASY5	--	SPEAG	--	--
<input checked="" type="checkbox"/>	System Validation Dipole,750MHz	D750V3	1103	SPEAG	2020.01.06	3year
<input type="checkbox"/>	System Validation Dipole,835MHz	D835V2	4d141	SPEAG	2018.09.06	3year
<input checked="" type="checkbox"/>	System Validation Dipole,900MHz	D900V2	1d077	SPEAG	2018.09.07	3year
<input checked="" type="checkbox"/>	System Validation Dipole,1800MHz	D1800V2	2d171	SPEAG	2018.09.12	3year
<input checked="" type="checkbox"/>	System Validation Dipole,1900MHz	D1900V2	5d162	SPEAG	2018.09.11	3year
<input type="checkbox"/>	System Validation Dipole,2300MHz	D2300V2	1034	SPEAG	2020.01.02	3year
<input checked="" type="checkbox"/>	System Validation Dipole,2450MHz	D2450V2	818	SPEAG	2018.08.31	3year
<input checked="" type="checkbox"/>	System Validation Dipole,2600MHz	D2600V2	1074	SPEAG	2020.01.02	3year
<input checked="" type="checkbox"/>	System Validation Dipole,1750MHz	D1750V2	1108	SPEAG	2020.01.03	3year
<input checked="" type="checkbox"/>	System Validation Dipole,5GHz	D5GzV2	1185	SPEAG	2019.12.31	3year
<input checked="" type="checkbox"/>	Dielectric Probe Kit	85070E	MY44300455	Agilent	NCR	NCR
<input checked="" type="checkbox"/>	Dual-directional coupler,0.10-2.0GHz	778D	MY48220198	Agilent	NCR	NCR
<input checked="" type="checkbox"/>	Dual-directional coupler,2.00-18GHz	772D	MY46151160	Agilent	NCR	NCR

<input checked="" type="checkbox"/>	Power Amplifier	ZVE-8G	SC280800926	MINI-CIRCUITS	NCR	NCR
<input checked="" type="checkbox"/>	Power Amplifier	ZHL42W	81709	MINI-CIRCUITS	NCR	NCR
<input checked="" type="checkbox"/>	Signal Generator	SMR20	100047	R&S	2020.02.20	1year
<input checked="" type="checkbox"/>	Power Sensor	NRP-Z21	102626	R&S	2020.06.04	1year
<input checked="" type="checkbox"/>	Power Sensor	NRP-Z21	102627	R&S	2020.06.04	1year
<input checked="" type="checkbox"/>	Call Tester	CMU 200	100110	R&S	2019.12.02	1year
<input checked="" type="checkbox"/>	Network Analyzer	E5071C	MY46109550	Agilent	2020.02.20	1Year
<input checked="" type="checkbox"/>	Flat Phantom	ELI4.0	TP-1904	SPEAG	NCR	NCR
<input checked="" type="checkbox"/>	Twin Phantom	SAM	TP-1504	SPEAG	NCR	NCR
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	CMW500	125469	R&S	2019.10.24	1Year
<input checked="" type="checkbox"/>	Precision Thermometer	--	--	--	2020.08.07	1Year

Table 3: List of Test and Measurement Equipment

Note: All the test equipments are calibrated once a year, except the dipoles, which are calibrated every three years. Moreover, we have self-calibration every year to the dipoles.

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

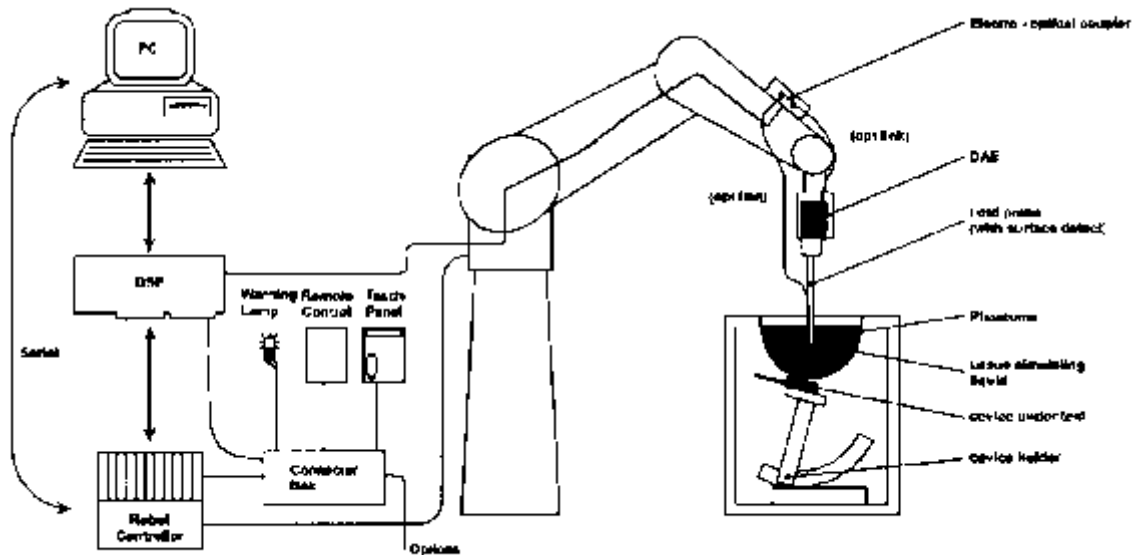
The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations: China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A.

3. SAR MEASUREMENT SYSTEM CONFIGURATION

3.1. SAR Measurement Set-up



The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
- A computer operating Windows XP.
- DASY5 software and SEMCAD data evaluation software.



Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System checks dipoles allowing validating the proper functioning of the system.
- Test environment
- The DASY5 measurement system is placed at the head end of a room with dimensions: 4.5 x 4 x 3 m³, the SAM phantom is placed in a distance of 1.3 m from the side walls and 1.1m from the rear wall.

Picture 1 of the photo documentation shows a complete view of the test environment.

3.2. Probe description

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 µW/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Overall length: 337 mm (Tip: 20mm) Tip length: 2.5 mm (Body: 12mm) Typical distance from probe tip to dipole centers: 1mm	

Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	
-------------	---	--

3.3. Phantom description

The used SAM Phantom meets the requirements specified in Edition 01-01 of Supplement C to OET Bulletin 65 for Specific Absorption Rate (SAR) measurements.

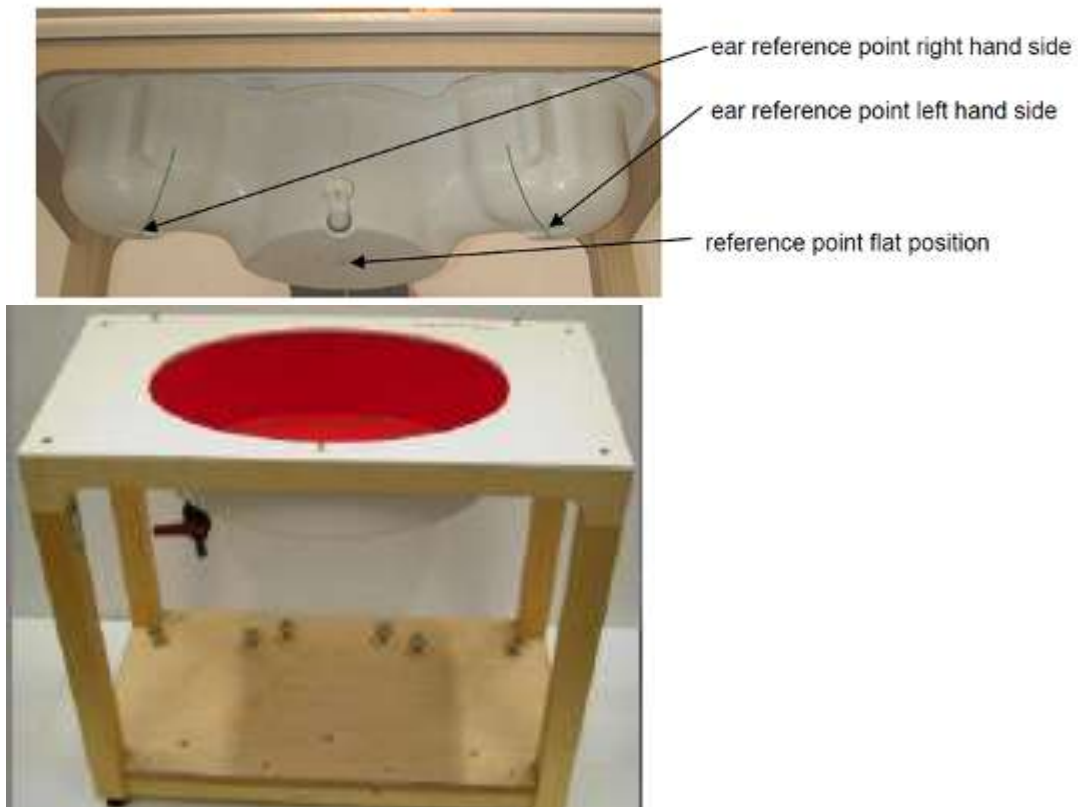The phantom consists of a fibreglass shell integrated in a wooden table. It allows left-hand and right-hand head as well as body-worn measurements with a maximum liquid depth of 18 cm in head position and 22 cm in planar position (body measurements). The thickness of the Phantom shell is 2 mm +/- 0.1 mm.



ELI4 Phantom

Shell Thickness	2mm+/- 0.2mm
Filling Volume	Approximately 30 liters
Measurement Areas	Flat phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity ≤ 5 and a loss tangent ≤ 0.05 .

3.4. Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard



mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

4. SAR MEASUREMENT PROCEDURE

4.1. Scanning procedure

- The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The reference and drift measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The surface check measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The area scan measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in

orientation.

Results of this coarse scan are shown in Appendix B.

- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: Δx_{zoom} , $\Delta y_{zoom} \leq 2\text{GHz} \leq 8 \text{ mm}$, $2\text{-}4\text{GHz} - \leq 5 \text{ mm}$ and $4\text{-}6 \text{ GHz} - \leq 4 \text{ mm}$; $\Delta z_{zoom} \leq 3\text{GHz} - \leq 5 \text{ mm}$, $3\text{-}4 \text{ GHz} - \leq 4 \text{ mm}$ and $4\text{-}6\text{GHz} - \leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. Test results relevant for the specified standard (see chapter 1.5.) are shown in table form in chapter 3.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can – depending in the field strength- also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximum Area Scan resolution ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan spatial resolution ($\Delta x_{zoom}, \Delta y_{zoom}$)	Maximum Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
				$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)$	
$\leq 2\text{GHz}$	$\leq 15\text{mm}$	$\leq 8\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 5\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 10\text{mm}$	$\leq 5\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.5\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 25\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	\leq	$\geq 22\text{mm}$

					1.5* $\Delta z_{\text{zoom}}(n-1)$	
--	--	--	--	--	------------------------------------	--

Spatial Peak SAR Evaluation

- The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The bases of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7 points (with 5mm horizontal resolution).
- The algorithm that finds the maximal averaged volume is separated into three different stages.
- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.
- Extrapolation
- The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

- The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].
- Volume Averaging
- At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.
- Advanced Extrapolation

- DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

4.1.1. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DAE4. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	σ
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component

documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcpi$$

with V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

$dcpi$ = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i ($i = x, y, z$)

$Norm_i$ = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

5. SYSTEM VERIFICATION PROCEDURE

5.1. Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials

Ingredient (% by weight)	Head Tissue					
	835	1750	1900	2450	2600	5G
Water	41.45	52.64	55.24	62.7	55.242	56
Salt(NaCl)	1.45	0.36	0.306	0.5	0.306	0.0
Sugar	56.0	0.0	0.0	0.0	0.0	0.0
HEC	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	17.24
DGBE	0.0	47.0	44.54	36.8	44.452	0.0

Table 4 : Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity

HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Head & Body Tissue-equivalent liquid measurements:


Used Target Frequency	Target Tissue		Measured Tissue		Liquid Temp	Test Date
	ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
750MHz Head	43.19 (41.03~45.35)	0.89 (0.85~0.93)	41.30	0.88	22°C	2020.10.16
835MHz Head	42.77 (40.63~44.91)	0.93 (0.88~0.98)	42.20	0.93	21°C	2020.10.17
1750MHz Head	39.31 (37.34~41.28)	1.35 (1.28~1.42)	39.72	1.40	21°C	2020.10.18
1900MHz Head	38.81 (36.87~40.75)	1.39 (1.32~1.46)	39.65	1.43	22°C	2020.10.19
2300MHz Head	38.91 (36.87~40.75)	1.62 (1.46~1.78)	38.45	1.48	22°C	2020.10.20
2450MHz Head	39.60 (37.62~41.58)	1.75 (1.66~1.84)	37.97	1.76	21°C	2020.10.21
2600MHz Head	40.40 (38.38~42.42)	2.04 (1.94~2.14)	37.70	1.88	21°C	2020.10.22
ϵ_r = Relative permittivity, σ = Conductivity						

System checking, Head & Body Tissue-equivalent liquid:

System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/kg)	10-g (W/kg)	1-g (W/kg)	10-g (W/kg)		
D750V2 Head	8.66 (7.79~9.53)	5.83 (5.25~6.41)	8.16	5.36	22°C	2020.10.16
D835V2 Head	9.31 (8.38~10.24)	6.13 (5.52~6.74)	9.24	6.04	21°C	2020.10.17
D1750V2 Head	35.7 (33.13~39.27)	18.8 (16.92~20.68)	36.04	18.80	21°C	2020.10.18
D1900V2 Head	39.8 (35.82~43.78)	21.1 (18.99~23.21)	36.92	19.28	22°C	2020.10.19
D2300V2 Head	47.5 (42.75~52.25)	22.4 (20.16~24.64)	49.20	23.96	22°C	2020.10.20
D2450V2 Head	53.1 (47.79~58.41)	24.7 (22.23~27.17)	50.40	26.60	21°C	2020.10.21
D2600V3 Head	56.9 (51.21~62.59)	25.2 (22.68~27.72)	54.80	25.00	21°C	2020.10.22

System Checking

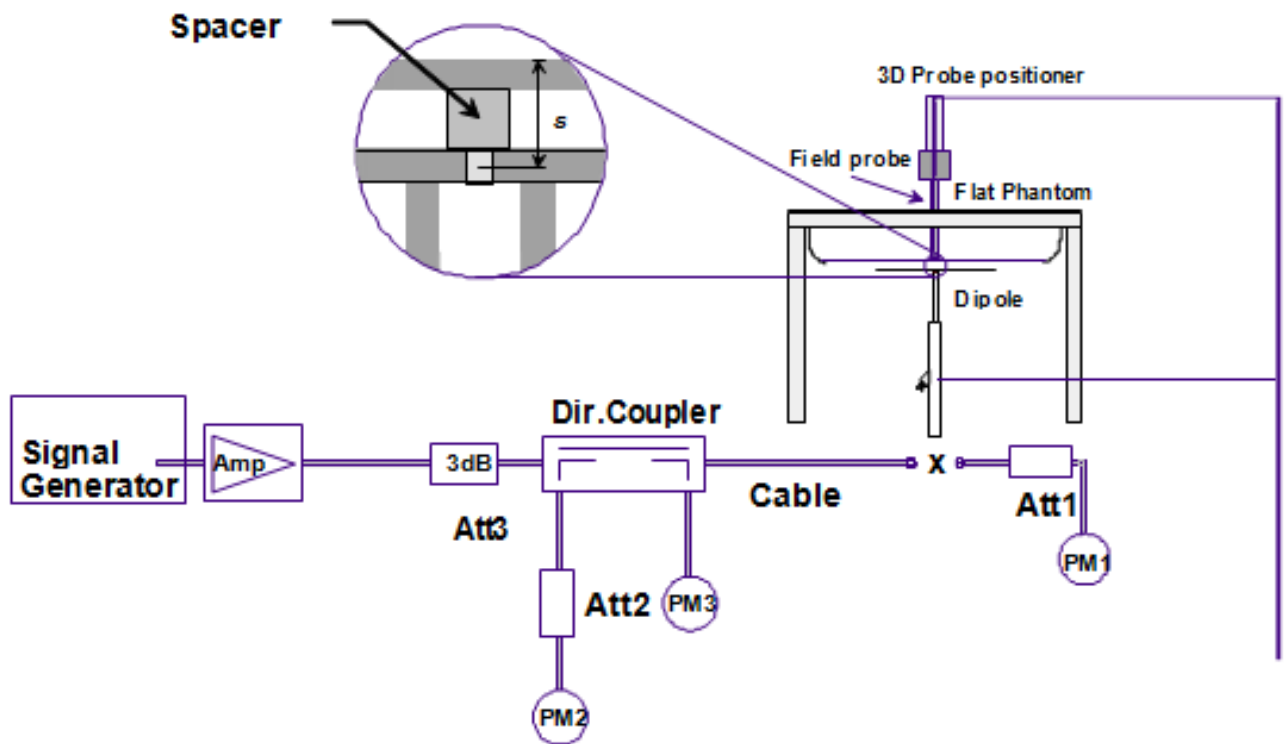The manufacturer calibrates the probes annually. A system check measurement was made following the determination of the dielectric parameters of the tissue-equivalent liquid, using the dipole validation kit. A power level of 250mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom.



The system checking results (dielectric parameters and SAR values) are given in the table below.

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).

6. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

6.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100MHz to 6GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurement requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg; step2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 W/kg , repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is >1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

6.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100MHz to 6GHz v01r03, when the highest measured 1-g SAR within a frequency band is <1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval. The equivalent ratio(1.5/1.6) is applied to

extremity and occupational exposure conditions.

7. Test Configuration

The DUT is tested using a CMU 200 or E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.

Test positions as described in the tables above are in accordance with the specified test standard.

GSM Test Configuration

The tests for GSM850 and GSM1900, a communication link is set up with a System Simulator by air link. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 975, 37 and 124 respectively in the case of GSM900, to 512, 698 and 885 respectively in the case of GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 10 for this EUT, it has at most 2 timeslots in Up antenna and at most 4 timeslots in Down antenna, the maximum total timeslot is 5. The EGPRS class is 10 for this EUT, it has at most 2 timeslots in Up antenna, and at most 4 timeslots in Down antenna, the maximum total timeslot is 5. The device output power was set to maximum power level for all tests. Using CMU200 the power control level is set to “5”for GSM850, set to “0”for GSM1900.

WCDMA Test Configuration

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The EUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

	Mode	Rel99
	Subtest	---
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices” section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8$ $\beta_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory

measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of this document

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} :47/15 β_{ed2} :47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.
 UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)

HSPA, HSPA+ and DC-HSDPA Test Configuration

measurement is required for HSPA, HSPA+ or DC-HSDPA, a KDB inquiry is required to confirm that the wireless mode configurations in the test setup have remained stable throughout the SAR measurements.³⁵ Without prior KDB confirmation to determine the SAR results are acceptable, a PBA is required for TCB approval. SAR test exclusion for HSPA, HSPA+ and DC-HSDPA is determined according to the following:

- 1) The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required Sub-test mode(s) to determine SAR test exclusion.
- 2) SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (Up antenna) HSPA+ with 12.2 kbps RMC as the primary mode.³⁶ Power is measured for HSPA+ that supports Up antenna 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.
- 3) SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.
- 4) Regardless of whether a PBA is required, the following information must be verified and included in the SAR report for devices supporting HSPA, HSPA+ or DC-HSDPA:
 - a) The output power measurement results and applicable release version(s) of 3GPP TS 34.121.
 - i) Power measurement difficulties due to test equipment setup or availability must be resolved between the grantee and its test lab.
 - b) The power measurement results are in agreement with the individual device implementation and specifications. When Enhanced MPR (E-MPR) applies, the normal MPR targets may be modified according to the Cubic Metric (CM) measured by the device, which must be taken into consideration.
 - c) The UE category, operating parameters, such as the β and Δ values used to configure the device for testing, power setback procedures described in 3GPP TS 34.121 for the power measurements, and HSPA/HSPA+ channel conditions (active and stable) for the entire duration

of the measurement according to the required E-TFCI and AG index values.

5) When SAR measurement is required, the test configurations, procedures and power measurement results must be clearly described to confirm that the required test parameters are used, including E-TFCI and AG index stability and output power conditions.

HS-DSCH category	Maximum number of HS-DSCH codes received	Minimum inter-TTI interval	Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1	Total number of soft channel bits	Supported modulations without MIMO operation or dual cell operation	Supported modulations with MIMO operation and without dual cell operation	Supported modulations with dual cell operation	
Category 1	5	3	7298	19200	QPSK, 16QAM	Not applicable (MIMO not supported)	Not applicable (dual cell operation not supported)	
Category 2	5	3	7298	26800				
Category 3	5	2	7298	28800				
Category 4	5	2	7298	38400				
Category 5	5	1	7298	57600				
Category 6	5	1	7298	67200				
Category 7	10	1	14411	115200				
Category 8	10	1	14411	134400				
Category 9	15	1	20251	172800				
Category 10	15	1	27952	172800				
Category 11	5	2	3630	14400	QPSK	Not applicable (dual cell operation not supported)		
Category 12	5	1	3630	28800	QPSK, 16QAM, 64QAM			
Category 13	15	1	35280	259200	QPSK, 16QAM			
Category 14	15	1	42192	259200	QPSK, 16QAM			
Category 15	15	1	23370	345600	QPSK, 16QAM			
Category 16	15	1	27952	345600	QPSK, 16QAM			
Category 17 NOTE 2	15	1	35280	259200	QPSK, 16QAM, 64QAM		-	
			23370	345600	-		QPSK, 16QAM	
Category 18 NOTE 3	15	1	42192	259200	QPSK, 16QAM, 64QAM		-	
			27952	345600	-		QPSK, 16QAM	
Category 19	15	1	35280	518400	QPSK, 16QAM, 64QAM			
Category 20	15	1	42192	518400	QPSK, 16QAM, 64QAM			
Category 21	15	1	23370	345600	-		-	QPSK, 16QAM
Category 22	15	1	27952	345600				
Category 23	15	1	35280	518400				
Category 24	15	1	42192	518400				

LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r05. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power

measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

Maximum Power Reduction(MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth(N_{RB})						MPR(dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	>5	>4	>8	>12	>16	>18	≤1
16 QAM	≤5	≤4	≤8	≤12	≤16	≤18	≤1
16 QAM	>5	>4	>8	>12	>16	>18	≤2

Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 T_S$	$2192 T_S$	$2560 T_S$	$7680 T_S$	$2192 T_S$	$2560 T_S$
1	$19760 T_S$			$20480 T_S$		
2	$21952 T_S$			$23040 T_S$		
3	$24144 T_S$			$25600 T_S$		
4	$26336 T_S$			$7680 T_S$	$4384 T_S$	$5120 T_S$

5	6592 T_S	4384 T_S	5120 T_S	20480 T_S				
6	19760 T_S			23040 T_S				
7	21952 T_S			12800 T_S				
8	24144 T_S			-			-	-
9	13168 T_S			-			-	-

Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number											
		0	1	2	3	4	5	6	7	8	9		
0	5 ms	D	S	U	U	U	D	S	U	U	U	U	
1	5 ms	D	S	U	U	D	D	S	U	U	D	D	
2	5 ms	D	S	U	D	D	D	S	U	D	D	D	
3	10 ms	D	S	U	U	U	D	D	D	D	D	D	
4	10 ms	D	S	U	U	D	D	D	D	D	D	D	
5	10 ms	D	S	U	D	D	D	D	D	D	D	D	
6	5 ms	D	S	U	U	U	D	S	U	U	D	D	

Calculated Duty Cycle = Extended cyclic prefix in uplink x (T_s) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

Where $T_s = 1/(15000 \times 2048)$ seconds

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is $\leq 0.8\text{W/kg}$, testing of the remaining RB offset configurations and required test channels is not required for 1RB allocation; otherwise,

SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

8. TUNE-UP LIMIT

The GSM850 power adjust procedure

GSM (CS): 33dBm [-1.0dB~+0.3dB]
GPRS/GSM (GMSK, 1 Tx slot): 33dBm [-1.0dB~+0.3dB]
GPRS/GSM (GMSK, 2 Tx slot): 32dBm [-1.0dB~+0.5dB]
GPRS/GSM (GMSK, 3Tx slot): 30dBm [-1.0dB~+0.5dB]
GPRS/GSM (GMSK, 4Tx slot): 30dBm [-1.0dB~+0.0dB]
EDGE (8PSK, 1 Tx slot) : 27dBm [-1.0dB~+1.0dB]
EDGE (8PSK, 2 Tx slot) : 26dBm [-1.0dB~+1.0dB]
EDGE (8PSK, 3 Tx slot) : 24dBm[-1.0dB~+1.0dB]
EDGE (8PSK, 4 Tx slot) : 23dBm [-1.0dB~+1.0dB]

The PCS1900 power adjust procedure

GSM (CS): 30dBm [-1.0dB~+0.3dB]
GPRS/GSM (GMSK, 1 Tx slot): 30dBm [-1.0dB~+0.3dB]
GPRS/GSM (GMSK, 2 Tx slot): 23dBm [-1.0dB~+1.0dB]
GPRS/GSM (GMSK, 3Tx slot): 22dBm [-1.0dB~+1.0dB]
GPRS/GSM (GMSK, 4Tx slot): 20dBm [-1.0dB~+0.5dB]
EDGE (8PSK, 1 Tx slot) : 22dBm [-4.0dB~+1.0dB]
EDGE (8PSK, 2 Tx slot) : 18dBm [-4.0dB~+1.0dB]
EDGE (8PSK, 3 Tx slot) : 18dBm[-4.0dB~+1.0dB]
EDGE (8PSK, 4 Tx slot) : 18dBm[-4.0dB~+1.0dB]

The reduced of PCS1900 power adjust procedure

GSM (CS): 23dBm [-1.0dB~+0.3dB]
GPRS/GSM (GMSK, 1 Tx slot): 23dBm [-1.0dB~+0.3dB]
GPRS/GSM (GMSK, 2 Tx slot): 20dBm [-1.0dB~+1.0dB]
GPRS/GSM (GMSK, 3Tx slot): 18dBm [-1.0dB~+1.0dB]
GPRS/GSM (GMSK, 4Tx slot): 17dBm [-1.0dB~+0.5dB]
EDGE (8PSK, 1 Tx slot) : 18dBm [-1.0dB~+0.5dB]
EDGE (8PSK, 2 Tx slot) : 15dBm [-1.0dB~+1.0dB]
EDGE (8PSK, 3 Tx slot) : 13dBm [-1.0dB~+1.0dB]

EDGE (8PSK, 4 Tx slot) : 12dBm [-1.0dB~+1.0dB]

The WCDMA Band 2 power adjust procedure

RMC: 23dBm [-1.0dB~+0.8dB]

HSDPA: 22.5dBm[-1.0dB~+1.0dB]

HSUPA: 21.5dBm [-1.0dB~+1.0dB]

HSUPA+: 20.5dBm[-1.0dB~+1.0dB]

The reduced of WCDMA Band 2 power adjust procedure

RMC:18dBm [-1.0dB~+0.8dB]

HSDPA: 18dBm[-1.0dB~+1.0dB]

HSUPA: 17dBm [-1.0dB~+1.0dB]

HSUPA+:15dBm[-1.0dB~+1.0dB]

The WCDMA Band 4 power adjust procedure

RMC: 24dBm [-1.0dB~+0.1dB]

HSDPA: 22.5dBm[-1.0dB~+1.0dB]

HSUPA: 21.5dBm [-1.0dB~+1.0dB]

HSUPA+: 20.5dBm[-1.0dB~+1.0dB]

The reduced of WCDMA Band 4 power adjust procedure

RMC: 19dBm [-1.0dB~+0.1dB]

HSDPA: 18dBm[-1.0dB~+1.0dB]

HSUPA: 17dBm [-1.0dB~+1.0dB]

HSUPA+: 17dBm[-1.0dB~+1.0dB]

The WCDMA Band 5 power adjust procedure

RMC: 24dBm [-1.0dB~+0.1dB]

HSDPA: 22.5dBm[-1.0dB~+1.0dB]

HSUPA: 21.5dBm [-1.0dB~+1.0dB]

HSUPA+: 20.5dBm[-1.0dB~+1.0dB]

The LTE Band 2 power adjust procedure

1.4 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

3 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

5 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

The reduced of LTE Band 2power adjust procedure

1.4 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

3 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

5 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

The LTE Band 4power adjust procedure

1.4 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

3 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

5 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

The reduced of LTE Band 4power adjust procedure

1.4 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

3 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

5 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

The LTE Band 5 power adjust procedure

1.4 MHz QPSK/16QAM: 23.3dBm [-3.0dB~~+1.0dB]

3 MHz QPSK/16QAM: 23.3dBm [-3.0dB~~+1.0dB]

5 MHz QPSK/16QAM: 23.3dBm [-3.0dB~~+1.0dB]

10 MHz QPSK/16QAM: 23.3dBm [-3.0dB~~+1.0dB]

The LTE Band 7 power adjust procedure

5 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.3dB]

10 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.3dB]

15 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.3dB]

20 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.3dB]

The reduced of LTE Band 7 power adjust procedure

5 MHz QPSK/16QAM: 21dBm [-3.0dB~~+0.3dB]

10 MHz QPSK/16QAM: 21dBm [-3.0dB~~+0.3dB]

15 MHz QPSK/16QAM: 21dBm [-3.0dB~~+0.3dB]

20 MHz QPSK/16QAM: 21dBm [-3.0dB~~+0.3dB]

The LTE Band 12 power adjust procedure

1.4 MHz QPSK/16QAM: 23.3dBm [-3.0dB~~+1.0dB]

3 MHz QPSK/16QAM: 23.3dBm [-3.0dB~~+1.0dB]

5 MHz QPSK/16QAM: 23.3dBm [-3.0dB~~+1.0dB]

10 MHz QPSK/16QAM: 23.3dBm [-3.0dB~~+1.0dB]

The LTE Band 17 power adjust procedure

5 MHz QPSK/16QAM: 24dBm [-3.0dB~~+0.1dB]

10 MHz QPSK/16QAM: 24dBm [-3.0dB~~+0.1dB]

The LTE Band 26 power adjust procedure

1.4 MHz QPSK/16QAM: 24dBm [-3.0dB~~+0.1dB]

3 MHz QPSK/16QAM: 24dBm [-3.0dB~~+0.1dB]

5 MHz QPSK/16QAM: 24dBm [-3.0dB~~+0.1dB]

10 MHz QPSK/16QAM: 24dBm [-3.0dB~~+0.1dB]

The LTE Band 38 power adjust procedure

5 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

The reduced of LTE Band 38 power adjust procedure

5 MHz QPSK/16QAM: 20dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 20dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 20dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 20dBm [-3.0dB~~+0.8dB]

The LTE Band 41 power adjust procedure

5 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

The reduced of LTE Band 41 power adjust procedure

5 MHz QPSK/16QAM: 19dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 19dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 19dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 19dBm [-3.0dB~~+0.8dB]

The LTE Band 66 power adjust procedure

5 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 23dBm [-3.0dB~~+0.8dB]

The reduced of LTE Band 66 power adjust procedure

5 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

10 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

15 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

20 MHz QPSK/16QAM: 18dBm [-3.0dB~~+0.8dB]

The Wi-Fi 2.4G power adjust procedure

802.11b: 18dBm [-2.0dB~~+0.0dB]

802.11g: 18dBm [-3.0dB~~+0.0dB]

802.11n-HT20: 18dBm [-2.0dB~~+0.0dB]

The Reduced of Wi-Fi 2.4Gpower adjust procedure

802.11b: 16dBm [-2.0dB~~+0.0dB]

802.11g: 16dBm [-2.0dB~~+0.0dB]

802.11n-HT20: 16dBm [-2.0dB~~+0.0dB]

The BT power adjust procedure

BT: 7dBm [-2dB~~+1.0dB]

BLE: 0dBm[-2dB~~+2.0dB]

9. MEASUREMENT RESULTS

Result: Passed

Date of testing : 2020.10.16~2018.10.22
Ambient temperature : 20°C~22°C
Relative humidity : 50~68%

9.1. Conducted Power

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used. SAR drift measured at the same position in liquid before and after each SAR test.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of Timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
Time based avg. power compared to slotted avg. power	-9.00dB	-6.00 dB	-4.26dB	-3.00dB

The signalling modes differ as follows:

Mode	Coding scheme	Modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

GSM Conducted Power Measurement Results

Band: GSM850	Burst Average Power (dBm)			Frame Average Power (dBm)		
	128	190	251	128	190	251
Channel						
GSM(CS)	33.27	33.24	33.25	24.27	24.24	24.25
GPRS/EDGE (GMSK, 1 Tx slot)	33.15	33.17	33.16	24.15	24.17	24.16
GPRS/EDGE (GMSK, 2 Tx slots)	31.88	31.82	31.81	25.88	25.82	25.81
GPRS/EDGE (GMSK, 3 Tx slots)	28.72	28.66	28.68	24.46	24.40	24.42
GPRS/EDGE (GMSK, 4 Tx slots)	26.86	26.84	26.82	23.86	23.84	23.82
EDGE (8PSK, 1 Tx slot)	27.03	26.81	26.87	18.03	17.81	17.87
EDGE (8PSK, 2 Tx slots)	25.47	25.28	25.32	19.47	19.28	19.32
EDGE (8PSK, 3 Tx slots)	23.78	23.64	23.69	19.52	19.38	19.43
EDGE (8PSK, 4 Tx slots)	21.34	21.42	21.35	18.34	18.42	18.35

Remark:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) The bolded GPRS 2 Tx mode was selected as the primary mode for SAR testing according to the highest frame- averaged output power table.

GSM Conducted Power Measurement Results

Band: DCS1900	Burst Average Power (dBm)			Frame Average Power (dBm)		
	513	661	810	513	661	810
Channel	513	661	810	513	661	810
GSM1900(CS)	28.68	28.68	26.54	19.68	19.68	19.54
GPRS/EDGE (GMSK, 1 Tx slot)	28.62	28.64	28.47	19.62	19.64	19.47
GPRS/EDGE (GMSK, 2 Tx slots)	23.65	23.66	23.50	17.65	17.66	17.50
GPRS/EDGE (GMSK, 3 Tx slots)	21.88	21.91	21.76	17.62	17.65	17.50
GPRS/EDGE (GMSK, 4 Tx slots)	20.60	20.61	20.36	17.60	17.61	17.36
EGPRS (8PSK, 1 Tx slot)	22.18	22.25	22.16	13.18	13.25	13.16
EGPRS (8PSK, 2 Tx slots)	18.94	19.04	19.00	12.94	13.04	13.00
EGPRS (8PSK, 3 Tx slots)	17.16	17.19	17.15	12.9	12.93	12.89
EGPRS (8PSK, 4 Tx slots)	15.80	15.91	15.84	12.8	12.91	12.84

Remark:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

The bolded GPRS 2 Tx mode was selected as the primary mode for SAR testing according to the highest frame- averaged output power table.

The reduced of GSM Conducted Power Measurement Results

Band: DCS1900	Burst Average Power (dBm)			Frame Average Power (dBm)		
	513	661	810	513	661	810
Channel						
GSM1900(CS)	23.26	23.26	23.12	14.26	14.26	14.12
GPRS/EDGE (GMSK, 1 Tx slot)	23.20	23.22	23.05	14.20	14.22	14.05
GPRS/EDGE (GMSK, 2 Tx slots)	20.23	20.24	20.08	14.23	14.24	14.08
GPRS/EDGE (GMSK, 3 Tx slots)	18.46	18.49	18.34	14.20	14.23	14.08
GPRS/EDGE (GMSK, 4 Tx slots)	17.18	17.19	16.94	14.18	14.19	13.94
EGPRS (8PSK, 1 Tx slot)	18.76	18.83	18.74	9.76	9.83	9.74
EGPRS (8PSK, 2 Tx slots)	15.52	15.62	15.58	9.52	9.62	9.58
EGPRS (8PSK, 3 Tx slots)	13.74	13.77	13.73	9.48	9.51	9.47
EGPRS (8PSK, 4 Tx slots)	12.38	12.49	12.42	9.38	9.49	9.42

Remark:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

The bolded GPRS 2 Tx mode was selected as the primary mode for SAR testing according to the highest frame- averaged output power table.

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbpsRMC	23.60	23.48	23.50
	64kbps RMC	22.10	22.05	22.09
	144kbps RMC	22.12	21.97	22.14
	384kbps RMC	22.15	22.09	22.14
HSDPA	Subtest 1	22.59	22.45	22.51
	Subtest 2	21.84	21.72	21.75
	Subtest 3	21.85	21.76	21.71
	Subtest 4	21.85	21.77	21.69
HSUPA	Subtest 1	20.30	20.17	20.22
	Subtest 2	20.38	20.25	20.27
	Subtest 3	21.31	21.21	21.20
	Subtest 4	19.90	19.75	19.82
	Subtest 5	21.25	21.12	21.14

The reduced of UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbpsRMC	18.63	18.51	18.53
	64kbps RMC	17.13	17.08	17.12
	144kbps RMC	17.15	17.00	17.17
	384kbps RMC	17.18	17.12	17.17
HSDPA	Subtest 1	17.62	17.48	17.54
	Subtest 2	16.87	16.75	16.78
	Subtest 3	16.88	16.79	16.74
	Subtest 4	16.88	16.80	16.72
HSUPA	Subtest 1	15.33	15.20	15.25
	Subtest 2	15.41	15.28	15.30
	Subtest 3	16.34	16.24	16.23
	Subtest 4	14.93	14.78	14.85
	Subtest 5	16.28	16.15	16.17

UMTS Band IV		Conducted Power (dBm)		
		1312CH	1412CH	1513CH
WCDMA	12.2kbpsRMC	23.44	23.42	23.44
	64kbps RMC	23.22	23.33	23.40
	144kbps RMC	23.19	23.30	23.44
	384kbps RMC	23.17	23.34	23.40
HSDPA	Subtest 1	23.16	23.26	23.36
	Subtest 2	22.36	22.35	22.59
	Subtest 3	21.76	21.85	21.99
	Subtest 4	21.49	21.59	21.69
HSUPA	Subtest 1	22.14	22.21	22.38
	Subtest 2	20.08	20.22	20.39
	Subtest 3	20.96	21.10	21.22
	Subtest 4	20.37	20.63	20.76
	Subtest 5	22.23	22.30	22.43

The reduced of UMTS Band IV		Conducted Power (dBm)		
		1312CH	1412CH	1513CH
WCDMA	12.2kbpsRMC	18.47	18.45	18.47
	64kbps RMC	18.25	18.36	18.43
	144kbps RMC	18.22	18.33	18.47
	384kbps RMC	18.20	18.37	18.43
HSDPA	Subtest 1	18.19	18.29	18.39
	Subtest 2	17.39	17.38	17.62
	Subtest 3	16.79	16.88	17.02
	Subtest 4	16.52	16.62	16.72
HSUPA	Subtest 1	17.17	17.24	17.41
	Subtest 2	15.11	15.25	15.42
	Subtest 3	15.99	16.13	16.25
	Subtest 4	15.40	15.66	15.79
	Subtest 5	17.26	17.33	17.46

UMTS Band V		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbpsRMC	23.54	23.53	23.59
	64kbpsRMC	23.17	23.25	23.14
	144kbpsRMC	23.19	23.17	23.19
	384kbpsRMC	23.22	23.29	23.19
HSDPA	Subtest 1	23.22	23.22	23.14
	Subtest 2	22.44	22.46	22.32
	Subtest 3	21.86	21.85	21.75
	Subtest 4	21.55	21.58	21.46
HSUPA	Subtest 1	22.27	22.27	22.14
	Subtest 2	20.19	20.21	20.09
	Subtest 3	21.12	21.14	21.04
	Subtest 4	20.91	20.91	20.84
	Subtest 5	22.36	22.40	22.26

Conducted power measurements of LTE Band 2

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607	18900	19193
1.4MHz	QPSK	1	0	23.67	23.51	23.44
		1	3	23.77	23.62	23.55
		1	5	23.63	23.44	23.46
		3	0	23.72	23.56	23.54
		3	2	23.75	23.56	23.58
		3	3	23.73	23.57	23.54
		6	0	22.73	22.57	22.56
	16QAM	1	0	22.55	22.40	22.41
		1	3	22.75	22.52	22.59
		1	5	22.53	22.39	22.38
		3	0	22.52	22.34	22.37
		3	2	22.51	22.37	22.32
		3	3	22.50	22.32	22.32
		6	0	21.71	21.55	21.55

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615	18900	19185
3MHz	QPSK	1	0	23.69	23.51	23.52
		1	7	23.66	23.54	23.57
		1	14	23.66	23.55	23.45
		8	0	22.63	22.49	22.52
		8	4	22.61	22.52	22.54
		8	7	22.58	22.50	22.50
		15	0	22.55	22.48	22.49
	16QAM	1	0	22.52	22.30	22.56
		1	7	22.47	22.27	22.54
		1	14	22.43	22.28	22.49
		8	0	21.60	21.46	21.54
		8	4	21.58	21.48	21.52
		8	7	21.55	21.43	21.45
		15	0	21.44	21.35	21.49

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625	18900	19175
5MHz	QPSK	1	0	23.60	23.45	23.49
		1	12	23.70	23.57	23.65
		1	24	23.56	23.44	23.47
		12	0	22.68	22.49	22.50
		12	6	22.64	22.48	22.50
		12	13	22.66	22.47	22.51
		25	0	22.71	22.50	22.52
	16QAM	1	0	22.63	22.36	22.39
		1	13	22.80	22.44	22.54
		1	24	22.61	22.28	22.37
		12	0	21.67	21.46	21.45
		12	6	21.64	21.44	21.44
		12	13	21.67	21.44	21.42
		25	0	21.60	21.50	21.51

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650	18900	19150
10MHz	QPSK	1	0	23.65	23.54	23.53
		1	24	23.69	23.64	23.58
		1	49	23.62	23.46	23.53
		25	0	22.67	22.52	22.61
		25	12	22.67	22.54	22.67
		25	25	22.70	22.51	22.56
		50	0	22.68	22.51	22.58
	16QAM	1	0	22.69	22.41	22.52
		1	24	22.81	22.53	22.72
		1	49	22.66	22.21	22.49
		25	0	21.66	21.54	21.61
		25	12	21.66	21.56	21.61
		25	25	21.63	21.52	21.52
		50	0	21.66	21.54	21.55

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0	23.55	23.43	23.38
		1	24	23.66	23.45	23.57
		1	49	23.56	23.28	23.45
		25	0	22.53	22.58	22.15
		25	12	22.65	22.60	22.37
		25	25	22.55	22.42	22.18
		50	0	22.67	22.56	22.52
	16QAM	1	0	22.58	22.54	22.13
		1	24	22.64	22.58	22.37
		1	49	22.57	22.41	22.19
		25	0	22.55	22.53	22.13
		25	12	22.64	22.58	22.35
		25	25	22.58	22.39	22.18
		50	0	21.57	21.45	21.54

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0	23.35	23.28	23.18
		1	24	23.79	23.76	23.78
		1	49	23.38	23.16	23.25
		25	0	22.48	22.53	22.54
		25	12	22.52	22.46	22.52
		25	25	22.55	22.51	22.49
		50	0	22.46	22.48	22.52
	16QAM	1	0	22.41	22.10	22.05
		1	24	22.86	22.30	22.49
		1	49	22.49	21.98	22.14
		25	0	21.50	21.55	21.52
		25	12	21.48	21.57	21.55
		25	25	21.53	21.56	21.48
		50	0	21.46	21.48	21.50

The reduced of Conducted power measurements of LTE Band 2

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607	18900	19193
1.4MHz	QPSK	1	0	18.70	18.54	18.47
		1	3	18.80	18.65	18.58
		1	5	18.66	18.47	18.49
		3	0	18.75	18.59	18.57
		3	2	18.78	18.59	18.61
		3	3	18.76	18.60	18.57
		6	0	17.76	17.60	17.59
	16QAM	1	0	17.58	17.43	17.44
		1	3	17.78	17.55	17.62
		1	5	17.56	17.42	17.41
		3	0	17.55	17.37	17.40
		3	2	17.54	17.40	17.35
		3	3	17.53	17.35	17.35
		6	0	18.70	18.54	18.47

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615	18900	19185
3MHz	QPSK	1	0	18.72	18.54	18.55
		1	7	18.69	18.57	18.60
		1	14	18.69	18.58	18.48
		8	0	17.66	17.52	17.55
		8	4	17.64	17.55	17.57
		8	7	17.61	17.53	17.53
		15	0	17.58	17.51	17.52
	16QAM	1	0	17.55	17.33	17.59
		1	7	17.50	17.30	17.57
		1	14	17.46	17.31	17.52
		8	0	16.63	16.49	16.57
		8	4	16.61	16.51	16.55
		8	7	16.58	16.46	16.48
		15	0	18.72	18.54	18.55

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625	18900	19175
5MHz	QPSK	1	0	18.63	18.48	18.52
		1	12	18.73	18.60	18.68
		1	24	18.59	18.47	18.50
		12	0	17.71	17.52	17.53
		12	6	17.67	17.51	17.53
		12	13	17.69	17.50	17.54
		25	0	17.74	17.53	17.55
	16QAM	1	0	17.66	17.39	17.42
		1	13	17.83	17.47	17.57
		1	24	17.64	17.31	17.40
		12	0	16.70	16.49	16.48
		12	6	16.67	16.47	16.47
		12	13	16.70	16.47	16.45
		25	0	18.63	18.48	18.52

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650	18900	19150
10MHz	QPSK	1	0	18.68	18.57	18.56
		1	24	18.82	18.67	18.61
		1	49	18.65	18.49	18.56
		25	0	17.70	17.55	17.64
		25	12	17.70	17.57	17.70
		25	25	17.73	17.54	17.59
		50	0	17.71	17.54	17.61
	16QAM	1	0	17.72	17.44	17.55
		1	24	17.84	17.56	17.75
		1	49	17.69	17.24	17.52
		25	0	16.69	16.57	16.64
		25	12	16.69	16.59	16.64
		25	25	16.66	16.55	16.55
		50	0	18.68	18.57	18.56

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0	18.58	18.46	18.41
		1	24	18.69	18.48	18.60
		1	49	18.59	18.31	18.48
		25	0	17.56	17.61	17.18
		25	12	17.68	17.63	17.40
		25	25	17.58	17.45	17.21
		50	0	17.70	17.59	17.55
	16QAM	1	0	17.61	17.57	17.16
		1	24	17.67	17.61	17.40
		1	49	17.60	17.44	17.22
		25	0	17.58	17.56	17.16
		25	12	17.67	17.61	17.38
		25	25	17.61	17.42	17.21
		50	0	18.58	18.46	18.41

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0	18.38	18.31	18.21
		1	24	18.77	18.76	18.72
		1	49	18.41	18.19	18.28
		25	0	17.51	17.56	17.57
		25	12	17.55	17.49	17.55
		25	25	17.58	17.54	17.52
		50	0	17.49	17.51	17.55
	16QAM	1	0	17.44	17.13	17.08
		1	24	17.89	17.33	17.52
		1	49	17.52	17.01	17.17
		25	0	16.53	16.58	16.55
		25	12	16.51	16.60	16.58
		25	25	16.56	16.59	16.51
		50	0	18.38	18.31	18.21

Conducted power measurements of LTE Band 4

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957	20175	20393
1.4MHz	QPSK	1	0	23.56	23.39	23.38
		1	3	23.5	23.6	23.5
		1	5	23.45	23.43	23.41
		3	0	23.56	23.48	23.49
		3	2	23.59	23.39	23.46
		3	3	23.55	23.43	23.45
		6	0	22.54	22.44	22.46
	16QAM	1	0	22.36	22.21	22.35
		1	3	22.58	22.24	22.45
		1	5	22.37	22.21	22.26
		3	0	22.36	22.26	22.27
		3	2	22.36	22.19	22.24
		3	3	22.36	22.27	22.22
		6	0	21.49	21.25	21.45

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965	20175	20385
3MHz	QPSK	1	0	23.37	23.25	23.2
		1	7	23.42	23.19	23.18
		1	14	23.3	23.24	23.19
		8	0	22.29	22.2	22.22
		8	4	22.3	22.19	22.23
		8	7	22.26	22.18	22.2
		15	0	22.28	22.19	22.18
	16QAM	1	0	22.21	21.92	22.26
		1	7	22.18	21.99	22.18
		1	14	22.1	21.99	22.19
		8	0	21.27	21.18	21.23
		8	4	21.23	21.18	21.26
		8	7	21.25	21.2	21.2
		15	0	21.19	21.09	21.24

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975	20175	20375
5MHz	QPSK	1	0	23.33	23.11	23.18
		1	12	23.39	23.21	23.29
		1	24	23.18	23.14	23.2
		12	0	22.27	22.15	22.21
		12	6	22.28	22.22	22.2
		12	13	22.26	22.17	22.21
		25	0	22.26	22.2	22.21
	16QAM	1	0	22.18	22.12	22.06
		1	13	22.25	22.29	22.14
		1	24	22.08	22.19	22.09
		12	0	21.17	21.21	21.17
		12	6	21.23	21.17	21.13
		12	13	21.24	21.18	21.17
		25	0	21.27	21.19	21.23

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000	20175	20350
10MHz	QPSK	1	0	23.42	23.29	23.27
		1	24	23.43	23.5	23.39
		1	49	23.31	23.35	23.3
		25	0	22.36	22.29	22.3
		25	12	22.39	22.29	22.3
		25	25	22.39	22.36	22.32
		50	0	22.33	22.31	22.28
	16QAM	1	0	22.47	22.09	22
		1	24	22.54	22.24	22.16
		1	49	22.28	22.14	22.07
		25	0	21.35	21.31	21.34
		25	12	21.34	21.3	21.37
		25	25	21.35	21.34	21.33
		50	0	21.32	21.34	21.36

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025	20175	20325
15MHz	QPSK	1	0	23.31	23.07	23.17
		1	24	23.29	23.22	23.22
		1	49	23.14	23.17	23.17
		25	0	22.26	22.17	22.14
		25	12	22.31	22.3	22.27
		25	25	22.15	22.32	22.18
		50	0	22.32	22.28	22.27
	16QAM	1	0	22.29	22.2	22.17
		1	24	22.27	22.26	22.23
		1	49	22.15	22.32	22.18
		25	0	22.27	22.14	22.2
		25	12	22.3	22.29	22.23
		25	25	22.17	22.27	22.16
		50	0	21.23	21.28	21.25

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050	20175	20175
20MHz	QPSK	1	0	23.70	23.51	23.56
		1	24	23.74	23.73	23.79
		1	49	23.60	23.72	23.64
		25	0	22.83	22.70	22.93
		25	12	22.75	22.73	22.91
		25	25	22.92	22.89	22.85
		50	0	22.86	22.75	22.83
	16QAM	1	0	22.58	22.64	22.41
		1	24	22.80	23.10	22.91
		1	49	22.49	22.85	22.55
		25	0	21.79	21.78	21.95
		25	12	21.75	21.76	21.91
		25	25	21.92	21.91	21.86
		50	0	21.83	21.74	21.91

The reduced of Conducted power measurements of LTE Band 4

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957	20175	20393
1.4MHz	QPSK	1	0	18.50	18.33	18.32
		1	3	18.44	18.54	18.44
		1	5	18.39	18.37	18.35
		3	0	18.50	18.42	18.43
		3	2	18.53	18.33	18.40
		3	3	18.49	18.37	18.39
		6	0	17.48	17.38	17.40
	16QAM	1	0	17.30	17.15	17.29
		1	3	17.52	17.18	17.39
		1	5	17.31	17.15	17.20
		3	0	17.30	17.20	17.21
		3	2	17.30	17.13	17.18
		3	3	17.30	17.21	17.16
		6	0	18.50	18.33	18.32

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965	20175	20385
3MHz	QPSK	1	0	18.31	18.19	18.14
		1	7	18.36	18.13	18.12
		1	14	18.24	18.18	18.13
		8	0	17.23	17.14	17.16
		8	4	17.24	17.13	17.17
		8	7	17.20	17.12	17.14
		15	0	17.22	17.13	17.12
	16QAM	1	0	17.15	16.86	17.20
		1	7	17.12	16.93	17.12
		1	14	17.04	16.93	17.13
		8	0	16.21	16.12	16.17
		8	4	16.17	16.12	16.20
		8	7	16.19	16.14	16.14
		15	0	18.31	18.19	18.14

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975	20175	20375
5MHz	QPSK	1	0	18.27	18.05	18.12
		1	12	18.33	18.15	18.23
		1	24	18.12	18.08	18.14
		12	0	17.21	17.09	17.15
		12	6	17.22	17.16	17.14
		12	13	17.20	17.11	17.15
		25	0	17.20	17.14	17.15
	16QAM	1	0	17.12	17.06	17.00
		1	13	17.19	17.23	17.08
		1	24	17.02	17.13	17.03
		12	0	16.11	16.15	16.11
		12	6	16.17	16.11	16.07
		12	13	16.18	16.12	16.11
		25	0	18.27	18.05	18.12

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000	20175	20350
10MHz	QPSK	1	0	18.36	18.23	18.21
		1	24	18.37	18.44	18.33
		1	49	18.25	18.29	18.24
		25	0	17.30	17.23	17.24
		25	12	17.33	17.23	17.24
		25	25	17.33	17.30	17.26
		50	0	17.27	17.25	17.22
	16QAM	1	0	17.41	17.03	16.94
		1	24	17.48	17.18	17.10
		1	49	17.22	17.08	17.01
		25	0	16.29	16.25	16.28
		25	12	16.28	16.24	16.31
		25	25	16.29	16.28	16.27
		50	0	18.36	18.23	18.21

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025	20175	20325
15MHz	QPSK	1	0	18.25	18.01	18.11
		1	24	18.23	18.16	18.16
		1	49	18.08	18.11	18.11
		25	0	17.20	17.11	17.08
		25	12	17.25	17.24	17.21
		25	25	17.09	17.26	17.12
		50	0	17.26	17.22	17.21
	16QAM	1	0	17.23	17.14	17.11
		1	24	17.21	17.20	17.17
		1	49	17.09	17.26	17.12
		25	0	17.21	17.08	17.14
		25	12	17.24	17.23	17.17
		25	25	17.11	17.21	17.10
		50	0	18.25	18.01	18.11

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050	20175	20175
20MHz	QPSK	1	0	18.04	17.85	17.90
		1	24	18.55	18.57	18.58
		1	49	17.94	18.06	17.98
		25	0	17.17	17.04	17.27
		25	12	17.09	17.07	17.25
		25	25	17.26	17.23	17.19
		50	0	17.20	17.09	17.17
	16QAM	1	0	16.92	16.98	16.75
		1	24	17.14	17.44	17.25
		1	49	16.83	17.19	16.89
		25	0	16.13	16.12	16.29
		25	12	16.09	16.10	16.25
		25	25	16.26	16.25	16.20
		50	0	18.04	17.85	17.90

Conducted power measurements of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407	20525	20643
1.4MHz	QPSK	1	0	23.31	23.11	23.24
		1	3	23.38	23.25	23.41
		1	5	23.28	23.10	23.26
		3	0	23.37	23.23	23.35
		3	2	23.34	23.21	23.33
		3	3	23.39	23.23	23.35
		6	0	22.26	22.10	22.27
	16QAM	1	0	22.10	21.98	22.07
		1	3	22.25	22.06	22.21
		1	5	22.08	21.91	22.03
		3	0	22.18	22.02	22.16
		3	2	22.21	22.03	22.15
		3	3	22.17	22.00	22.11
		6	0	21.13	20.98	21.11

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415	20525	20635
3MHz	QPSK	1	0	23.31	23.16	23.21
		1	7	23.33	23.14	23.23
		1	14	23.25	23.11	23.25
		8	0	22.28	22.14	22.24
		8	4	22.25	22.17	22.22
		8	7	22.23	22.11	22.27
		15	0	22.23	22.09	22.22
	16QAM	1	0	22.20	21.88	22.19
		1	7	22.23	21.89	22.18
		1	14	22.10	21.89	22.18
		8	0	21.28	21.14	21.24
		8	4	21.27	21.12	21.26
		8	7	21.30	21.12	21.29
		15	0	21.20	21.00	21.29

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20625
5MHz	QPSK	1	0	23.26	23.05	23.11
		1	12	23.37	23.15	23.29
		1	24	23.28	23.07	23.22
		12	0	22.27	22.17	22.26
		12	6	22.19	22.21	22.22
		12	13	22.26	22.07	22.21
		25	0	22.31	22.18	22.24
	16QAM	1	0	22.22	22.14	22.08
		1	13	22.32	22.19	22.19
		1	24	22.20	22.07	22.06
		12	0	21.26	21.23	21.26
		12	6	21.21	21.22	21.23
		12	13	21.23	21.14	21.20
		25	0	21.36	21.10	21.32

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0	23.24	23.16	23.16
		1	24	23.55	23.60	23.65
		1	49	23.15	23.16	23.29
		25	0	22.32	22.25	22.28
		25	12	22.28	22.20	22.24
		25	25	22.31	22.12	22.19
		50	0	22.29	22.16	22.20
	16QAM	1	0	22.26	22.16	22.05
		1	24	22.31	22.24	22.18
		1	49	22.12	22.14	22.08
		25	0	21.28	21.23	21.30
		25	12	21.28	21.20	21.30
		25	25	21.26	21.10	21.20
		50	0	21.32	21.19	21.22

Conducted power measurements of LTE Band 7

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775	21100	21425
5MHz	QPSK	1	0	21.90	21.90	21.95
		1	12	21.99	22.07	22.12
		1	24	21.89	21.98	22.06
		12	0	20.92	20.99	20.97
		12	6	20.92	20.97	20.93
		12	13	20.95	20.97	21.04
		25	0	21.00	20.98	21.01
	16QAM	1	0	20.95	20.77	20.89
		1	13	21.04	20.99	21.08
		1	24	21.00	20.83	21.00
		12	0	19.97	19.99	20.02
		12	6	19.96	20.06	20.03
		12	13	20.01	20.03	20.09
		25	0	20.00	20.11	20.04

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800	21100	21400
10MHz	QPSK	1	0	21.99	21.94	21.96
		1	24	22.15	22.16	22.19
		1	49	22.04	22.06	22.13
		25	0	21.06	21.10	21.05
		25	12	21.07	21.11	21.04
		25	25	21.14	21.09	21.13
		50	0	21.07	21.06	21.05
	16QAM	1	0	20.83	20.75	20.95
		1	24	21.05	20.88	21.07
		1	49	20.89	20.80	21.09
		25	0	20.10	20.19	20.11
		25	12	20.07	20.19	20.07
		25	25	20.14	20.17	20.20
		50	0	20.11	20.14	20.17

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825	21100	21375
15MHz	QPSK	1	0	21.79	21.85	21.88
		1	24	21.96	22.04	22.08
		1	49	21.81	21.97	22.00
		25	0	20.94	20.63	20.94
		25	12	21.11	20.77	21.07
		25	25	20.94	20.71	20.96
		50	0	21.10	21.03	21.06
	16QAM	1	0	20.97	20.64	20.93
		1	24	21.10	20.85	21.09
		1	49	20.98	20.77	21.01
		25	0	20.96	20.63	20.92
		25	12	21.12	20.82	21.11
		25	25	20.98	20.70	20.97
		50	0	20.06	20.08	20.11

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850	21100	21350
20MHz	QPSK	1	0	21.93	22.00	22.03
		1	24	22.36	22.34	22.42
		1	49	22.00	22.09	22.15
		25	0	21.20	21.31	21.30
		25	12	21.18	21.24	21.33
		25	25	21.32	21.28	21.36
		50	0	21.25	21.28	21.29
	16QAM	1	0	20.72	20.86	21.12
		1	24	21.23	21.35	21.55
		1	49	20.80	20.99	21.24
		25	0	20.24	20.40	20.39
		25	12	20.37	20.31	20.43
		25	25	20.24	20.30	20.39
		50	0	20.27	20.32	20.35

The reduced of Conducted power measurements of LTE Band 7

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775	21100	21425
5MHz	QPSK	1	0	19.90	19.90	19.95
		1	12	19.99	20.07	20.12
		1	24	19.89	19.98	20.06
		12	0	18.92	18.99	18.97
		12	6	18.92	18.97	18.93
		12	13	18.95	18.97	19.04
		25	0	19.00	18.98	19.01
	16QAM	1	0	18.95	18.77	18.89
		1	13	19.04	18.99	19.08
		1	24	19.00	18.83	19.00
		12	0	17.97	17.99	18.02
		12	6	17.96	18.06	18.03
		12	13	18.01	18.03	18.09
		25	0	18.01	18.03	18.09

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800	21100	21400
10MHz	QPSK	1	0	19.99	19.94	19.96
		1	24	20.15	20.16	20.19
		1	49	20.04	20.06	20.13
		25	0	19.06	19.10	19.05
		25	12	19.07	19.11	19.04
		25	25	19.14	19.09	19.13
		50	0	19.07	19.06	19.05
	16QAM	1	0	18.83	18.75	18.95
		1	24	19.05	18.88	19.07
		1	49	18.89	18.80	19.09
		25	0	18.10	18.19	18.11
		25	12	18.07	18.19	18.07
		25	25	18.14	18.17	18.20
		50	0	18.01	18.03	18.09

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825	21100	21375
15MHz	QPSK	1	0	19.79	19.85	19.88
		1	24	19.96	20.04	20.08
		1	49	19.81	19.97	20.00
		25	0	18.94	18.63	18.94
		25	12	19.11	18.77	19.07
		25	25	18.94	18.71	18.96
		50	0	19.10	19.03	19.06
	16QAM	1	0	18.97	18.64	18.93
		1	24	19.10	18.85	19.09
		1	49	18.98	18.77	19.01
		25	0	18.96	18.63	18.92
		25	12	19.12	18.82	19.11
		25	25	18.98	18.70	18.97
		50	0	18.98	18.70	18.97

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850	21100	21350
20MHz	QPSK	1	0	19.70	19.72	19.73
		1	24	20.37	20.38	20.32
		1	49	19.76	19.83	19.81
		25	0	18.93	19.02	18.99
		25	12	18.93	19.01	19.03
		25	25	19.08	19.07	19.08
		50	0	18.95	19.04	19.06
	16QAM	1	0	18.63	18.83	18.58
		1	24	19.01	19.23	18.87
		1	49	18.63	18.97	18.62
		25	0	17.95	18.14	18.14
		25	12	17.94	18.11	18.09
		25	25	18.07	18.14	18.24
		50	0	19.70	19.72	19.73

Conducted power measurements of LTE Band 12

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23017	23095	23173
1.4MHz	QPSK	1	0	23.20	23.03	23.00
		1	3	23.17	23.19	23.13
		1	5	23.09	22.98	22.96
		3	0	23.21	23.12	23.09
		3	2	23.18	23.13	23.06
		3	3	23.23	23.18	23.09
		6	0	22.15	22.03	22.06
	16QAM	1	0	21.98	21.80	21.90
		1	3	22.09	21.97	22.08
		1	5	21.93	21.79	21.85
		3	0	22.00	21.87	21.86
		3	2	22.02	21.86	21.86
		3	3	22.03	21.85	21.78
		6	0	21.00	21.06	21.10

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23025	23095	23165
3MHz	QPSK	1	0	23.20	23.10	23.09
		1	7	23.13	23.09	23.08
		1	14	23.13	23.11	23.03
		8	0	22.16	22.01	22.03
		8	4	22.17	21.98	22.03
		8	7	22.14	21.99	22.03
		15	0	22.13	22.00	21.99
	16QAM	1	0	22.19	21.96	21.76
		1	7	22.16	21.90	21.84
		1	14	22.16	21.85	21.77
		8	0	21.21	21.06	21.10
		8	4	21.20	21.05	21.07
		8	7	21.19	21.01	21.05
		15	0	21.18	20.94	20.95

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23035	23095	23155
5MHz	QPSK	1	0	23.11	23.03	23.01
		1	12	23.30	23.11	23.13
		1	24	23.18	22.95	22.99
		12	0	22.11	22.02	22.07
		12	6	22.10	22.00	22.11
		12	13	22.19	22.02	22.05
		25	0	22.22	22.03	22.11
	16QAM	1	0	22.07	22.08	21.88
		1	13	22.21	22.12	21.97
		1	24	22.04	22.00	21.84
		12	0	21.13	21.16	21.09
		12	6	21.14	21.09	21.13
		12	13	21.21	21.02	21.06
		25	0	21.24	21.02	21.17

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23060	23095	23130
10MHz	QPSK	1	0	23.08	23.06	23.04
		1	24	23.67	23.65	23.64
		1	49	23.07	23.07	23.07
		25	0	22.08	22.00	22.08
		25	12	22.10	21.99	22.11
		25	25	22.16	22.03	22.07
		50	0	22.14	22.03	22.07
	16QAM	1	0	21.87	22.09	21.93
		1	24	22.01	22.18	21.98
		1	49	21.82	22.04	21.85
		25	0	21.15	21.04	21.15
		25	12	21.17	21.04	21.13
		25	25	21.26	21.02	21.13
		50	0	21.16	20.99	21.19

Conducted power measurements of LTE Band 17

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23755	23790	23825
5MHz	QPSK	1	0	23.23	23.08	23.08
		1	12	23.31	23.11	23.24
		1	24	23.18	23.01	23.10
		12	0	22.12	22.13	22.07
		12	6	22.14	22.12	22.17
		12	13	22.22	22.02	22.05
		25	0	22.21	22.15	22.11
	16QAM	1	0	22.10	22.11	21.93
		1	13	22.27	22.20	22.09
		1	24	22.09	22.10	21.96
		12	0	21.12	21.12	21.19
		12	6	21.17	21.17	21.16
		12	13	21.18	21.10	21.14
		25	0	21.24	21.13	21.18

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23450	23790	23800
10MHz	QPSK	1	0	23.14	23.19	23.19
		1	24	23.50	23.54	23.57
		1	49	23.08	23.12	23.18
		25	0	22.14	22.15	22.21
		25	12	22.12	22.14	22.23
		25	25	22.05	22.12	22.16
		50	0	22.12	22.15	22.18
	16QAM	1	0	22.19	21.99	21.94
		1	24	22.29	22.08	22.00
		1	49	22.18	22.01	21.92
		25	0	21.15	21.18	21.26
		25	12	21.13	21.23	21.32
		25	25	21.06	21.16	21.20
		50	0	21.09	21.20	21.21

Conducted power measurements of LTE Band 26

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26697	26865	27033
1.4MHz	QPSK	1	0	23.05	23.00	23.03
		1	3	23.12	23.13	23.11
		1	5	23.05	23.06	22.96
		3	0	23.06	23.15	23.13
		3	2	23.08	23.16	23.13
		3	3	23.08	23.18	23.12
		6	0	22.03	22.04	22.08
	16QAM	1	0	21.83	21.74	21.92
		1	3	22.02	21.94	22.05
		1	5	21.89	21.78	21.93
		3	0	21.91	21.87	21.89
		3	2	21.89	21.88	21.92
		3	3	21.88	21.89	21.90
		6	0	20.91	21.01	21.07

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26705	26865	27025
3MHz	QPSK	1	0	23.06	23.06	23.08
		1	7	23.15	23.06	23.05
		1	14	23.08	23.15	23.10
		8	0	21.99	22.01	22.04
		8	4	22.01	22.03	22.07
		8	7	22.04	22.06	22.04
		15	0	22.00	22.03	22.00
	16QAM	1	0	21.92	21.87	22.12
		1	7	21.96	21.86	22.09
		1	14	21.92	21.87	22.10
		8	0	21.02	21.09	21.11
		8	4	20.99	21.06	21.11
		8	7	21.03	21.08	21.12
		15	0	20.93	20.98	21.09

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26715	26865	27015
5MHz	QPSK	1	0	22.93	23.04	23.03
		1	12	23.39	23.36	23.33
		1	24	23.03	23.05	23.05
		12	0	21.97	21.99	22.07
		12	6	22.01	22.05	22.10
		12	13	22.00	22.05	22.06
		25	0	21.99	22.08	22.13
	16QAM	1	0	22.03	21.92	22.01
		1	13	22.09	22.04	22.03
		1	24	22.07	21.95	21.97
		12	0	21.01	21.08	21.10
		12	6	21.11	21.09	21.03
		12	13	21.08	21.08	21.08
		25	0	21.06	21.12	21.17

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26740	26865	26990
10MHz	QPSK	1	0	23.02	--	--
		1	24	23.16	--	--
		1	49	23.10	--	--
		25	0	22.05	--	--
		25	12	22.05	--	--
		25	25	22.16	--	--
		50	0	22.08	--	--
	16QAM	1	0	21.84	--	--
		1	24	22.06	--	--
		1	49	21.98	--	--
		25	0	21.16	--	--
		25	12	21.12	--	--
		25	25	21.19	--	--
		50	0	21.14	--	--

Conducted power measurements of LTE Band 38

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37775	38000	38225
5MHz	QPSK	1	0	23.75	23.39	23.46
		1	12	23.52	23.53	23.61
		1	24	23.38	23.44	23.51
		12	0	22.43	22.44	22.46
		12	6	22.42	22.46	22.45
		12	13	22.45	22.44	22.47
		25	0	22.42	22.49	22.48
	16QAM	1	0	22.39	22.30	22.35
		1	13	22.51	22.40	22.49
		1	24	22.42	22.28	22.36
		12	0	21.41	21.44	21.41
		12	6	21.44	21.40	21.42
		12	13	21.42	21.37	21.44
		25	0	21.40	21.50	21.48

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37800	38000	38200
10MHz	QPSK	1	0	23.44	23.43	23.56
		1	24	23.75	23.71	23.66
		1	49	23.40	23.45	23.60
		25	0	22.49	22.51	22.51
		25	12	22.51	22.53	22.55
		25	25	22.45	22.52	22.55
		50	0	22.50	22.46	22.54
	16QAM	1	0	22.17	22.38	22.30
		1	24	22.45	22.71	22.60
		1	49	22.11	22.45	22.34
		25	0	21.50	21.47	21.54
		25	12	21.49	21.47	21.54
		25	25	21.46	21.44	21.55
		50	0	21.44	21.50	21.54

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37825	38000	38175
15MHz	QPSK	1	0	23.34	23.30	23.26
		1	24	23.45	23.49	23.45
		1	49	23.34	23.35	23.37
		25	0	22.07	22.29	22.41
		25	12	22.22	22.45	22.55
		25	25	22.08	22.38	22.47
		50	0	22.49	22.52	22.54
	16QAM	1	0	22.06	22.28	22.38
		1	24	22.18	22.45	22.56
		1	49	22.05	22.35	22.48
		25	0	22.05	22.30	22.42
		25	12	22.20	22.47	22.56
		25	25	22.06	22.37	22.45
		50	0	21.43	21.39	21.48

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37850	38000	38150
20MHz	QPSK	1	0	23.18	23.13	23.14
		1	24	23.78	23.74	23.72
		1	49	23.27	23.20	23.19
		25	0	22.38	22.44	22.43
		25	12	22.35	22.42	22.39
		25	25	22.35	22.39	22.42
		50	0	22.41	22.41	22.45
	16QAM	1	0	22.01	22.22	21.95
		1	24	22.52	22.81	22.55
		1	49	22.14	22.29	22.05
		25	0	21.36	21.41	21.45
		25	12	21.36	21.46	21.44
		25	25	21.34	21.42	21.48
		50	0	21.38	21.44	21.48

The reduced of Conducted power measurements of LTE Band 38

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37775	38000	38225
5MHz	QPSK	1	0	19.09	18.73	18.80
		1	12	18.86	18.87	18.95
		1	24	18.72	18.78	18.85
		12	0	17.77	17.78	17.80
		12	6	17.76	17.80	17.79
		12	13	17.79	17.78	17.81
		25	0	17.76	17.83	17.82
	16QAM	1	0	17.73	17.64	17.69
		1	13	17.85	17.74	17.83
		1	24	17.76	17.62	17.70
		12	0	16.75	16.78	16.75
		12	6	16.78	16.74	16.76
		12	13	16.76	16.71	16.78
		25	0	19.09	18.73	18.80

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37800	38000	38200
10MHz	QPSK	1	0	18.78	18.77	18.90
		1	24	19.09	19.05	19.20
		1	49	18.74	18.79	18.94
		25	0	17.83	17.85	17.85
		25	12	17.85	17.87	17.89
		25	25	17.79	17.86	17.89
		50	0	17.84	17.80	17.88
	16QAM	1	0	17.51	17.72	17.64
		1	24	17.79	18.05	17.94
		1	49	17.45	17.79	17.68
		25	0	16.84	16.81	16.88
		25	12	16.83	16.81	16.88
		25	25	16.80	16.78	16.89
		50	0	18.78	18.77	18.90

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37825	38000	38175
15MHz	QPSK	1	0	18.68	18.64	18.60
		1	24	18.79	18.83	18.79
		1	49	18.68	18.69	18.71
		25	0	17.41	17.63	17.75
		25	12	17.56	17.79	17.89
		25	25	17.42	17.72	17.81
		50	0	17.83	17.86	17.88
	16QAM	1	0	17.40	17.62	17.72
		1	24	17.52	17.79	17.90
		1	49	17.39	17.69	17.82
		25	0	17.39	17.64	17.76
		25	12	17.54	17.81	17.90
		25	25	17.40	17.71	17.79
		50	0	18.68	18.64	18.60

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37850	38000	38150
20MHz	QPSK	1	0	18.52	18.47	18.48
		1	24	19.92	19.98	19.96
		1	49	18.61	18.54	18.53
		25	0	17.72	17.78	17.77
		25	12	17.69	17.76	17.73
		25	25	17.69	17.73	17.76
		50	0	17.75	17.75	17.79
	16QAM	1	0	17.35	17.56	17.29
		1	24	17.86	18.15	17.89
		1	49	17.48	17.63	17.39
		25	0	16.70	16.75	16.79
		25	12	16.70	16.80	16.78
		25	25	16.68	16.76	16.82
		50	0	18.52	18.47	18.48

Conducted power measurements of LTE Band 41

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39675	40620	41565
5MHz	QPSK	1	0	23.47	23.37	23.55
		1	12	23.65	23.56	23.69
		1	24	23.44	23.39	23.52
		12	0	22.52	22.44	22.57
		12	6	22.51	22.43	22.58
		12	13	22.57	22.45	22.51
		25	0	22.50	22.44	22.51
	16QAM	1	0	22.50	22.27	22.43
		1	13	22.63	22.43	22.55
		1	24	22.48	22.29	22.41
		12	0	21.49	21.38	21.55
		12	6	21.48	21.44	21.59
		12	13	21.56	21.41	21.51
		25	0	21.45	21.45	21.63

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39700	40620	41540
10MHz	QPSK	1	0	23.18	23.00	23.11
		1	24	23.44	23.30	23.39
		1	49	23.14	23.04	23.11
		25	0	22.08	22.09	22.14
		25	12	22.02	22.08	22.15
		25	25	22.21	22.08	22.07
		50	0	22.11	22.02	22.13
	16QAM	1	0	21.91	21.75	22.10
		1	24	22.17	22.07	22.38
		1	49	21.88	21.78	22.06
		25	0	21.06	21.10	21.20
		25	12	21.04	21.10	21.15
		25	25	21.17	21.07	21.10
		50	0	21.12	21.03	21.16

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39725	40620	41515
15MHz	QPSK	1	0	23.48	23.22	23.46
		1	24	23.52	23.41	23.57
		1	49	23.40	23.31	23.41
		25	0	22.44	22.37	22.22
		25	12	22.51	22.49	22.35
		25	25	22.36	22.38	22.17
		50	0	22.62	22.48	22.56
	16QAM	1	0	22.47	22.39	22.19
		1	24	22.53	22.49	22.29
		1	49	22.36	22.41	22.14
		25	0	22.45	22.37	22.21
		25	12	22.53	22.50	22.33
		25	25	22.34	22.41	22.16
		50	0	21.53	21.45	21.55

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39750	40620	41490
20MHz	QPSK	1	0	23.30	23.18	23.33
		1	24	23.75	23.74	23.77
		1	49	23.19	23.25	23.35
		25	0	22.38	22.47	22.61
		25	12	22.37	22.46	22.59
		25	25	22.52	22.40	22.48
		50	0	22.51	22.44	22.53
	16QAM	1	0	22.07	22.04	22.42
		1	24	22.55	22.63	22.90
		1	49	22.02	22.11	22.42
		25	0	21.38	21.47	21.69
		25	12	21.40	21.41	21.68
		25	25	21.61	21.40	21.53
		50	0	21.48	21.46	21.59

The reduced of Conducted power measurements of LTE Band 41

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39675	40620	41565
5MHz	QPSK	1	0	19.50	19.40	19.58
		1	12	19.68	19.59	19.72
		1	24	19.47	19.42	19.55
		12	0	18.55	18.47	18.60
		12	6	18.54	18.46	18.61
		12	13	18.60	18.48	18.54
		25	0	18.53	18.47	18.54
	16QAM	1	0	18.53	18.30	18.46
		1	13	18.66	18.46	18.58
		1	24	18.51	18.32	18.44
		12	0	17.52	17.41	17.58
		12	6	17.51	17.47	17.62
		12	13	17.59	17.44	17.54
		25	0	19.50	19.40	19.58

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39700	40620	41540
10MHz	QPSK	1	0	19.64	19.46	19.57
		1	24	19.70	19.72	19.65
		1	49	19.60	19.50	19.57
		25	0	18.54	18.55	18.60
		25	12	18.48	18.54	18.61
		25	25	18.67	18.54	18.53
		50	0	18.57	18.48	18.59
	16QAM	1	0	18.37	18.21	18.56
		1	24	18.63	18.53	18.84
		1	49	18.34	18.24	18.52
		25	0	17.52	17.56	17.66
		25	12	17.50	17.56	17.61
		25	25	17.63	17.53	17.56
		50	0	19.64	19.46	19.57

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39725	40620	41515
15MHz	QPSK	1	0	19.51	19.25	19.49
		1	24	19.55	19.44	19.60
		1	49	19.43	19.34	19.44
		25	0	18.47	18.40	18.25
		25	12	18.54	18.52	18.38
		25	25	18.39	18.41	18.20
		50	0	18.65	18.51	18.59
	16QAM	1	0	18.50	18.42	18.22
		1	24	18.56	18.52	18.32
		1	49	18.39	18.44	18.17
		25	0	18.48	18.40	18.24
		25	12	18.56	18.53	18.36
		25	25	18.37	18.44	18.19
		50	0	19.51	19.25	19.49

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39750	40620	41490
20MHz	QPSK	1	0	19.33	19.21	19.36
		1	24	19.78	19.77	19.80
		1	49	19.22	19.28	19.38
		25	0	18.41	18.50	18.64
		25	12	18.40	18.49	18.62
		25	25	18.55	18.43	18.51
		50	0	18.54	18.47	18.56
	16QAM	1	0	18.10	18.07	18.45
		1	24	18.58	18.66	18.93
		1	49	18.05	18.14	18.45
		25	0	17.41	17.50	17.72
		25	12	17.43	17.44	17.71
		25	25	17.64	17.43	17.56
		50	0	19.33	19.21	19.36

Conducted power measurements of LTE Band 66

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131997	132322	132647
1.4MHz	QPSK	1	0	23.59	23.42	23.65
		1	12	23.60	23.57	23.68
		1	24	23.53	23.43	23.64
		12	0	23.62	23.54	23.69
		12	6	23.62	23.55	23.69
		12	13	23.66	23.57	23.71
		25	0	22.58	22.50	22.64
	16QAM	1	0	22.38	22.17	22.44
		1	13	22.57	22.33	22.63
		1	24	22.36	22.17	22.46
		12	0	22.44	22.28	22.47
		12	6	22.46	22.30	22.48
		12	13	22.39	22.28	22.48
		25	0	21.40	21.44	21.50

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132022	132322	132622
3MHz	QPSK	1	0	23.57	23.52	23.71
		1	24	23.61	23.57	23.68
		1	49	23.59	23.51	23.66
		25	0	22.59	22.49	22.68
		25	12	22.57	22.54	22.70
		25	25	22.60	22.46	22.63
		50	0	22.50	22.49	22.60
	16QAM	1	0	22.62	22.39	22.40
		1	24	22.58	22.37	22.45
		1	49	22.56	22.29	22.43
		25	0	21.55	21.47	21.67
		25	12	21.57	21.45	21.70
		25	25	21.59	21.38	21.62
		50	0	21.52	21.39	21.54

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131997	132322	132647
5MHz	QPSK	1	0	23.55	23.50	23.55
		1	12	23.64	23.63	23.69
		1	24	23.53	23.49	23.53
		12	0	22.51	22.52	22.63
		12	6	22.52	22.51	22.66
		12	13	22.54	22.49	22.64
		25	0	22.56	22.49	22.67
	16QAM	1	0	22.39	22.38	22.63
		1	13	22.54	22.50	22.76
		1	24	22.40	22.40	22.58
		12	0	21.45	21.45	21.65
		12	6	21.50	21.49	21.67
		12	13	21.54	21.41	21.62
		25	0	21.60	21.54	21.58

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132022	132322	132622
10MHz	QPSK	1	0	23.58	23.47	23.55
		1	24	23.69	23.70	23.66
		1	49	23.52	23.43	23.59
		25	0	22.59	22.54	22.70
		25	12	22.57	22.53	22.64
		25	25	22.57	22.47	22.66
		50	0	22.59	22.47	22.64
	16QAM	1	0	22.41	22.17	22.53
		1	24	22.51	22.30	22.69
		1	49	22.35	22.20	22.61
		25	0	21.57	21.55	21.64
		25	12	21.55	21.52	21.65
		25	25	21.60	21.51	21.60
		50	0	21.60	21.51	21.59

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132047	132322	132597
15MHz	QPSK	1	0	23.53	23.29	23.45
		1	24	23.53	23.41	23.67
		1	49	23.42	23.33	23.50
		25	0	22.46	22.39	22.22
		25	12	22.52	22.53	22.42
		25	25	22.36	22.48	22.33
		50	0	22.55	22.54	22.62
	16QAM	1	0	22.46	22.44	22.20
		1	24	22.56	22.58	22.42
		1	49	22.40	22.45	22.28
		25	0	22.45	22.42	22.21
		25	12	22.55	22.53	22.38
		25	25	22.36	22.44	22.32
		50	0	21.48	21.52	21.61

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132072	132322	132572
20MHz	QPSK	1	0	23.69	23.56	23.60
		1	24	23.77	23.75	23.75
		1	49	23.63	23.67	23.72
		25	0	22.88	22.98	22.76
		25	12	22.88	22.96	22.75
		25	25	22.98	22.84	22.94
		50	0	22.90	22.91	22.92
	16QAM	1	0	22.53	22.53	22.68
		1	24	22.77	22.97	23.21
		1	49	22.47	22.61	22.93
		25	0	21.94	21.95	21.88
		25	12	21.93	21.97	21.88
		25	25	22.04	21.87	22.02
		50	0	21.93	21.93	21.88

The reduced of Conducted power measurements of LTE Band 66

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131997	132322	132647
1.4MHz	QPSK	1	0	18.15	17.98	18.21
		1	12	18.16	18.13	18.34
		1	24	18.09	17.99	18.20
		12	0	18.18	18.10	18.25
		12	6	18.18	18.11	18.25
		12	13	18.22	18.13	18.27
		25	0	17.14	17.06	17.20
	16QAM	1	0	16.94	16.73	17.00
		1	13	17.13	16.89	17.19
		1	24	16.92	16.73	17.02
		12	0	17.00	16.84	17.03
		12	6	17.02	16.86	17.04
		12	13	16.95	16.84	17.04
		25	0	18.15	17.98	18.21

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132022	132322	132622
3MHz	QPSK	1	0	18.13	18.08	18.27
		1	24	18.17	18.13	18.24
		1	49	18.15	18.07	18.22
		25	0	17.15	17.05	17.24
		25	12	17.13	17.10	17.26
		25	25	17.16	17.02	17.19
		50	0	17.06	17.05	17.16
	16QAM	1	0	17.18	16.95	16.96
		1	24	17.14	16.93	17.01
		1	49	17.12	16.85	16.99
		25	0	16.11	16.03	16.23
		25	12	16.13	16.01	16.26
		25	25	16.15	15.94	16.18
		50	0	18.13	18.08	18.27

.Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131997	132322	132647
5MHz	QPSK	1	0	18.11	18.06	18.11
		1	12	18.20	18.19	18.25
		1	24	18.09	18.05	18.09
		12	0	17.07	17.08	17.19
		12	6	17.08	17.07	17.22
		12	13	17.10	17.05	17.20
		25	0	17.12	17.05	17.23
	16QAM	1	0	16.95	16.94	17.19
		1	13	17.10	17.06	17.32
		1	24	16.96	16.96	17.14
		12	0	16.01	16.01	16.21
		12	6	16.06	16.05	16.23
		12	13	16.10	15.97	16.18
		25	0	18.11	18.06	18.11

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132022	132322	132622
10MHz	QPSK	1	0	18.14	18.03	18.11
		1	24	18.25	18.26	18.22
		1	49	18.08	17.99	18.15
		25	0	17.15	17.10	17.26
		25	12	17.13	17.09	17.20
		25	25	17.13	17.03	17.22
		50	0	17.15	17.03	17.20
	16QAM	1	0	16.97	16.73	17.09
		1	24	17.07	16.86	17.25
		1	49	16.91	16.76	17.17
		25	0	16.13	16.11	16.20
		25	12	16.11	16.08	16.21
		25	25	16.16	16.07	16.16
		50	0	18.14	18.03	18.11

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132047	132322	132597
15MHz	QPSK	1	0	18.09	17.85	18.01
		1	24	18.09	17.97	18.23
		1	49	17.98	17.89	18.06
		25	0	17.02	16.95	16.78
		25	12	17.08	17.09	16.98
		25	25	16.92	17.04	16.89
		50	0	17.11	17.10	17.18
	16QAM	1	0	17.02	17.00	16.76
		1	24	17.12	17.14	16.98
		1	49	16.96	17.01	16.84
		25	0	17.01	16.98	16.77
		25	12	17.11	17.09	16.94
		25	25	16.92	17.00	16.88
		50	0	18.09	17.85	18.01

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132072	132322	132572
20MHz	QPSK	1	0	17.82	17.69	17.73
		1	24	18.43	18.47	18.44
		1	49	17.76	17.80	17.95
		25	0	17.01	17.11	16.99
		25	12	17.01	17.09	16.98
		25	25	17.11	16.97	17.07
		50	0	17.03	17.04	17.05
	16QAM	1	0	16.66	16.66	16.81
		1	24	16.90	17.10	17.34
		1	49	16.60	16.74	17.06
		25	0	16.07	16.08	16.01
		25	12	16.06	16.10	16.01
		25	25	16.17	16.00	16.15
		50	0	17.82	17.69	17.73

802.11b (dBm)					
Channel	Frequency (MHz)	Data Rate (bps)			
		1M	2M	5.5M	11M
CH 01	2,412	16.51	16.39	16.34	16.23
CH 06	2,437	16.55	16.21	16.18	16.24
CH 11	2,462	16.34	16.04	15.70	15.68

802.11g (dBm)									
Channel	Frequency (MHz)	Data Rate (bps)							
		6M	9M	12M	18M	24M	36M	48M	54M
CH 01	2,412	16.31	15.56	15.61	15.53	15.45	15.33	15.11	14.99
CH 06	2,437	16.38	16.19	16.16	16.22	16.27	15.94	15.66	15.51
CH 11	2,462	16.33	16.16	16.11	15.91	15.96	15.86	15.48	15.34

802.11n-HT20 (dBm)									
Channel	Frequency (MHz)	Data Rate (bps)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2,412	15.51	14.78	14.75	14.69	14.56	14.34	14.22	13.86
CH 06	2,437	15.51	15.39	15.40	15.24	15.14	14.78	14.69	14.50
CH 11	2,462	15.53	15.32	15.09	15.21	15.08	14.75	14.53	14.16

The reduced power of 802.11b (dBm)					
Channel	Frequency (MHz)	Data Rate (bps)			
		1M	2M	5.5M	11M
CH 01	2,412	15.11	14.99	14.94	14.83
CH 06	2,437	15.16	14.82	14.79	14.85
CH 11	2,462	15.12	14.82	14.48	14.46

The Simultaneous Transmission reduced power of 802.11b (dBm)					
Channel	Frequency (MHz)	Data Rate (bps)			
		1M	2M	5.5M	11M
CH 01	2,412	16.07	15.95	15.90	15.79
CH 06	2,437	16.16	15.82	15.79	15.85
CH 11	2,462	16.10	15.80	15.46	15.44

The reduced power of 802.11g (dBm)									
Channel	Frequency (MHz)	Data Rate (bps)							
		6M	9M	12M	18M	24M	36M	48M	54M
CH 01	2,412	14.51	13.76	13.81	13.73	13.65	13.53	13.31	13.19
CH 06	2,437	14.39	14.20	14.17	14.23	14.28	13.95	13.67	13.52
CH 11	2,462	14.48	14.31	14.26	14.06	14.11	14.01	13.63	13.49

The reduced power of 802.11n-HT20 (dBm)									
Channel	Frequency (MHz)	Data Rate (bps)							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2,412	13.81	13.08	13.05	12.99	12.86	12.64	12.52	12.16
CH 06	2,437	13.71	13.59	13.60	13.44	13.34	12.98	12.89	12.70
CH 11	2,462	13.63	13.42	13.19	13.31	13.18	12.85	12.63	12.26

Bluetooth 2.4GHz Band Conducted Power		
Channel	Frequency(MHz)	Average Power (dBm)
CH 0	2,402	7.10
CH 39	2,441	7.04
CH 78	2,480	7.06

BLE2.4GHz Band Conducted Power		
Channel	Frequency(MHz)	Average Power (dBm)
CH 0	2,402	-2.27
CH 19	2,440	-0.71
CH 39	2,480	-1.48

9.2. SAR measurement Results

General Notes:

- 1) Per KDB447498 D01v06, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v06, testing of other required channels within the operating mode of a

frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> 1/2$ dB, instead of the middle channel, the highest output power channel must be used.

- 3) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measure SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- 4) Per KDB 941225 D06 Hotspot Mode SAR v02:r01, the DUT dimension is bigger than 9cm*5cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04v01r03, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan plots-processing (refer to appendix B for details).

9.3. WLAN Notes

Per KDB 248227 D01v02r02, for all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Per KDB 248227 D01v02r02, for 802.11g/n SAR testing is required. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is > 1.2 W/kg.

Per KDB 248227 D01v02r02, for OFDM transmission configurations in the 2.4 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency

band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n mode is used for SAR measurement, on the highest measured output power channel for each frequency band.

9.3. GSM850 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GSM(CS)	Left Cheek	190	836.6	33.24	33.30	1.014	0.108	0.110
GSM(CS)	Left Tilted	190	836.6	33.24	33.30	1.014	0.046	0.047
GSM(CS)	Right Cheek	190	836.6	33.24	33.30	1.014	0.182	0.185
GSM(CS)	Right Tilted	190	836.6	33.24	33.30	1.014	0.057	0.058
GSM(CS)(sim2)	Left Tilted	190	836.6	33.24	33.30	1.014	0.179	0.181

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GPRS (GMSK, 2 Tx slots)	Front Side	190	836.6	31.82	32.50	1.169	0.101	0.118
GPRS (GMSK, 2 Tx slots)	Back Side	190	836.6	31.82	32.50	1.169	0.292	0.341
GPRS (GMSK, 2 Tx slots)	Left Side	190	836.6	31.82	32.50	1.169	0.051	0.060
GPRS (GMSK, 2 Tx slots)	Right Side	190	836.6	31.82	32.50	1.169	0.04	0.047
GPRS (GMSK, 2 Tx slots)	Top Side	190	836.6	31.82	32.50	1.169	0.013	0.015
GPRS (GMSK, 2 Tx slots)	Bottom Side	190	836.6	31.82	32.50	1.169	0.205	0.240
GPRS (GMSK, 2 Tx slots)	Back Side	190	836.6	31.82	32.50	1.169	0.271	0.317

GPRS (GMSK, 2 Tx slots)(battery 2#)	Back Side	190	836.6	31.82	32.50	1.169	0.289	0.338
---	-----------	-----	-------	-------	-------	-------	-------	-------

Body Hotspot Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GPRS (GMSK, 2 Tx slots)	Front Side	190	836.6	31.82	32.50	1.169	0.520	0.608
GPRS (GMSK, 2 Tx slots)	Back Side	190	836.6	31.82	32.50	1.169	0.801	0.936
GPRS (GMSK, 2 Tx slots)	Left Side	190	836.6	31.82	32.50	1.169	0.160	0.187
GPRS (GMSK, 2 Tx slots)	Right Side	190	836.6	31.82	32.50	1.169	0.630	0.736
GPRS (GMSK, 2 Tx slots)	Top Side	190	836.6	31.82	32.50	1.169	0.310	0.362
GPRS (GMSK, 2 Tx slots)	Bottom Side	190	836.6	31.82	32.50	1.169	0.150	0.175
GPRS (GMSK, 2 Tx slots)	Back Side	190	836.6	31.82	32.50	1.169	0.787	0.920
GPRS (GMSK, 2 Tx slots)(battery 2#)	Back Side	190	836.6	31.82	32.50	1.169	0.789	0.922

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GSM(CS)	Front Side	190	836.6	33.24	33.30	1.014	0.083	0.084
GSM(CS)	Back Side	190	836.6	33.24	33.30	1.014	0.132	0.134
GSM(CS)	Back Side	190	836.6	33.24	33.30	1.014	0.125	0.127

9.4.PCS1900 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GSM(CS)	Left Cheek	661	1880	28.68	30.30	1.452	0.079	0.115
GSM(CS)	Left Tilted	661	1880	28.68	30.30	1.452	0.023	0.033
GSM(CS)	Right Cheek	661	1880	28.68	30.30	1.452	0.111	0.161
GSM(CS)	Right Tilted	661	1880	28.68	30.30	1.452	0.041	0.060
GSM(CS) (sim2)	Right Cheek	661	1880	28.68	30.30	1.452	0.101	0.147

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GPRS (GMSK, 2 Tx slots)	Front Side	661	1880	23.26	23.30	1.009	0.063	0.064
GPRS (GMSK, 2 Tx slots)	Back Side	661	1880	23.26	23.30	1.009	0.131	0.132
GPRS (GMSK, 2 Tx slots)	Left Side	661	1880	23.26	23.30	1.009	0.037	0.037
GPRS (GMSK, 2 Tx slots)	Right Side	661	1880	23.26	23.30	1.009	0.016	0.016
GPRS (GMSK, 2 Tx slots)	Top Side	661	1880	23.26	23.30	1.009	0.007	0.007
GPRS (GMSK, 2 Tx slots)	Bottom Side	661	1880	23.26	23.30	1.009	0.105	0.106
GPRS (GMSK, 2 Tx slots, SIM2)	Back Side	661	1880	23.26	23.30	1.009	0.121	0.122

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GSM(CS)	Front Side	661	1880	20.24	21.00	1.191	0.089	0.106
GSM(CS)	Back Side	661	1880	20.24	21.00	1.191	0.126	0.150
GSM(CS)	Back Side	661	1880	20.24	21.00	1.191	0.121	0.144

9.5.WCDMA II SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GSM(CS)	Left Cheek	661	1880	23.48	23.80	1.076	0.105	0.113
GSM(CS)	Left Tilted	661	1880	23.48	23.80	1.076	0.047	0.051
GSM(CS)	Right Cheek	661	1880	23.48	23.80	1.076	0.162	0.174
GSM(CS)	Right Tilted	661	1880	23.48	23.80	1.076	0.061	0.066
GSM(CS)(sim 2)	Right Cheek	661	1880	23.48	23.80	1.076	0.158	0.170

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	661	1880	18.51	18.80	1.069	0.042	0.045
RMC	Back Side	661	1880	18.51	18.80	1.069	0.083	0.089
RMC	Left Side	661	1880	18.51	18.80	1.069	0.033	0.035
RMC	Right Side	661	1880	18.51	18.80	1.069	0.02	0.021
RMC	Top Side	661	1880	18.51	18.80	1.069	0.008	0.009
RMC	Bottom Side	661	1880	18.51	18.80	1.069	0.071	0.076
RMC	Back Side	661	1880	18.51	18.80	1.069	0.076	0.081

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
------	---------------	-----	-------------	---------------------------	---------------------	----------------	---------------------	---------------------

RMC	Front Side	661	1880	18.51	18.80	1.069	0.039	0.042
RMC	Back Side	661	1880	18.51	18.80	1.069	0.052	0.056
RMC	Back Side	661	1880	18.51	18.80	1.069	0.048	0.051

9.6.WCDMA IV SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Left Cheek	1412	1732.4	23.42	24.10	1.169	0.116	0.136
RMC	Left Tilted	1412	1732.4	23.42	24.10	1.169	0.041	0.048
RMC	Right Cheek	1412	1732.4	23.42	24.10	1.169	0.277	0.324
RMC	Right Tilted	1412	1732.4	23.42	24.10	1.169	0.058	0.068
RMC	Right Cheek	1412	1732.4	23.42	24.10	1.169	0.269	0.315

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	1412	1732.4	18.45	19.10	1.161	0.032	0.037
RMC	Back Side	1412	1732.4	18.45	19.10	1.161	0.069	0.080
RMC	Left Side	1412	1732.4	18.45	19.10	1.161	0.019	0.022
RMC	Right Side	1412	1732.4	18.45	19.10	1.161	0.011	0.013
RMC	Top Side	1412	1732.4	18.45	19.10	1.161	0.005	0.006
RMC	Bottom Side	1412	1732.4	18.45	19.10	1.161	0.043	0.050
RMC	Back Side	1412	1732.4	18.45	19.10	1.161	0.062	0.072

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	1412	1732.4	23.42	24.10	1.169	0.037	0.043
RMC	Back Side	1412	1732.4	23.42	24.10	1.169	0.073	0.085
RMC	Back Side	1412	1732.4	23.42	24.10	1.169	0.068	0.079

9.7.WCDMA V SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Left Cheek	4182	836.4	23.53	24.10	1.140	0.131	0.149
RMC	Left Tilted	4182	836.4	23.53	24.10	1.140	0.039	0.044
RMC	Right Cheek	4182	836.4	23.53	24.10	1.140	0.177	0.202
RMC	Right Tilted	4182	836.4	23.53	24.10	1.140	0.042	0.048
RMC(sim2)	Right Cheek	4182	836.4	23.53	24.10	1.140	0.041	0.047

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	4182	836.4	23.53	24.10	1.140	0.107	0.122
RMC	Back Side	4182	836.4	23.53	24.10	1.140	0.269	0.307
RMC	Left Side	4182	836.4	23.53	24.10	1.140	0.053	0.060
RMC	Right Side	4182	836.4	23.53	24.10	1.140	0.038	0.043
RMC	Top Side	4182	836.4	23.53	24.10	1.140	0.011	0.013
RMC	Bottom Side	4182	836.4	23.53	24.10	1.140	0.217	0.247
RMC	Back Side	4182	836.4	23.53	24.10	1.140	0.261	0.298

Body Hotspot Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
------	---------------	-----	-------------	---------------------------	---------------------	----------------	---------------------	---------------------

RMC	Front Side	4182	836.4	23.53	24.10	1.140	0.860	0.980
RMC	Back Side	4182	836.4	23.53	24.10	1.140	1.450	1.653
RMC	Left Side	4182	836.4	23.53	24.10	1.140	0.590	0.673
RMC	Right Side	4182	836.4	23.53	24.10	1.140	0.480	0.547
RMC	Top Side	4182	836.4	23.53	24.10	1.140	0.230	0.262
RMC	Bottom Side	4182	836.4	23.53	24.10	1.140	1.370	1.562
RMC	Back Side	4182	836.4	23.53	24.10	1.140	1.421	1.620

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	4182	836.4	23.53	24.10	1.140	0.088	0.100
RMC	Back Side	4182	836.4	23.53	24.10	1.140	0.124	0.141
RMC	Back Side	4182	836.4	23.53	24.10	1.140	0.119	0.136

9.8.LTE Band 2 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Left Cheek	18900	1880	23.76	23.80	1.009	0.081	0.082
20M QPSK (1#25)	Left Tilted	18900	1880	23.76	23.80	1.009	0.034	0.034
20M QPSK (1#25)	Right Cheek	18900	1880	23.76	23.80	1.009	0.097	0.098
20M QPSK (1#25)	Right Tilted	18900	1880	23.76	23.80	1.009	0.049	0.049
20M QPSK (1#25)(50%)	Right Cheek	18900	1880	23.76	23.80	1.009	0.093	0.094

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	18900	1880	18.76	18.80	1.009	0.103	0.104
20M QPSK (1#25)	Back Side	18900	1880	18.76	18.80	1.009	0.276	0.279
20M QPSK (1#25)	Left Side	18900	1880	18.76	18.80	1.009	0.046	0.046
20M QPSK (1#25)	Right Side	18900	1880	18.76	18.80	1.009	0.029	0.029
20M QPSK (1#25)	Top Side	18900	1880	18.76	18.80	1.009	0.008	0.008
20M QPSK (1#25)	Bottom Side	18900	1880	18.76	18.80	1.009	0.236	0.238
20M QPSK (1#25)(50%)	Back Side	18900	1880	18.76	18.80	1.009	0.271	0.274

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	4182	836.4	18.76	18.80	1.009	0.068	0.069
20M QPSK (1#25)	Back Side	4182	836.4	18.76	18.80	1.009	0.123	0.124
20M QPSK (1#25)(50%)	Back Side	4182	836.4	18.76	18.80	1.009	0.121	0.122

9.9.LTE Band 4 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Left Cheek	20175	1732.5	23.73	23.80	1.016	0.017	0.017
20M QPSK (1#25)	Left Tilted	20175	1732.5	23.73	23.80	1.016	0.008	0.008
20M QPSK (1#25)	Right Cheek	20175	1732.5	23.73	23.80	1.016	0.026	0.026
20M QPSK (1#25)	Right Tilted	20175	1732.5	23.73	23.80	1.016	0.011	0.011
20M QPSK (1#25)(50%)	Right Cheek	20175	1732.5	23.73	23.80	1.016	0.023	0.023

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	20175	1732.5	18.57	18.80	1.054	0.065	0.069
20M QPSK (1#25)	Back Side	20175	1732.5	18.57	18.80	1.054	0.096	0.101
20M QPSK (1#25)	Left Side	20175	1732.5	18.57	18.80	1.054	0.032	0.034
20M QPSK (1#25)	Right Side	20175	1732.5	18.57	18.80	1.054	0.019	0.020
20M QPSK (1#25)	Top Side	20175	1732.5	18.57	18.80	1.054	0.006	0.006
20M QPSK (1#25)	Bottom Side	20175	1732.5	18.57	18.80	1.054	0.072	0.076
20M QPSK (1#25)(50%)	Back Side	20050	1720.0	18.57	18.80	1.054	0.093	0.098

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	20175	1732.5	18.57	18.80	1.054	0.021	0.022
20M QPSK (1#25)	Back Side	20175	1732.5	18.57	18.80	1.054	0.036	0.038
20M QPSK (1#25)(50%)	Back Side	20175	1732.5	18.57	18.80	1.054	0.035	0.037

9.10. LTE Band 5 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Left Cheek	20525	836.5	23.60	24.30	1.175	0.106	0.125
20M QPSK (1#25)	Left Tilted	20525	836.5	23.60	24.30	1.175	0.042	0.049
20M QPSK (1#25)	Right Cheek	20525	836.5	23.60	24.30	1.175	0.184	0.216
20M QPSK (1#25)	Right Tilted	20525	836.5	23.60	24.30	1.175	0.055	0.065
20M QPSK (1#25)(50%)	Right Cheek	20525	836.5	23.60	24.30	1.175	0.178	0.209

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	20525	836.5	23.60	24.30	1.175	0.103	0.121
20M QPSK (1#25)	Back Side	20525	836.5	23.60	24.30	1.175	0.287	0.337
20M QPSK (1#25)	Left Side	20525	836.5	23.60	24.30	1.175	0.051	0.060
20M QPSK (1#25)	Right Side	20525	836.5	23.60	24.30	1.175	0.033	0.039
20M QPSK (1#25)	Top Side	20525	836.5	23.60	24.30	1.175	0.011	0.013
20M QPSK (1#25)	Bottom Side	20525	836.5	23.60	24.30	1.175	0.253	0.297

20M QPSK (1#25)(50%)	Back Side	20525	836.5	23.60	24.30	1.175	0.278	0.327
-------------------------	-----------	-------	-------	-------	-------	-------	-------	-------

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	20525	836.5	23.60	24.30	1.175	0.079	0.093
20M QPSK (1#25)	Back Side	20525	836.5	23.60	24.30	1.175	0.131	0.154
20M QPSK (1#25)(50%)	Back Side	20525	836.5	23.60	24.30	1.175	0.124	0.146

9.11. LTE Band 7 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Left Cheek	21100	2535	22.34	23.30	1.247	0.032	0.040
20M QPSK (1#25)	Left Tilted	21100	2535	22.34	23.30	1.247	0.011	0.014
20M QPSK (1#25)	Right Cheek	21100	2535	22.34	23.30	1.247	0.06	0.075
20M QPSK (1#25)	Right Tilted	21100	2535	22.34	23.30	1.247	0.02	0.025
20M QPSK (1#25)(50%)	Right Cheek	21100	2535	22.34	23.30	1.247	0.057	0.071

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	21100	2535	20.38	21.30	1.236	0.317	0.392
20M QPSK (1#25)	Back Side	21100	2535	20.38	21.30	1.236	0.521	0.644
20M QPSK (1#25)	Left Side	21100	2535	20.38	21.30	1.236	0.169	0.209
20M QPSK (1#25)	Right Side	21100	2535	20.38	21.30	1.236	0.179	0.221
20M QPSK (1#25)	Top Side	21100	2535	20.38	21.30	1.236	0.081	0.100
20M QPSK (1#25)	Bottom Side	21100	2535	20.38	21.30	1.236	0.494	0.611
20M QPSK (1#25)(50%)	Back Side	21100	2535	20.38	21.30	1.236	0.51	0.630

Body Hotspot Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	21100	2535	20.38	21.30	1.236	0.760	0.939
20M QPSK (1#25)	Back Side	21100	2535	20.38	21.30	1.236	1.400	1.730
20M QPSK (1#25)	Left Side	21100	2535	20.38	21.30	1.236	0.540	0.667
20M QPSK (1#25)	Right Side	21100	2535	20.38	21.30	1.236	0.460	0.569
20M QPSK (1#25)	Top Side	21100	2535	20.38	21.30	1.236	0.170	0.210
20M QPSK (1#25)	Bottom Side	21100	2535	20.38	21.30	1.236	1.230	1.520
20M QPSK (1#25)(50%)	Back Side	21100	2535	20.38	21.30	1.236	1.358	1.678

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	21100	2535	22.34	23.30	1.247	0.058	0.072
20M QPSK (1#25)	Back Side	21100	2535	22.34	23.30	1.247	0.105	0.131
20M QPSK (1#25)(50%)	Back Side	21100	2535	22.34	23.30	1.247	0.101	0.126

9.12. LTE Band12 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Left Cheek	23095	707.5	23.65	24.30	1.161	0.096	0.111
20M QPSK (1#25)	Left Tilted	23095	707.5	23.65	24.30	1.161	0.042	0.049
20M QPSK (1#25)	Right Cheek	23095	707.5	23.65	24.30	1.161	0.134	0.156
20M QPSK (1#25)	Right Tilted	23095	707.5	23.65	24.30	1.161	0.057	0.066
20M QPSK (1#25)(50%)	Right Cheek	23095	707.5	23.65	24.30	1.161	0.128	0.149

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	23095	707.5	23.65	24.30	1.161	0.109	0.127
20M QPSK (1#25)	Back Side	23095	707.5	23.65	24.30	1.161	0.208	0.242
20M QPSK (1#25)	Left Side	23095	707.5	23.65	24.30	1.161	0.012	0.014
20M QPSK (1#25)	Right Side	23095	707.5	23.65	24.30	1.161	0.197	0.229
20M QPSK (1#25)	Top Side	23095	707.5	23.65	24.30	1.161	0.043	0.050
20M QPSK (1#25)	Bottom Side	23095	707.5	23.65	24.30	1.161	0.022	0.026
20M QPSK (1#25)(50%)	Back Side	23095	707.5	23.65	24.30	1.161	0.196	0.228

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	23095	707.5	23.65	24.30	1.161	0.102	0.118
20M QPSK (1#25)	Back Side	23095	707.5	23.65	24.30	1.161	0.182	0.211
20M QPSK (1#25)(50%)	Back Side	23095	707.5	23.65	24.30	1.161	0.178	0.207
20M QPSK (1#25)(battery 2#)	Back Side	23095	707.5	23.65	24.30	1.161	0.180	0.209

20M QPSK (1#25)	Back Side	23095	707.5	23.65	24.30	1.161	0.185	0.215
--------------------	-----------	-------	-------	-------	-------	-------	-------	-------

9.13. LTE Band17 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#24)	Left Cheek	23790	710	23.54	24.10	1.138	0.123	0.140
10M QPSK (1#24)	Left Tilted	23790	710	23.54	24.10	1.138	0.043	0.049
10M QPSK (1#24)	Right Cheek	23790	710	23.54	24.10	1.138	0.143	0.163
10M QPSK (1#24)	Right Tilted	23790	710	23.54	24.10	1.138	0.058	0.066
10M QPSK (1#24)	Right Cheek	23790	710	23.54	24.10	1.138	0.137	0.156

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#24)	Front Side	23790	710	23.54	24.10	1.138	0.105	0.119
10M QPSK (1#24)	Back Side	23790	710	23.54	24.10	1.138	0.214	0.243
10M QPSK (1#24)	Left Side	23790	710	23.54	24.10	1.138	0.051	0.058
10M QPSK (1#24)	Right Side	23790	710	23.54	24.10	1.138	0.037	0.042
10M QPSK (1#24)	Top Side	23790	710	23.54	24.10	1.138	0.008	0.009
10M QPSK (1#24)	Bottom Side	23790	710	23.54	24.10	1.138	0.201	0.229

10M QPSK (1#24) (50%)	Back Side	23790	710	23.54	24.10	1.138	0.211	0.240
--------------------------	-----------	-------	-----	-------	-------	-------	-------	-------

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#24)	Front Side	23790	710	23.54	24.10	1.138	0.106	0.121
10M QPSK (1#24)	Back Side	23790	710	23.54	24.10	1.138	0.188	0.214
10M QPSK (1#24) (50%)	Back Side	23790	710	23.54	24.10	1.138	0.182	0.207

9.14. LTE Band26 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK (1#12)	Left Cheek	26865	831.5	23.36	24.10	1.186	0.106	0.126
5M QPSK (1#12)	Left Tilted	26865	831.5	23.36	24.10	1.186	0.034	0.040
5M QPSK (1#12)	Right Cheek	26865	831.5	23.36	24.10	1.186	0.173	0.205
5M QPSK (1#12)	Right Tilted	26865	831.5	23.36	24.10	1.186	0.052	0.062
5M QPSK (1#12)(50%)	Right Cheek	26865	831.5	23.36	24.10	1.186	0.168	0.199

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK (1#12)	Front Side	26865	831.5	23.36	24.10	1.186	0.123	0.146
5M QPSK (1#12)	Back Side	26865	831.5	23.36	24.10	1.186	0.217	0.257
5M QPSK (1#12)	Left Side	26865	831.5	23.36	24.10	1.186	0.054	0.064
5M QPSK (1#12)	Right Side	26865	831.5	23.36	24.10	1.186	0.032	0.038
5M QPSK (1#12)	Top Side	26865	831.5	23.36	24.10	1.186	0.011	0.013
5M QPSK (1#12)	Bottom Side	26865	831.5	23.36	24.10	1.186	0.209	0.248
5M QPSK (1#12)(50%)	Back Side	26865	831.5	23.36	24.10	1.186	0.208	0.247

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK (1#12)	Front Side	26865	831.5	23.36	24.10	1.186	0.076	0.090
5M QPSK (1#12)	Back Side	26865	831.5	23.36	24.10	1.186	0.102	0.121
5M QPSK (1#12)(50%)	Back Side	26865	831.5	23.36	24.10	1.186	0.1	0.119

9.15. LTE Band 38 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#50)	Left Cheek	38000	2595	23.74	23.80	1.014	0.017	0.017
20M QPSK(1#50)	Left Tilted	38000	2595	23.74	23.80	1.014	0.008	0.008
20M QPSK(1#50)	Right Cheek	38000	2595	23.74	23.80	1.014	0.022	0.022
20M QPSK(1#50)	Right Tilted	38000	2595	23.74	23.80	1.014	0.01	0.010
20M QPSK(1#50)(50%)	Right Cheek	38000	2595	23.74	23.80	1.014	0.019	0.019

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#50)	Front Side	38000	2595	19.98	20.80	1.208	0.087	0.105
20M QPSK(1#50)	Back Side	38000	2595	19.98	20.80	1.208	0.138	0.167
20M QPSK(1#50)	Left Side	38000	2595	19.98	20.80	1.208	0.046	0.056
20M QPSK(1#50)	Right Side	38000	2595	19.98	20.80	1.208	0.029	0.035
20M QPSK(1#50)	Top Side	38000	2595	19.98	20.80	1.208	0.01	0.012
20M QPSK(1#50)	Bottom Side	38000	2595	19.98	20.80	1.208	0.116	0.140
20M QPSK(1#50) (50%)	Back Side	38000	2595	19.98	20.80	1.208	0.132	0.159

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
------	---------------	-----	-------------	---------------------	---------------------	----------------	---------------------	---------------------

				(dBm)				
20M QPSK(1#50)	Front Side	38000	2595	19.98	20.80	1.208	0.034	0.041
20M QPSK(1#50)	Back Side	38000	2595	19.98	20.80	1.208	0.067	0.081
20M QPSK(1#50) (50%)	Back Side	38000	2595	19.98	20.80	1.208	0.055	0.066

9.16. LTE Band 41 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#50)	Left Cheek	40620	2593.0	23.74	23.80	1.014	0.029	0.029
20M QPSK(1#50)	Left Tilted	40620	2593.0	23.74	23.80	1.014	0.009	0.009
20M QPSK(1#50)	Right Cheek	40620	2593.0	23.74	23.80	1.014	0.041	0.042
20M QPSK(1#50)	Right Tilted	40620	2593.0	23.74	23.80	1.014	0.015	0.015
20M QPSK(1#50)(50%)	Left Cheek	40620	2593.0	23.74	23.80	1.014	0.038	0.039

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#50)	Front Side	40620	2593.0	19.77	19.80	1.007	0.076	0.077
20M QPSK(1#50)	Back Side	40620	2593.0	19.77	19.80	1.007	0.150	0.151
20M QPSK(1#50)	Left Side	40620	2593.0	19.77	19.80	1.007	0.042	0.042
20M QPSK(1#50)	Right Side	40620	2593.0	19.77	19.80	1.007	0.028	0.028
20M QPSK(1#50)	Top Side	40620	2593.0	19.77	19.80	1.007	0.007	0.007
20M QPSK(1#50)	Bottom Side	40620	2593.0	19.77	19.80	1.007	0.106	0.107
20M QPSK(1#50) (50%)	Back Side	40620	2593.0	19.77	19.80	1.007	0.136	0.137

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#50)	Front Side	40620	2593.0	23.74	23.80	1.014	0.104	0.105
20M QPSK(1#50)	Back Side	40620	2593.0	23.74	23.80	1.014	0.165	0.167
20M QPSK(1#50) (50%)	Back Side	40620	2593.0	23.74	23.80	1.014	0.142	0.144

9.17. LTE Band66 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#50)	Left Cheek	132322	1745	23.75	23.80	1.012	0.015	0.015
20M QPSK(1#50)	Left Tilted	132322	1745	23.75	23.80	1.012	0.007	0.007
20M QPSK(1#50)	Right Cheek	132322	1745	23.75	23.80	1.012	0.022	0.022
20M QPSK(1#50)	Right Tilted	132322	1745	23.75	23.80	1.012	0.009	0.009
20M QPSK(1#50)(50%)	Right Cheek	132322	1745	23.75	23.80	1.012	0.02	0.020

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#50)	Front Side	132322	1745	18.47	18.80	1.079	0.068	0.073
20M QPSK(1#50)	Back Side	132322	1745	18.47	18.80	1.079	0.127	0.137
20M QPSK(1#50)	Left Side	132322	1745	18.47	18.80	1.079	0.034	0.037
20M QPSK(1#50)	Right Side	132322	1745	18.47	18.80	1.079	0.025	0.027
20M QPSK(1#50)	Top Side	132322	1745	18.47	18.80	1.079	0.008	0.009
20M QPSK(1#50)	Bottom Side	132322	1745	18.47	18.80	1.079	0.104	0.112
20M QPSK(1#50) (50%)	Bottom Side	132322	1745	18.47	18.80	1.079	0.121	0.131

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#50)	Front Side	132322	1745	18.47	18.80	1.079	0.037	0.040
20M QPSK(1#50)	Back Side	132322	1745	18.47	18.80	1.079	0.061	0.066
20M QPSK(1#50) (50%)	Back Side	132322	1745	18.47	18.80	1.079	0.057	0.061

9.18. Wi-Fi 2.4G SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11b	Left Cheek	6	2437	16.55	18.00	1.396	0.392	0.547
802.11b	Left Tilted	6	2437	16.55	18.00	1.396	0.121	0.169
802.11b	Right Cheek	6	2437	16.55	18.00	1.396	0.171	0.239
802.11b	Right Tilted	6	2437	16.55	18.00	1.396	0.097	0.135
802.11b	Left Cheek	6	2437	16.16	17.00	1.213	0.321	0.389
802.11b	Left Tilted	6	2437	16.16	17.00	1.213	0.12	0.146
802.11b	Right Cheek	6	2437	16.16	17.00	1.213	0.167	0.203
802.11b	Right Tilted	6	2437	16.16	17.00	1.213	0.089	0.108
802.11b	Left Cheek	6	2437	16.16	17.00	1.213	0.319	0.387

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11b	Front Side	6	2437	16.55	18.00	1.396	0.089	0.124
802.11b	Back Side	6	2437	16.55	18.00	1.396	0.116	0.162
802.11b	Left Side	6	2437	16.55	18.00	1.396	0.031	0.043
802.11b	Right Side	6	2437	16.55	18.00	1.396	0.069	0.096
802.11b	Top Side	6	2437	16.55	18.00	1.396	0.108	0.151
802.11b	Bottom Side	6	2437	16.55	18.00	1.396	0.013	0.018
802.11b	Front Side	6	2437	15.16	16.00	1.213	0.054	0.066
802.11b	Back Side	6	2437	15.16	16.00	1.213	0.061	0.074

802.11b	Left Side	6	2437	15.16	16.00	1.213	0.027	0.033
802.11b	Right Side	6	2437	15.16	16.00	1.213	0.033	0.040
802.11b	Top Side	6	2437	15.16	16.00	1.213	0.041	0.050
802.11b	Bottom Side	6	2437	15.16	16.00	1.213	0.011	0.013

Body Hotspot Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11b	Front Side	6	2437	16.55	18.00	1.396	0.415	0.579
802.11b	Back Side	6	2437	16.55	18.00	1.396	0.667	0.931
802.11b	Left Side	6	2437	16.55	18.00	1.396	0.278	0.388
802.11b	Right Side	6	2437	16.55	18.00	1.396	0.196	0.274
802.11b	Top Side	6	2437	16.55	18.00	1.396	0.433	0.604
802.11b	Bottom Side	6	2437	16.55	18.00	1.396	0.102	0.142
802.11b	Front Side	6	2437	15.16	16.00	1.213	0.415	0.503
802.11b	Back Side	6	2437	15.16	16.00	1.213	0.667	0.809
802.11b	Left Side	6	2437	15.16	16.00	1.213	0.278	0.337
802.11b	Right Side	6	2437	15.16	16.00	1.213	0.196	0.238
802.11b	Top Side	6	2437	15.16	16.00	1.213	0.433	0.525
802.11b	Bottom Side	6	2437	15.16	16.00	1.213	0.102	0.124

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11b	Front Side	6	2437	16.55	18.00	1.396	0.031	0.043
802.11b	Back Side	6	2437	16.55	18.00	1.396	0.061	0.085
802.11b	Front Side	6	2437	15.16	16.00	1.213	0.022	0.027
802.11b	Back Side	6	2437	15.16	16.00	1.213	0.031	0.038

9.19. BT SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GFSK	Left Cheek	39	2440	7.04	8.0	1.247	0.022	0.027
GFSK	Left Tilted	39	2440	7.04	8.0	1.247	0.008	0.010
GFSK	Right Cheek	39	2440	7.04	8.0	1.247	0.019	0.024
GFSK	Right Tilted	39	2440	7.04	8.0	1.247	0.009	0.011

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GFSK	Front Side	39	2440	7.04	8.0	1.247	0.004	0.005
GFSK	Back Side	39	2440	7.04	8.0	1.247	0.013	0.016
GFSK	Left Side	39	2440	7.04	8.0	1.247	0.003	0.004
GFSK	Right Side	39	2440	7.04	8.0	1.247	0.003	0.004
GFSK	Top Side	39	2440	7.04	8.0	1.247	0.009	0.011
GFSK	Bottom Side	39	2440	7.04	8.0	1.247	0.001	0.001

Body Hotspot Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GFSK	Front Side	39	2440	7.04	8.0	1.247	0.021	0.026
GFSK	Back Side	39	2440	7.04	8.0	1.247	0.091	0.113
GFSK	Left Side	39	2440	7.04	8.0	1.247	0.016	0.020
GFSK	Right Side	39	2440	7.04	8.0	1.247	0.016	0.020
GFSK	Top Side	39	2440	7.04	8.0	1.247	0.049	0.061
GFSK	Bottom Side	39	2440	7.04	8.0	1.247	0.005	0.006

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GFSK	Front Side	39	2440	7.04	8.0	1.247	0.001	0.001
GFSK	Back Side	39	2440	7.04	8.0	1.247	0.004	0.005

9.20. Repeated SAR results


Remark:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated measured SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--

10. EXPOSURE POSITIONS CONSIDERATION

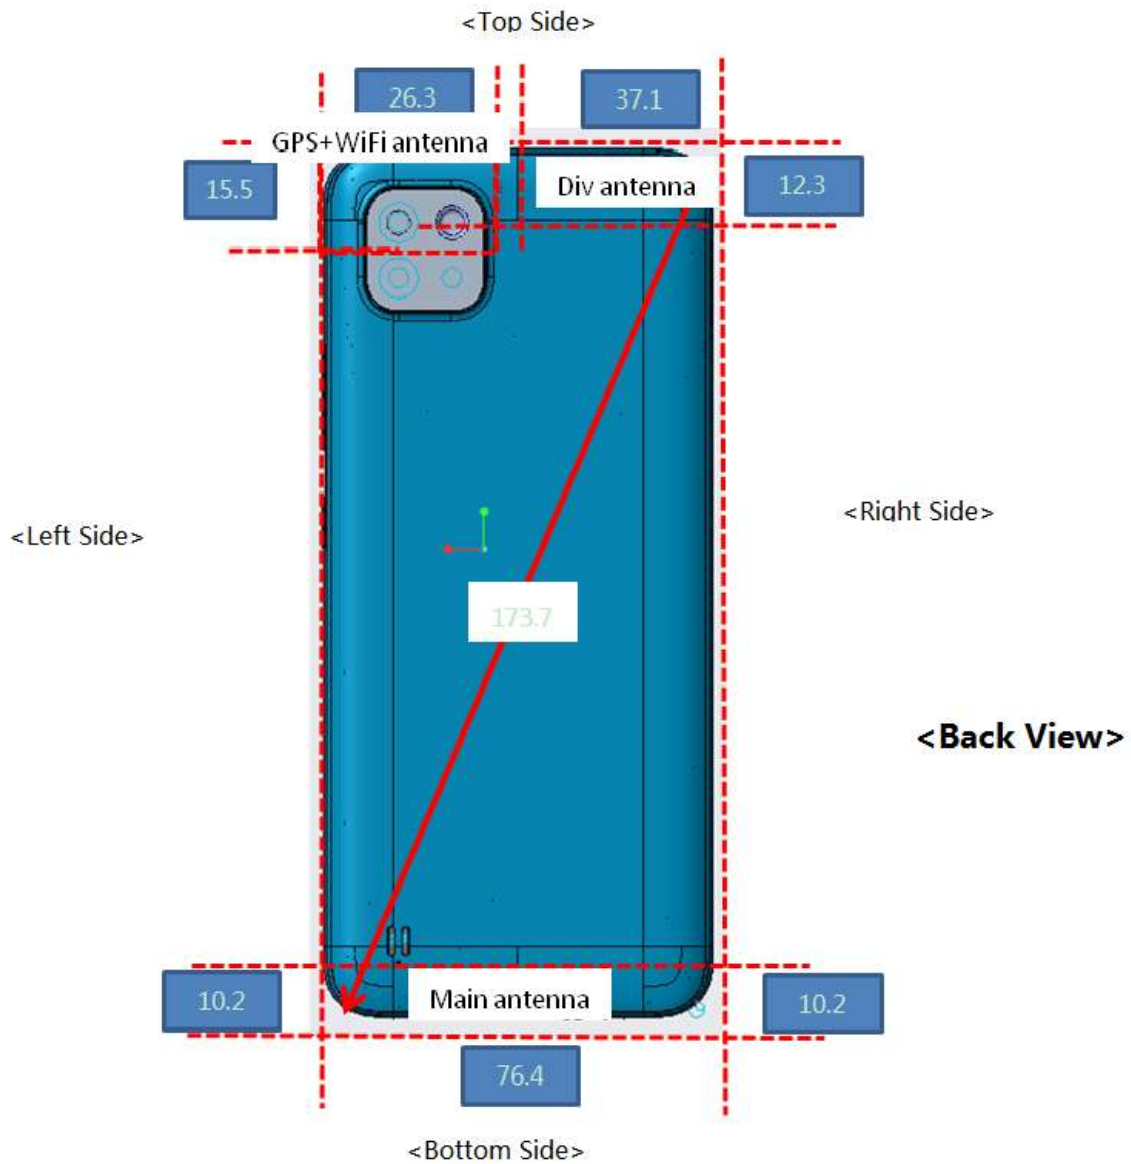10.1. Multiple Transmitter Evaluation



Mode	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
TX Main Antenna	YES	YES	YES	YES	YES	YES
Wi-Fi Antenna	YES	YES	YES	YES	YES	YES

10.2. Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	
1	GSM(voice)+ WiFi2.4G	Yes
2	GPRS/EDGE(DATA)+ WiFi2.4G	Yes
3	GPRS/EDGE(DATA)+ BT	Yes
4	UMTS(Voice)+ WiFi2.4G	Yes
5	UMTS(DATA)+ WiFi2.4G	Yes
6	UMTS(DATA)+ BT	Yes
7	LTE(DATA)+WiFi2.4G	Yes
8	LTE(DATA)+BT	Yes

Table 5: Simultaneous Transmission Possibilities

Note:

- 1) Wi-Fi 2.4G and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) 2G&3G&4G can't transmit simultaneously.
- 3) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

10.3. SAR Summation Scenario

Test Position		Left Cheek	Left Tilted	Right Cheek	Right Tilted
MAX 1-g SAR (W/kg)	GSM 850	0.110	0.047	0.185	0.058
	PCS 1900	0.115	0.033	0.161	0.060
	WCDMA Band II	0.113	0.051	0.174	0.066
	WCDMA Band IV	0.136	0.048	0.324	0.068
	WCDMA Band V	0.149	0.044	0.202	0.048
	LTE Band 2	0.082	0.034	0.098	0.049
	LTE Band 4	0.017	0.008	0.026	0.011
	LTE Band 5	0.125	0.049	0.216	0.065
	LTE Band 7	0.040	0.014	0.075	0.025
	LTE Band 12	0.111	0.049	0.156	0.066
	LTE Band 17	0.140	0.049	0.163	0.066
	LTE Band 26	0.126	0.040	0.205	0.062
	LTE Band 38	0.017	0.008	0.022	0.010
	LTE Band 41	0.029	0.009	0.042	0.015
	LTE Band 66	0.015	0.007	0.022	0.009
	2.4G Wi-Fi	0.389	0.146	0.203	0.108
	BT	0.027	0.010	0.024	0.011
Σ 1-g SAR(W/kg)		0.538	0.197	0.527	0.176

Test Position		Front Side (10mm)	Back Side (10mm)	Left Side (10mm)	Right Side (10mm)	Top Side (10mm)	Bottom Side (10mm)
MAX 1-g SAR (W/kg)	GSM 850	0.118	0.341	0.060	0.047	0.015	0.240
	PCS 1900	0.064	0.132	0.037	0.016	0.007	0.106
	WCDMA Band II	0.045	0.089	0.035	0.021	0.009	0.076
	WCDMA Band IV	0.037	0.080	0.022	0.013	0.006	0.050
	WCDMA Band V	0.122	0.307	0.060	0.043	0.013	0.247
	LTE Band 2	0.104	0.279	0.046	0.029	0.008	0.238
	LTE Band 4	0.069	0.101	0.034	0.020	0.006	0.076
	LTE Band 5	0.121	0.337	0.060	0.039	0.013	0.297
	LTE Band 7	0.392	0.644	0.209	0.221	0.100	0.611
	LTE Band 12	0.127	0.242	0.014	0.229	0.050	0.026
	LTE Band 17	0.119	0.243	0.058	0.042	0.009	0.229
	LTE Band 26	0.146	0.257	0.064	0.038	0.013	0.248
	LTE Band 38	0.105	0.167	0.056	0.035	0.012	0.140
	LTE Band 41	0.077	0.151	0.042	0.028	0.007	0.107
	LTE Band 66	0.073	0.137	0.037	0.027	0.009	0.112
	2.4G Wi-Fi	0.066	0.074	0.027	0.033	0.041	0.011
BT	0.005	0.016	0.004	0.004	0.011	0.001	
Σ 1-g SAR(W/kg)		0.458	0.718	0.236	0.262	0.141	0.622

Test Position		Front Side (0mm)	Back Side (0mm)	Left Side (0mm)	Right Side (0mm)	Top Side (0mm)	Bottom Side (0mm)
MAX 10-g SAR (W/kg)	GSM850	0.608	0.936	0.187	0.736	0.362	0.175
	WCDMA Band V	0.980	1.653	0.673	0.547	0.262	1.562
	LTE Band 7	0.939	1.730	0.667	0.569	0.210	1.520
	2.4G Wi-Fi	0.503	0.809	0.337	0.238	0.525	0.124
	BT	0.026	0.113	0.020	0.020	0.061	0.006
Σ 10-g SAR(W/kg)		1.483	2.539	1.010	0.974	0.887	1.686

Test Position		Front Side (15mm)	Back Side (15mm)
MAX 1-g SAR (W/kg)	GSM 850	0.084	0.134
	PCS 1900	0.106	0.150
	WCDMA Band II	0.042	0.056
	WCDMA Band IV	0.043	0.085
	WCDMA Band V	0.100	0.141
	LTE Band 2	0.069	0.124
	LTE Band 4	0.022	0.038
	LTE Band 5	0.093	0.154
	LTE Band 7	0.072	0.131
	LTE Band 12	0.118	0.211
	LTE Band 17	0.121	0.214
	LTE Band 26	0.090	0.121
	LTE Band 38	0.041	0.081
	LTE Band 41	0.105	0.167
	LTE Band 66	0.040	0.066
	2.4G Wi-Fi	0.027	0.038
	BT	0.001	0.005
Σ 1-g SAR(W/kg)		0.148	0.252

10.4. Simultaneous Transmission Conclusion

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scan is not required per KDB 447498 D01v06

11. PHOTOGRAPHS OF THE TEST SET-UP

Photograph: Liquid depth

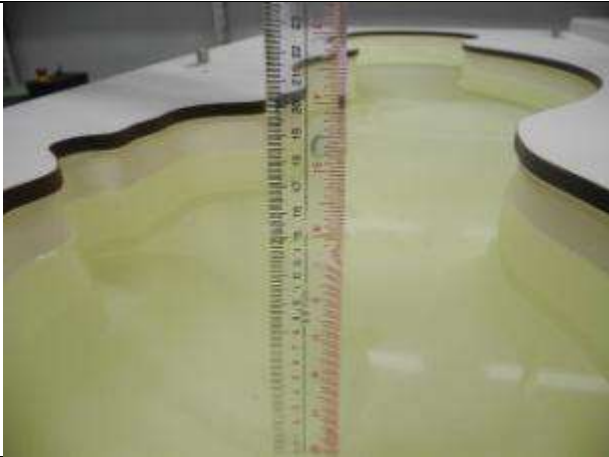
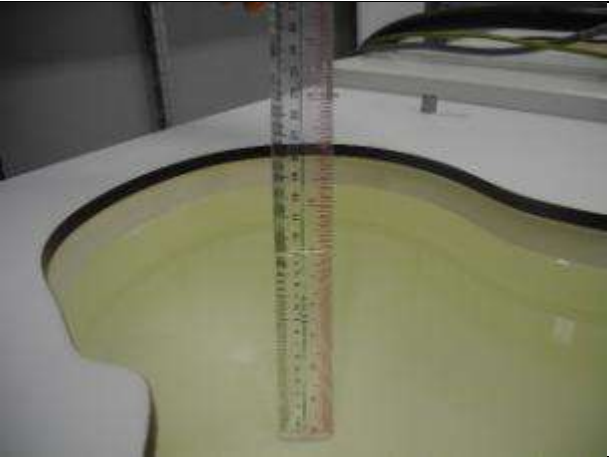




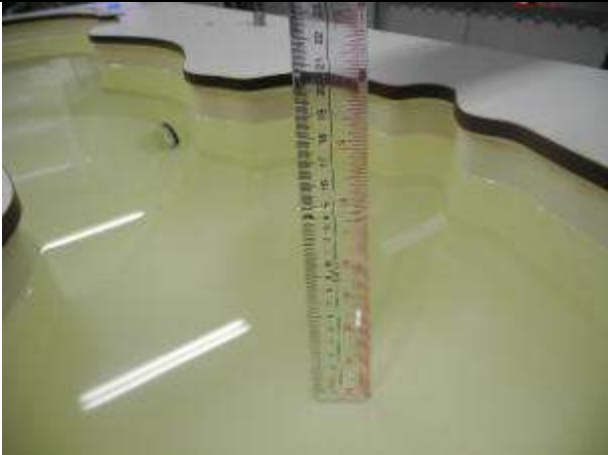
Photo 1: Body 750 Depth (15.0cm)	Photo 2: Body835 Depth (15.0cm)
	
Photo 3: Body1750 Depth (15.0cm)	Photo 4: Body1900 Depth(15.0cm)
	

Photo 5: Body 2300 Depth (15.0cm)	Photo 6: Body 2450 Depth (15.0cm)
	
Photo 7: Body2600 Depth (15.0cm)	N/A
	N/A

Appendix A. System Check Plots

(Pls see Appendix A)

Appendix B. MEASUREMENT SCANS

(Pls see Appendix B)

AppendixC RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

(Pls see Appendix C)

Appendix D. RELEVANT PAGES FROM DAE&DIPOLE VALIDATION KIT REPORT(S)

(Pls see Appendix D)