


n66, CP-64QAM (PAPR)




n66, DFT-s-pi/2 BPSK (PAPR)




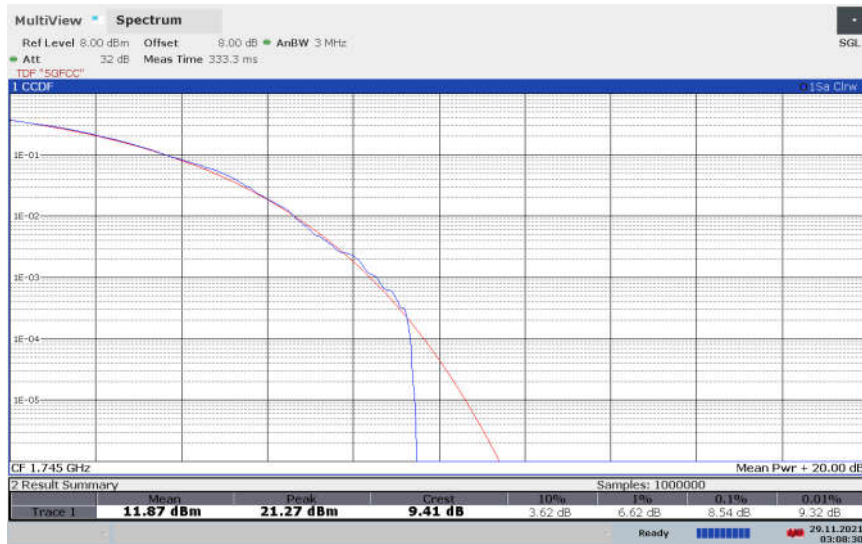


n66, DFT-s-QPSK (PAPR)

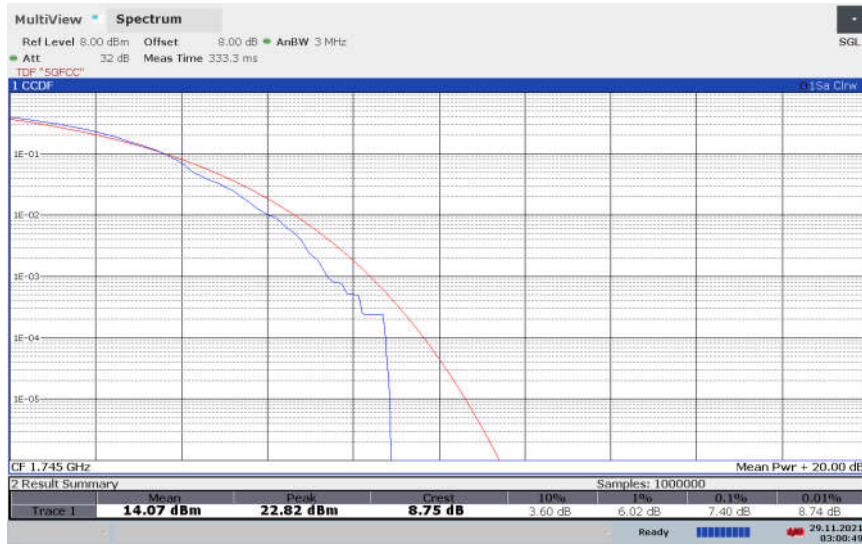

n66, DFT-s-16QAM (PAPR)

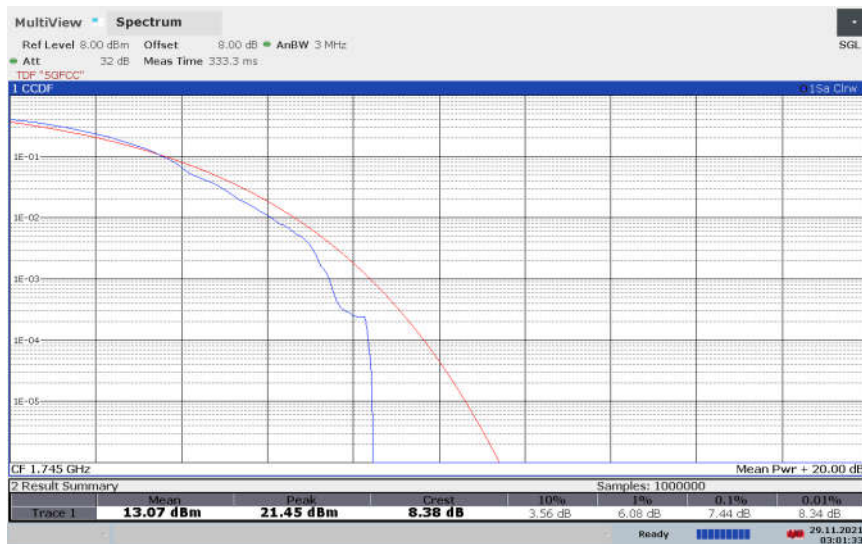

n66, DFT-s-64QAM (PAPR)

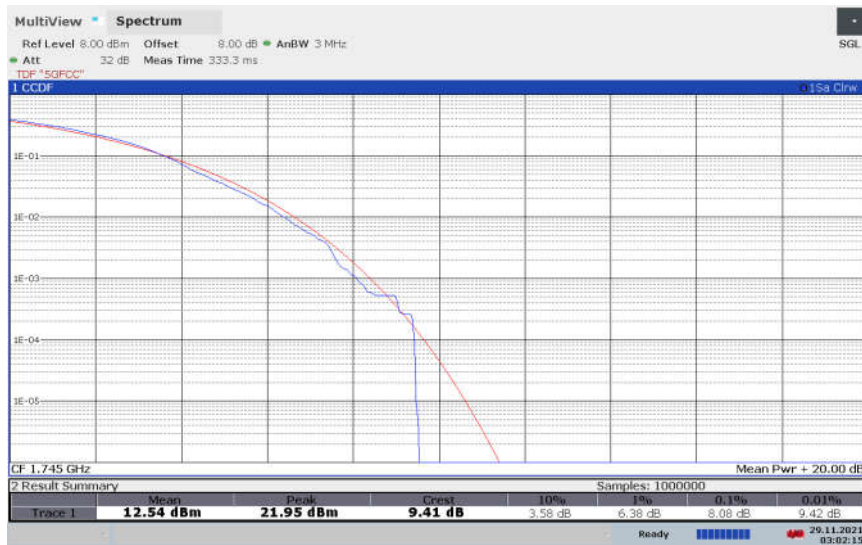

NSA

LTE Bands are set under the 10MHz bandwidth, middle channel, 50RB and QPSK modulation.

DC_66A_n5A

Frequency(MHz)	BW(MHz)	OFDM	PAPR(dB)			
			pi/2 BPSK	QPSK	16QAM	64QAM
836.5	20	DFT	6.40	7.42	7.58	8.32
		CP	N/A	7.80	8.44	8.48

DC_5A_n7A

Frequency(MHz)	BW(MHz)	OFDM	PAPR(dB)			
			pi/2 BPSK	QPSK	16QAM	64QAM
836.5	20	DFT	5.24	7.36	7.40	8.04
		CP	N/A	8.18	8.30	8.30

DC_66A_n7A

Frequency(MHz)	BW(MHz)	OFDM	PAPR(dB)			
			pi/2 BPSK	QPSK	16QAM	64QAM
836.5	20	DFT	6.34	7.48	7.72	8.16
		CP	N/A	8.28	8.56	8.56

DC_26A_n41A

Frequency(MHz)	BW(MHz)	OFDM	PAPR(dB)			
			pi/2 BPSK	QPSK	16QAM	64QAM
836.5	20	DFT	4.44	5.34	6.15	6.40
		CP	N/A	7.55	7.69	7.81

Note: Expanded measurement uncertainty is $U = 0.48, k = 2$

*****END OF REPORT*****