


Test Mode	IEEE 802.11a	Test Date	2022/10/19
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

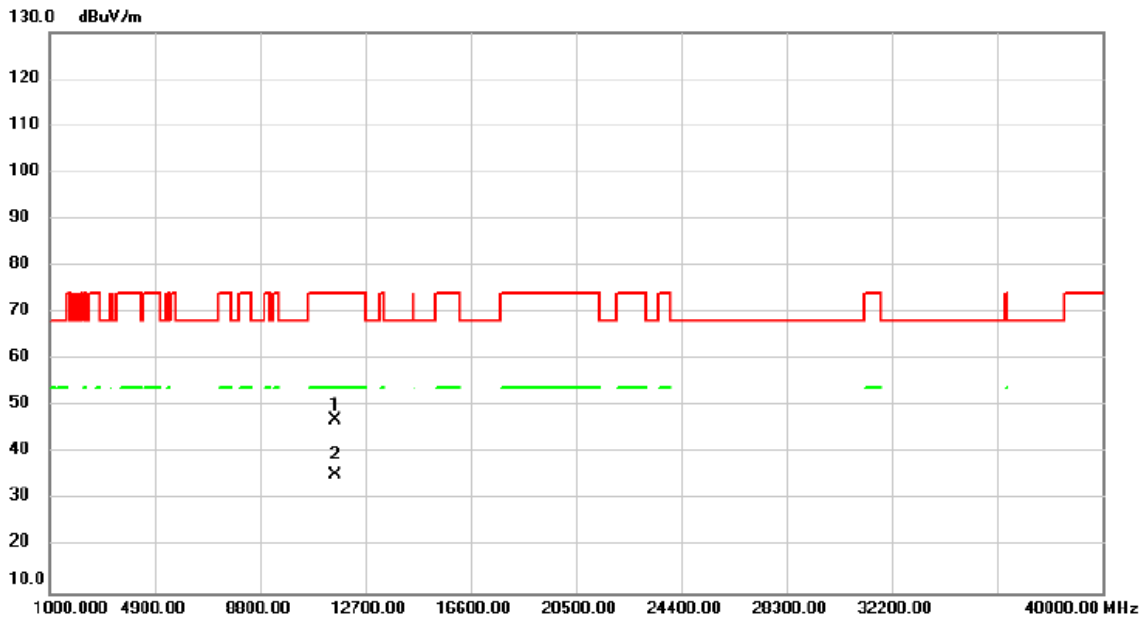


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	44.23	2.78	47.01	74.00	-26.99	peak	
2	*	11570.00	32.58	2.78	35.36	54.00	-18.64	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2022/10/19
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

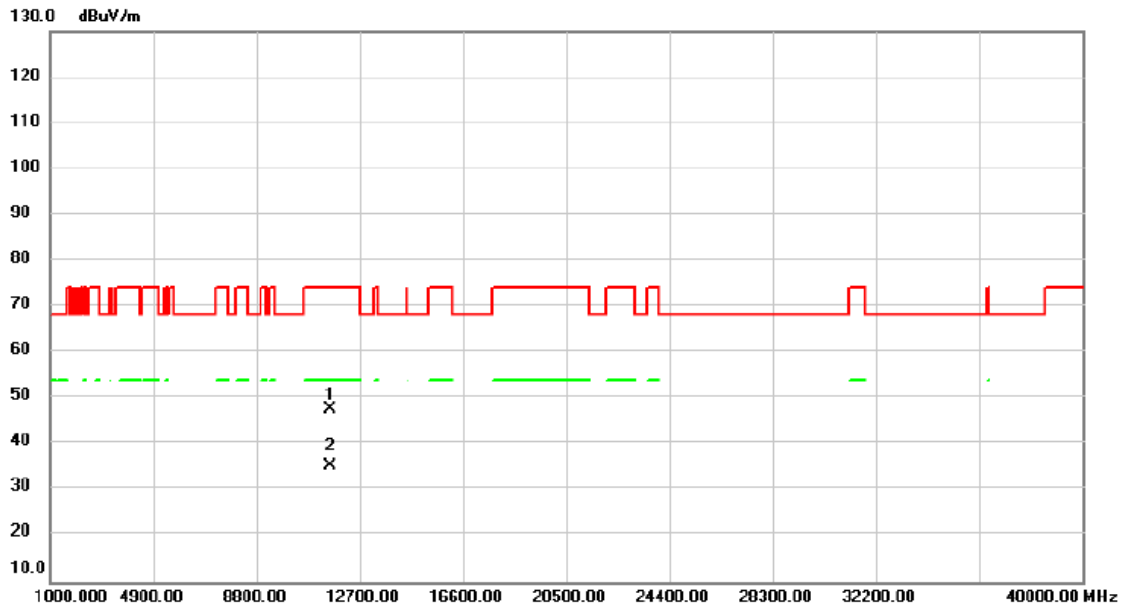


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	44.86	2.78	47.64	74.00	-26.36	peak	
2	*	11570.00	32.43	2.78	35.21	54.00	-18.79	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2022/10/19
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

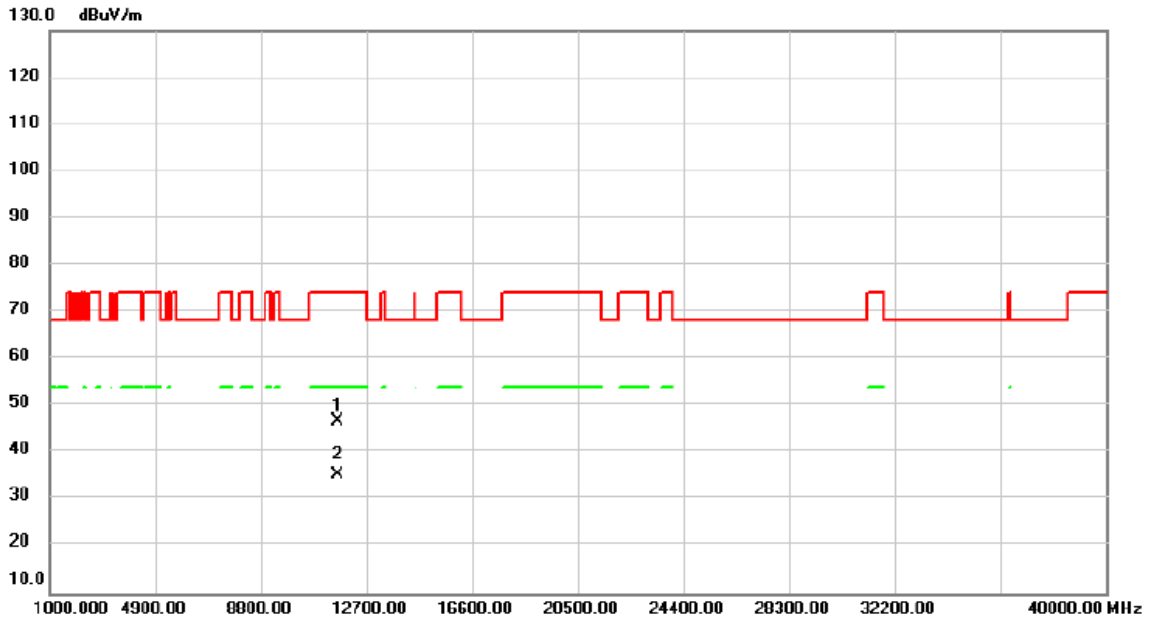


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	43.80	2.94	46.74	74.00	-27.26	peak	
2	*	11650.00	32.56	2.94	35.50	54.00	-18.50	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2022/10/19
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

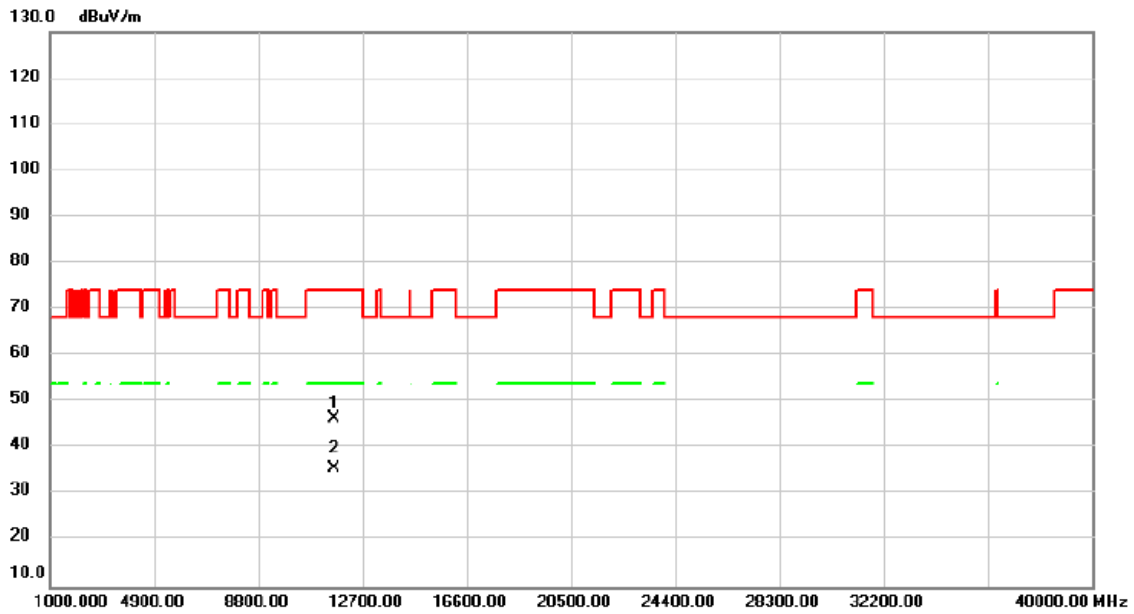


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	43.61	2.94	46.55	74.00	-27.45	peak	
2	*	11650.00	32.66	2.94	35.60	54.00	-18.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5180MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

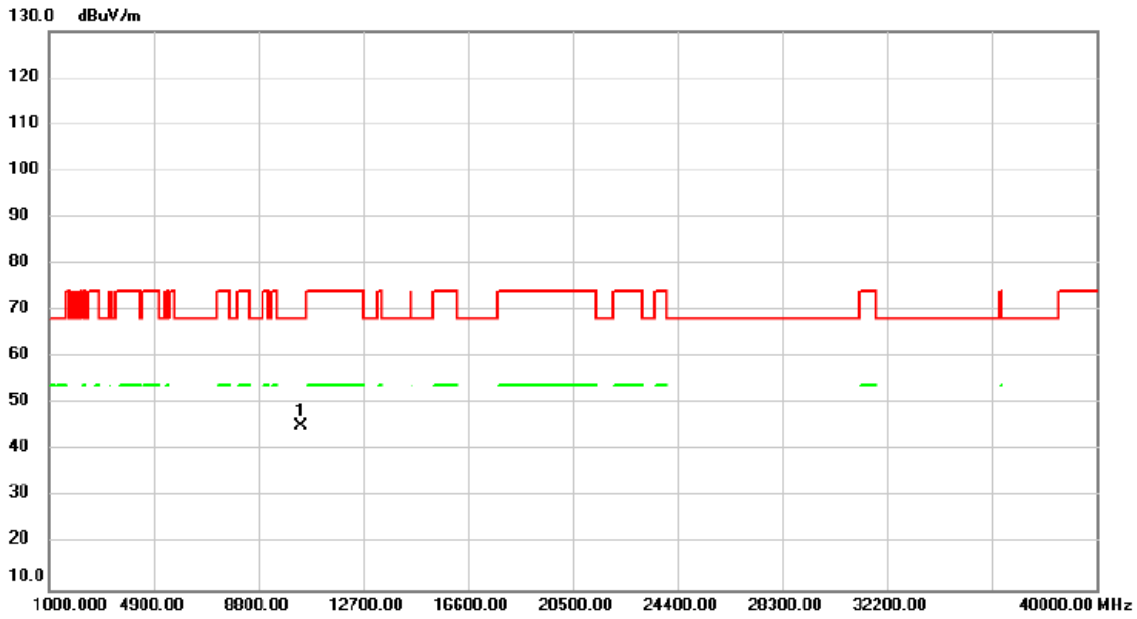


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	39.55	5.82	45.37	68.20	-22.83	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

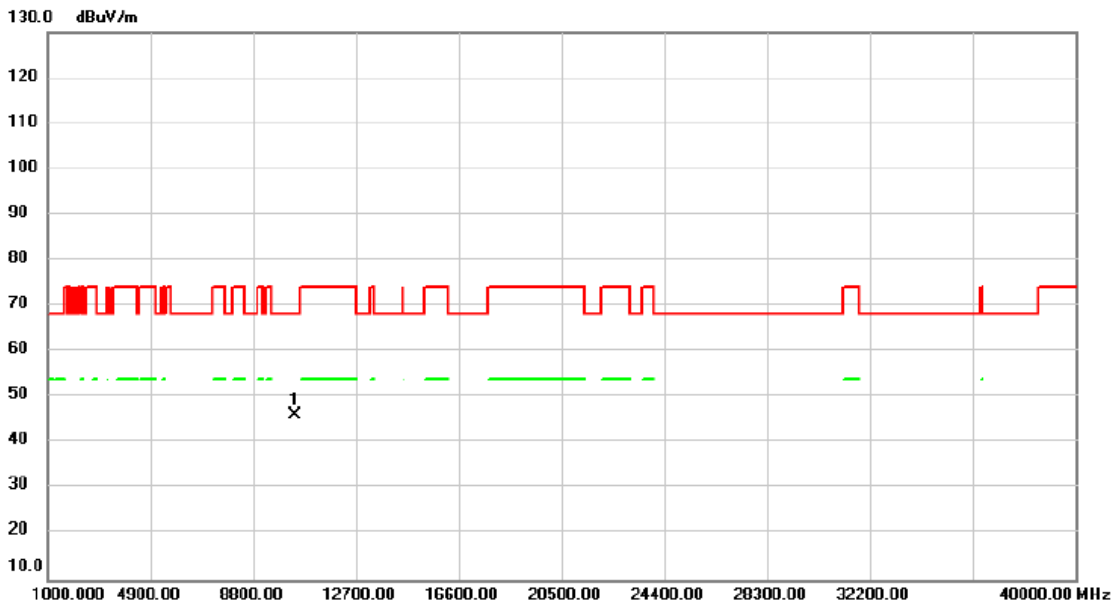


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	40.39	5.82	46.21	68.20	-21.99	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5200MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

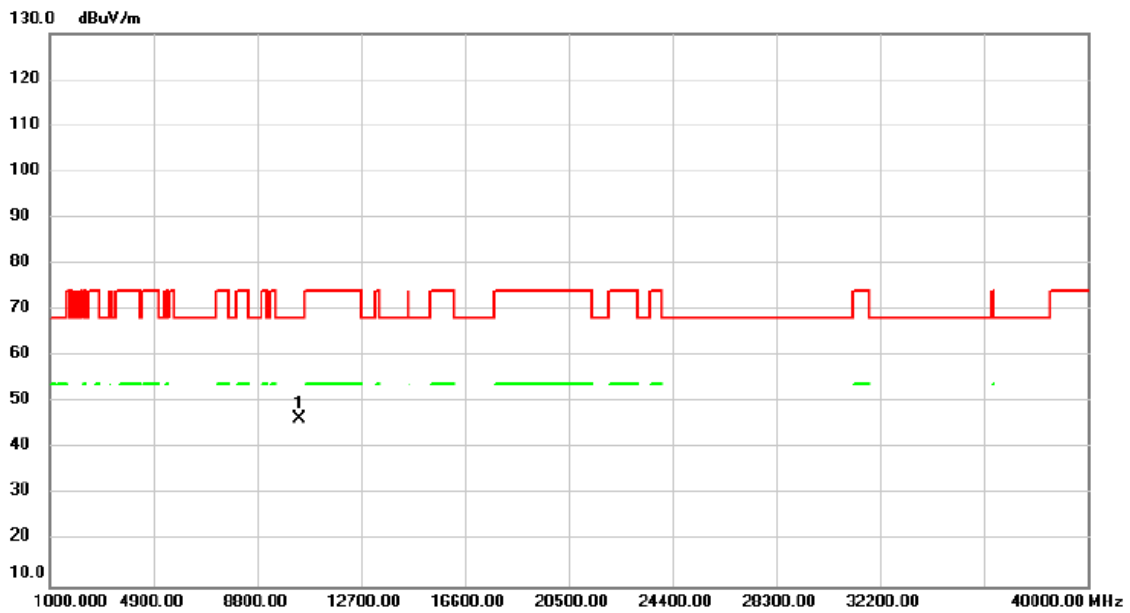


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	40.51	5.80	46.31	68.20	-21.89	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5200MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

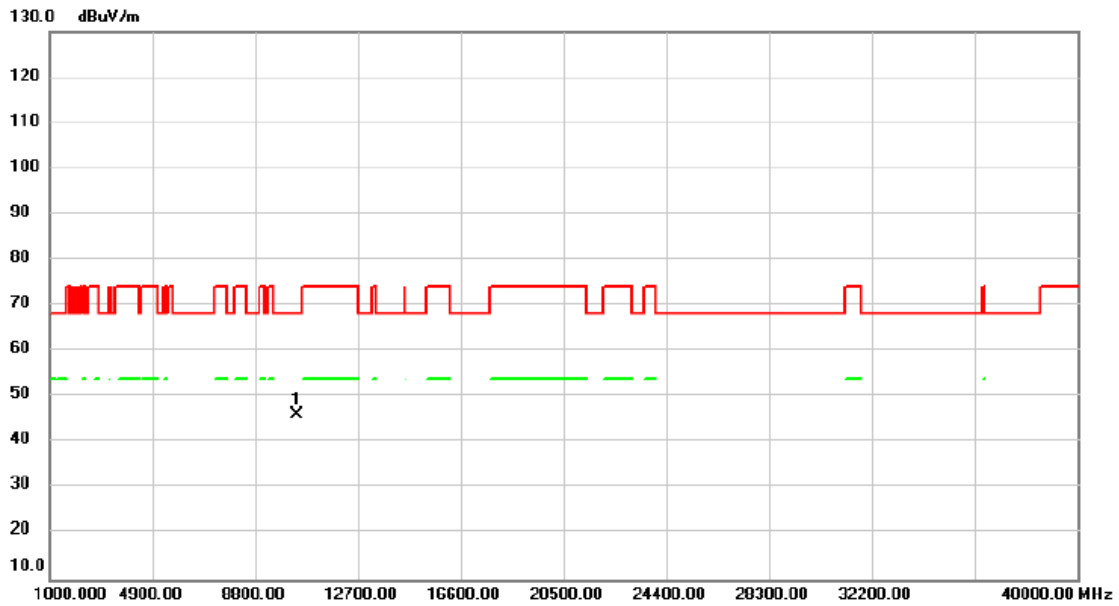


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	40.30	5.80	46.10	68.20	-22.10	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5240MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

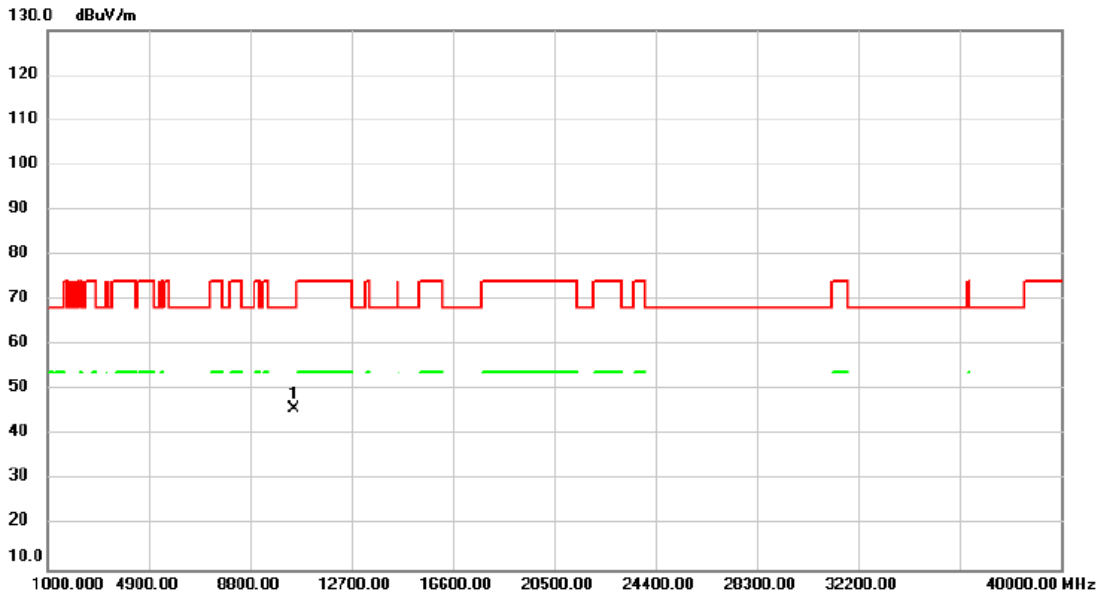


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	40.21	5.75	45.96	68.20	-22.24	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

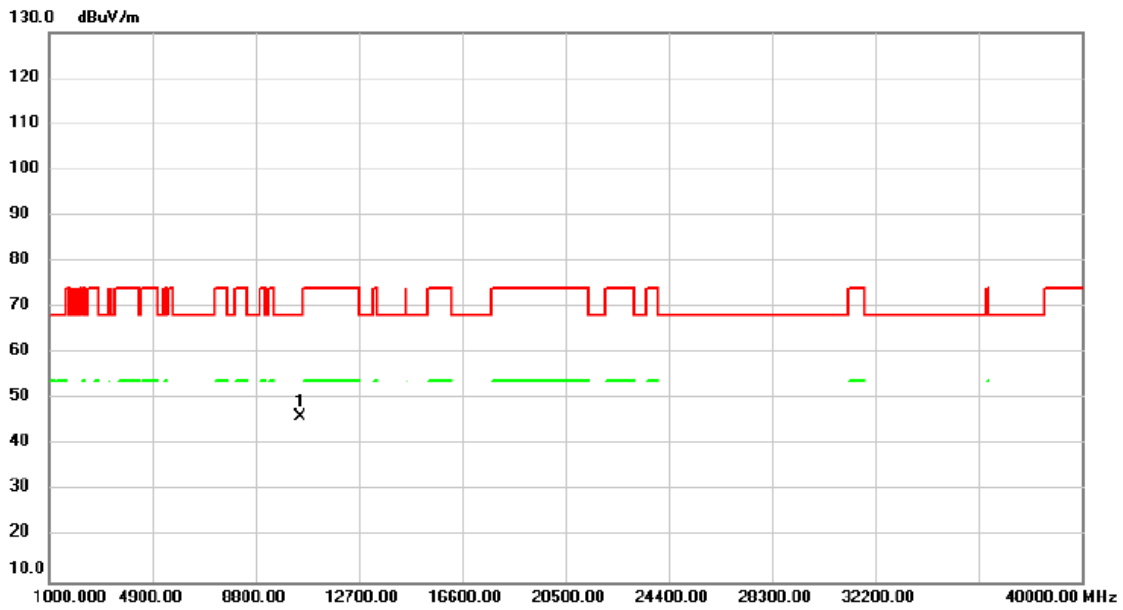


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	40.42	5.75	46.17	68.20	-22.03	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5260MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

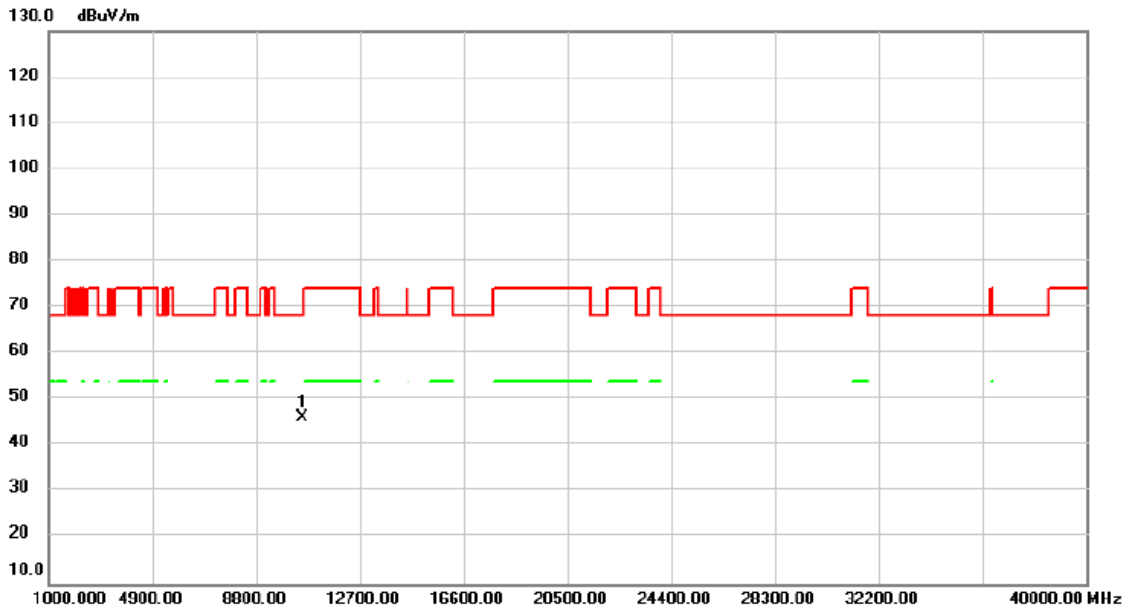


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	40.55	5.72	46.27	68.20	-21.93	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/23
Test Frequency	5260MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

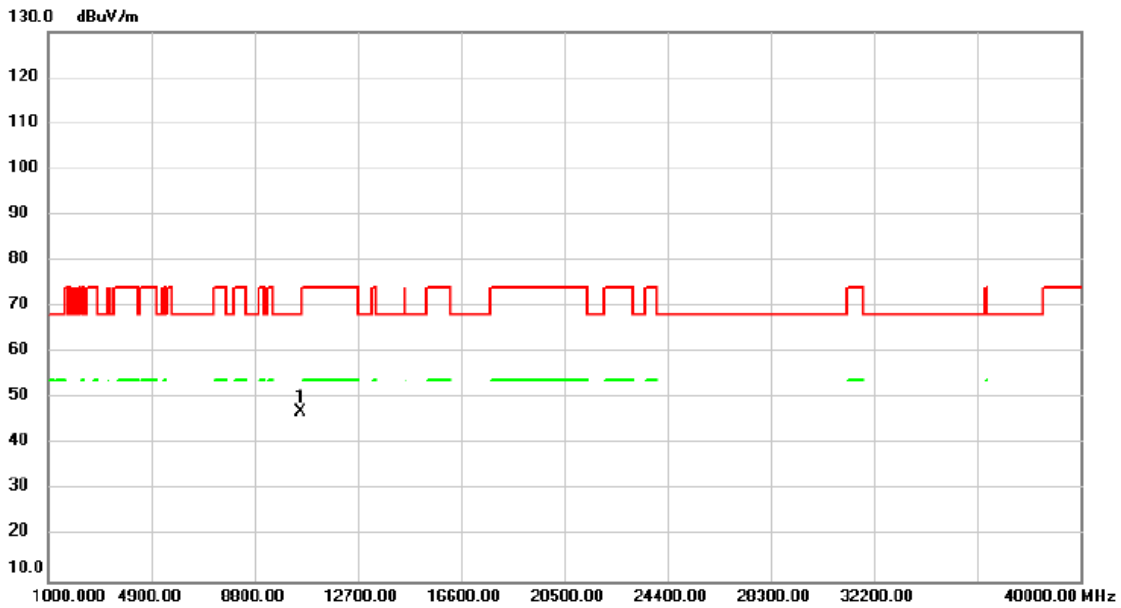


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	41.25	5.72	46.97	68.20	-21.23	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5300MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

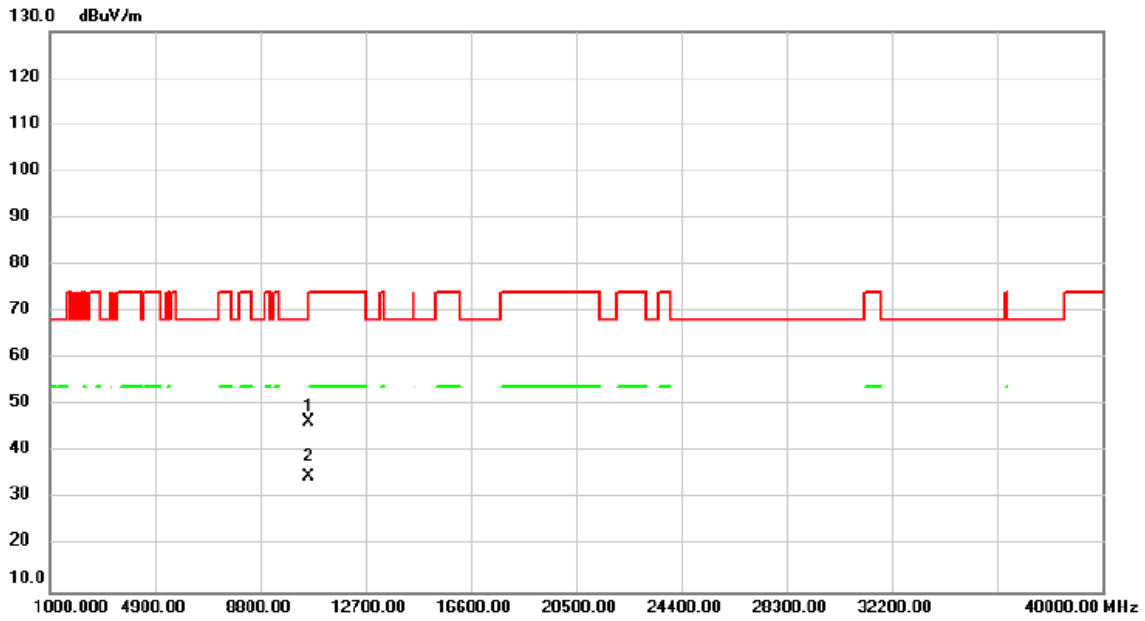


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	40.66	5.68	46.34	68.20	-21.86	peak	
2	*	10600.00	28.96	5.68	34.64	54.00	-19.36	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5300MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

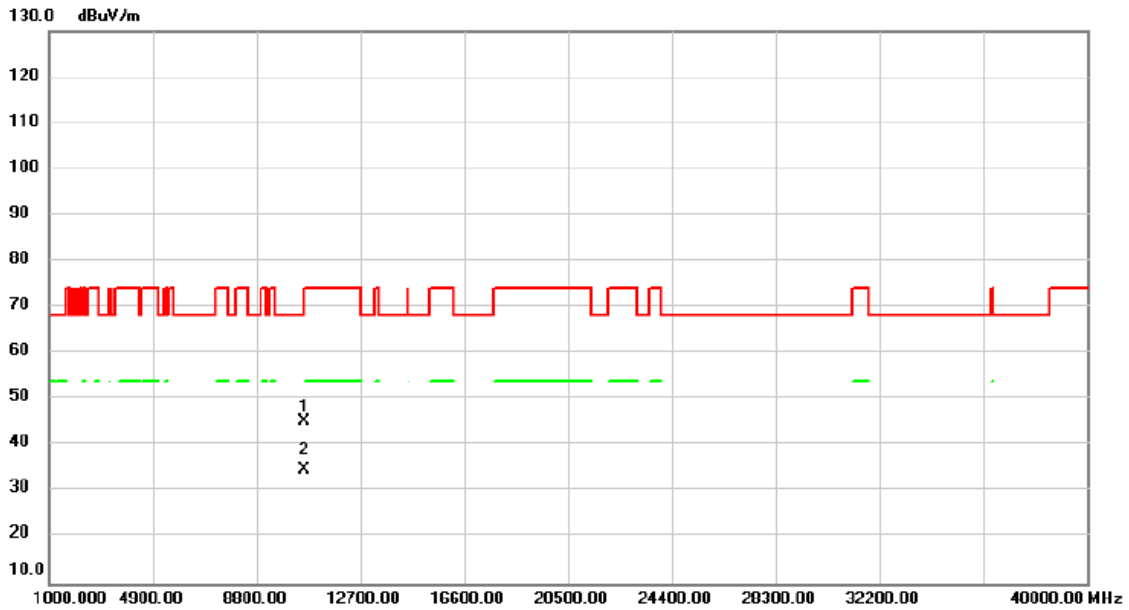


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	39.54	5.68	45.22	68.20	-22.98	peak	
2	*	10600.00	29.04	5.68	34.72	54.00	-19.28	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5320MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

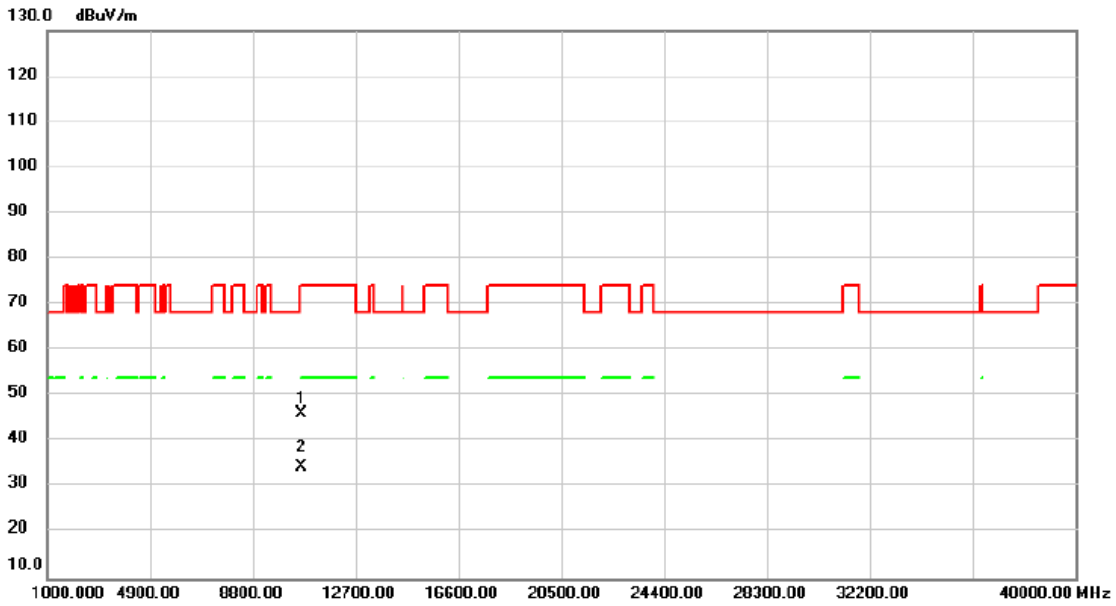


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10640.00	40.44	5.65	46.09	74.00	-27.91	peak	
2 *	10640.00	28.87	5.65	34.52	54.00	-19.48	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5320MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

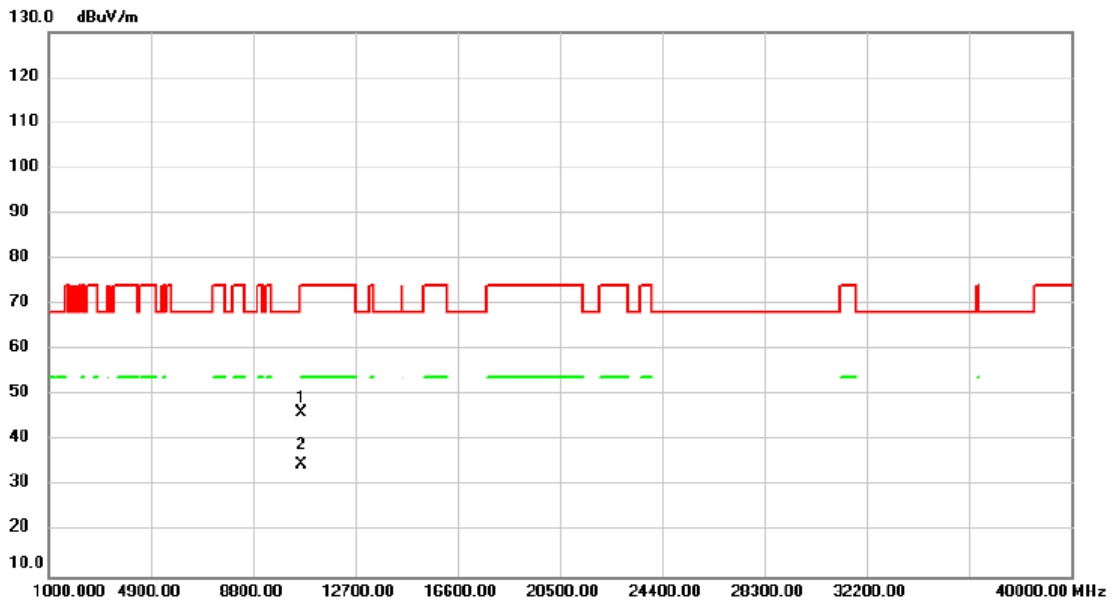


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	40.63	5.65	46.28	74.00	-27.72	peak	
2	*	10640.00	28.98	5.65	34.63	54.00	-19.37	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

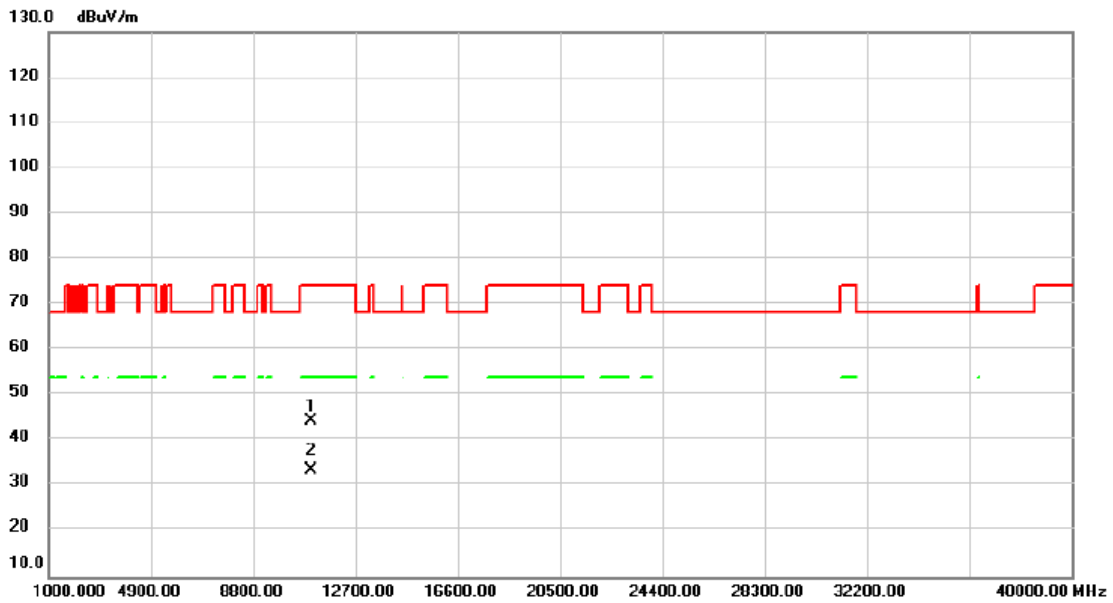


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11000.00	43.15	1.21	44.36	74.00	-29.64	peak	
2 *	11000.00	32.45	1.21	33.66	54.00	-20.34	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

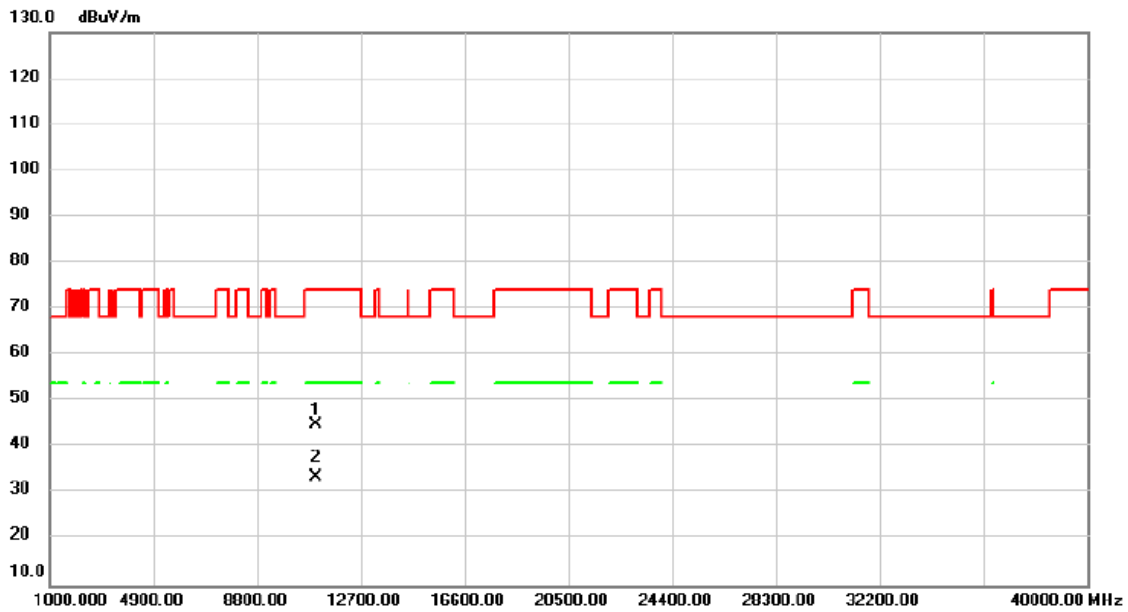


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	43.63	1.21	44.84	74.00	-29.16	peak	
2	*	11000.00	32.36	1.21	33.57	54.00	-20.43	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5580MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

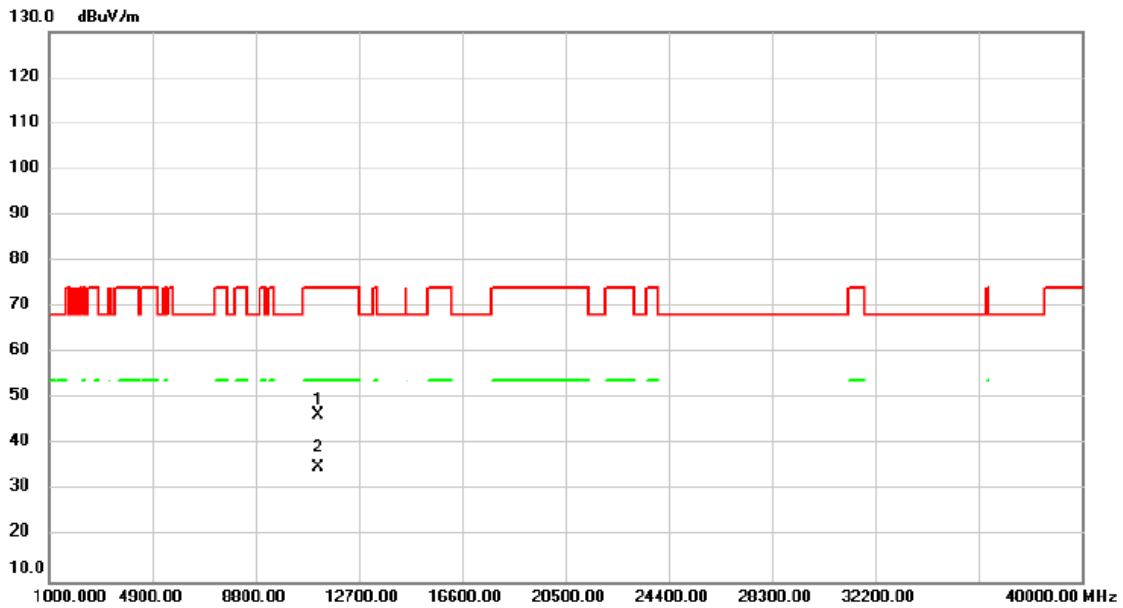


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11160.00	40.60	5.73	46.33	74.00	-27.67	peak	
2	*	11160.00	29.27	5.73	35.00	54.00	-19.00	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/26
Test Frequency	5580MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

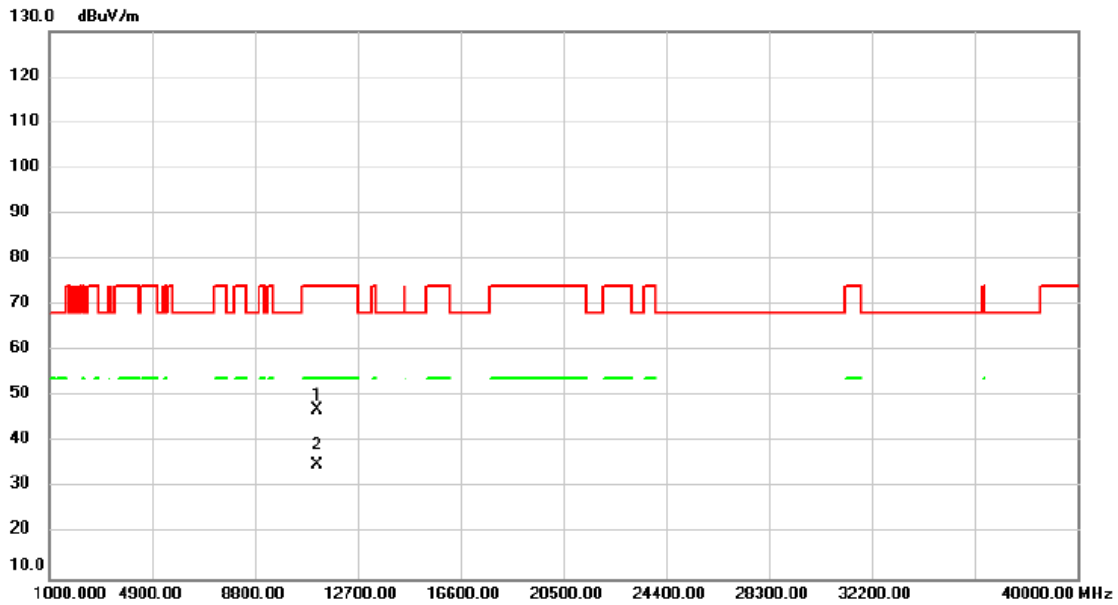


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11160.00	41.34	5.73	47.07	74.00	-26.93	peak	
2 *	11160.00	29.32	5.73	35.05	54.00	-18.95	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

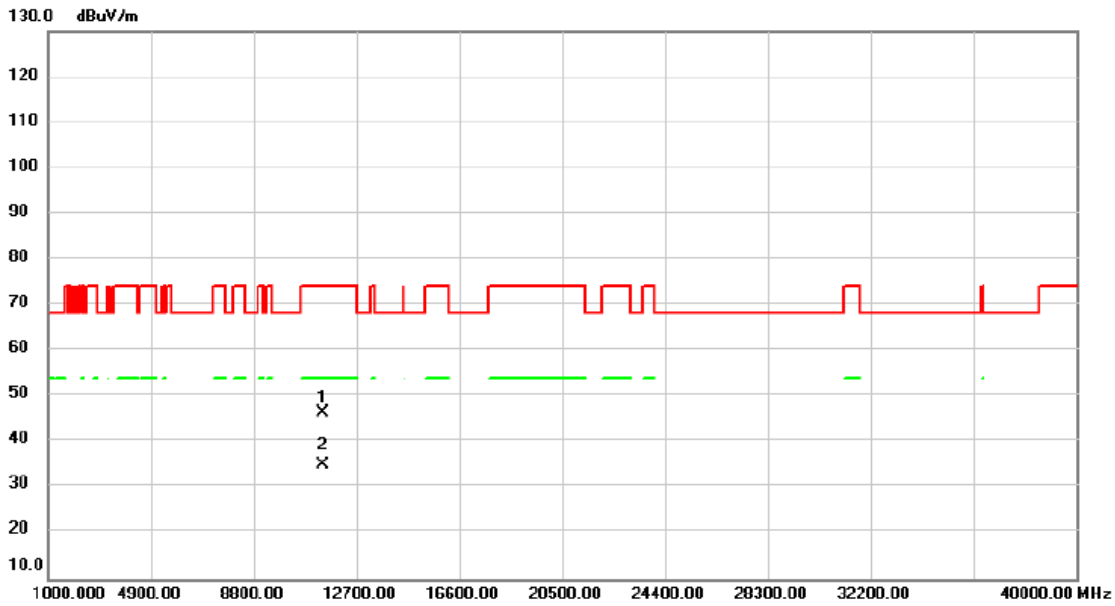


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11400.00	44.16	2.36	46.52	74.00	-27.48	peak	
2	*	11400.00	32.63	2.36	34.99	54.00	-19.01	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

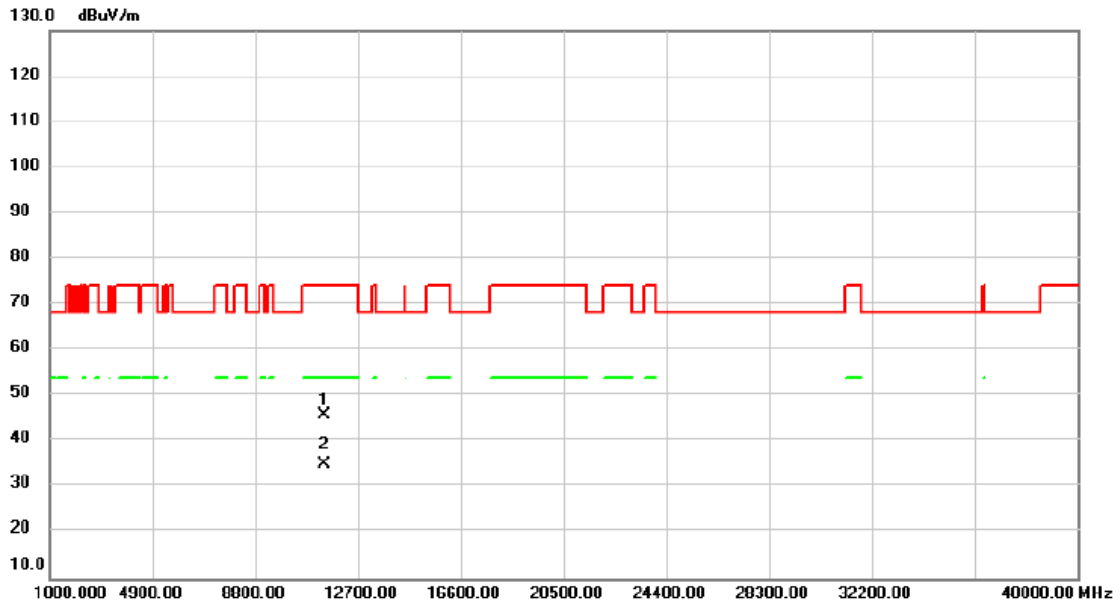


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.00	43.46	2.36	45.82	74.00	-28.18	peak	
2 *	11400.00	32.60	2.36	34.96	54.00	-19.04	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

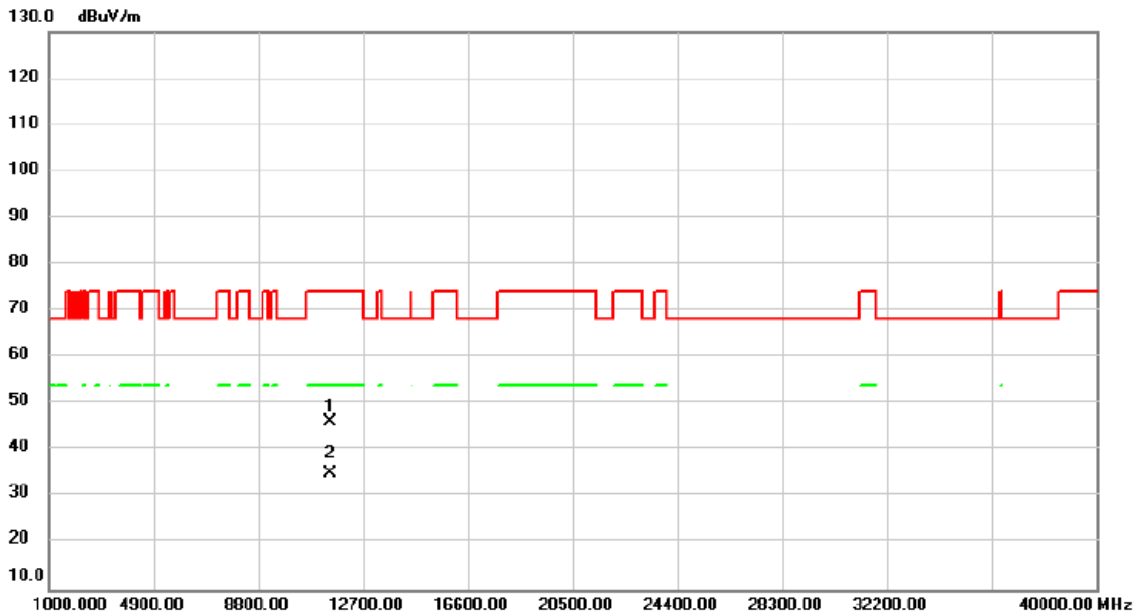


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	43.66	2.62	46.28	74.00	-27.72	peak	
2	*	11490.00	32.51	2.62	35.13	54.00	-18.87	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

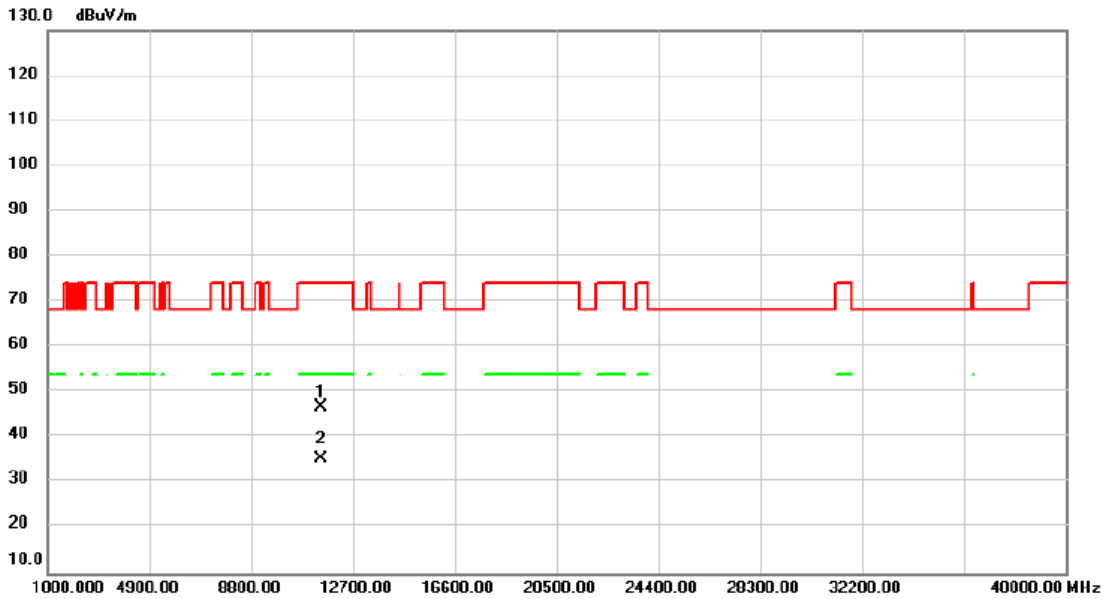


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11490.00	44.23	2.62	46.85	74.00	-27.15	peak	
2	*	11490.00	32.59	2.62	35.21	54.00	-18.79	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

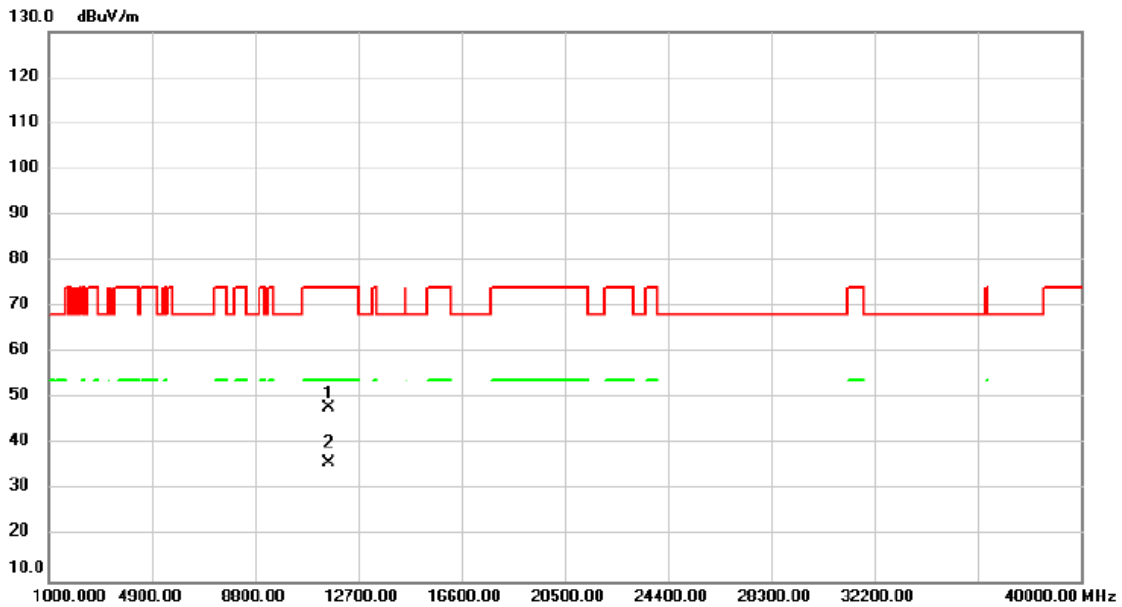


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	45.31	2.78	48.09	74.00	-25.91	peak	
2	*	11570.00	33.03	2.78	35.81	54.00	-18.19	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

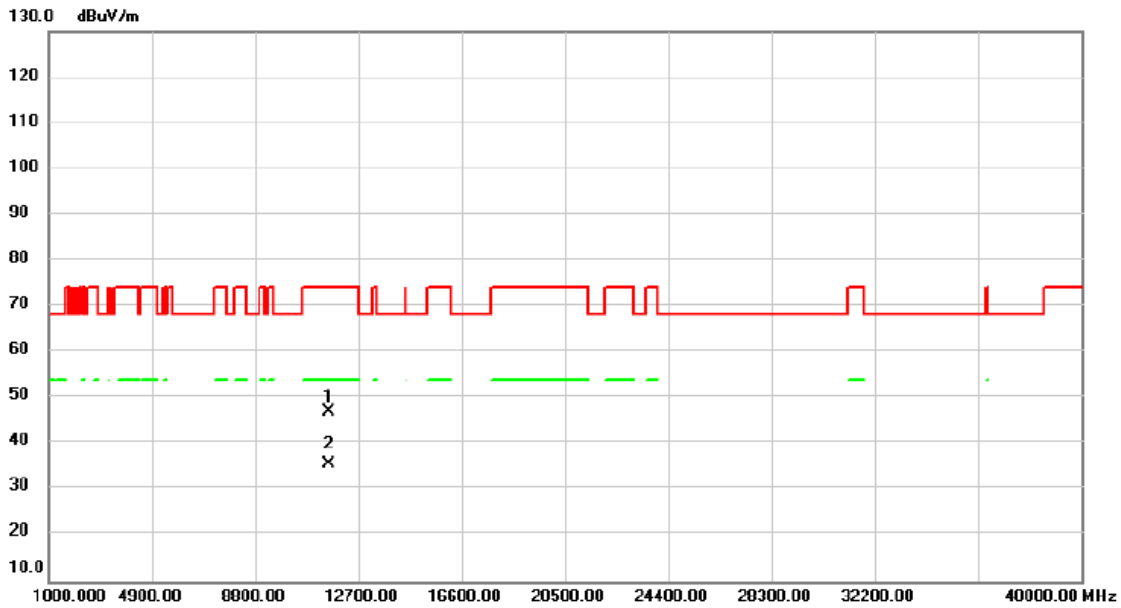


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	44.15	2.78	46.93	74.00	-27.07	peak	
2	*	11570.00	32.93	2.78	35.71	54.00	-18.29	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

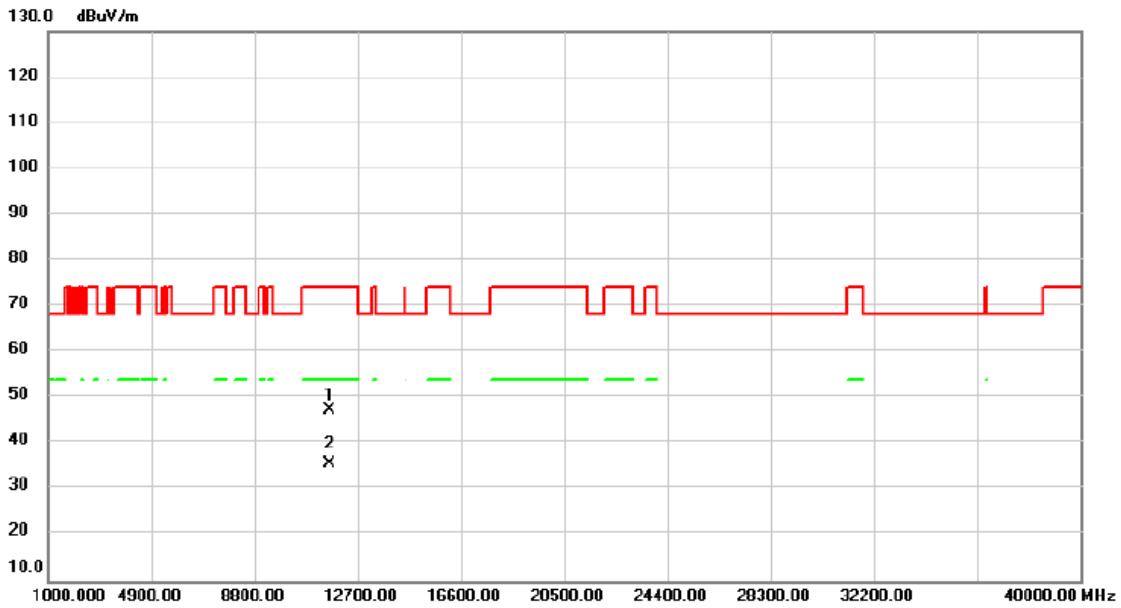


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	44.50	2.94	47.44	74.00	-26.56	peak	
2	*	11650.00	32.76	2.94	35.70	54.00	-18.30	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2022/10/19
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

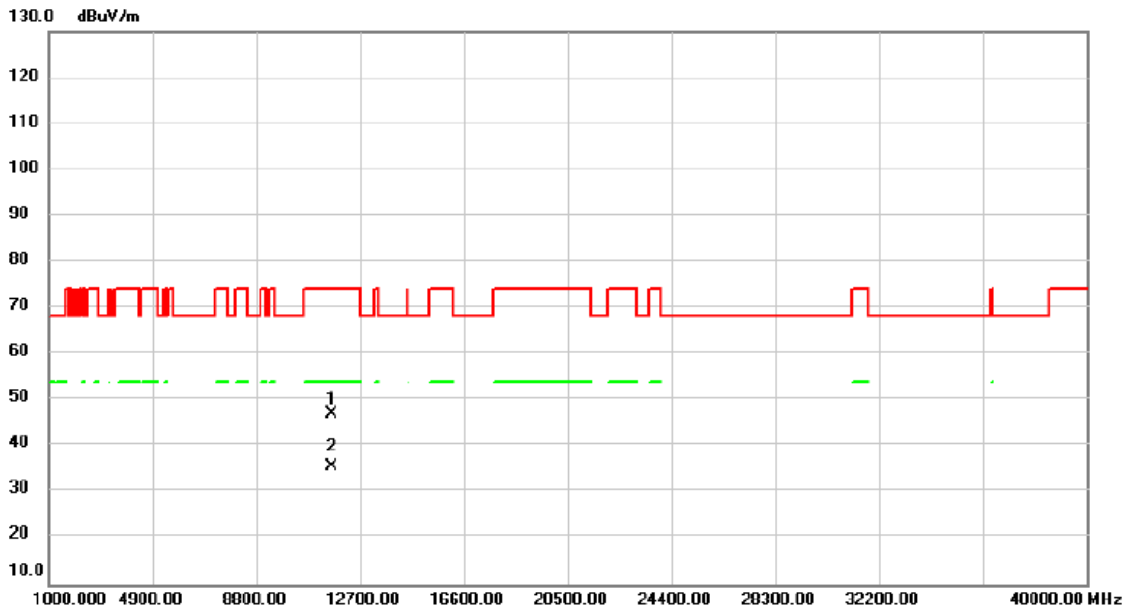


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11650.00	44.23	2.94	47.17	74.00	-26.83	peak	
2	*	11650.00	32.75	2.94	35.69	54.00	-18.31	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

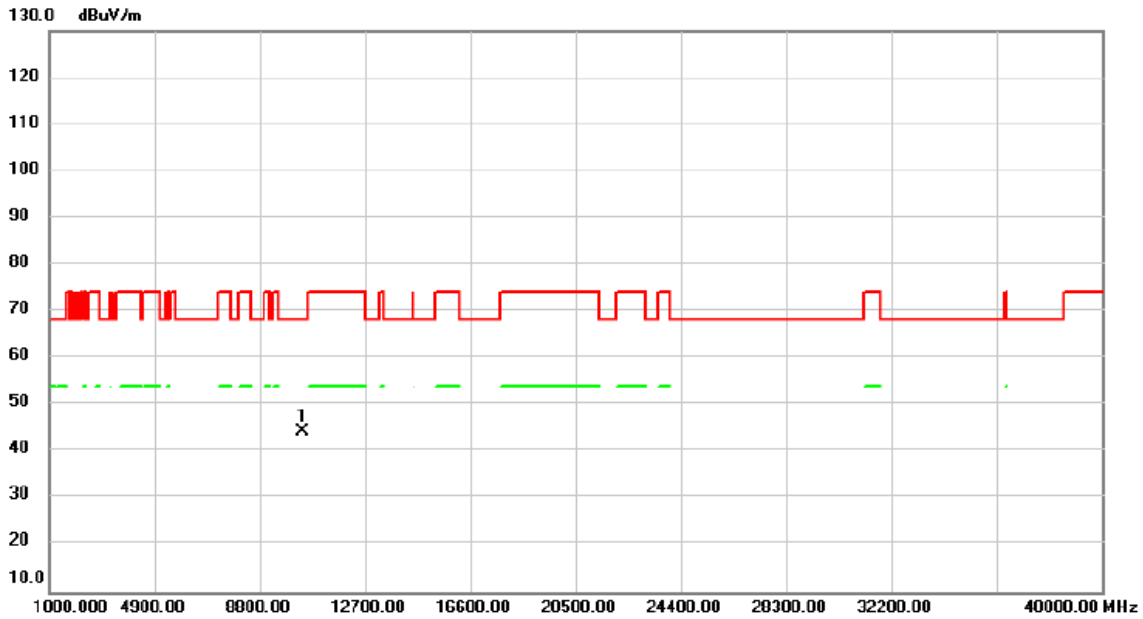


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10380.00	43.36	1.04	44.40	68.20	-23.80	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

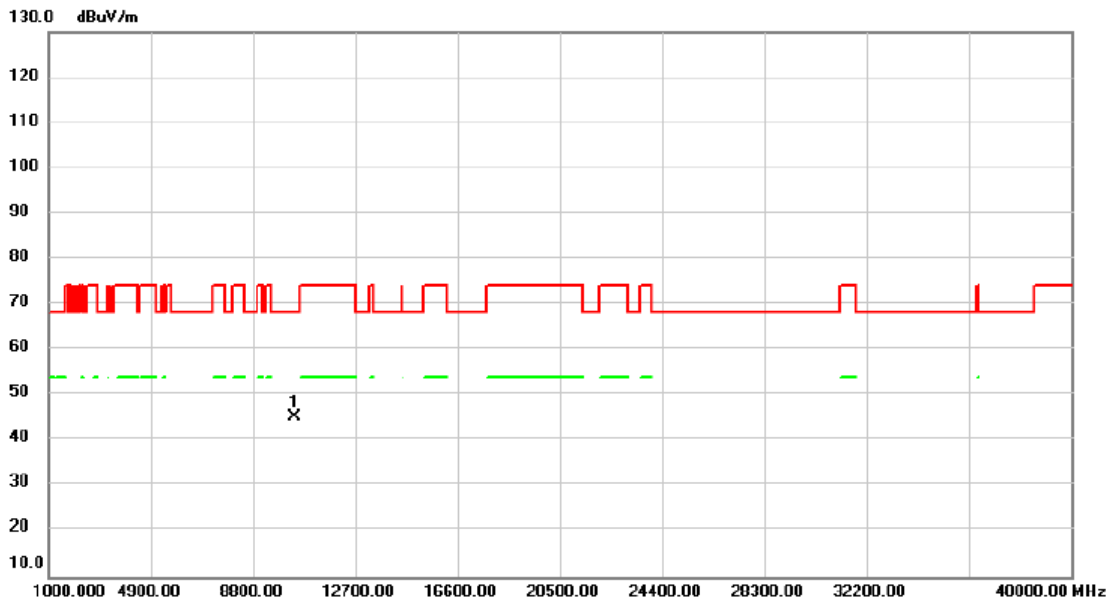


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	44.21	1.04	45.25	68.20	-22.95	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/26
Test Frequency	5230MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

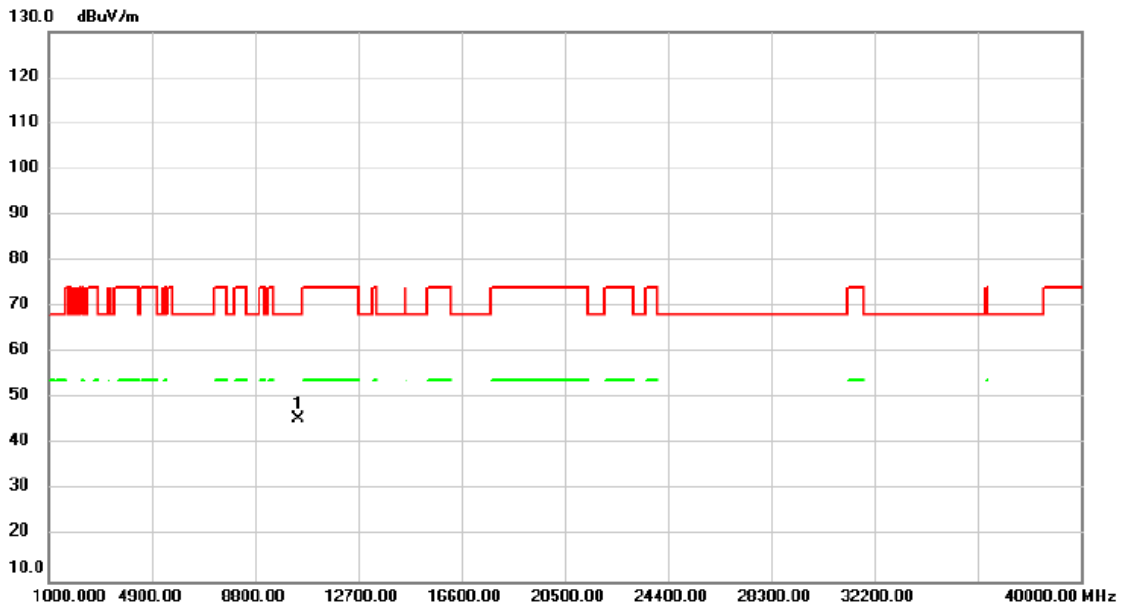


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	39.74	5.75	45.49	68.20	-22.71	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/26
Test Frequency	5230MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

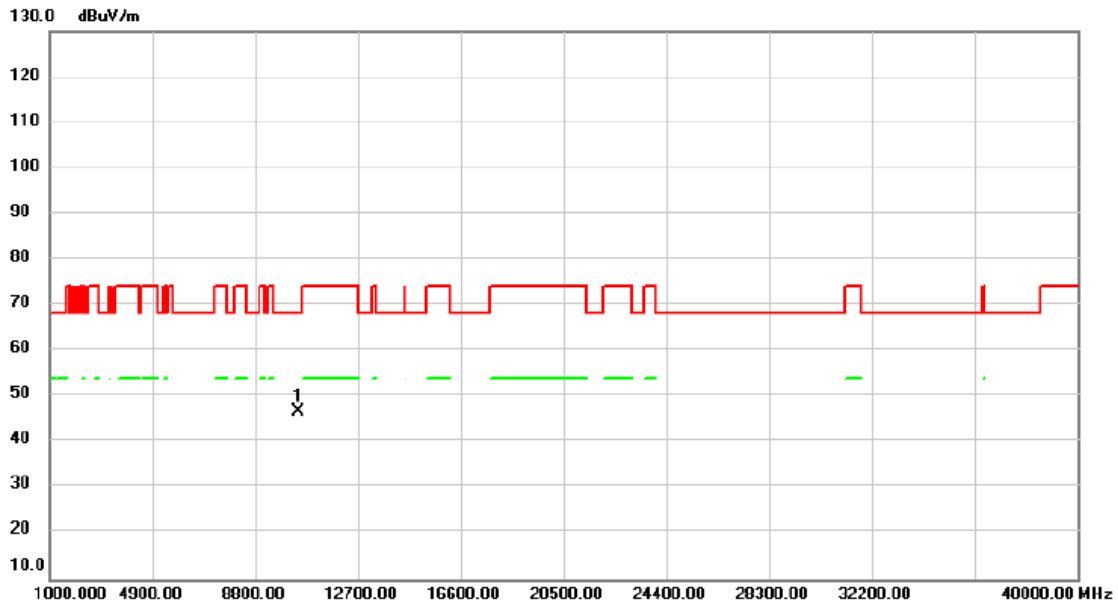


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	40.96	5.75	46.71	68.20	-21.49	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

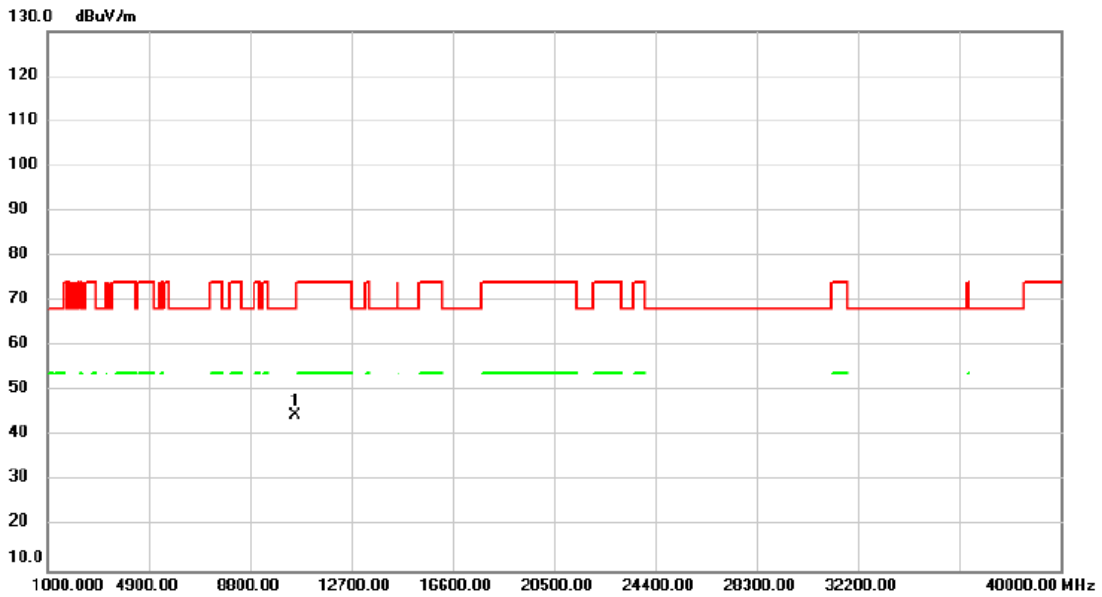


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	43.48	1.08	44.56	68.20	-23.64	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

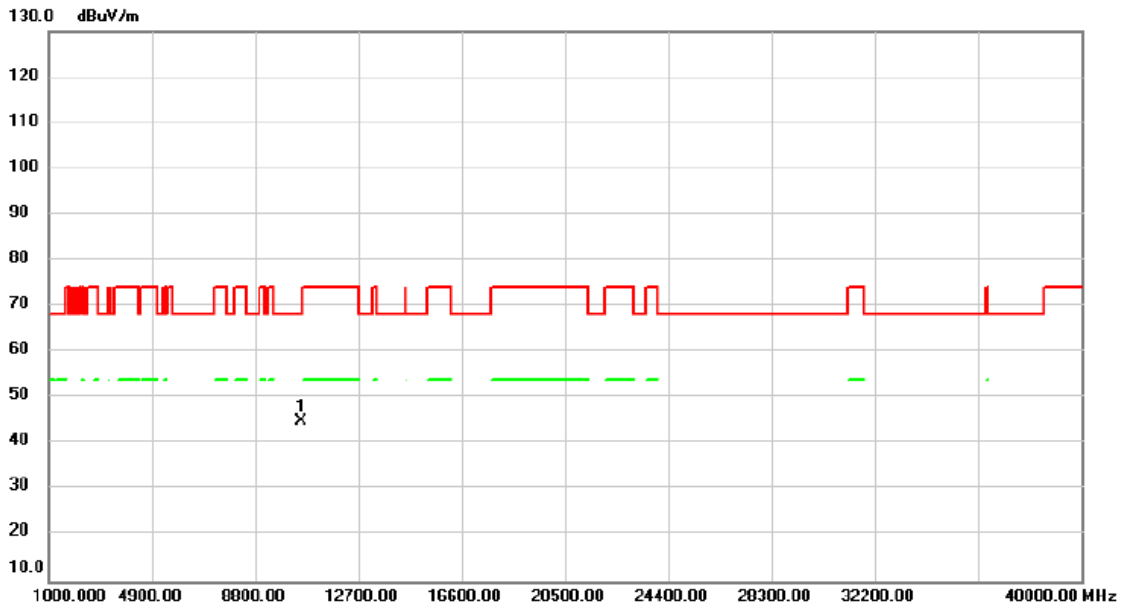


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	44.00	1.08	45.08	68.20	-23.12	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

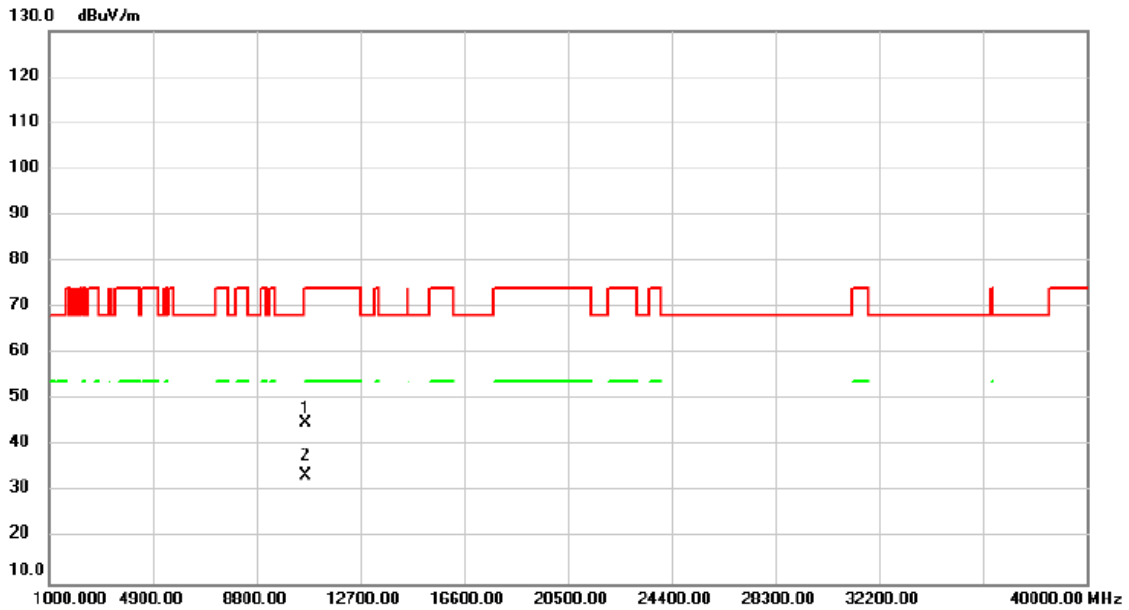


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10620.00	43.96	1.10	45.06	74.00	-28.94	peak	
2	*	10620.00	32.50	1.10	33.60	54.00	-20.40	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

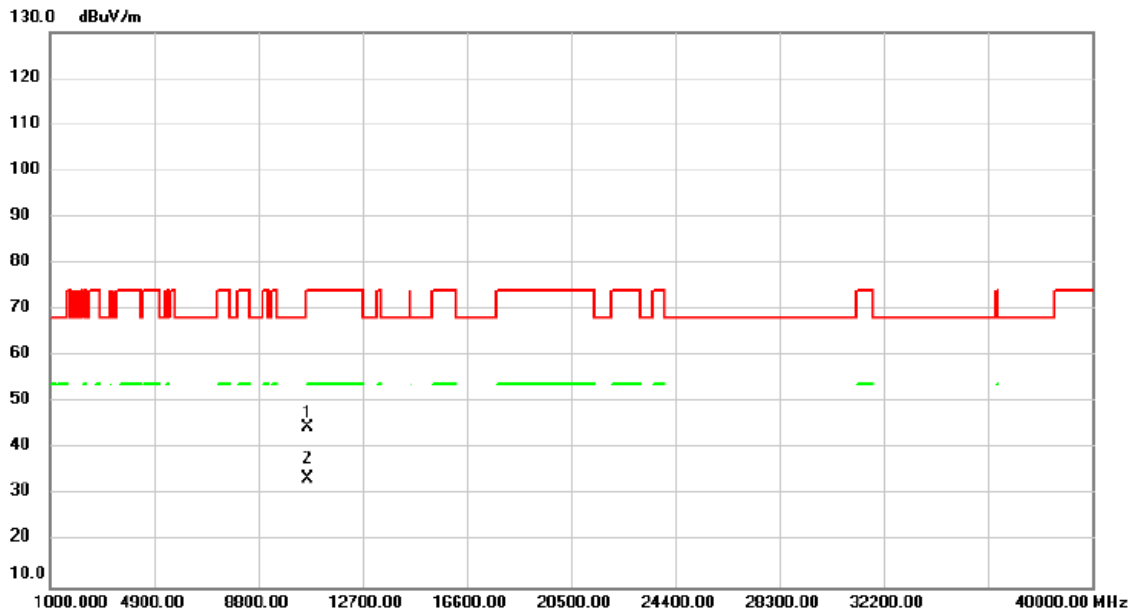


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	43.62	1.10	44.72	74.00	-29.28	peak	
2	*	10620.00	32.44	1.10	33.54	54.00	-20.46	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

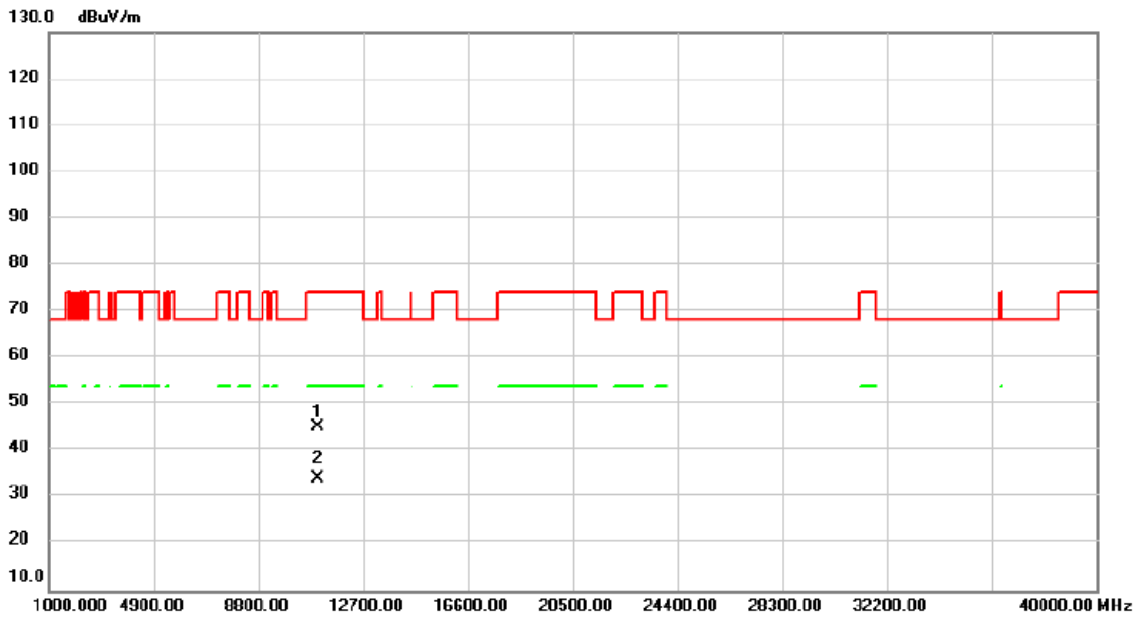


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11020.00	43.87	1.27	45.14	74.00	-28.86	peak	
2	*	11020.00	32.79	1.27	34.06	54.00	-19.94	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

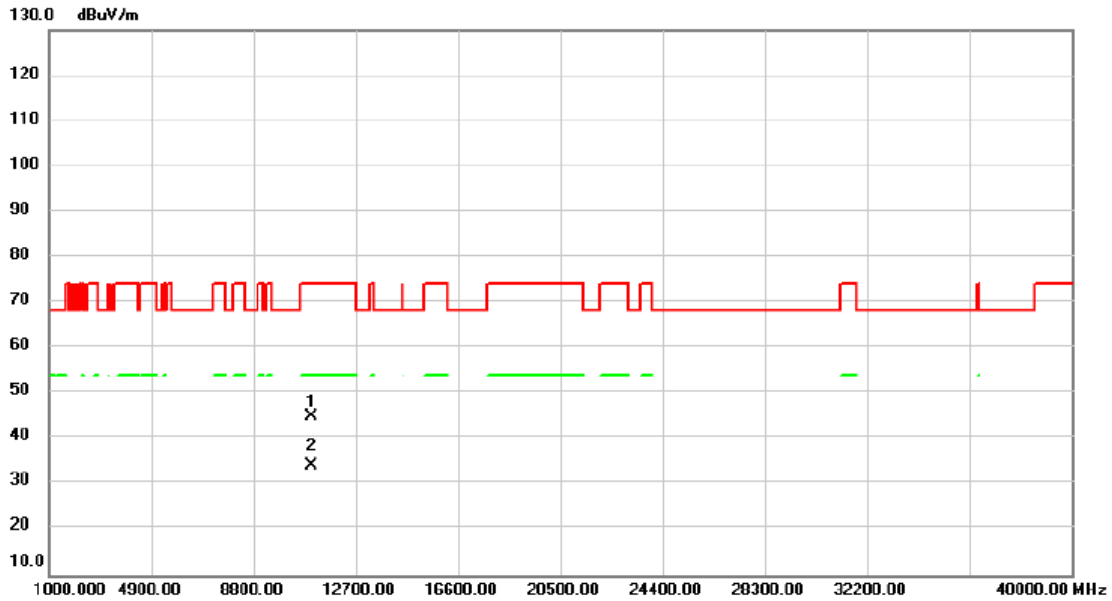


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11020.00	43.79	1.27	45.06	74.00	-28.94	peak	
2	*	11020.00	32.94	1.27	34.21	54.00	-19.79	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

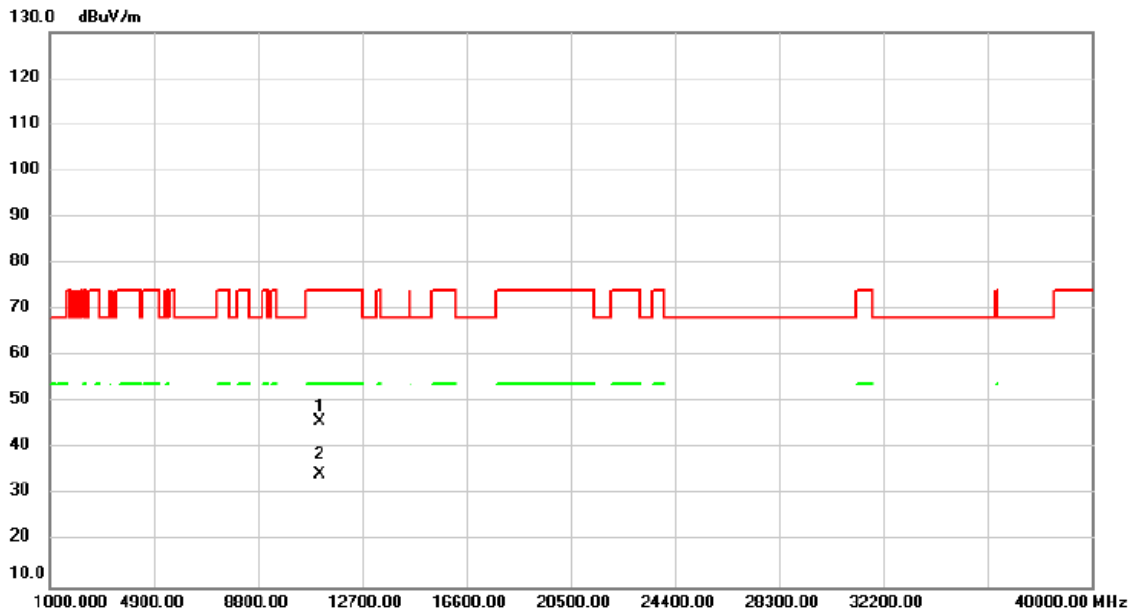


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11100.00	44.49	1.50	45.99	74.00	-28.01	peak	
2	*	11100.00	32.98	1.50	34.48	54.00	-19.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5550MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

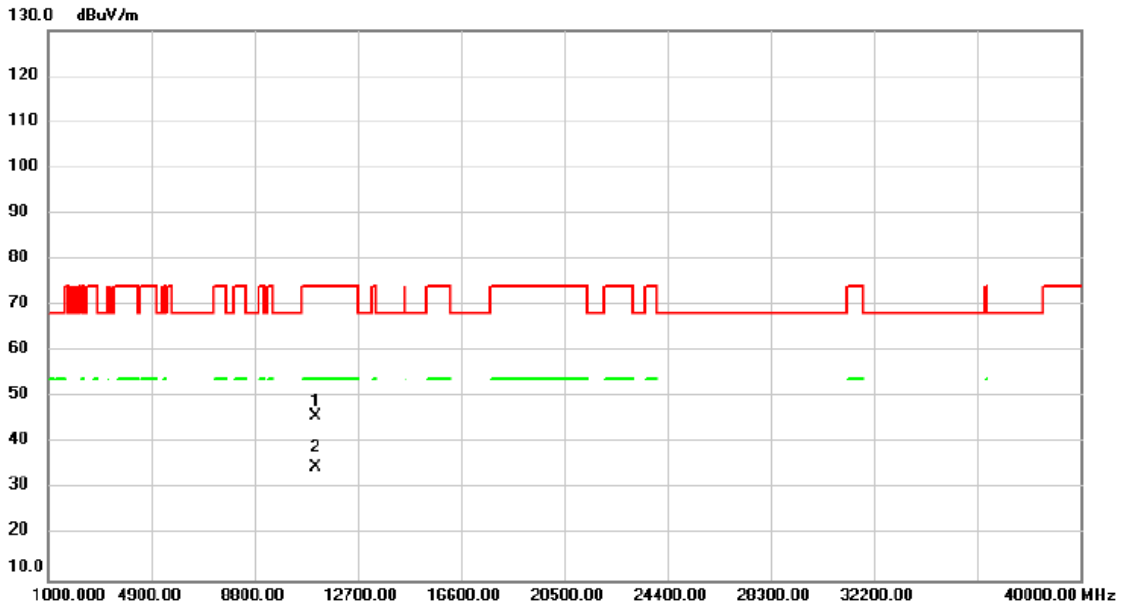


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11100.00	44.24	1.50	45.74	74.00	-28.26	peak	
2	*	11100.00	33.17	1.50	34.67	54.00	-19.33	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

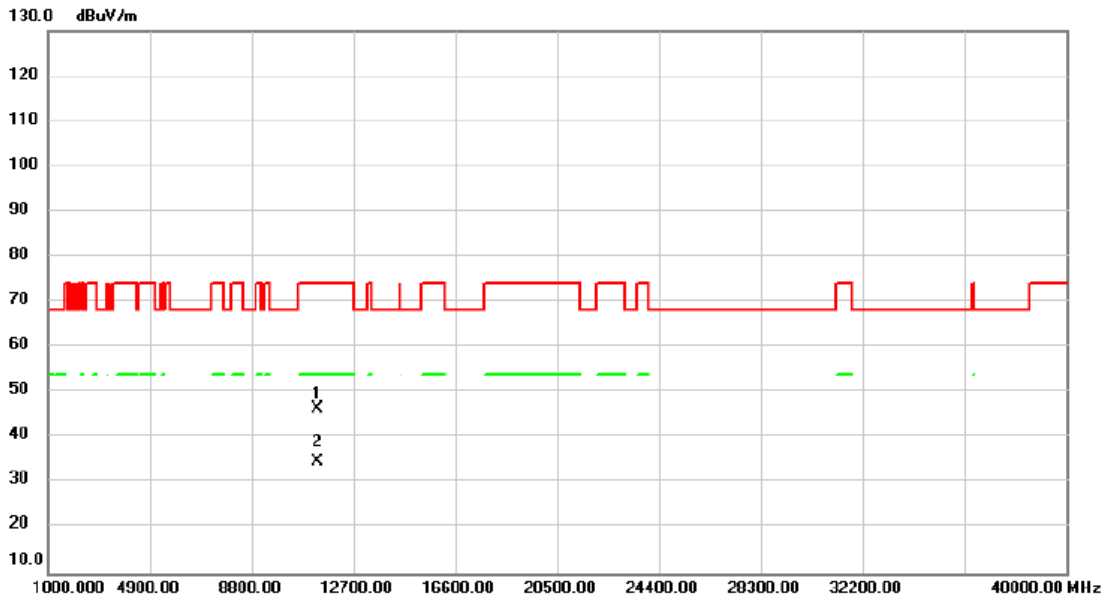


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11340.00	44.31	2.18	46.49	74.00	-27.51	peak	
2 *	11340.00	32.47	2.18	34.65	54.00	-19.35	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

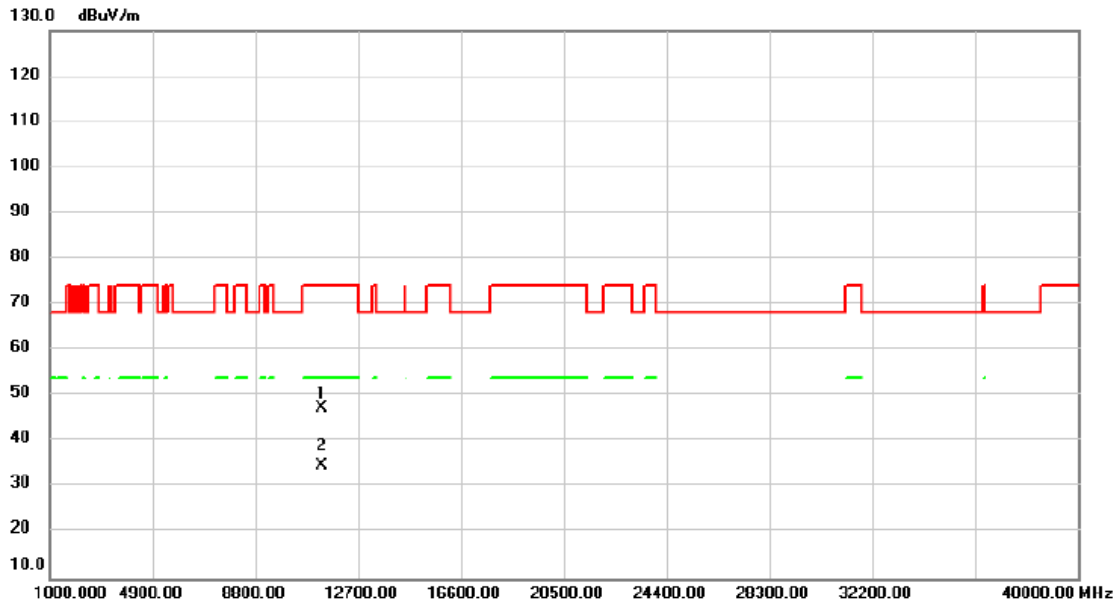


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11340.00	45.08	2.18	47.26	74.00	-26.74	peak	
2 *	11340.00	32.43	2.18	34.61	54.00	-19.39	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

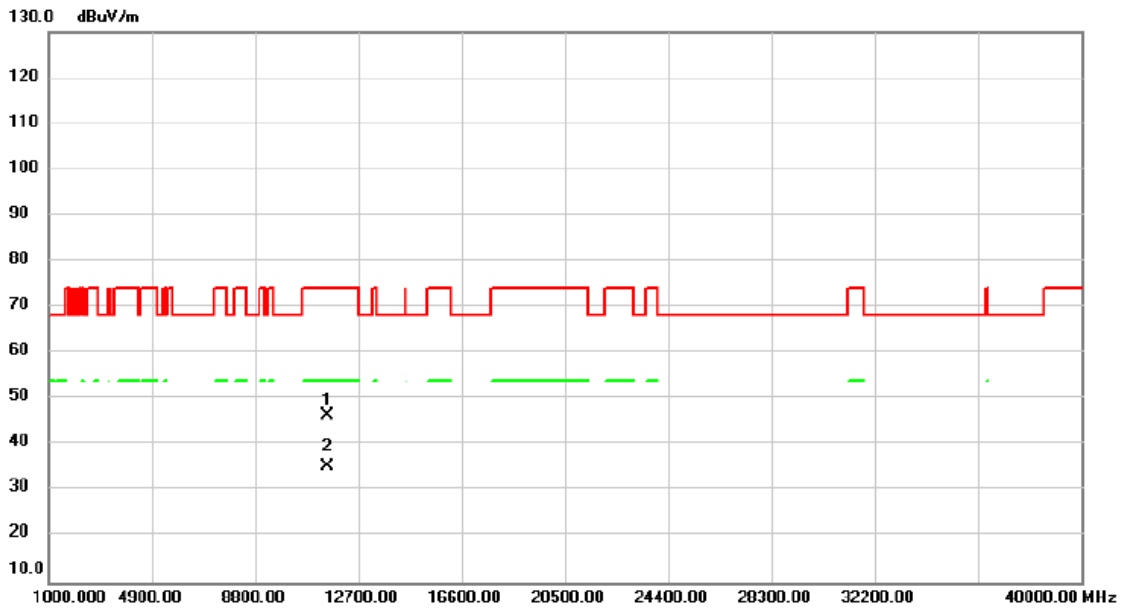


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11510.00	43.70	2.67	46.37	74.00	-27.63	peak	
2	*	11510.00	32.60	2.67	35.27	54.00	-18.73	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

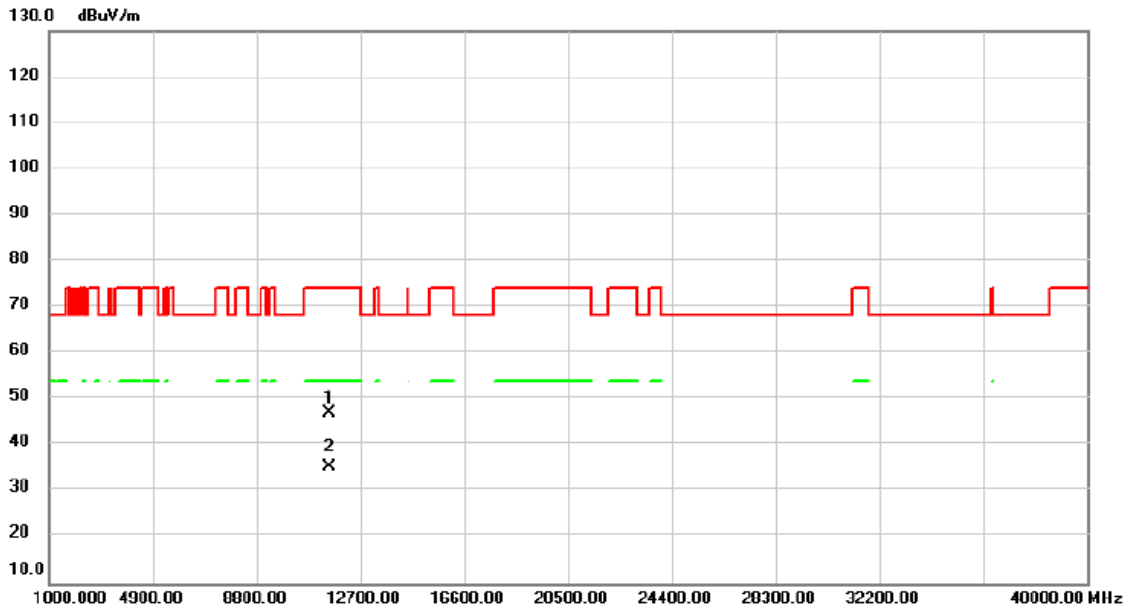


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11510.00	44.39	2.67	47.06	74.00	-26.94	peak	
2	*	11510.00	32.81	2.67	35.48	54.00	-18.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

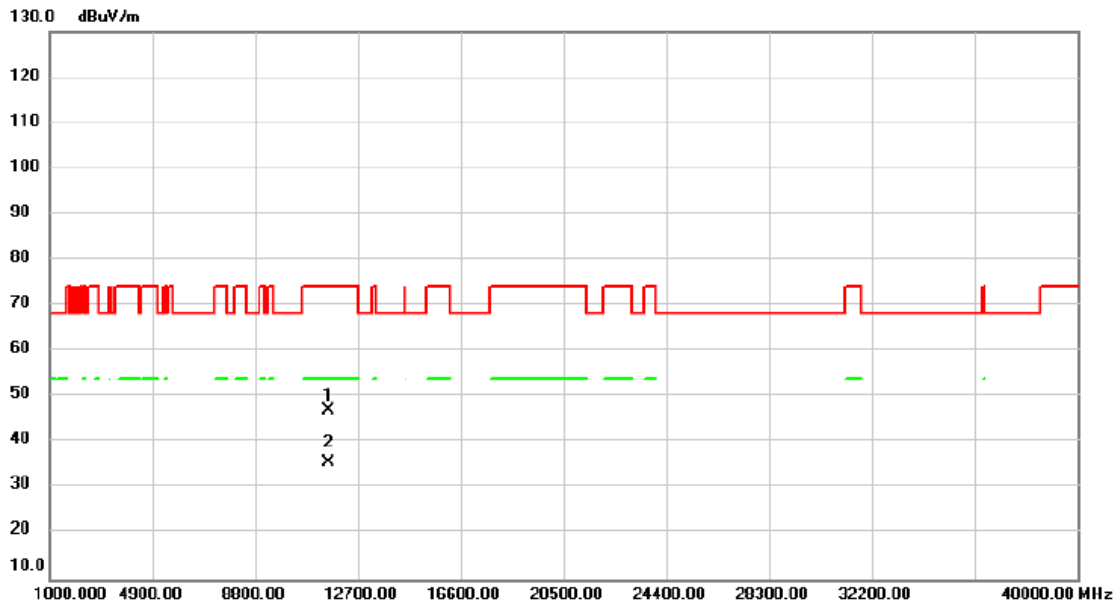


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	44.34	2.82	47.16	74.00	-26.84	peak	
2	*	11590.00	32.89	2.82	35.71	54.00	-18.29	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2022/10/19
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

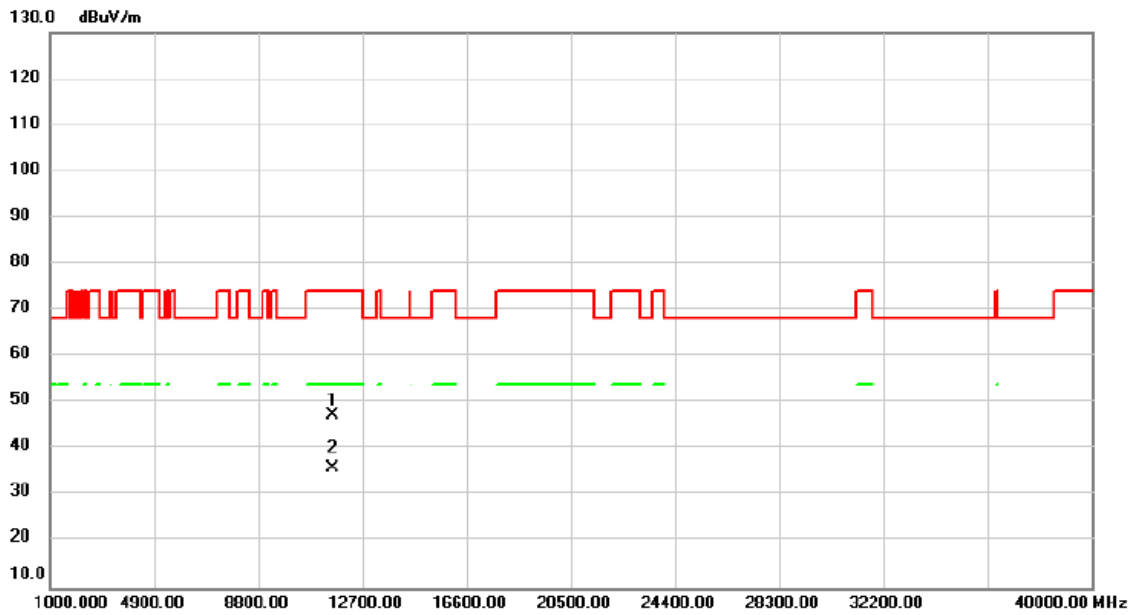


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	44.45	2.82	47.27	74.00	-26.73	peak	
2	*	11590.00	33.18	2.82	36.00	54.00	-18.00	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

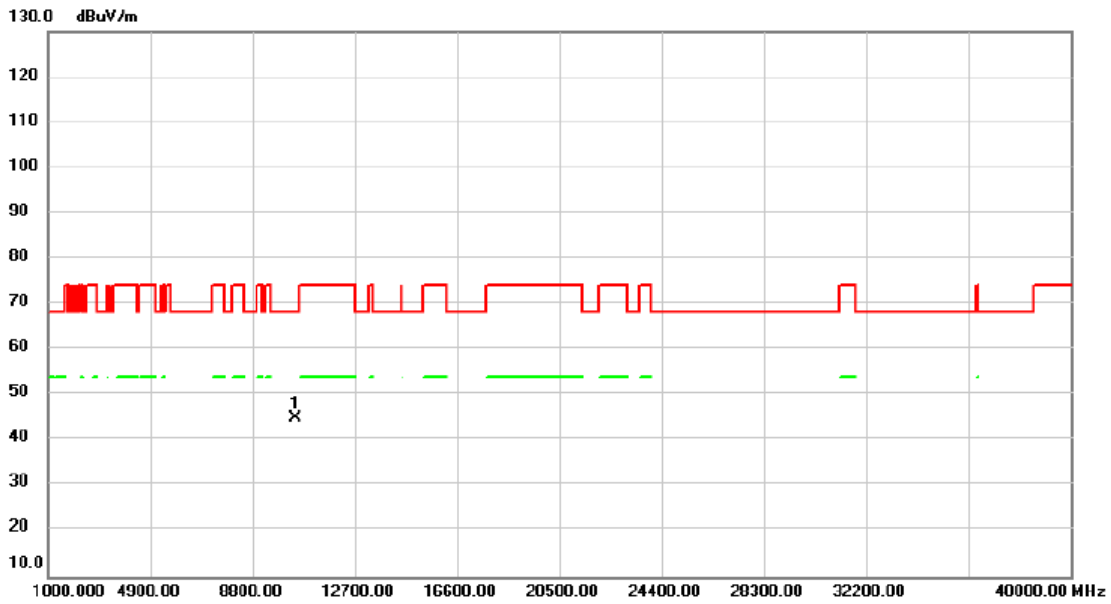


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	10420.00	44.02	1.04	45.06	68.20	-23.14	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

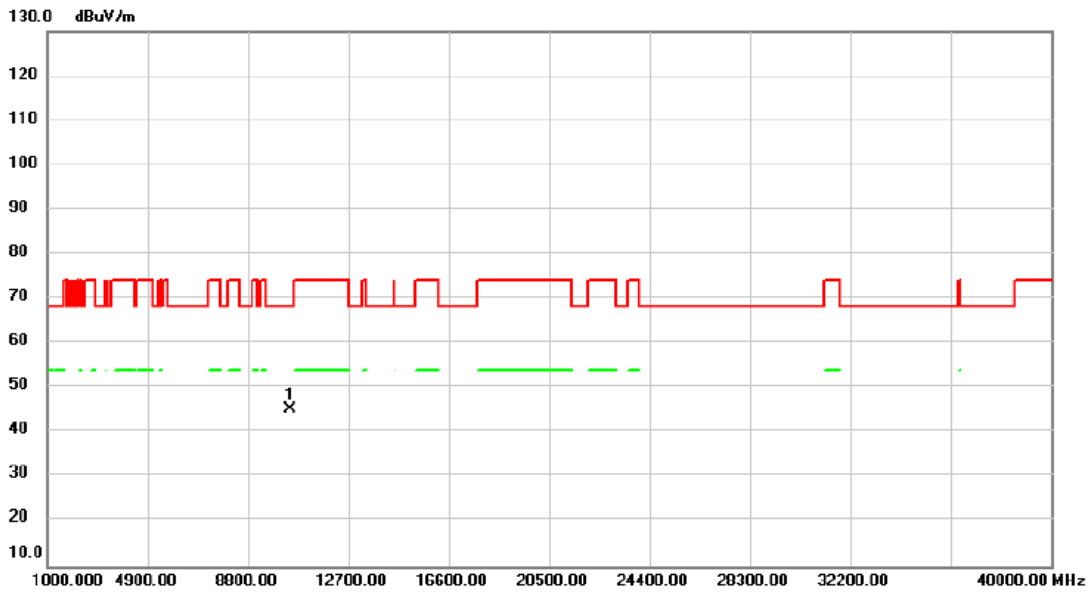


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	44.10	1.04	45.14	68.20	-23.06	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

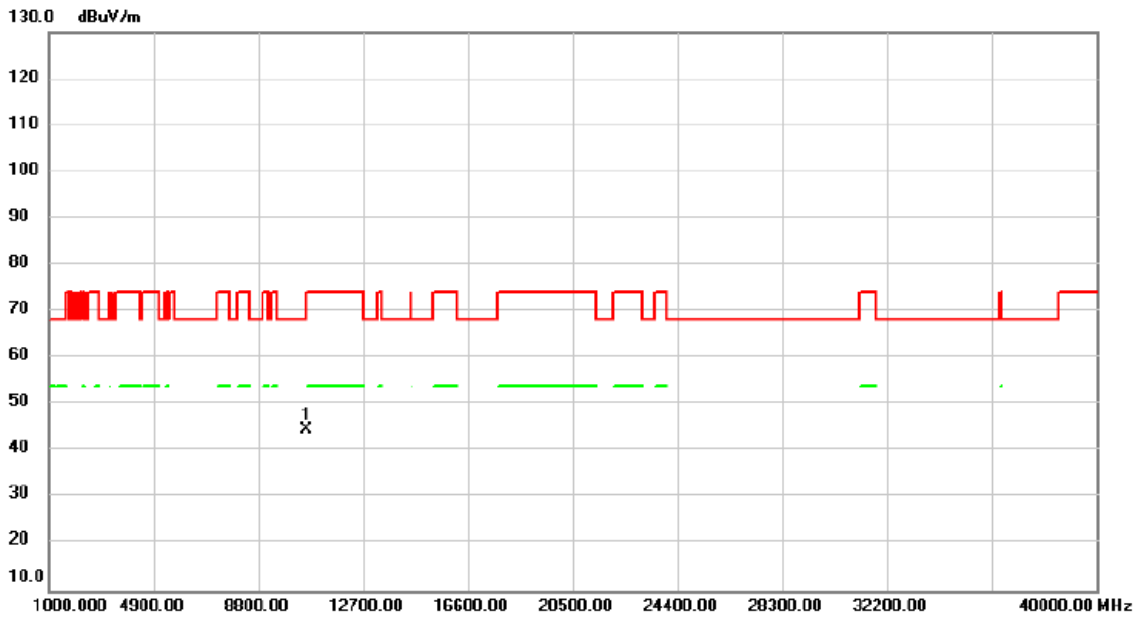


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	43.49	1.08	44.57	68.20	-23.63	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

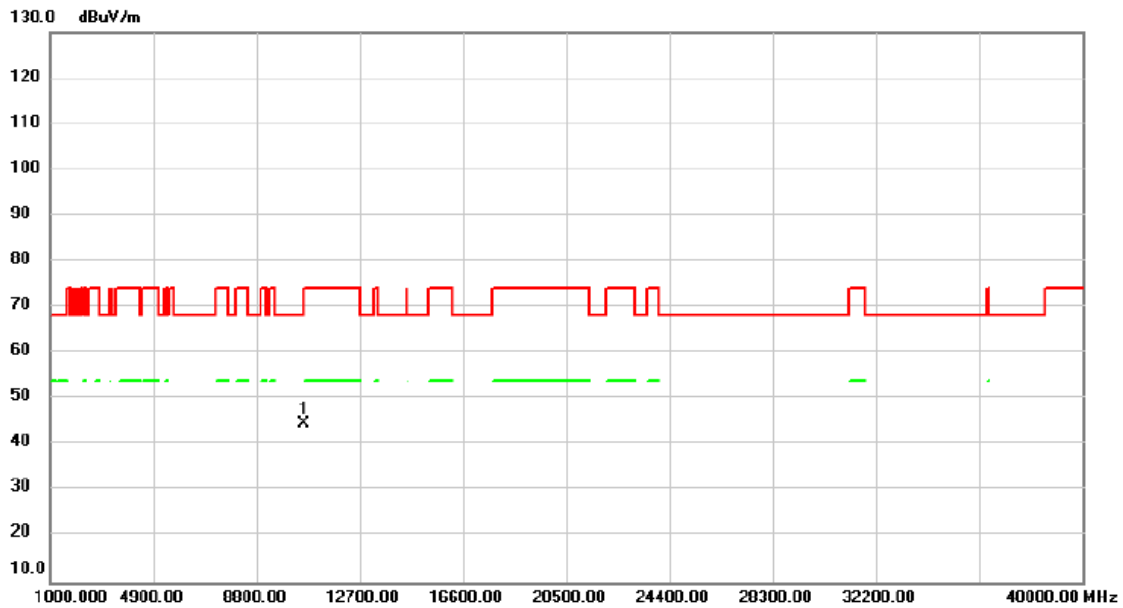


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	43.57	1.08	44.65	68.20	-23.55	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

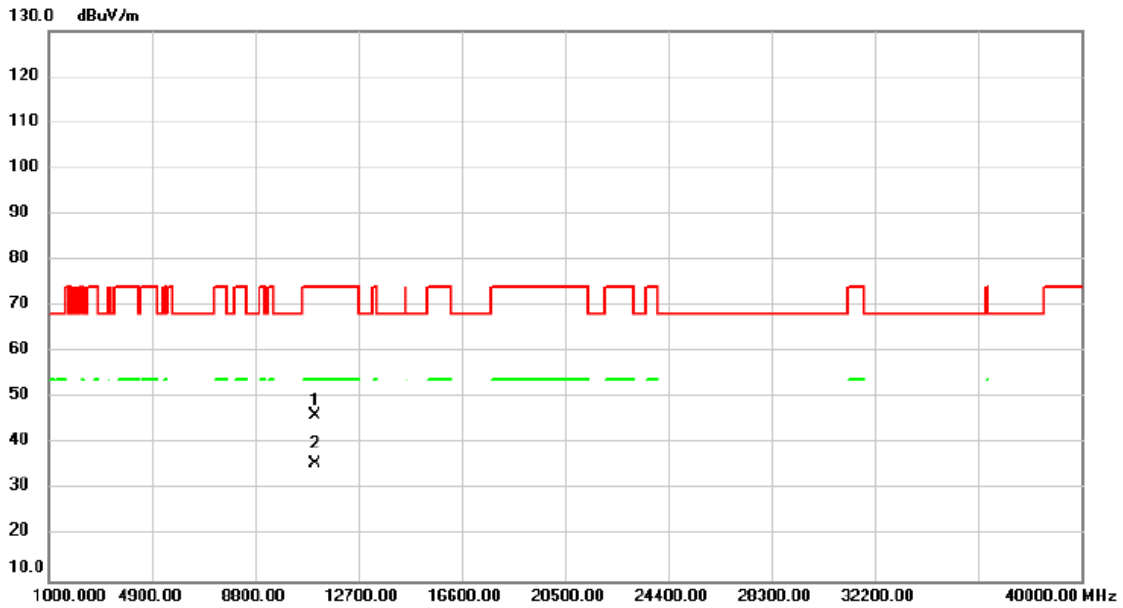


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	44.71	1.39	46.10	74.00	-27.90	peak	
2	*	11060.00	34.17	1.39	35.56	54.00	-18.44	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

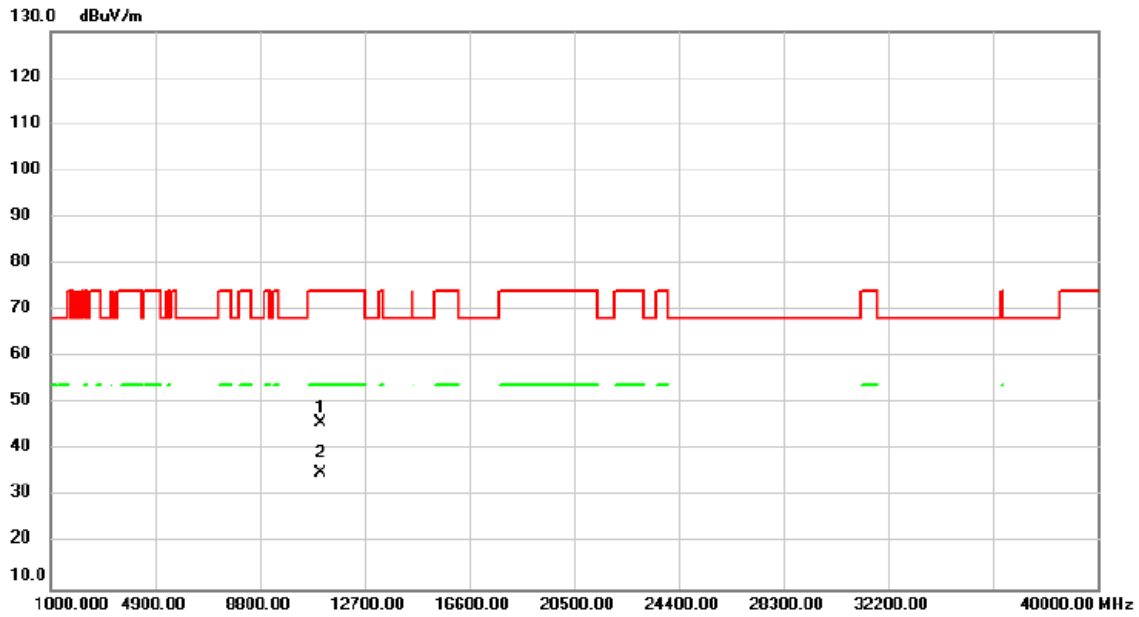


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	44.54	1.39	45.93	74.00	-28.07	peak	
2	*	11060.00	33.71	1.39	35.10	54.00	-18.90	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

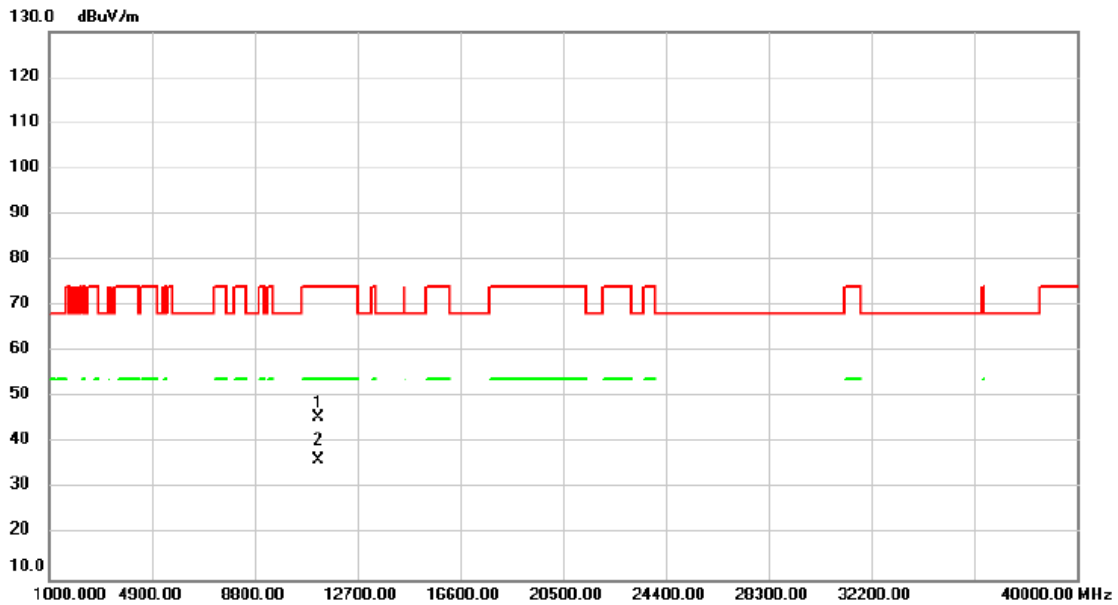


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11220.00	43.80	1.84	45.64	74.00	-28.36	peak	
2 *	11220.00	34.26	1.84	36.10	54.00	-17.90	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

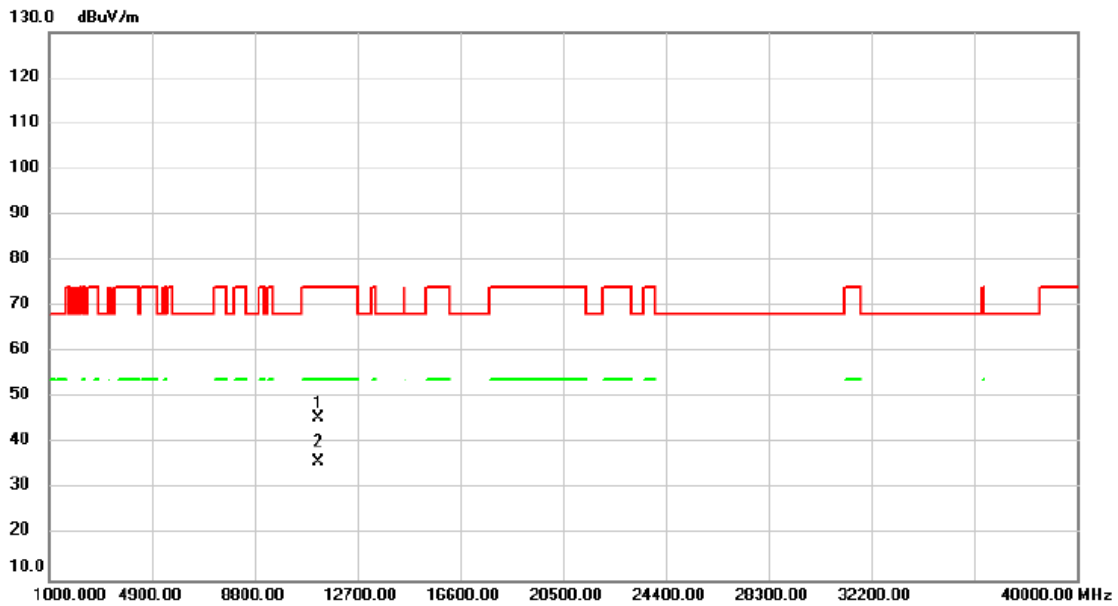


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	43.81	1.84	45.65	74.00	-28.35	peak	
2	*	11220.00	34.04	1.84	35.88	54.00	-18.12	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

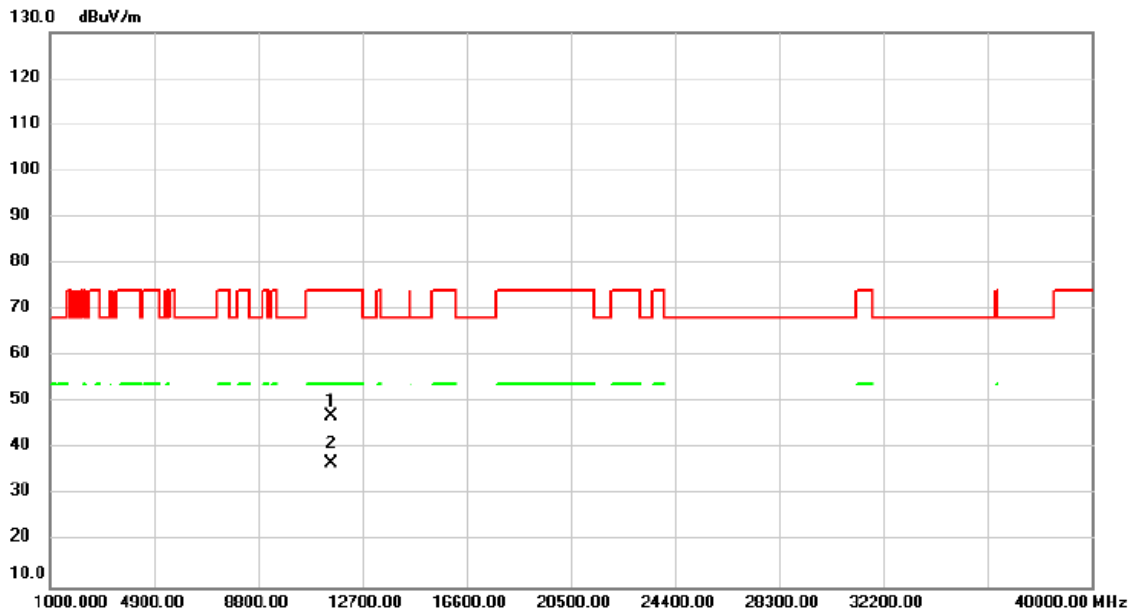


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	44.41	2.74	47.15	74.00	-26.85	peak	
2	*	11550.00	34.01	2.74	36.75	54.00	-17.25	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2022/10/19
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

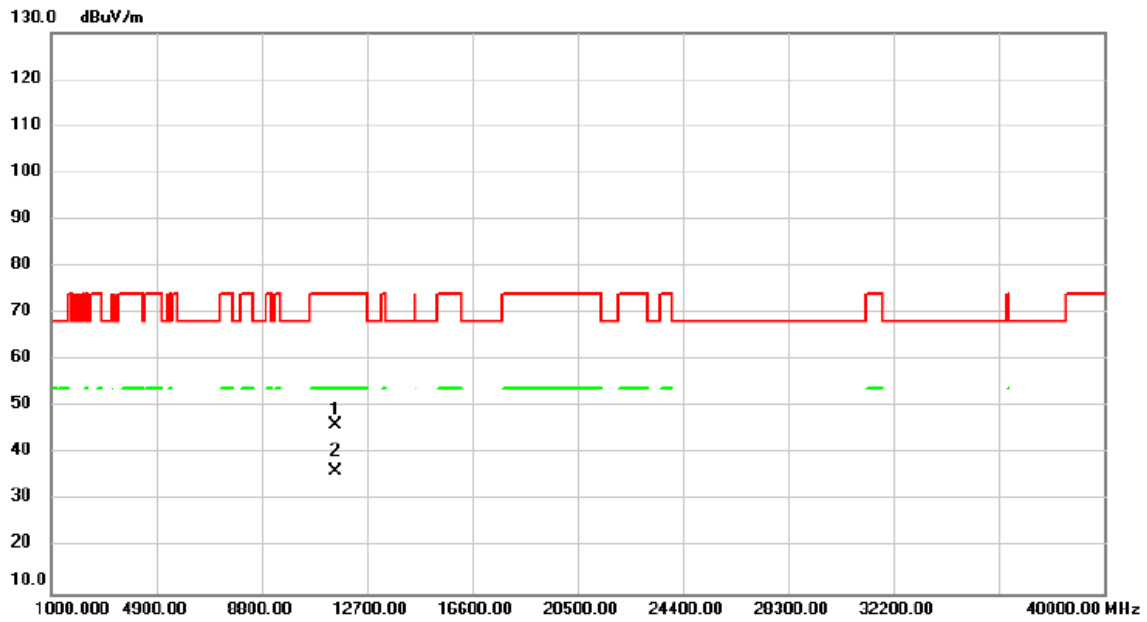


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	43.43	2.74	46.17	74.00	-27.83	peak	
2	*	11550.00	33.66	2.74	36.40	54.00	-17.60	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/26
Test Frequency	5180MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

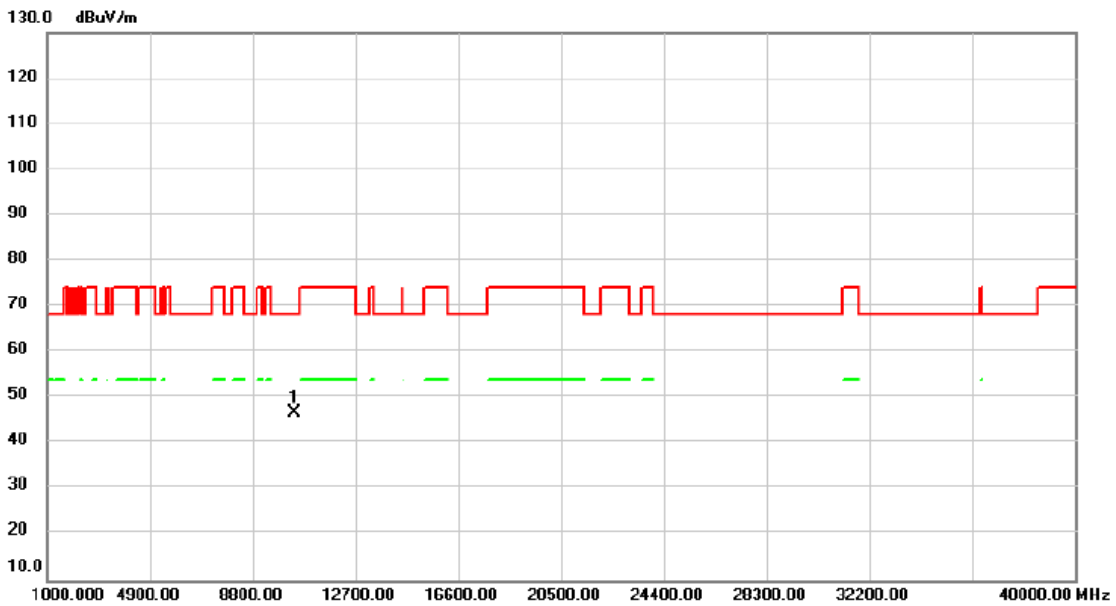


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	10360.00	40.97	5.82	46.79	68.20	-21.41	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/26
Test Frequency	5180MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

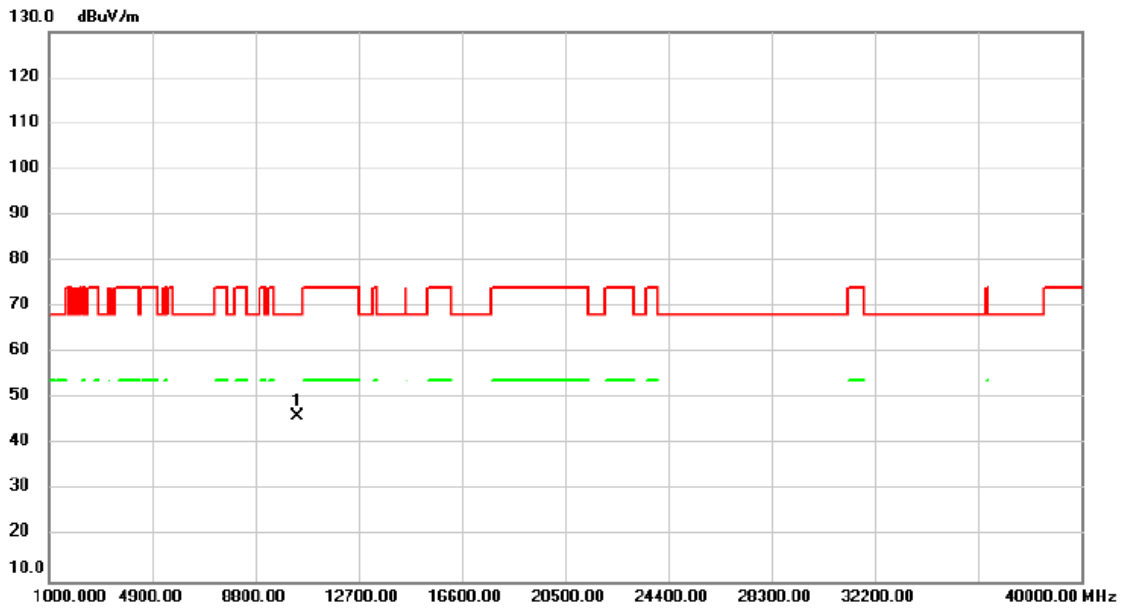


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10360.00	40.42	5.82	46.24	68.20	-21.96	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/26
Test Frequency	5200MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

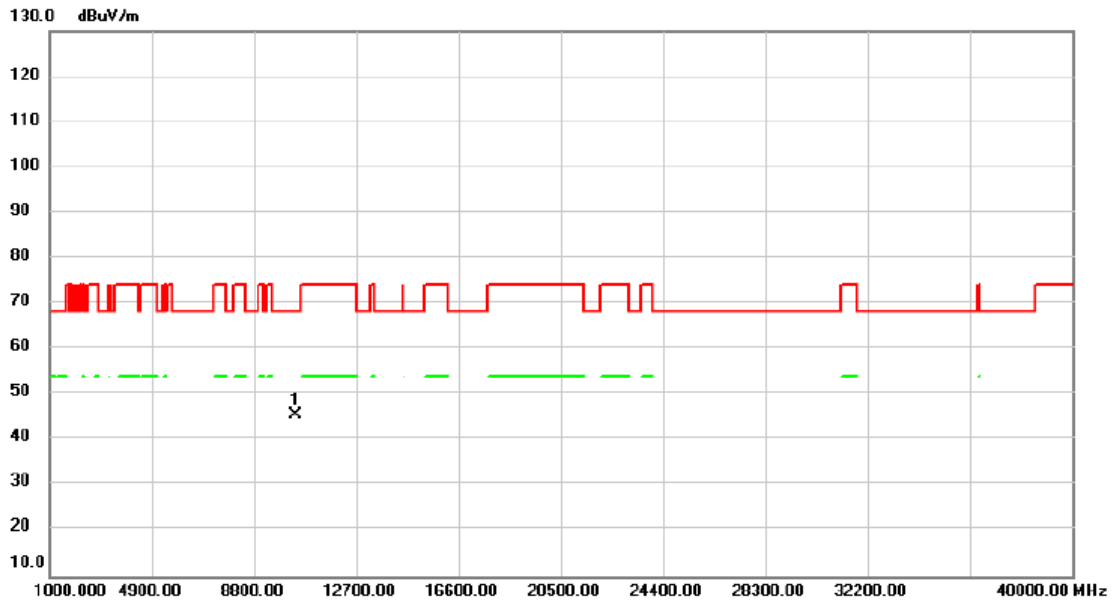


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	39.71	5.80	45.51	68.20	-22.69	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/26
Test Frequency	5200MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

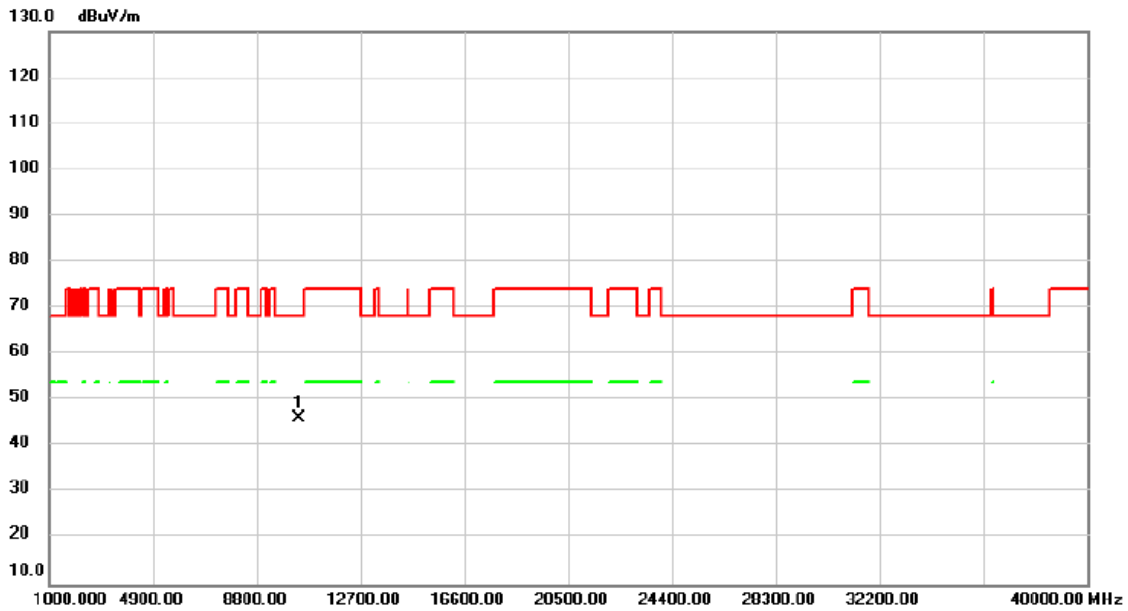


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	40.38	5.80	46.18	68.20	-22.02	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/26
Test Frequency	5240MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

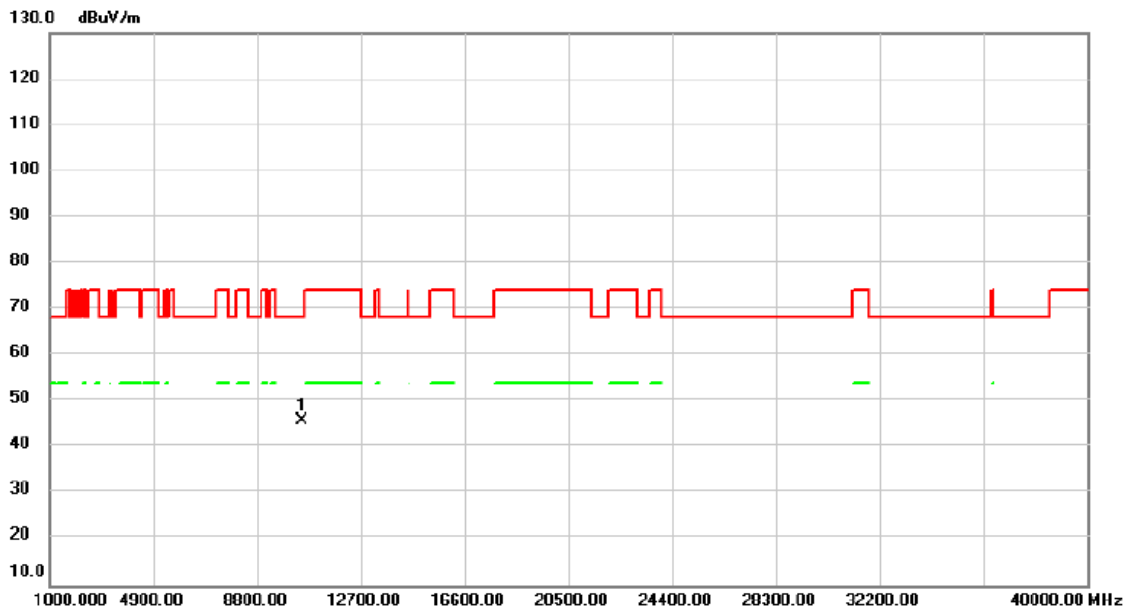


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	40.23	5.75	45.98	68.20	-22.22	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/26
Test Frequency	5240MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

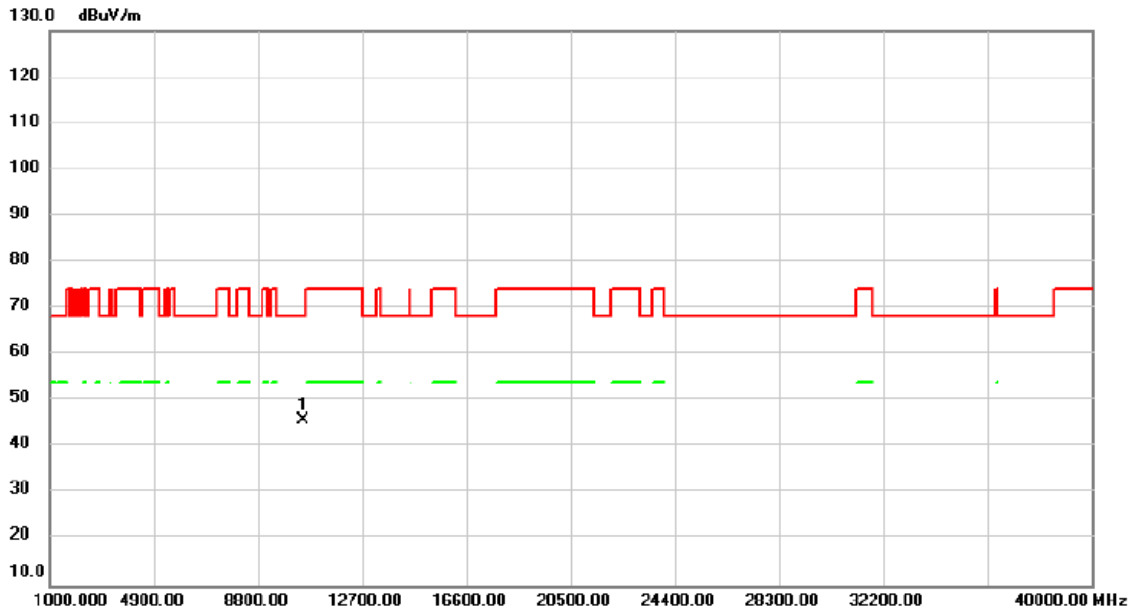


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10480.00	40.16	5.75	45.91	68.20	-22.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

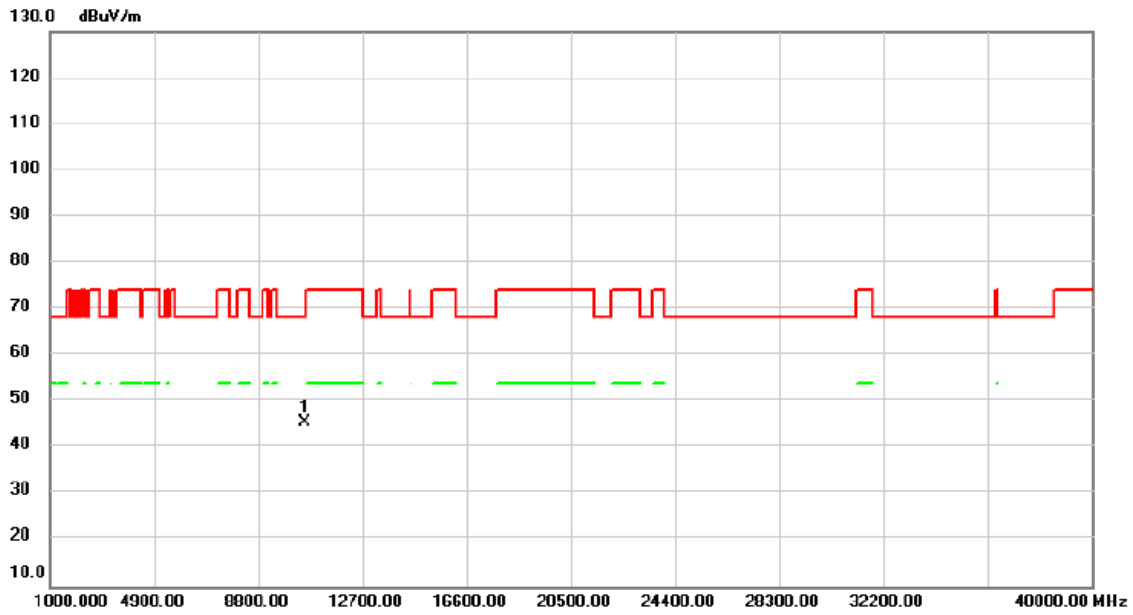


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	44.60	1.07	45.67	68.20	-22.53	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

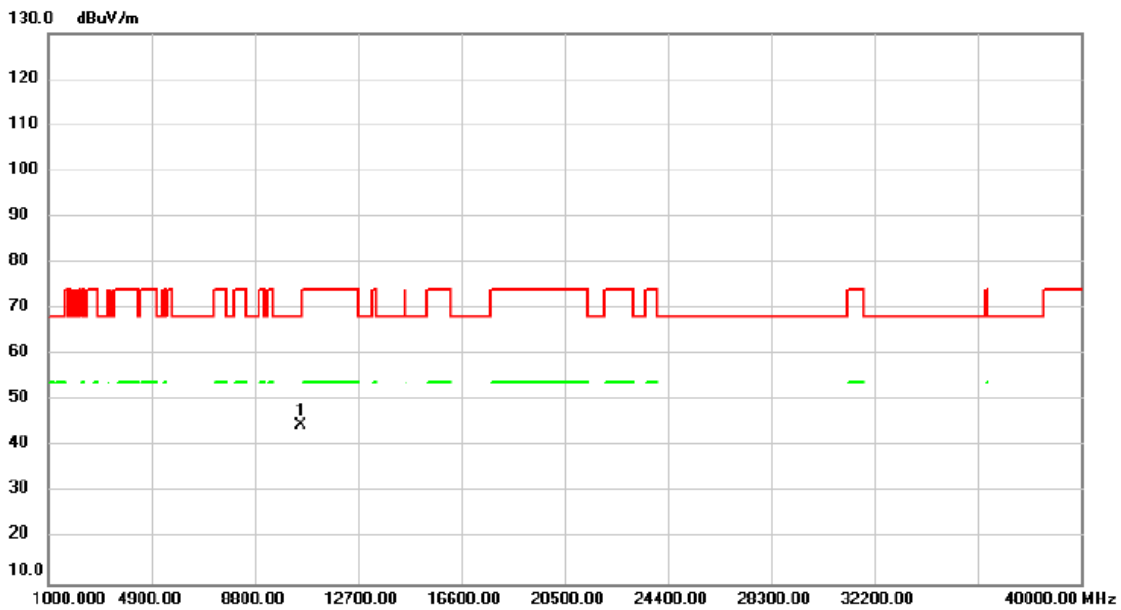


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	10520.00	43.55	1.07	44.62	68.20	-23.58	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

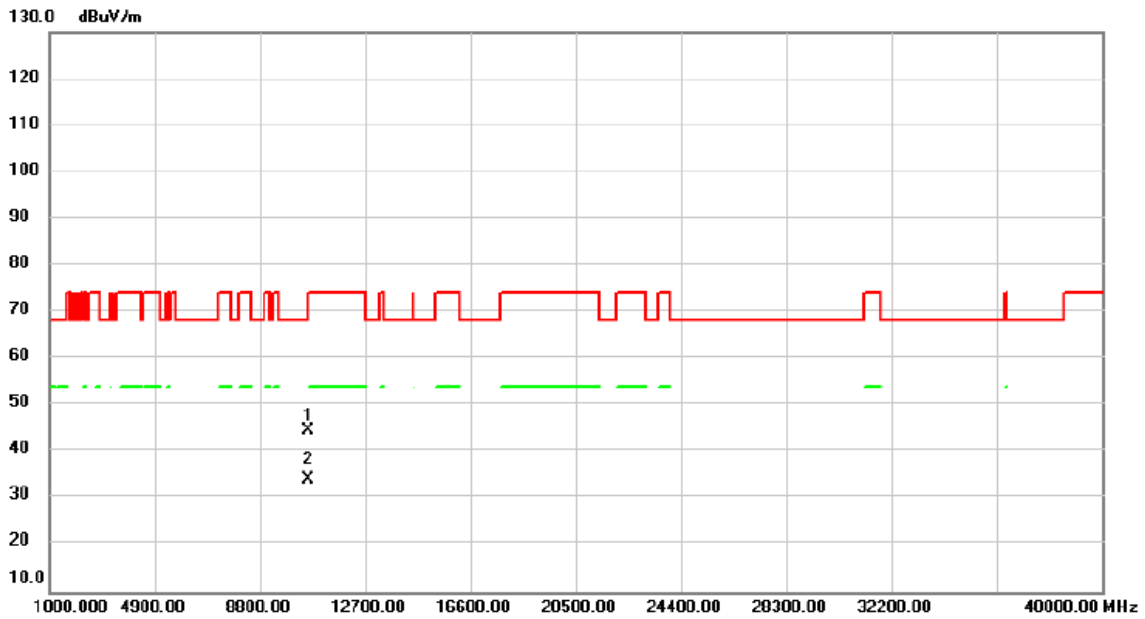


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10600.00	43.48	1.09	44.57	68.20	-23.63	peak	
2	*	10600.00	32.97	1.09	34.06	54.00	-19.94	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5300MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

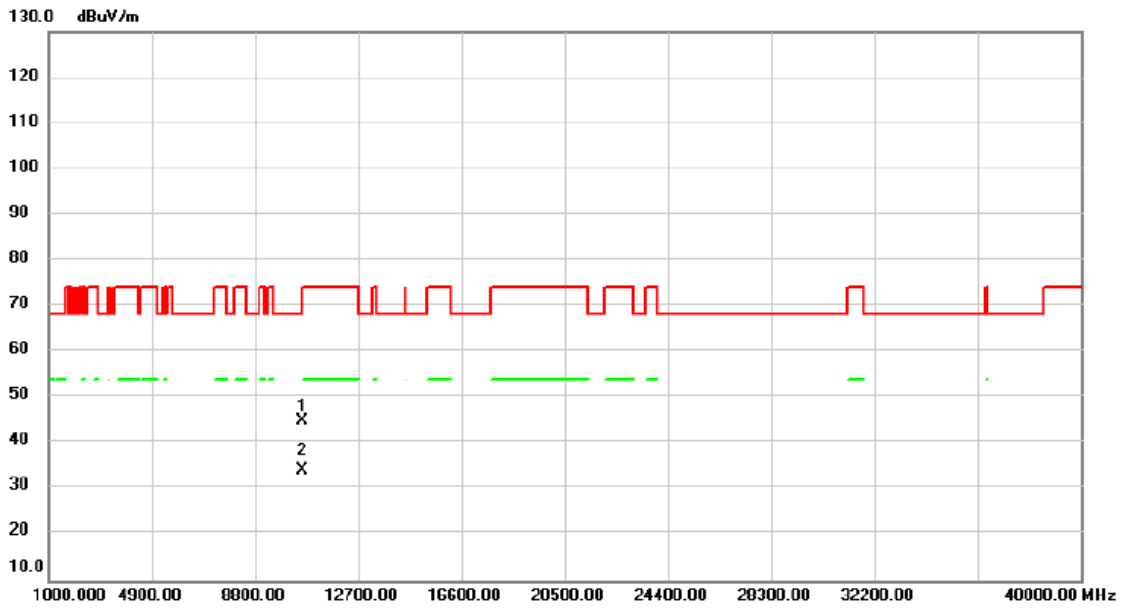


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10600.00	43.88	1.09	44.97	68.20	-23.23	peak	
2	*	10600.00	32.95	1.09	34.04	54.00	-19.96	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

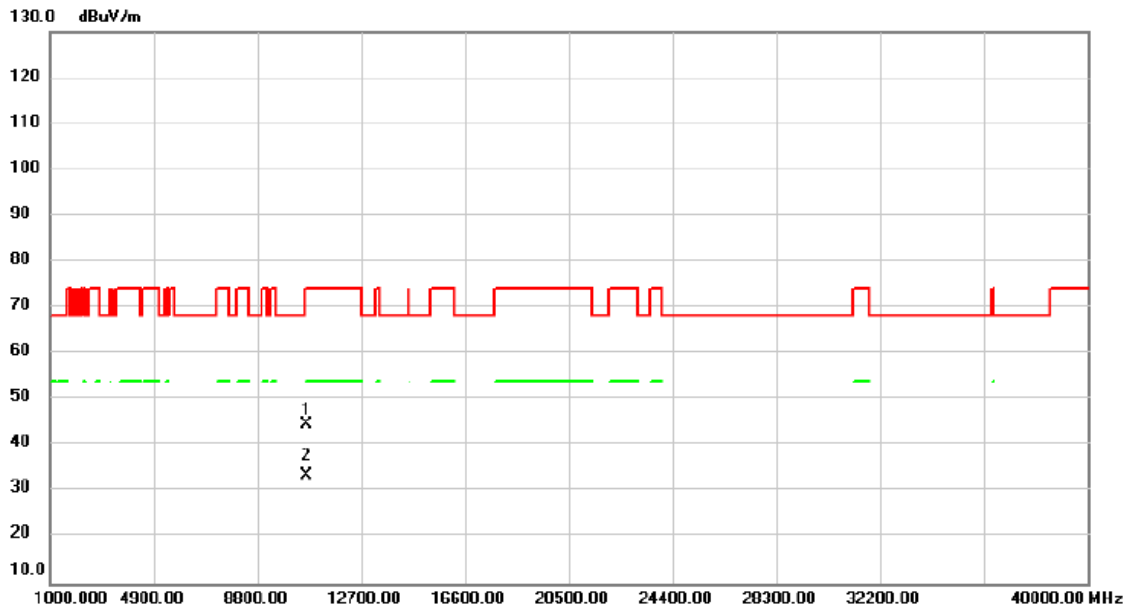


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	43.67	1.10	44.77	74.00	-29.23	peak	
2	*	10640.00	32.51	1.10	33.61	54.00	-20.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

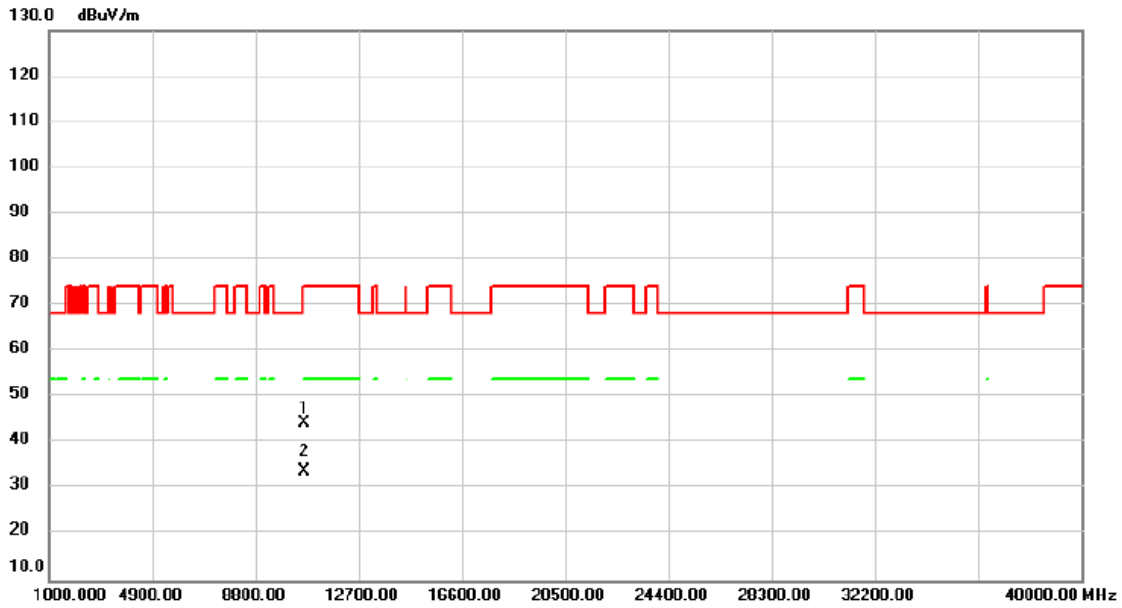


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10640.00	43.34	1.10	44.44	74.00	-29.56	peak	
2	*	10640.00	32.63	1.10	33.73	54.00	-20.27	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

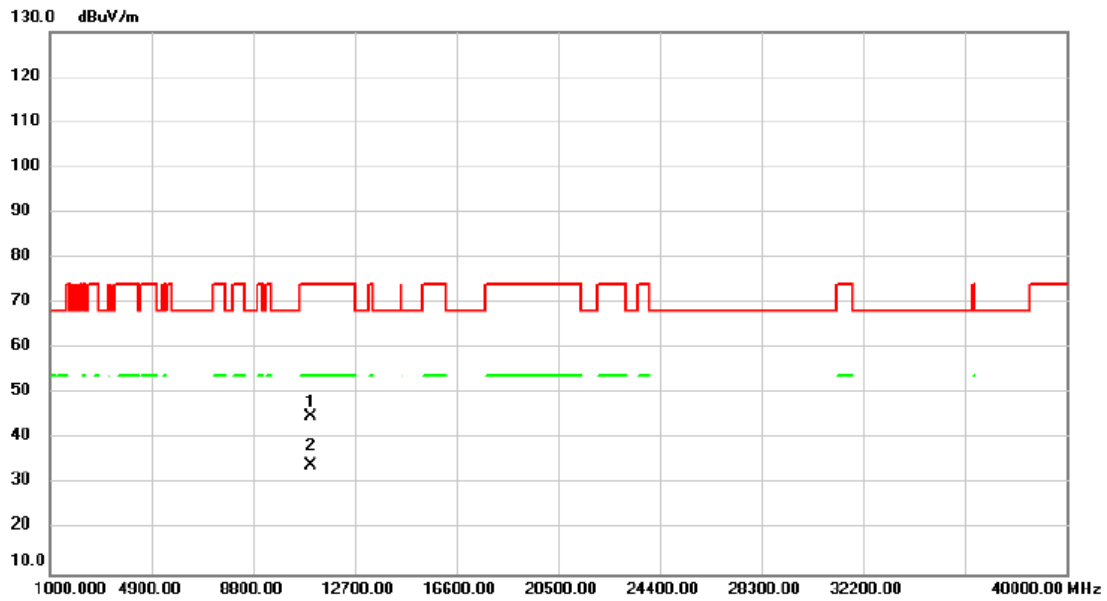


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11000.00	43.81	1.21	45.02	74.00	-28.98	peak	
2	*	11000.00	33.05	1.21	34.26	54.00	-19.74	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

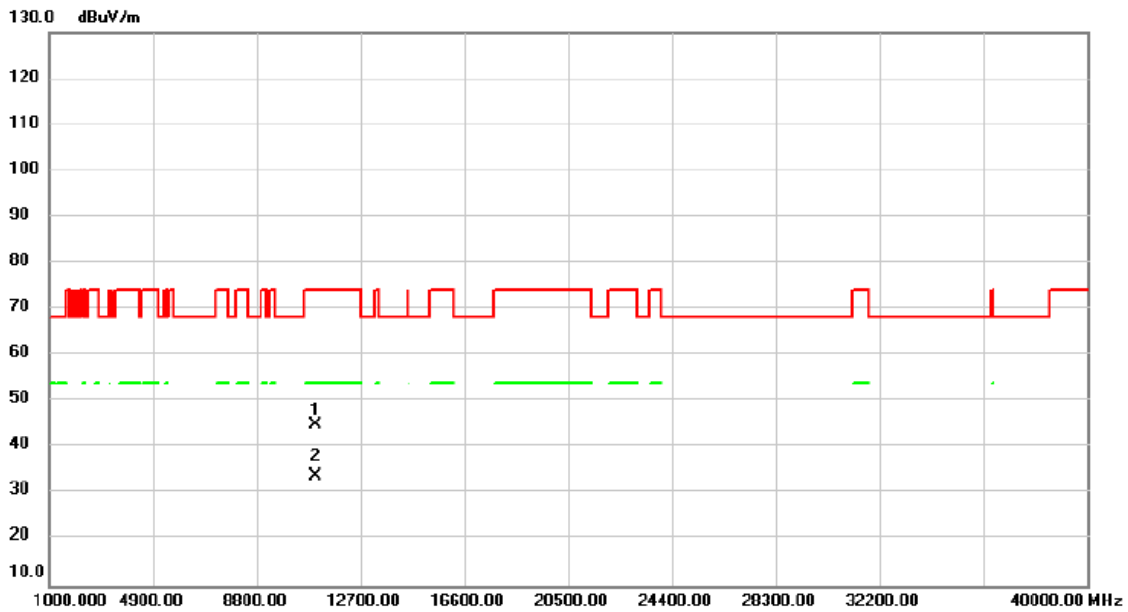


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11000.00	43.72	1.21	44.93	74.00	-29.07	peak	
2	*	11000.00	32.71	1.21	33.92	54.00	-20.08	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

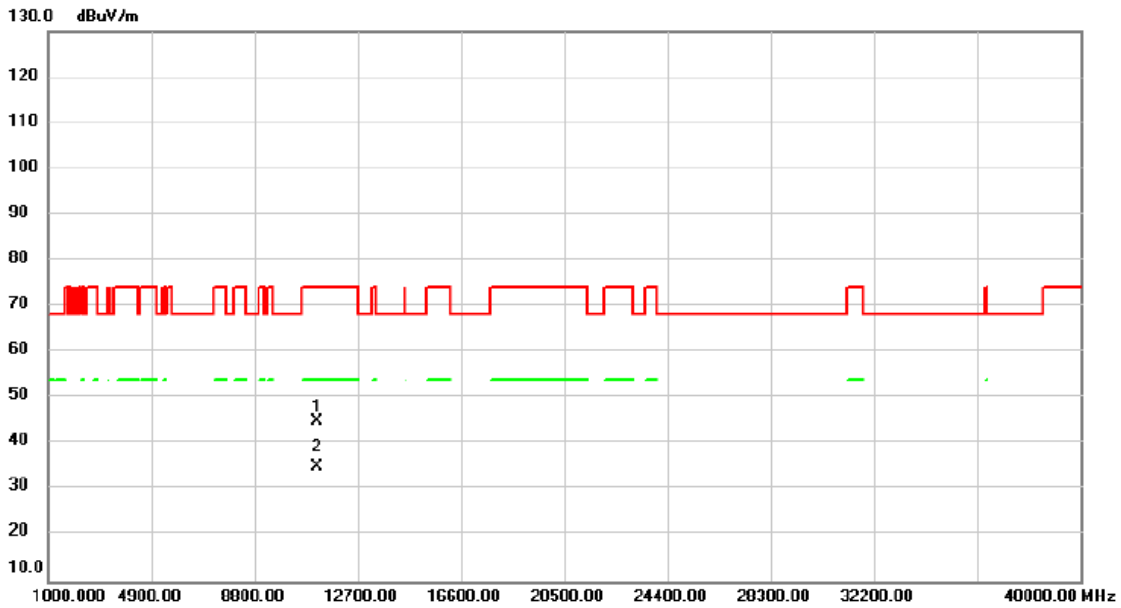


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11160.00	43.32	1.68	45.00	74.00	-29.00	peak	
2	*	11160.00	33.27	1.68	34.95	54.00	-19.05	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

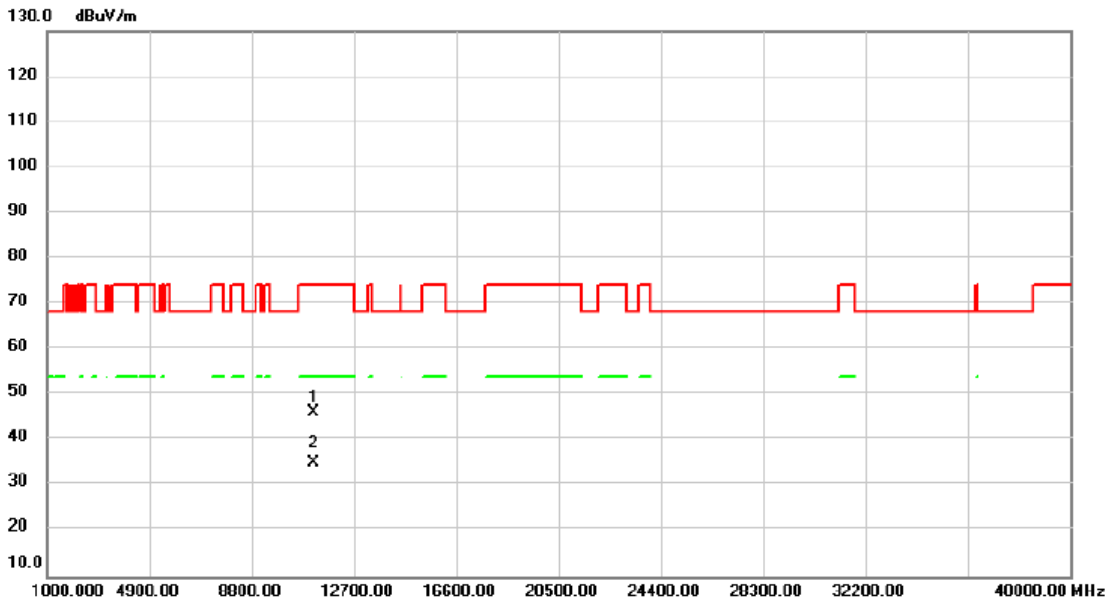


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11160.00	44.40	1.68	46.08	74.00	-27.92	peak	
2 *	11160.00	33.27	1.68	34.95	54.00	-19.05	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

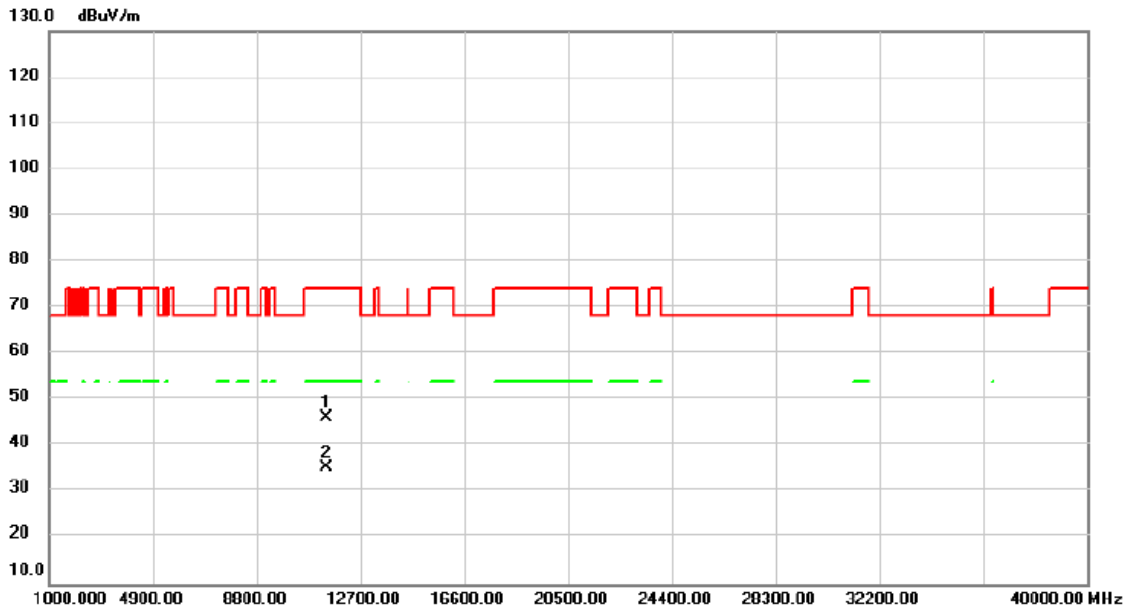


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	11400.00	43.74	2.36	46.10	74.00	-27.90	peak	
2		11400.00	32.86	2.36	35.22	74.00	-38.78	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

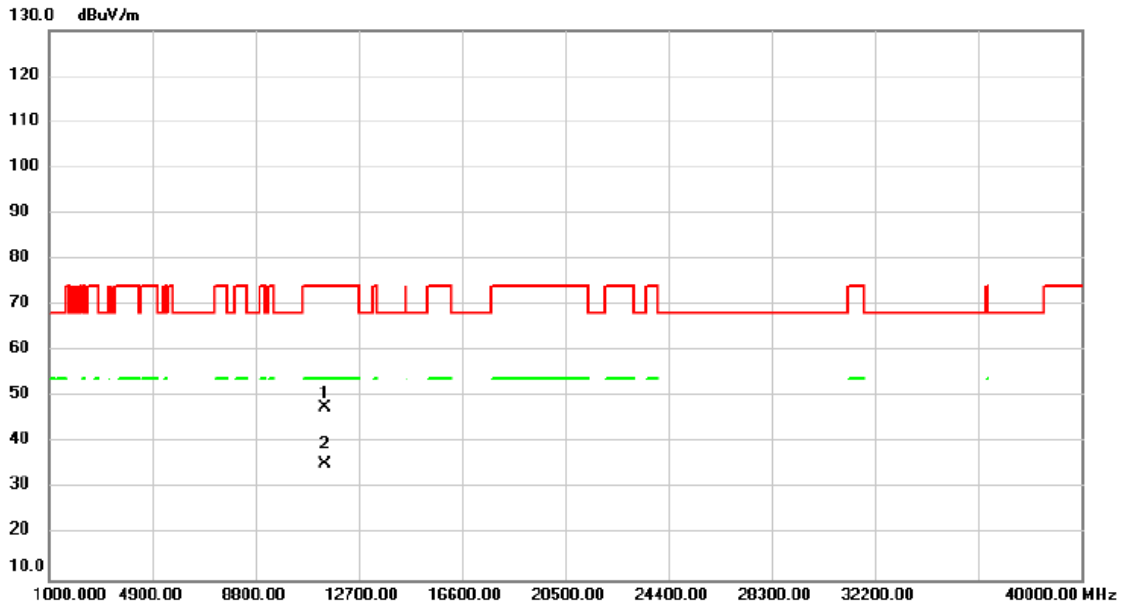


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	45.17	2.36	47.53	74.00	-26.47	peak	
2	*	11400.00	33.12	2.36	35.48	54.00	-18.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

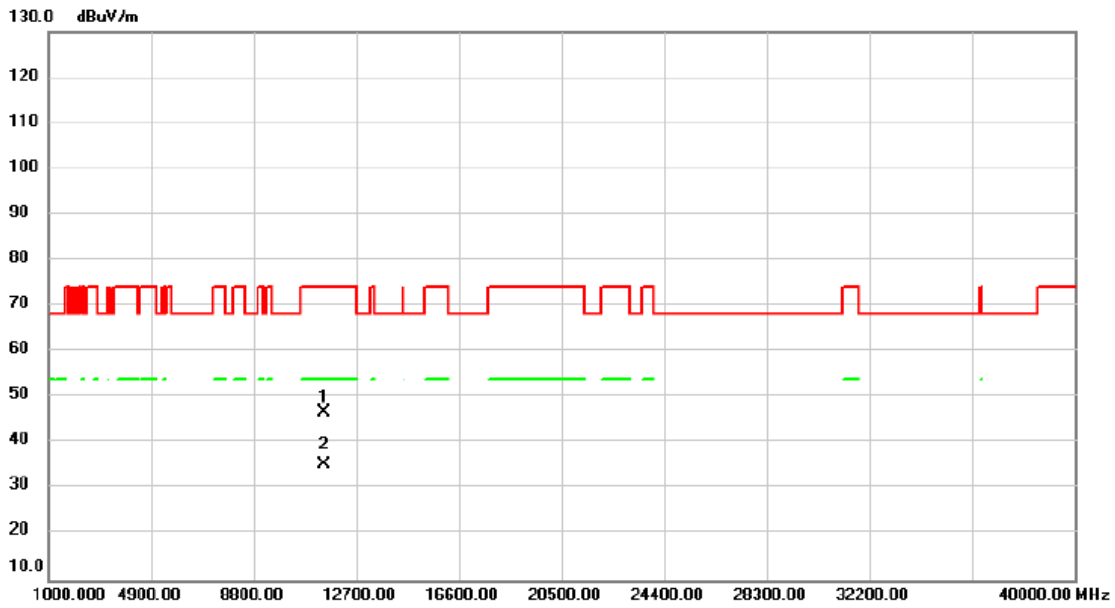


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.00	44.02	2.62	46.64	74.00	-27.36	peak	
2 *	11490.00	32.84	2.62	35.46	54.00	-18.54	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

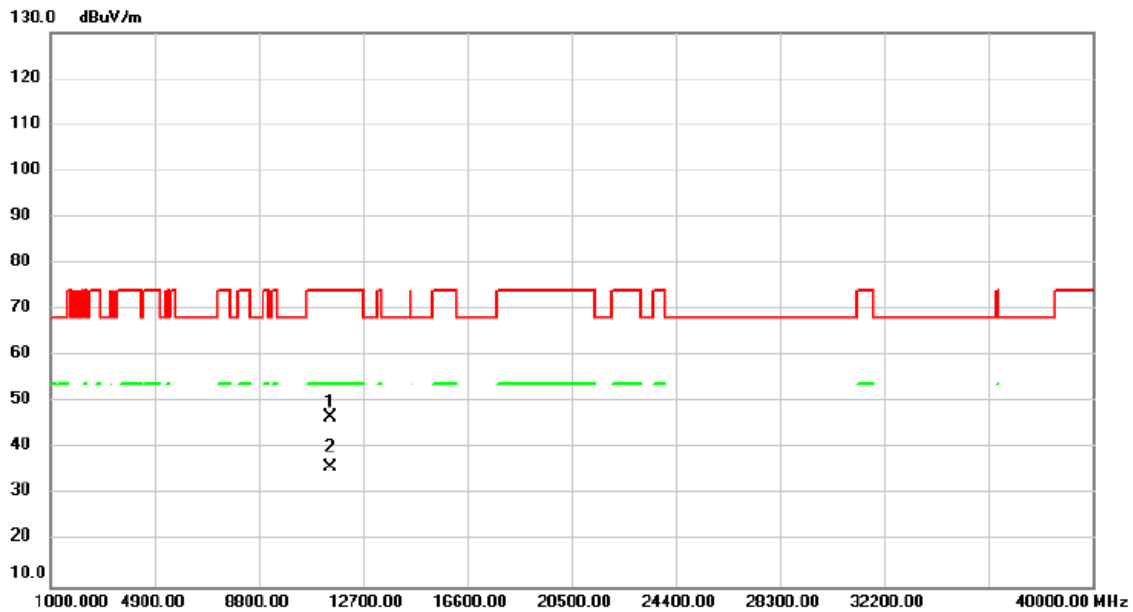


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11490.00	44.11	2.62	46.73	74.00	-27.27	peak	
2	*	11490.00	33.29	2.62	35.91	54.00	-18.09	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

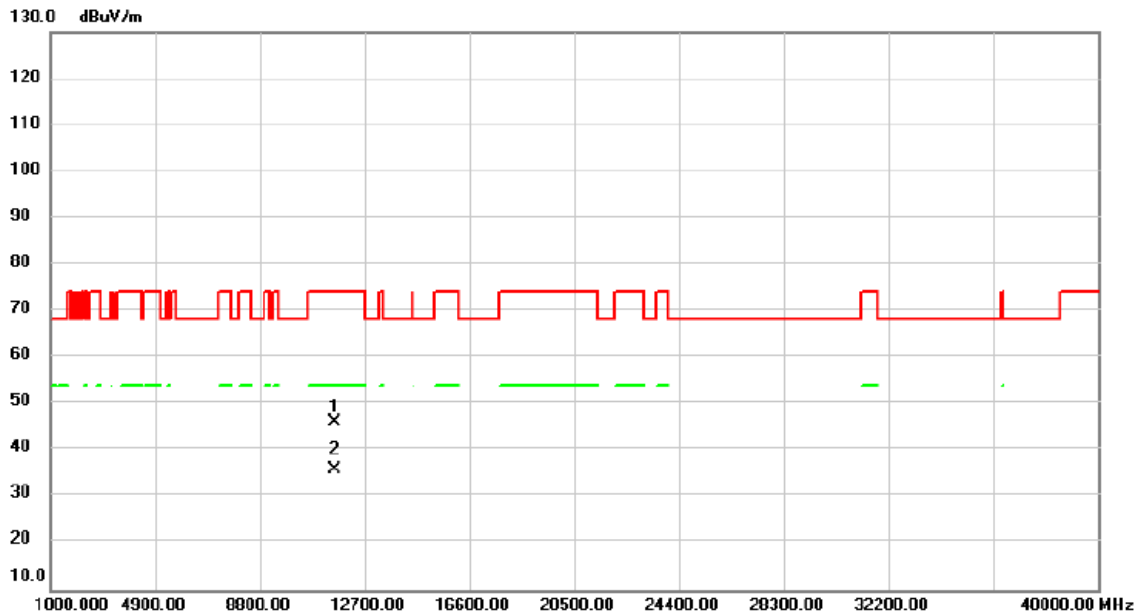


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	43.51	2.78	46.29	74.00	-27.71	peak	
2	*	11570.00	33.28	2.78	36.06	54.00	-17.94	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

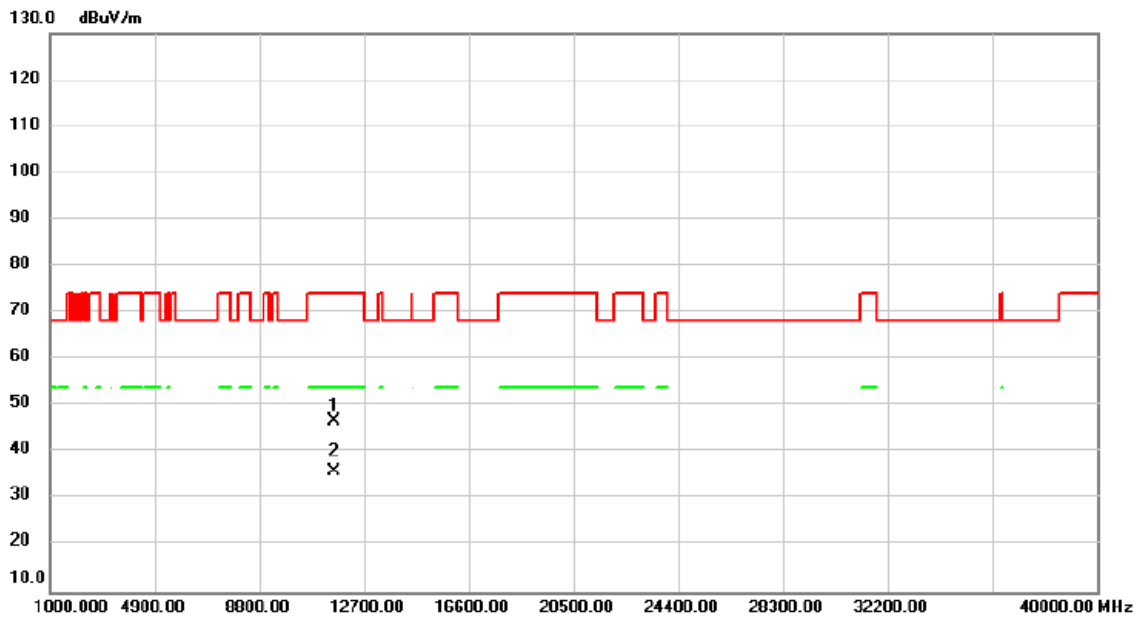


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11570.00	43.96	2.78	46.74	74.00	-27.26	peak	
2	*	11570.00	33.27	2.78	36.05	54.00	-17.95	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

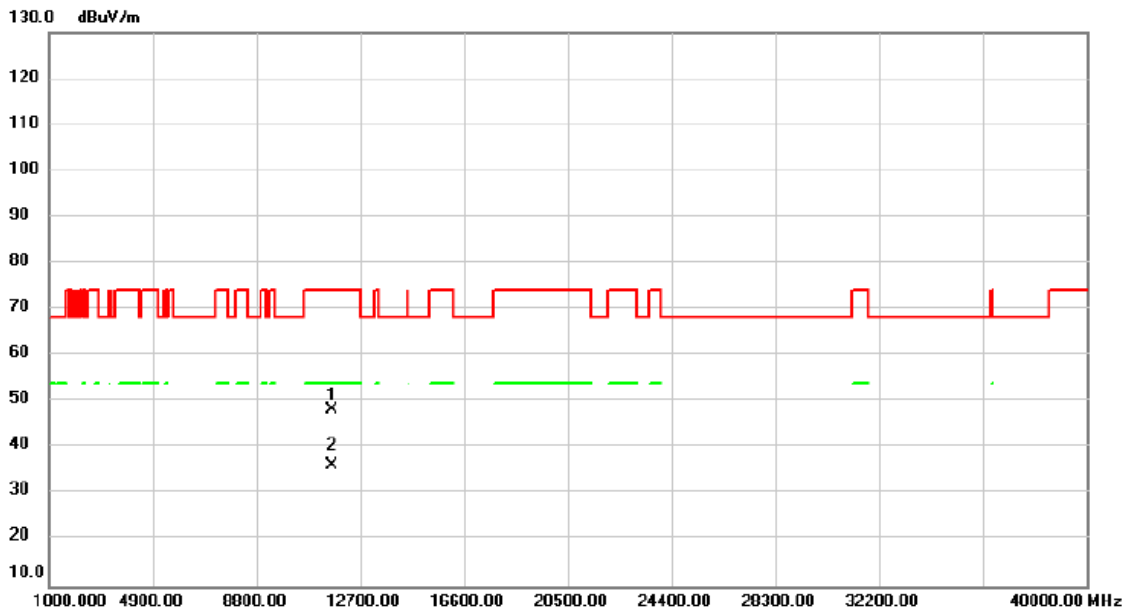


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	45.39	2.94	48.33	74.00	-25.67	peak	
2	*	11650.00	33.27	2.94	36.21	54.00	-17.79	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2022/10/19
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

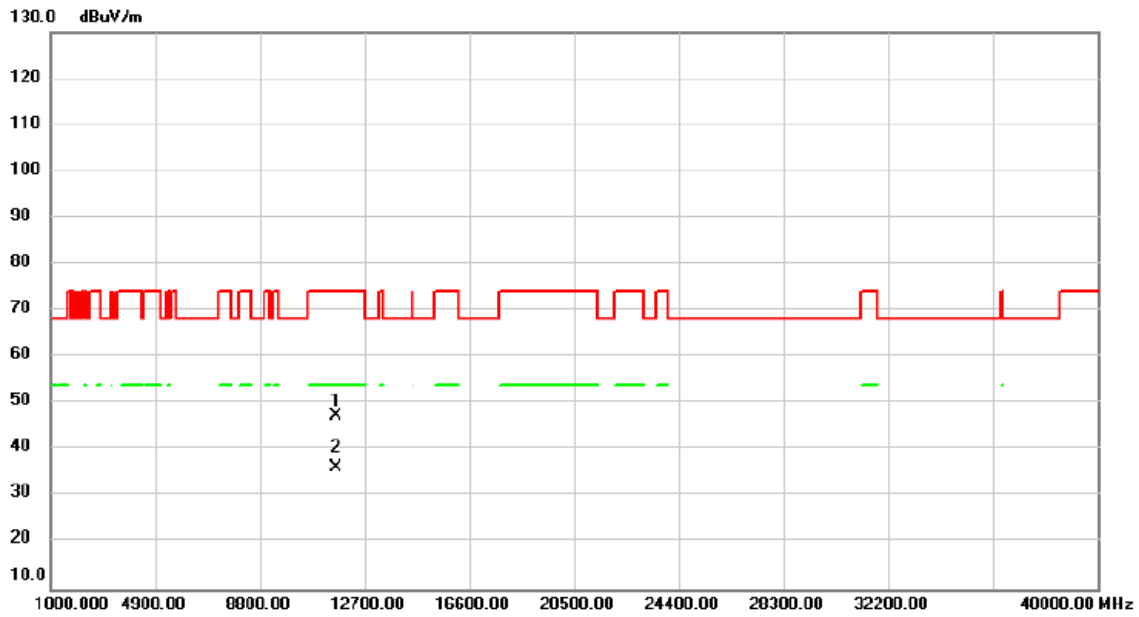


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11650.00	44.37	2.94	47.31	74.00	-26.69	peak	
2	*	11650.00	33.18	2.94	36.12	54.00	-17.88	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

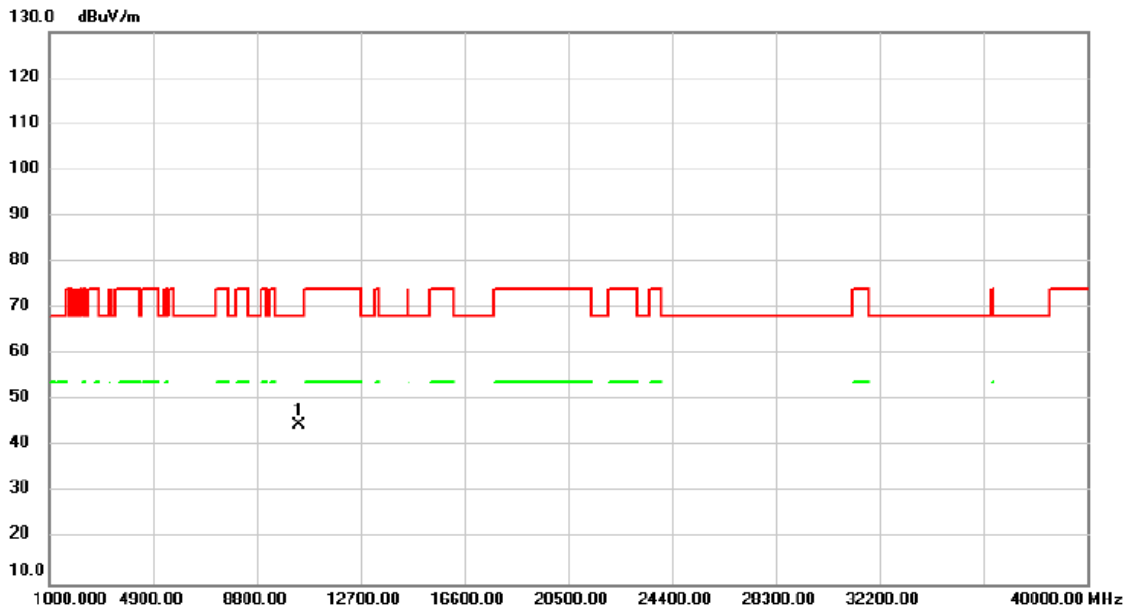


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	43.71	1.04	44.75	68.20	-23.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

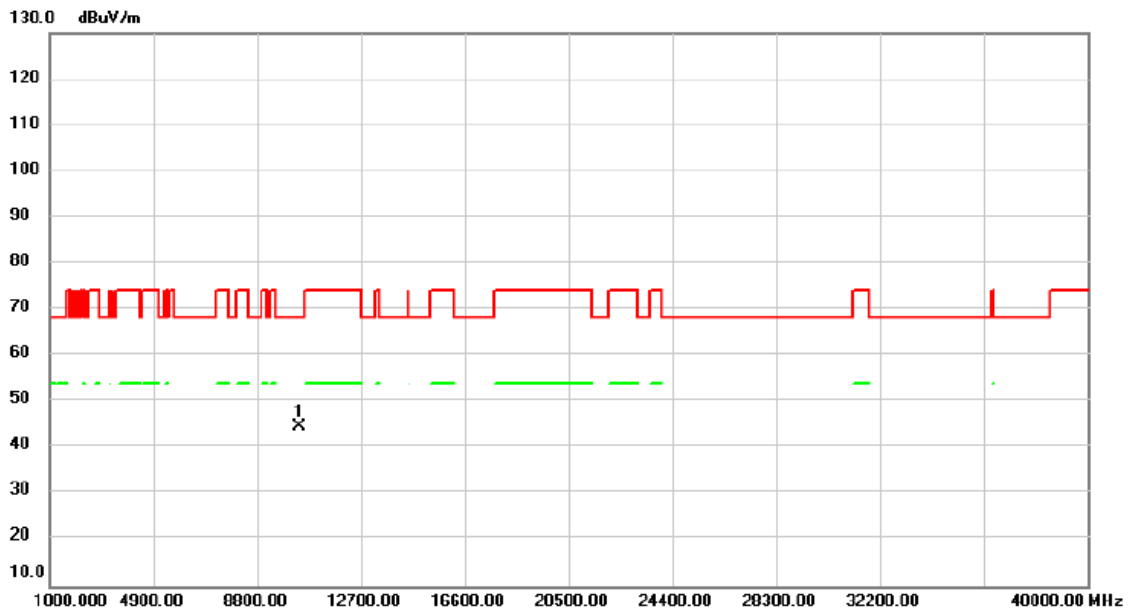


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	43.73	1.04	44.77	68.20	-23.43	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

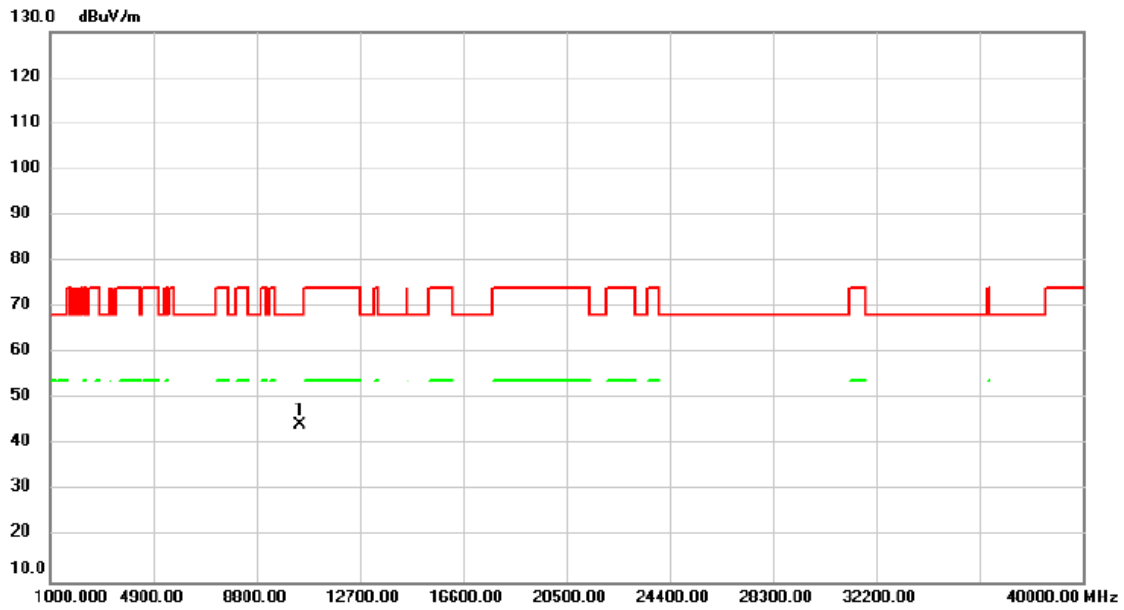


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	43.45	1.05	44.50	68.20	-23.70	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

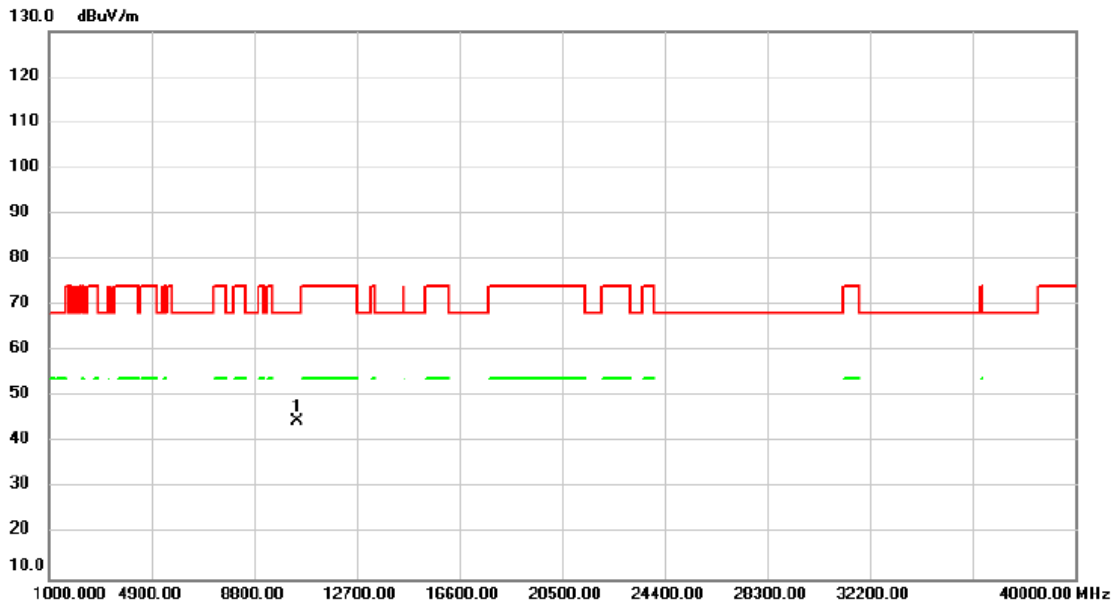


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	43.50	1.05	44.55	68.20	-23.65	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

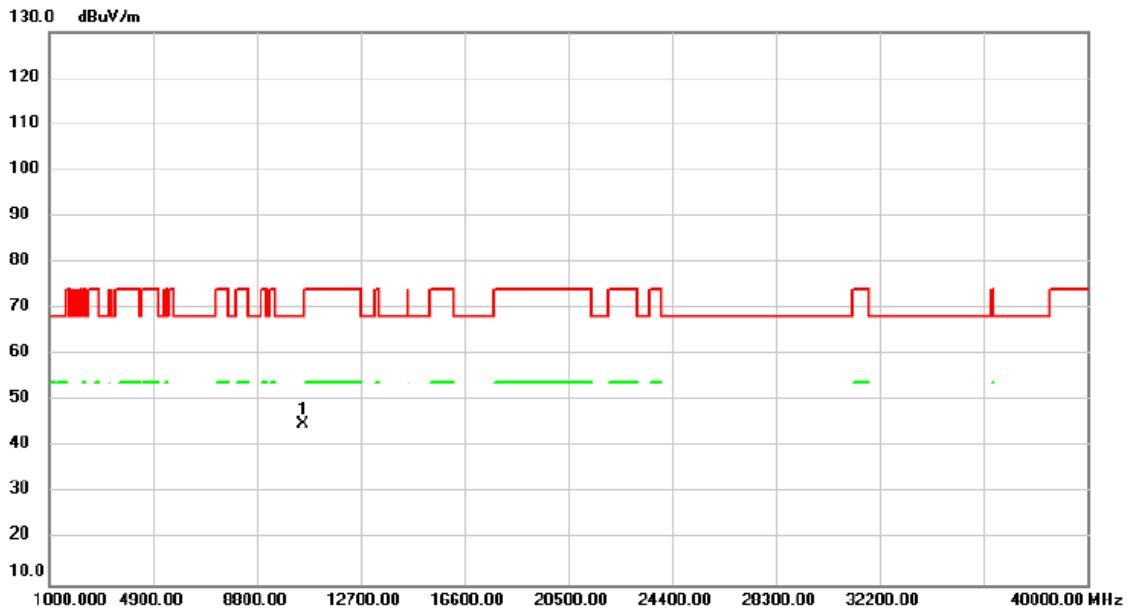


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	43.91	1.08	44.99	68.20	-23.21	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

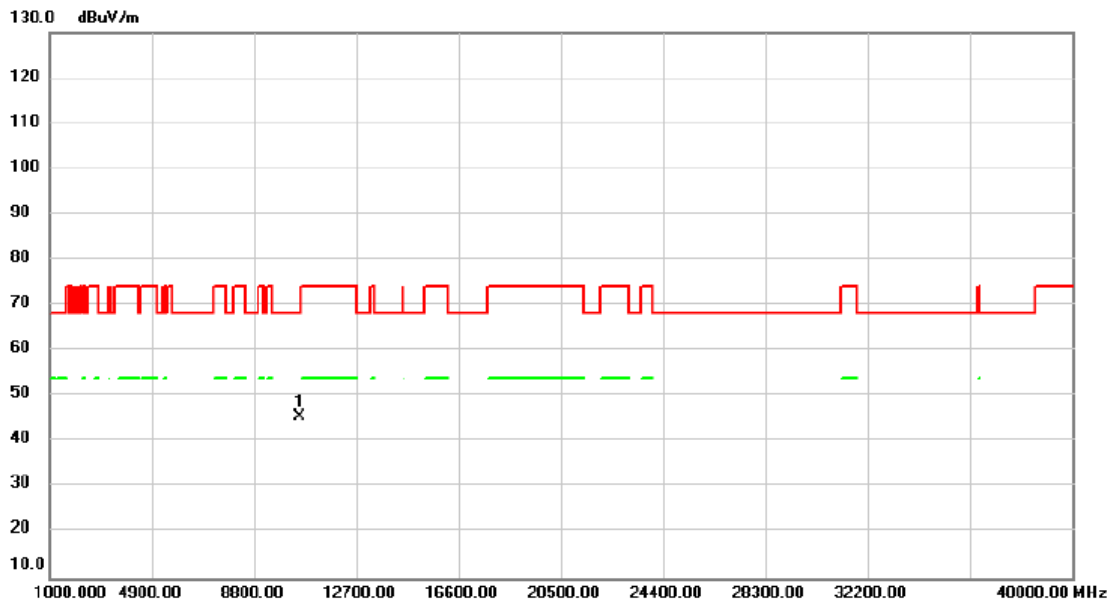


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	44.38	1.08	45.46	68.20	-22.74	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

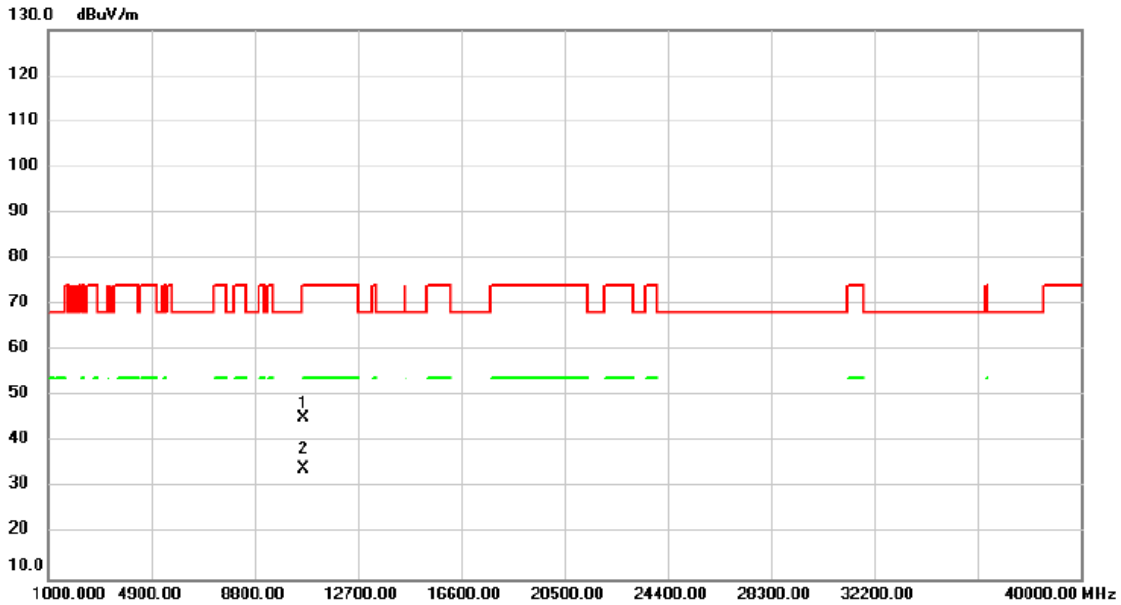


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	44.04	1.10	45.14	74.00	-28.86	peak	
2	*	10620.00	33.05	1.10	34.15	54.00	-19.85	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

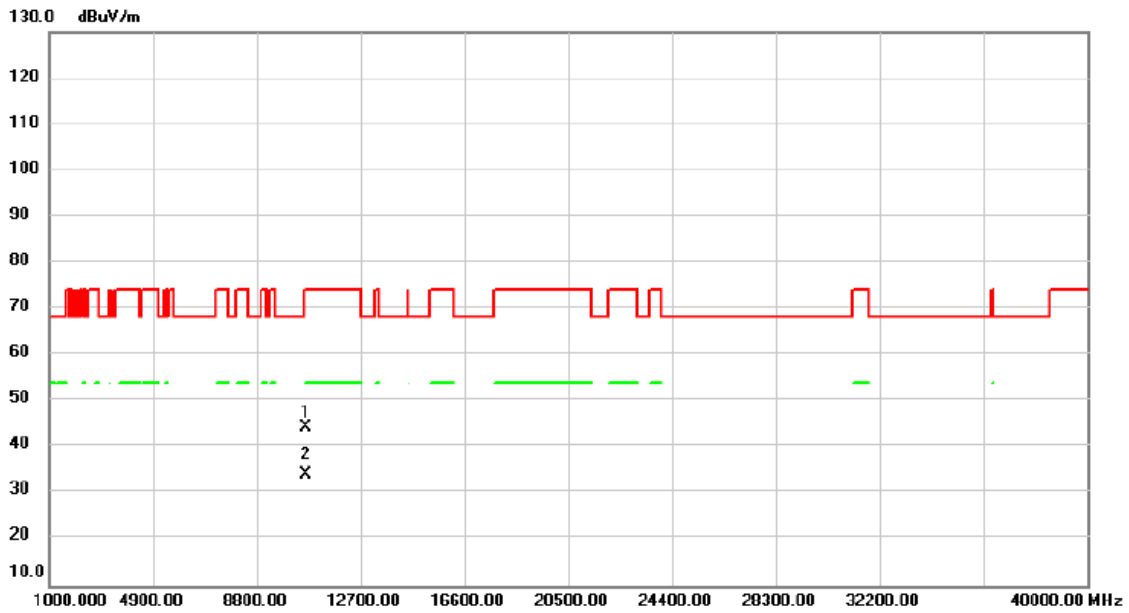


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		10620.00	43.31	1.10	44.41	74.00	-29.59	peak	
2	*	10620.00	33.09	1.10	34.19	54.00	-19.81	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

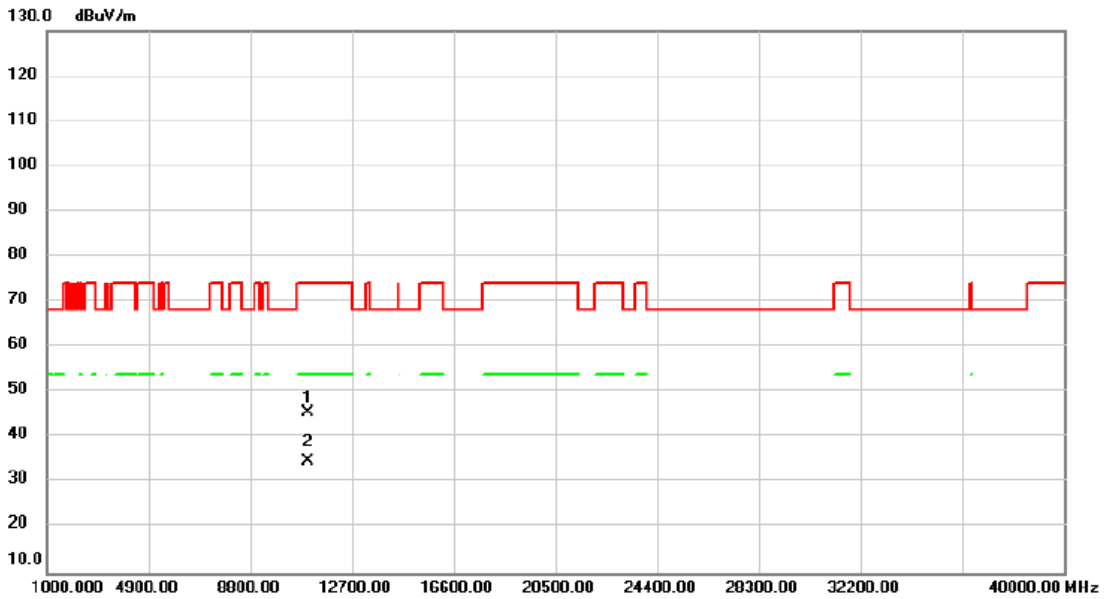


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11020.00	44.41	1.27	45.68	74.00	-28.32	peak	
2 *	11020.00	33.35	1.27	34.62	54.00	-19.38	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

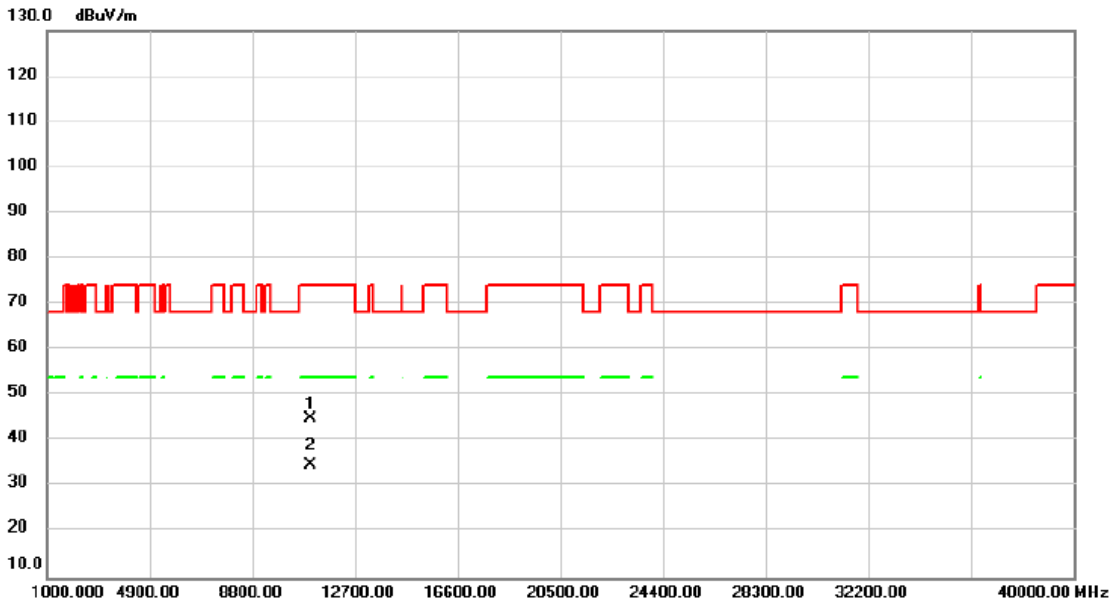


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11020.00	43.59	1.27	44.86	74.00	-29.14	peak	
2 *	11020.00	33.41	1.27	34.68	54.00	-19.32	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

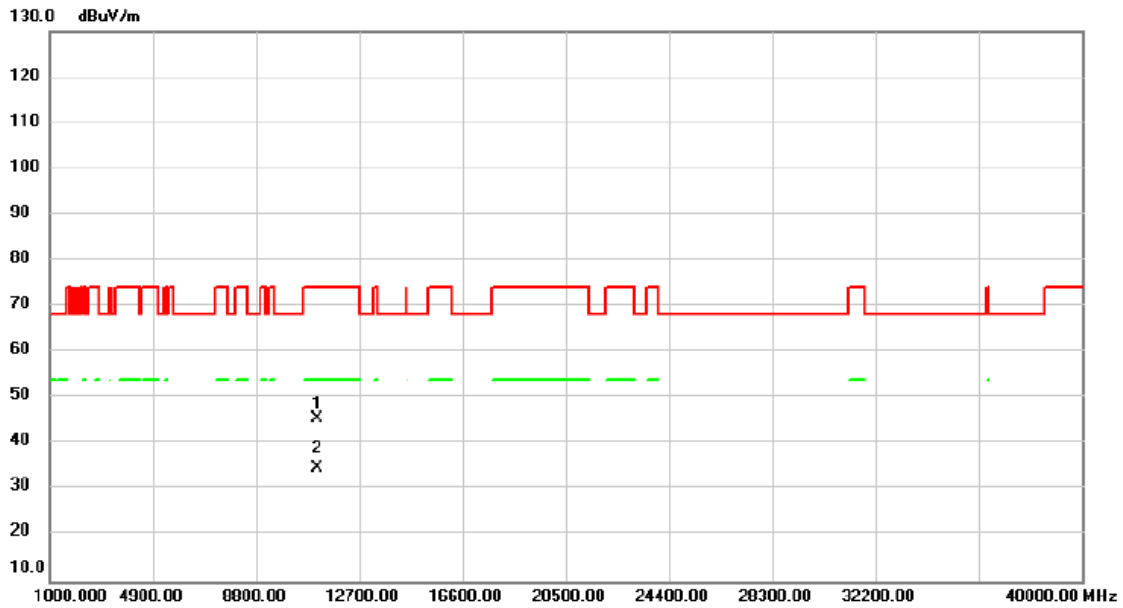


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11100.00	44.05	1.50	45.55	74.00	-28.45	peak	
2 *	11100.00	33.35	1.50	34.85	54.00	-19.15	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5550MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

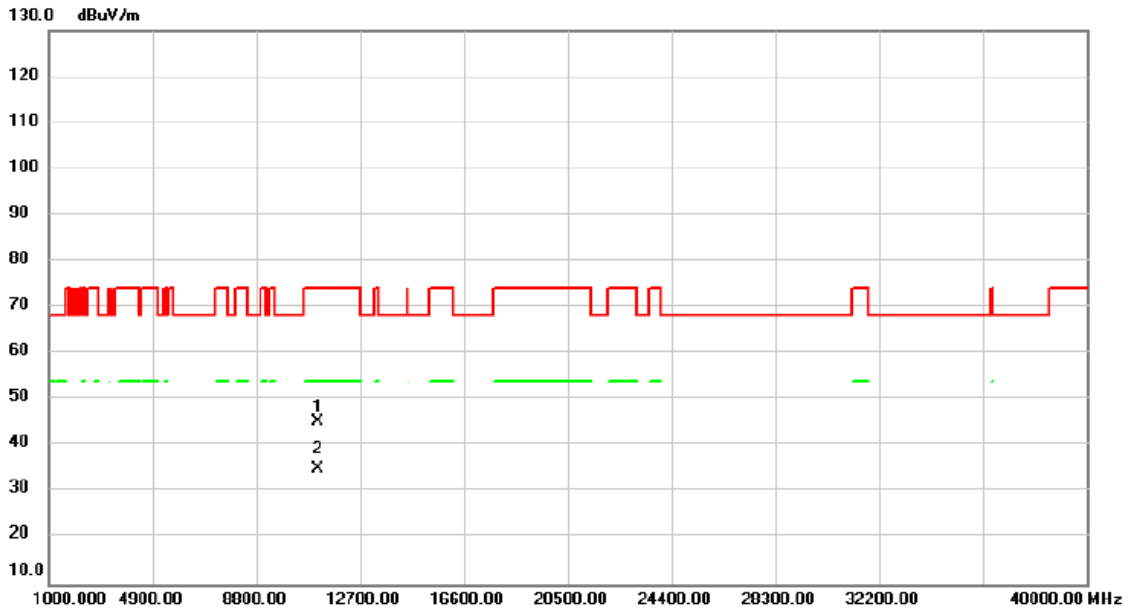


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11100.00	43.78	1.50	45.28	74.00	-28.72	peak	
2 *	11100.00	33.59	1.50	35.09	54.00	-18.91	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/26
Test Frequency	5670MHz	Polarization	Vertical
Temp	23°C	Hum.	59%

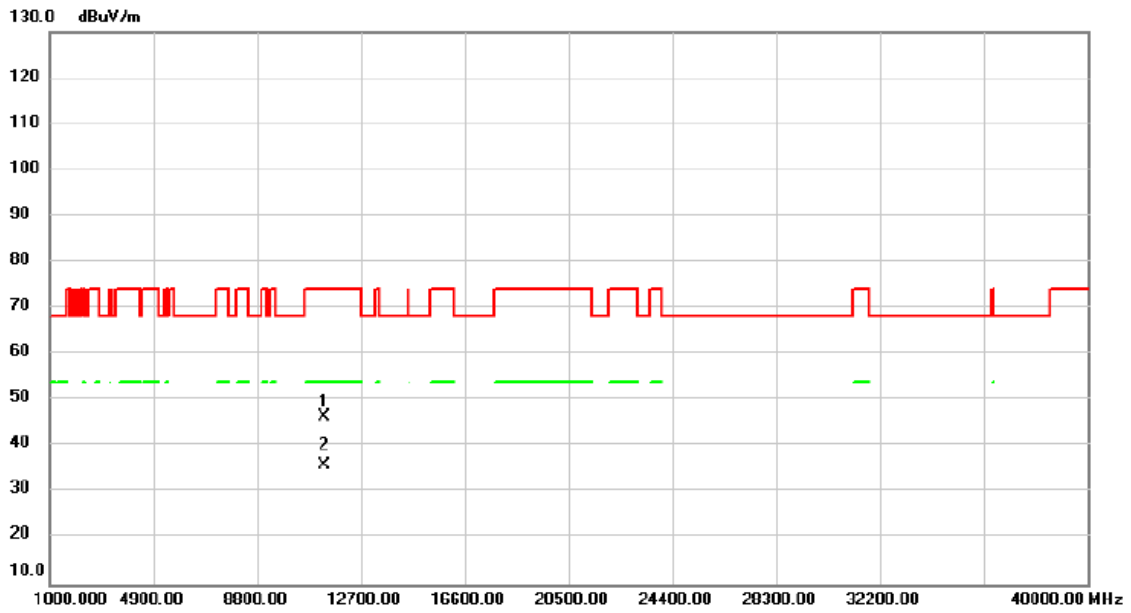


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11340.00	40.43	6.01	46.44	74.00	-27.56	peak	
2	*	11340.00	29.96	6.01	35.97	54.00	-18.03	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/26
Test Frequency	5670MHz	Polarization	Horizontal
Temp	23°C	Hum.	59%

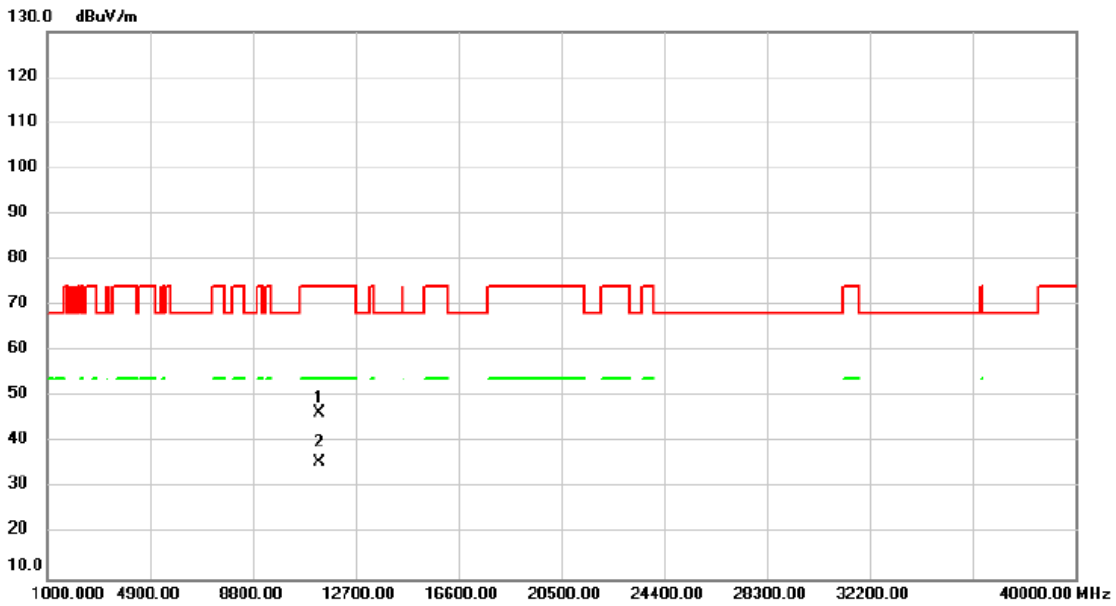


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11340.00	40.31	6.01	46.32	74.00	-27.68	peak	
2 *	11340.00	29.69	6.01	35.70	54.00	-18.30	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

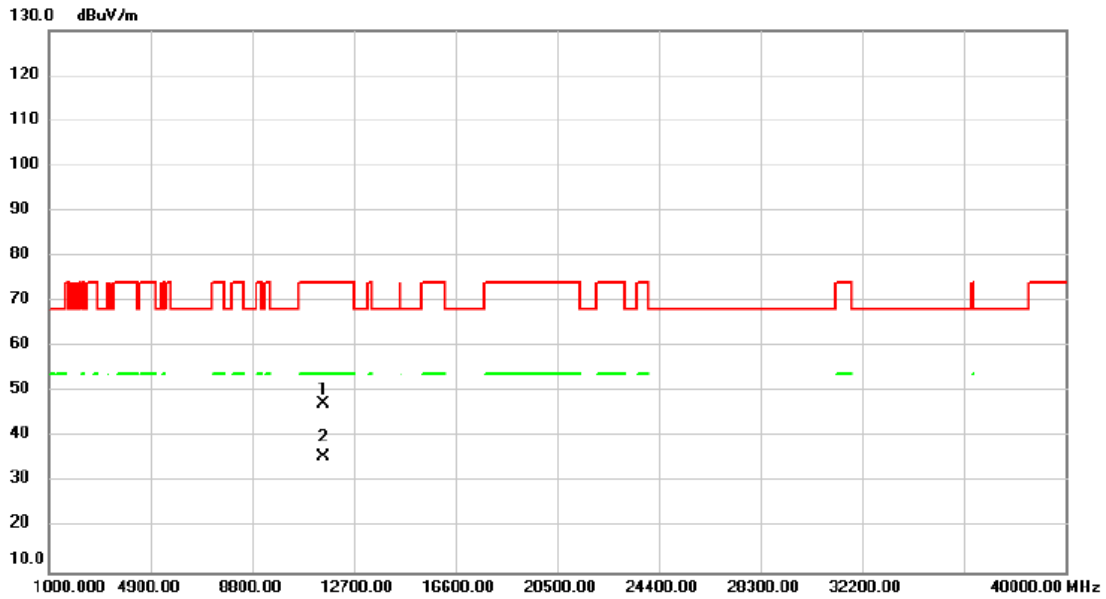


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.00	44.76	2.67	47.43	74.00	-26.57	peak	
2 *	11510.00	33.01	2.67	35.68	54.00	-18.32	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

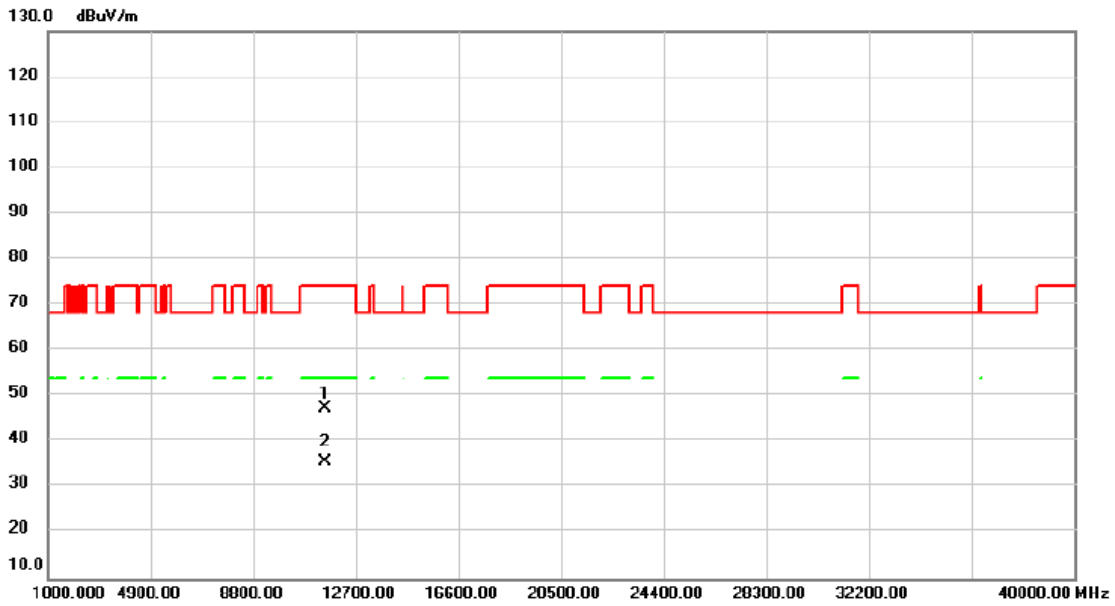


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.00	44.76	2.67	47.43	74.00	-26.57	peak	
2 *	11510.00	33.01	2.67	35.68	54.00	-18.32	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

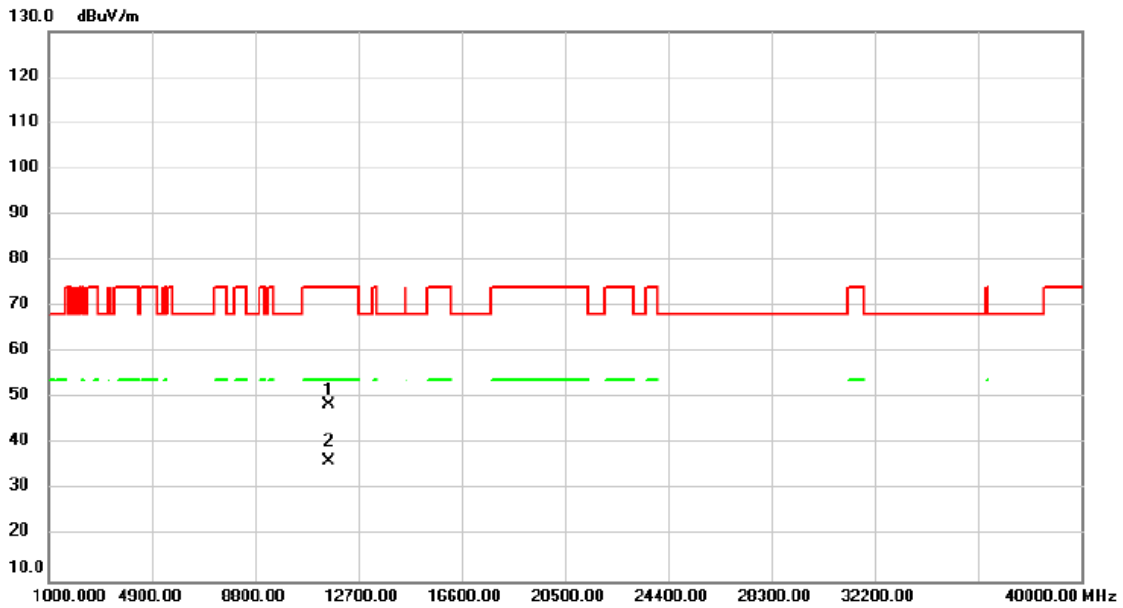


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11590.00	45.85	2.82	48.67	74.00	-25.33	peak	
2	*	11590.00	33.54	2.82	36.36	54.00	-17.64	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2022/10/19
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

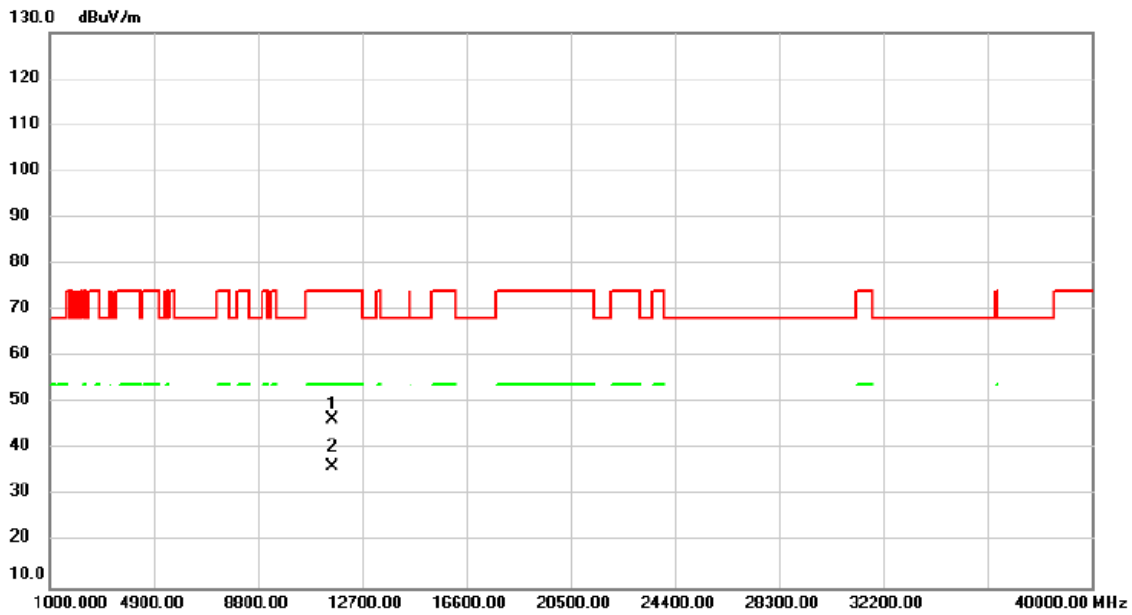


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11590.00	43.68	2.82	46.50	74.00	-27.50	peak	
2	*	11590.00	33.46	2.82	36.28	54.00	-17.72	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

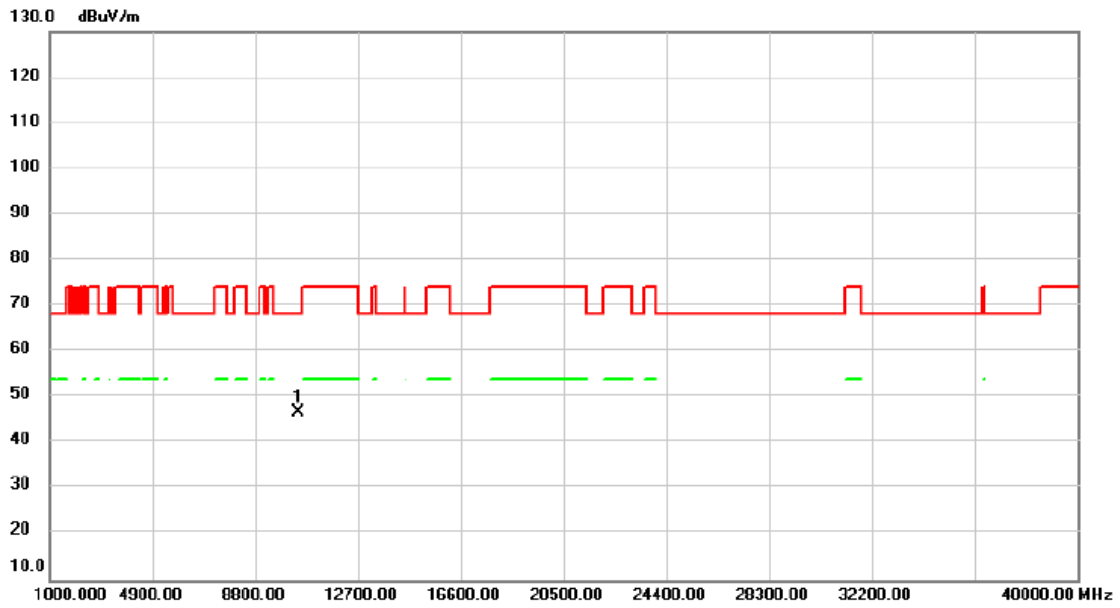


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	10420.00	45.78	1.04	46.82	68.20	-21.38	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

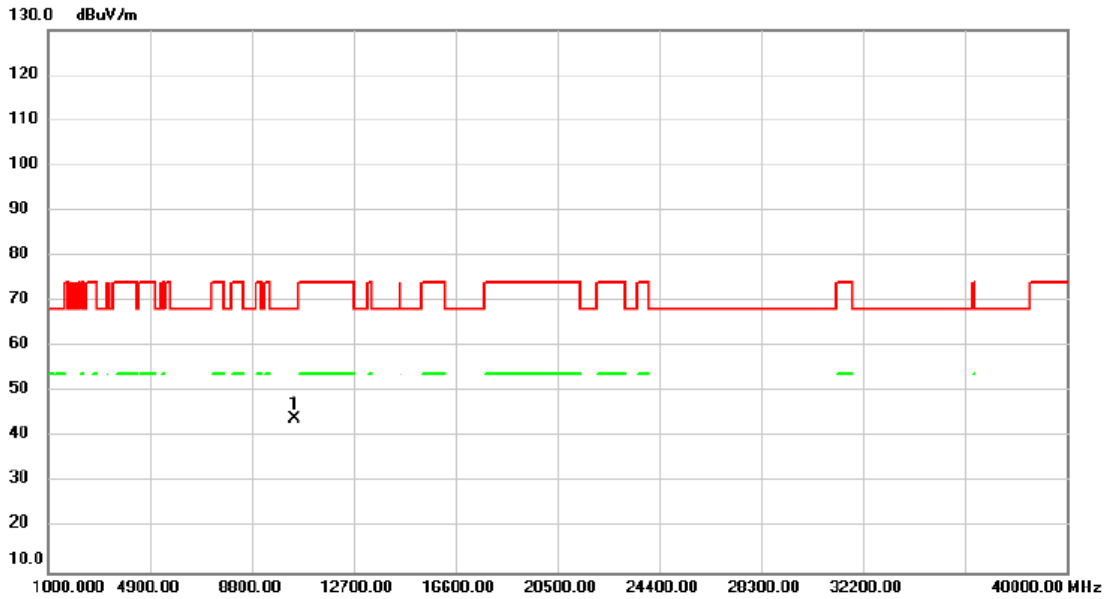


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10420.00	43.03	1.04	44.07	68.20	-24.13	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

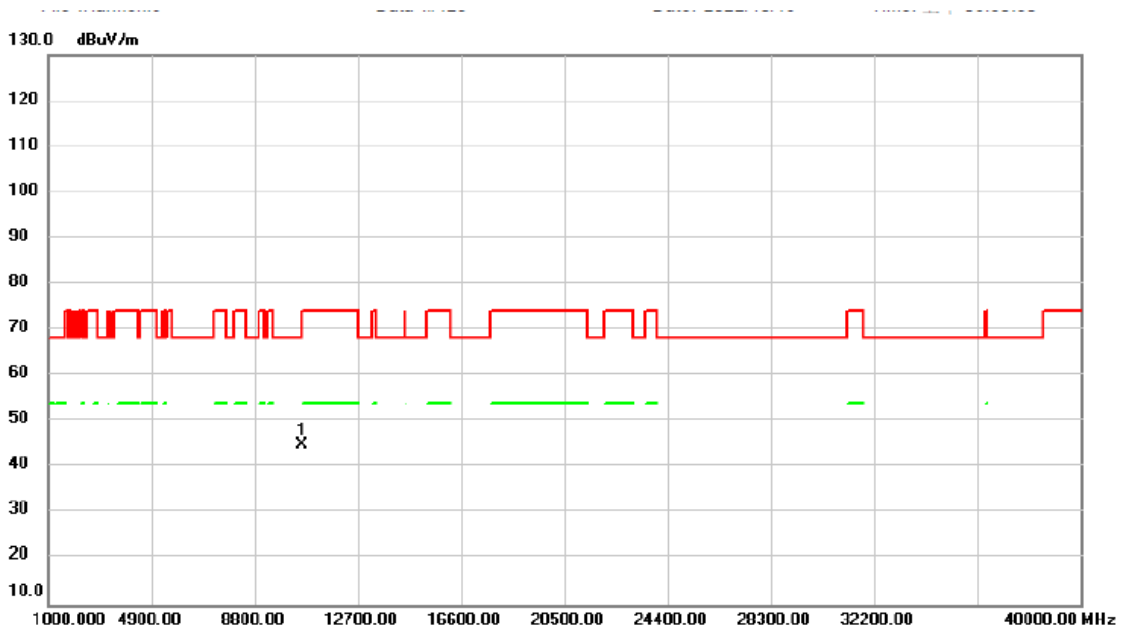


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	10580.00	43.90	1.08	44.98	68.20	-23.22	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

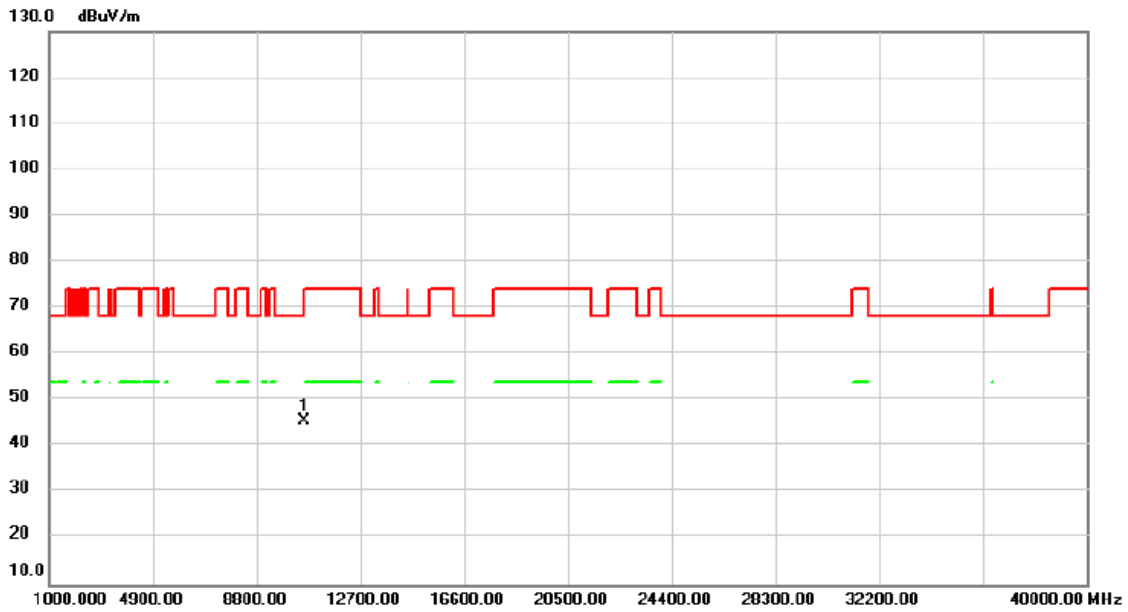


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	44.41	1.08	45.49	68.20	-22.71	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

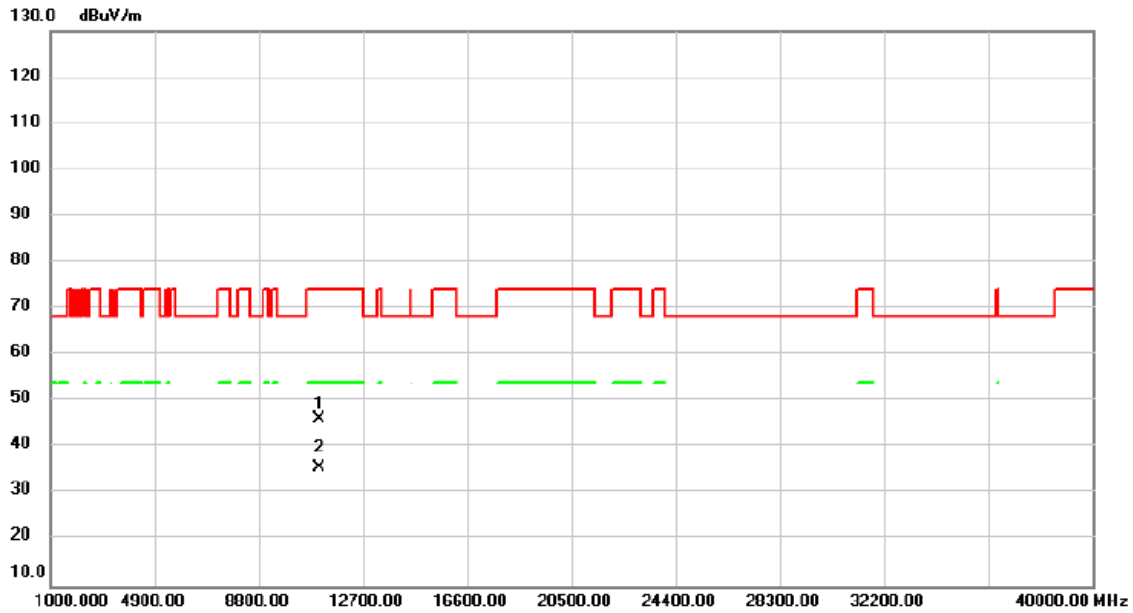


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11060.00	44.80	1.39	46.19	74.00	-27.81	peak	
2	*	11060.00	34.13	1.39	35.52	54.00	-18.48	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

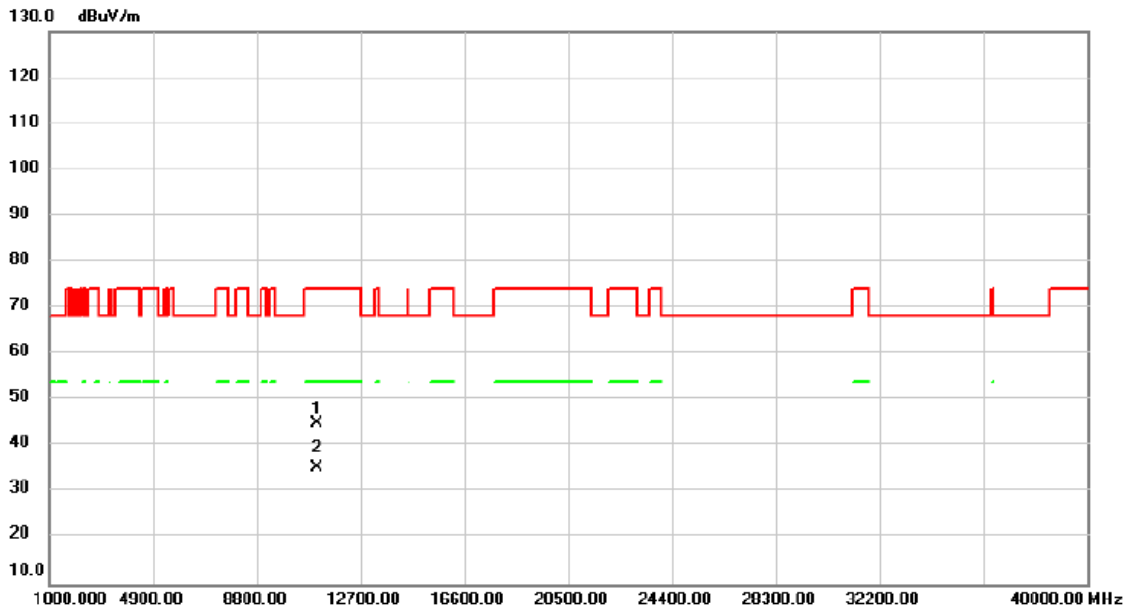


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11060.00	43.59	1.39	44.98	74.00	-29.02	peak	
2	*	11060.00	33.96	1.39	35.35	54.00	-18.65	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

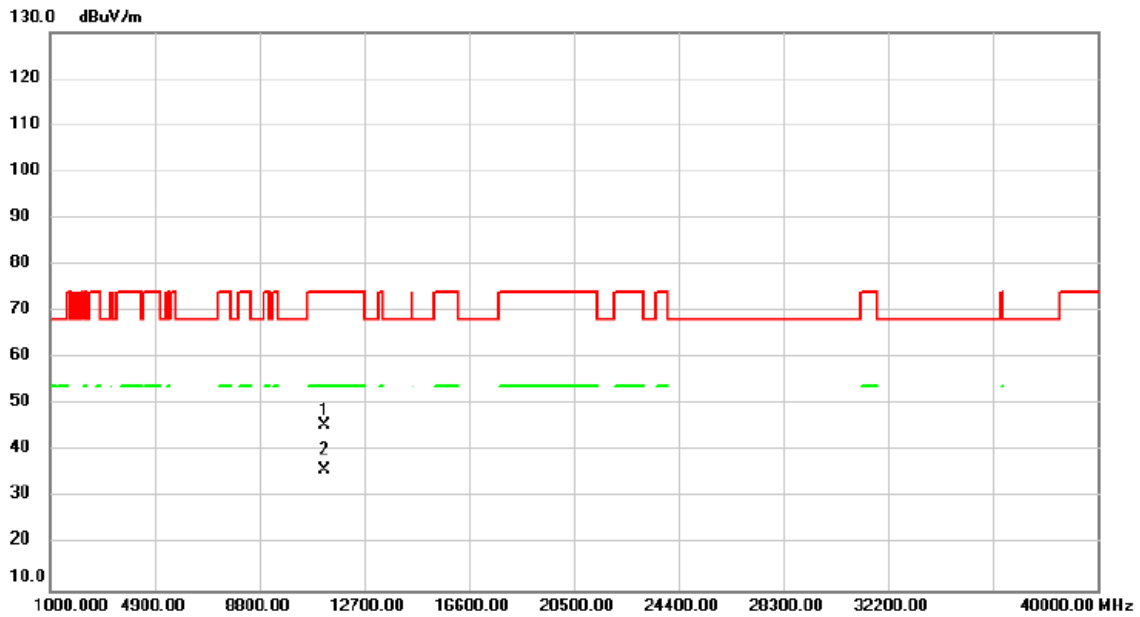


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11220.00	43.64	1.84	45.48	74.00	-28.52	peak	
2	*	11220.00	34.23	1.84	36.07	54.00	-17.93	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

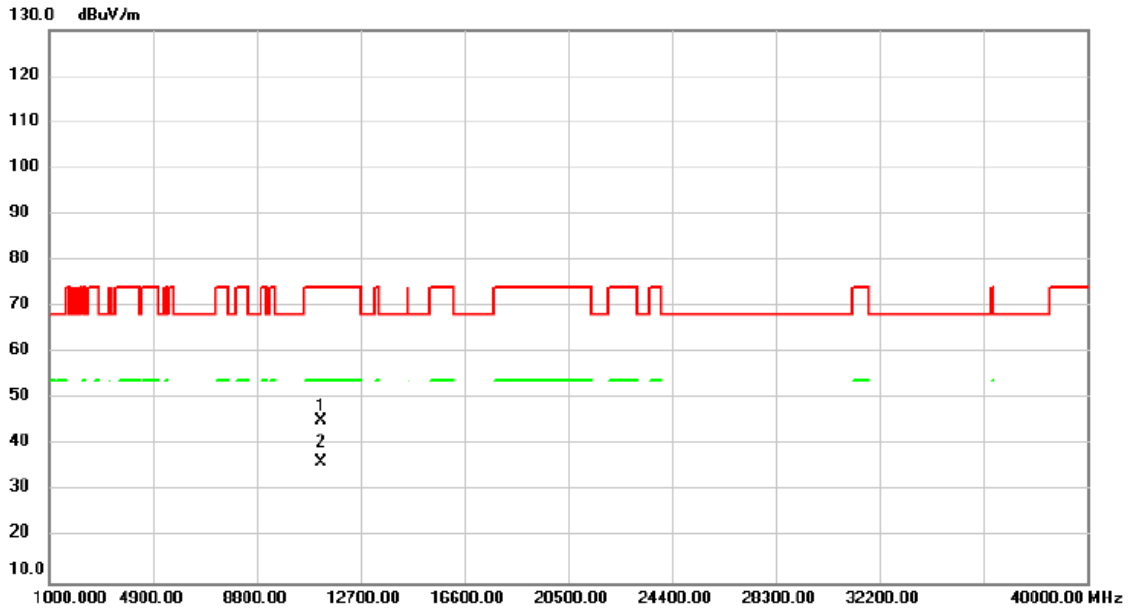


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11220.00	43.30	1.84	45.14	74.00	-28.86	peak	
2	*	11220.00	34.27	1.84	36.11	54.00	-17.89	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	62%

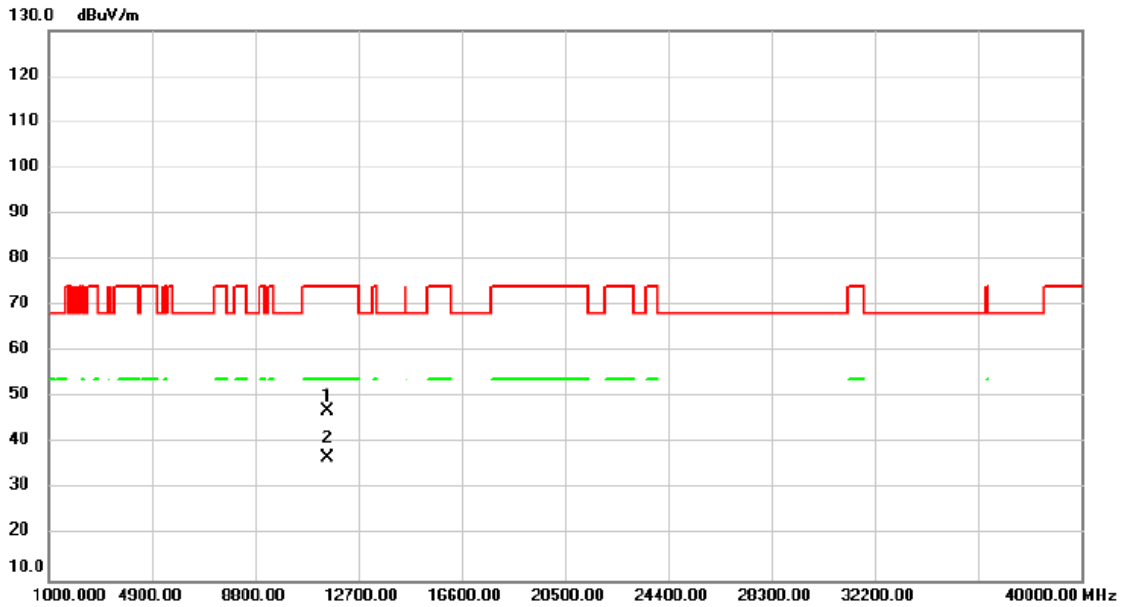


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	44.24	2.74	46.98	74.00	-27.02	peak	
2	*	11550.00	34.05	2.74	36.79	54.00	-17.21	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2022/10/19
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	62%

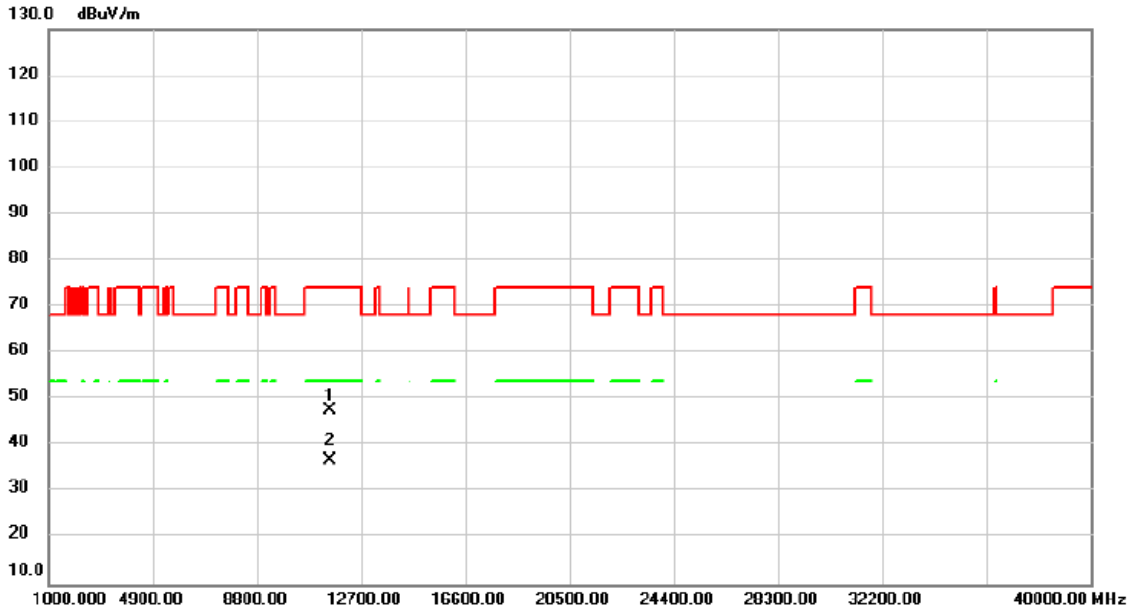

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11550.00	44.78	2.74	47.52	74.00	-26.48	peak	
2	*	11550.00	33.98	2.74	36.72	54.00	-17.28	AVG	

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX D BANDWIDTH


Test Mode	IEEE 802.11a_Antenna 1
-----------	------------------------

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	24.450	17.100	No limit
5200	24.750	17.100	No limit
5240	24.089	17.000	No limit

### 5180 MHz

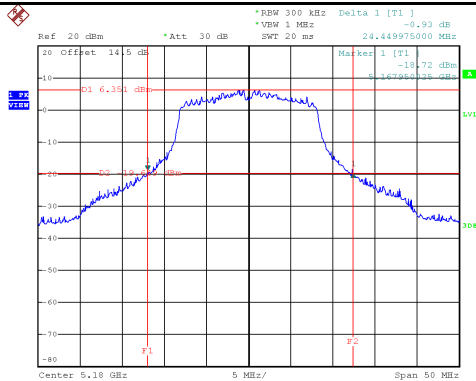


Date: 19.OCT.2022 12:41:14

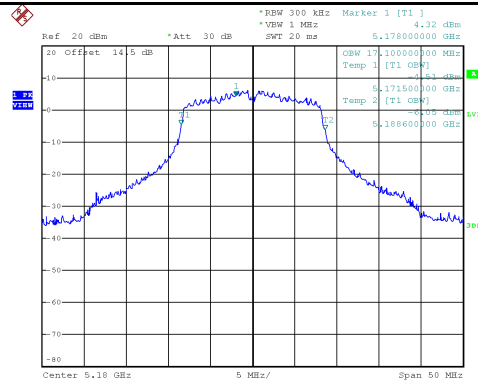


Date: 19.OCT.2022 12:40:44

### 5200 MHz

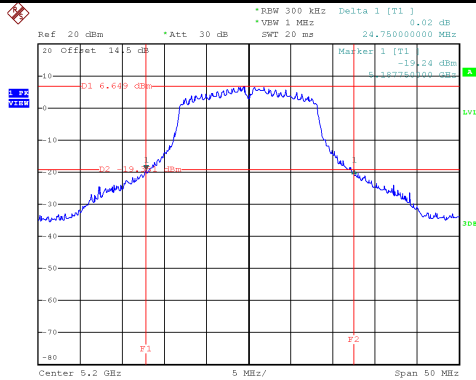


Date: 19.OCT.2022 12:45:14

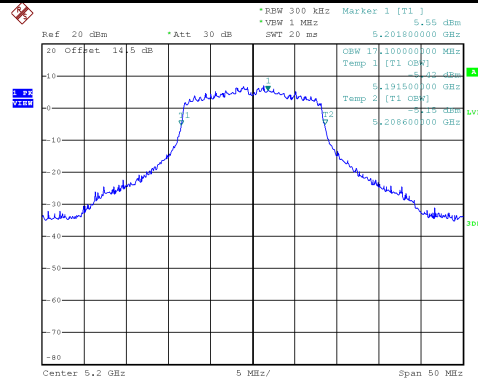


Date: 19.OCT.2022 12:44:46

### 5240 MHz

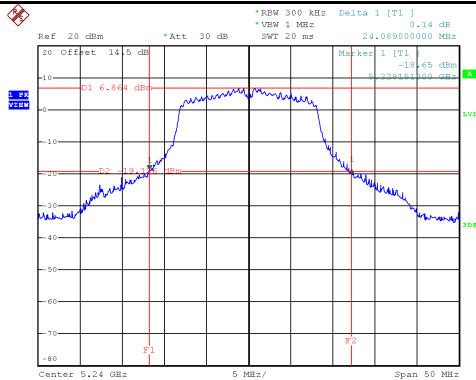



Date: 19.OCT.2022 12:47:30

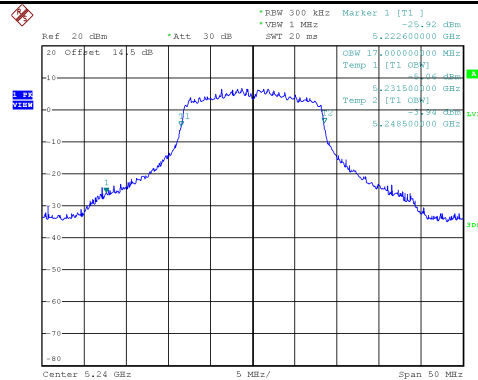



Date: 19.OCT.2022 12:46:59

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	24.890	17.000	No limit
5300	25.250	17.000	No limit
5320	24.689	17.100	No limit



### 5260 MHz

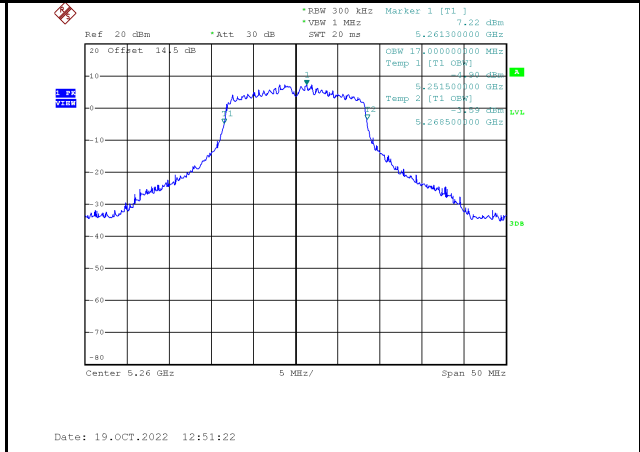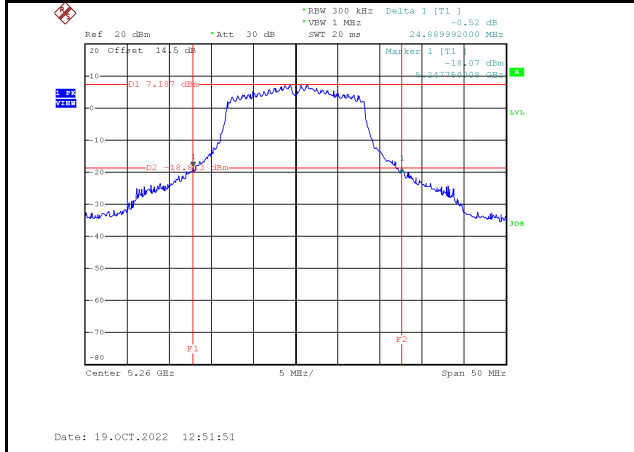

### 5300 MHz

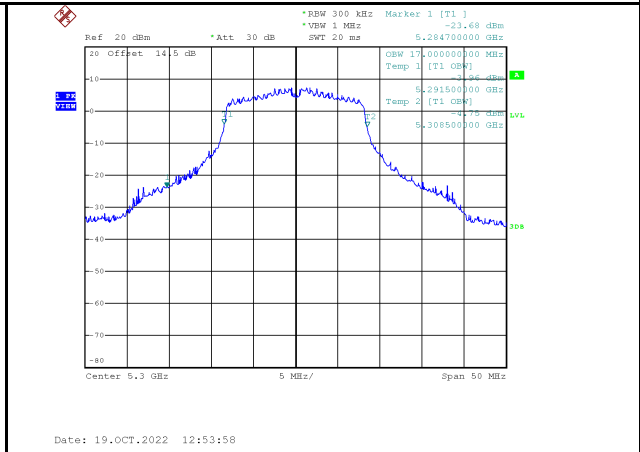
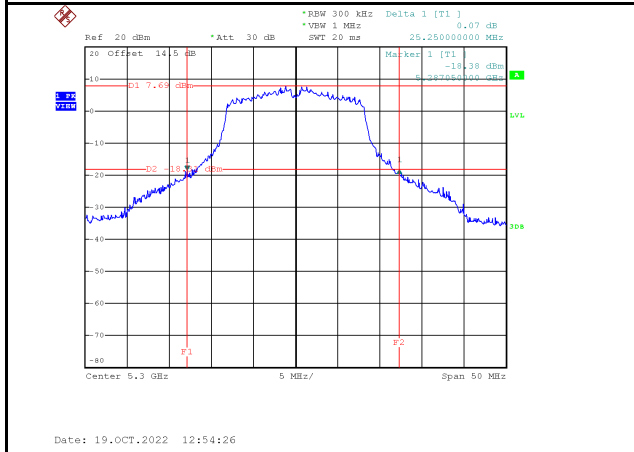


### 5320 MHz

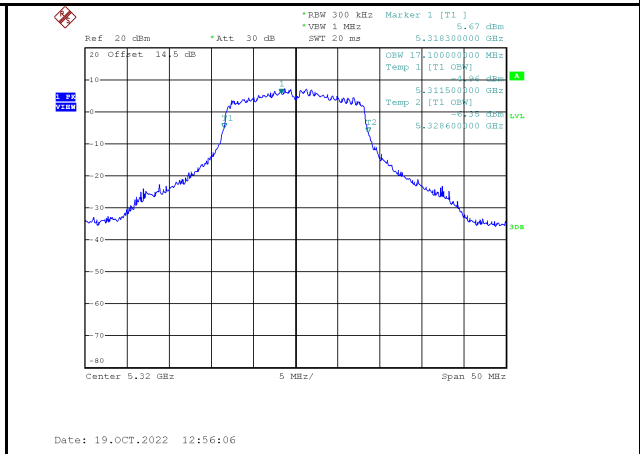
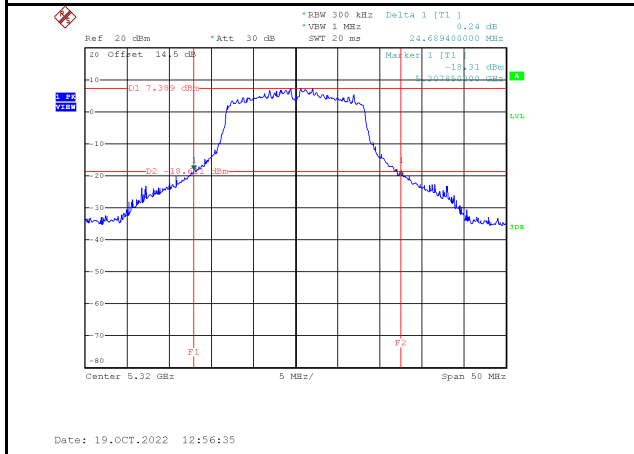


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	25.289	17.100	No limit
5580	24.690	17.100	No limit
5700	24.498	17.100	No limit



### 5500 MHz

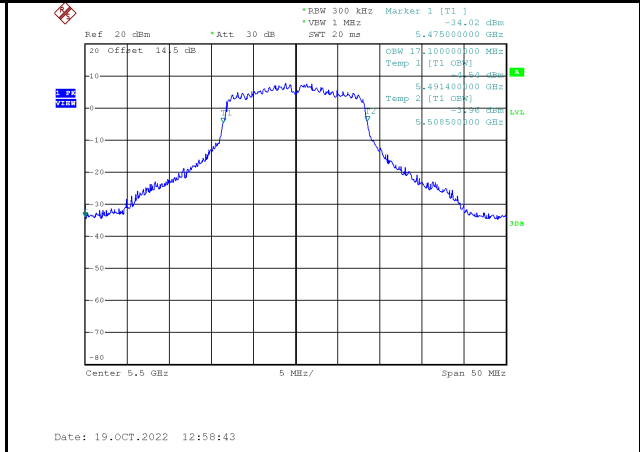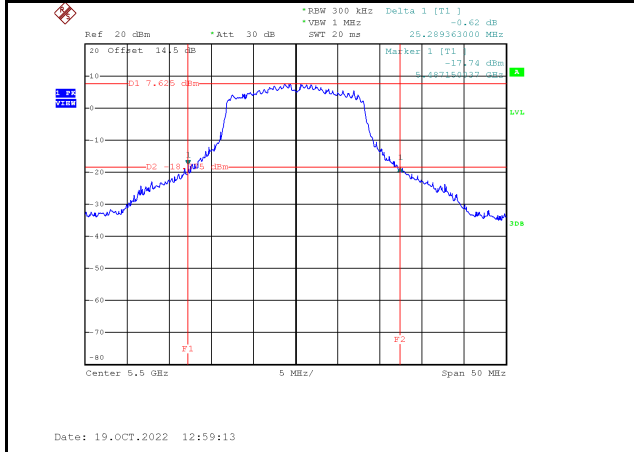

### 5580 MHz


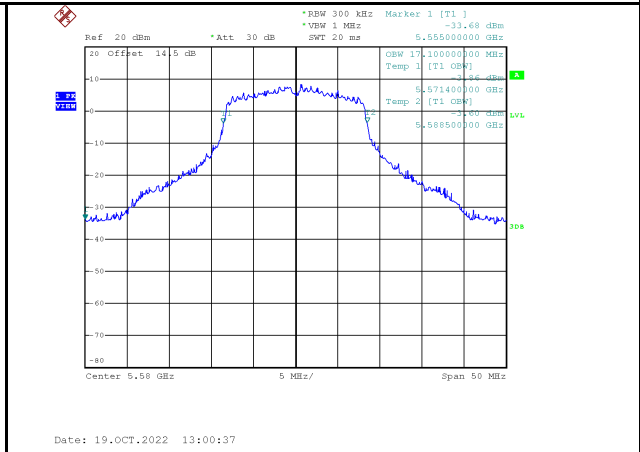
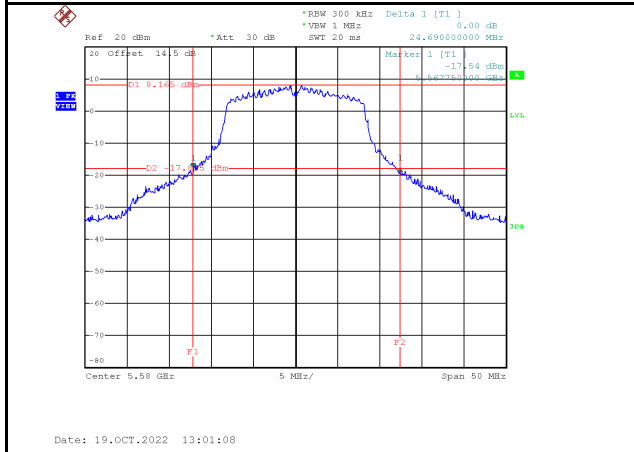


### 5700 MHz

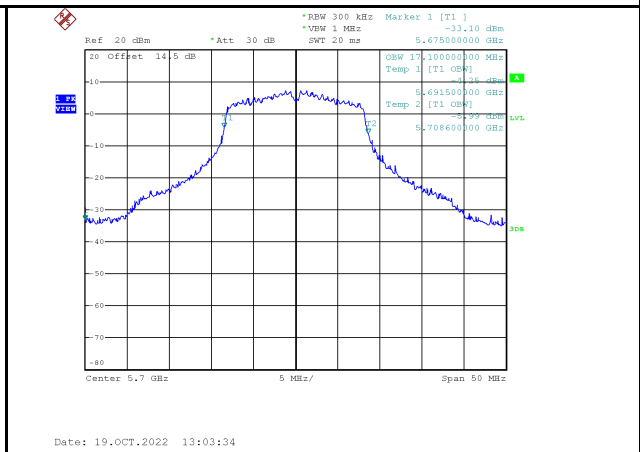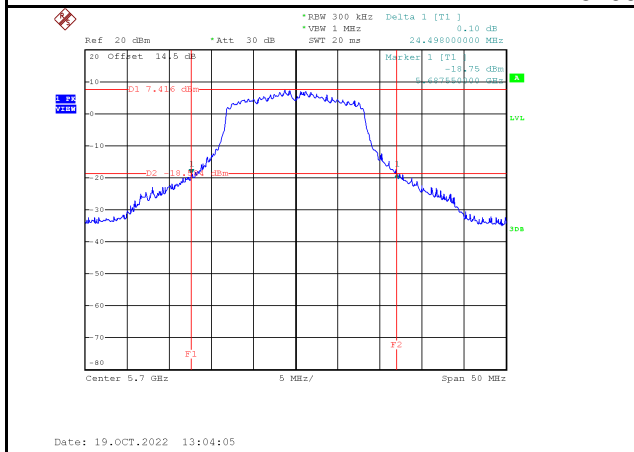





Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	15.090	17.000	500	Pass
5785	15.200	17.100	500	Pass
5825	16.350	17.000	500	Pass

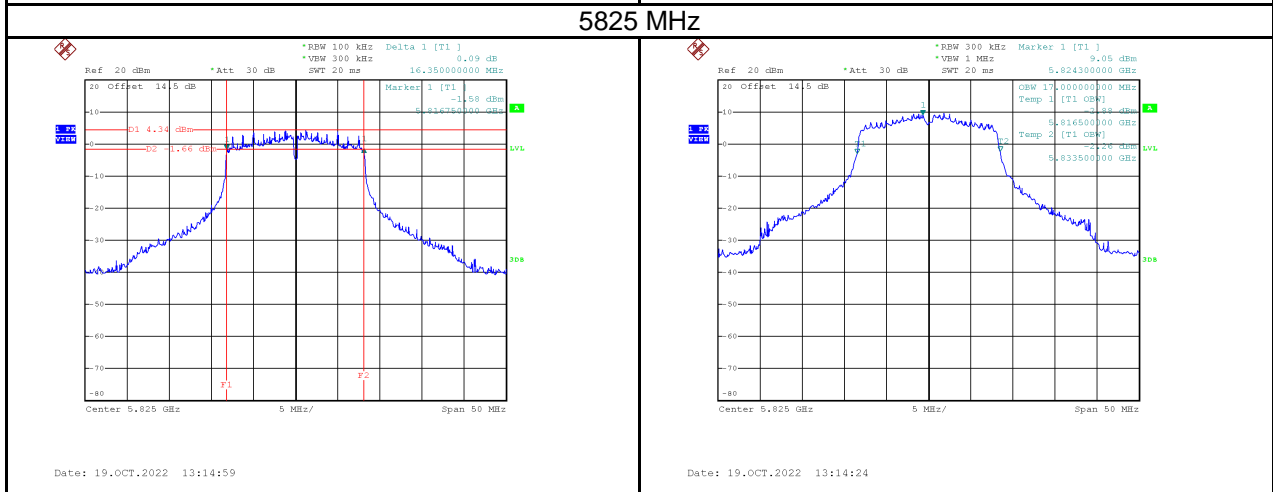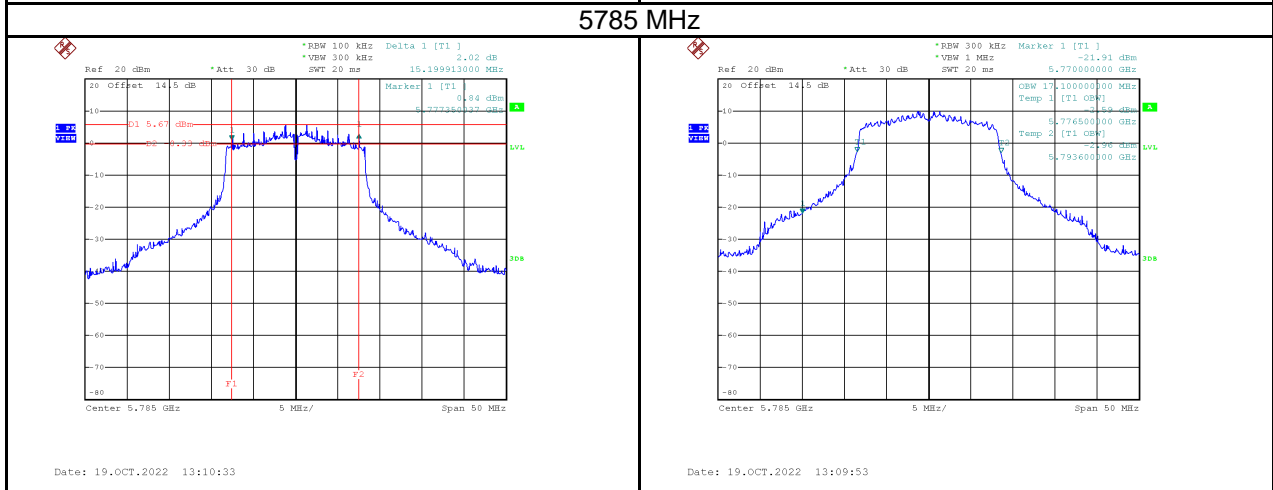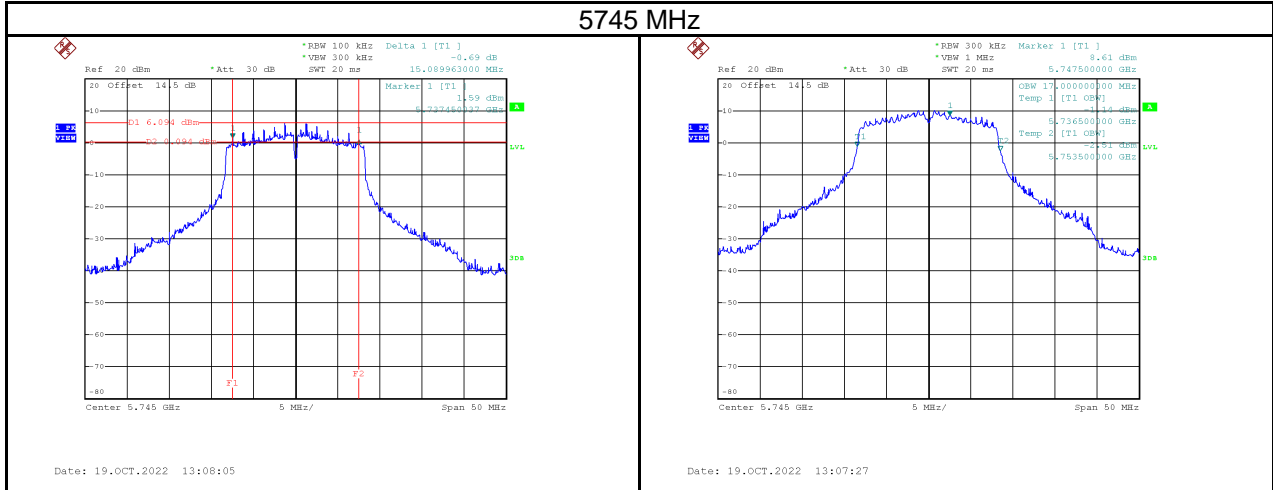

Test Mode | IEEE 802.11a\_Antenna 2

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	26.790	17.600	No limit
5200	26.800	17.600	No limit
5240	26.290	17.500	No limit



### 5180 MHz

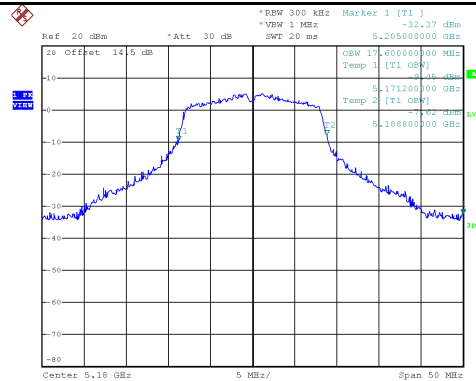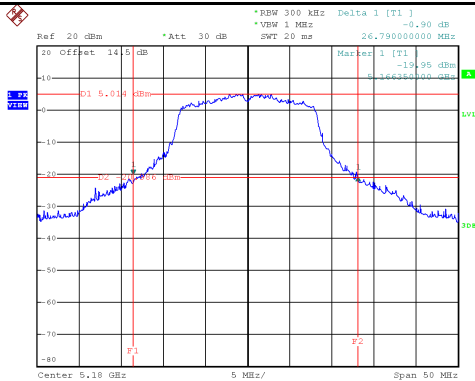

Date: 19.OCT.2022 14:57:32

Date: 19.OCT.2022 14:57:02



### 5200 MHz

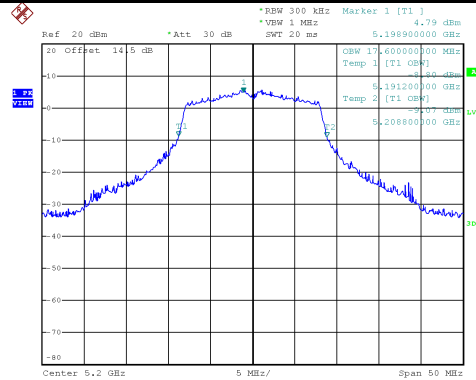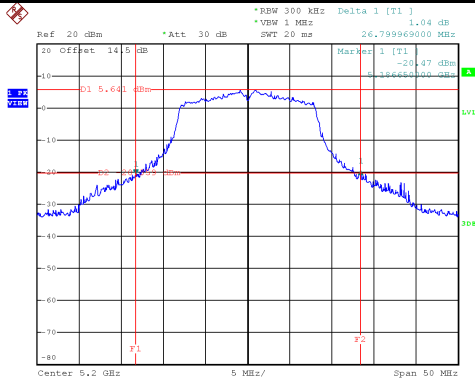

Date: 19.OCT.2022 13:21:07

Date: 19.OCT.2022 13:20:37

### 5240 MHz

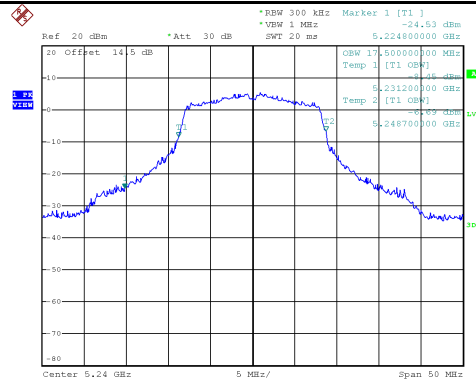
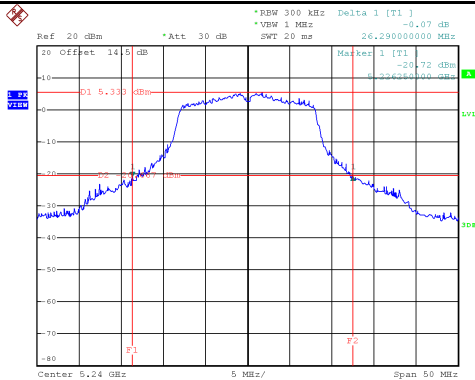


Date: 19.OCT.2022 13:23:49



Date: 19.OCT.2022 13:23:21

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	26.390	17.500	No limit
5300	25.689	17.500	No limit
5320	26.289	17.600	No limit



### 5260 MHz

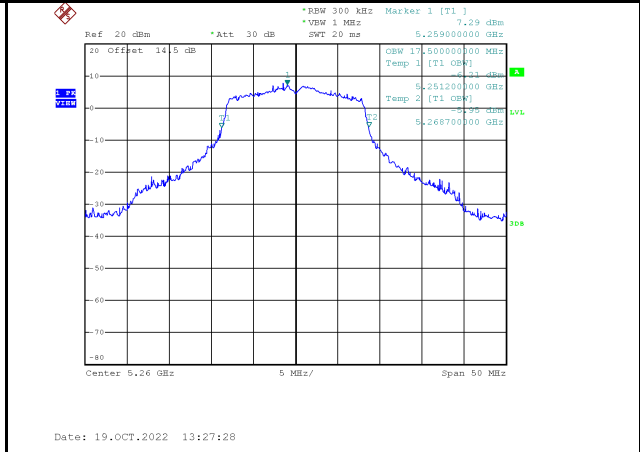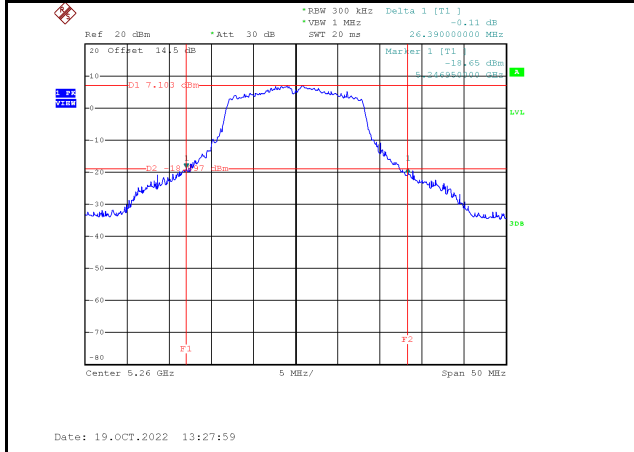

### 5300 MHz

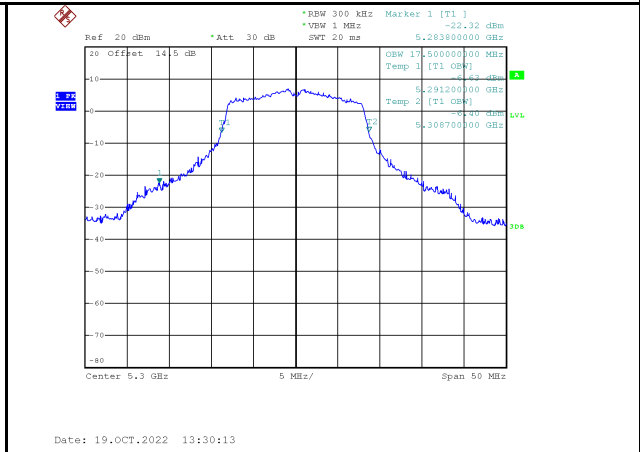
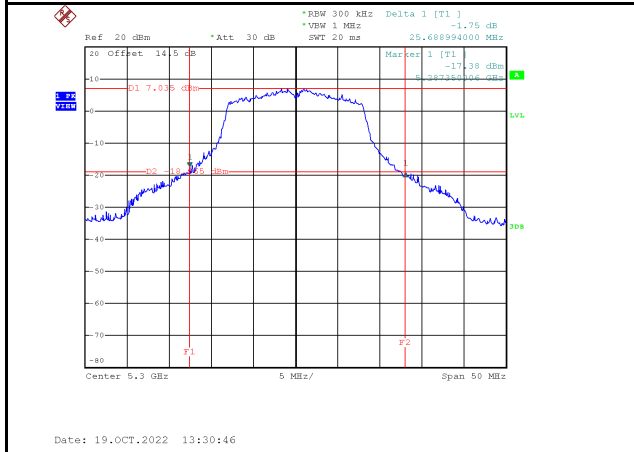


### 5320 MHz

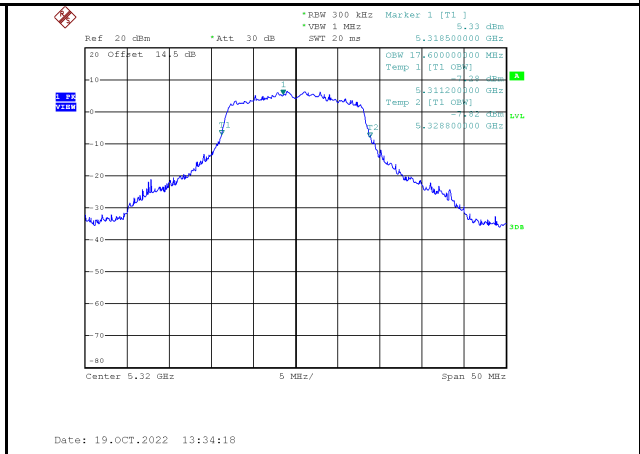
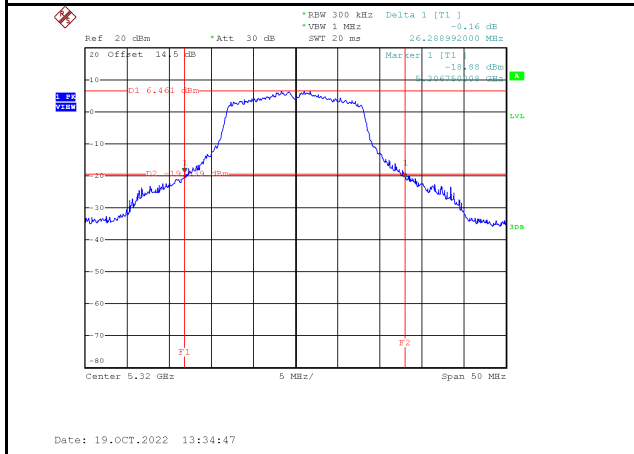


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	25.298	17.600	No limit
5580	26.690	17.600	No limit
5700	26.746	17.500	No limit



### 5500 MHz

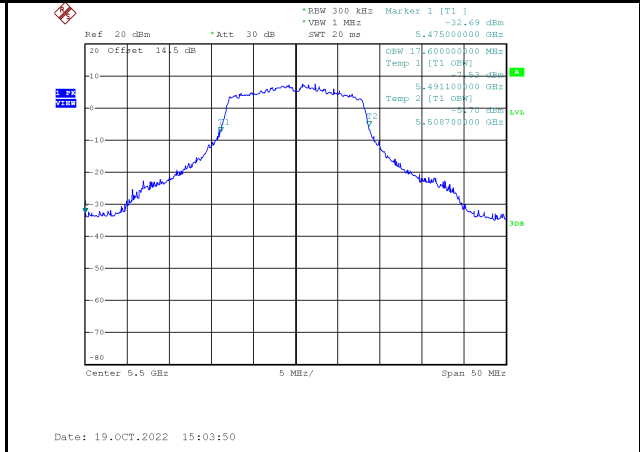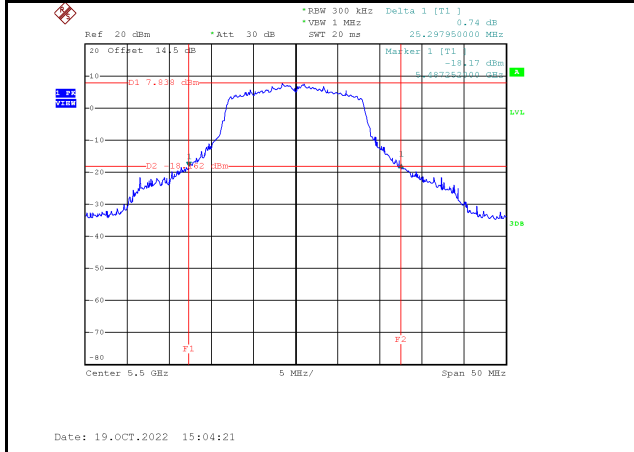

### 5580 MHz

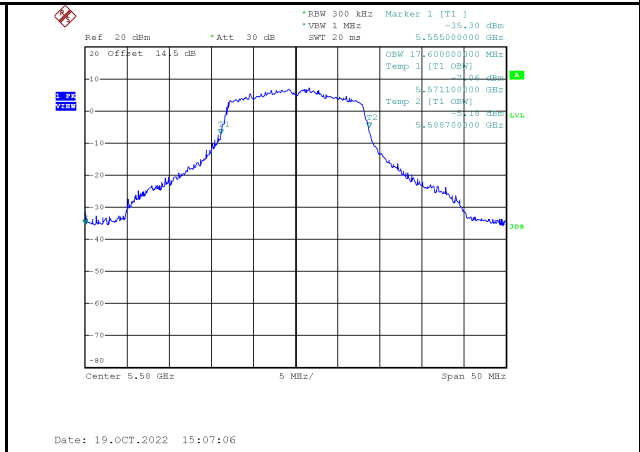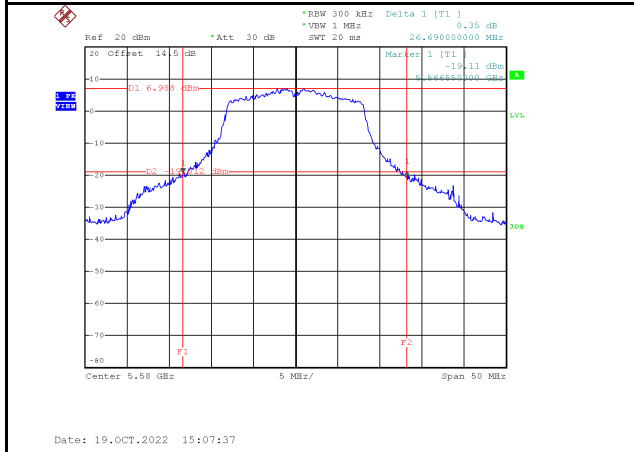


### 5700 MHz

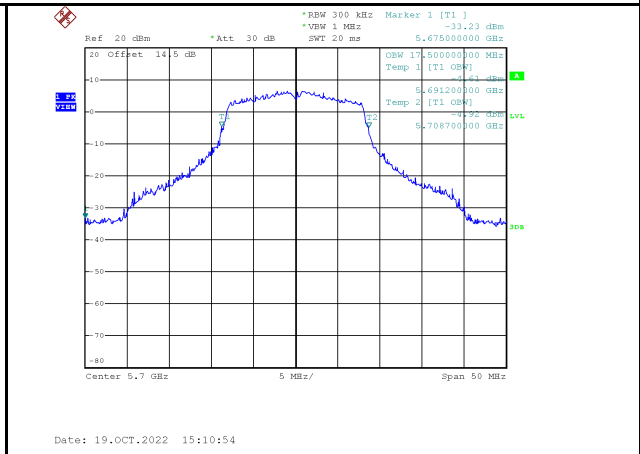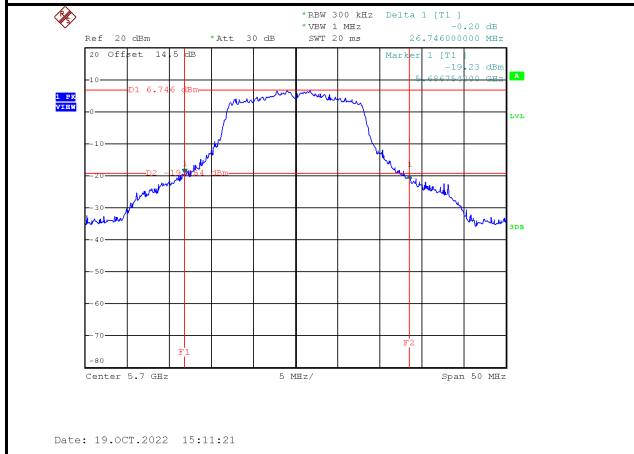


Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	14.489	17.600	500	Pass
5785	15.150	17.600	500	Pass
5825	15.150	17.800	500	Pass

### 5745 MHz

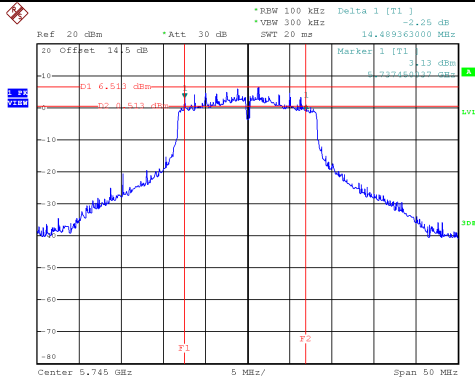


Date: 19.OCT.2022 15:13:37

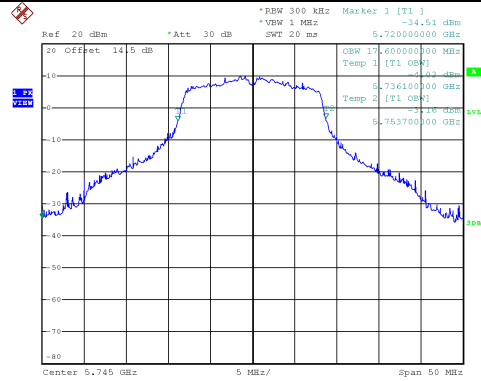


Date: 19.OCT.2022 15:12:59

### 5785 MHz

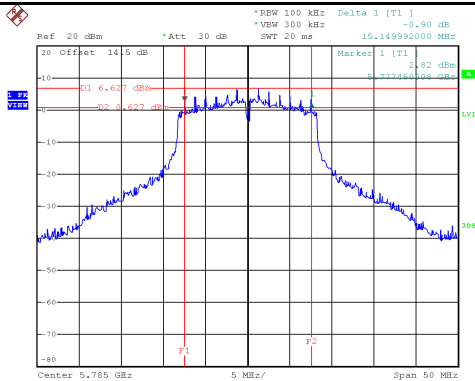


Date: 19.OCT.2022 15:16:19

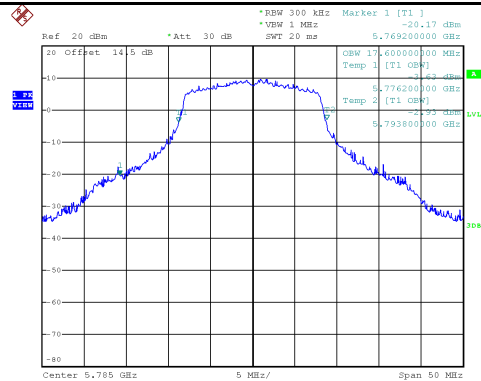


Date: 19.OCT.2022 15:15:42

### 5825 MHz

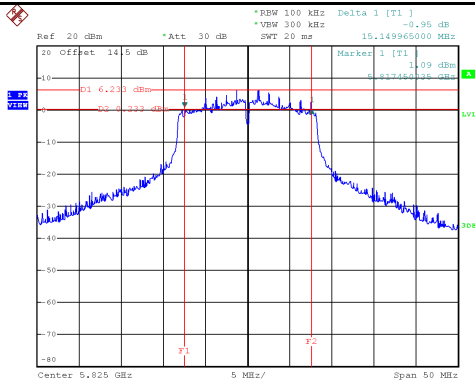

Date: 19.OCT.2022 15:22:37

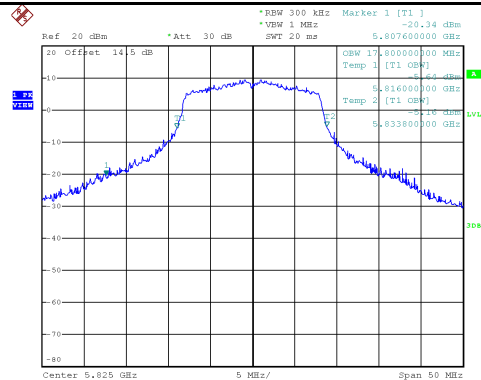


Date: 19.OCT.2022 15:22:00


Test Mode | IEEE 802.11ac (VHT20)\_Antenna 1

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	24.199	18.100	No limit
5200	24.950	18.100	No limit
5240	25.190	18.000	No limit

### 5180 MHz

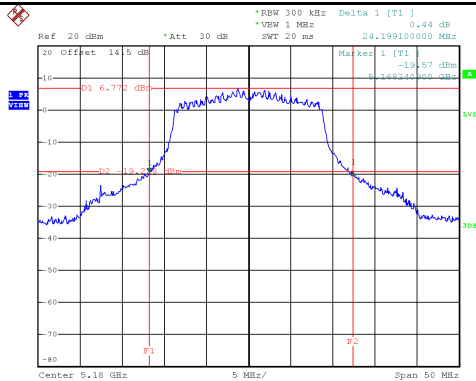


Date: 19.OCT.2022 20:12:42

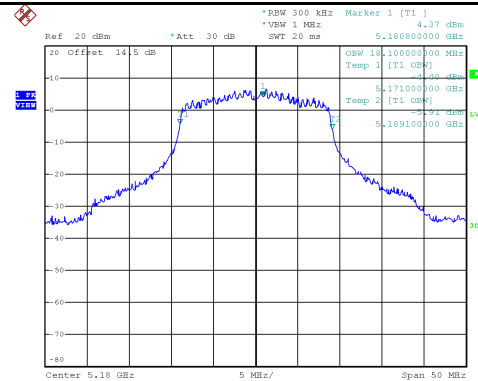


Date: 19.OCT.2022 20:12:11

### 5200 MHz

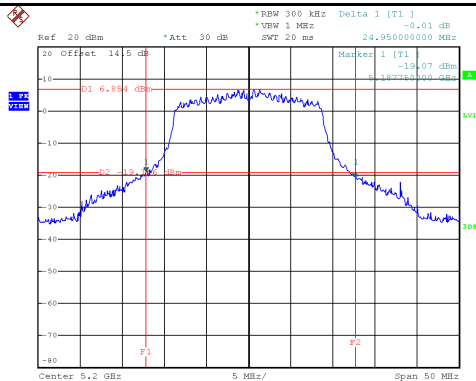


Date: 19.OCT.2022 20:14:48

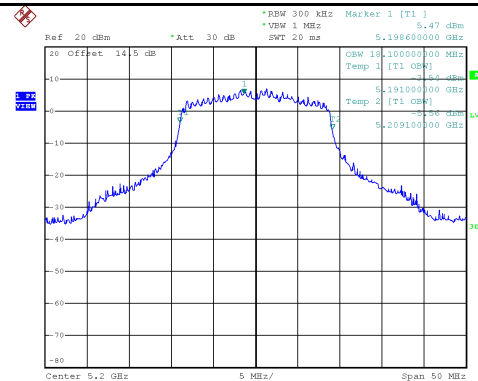


Date: 19.OCT.2022 20:14:19

### 5240 MHz

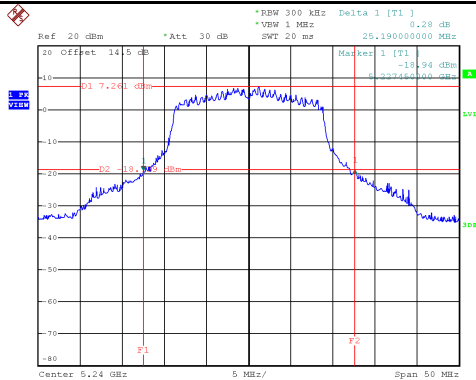



Date: 19.OCT.2022 20:19:31

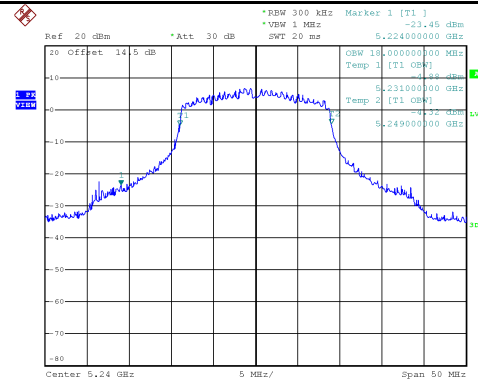



Date: 19.OCT.2022 20:19:02

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5260	24.699	18.000	No limit
5300	25.390	18.100	No limit
5320	24.389	18.000	No limit



### 5260 MHz

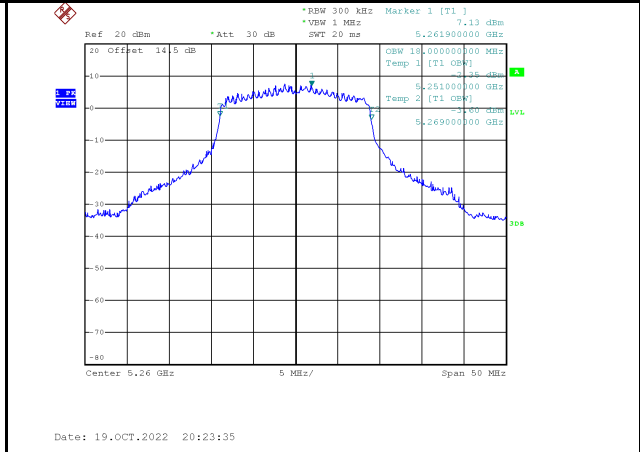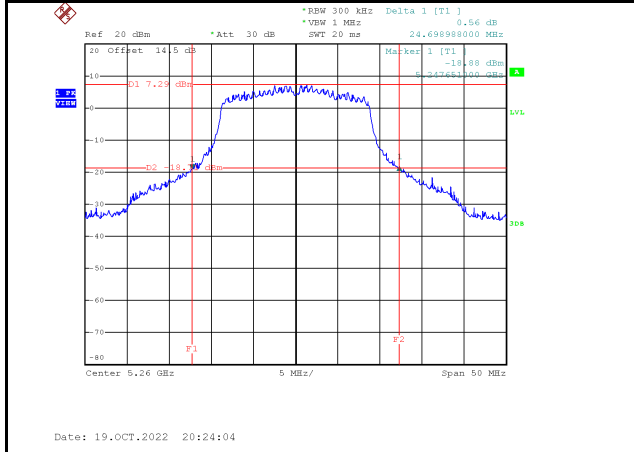

### 5300 MHz

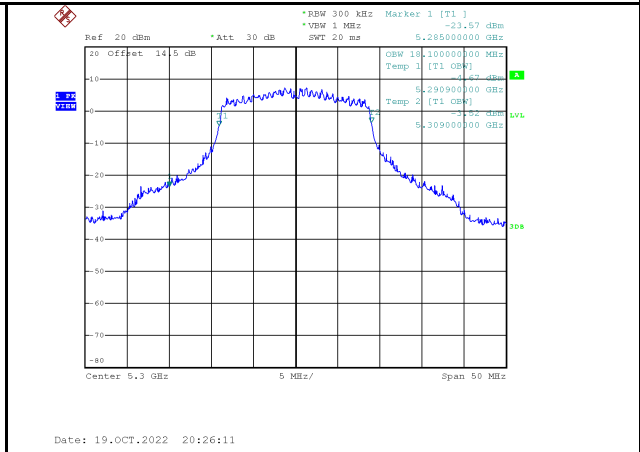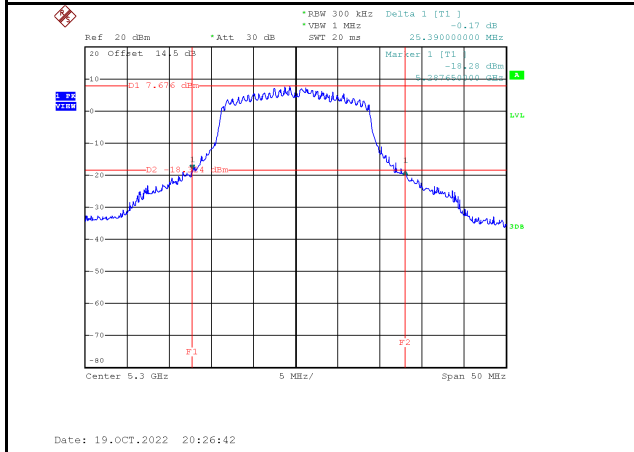


### 5320 MHz

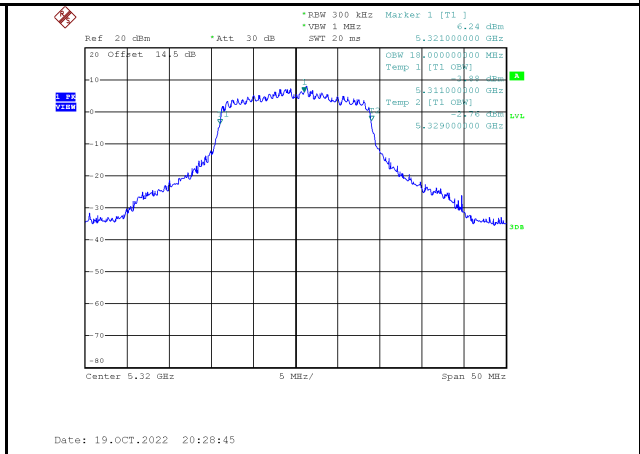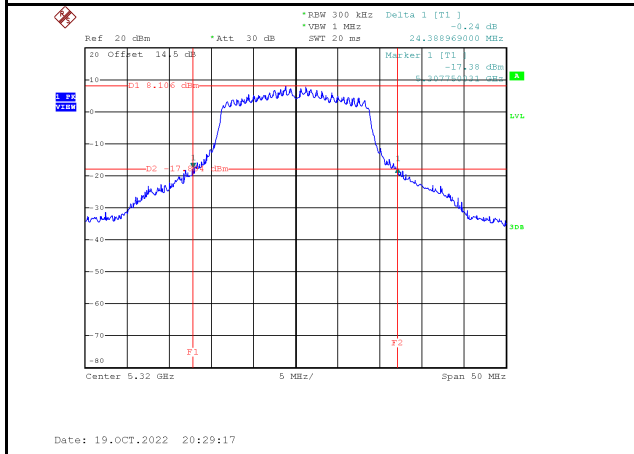


Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5500	25.650	18.000	No limit
5580	25.850	18.000	No limit
5700	24.749	18.000	No limit

### 5500 MHz

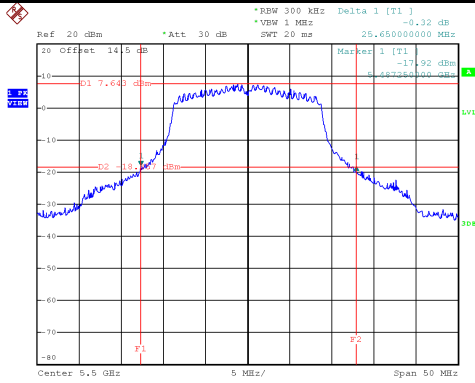


Date: 19.OCT.2022 20:32:01

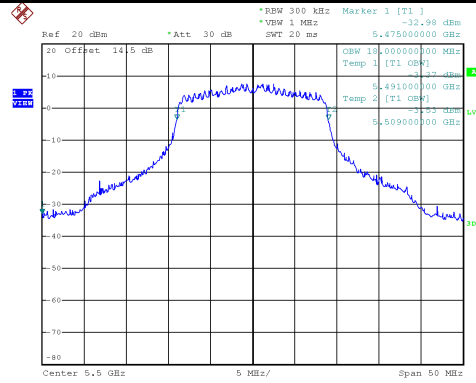


Date: 19.OCT.2022 20:31:34

### 5580 MHz

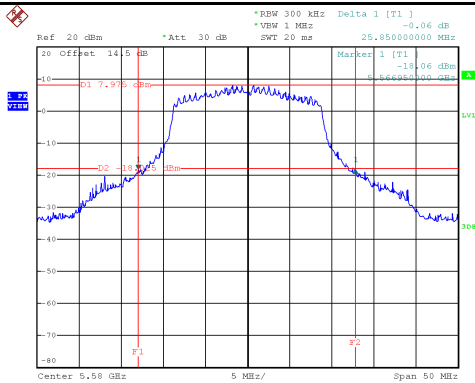


Date: 19.OCT.2022 20:35:35

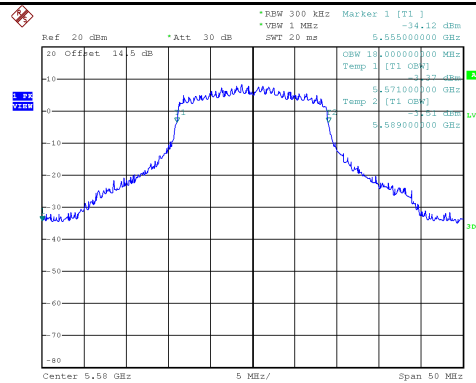


Date: 19.OCT.2022 20:35:08

### 5700 MHz

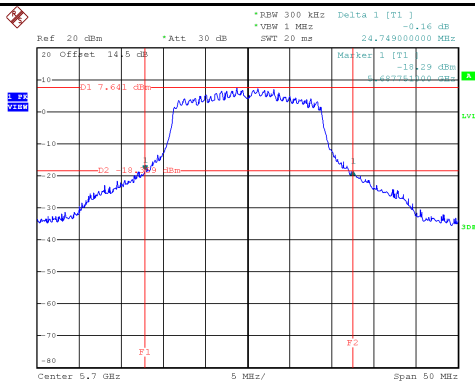




Date: 19.OCT.2022 20:38:02

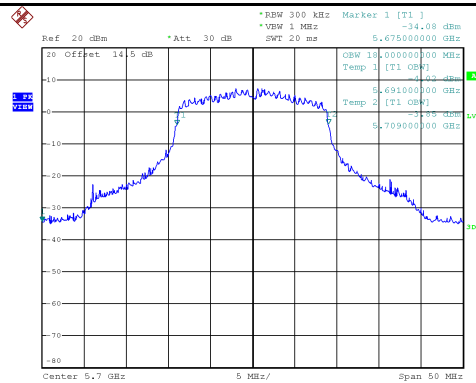

Date: 19.OCT.2022 20:37:32




Test Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Minimum 6 dB Bandwidth Limit (kHz)	Result
5745	15.900	18.000	500	Pass
5785	16.350	18.000	500	Pass
5825	15.748	18.000	500	Pass

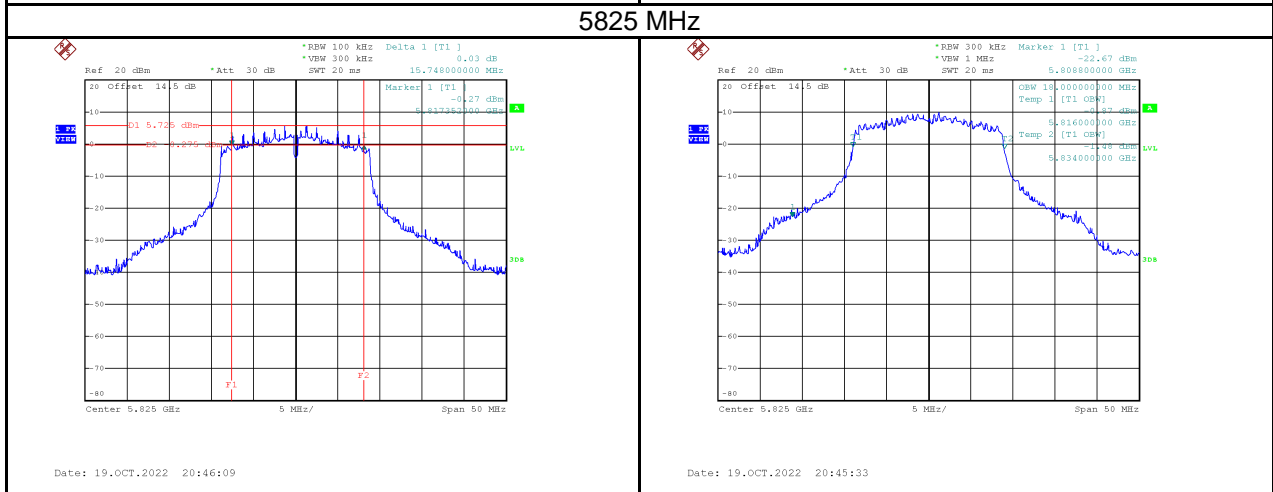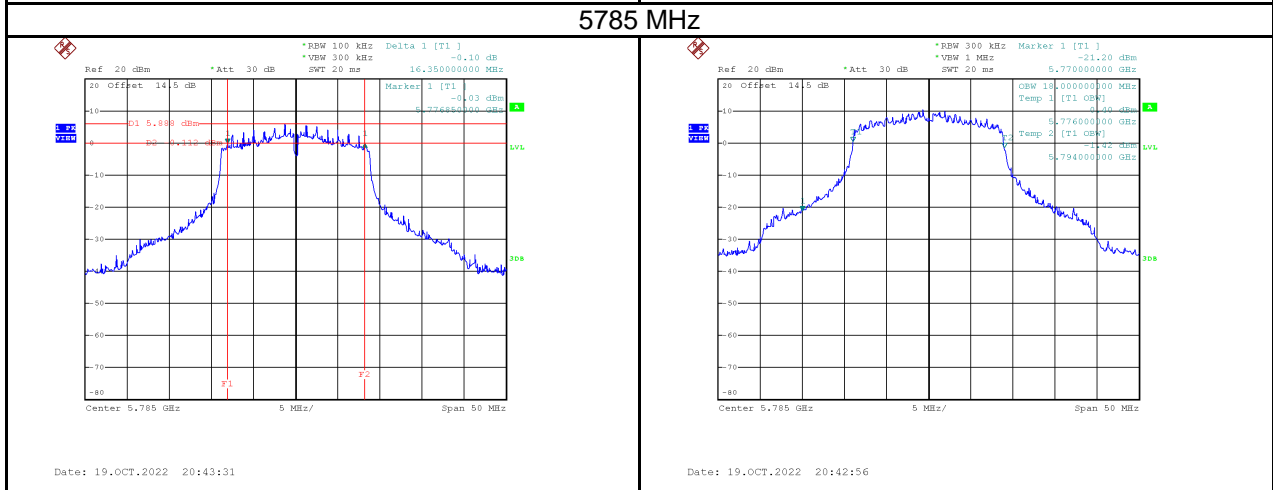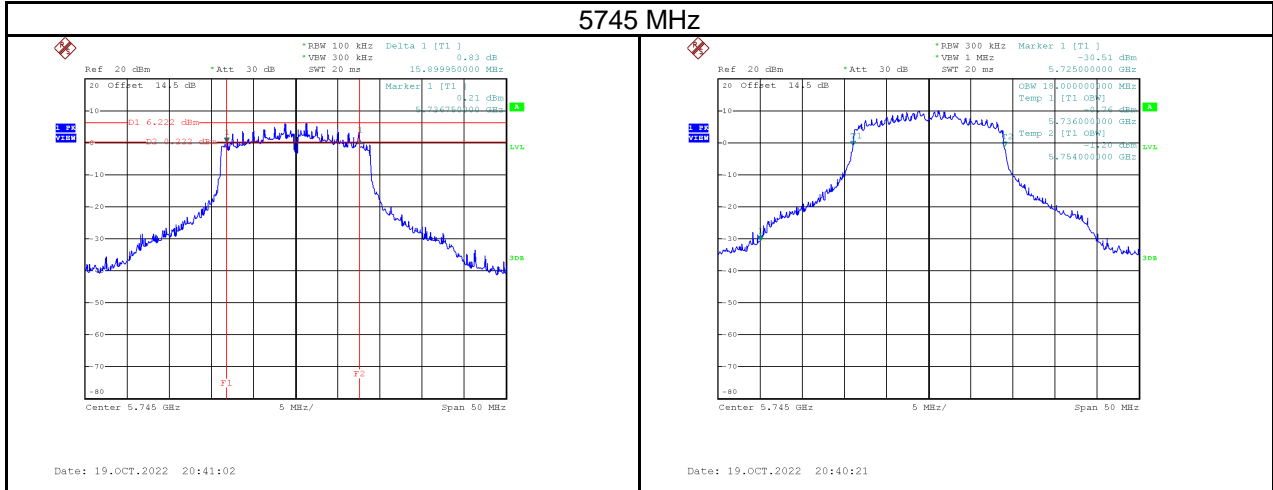


Test Mode | IEEE 802.11ac (VHT20)\_Antenna 2

Test Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit
5180	28.989	18.600	No limit
5200	27.690	18.700	No limit
5240	28.789	18.700	No limit

### 5180 MHz

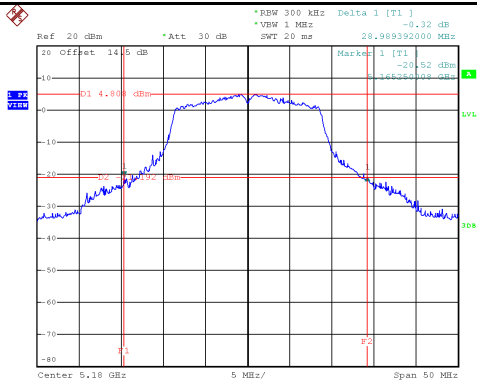


Date: 19.OCT.2022 15:27:51

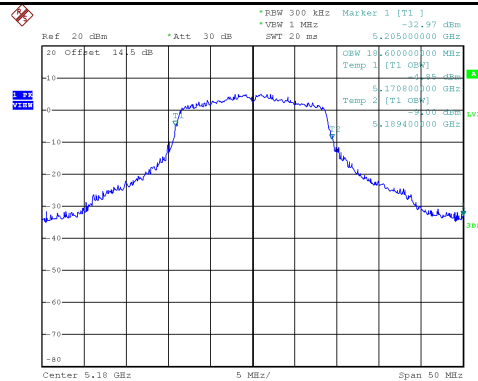


Date: 19.OCT.2022 15:27:26

### 5200 MHz

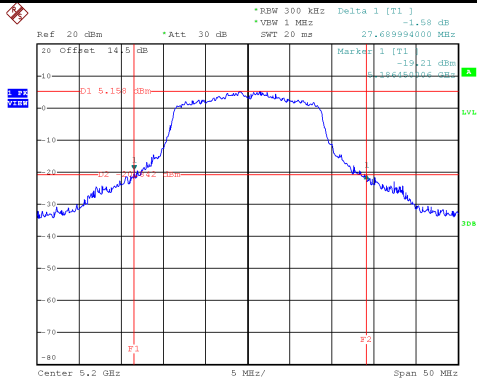


Date: 19.OCT.2022 15:32:10

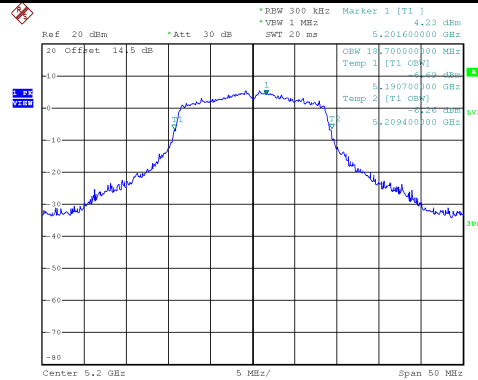


Date: 19.OCT.2022 15:31:38

### 5240 MHz

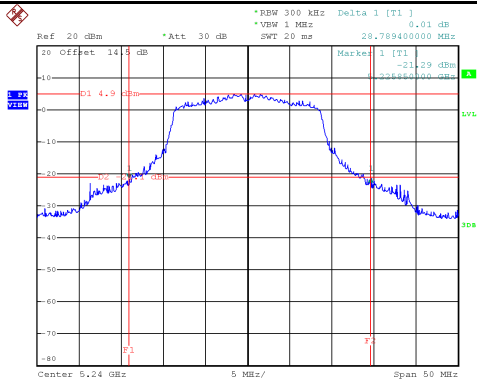

Date: 19.OCT.2022 15:34:15

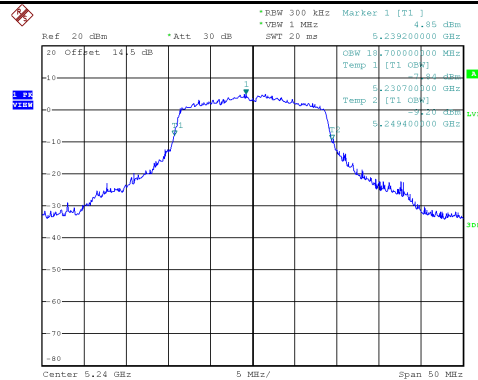

Date: 19.OCT.2022 15:33:51