



17.3. CA Peak to Average Ratio(NTNV)(Subtest:3, Channel:37901|38099, Bandwidth:20|20MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

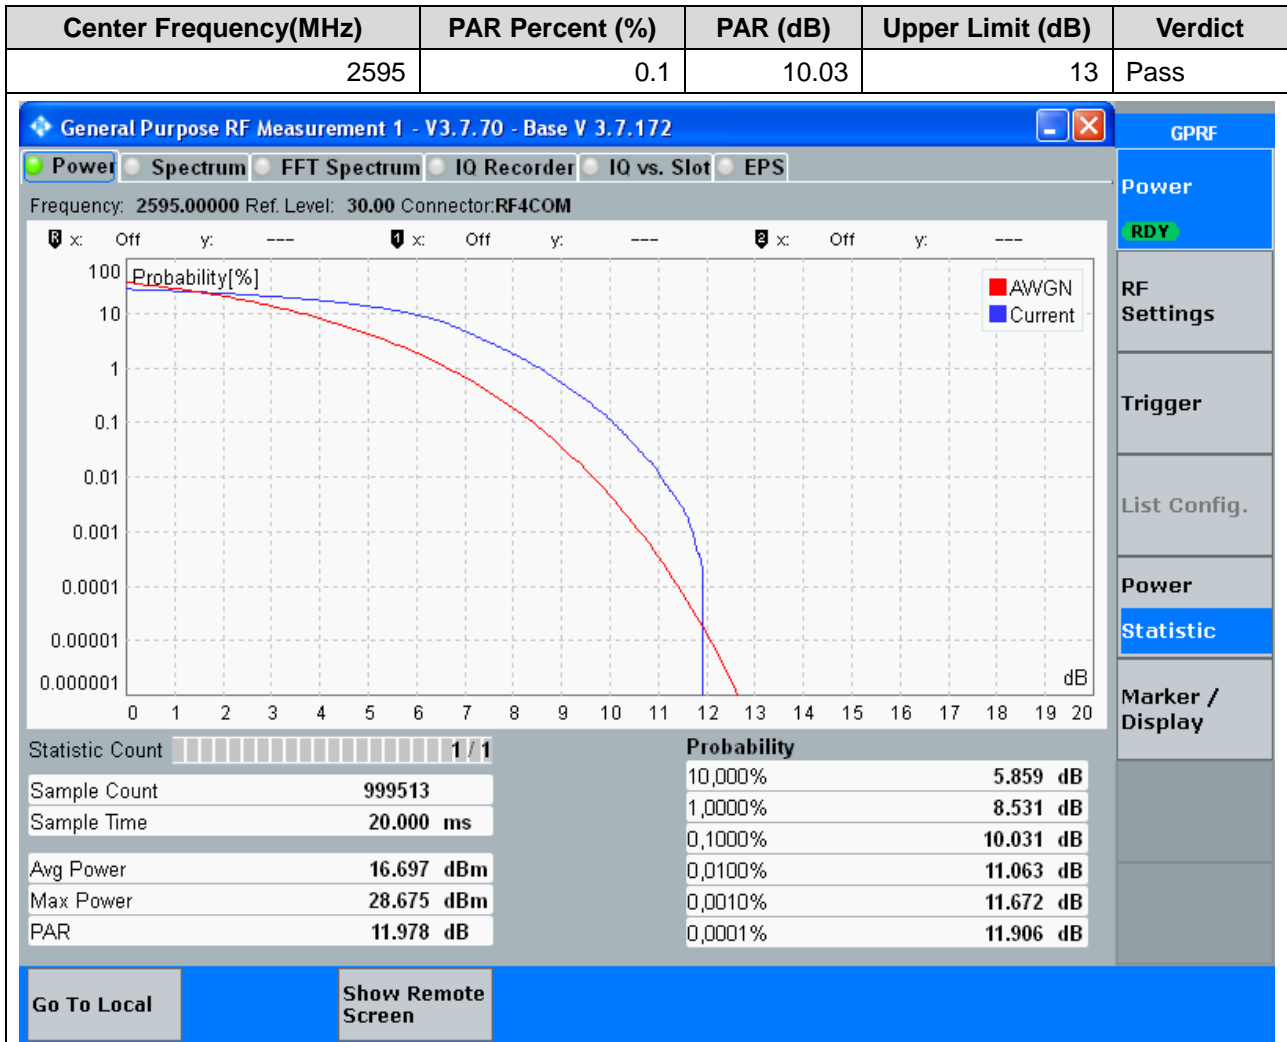


17.4. CA Peak to Average Ratio(NTNV)(Subtest:4, Channel:37901|38099, Bandwidth:20|20MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

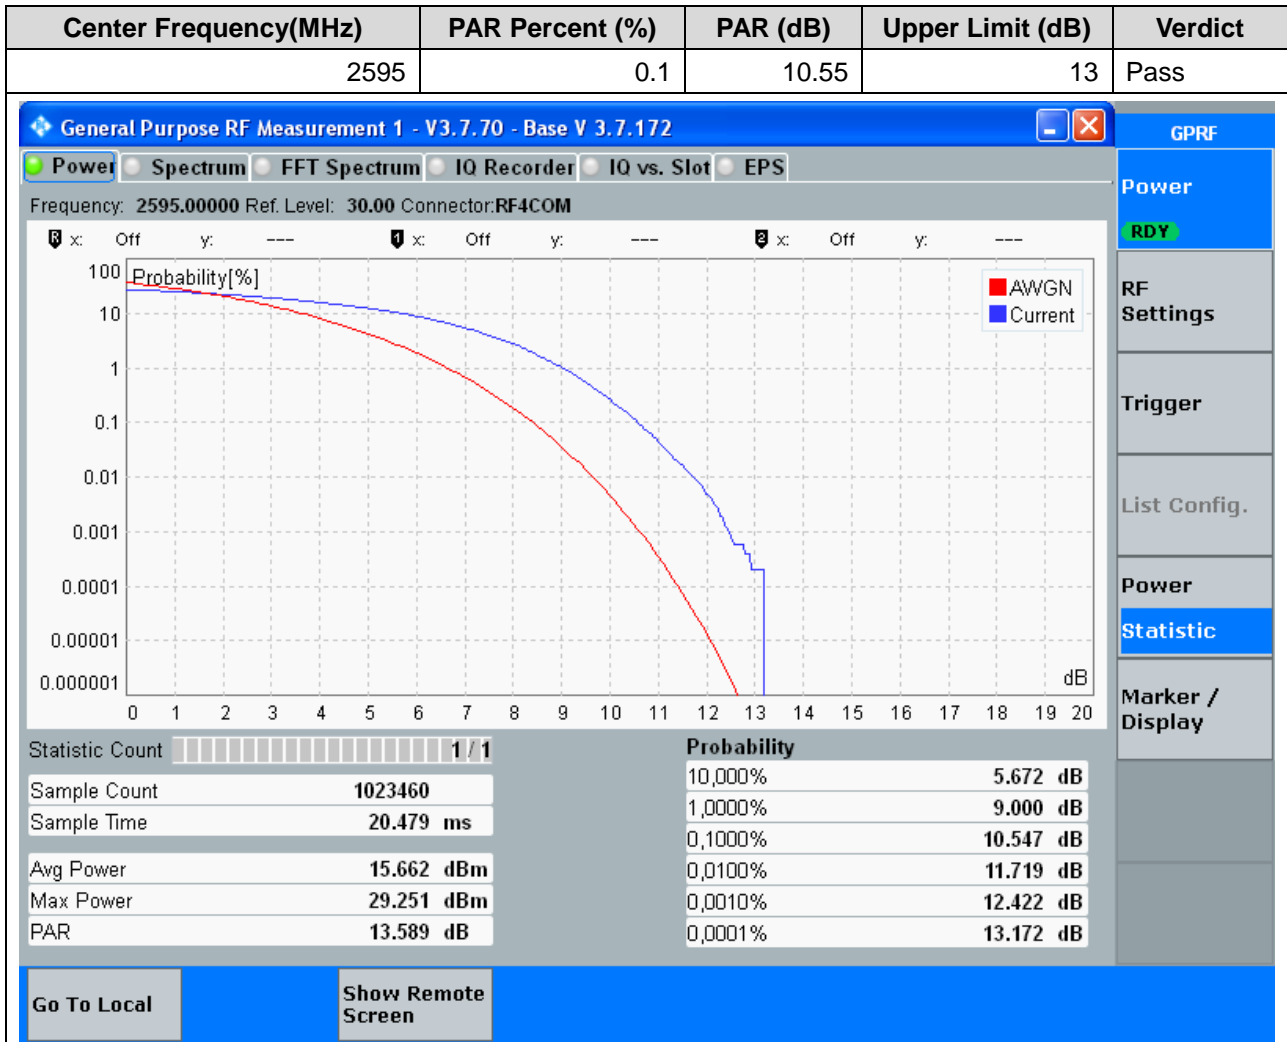


18. CA_41C_full

18.1. CA Peak to Average Ratio(NTNV)(Subtest:1, Channel:40528|40645, Bandwidth:5|20MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

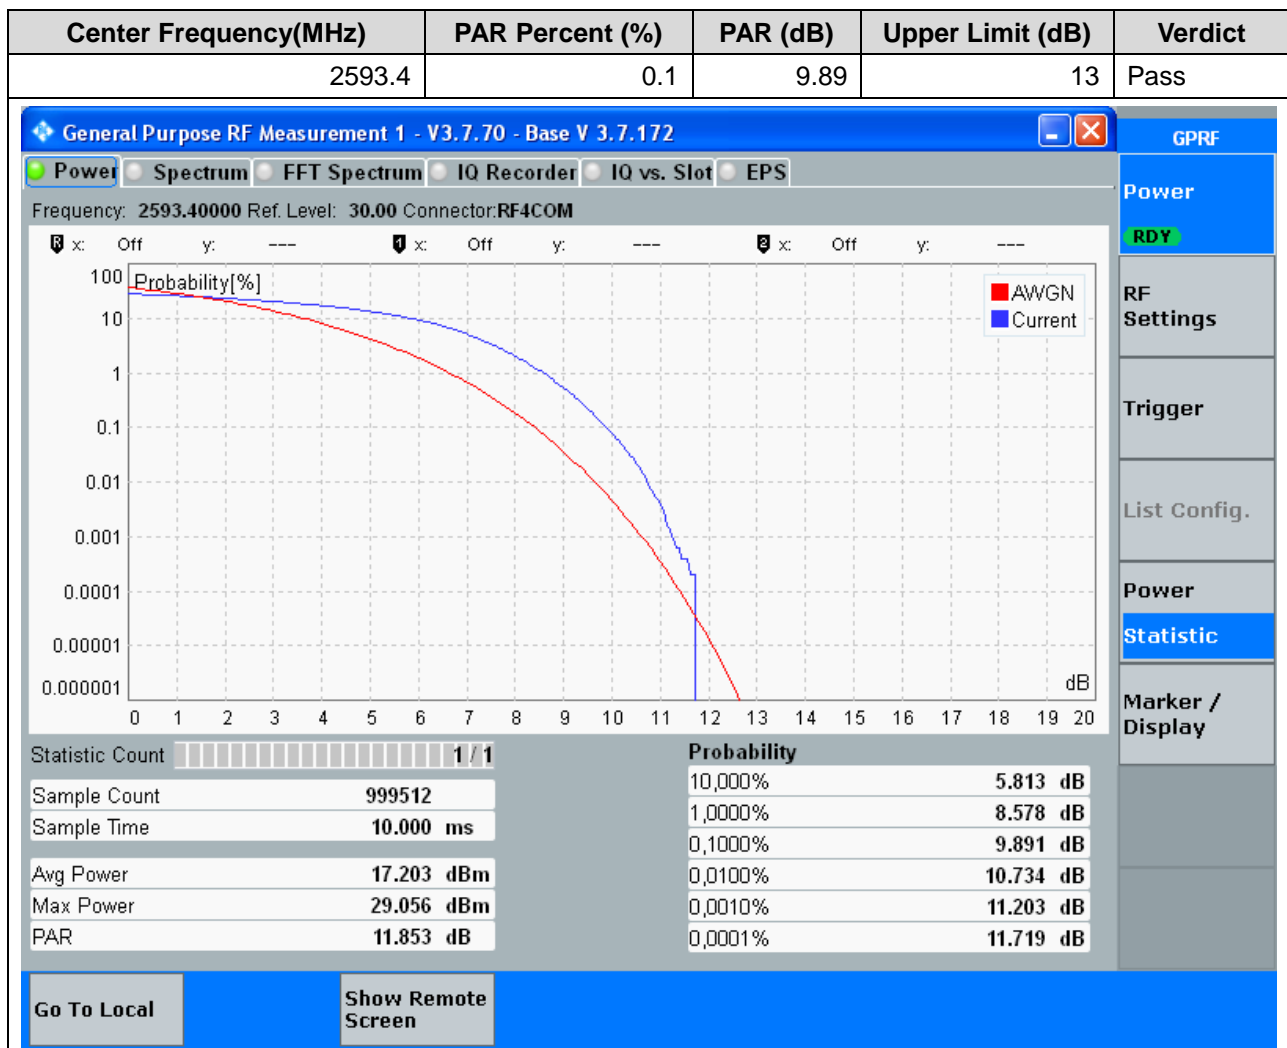

18.2. CA Peak to Average Ratio(NTNV)(Subtest:2, Channel:40528|40645, Bandwidth:5|20MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

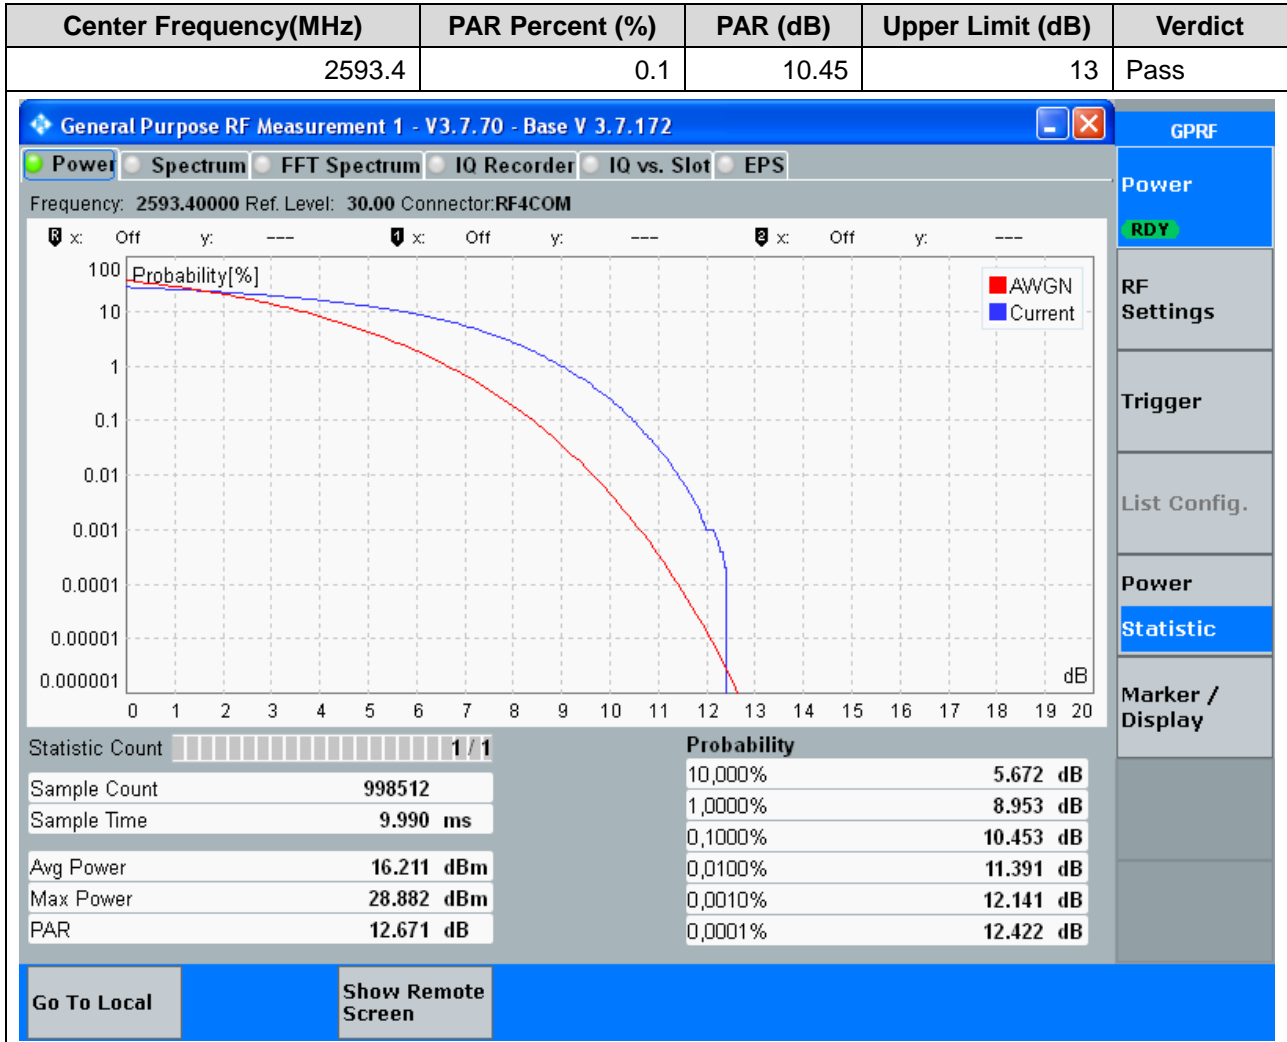

18.3. CA Peak to Average Ratio(NTNV)(Subtest:3, Channel:40595|40712, Bandwidth:20|5MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2592.6	0.1	9.89	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF

Power Spectrum FFT Spectrum IQ Recorder IQ vs. Slot EPS

Frequency: 2592.60000 Ref. Level: 30.00 Connector:RF4COM

Statistic Count		Probability	
Sample Count	999512	10,000%	5.766 dB
Sample Time	10.000 ms	1,0000%	8.578 dB
		0,1000%	9.891 dB
Avg Power	17.173 dBm	0,0100%	10.734 dB
Max Power	29.216 dBm	0,0010%	11.203 dB
PAR	12.042 dB	0,0001%	11.578 dB

Go To Local
Show Remote Screen

18.4. CA Peak to Average Ratio(NTNV)(Subtest:4, Channel:40595|40712, Bandwidth:20|5MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2592.6	0.1	10.5	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF

Power Spectrum FFT Spectrum IQ Recorder IQ vs. Slot EPS

Frequency: 2592.60000 Ref. Level: 30.00 Connector:RF4COM

Statistic Count		Probability	
Sample Count	998512	10,000%	5.625 dB
Sample Time	9.990 ms	1,0000%	9.047 dB
Avg Power	16.209 dBm	0,1000%	10.500 dB
Max Power	28.635 dBm	0,0100%	11.391 dB
PAR	12.426 dB	0,0010%	12.000 dB
		0,0001%	12.281 dB

Go To Local
Show Remote Screen

GPRF

Power
RDY

RF Settings


Trigger

List Config.

Power
Statistic

Marker / Display

18.5. CA Peak to Average Ratio(NTNV)(Subtest:5, Channel:40526|40670, Bandwidth:10|20MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

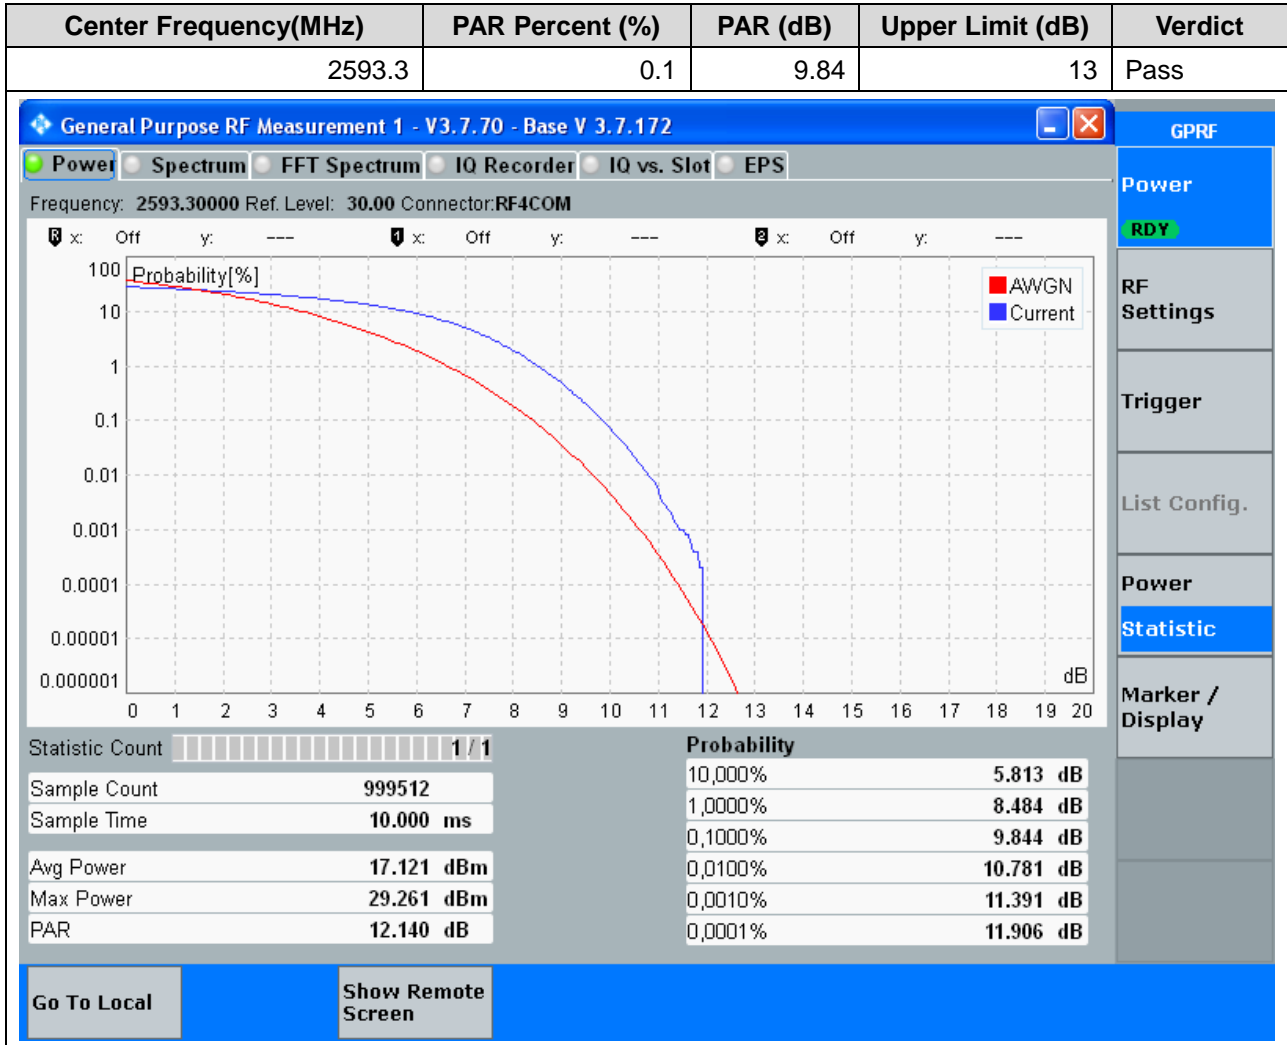

18.6. CA Peak to Average Ratio(NTNV)(Subtest:6, Channel:40526|40670, Bandwidth:10|20MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2593.3	0.1	10.5	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF


Power Spectrum FFT Spectrum IQ Recorder IQ vs. Slot EPS

Frequency: 2593.30000 Ref. Level: 30.00 Connector:RF4COM


Statistic Count		Probability	
Sample Count	998512	10,000%	5.672 dB
Sample Time	9.990 ms	1,0000%	9.000 dB
Avg Power	16.169 dBm	0,1000%	10.500 dB
Max Power	28.728 dBm	0,0100%	11.484 dB
PAR	12.559 dB	0,0010%	12.047 dB
		0,0001%	12.375 dB

Go To Local
Show Remote Screen


18.7. CA Peak to Average Ratio(NTNV)(Subtest:7, Channel:40571|40715, Bandwidth:20|10MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

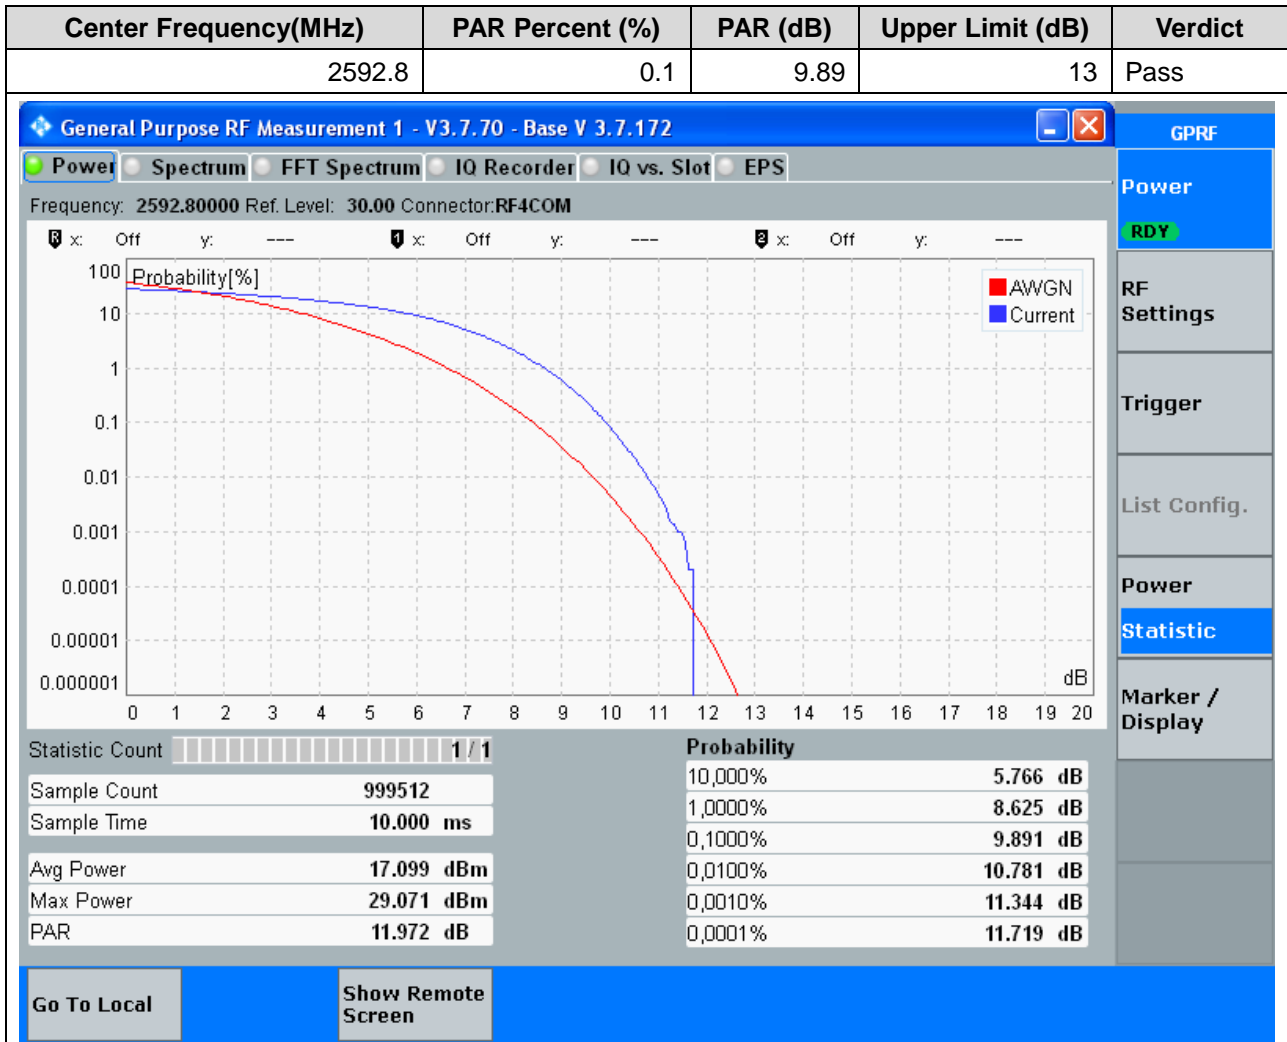

18.8. CA Peak to Average Ratio(NTNV)(Subtest:8, Channel:40571|40715, Bandwidth:20|10MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

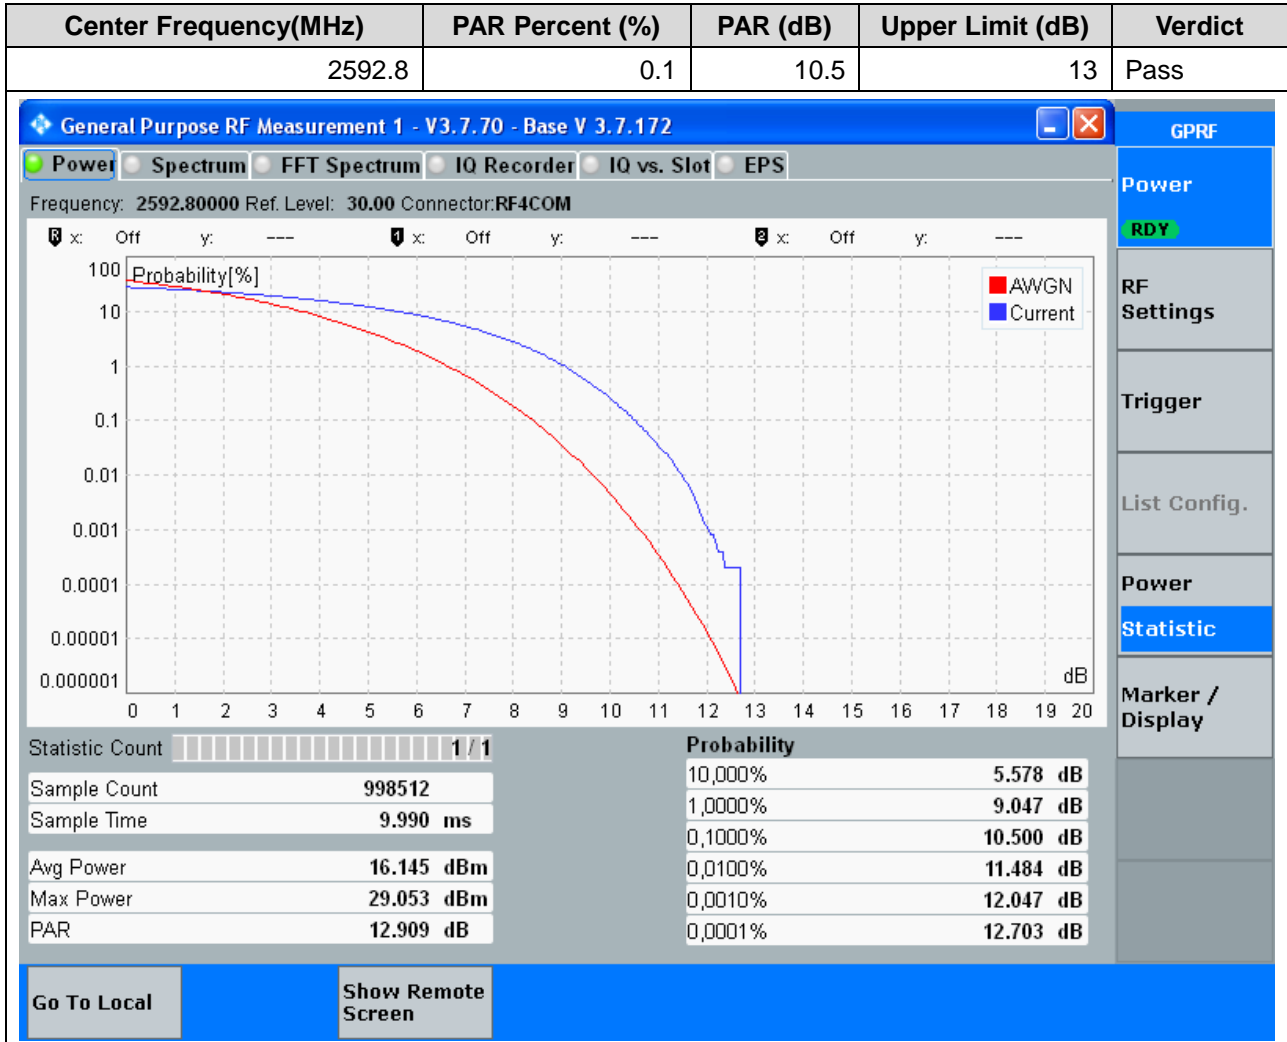

18.9. CA Peak to Average Ratio(NTNV)(Subtest:9, Channel:40545|40695, Bandwidth:15|15MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

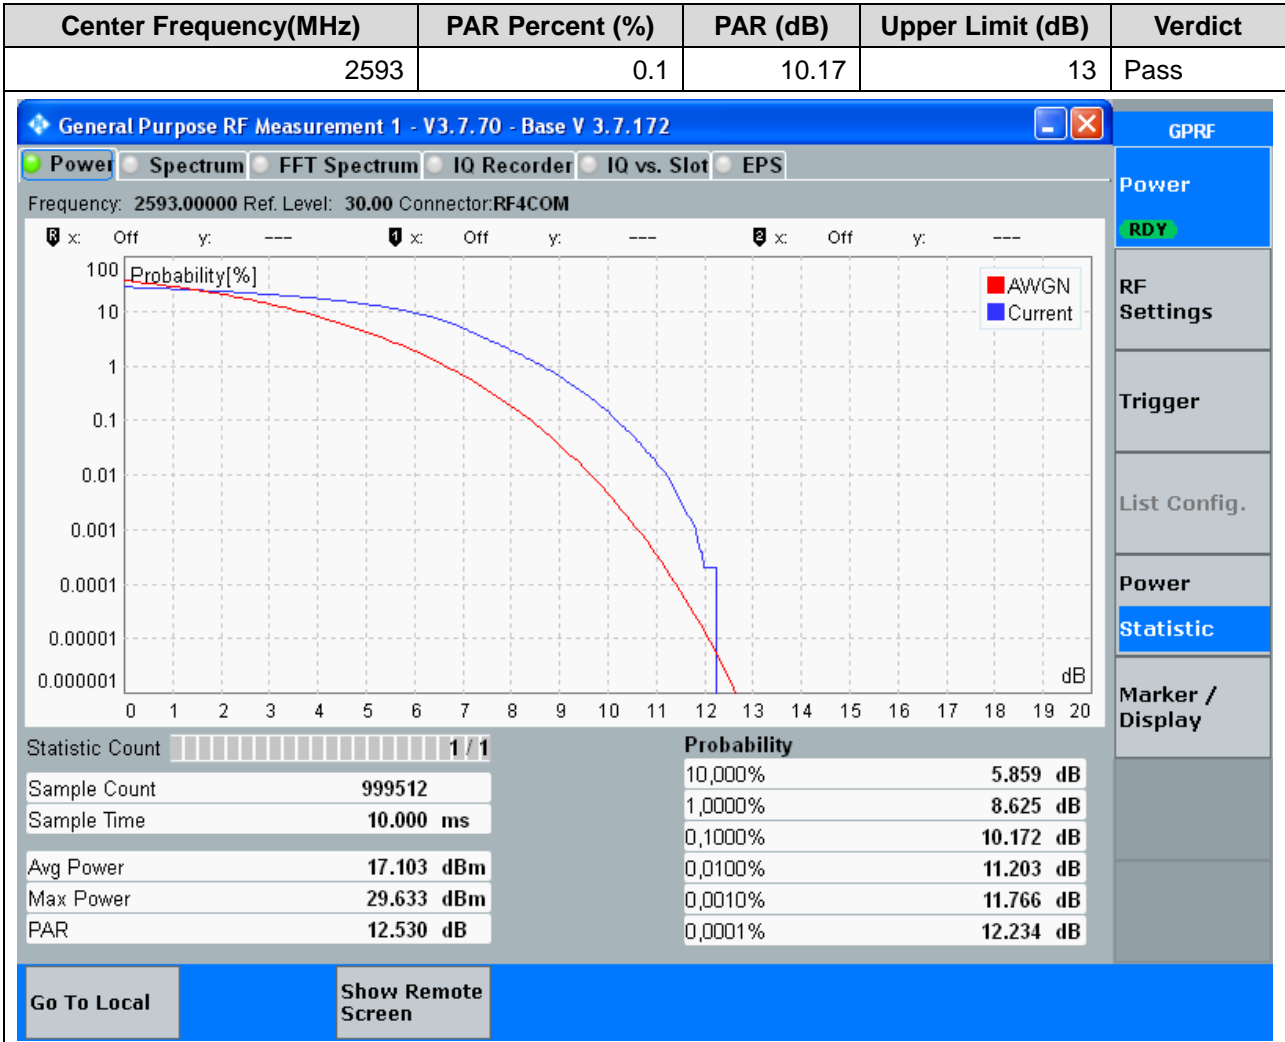

18.10. CA Peak to Average Ratio(NTNV)(Subtest:10, Channel:40545|40695, Bandwidth:15|15MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2593	0.1	10.64	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF

Power | Spectrum | FFT Spectrum | IQ Recorder | IQ vs. Slot | EPS

Frequency: 2593.00000 Ref. Level: 30.00 Connector:RF4COM

Statistic Count		Probability	
Sample Count	998512	10,000%	5.625 dB
Sample Time	9.990 ms	1,0000%	9.047 dB
Avg Power	16.120 dBm	0,1000%	10.641 dB
Max Power	28.886 dBm	0,0100%	11.625 dB
PAR	12.766 dB	0,0010%	12.281 dB
		0,0001%	12.703 dB

Go To Local
Show Remote Screen

18.11. CA Peak to Average Ratio(NTNV)(Subtest:11, Channel:40523|40694, Bandwidth:15|20MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2593.1	0.1	9.94	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF

Power Spectrum FFT Spectrum IQ Recorder IQ vs. Slot EPS

Frequency: 2593.10000 Ref. Level: 30.00 Connector:RF4COM

Statistic Count		Probability	
Sample Count	999513	10,000%	5.813 dB
Sample Time	20.000 ms	1,0000%	8.578 dB
Avg Power	17.127 dBm	0,1000%	9.938 dB
Max Power	30.018 dBm	0,0100%	10.734 dB
PAR	12.891 dB	0,0010%	11.484 dB
		0,0001%	12.188 dB

Go To Local
Show Remote Screen

18.12. CA Peak to Average Ratio(NTNV)(Subtest:12, Channel:40523|40694, Bandwidth:15|20MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2593.1	0.1	10.41	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172 GPRF

Power
 Spectrum
 FFT Spectrum
 IQ Recorder
 IQ vs. Slot
 EPS

Frequency: 2593.10000 Ref. Level: 30.00 Connector:RF4COM

Statistic Count		Probability	
Sample Count	1023460	10,000%	5.578 dB
Sample Time	20.479 ms	1,0000%	8.953 dB
Avg Power	16.180 dBm	0,1000%	10.406 dB
Max Power	28.600 dBm	0,0100%	11.344 dB
PAR	12.421 dB	0,0001%	12.141 dB

18.13. CA Peak to Average Ratio(NTNV)(Subtest:13, Channel:40546|40717, Bandwidth:20|15MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2592.9	0.1	9.84	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF

Power | Spectrum | FFT Spectrum | IQ Recorder | IQ vs. Slot | EPS

Frequency: 2592.90000 Ref. Level: 30.00 Connector:RF4COM

Probability[%]

Statistic Count		Probability	
Sample Count	999513	10,000%	5.766 dB
Sample Time	20.000 ms	1,0000%	8.578 dB
Avg Power	17.112 dBm	0,1000%	9.844 dB
Max Power	28.948 dBm	0,0100%	10.641 dB
PAR	11.835 dB	0,0010%	11.344 dB
		0,0001%	11.625 dB

Go To Local
Show Remote Screen

GPRF

Power

RDY

RF Settings

Trigger

List Config.

Power

Statistic

Marker / Display

18.14. CA Peak to Average Ratio(NTNV)(Subtest:14, Channel:40546|40717, Bandwidth:20|15MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2592.9	0.1	10.36	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF

Power Spectrum FFT Spectrum IQ Recorder IQ vs. Slot EPS

Frequency: 2592.90000 Ref. Level: 30.00 Connector:RF4COM

Statistic Count		Probability	
Sample Count	1023460	10,000%	5.578 dB
Sample Time	20.479 ms	1,0000%	8.906 dB
Avg Power	16.263 dBm	0,1000%	10.359 dB
Max Power	28.746 dBm	0,0100%	11.297 dB
PAR	12.483 dB	0,0010%	11.953 dB
		0,0001%	12.328 dB

Go To Local
Show Remote Screen

18.15. CA Peak to Average Ratio(NTNV)(Subtest:15, Channel:40521|40719, Bandwidth:20|20MHz, Modulation:QPSK, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2593	0.1	9.98	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF

Power | Spectrum | FFT Spectrum | IQ Recorder | IQ vs. Slot | EPS

Frequency: 2593.00000 Ref. Level: 30.00 Connector:RF4COM

Statistic Count		Probability	
Sample Count	999513	10,000%	5.859 dB
Sample Time	20.000 ms	1,0000%	8.484 dB
Avg Power	17.135 dBm	0,1000%	9.984 dB
Max Power	29.220 dBm	0,0100%	10.922 dB
PAR	12.085 dB	0,0010%	11.531 dB
		0,0001%	12.000 dB

Go To Local
Show Remote Screen

18.16. CA Peak to Average Ratio(NTNV)(Subtest:16, Channel:40521|40719, Bandwidth:20|20MHz, Modulation:16QAM, RB Number:Full|Full, RB Position:Low|Low)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2593	0.1	10.36	13	Pass

General Purpose RF Measurement 1 - V3.7.70 - Base V 3.7.172
GPRF

Power | Spectrum | FFT Spectrum | IQ Recorder | IQ vs. Slot | EPS


Frequency: 2593.00000 Ref. Level: 30.00 Connector:RF4COM

Statistic Count		Probability	
Sample Count	1023460	10,000%	5.625 dB
Sample Time	20.479 ms	1,0000%	8.813 dB
Avg Power	16.268 dBm	0,1000%	10.359 dB
Max Power	28.836 dBm	0,0010%	12.094 dB
PAR	12.568 dB	0,0001%	12.422 dB


Go To Local
Show Remote Screen

19. n5


19.1. Peak to Average Ratio for SA(NTNV)(Channel:166800, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

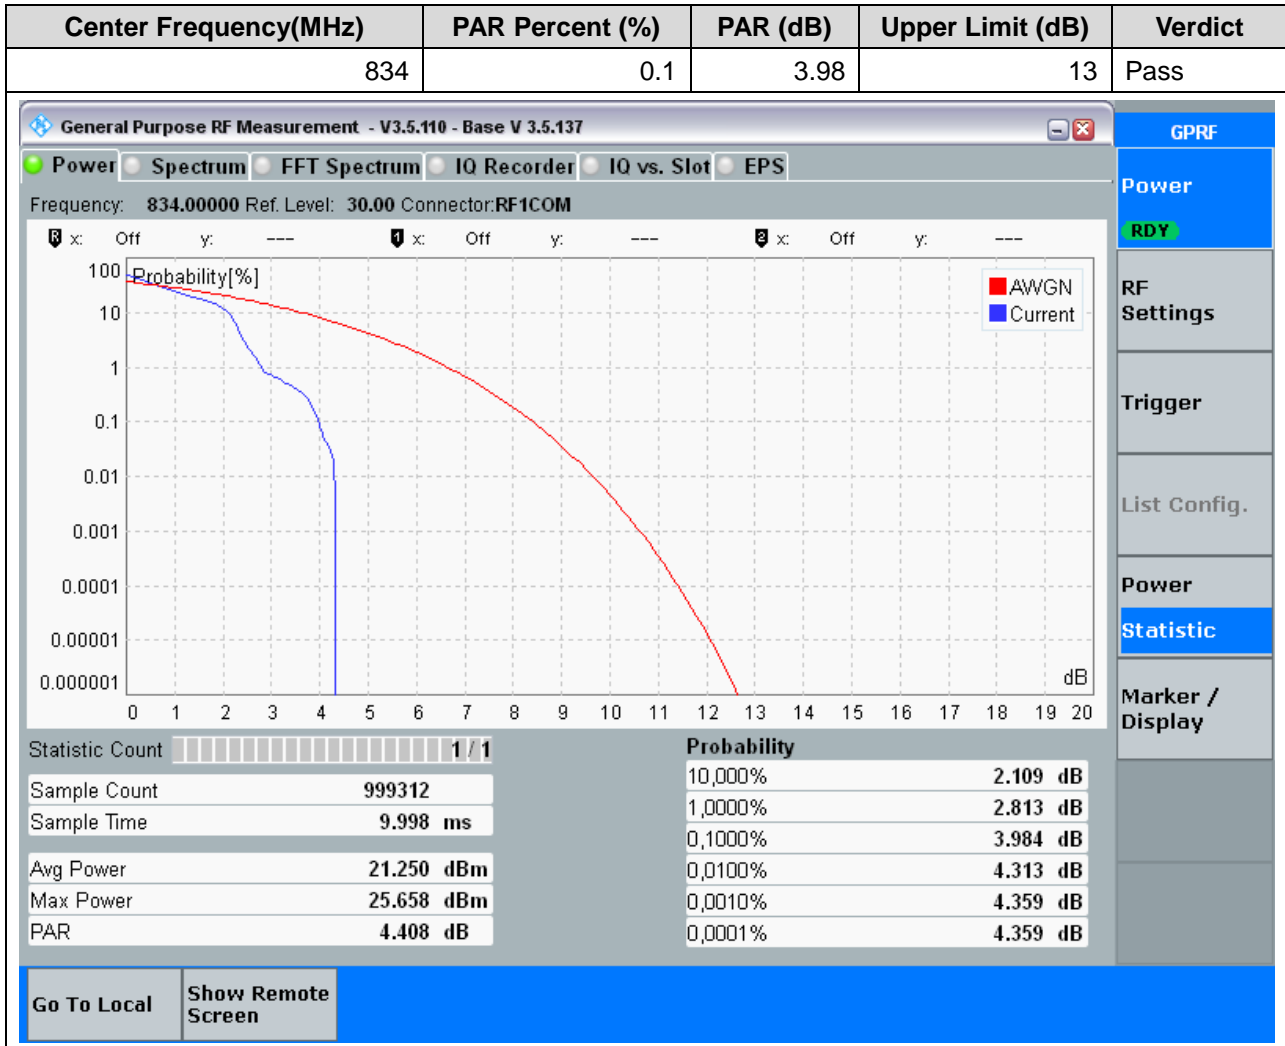


19.2. Peak to Average Ratio for SA(NTNV)(Channel:166800, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

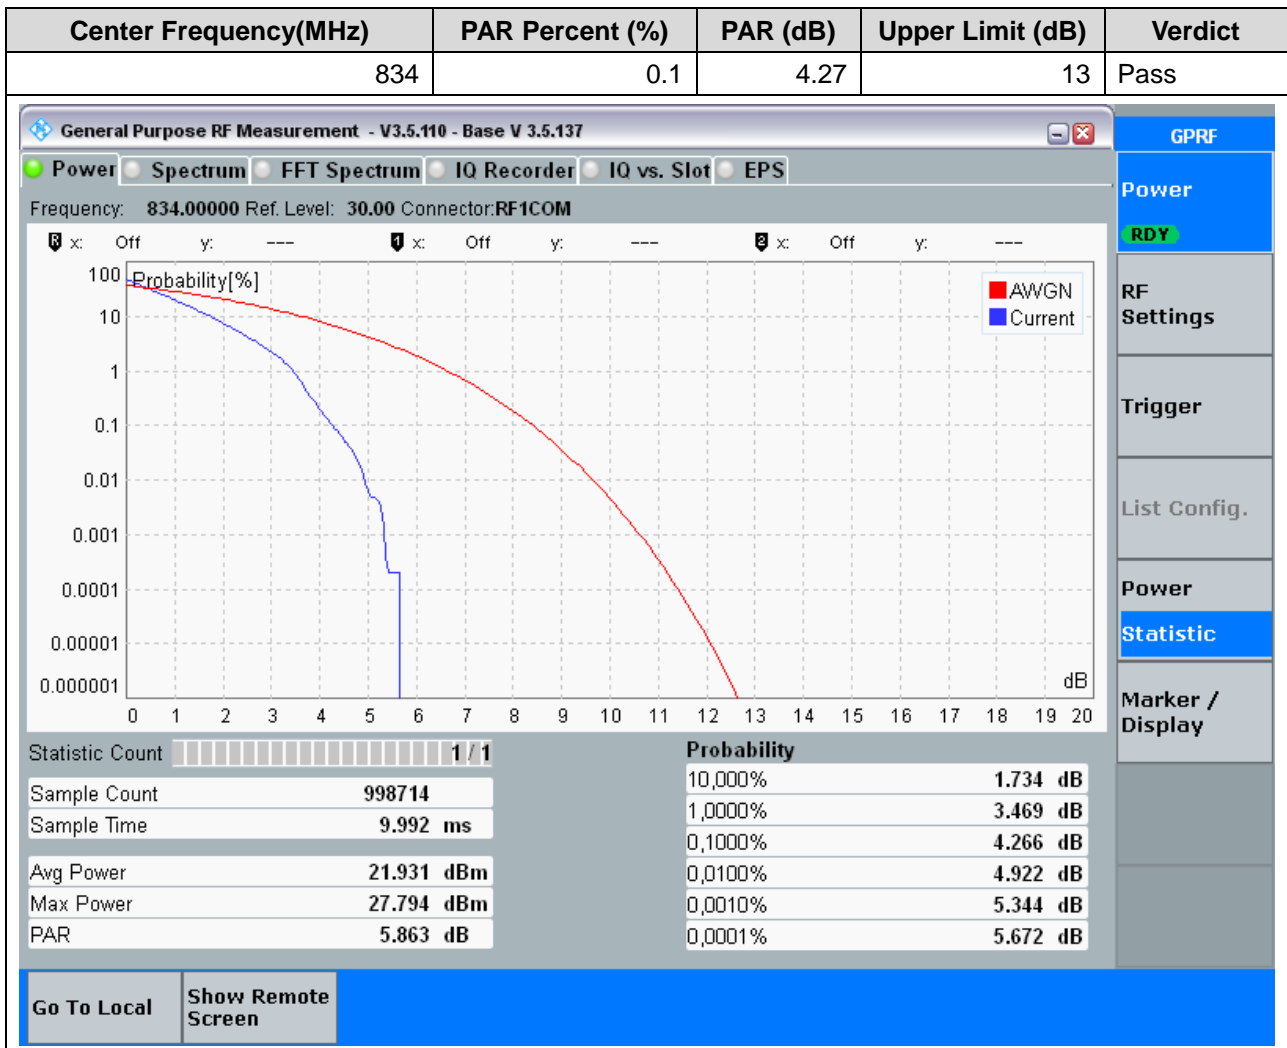


19.3. Peak to Average Ratio for SA(NTNV)(Channel:166800, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

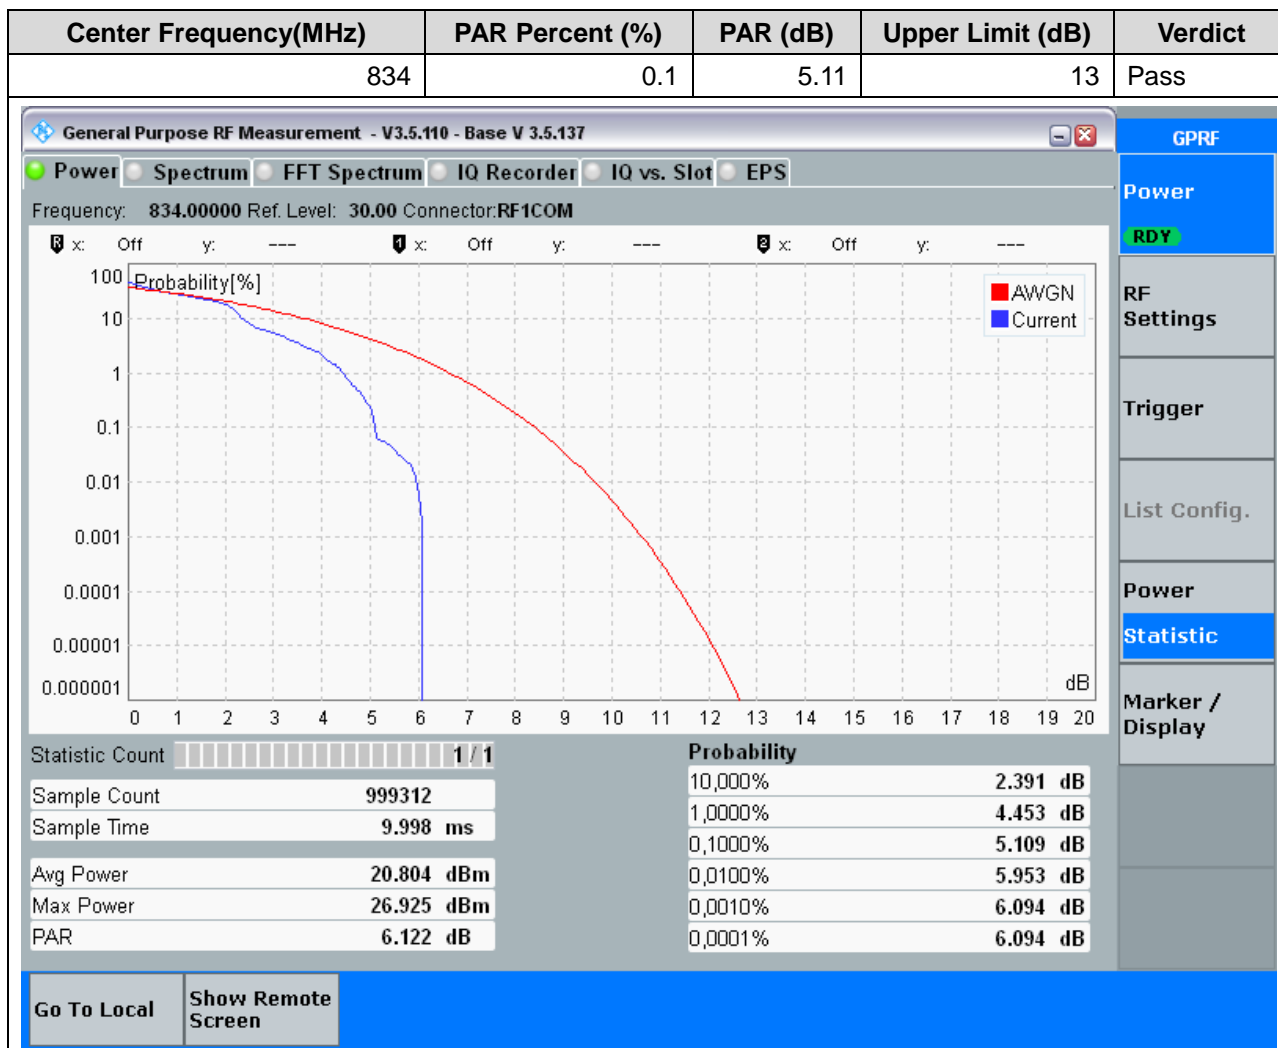


19.4. Peak to Average Ratio for SA(NTNV)(Channel:166800, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

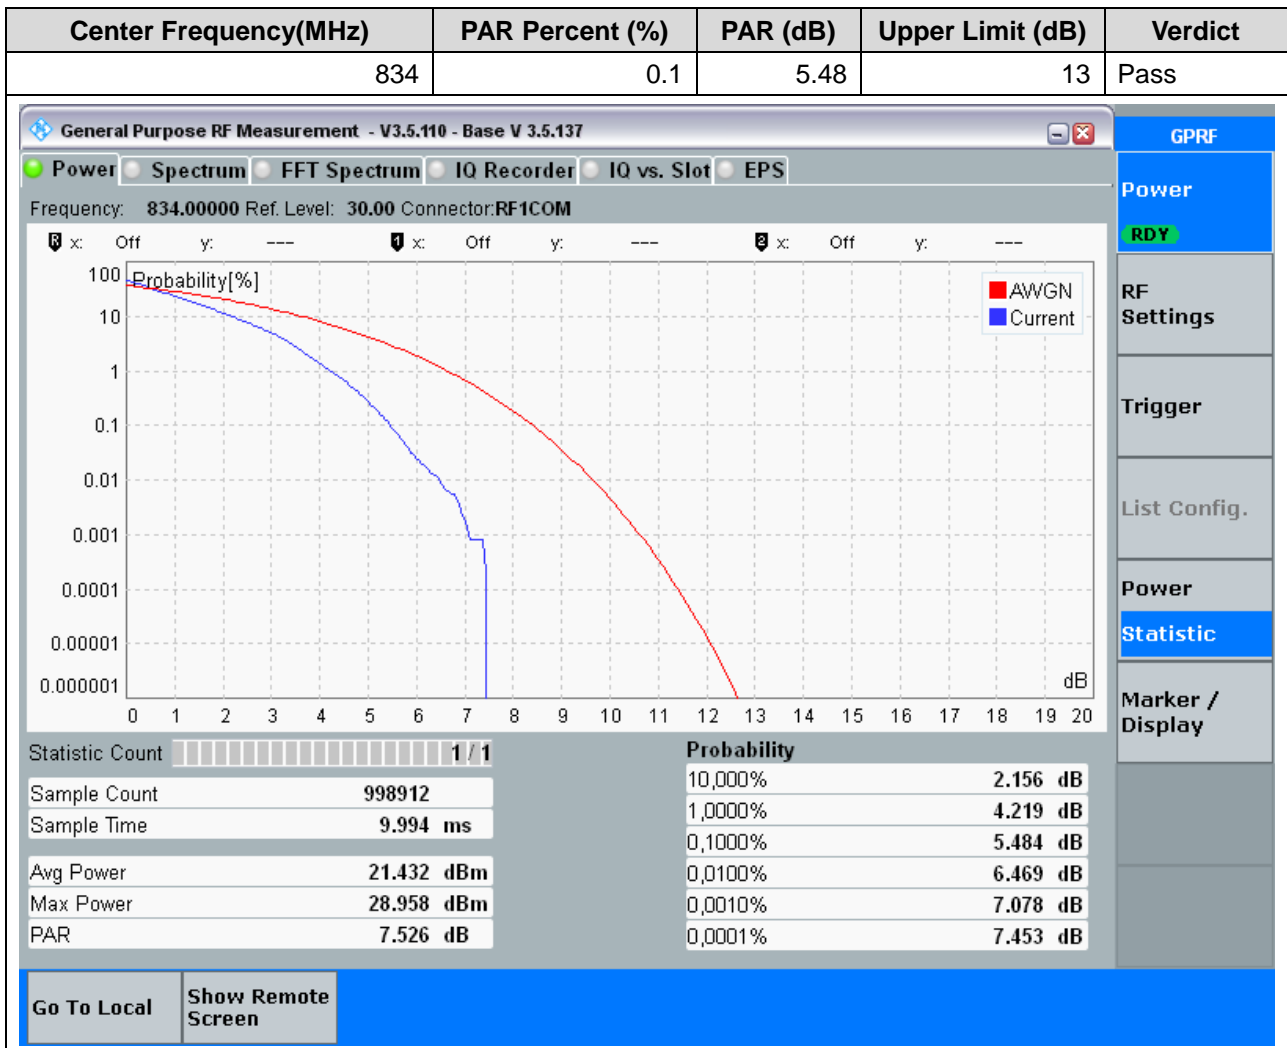


19.5. Peak to Average Ratio for SA(NTNV)(Channel:167300, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

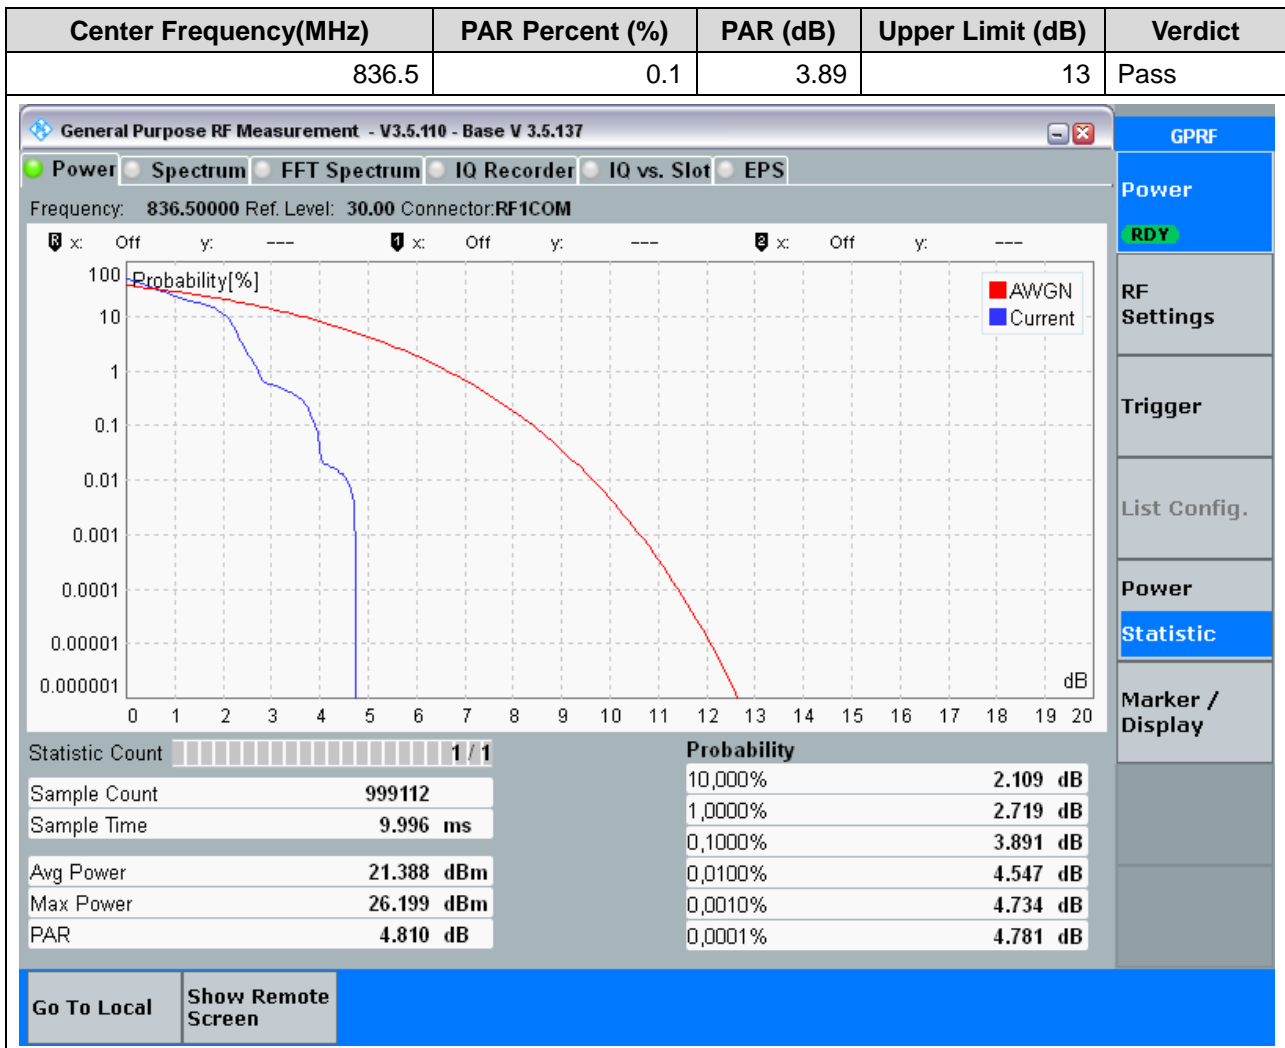


19.6. Peak to Average Ratio for SA(NTNV)(Channel:167300, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

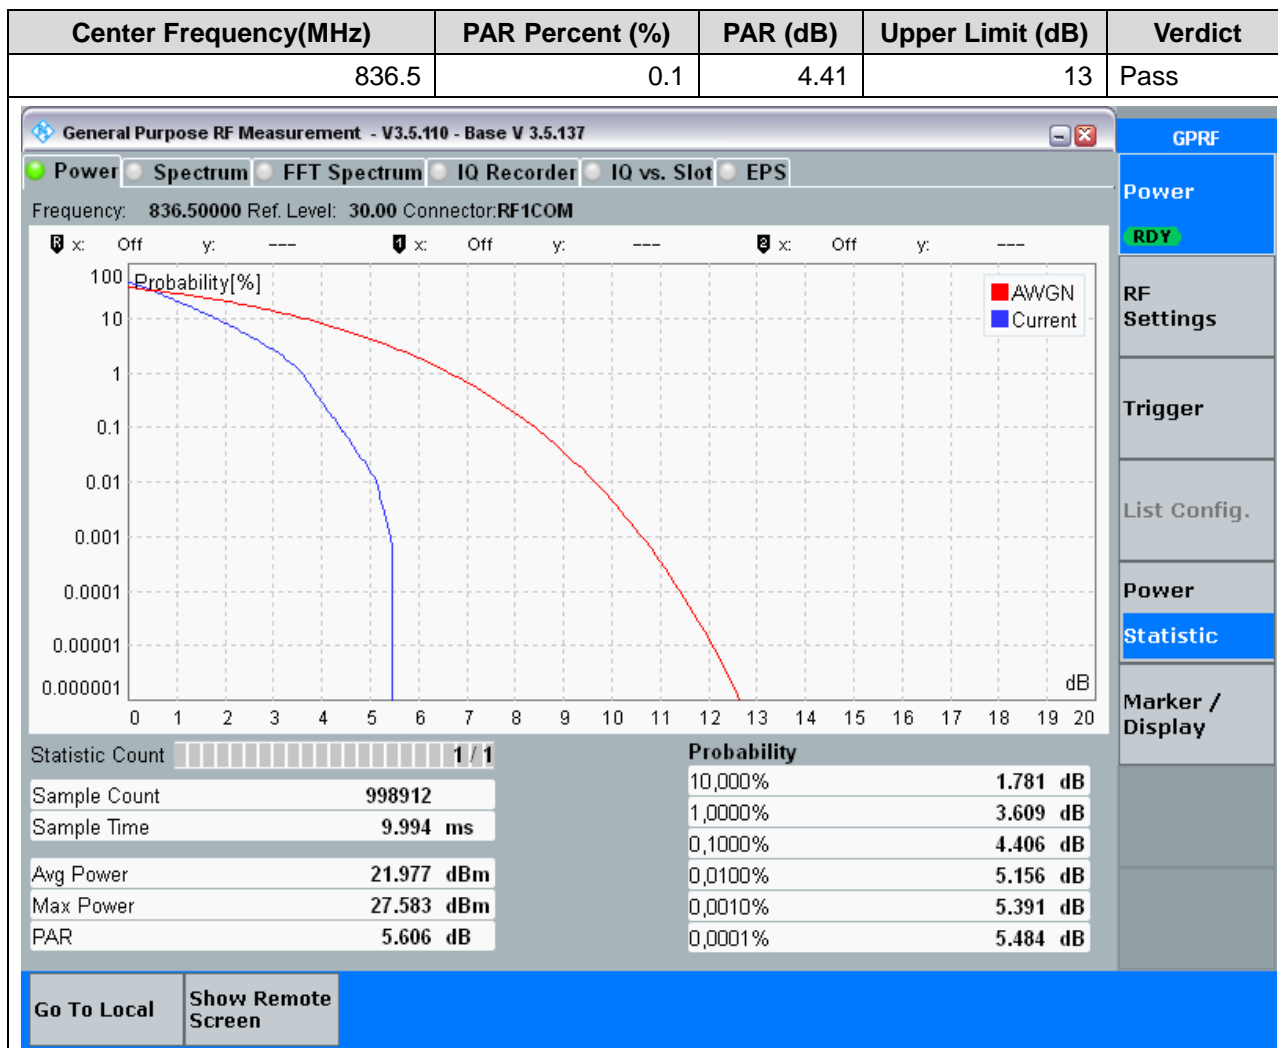


19.7. Peak to Average Ratio for SA(NTNV)(Channel:167300, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

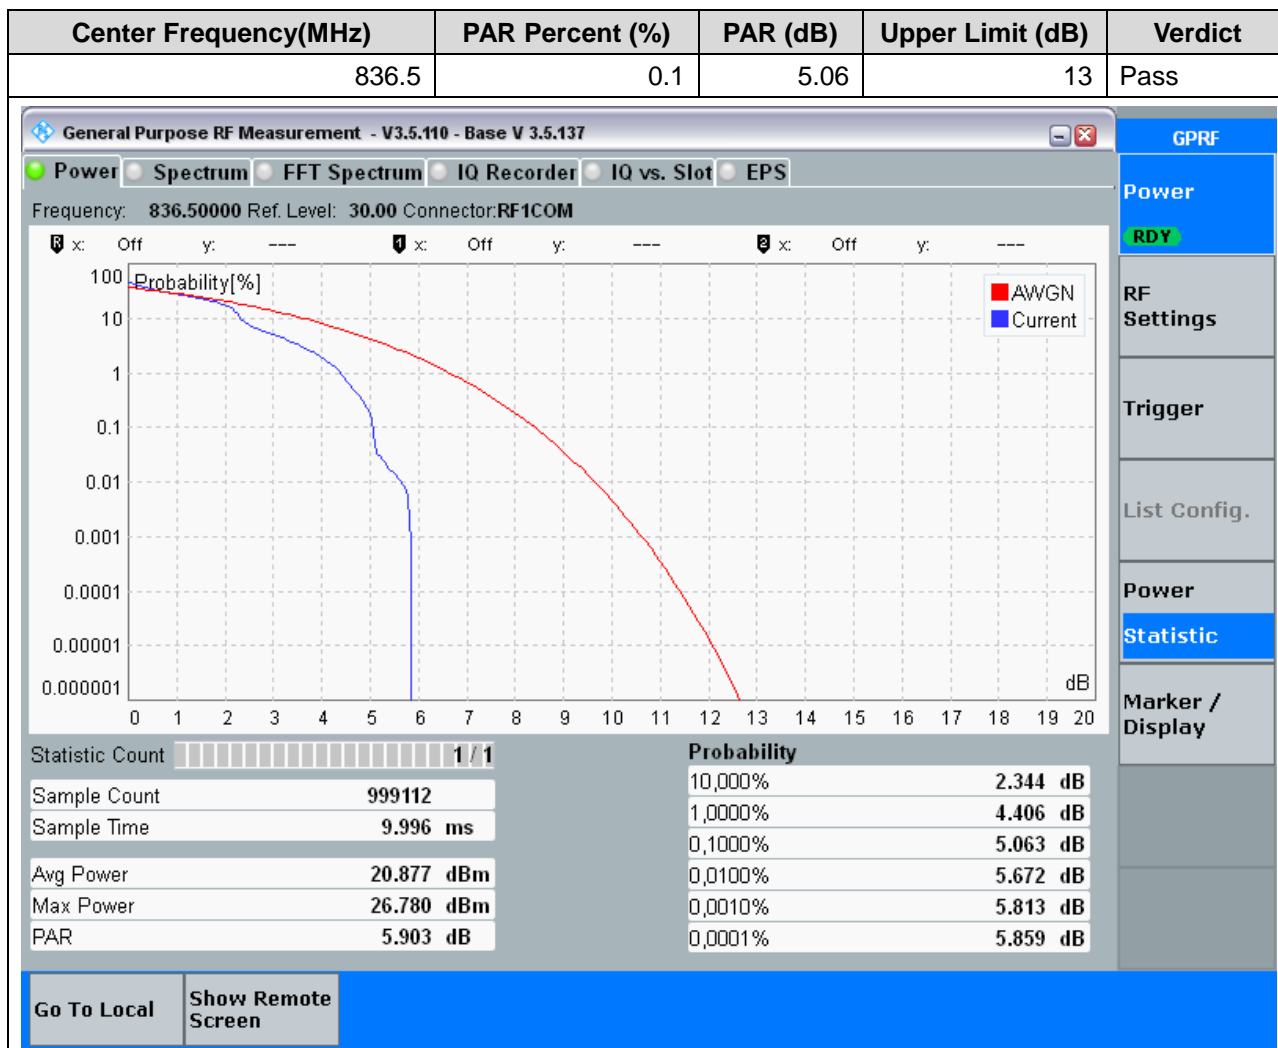


19.8. Peak to Average Ratio for SA(NTNV)(Channel:167300, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

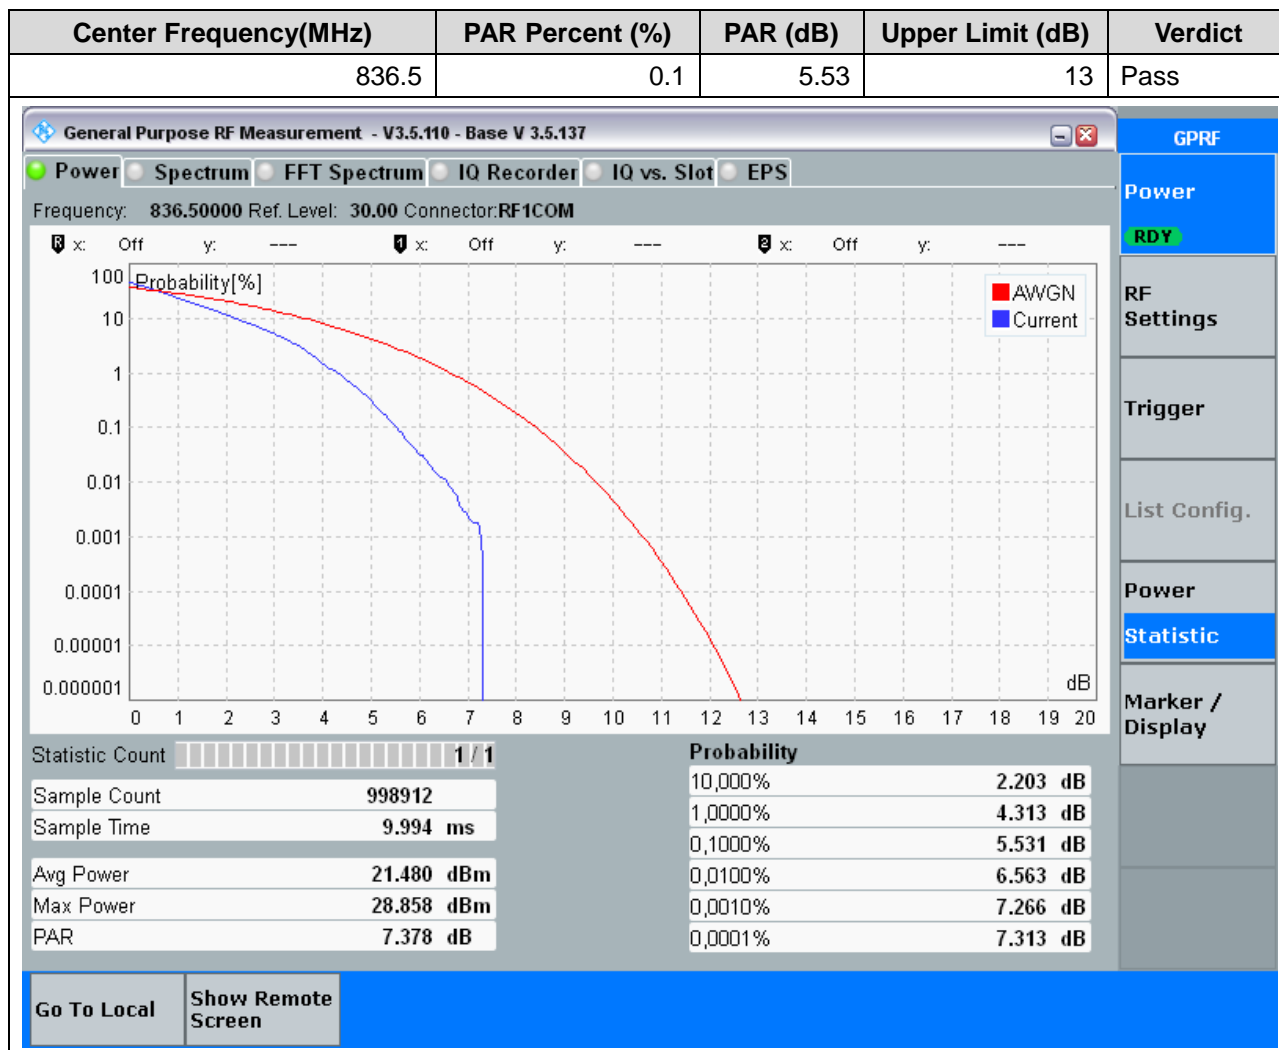


19.9. Peak to Average Ratio for SA(NTNV)(Channel:167800, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

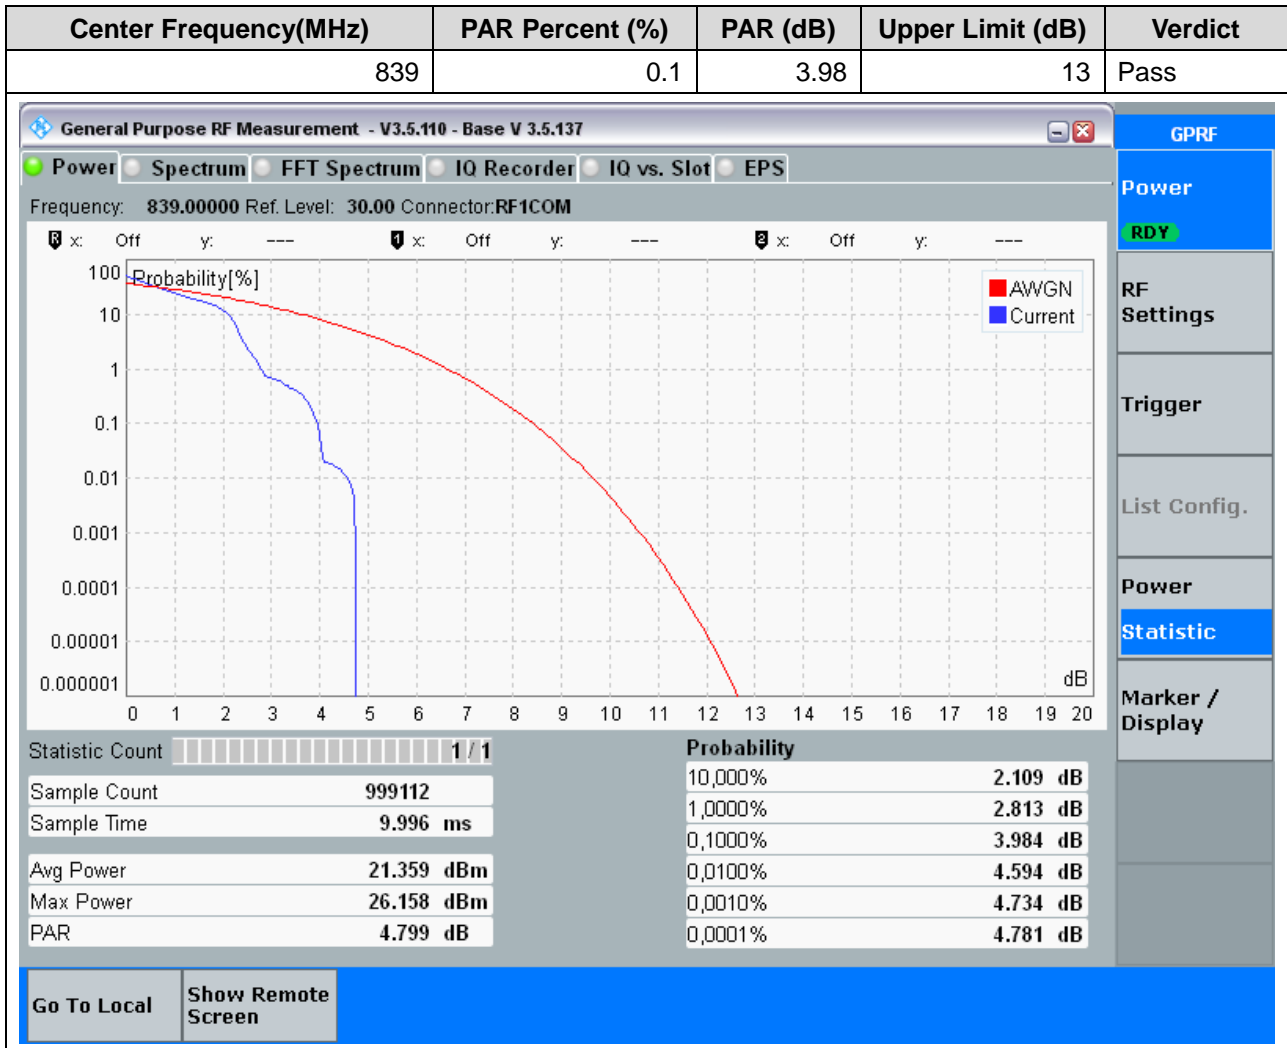


19.10. Peak to Average Ratio for SA(NTNV)(Channel:167800, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

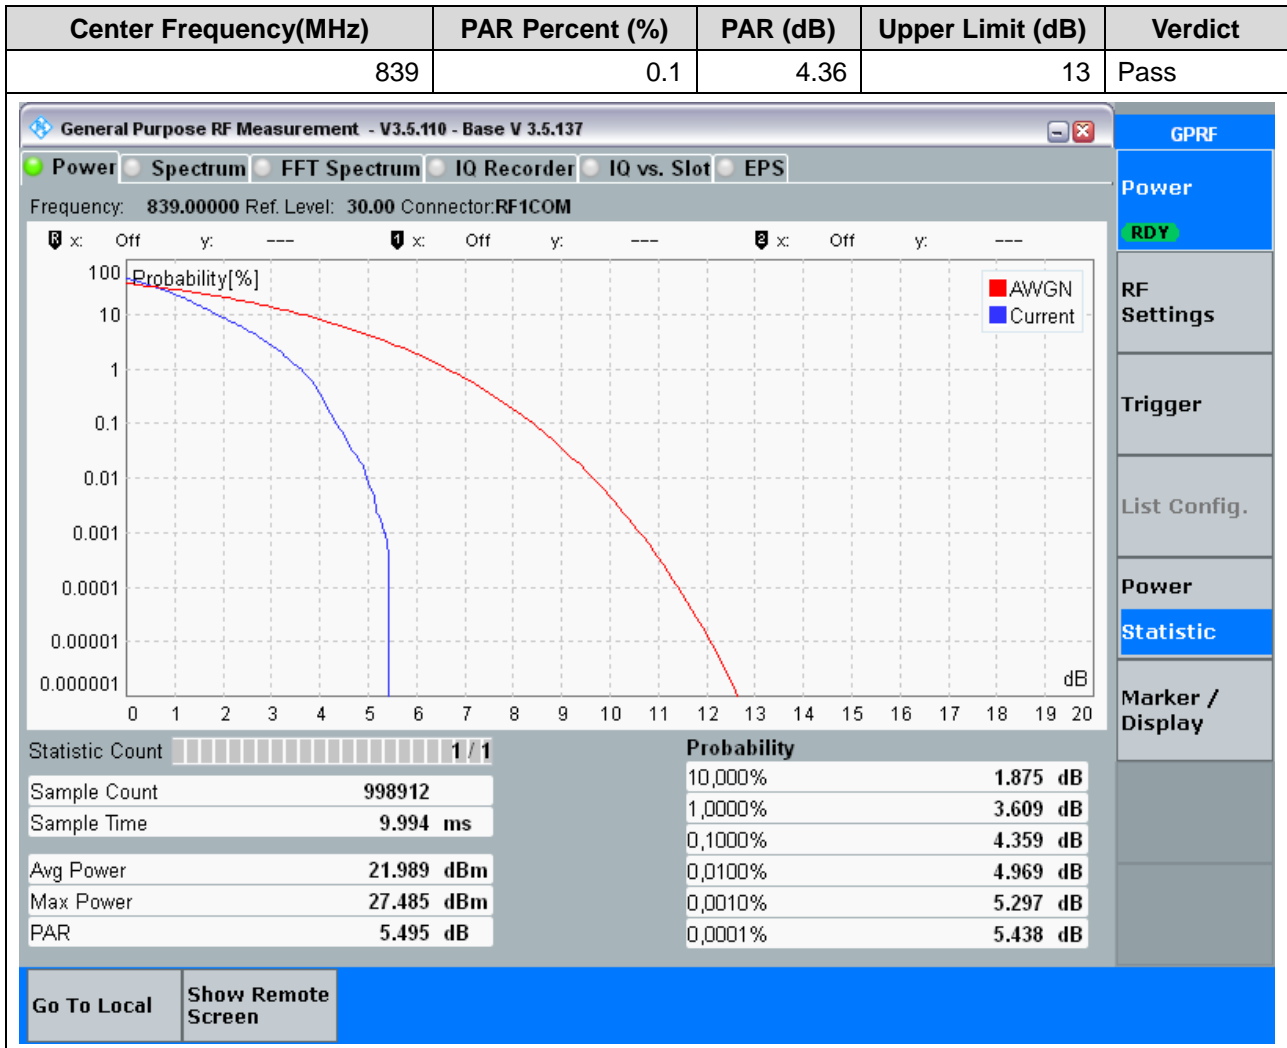

19.11. Peak to Average Ratio for SA(NTNV)(Channel:167800, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

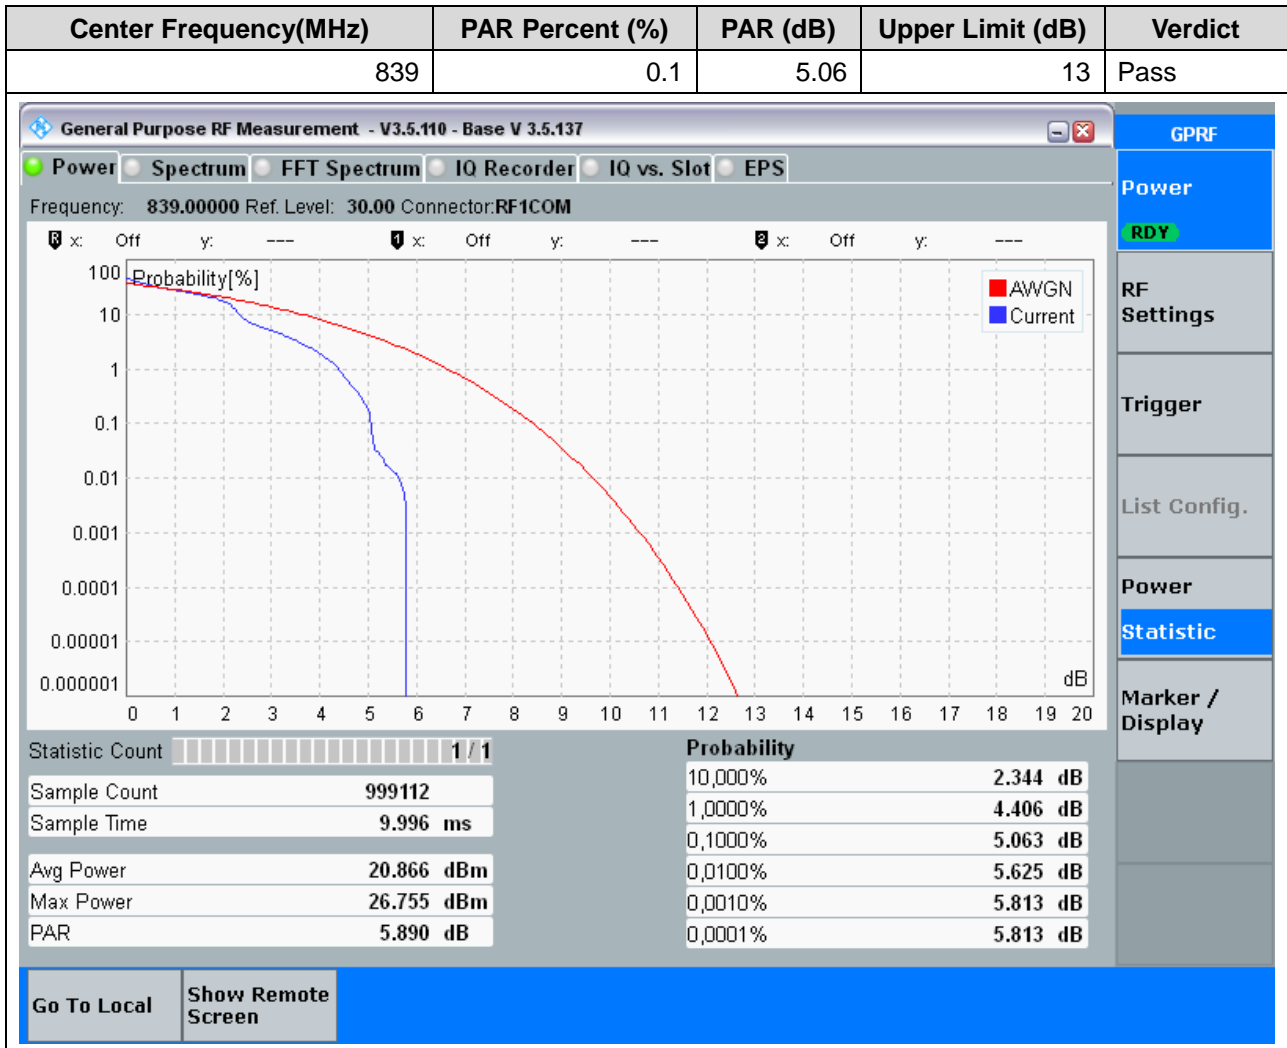


19.12. Peak to Average Ratio for SA(NTNV)(Channel:167800, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

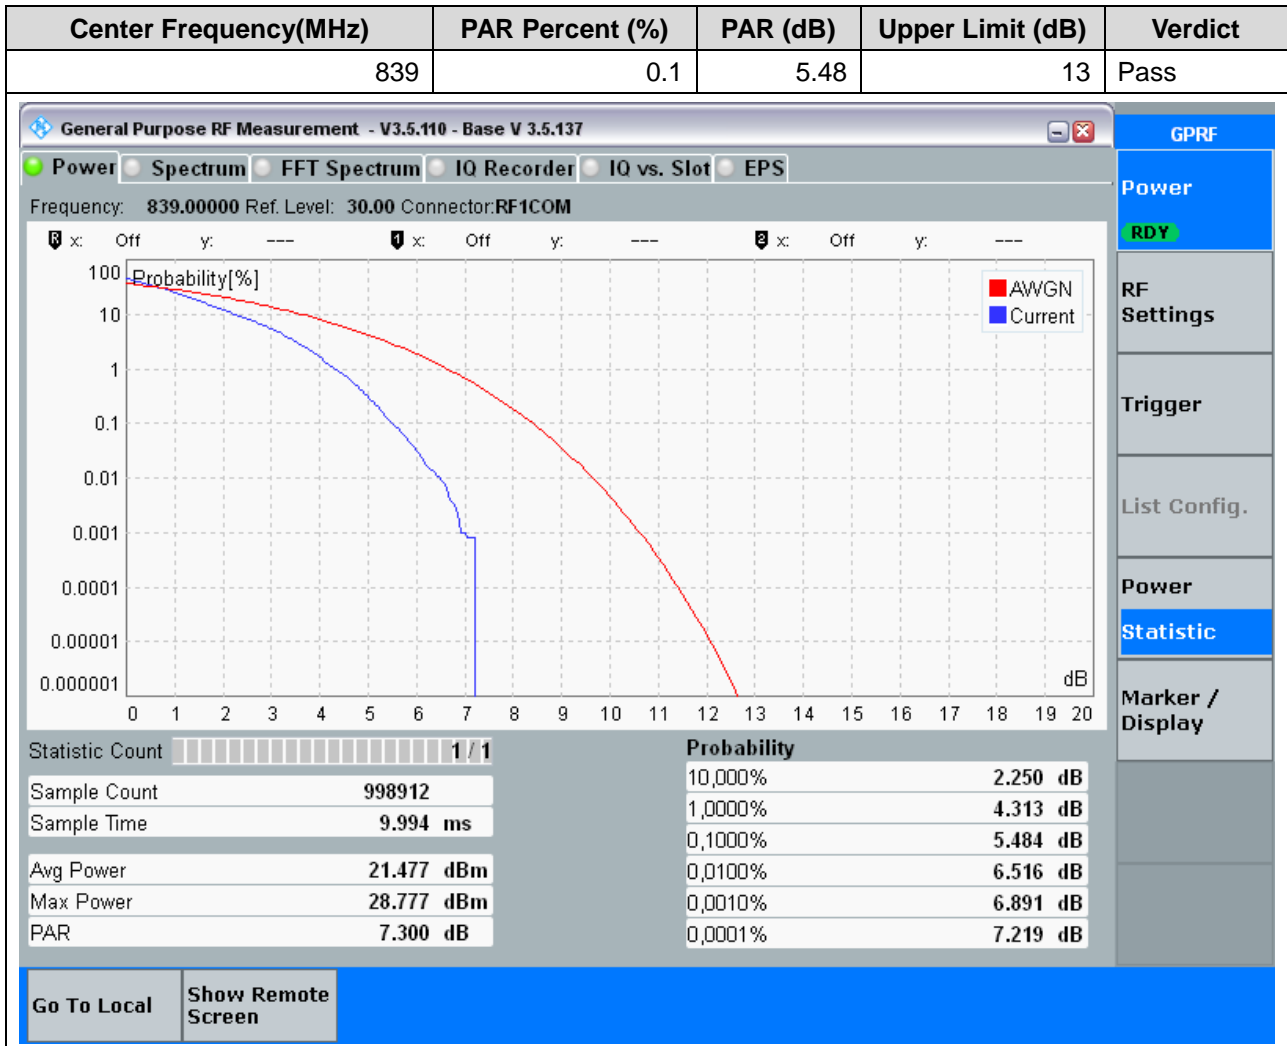


20. n7


20.1. Peak to Average Ratio for SA(NTNV)(Channel:502000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

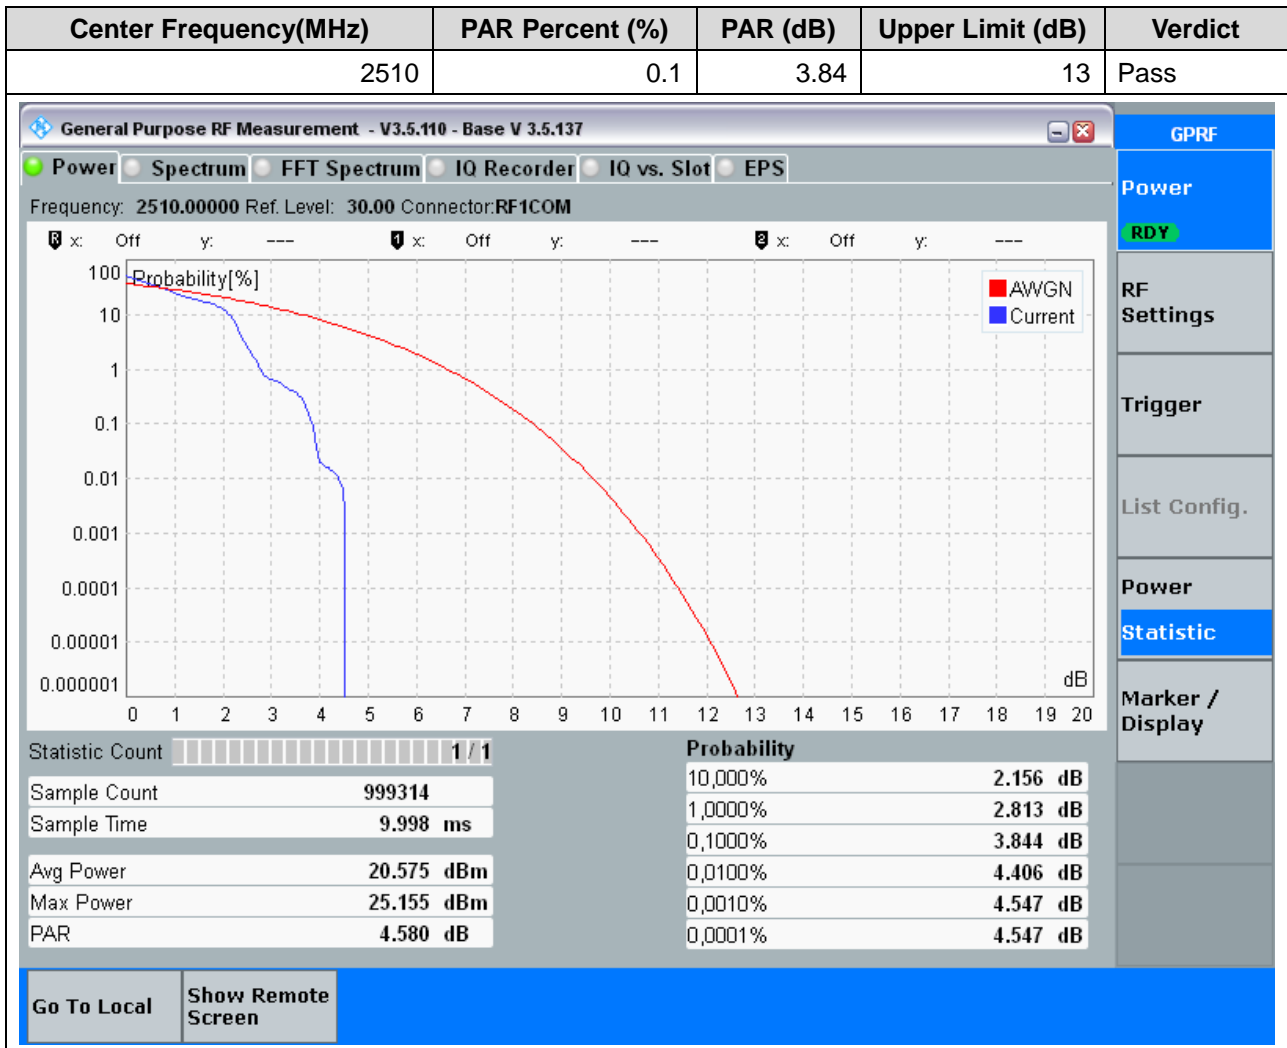


20.2. Peak to Average Ratio for SA(NTNV)(Channel:502000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

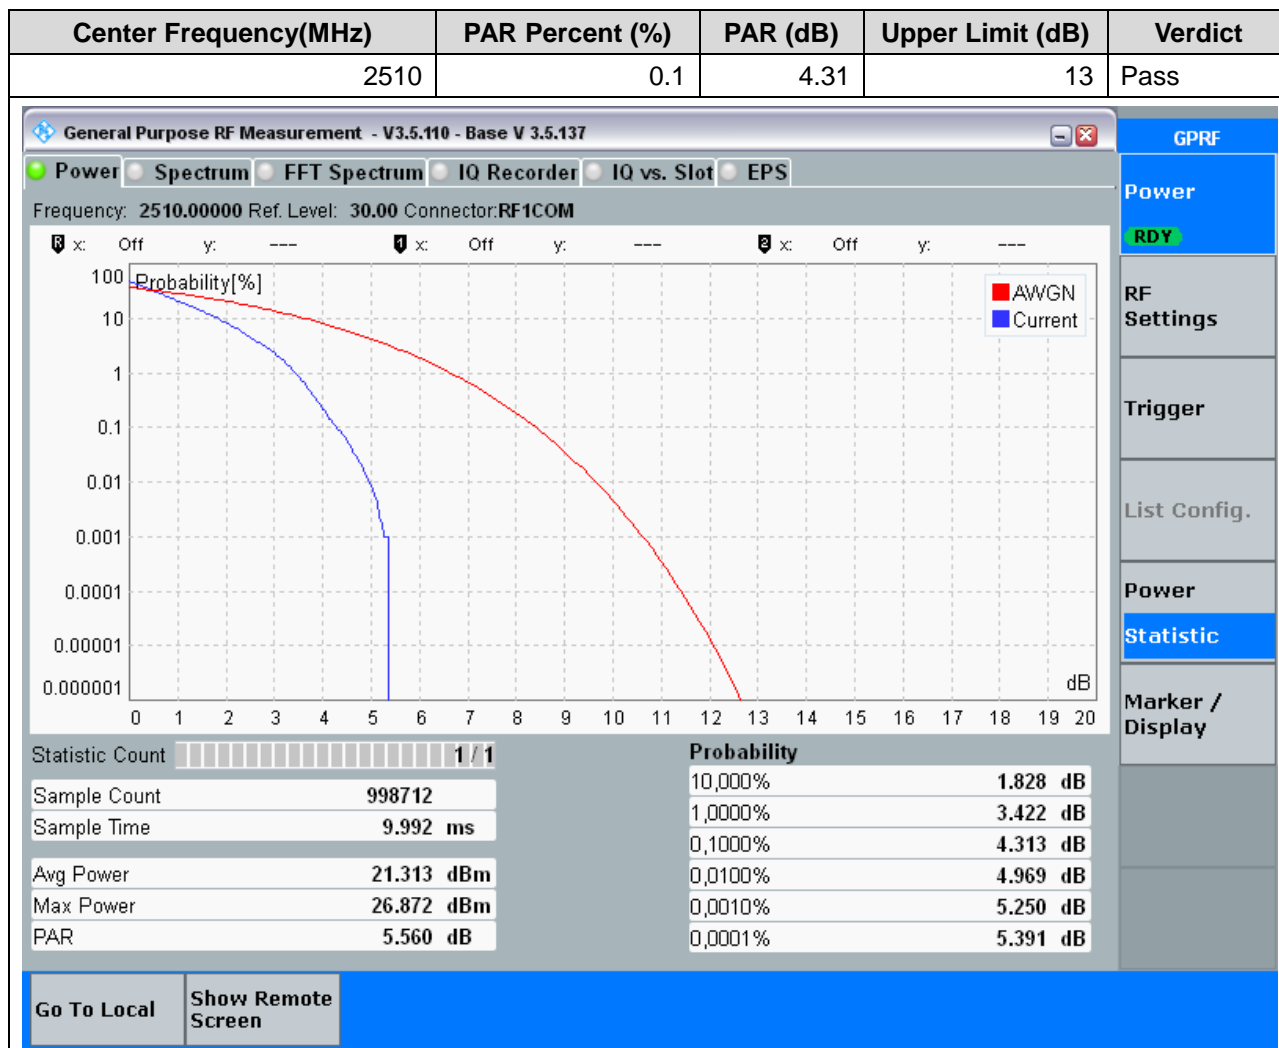


20.3. Peak to Average Ratio for SA(NTNV)(Channel:502000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

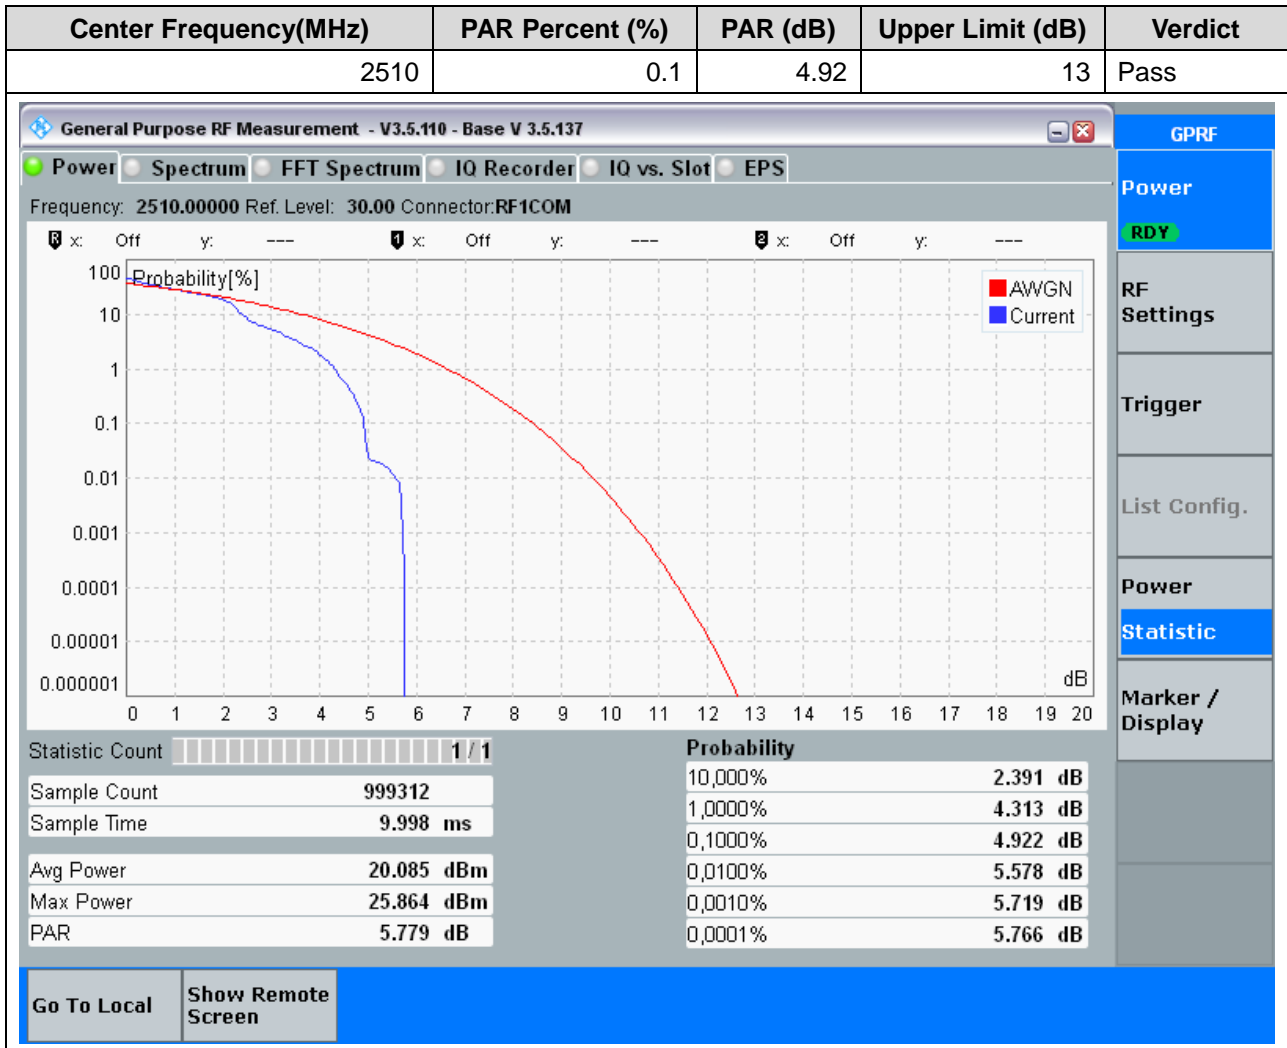


20.4. Peak to Average Ratio for SA(NTNV)(Channel:502000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

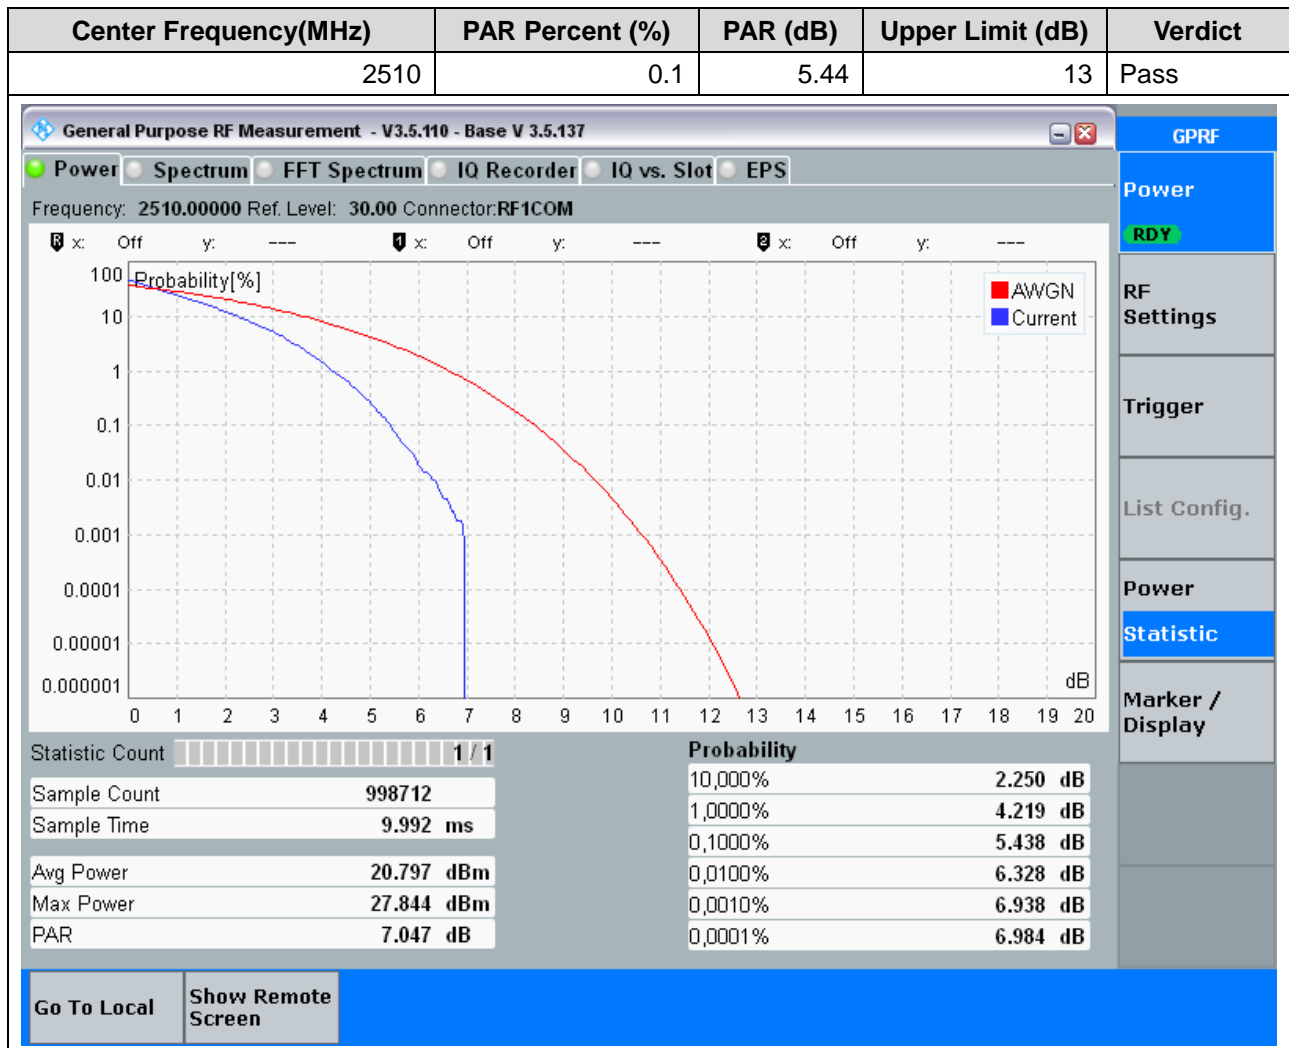


20.5. Peak to Average Ratio for SA(NTNV)(Channel:507000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

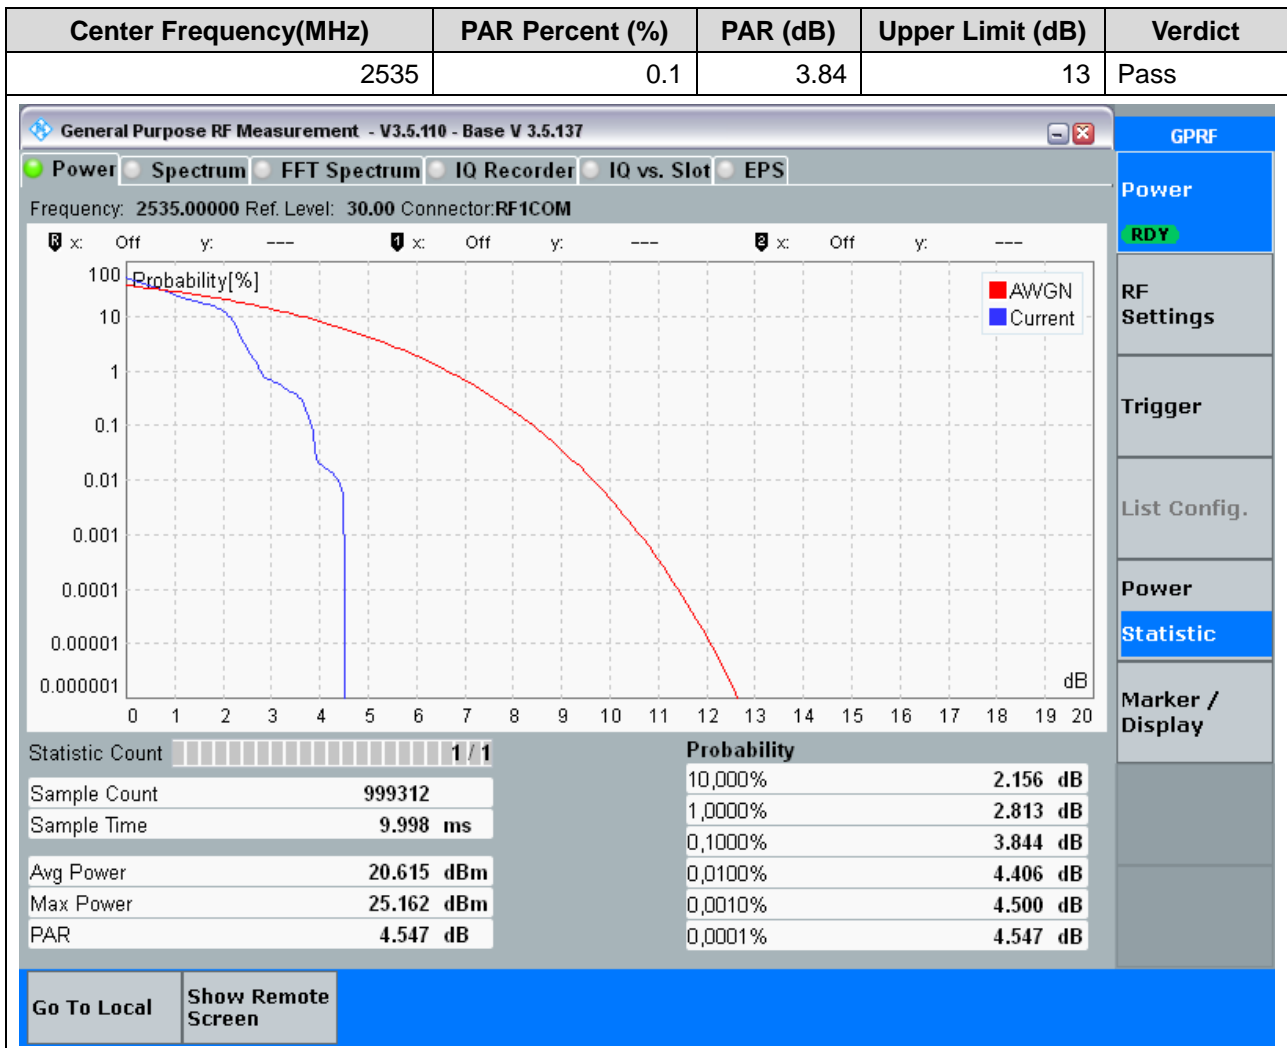


20.6. Peak to Average Ratio for SA(NTNV)(Channel:507000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

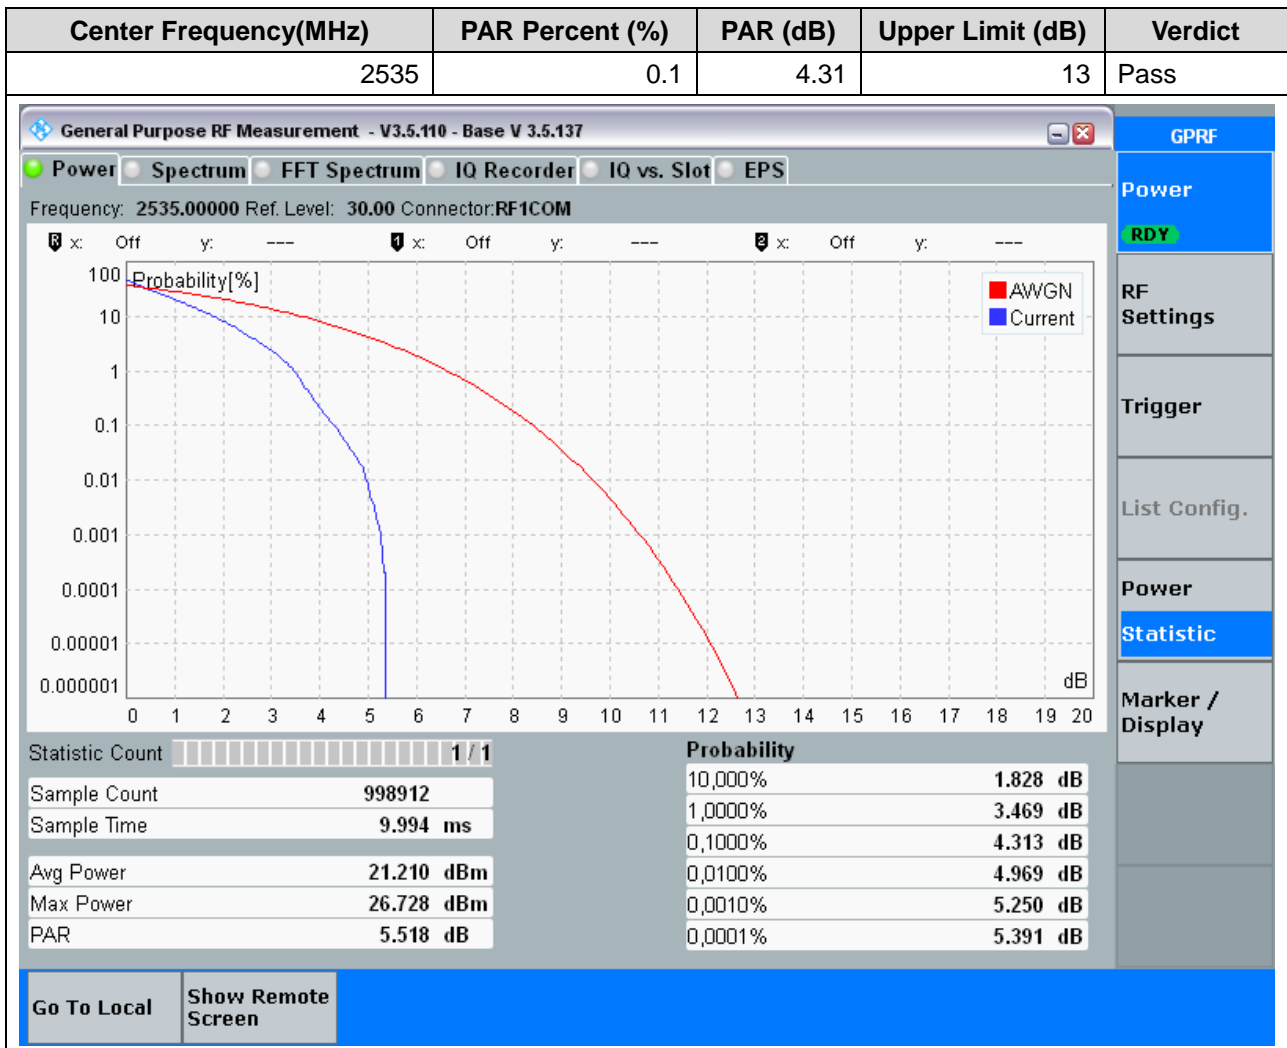


20.7. Peak to Average Ratio for SA(NTNV)(Channel:507000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

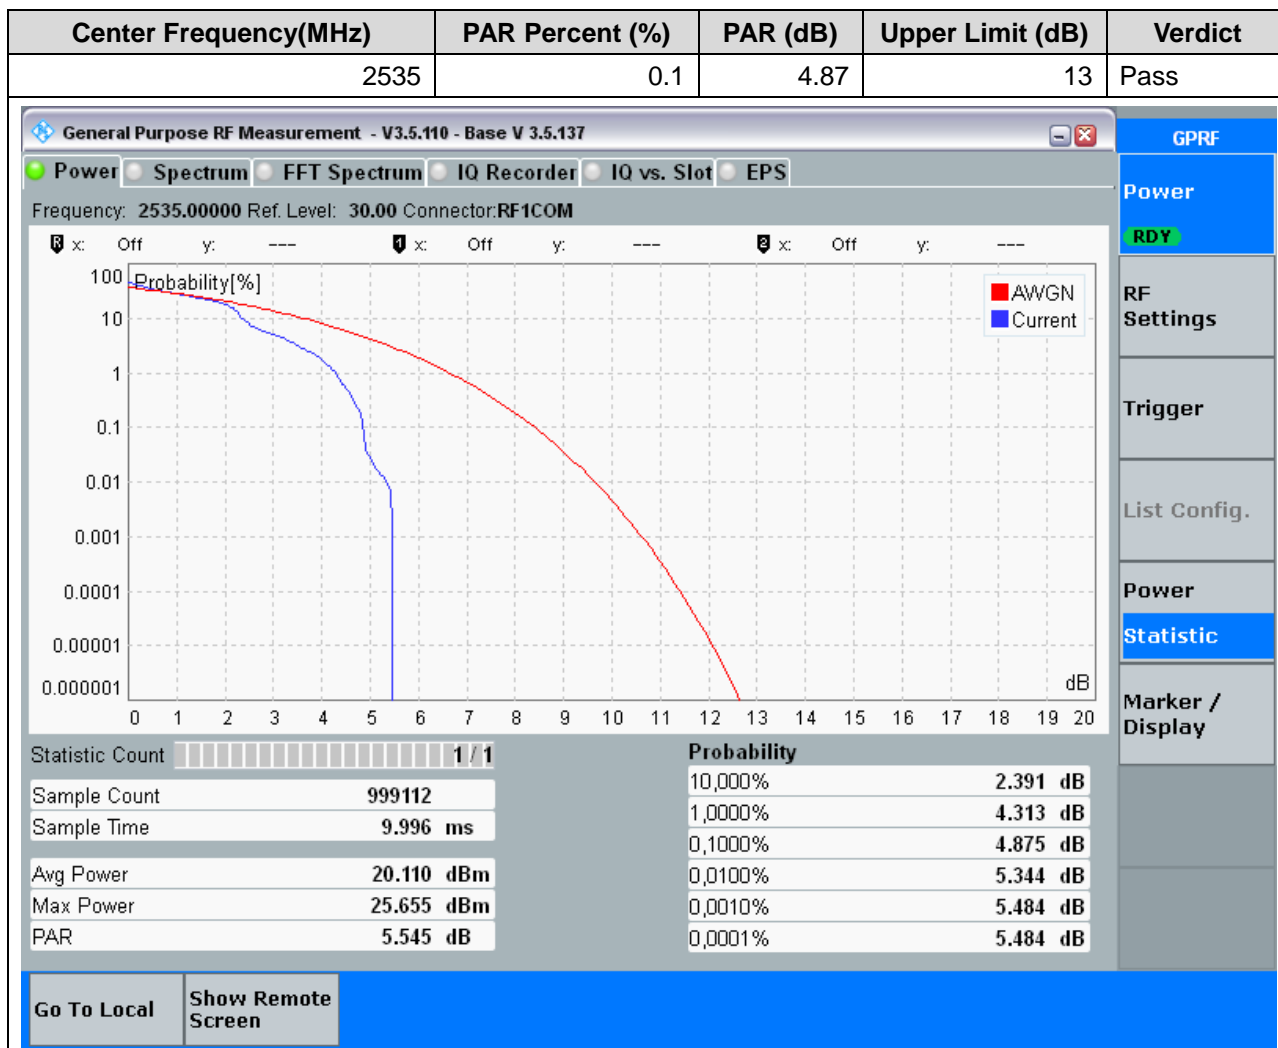


20.8. Peak to Average Ratio for SA(NTNV)(Channel:507000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

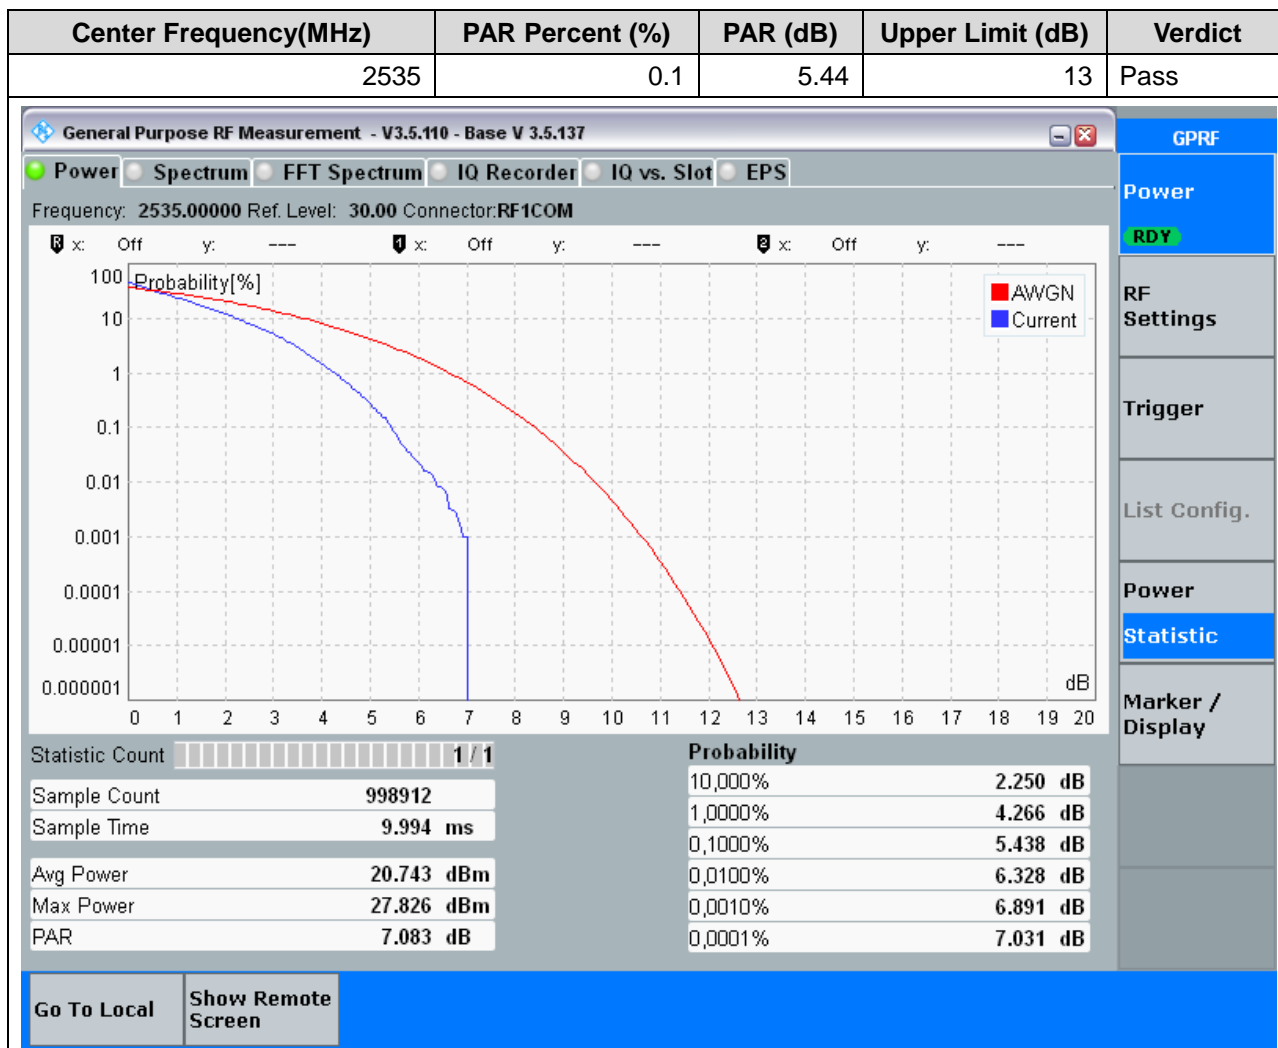


20.9. Peak to Average Ratio for SA(NTNV)(Channel:512000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

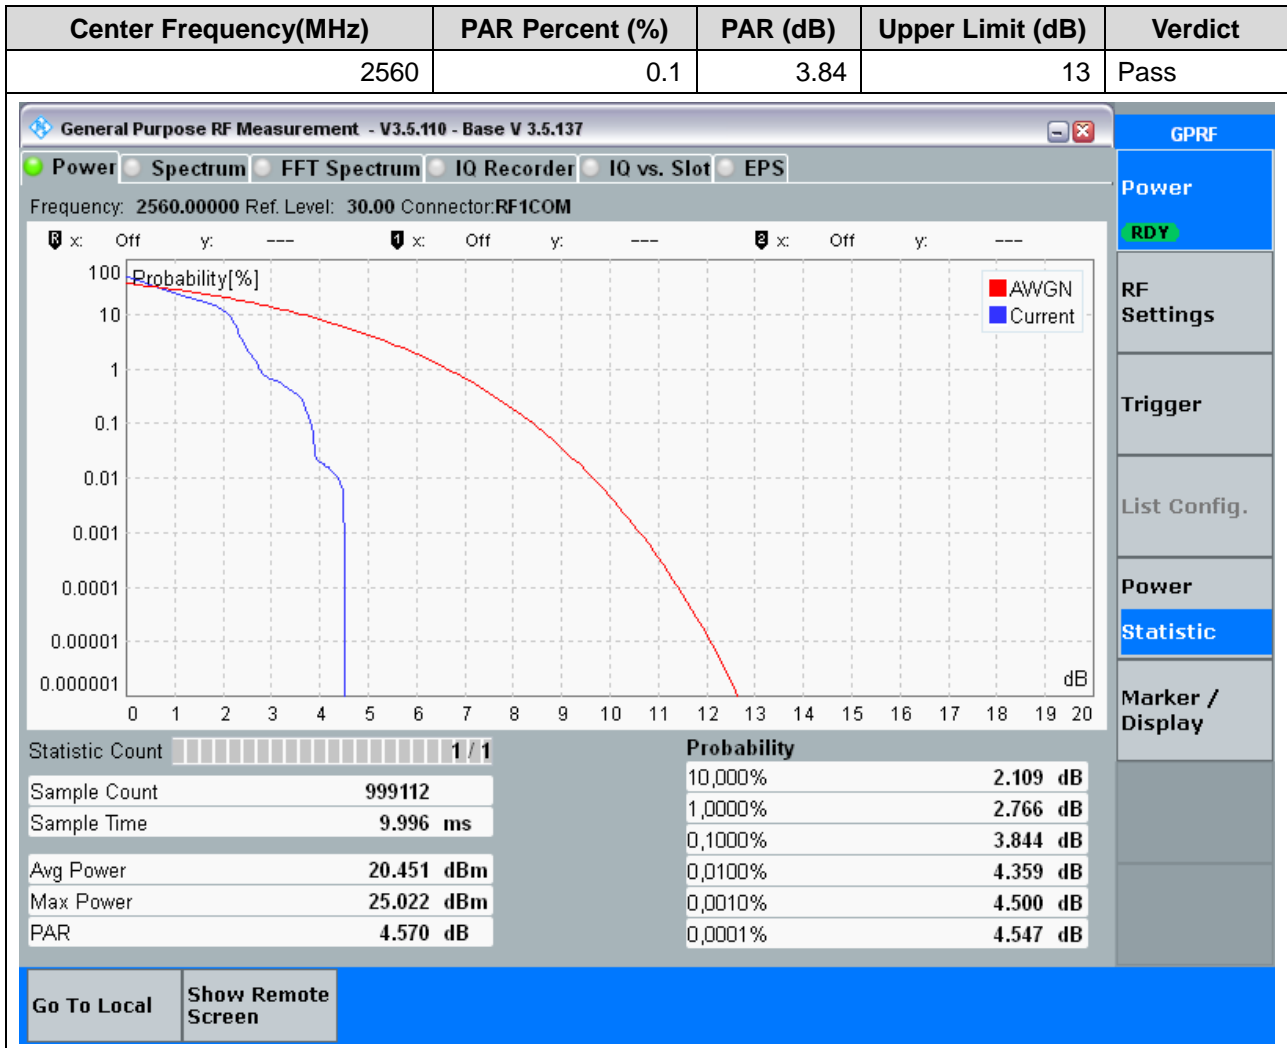


20.10. Peak to Average Ratio for SA(NTNV)(Channel:512000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

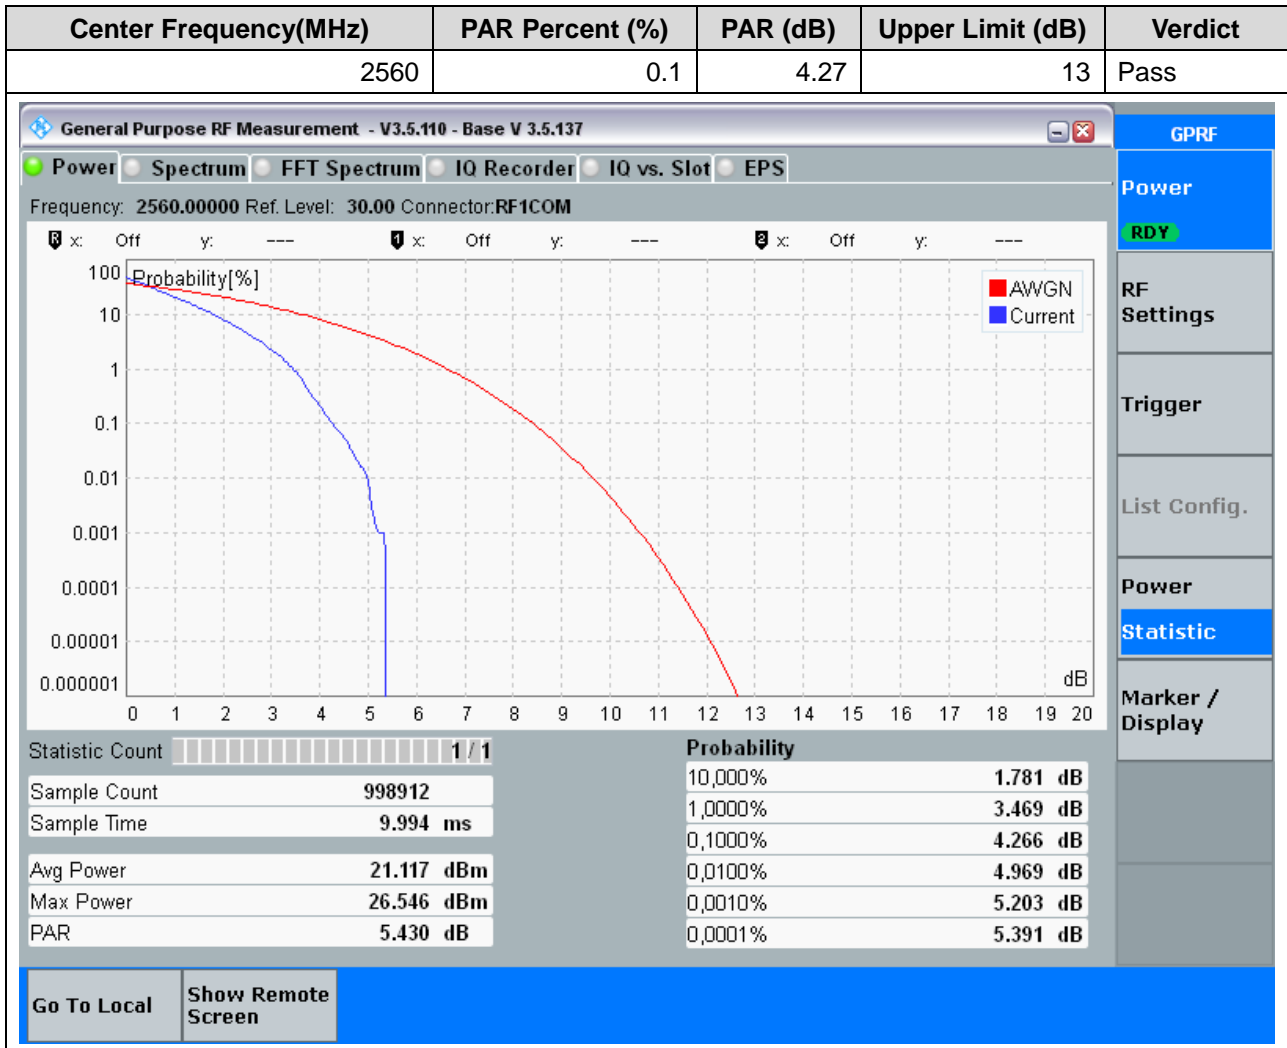

20.11. Peak to Average Ratio for SA(NTNV)(Channel:512000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

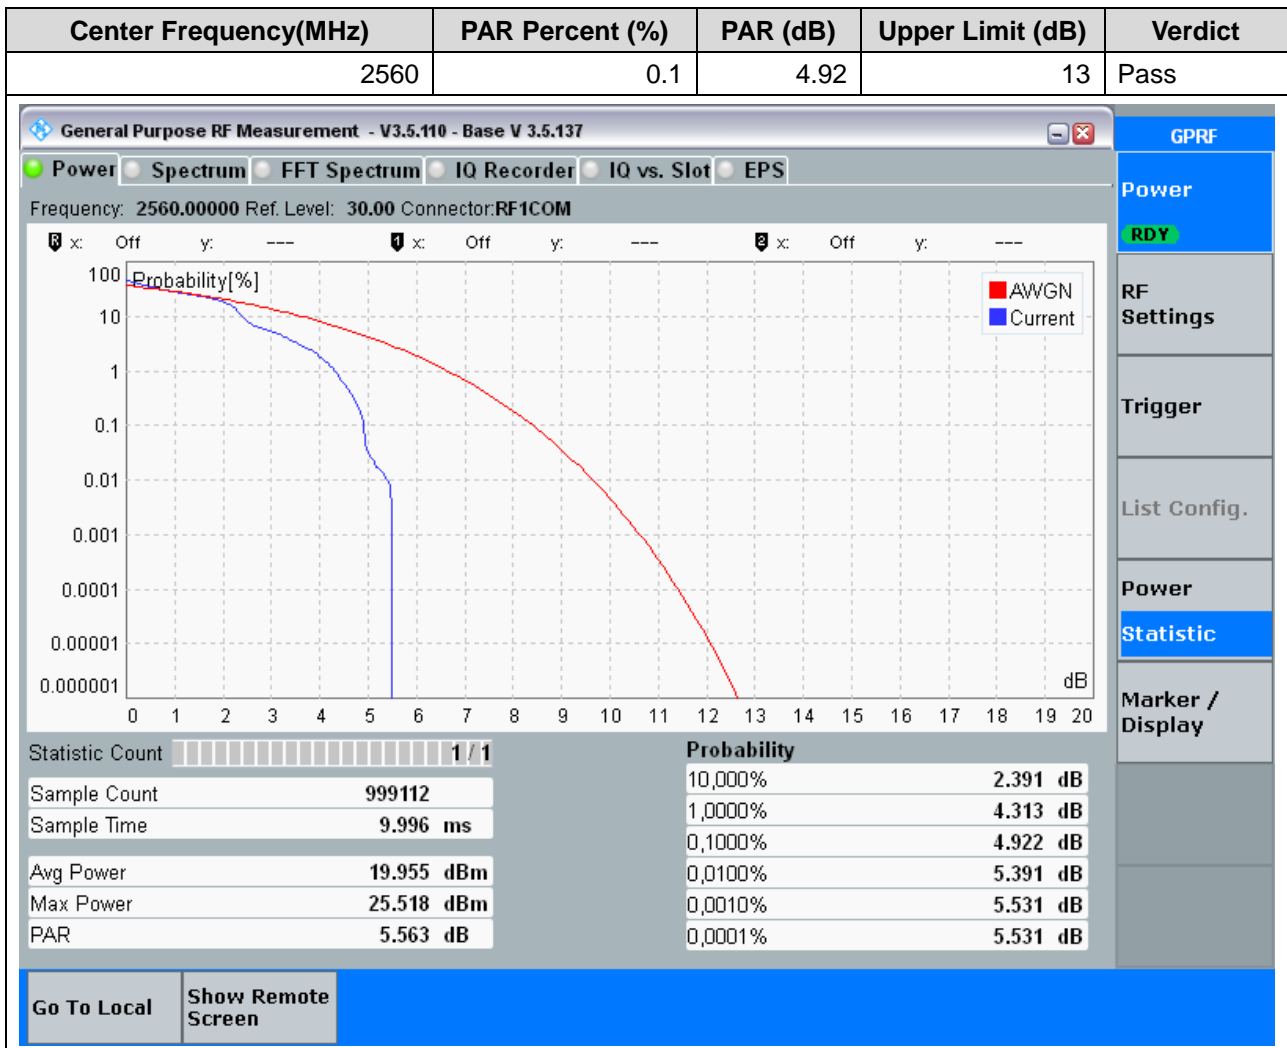


20.12. Peak to Average Ratio for SA(NTNV)(Channel:512000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

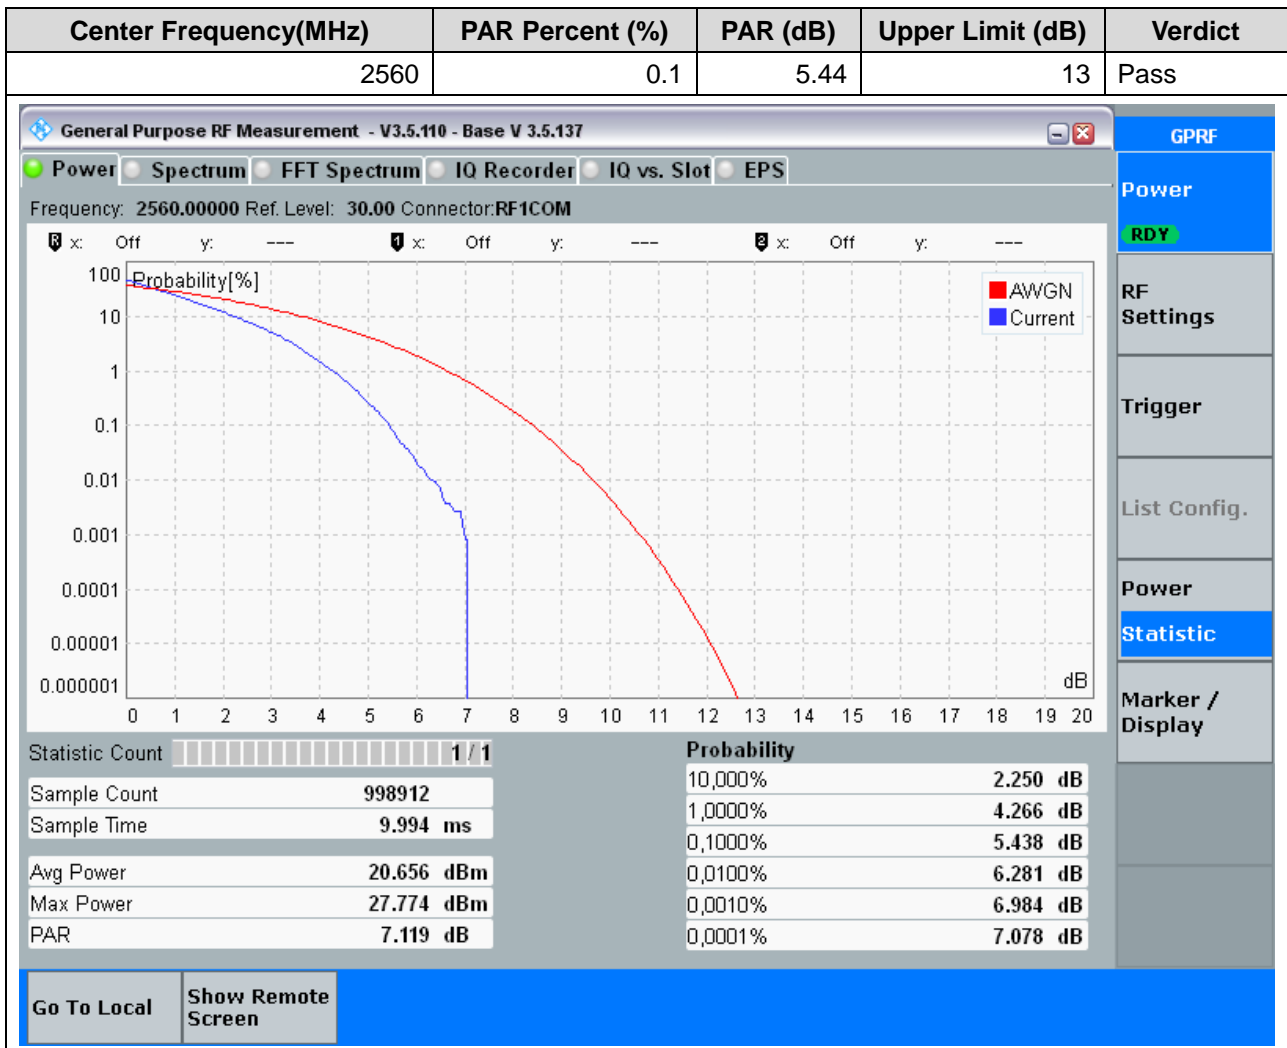


21. n38_PC3


21.1. Peak to Average Ratio for SA(NTNV)(Channel:516000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

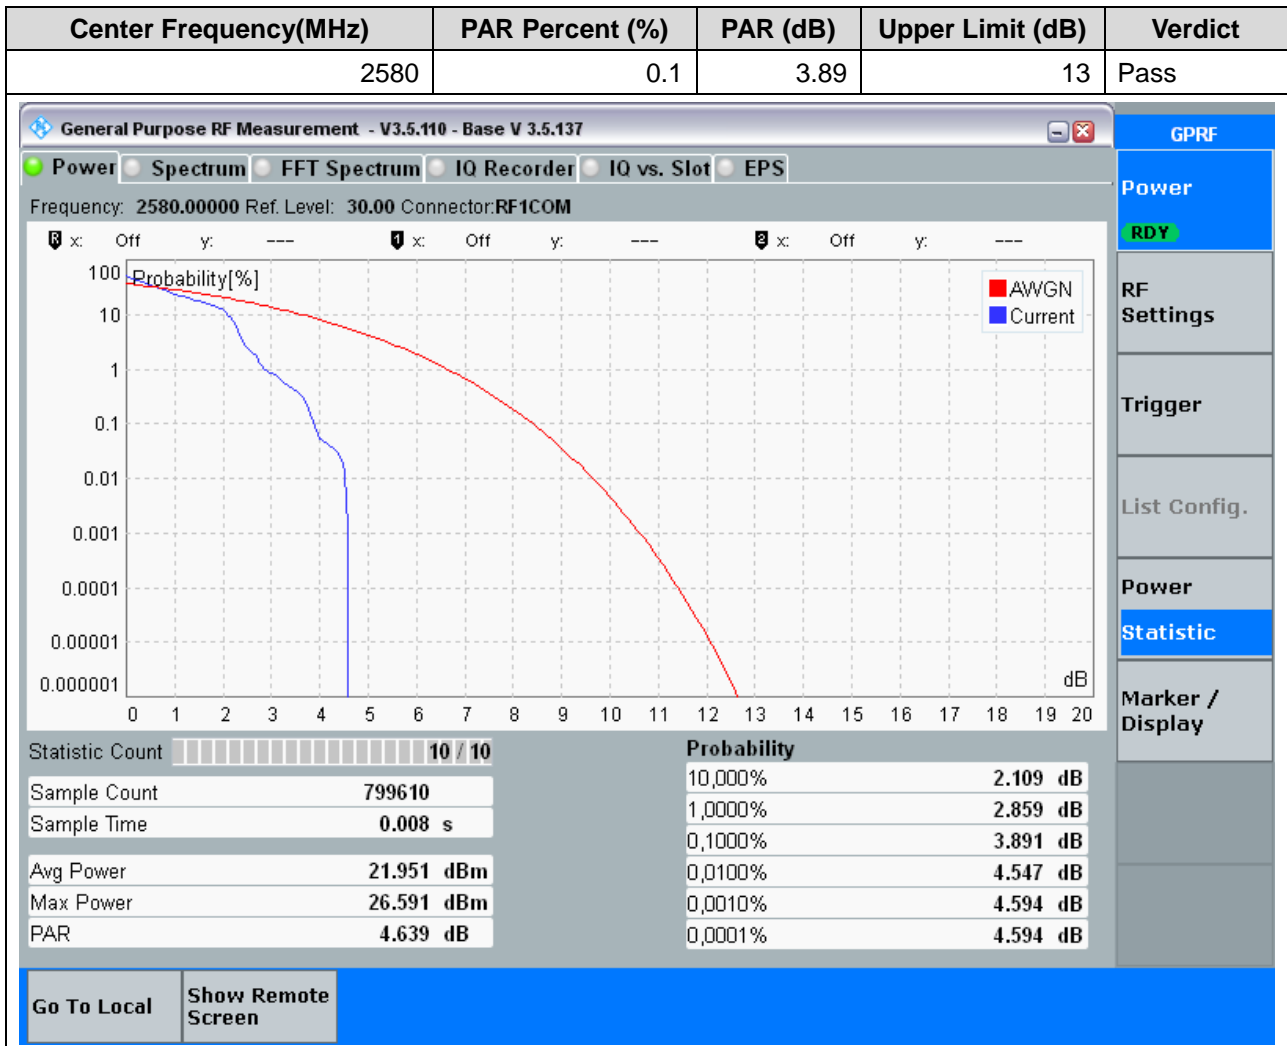


21.2. Peak to Average Ratio for SA(NTNV)(Channel:516000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:50, RB Position:0)

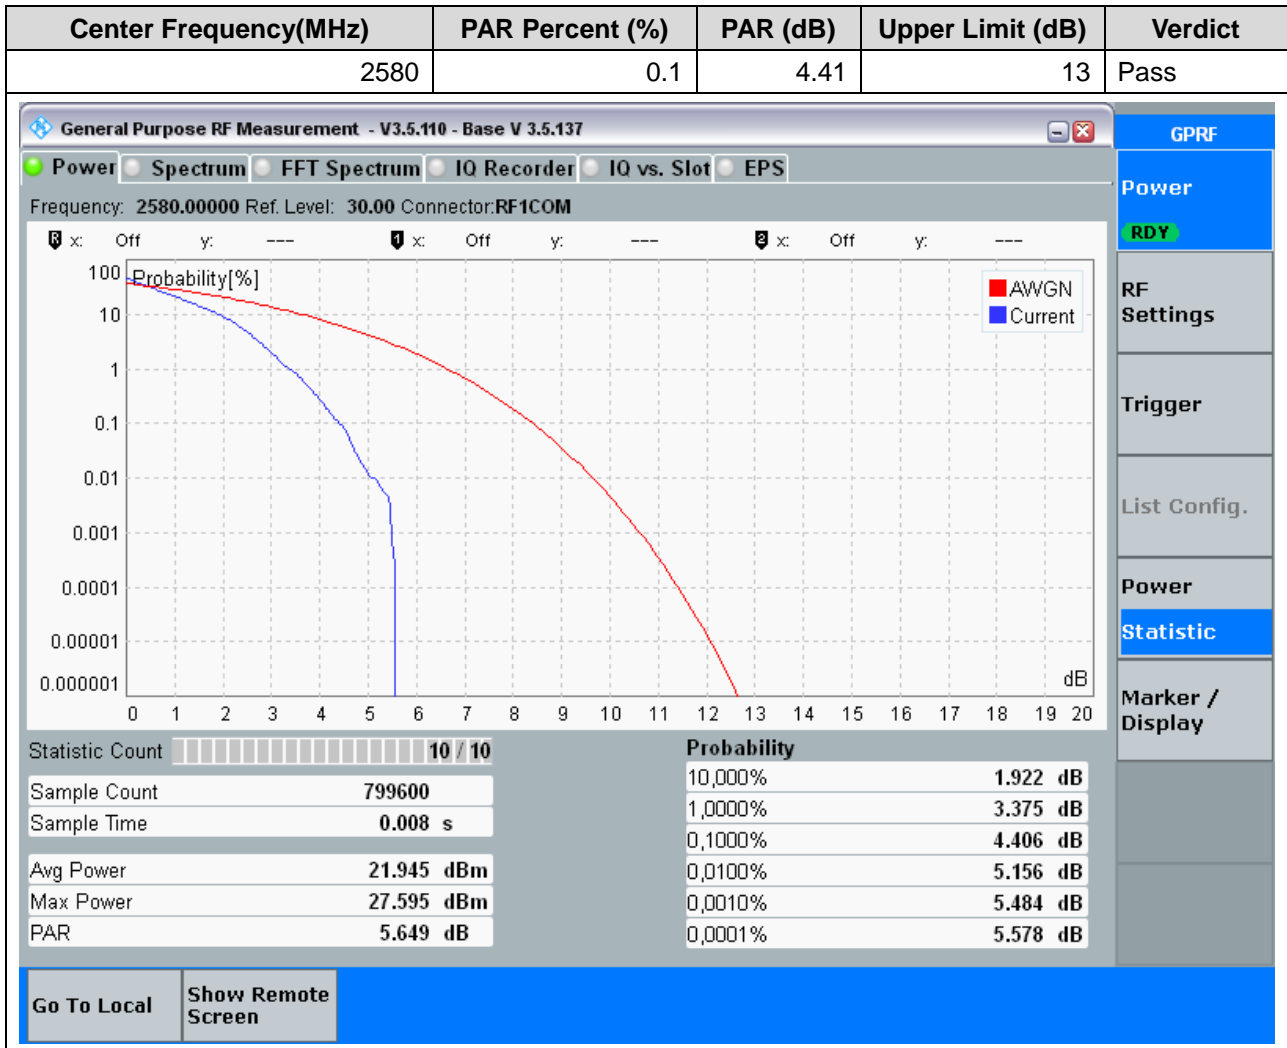


21.3. Peak to Average Ratio for SA(NTNV)(Channel:516000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

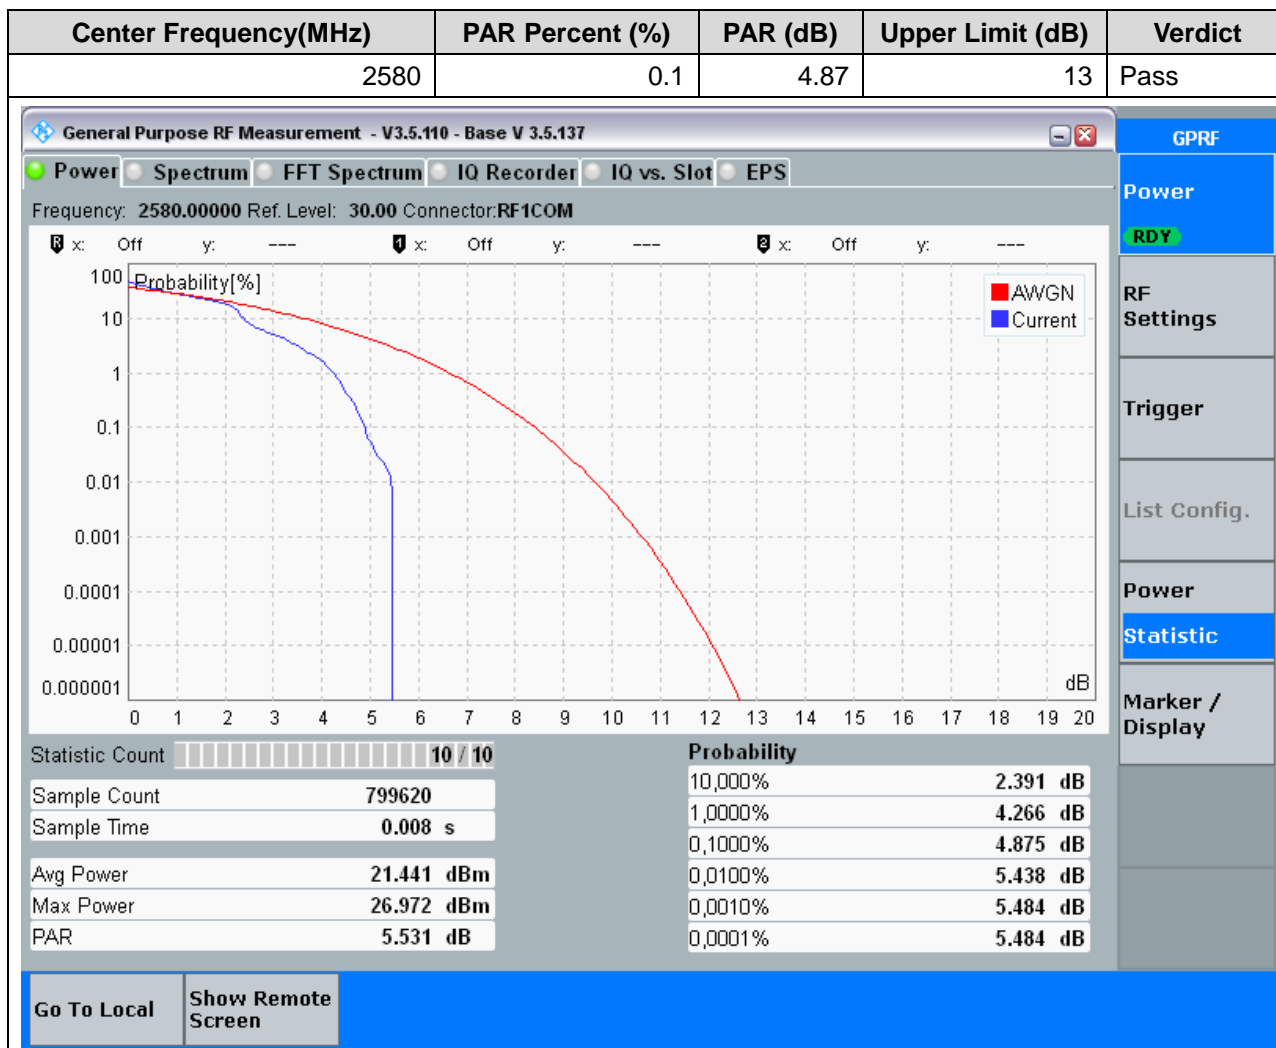


21.4. Peak to Average Ratio for SA(NTNV)(Channel:516000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

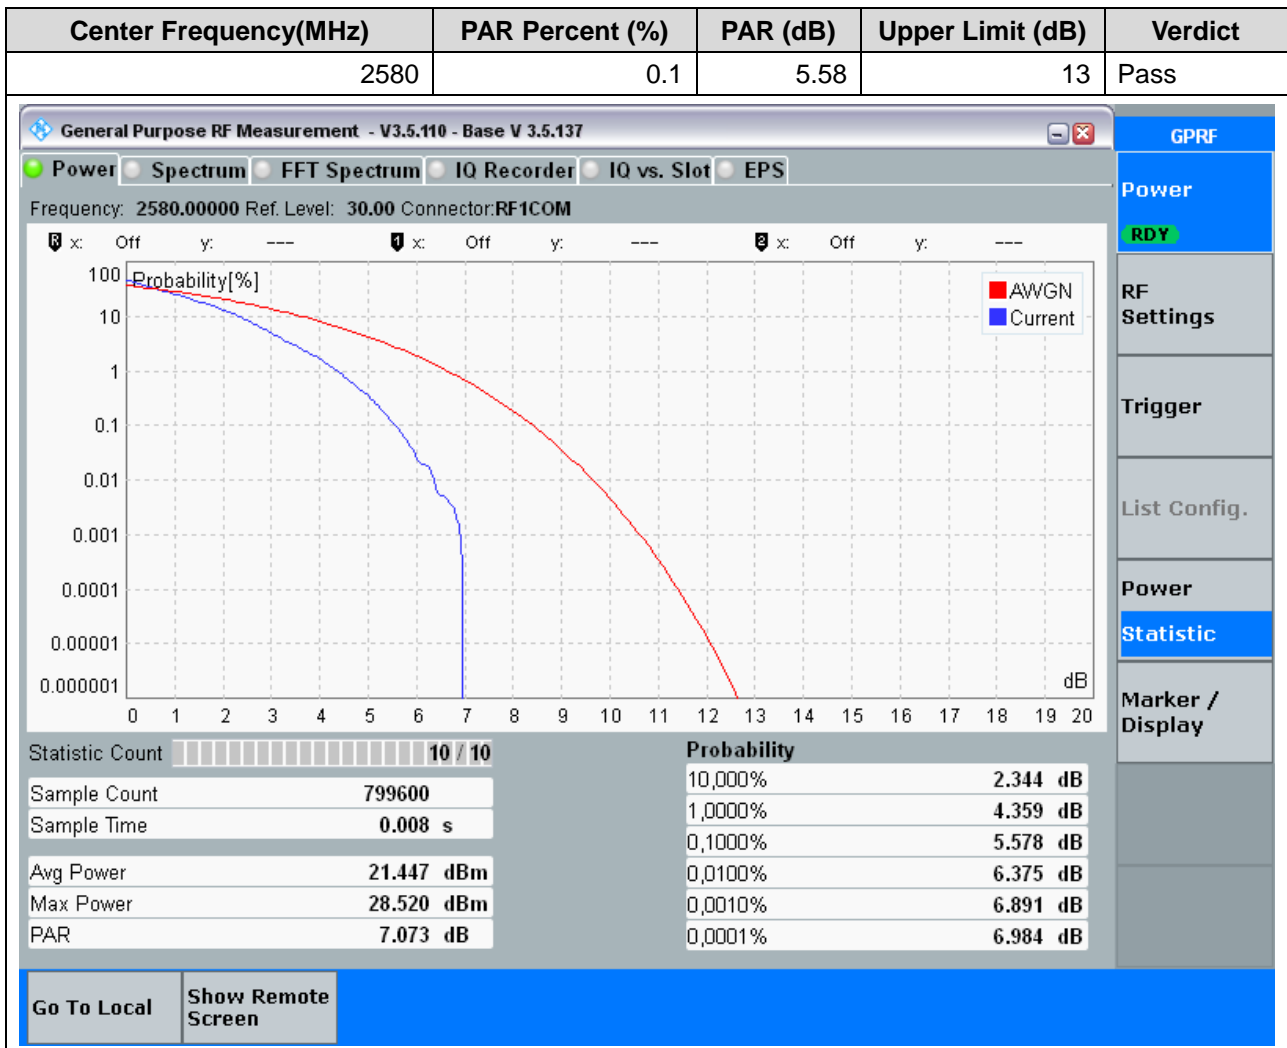


21.5. Peak to Average Ratio for SA(NTNV)(Channel:519000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

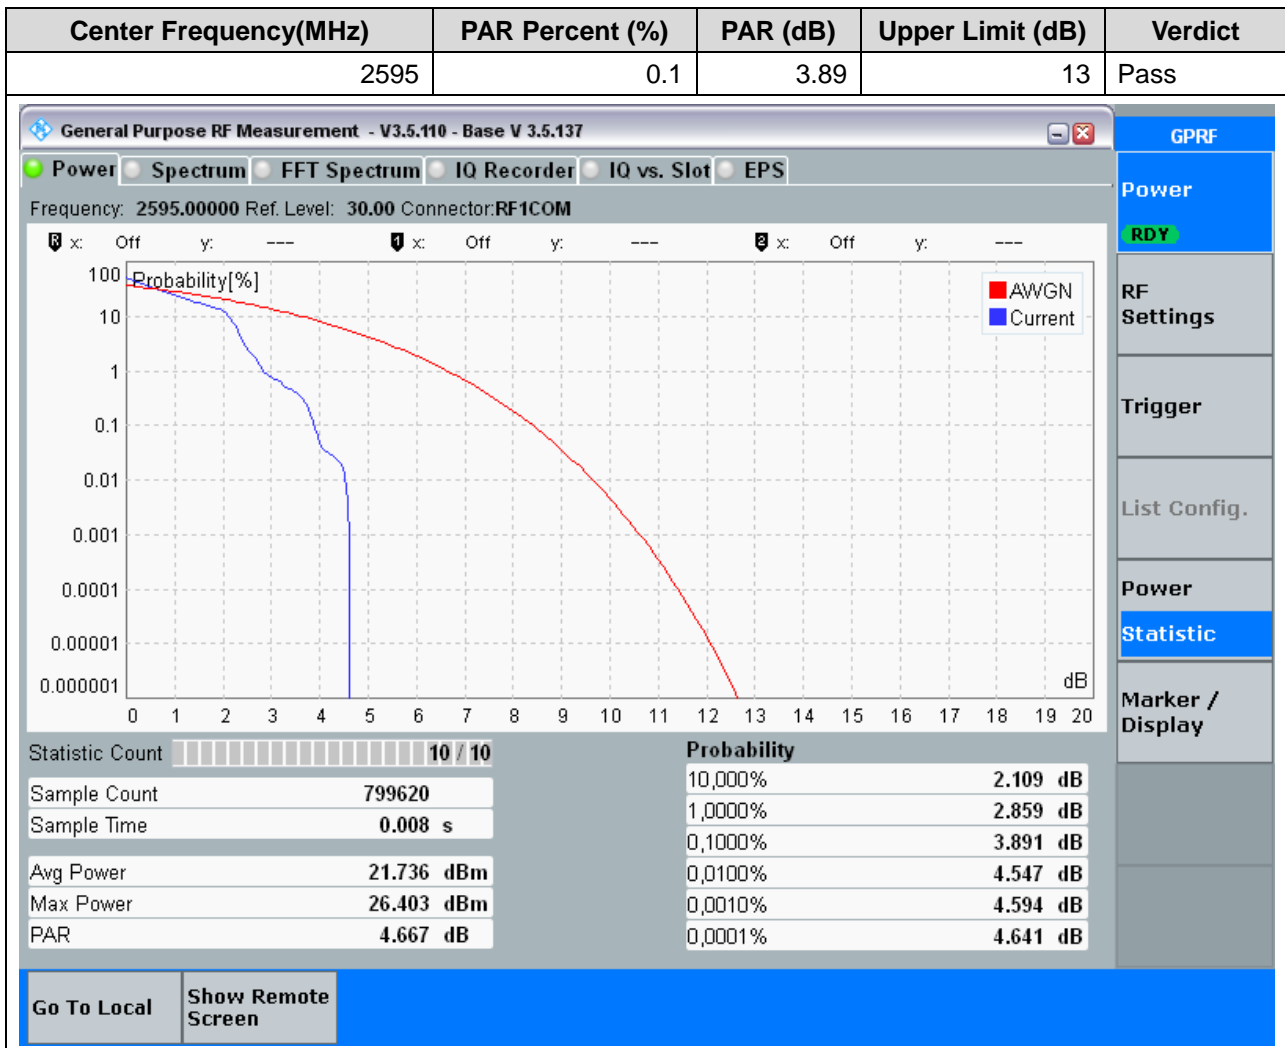


21.6. Peak to Average Ratio for SA(NTNV)(Channel:519000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:50, RB Position:0)

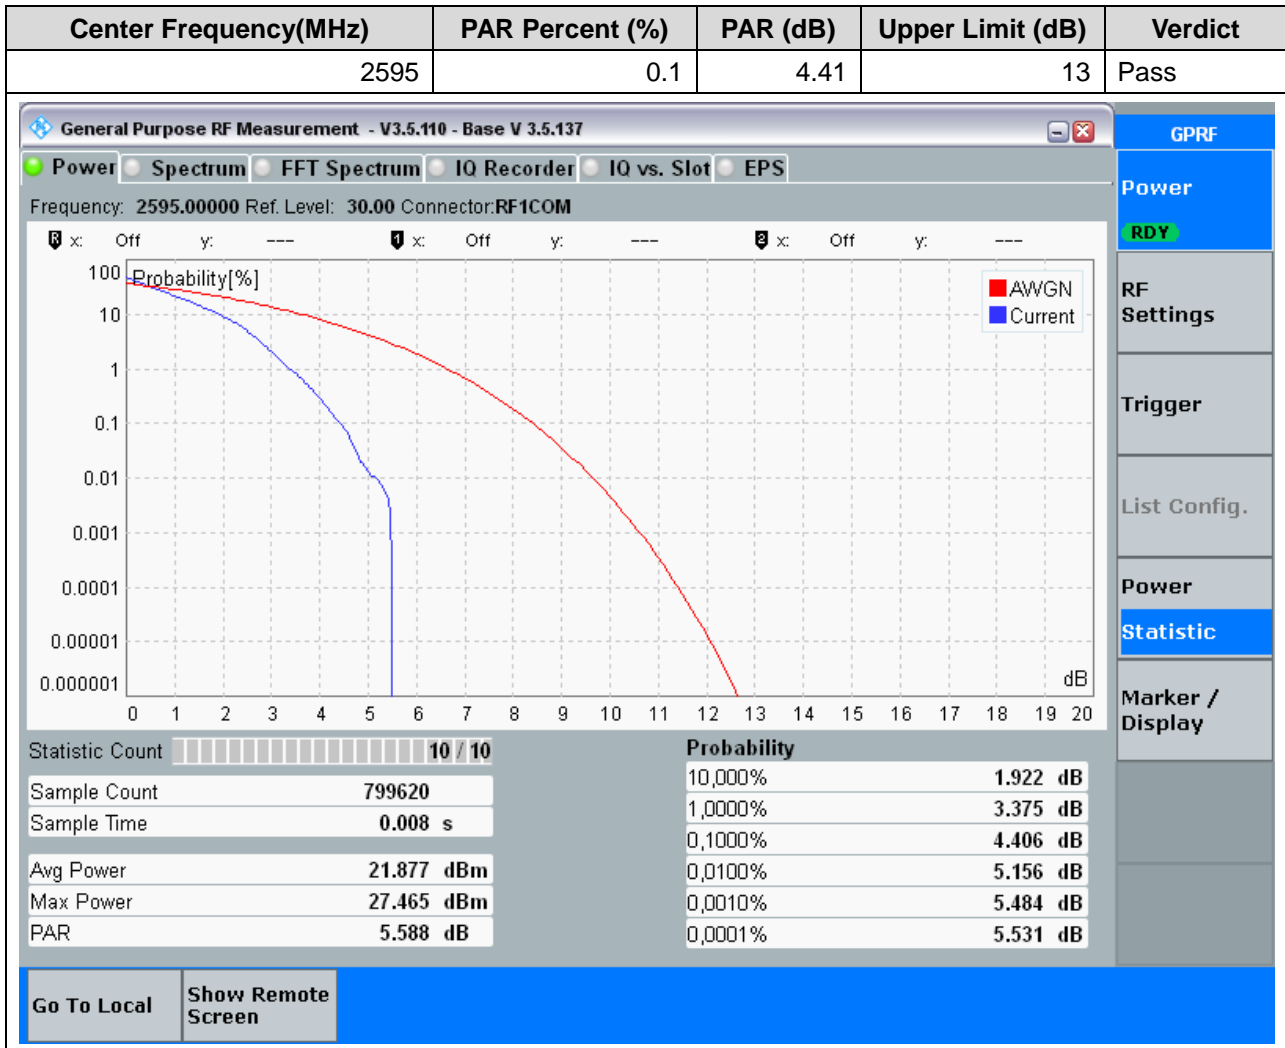


21.7. Peak to Average Ratio for SA(NTNV)(Channel:519000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

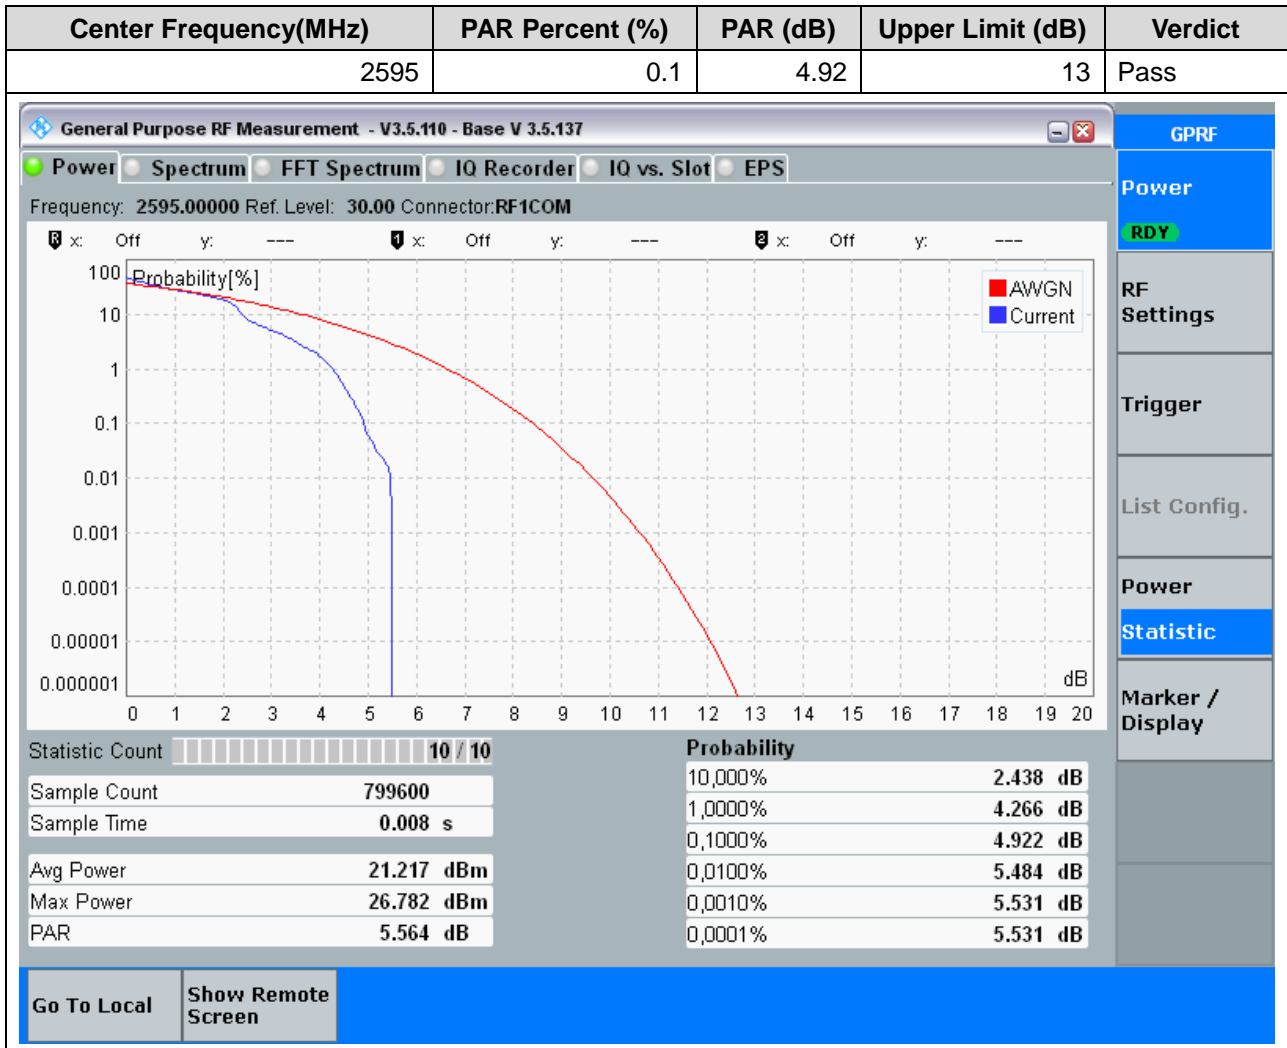


21.8. Peak to Average Ratio for SA(NTNV)(Channel:519000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

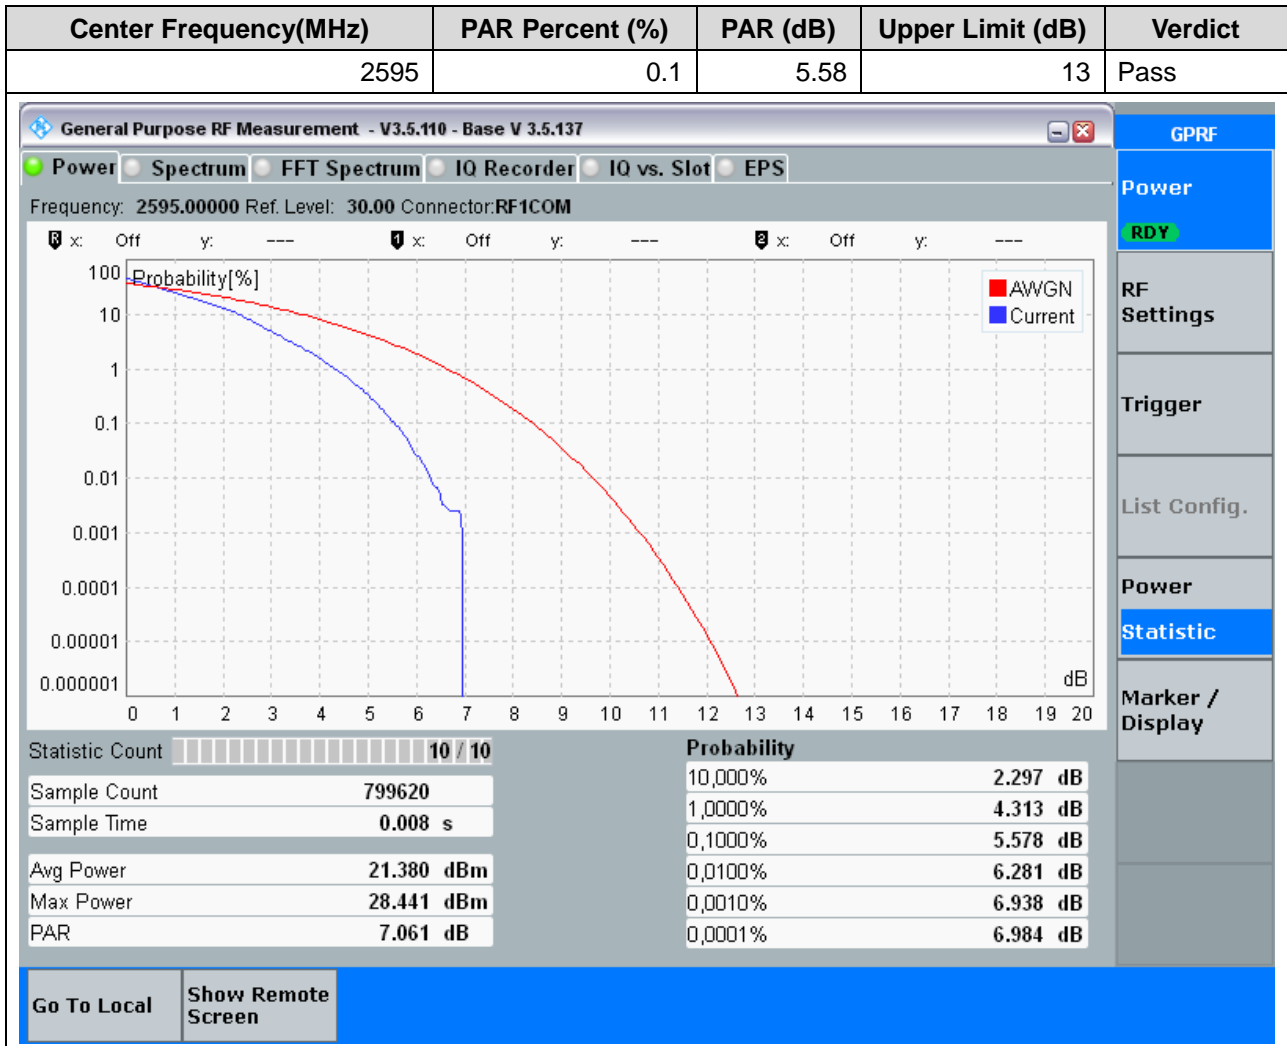

21.9. Peak to Average Ratio for SA(NTNV)(Channel:522000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

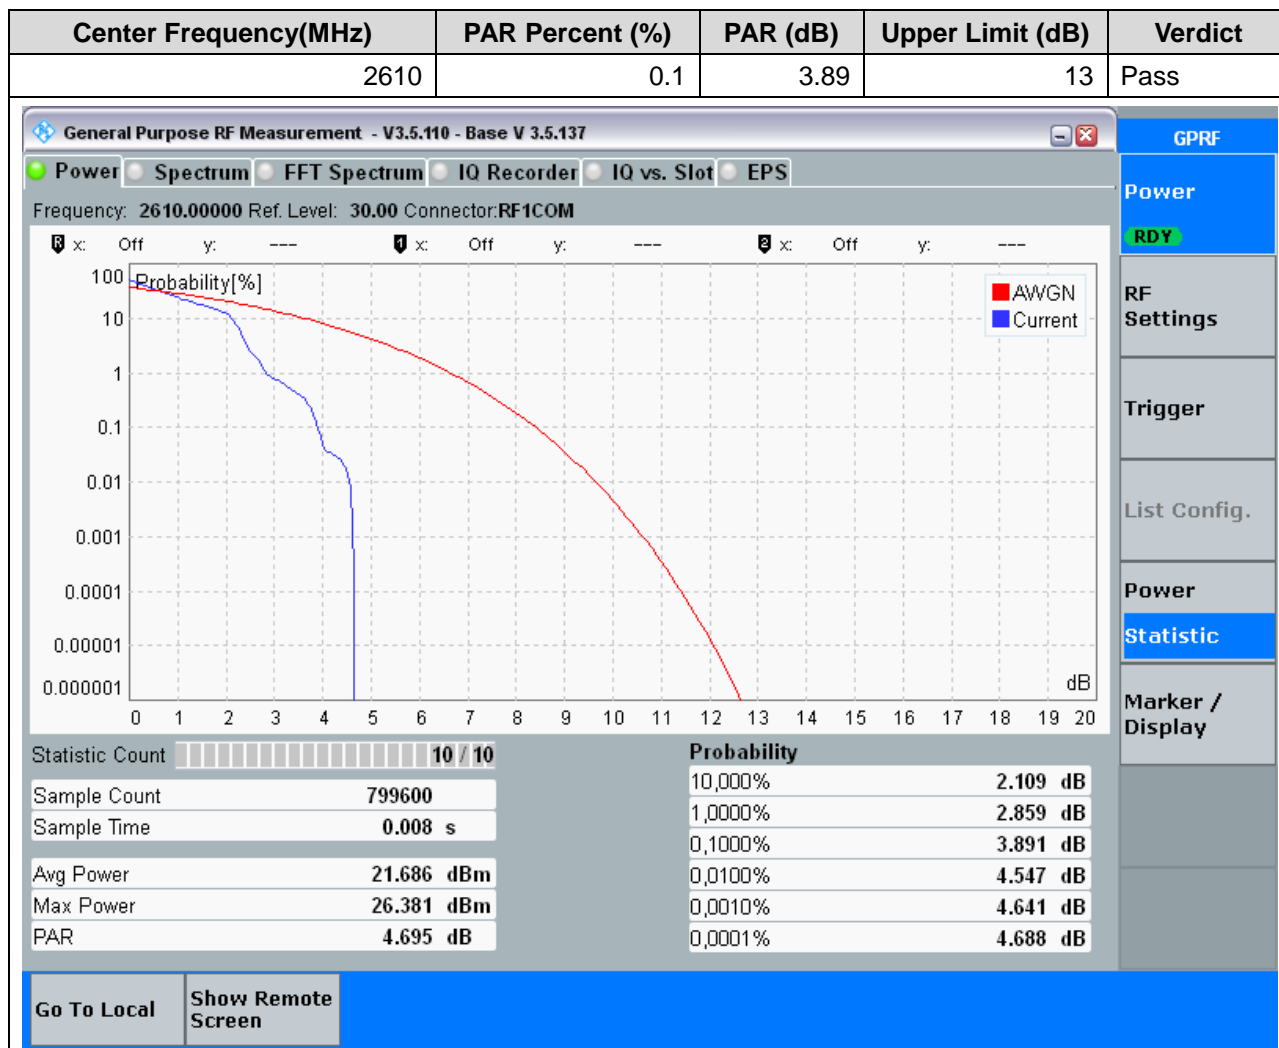

21.10. Peak to Average Ratio for SA(NTNV)(Channel:522000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:50, RB Position:0)

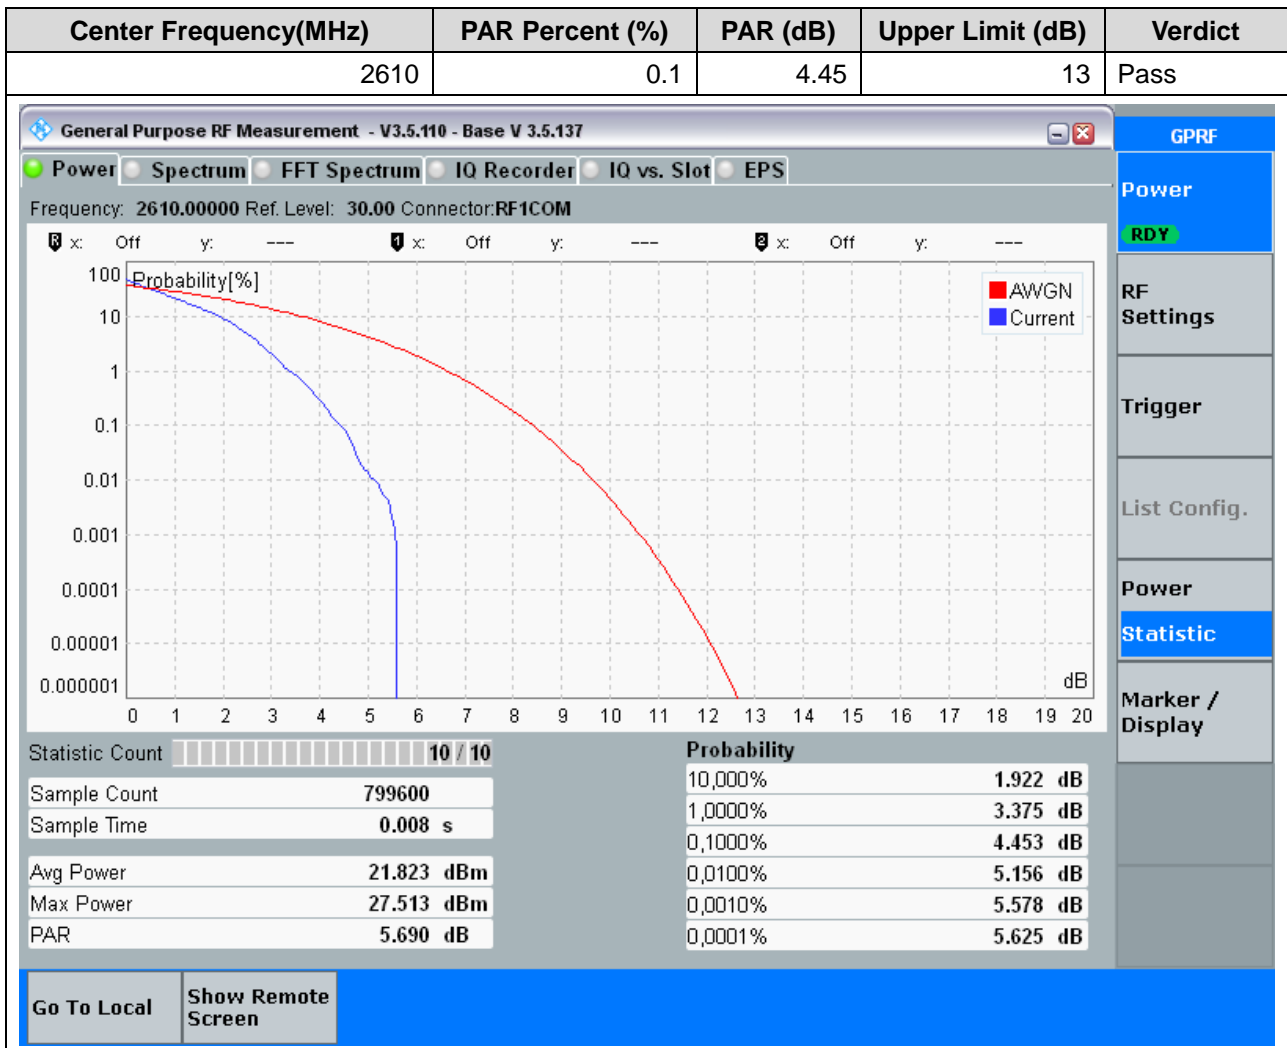

21.11. Peak to Average Ratio for SA(NTNV)(Channel:522000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

Center Frequency(MHz)	PAR Percent (%)	PAR (dB)	Upper Limit (dB)	Verdict
2610	0.1	4.92	13	Pass

General Purpose RF Measurement - V3.5.110 - Base V 3.5.137

Power Spectrum FFT Spectrum IQ Recorder IQ vs. Slot EPS

Frequency: 2610.00000 Ref. Level: 30.00 Connector:RF1COM

Statistic Count 10 / 10

Parameter	Value	Probability	Value
Sample Count	799600	10,000%	2.391 dB
Sample Time	0.008 s	1,0000%	4.266 dB
Avg Power	21.189 dBm	0,1000%	4.922 dB
Max Power	26.801 dBm	0,0100%	5.484 dB
PAR	5.611 dB	0,0010%	5.531 dB
		0,0001%	5.531 dB

Go To Local Show Remote Screen

GPRF

Power

RDY

RF Settings

Trigger


List Config.

Power

Statistic


Marker / Display

21.12. Peak to Average Ratio for SA(NTNV)(Channel:522000, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

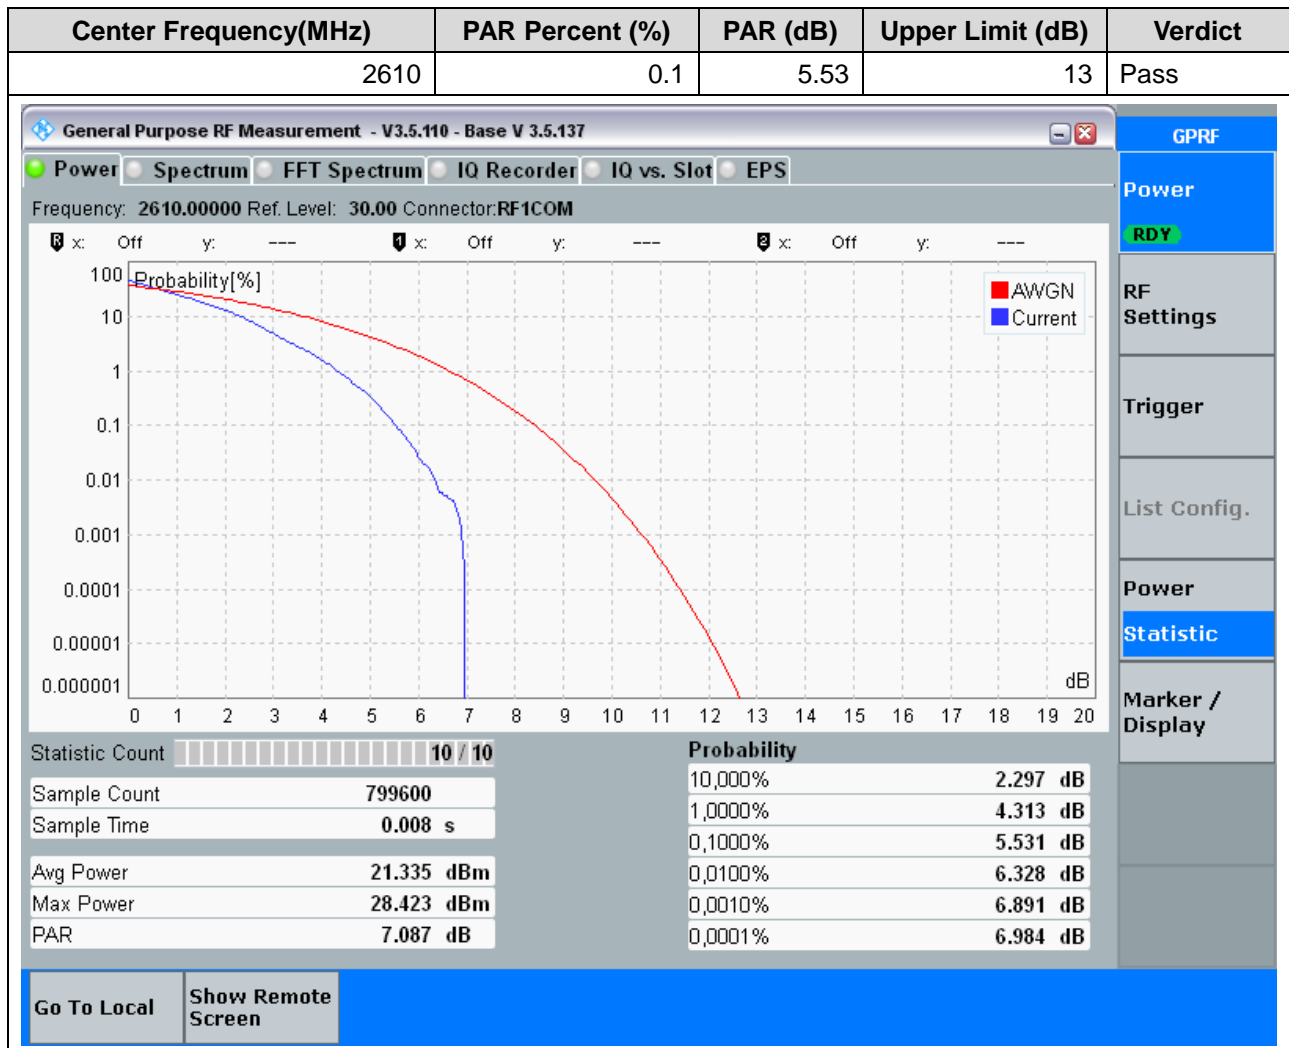


22. n41


22.1. Peak to Average Ratio for SA(NTNV)(Channel:501204, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

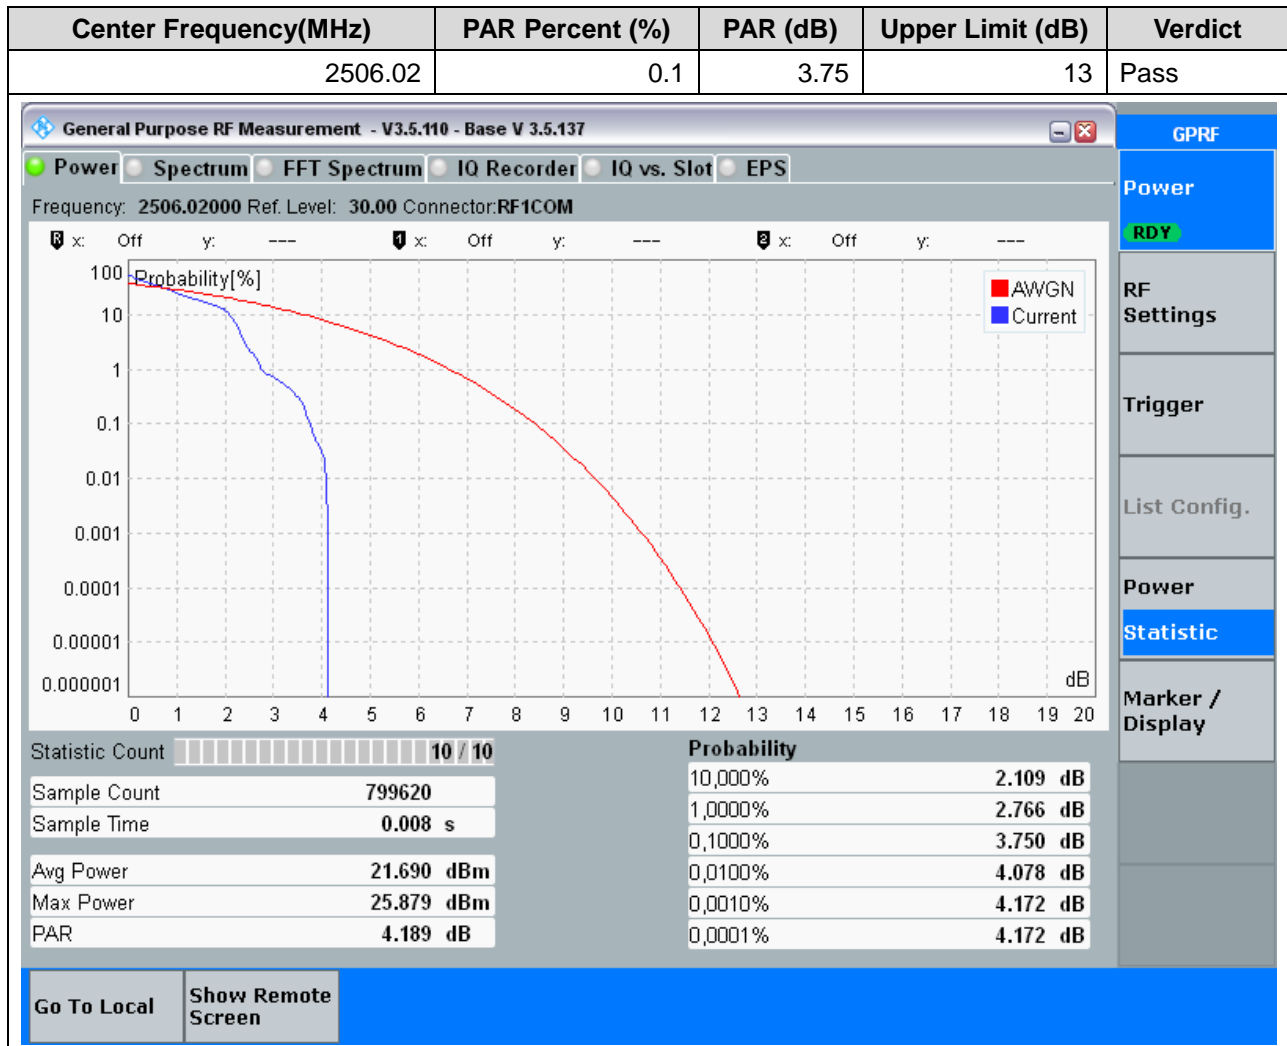


22.2. Peak to Average Ratio for SA(NTNV)(Channel:501204, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:50, RB Position:0)

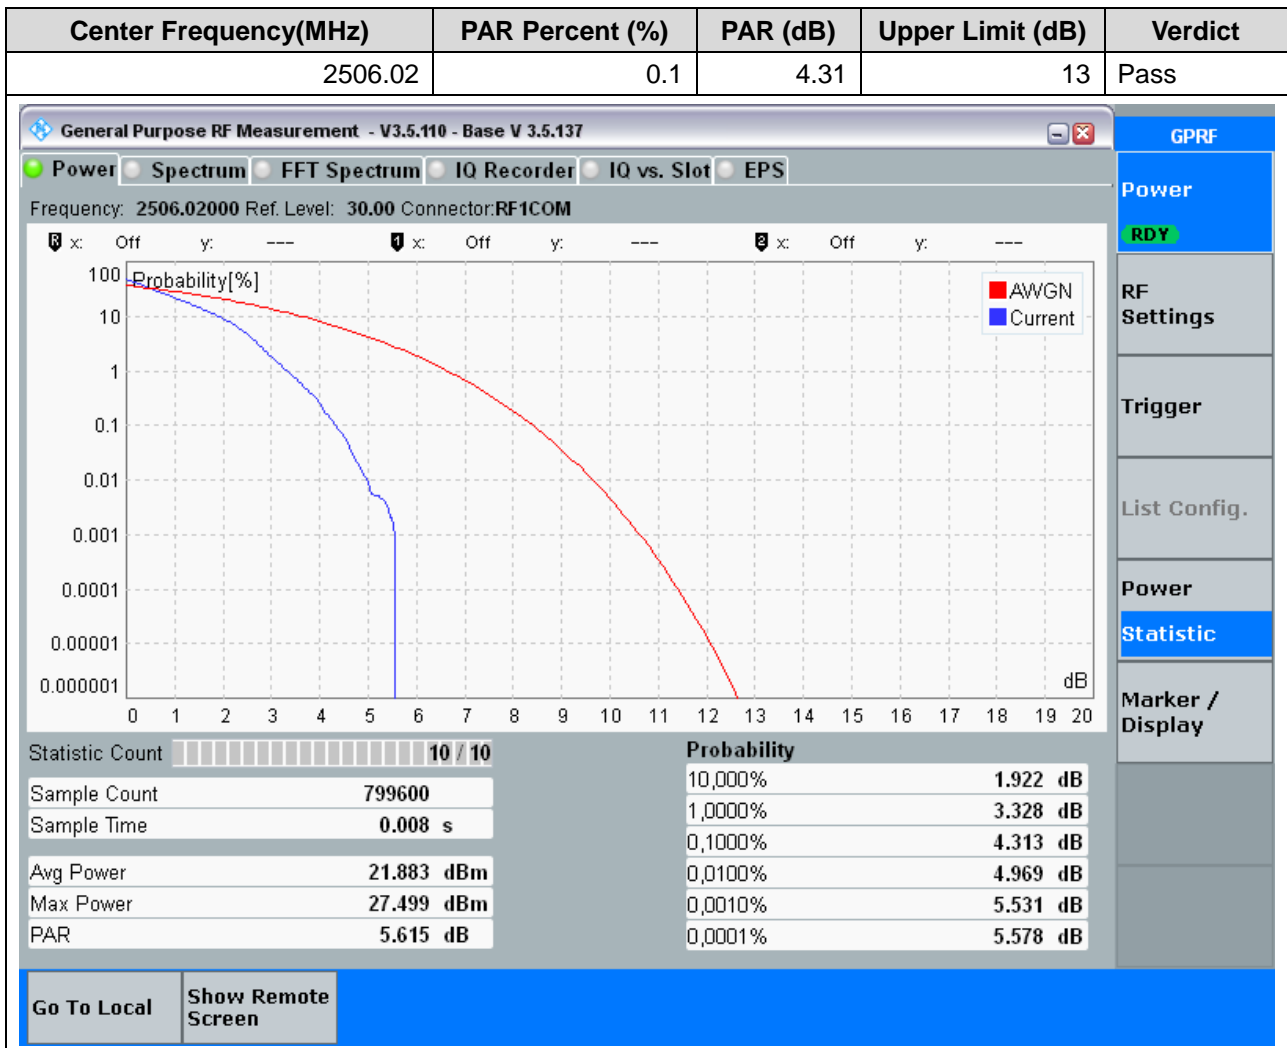


22.3. Peak to Average Ratio for SA(NTNV)(Channel:501204, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

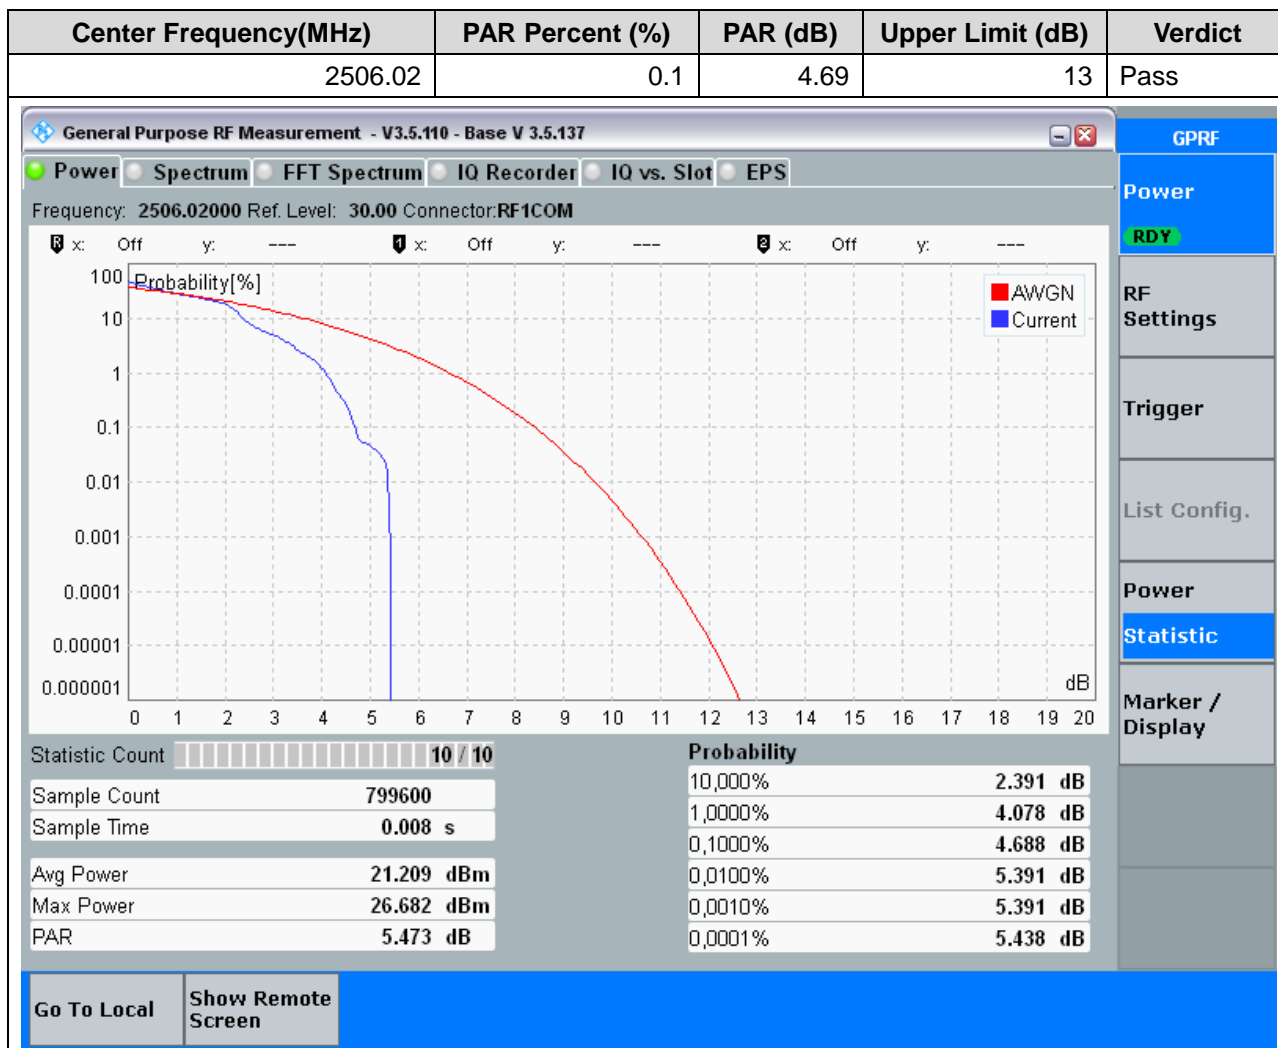


22.4. Peak to Average Ratio for SA(NTNV)(Channel:501204, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

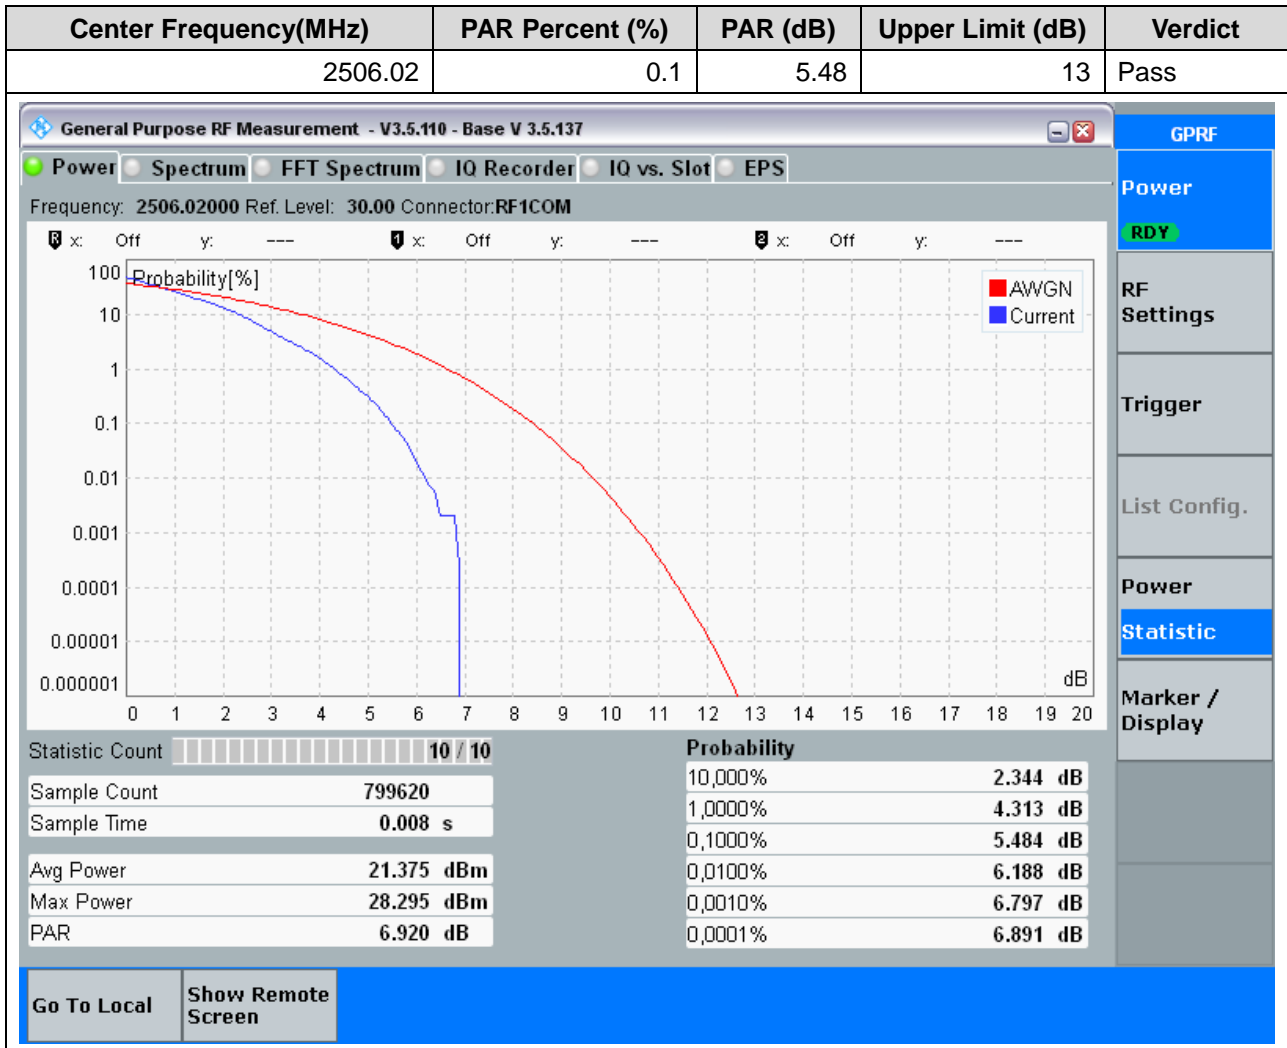


22.5. Peak to Average Ratio for SA(NTNV)(Channel:518598, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

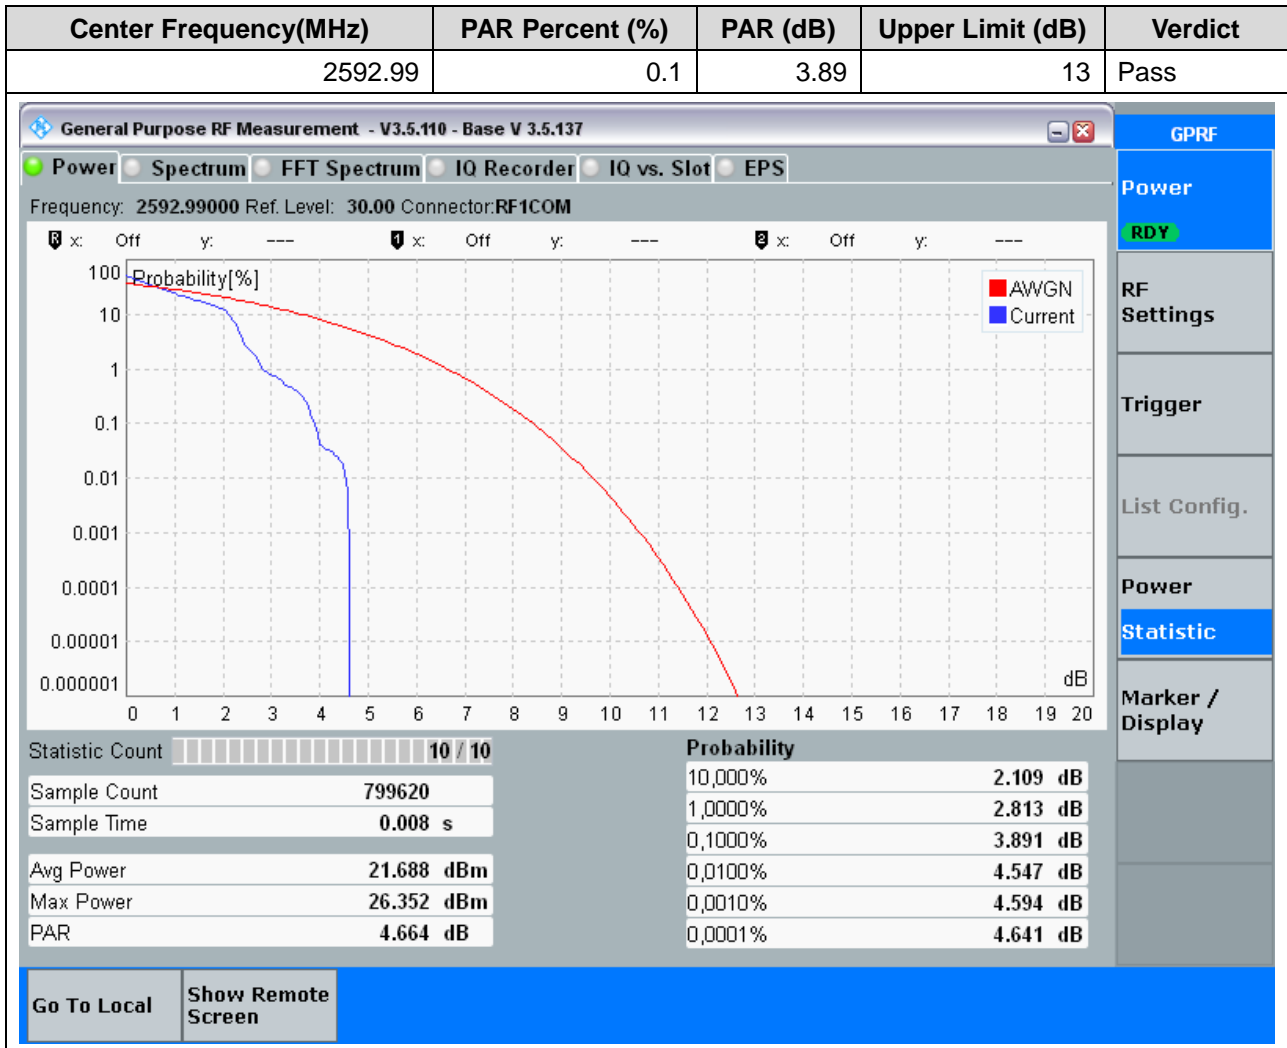


22.6. Peak to Average Ratio for SA(NTNV)(Channel:518598, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:50, RB Position:0)

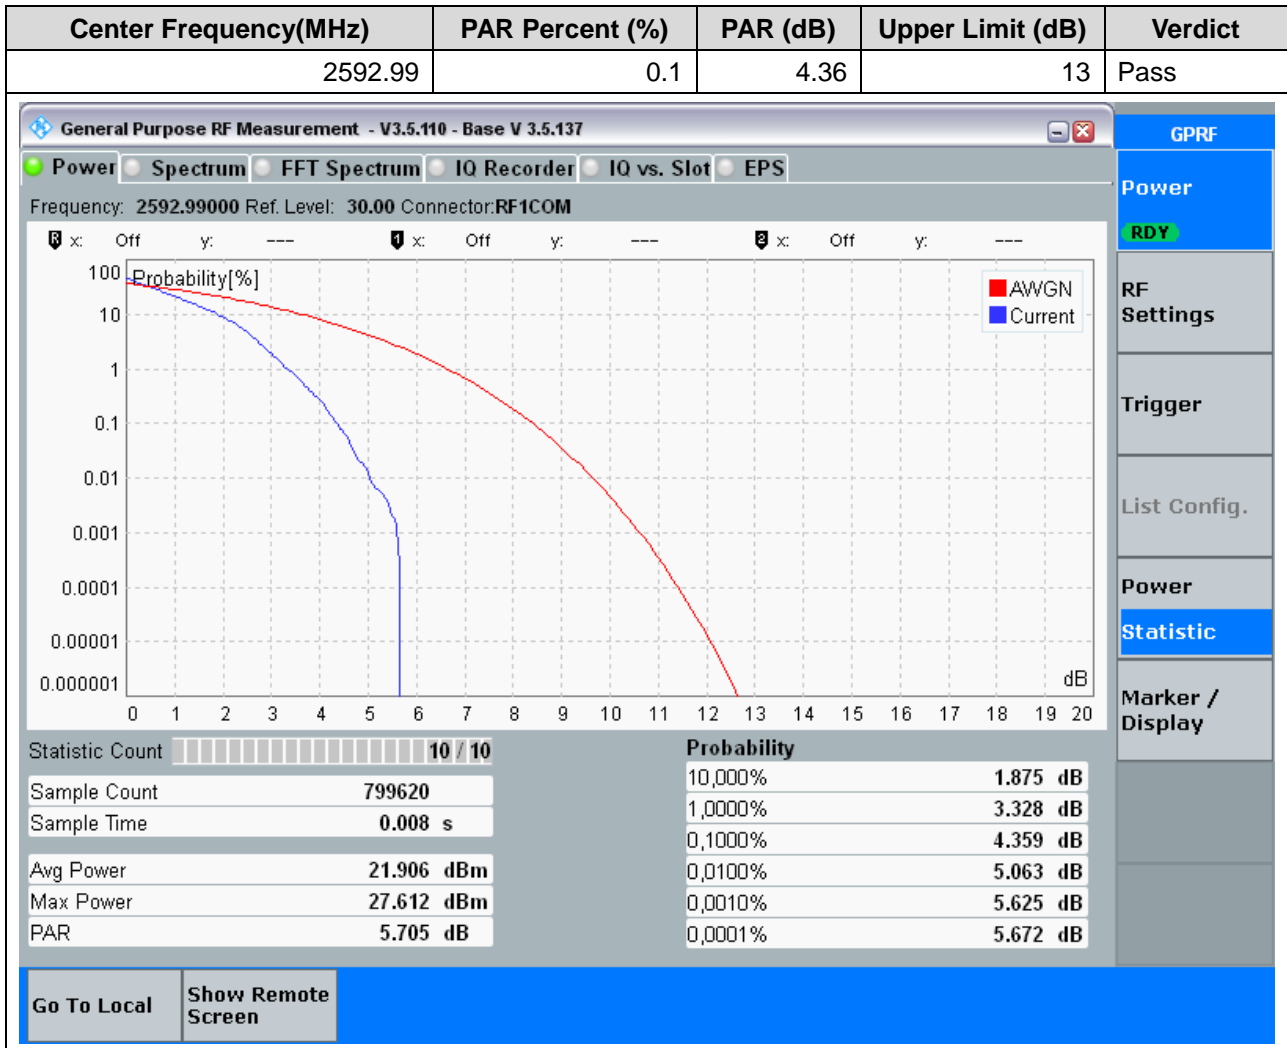


22.7. Peak to Average Ratio for SA(NTNV)(Channel:518598, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

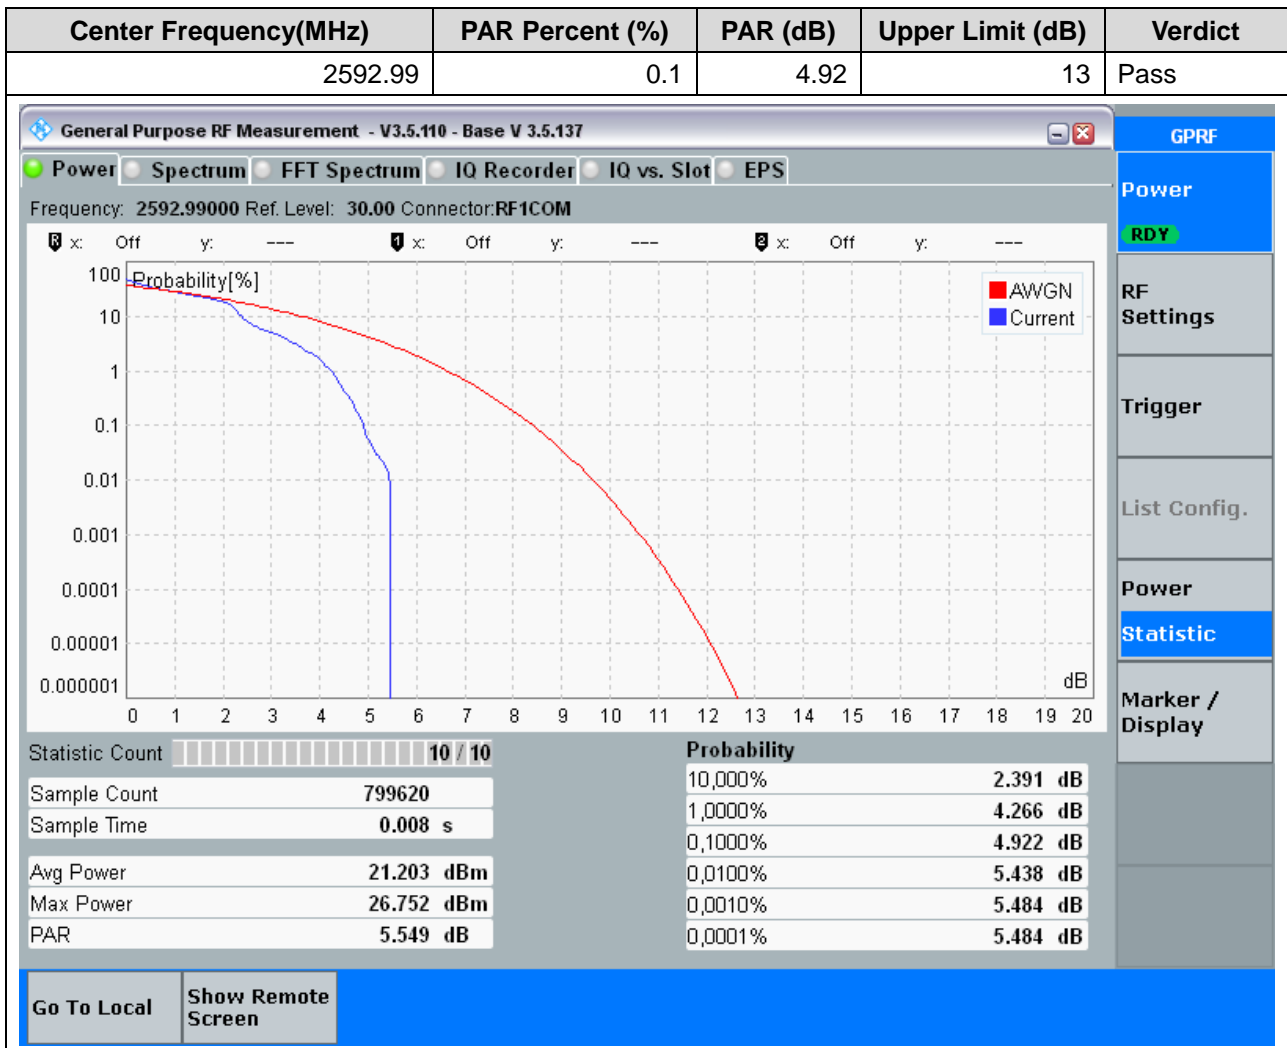


22.8. Peak to Average Ratio for SA(NTNV)(Channel:518598, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

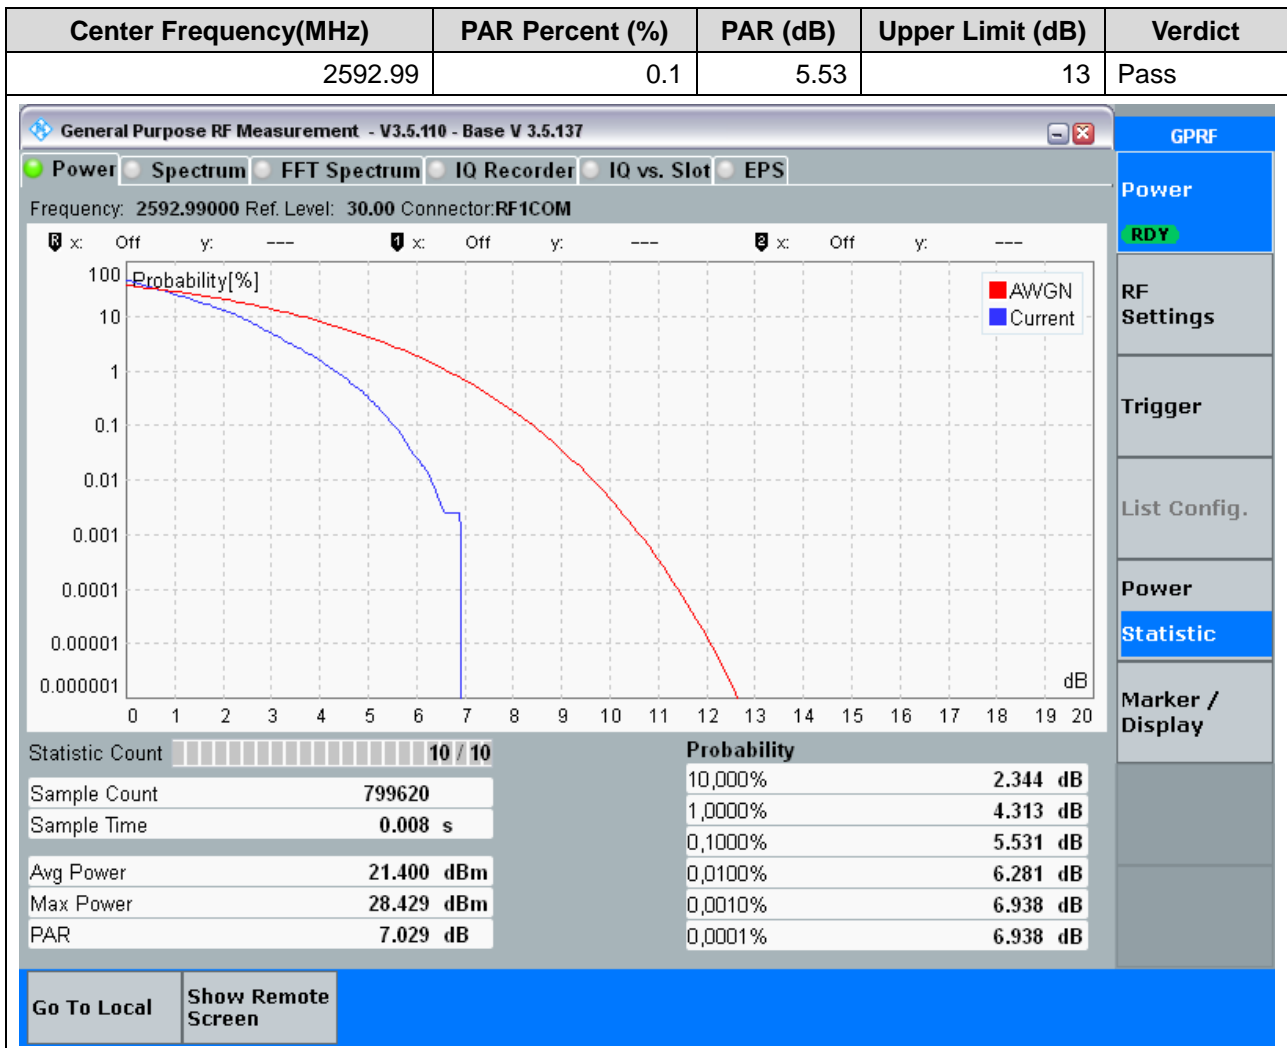


22.9. Peak to Average Ratio for SA(NTNV)(Channel:535998, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

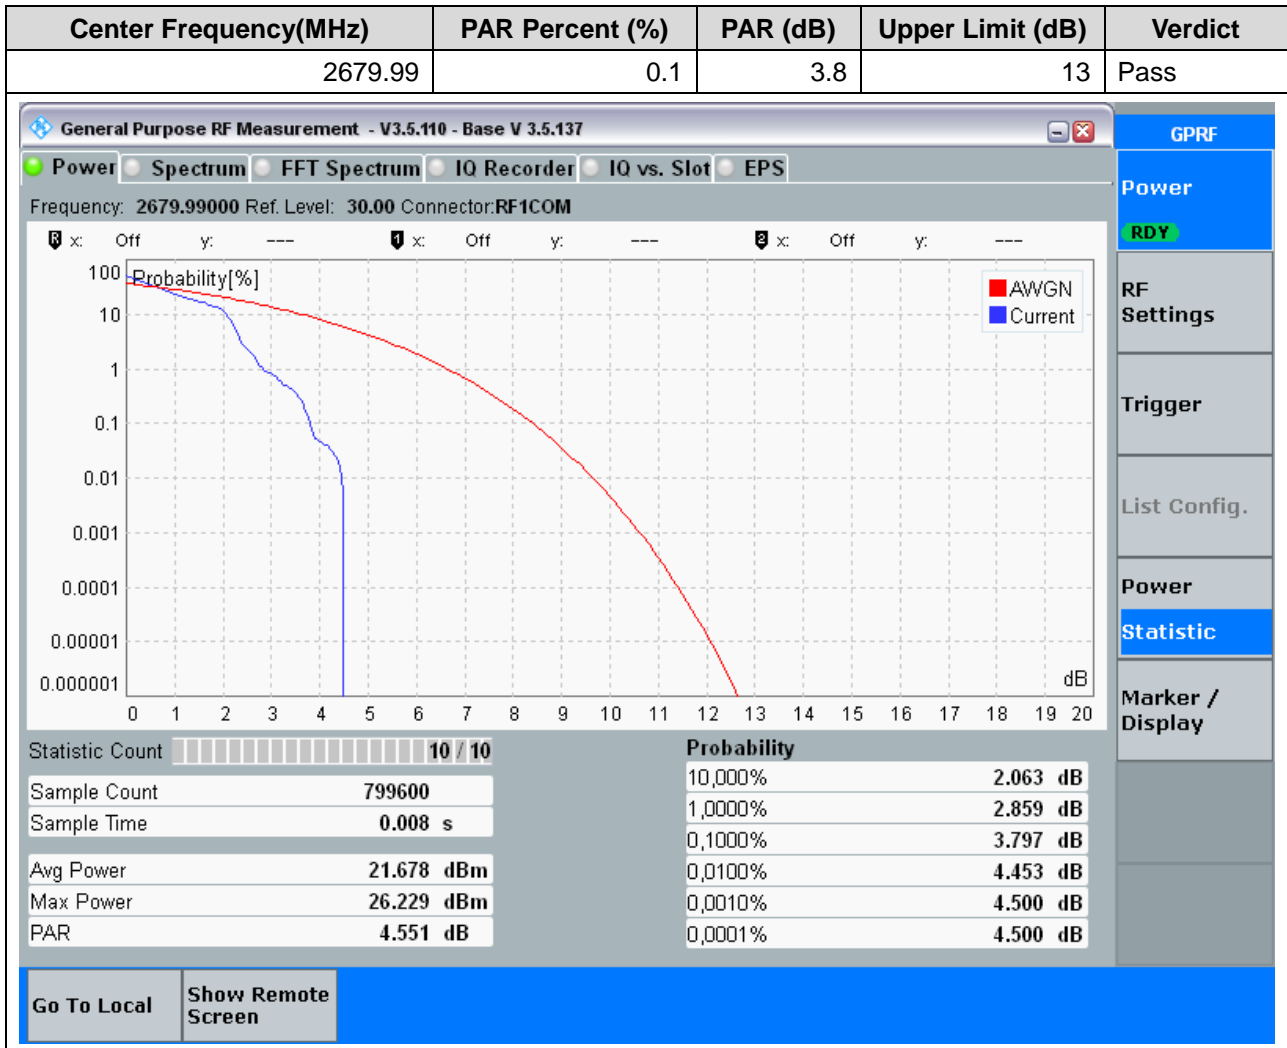


22.10. Peak to Average Ratio for SA(NTNV)(Channel:535998, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:50, RB Position:0)

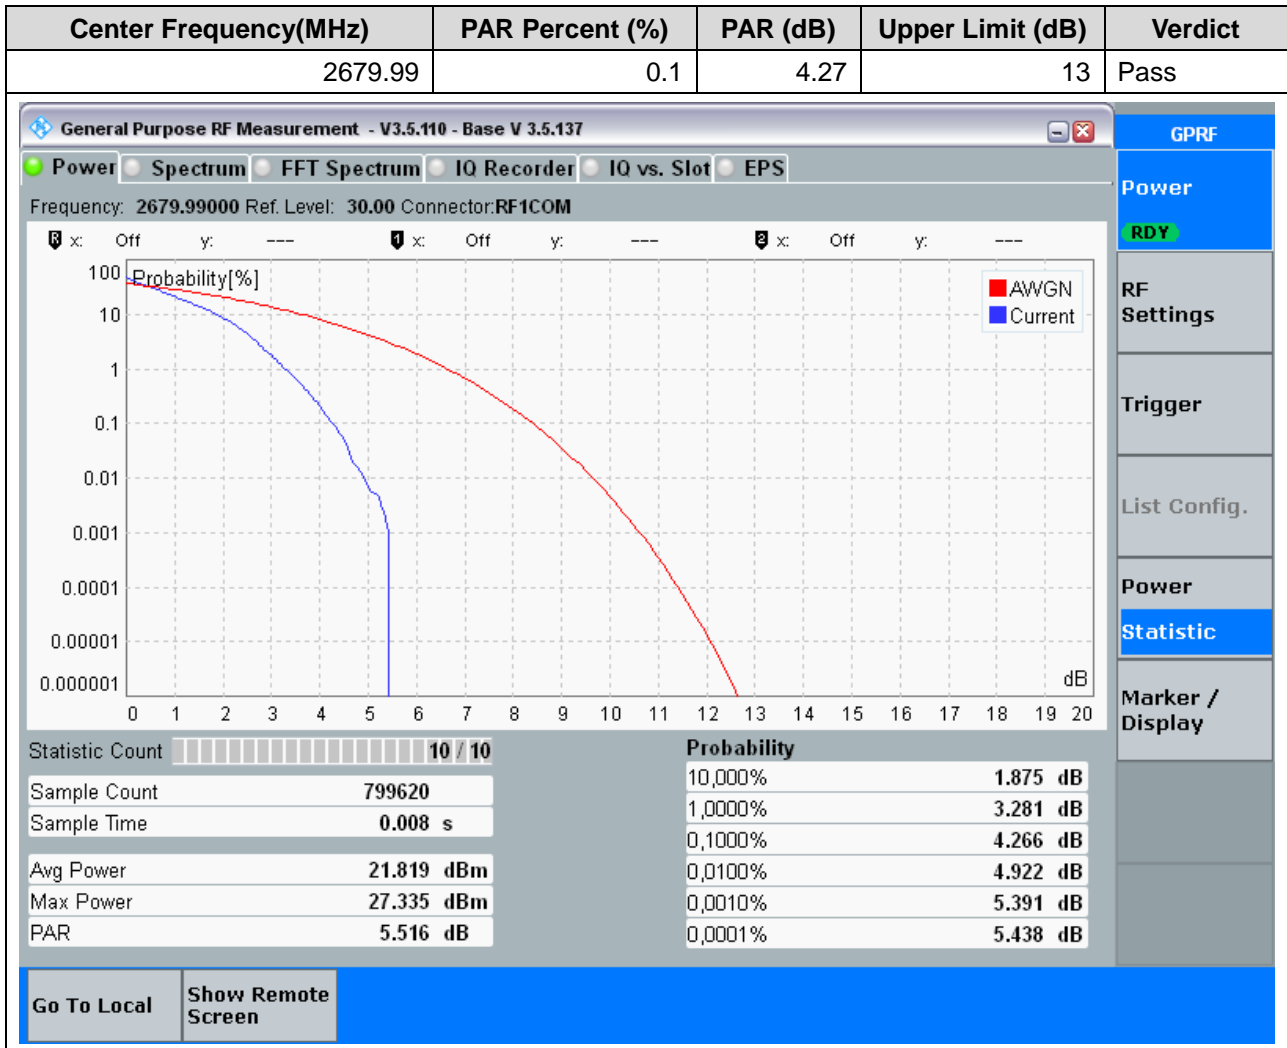

22.11. Peak to Average Ratio for SA(NTNV)(Channel:535998, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

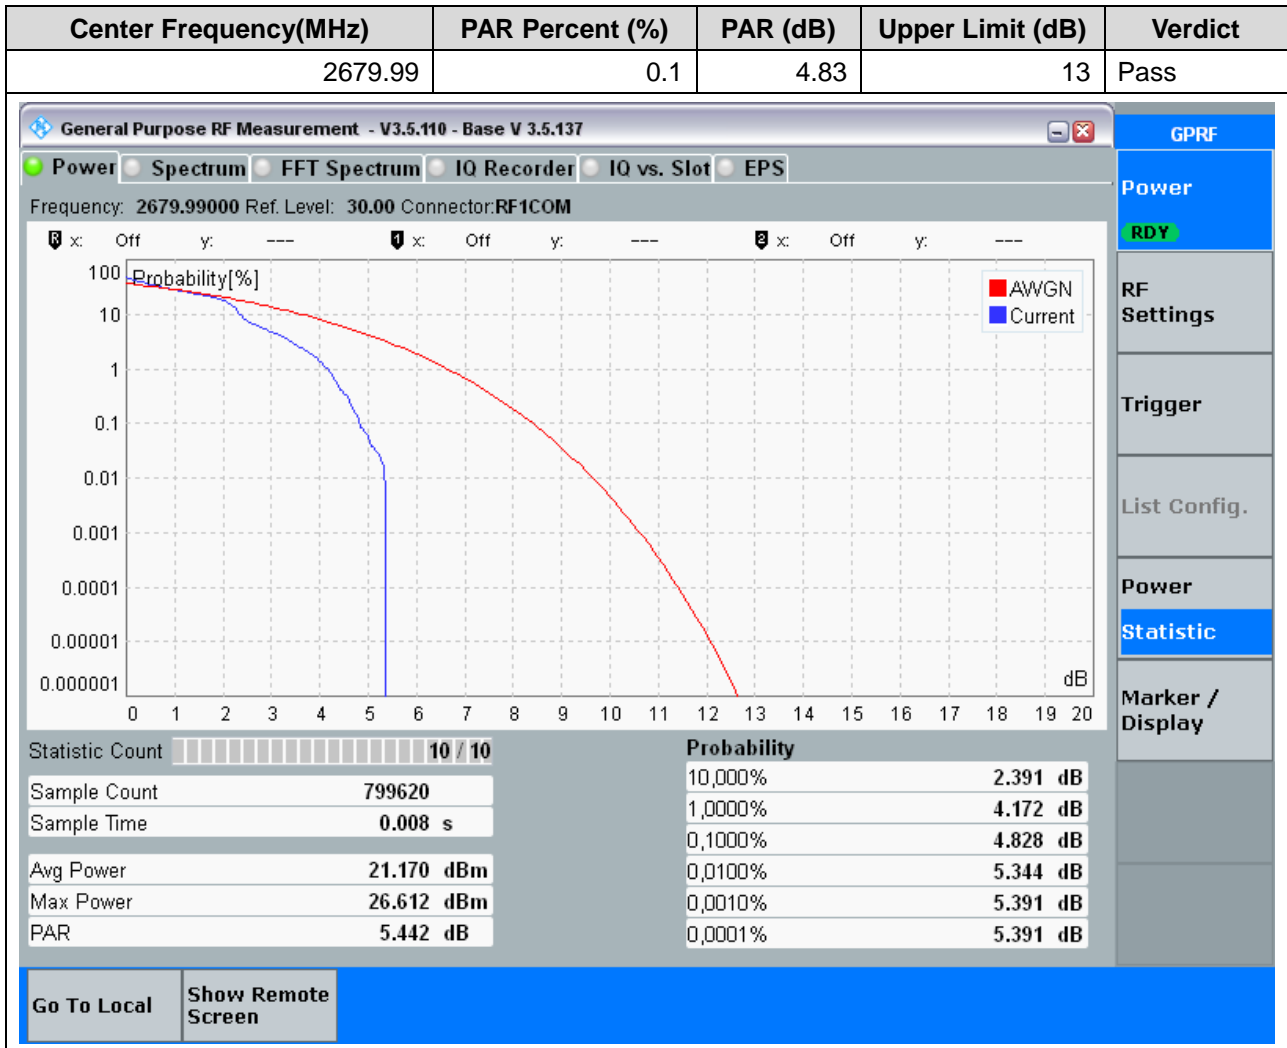


22.12. Peak to Average Ratio for SA(NTNV)(Channel:535998, Bandwidth:20, SCS:30, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:50, RB Position:0)

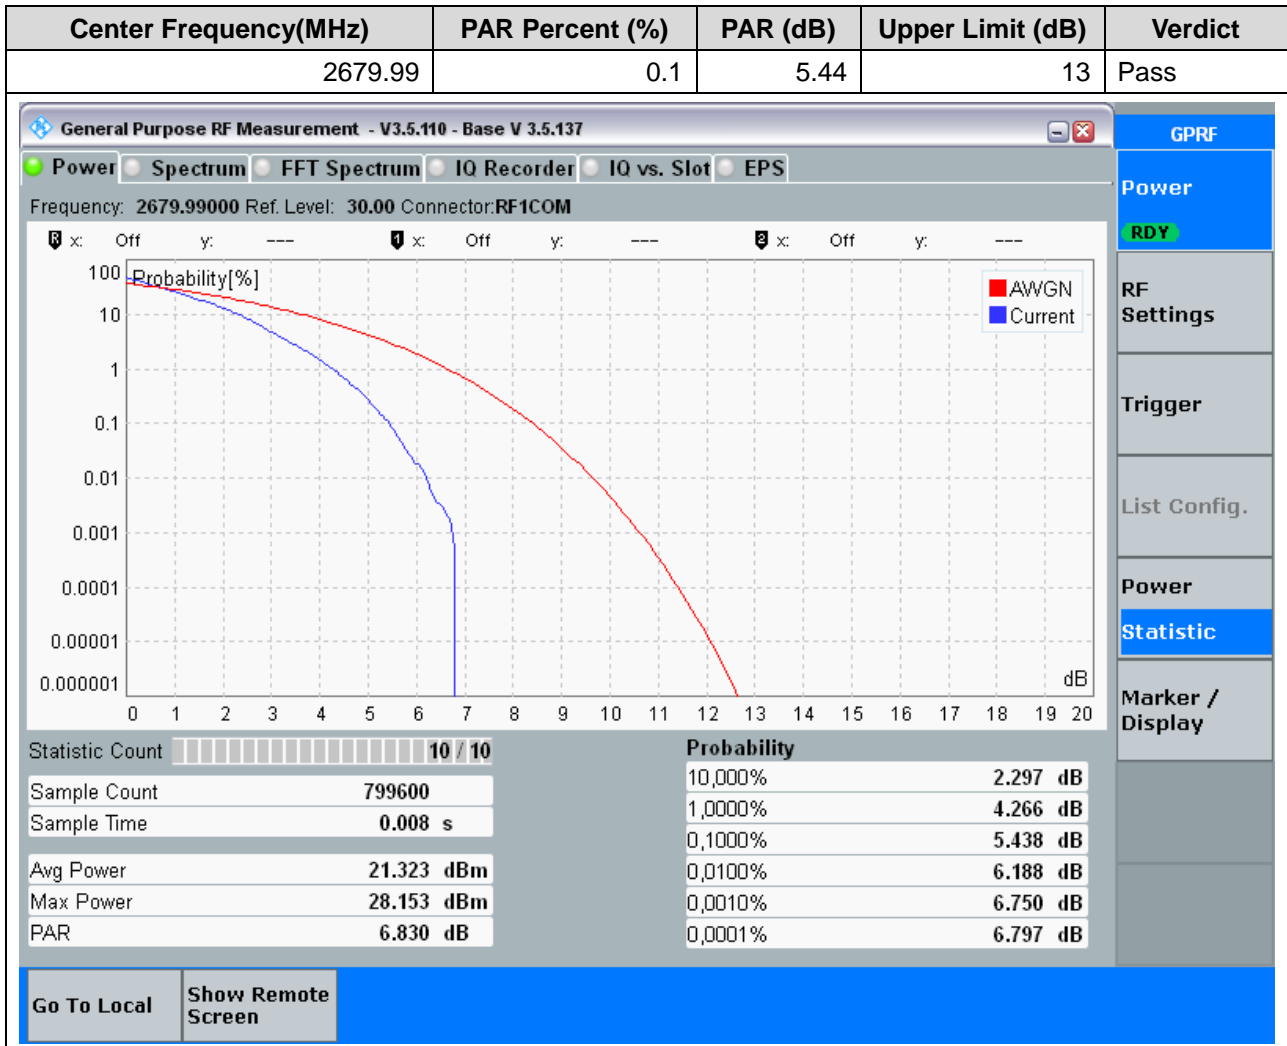


23. n66 15kHz


23.1. Peak to Average Ratio for SA(NTNV)(Channel:344000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

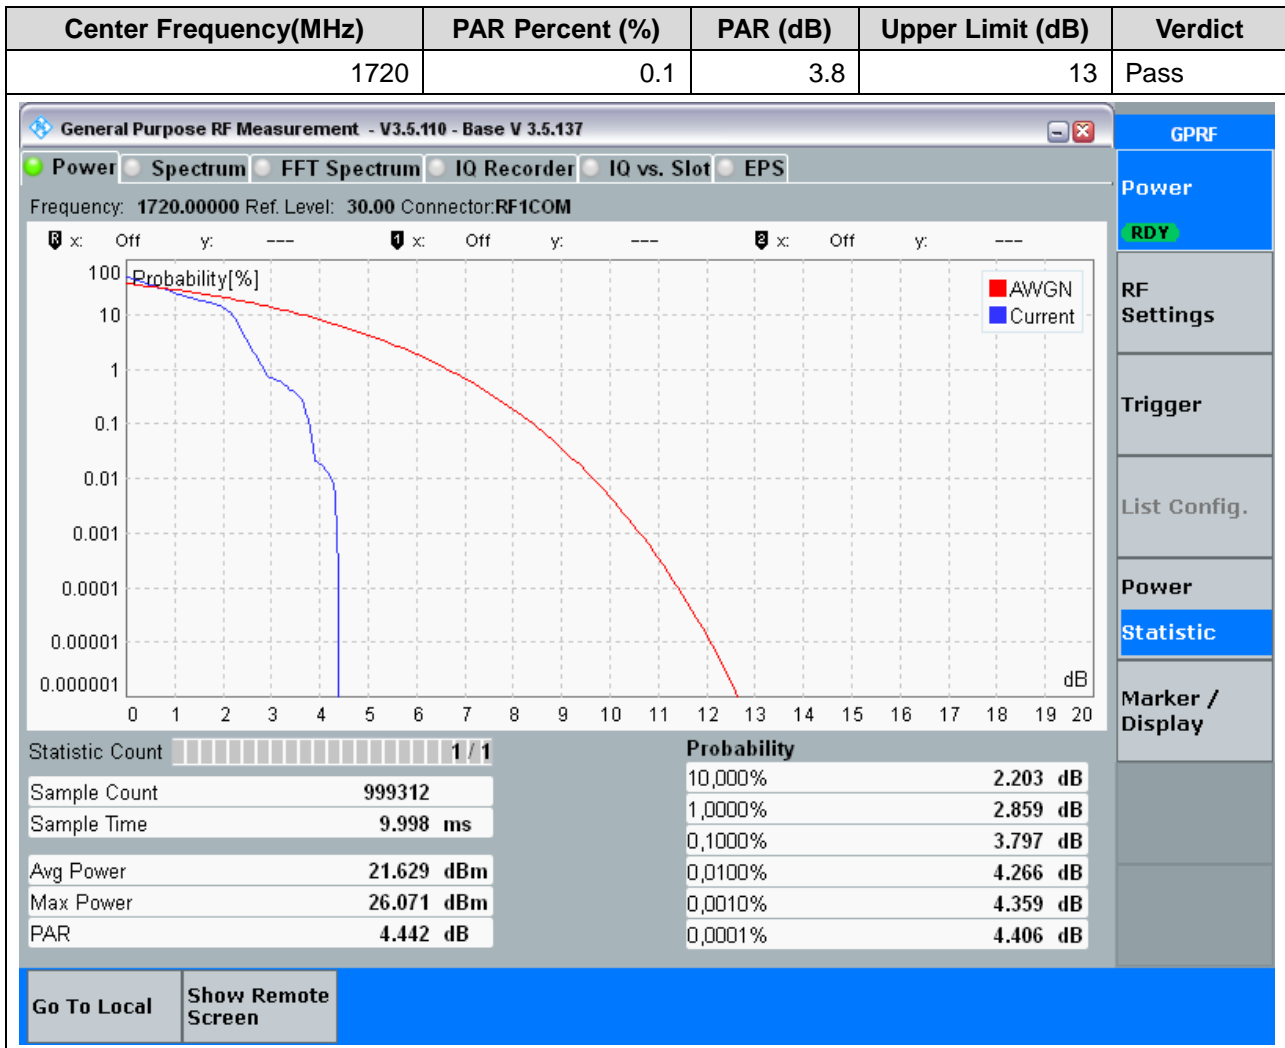


23.2. Peak to Average Ratio for SA(NTNV)(Channel:344000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

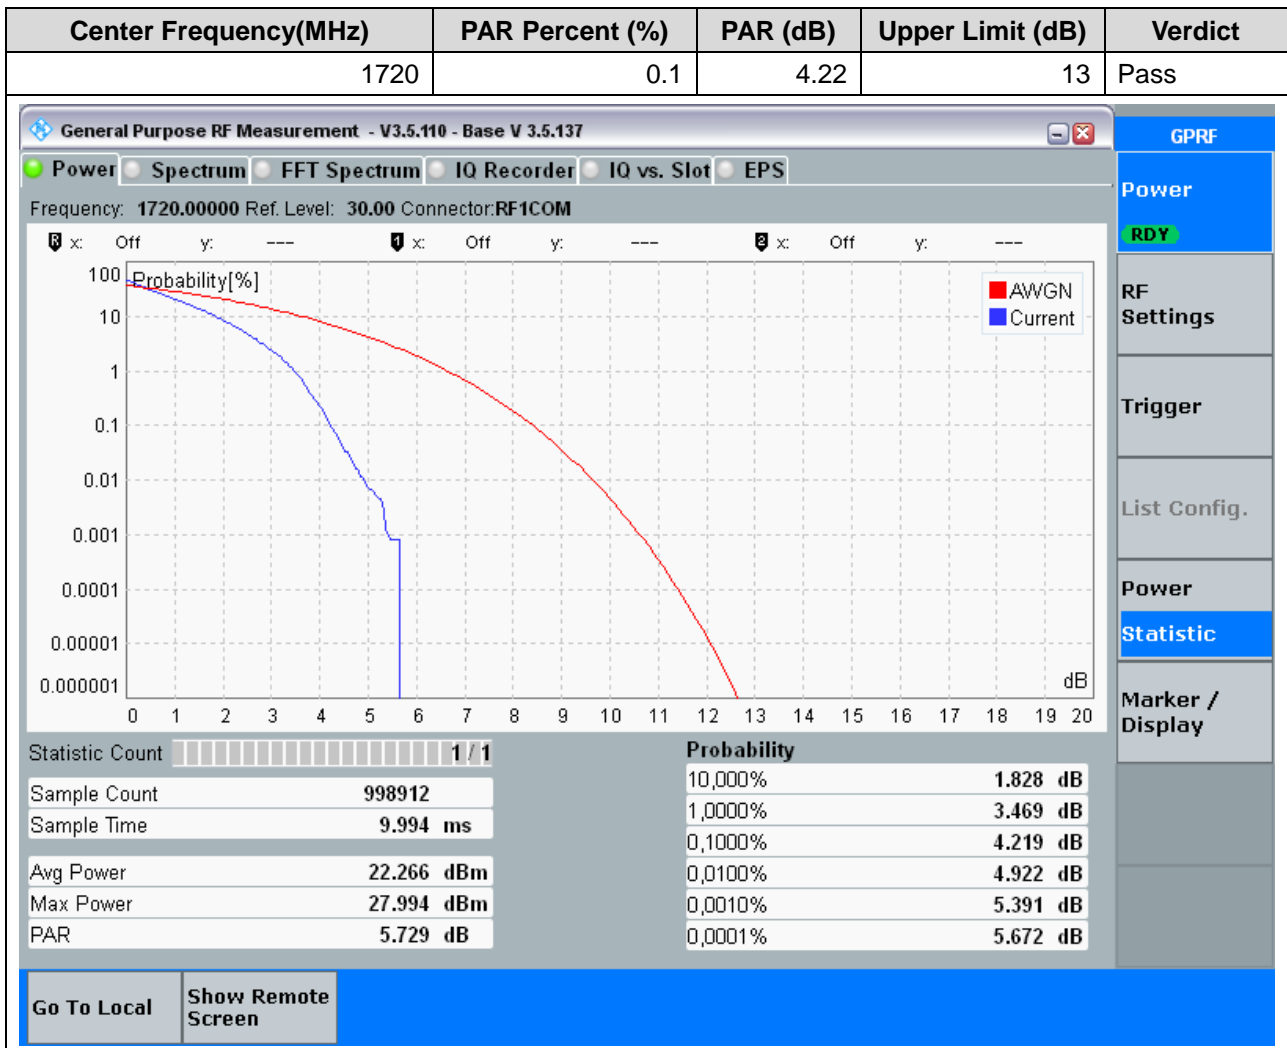


23.3. Peak to Average Ratio for SA(NTNV)(Channel:344000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

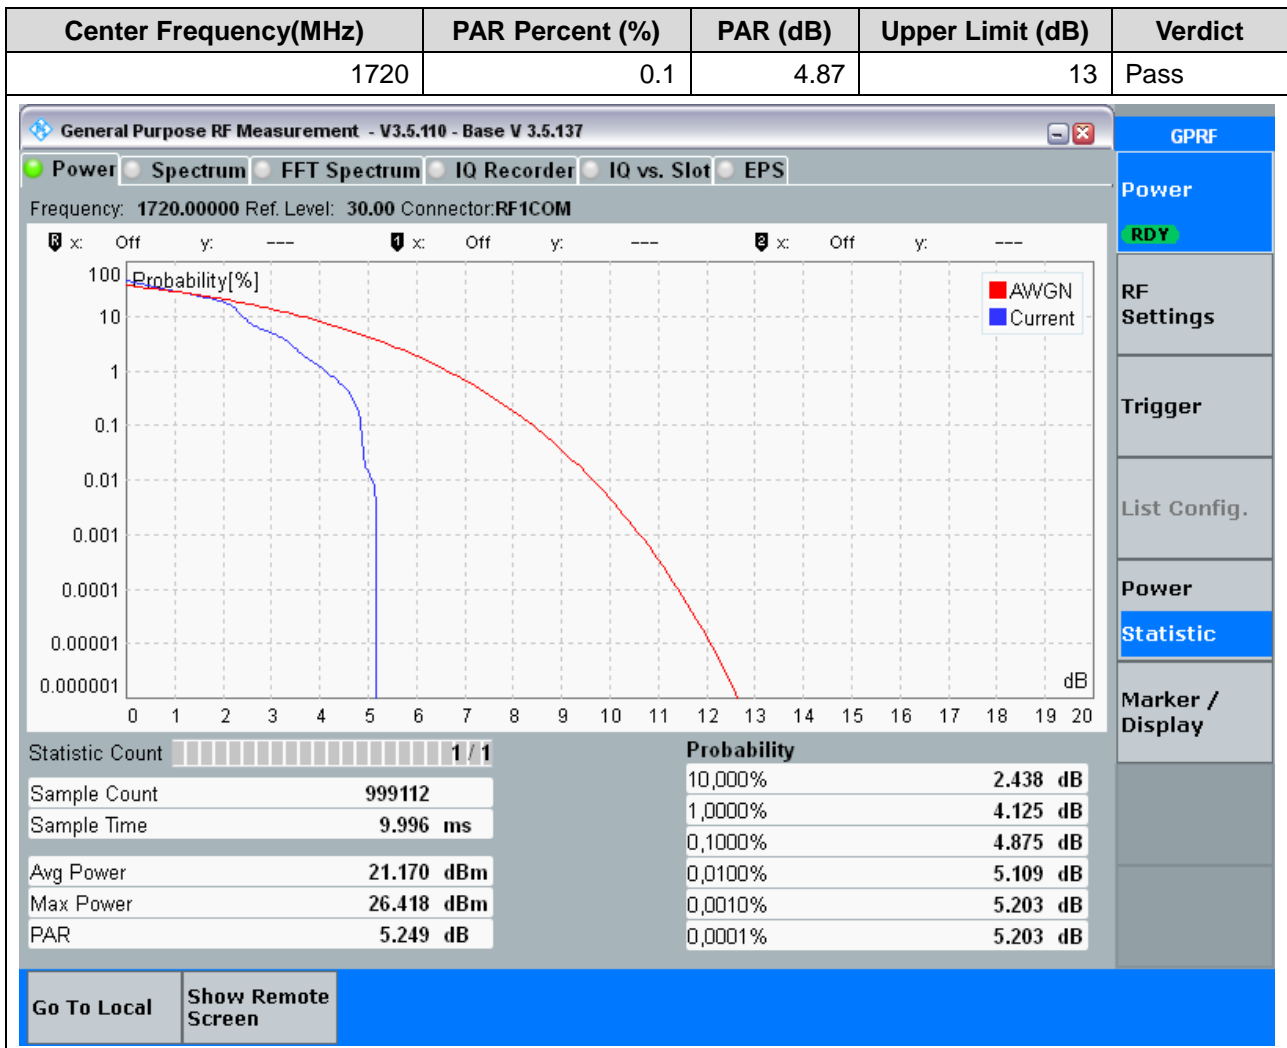


23.4. Peak to Average Ratio for SA(NTNV)(Channel:344000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

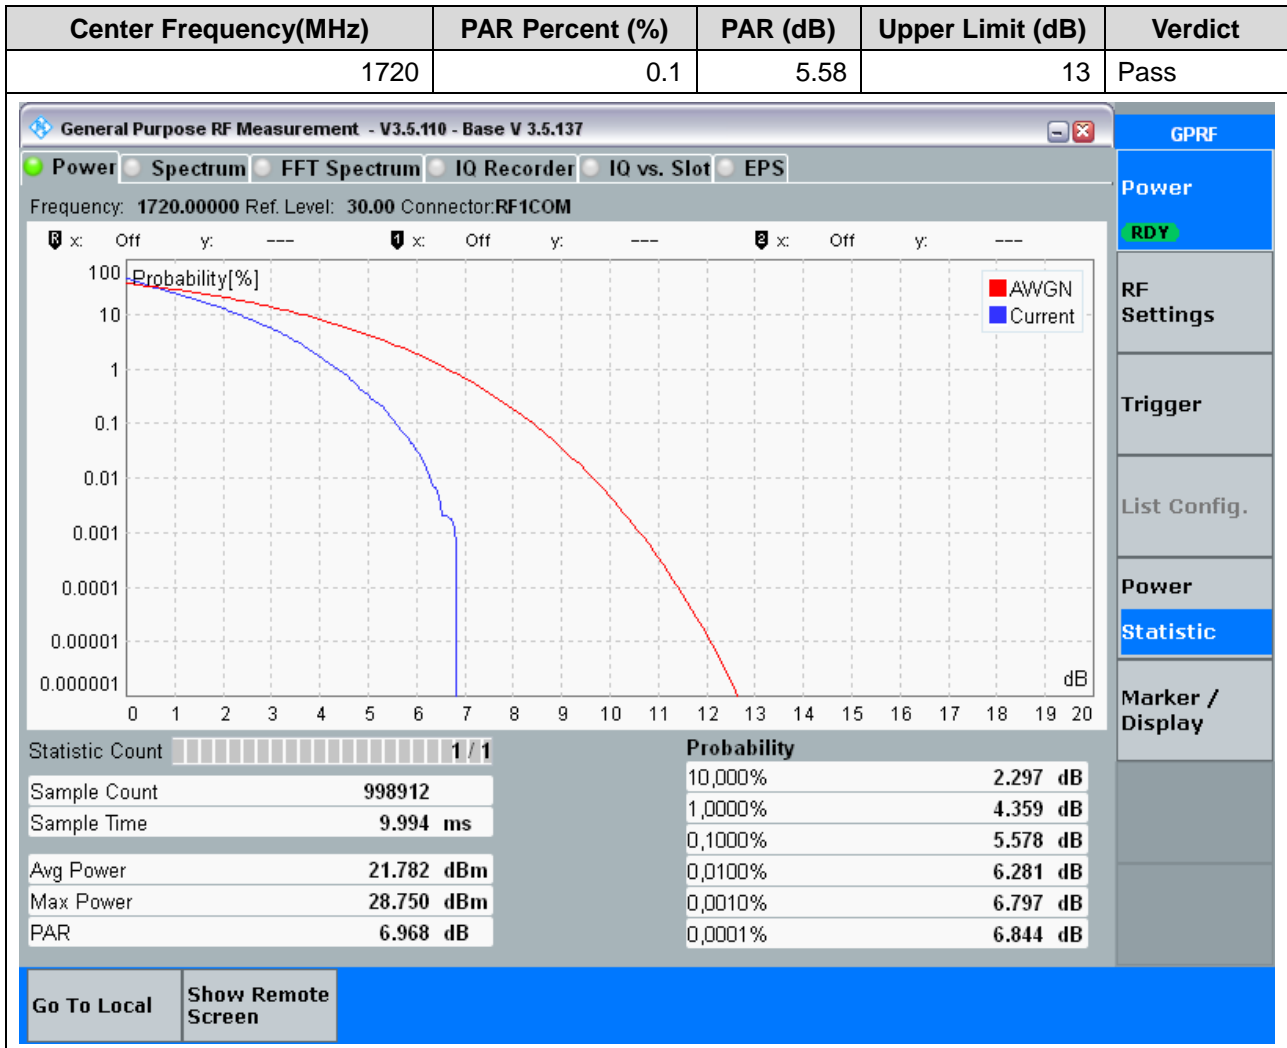


23.5. Peak to Average Ratio for SA(NTNV)(Channel:349000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

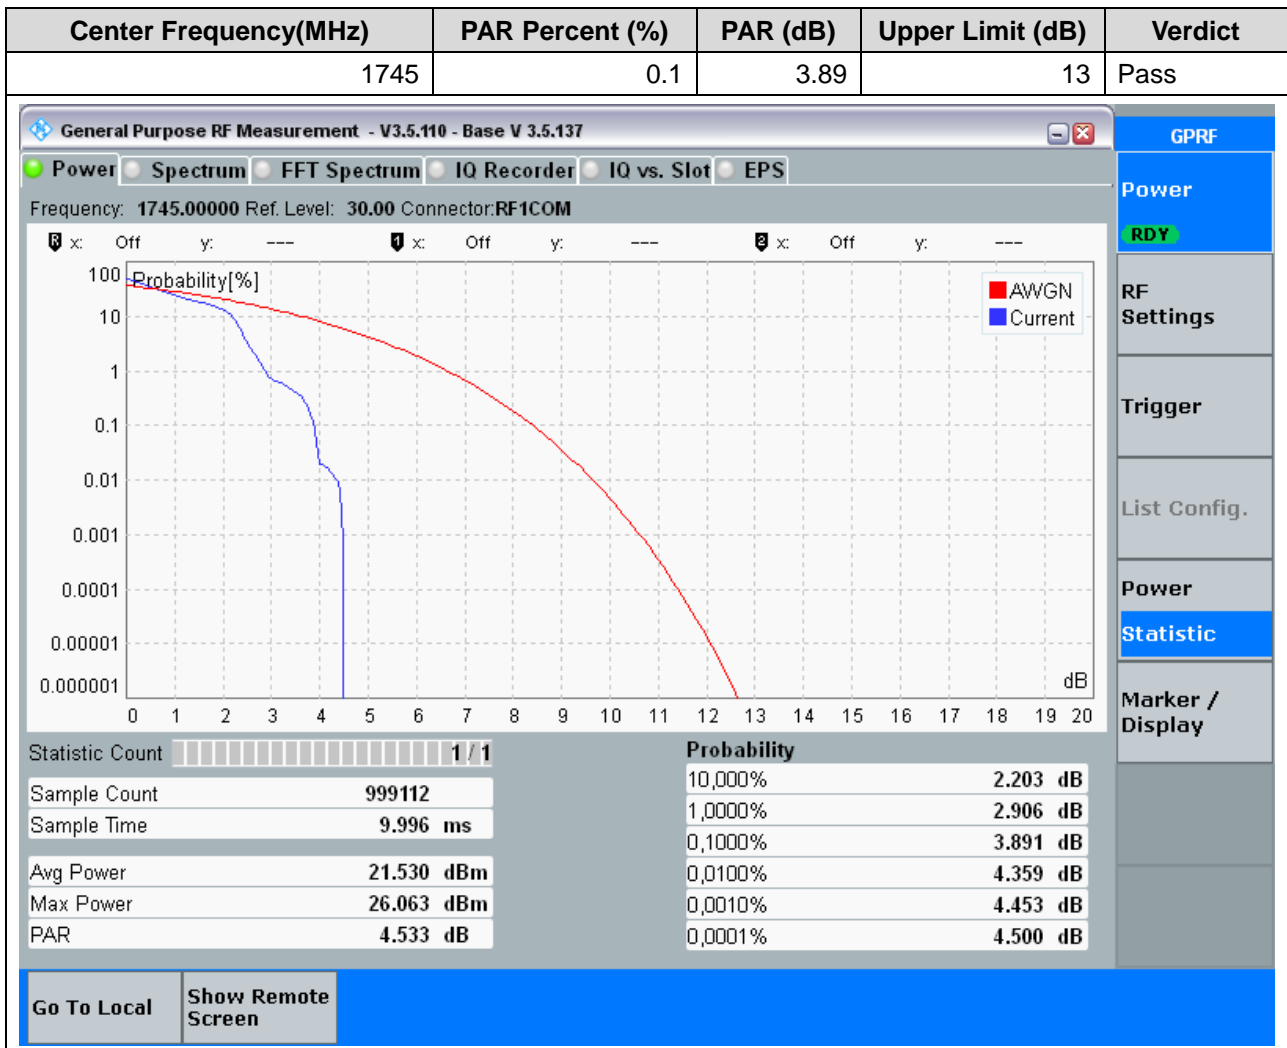


23.6. Peak to Average Ratio for SA(NTNV)(Channel:349000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

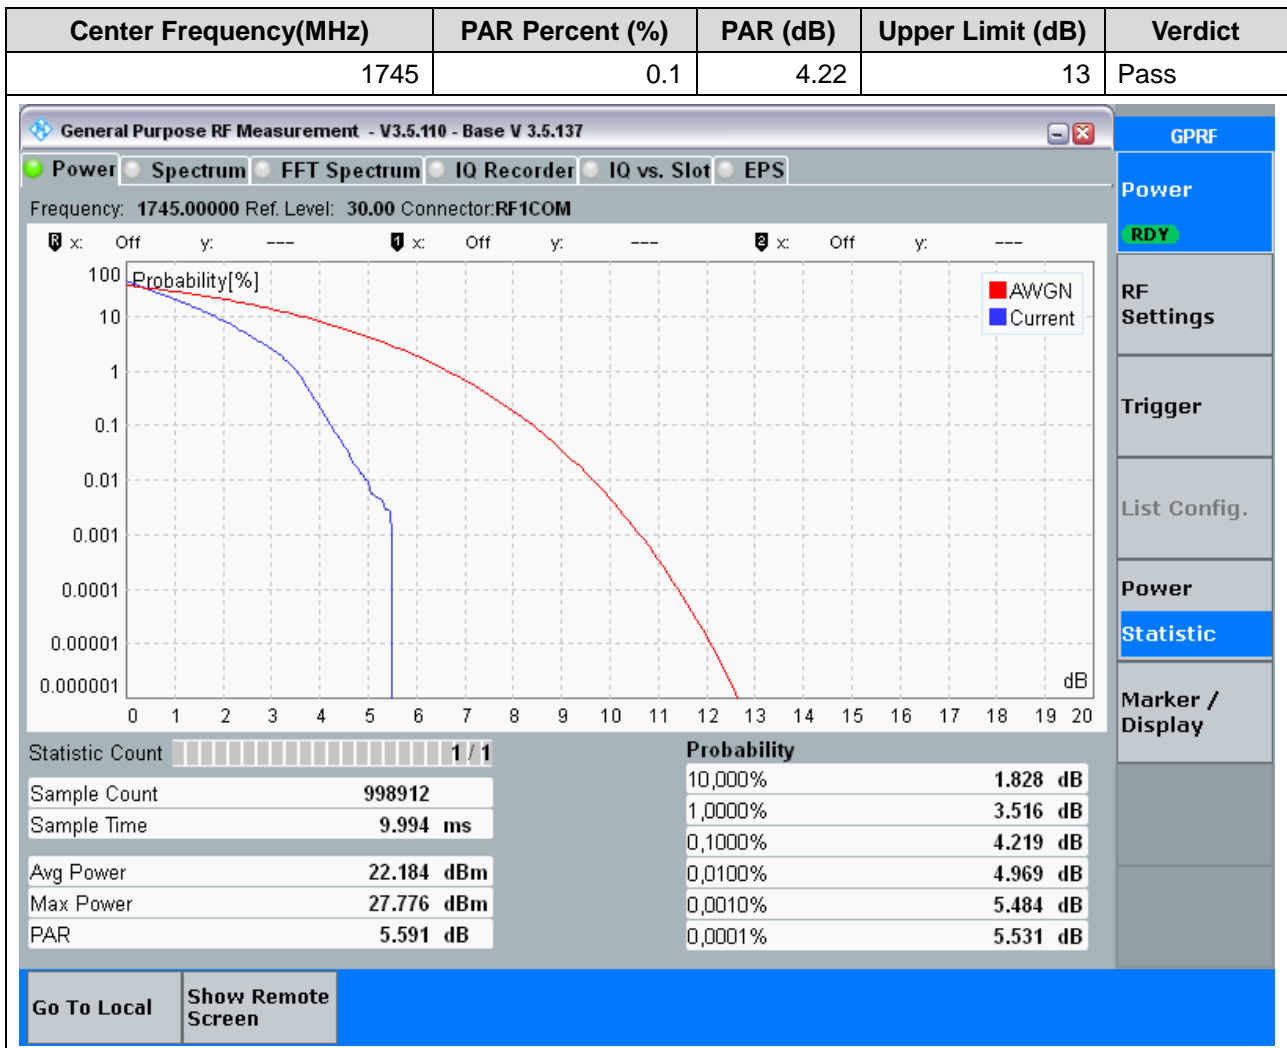


23.7. Peak to Average Ratio for SA(NTNV)(Channel:349000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

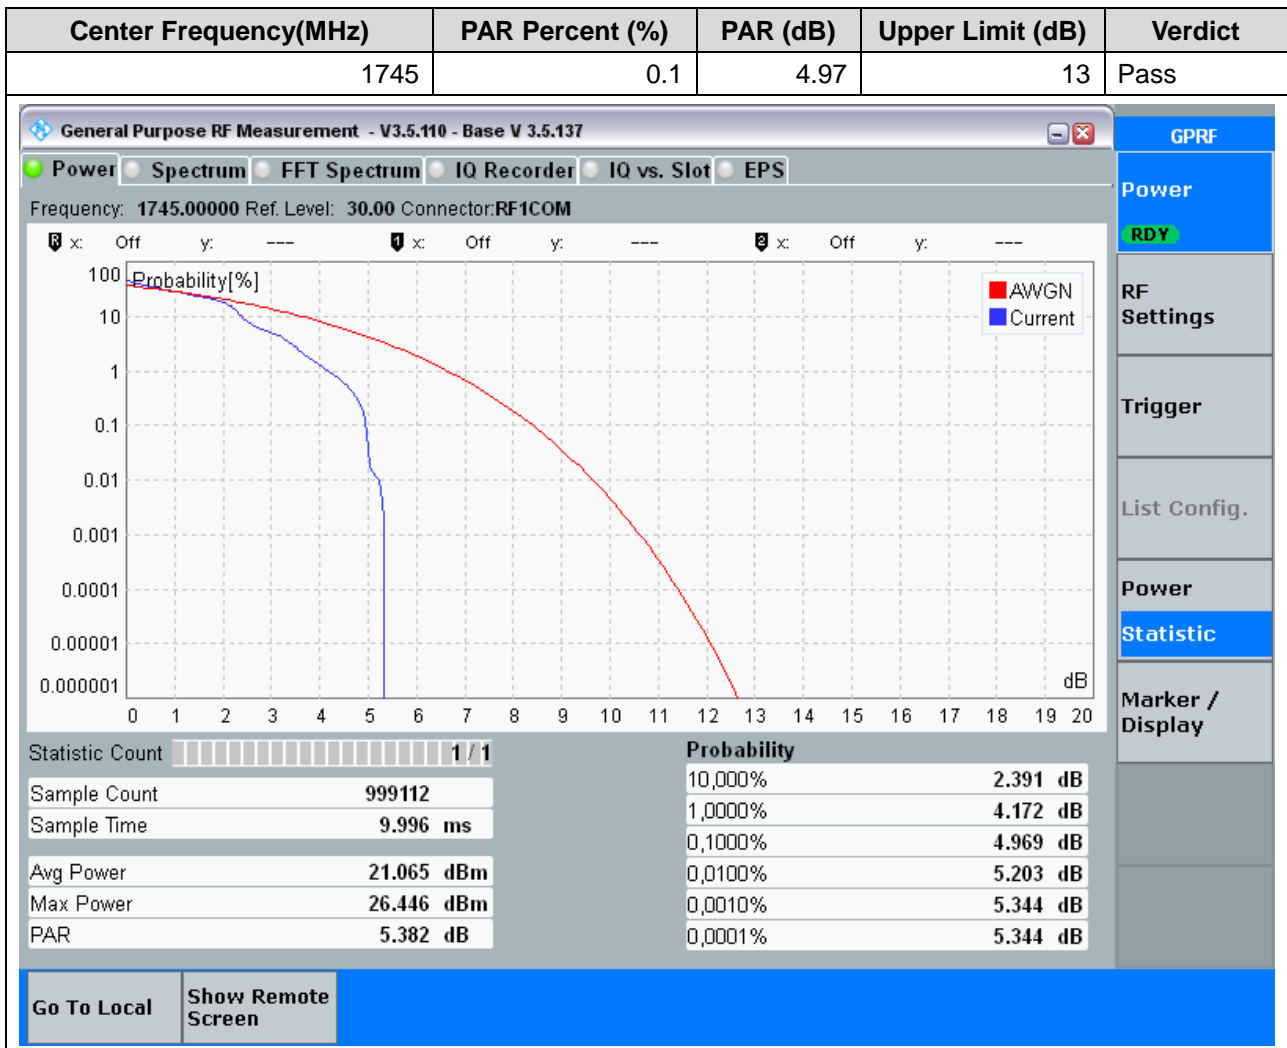


23.8. Peak to Average Ratio for SA(NTNV)(Channel:349000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

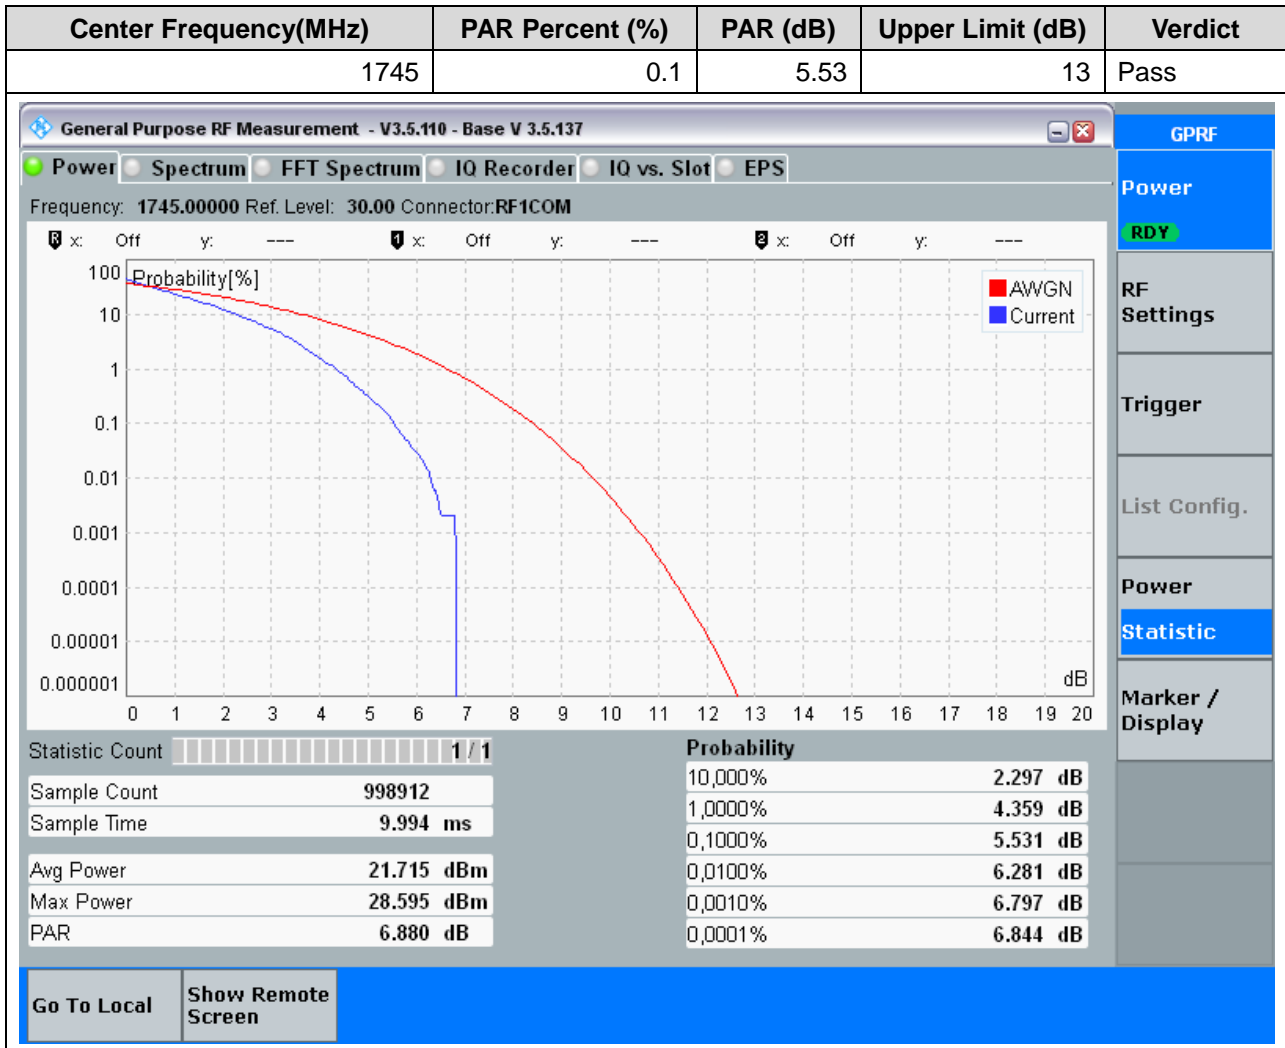


23.9. Peak to Average Ratio for SA(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:1, RB Position:0)

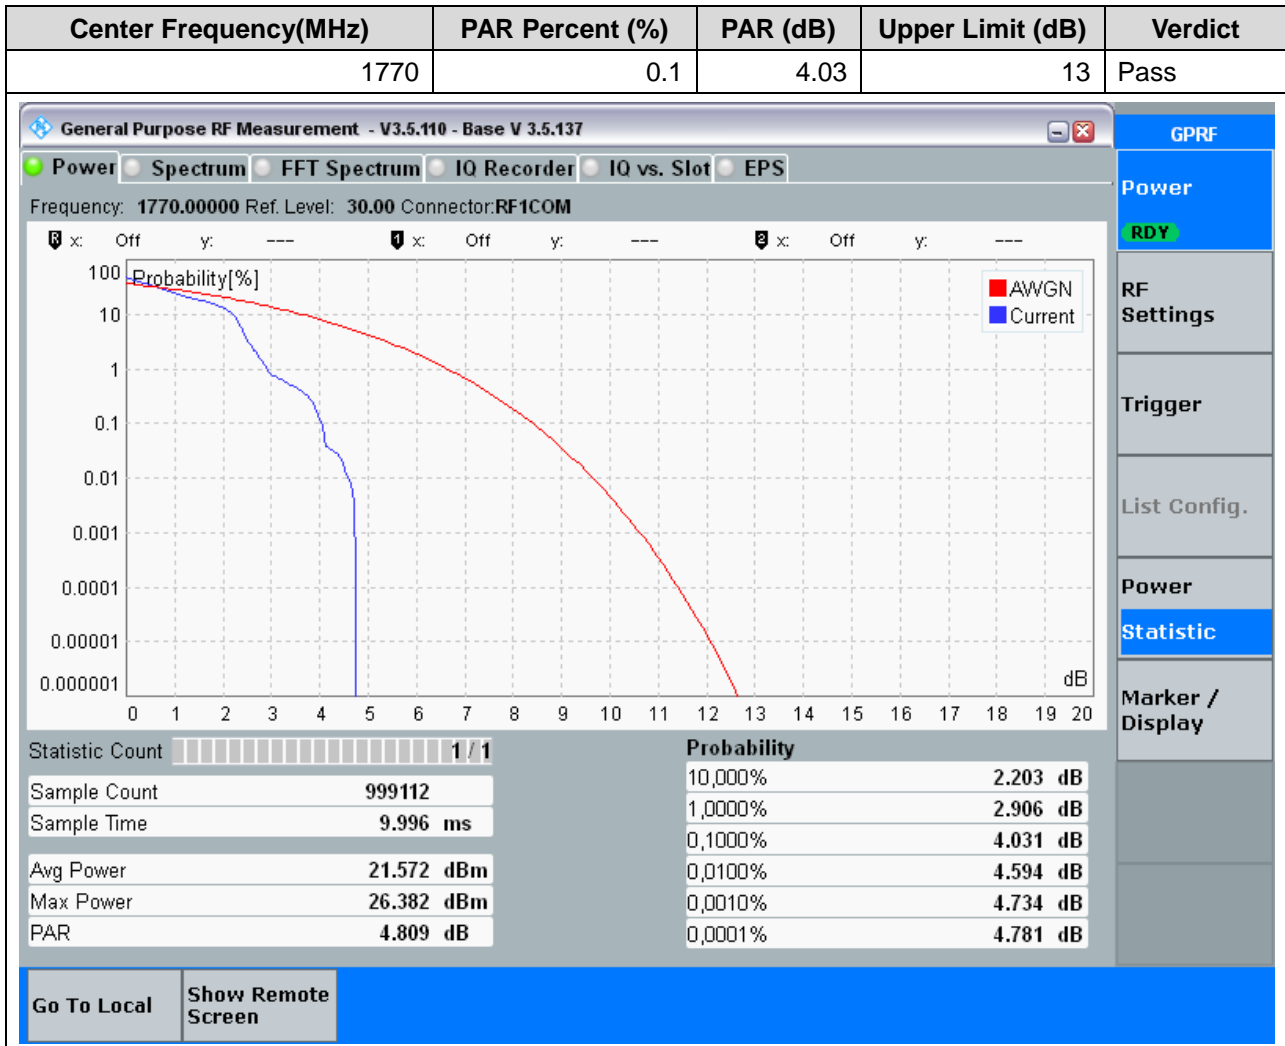


23.10. Peak to Average Ratio for SA(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:Pi/2-BPSK, RB Number:100, RB Position:0)

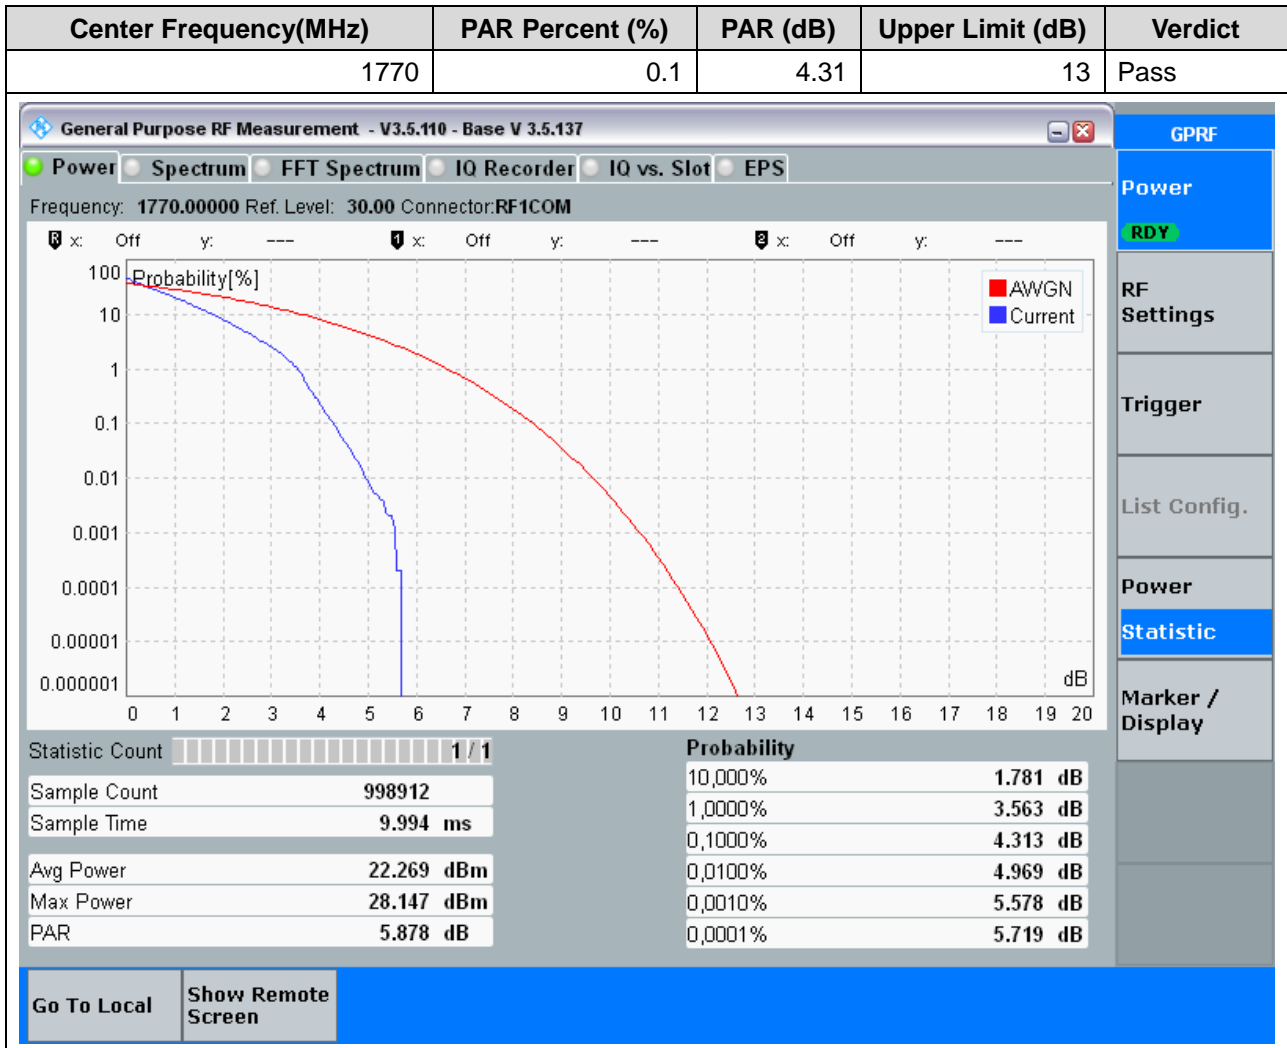

23.11. Peak to Average Ratio for SA(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:1, RB Position:0)

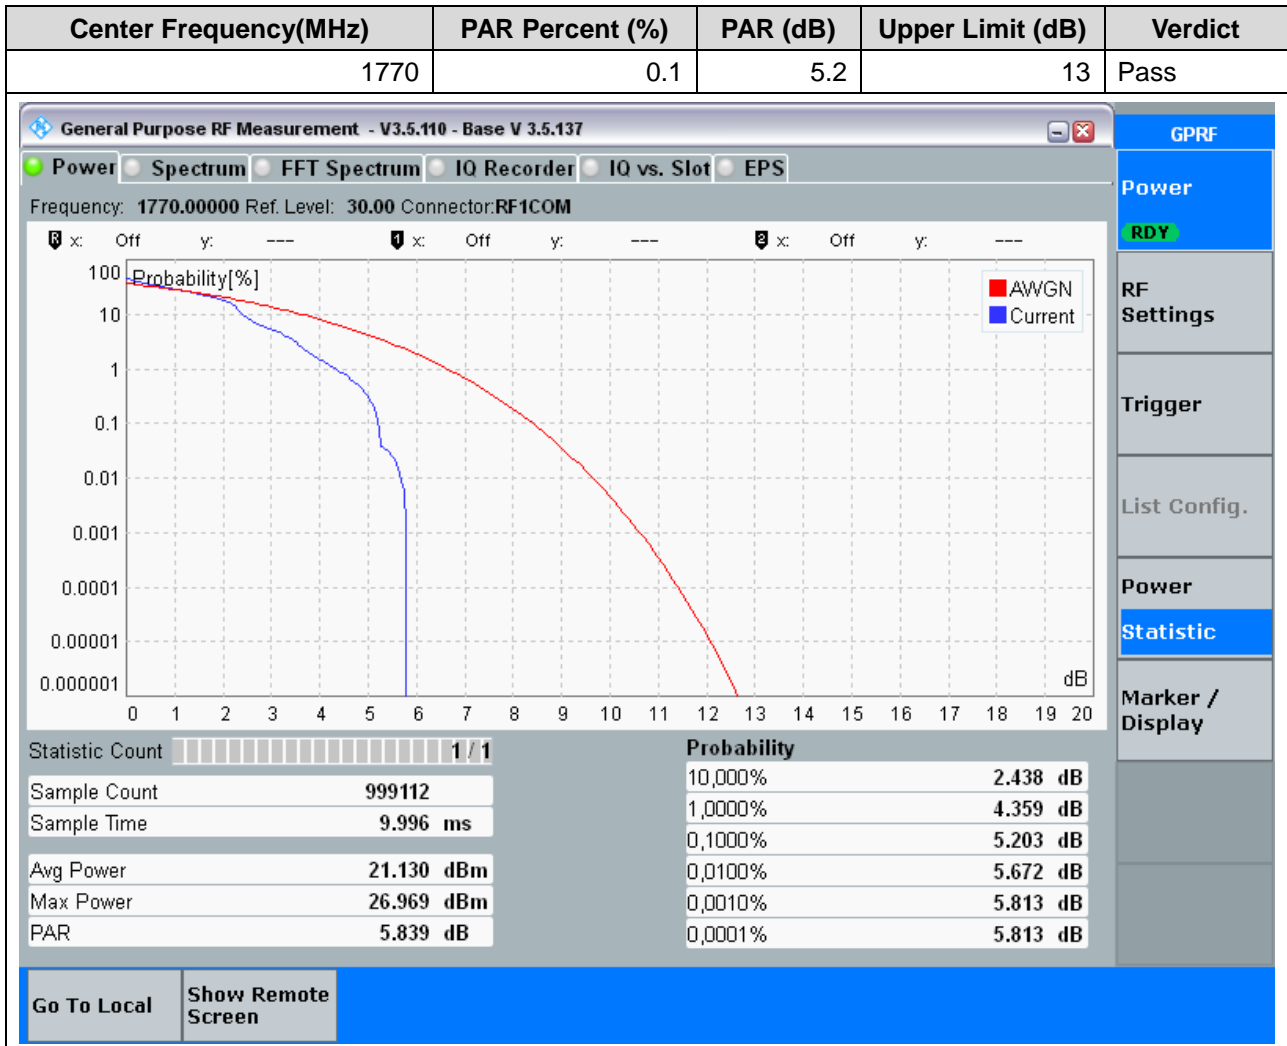

23.12. Peak to Average Ratio for SA(NTNV)(Channel:354000, Bandwidth:20, SCS:15, OFDM:DFT-s-OFDM, Modulation:QPSK, RB Number:100, RB Position:0)

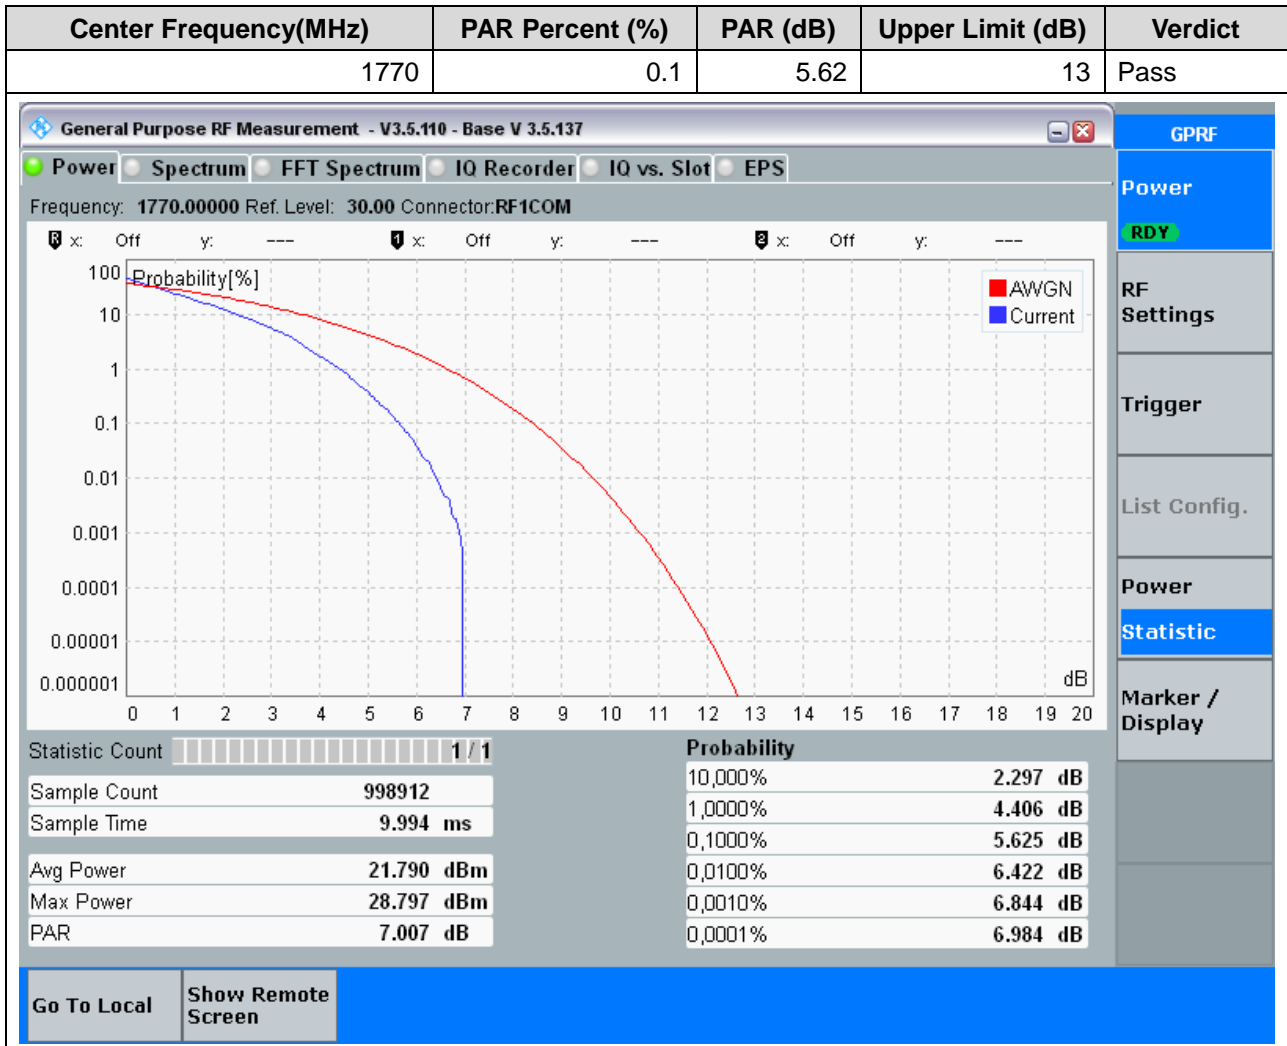

--BLANK BELOW--