

# FCC RF TEST REPORT

For

**Mobile Phone**

**Model Number: RMX3867**

**FCC ID: 2AUYFRMX3867**

**Report Number : WT238001932**

Test Laboratory : Shenzhen Academy of Metrology and Quality  
Inspection  
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan,  
Shenzhen, China  
Tel : 0086-755-86928965  
Fax : 0086-755-86009898-31396  
Web : [www.smq.com.cn](http://www.smq.com.cn)  
E-mail : [emcrf@smq.com.cn](mailto:emcrf@smq.com.cn)

## Revision History

No	Date	Remark
V1.0	2023.12.20	Initial issue

## Test report declaration

Applicant : Realme Chongqing Mobile Telecommunications Corp., Ltd.  
Address : No.178 Yulong Avenue, Yufengshan, Yubei District,  
Chongqing,China  
Manufacturer : Realme Chongqing Mobile Telecommunications Corp., Ltd.  
Address : No.178 Yulong Avenue, Yufengshan, Yubei District,  
Chongqing,China  
EUT Description : Mobile Phone  
Model No. : RMX3867  
Trade mark : realme  
FCC ID : 2AUYFRMX3867

Test Standards:

**FCC PART 2, 22H , 24E , 27 & 90S**

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.26 (2015) & KDB971168 and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 2, 22H, 24E, 27 & 90S.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project  
Engineer:

(Zeng Wei 曾伟)

Date: Dec.20, 2023

Checked by:

(Wan Xiaojing 万晓婧)

Date: Dec.20, 2023

Approved by:

(Lin Yixiang 林奕翔)

Date: Dec.20, 2023

## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION .....</b>	<b>3</b>
<b>1. TEST RESULTS SUMMARY .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer .....	6
<b>3. PRODUCT DESCRIPTION.....</b>	<b>7</b>
3.1. EUT Description.....	7
3.2. Identification of Accessory equipment .....	8
3.3. Related Submittal(s) / Grant (s) .....	8
3.4. Operating Condition of EUT .....	9
3.5. Frequency List .....	9
3.6. Max EIRP / ERP .....	16
3.7. Environmental Conditions .....	17
3.8. Special Accessories.....	17
3.9. Equipment Modifications .....	17
<b>4. TEST EQUIPMENT USED .....</b>	<b>18</b>
<b>5. MEASUREMENT UNCERTAINTY .....</b>	<b>19</b>
<b>6. TEST ITEMS .....</b>	<b>20</b>
6.1. Conducted Power & Effective Radiated Power .....	20
6.2. Peak to Average Ratio .....	22
6.3. Occupied Bandwidth & Emission Bandwidth .....	23
6.4. Conducted Band Edge .....	24
6.5. Conducted Spurious Emissions .....	28
6.6. Frequency Stability.....	32
6.7. Radiated Spurious Emissions .....	34

## 1. TEST RESULTS SUMMARY

No.	Test Description	FCC Part No.	Test Result	Test Verdict
1	Conducted Power & Effective Radiated Power	2.1046 22.913 24.232 27.50 90.635(b)	APPENDIX A	Pass
2	Peak to Average Ratio	2.1046 24.232 27.50	APPENDIX A	Pass
3	Occupied Bandwidth & Emission Bandwidth	2.1049 22.917 24.238 27.53 90.209	APPENDIX A	Pass
4	Conducted Band Edge	2.1051 22.917 24.238 27.53 90.691 90.543	APPENDIX A	Pass
5	Conducted Spurious Emissions	2.1051 22.917 24.238 27.53 90.691 90.543	APPENDIX A	Pass
6	Frequency Stability	2.1055 22.355 24.235 27.54 90.213	APPENDIX A	Pass
7	Radiated Spurious Emissions	2.1053 22.917 24.238 27.53 90.691 90.543	APPENDIX B	Pass

## **2. GENERAL INFORMATION**

### **2.1. Report information**

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The samples mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacture.

### **2.2. Laboratory Accreditation and Relationship to Customer**

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations: China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078, and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

### 3. PRODUCT DESCRIPTION

#### 3.1.EUT Description

##### Specification of the Equipment under Test

Hardware Revision:	11	
Software Revision:	realme UI V5.0	
Tx Frequency:	GSM850:	824 ~ 849 MHz
	PCS1900:	1850 ~ 1910 MHz
	WCDMA Band V:	824 ~ 849 MHz
	WCDMA Band IV:	1710 ~ 1755 MHz
	WCDMA Band II:	1850 ~ 1910 MHz
	LTE Band 2:	1850 ~ 1910 MHz
	LTE Band 4:	1710 ~ 1755 MHz
	LTE Band 5:	824 ~ 849 MHz
	LTE Band 7:	2500 ~ 2570 MHz
	LTE Band 12:	699 ~ 716 MHz
	LTE Band 13:	777 ~ 787 MHz
	LTE Band 17:	704 ~ 716 MHz
	LTE Band 26:	814 ~ 849 MHz
	LTE Band 38:	2570 ~ 2620 MHz
	LTE Band 41:	2496 ~ 2690 MHz
	CA_7C:	2500 ~ 2570 MHz
	CA_38C:	2570 ~ 2620 MHz
	CA_41C:	2496 ~ 2690 MHz
Rx Frequency:	GSM850:	869 ~ 894 MHz
	PCS1900:	1930 ~ 1990 MHz
	WCDMA Band V:	869 ~ 894 MHz
	WCDMA Band IV:	2110 ~ 2155 MHz
	WCDMA Band II:	1930 ~ 1990 MHz
	LTE Band 2:	1930 ~ 1990 MHz
	LTE Band 4:	2110 ~ 2155 MHz
	LTE Band 5:	869 ~ 894 MHz
	LTE Band 7:	2620 ~ 2690 MHz
	LTE Band 12:	729 ~ 746 MHz
	LTE Band 13:	746 ~ 756 MHz
	LTE Band 17:	734 ~ 746 MHz
	LTE Band 26:	859 ~ 894 MHz
	LTE Band 38:	2570 ~ 2620 MHz
	LTE Band 41:	2496 ~ 2690 MHz
	LTE Band 66:	2110 ~ 2180 MHz
	CA_7C:	2620 ~ 2690 MHz
	CA_38C:	2570 ~ 2620 MHz
CA_41C:	2496 ~ 2690 MHz	
Type(s) of Modulation:	GSM: GMSK, 8PSK WCDMA: QPSK	

	LTE: QPSK, 16QAM, 64QAM
Power Supply Voltage:	DC: 3.85V (Low) / 4.0V (Nominal) / 4.5V (Max)

NOTE: The extreme test conditions for temperature and antenna gain were declared by the manufacturer.

Antenna Gain (dBi)		Ant 0	Ant 1	Ant 4
GSM 850	824 - 849 MHz	<b>-5.6</b>	-6.3	
PCS 1900	1850 - 1910 MHz	<b>-0.3</b>	-4.3	
WCDMA band 2	1850 -1910 MHz	<b>-0.3</b>	-4.3	
WCDMA band 4	1710 -1755MHz	<b>-1.8</b>	-3.6	
WCDMA band 5	824 - 849MHz	<b>-5.6</b>	-6.3	
LTE band 2	1850 - 1910 MHz	<b>-0.3</b>	-4.3	
LTE band 4	1710 - 1755 MHz	<b>-1.8</b>	-3.6	
LTE band 5	824 - 849 MHz	<b>-5.6</b>	-6.3	
LTE band 7	2500 - 2570 MHz	<b>-0.6</b>	-1.3	-2.9
LTE band 12	699 - 716 MHz	<b>-4.8</b>	-5	
LTE band 13	777 - 787 MHz	<b>-4.8</b>	-5	
LTE band 17	704 - 716 MHz	<b>-4.8</b>	-5	
LTE band 26	814 - 849 MHz	<b>-5.6</b>	-6.3	
LTE band 38	2570 - 2620 MHz	<b>-0.6</b>	-1.3	-1.5
LTE band 41	2496 - 2690 MHz	<b>-0.6</b>	-1.3	-2.2
LTE band 66	1710 - 1780 MHz	<b>-1.8</b>	-3.6	
CA_7C	2620 - 2690 MHz	<b>-0.6</b>	-1.3	-2.9
CA_38C	2570 - 2620 MHz	<b>-0.6</b>	-1.3	-1.5
CA_41C	2496 - 2690 MHz	<b>-0.6</b>	-1.3	-2.2

NOTE:

1. The extreme test conditions for temperature and antenna gain were declared by the manufacturer.
2. The port of bottom antenna was chosen as representative port to perform the worst case of conducted test.
3. Both bottom and top antennas support transmission (1TX2RX). The EUT doesn't support UL-MIMO mode of GSM, WCDMA and LTE.

### 3.2. Identification of Accessory equipment

AE #	Type	Manufacturer	Model	Serial Number
--	--	--	--	--

### 3.3. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AUYFRMX3867 filing to comply with FCC PART 2, 22H, 24E, 27 and 90S.



### 3.4. Operating Condition of EUT

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission (Y plane).

Radiated spurious emissions were investigated below 30MHz, 30MHz-1GHz and above 1GHz. There were no emissions found on below 30MHz and 30MHz-1GHz.

- TM1:** GSM Mode with GMSK Modulation
- TM2:** EDGE Mode with 8PSK Modulation
- TM3:** WCDMA Mode with QPSK Modulation
- TM4:** LTE Mode with QPSK Modulation
- TM5:** LTE Mode with 16QAM Modulation
- TM6:** LTE Mode with 64QAM Modulation

### 3.5. Frequency List

Test Mode	UL Channel	UL Channel No.	UL Frequency (MHz)
GSM/GPRS/EGPRS 850	Low Channel	128	824.2
	Middle Channel	190	836.6
	High Channel	251	848.8
GSM/GPRS/EGPRS 1900	Low Channel	512	1850.2
	Middle Channel	661	1880.0
	High Channel	810	1909.8
WCDMA Band 2	Low Channel	9262	1852.4
	Middle Channel	9400	1880.0
	High Channel	9538	1907.6
WCDMA Band 4	Low Channel	1312	1712.4
	Middle Channel	1412	1732.4
	High Channel	1513	1752.6
WCDMA Band 5	Low Channel	4132	826.4
	Middle Channel	4182	836.4
	High Channel	4233	846.6

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
LTE Band 2	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5
		10	19150	1905
		15	19125	1902.5
20		19100	1900	
LTE Band 4	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5
20		20300	1745	
LTE Band 5	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Middle Range	1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
		10	20600	844

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
LTE Band 7	Low Range	5	20775	2502.5
		10	20800	2505
		15	20825	2507.5
		20	20850	2510
	Middle Range	5/10/15/20	21100	2535
	High Range	5	21425	2567.5
		10	21400	2565
		15	21375	2562.5
		20	21350	2560
	LTE Band 38	Low Range	5	37775
10			37800	2575
15			37825	2577.5
20			37850	2580
Middle Range		5/10/15/20	38000	2595
High Range		5	38225	2617.5
		10	38200	2615
		15	38175	2612.5
		20	38150	2610
LTE Band 41		Low Range	5	39675
	10		39700	2501
	15		39725	2503.5
	20		39750	2506
	Middle Range	5/10/15/20	40620	2593
	High Range	5	41565	2687.5
		10	41540	2685
		15	41515	2682.5
		20	41490	2680

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
LTE Band 12	Low Range	1.4	23017	699.7
		3	23025	700.5
		5	23035	701.5
		10	23060	704
	Middle Range	1.4/3/5/10	23095	707.5
	High Range	1.4	23173	715.3
		3	23165	714.5
		5	23155	713.5
10		23130	711	
LTE Band 13	Low Range	5	23205	779.5
	Middle Range	5/10	23230	782
	High Range	5	23255	784.5
LTE Band 17	Low Range	5	23755	706.5
		10	23780	709
	Middle Range	5/10	23790	710
	High Range	5	23825	713.5
		10	23800	711
LTE Band 26 (824 - 849 MHz)	Low Range	1.4	26797	824.7
		3	26805	825.5
		5	26815	826.5
		10	26840	829
		15	26865	831.5
	Middle Range	1.4/3/5/10/15	26915	836.5
	High Range	1.4	27033	848.3
		3	27025	847.5
		5	27015	846.5
		10	26990	844
15		26965	841.5	
LTE Band 26 (814 - 824 MHz)	Low Range	1.4	26697	814.7
		3	26705	815.5
		5	26715	816.5
	Middle Range	1.4/3/5/10	26740	819
	High Range	1.4	26783	823.3
		3	26775	822.5
5		26765	821.5	

Test Mode	UL Channel	Channel Bandwidth (MHz)	UL Channel No.	UL Frequency (MHz)
LTE Band 66	Low Range	1.4	131979	1710.7
		3	131987	1711.5
		5	131997	1712.5
		10	132022	1715
		15	132047	1717.5
		20	132072	1720
	Middle Range	1.4/3/5/10/15/20	132322	1745
	High Range	1.4	132665	1779.3
		3	132657	1778.5
		5	132647	1777.5
		10	132622	1775
		15	132597	1772.5
		20	132572	1770

Test frequencies for CA_7C											
Range	CC-Combo / NRB_agg [RB]	CC1					CC2				
		BW [RB]	N <sub>UL</sub>	f <sub>UL</sub> [MHz]	N <sub>DL</sub>	f <sub>DL</sub> [MHz]	BW [RB]	N <sub>UL</sub>	f <sub>UL</sub> [MHz]	N <sub>DL</sub>	f <sub>DL</sub> [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8	
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9	
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680	

Test frequencies for CA_38C							
Range	CC-Combo / NRB_agg [RB]	CC1			CC2		
		BW [RB]	N <sub>UL/DL</sub>	f <sub>UL/DL</sub> [MHz]	BW [RB]	N <sub>UL/DL</sub>	f <sub>UL/DL</sub> [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37901	2585.1	100	38099	2604.9
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610

Test frequencies for CA_41C (2496-2690MHz)							
Range	CC-Combo / NRB_agg [RB]	CC1			CC2		
		BW [RB]	N <sub>UL/DL</sub>	f <sub>UL/DL</sub> [MHz]	BW [RB]	N <sub>UL/DL</sub>	f <sub>UL/DL</sub> [MHz]
Low	25+100	25	39683	2499.3	100	39800	2511
		100	39750	2506	25	39867	2517.7
	50+75	50	39703	2501.3	75	39823	2513.3
		75	39725	2503.5	50	39845	2515.5
	50+100	50	39705	2501.5	100	39849	2515.9
		100	39750	2506	50	39894	2520.4
	75+75	75	39725	2503.5	75	39875	2518.5
	75+100	75	39728	2503.8	100	39899	2520.9
100		39750	2506	75	39921	2523.1	
100+100	100	39750	2506	100	39948	2525.8	
Mid	25+100	25	40528	2583.8	100	40645	2595.5
		100	40595	2590.5	25	40712	2602.2
	50+75	50	40549	2585.9	75	40669	2597.9
		75	40571	2588.1	50	40691	2600.1
	50+100	50	40526	2583.6	100	40670	2598.0
		100	40571	2588.1	50	40715	2602.5
	75+75	75	40545	2585.5	75	40695	2600.5
	75+100	75	40523	2583.3	100	40694	2600.4
100		40546	2585.6	75	40717	2602.7	
100+100	100	40521	2583.1	100	40719	2602.9	
High	25+100	25	41373	2668.3	100	41490	2680
		100	41440	2675	25	41557	2686.7
	50+75	50	41395	2670.5	75	41515	2682.5
		75	41417	2672.7	50	41537	2684.7
	50+100	50	41346	2665.6	100	41490	2680
		100	41391	2670.1	50	41535	2684.5
	75+75	75	41365	2667.5	75	41515	2682.5
	75+100	75	41319	2662.9	100	41490	2680
100		41341	2665.1	75	41512	2682.2	
100+100	100	41292	2660.2	100	41490	2680	

### 3.6. Max EIRP / ERP

Mode	Maximum EIRP/ERP (dBm)
GSM850	25.41
PCS1900	30.11
WCDMA Band V	16.65
WCDMA Band IV	22.62
WCDMA Band II	24.03
LTE Band 2	23.29
LTE Band 4	21.72
LTE Band 5	16.14
LTE Band 7	22.37
LTE Band 12	17.07
LTE Band 13	16.77
LTE Band 17	17.03
LTE Band 26 (814 - 824 MHz)	16.02
LTE Band 26 (824 - 849 MHz)	15.61
LTE band 38	23.13
LTE band 41	23.67
LTE band 66	21.97
CA_7C	22.47
CA_38C	22.9
CA_41C	23.36

Note: FCC rule Part 22.905 of LTE Band 26 (824-849MHz) is covered by LTE band 5 of same rule, since they have the same output power and supported bandwidths. In this report, only test FCC rule Part 90S of LTE Band 26 (814-824MHz) and Part 22.905 of LTE Band 26 (824-849MHz) bandwidth 15MHz.



### **3.7.Environmental Conditions**

Date of test: 2023.11.8 – 2023.12.14

Date of EUT Receive: 2023.11.7

Temperature: (22-26) °C

Relative Humidity: (44-51)%

Air Pressure: (100.7-101.9) kPa

### **3.8.Special Accessories**

Not available for this EUT intended for grant.

### **3.9.Equipment Modifications**

Not available for this EUT intended for grant.

#### 4. TEST EQUIPMENT USED

##### Conducted test equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB18827	Wideband Radio communication Tester	Rohde & Schwarz	CMW500	2023.04.24	1 Year
SB9721/02	Signal Analyzer	Agilent	N9020A	2023.04.24	1 Year
SB20321/01	Signal Analyzer	Rohde & Schwarz	FSV3044	2023.04.24	1 Year
SB9721/07	DC Power Supply	Agilent	66319D	--	--
SB11818	Temperature & Humidity Test chamber	Espec	EH-010U	2022.12.16	1 Year
--	Test Software	Tonscend	JS1120	--	--

##### Radiated spurious test equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	2023.01.19	1 Year
SB9054/08	Bilog Antenna	Schwarzbeck	VULB9163	2023.05.30	1 Year
SB3435	Horn Antenna	Rohde & Schwarz	HF906	2022.11.28	1 Year
SB8501/11	Horn Antenna	ETS-Lindgren	3160-09	2023.02.22	3 Year
SB8501/12	Horn Antenna	ETS-Lindgren	3160-10	2023.02.22	3 Year
SB8501/14	Preamplifier	Rohde & Schwarz	SCU-03	2023.01.31	1 Year
SB8501/17	Preamplifier	Rohde & Schwarz	SCU-18	2023.01.31	1 Year
SB8501/16	Preamplifier	Rohde & Schwarz	SCU-26	2023.01.31	1 Year
SB9059	Preamplifier	Rohde & Schwarz	SCU-40	2023.08.09	1 Year
SB12724/06	Wideband Radio communication Tester	Rohde & Schwarz	CMW500	2023.04.24	1 Year
--	Radiated Test Software	Rohde & Schwarz	EMC 32	--	--
SB9555/02	Fully Anechoic Chamber	Albatross	10.0*5.2*5.4(m)	2022.08.16	1 Year
SB15044/01	Test Receiver	Rohde & Schwarz	ESW8	2023.09.12	1 Year
SB12944	Broadband Antenna	Rohde & Schwarz	VULB9163	2023.09.12	1 Year
SB18844	Semi Anechoic Chamber	Albatross	9×6×6(m)	2023.03.20	1 Year

## 5. MEASUREMENT UNCERTAINTY

For a 95% confidence level ( $k = 2$ ), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

26dB & Occupied Bandwidth:  $\pm 0.39\%$

Frequency Stability:  $\pm 0.42\%$

Peak to Average Ratio:  $\pm 0.45$  dB

Conducted power:  $\pm 0.3$  dB

Conducted Spurious Emissions:  $\pm 2.0$  dB

Conducted Band Edge:  $\pm 2.0$  dB

Temperature:  $\pm 0.698$  °C

Supply voltages:  $\pm 0.15\%$

Radiated Emission:

30MHz~1000MHz 4.5dB

1GHz~6GHz 4.6dB

6GHz~18GHz 5.1dB

18GHz~26.5GHz 5.1dB

## 6. TEST ITEMS

### 6.1. Conducted Power & Effective Radiated Power

#### 6.1.1. Test Standard

FCC: CFR Part 2.1046, CFR Part 22.913, CFR Part 24.232 CFR Part 27.50, CFR Part 90.635

#### 6.1.2. Test Limit

22.913 (a) Effective radiated power limits.

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

24.232 (c) mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

27.50(a) (3), for mobile and portable stations transmitting in the 2305-2315MHz band or the 2350-2360MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards.

27.50(b) (10), portable stations (hand-held devices) transmitting in the 746-757MHz, 776-788MHz, and 805-806MHz bands are limited to 3 watts ERP.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 600MHz uplink band and the 698-746MHz band, and fixed and mobile stations in the 600MHz uplink band are limited to 3 watts ERP.

27.50(d) (4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications. (7) Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP.

27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

90.635(b), the maximum output power of the transmitter for mobile stations is 100 watts (20dBW).

### 6.1.3. Test Procedure

KDB 971168 Section 5.6

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.15 \text{ (dB)}$$

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted and ERP/EIRP output powers.

### 6.1.4. Test Data

Please refer to Appendix A

## 6.2. Peak to Average Ratio

### 6.2.1. Test Standard

FCC: CFR 47 (FCC) Part 22.913, 24.232(d) & 27.50(d)

### 6.2.2. Test Limit

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 6.2.3. Test Procedure

According to KDB 971168 D01, there is CCDF procedure for PAPR:  
Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;

Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;

Set the number of counts to a value that stabilizes the measured CCDF curve;

Set the measurement interval as follows:

for continuous transmissions, set to 1 ms,

for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

Record the maximum PAPR level associated with a probability of 0.1%.

Alternate procedure for PAPR:

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPK. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$PAPR (dB) = PPK (dBm) - PAvg (dBm).$

### 6.2.4. Test Data

Please refer to Appendix A

## **6.3. Occupied Bandwidth & Emission Bandwidth**

### **6.3.1. Test Standard**

FCC: CFR Part 2.1049, Part 22.913, Part 24.238, Part 27.53

### **6.3.2. Test Limit**

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.

Transmitters employing digital modulation techniques-when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated.

### **6.3.3. Test Procedure**

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Universal Radio Communication Tester (CMU/CMW) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure the 99% occupied bandwidth. Record the value.
4. Set the spectrum analyzer to measure the -26 dB emission bandwidth. Record the value.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

Spectrum analyzer settings: Measurement bandwidth of at least 1% of the occupied bandwidth.

### **6.3.4. Test Data**

Please refer to Appendix A

## 6.4. Conducted Band Edge

### 6.4.1. Test Standard

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(g) & 27.53(h) & 27.53(m) & 90.691 & 90.543

### 6.4.2. Test Limit

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

By a factor of not less than:  $43 + 10 \log(P)$  dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log(P)$  dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than  $61 + 10 \log(P)$  dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than  $67 + 10 \log(P)$  dB on all frequencies between 2328 and 2337MHz.

By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2300 and 2305MHz,  $55 + 10 \log(P)$  dB on all frequencies between 2296 and 2300MHz,  $61 + 10 \log(P)$  dB on all frequencies between 2292 and 2296MHz,  $67 + 10 \log(P)$  dB on all frequencies between 2288 and 2292MHz, and  $70 + 10 \log(P)$  dB below 2288MHz.

By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2360 and 2365MHz, and not less than  $70 + 10 \log(P)$  dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;



On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

#### FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10*\log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

#### FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

#### FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40+10\log P$  dB (–10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.

$43+10\log P$  dB (–13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

$55+10\log P$  dB (–25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

#### FCC § 90.691

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}_{10}(f/6.1)$  decibels or  $50 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

#### FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

### 6.4.3. Test Procedure

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Wideband Radio Communication Tester to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360 . Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360 at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS).  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$ .
7. Determine the level of spurious emissions using the following equation:  
 $\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
 $\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.  
(Note: Steps 5 and 6 above are performed prior to testing and LOSS is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)  
Spectrum analyzer settings: RBW=1MHz, VBW=3\*RBW

### 6.4.4. Test Data

Please refer to Appendix A

## 6.5. Conducted Spurious Emissions

### 6.5.1. Test Standard

FCC § 2.1051 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(m) & 90.691 & 90.543.

### 6.5.2. Test Limit

In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC § 22.917(a) & 24.238(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. This is calculated to be -13 dBm.

FCC § 27.53(a) (4)

For mobile and portable stations operating in the 2305-2315MHz and 2350-2360MHz bands:

By a factor of not less than:  $43 + 10 \log(P)$  dB on all frequencies between 2305 and 2320MHz and on all frequencies between 2345 and 2360MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log(P)$  dB on all frequencies between 2320 and 2324MHz and on all frequencies between 2341 and 2345MHz, not less than  $61 + 10 \log(P)$  dB on all frequencies between 2324 and 2328MHz and on all frequencies between 2337 and 2341MHz, and not less than  $67 + 10 \log(P)$  dB on all frequencies between 2328 and 2337MHz.

By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2300 and 2305MHz,  $55 + 10 \log(P)$  dB on all frequencies between 2296 and 2300MHz,  $61 + 10 \log(P)$  dB on all frequencies between 2292 and 2296MHz,  $67 + 10 \log(P)$  dB on all frequencies between 2288 and 2292MHz, and  $70 + 10 \log(P)$  dB below 2288MHz.

By a factor of not less than  $43 + 10 \log(P)$  dB on all frequencies between 2360 and 2365MHz, and not less than  $70 + 10 \log(P)$  dB above 2365MHz.

FCC § 27.53(c)

For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

On any frequency outside the 746–758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

#### FCC § 27.53(g)

For operations in the 600MHz band and the 698-746MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43+10*\log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

#### FCC § 27.53(h) (1)

Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the

power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

#### FCC § 27.53(m) (4)

For mobile digital stations (BRS and EBS stations), the attenuation factor shall be not less than:

$40+10\log P$  dB (–10 dBm, 100 nW) on all frequencies between the channel edge and 5 MHz from the channel edge.

$43+10\log P$  dB (–13 dBm, 50 nW) on all frequencies between 5 MHz and X MHz from the channel edge,

$55+10\log P$  dB (–25 dBm, 3 nW) on all frequencies more than X MHz from the channel edge, where X is the greater of 6 MHz or the actual emission bandwidth (26 dB).

In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

#### FCC § 90.691

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}_{10}(f/6.1)$  decibels or  $50 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

#### FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.

Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

### 6.5.3. Test Procedure

1. Connect the equipment as shown in the above diagram.
  2. Set the spectrum analyzer to measure peak hold with the required settings.
  3. Set the signal generator to a known output power and record the path loss in dB (LOSS) for frequencies up to the tenth harmonic of the EUT's carrier frequency.  
 $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$ .
  4. Replace the signal generator with the EUT.
  5. Adjust the settings of the Universal Radio Communication Tester to set the EUT to its maximum power at the required channel.
  6. Set the spectrum analyzer to measure peak hold with the required settings. Offset the spectrum analyzer reference level by the path loss measured above.
  7. Measure and record all spurious emissions up to the tenth harmonic of the carrier frequency.
  8. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.
  9. If necessary steps 6 and 7 may be performed with the spectrum analyzer set to average detector.
- (Note: Step 3 above is performed prior to testing and LOSS is recorded by test software. Steps 2, 6, and 7 above are performed with test software.)

### 6.5.4. Test Data

Please refer to Appendix A

## 6.6. Frequency Stability

### 6.6.1. Test Standard

FCC § 2.1055 & 22.355 & 24.235 & 27.54 & 90.213.

### 6.6.2. Test Limit

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

FCC: §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. Test Setup

#### Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +50°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.


(3) Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### Frequency Stability (Voltage Variation)

The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

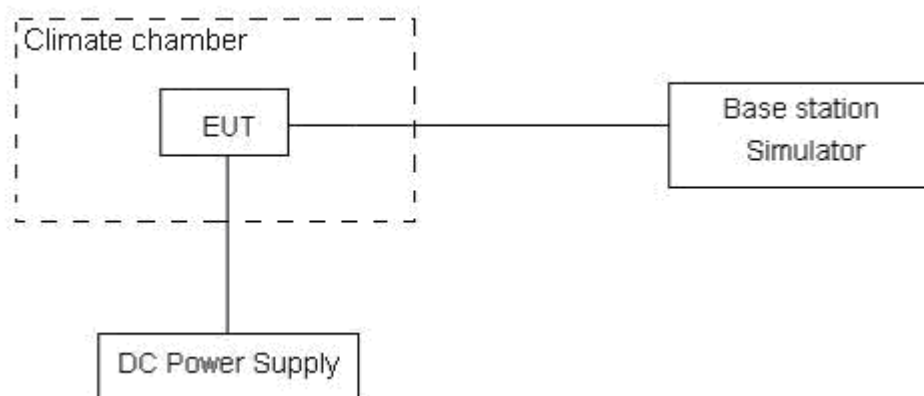



### 6.6.3. Test Data

Please refer to Appendix A

## 6.7. Radiated Spurious Emissions

### 6.7.1. Test Standard

FCC § 2.1053 & 22.917(a) & 24.238(a) & 27.53(a) & 27.53(c) & 27.53(f) & 27.53(g) & 27.53(h) & 27.53(m) & 90.691 & 90.543.

### 6.7.2. Test Limit

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in FCC 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

#### §22.917:

The rules in this section govern the spectral characteristics of emissions in the Cellular Radio telephone Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### §24.238:

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) Measurement procedure. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions

are attenuated at least 26 dB below the transmitter power.

§27.53:

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log(P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log(P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than  $43 + 10 \log(P)$  dB at the channel edge and  $55 + 10 \log(P)$  dB at 5.5 megahertz from the channel edges. (Channel edges are defined under §27.5 (i) Frequency assignment for the BRS/EBS band)

(m)(6) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### FCC § 90.691

Out-of-band emission requirement shall apply only to the “outer” channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \text{ Log}_{10}(f/6.1)$  decibels or  $50 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \text{ Log}_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

#### FCC § 90.543

(e) For operations in the 758–768 MHz and the 788–798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.

On all frequencies between 769–775 MHz and 799–805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.

On any frequency between 775–788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.


Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

### 6.7.3. Test Procedure


1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Wideband Radio Communication Tester (CMW500) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360 . Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360 at each height to maximize all emissions. Measure and record all spurious emissions (LVL) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (LOSS).  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$ .
7. Determine the level of spurious emissions using the following equation:  
 $\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
 $\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.  
(Note: Steps 5 and 6 above are performed prior to testing and LOSS is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)  
Spectrum analyzer settings: RBW=VBW=1MHz

### 6.7.4. Test Setup

For Radiated test from 30MHz to 1GHz

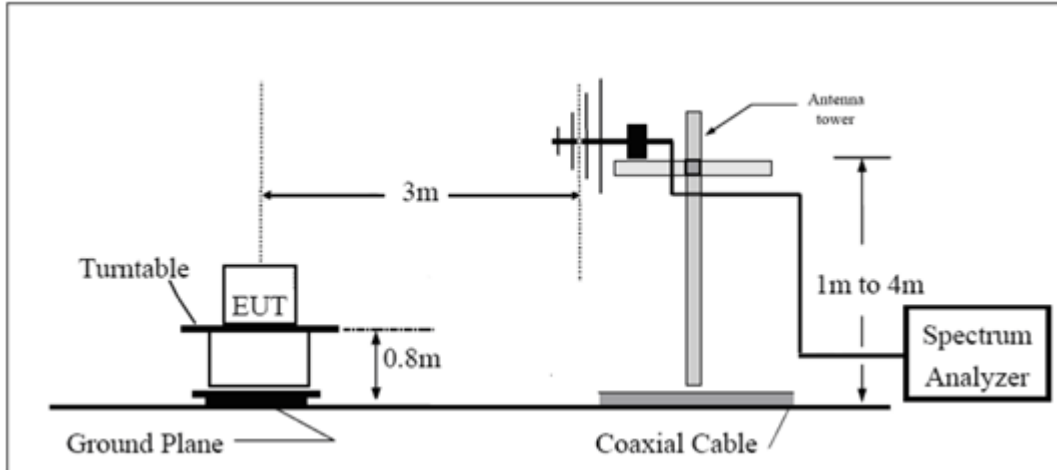

For Radiated test above 1GHz

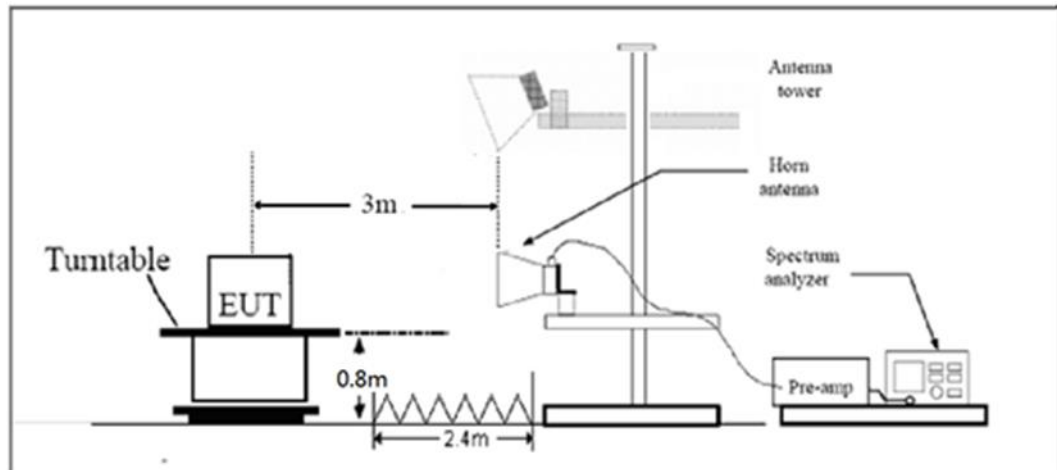

### 6.7.5. Test Data

Please refer to Appendix B

---

# **APPENDIX A-1. TEST RESULTS OF CONDUCTED TEST – GSM / WCDMA**

---

## CONDUCTED POWER & EFFECTIVE RADIATED POWER

### Test Result

#### GSM:

Band	Channel	Frequency (MHz)	Conducted Power(dBm)	ERP/EIRP (dBm)	Limit(dBm)	Verdict
GSM850	128	824.2	33.03	25.28	38.5	PASS
GSM850	190	836.6	33.12	25.37	38.5	PASS
GSM850	251	848.8	33.16	25.41	38.5	PASS
GSM1900	512	1850.2	30.41	30.11	33	PASS
GSM1900	661	1880	30.25	29.95	33	PASS
GSM1900	810	1909.8	30.12	29.82	33	PASS
GPRS850	128	824.2	30.08	22.33	38.5	PASS
GPRS850	190	836.6	30.26	22.51	38.5	PASS
GPRS850	251	848.8	30.34	22.59	38.5	PASS
GPRS1900	512	1850.2	30.44	30.14	33	PASS
GPRS1900	661	1880	30.27	29.97	33	PASS
GPRS1900	810	1909.8	30.15	29.85	33	PASS
EGPRS850	128	824.2	27.1	19.35	38.5	PASS
EGPRS850	190	836.6	27.11	19.36	38.5	PASS
EGPRS850	251	848.8	27.11	19.36	38.5	PASS
EGPRS1900	512	1850.2	26.8	26.5	33	PASS
EGPRS1900	661	1880	26.77	26.47	33	PASS
EGPRS1900	810	1909.8	26.45	26.15	33	PASS



Band: GSM850	Measured (dBm)		
Test Condition	TNVN		
Channel	128	190	251
Frequency (MHz)	824.2	836.6	848.8
GSM (GMSK, 1 Tx slot)	33.03	33.12	33.16
GPRS (GMSK, 1 Tx slot)	32.98	33.08	33.15
GPRS (GMSK, 2 Tx slots)	30.08	30.26	30.34
GPRS (GMSK, 3 Tx slots)	28.06	28.24	28.33
GPRS (GMSK, 4 Tx slots)	26.95	27.11	27.25
EDGE (8PSK, 1 Tx slot)	27.10	27.11	27.11
EDGE (8PSK, 2 Tx slots)	24.24	24.23	24.24
EDGE (8PSK, 3 Tx slots)	22.50	22.50	22.49
EDGE (8PSK, 4 Tx slots)	20.97	21.03	21.02

Band: PCS1900	Measured (dBm)		
Test Condition	TNVN		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM (GMSK, 1 Tx slot)	30.41	30.25	30.12
GPRS (GMSK, 1 Tx slot)	30.44	30.27	30.15
GPRS (GMSK, 2 Tx slots)	27.38	27.27	27.23
GPRS (GMSK, 3 Tx slots)	25.32	25.28	25.21
GPRS (GMSK, 4 Tx slots)	24.28	24.22	24.18
EDGE (8PSK, 1 Tx slot)	26.80	26.77	26.45
EDGE (8PSK, 2 Tx slots)	23.42	23.37	23.11
EDGE (8PSK, 3 Tx slots)	21.31	21.23	20.96
EDGE (8PSK, 4 Tx slots)	20.61	20.65	20.35

**WCDMA:**

Band	Channel	Frequency (MHz)	Conducted Power(dBm)	ERP/EIRP (dBm)	Limit(dBm)	Verdict
Band II	9262	1852.4	24.31	24.01	33	PASS
Band II	9400	1880.0	24.33	24.03	33	PASS
Band II	9538	1907.6	24.33	24.03	33	PASS
Band IV	1312	1712.4	24.34	22.54	30	PASS
Band IV	1413	1732.6	24.37	22.57	30	PASS
Band IV	1513	1752.6	24.42	22.62	30	PASS
Band V	4132	826.4	24.36	16.61	38.5	PASS
Band V	4182	836.4	24.38	16.63	38.5	PASS
Band V	4233	846.6	24.4	16.65	38.5	PASS

Band: WCDMA Band II	Average Power [dBm]		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	24.31	24.33	24.33
HSDPA Subtest-1	23.35	23.33	23.32
HSDPA Subtest-2	22.51	22.50	22.55
HSDPA Subtest-3	22.42	22.46	22.54
HSDPA Subtest-4	22.34	22.34	22.42
HSUPA Subtest-1	21.72	21.20	21.18
HSUPA Subtest-2	20.75	21.21	21.20
HSUPA Subtest-3	22.26	22.26	22.27
HSUPA Subtest-4	20.78	20.75	20.73
HSUPA Subtest-5	22.27	22.23	22.26

Band: WCDMA Band IV	Average Power [dBm]		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	24.34	24.37	24.42
HSDPA Subtest-1	23.39	23.34	23.40
HSDPA Subtest-2	22.98	22.79	22.88
HSDPA Subtest-3	22.85	22.91	22.95
HSDPA Subtest-4	22.92	22.94	22.97
HSUPA Subtest-1	21.21	21.27	21.31
HSUPA Subtest-2	21.34	21.42	21.43
HSUPA Subtest-3	22.28	22.31	22.37
HSUPA Subtest-4	20.85	20.84	20.95

HSUPA Subtest-5	22.28	22.33	22.38
-----------------	-------	-------	-------

Band: WCDMA Band V	Average Power [dBm]		
Channel	4,132	4,182	4,233
Frequency (MHz)	826.4	836.4	846.6
RMC 12.2K	24.36	24.38	24.40
HSDPA Subtest-1	23.40	23.34	23.35
HSDPA Subtest-2	22.70	22.66	22.67
HSDPA Subtest-3	22.87	22.83	22.84
HSDPA Subtest-4	22.72	22.75	22.71
HSUPA Subtest-1	21.06	21.03	21.08
HSUPA Subtest-2	21.11	21.13	21.12
HSUPA Subtest-3	22.07	22.04	22.12
HSUPA Subtest-4	20.63	20.62	20.66
HSUPA Subtest-5	22.12	22.12	22.15

---

## Peak-to-Average Ratio

### Test Result


#### GSM:

Band	Channel	Result(dB)	Limit(dB)	Verdict
GSM850	128	2.68	13	PASS
GSM850	190	2.68	13	PASS
GSM850	251	2.68	13	PASS
GPRS850	128	2.68	13	PASS
GPRS850	190	2.68	13	PASS
GPRS850	251	2.68	13	PASS
EGPRS850	128	5.36	13	PASS
EGPRS850	190	5.39	13	PASS
EGPRS850	251	5.52	13	PASS
GSM1900	512	2.62	13	PASS
GSM1900	661	2.62	13	PASS
GSM1900	810	2.62	13	PASS
GPRS1900	512	2.62	13	PASS
GPRS1900	661	2.62	13	PASS
GPRS1900	810	2.62	13	PASS
EGPRS1900	512	5.42	13	PASS
EGPRS1900	661	5.45	13	PASS
EGPRS1900	810	5.43	13	PASS


#### WCDMA:

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
Band2	9262	2.72	13	PASS
Band2	9400	2.92	13	PASS
Band2	9538	2.76	13	PASS
Band4	1312	3.08	13	PASS
Band4	1413	2.98	13	PASS
Band4	1513	3.04	13	PASS
Band5	4132	2.95	13	PASS
Band5	4182	2.99	13	PASS
Band5	4233	2.99	13	PASS

## Test Graphs

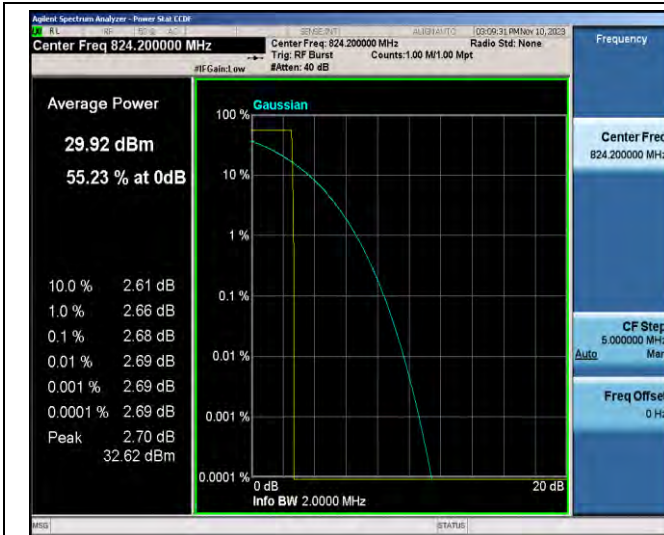


GSM850-128-3

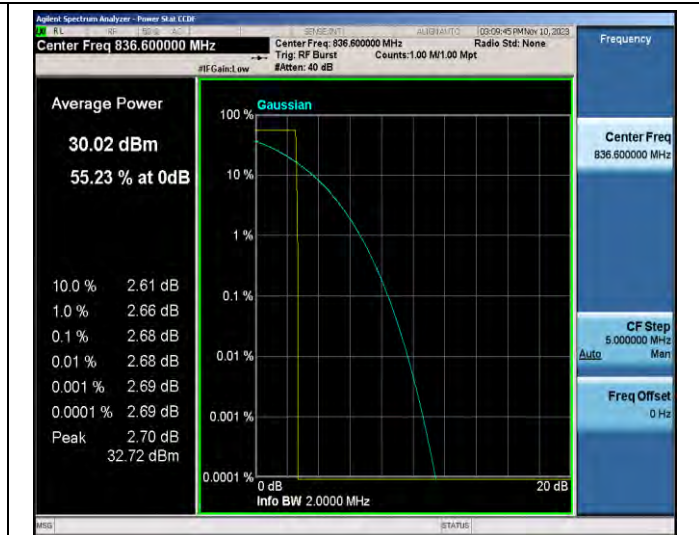


GSM850-190-3




GSM850-251-3

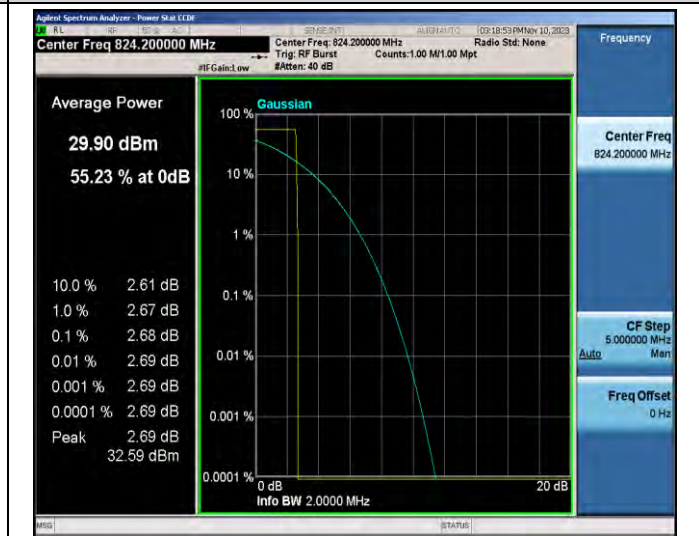


GPRS850-128-3

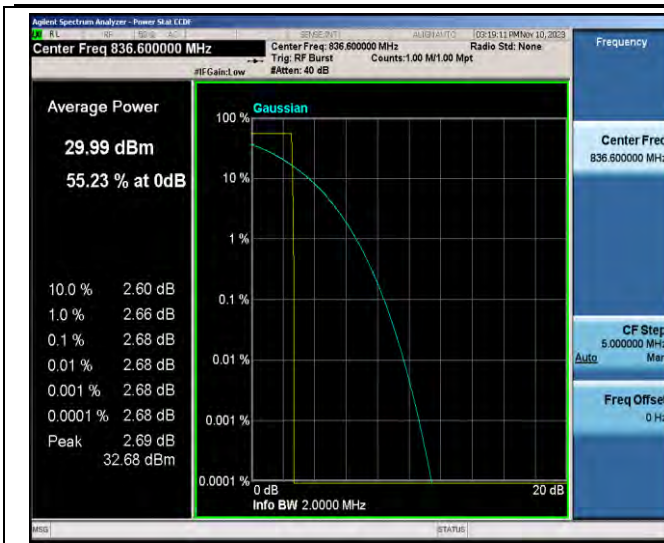


GPRS850-190-3

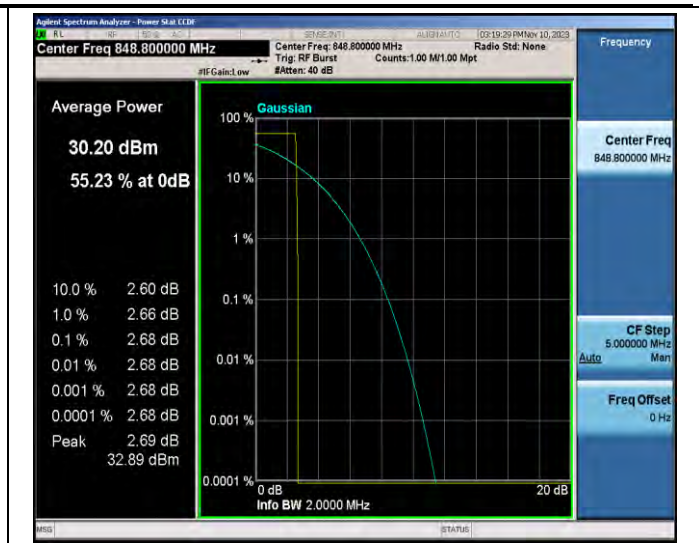


GPRS850-251-3

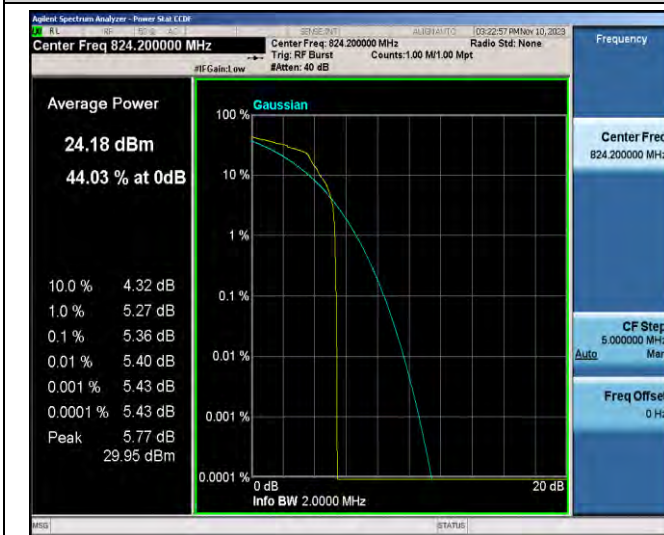

EGPRS850-128-8

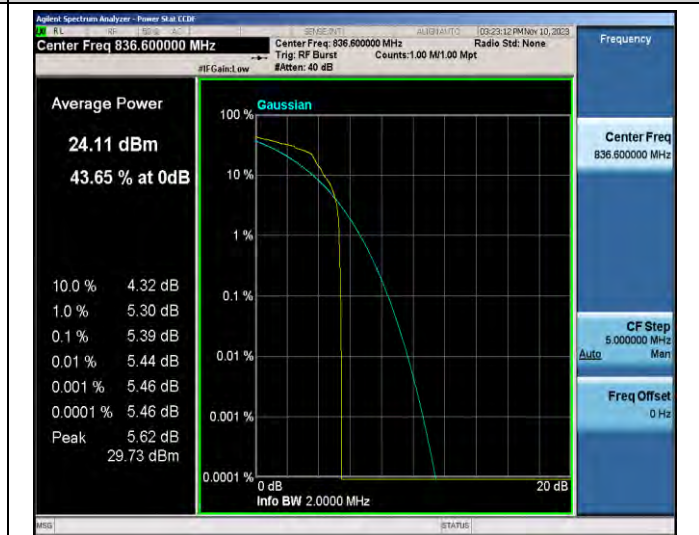

EGPRS850-190-8

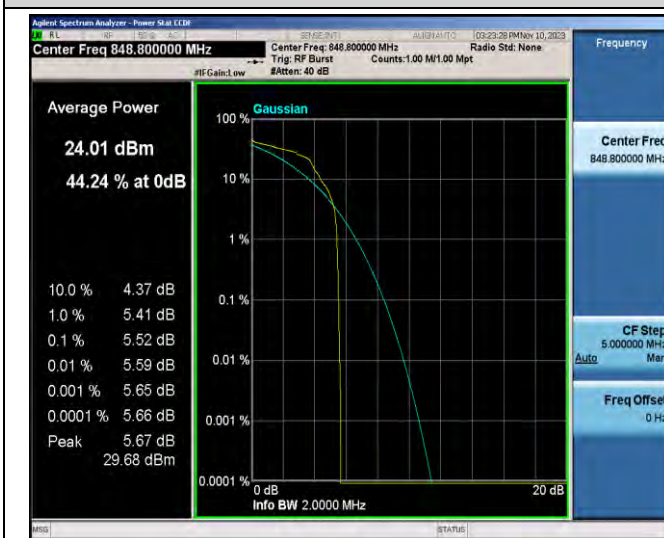


EGPRS850-251-8



GSM1900-512-0




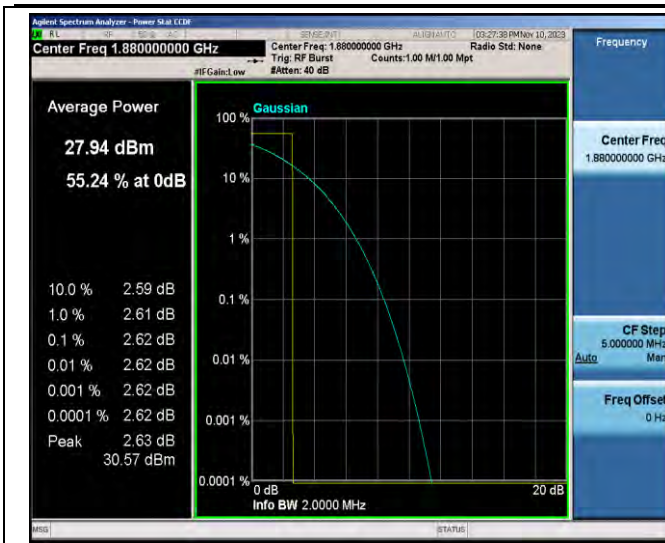


GSM1900-661-0




GSM1900-810-0

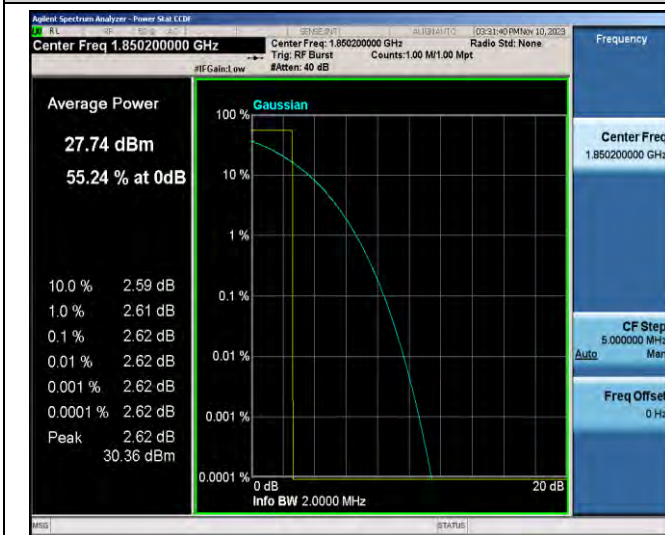

GPRS1900-512-0

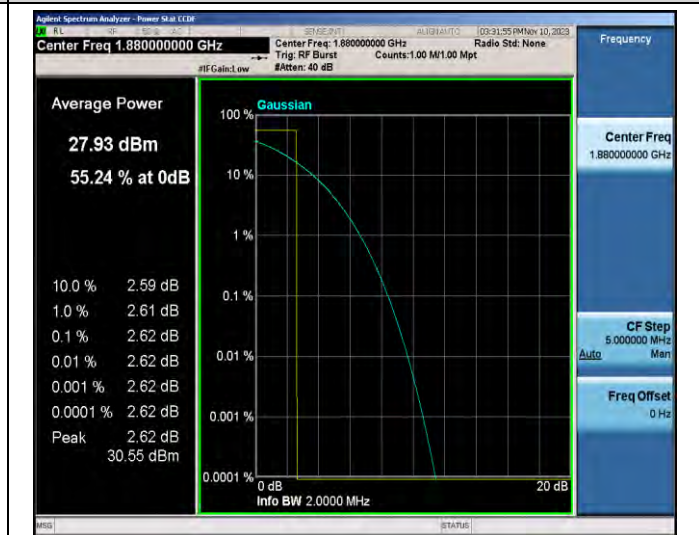


GPRS1900-661-0

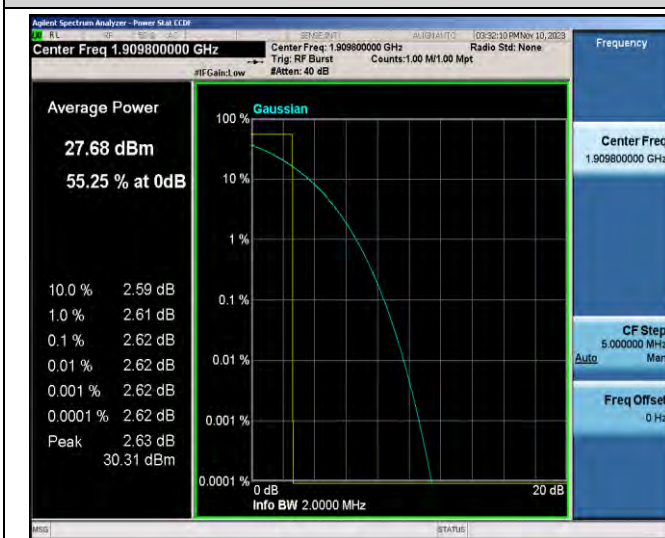

GPRS1900-810-0



EGPRS1900-512-2

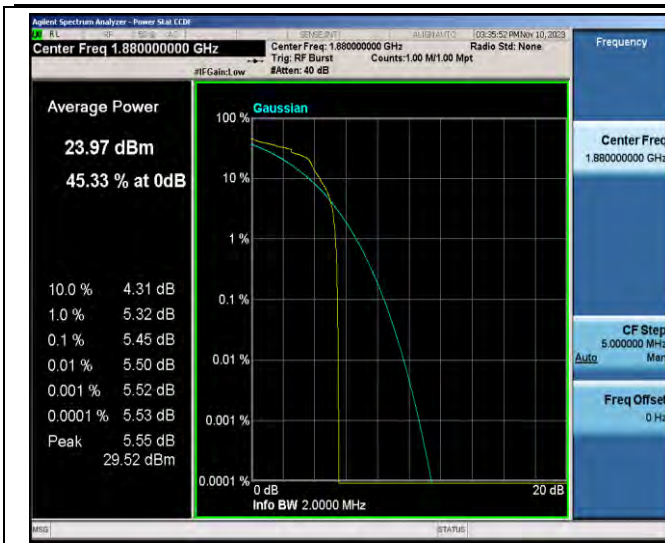


EGPRS1900-661-2




EGPRS1900-810-2




Band2-9262

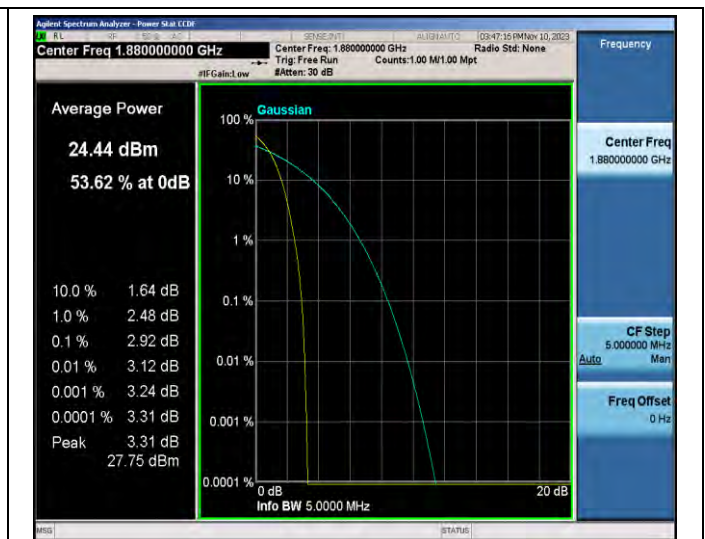

Band2-9400

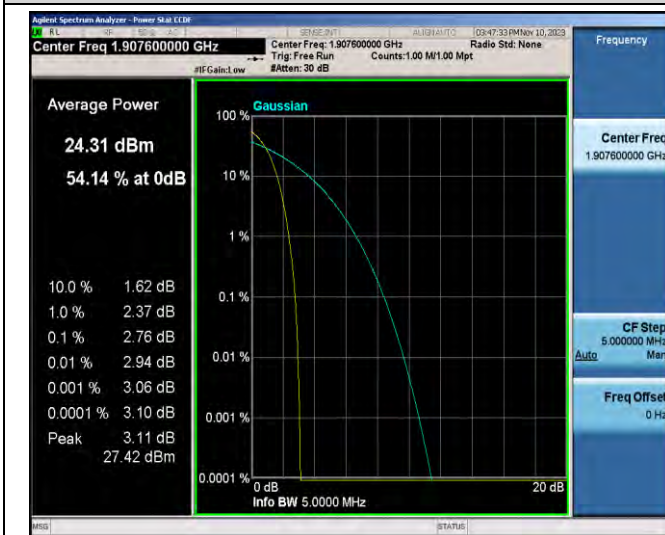

Band2-9538

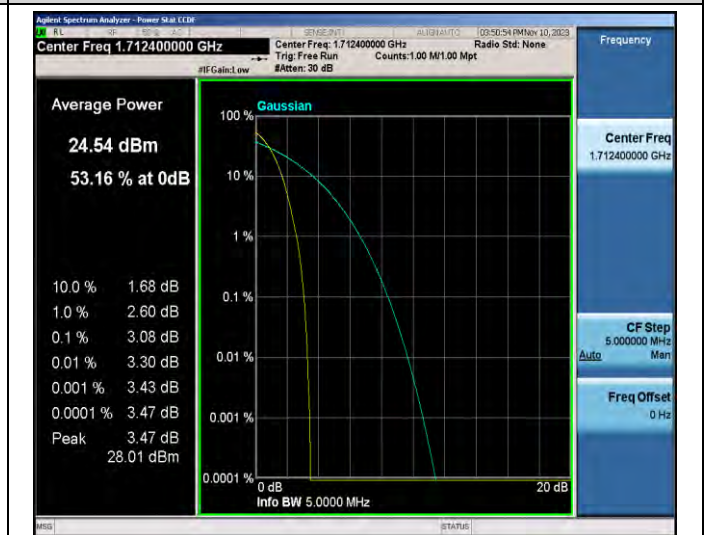


Band4-1312






Band4-1413

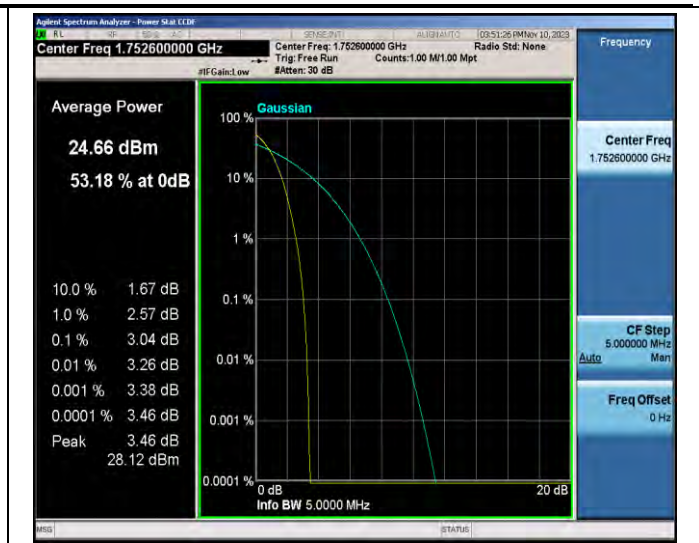

Band4-1513

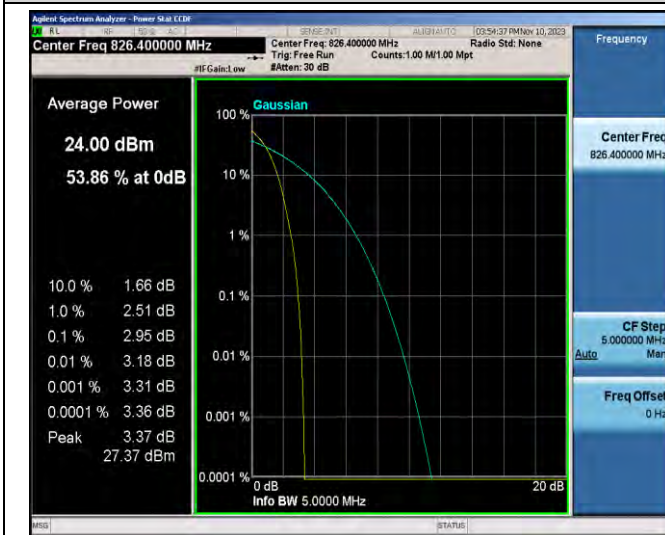

Band5-4132



Band5-4182



Band5-4233

---

## OCCUPIED BANDWIDTH

### Test Result


#### GSM:

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
GSM850	128	0.24457	0.3113	PASS
GSM850	190	0.24585	0.3109	PASS
GSM850	251	0.24621	0.3102	PASS
GPRS850	128	0.24356	0.3095	PASS
GPRS850	190	0.24415	0.3121	PASS
GPRS850	251	0.24396	0.3162	PASS
EGPRS850	128	0.24803	0.3158	PASS
EGPRS850	190	0.25145	0.3175	PASS
EGPRS850	251	0.24970	0.3099	PASS
GSM1900	512	0.24237	0.3083	PASS
GSM1900	661	0.24521	0.3079	PASS
GSM1900	810	0.24363	0.3093	PASS
GPRS1900	512	0.24292	0.3150	PASS
GPRS1900	661	0.24500	0.3178	PASS
GPRS1900	810	0.24379	0.3159	PASS
EGPRS1900	512	0.24963	0.3152	PASS
EGPRS1900	661	0.25318	0.3192	PASS
EGPRS1900	810	0.24861	0.3104	PASS

#### WCDMA:

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band2	9262	4.1728	4.734	PASS
Band2	9400	4.1650	4.720	PASS
Band2	9538	4.1755	4.718	PASS
Band4	1312	4.1665	4.711	PASS
Band4	1413	4.1654	4.714	PASS
Band4	1513	4.1650	4.714	PASS
Band5	4132	4.1620	4.719	PASS
Band5	4182	4.1613	4.702	PASS
Band5	4233	4.1528	4.705	PASS


## Test Graphs

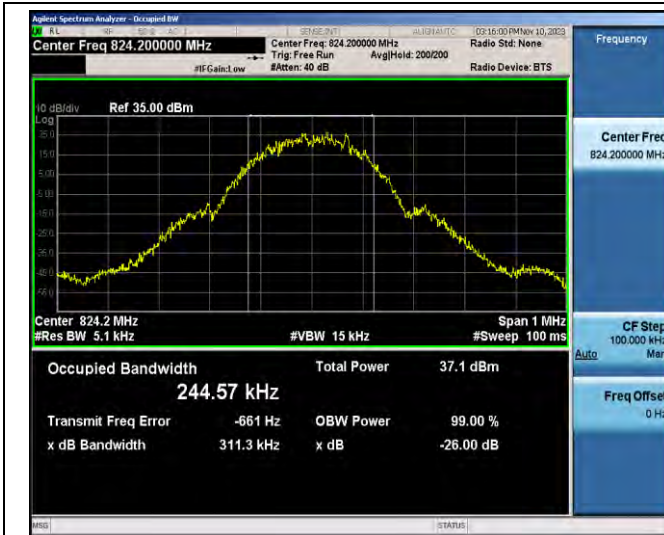

GSM850-128-3-0.3113



GSM850-190-3-0.3109

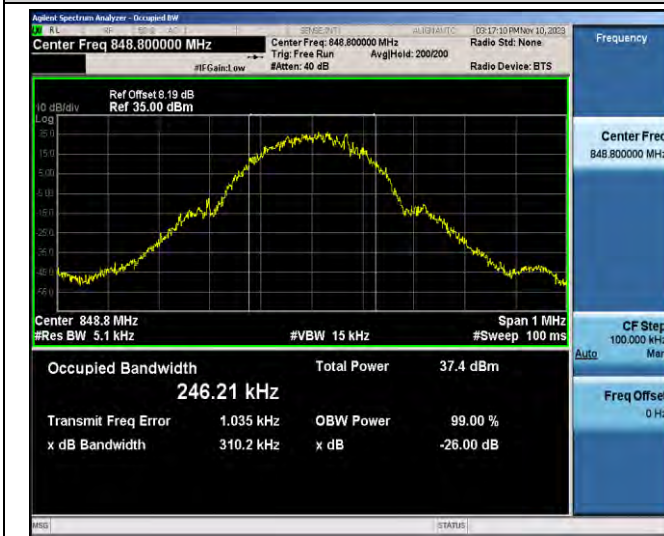


GSM850-251-3-0.3102



GPRS850-128-3-0.3095




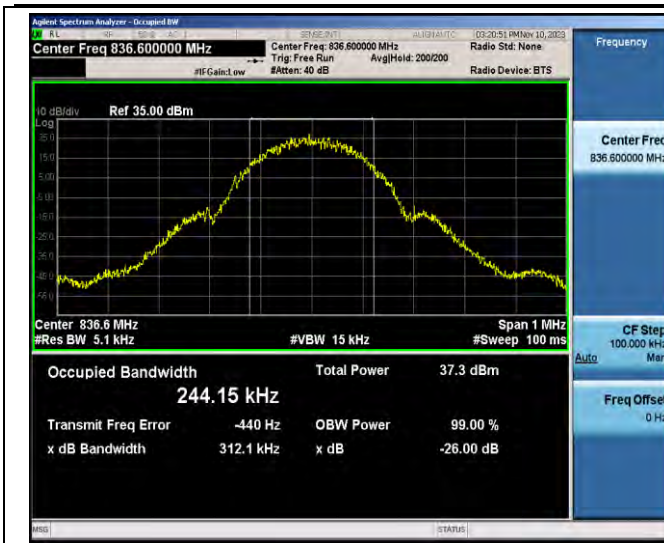

GPRS850-190-3-0.3121




GPRS850-251-3-0.3162

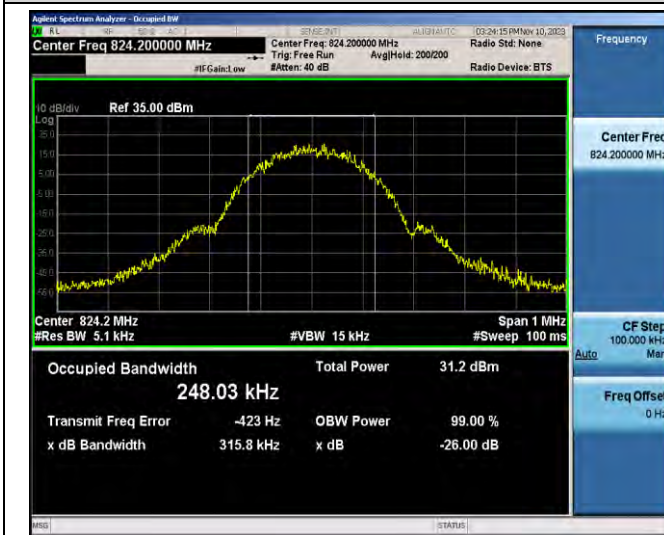

EGPRS850-128-8-0.3158




EGPRS850-190-8-0.3175

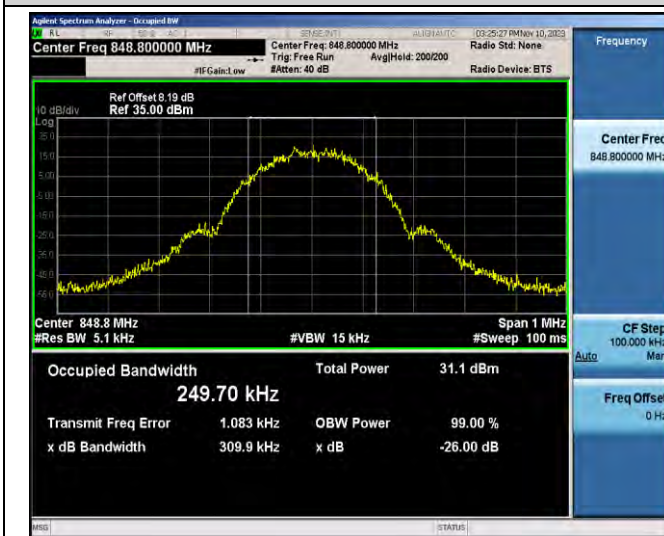

EGPRS850-251-8-0.3099



GSM1900-512-0-0.3083

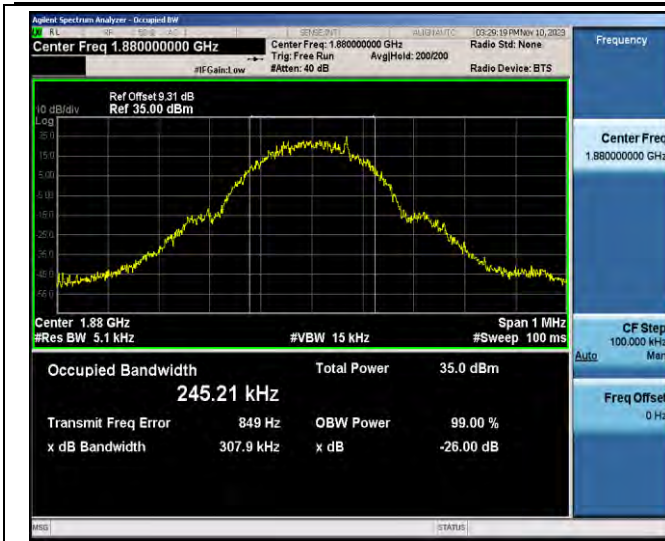

GSM1900-661-0-0.3079




GSM1900-810-0-0.3093



GPRS1900-512-0-0.3150



GPRS1900-661-0-0.3178

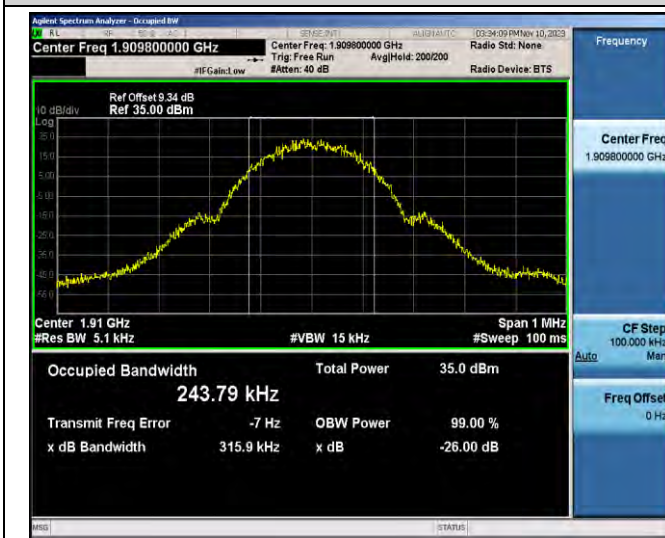


GPRS1900-810-0-0.3159




EGPRS1900-512-2-0.3152



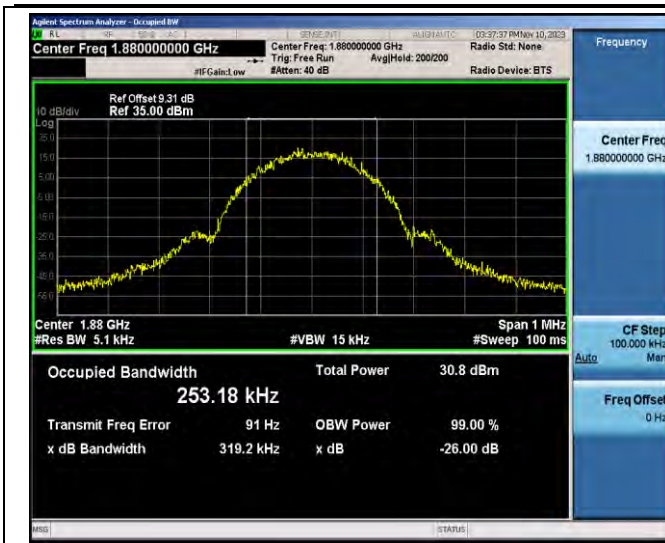

EGPRS1900-661-2-0.3192

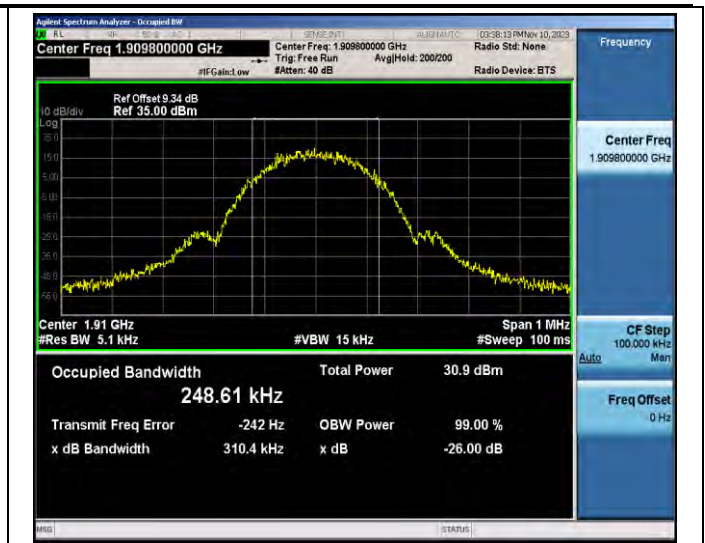

EGPRS1900-810-2-0.3104




Band2-9262-4.734



Band2-9400-4.720



Band2-9538-4.718

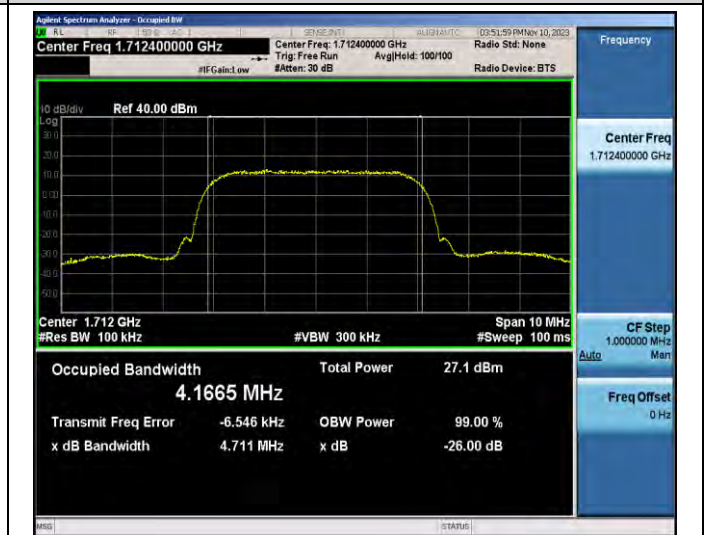


Band4-1312-4.711



Band4-1413-4.714




Band4-1513-4.714

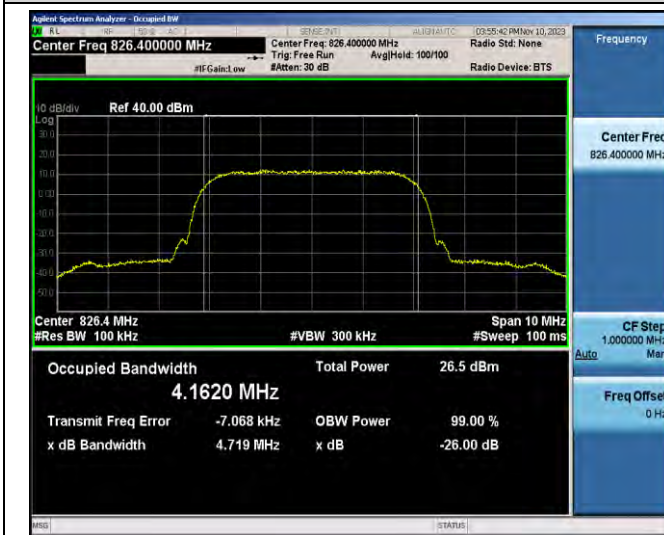

Band5-4132-4.719



Band5-4182-4.702

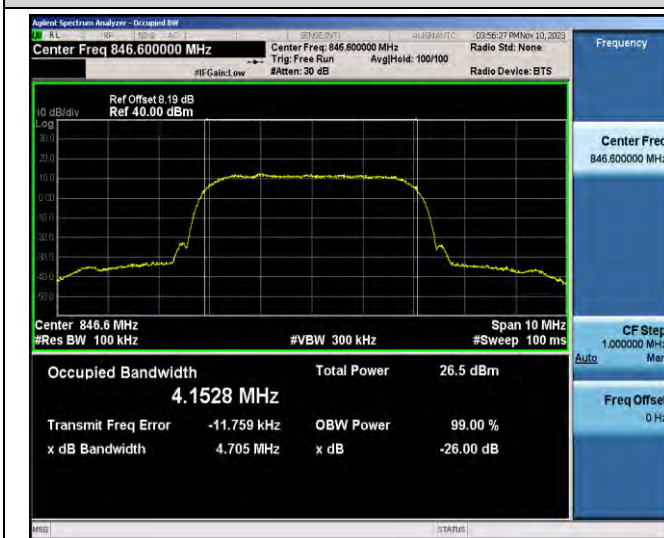

Band5-4233-4.705

---

## Band Edge

### Test Result

#### GSM:


Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM850	128	823.98	-18.02	-13	PASS
GSM850	251	849.00	-17.71	-13	PASS
GPRS850	128	824.00	-18.44	-13	PASS
GPRS850	251	849.01	-18.51	-13	PASS
EGPRS850	128	824.00	-27.07	-13	PASS
EGPRS850	251	849.00	-28.27	-13	PASS
GSM1900	512	1849.99	-20.70	-13	PASS
GSM1900	810	1910.02	-20.79	-13	PASS
GPRS1900	512	1849.99	-20.55	-13	PASS
GPRS1900	810	1910.03	-20.74	-13	PASS
EGPRS1900	512	1850.00	-29.12	-13	PASS
EGPRS1900	810	1910.01	-28.53	-13	PASS

#### WCDMA:


Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1850.00	-18.01	-13	PASS
Band2	9538	1910.00	-18.92	-13	PASS
Band4	1312	1710.00	-18.39	-13	PASS
Band4	1513	1755.01	-20.14	-13	PASS
Band5	4132	824.00	-20.69	-13	PASS
Band5	4233	849.00	-21.50	-13	PASS




# Test Graphs

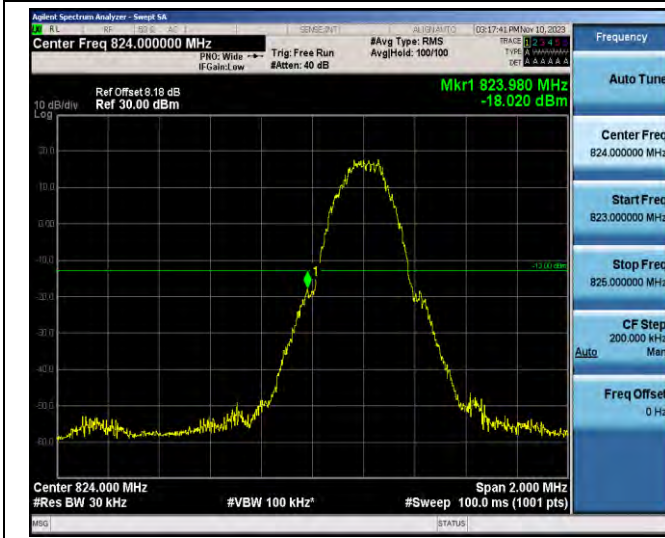


GSM850-128-3

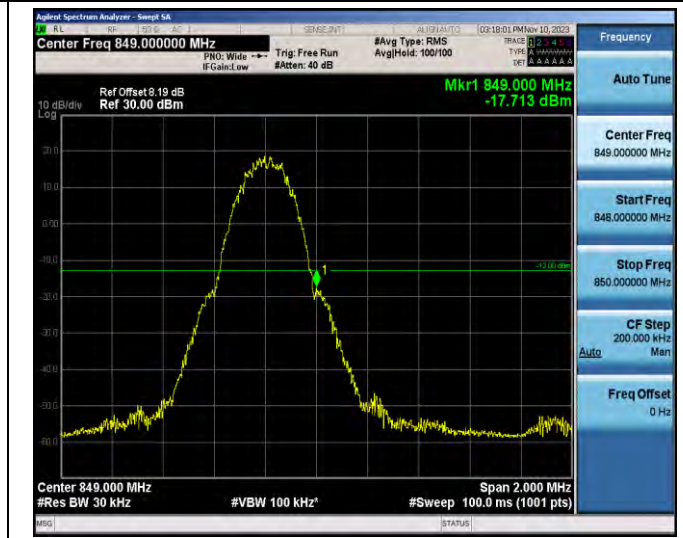


GSM850-251-3

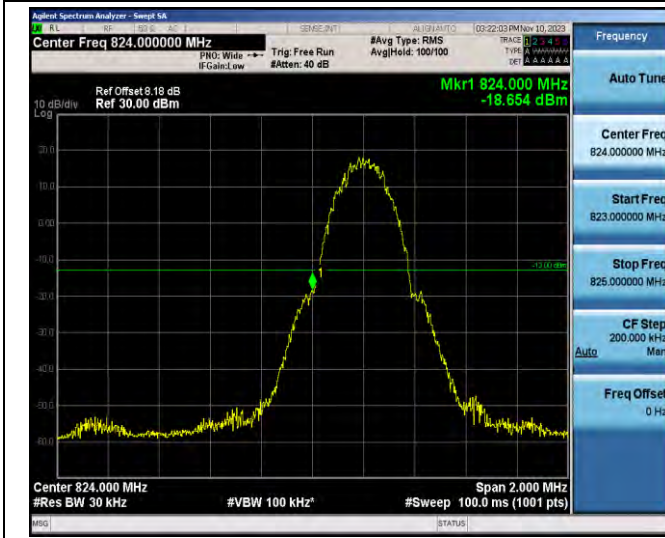


GPRS850-128-3

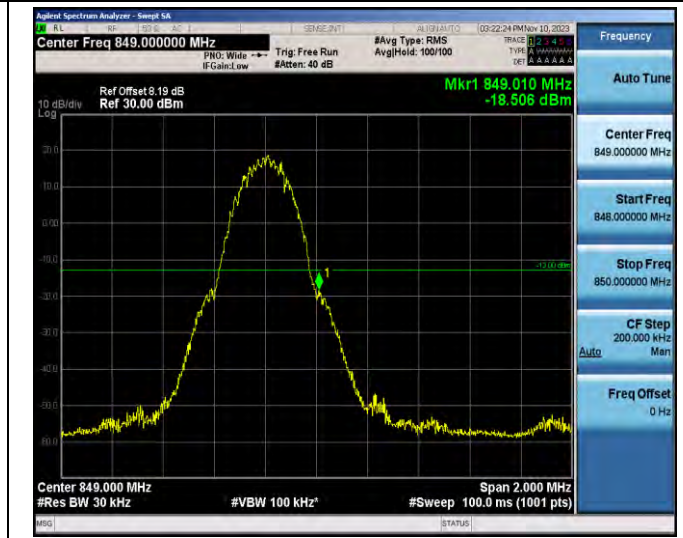


GPRS850-251-3

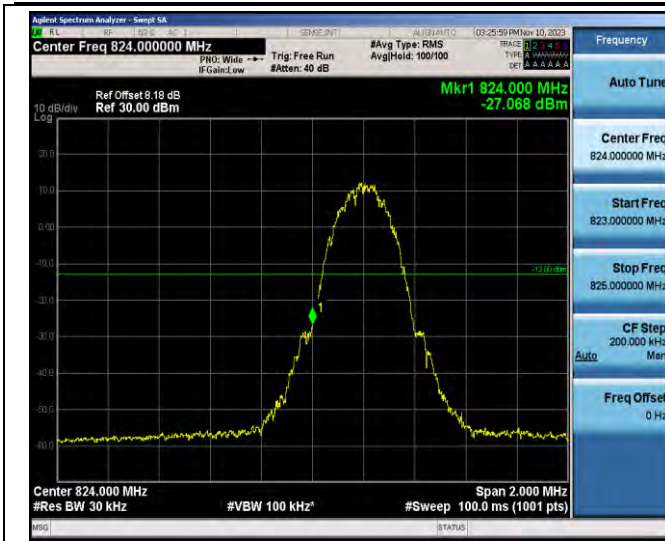


EGPRS850-128-8

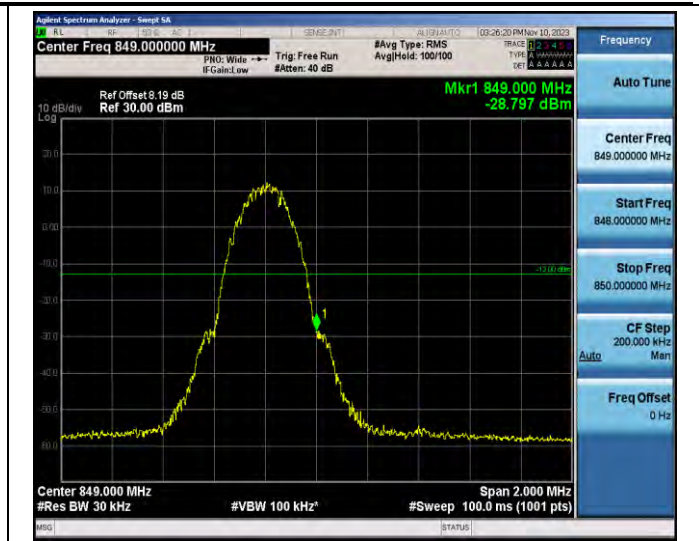


EGPRS850-251-8

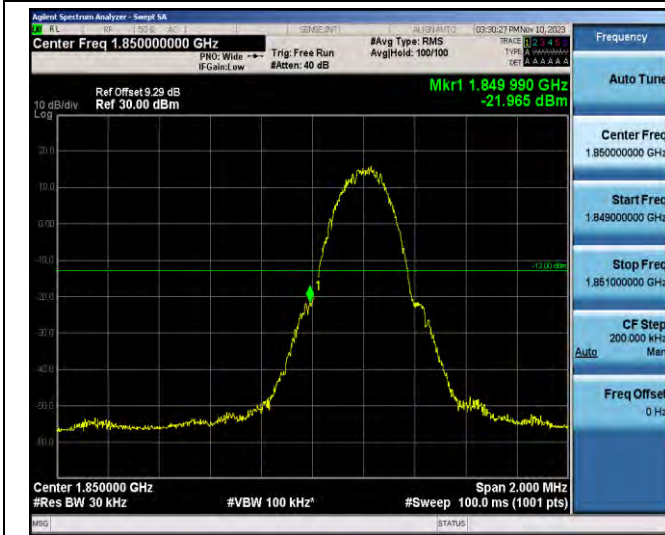


GSM1900-512-0

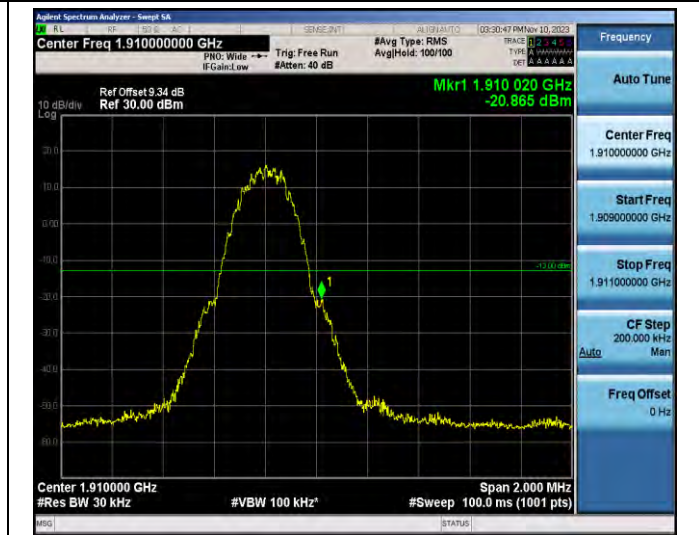

GSM1900-810-0

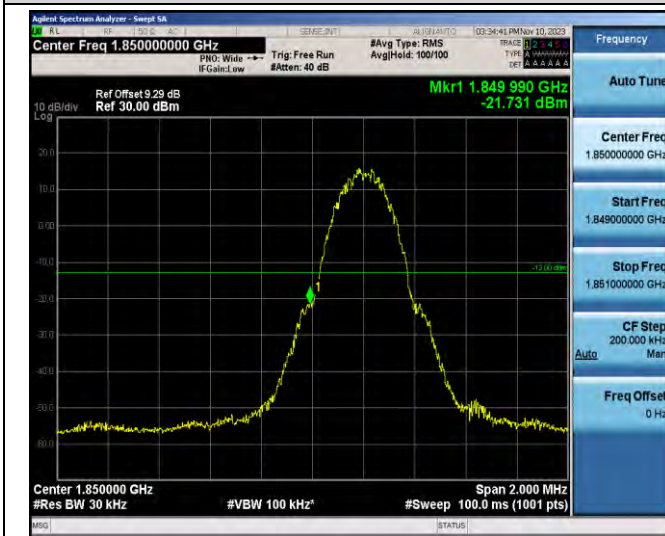


GPRS1900-512-0

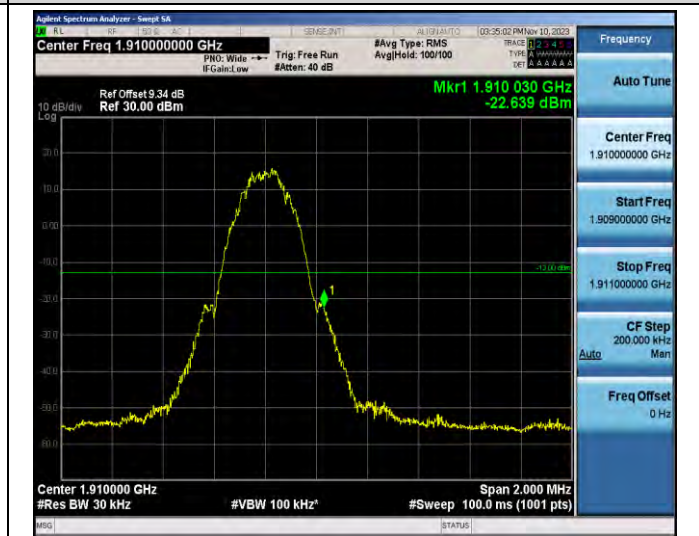


GPRS1900-810-0




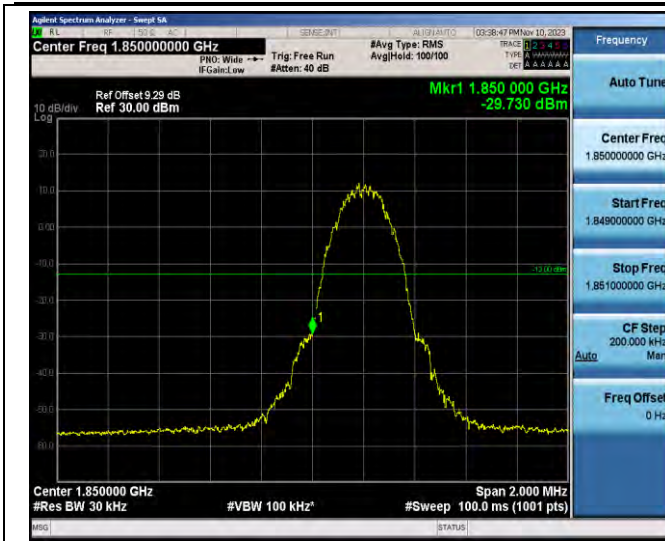

EGPRS1900-512-2

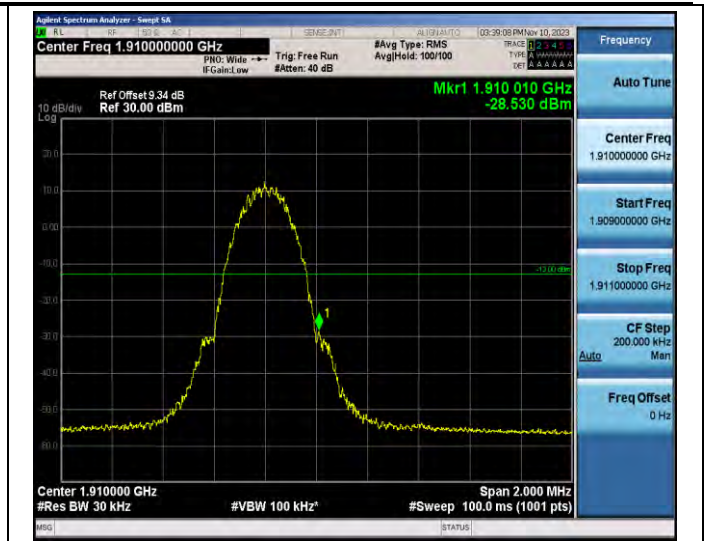


EGPRS1900-810-2

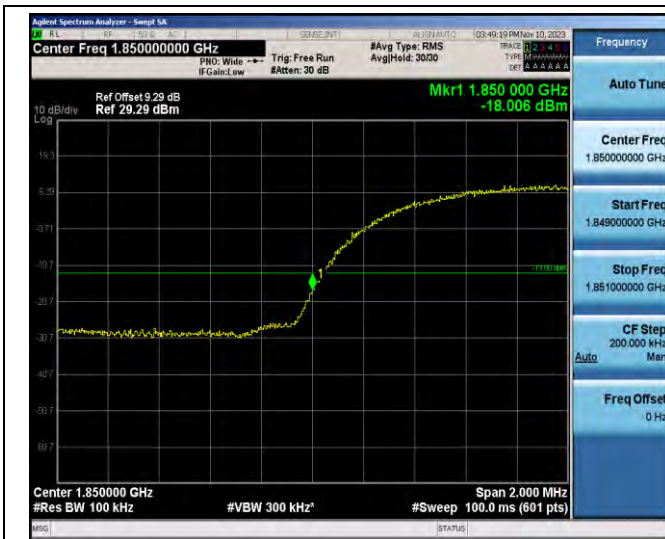

Band2-9262




Band2-9538

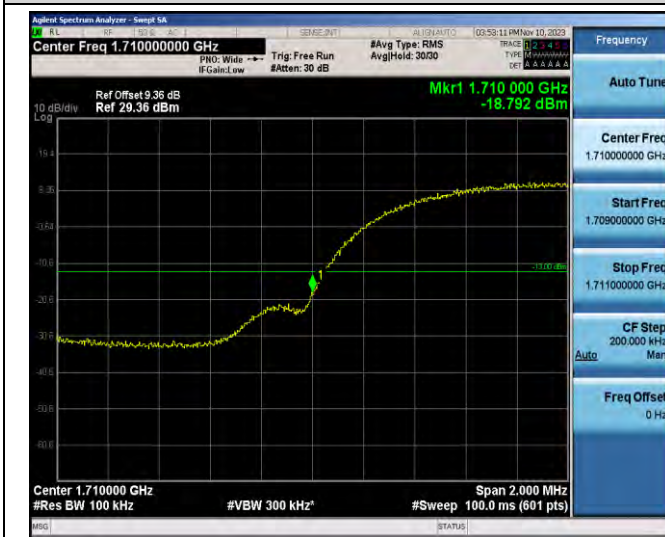

Band4-1312



Band4-1513

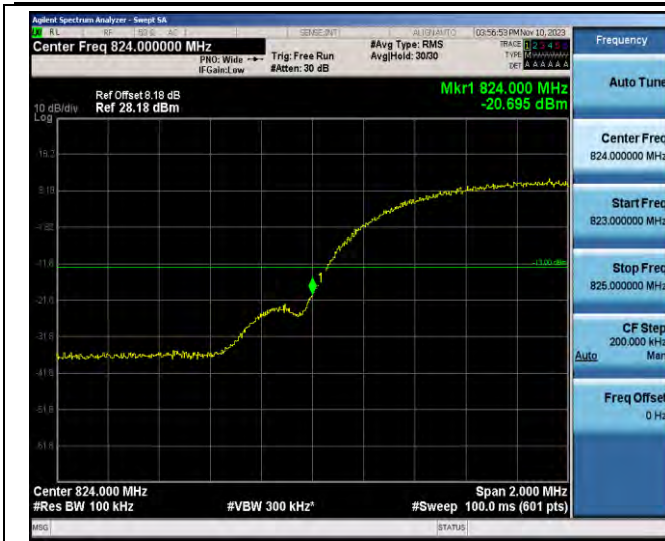

Band5-4132



Band5-4233

## Conducted Spurious Emission

### Test Result

#### GSM:

Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM850	128	30~1000MHz	32.59	-53.31	-13	PASS
GSM850	128	1000~10000MHz	2473.1	-21.85	-13	PASS
GPRS850	128	30~1000MHz	42.71	-53.55	-13	PASS
GPRS850	128	1000~10000MHz	2474.3	-48.86	-13	PASS
EGPRS850	128	30~1000MHz	48.17	-53.21	-13	PASS
EGPRS850	128	1000~10000MHz	7498.83	-56.69	-13	PASS
GSM850	190	30~1000MHz	40.77	-53.62	-13	PASS
GSM850	190	1000~10000MHz	2510.9	-31.63	-13	PASS
GPRS850	190	30~1000MHz	35.69	-53.59	-13	PASS
GPRS850	190	1000~10000MHz	2509.7	-22.16	-13	PASS
EGPRS850	190	30~1000MHz	523.63	-52.89	-13	PASS
EGPRS850	190	1000~10000MHz	2510.3	-42.17	-13	PASS
GSM850	251	30~1000MHz	33.91	-53.58	-13	PASS
GSM850	251	1000~10000MHz	2546.3	-17.32	-13	PASS
GPRS850	251	30~1000MHz	35.53	-53.49	-13	PASS
GPRS850	251	1000~10000MHz	2546.6	-18.53	-13	PASS
EGPRS850	251	30~1000MHz	32.07	-53.64	-13	PASS
EGPRS850	251	1000~10000MHz	1697.03	-46.46	-13	PASS
GSM1900	512	3000~18000MHz	7492.1	-52.66	-13	PASS
GSM1900	512	30~1000MHz	35.77	-49.18	-13	PASS
GSM1900	512	1000~3000MHz	2994.87	-45.44	-13	PASS
GSM1900	512	3000~20000MHz	7488.13	-52.67	-13	PASS
GPRS1900	512	3000~18000MHz	7498.6	-52.66	-13	PASS
GPRS1900	512	30~1000MHz	35.16	-49.37	-13	PASS
GPRS1900	512	1000~3000MHz	2997.8	-45.44	-13	PASS
GPRS1900	512	3000~20000MHz	7483.03	-52.87	-13	PASS
EGPRS1900	512	3000~18000MHz	7489.6	-52.71	-13	PASS
EGPRS1900	512	30~1000MHz	33.9	-49.26	-13	PASS
EGPRS1900	512	1000~3000MHz	2993.33	-45.59	-13	PASS
EGPRS1900	512	3000~20000MHz	7498.9	-52.76	-13	PASS
GSM1900	661	30~1000MHz	35.32	-49.14	-13	PASS
GSM1900	661	3000~18000MHz	7464.1	-52.75	-13	PASS
GSM1900	661	1000~3000MHz	2983	-45.52	-13	PASS


GSM1900	661	3000~20000MHz	7499.47	-52.74	-13	PASS
GPRS1900	661	3000~18000MHz	7483.6	-52.77	-13	PASS
GPRS1900	661	30~1000MHz	35.74	-49.33	-13	PASS
GPRS1900	661	1000~3000MHz	2959.13	-45.59	-13	PASS
GPRS1900	661	3000~20000MHz	7490.4	-52.6	-13	PASS
EGPRS1900	661	3000~18000MHz	7488.6	-52.66	-13	PASS
EGPRS1900	661	30~1000MHz	35.64	-49.22	-13	PASS
EGPRS1900	661	1000~3000MHz	2997	-45.49	-13	PASS
EGPRS1900	661	3000~20000MHz	7485.87	-52.75	-13	PASS
GSM1900	810	3000~18000MHz	7494.6	-52.77	-13	PASS
GSM1900	810	30~1000MHz	32.8	-49.26	-13	PASS
GSM1900	810	1000~3000MHz	2988.27	-45.52	-13	PASS
GSM1900	810	3000~20000MHz	7483.6	-52.74	-13	PASS
GPRS1900	810	3000~18000MHz	7489.6	-52.78	-13	PASS
GPRS1900	810	30~1000MHz	35.64	-49.08	-13	PASS
GPRS1900	810	1000~3000MHz	2981.73	-45.53	-13	PASS
GPRS1900	810	3000~20000MHz	7495.5	-52.73	-13	PASS
EGPRS1900	810	3000~18000MHz	7498.1	-52.72	-13	PASS
EGPRS1900	810	30~1000MHz	35.9	-49.21	-13	PASS
EGPRS1900	810	1000~3000MHz	2988.73	-45.47	-13	PASS
EGPRS1900	810	3000~20000MHz	7489.83	-52.78	-13	PASS

**WCDMA:**


Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	30~1000MHz	39.2	-49.03	-13	PASS
Band2	9262	1000~20000MHz	19172.87	-45.21	-13	PASS
Band2	9400	30~1000MHz	32.47	-48.95	-13	PASS
Band2	9400	1000~20000MHz	19179.83	-45.03	-13	PASS
Band2	9538	30~1000MHz	35.8	-49.12	-13	PASS
Band2	9538	1000~20000MHz	19150.07	-45.17	-13	PASS
Band4	1312	30~1000MHz	36.64	-49.12	-13	PASS
Band4	1312	1000~20000MHz	19098.77	-45.25	-13	PASS
Band4	1413	30~1000MHz	33.9	-49.08	-13	PASS
Band4	1413	1000~20000MHz	19214.03	-44.9	-13	PASS
Band4	1513	30~1000MHz	39.65	-49.02	-13	PASS
Band4	1513	1000~20000MHz	19123.47	-45.15	-13	PASS
Band5	4132	30~1000MHz	61.43	-58.71	-13	PASS
Band5	4132	1000~3000MHz	2476.38	-48.4	-13	PASS
Band5	4132	3000~10000MHz	7474.6	-52.82	-13	PASS
Band5	4182	30~1000MHz	32.78	-58.52	-13	PASS

Band5	4182	1000~3000MHz	2506.32	-49.85	-13	PASS
Band5	4182	3000~10000MHz	7497.7	-52.72	-13	PASS
Band5	4233	30~1000MHz	36.98	-58.71	-13	PASS
Band5	4233	1000~3000MHz	2536.65	-45.79	-13	PASS
Band5	4233	3000~10000MHz	7488.13	-52.75	-13	PASS


# Test Graphs

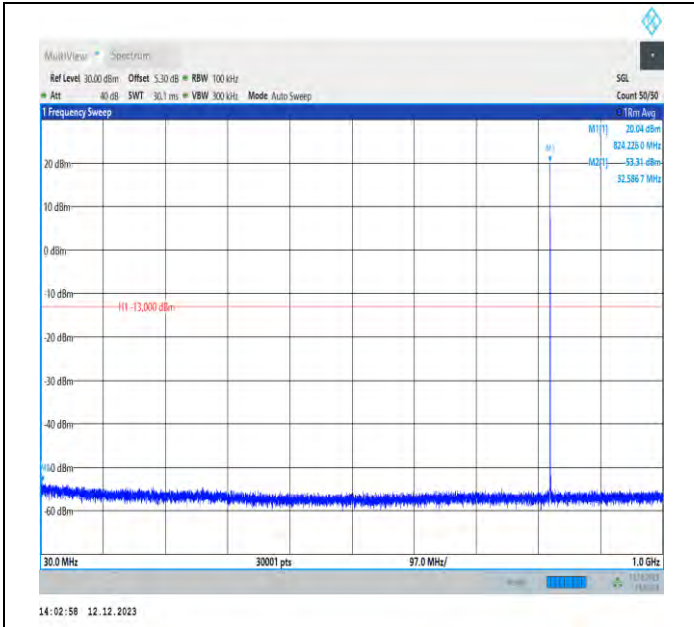


GSM850-128-5-30~1000MHz-PASS

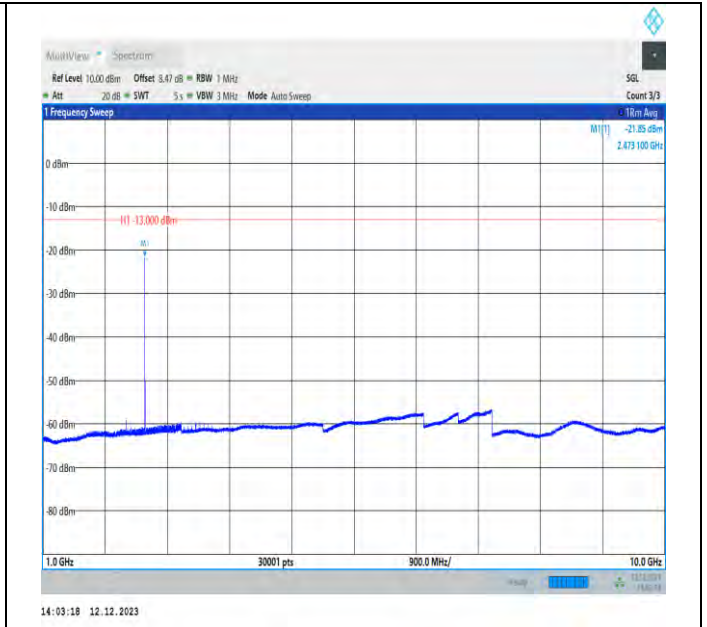

GSM850-128-5-1000~10000MHz-PASS

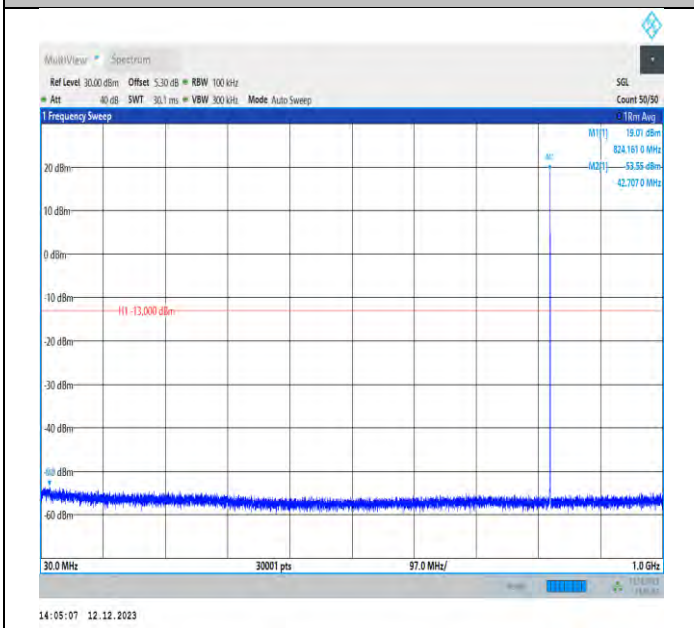


GPRS850-128-5-30~1000MHz-PASS

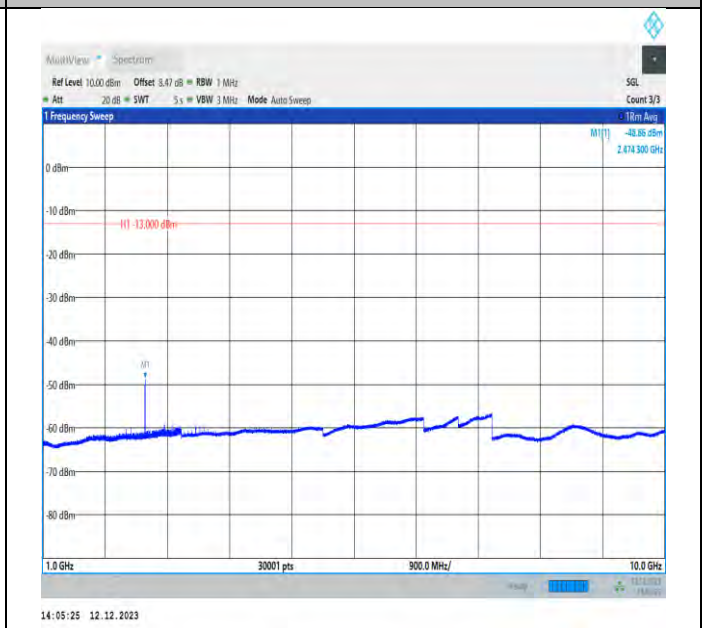


GPRS850-128-5-1000~10000MHz-PASS




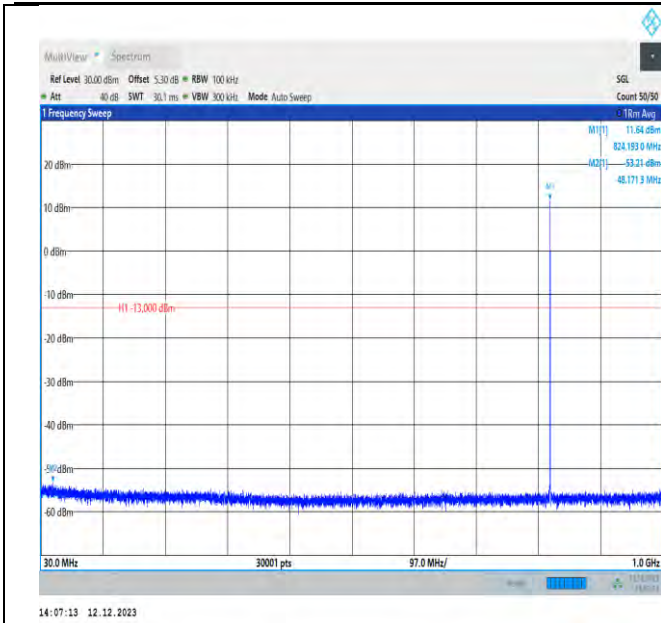


EGPRS850-128-8-30~1000MHz-PASS

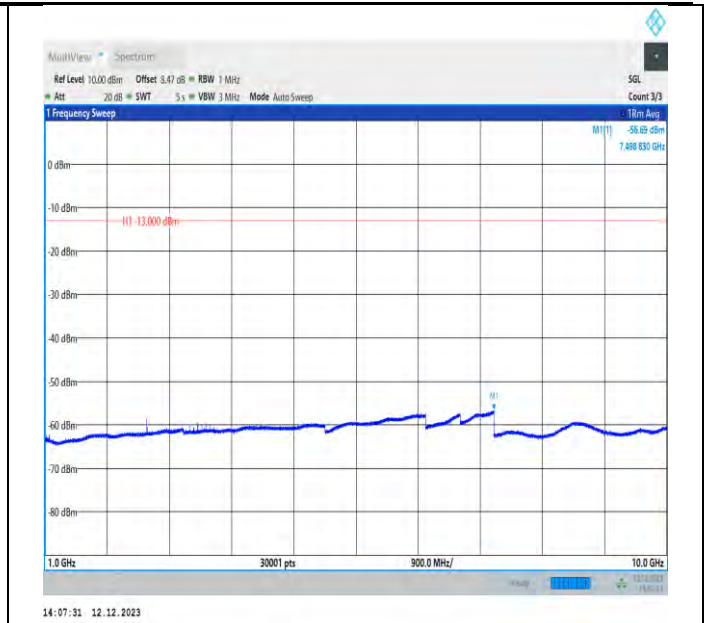


EGPRS850-128-8-1000~10000MHz-PASS

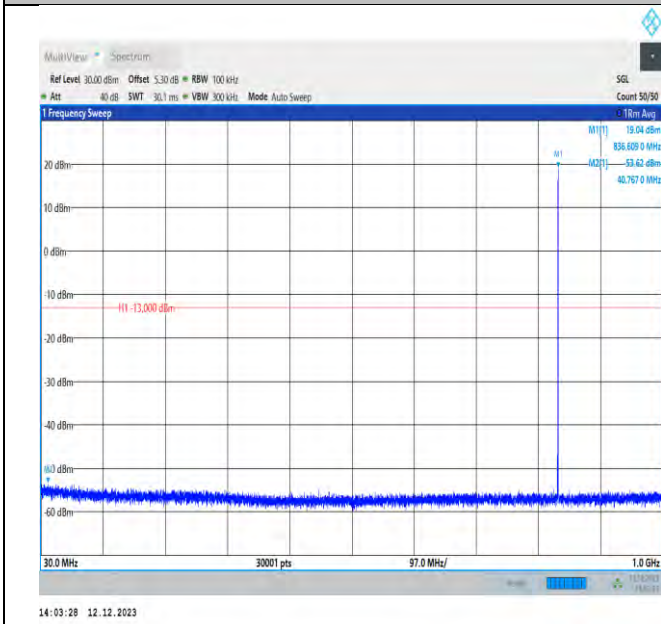


GSM850-190-5-30~1000MHz-PASS

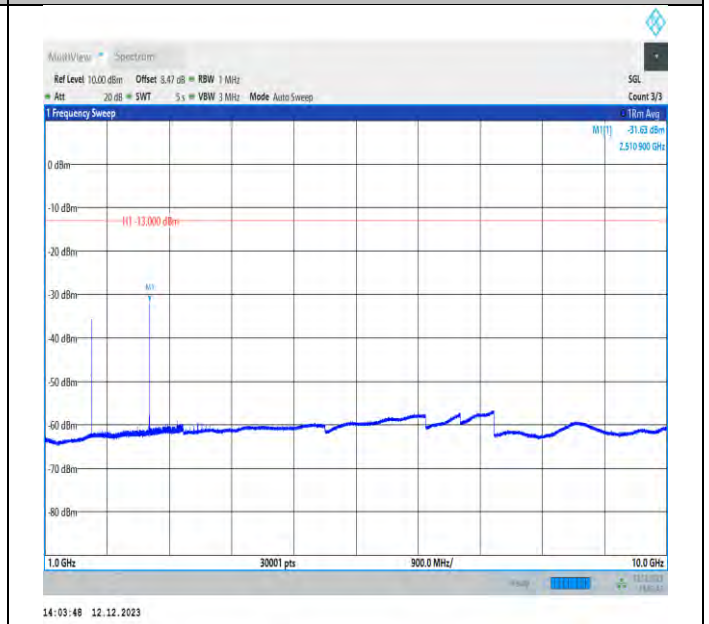


GSM850-190-5-1000~10000MHz-PASS

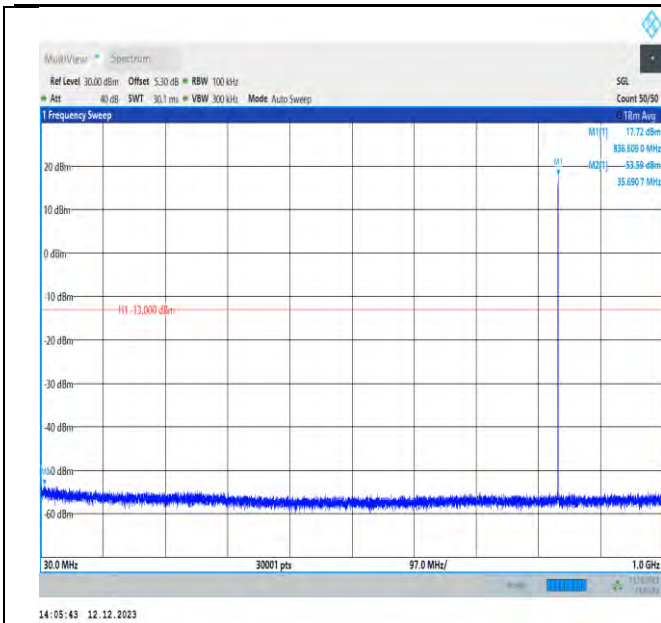


GPRS850-190-5-30~1000MHz-PASS

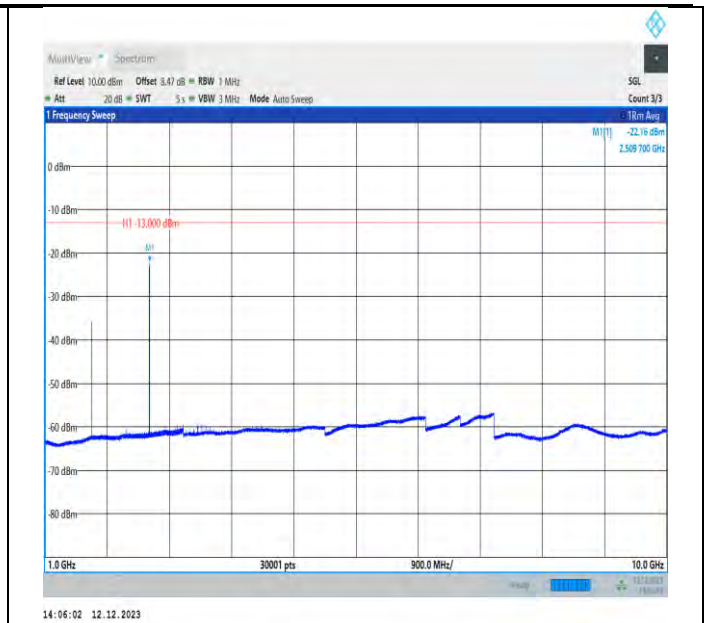


GPRS850-190-5-1000~10000MHz-PASS

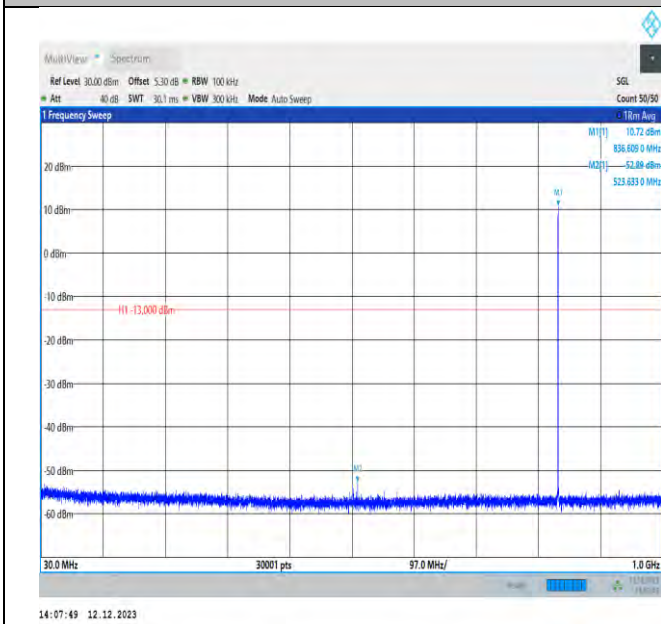


EGPRS850-190-8-30~1000MHz-PASS

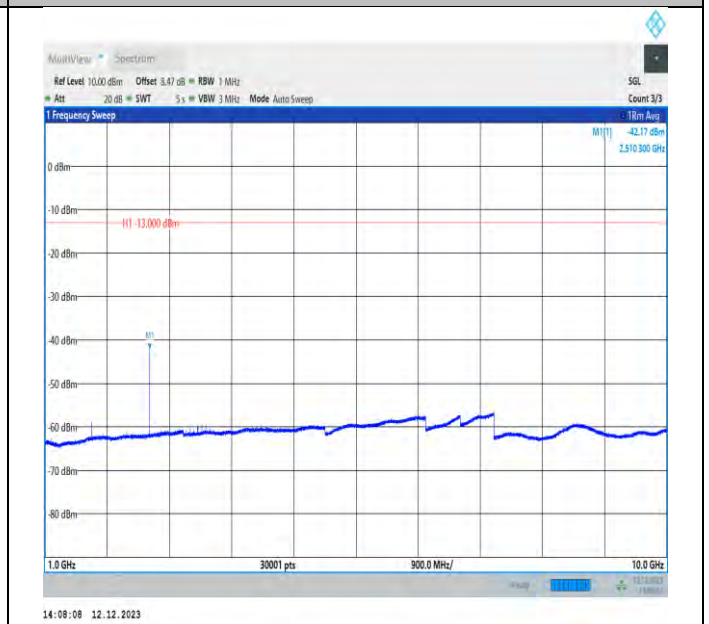


EGPRS850-190-8-1000~10000MHz-PASS

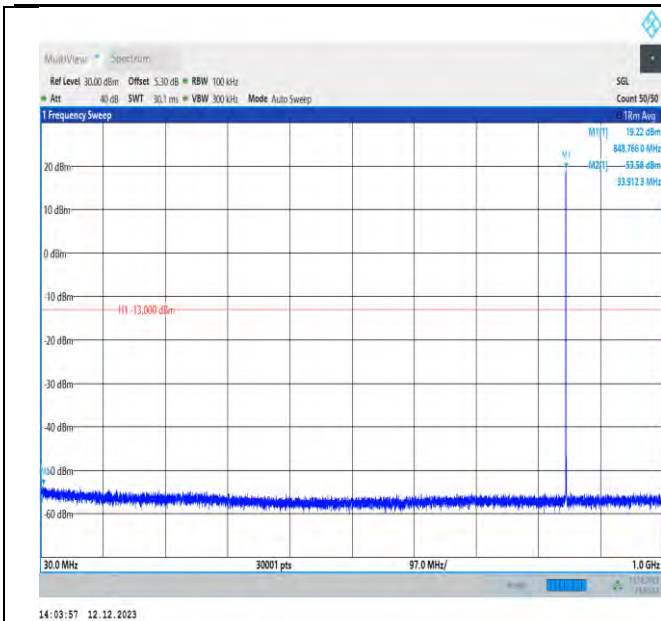


GSM850-251-5-30~1000MHz-PASS

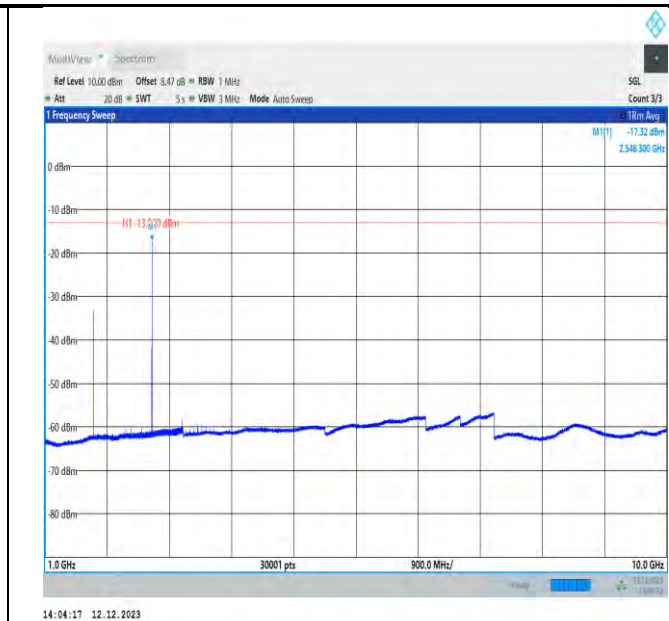

GSM850-251-5-1000~10000MHz-PASS

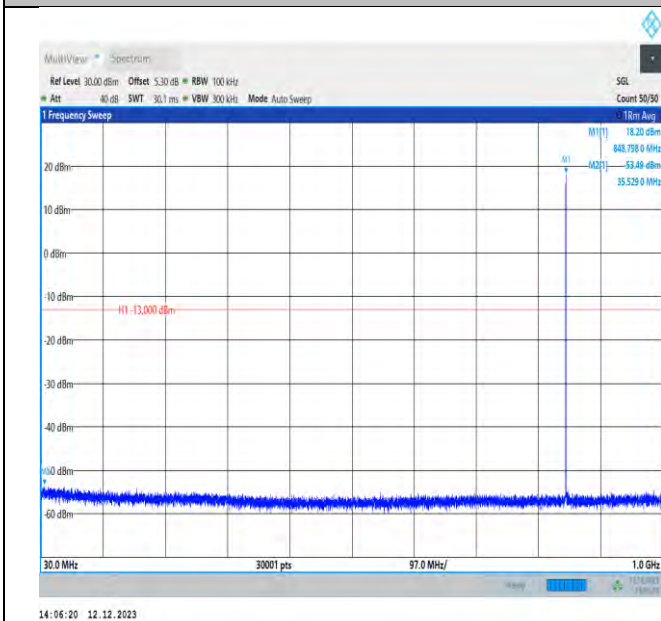


GPRS850-251-5-30~1000MHz-PASS

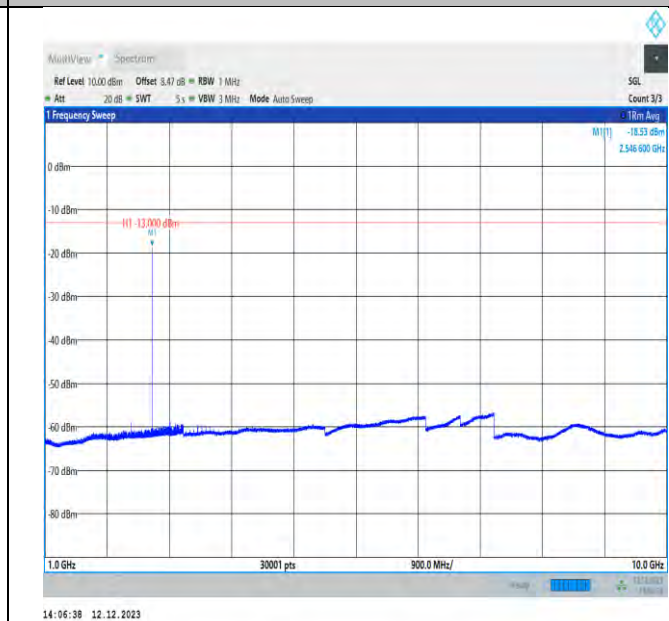


GPRS850-251-5-1000~10000MHz-PASS




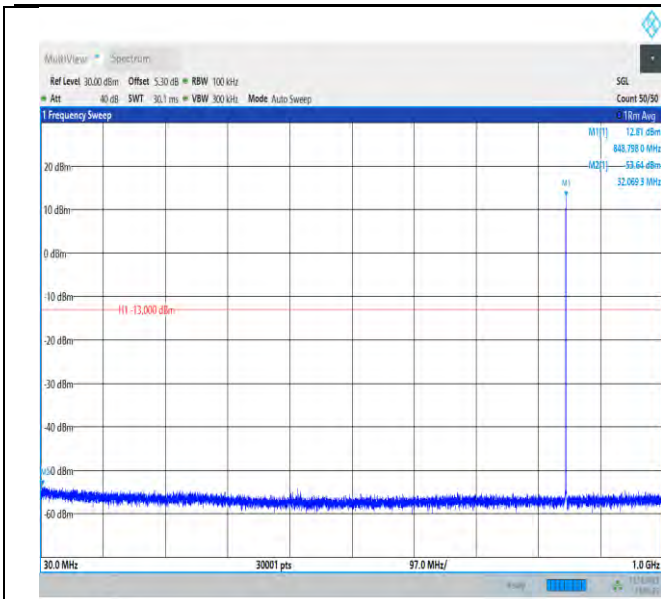


EGPRS850-251-8-30~1000MHz-PASS

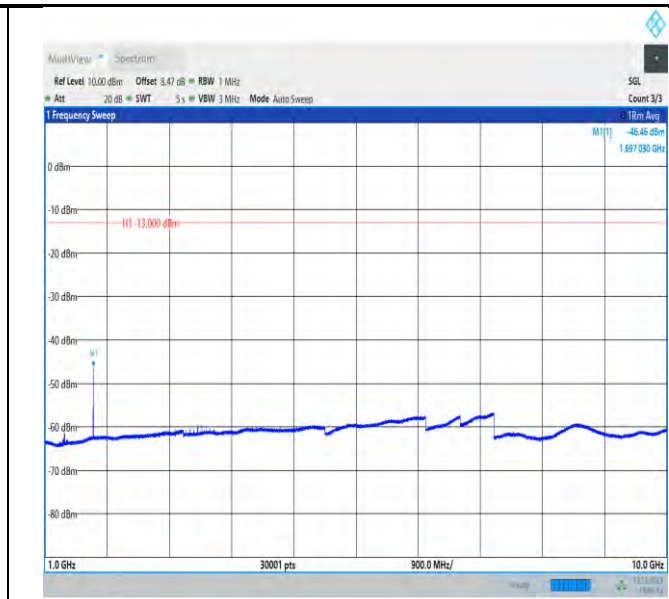


EGPRS850-251-8-1000~10000MHz-PASS

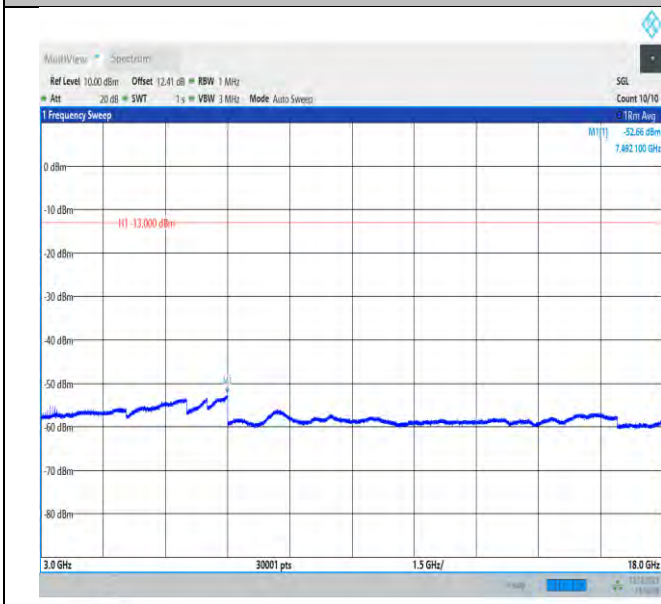


GSM1900-512-0-3000~18000MHz-PASS

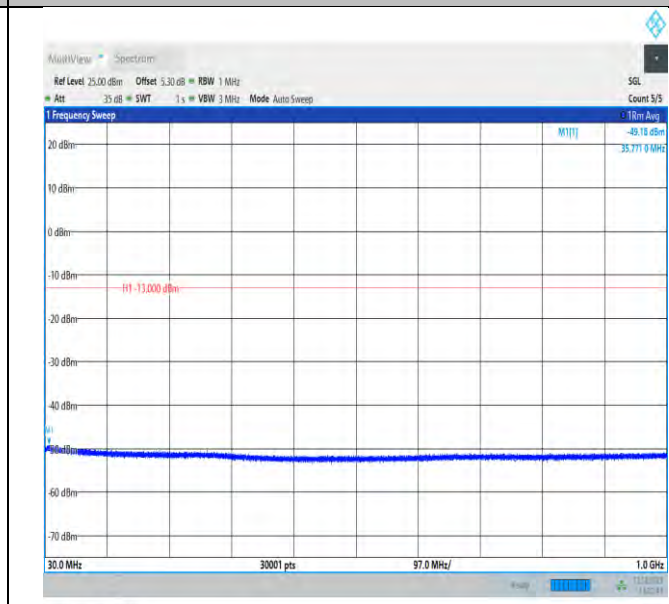


GSM1900-512-0-30~1000MHz-PASS

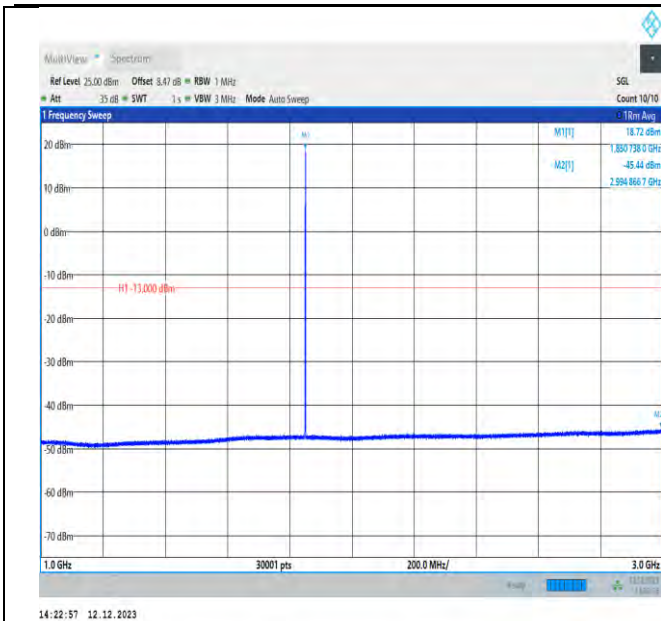


GSM1900-512-0-1000~3000MHz-PASS

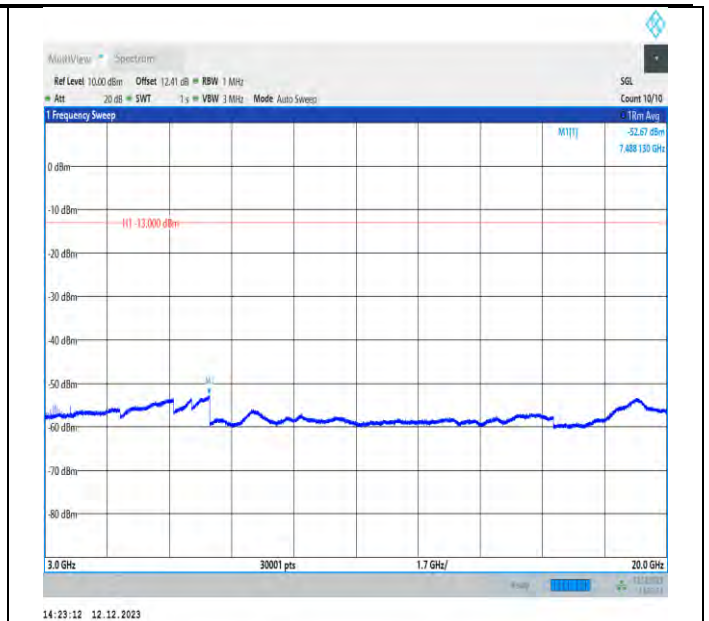


GSM1900-512-0-3000~20000MHz-PASS

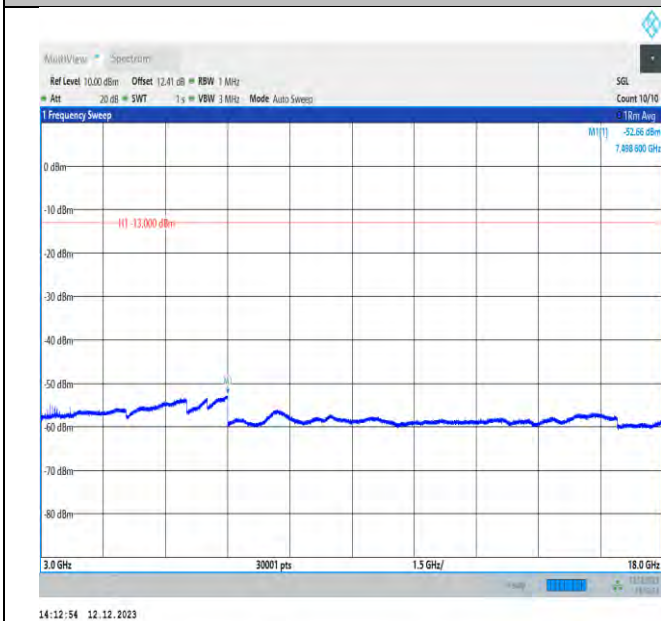


GPRS1900-512-0-3000~18000MHz-PASS

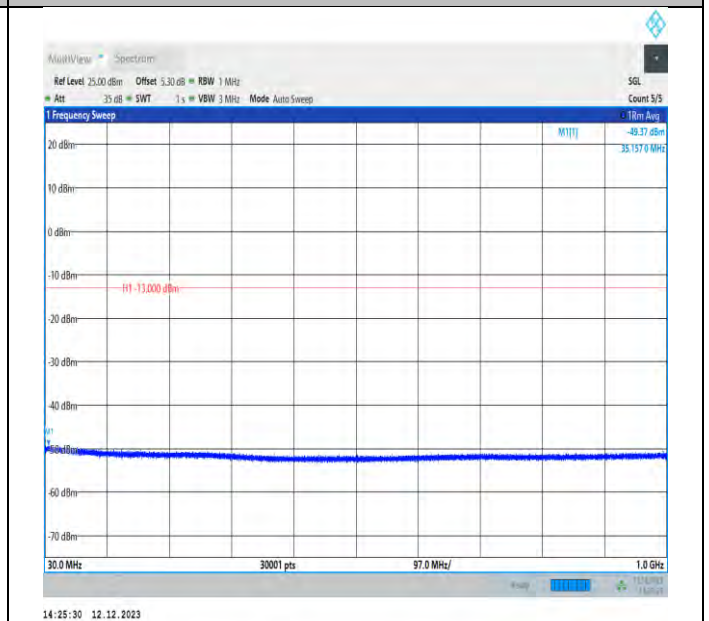


GPRS1900-512-0-30~1000MHz-PASS

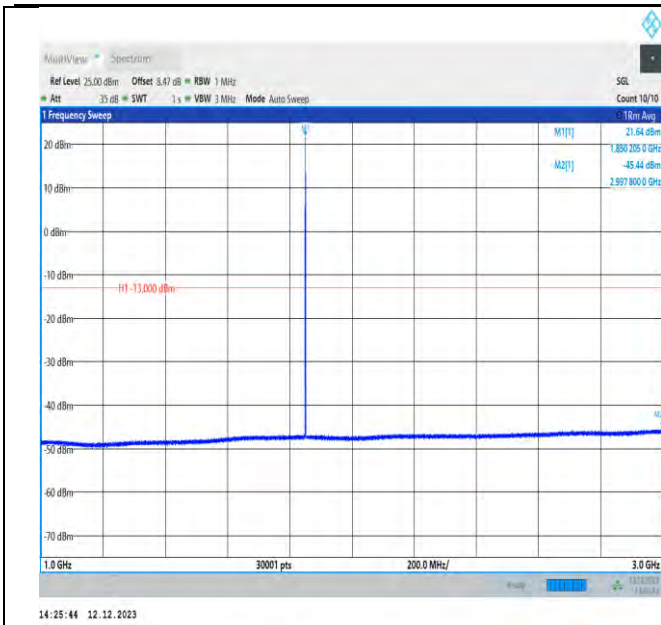


GPRS1900-512-0-1000~3000MHz-PASS

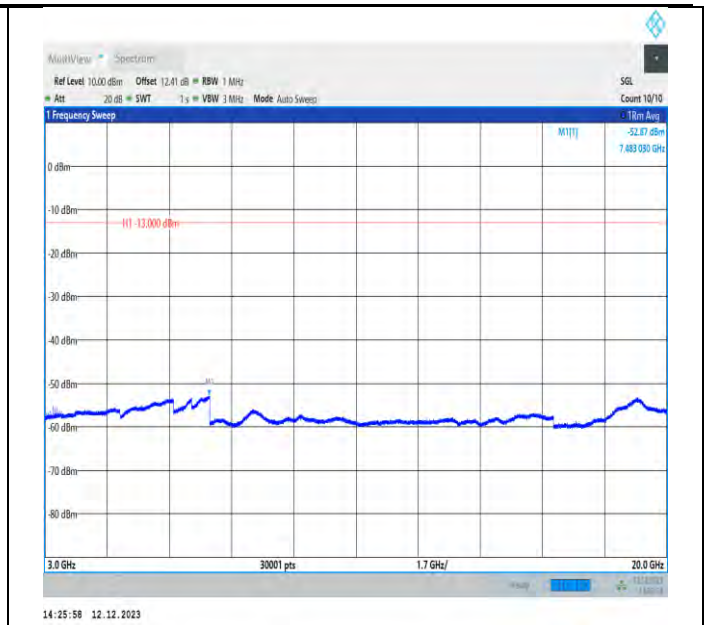

GPRS1900-512-0-3000~20000MHz-PASS

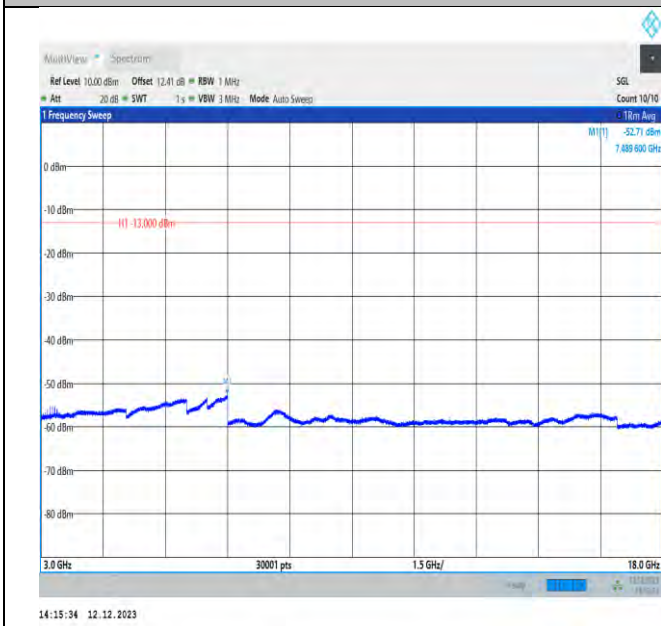


EGPRS1900-512-2-3000~18000MHz-PASS

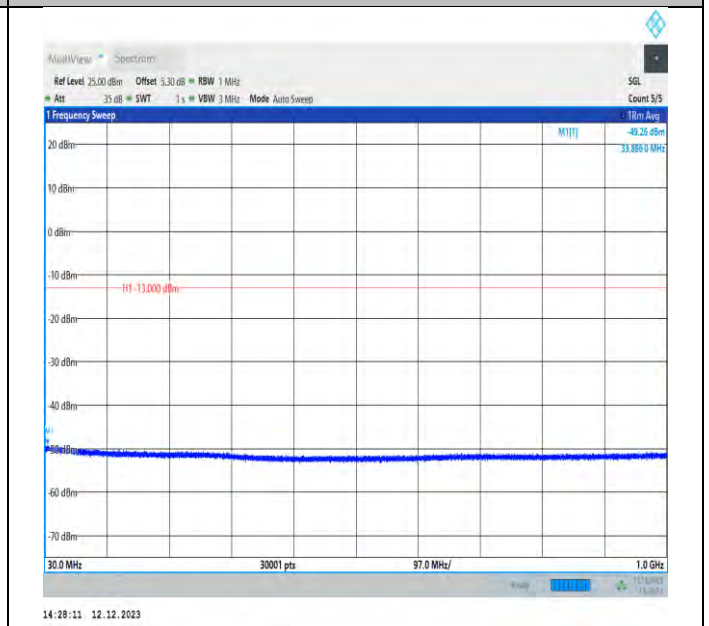


EGPRS1900-512-2-30~1000MHz-PASS




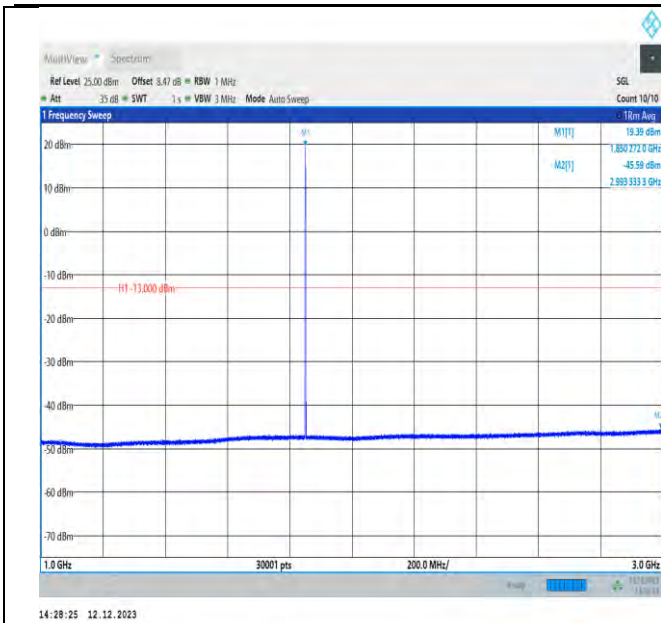


EGPRS1900-512-2-1000~3000MHz-PASS

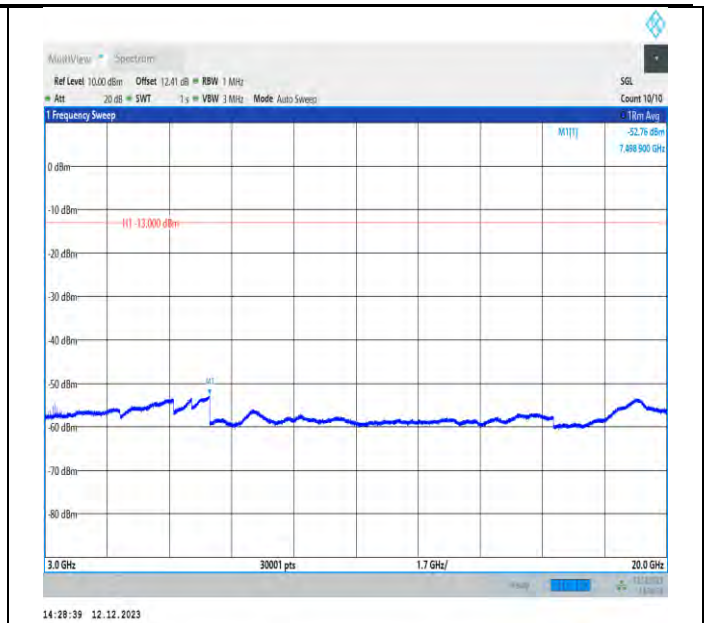


EGPRS1900-512-2-3000~20000MHz-PASS

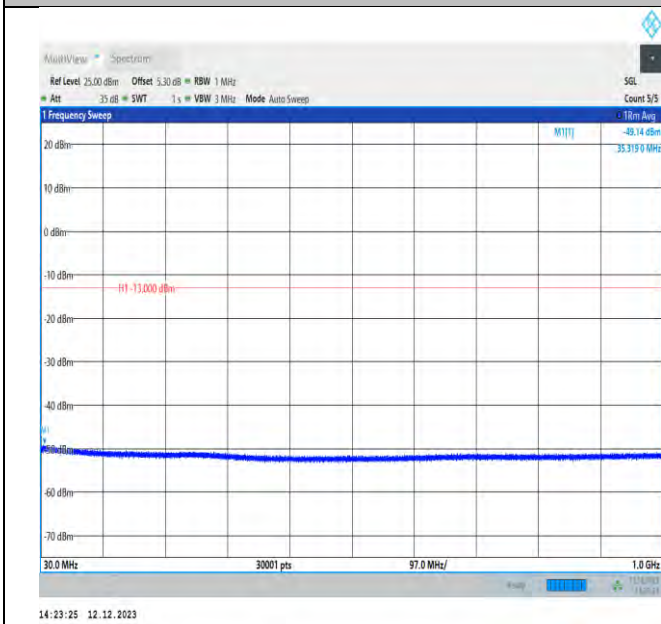


GSM1900-661-0-30~1000MHz-PASS

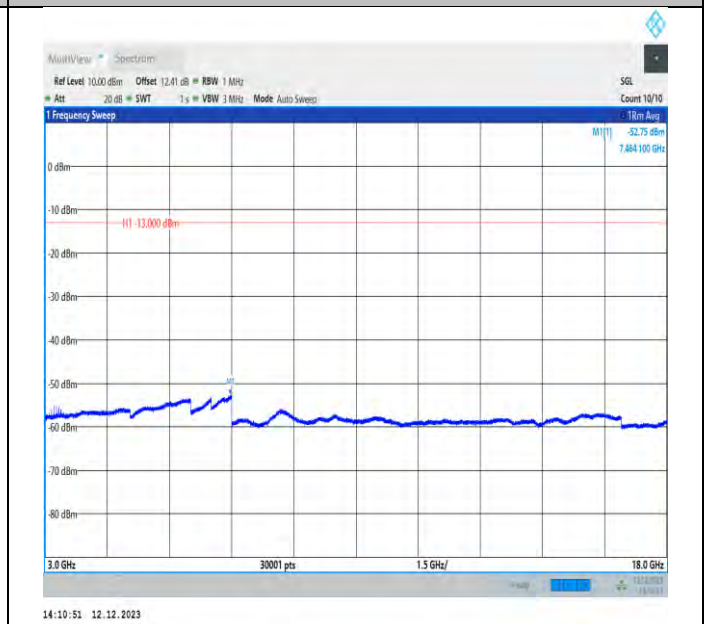


GSM1900-661-0-3000~18000MHz-PASS

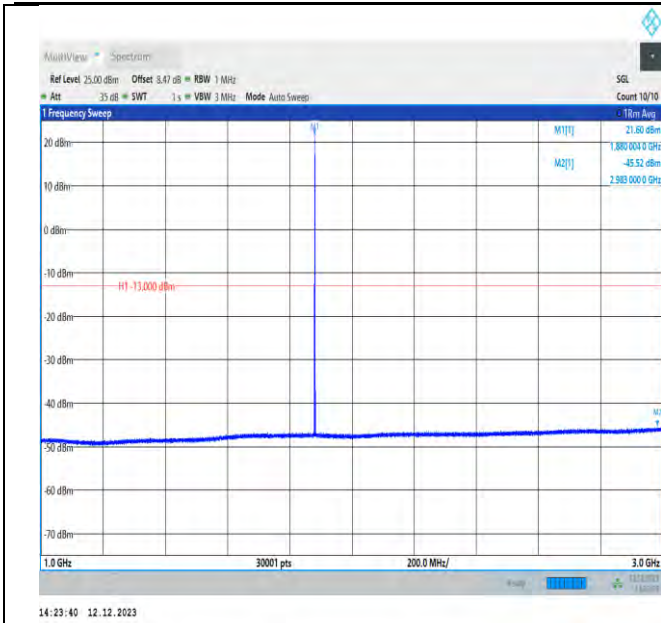


GSM1900-661-0-1000~3000MHz-PASS

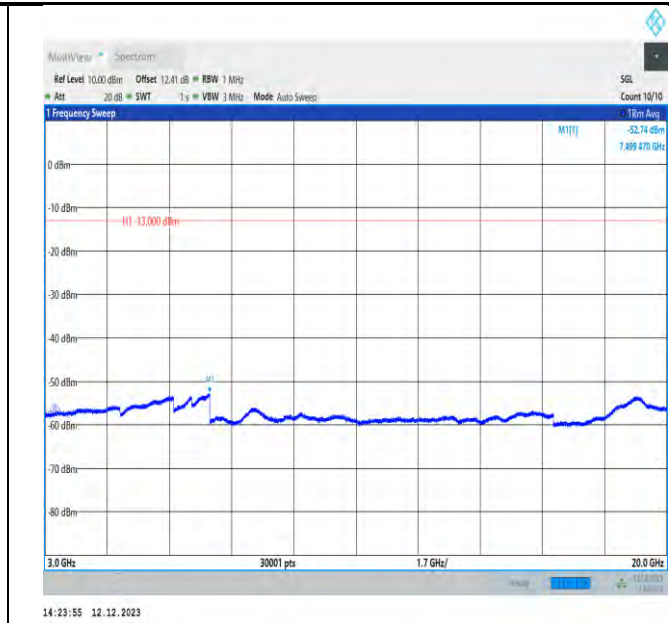

GSM1900-661-0-3000~20000MHz-PASS

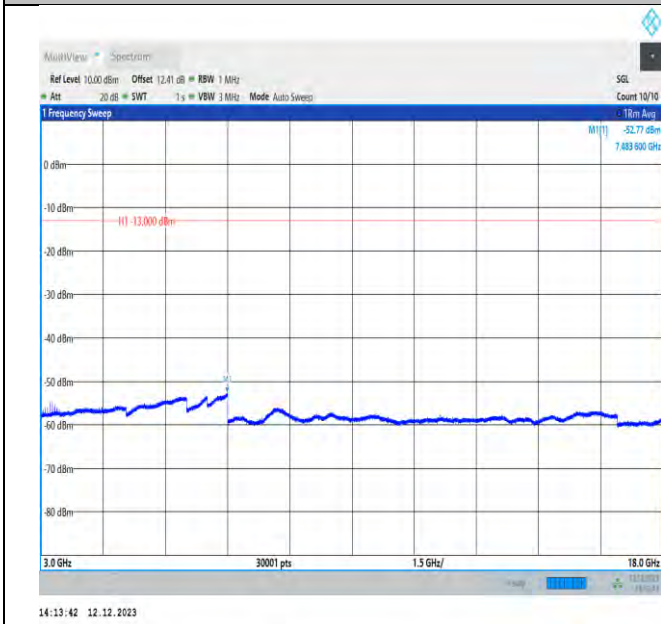


GPRS1900-661-0-3000~18000MHz-PASS

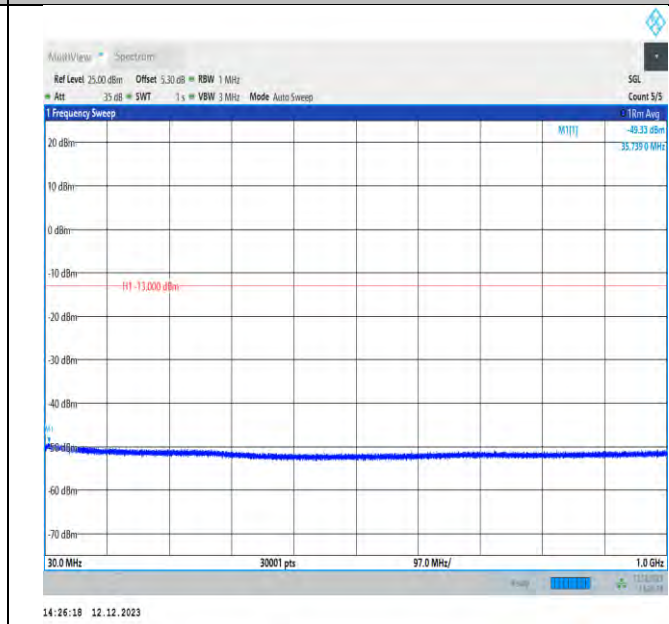


GPRS1900-661-0-30~1000MHz-PASS




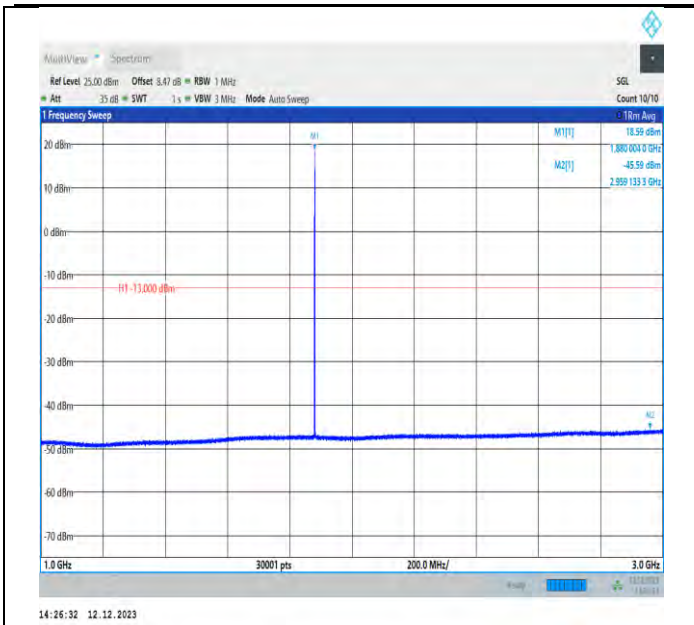


GPRS1900-661-0-1000~3000MHz-PASS

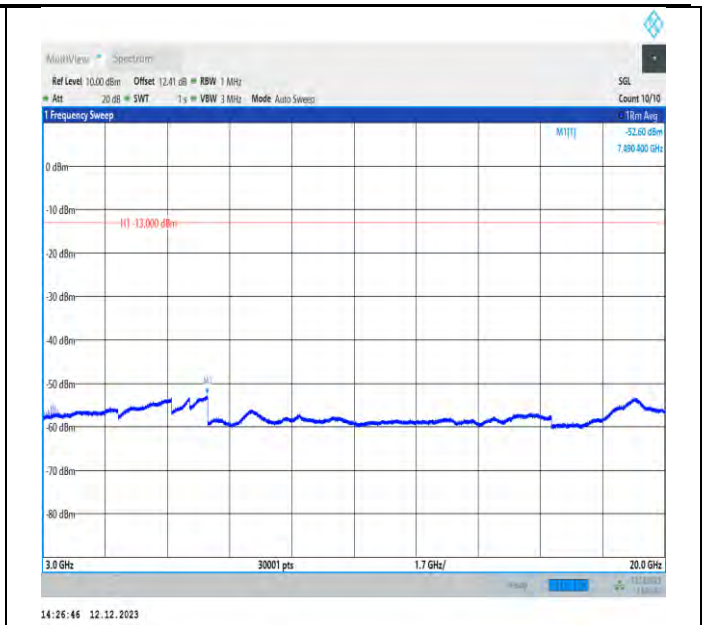


GPRS1900-661-0-3000~20000MHz-PASS

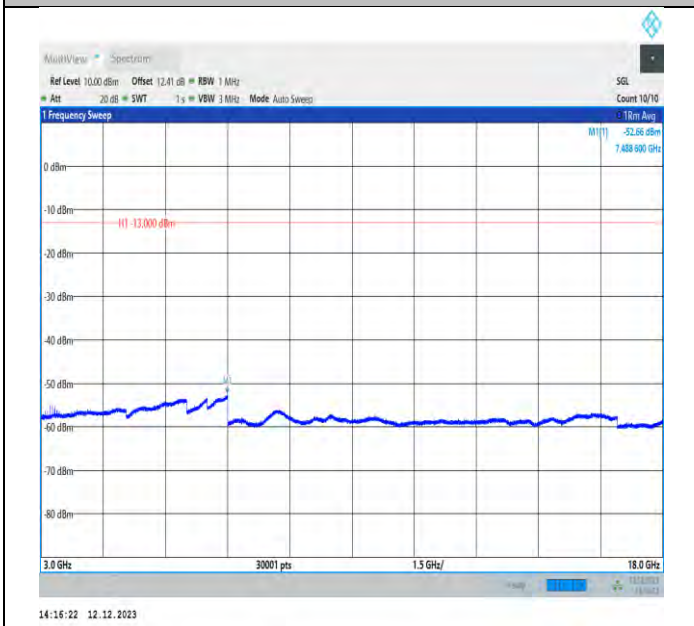


EGPRS1900-661-2-3000~18000MHz-PASS

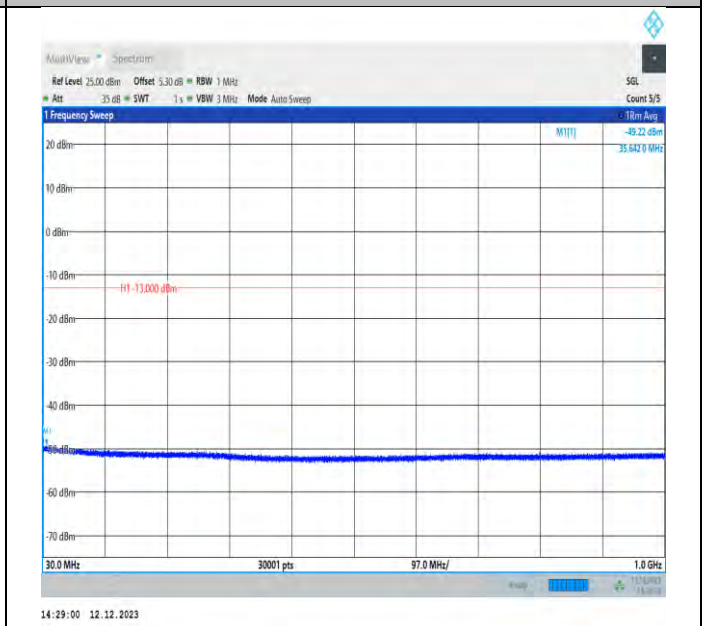


EGPRS1900-661-2-30~1000MHz-PASS

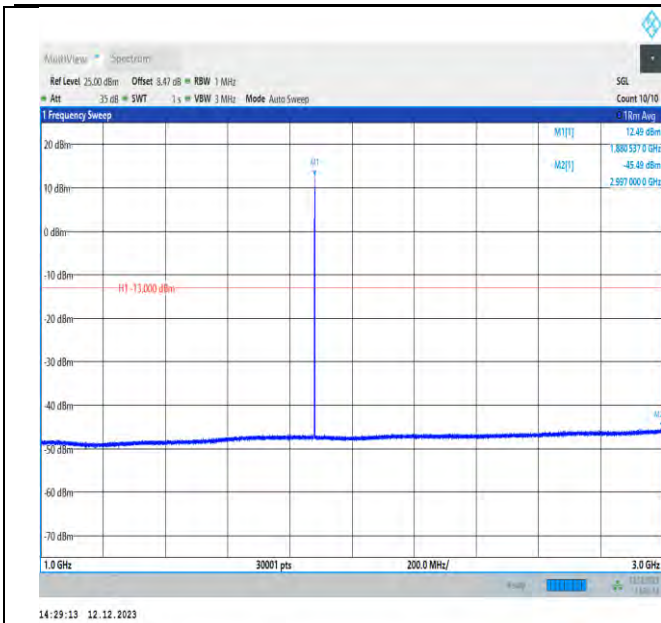


EGPRS1900-661-2-1000~3000MHz-PASS

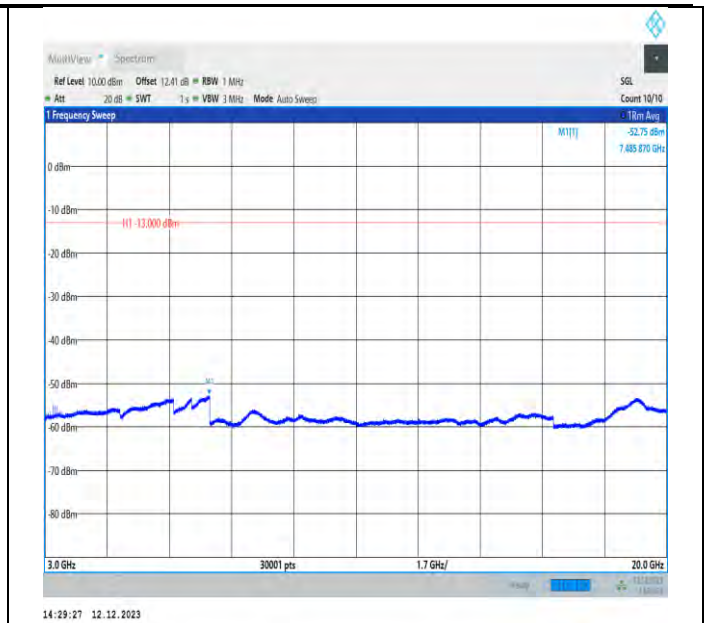


EGPRS1900-661-2-3000~20000MHz-PASS

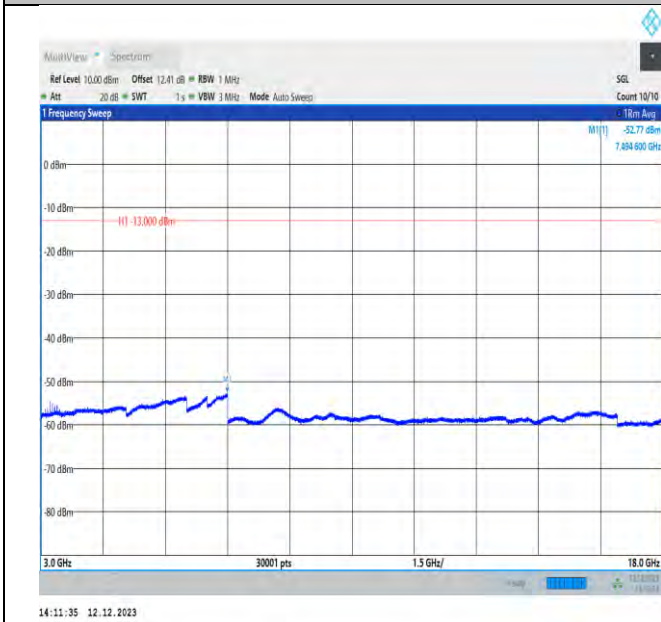


GSM1900-810-0-3000~18000MHz-PASS

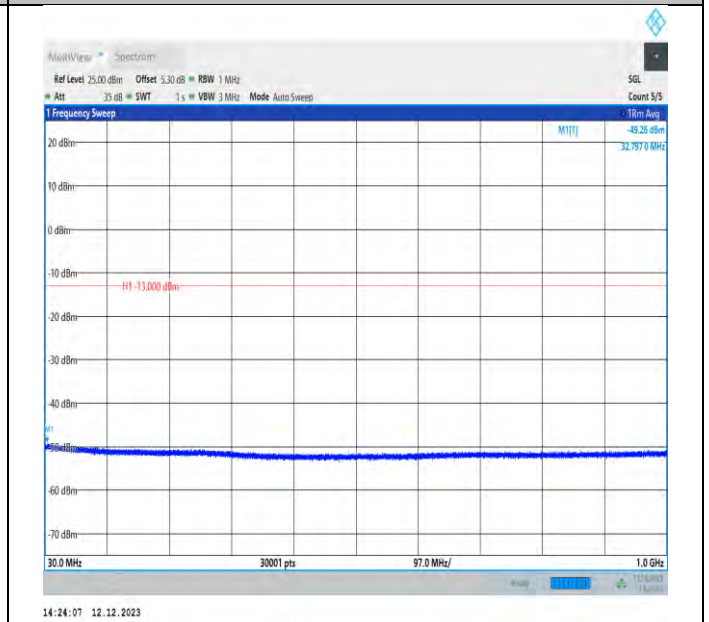


GSM1900-810-0-30~1000MHz-PASS

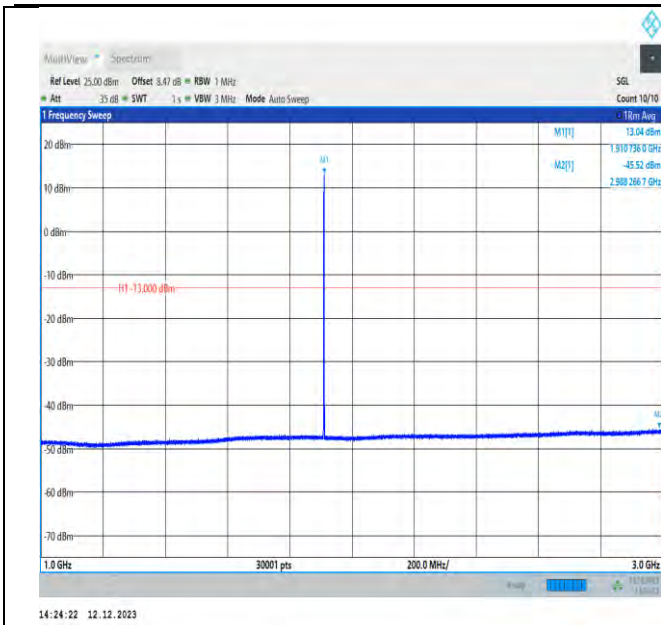


GSM1900-810-0-1000~3000MHz-PASS

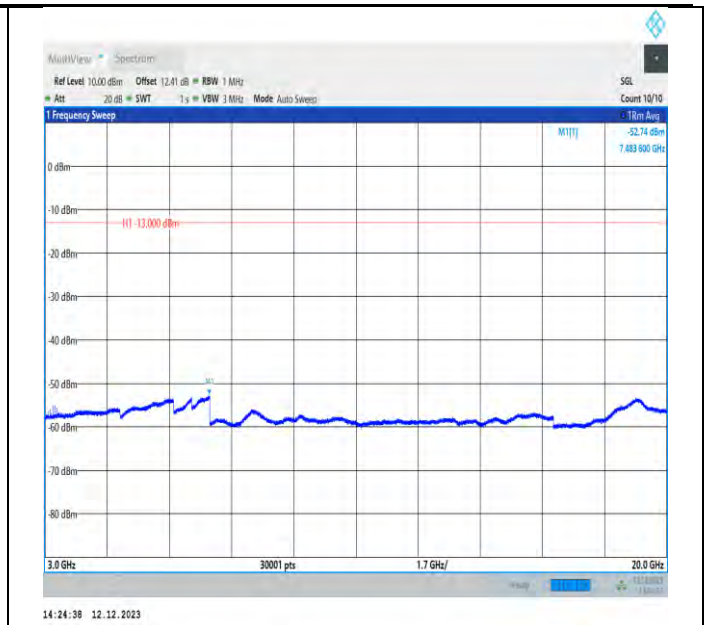

GSM1900-810-0-3000~20000MHz-PASS

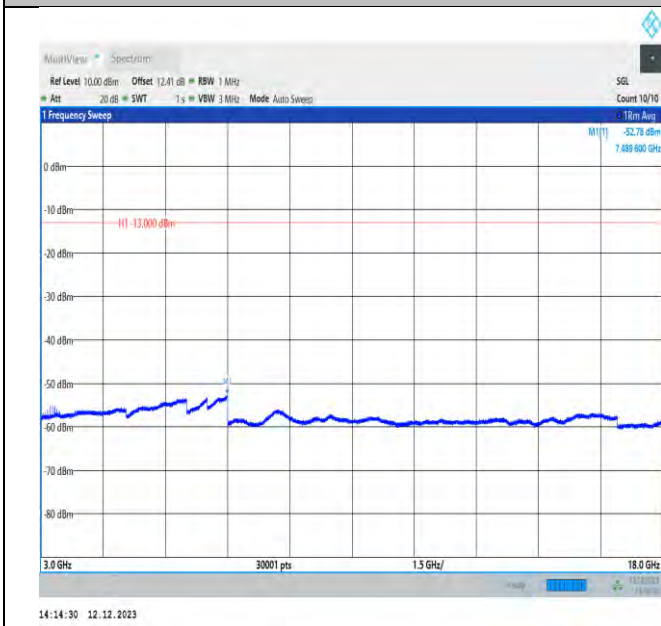

GPRS1900-810-0-3000~18000MHz-PASS

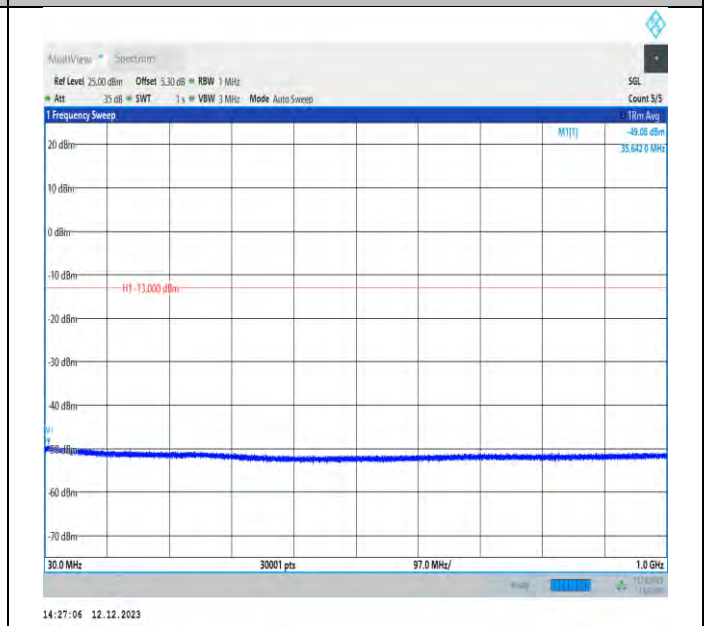

GPRS1900-810-0-30~1000MHz-PASS