




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

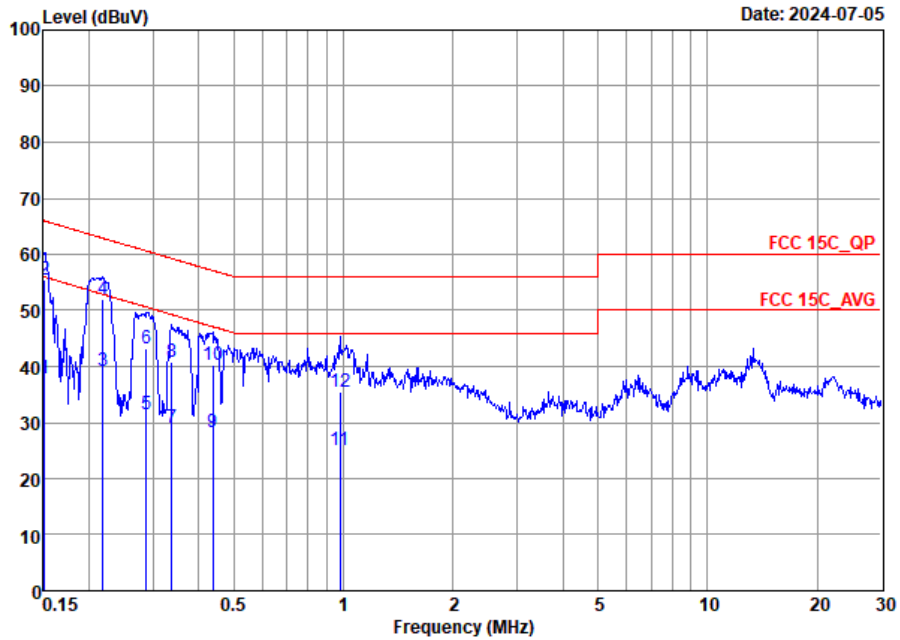


Site : CO01-SZ
 Condition: FCC 15C_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	37.92	-18.04	55.96	17.41	10.38	10.13	Average
2 *	0.15	55.52	-10.44	65.96	35.01	10.38	10.13	QP
3	0.22	39.10	-13.78	52.88	18.61	10.34	10.15	Average
4	0.22	52.00	-10.88	62.88	31.51	10.34	10.15	QP
5	0.29	31.41	-19.18	50.59	11.20	10.06	10.15	Average
6	0.29	43.11	-17.48	60.59	22.90	10.06	10.15	QP
7	0.34	29.14	-20.13	49.27	8.80	10.18	10.16	Average
8	0.34	40.84	-18.43	59.27	20.50	10.18	10.16	QP
9	0.44	28.33	-18.78	47.11	7.80	10.37	10.16	Average
10	0.44	40.23	-16.88	57.11	19.70	10.37	10.16	QP
11	0.98	25.04	-20.96	46.00	4.60	10.28	10.16	Average
12	0.98	35.44	-20.56	56.00	15.00	10.28	10.16	QP



Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

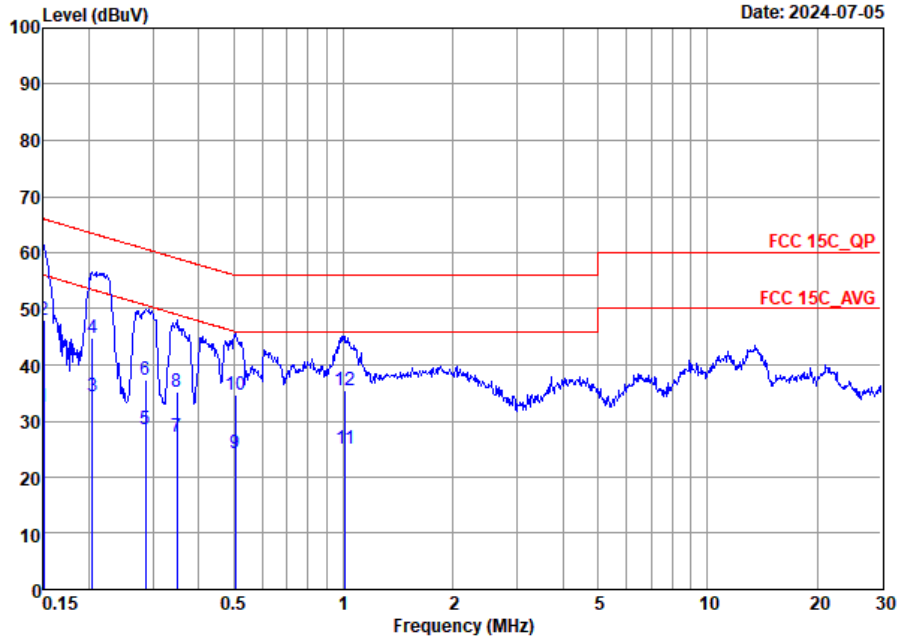

Site : CO01-SZ
 Condition: FCC 15C_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	32.66	-23.34	56.00	12.40	10.13	10.13	Average
2 *	0.15	47.96	-18.04	66.00	27.70	10.13	10.13	QP
3	0.20	34.51	-18.94	53.45	14.10	10.26	10.15	Average
4	0.20	44.71	-18.74	63.45	24.30	10.26	10.15	QP
5	0.29	28.65	-21.98	50.63	8.10	10.40	10.15	Average
6	0.29	37.25	-23.38	60.63	16.70	10.40	10.15	QP
7	0.35	27.19	-21.81	49.00	6.69	10.34	10.16	Average
8	0.35	35.19	-23.81	59.00	14.69	10.34	10.16	QP
9	0.50	24.29	-21.71	46.00	4.00	10.13	10.16	Average
10	0.50	34.79	-21.21	56.00	14.50	10.13	10.16	QP
11	1.01	25.18	-20.82	46.00	4.80	10.22	10.16	Average
12	1.01	35.38	-20.62	56.00	15.00	10.22	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	HuaCong Liang	Relative Humidity :	50%
		Temperature :	20-12°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	10	Bluetooth BR_GFSK	00	2402	DH5	-	-
Mode 2	2400-2483.5	10	Bluetooth BR_GFSK	39	2441	DH5	-	-
Mode 3	2400-2483.5	10	Bluetooth BR_GFSK	78	2480	DH5	-	-
Mode 4	2400-2483.5	10	Bluetooth BR_GFSK	78	2480	DH5	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	00	2353.05	49.13	74.00	-24.87	H	PEAK	Pass	Band Edge
	Bluetooth BR_GFSK	00	4804.00	56.55	74.00	-17.45	H	Peak	Pass	Harmonic
2	Bluetooth BR_GFSK	39	-	-	-	-	-	-	-	Band Edge
	Bluetooth BR_GFSK	39	4882.00	57.06	74.00	-16.94	H	Peak	Pass	Harmonic
3	Bluetooth BR_GFSK	78	2485.07	53.23	74.00	-20.77	H	PEAK	Pass	Band Edge
	Bluetooth BR_GFSK	78	4960.00	57.30	74.00	-16.70	H	Peak	Pass	Harmonic
4	Bluetooth BR_GFSK	78	288.99	-30.5	46	-15.5	H	Peak	Pass	LF



Mode	1																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																							
ANT	10																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<p style="text-align: right;">Date: 2024-07-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2353.05</td> <td>49.13</td> <td>74.00</td> <td>-24.87</td> <td>41.36</td> <td>32.18</td> <td>7.66</td> <td>32.07</td> <td>357</td> <td>24</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2353.05</td> <td>24.34</td> <td>54.00</td> <td>-29.66</td> <td>16.57</td> <td>32.18</td> <td>7.66</td> <td>32.07</td> <td>357</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2353.05	49.13	74.00	-24.87	41.36	32.18	7.66	32.07	357	24	PEAK	2	2353.05	24.34	54.00	-29.66	16.57	32.18	7.66	32.07	357	24	AVERAGE	<p style="text-align: right;">Date: 2024-07-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>110.91</td> <td>70.00</td> <td>40.91</td> <td>102.92</td> <td>32.28</td> <td>7.79</td> <td>32.08</td> <td>357</td> <td>24</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>86.12</td> <td>70.00</td> <td>16.12</td> <td>78.13</td> <td>32.28</td> <td>7.79</td> <td>32.08</td> <td>357</td> <td>24</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	110.91	70.00	40.91	102.92	32.28	7.79	32.08	357	24	PEAK	2	2402.00	86.12	70.00	16.12	78.13	32.28	7.79	32.08	357	24	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2353.05	49.13	74.00	-24.87	41.36	32.18	7.66	32.07	357	24	PEAK																																																																																													
2	2353.05	24.34	54.00	-29.66	16.57	32.18	7.66	32.07	357	24	AVERAGE																																																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2402.00	110.91	70.00	40.91	102.92	32.28	7.79	32.08	357	24	PEAK																																																																																													
2	2402.00	86.12	70.00	16.12	78.13	32.28	7.79	32.08	357	24	AVERAGE																																																																																													



Mode	1																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																							
ANT	10																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<p style="text-align: right;">Date: 2024-07-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2374.47</td> <td>49.05</td> <td>74.00</td> <td>-24.95</td> <td>41.18</td> <td>32.22</td> <td>7.72</td> <td>32.07</td> <td>165</td> <td>200</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2374.47</td> <td>24.26</td> <td>54.00</td> <td>-29.74</td> <td>16.39</td> <td>32.22</td> <td>7.72</td> <td>32.07</td> <td>165</td> <td>200</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2374.47	49.05	74.00	-24.95	41.18	32.22	7.72	32.07	165	200	PEAK	2	2374.47	24.26	54.00	-29.74	16.39	32.22	7.72	32.07	165	200	AVERAGE	<p style="text-align: right;">Date: 2024-07-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>105.40</td> <td>-----</td> <td>-----</td> <td>97.41</td> <td>32.28</td> <td>7.79</td> <td>32.08</td> <td>165</td> <td>200</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2402.00</td> <td>80.61</td> <td>-----</td> <td>-----</td> <td>72.62</td> <td>32.28</td> <td>7.79</td> <td>32.08</td> <td>165</td> <td>200</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	105.40	-----	-----	97.41	32.28	7.79	32.08	165	200	PEAK	2	2402.00	80.61	-----	-----	72.62	32.28	7.79	32.08	165	200	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2374.47	49.05	74.00	-24.95	41.18	32.22	7.72	32.07	165	200	PEAK																																																																																													
2	2374.47	24.26	54.00	-29.74	16.39	32.22	7.72	32.07	165	200	AVERAGE																																																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2402.00	105.40	-----	-----	97.41	32.28	7.79	32.08	165	200	PEAK																																																																																													
2	2402.00	80.61	-----	-----	72.62	32.28	7.79	32.08	165	200	AVERAGE																																																																																													



Mode	1																																																																																																																																																
	Harmonic																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																
ANT	10																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																															
Peak Avg																																																																																																																																																	
	<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>56.55</td> <td>74.00</td> <td>-17.45</td> <td>62.24</td> <td>34.82</td> <td>11.07</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Peak</td> <td colspan="6"></td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>31.76</td> <td>54.00</td> <td>-22.24</td> <td>37.45</td> <td>34.82</td> <td>11.07</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Average</td> <td colspan="6"></td> </tr> </tbody> </table>			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark		Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor	dB	dB	cm	deg					1	4804.00	56.55	74.00	-17.45	62.24	34.82	11.07	51.58	--	--	Peak							2	4804.00	31.76	54.00	-22.24	37.45	34.82	11.07	51.58	--	--	Average							<table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th colspan="2">Ant</th> <th colspan="2">Cable</th> <th colspan="2">Preamp</th> <th colspan="2">APos</th> <th colspan="2">TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th colspan="4"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>51.62</td> <td>74.00</td> <td>-22.38</td> <td>57.31</td> <td>34.82</td> <td>11.07</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Peak</td> <td colspan="6"></td> </tr> <tr> <td>2</td> <td>4804.00</td> <td>26.83</td> <td>54.00</td> <td>-27.17</td> <td>32.52</td> <td>34.82</td> <td>11.07</td> <td>51.58</td> <td>--</td> <td>--</td> <td>Average</td> <td colspan="6"></td> </tr> </tbody> </table>			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark		Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor	dB	dB	cm	deg					1	4804.00	51.62	74.00	-22.38	57.31	34.82	11.07	51.58	--	--	Peak							2	4804.00	26.83	54.00	-27.17	32.52	34.82	11.07	51.58	--	--	Average					
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor	dB	dB	cm	deg																																																																																																																																				
1	4804.00	56.55	74.00	-17.45	62.24	34.82	11.07	51.58	--	--	Peak																																																																																																																																						
2	4804.00	31.76	54.00	-22.24	37.45	34.82	11.07	51.58	--	--	Average																																																																																																																																						
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor	dB	dB	cm	deg																																																																																																																																				
1	4804.00	51.62	74.00	-22.38	57.31	34.82	11.07	51.58	--	--	Peak																																																																																																																																						
2	4804.00	26.83	54.00	-27.17	32.52	34.82	11.07	51.58	--	--	Average																																																																																																																																						



Mode	2																																																																																																																																								
	Harmonic																																																																																																																																								
	2400-2483.5_Bluetooth BR_GFSK_CH39_2441MHz																																																																																																																																								
ANT	10																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																							
Peak Avg	<p style="text-align: right;">Date: 2024-07-01</p>	<p style="text-align: right;">Date: 2024-07-01</p>																																																																																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>57.06</td> <td>74.00</td> <td>-16.94</td> <td>62.66</td> <td>34.85</td> <td>11.10</td> <td>51.55</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>32.27</td> <td>54.00</td> <td>-21.73</td> <td>37.87</td> <td>34.85</td> <td>11.10</td> <td>51.55</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>49.87</td> <td>74.00</td> <td>-24.13</td> <td>51.62</td> <td>36.33</td> <td>13.09</td> <td>51.17</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>25.08</td> <td>54.00</td> <td>-28.92</td> <td>26.83</td> <td>36.33</td> <td>13.09</td> <td>51.17</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4882.00	57.06	74.00	-16.94	62.66	34.85	11.10	51.55	--	Peak	2	4882.00	32.27	54.00	-21.73	37.87	34.85	11.10	51.55	--	Average	3	7323.00	49.87	74.00	-24.13	51.62	36.33	13.09	51.17	--	Peak	4	7323.00	25.08	54.00	-28.92	26.83	36.33	13.09	51.17	--	Average	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4882.00</td> <td>53.69</td> <td>74.00</td> <td>-20.31</td> <td>59.29</td> <td>34.85</td> <td>11.10</td> <td>51.55</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>4882.00</td> <td>28.90</td> <td>54.00</td> <td>-25.10</td> <td>34.50</td> <td>34.85</td> <td>11.10</td> <td>51.55</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>7323.00</td> <td>47.93</td> <td>74.00</td> <td>-26.07</td> <td>49.68</td> <td>36.33</td> <td>13.09</td> <td>51.17</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>7323.00</td> <td>23.14</td> <td>54.00</td> <td>-30.86</td> <td>24.89</td> <td>36.33</td> <td>13.09</td> <td>51.17</td> <td>--</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4882.00	53.69	74.00	-20.31	59.29	34.85	11.10	51.55	--	Peak	2	4882.00	28.90	54.00	-25.10	34.50	34.85	11.10	51.55	--	Average	3	7323.00	47.93	74.00	-26.07	49.68	36.33	13.09	51.17	--	Peak	4	7323.00	23.14	54.00	-30.86	24.89	36.33	13.09	51.17	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																		
1	4882.00	57.06	74.00	-16.94	62.66	34.85	11.10	51.55	--	Peak																																																																																																																															
2	4882.00	32.27	54.00	-21.73	37.87	34.85	11.10	51.55	--	Average																																																																																																																															
3	7323.00	49.87	74.00	-24.13	51.62	36.33	13.09	51.17	--	Peak																																																																																																																															
4	7323.00	25.08	54.00	-28.92	26.83	36.33	13.09	51.17	--	Average																																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																		
1	4882.00	53.69	74.00	-20.31	59.29	34.85	11.10	51.55	--	Peak																																																																																																																															
2	4882.00	28.90	54.00	-25.10	34.50	34.85	11.10	51.55	--	Average																																																																																																																															
3	7323.00	47.93	74.00	-26.07	49.68	36.33	13.09	51.17	--	Peak																																																																																																																															
4	7323.00	23.14	54.00	-30.86	24.89	36.33	13.09	51.17	--	Average																																																																																																																															



Mode	3																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																							
ANT	10																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																						
Peak	<p style="text-align: right;">Date: 2024-07-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.07</td> <td>53.23</td> <td>74.00</td> <td>-20.77</td> <td>44.98</td> <td>32.47</td> <td>7.88</td> <td>32.10</td> <td>371</td> <td>35</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2485.07</td> <td>28.44</td> <td>54.00</td> <td>-25.56</td> <td>20.19</td> <td>32.47</td> <td>7.88</td> <td>32.10</td> <td>371</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.07	53.23	74.00	-20.77	44.98	32.47	7.88	32.10	371	35	PEAK	2	2485.07	28.44	54.00	-25.56	20.19	32.47	7.88	32.10	371	35	AVERAGE	<p style="text-align: right;">Date: 2024-07-01</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>111.38</td> <td>-----</td> <td>-----</td> <td>103.15</td> <td>32.46</td> <td>7.87</td> <td>32.10</td> <td>371</td> <td>35</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>86.59</td> <td>-----</td> <td>-----</td> <td>78.36</td> <td>32.46</td> <td>7.87</td> <td>32.10</td> <td>371</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	111.38	-----	-----	103.15	32.46	7.87	32.10	371	35	PEAK	2	2480.00	86.59	-----	-----	78.36	32.46	7.87	32.10	371	35	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2485.07	53.23	74.00	-20.77	44.98	32.47	7.88	32.10	371	35	PEAK																																																																																													
2	2485.07	28.44	54.00	-25.56	20.19	32.47	7.88	32.10	371	35	AVERAGE																																																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2480.00	111.38	-----	-----	103.15	32.46	7.87	32.10	371	35	PEAK																																																																																													
2	2480.00	86.59	-----	-----	78.36	32.46	7.87	32.10	371	35	AVERAGE																																																																																													



Mode	3																																																																																																							
	Band Edge																																																																																																							
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																							
ANT	10																																																																																																							
Pol.	Vertical	Fundamental																																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.83</td> <td>51.77</td> <td>74.00</td> <td>-22.23</td> <td>43.53</td> <td>32.46</td> <td>7.88</td> <td>32.10</td> <td>128</td> <td>203</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2483.83</td> <td>26.98</td> <td>54.00</td> <td>-27.02</td> <td>18.74</td> <td>32.46</td> <td>7.88</td> <td>32.10</td> <td>128</td> <td>203</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.83	51.77	74.00	-22.23	43.53	32.46	7.88	32.10	128	203	PEAK	2	2483.83	26.98	54.00	-27.02	18.74	32.46	7.88	32.10	128	203	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>108.03</td> <td>-----</td> <td>-----</td> <td>99.80</td> <td>32.46</td> <td>7.87</td> <td>32.10</td> <td>128</td> <td>203</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>2480.00</td> <td>83.24</td> <td>-----</td> <td>-----</td> <td>75.01</td> <td>32.46</td> <td>7.87</td> <td>32.10</td> <td>128</td> <td>203</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	108.03	-----	-----	99.80	32.46	7.87	32.10	128	203	PEAK	2	2480.00	83.24	-----	-----	75.01	32.46	7.87	32.10	128	203	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2483.83	51.77	74.00	-22.23	43.53	32.46	7.88	32.10	128	203	PEAK																																																																																													
2	2483.83	26.98	54.00	-27.02	18.74	32.46	7.88	32.10	128	203	AVERAGE																																																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	2480.00	108.03	-----	-----	99.80	32.46	7.87	32.10	128	203	PEAK																																																																																													
2	2480.00	83.24	-----	-----	75.01	32.46	7.87	32.10	128	203	AVERAGE																																																																																													




Mode	3																																																																																																																																						
	Harmonic																																																																																																																																						
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																						
ANT	10																																																																																																																																						
Pol.	Horizontal	Vertical																																																																																																																																					
Peak Avg	<p style="text-align: right;">Date: 2024-07-01</p>	<p style="text-align: right;">Date: 2024-07-01</p>																																																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>57.30</td> <td>74.00</td> <td>-16.70</td> <td>62.79</td> <td>34.88</td> <td>11.14</td> <td>51.51</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>32.51</td> <td>54.00</td> <td>-21.49</td> <td>38.00</td> <td>34.88</td> <td>11.14</td> <td>51.51</td> <td>-- -- Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>47.36</td> <td>74.00</td> <td>-26.64</td> <td>49.20</td> <td>36.38</td> <td>12.97</td> <td>51.19</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>22.57</td> <td>54.00</td> <td>-31.43</td> <td>24.41</td> <td>36.38</td> <td>12.97</td> <td>51.19</td> <td>-- -- Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4960.00	57.30	74.00	-16.70	62.79	34.88	11.14	51.51	-- -- Peak	2	4960.00	32.51	54.00	-21.49	38.00	34.88	11.14	51.51	-- -- Average	3	7440.00	47.36	74.00	-26.64	49.20	36.38	12.97	51.19	-- -- Peak	4	7440.00	22.57	54.00	-31.43	24.41	36.38	12.97	51.19	-- -- Average	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>53.78</td> <td>74.00</td> <td>-20.22</td> <td>59.27</td> <td>34.88</td> <td>11.14</td> <td>51.51</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>4960.00</td> <td>28.99</td> <td>54.00</td> <td>-25.01</td> <td>34.48</td> <td>34.88</td> <td>11.14</td> <td>51.51</td> <td>-- -- Average</td> </tr> <tr> <td>3</td> <td>7440.00</td> <td>46.57</td> <td>74.00</td> <td>-27.43</td> <td>48.41</td> <td>36.38</td> <td>12.97</td> <td>51.19</td> <td>-- -- Peak</td> </tr> <tr> <td>4</td> <td>7440.00</td> <td>21.78</td> <td>54.00</td> <td>-32.22</td> <td>23.62</td> <td>36.38</td> <td>12.97</td> <td>51.19</td> <td>-- -- Average</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1	4960.00	53.78	74.00	-20.22	59.27	34.88	11.14	51.51	-- -- Peak	2	4960.00	28.99	54.00	-25.01	34.48	34.88	11.14	51.51	-- -- Average	3	7440.00	46.57	74.00	-27.43	48.41	36.38	12.97	51.19	-- -- Peak	4	7440.00	21.78	54.00	-32.22	23.62	36.38	12.97	51.19
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																															
1	4960.00	57.30	74.00	-16.70	62.79	34.88	11.14	51.51	-- -- Peak																																																																																																																														
2	4960.00	32.51	54.00	-21.49	38.00	34.88	11.14	51.51	-- -- Average																																																																																																																														
3	7440.00	47.36	74.00	-26.64	49.20	36.38	12.97	51.19	-- -- Peak																																																																																																																														
4	7440.00	22.57	54.00	-31.43	24.41	36.38	12.97	51.19	-- -- Average																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																																																															
1	4960.00	53.78	74.00	-20.22	59.27	34.88	11.14	51.51	-- -- Peak																																																																																																																														
2	4960.00	28.99	54.00	-25.01	34.48	34.88	11.14	51.51	-- -- Average																																																																																																																														
3	7440.00	46.57	74.00	-27.43	48.41	36.38	12.97	51.19	-- -- Peak																																																																																																																														
4	7440.00	21.78	54.00	-32.22	23.62	36.38	12.97	51.19	-- -- Average																																																																																																																														




Mode	4																																																																																																																																																																																																
	LF																																																																																																																																																																																																
	2400-2483.5_Bluetooth BR_GFSK_CH78_2480MHz																																																																																																																																																																																																
ANT	10																																																																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																																																															
QP/Peak	<p>Date: 2024-06-24</p>	<p>Date: 2024-06-24</p>																																																																																																																																																																																															
	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>62.01</td><td>17.20</td><td>40.00</td><td>-22.80</td><td>36.44</td><td>19.29</td><td>1.44</td><td>39.97</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>160.95</td><td>22.43</td><td>43.50</td><td>-21.07</td><td>40.82</td><td>19.32</td><td>2.31</td><td>40.02</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>191.99</td><td>25.51</td><td>43.50</td><td>-17.99</td><td>46.26</td><td>16.73</td><td>2.52</td><td>40.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>219.15</td><td>28.10</td><td>46.00</td><td>-17.90</td><td>48.35</td><td>17.05</td><td>2.68</td><td>39.98</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>288.99</td><td>30.50</td><td>46.00</td><td>-15.50</td><td>47.85</td><td>19.54</td><td>3.06</td><td>39.95</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>808.91</td><td>29.53</td><td>46.00</td><td>-16.47</td><td>35.59</td><td>28.29</td><td>5.11</td><td>39.46</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	62.01	17.20	40.00	-22.80	36.44	19.29	1.44	39.97	--	--	Peak	2	160.95	22.43	43.50	-21.07	40.82	19.32	2.31	40.02	--	--	Peak	3	191.99	25.51	43.50	-17.99	46.26	16.73	2.52	40.00	--	--	Peak	4	219.15	28.10	46.00	-17.90	48.35	17.05	2.68	39.98	--	--	Peak	5	288.99	30.50	46.00	-15.50	47.85	19.54	3.06	39.95	--	--	Peak	6	808.91	29.53	46.00	-16.47	35.59	28.29	5.11	39.46	--	--	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>40.67</td><td>24.30</td><td>40.00</td><td>-15.70</td><td>43.23</td><td>19.81</td><td>1.17</td><td>39.91</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>103.72</td><td>20.50</td><td>43.50</td><td>-23.00</td><td>43.22</td><td>15.49</td><td>1.86</td><td>40.07</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>161.92</td><td>23.95</td><td>43.50</td><td>-19.55</td><td>42.34</td><td>19.32</td><td>2.31</td><td>40.02</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>222.06</td><td>23.36</td><td>46.00</td><td>-22.64</td><td>43.45</td><td>17.19</td><td>2.70</td><td>39.98</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>267.65</td><td>23.90</td><td>46.00</td><td>-22.10</td><td>42.12</td><td>18.79</td><td>2.95</td><td>39.96</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>502.39</td><td>23.53</td><td>46.00</td><td>-22.47</td><td>35.31</td><td>23.88</td><td>4.04</td><td>39.70</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	40.67	24.30	40.00	-15.70	43.23	19.81	1.17	39.91	--	--	Peak	2	103.72	20.50	43.50	-23.00	43.22	15.49	1.86	40.07	--	--	Peak	3	161.92	23.95	43.50	-19.55	42.34	19.32	2.31	40.02	--	--	Peak	4	222.06	23.36	46.00	-22.64	43.45	17.19	2.70	39.98	--	--	Peak	5	267.65	23.90	46.00	-22.10	42.12	18.79	2.95	39.96	--	--	Peak	6	502.39	23.53	46.00	-22.47	35.31	23.88	4.04	39.70	--	--
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	62.01	17.20	40.00	-22.80	36.44	19.29	1.44	39.97	--	--	Peak																																																																																																																																																																																						
2	160.95	22.43	43.50	-21.07	40.82	19.32	2.31	40.02	--	--	Peak																																																																																																																																																																																						
3	191.99	25.51	43.50	-17.99	46.26	16.73	2.52	40.00	--	--	Peak																																																																																																																																																																																						
4	219.15	28.10	46.00	-17.90	48.35	17.05	2.68	39.98	--	--	Peak																																																																																																																																																																																						
5	288.99	30.50	46.00	-15.50	47.85	19.54	3.06	39.95	--	--	Peak																																																																																																																																																																																						
6	808.91	29.53	46.00	-16.47	35.59	28.29	5.11	39.46	--	--	Peak																																																																																																																																																																																						
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																							
1	40.67	24.30	40.00	-15.70	43.23	19.81	1.17	39.91	--	--	Peak																																																																																																																																																																																						
2	103.72	20.50	43.50	-23.00	43.22	15.49	1.86	40.07	--	--	Peak																																																																																																																																																																																						
3	161.92	23.95	43.50	-19.55	42.34	19.32	2.31	40.02	--	--	Peak																																																																																																																																																																																						
4	222.06	23.36	46.00	-22.64	43.45	17.19	2.70	39.98	--	--	Peak																																																																																																																																																																																						
5	267.65	23.90	46.00	-22.10	42.12	18.79	2.95	39.96	--	--	Peak																																																																																																																																																																																						
6	502.39	23.53	46.00	-22.47	35.31	23.88	4.04	39.70	--	--	Peak																																																																																																																																																																																						

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

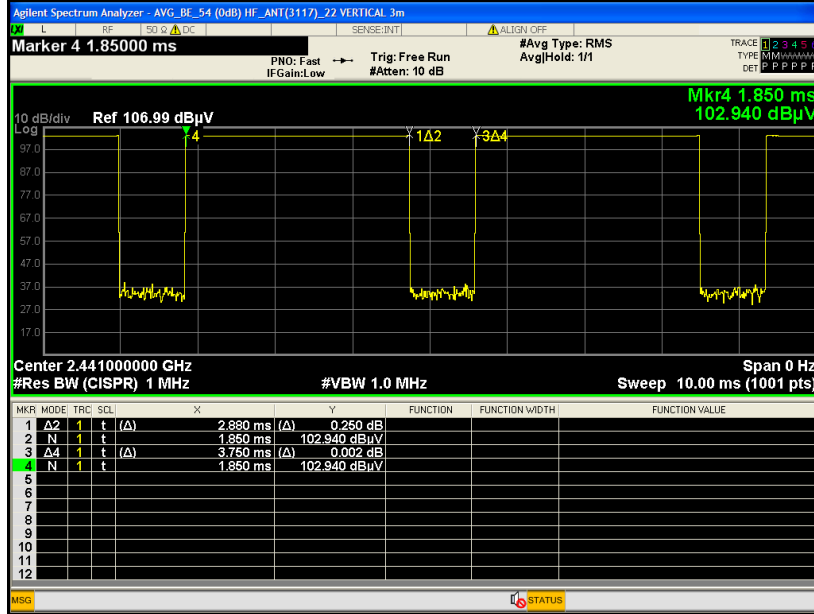

DH5 on time (Count Pulses) Plot on Channel 39

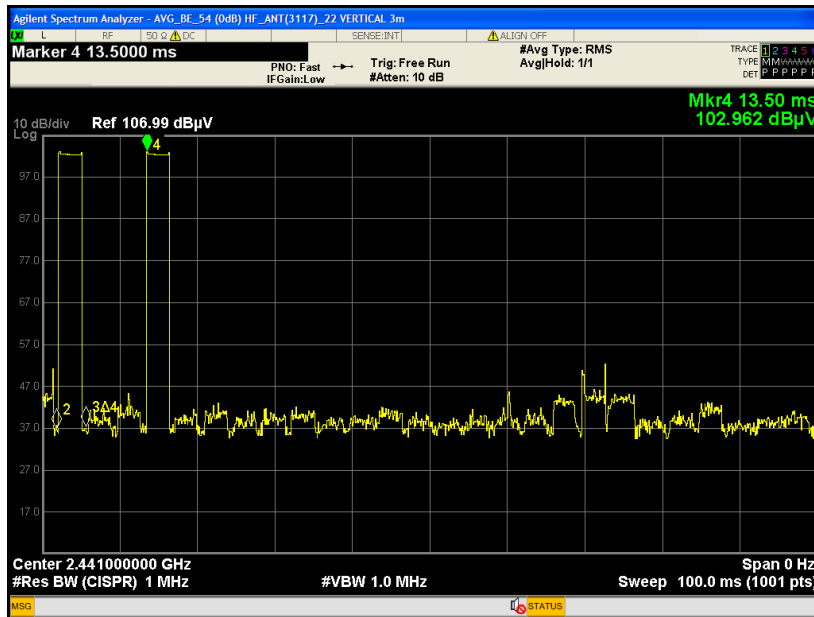

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.