



FCC Part 15C Test Report

FCC ID: 2AUZB-RM2500

Product Name:	Wireless Router
Trademark:	HNK
Model Name :	RM2500
Prepared For :	SHENZHEN ZK TECHNOLOGY CO., LTD
Address :	SHENZHEN CITY LONGGANG DISTRICT STREETS QINGLIN ROAD SHENZHEN CITY STUDENTS (LONGGANG) BUSINESS PA... China 518172 □
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	Oct. 25, 2019 – Dec. 11, 2019
Date of Report :	Dec. 11, 2019
Report No.:	BCTC-LH191001468-1E

TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN ZK TECHNOLOGY CO., LTD
Address : SHENZHEN CITY LONGGANG DISTRICT STREETS QINGLIN
ROAD SHENZHEN CITY STUDENTS (LONGGANG) BUSINESS
PA... China 518172 □
Manufacture's Name..... : Huizhou MTN WEIYE Technology Development Co., Ltd
Address : No.2 Huitai Road, Huinan High-tech Industrial Park, Huiao
Avenue, Huizhou City, Guangdong Province, China.
Product description
Product name : Wireless Router
Trademark : HNK
Model and/or type reference : RM2500
Standards : FCC Part15.247
ANSI C63.10:2013
KDB 662911 D01 v02r01
558074 D01 15.247 Meas Guidance v05r02

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Willem Wang

Reviewer(Supervisor): Eric Yang

Approved(Manager): Zero Zhou

Willem Wang

Zero Zhou

Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	13
3.1.3 DEVIATION FROM TEST STANDARD	13
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	19
3.2.1 RADIATED EMISSION LIMITS	19
3.2.2 TEST PROCEDURE	20
3.2.3 DEVIATION FROM TEST STANDARD	20
3.2.4 TEST SETUP	20
3.2.5 EUT OPERATING CONDITIONS	21
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	22
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	23
3.2.8 TEST RESULTS (1GHZ~25GHZ)	27
3.3 RADIATED BAND EMISSION MEASUREMENT	31
3.3.1 TEST REQUIREMENT:	31
3.3.2 TEST PROCEDURE	31
3.3.3 DEVIATION FROM TEST STANDARD	32
3.3.4 TEST SETUP	32
3.3.5 EUT OPERATING CONDITIONS	32

Table of Contents	Page
4 . POWER SPECTRAL DENSITY TEST	34
4.1 APPLIED PROCEDURES / LIMIT	34
4.1.1 TEST PROCEDURE	34
4.1.2 DEVIATION FROM STANDARD	34
4.1.3 TEST SETUP	34
4.1.4 EUT OPERATION CONDITIONS	34
4.1.5 TEST RESULTS	35
5 . BANDWIDTH TEST	43
5.1 APPLIED PROCEDURES / LIMIT	43
5.1.1 TEST PROCEDURE	43
5.1.2 DEVIATION FROM STANDARD	43
5.1.3 TEST SETUP	43
5.1.4 EUT OPERATION CONDITIONS	43
5.1.5 TEST RESULTS	44
6 . PEAK OUTPUT POWER TEST	52
6.1 APPLIED PROCEDURES/LIMIT	52
6.1.1 TEST PROCEDURE	52
6.1.2 DEVIATION FROM STANDARD	52
6.1.3 TEST SETUP	52
6.1.4 EUT OPERATION CONDITIONS	52
6.1.5 TEST RESULTS	53
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	54
7.1 APPLICABLE STANDARD	54
7.2 TEST PROCEDURE	54
7.3 DEVIATION FROM STANDARD	54
7.4 TEST SETUP	54
7.5 EUT OPERATION CONDITIONS	54
7.6 TEST RESULTS	54
8 . DUTY CYCLE OF TEST SIGNAL	63
8.1 STANDARD REQUIREMENT	63
8.2 FORMULA:	63
9 . ANTENNA REQUIREMENT	66
9.1 STANDARD REQUIREMENT	66

Table of Contents

	Page
9.2 EUT ANTENNA	66
10 . EUT TEST PHOTO	67
11 . EUT PHOTO	70
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (d)	Radiated Spurious Emission	PASS	
15.247 (e)	Power Spectral Density	PASS	
15.205	Restricted Band of Operation	PASS	
15.247 (d)	Band Edge (Out of Band Emissions)	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59 °C

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless Router	
Trade Name	HNK	
Model Name	RM2500	
Model Difference	N/A	
Product Description	Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n HT40: 2422-2452MHz
	Modulation Type:	WIFI: OFDM/DSSS
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
	Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz:7 CH
	Antenna Designation:	Please see Note 3.
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Power Supply	Adapter 1: Model No.: LPL-U012120100ZH Input: AC 100-240V 50/60Hz 0.35A MAX Output: DC 12V 1A Adapter 2: Model No.: RA004-1201000US Input: AC 100-240V 50/60Hz 0.35A MAX Output: DC 12V 1A	
hardware version	H1.0	
Software version	S1.0	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List for 802.11b/g/n(20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	05	2432	07	2442	09	2452
04	2427	06	2437	08	2447		

3.

Table for Internal Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	Internal antenna	3	
B	N/A	N/A	Internal antenna	3	

Antenna A gain: 3dBi, Antenna B gain: 3dBi,

For MIMO mode for 802.11n20, 802.11n40, Directional gain=[10log(GA+ G B)] dbi =6.01dbi

4. Type of device:Indoor AP

2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

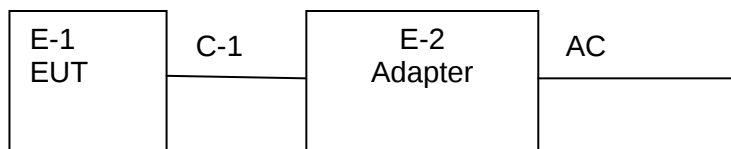

Radiated Spurious Emission

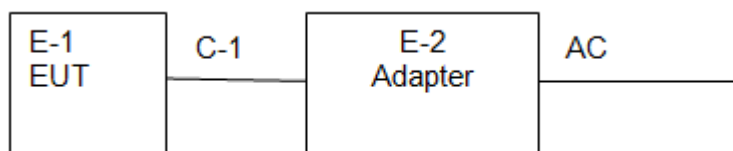

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless Router	HNK	RM2500	N/A	EUT
E-2	Adapter	N/A	LPL-U012120100ZH/ RA004-1201000US	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.5M	DC cableunshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 13, 2019	Jun. 12, 2020
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 13, 2019	Jun. 12, 2020
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	Jun. 22, 2019	Jun. 21, 2020
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Jun. 22, 2019	Jun. 21, 2020
5	Horn Antenna (18GHz-40GHz)	SCHWARZBECK	BBHA9170	822	Jun. 22, 2019	Jun. 21, 2020
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
7	Amplifier (0.5GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	Jun. 17, 2019	Jun. 16, 2020
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Jul. 02, 2019	Jul. 01, 2020
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 25, 2019	Jun. 24, 2020
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 25, 2019	Jun. 24, 2020
13	Power Metter	Keysight	E4419B	\	Jun. 17, 2019	Jun. 16, 2020
14	Power Sensor (AV)	Keysight	E9 300A	\	Jun. 17, 2019	Jun. 16, 2020
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 13, 2019	Jun. 12, 2020
16	Spectrum Analyzer 9kHz-40GHz	Aglient	FSP40	100363	Jun. 13, 2019	Jun. 12, 2020
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\



Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESR3	102075	Jun. 13, 2019	Jun. 12, 2020
2	LISN	SCHWARZBEC K	NSLK8127	8127739	Jun. 13, 2019	Jun. 12, 2020
3	LISN	R&S	ENV216	101375	Jun. 13, 2019	Jun. 12, 2020
4	RF cables	Huber+Suhnar	9kHz-30MHz	B1702988-00 08	Jun. 25, 2019	Jun. 24, 2020
5	Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

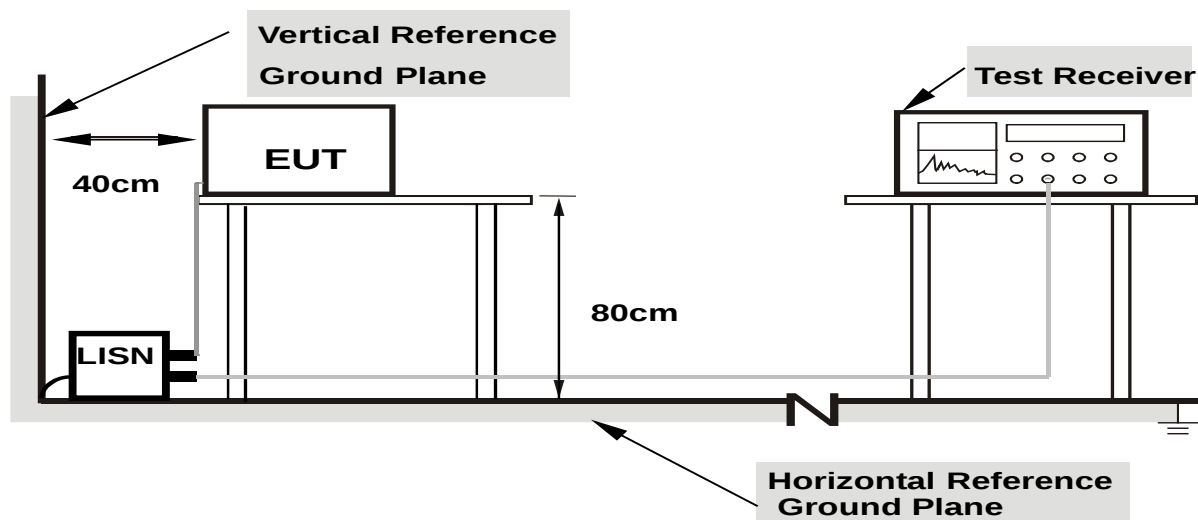

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



3.1.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 1			

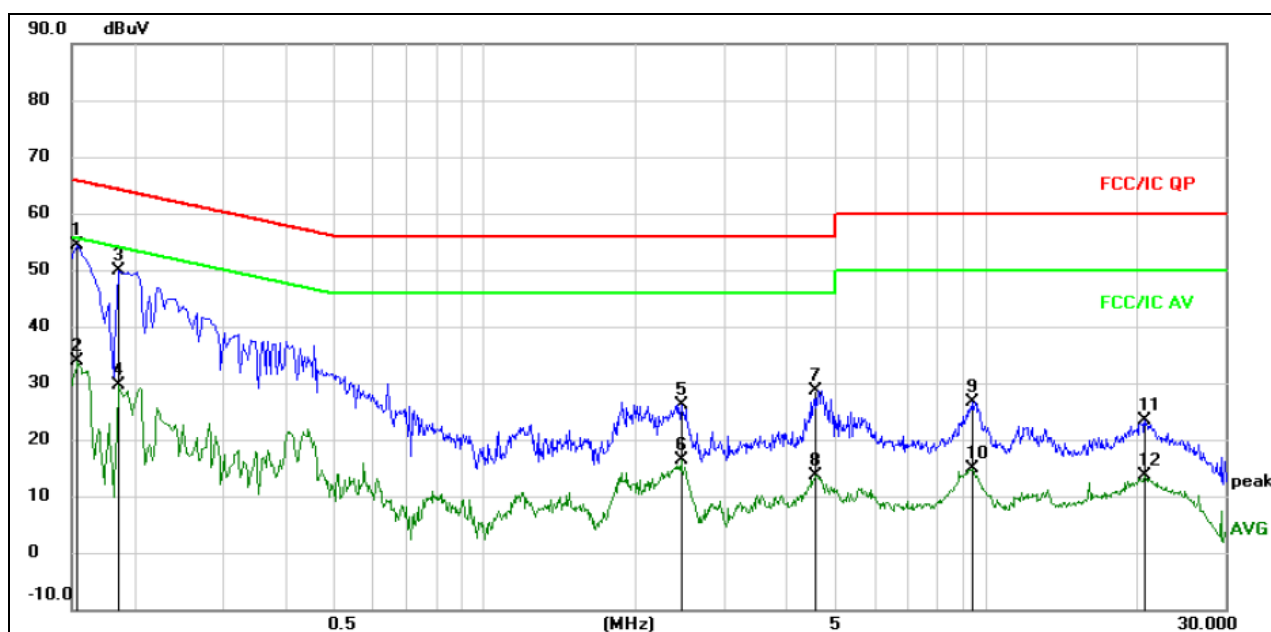

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV		dBuV	dBuV	dB		
1	*	0.1539	44.97	9.52	54.49	65.79	-11.30	QP	
2		0.1539	24.31	9.52	33.83	55.79	-21.96	AVG	
3		0.1860	40.40	9.48	49.88	64.21	-14.33	QP	
4		0.1860	20.13	9.48	29.61	54.21	-24.60	AVG	
5		2.4660	16.59	9.62	26.21	56.00	-29.79	QP	
6		2.4660	6.83	9.62	16.45	46.00	-29.55	AVG	
7		4.5860	18.82	9.77	28.59	56.00	-27.41	QP	
8		4.5860	3.81	9.77	13.58	46.00	-32.42	AVG	
9		9.3940	17.05	9.70	26.75	60.00	-33.25	QP	
10		9.3940	5.18	9.70	14.88	50.00	-35.12	AVG	
11		20.7700	13.50	9.78	23.28	60.00	-36.72	QP	
12		20.7700	3.97	9.78	13.75	50.00	-36.25	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 1			




Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV		dBuV	dBuV	dB	Detector	Comment
1	*	0.1539	46.52	9.52	56.04	65.79	-9.75	QP	
2		0.1539	26.65	9.52	36.17	55.79	-19.62	AVG	
3		0.1940	41.77	9.47	51.24	63.86	-12.62	QP	
4		0.1940	21.52	9.47	30.99	53.86	-22.87	AVG	
5		2.4539	14.79	9.62	24.41	56.00	-31.59	QP	
6		2.4539	3.95	9.62	13.57	46.00	-32.43	AVG	
7		4.6340	16.41	9.77	26.18	56.00	-29.82	QP	
8		4.6340	0.84	9.77	10.61	46.00	-35.39	AVG	
9		9.3180	15.09	9.70	24.79	60.00	-35.21	QP	
10		9.3180	2.19	9.70	11.89	50.00	-38.11	AVG	
11		20.9700	11.51	9.78	21.29	60.00	-38.71	QP	
12		20.9700	0.99	9.78	10.77	50.00	-39.23	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 2			

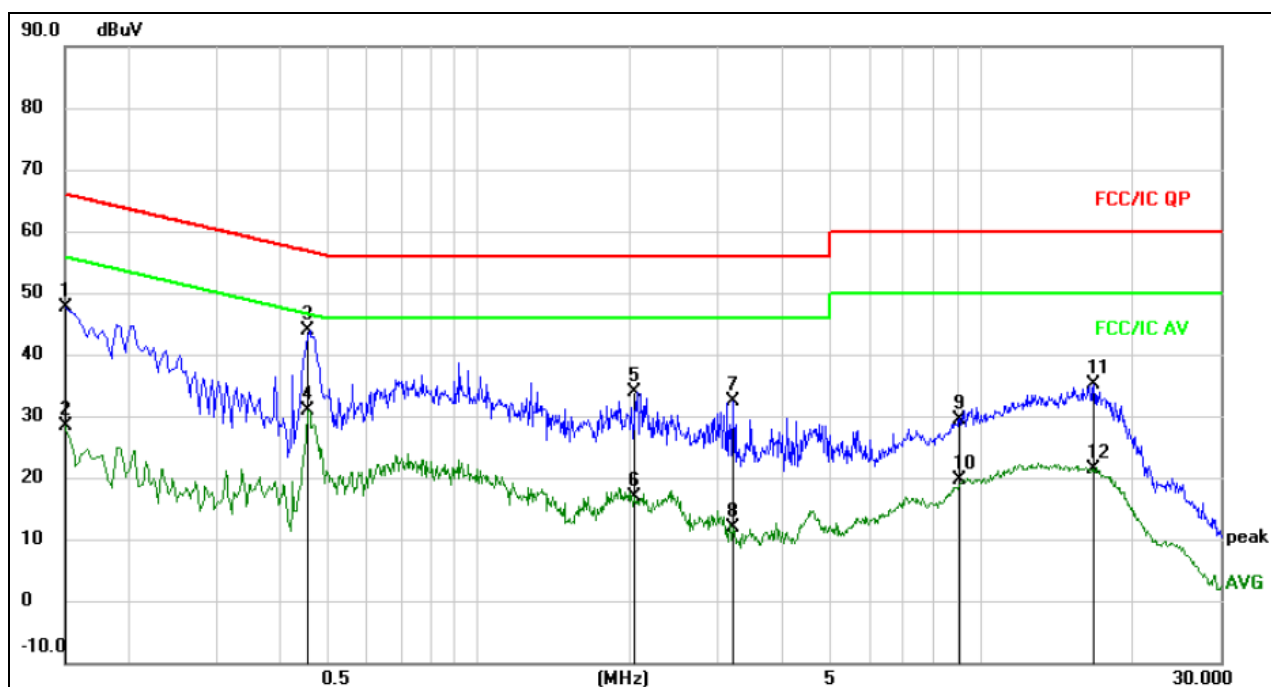


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV		dBuV	dBuV	dB	Detector	Comment
1		0.1500	38.18	9.52	47.70	66.00	-18.30	QP	
2		0.1500	18.86	9.52	28.38	56.00	-27.62	AVG	
3	*	0.4580	34.29	9.55	43.84	56.73	-12.89	QP	
4		0.4580	21.31	9.55	30.86	46.73	-15.87	AVG	
5		2.0500	24.26	9.59	33.85	56.00	-22.15	QP	
6		2.0500	7.37	9.59	16.96	46.00	-29.04	AVG	
7		3.2180	22.76	9.68	32.44	56.00	-23.56	QP	
8		3.2180	2.08	9.68	11.76	46.00	-34.24	AVG	
9		9.0460	19.75	9.70	29.45	60.00	-30.55	QP	
10		9.0460	9.83	9.70	19.53	50.00	-30.47	AVG	
11		16.7700	25.41	9.73	35.14	60.00	-24.86	QP	
12		16.7700	11.67	9.73	21.40	50.00	-28.60	AVG	



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 2			

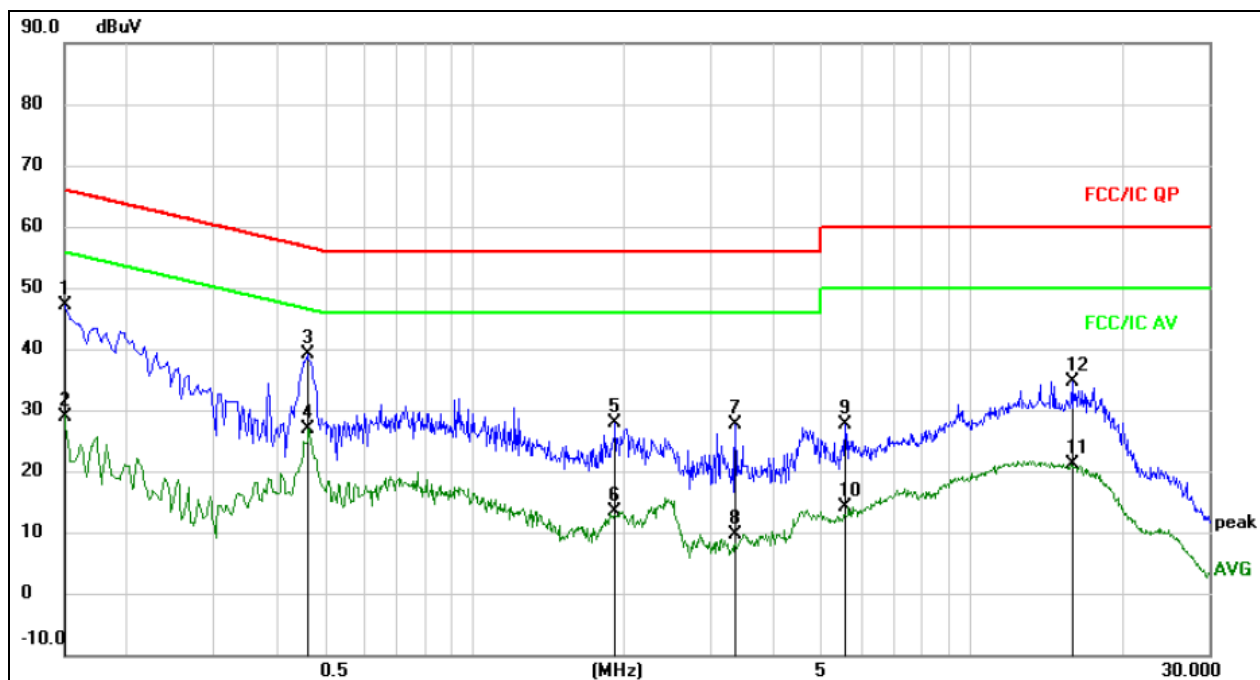

Remark:

1. All readings are Quasi-Peak and Average values.

2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV		dBuV	dBuV	dB	Detector	Comment
1		0.1500	37.69	9.52	47.21	66.00	-18.79	QP	
2		0.1500	19.48	9.52	29.00	56.00	-27.00	AVG	
3	*	0.4620	29.64	9.56	39.20	56.66	-17.46	QP	
4		0.4620	17.36	9.56	26.92	46.66	-19.74	AVG	
5		1.9220	18.25	9.59	27.84	56.00	-28.16	QP	
6		1.9220	3.90	9.59	13.49	46.00	-32.51	AVG	
7		3.3500	17.96	9.68	27.64	56.00	-28.36	QP	
8		3.3500	0.04	9.68	9.72	46.00	-36.28	AVG	
9		5.5780	17.74	9.78	27.52	60.00	-32.48	QP	
10		5.5780	4.40	9.78	14.18	50.00	-35.82	AVG	
11		15.8540	11.36	9.72	21.08	50.00	-28.92	AVG	
12		15.8940	24.80	9.72	34.52	60.00	-25.48	QP	

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

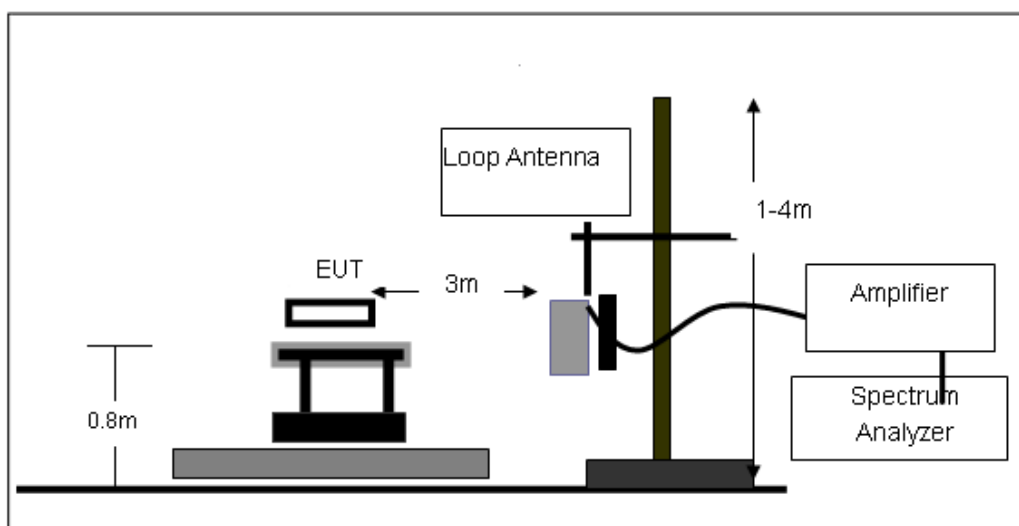

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

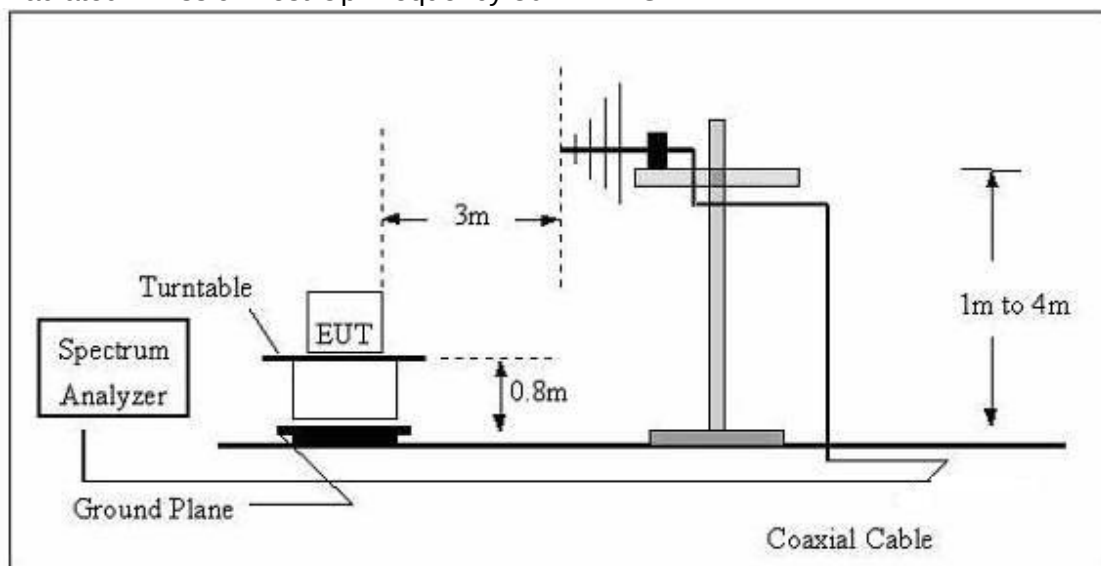

(C) Radiated Emission Test-Up Frequency Above 1GHz

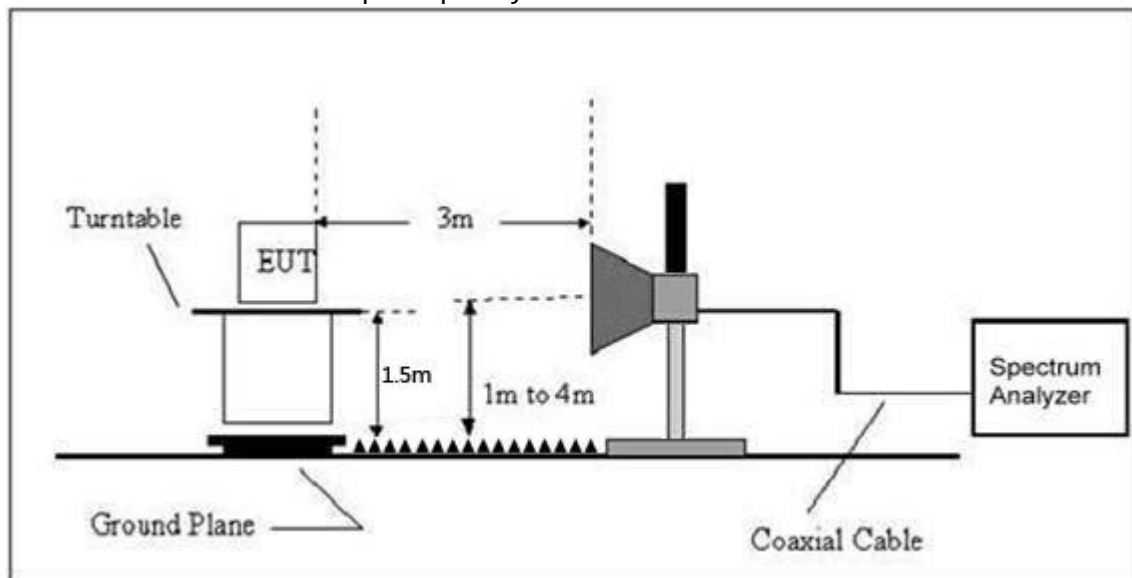

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

Temperature:	26 °C	Relative Humidity :	54%
Pressure:	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 1			

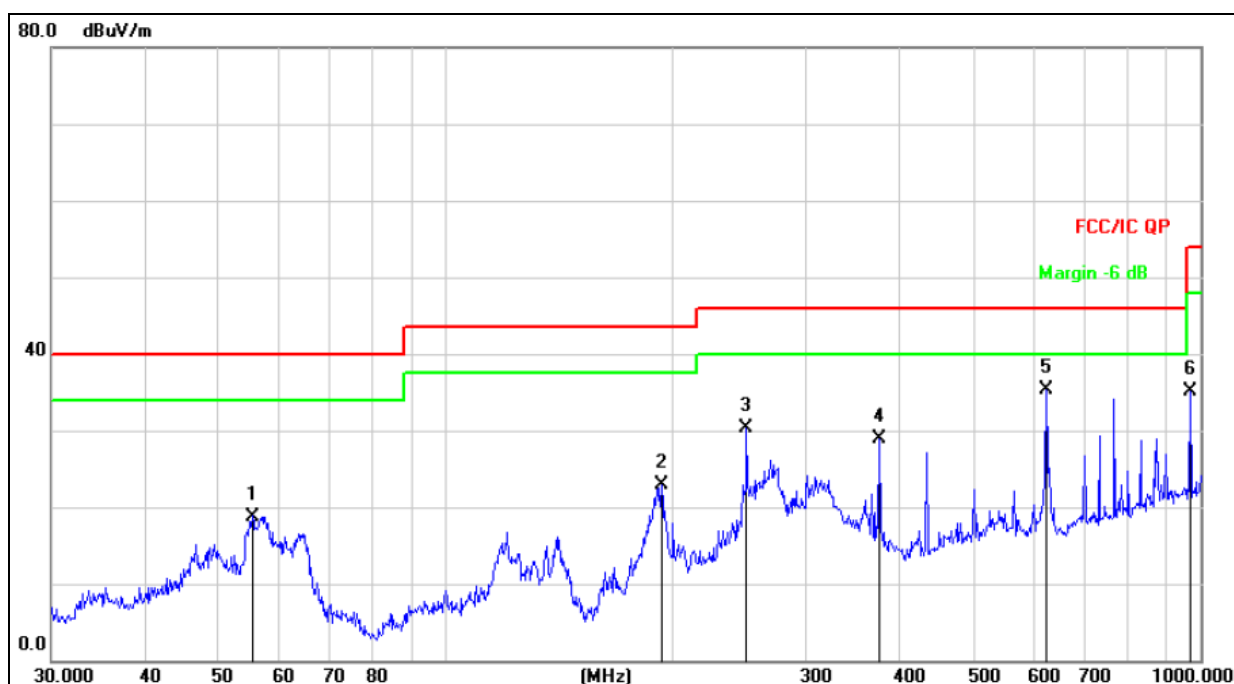


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB/m	dB Detector
1		55.4147	34.22	-15.42	18.80	40.00	-21.20 QP
2		193.0945	39.69	-16.74	22.95	43.50	-20.55 QP
3		250.3012	45.40	-15.14	30.26	46.00	-15.74 QP
4		375.9385	40.57	-11.64	28.93	46.00	-17.07 QP
5	*	625.0780	41.96	-6.67	35.29	46.00	-10.71 QP
6		968.9338	36.07	-1.00	35.07	54.00	-18.93 QP



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 1			

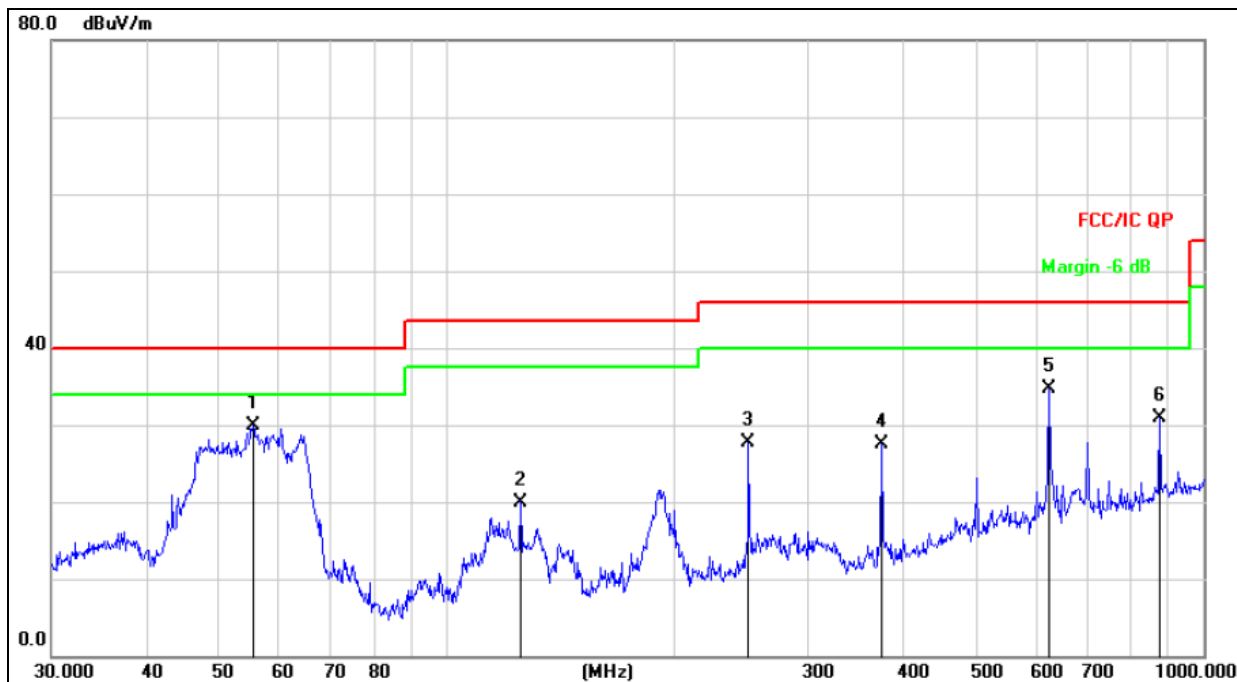


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB/m	dB Detector
1	*	55.4147	45.27	-15.42	29.85	40.00	-10.15 QP
2		125.0066	37.89	-17.89	20.00	43.50	-23.50 QP
3		250.3012	42.76	-15.14	27.62	46.00	-18.38 QP
4		375.9385	39.09	-11.64	27.45	46.00	-18.55 QP
5		625.0780	41.36	-6.67	34.69	46.00	-11.31 QP
6		875.2470	32.99	-2.00	30.99	46.00	-15.01 QP



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 2			

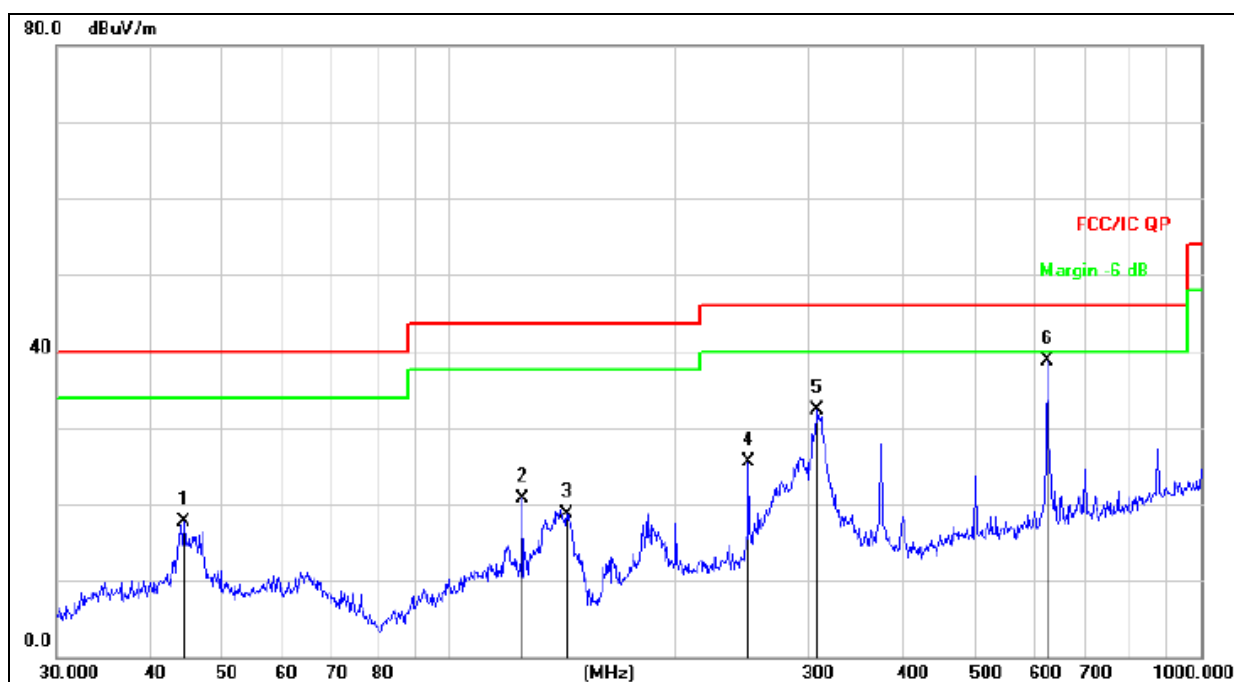


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.2752	32.97	-15.17	17.80	40.00	-22.20	QP
2		125.0066	38.52	-17.89	20.63	43.50	-22.87	QP
3		143.3261	37.80	-19.07	18.73	43.50	-24.77	QP
4		250.3012	40.67	-15.14	25.53	46.00	-20.47	QP
5		308.9126	45.57	-13.36	32.21	46.00	-13.79	QP
6	*	625.0780	45.34	-6.67	38.67	46.00	-7.33	QP



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5
Remark: Adapter 2			

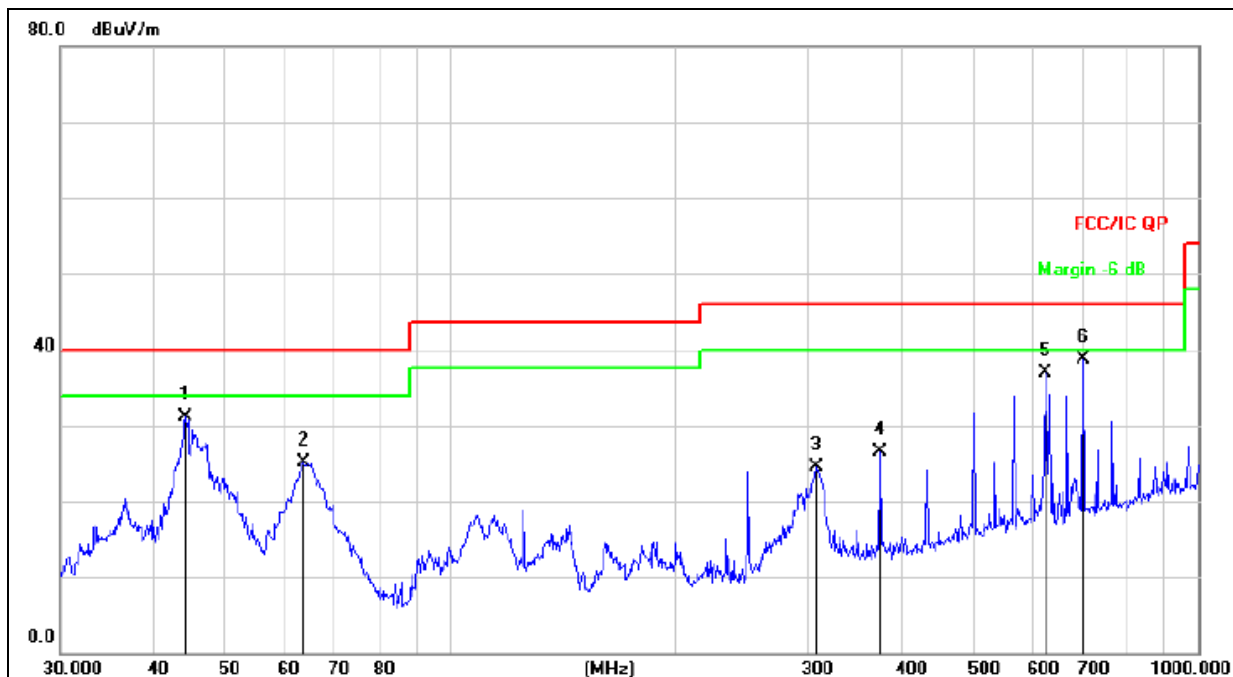

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.1202	46.32	-15.18	31.14	40.00	-8.86	QP
2		63.5356	41.77	-16.72	25.05	40.00	-14.95	QP
3		308.9126	37.80	-13.36	24.44	46.00	-21.56	QP
4		375.9385	38.09	-11.64	26.45	46.00	-19.55	QP
5		625.0780	43.59	-6.67	36.92	46.00	-9.08	QP
6	*	701.7610	43.81	-5.11	38.70	46.00	-7.30	QP



3.2.8 TEST RESULTS (1GHZ~25GHZ)

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	66.54	39.55	7.85	25.66	60.50	74.00	-13.50	PK
V	4824.00	52.47	39.55	7.85	25.66	46.43	54.00	-7.57	AV
V	7236.00	66.85	38.33	7.52	24.55	60.59	74.00	-13.41	PK
V	7236.00	49.54	38.33	7.52	24.55	43.28	54.00	-10.72	AV
V	15450.00	50.22	35.23	6.75	26.59	48.33	74.00	-25.67	PK
H	4824.00	65.01	39.55	7.85	25.66	58.97	74.00	-15.03	PK
H	4824.00	47.98	39.55	7.85	25.66	41.94	54.00	-12.06	AV
H	7236.00	66.21	38.33	7.52	23.55	58.95	74.00	-15.05	PK
H	7236.00	49.33	38.33	7.52	23.22	41.74	54.00	-12.26	AV
H	15450.00	47.13	35.45	6.75	27.88	46.31	74.00	-27.69	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	67.26	38.89	7.57	25.45	61.39	74.00	-12.61	Pk
V	4874.00	53.03	38.89	7.57	25.45	47.16	54.00	-6.84	AV
V	7311.00	66.11	38.78	7.35	24.78	59.46	74.00	-14.54	Pk
V	7311.00	50.35	38.78	7.35	24.78	43.70	54.00	-10.30	AV
V	15450.00	51.51	35.89	6.42	26.47	48.51	74.00	-25.49	Pk
H	4874.00	67.76	38.89	7.57	25.45	61.89	74.00	-12.11	Pk
H	4874.00	49.46	38.89	7.57	25.45	43.59	54.00	-10.41	AV
H	7311.00	65.73	38.78	7.35	24.78	59.08	74.00	-14.92	Pk
H	7311.00	47.66	38.78	7.35	24.78	41.01	54.00	-12.99	AV
H	15450.00	47.38	36.68	6.42	26.65	43.77	74.00	-30.23	Pk

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel: 2462MHz									
V	4924.00	67.82	38.75	7.46	25.45	61.98	74.00	-12.02	PK
V	4924.00	53.03	38.75	7.46	25.45	47.19	54.00	-6.81	AV
V	7386.00	68.26	38.65	7.22	24.78	61.61	74.00	-12.39	PK
V	7386.00	50.16	38.65	7.22	24.78	43.51	54.00	-10.49	AV
V	15450.00	50.31	35.58	6.35	26.47	47.55	74.00	-26.45	PK
H	4924.00	65.97	38.75	7.46	25.45	60.13	74.00	-13.87	PK
H	4924.00	49.09	38.75	7.46	25.45	43.25	54.00	-10.75	AV
H	7386.00	68.76	38.65	7.22	24.78	62.11	74.00	-11.89	PK
H	7386.00	48.80	38.65	7.22	24.78	42.15	54.00	-11.85	AV
H	15450.00	49.68	36.42	6.32	26.65	46.23	74.00	-27.77	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is Antenna A.



802.11g

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel:2412MHz									
V	4824.00	64.98	39.55	7.85	25.66	58.94	74.00	-15.06	PK
V	4824.00	50.52	39.55	7.85	25.66	44.48	54.00	-9.52	AV
V	7236.00	64.50	38.33	7.52	24.55	58.24	74.00	-15.76	PK
V	7236.00	47.62	38.33	7.52	24.55	41.36	54.00	-12.64	AV
V	15450.00	50.40	35.23	6.75	26.59	48.51	74.00	-25.49	PK
H	4824.00	64.68	39.55	7.85	25.66	58.64	74.00	-15.36	PK
H	4824.00	47.14	39.55	7.85	25.66	41.10	54.00	-12.90	AV
H	7236.00	65.64	38.33	7.52	23.55	58.38	74.00	-15.62	PK
H	7236.00	47.07	38.33	7.52	23.22	39.48	54.00	-14.52	AV
H	15450.00	46.59	35.45	6.75	27.88	45.77	74.00	-28.23	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Middle Channel:2437MHz									
V	4874.00	64.10	38.89	7.57	25.45	58.23	74.00	-15.77	PK
V	4874.00	49.64	38.89	7.57	25.45	43.77	54.00	-10.23	AV
V	7311.00	63.39	38.78	7.35	24.78	56.74	74.00	-17.26	PK
V	7311.00	47.41	38.78	7.35	24.78	40.76	54.00	-13.24	AV
V	15450.00	47.98	35.89	6.42	26.47	44.98	74.00	-29.02	PK
H	4874.00	64.62	38.89	7.57	25.45	58.75	74.00	-15.25	PK
H	4874.00	46.69	38.89	7.57	25.45	40.82	54.00	-13.18	AV
H	7311.00	63.72	38.78	7.35	24.78	57.07	74.00	-16.93	PK
H	7311.00	45.52	38.78	7.35	24.78	38.87	54.00	-15.13	AV
H	15450.00	43.72	36.68	6.42	26.65	40.11	74.00	-33.89	PK

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel: 2462MHz									
V	4924.00	62.83	38.75	7.46	25.45	56.99	74.00	-17.01	PK
V	4924.00	49.49	38.75	7.46	25.45	43.65	54.00	-10.35	AV
V	7386.00	63.23	38.65	7.22	24.78	56.58	74.00	-17.42	PK
V	7386.00	48.37	38.65	7.22	24.78	41.72	54.00	-12.28	AV
V	15450.00	47.45	35.58	6.35	26.47	44.69	74.00	-29.31	PK
H	4924.00	62.01	38.75	7.46	25.45	56.17	74.00	-17.83	PK
H	4924.00	46.40	38.75	7.46	25.45	40.56	54.00	-13.44	AV
H	7386.00	62.75	38.65	7.22	24.78	56.10	74.00	-17.90	PK
H	7386.00	45.83	38.65	7.22	24.78	39.18	54.00	-14.82	AV
H	15450.00	44.22	36.42	6.32	26.65	40.77	74.00	-33.23	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is Antenna A.



802.11n(20MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	63.21	39.55	7.85	25.66	57.17	74.00	-16.83	PK
V	4824.00	49.43	39.55	7.85	25.66	43.39	54.00	-10.61	AV
V	7236.00	62.72	38.33	7.52	24.55	56.46	74.00	-17.54	PK
V	7236.00	49.06	38.33	7.52	24.55	42.80	54.00	-11.20	AV
V	15450.00	46.86	35.23	6.75	26.59	44.97	74.00	-29.03	PK
H	4824.00	62.84	39.55	7.85	25.66	56.80	74.00	-17.20	PK
H	4824.00	45.91	39.55	7.85	25.66	39.87	54.00	-14.13	AV
H	7236.00	63.49	38.33	7.52	23.55	56.23	74.00	-17.77	PK
H	7236.00	44.32	38.33	7.52	23.22	36.73	54.00	-17.27	AV
H	15450.00	43.51	35.45	6.75	27.88	42.69	74.00	-31.31	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	63.10	38.89	7.57	25.45	57.23	74.00	-16.77	PK
V	4874.00	50.11	38.89	7.57	25.45	44.24	54.00	-9.76	AV
V	7311.00	64.06	38.78	7.35	24.78	57.41	74.00	-16.59	PK
V	7311.00	48.63	38.78	7.35	24.78	41.98	54.00	-12.02	AV
V	15450.00	48.83	35.89	6.42	26.47	45.83	74.00	-28.17	PK
H	4874.00	61.21	38.89	7.57	25.45	55.34	74.00	-18.66	PK
H	4874.00	45.44	38.89	7.57	25.45	39.57	54.00	-14.43	AV
H	7311.00	63.97	38.78	7.35	24.78	57.32	74.00	-16.68	PK
H	7311.00	46.26	38.78	7.35	24.78	39.61	54.00	-14.39	AV
H	15450.00	46.19	36.68	6.42	26.65	42.58	74.00	-31.42	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel: 2462MHz									
V	4924.00	62.30	38.75	7.46	25.45	56.46	74.00	-17.54	PK
V	4924.00	49.29	38.75	7.46	25.45	43.45	54.00	-10.55	AV
V	7386.00	61.62	38.65	7.22	24.78	54.97	74.00	-19.03	PK
V	7386.00	49.17	38.65	7.22	24.78	42.52	54.00	-11.48	AV
V	15450.00	47.93	35.58	6.35	26.47	45.17	74.00	-28.83	PK
H	4924.00	60.87	38.75	7.46	25.45	55.03	74.00	-18.97	PK
H	4924.00	46.87	38.75	7.46	25.45	41.03	54.00	-12.97	AV
H	7386.00	60.72	38.65	7.22	24.78	54.07	74.00	-19.93	PK
H	7386.00	45.34	38.65	7.22	24.78	38.69	54.00	-15.31	AV
H	15450.00	43.62	36.42	6.32	26.65	40.17	74.00	-33.83	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n(40MHz)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2422MHz									
V	4844.00	2422	39.55	7.77	25.66	57.33	74.00	-16.67	PK
V	4844.00	49.25	39.55	7.77	25.66	43.13	54.00	-10.87	AV
V	7266.00	64.65	38.33	7.30	24.55	58.17	74.00	-15.83	PK
V	7266.00	47.36	38.33	7.30	24.55	40.88	54.00	-13.12	AV
V	15450.00	49.00	35.23	6.60	26.59	46.96	74.00	-27.04	PK
H	4844.00	64.13	39.55	7.77	25.66	58.01	74.00	-15.99	PK
H	4844.00	46.65	39.55	7.77	25.66	40.53	54.00	-13.47	AV
H	7266.00	63.11	38.33	7.30	23.55	55.63	74.00	-18.37	PK
H	7266.00	43.93	38.33	7.30	23.22	36.12	54.00	-17.88	AV
H	15450.00	45.27	35.45	6.60	27.88	44.30	74.00	-29.70	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	64.01	38.89	7.57	25.45	58.14	74.00	-15.86	PK
V	4874.00	49.45	38.89	7.57	25.45	43.58	54.00	-10.42	AV
V	7311.00	63.72	38.78	7.35	24.78	57.07	74.00	-16.93	PK
V	7311.00	47.51	38.78	7.35	24.78	40.86	54.00	-13.14	AV
V	15450.00	49.31	35.89	6.42	26.47	46.31	74.00	-27.69	PK
H	4874.00	63.12	38.89	7.57	25.45	57.25	74.00	-16.75	PK
H	4874.00	45.05	38.89	7.57	25.45	39.18	54.00	-14.82	AV
H	7311.00	63.74	38.78	7.35	24.78	57.09	74.00	-16.91	PK
H	7311.00	46.11	38.78	7.35	24.78	39.46	54.00	-14.54	AV
H	15450.00	45.80	36.68	6.42	26.65	42.19	74.00	-31.81	PK

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel: 2452MHz									
V	4904.00	64.29	38.75	7.38	25.45	58.37	74.00	-15.63	PK
V	4904.00	48.15	38.75	7.38	25.45	42.23	54.00	-11.77	AV
V	7356.00	63.38	38.65	7.15	24.78	56.66	74.00	-17.34	PK
V	7356.00	45.62	38.65	7.15	24.78	38.90	54.00	-15.10	AV
V	15450.00	47.53	35.58	6.25	26.47	44.67	74.00	-29.33	PK
H	4904.00	62.72	38.75	7.38	25.45	56.80	74.00	-17.20	PK
H	4904.00	45.34	38.75	7.38	25.45	39.42	54.00	-14.58	AV
H	7356.00	62.94	38.65	7.15	24.78	56.22	74.00	-17.78	PK
H	7356.00	42.91	38.65	7.15	24.78	36.19	54.00	-17.81	AV
H	15450.00	43.63	36.42	6.25	26.65	40.11	74.00	-33.89	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,

Margin= Emission Level - Limit

2. If peak below the average limit, the average emission was no test.

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested
and performed pretest to three orthogonal axis. The worst case emissions were reported

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

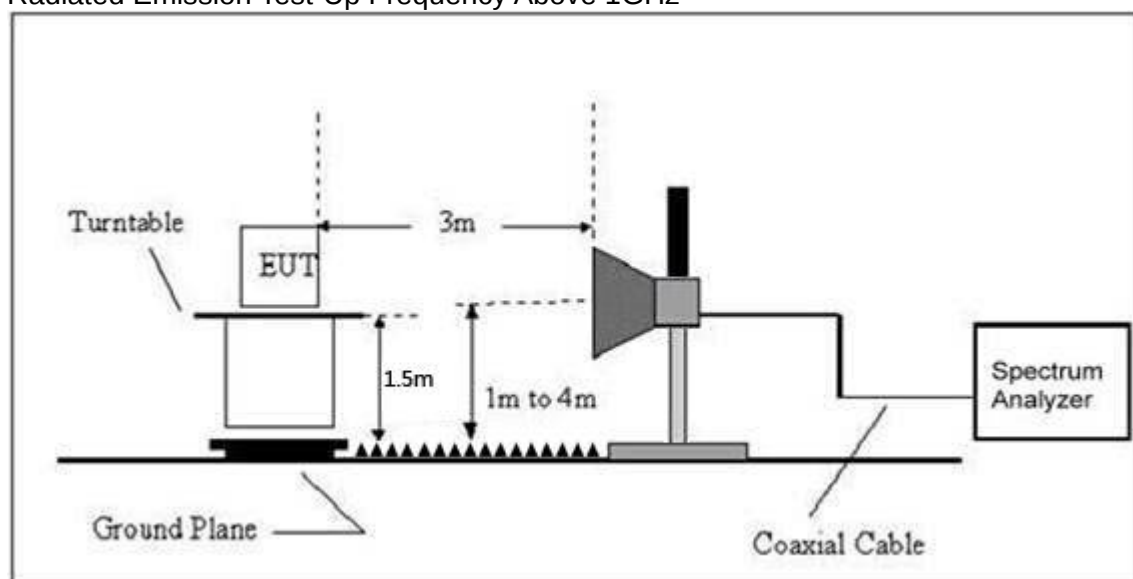

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission evel (dBuV/m)	Limits (dBuV/m)		Result
							PK	PK	AV	
802.11b	Low Channel 2412MHz									
	H	2390.00	60.92	38.06	7.42	20.15	50.43	74.00	54.00	PASS
	H	2400.00	53.66	38.06	7.42	20.15	43.17	74.00	54.00	PASS
	V	2390.00	63.36	38.06	7.42	20.15	52.87	74.00	54.00	PASS
	V	2400.00	55.19	38.06	7.42	20.15	44.70	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	59.90	38.17	7.45	20.54	49.72	74.00	54.00	PASS
	H	2485.50	53.08	38.17	7.45	20.54	42.90	74.00	54.00	PASS
	V	2483.50	62.13	38.2	7.45	20.54	51.92	74.00	54.00	PASS
	V	2485.50	55.23	38.2	7.45	20.54	45.02	74.00	54.00	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	62.25	38.06	7.42	20.15	51.76	74.00	54.00	PASS
	H	2400.00	52.49	38.06	7.42	20.15	42.00	74.00	54.00	PASS
	V	2390.00	62.14	38.06	7.42	20.15	51.65	74.00	54.00	PASS
	V	2400.00	51.38	38.06	7.42	20.15	40.89	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.49	38.17	7.45	20.54	50.31	74.00	54.00	PASS
	H	2485.50	54.23	38.17	7.45	20.54	44.05	74.00	54.00	PASS
	V	2483.50	61.60	38.2	7.45	20.54	51.39	74.00	54.00	PASS
	V	2485.50	51.96	38.2	7.45	20.54	41.75	74.00	54.00	PASS
802.11n20	Low Channel 2412MHz									
	H	2390.00	60.99	38.06	7.42	20.15	50.50	74.00	54.00	PASS
	H	2400.00	54.47	38.06	7.42	20.15	43.98	74.00	54.00	PASS
	V	2390.00	60.78	38.06	7.42	20.15	50.29	74.00	54.00	PASS
	V	2400.00	54.99	38.06	7.42	20.15	44.50	74.00	54.00	PASS
	High Channel 2462MHz									
	H	2483.50	60.47	38.17	7.45	20.54	50.29	74.00	54.00	PASS
	H	2485.50	52.63	38.17	7.45	20.54	42.45	74.00	54.00	PASS
	V	2483.50	61.94	38.2	7.45	20.54	51.73	74.00	54.00	PASS
	V	2485.50	51.66	38.2	7.45	20.54	41.45	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz									
	H	2390.00	60.86	38.06	7.42	20.15	50.37	74.00	54.00	PASS
	H	2400.00	50.78	38.06	7.42	20.15	40.29	74.00	54.00	PASS
	V	2390.00	61.23	38.06	7.42	20.15	50.74	74.00	54.00	PASS
	V	2400.00	52.36	38.06	7.42	20.15	41.87	74.00	54.00	PASS
	High Channel 2452MHz									
	H	2483.50	62.93	38.17	7.45	20.54	52.75	74.00	54.00	PASS
	H	2485.50	54.17	38.17	7.45	20.54	43.99	74.00	54.00	PASS
	V	2483.50	60.47	38.2	7.45	20.54	50.26	74.00	54.00	PASS
	V	2485.50	52.77	38.2	7.45	20.54	42.56	74.00	54.00	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.										

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss




4.1.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b Mode		


Frequency	Power Spectral Density (dBm/3KHz) ANTA	Power Spectral Density (dBm/3KHz) ANTB	Total power density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	0.597	1.839	/	8	PASS
2437 MHz	1.151	1.247	/	8	PASS
2462 MHz	-2.058	1.126	/	8	PASS

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B, only shown Antenna B Plot.

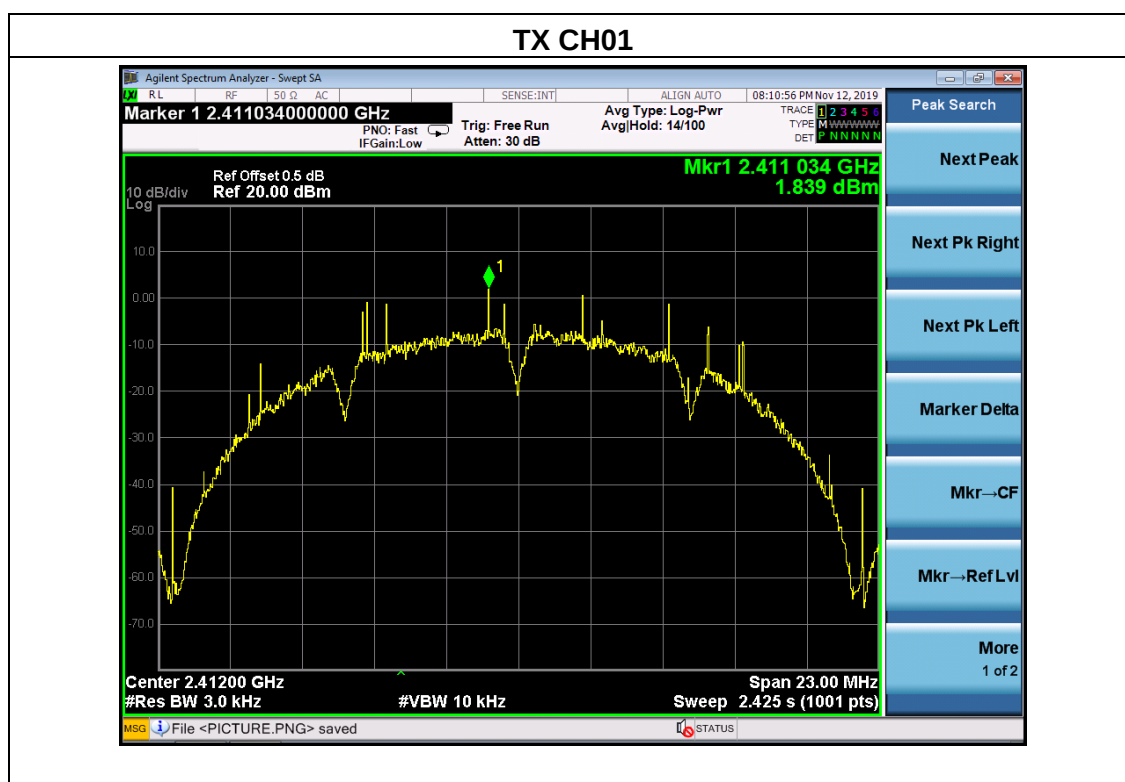




TX CH06

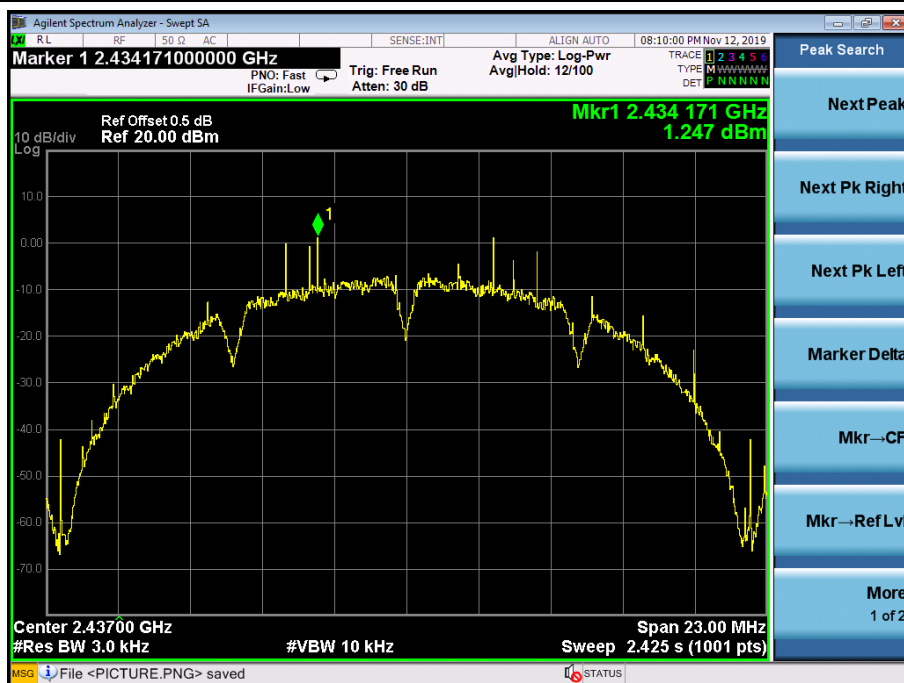

TX CH11

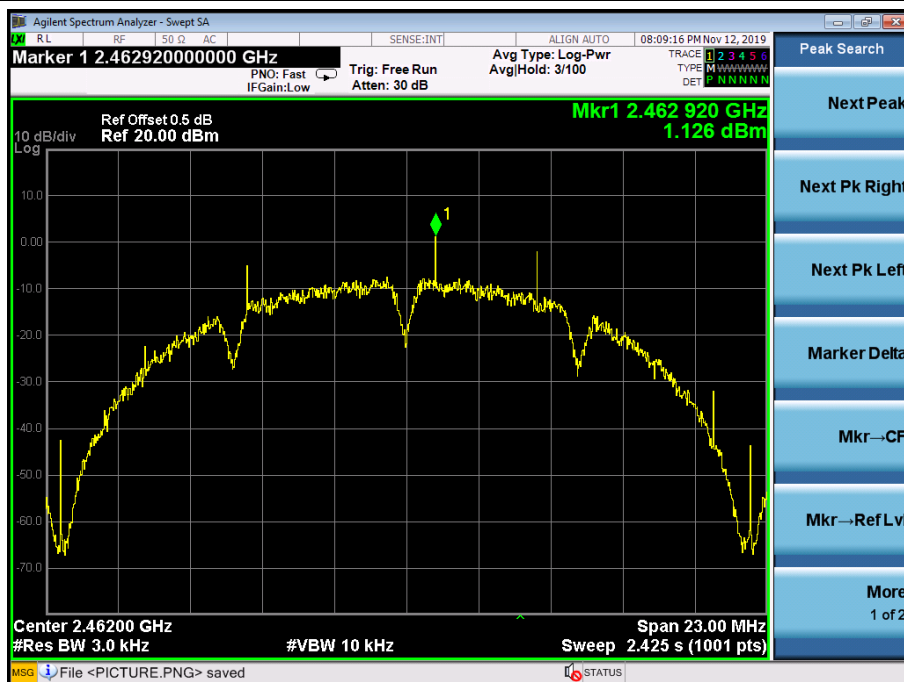




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX g Mode		


Frequency	Power Spectral Density (dBm/3KHz) ANTA	Power Spectral Density (dBm/3KHz) ANTB	Total power density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-9.489	-8.853	/	8	PASS
2437 MHz	-9.463	-10.359	/	8	PASS
2462 MHz	-9.819	-9.850	/	8	PASS

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

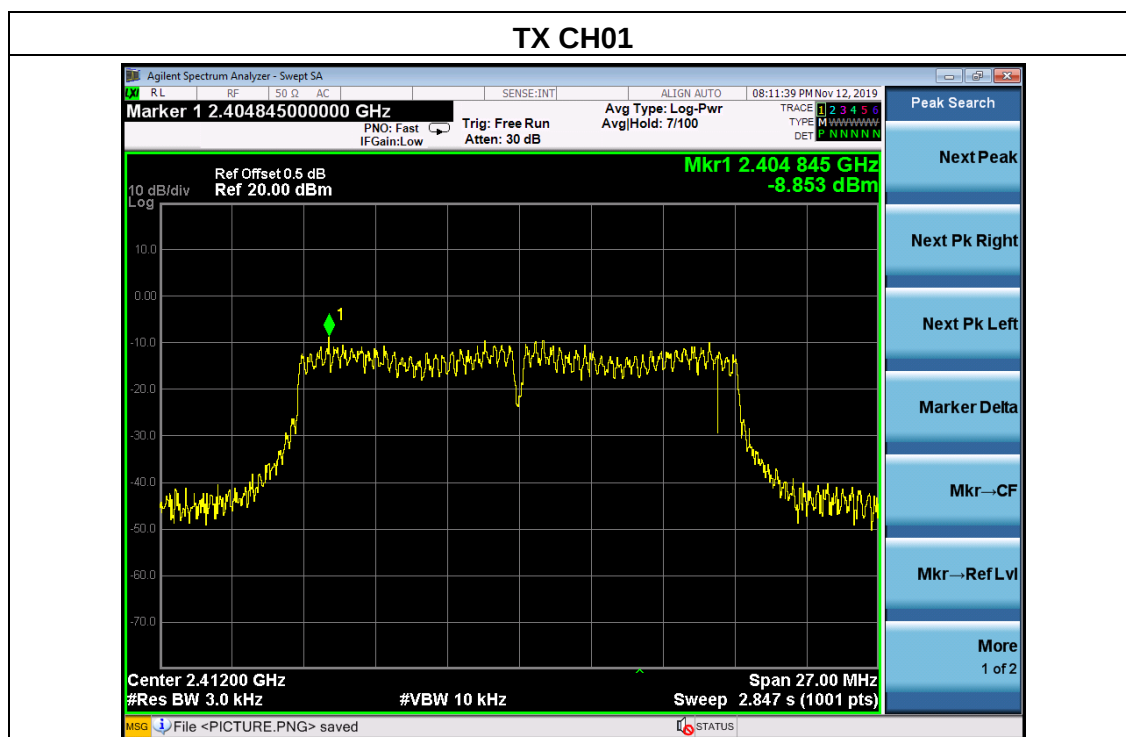




TX CH06

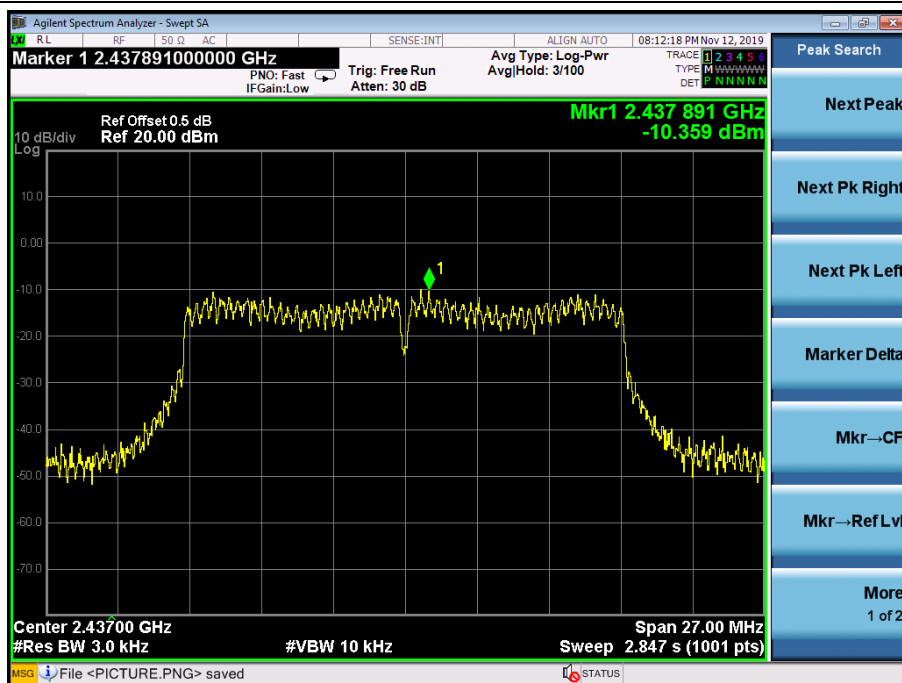

TX CH11

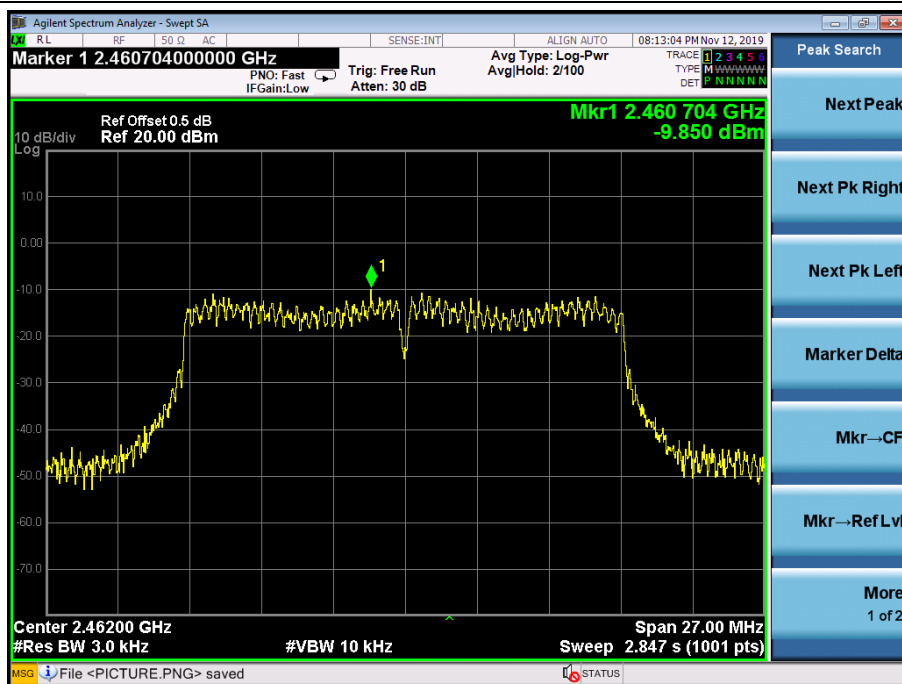




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(20M)		

Frequency	Power Spectral Density (dBm/3KHz) ANTA	Power Spectral Density (dBm/3KHz) ANTB	Total power density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2412 MHz	-9.210	-9.015	-6.10	7.99	PASS
2437 MHz	-9.116	-8.902	-6.00	7.99	PASS
2462 MHz	-10.173	-9.644	-6.89	7.99	PASS


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

Note:Antenna A gain: 3dBi, Antenna B gain: 3dBi, Directional gain=[10log(GA+ G B)] dbi =6.01dbi, limit=8-(6.01-6)=7.99

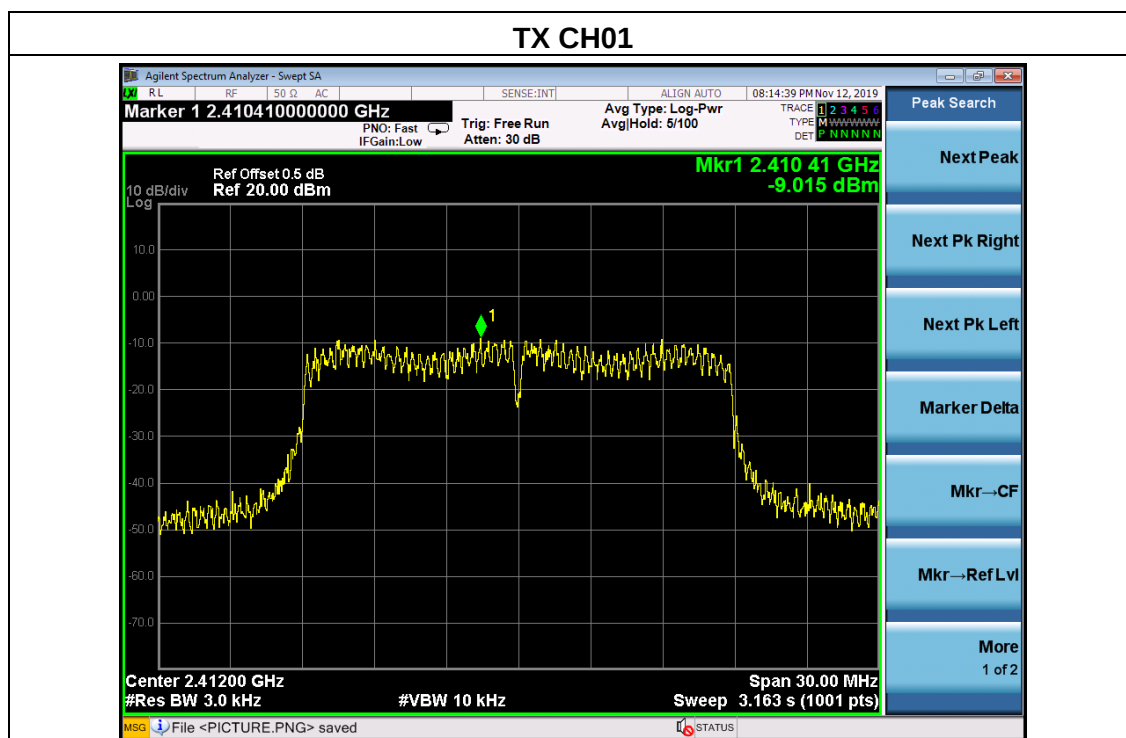




TX CH06

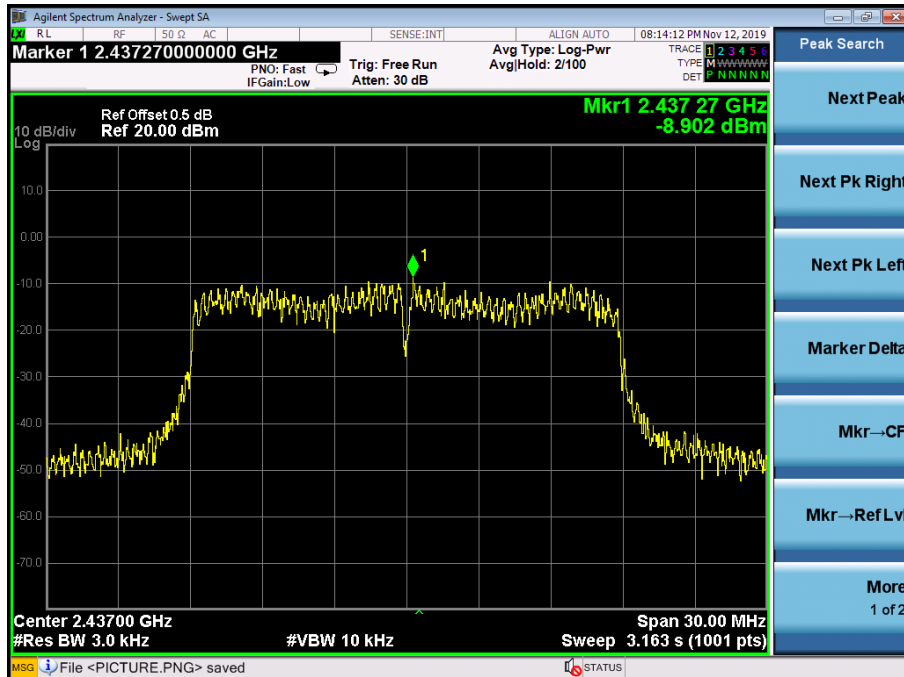

TX CH11

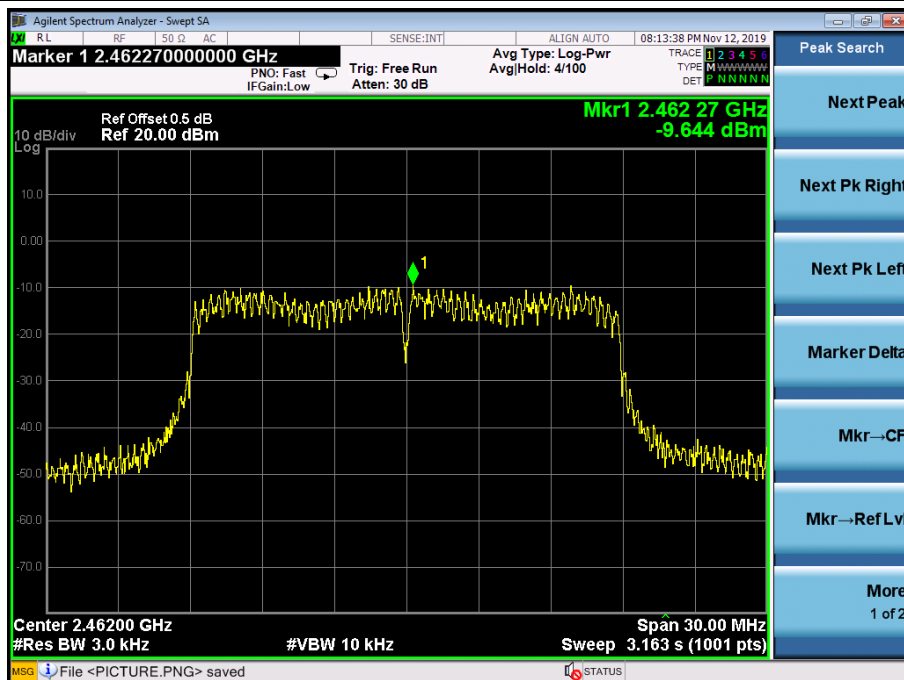




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(40M)		

Frequency	Power Spectral Density (dBm/3KHz) ANTA	Power Spectral Density (dBm/3KHz) ANTB	Total power density (dBm/3KHz)	Limit (dBm/3KHz)	Result
2422 MHz	-12.036	-13.114	-9.53	5.99	PASS
2437 MHz	-11.509	-13.057	-9.20	5.99	PASS
2452 MHz	-12.737	-12.789	-9.75	5.99	PASS


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

Note:Antenna A gain: 3dBi, Antenna B gain: 3dBi, Directional gain= $[10\log(GA+ G B)]$ dbi =6.01dbi, limit=8-(6.01-6)=7.99

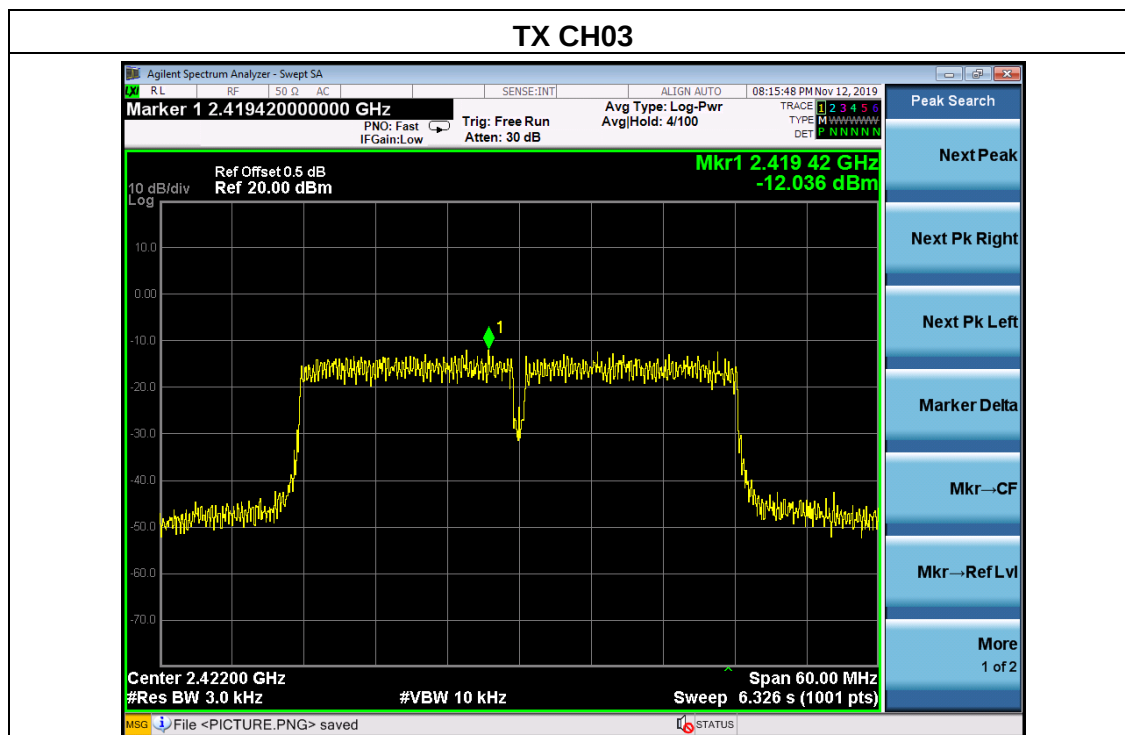




TX CH06

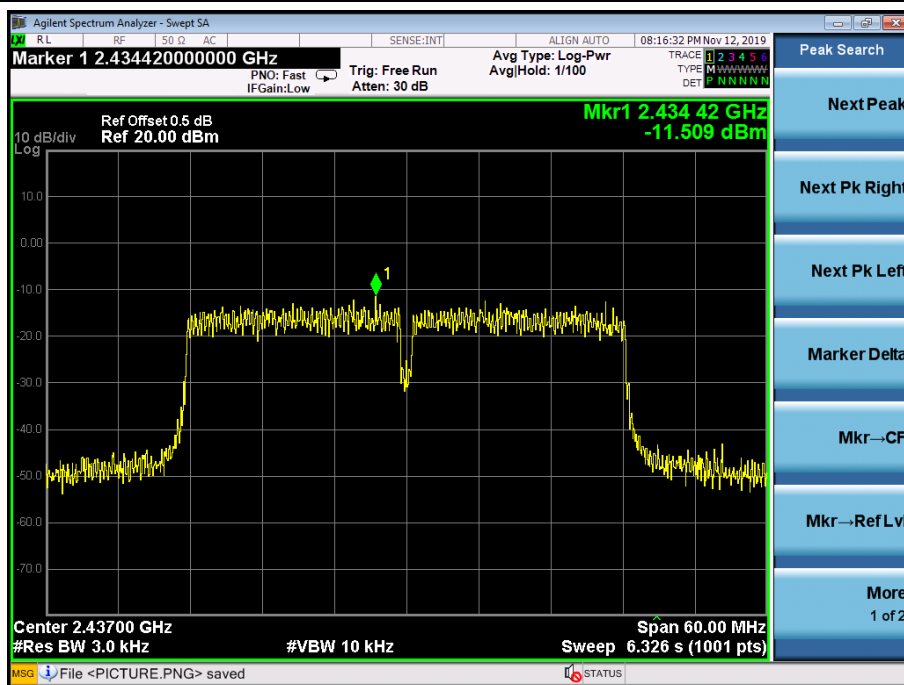

TX CH09

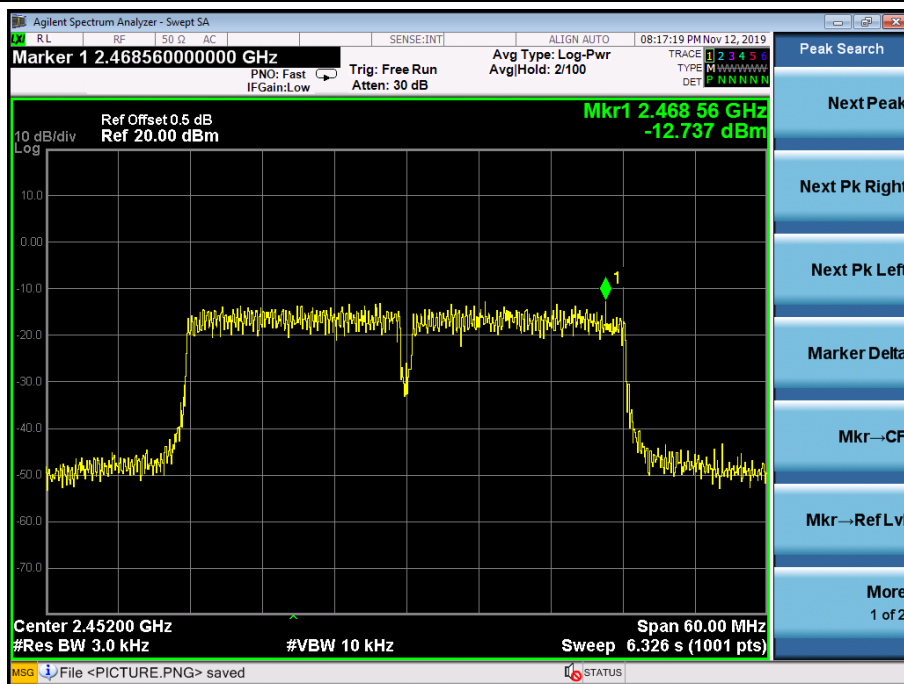

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

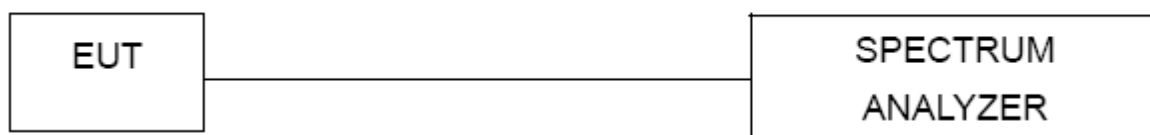

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.1.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b Mode		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
2412	9.55	9.56	500	Pass
2437	10.01	9.56	500	Pass
2462	9.56	9.12	500	Pass

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

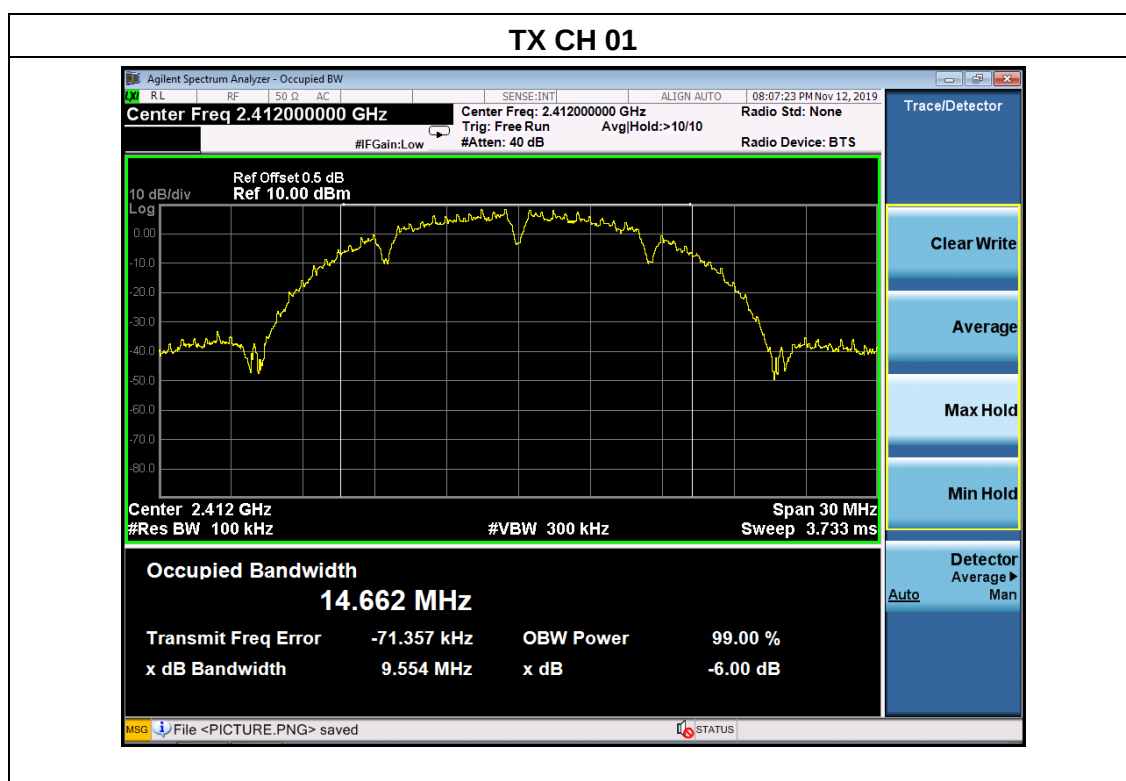




TX CH 06

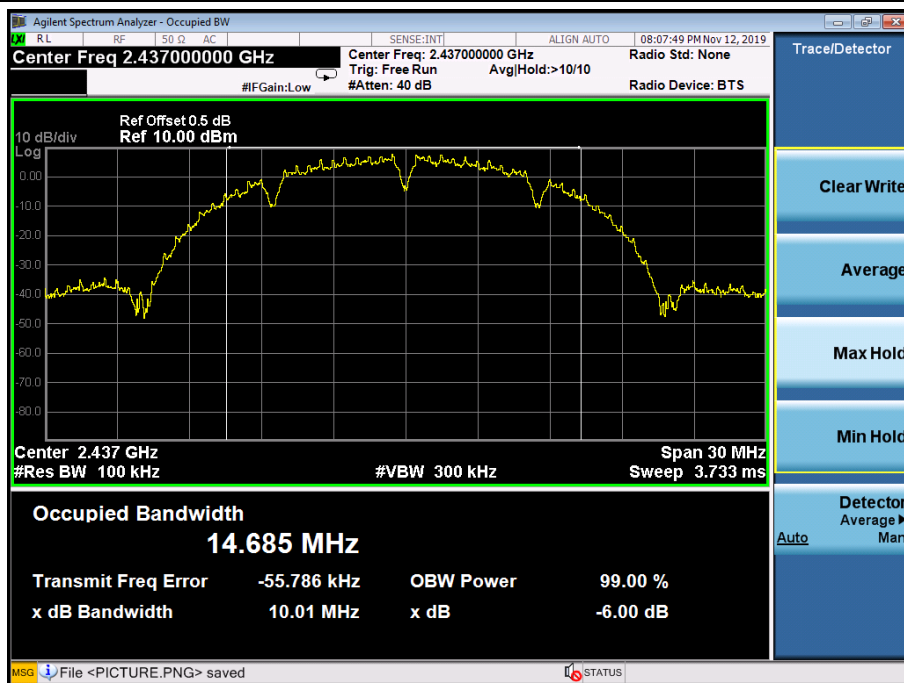

TX CH 11

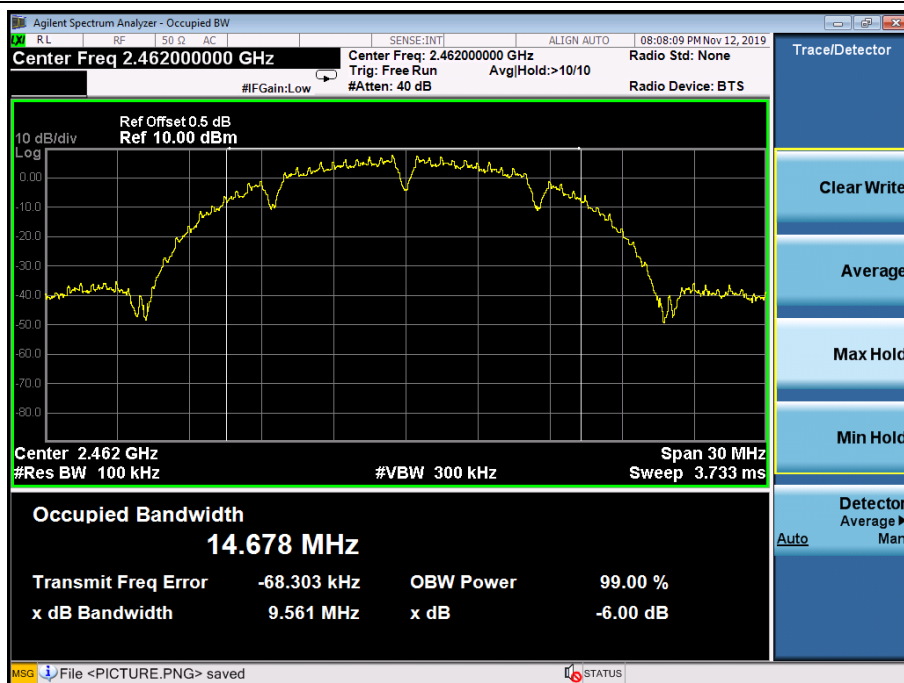




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX g Mode		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
2412	16.31	16.05	500	Pass
2437	15.90	15.78	500	Pass
2462	16.30	16.05	500	Pass

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

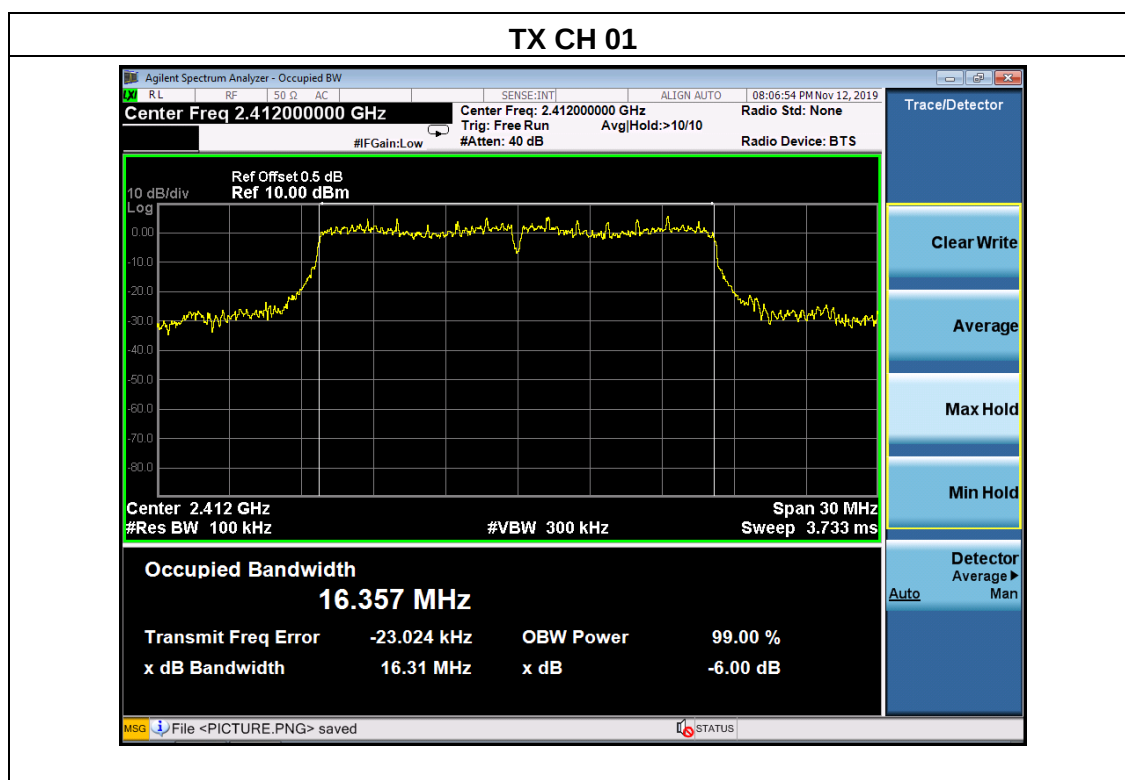




TX CH 06

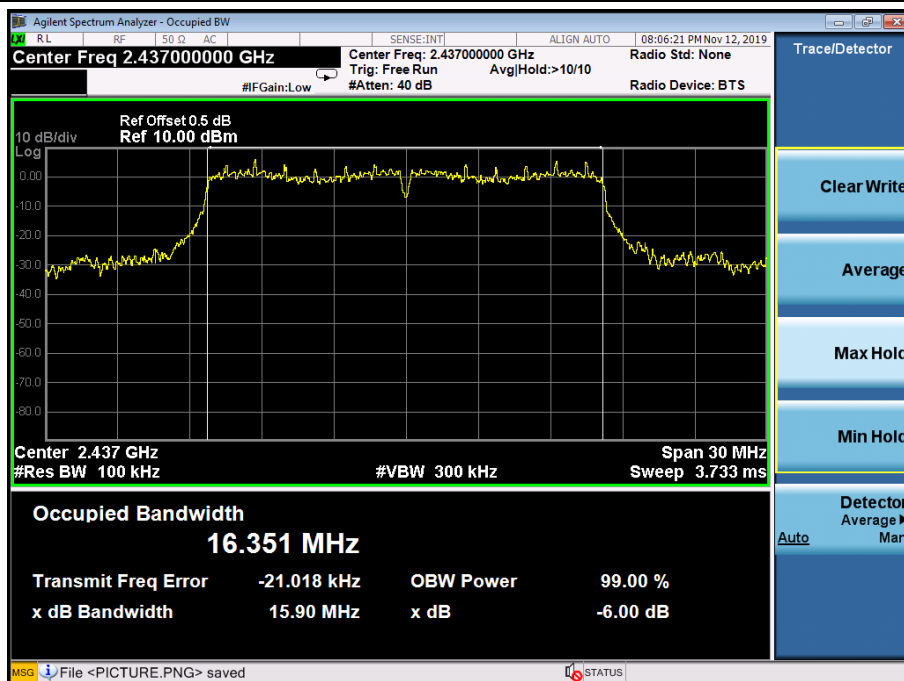

TX CH 11

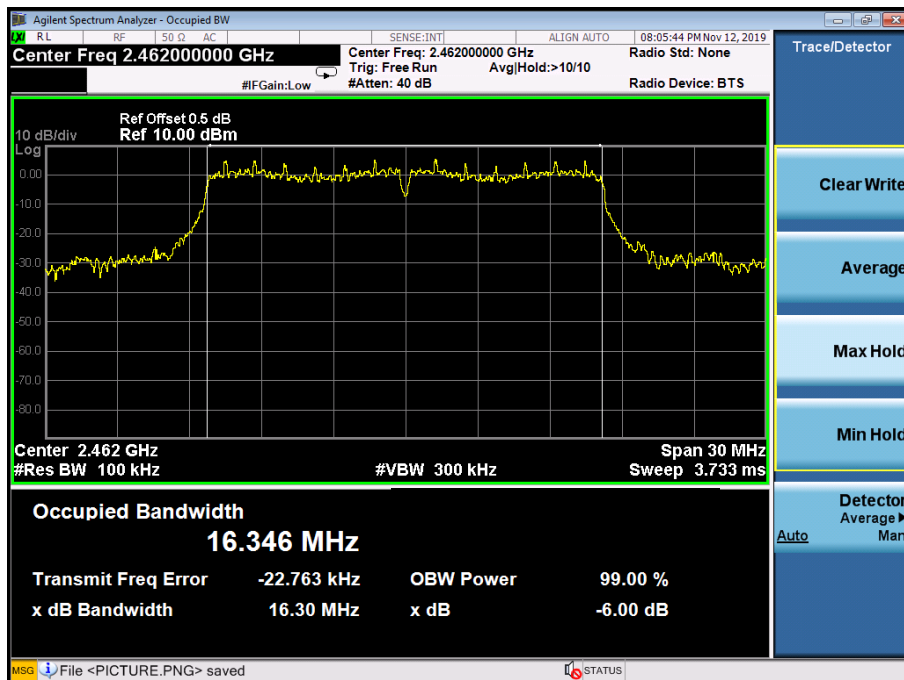




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(20M)		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
2412	16.64	16.28	500	Pass
2437	16.67	16.07	500	Pass
2462	16.28	16.08	500	Pass

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

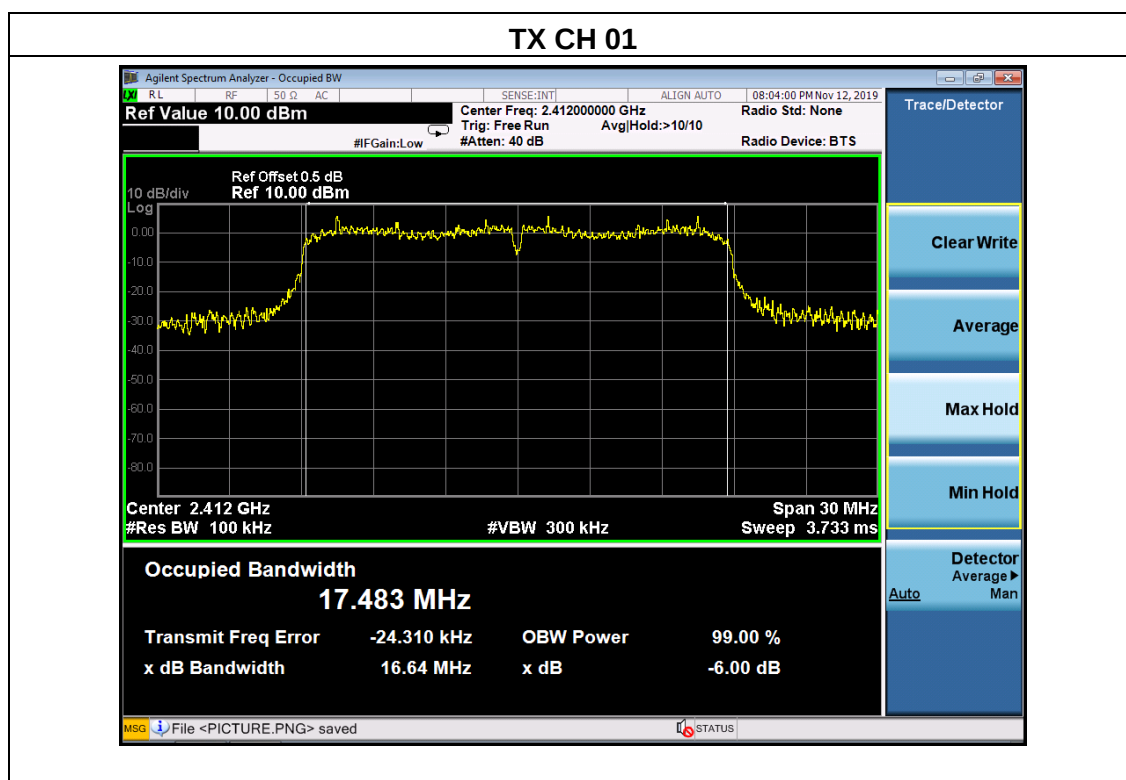




TX CH 06

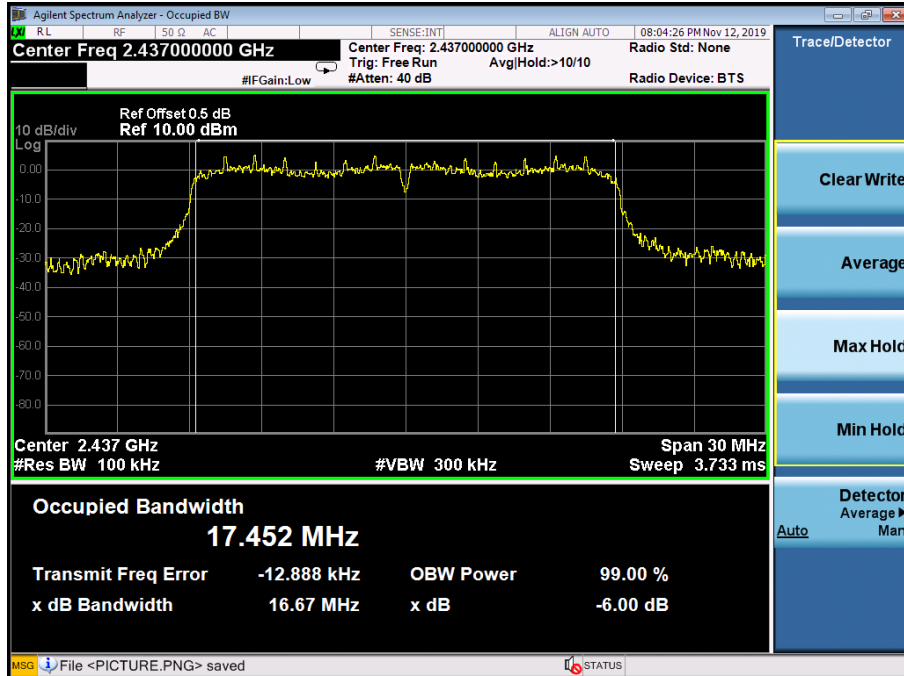

TX CH 11

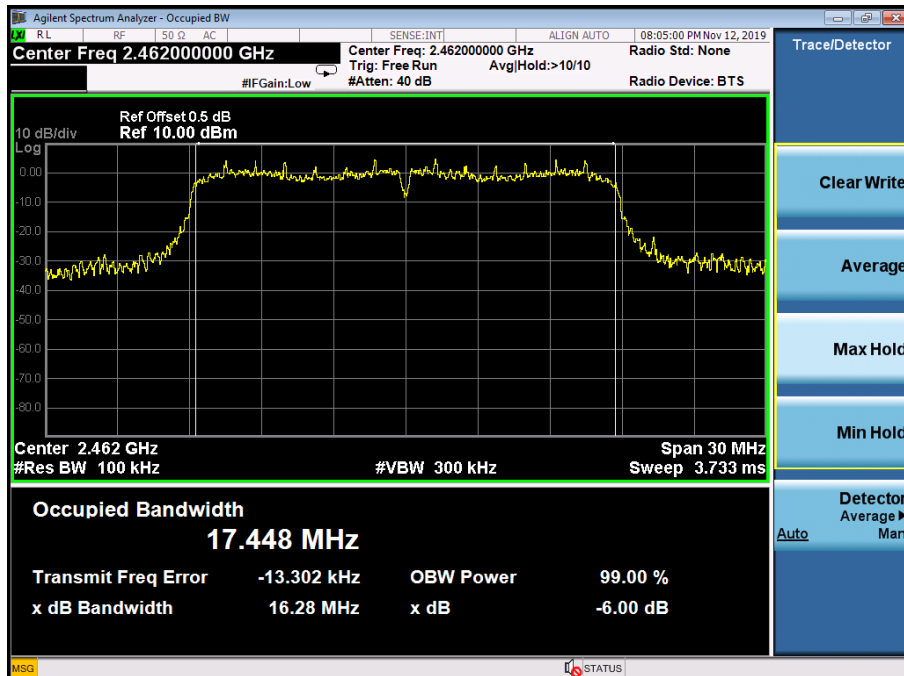




Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX n Mode(40M)		


Frequency (MHz)	6dB bandwidth (MHz) ANTA	6dB bandwidth (MHz) ANTB	Limit (kHz)	Result
2422	36.29	36.25	500	Pass
2437	36.08	36.26	500	Pass
2452	36.03	36.05	500	Pass

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

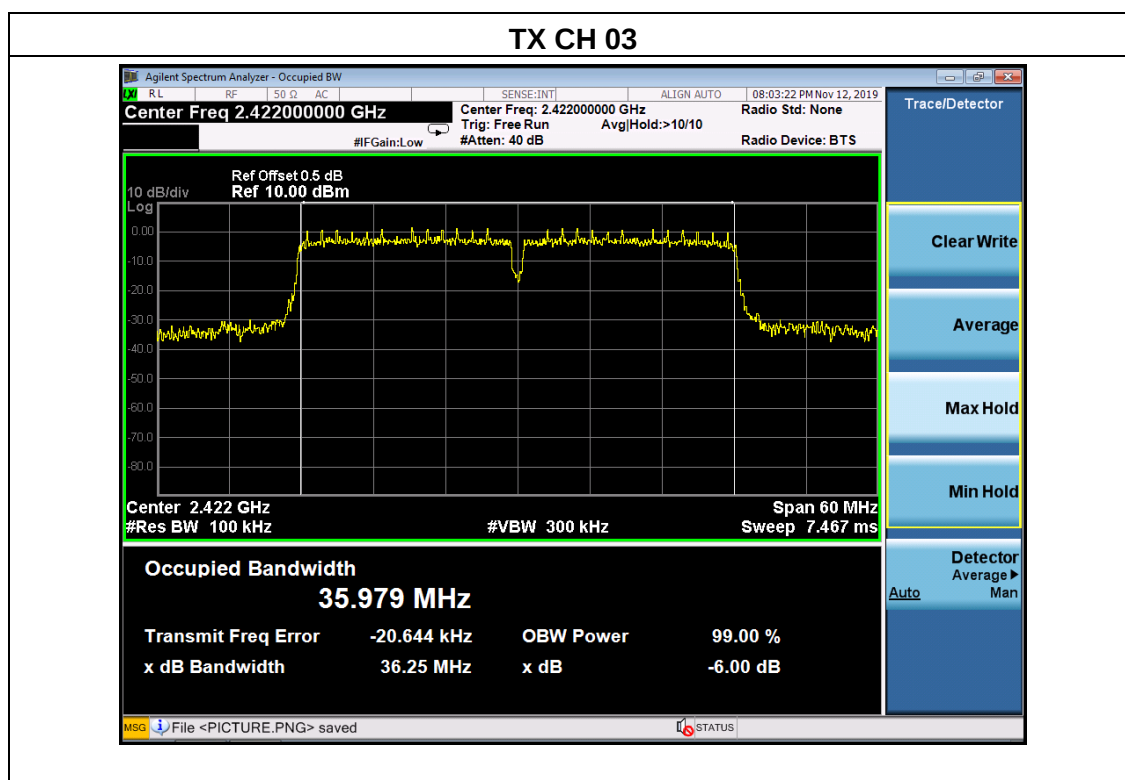




TX CH 06

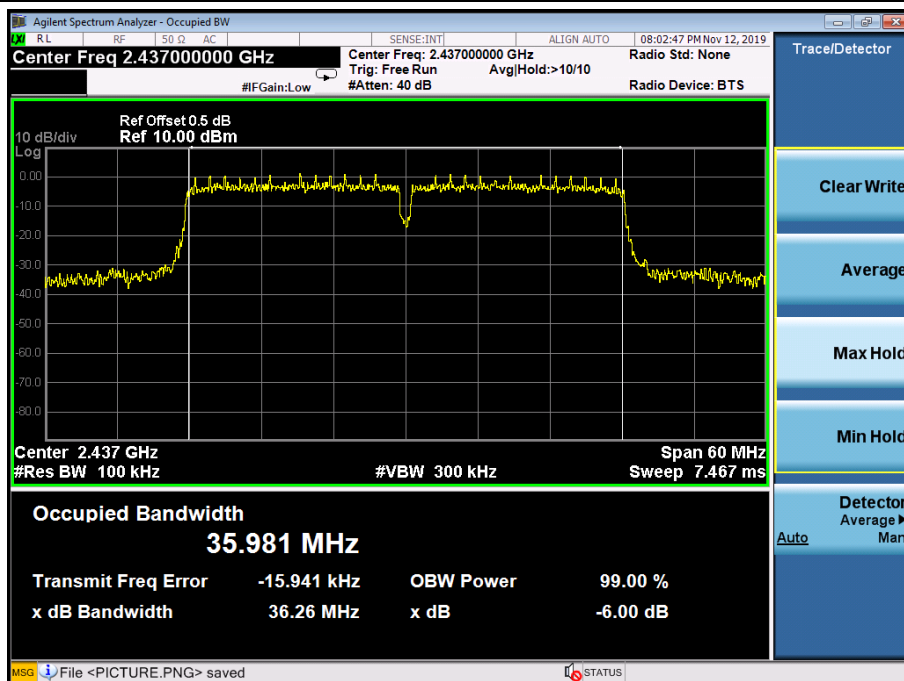

TX CH 09

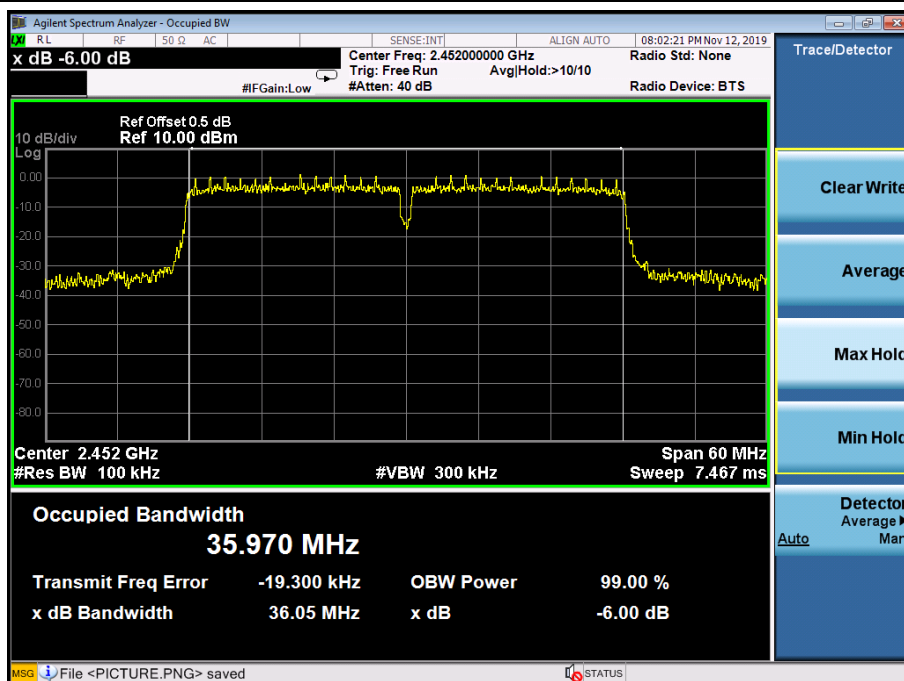

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

	Frequency	Maximum Conducted Output Power(PK) ANTA	Maximum Conducted Output Power(PK) ANTB	Total Power Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	(dBm)	(dBm)	dBm
802.11b	2412	20.67	20.11	/	30
	2437	19.24	20.42	/	30
	2462	19.04	19.54	/	30
802.11g	2412	20.49	20.62	/	30
	2437	20.19	20.03	/	30
	2462	19.67	19.74	/	30
802.11n 20	2412	19.97	20.60	23.31	30
	2437	19.19	19.55	22.38	30
	2462	19.16	19.08	22.13	30
802.11n 40	2422	17.52	17.56	20.55	30
	2437	17.17	17.27	20.23	30
	2452	17.08	17.23	20.17	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

7.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

7.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS



Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

802.11b: Band Edge, Left Side

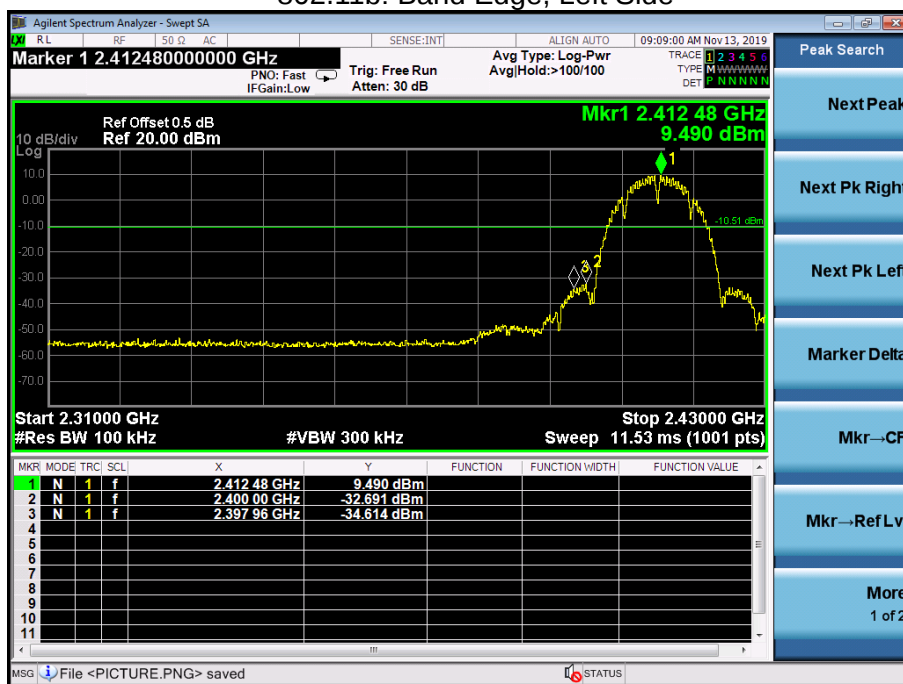

802.11b: Band Edge, Right Side





802.11g: Band Edge, Left Side



802.11g: Band Edge, Right Side





802.11n-HT20: Band Edge, Left Side




802.11n-HT20: Band Edge, Right Side






802.11n-HT40: Band Edge, Left Side

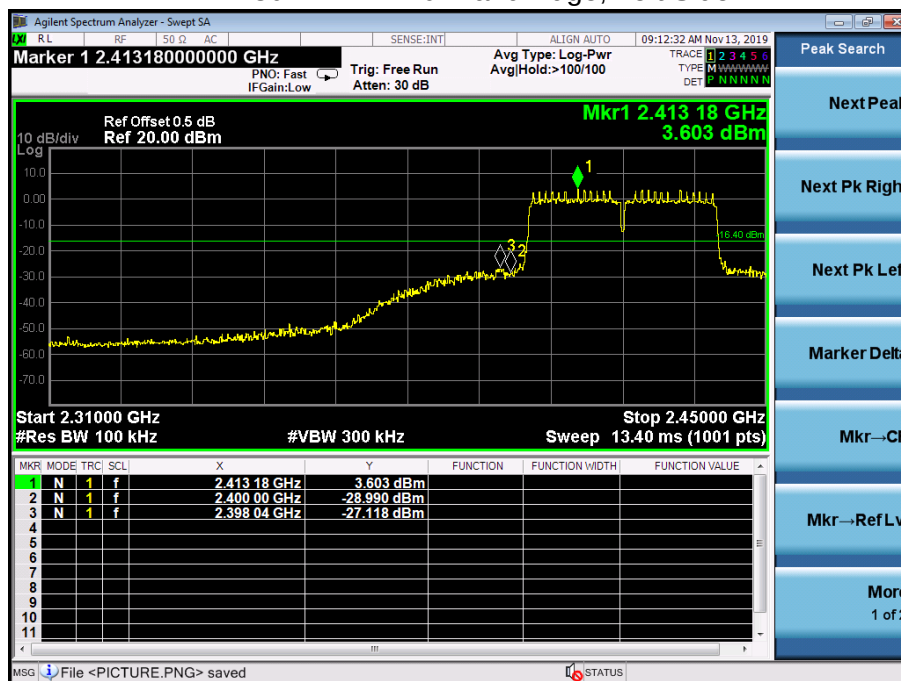

802.11n-HT40: Band Edge, Right Side

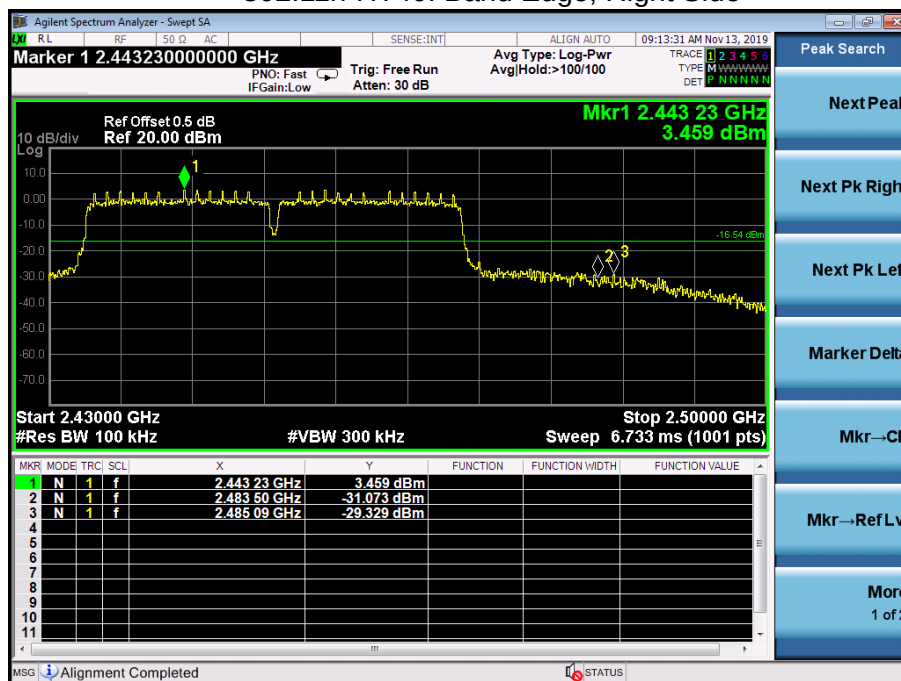





CONDUCTED EMISSION MEASUREMENT

802.11b


Low Channel 2412MHz

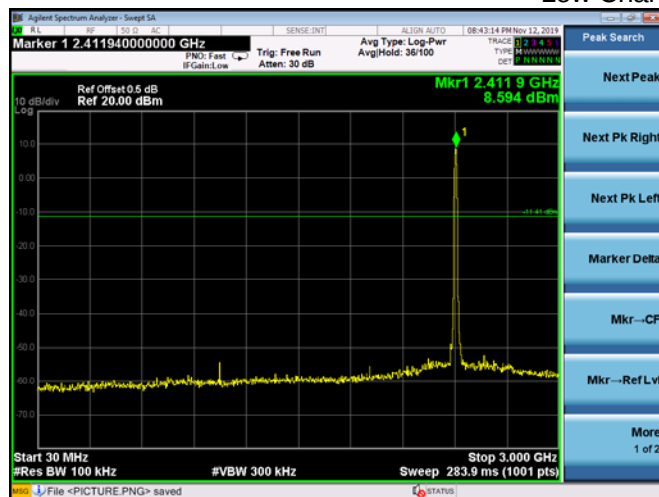

Middle Channel 2437MHz

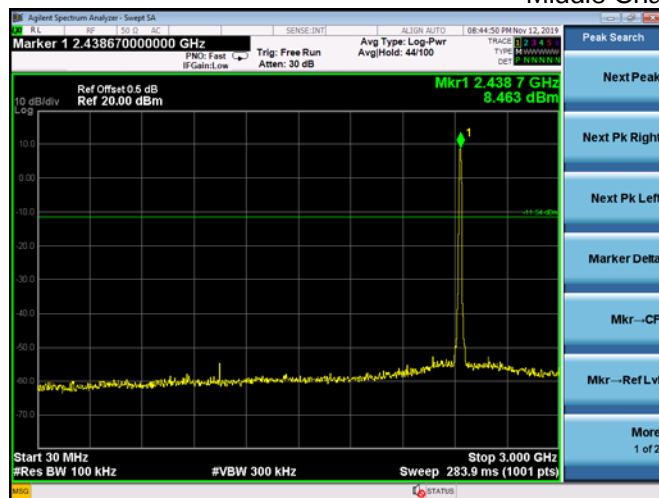


High Channel 2462MHz

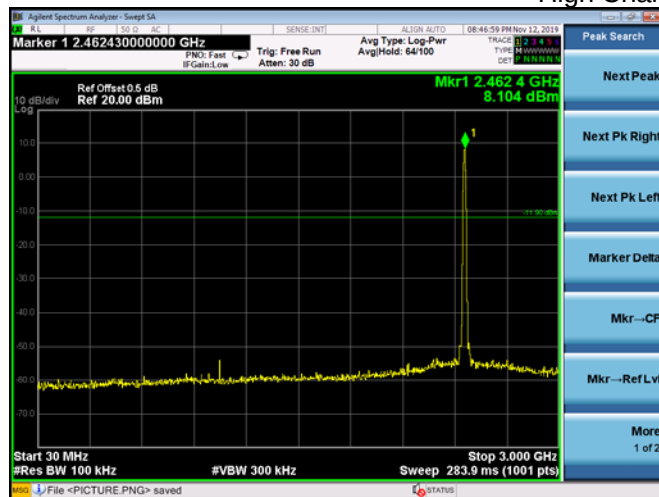




802.11g


Low Channel 2412MHz

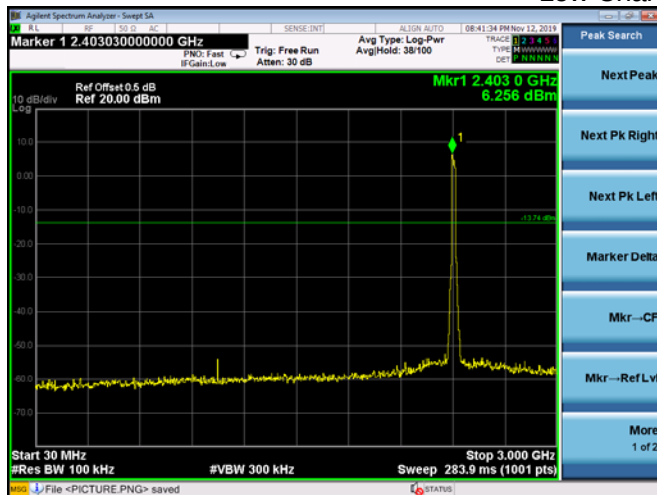

Middle Channel 2437MHz

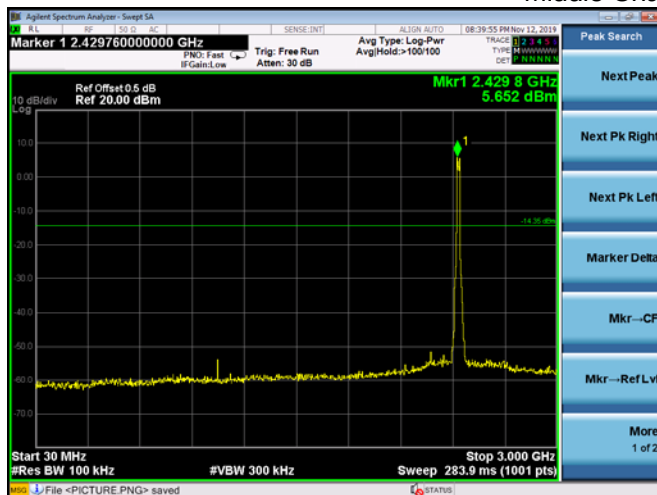


High Channel 2462MHz

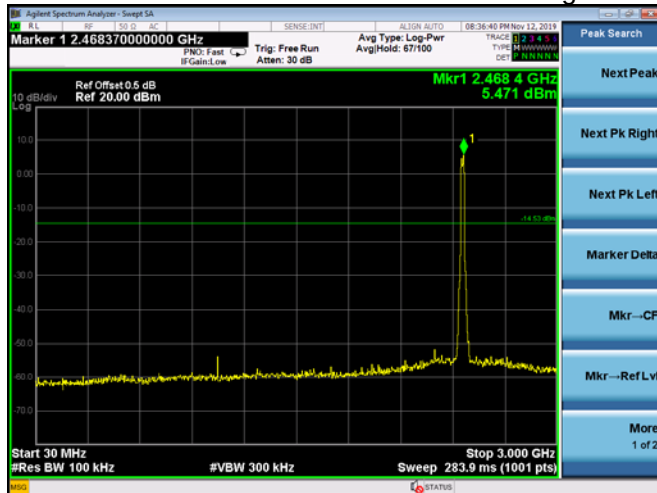




802.11n20


Low Channel 2412MHz

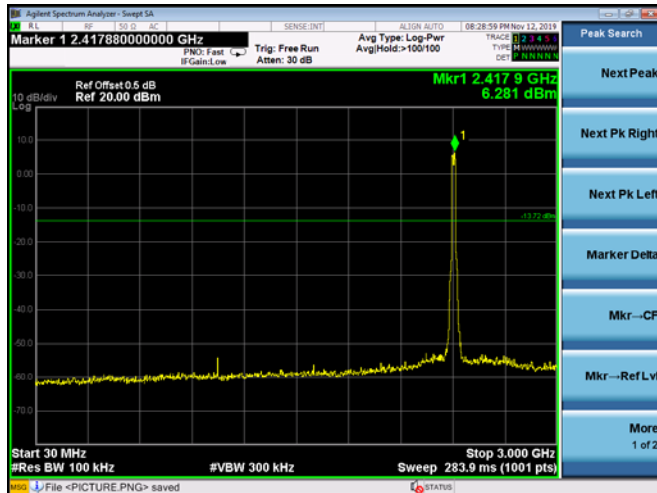

Middle Channel 2437MHz

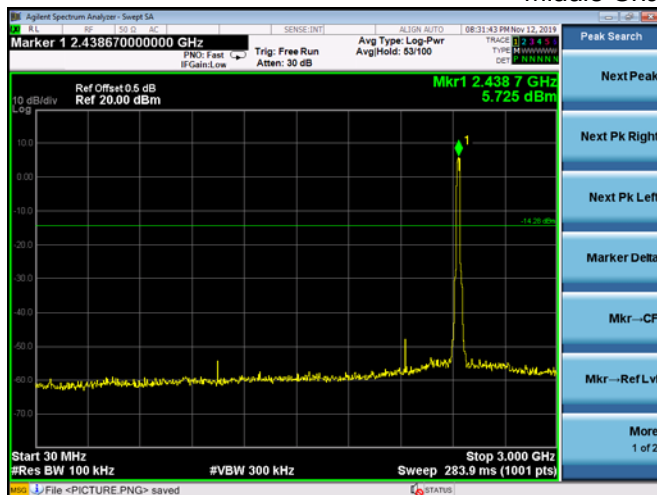


High Channel 2462MHz

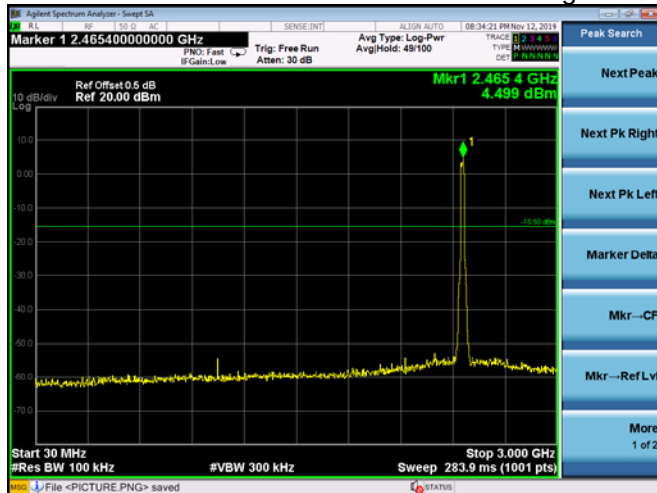




802.11n40


Low Channel 2422MHz

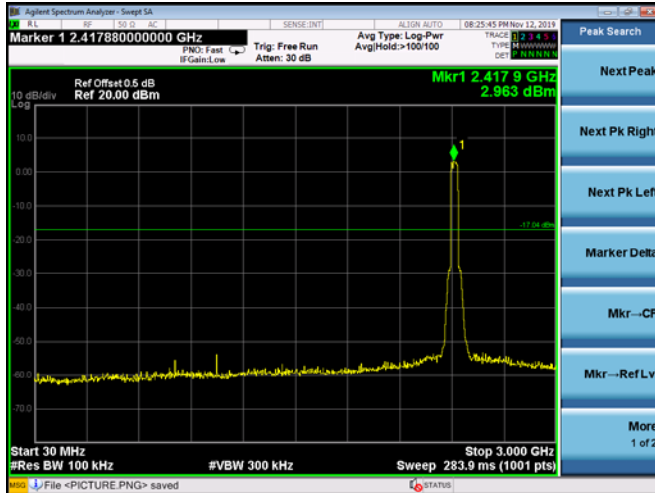

Middle Channel 2437MHz

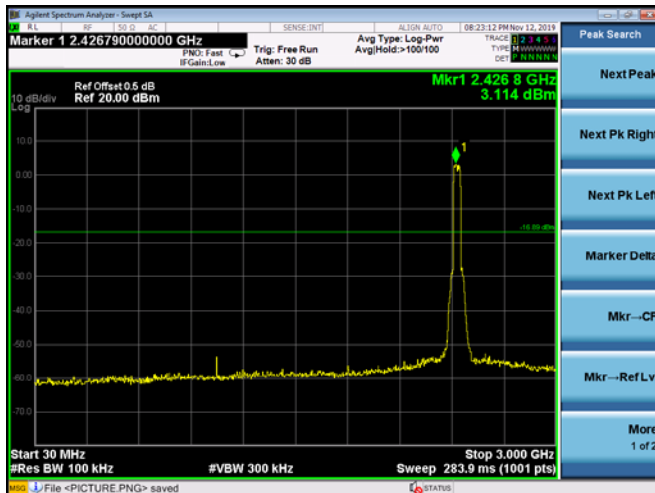

High Channel 2452MHz

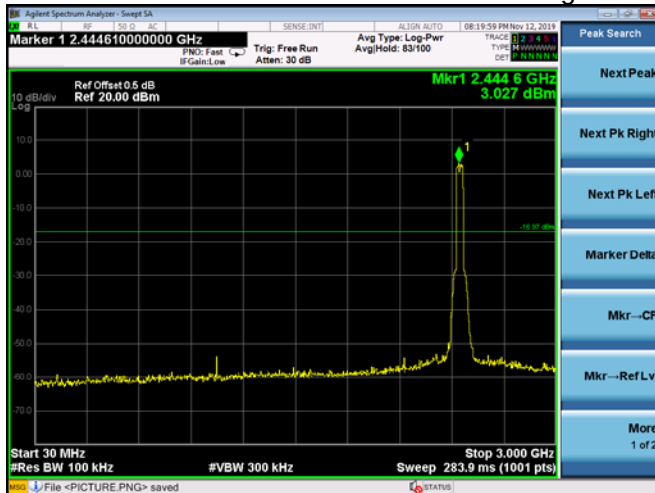



8. DUTY CYCLE OF TEST SIGNAL

8.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 FORMULA:

Duty Cycle = $T_{on} / (T_{on} + T_{off})$

Measurement Procedure:


1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak

Duty Cycle:

	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

802.11b

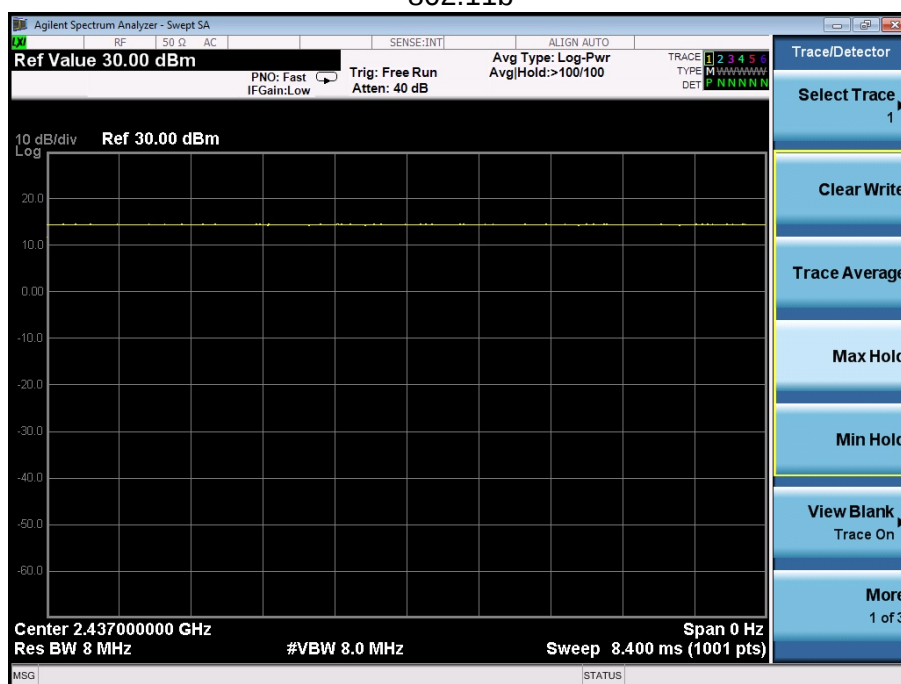




802.11g

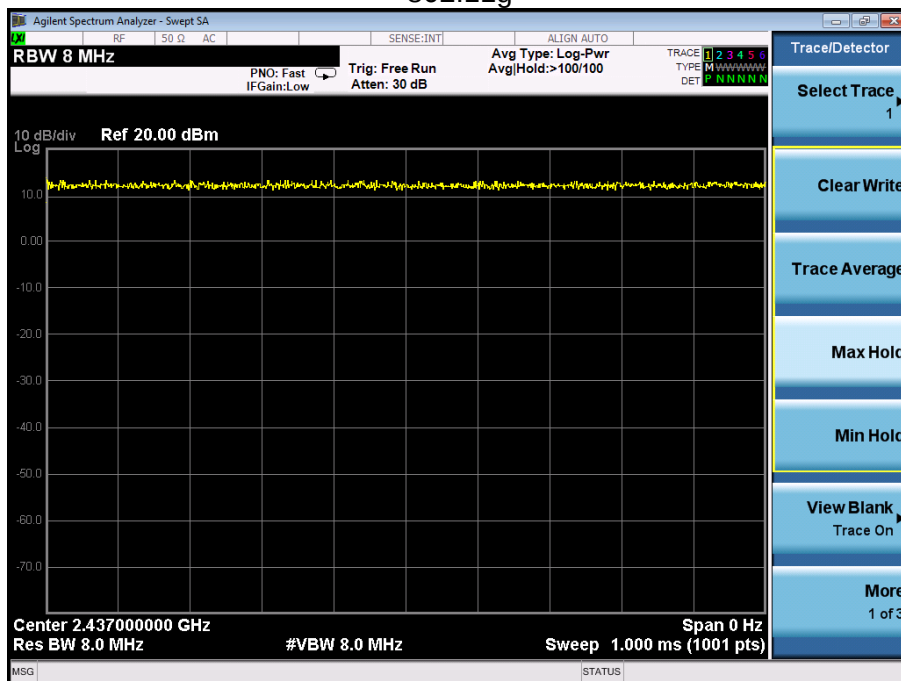


802.11n(HT20)

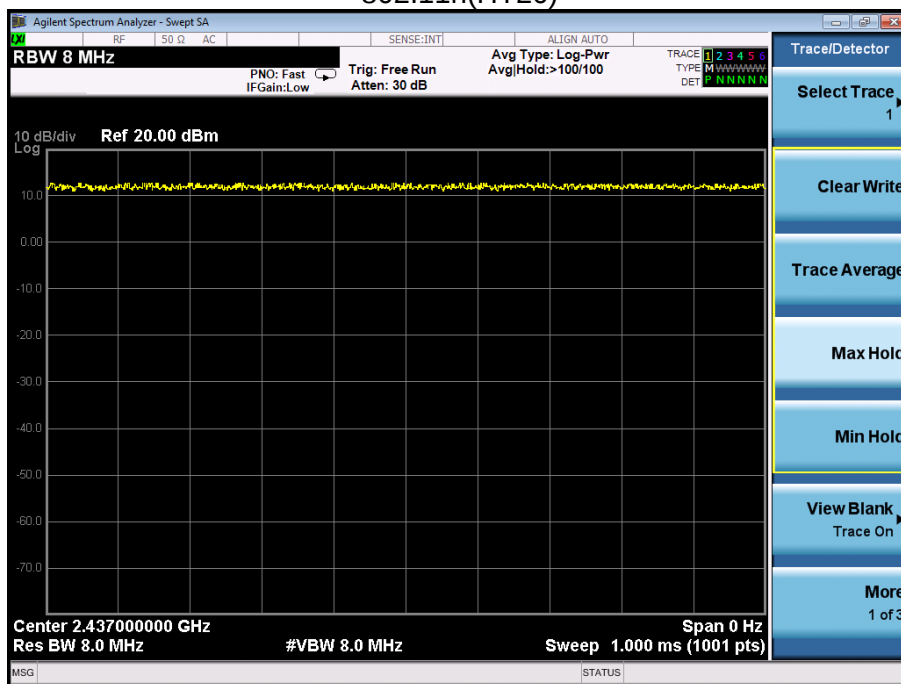



802.11n(HT40)

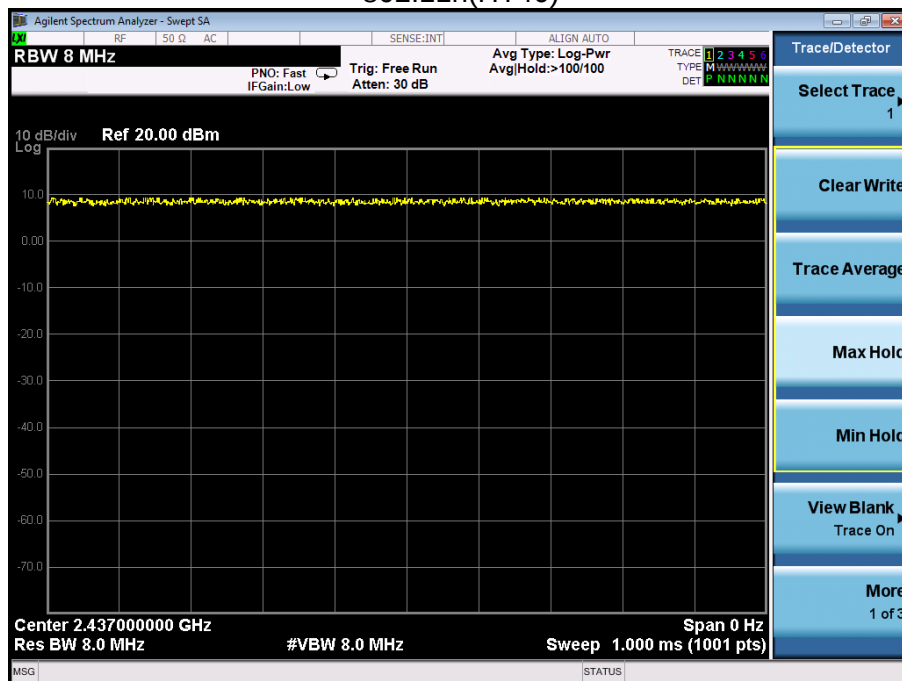

9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA

The EUT antenna is Internal antenna, antenna Gain 6.01dBi, impedance 50Ω. It comply with the standard requirement.



10. EUT TEST PHOTO

Conducted Measurement Photos





Radiated Measurement Photos








11. EUT PHOTO



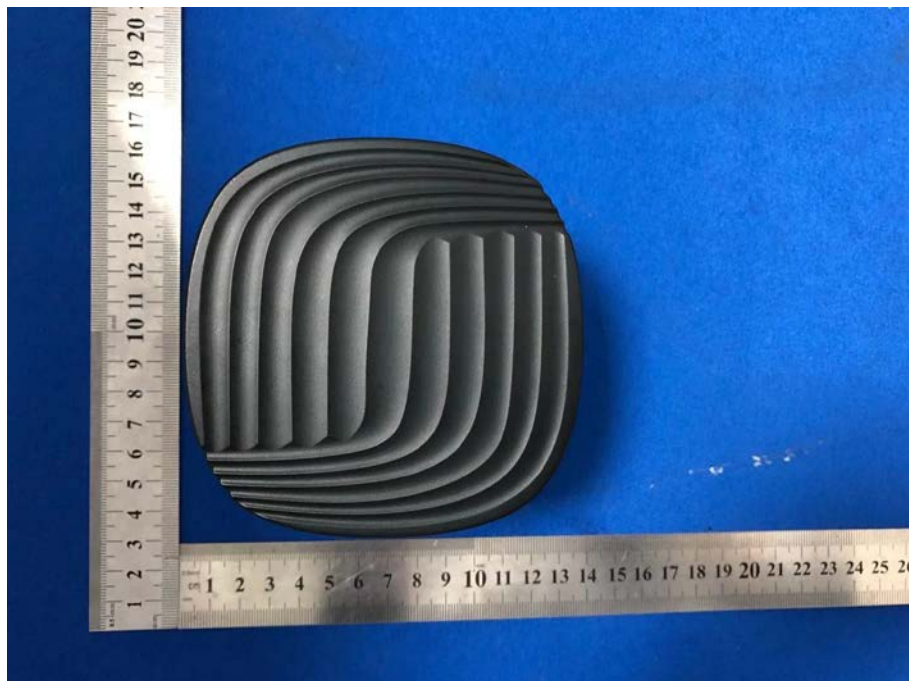



***** END OF REPORT *****