


Inverted F Antenna Specification

Summary

|                         |                                             |         |         |          |         |         |
|-------------------------|---------------------------------------------|---------|---------|----------|---------|---------|
| ITEM                    | ANT SPEC                                    |         |         |          |         |         |
| Model Name              | 2.4G ANT                                    |         |         |          |         |         |
| Center<br>Frequency     | Horizontal                                  |         |         | Vertical |         |         |
|                         | 2400MHz                                     | 2450MHz | 2500MHz | 2400MHz  | 2450MHz | 2500MHz |
|                         | -1.26                                       | -0.76   | -0.58   | -5.25    | -2.46   | -1.86   |
| MAX. Gain               | -0.58dBi                                    |         |         |          |         |         |
| Polarization            | Horizontal and Vertical                     |         |         |          |         |         |
| Azimuth Beam<br>Pattern | Omni-directional                            |         |         |          |         |         |
| Impedance               | 50 Ohm                                      |         |         |          |         |         |
| Antenna Length          | 38.20mm                                     |         |         |          |         |         |
| Manufacture             | ZHUHAI JIELI TECHNOLOGY CO.,LTD             |         |         |          |         |         |
| Manufacture address     | 333 Kexing Road, Xiangzhou District, Zhuhai |         |         |          |         |         |


Antenna Photo & Length (mm)

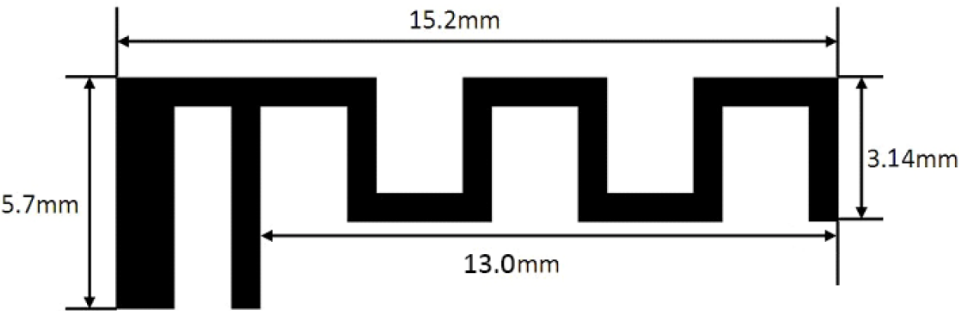

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

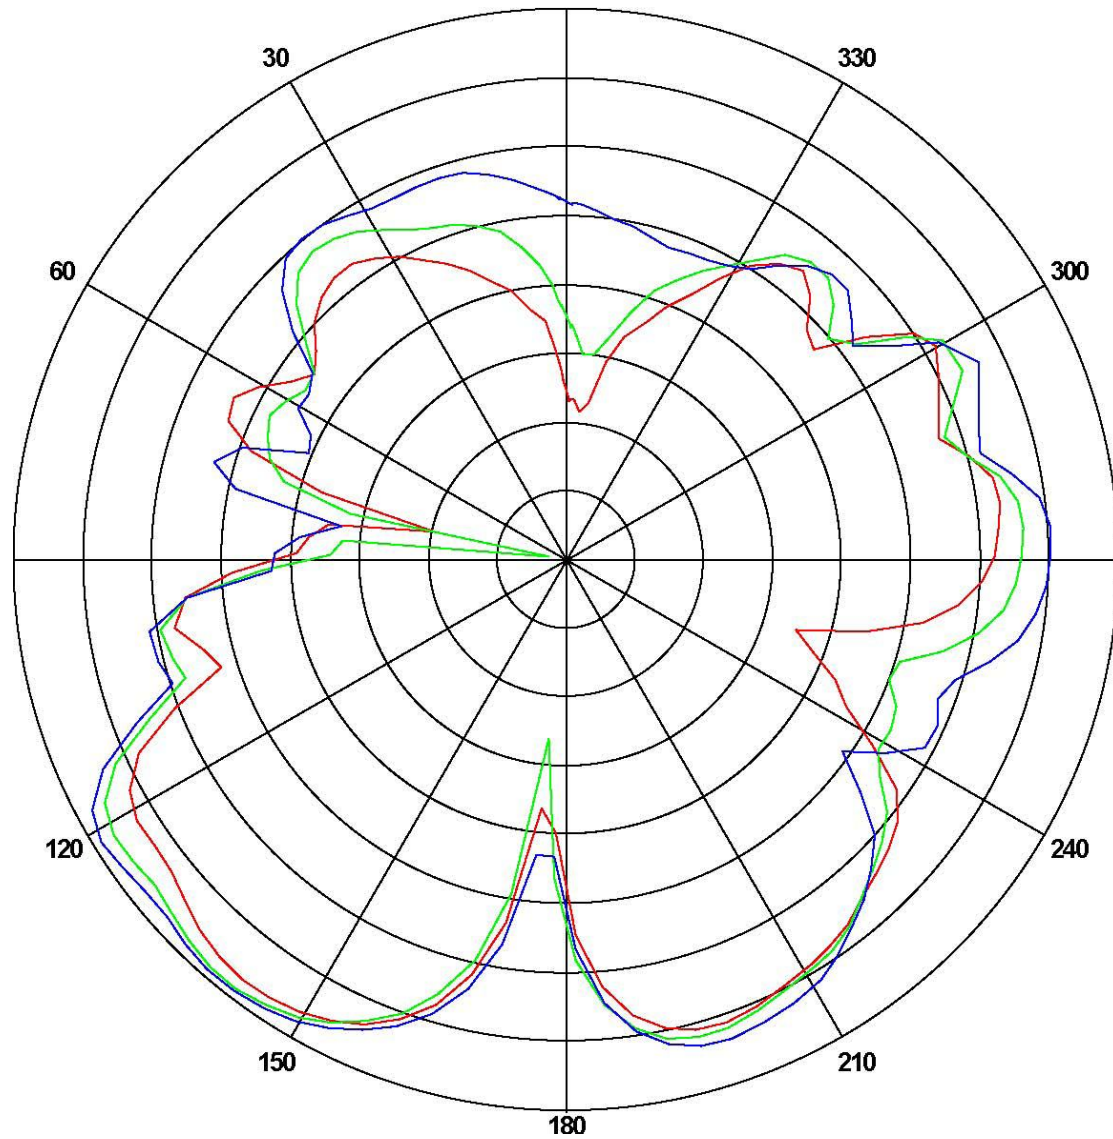


| Frequency<br>(MHz) | Gain(dBi) |          |          |
|--------------------|-----------|----------|----------|
|                    | Max       | Min      | Avg      |
| 2400               | -1.26174  | -30.0801 | -7.18716 |
| 2450               | -0.765802 | -36.5604 | -7.48023 |
| 2500               | -0.585582 | -22.0315 | -6.59127 |

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

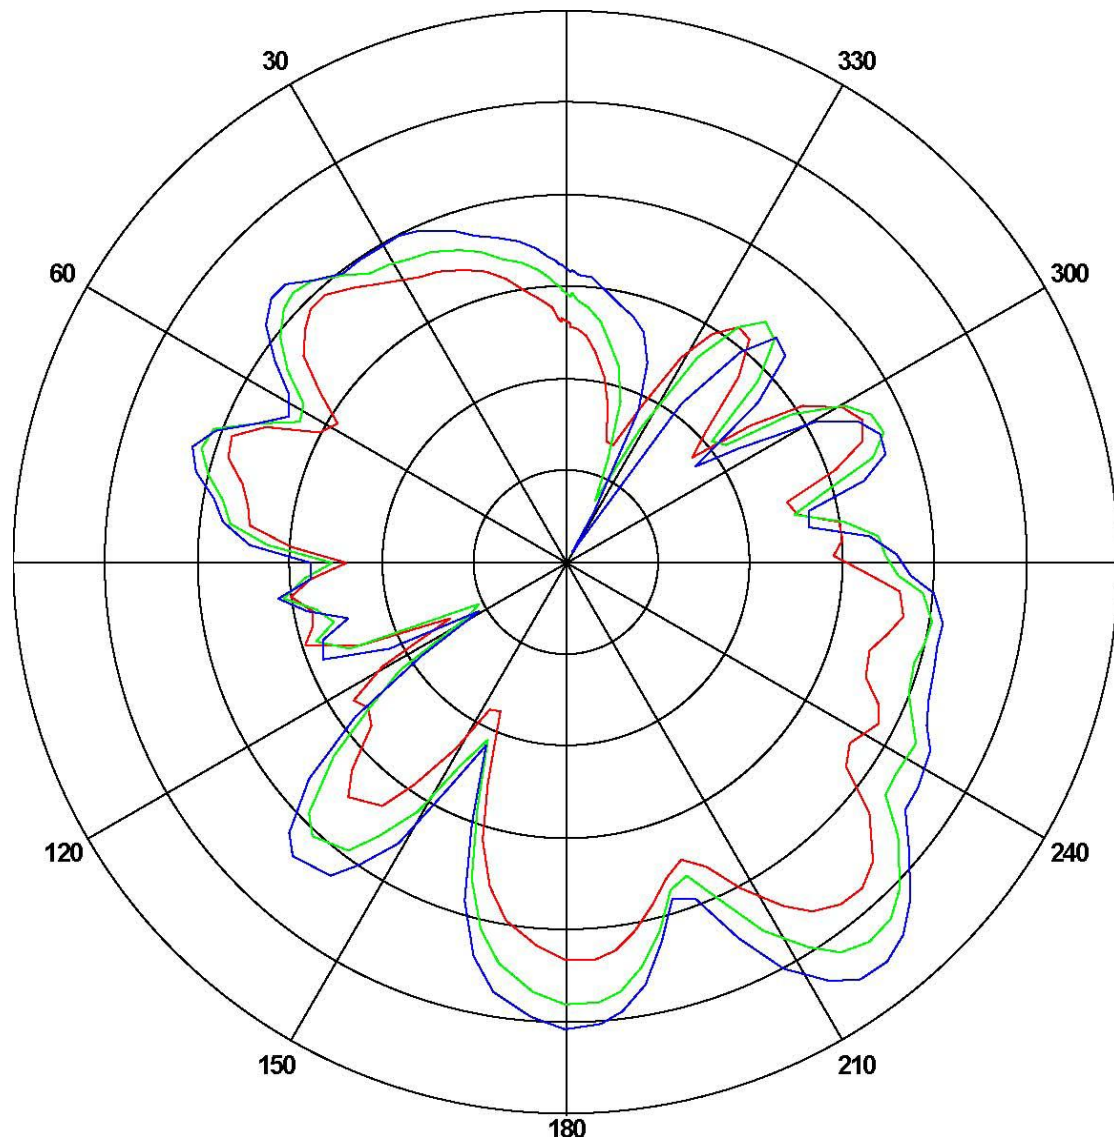

| Frequency<br>(MHz) | Gain(dBi) |          |          |
|--------------------|-----------|----------|----------|
|                    | Max       | Min      | Avg      |
| 2400               | -5.2537   | -22.1424 | -12.4294 |
| 2450               | -2.4652   | -24.5837 | -10.4702 |
| 2500               | -1.86120  | -29.5214 | -9.20432 |