





# **FCC Test Report**

FCC ID : 2AV24-BGM039

Equipment : BGM039 Link Blood Glucose Monitoring

System

Model No. : BGM039

Brand Name : ApexBio

Applicant : Apex Biotechnology Corp.

Address : No. 7, Li-Hsin Rd. V, Hsinchu Science Park,

Hsinchu, Taiwan, R.O.C.

Standard : 47 CFR FCC Part 15.247

Received Date : Dec. 06, 2023

Tested Date : Mar. 14 ~ Mar. 18, 2024

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

Along Cheld/ Assistant Manager Gary Chang / Manager

Report No.: FR3D0601AE Page: 1 of 17



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	Test Equipment List and Calibration Data	8
1.5	Test Standards	
1.6	Reference Guidance	g
1.7	Deviation from Test Standard and Measurement Procedure	g
1.8	Measurement Uncertainty	g
2	TEST CONFIGURATION	10
2.1	Testing Facility	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	6dB and Occupied Bandwidth	11
3.2	Conducted Output Power	12
3.3	Power Spectral Density	13
3.4	Unwanted Emissions in Restricted Frequency Bands	14
3.5	Emissions in non-restricted Frequency Bands	16
4	TEST LABORATORY INFORMATION	17

- Appendix A. 6dB and Occupied Bandwidth
- **Appendix B. Conducted Output Power**
- **Appendix C. Power Spectral Density**
- Appendix D. Unwanted Emissions into Restricted Frequency Bands
- Appendix E. Emissions in Non-Restricted Frequency Bands



## **Release Record**

Report No.	Version	Description	Issued Date
FR3D0601AE	Rev. 01	Initial issue	May 02, 2024

Report No.: FR3D0601AE Page: 3 of 17



## **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	Note <sup>1</sup>	N/A
15.247(d)	Unwanted Emissions	[dBuV/m at 3m]: 12400.00MHz	Pass
15.209		52.99 (Margin -1.01dB) - AV	1 033
15.247(b)(3)	Conducted Output Power	Power [dBm]: -5.28	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

N/A means Not Applicable.

Note<sup>1</sup>: The EUT consumes DC power from battery, so the test is not required

### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR3D0601AE Page: 4 of 17



## 1 General Description

## 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

Frequency Range (MHz) Bluetooth (MHz) Channel Number Data Rate							
2400-2463.5	0-39 [40]	2 Mbps					
Note: Bluetooth LE (L	Note: Bluetooth LE (Low energy) uses GFSK modulation.						

### 1.1.2 Antenna Details

Ant. No.	Brand	Model	Туре	Connector	Gain (dBi)
1	ApexBio	APEX_BGM039 onboard PCB ANT	PCB antenna	No	-7.09

## 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	6Vdc from batteries (3Vdc x2)
-------------------	-------------------------------

### 1.1.4 Accessories

	Accessories					
No. Equipment Description						
1	Battery(x2)	Brand: TOSHIBA Model: CR2032 Rating: 3Vdc				

Report No.: FR3D0601AE Page: 5 of 17



## 1.1.5 Channel List

	Frequency band (MHz)				2400~	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

## 1.1.6 Test Tool and Duty Cycle

Test Tool	AccessPort, Version: 1.37	AccessPort, Version: 1.37			
Modulation Mode	Duty Cycle Of Test Signal (%)	Duty Factor (dB)			
BT-LE(1Mbps)	62.50%	2.04			
BT-LE(2Mbps)	32.87%	4.83			

## 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)				
Wodulation Wode	2402	2440	2480		
BT-LE(1Mbps)	Default	Default	Default		
BT-LE(2Mbps)	Default	Default	Default		

Report No.: FR3D0601AE Page: 6 of 17




## 1.2 Local Support Equipment List

	Support Equipment List						
No. Equipment Brand			Model	FCC ID	Remarks		
1	Laptop	DELL	Latitude 5440	DoC			

Note: The support notebook was disconnected from EUT and was removed from test table after sending command from notebook to control EUT to transmit continuously.

## 1.3 Test Setup Chart

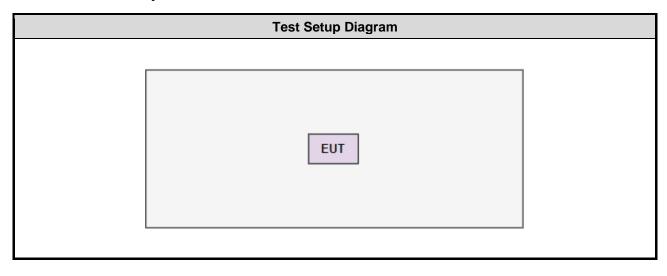

Report No.: FR3D0601AE Page: 7 of 17



## 1.4 Test Equipment List and Calibration Data

Test Item Radiated Emission							
Test Site	966 chamber1 / (03CH01-WS)						
Tested Date	Mar. 14, 2024						
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until		
Receiver	R&S	ESR3	101657	Mar. 05, 2024	Mar. 04, 2025		
Spectrum Analyzer	R&S	FSV40	101498	Nov. 23, 2023	Nov. 22, 2024		
Loop Antenna	R&S	HFH2-Z2	100330	Oct. 31, 2023	Oct. 30, 2024		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 31, 2023	Jul. 30, 2024		
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Nov. 27, 2023	Nov. 26, 2024		
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 30, 2023	Oct. 29, 2024		
Preamplifier	EMC	EMC02325	980225	Jun. 28, 2023	Jun. 27, 2024		
Preamplifier	EMC	EMC118A45SE	980898	Jul. 14, 2023	Jul. 13, 2024		
Preamplifier	EMC	EMC184045SE	980903	Jul. 17, 2023	Jul. 16, 2024		
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 03, 2023	Oct. 02, 2024		
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 03, 2023	Oct. 02, 2024		
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 03, 2023	Oct. 02, 2024		
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 03, 2023	Oct. 02, 2024		
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 03, 2023	Oct. 02, 2024		
RF Cable	EMC	EMC104-35M-35M- 3000	210922	Oct. 03, 2023	Oct. 02, 2024		
Attenuator	Pasternack	PE7005-10	10-1	Oct. 05, 2023	Oct. 04, 2024		
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 05, 2023	Oct. 04, 2024		
Measurement Software	AUDIX	e3	6.120210g	NA	NA		

Test Item	RF Conducted					
Test Site	(TH01-WS)	(TH01-WS)				
Tested Date	Mar. 18, 2024					
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until	
Spectrum Analyzer	R&S	FSV40	101910	Apr. 14, 2023	Apr. 13, 2024	
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2023	Nov. 20, 2024	
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2023	Nov. 20, 2024	
Attenuator	Pasternack	PE7005-10	10-2	Oct. 05, 2023	Oct. 04, 2024	
Measurement Software	Sporton	SENSE-15247_FS	V5.10.8	NA	NA	
Note: Calibration Inte	rval of instruments liste	d above is one year.				

Report No.: FR3D0601AE Page: 8 of 17



### 1.5 Test Standards

47 CFR FCC Part 15.247 ANSI C63.10-2013

### 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty				
Parameters	Uncertainty			
Bandwidth	±34.130 Hz			
Conducted power	±0.808 dB			
Power density	±0.583 dB			
Conducted emission	±2.715 dB			
AC conducted emission	±2.92 dB			
Unwanted Emission ≤ 1GHz	±3.41 dB			
Unwanted Emission > 1GHz	±4.59 dB			

Report No.: FR3D0601AE Page: 9 of 17



## 2 Test Configuration

## 2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

FCC Designation No.: TW2732FCC site registration No.: 181692

➤ ISED#: 10807A

➤ CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Test Configuration
AC Power Line Conducted Emissions	BT-LE(1Mbps)	2402	
Unwanted Emissions ≤ 1GHz	BT-LE(1Mbps)	2402	
Unwanted Emissions > 1GHz	BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480 2402, 2440, 2480	
Conducted Output Power 6dB bandwidth Power spectral density	BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480 2402, 2440, 2480	

### NOTE:

Report No.: FR3D0601AE Page: 10 of 17

<sup>1.</sup> The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.



## 3 Transmitter Test Results

## 3.1 6dB and Occupied Bandwidth

### 3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.1.2 Test Procedures


#### 6dB Bandwidth

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

### **Occupied Bandwidth**

- 1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
- 2. Detector = Sample, Trace mode = max hold.
- 3 Sweep = auto couple, Allow the trace to stabilize.
- 4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.1.3 Test Setup



#### 3.1.4 Test Results

Ambient Condition	23°C / 65%	Tested By	Roger Lu

Refer to Appendix A.

Report No.: FR3D0601AE Page: 11 of 17



## 3.2 Conducted Output Power

### 3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

#### 3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.2.3 Test Setup



#### 3.2.4 Test Results

Ambient Condition	23°C / 65%	Tested By	Roger Lu
-------------------	------------	-----------	----------

Refer to Appendix B.

Report No.: FR3D0601AE Page: 12 of 17



## 3.3 Power Spectral Density


### 3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.3.2 Test Procedures

- 1. Set the RBW = 3 kHz, VBW = 10 kHz.
- 2. Detector = Peak, Sweep time = auto couple.
- 3. Trace mode = max hold, allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

### 3.3.3 Test Setup



### 3.3.4 Test Results

	Ì		
<b>Ambient Condition</b>	23°C / 65%	Tested By	Roger Lu

Refer to Appendix C.

Report No.: FR3D0601AE Page: 13 of 17



## 3.4 Unwanted Emissions in Restricted Frequency Bands

### 3.4.1 Limit of Unwanted Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit					
Frequency Range (MHz) Field Strength (uV/m) Field Strength (dB		Field Strength (dBuV/m)	Measure Distance (m)		
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300		
0.490~1.705	24000/F(kHz)	33.8 - 23	30		
1.705~30.0	30	29	30		
30~88	100	40	3		
88~216	150	43.5	3		
216~960	200	46	3		
Above 960	500	54	3		

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.4.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR3D0601AE Page: 14 of 17



## 3.4.3 Test Setup

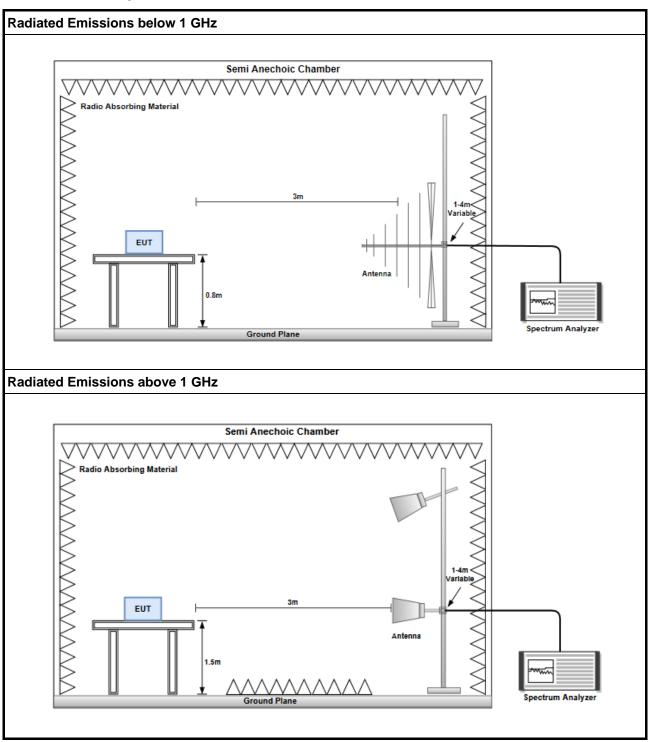

### 3.4.4 Test Results

Refer to Appendix D.

Report No.: FR3D0601AE Page: 15 of 17



## 3.5 Emissions in non-restricted Frequency Bands

### 3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

#### 3.5.2 Test Procedures


#### Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

#### **Emission level measurement**

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

### 3.5.3 Test Setup



### 3.5.4 Test Results

<b>Ambient Condition</b>	23°C / 65%	Tested By	Roger Lu

Refer to Appendix E.

Report No.: FR3D0601AE Page: 16 of 17



## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)

#### Kwei Shan

Tel: 886-3-271-8666
No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

#### Kwei Shan Site II

Tel: 886-3-271-8640 No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR3D0601AE Page: 17 of 17



## 6dB and Occupied Bandwidth

Appendix A

**Summary** 

Mode	Max-N dB	Max-OBW	ITU-Code	Min-N dB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	696.25k	1.038M	1M04F1D	677.5k	1.033M
BT-LE(2Mbps)	1.16M	2.06M	2M06F1D	1.15M	2.049M


Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth; Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

### Result


Mode	Result	Limit	Port 1-N dB	Port 1-OBW
		(Hz)	(Hz)	(Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	692.5k	1.033M
2440MHz	Pass	500k	696.25k	1.038M
2480MHz	Pass	500k	677.5k	1.036M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.158M	2.049M
2440MHz	Pass	500k	1.15M	2.06M
2480MHz	Pass	500k	1.16M	2.056M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth




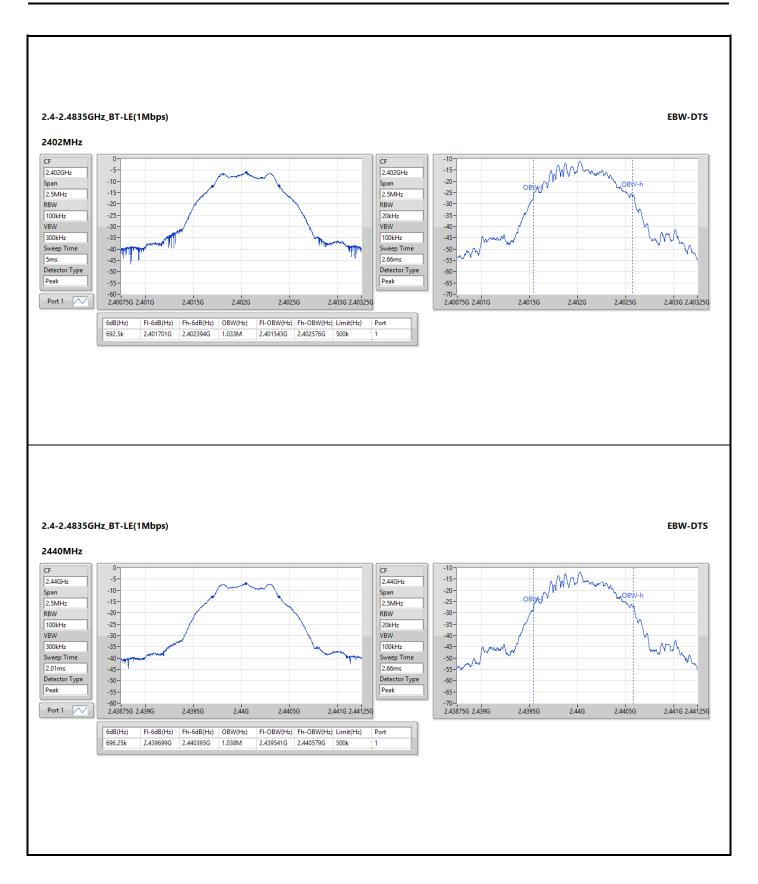



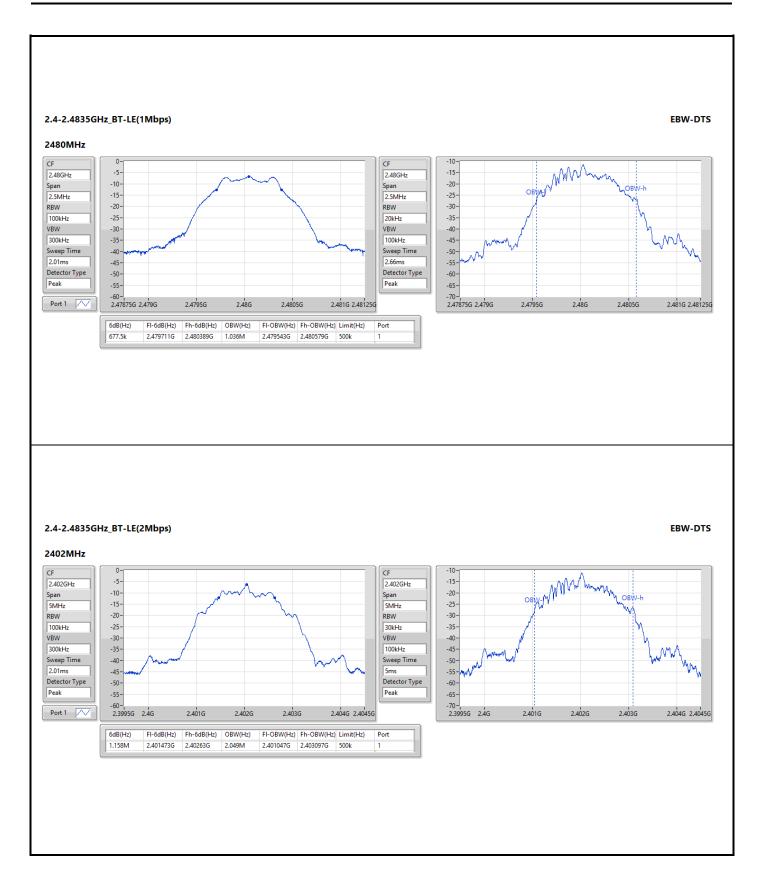



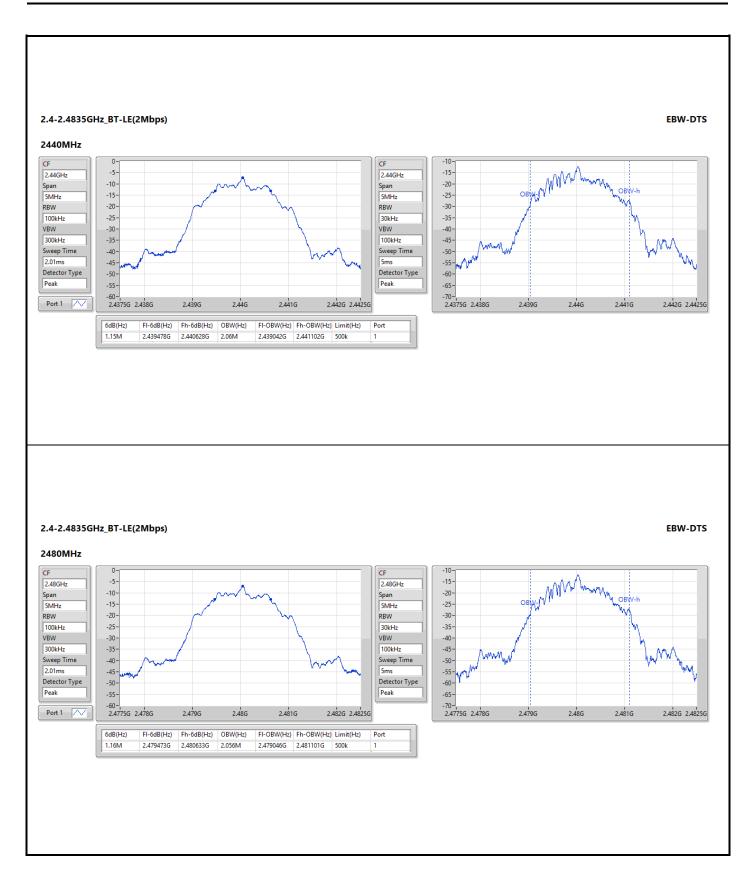



## Conducted Output Power (Peak)

Appendix B.1

Summary

Mode	Total Power	Power
	(dBm)	(W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	-5.28	0.00030
BT-LE(2Mbps)	-5.31	0.00029

### Result

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
2402MHz	Pass	-7.09	-5.28	30.00	-12.37	36.00
2440MHz	Pass	-7.09	-5.62	30.00	-12.71	36.00
2480MHz	Pass	-7.09	-6.25	30.00	-13.34	36.00
BT-LE(2Mbps)	-	-	-	-	-	-
2402MHz	Pass	-7.09	-5.31	30.00	-12.40	36.00
2440MHz	Pass	-7.09	-5.72	30.00	-12.81	36.00
2480MHz	Pass	-7.09	-6.22	30.00	-13.31	36.00



## Conducted Output Power (Average)

Appendix B.2

Summary

Mode	Total Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	-5.87	0.00026
BT-LE(2Mbps)	-5.91	0.00026

### Result

Mode	Result	Antenna Gain	Total Power	Power Limit	EIRP	EIRP Limit
		(dBi)	(dBm)	(dBm)	(dBm)	(dBm)
BT-LE(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	-7.09	-5.87	-	-12.96	-
2440MHz	Pass	-7.09	-6.28	-	-13.37	-
2480MHz	Pass	-7.09	-6.89	-	-13.98	-
BT-LE(2Mbps)	-	-	-	-	-	-
2402MHz	Pass	-7.09	-5.91	-	-13.00	-
2440MHz	Pass	-7.09	-6.37	-	-13.46	-
2480MHz	Pass	-7.09	-6.84	-	-13.93	-

Note: Average power is for reference only.



## **Power Spectral Density**

Appendix C


Summary

Mode	PD (dBm/3kHz)	
2.4-2.4835GHz	-	
BT-LE(1Mbps)	-20.53	
BT-LE(2Mbps)	-23.11	


### Result

Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	-7.09	-20.53	8.00
2440MHz	Pass	-7.09	-21.53	8.00
2480MHz	Pass	-7.09	-21.18	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	-7.09	-23.11	8.00
2440MHz	Pass	-7.09	-24.16	8.00
2480MHz	Pass	-7.09	-24.07	8.00




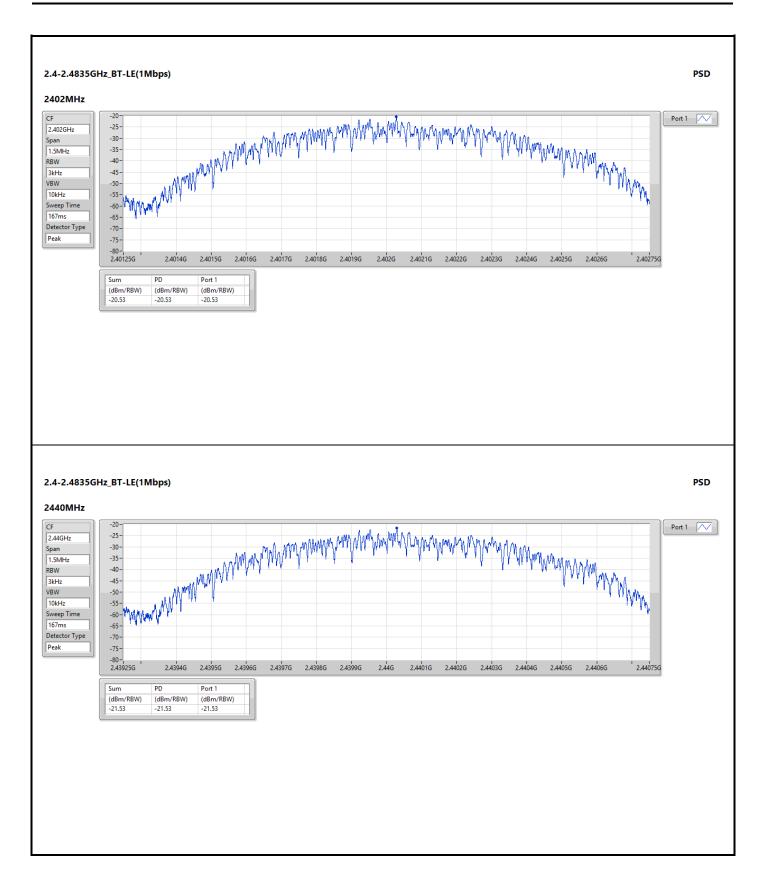



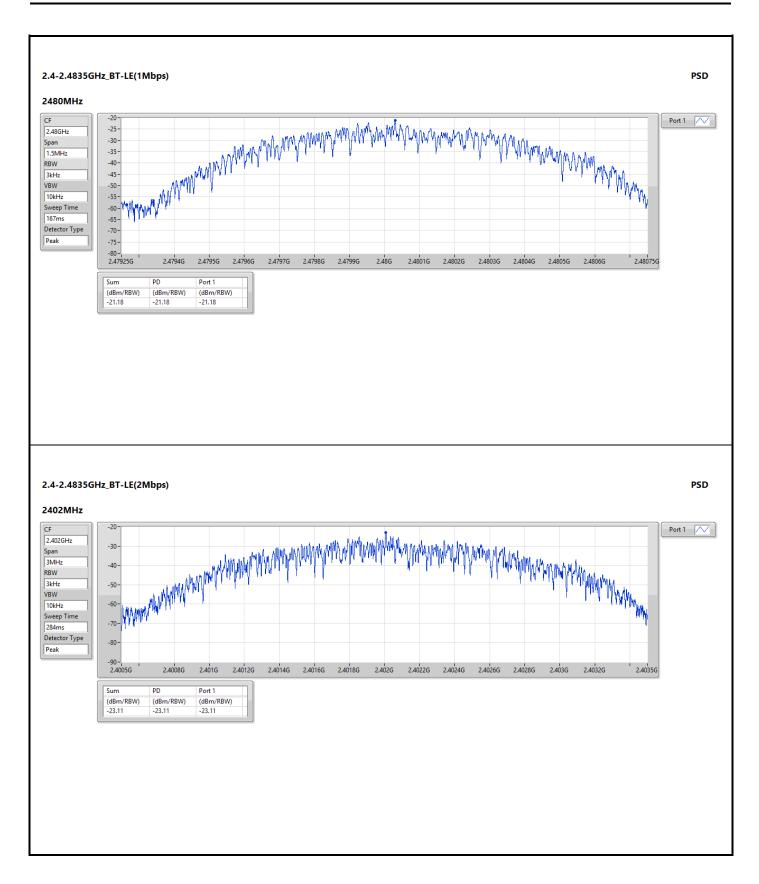




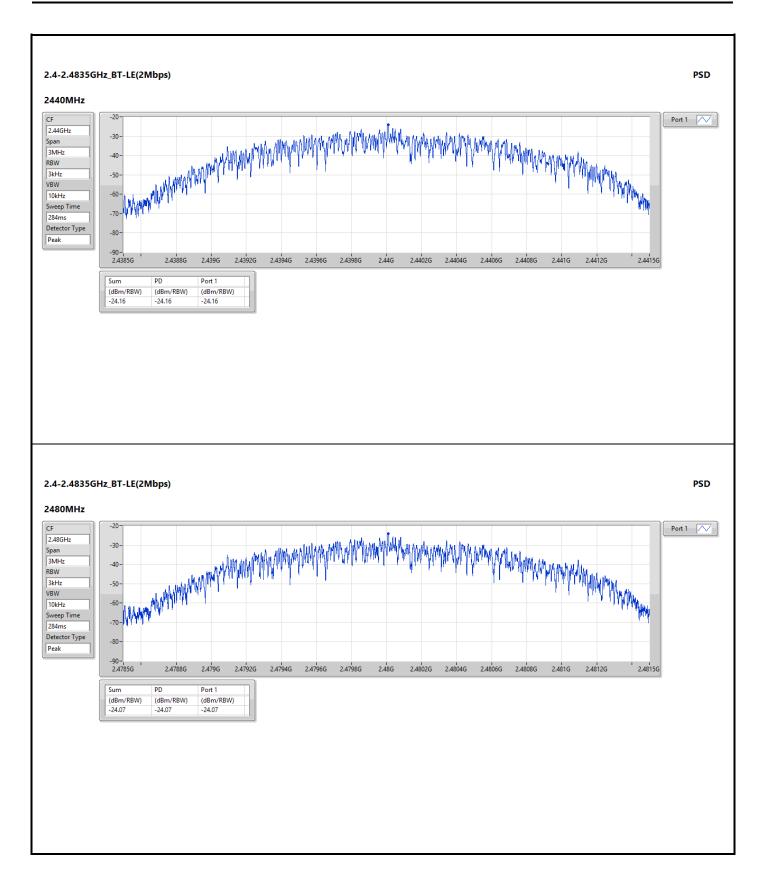



### **Unwanted Emissions (Below 1GHz)**

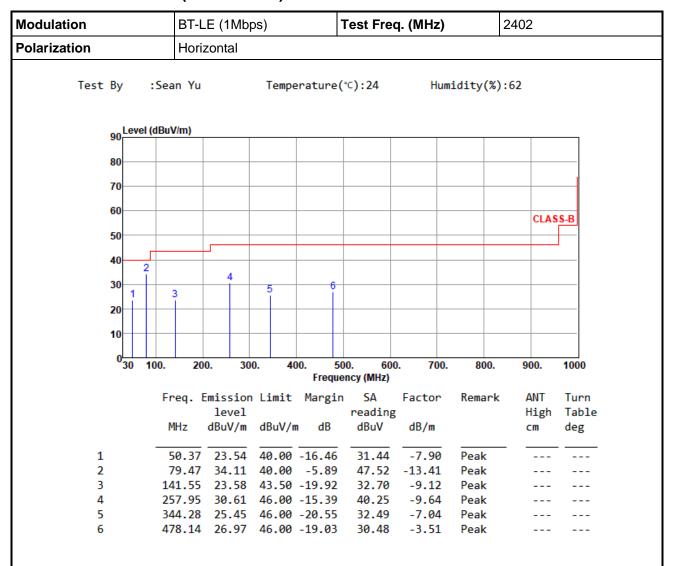


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



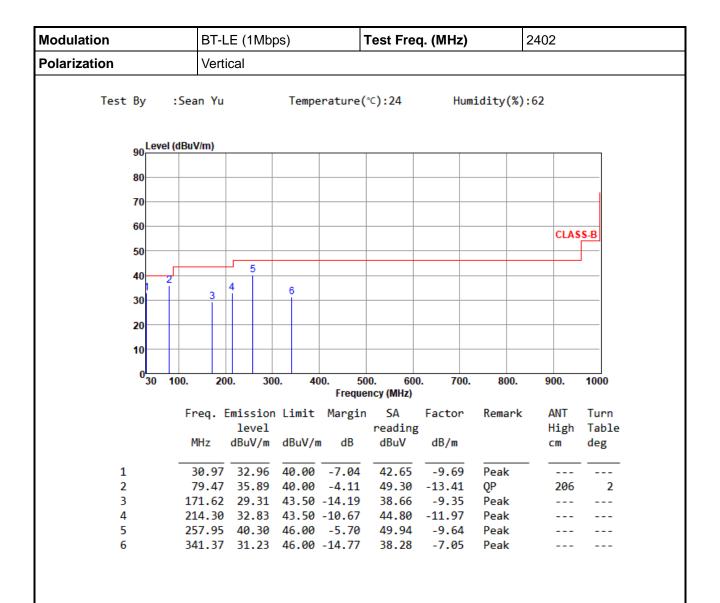


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



### **Unwanted Emissions (Above 1GHz)**

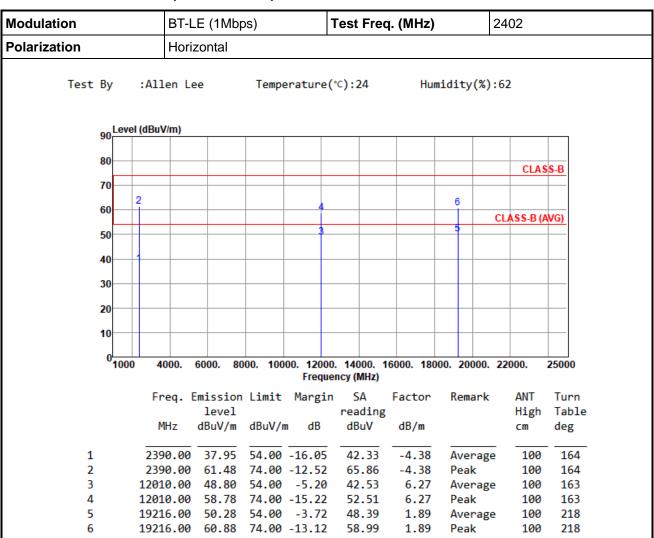


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).




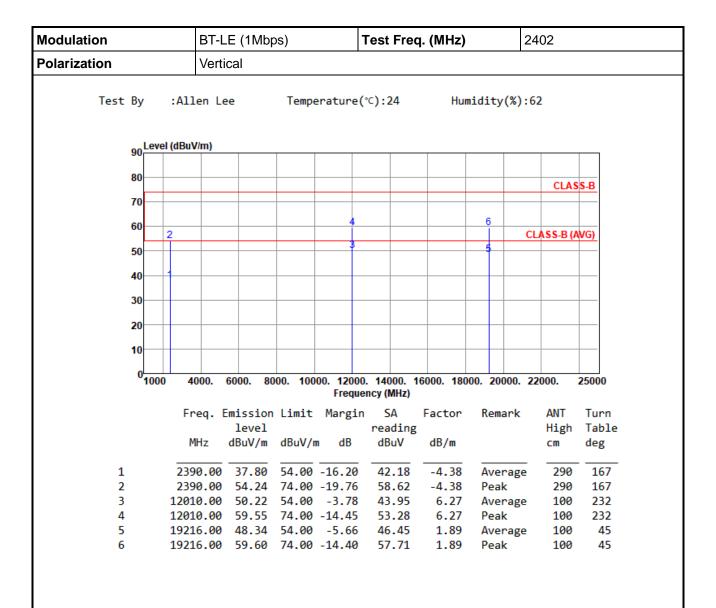

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




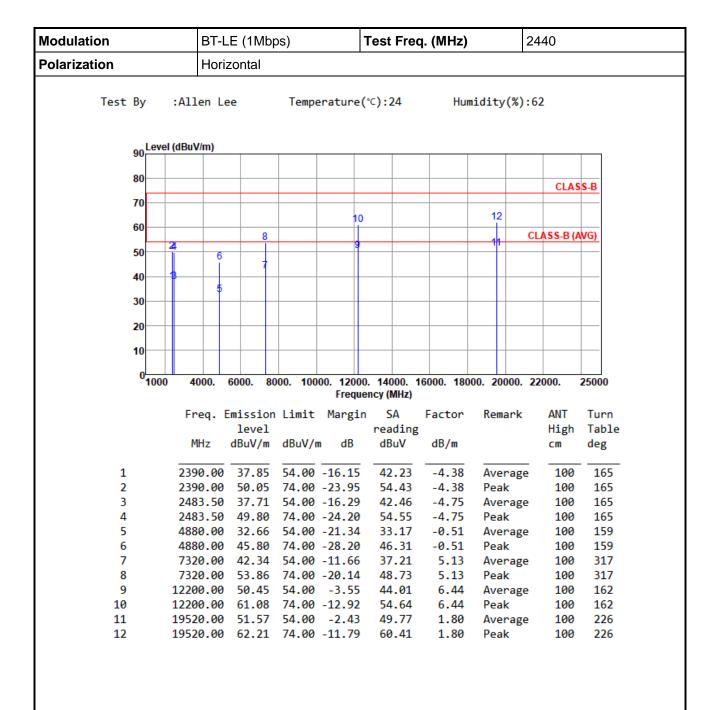

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




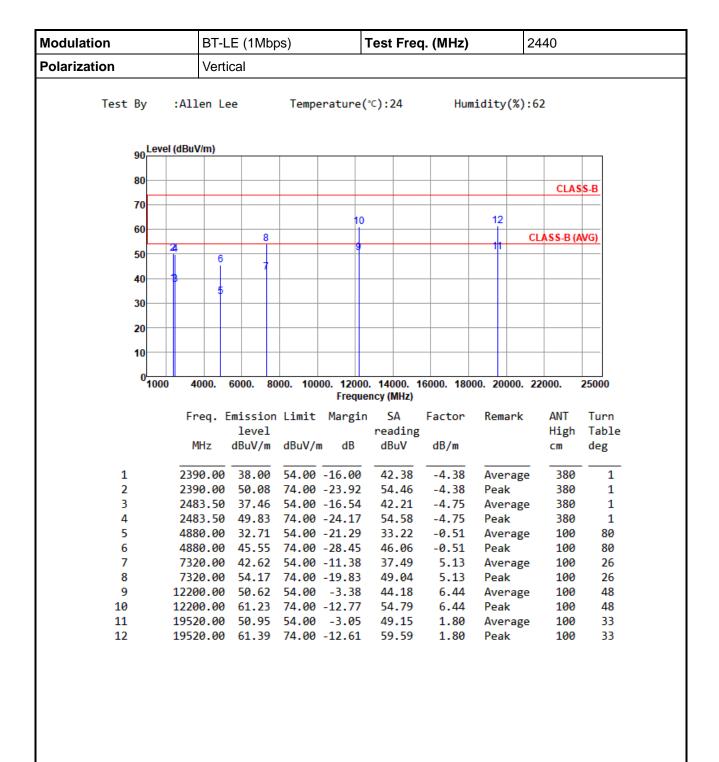

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




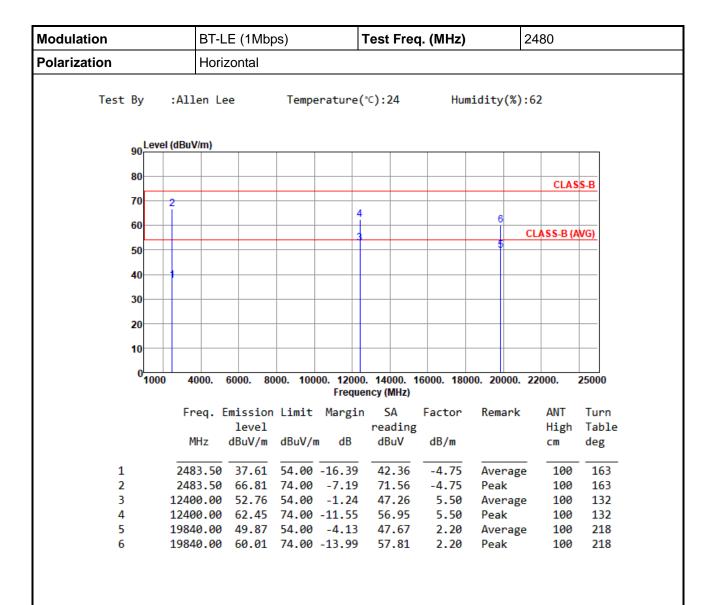

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




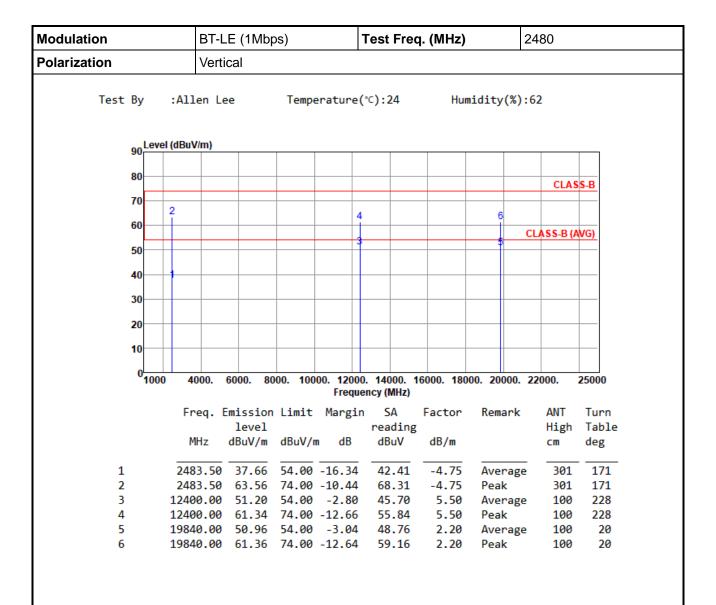

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




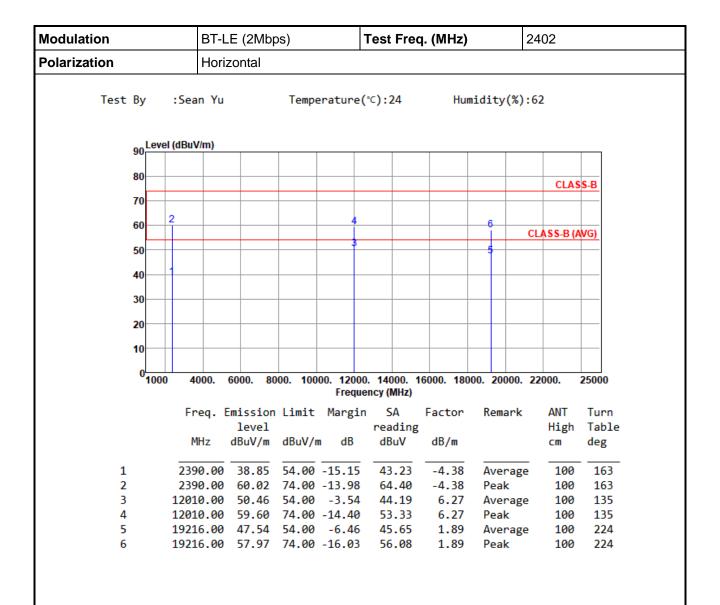

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




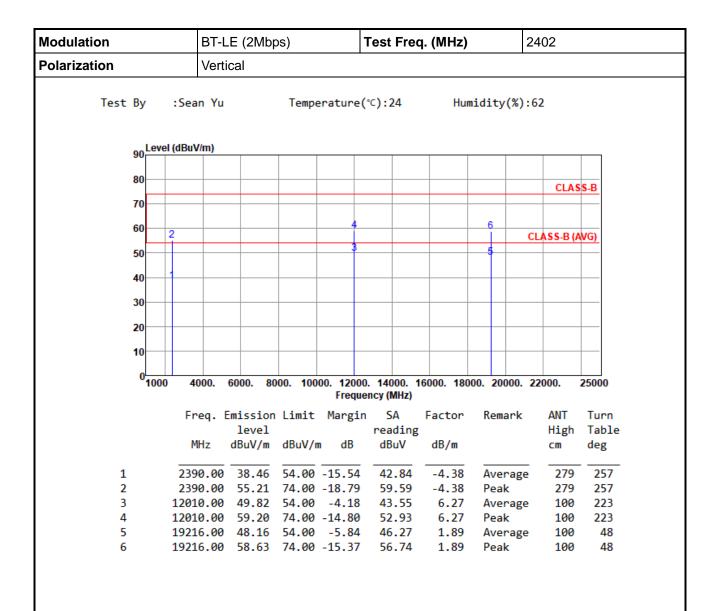

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




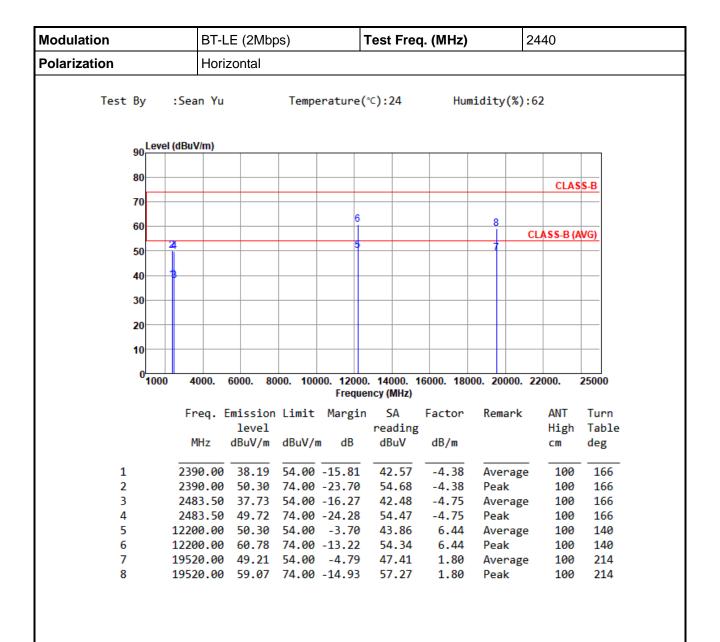

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




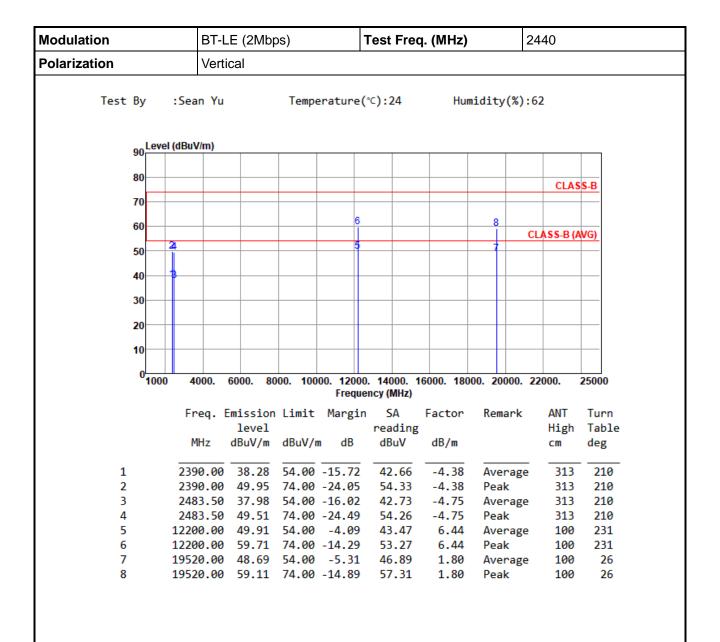

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




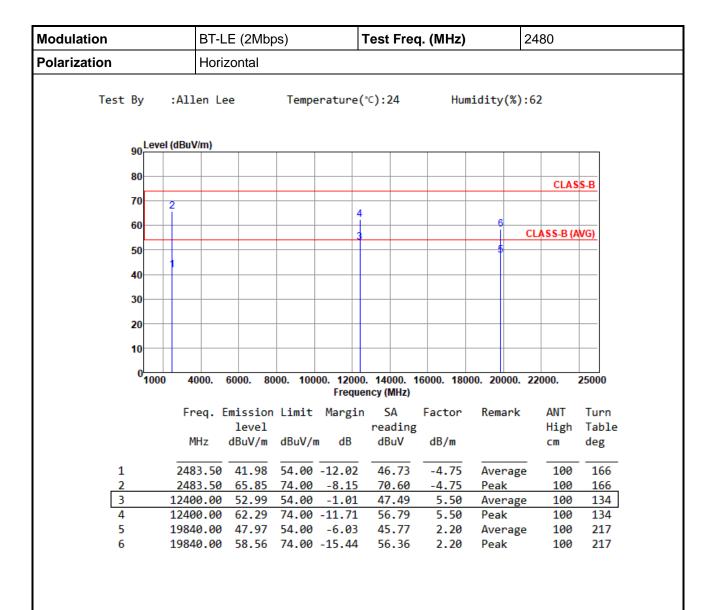

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



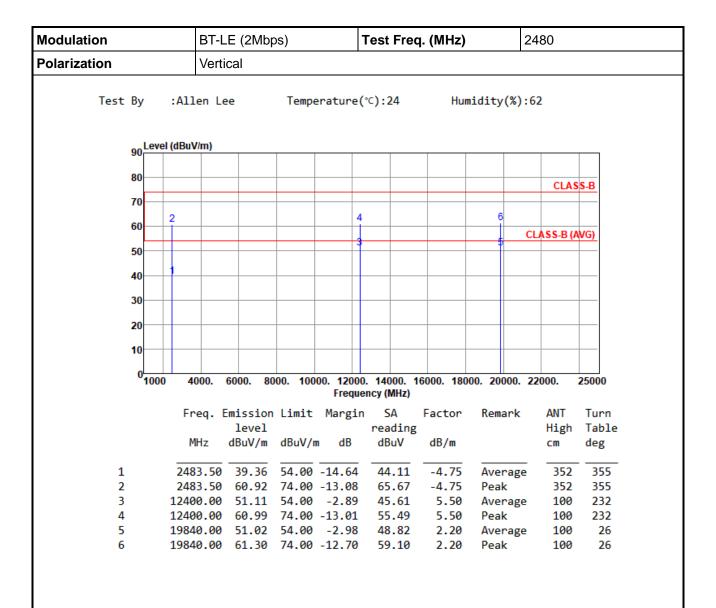

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



