

FCC Radio Test Report

FCC ID: 2AV29-56406


Original Grant

Report No. : TB-FCC173538
Applicant : Zhongshan Jesmay Electronics Co.,Ltd
Equipment Under Test (EUT)
EUT Name : NVR
Model No. : 56406
Series Model No. : N029, N039, 56405, 56409, 56410, MZ-N208F
Brand Name : Joustory, JSLBTECH, JouSecu, JouJou, TMEZON, JouLINK, Maysly

Receipt Date : 2020-06-05
Test Date : 2020-06-05 to 2020-07-03
Issue Date : 2020-07-03
Standards : FCC Part 15, Subpart C 15.247
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

The EUT technically complies with the FCC and IC requirements

Test/Witness Engineer :  Jack Deng
Engineer Supervisor :  Ivan Su
Authorized Signatory :  Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	7
1.4 Description of Support Units	7
1.5 Description of Test Mode.....	8
1.6 Description of Test Software Setting	9
1.7 Measurement Uncertainty	10
1.8 Test Facility.....	10
2. TEST SUMMARY	11
3. TEST SOFTWARE	11
4. TEST EQUIPMENT	12
5. CONDUCTED EMISSION TEST	13
5.1 Test Standard and Limit.....	13
5.2 Test Setup.....	13
5.3 Test Procedure.....	14
5.4 Deviation From Test Standard.....	14
5.5 EUT Operating Mode	14
5.6 Test Data.....	14
6. RADIATED EMISSION TEST	15
6.1 Test Standard and Limit.....	15
6.2 Test Setup.....	16
6.3 Test Procedure.....	17
6.4 Deviation From Test Standard.....	18
6.5 EUT Operating Condition	18
6.6 Test Data.....	18
7. RESTRICTED BANDS REQUIREMENT	19
7.1 Test Standard and Limit.....	19
7.2 Test Setup.....	19
7.3 Test Procedure.....	20
7.4 Deviation From Test Standard.....	20
7.5 EUT Operating Condition	20
7.6 Test Data.....	20
8. BANDWIDTH TEST	21
8.1 Test Standard and Limit.....	21
8.2 Test Setup.....	21
8.3 Test Procedure.....	21

8.4 Deviation From Test Standard.....	21
8.5 EUT Operating Condition	21
8.6 Test Data.....	21
9. PEAK OUTPUT POWER TEST.....	22
9.1 Test Standard and Limit.....	22
9.2 Test Setup.....	22
9.3 Test Procedure.....	22
9.4 Deviation From Test Standard.....	22
9.5 EUT Operating Condition	22
9.6 Test Data.....	22
10. POWER SPECTRAL DENSITY TEST	23
10.1 Test Standard and Limit	23
10.2 Test Setup.....	23
10.3 Test Procedure.....	23
10.4 Deviation From Test Standard.....	23
10.5 EUT Operating Condition	23
10.6 Test Data.....	23
11. ANTENNA REQUIREMENT.....	24
11.1 Standard Requirement.....	24
11.2 Deviation From Test Standard.....	24
11.3 Antenna Connected Construction.....	24
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	25
ATTACHMENT B-- RADIATED EMISSION TEST DATA	27
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT AND BAND-EDGE TEST DATA	77
ATTACHMENT D-- BANDWIDTH TEST DATA.....	121
ATTACHMENT E-- PEAK OUTPUT POWER TEST DATA.....	145
ATTACHMENT F-- POWER SPECTRAL DENSITY TEST DATA.....	154

Revision History

Report No.	Version	Description	Issued Date
TB-FCC173538	Rev.01	Initial issue of report	2020-07-03

1. General Information about EUT

1.1 Client Information

Applicant	:	Zhongshan Jesmay Electronics Co.,Ltd
Address	:	No.1 Industry District, Tan Zhou Town, Zhongshan City, Guangdong, China
Manufacturer	:	Zhongshan Jesmay Electronics Co.,Ltd
Address	:	No.1 Industry District, Tan Zhou Town, Zhongshan City, Guangdong, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	NVR	
Models No.	:	56406, N029, N039, 56405, 56409, 56410, MZ-N208F	
Model Different	:	All these model product are identical the same, for commercial use with different model number.	
Product Description	:	Operation Frequency:	802.11b/g/n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
		Number of Channel:	802.11b/g/n(HT20):11 channels <i>see note(3)</i> 802.11n(HT40): 7 channels <i>see note(3)</i>
		RF Output Power:	802.11b:16.330dBm(Max Module#1) 802.11g:15.834dBm(Max Module#1) 802.11n(HT20):16.043dBm(Max Module#1) 802.11n (HT40):16.421dBm(Max Module#1)
			802.11b:16.430dBm(Max Module#2) 802.11g:16.193dBm(Max Module#2) 802.11n(HT20):16.052dBm(Max Module#2) 802.11n (HT40):16.277dBm(Max Module#2)
		Antenna Gain:	Please see Note(4)
		Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK) 802.11g/n:OFDM(BPSK,QPSK,16QAM,64QAM)
		Bit Rate of Transmitter:	Using 20MHz bandwidth, data rate up to 173.3 Mbps Using 40MHz bandwidth, data rate up to 400 Mbps
		Power Rating	:
Software Version	:	WNVR-WNIP2_20200420	
Hardware Version	:	Hi3536D_V125P	

Note:

- (1) This Test Report is FCC Part 15.247 for 802.11b/g/n, the test procedure follows the FCC KDB 558074 D01 v05r02 and KDB 662911 D01 Multiple Transmitter Output v02r01.
- (2) For a more detailed features description, please refer to the User's Manual.
- (3) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	05	2432	09	2452
02	2417	06	2437	10	2457
03	2422	07	2442	11	2462
04	2427	08	2447		


Note: CH 01~CH 11 for 802.11b/g/n(HT20)
CH 03~CH 09 for 802.11n(HT40)

(4) Antenna information


Mode	TX Antenna (s)	Remark (module#1)	(module#2)
802.11b	3	ANT. A + ANT. B	ANT. A
802.11g	3	ANT. A+ ANT. B	ANT. A
802.11n(HT20)	3	ANT. A+ ANT. B	ANT. A
802.11n(HT40)	3	ANT. A+ ANT. B	ANT. A
Antenna	Brand	Type	Antenna Gain(dBi)
ANT. A(module#1)	N/A	Dipole Ant	5.0
ANT. B(module#1)	N/A	Dipole Ant	5.0
ANT. A(module#2)	N/A	FPC Ant	5.0

1.3 Block Diagram Showing the Configuration of System Tested

Conducted Test

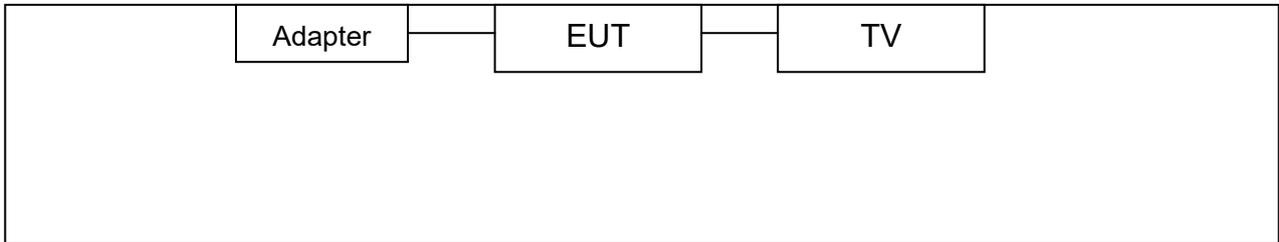

Radiated Test

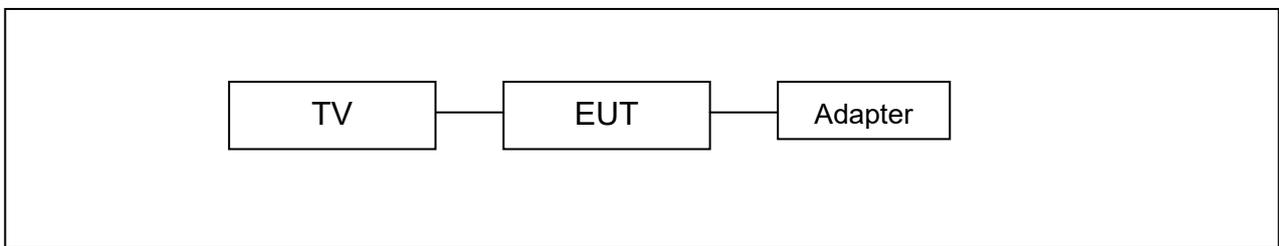

1.4 Description of Support Units

Name	Model	S/N	Manufacturer	Used “√”
TV	/	/	/	√
Adapter	R241-1202000U			√

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Charging with TX B Mode
For Radiated and RF Conducted Test	
Final Test Mode	Description
Mode 2	TX Mode B Mode Channel 01/06/11
Mode 3	TX Mode G Mode Channel 01/06/11
Mode 4	TX Mode N(HT20) Mode Channel 01/06/11
Mode 5	TX Mode N(HT40) Mode Channel 03/06/09
<p>Note : (1)The adapter and antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.</p> <p>(2)There are Only one prototypes of model 56406 which are 20200525-17-1, For the Conducted Emission and Radiated test used the 20200525-17-1. For the RF Conduction test used the 20200525-17-1.</p>	

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.
According to ANSI C63.10 standards, the measurements are performed at the highest, Middle, lowest available channels, and the worst case data rate as follows:
 - 802.11b Mode: CCK (1 Mbps)
 - 802.11g Mode: OFDM (6 Mbps)
 - 802.11n (HT20) Mode: MCS 0 (6.5 Mbps)
 - 802.11n (HT40) Mode: MCS 0 (30 Mbps)
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a Mobile device; in normal use it was positioned on X-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN.

Test Software: Xshell					
Test Mode: Continuously transmitting					
Mode	Data Rate	Channel	Parameters		Parameters
			Module#1		Module#2
			ANT a	ANT b	ANT a
802.11b	CCK/ 1Mbps	01	18	20	18
	CCK/ 1Mbps	07	18	21	20
	CCK/ 1Mbps	13	19	21	20
802.11g	OFDM/ 6Mbps	01	24	26	24
	OFDM/ 6Mbps	07	24	26	24
	OFDM/ 6Mbps	13	25	27	25
			Parameters		Parameters
			Module#1		Module#2
			ANT a	ANT b	ANT a
802.11n(20)	MCS 0	01	23	24	22
	MCS 0	07	23	24	22
	MCS 0	13	24	25	23
802.11n(40)	MCS 0	03	20	22	23
	MCS 0	07	20	22	22
	MCS 0	11	21	23	21

Note:(1) The report only showed the worst case.
When the product is working, only one of the Wi Fi templates can run.

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.50 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing was performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at: 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China.

At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A.

2. Test Summary

FCC Part 15 Subpart C(15.247)			
Standard Section FCC	Test Item	Judgment	Remark
15.203	Antenna Requirement	PASS	N/A
15.207	Conducted Emission	PASS	N/A
15.205	Restricted Bands	PASS	N/A
15.247(a)(2)	6dB Bandwidth	PASS	N/A
15.247(b)	Peak Output Power	PASS	N/A
15.247(e)	Power Spectral Density	PASS	N/A
15.247(d)	Band Edge	PASS	N/A
15.247(d)&15.209	Transmitter Radiated Spurious Emission	PASS	N/A
Note: “/” for no requirement for this test item. N/A is an abbreviation for Not Applicable.			

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFTest	V2.0.0.0

4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 13, 2019	Jul. 12, 2020
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 13, 2019	Jul. 12, 2020
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 13, 2019	Jul. 12, 2020
LISN	Rohde & Schwarz	ENV216	101131	Jul. 13, 2019	Jul. 12, 2020
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 13, 2019	Jul. 12, 2020
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 13, 2019	Jul. 12, 2020
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Mar.07, 2020	Mar. 06, 2021
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2021
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2021
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2021
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 13, 2019	Jul. 12, 2020
Pre-amplifier	Sonoma	310N	185903	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	HP	8449B	3008A00849	Mar.01, 2020	Feb. 28, 2021
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Jul. 27, 2019	Jul. 26, 2020
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar.07, 2020	Mar. 06, 2021
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 13, 2019	Jul. 12, 2020
Spectrum Analyzer	Rohde & Schwarz	ESCI	100010/007	Jul. 13, 2019	Jul. 12, 2020
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 16, 2019	Sep. 15, 2020
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 16, 2019	Sep. 15, 2020
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 16, 2019	Sep. 15, 2020
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO26	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO29	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO31	Sep. 16, 2019	Sep. 15, 2020
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO33	Sep. 16, 2019	Sep. 15, 2020

5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.207

5.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

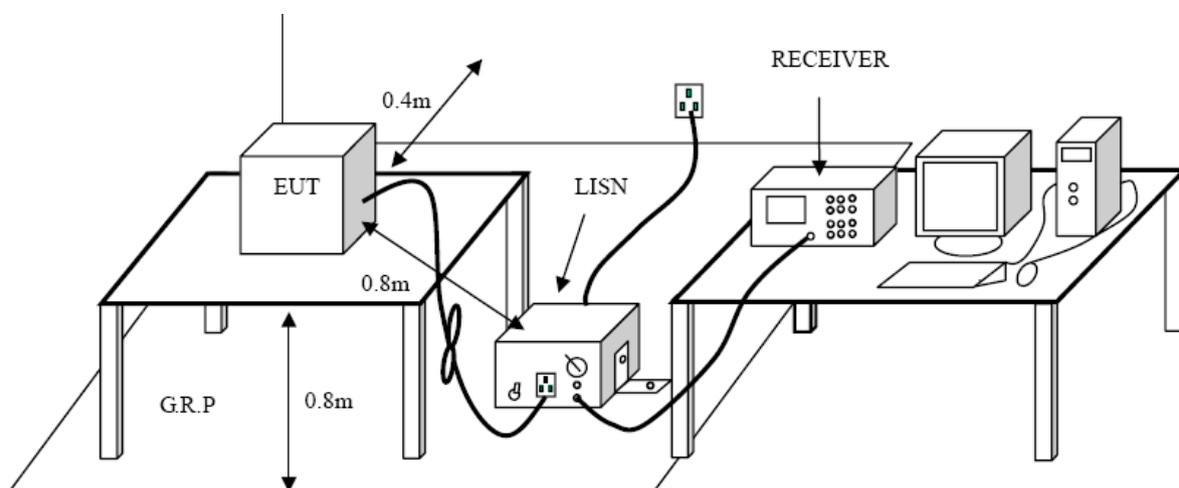

5.3 Test Procedure

- (1) The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- (2) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (3) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (4) LISN at least 80 cm from nearest part of EUT chassis.
- (5) The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A.

6. Radiated Emission Test

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.209

6.1.2 Test Limit

Radiated Emission Limits (9 kHz~1000 MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)


6.2 Test Setup

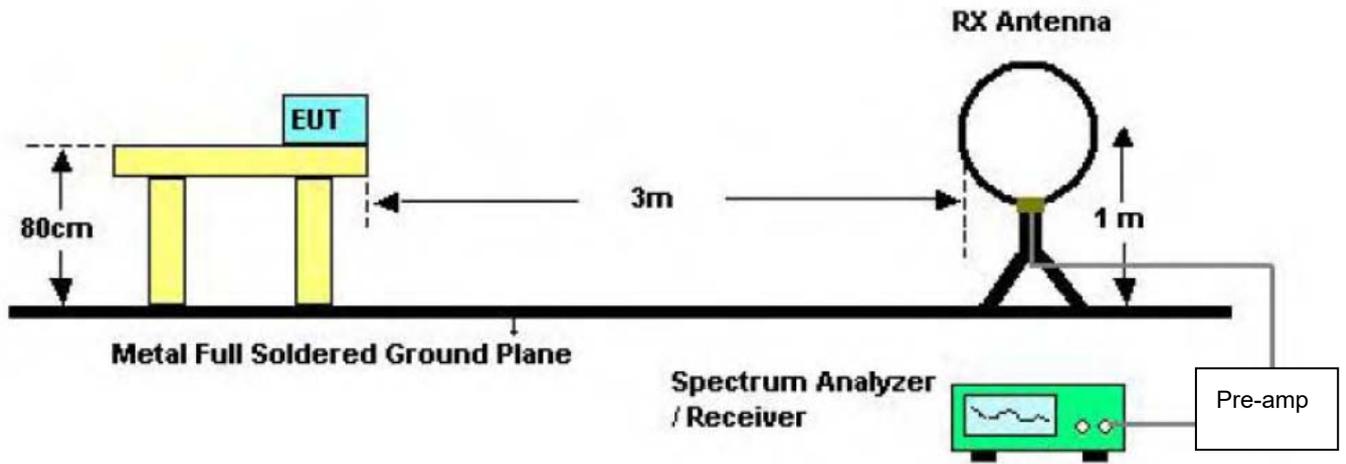

Below 30MHz Test Setup

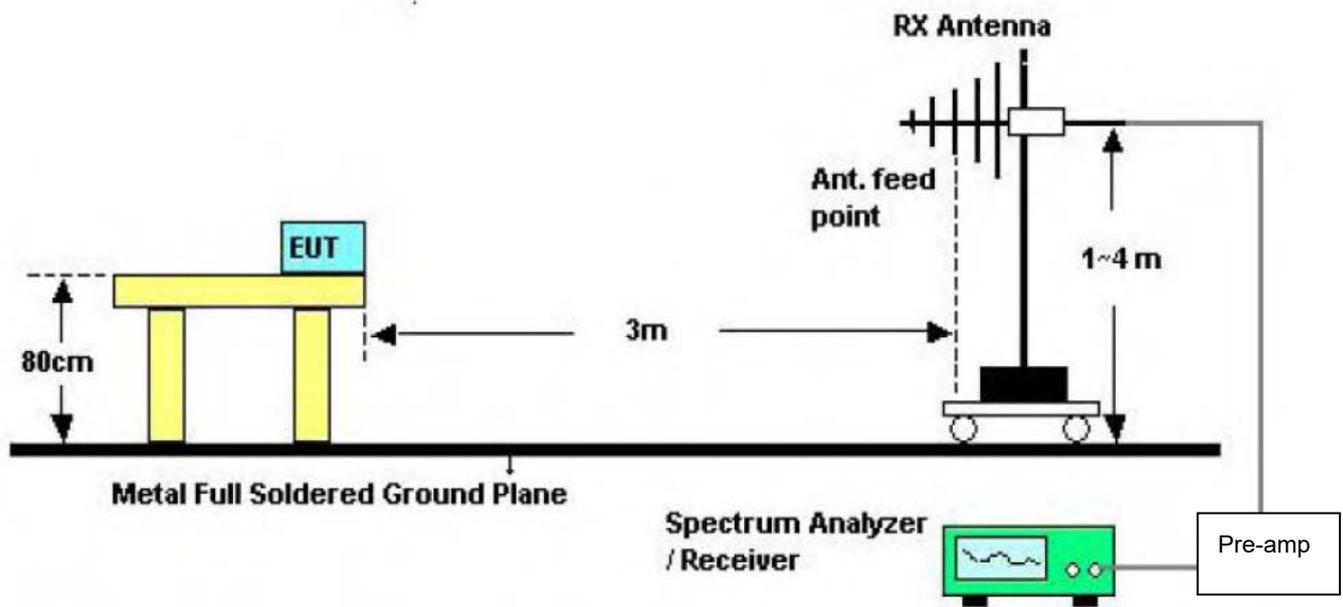

Below 1000MHz Test Setup

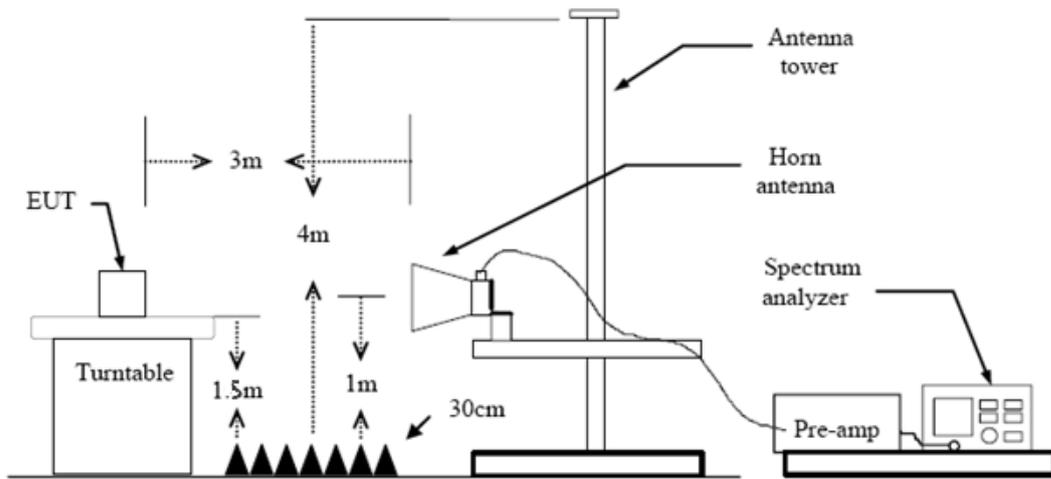

Above 1GHz Test Setup

6.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

6.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

7. Restricted Bands Requirement

7.1 Test Standard and Limit


7.1.1 Test Standard

FCC Part 15.247(d)
FCC Part 15.209
FCC Part 15.205

7.1.2 Test Limit

Restricted Frequency Band (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

7.2 Test Setup

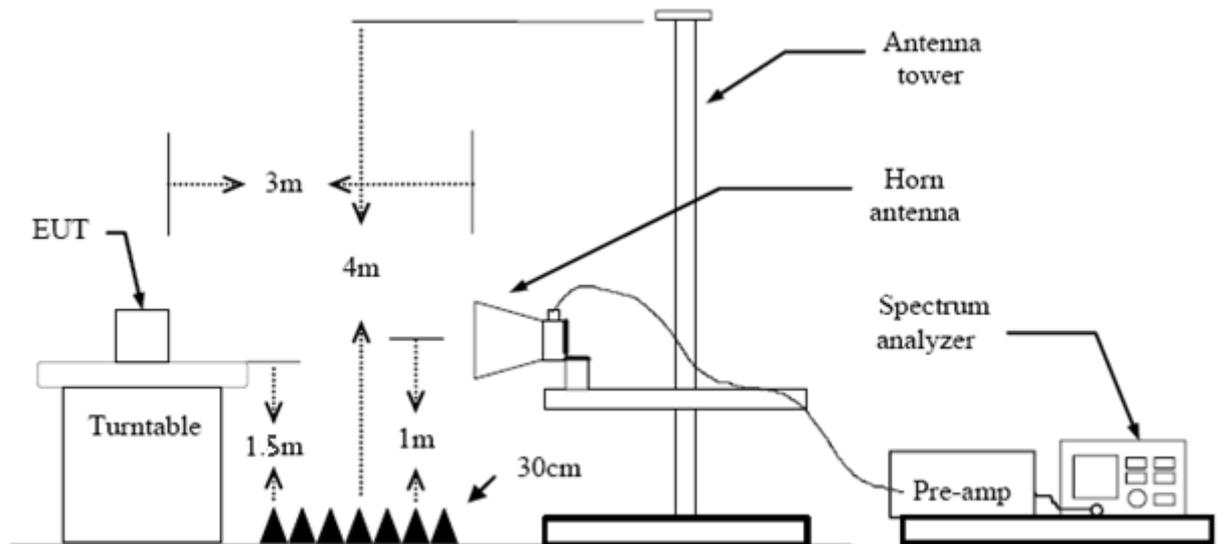

7.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency Below 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

7.6 Test Data

Please refer to the Attachment C.

8. Bandwidth Test

8.1 Test Standard and Limit


8.1.1 Test Standard

FCC Part 15.247 (a)(2)

8.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Bandwidth	≥ 500 KHz (6dB bandwidth)	2400~2483.5

8.2 Test Setup

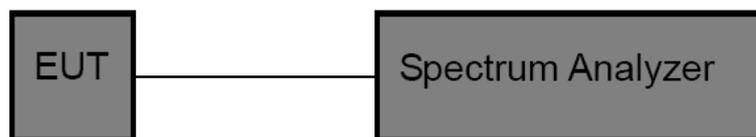

8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (3)Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:100 kHz, and Video Bandwidth:300 kHz, Detector: Peak, Sweep Time set auto.

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

8.6 Test Data

Please refer to the Attachment D.

9. Peak Output Power Test

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247 (b)

9.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Peak Output Power	1 Watt or 30 dBm	2400~2483.5

9.2 Test Setup

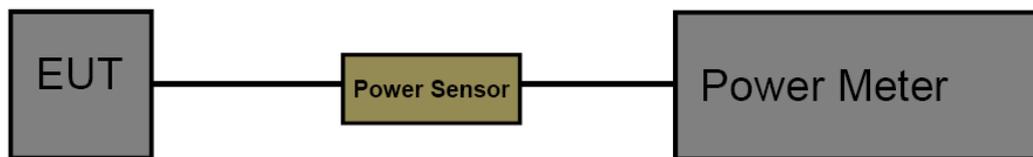

9.3 Test Procedure

The measurement is according to section 9.1.2 of KDB 558074 D01 v05r02.

The EUT was connected to RF power meter via a broadband power sensor as show the block above. The power sensor video bandwidth is greater than or equal to the DTS bandwidth of the equipment.

9.4 Deviation From Test Standard

No deviation

9.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

9.6 Test Data

Please refer to the Attachment E.

10. Power Spectral Density Test

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.247 (e)

10.1.2 Test Limit

FCC Part 15 Subpart C(15.247)		
Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

10.2 Test Setup



10.3 Test Procedure

The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 D01 v05r02.

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Set analyser centre frequency to DTS channel centre frequency.
- (3) Set the span to 1.5 times the DTS bandwidth.
- (4) Set the RBW to: 3 kHz
- (5) Set the VBW to: 10 kHz
- (6) Detector: peak
- (7) Sweep time: auto
- (8) Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

10.4 Deviation From Test Standard

No deviation

10.5 EUT Operating Condition

The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

10.6 Test Data

Please refer to the Attachment F.

11. Antenna Requirement

11.1 Standard Requirement

11.1.1 Standard

FCC Part 15.203

11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Deviation From Test Standard

No deviation

11.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 5.0 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

Result


The EUT antenna is a External Antenna. It complies with the standard requirement.

Antenna Type
<input type="checkbox"/> Permanent attached antenna
<input checked="" type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

Attachment A-- Conducted Emission Test Data

Remark: All channels have been tested and Shows only the worst channels.

Temperature:	23.5°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	Mode 1		
Remark:	Only worst case is reported		

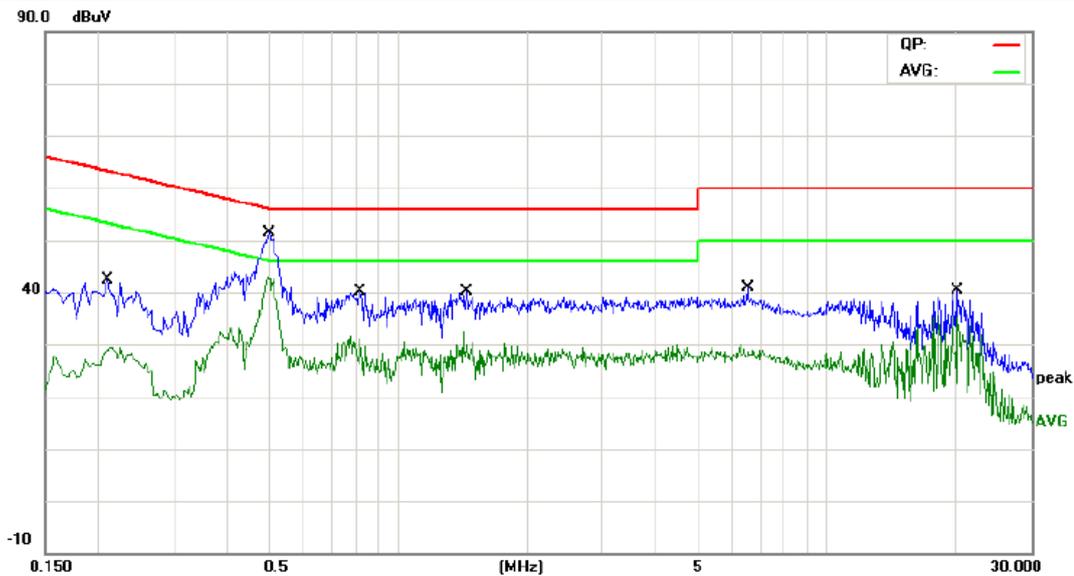


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2100	26.70	9.78	36.48	63.20	-26.72	QP
2		0.2100	17.18	9.78	26.96	53.20	-26.24	AVG
3		0.5020	39.20	9.95	49.15	56.00	-6.85	QP
4	*	0.5020	31.62	9.95	41.57	46.00	-4.43	AVG
5		0.8139	27.45	9.68	37.13	56.00	-18.87	QP
6		0.8139	18.87	9.68	28.55	46.00	-17.45	AVG
7		1.4420	25.96	9.81	35.77	56.00	-20.23	QP
8		1.4420	17.15	9.81	26.96	46.00	-19.04	AVG
9		6.5380	24.43	9.83	34.26	60.00	-25.74	QP
10		6.5380	16.90	9.83	26.73	50.00	-23.27	AVG
11		20.2580	28.52	9.82	38.34	60.00	-21.66	QP
12		20.2580	25.43	9.82	35.25	50.00	-14.75	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Temperature:	23.5°C	Relative Humidity:	45%
Test Voltage:	AC 120V/60Hz		
Terminal:	Neutral		
Test Mode:	Mode 1		
Remark:	Only worst case is reported		

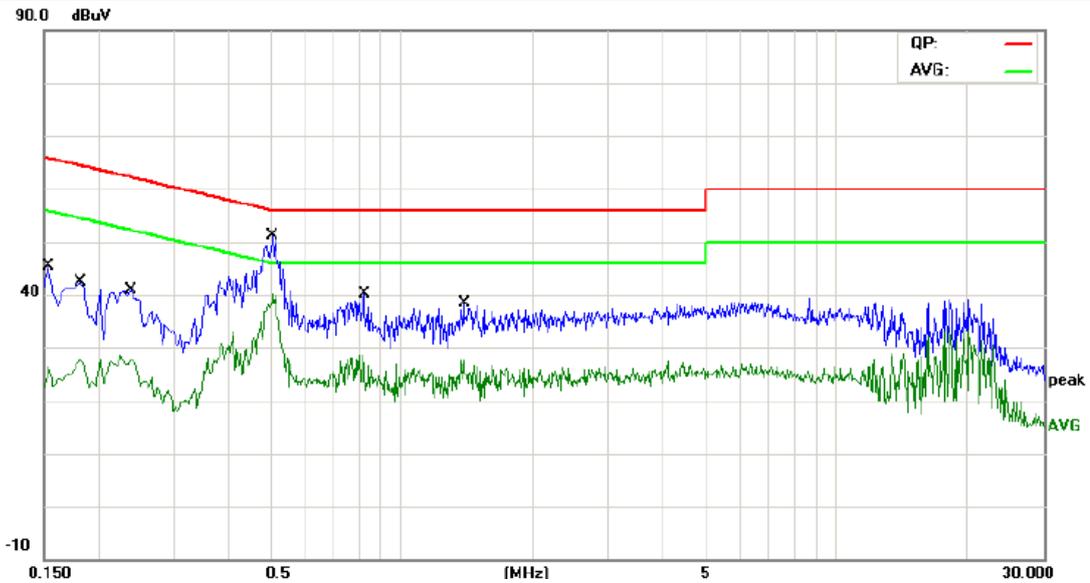

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	29.39	9.60	38.99	65.78	-26.79	QP
2		0.1539	14.09	9.60	23.69	55.78	-32.09	AVG
3		0.1819	28.16	9.60	37.76	64.39	-26.63	QP
4		0.1819	14.67	9.60	24.27	54.39	-30.12	AVG
5		0.2380	26.84	9.66	36.50	62.16	-25.66	QP
6		0.2380	16.28	9.66	25.94	52.16	-26.22	AVG
7		0.5060	37.66	9.78	47.44	56.00	-8.56	QP
8	*	0.5060	28.90	9.78	38.68	46.00	-7.32	AVG
9		0.8180	24.58	9.74	34.32	56.00	-21.68	QP
10		0.8180	15.41	9.74	25.15	46.00	-20.85	AVG
11		1.3900	22.98	9.75	32.73	56.00	-23.27	QP
12		1.3900	14.72	9.75	24.47	46.00	-21.53	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)

Attachment B-- Radiated Emission Test Data


9KHz~150KHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	23.5°C	Relative Humidity:	40%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only worst case is reported.		

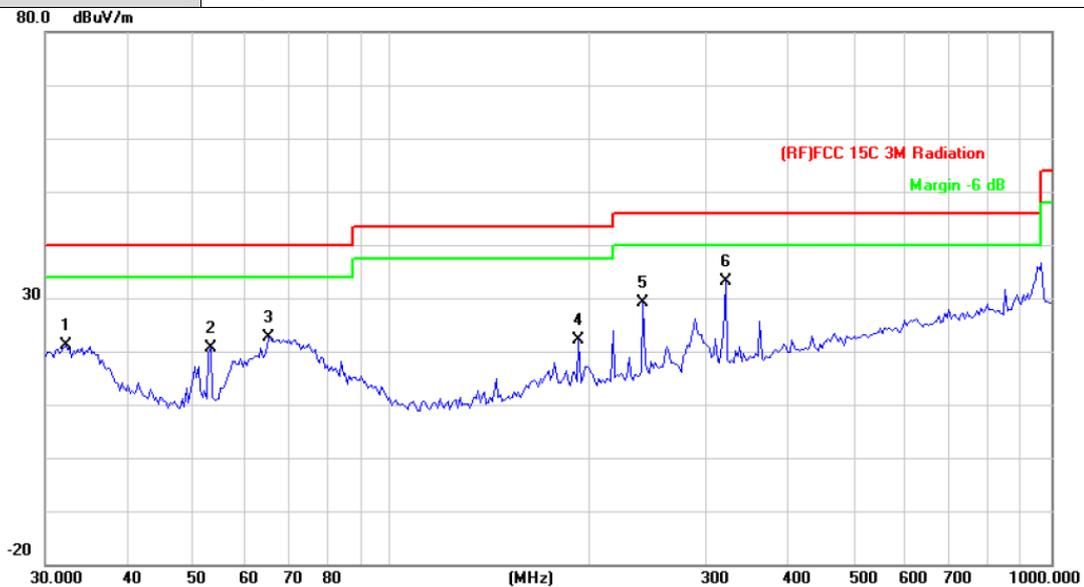


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		32.1795	35.69	-14.57	21.12	40.00	-18.88	QP
2		53.3179	44.05	-23.44	20.61	40.00	-19.39	QP
3		65.3432	46.40	-23.77	22.63	40.00	-17.37	QP
4		192.4186	41.90	-19.83	22.07	43.50	-21.43	QP
5		240.8304	46.88	-17.72	29.16	46.00	-16.84	QP
6	*	321.0608	48.72	-15.60	33.12	46.00	-12.88	QP

*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Temperature:	23.5°C	Relative Humidity:	40%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz		
Remark:	Only worst case is reported.		

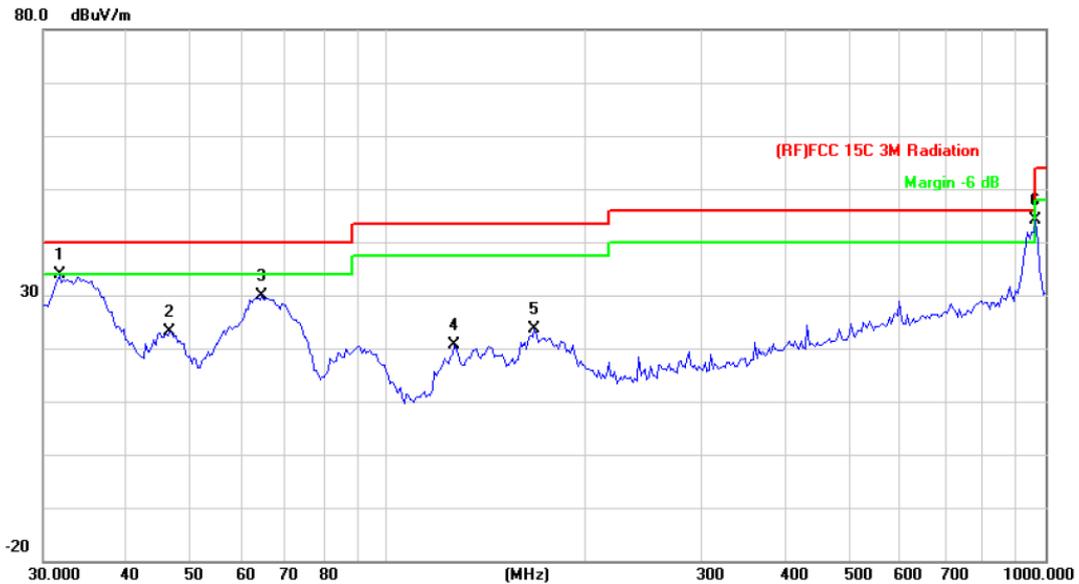

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	31.7313	48.15	-14.25	33.90	40.00	-6.10	QP
2		46.6664	45.21	-21.96	23.25	40.00	-16.75	QP
3		64.4331	53.66	-23.86	29.80	40.00	-10.20	QP
4		126.3286	42.85	-22.27	20.58	43.50	-22.92	QP
5		167.2368	44.30	-20.56	23.74	43.50	-19.76	QP
6		965.5421	48.20	-4.16	44.04	54.00	-9.96	QP


*:Maximum data x:Over limit !:over margin

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = QuasiPeak (dBμV/m)-Limit QPK(dBμV/m)

Above 1GHz

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

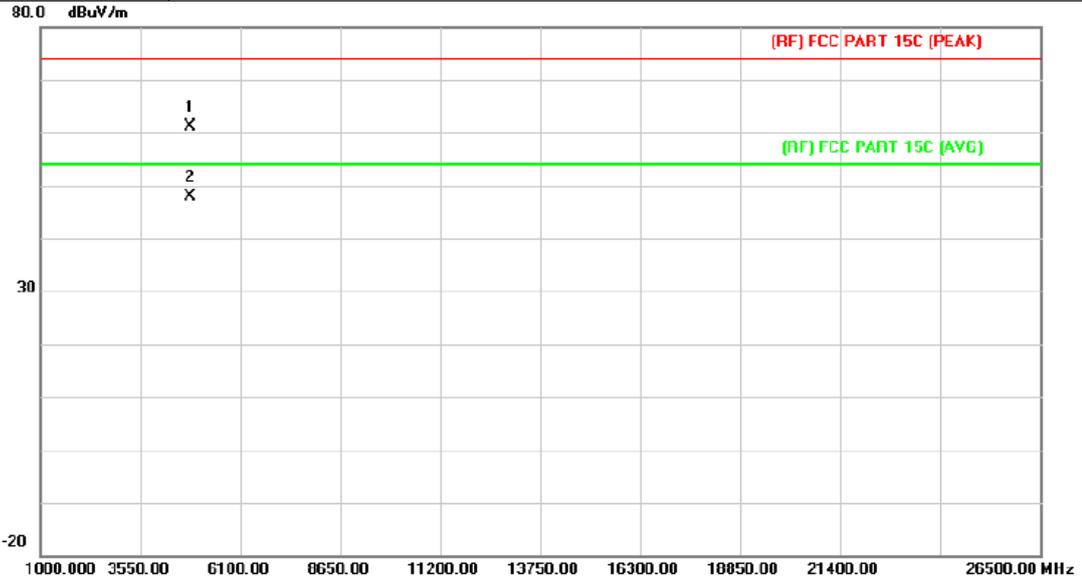


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.780	47.91	13.16	61.07	74.00	-12.93	peak
2	*	4824.780	34.73	13.16	47.89	54.00	-6.11	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

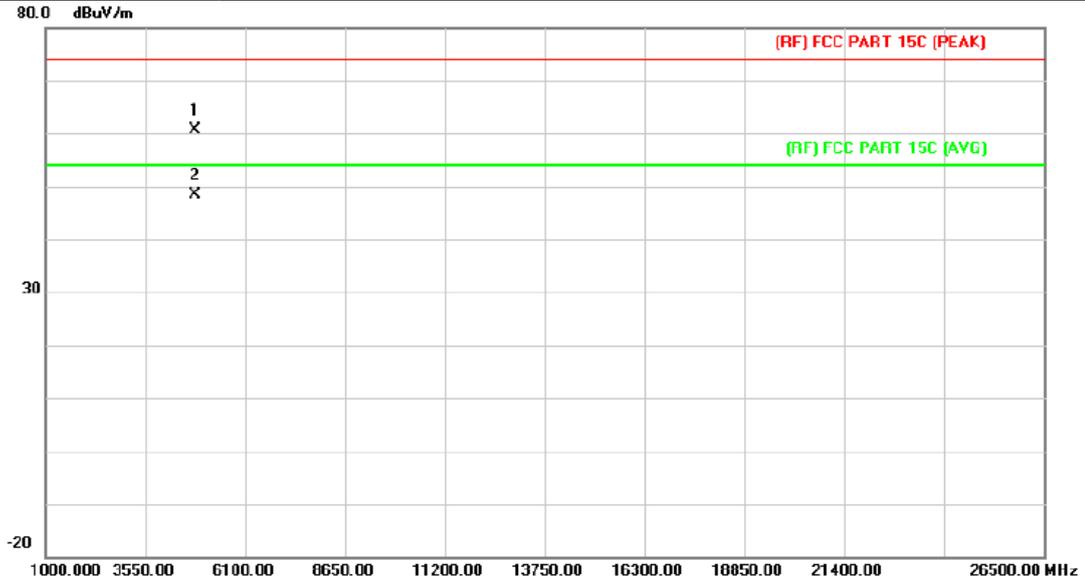


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4822.974	47.39	13.16	60.55	74.00	-13.45	peak
2	*	4823.424	35.20	13.16	48.36	54.00	-5.64	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2437MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

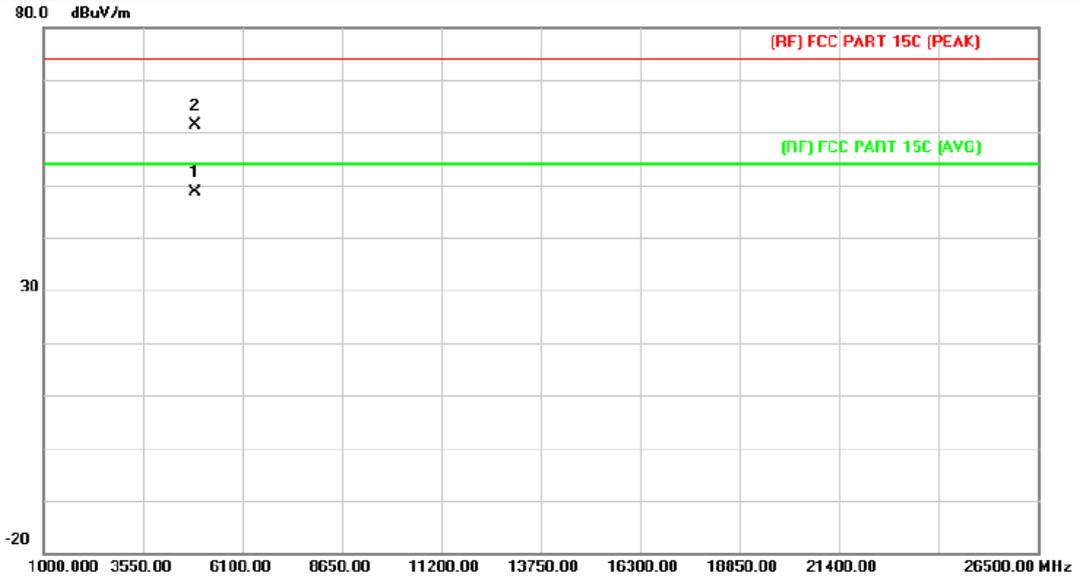


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4876.364	35.15	13.54	48.69	54.00	-5.31	AVG
2		4877.336	47.83	13.55	61.38	74.00	-12.62	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2437MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

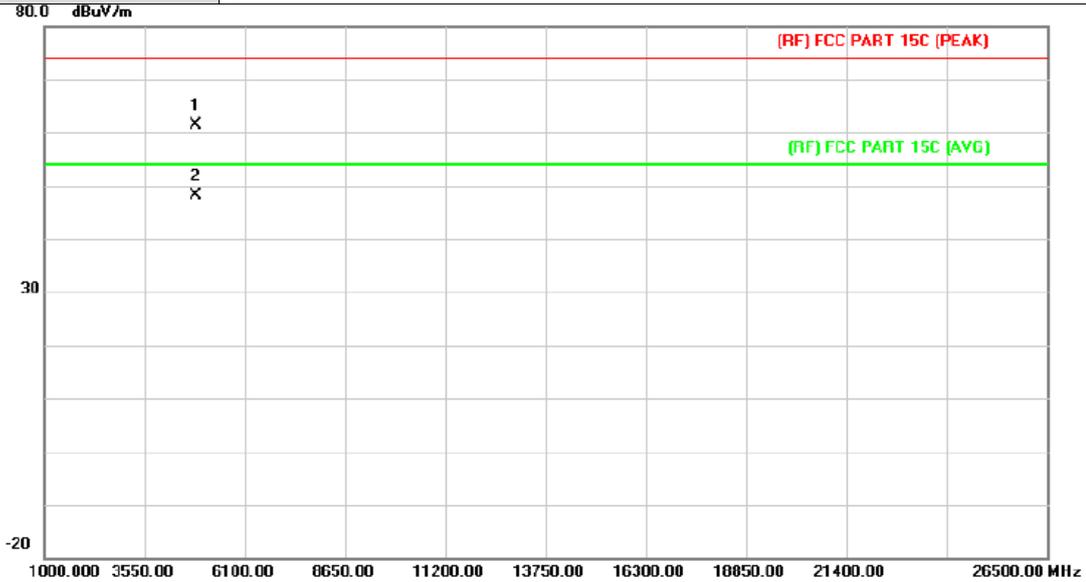


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4875.902	47.74	13.54	61.28	74.00	-12.72	peak
2	*	4875.902	34.71	13.54	48.25	54.00	-5.75	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4 °C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

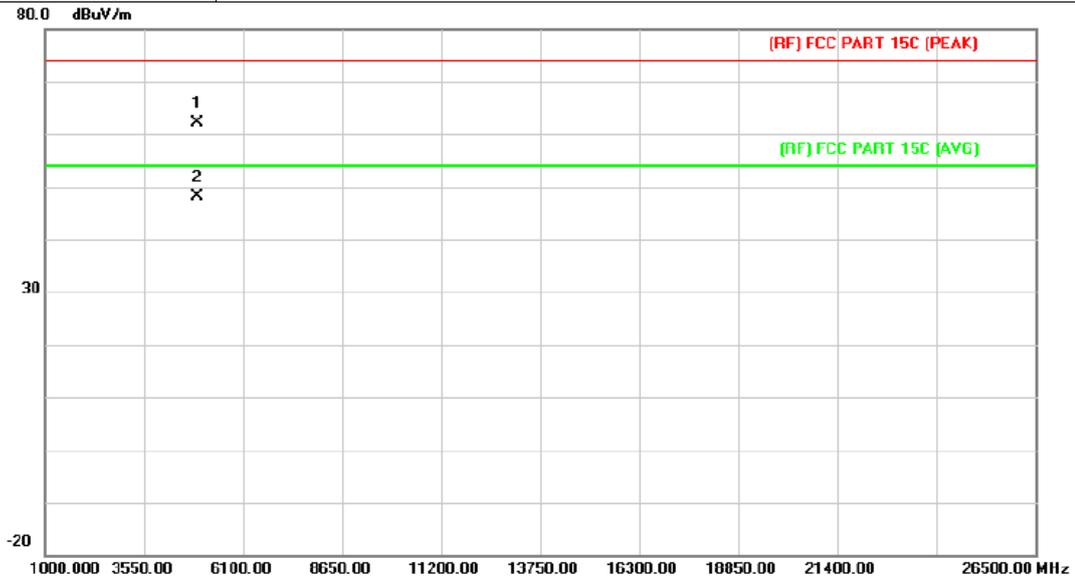


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4924.846	48.14	13.90	62.04	74.00	-11.96	peak
2	*	4924.846	34.29	13.90	48.19	54.00	-5.81	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4 °C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

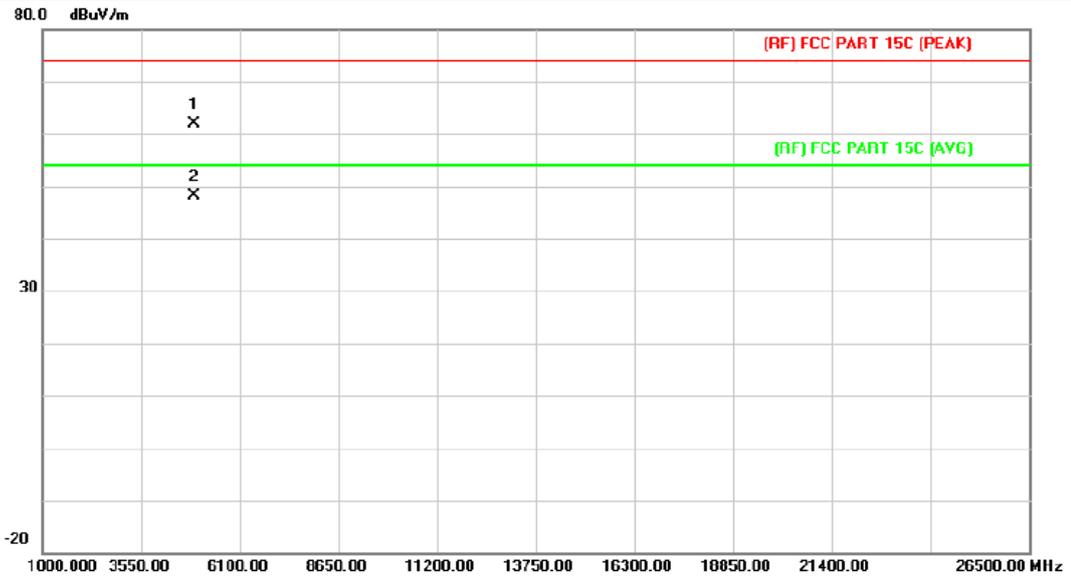


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4922.920	48.09	13.89	61.98	74.00	-12.02	peak
2	*	4922.920	34.36	13.89	48.25	54.00	-5.75	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

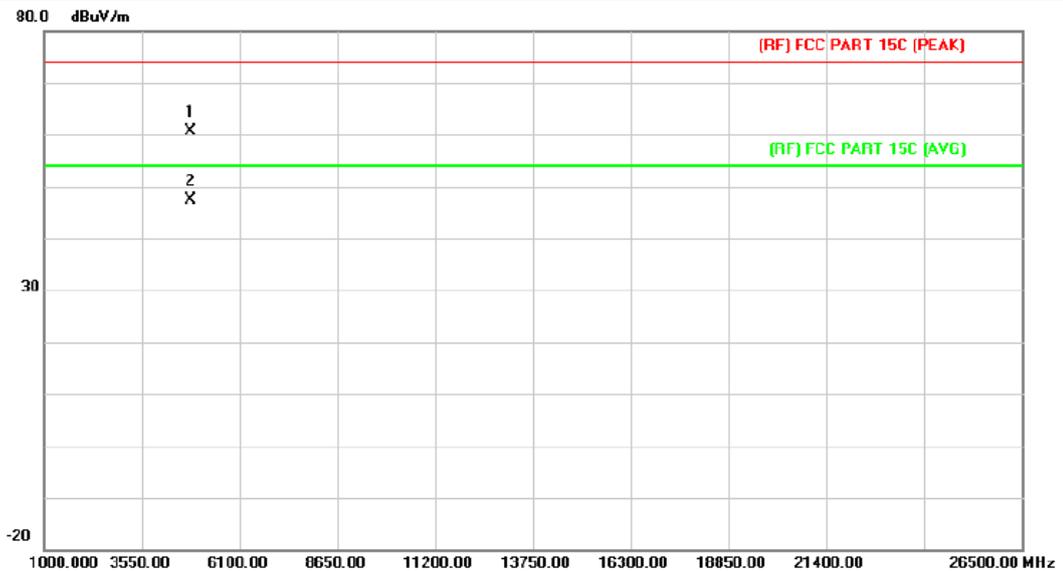


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4823.484	47.56	13.16	60.72	74.00	-13.28	peak
2	*	4823.556	34.15	13.16	47.31	54.00	-6.69	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz ANT. A+ANT. B (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

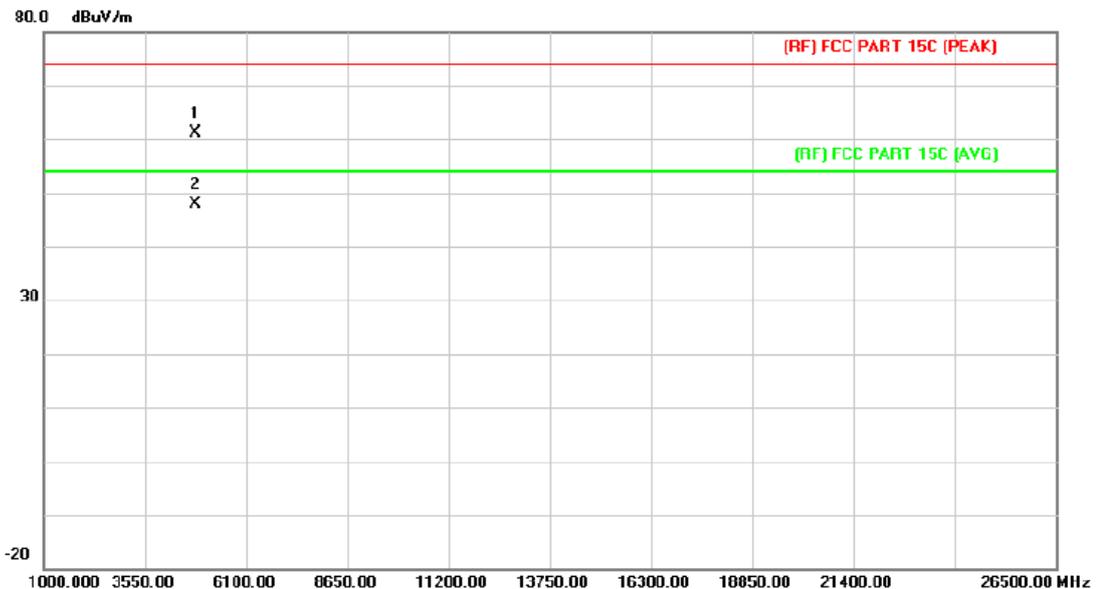


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4824.978	48.07	13.16	61.23	74.00	-12.77	peak
2	*	4824.978	34.74	13.16	47.90	54.00	-6.10	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2437MHz ANT. A. +ANT. B. (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

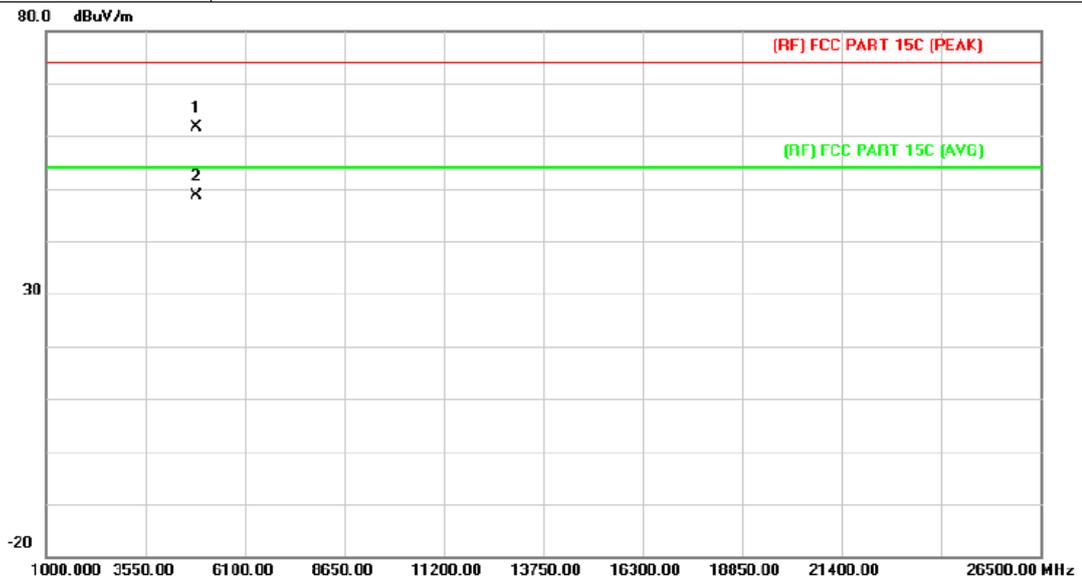


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4873.946	48.10	13.53	61.63	74.00	-12.37	peak
2	*	4873.946	35.14	13.53	48.67	54.00	-5.33	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2437MHz ANT. A. +ANT. B. (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

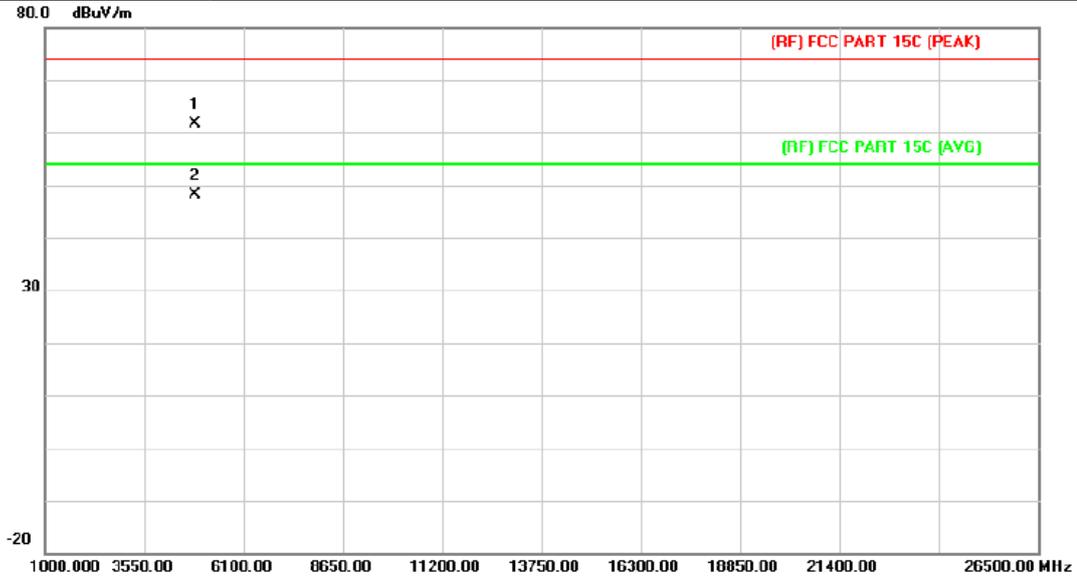


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4875.104	48.18	13.54	61.72	74.00	-12.28	peak
2	*	4875.452	34.54	13.54	48.08	54.00	-5.92	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz ANT. A.+ANT. B. (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

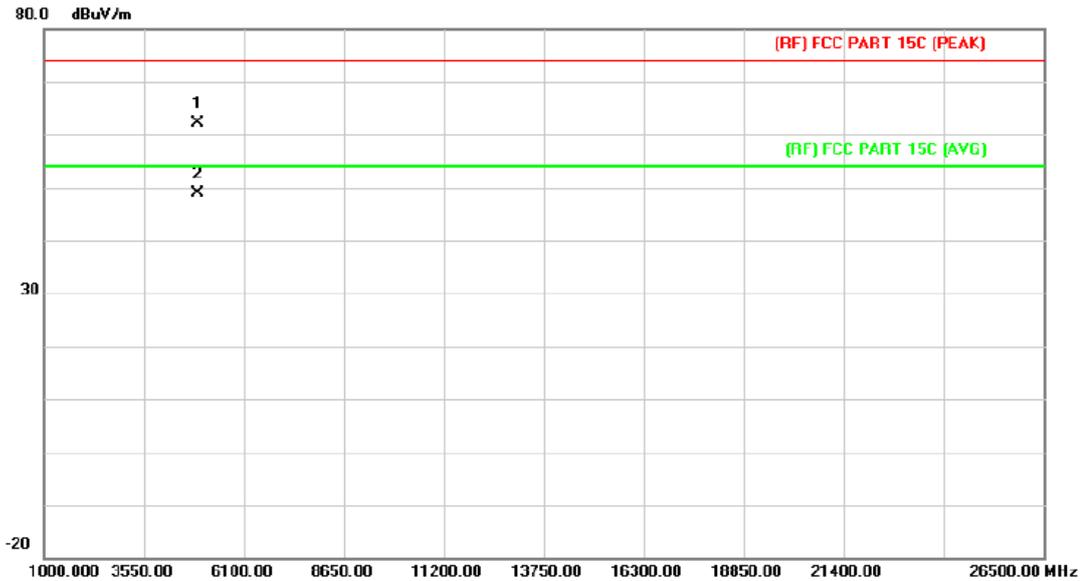


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4922.692	48.12	13.89	62.01	74.00	-11.99	peak
2	*	4923.946	34.95	13.89	48.84	54.00	-5.16	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz ANT. A. +ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

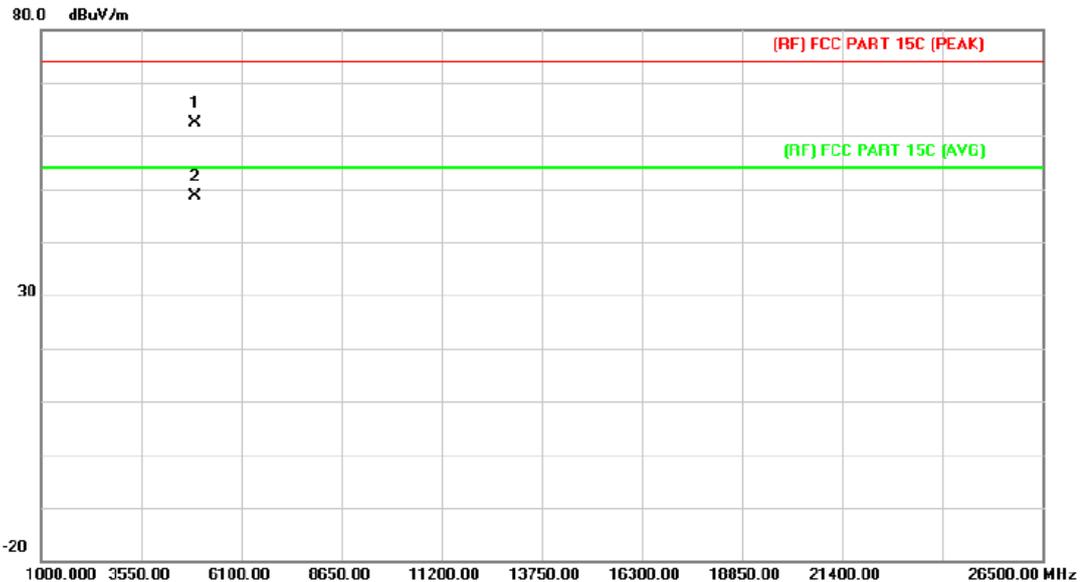


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4924.210	48.41	13.89	62.30	74.00	-11.70	peak
2	*	4924.210	34.67	13.89	48.56	54.00	-5.44	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2412MHz ANT. A+ANT. B (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

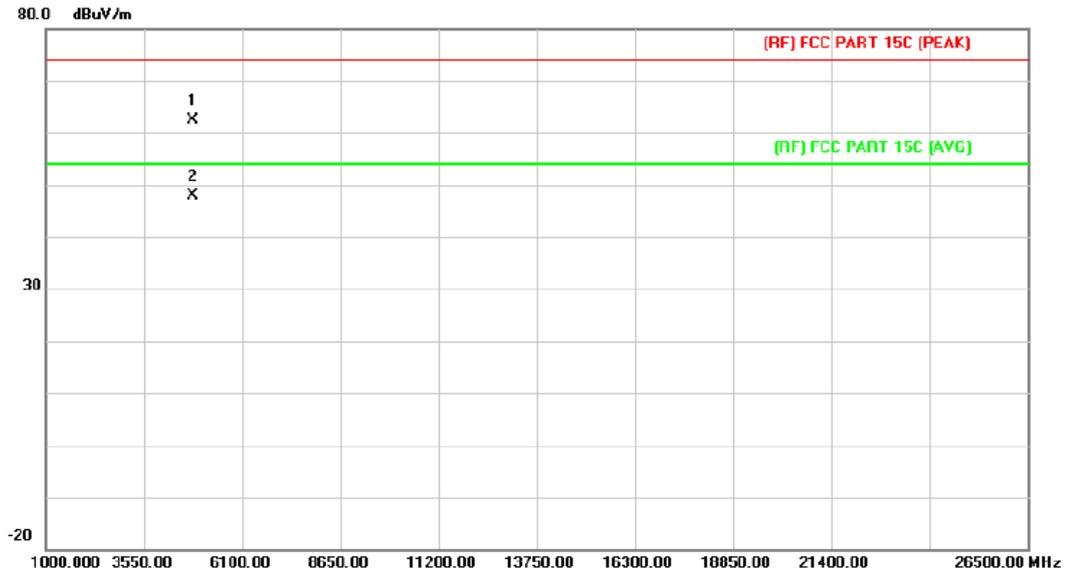


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		4824.744	49.21	13.16	62.37	74.00	-11.63	peak
2	*	4824.744	34.81	13.16	47.97	54.00	-6.03	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2412MHz ANT. A+ANT. B (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

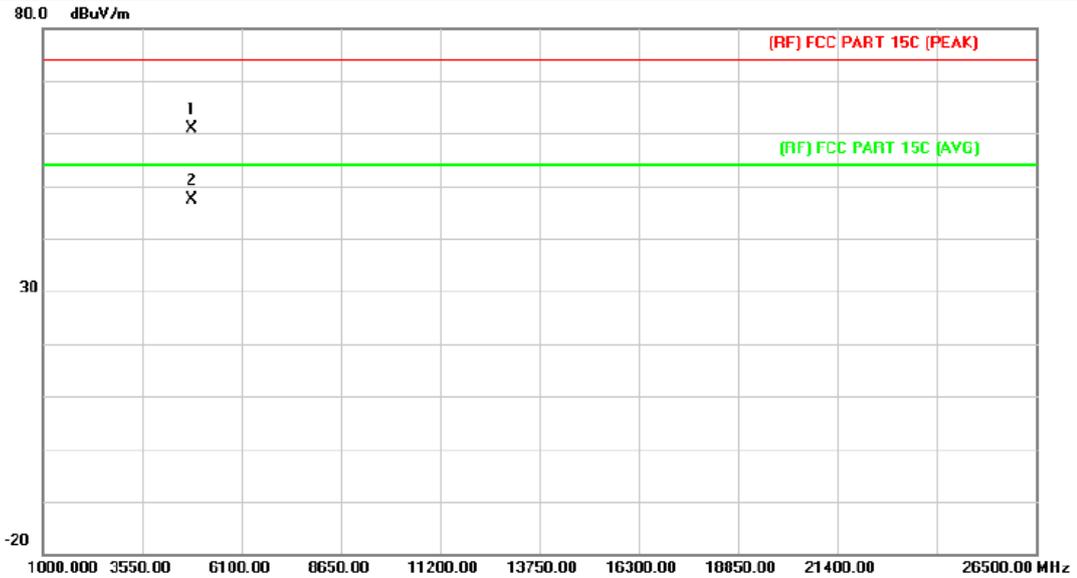


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.186	47.65	13.16	60.81	74.00	-13.19	peak
2	*	4824.354	34.25	13.16	47.41	54.00	-6.59	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2437MHz ANT. A+ANT. B (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

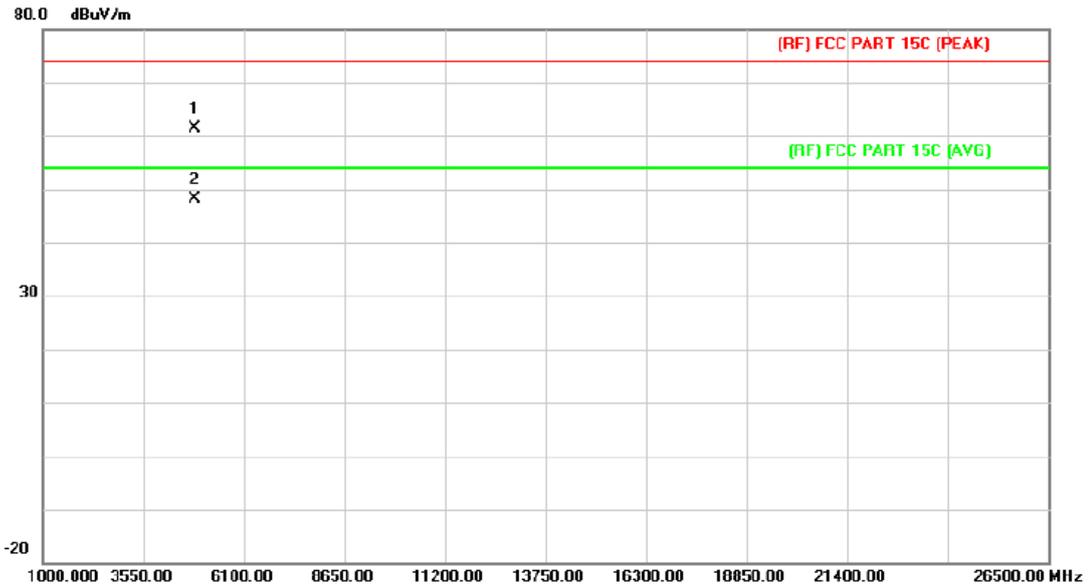


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4873.790	47.86	13.53	61.39	74.00	-12.61	peak
2	*	4875.230	34.53	13.54	48.07	54.00	-5.93	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2437MHz ANT. A+ANT. B (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

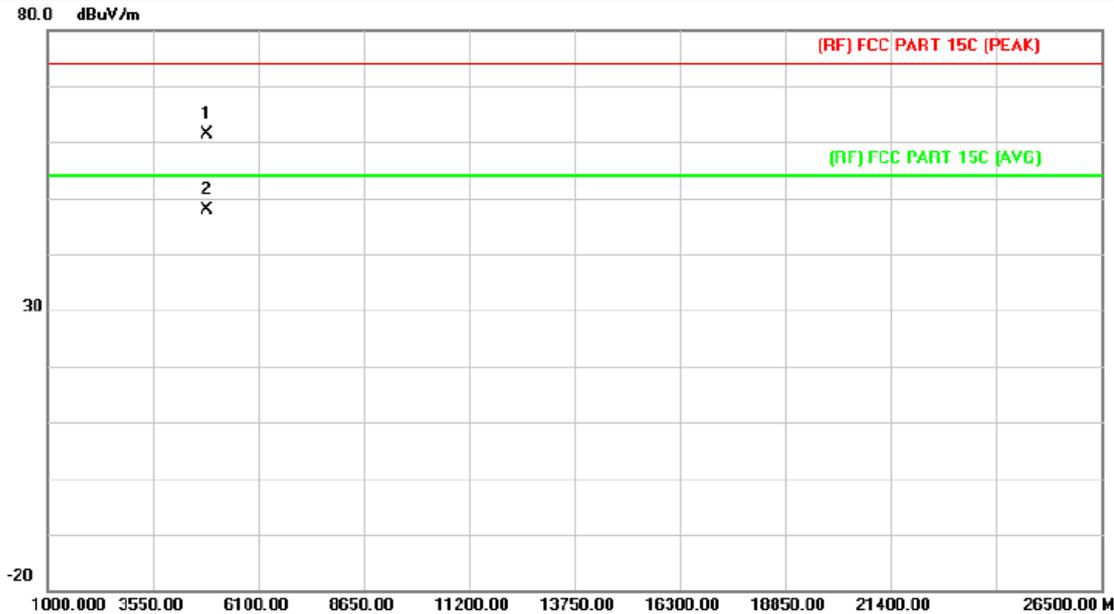


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4873.964	47.84	13.53	61.37	74.00	-12.63	peak
2	*	4873.964	34.23	13.53	47.76	54.00	-6.24	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2462MHz ANT. A+ANT. B (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

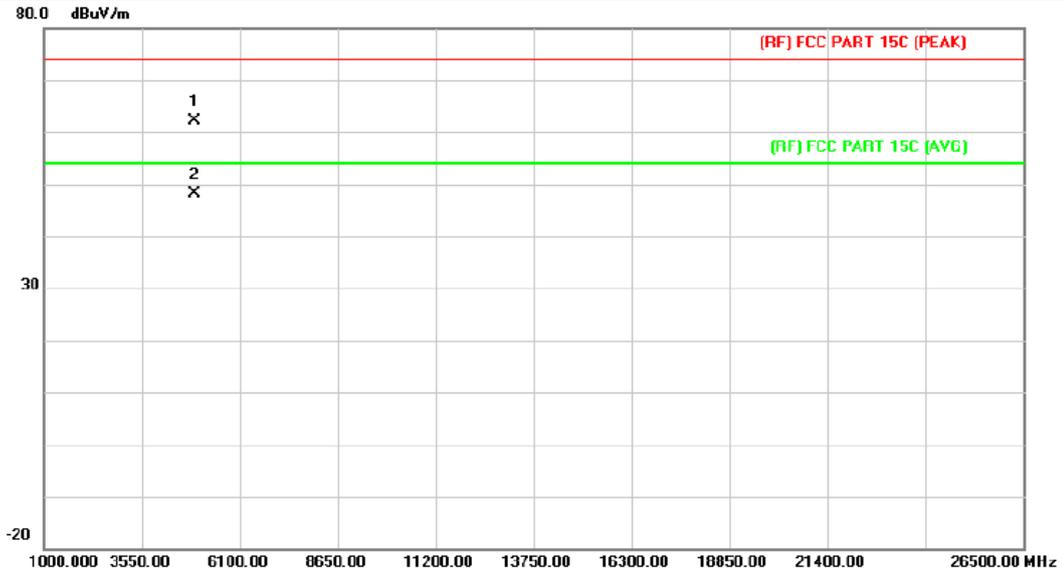


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4922.938	48.26	13.89	62.15	74.00	-11.85	peak
2	*	4922.938	34.17	13.89	48.06	54.00	-5.94	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2462MHz ANT. A+ANT. B (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

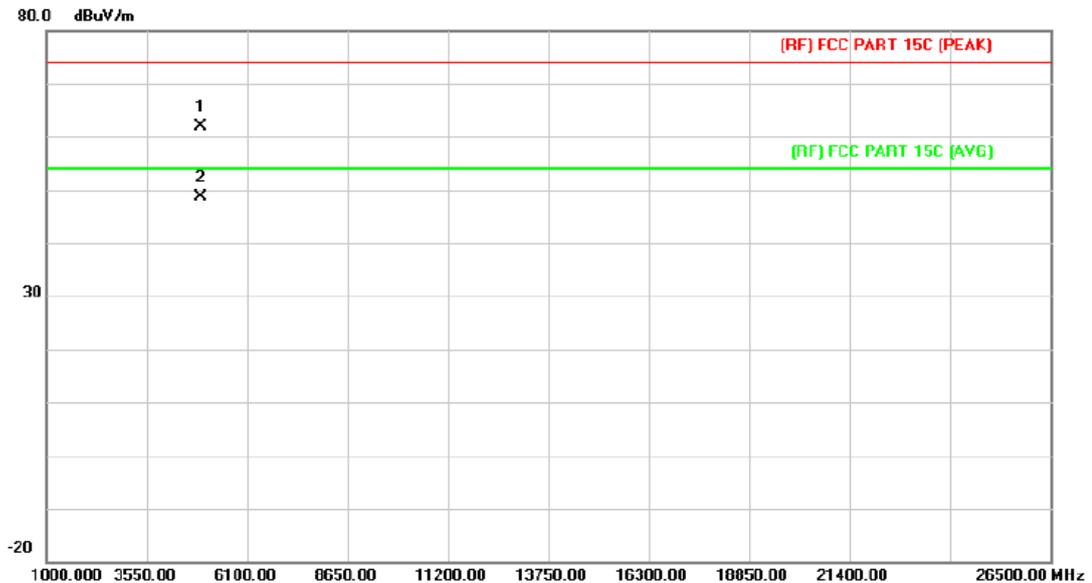


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4924.408	48.09	13.89	61.98	74.00	-12.02	peak
2	*	4925.416	34.73	13.91	48.64	54.00	-5.36	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2422MHz ANT. A+ANT. B (Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

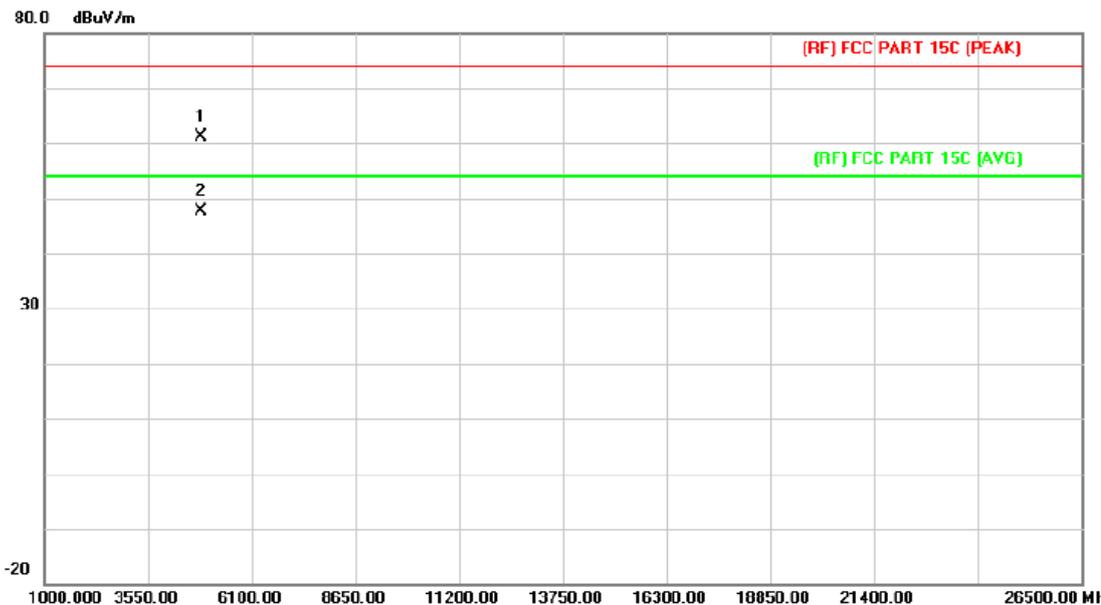


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4844.726	47.85	13.31	61.16	74.00	-12.84	peak
2	*	4845.446	34.29	13.31	47.60	54.00	-6.40	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2422MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

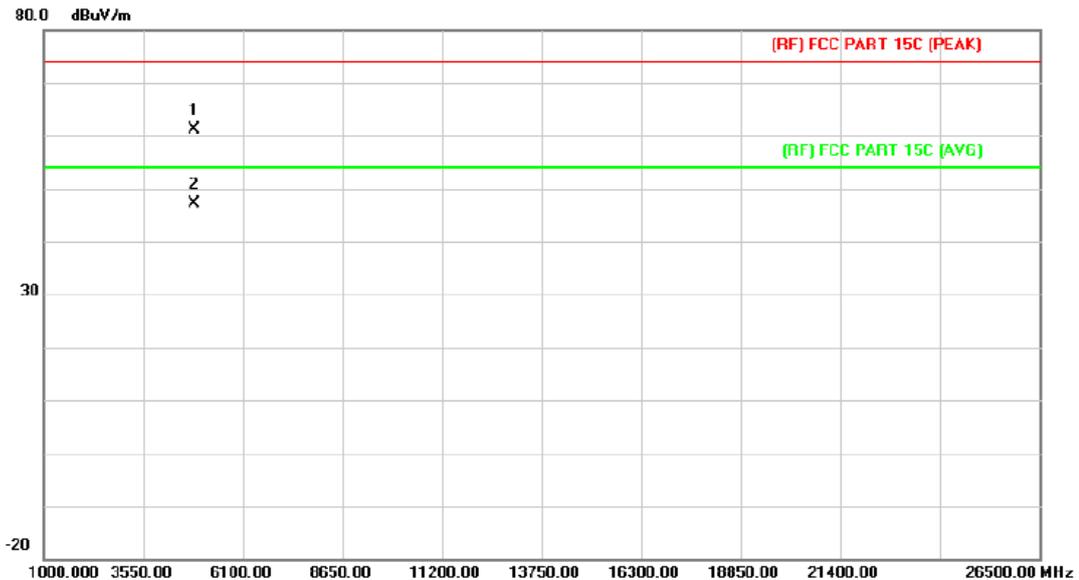


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4844.954	47.78	13.31	61.09	74.00	-12.91	peak
2	*	4844.954	33.76	13.31	47.07	54.00	-6.93	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2437MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

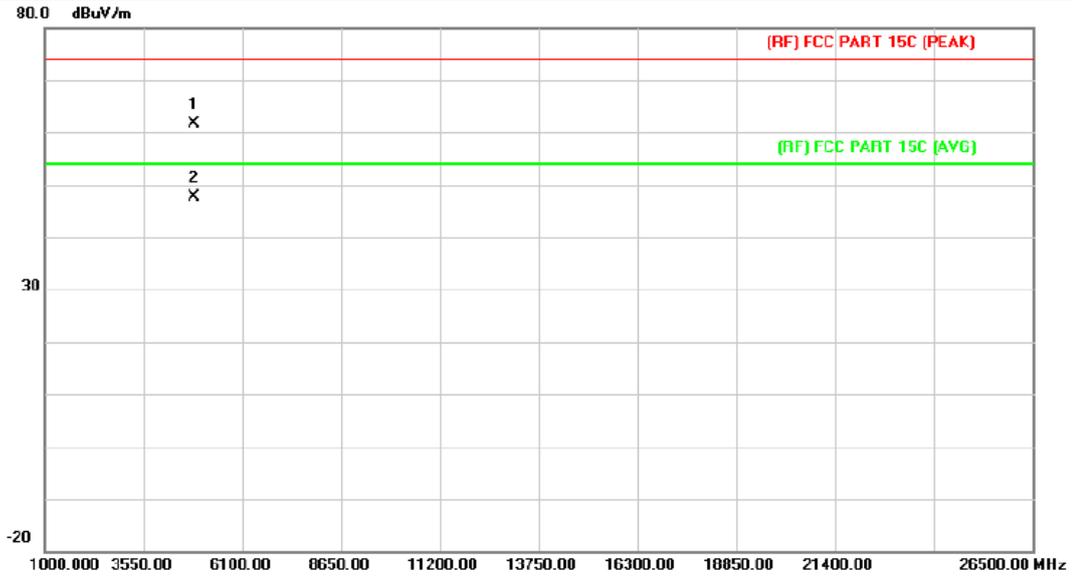


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4873.340	48.06	13.53	61.59	74.00	-12.41	peak
2	*	4873.340	34.05	13.53	47.58	54.00	-6.42	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2437MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

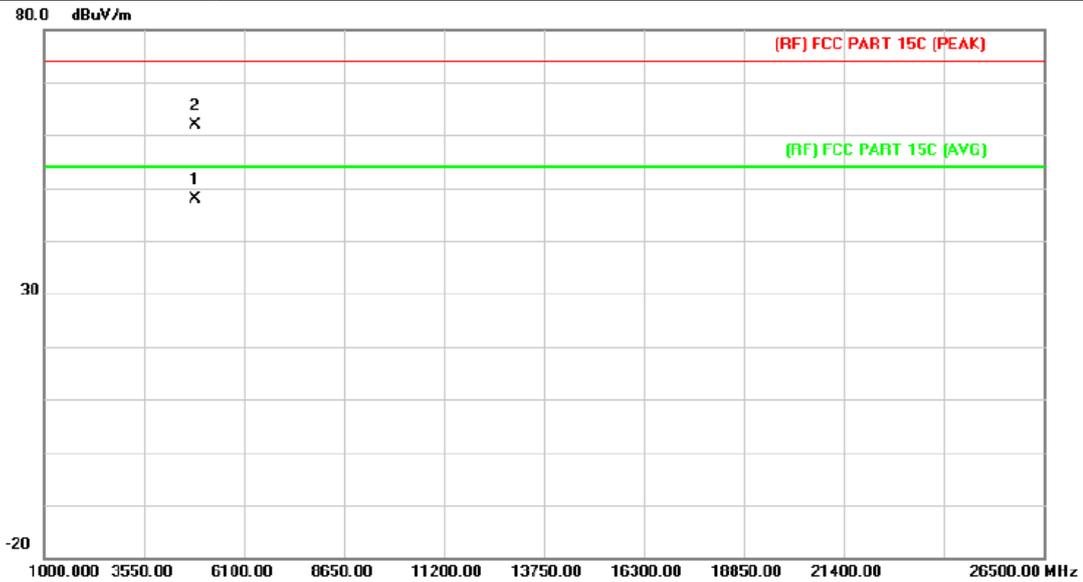


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4874.336	34.44	13.53	47.97	54.00	-6.03	AVG
2		4875.086	48.30	13.54	61.84	74.00	-12.16	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2452MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

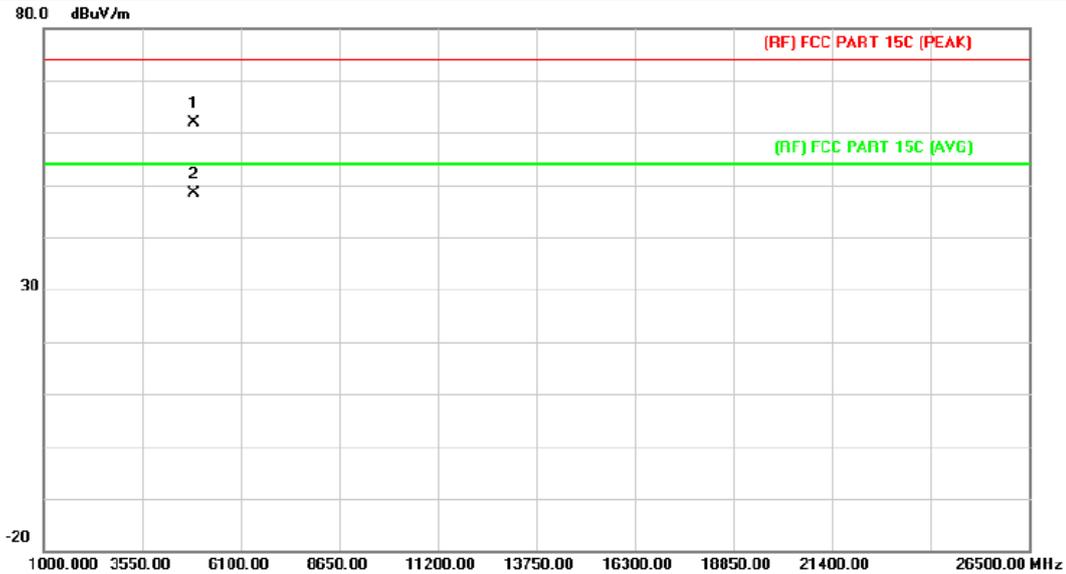


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4902.596	48.10	13.73	61.83	74.00	-12.17	peak
2	*	4905.290	34.72	13.76	48.48	54.00	-5.52	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2452MHz ANT. A+ANT. B(Module#1)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

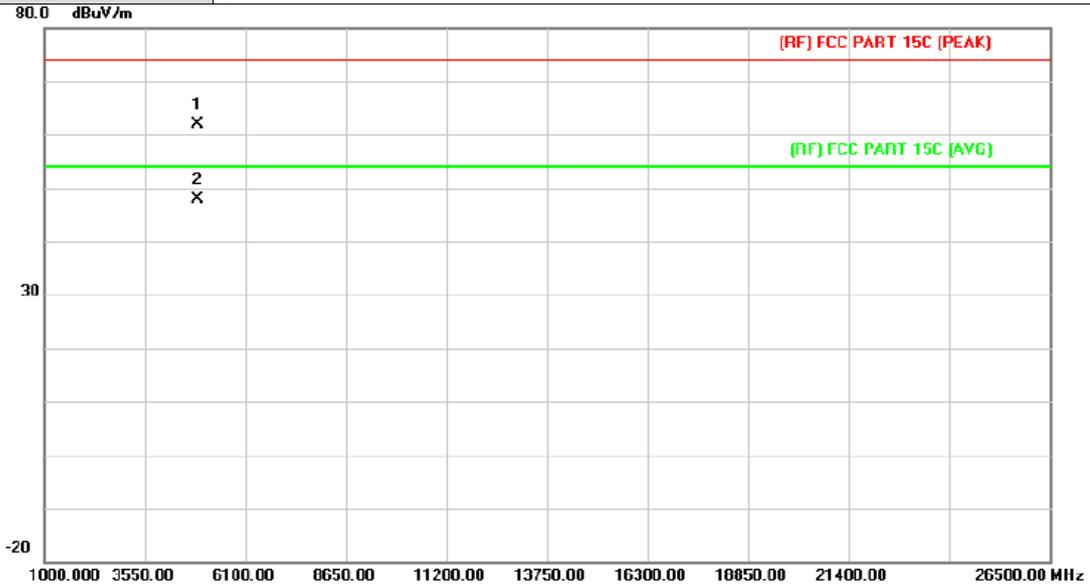


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4903.700	48.08	13.74	61.82	74.00	-12.18	peak
2	*	4903.700	34.25	13.74	47.99	54.00	-6.01	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

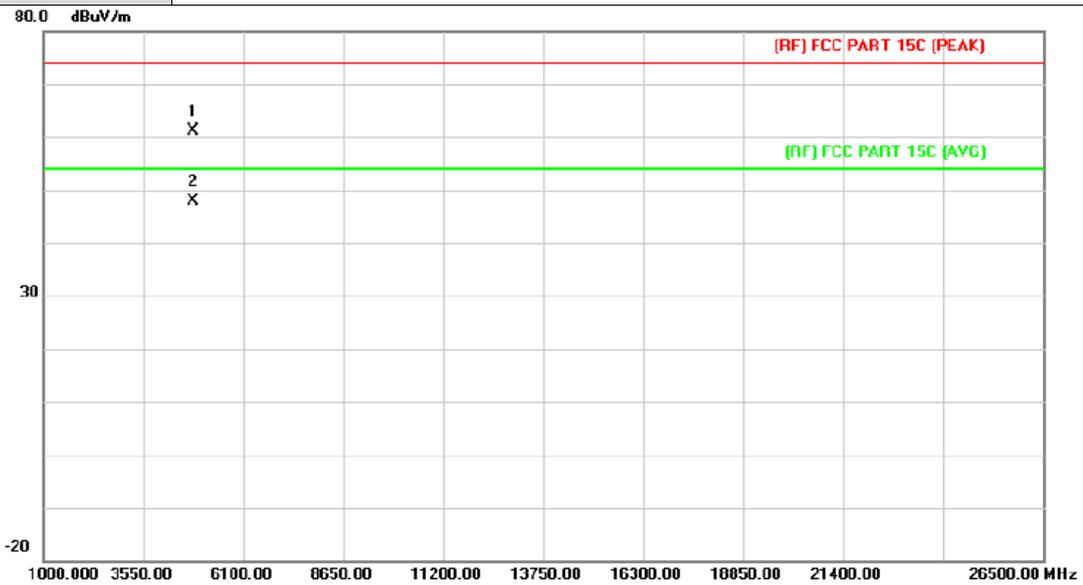


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.780	47.91	13.16	61.07	74.00	-12.93	peak
2	*	4824.780	34.73	13.16	47.89	54.00	-6.11	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

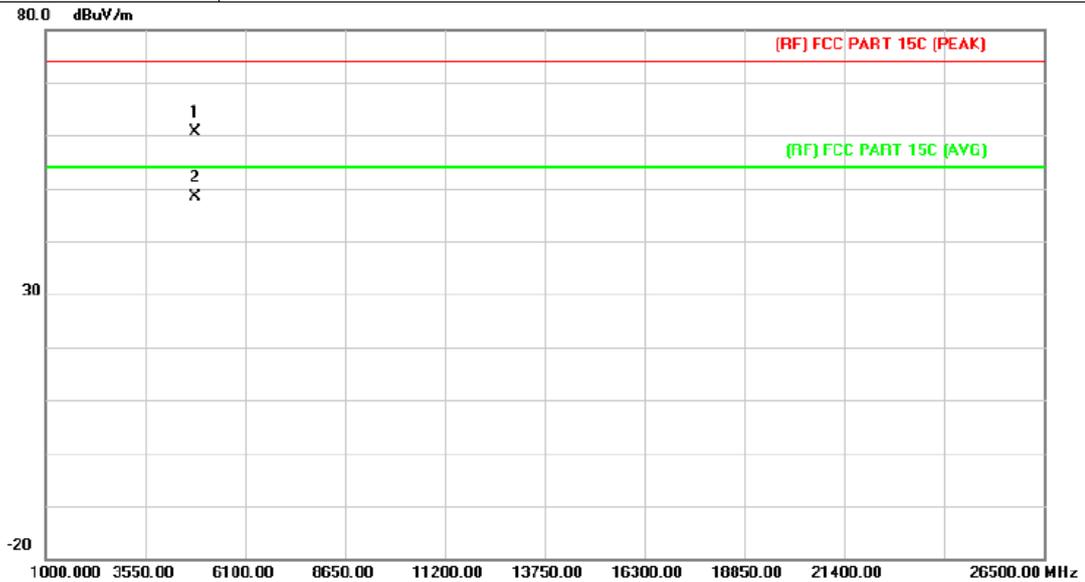


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4822.974	47.39	13.16	60.55	74.00	-13.45	peak
2	*	4823.424	35.20	13.16	48.36	54.00	-5.64	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2437MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

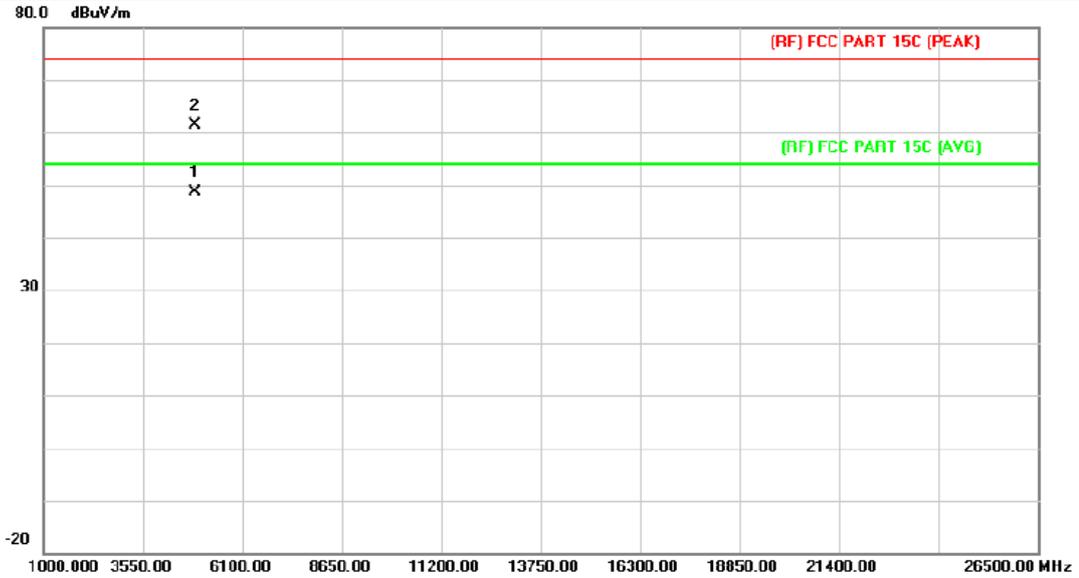


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4876.364	35.15	13.54	48.69	54.00	-5.31	AVG
2		4877.336	47.83	13.55	61.38	74.00	-12.62	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2437MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

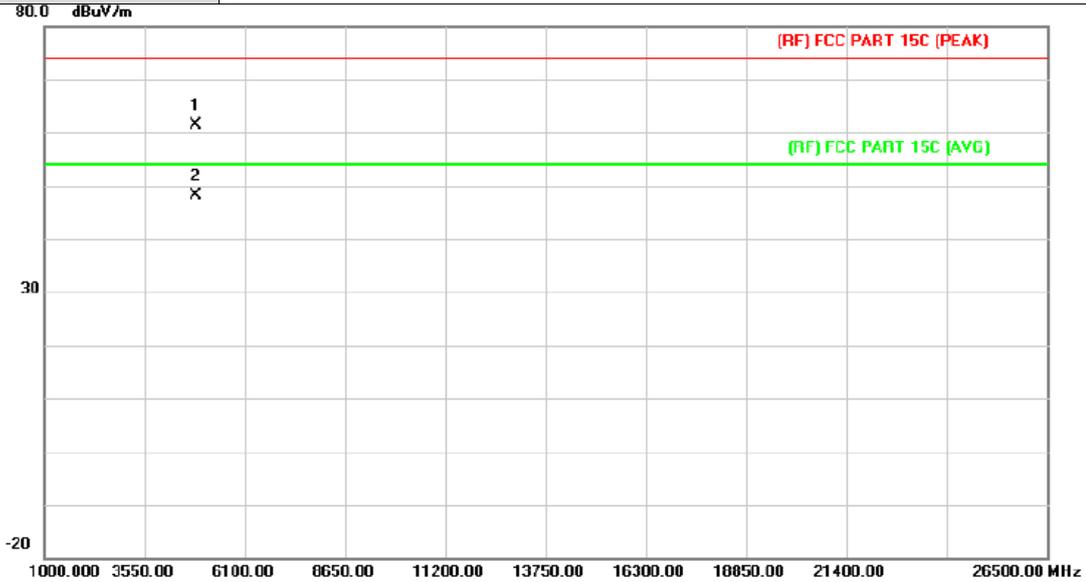


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4875.902	47.74	13.54	61.28	74.00	-12.72	peak
2	*	4875.902	34.71	13.54	48.25	54.00	-5.75	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4 °C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

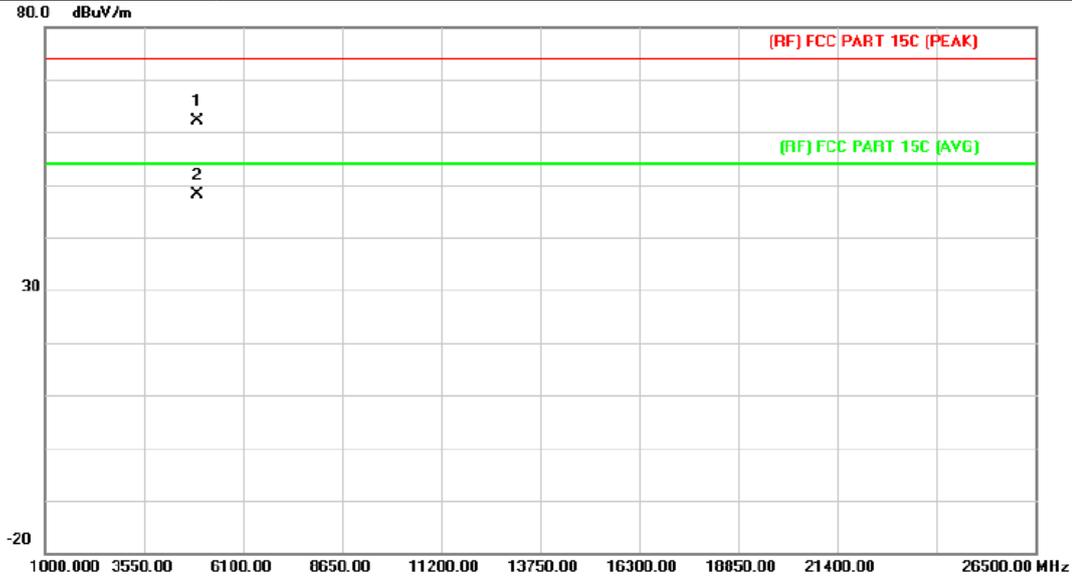


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4924.846	48.14	13.90	62.04	74.00	-11.96	peak
2	*	4924.846	34.29	13.90	48.19	54.00	-5.81	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4 °C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

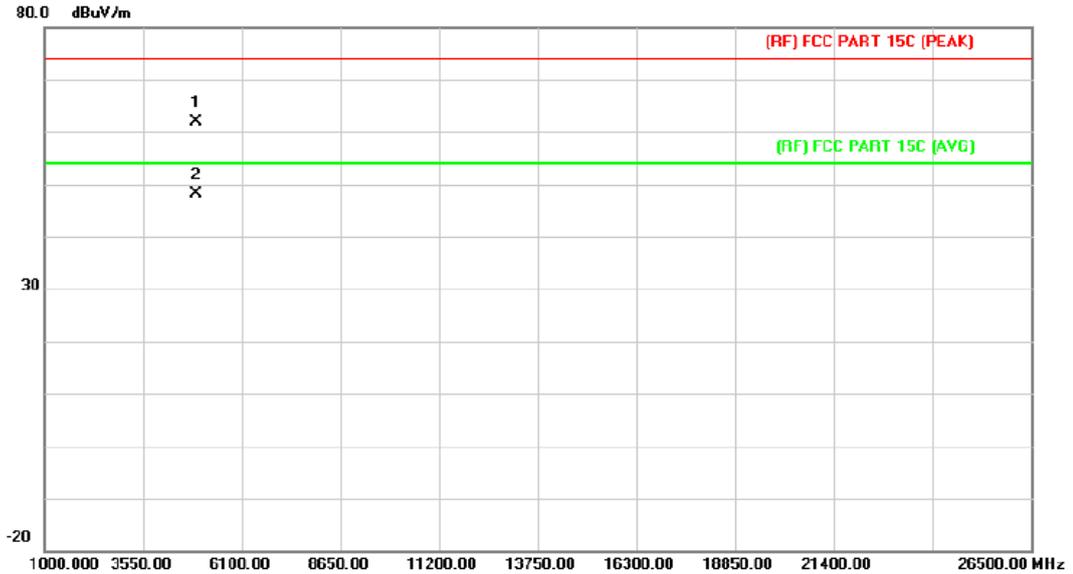


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4922.920	48.09	13.89	61.98	74.00	-12.02	peak
2	*	4922.920	34.36	13.89	48.25	54.00	-5.75	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

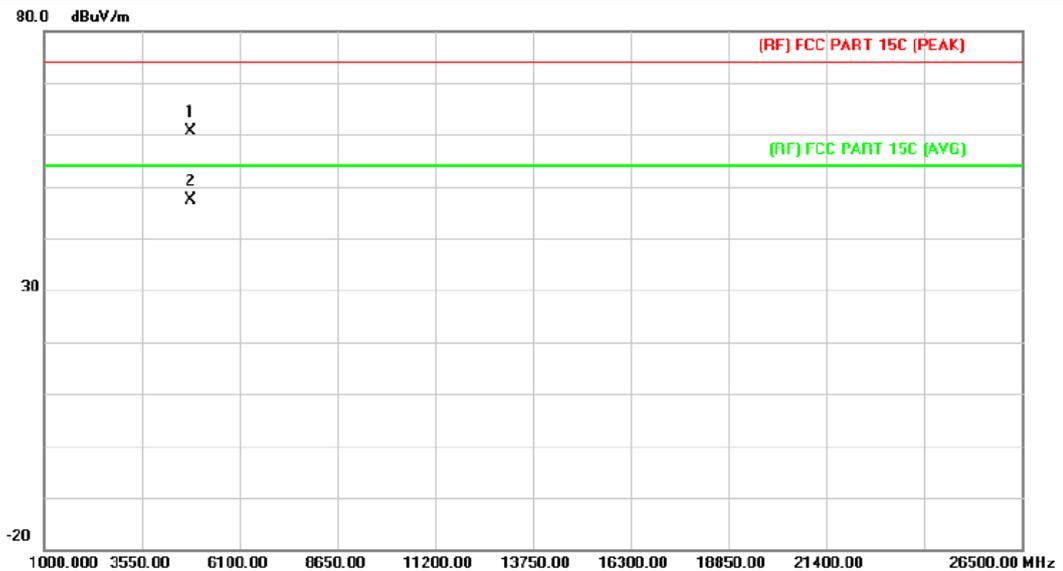


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4823.484	47.56	13.16	60.72	74.00	-13.28	peak
2	*	4823.556	34.15	13.16	47.31	54.00	-6.69	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

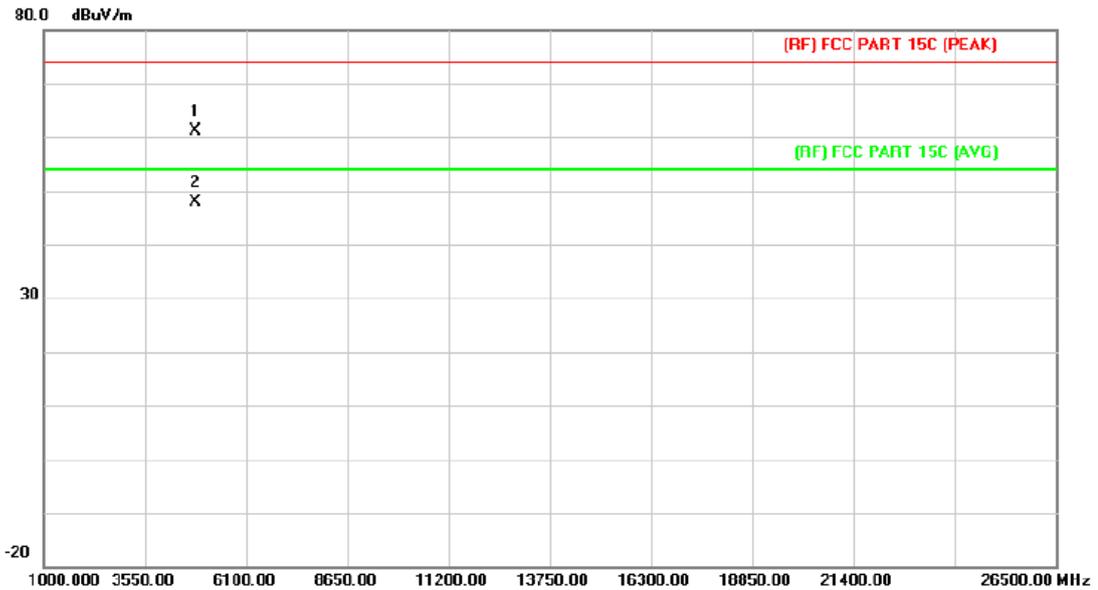


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.978	48.07	13.16	61.23	74.00	-12.77	peak
2	*	4824.978	34.74	13.16	47.90	54.00	-6.10	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2437MHz ANT. A. (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

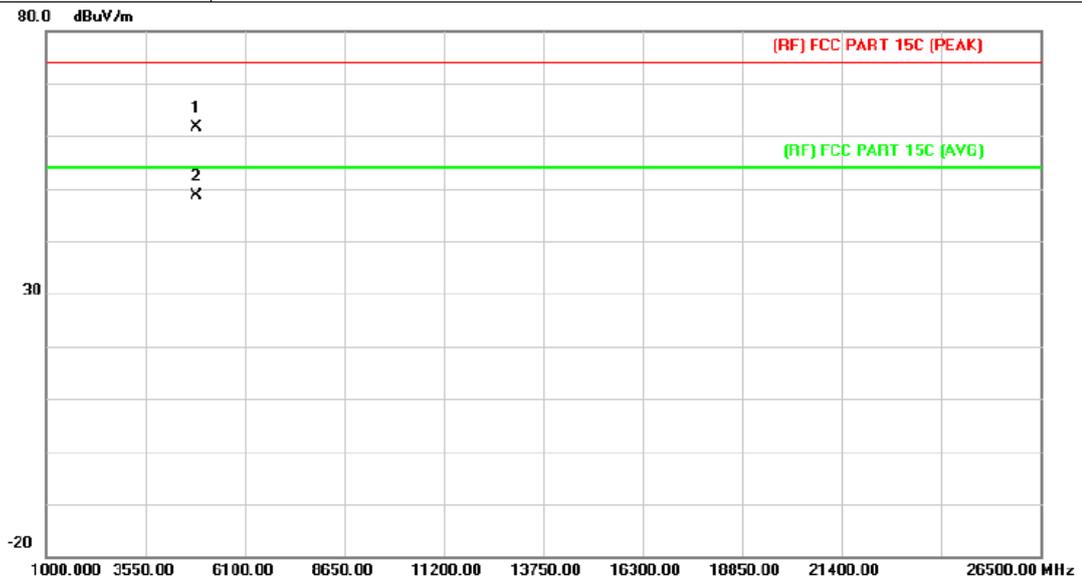


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4873.946	48.10	13.53	61.63	74.00	-12.37	peak
2	*	4873.946	35.14	13.53	48.67	54.00	-5.33	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2437MHz ANT. A. (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

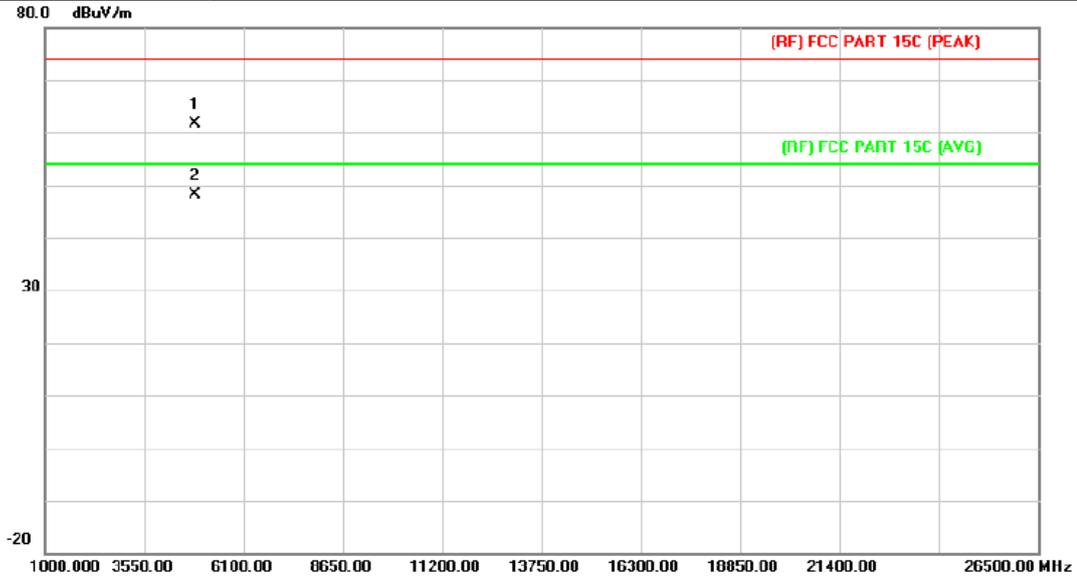


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4875.104	48.18	13.54	61.72	74.00	-12.28	peak
2	*	4875.452	34.54	13.54	48.08	54.00	-5.92	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz ANT. A. (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

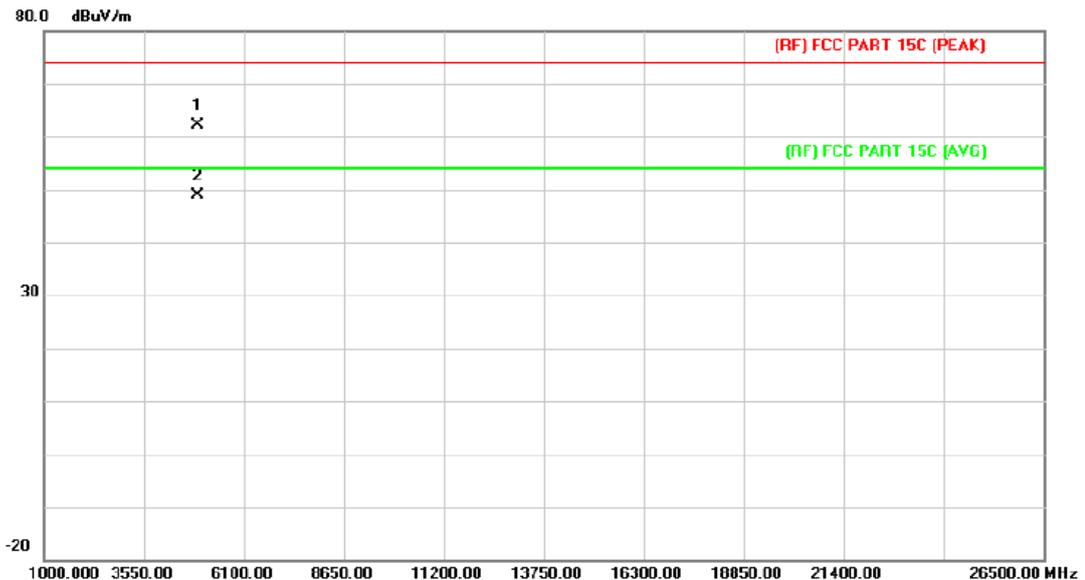


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4922.692	48.12	13.89	62.01	74.00	-11.99	peak
2	*	4923.946	34.95	13.89	48.84	54.00	-5.16	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz ANT. A. (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

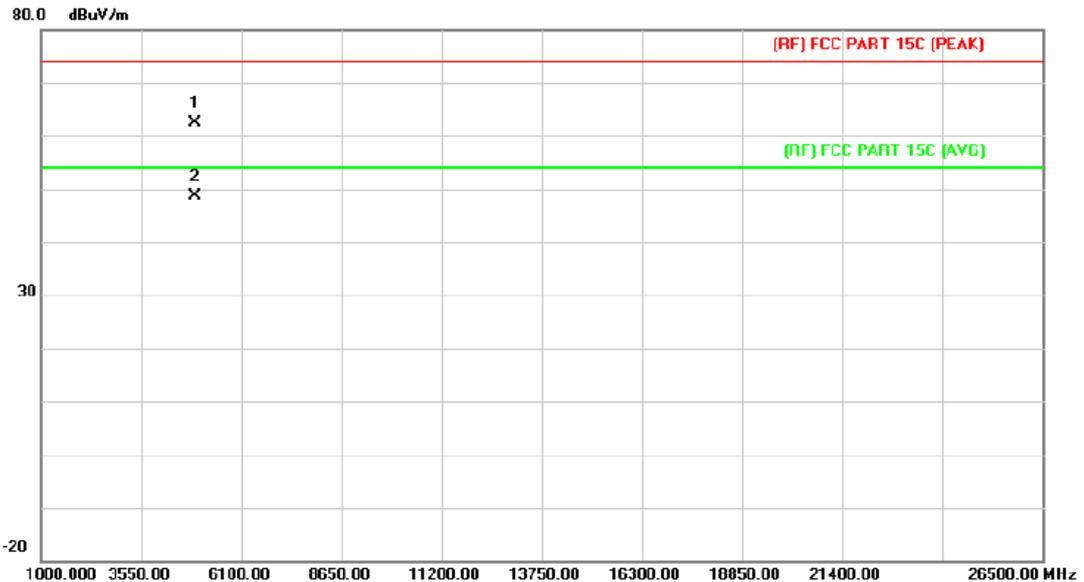


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4924.210	48.41	13.89	62.30	74.00	-11.70	peak
2	*	4924.210	34.67	13.89	48.56	54.00	-5.44	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2412MHz ANT. A(Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

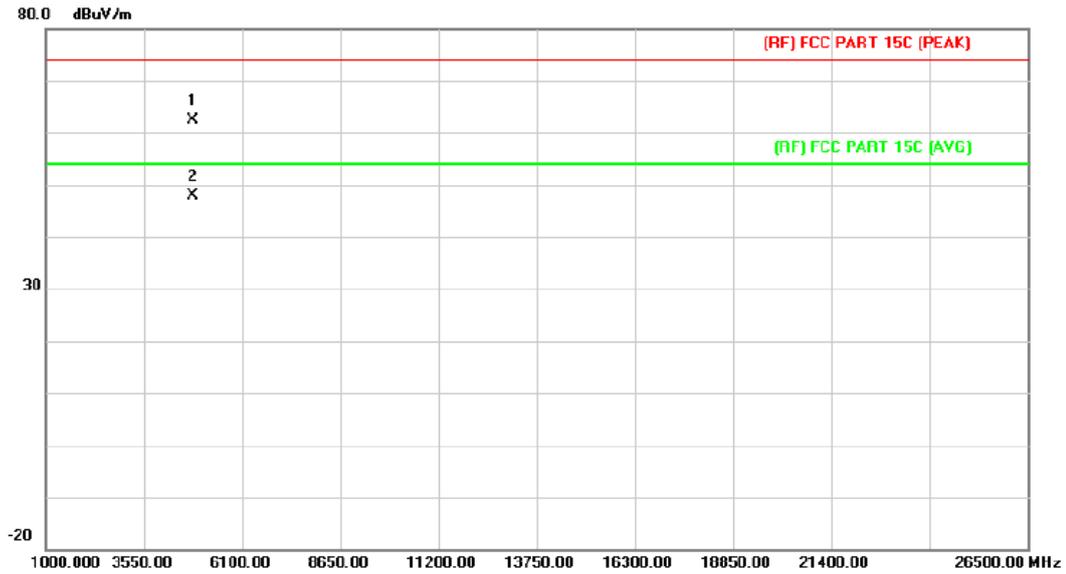


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.744	49.21	13.16	62.37	74.00	-11.63	peak
2	*	4824.744	34.81	13.16	47.97	54.00	-6.03	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2412MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

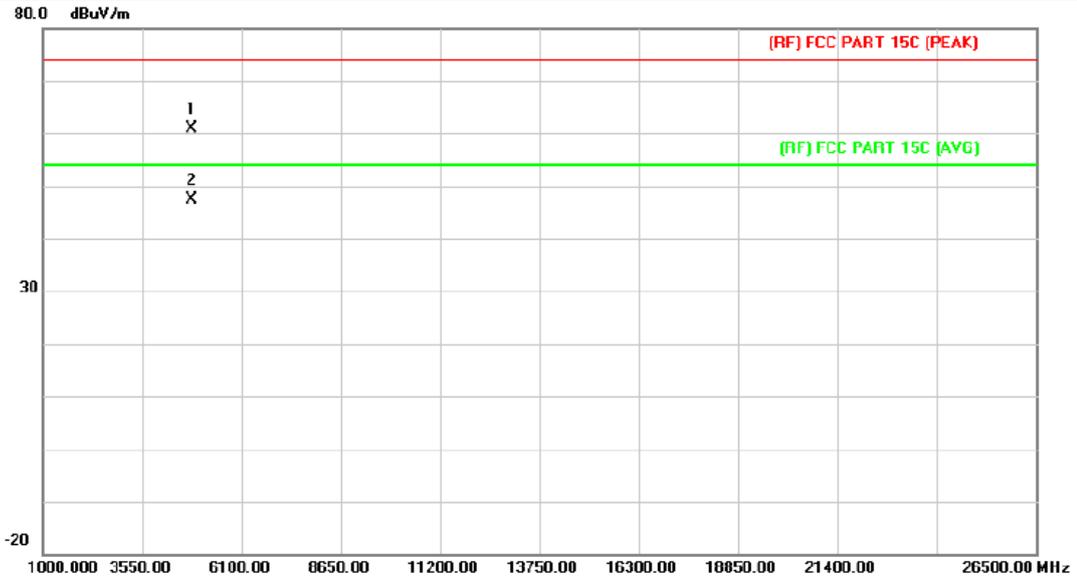


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4824.186	47.65	13.16	60.81	74.00	-13.19	peak
2	*	4824.354	34.25	13.16	47.41	54.00	-6.59	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2437MHz ANT. A(Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

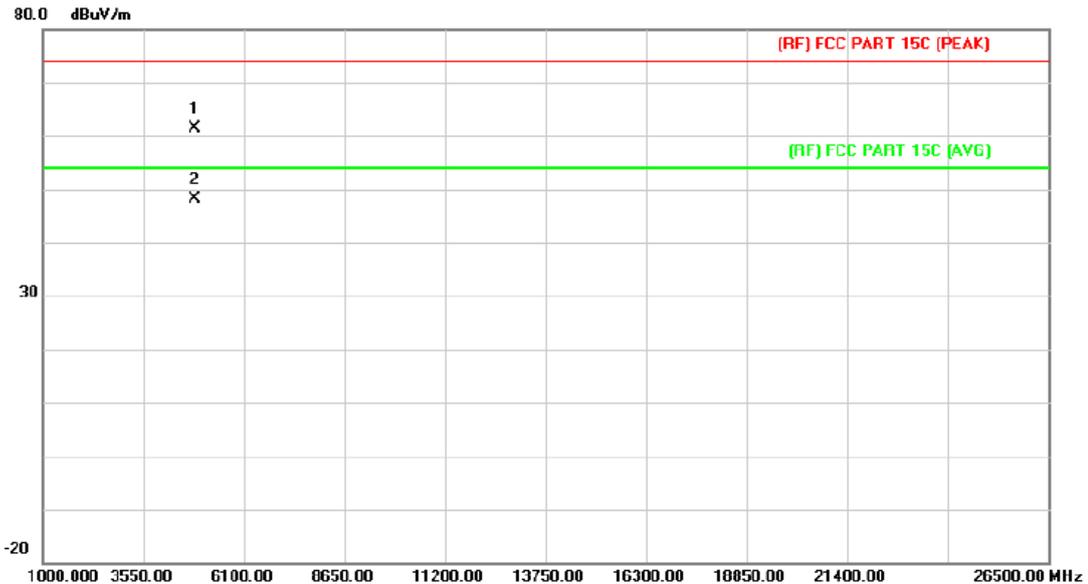


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4873.790	47.86	13.53	61.39	74.00	-12.61	peak
2	*	4875.230	34.53	13.54	48.07	54.00	-5.93	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2437MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

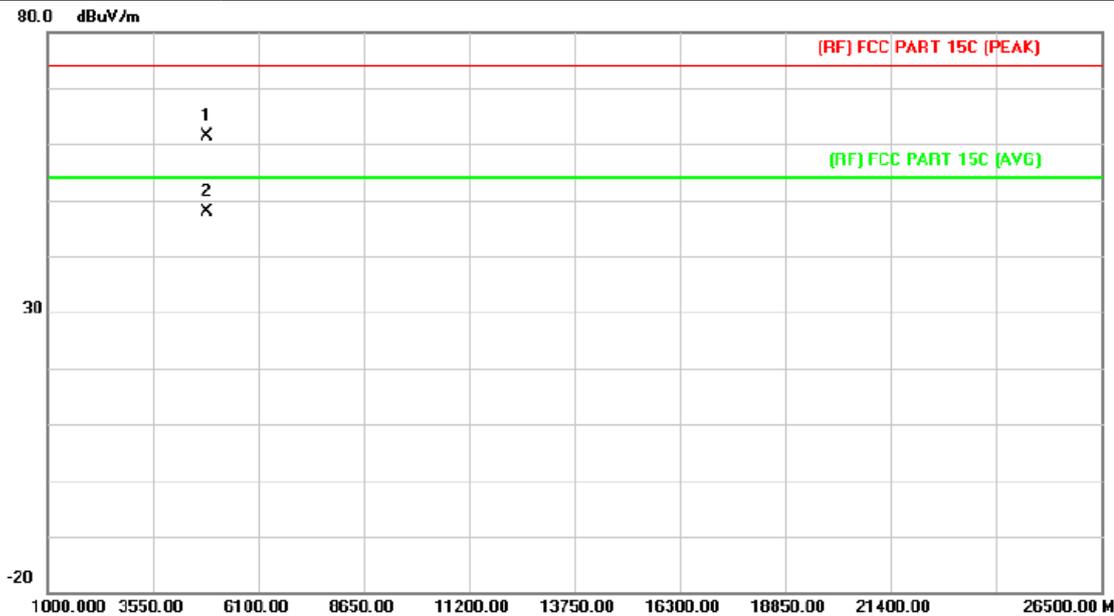


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4873.964	47.84	13.53	61.37	74.00	-12.63	peak
2	*	4873.964	34.23	13.53	47.76	54.00	-6.24	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT20) Mode 2462MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

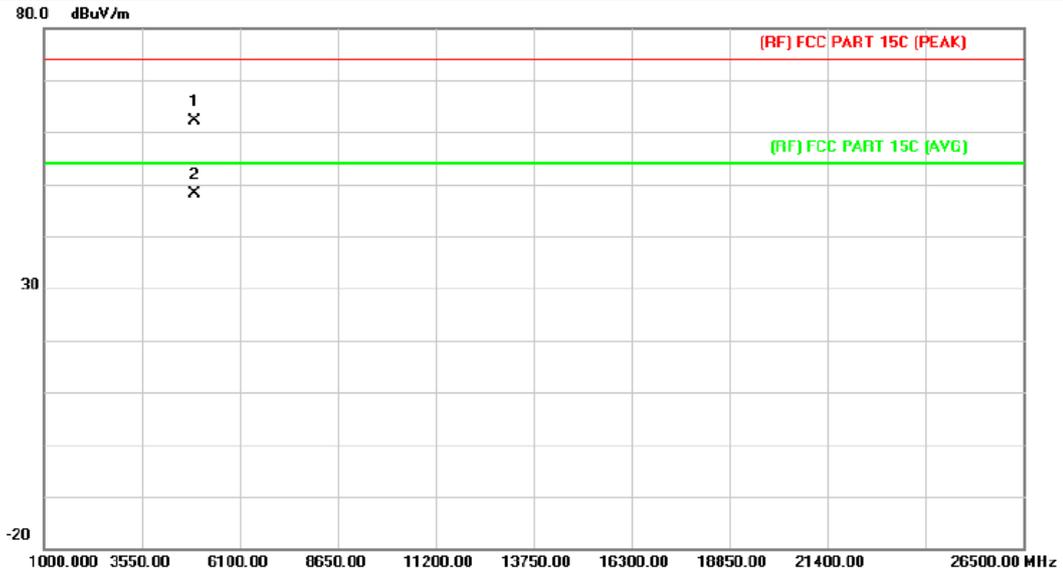


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4922.938	48.26	13.89	62.15	74.00	-11.85	peak
2	*	4922.938	34.17	13.89	48.06	54.00	-5.94	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT20) Mode 2462MHz ANT. A(Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

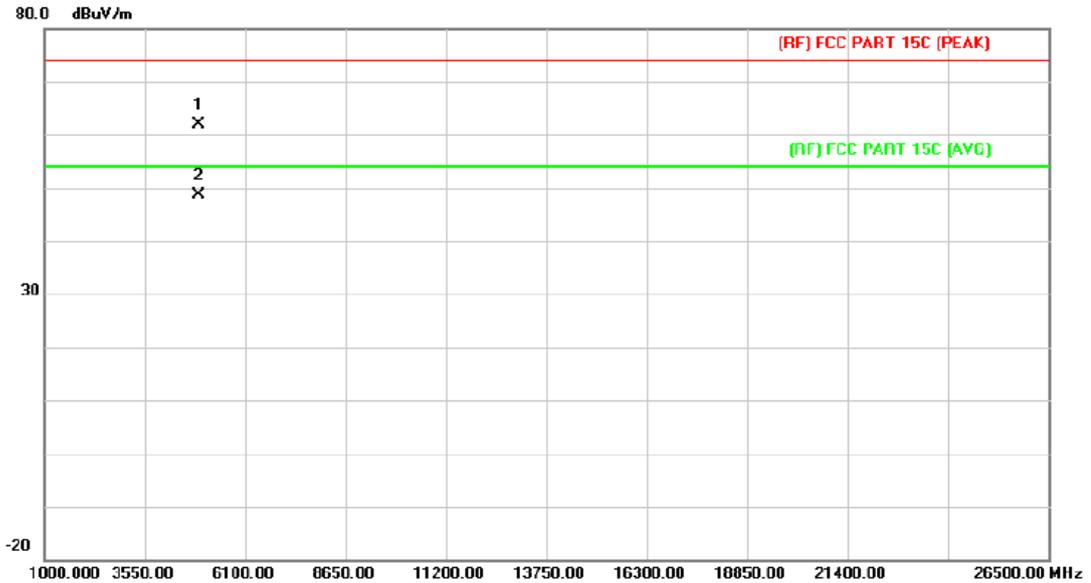


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4924.408	48.09	13.89	61.98	74.00	-12.02	peak
2	*	4925.416	34.73	13.91	48.64	54.00	-5.36	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2422MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

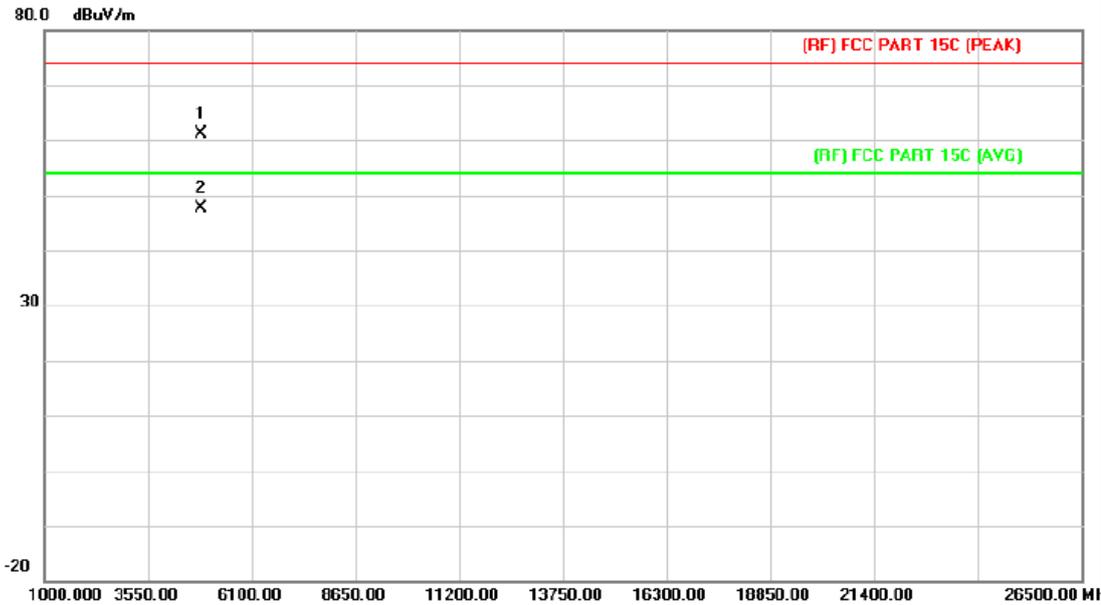


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4844.726	47.85	13.31	61.16	74.00	-12.84	peak
2	*	4845.446	34.29	13.31	47.60	54.00	-6.40	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2422MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

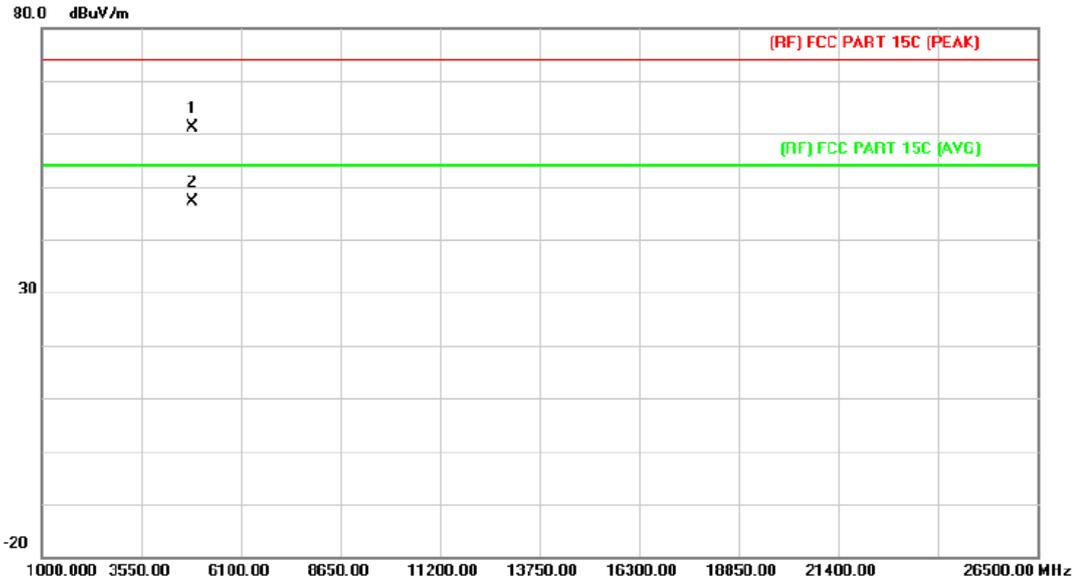


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4844.954	47.78	13.31	61.09	74.00	-12.91	peak
2	*	4844.954	33.76	13.31	47.07	54.00	-6.93	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2437MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

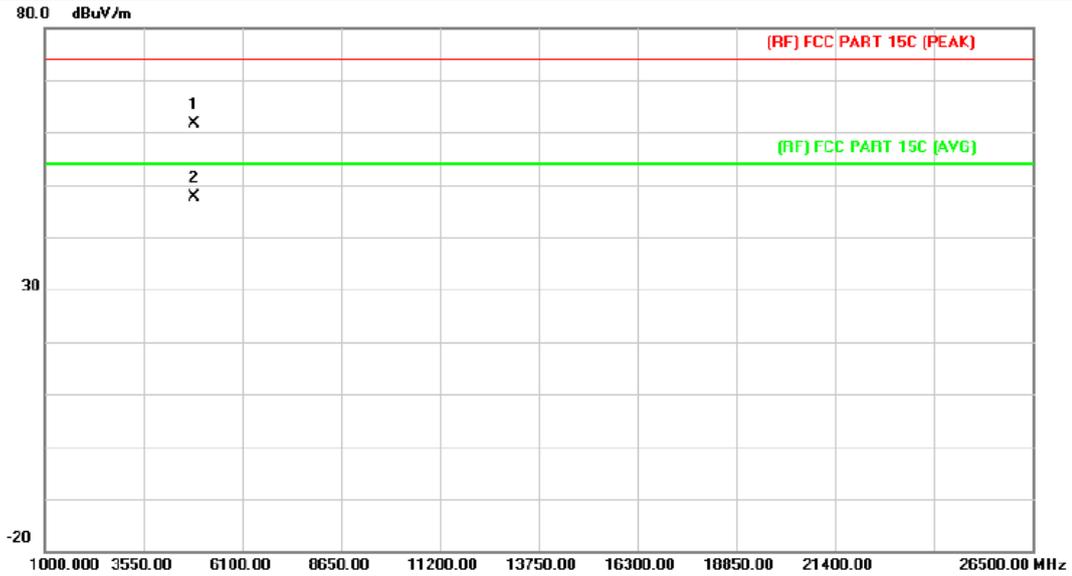


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4873.340	48.06	13.53	61.59	74.00	-12.41	peak
2	*	4873.340	34.05	13.53	47.58	54.00	-6.42	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2437MHz ANT. A(Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

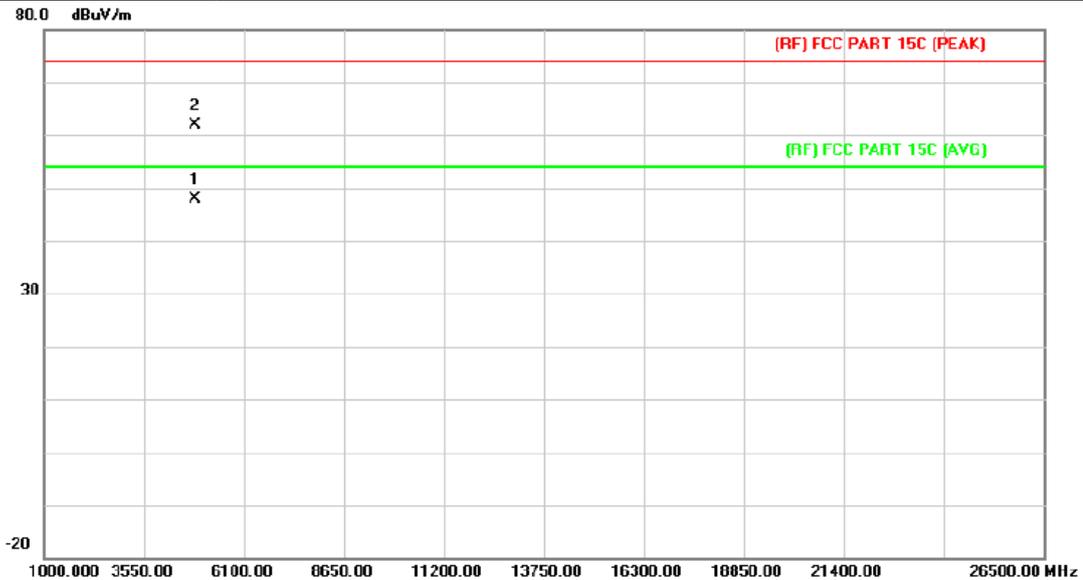


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4874.336	34.44	13.53	47.97	54.00	-6.03	AVG
2		4875.086	48.30	13.54	61.84	74.00	-12.16	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX n(HT40) Mode 2452MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

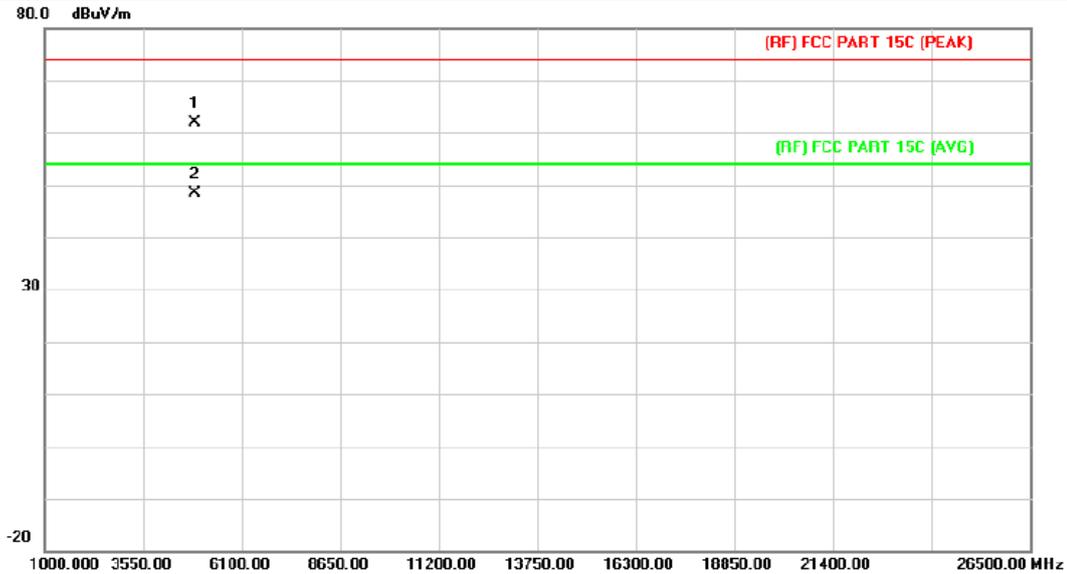


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4902.596	48.10	13.73	61.83	74.00	-12.17	peak
2	*	4905.290	34.72	13.76	48.48	54.00	-5.52	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60 Hz		
Ant. Pol.	Vertical		
Test Mode:	TX n(HT40) Mode 2452MHz ANT. A (Module#2)		
Remark:	No report for the emission which more than 15dB below the prescribed limit.		

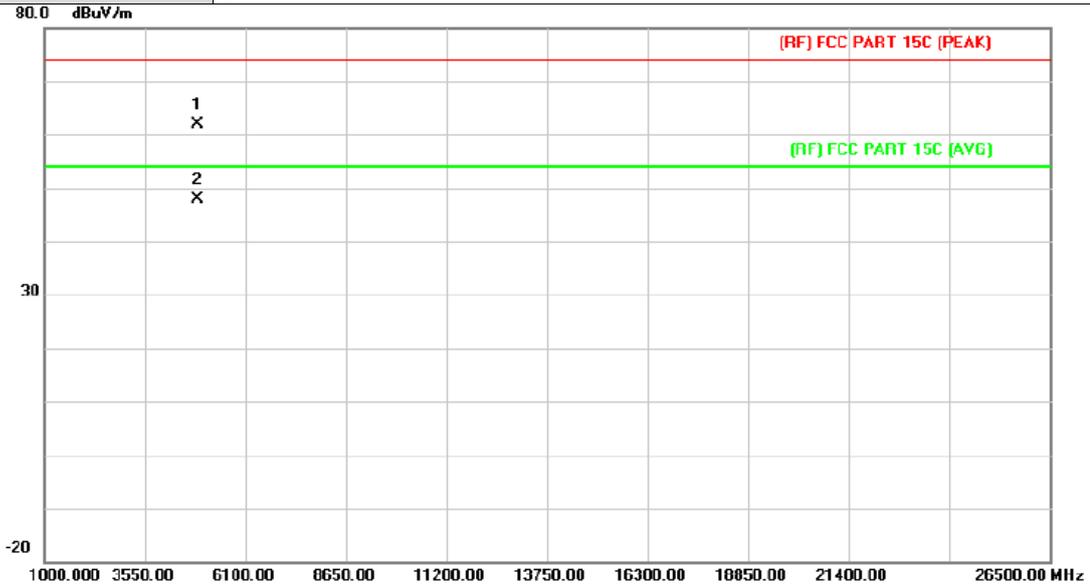

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4903.700	48.08	13.74	61.82	74.00	-12.18	peak
2	*	4903.700	34.25	13.74	47.99	54.00	-6.01	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Attachment C-- Restricted Bands Requirement and Band-edge Test Data

(1) Radiation Test

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz ANT. A+ANT. B(Module#1)		
Remark:	Only show the worst case		

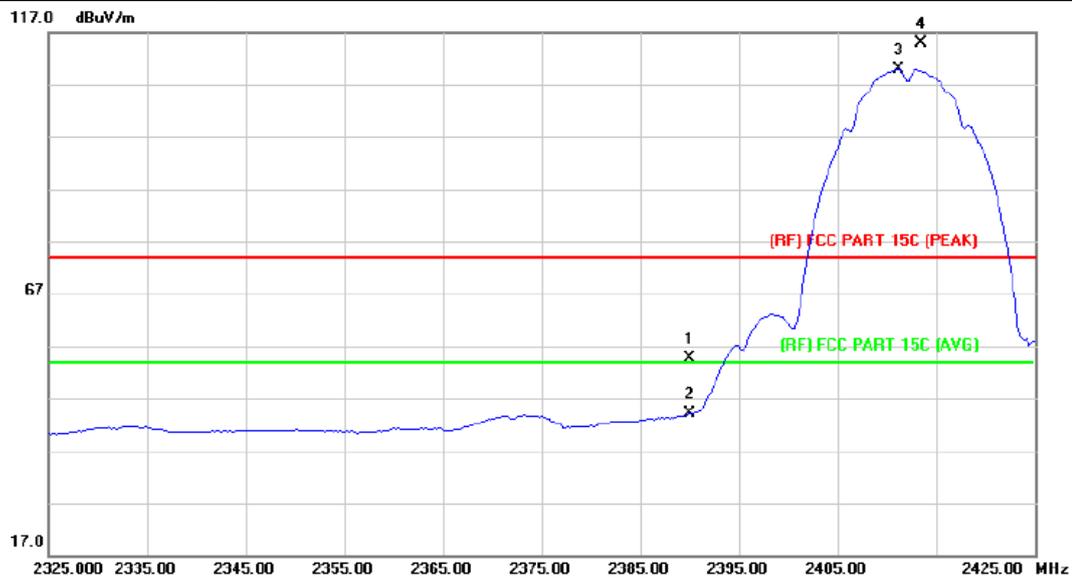


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	51.83	2.91	54.74	74.00	-19.26	peak
2		2390.000	41.11	2.91	44.02	54.00	-9.98	AVG
3	*	2411.200	106.97	3.00	109.97	Fundamental Frequency		AVG
4	X	2413.500	111.81	3.01	114.82	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz ANT. A+ANT. B(Module#1)		
Remark:	Only show the worst case		

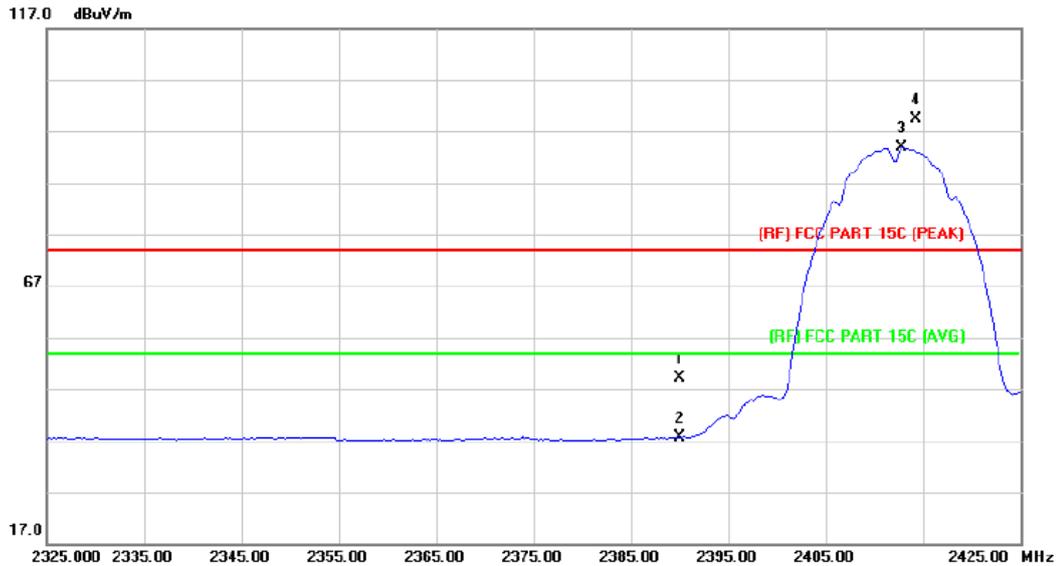


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	46.34	2.91	49.25	74.00	-24.75	peak
2		2390.000	34.69	2.91	37.60	54.00	-16.40	AVG
3	*	2412.800	90.77	3.00	93.77	Fundamental Frequency		AVG
4	X	2414.300	96.33	3.01	99.34	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz ANT. A+ANT. B(Module#1)		
Remark:	Only show the worst case		

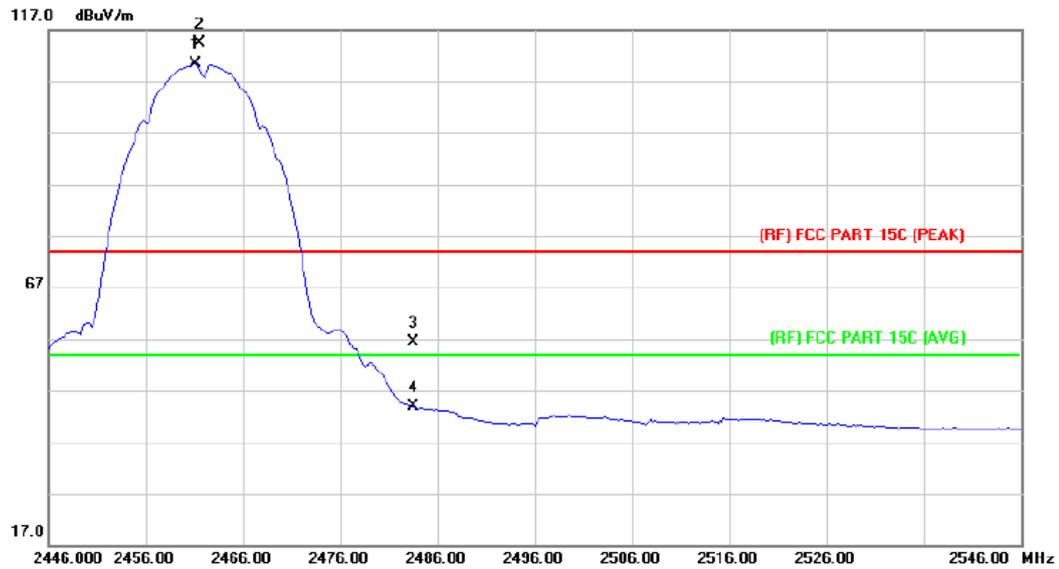


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2461.200	107.09	3.28	110.37	Fundamental Frequency		AVG
2	X	2461.500	111.18	3.28	114.46	Fundamental Frequency		peak
3		2483.500	52.95	3.40	56.35	74.00	-17.65	peak
4		2483.500	40.41	3.40	43.81	54.00	-10.19	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz ANT. A+ANT. B(Module#1)		
Remark:	Only show the worst case		

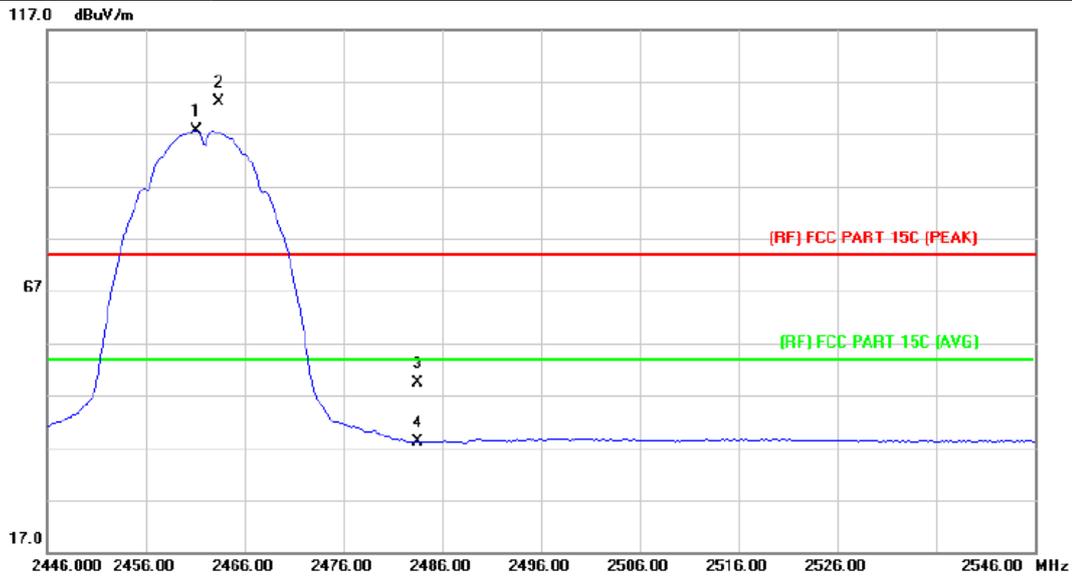


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2461.200	94.41	3.28	97.69	Fundamental Frequency		AVG
2	X	2463.400	99.95	3.29	103.24	Fundamental Frequency		peak
3		2483.500	45.94	3.40	49.34	74.00	-24.66	peak
4		2483.500	34.71	3.40	38.11	54.00	-15.89	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz ANT. A+ANT. B(Module#1)		
Remark:	Only show the worst case.		

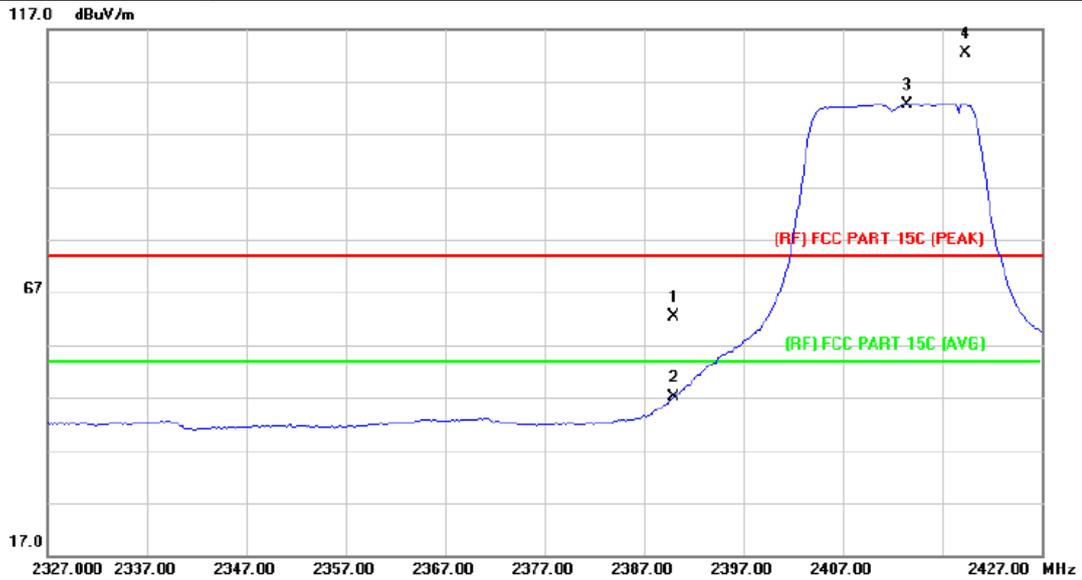


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	59.58	2.91	62.49	74.00	-11.51	peak
2		2390.000	44.17	2.91	47.08	54.00	-6.92	AVG
3	*	2413.400	99.65	3.01	102.66	Fundamental Frequency		AVG
4	X	2419.300	109.31	3.04	112.35	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz ANT. A+ANT. B(Module#1)		
Remark:	Only show the worst case.		

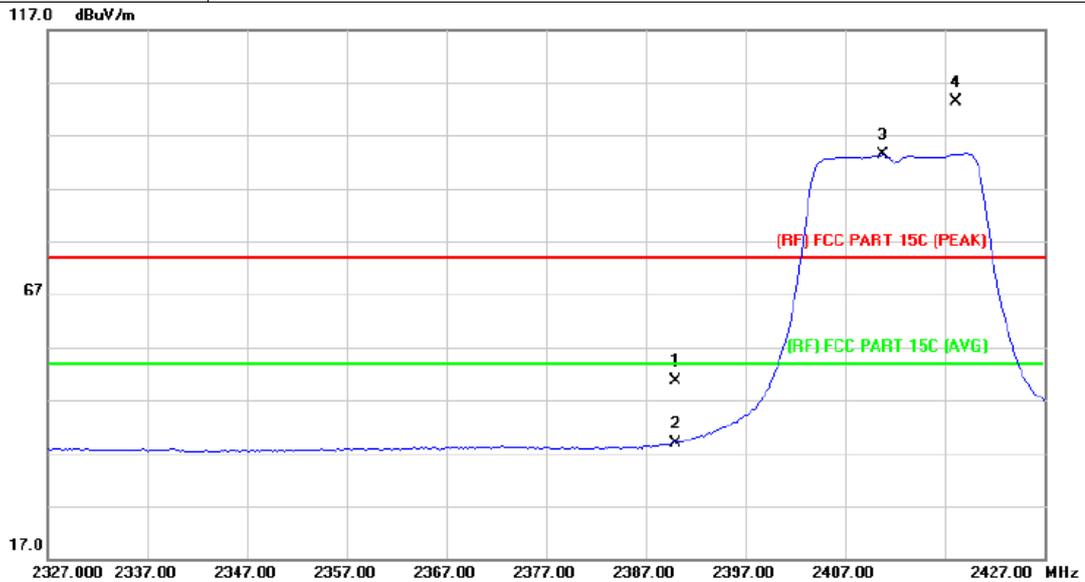


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	47.78	2.91	50.69	74.00	-23.31	peak
2		2390.000	36.07	2.91	38.98	54.00	-15.02	AVG
3	*	2410.800	90.30	2.99	93.29	Fundamental Frequency		AVG
4	X	2418.200	100.22	3.04	103.26	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz ANT. A+ANT. B(Module#1)		
Remark:	Only show the worst case.		

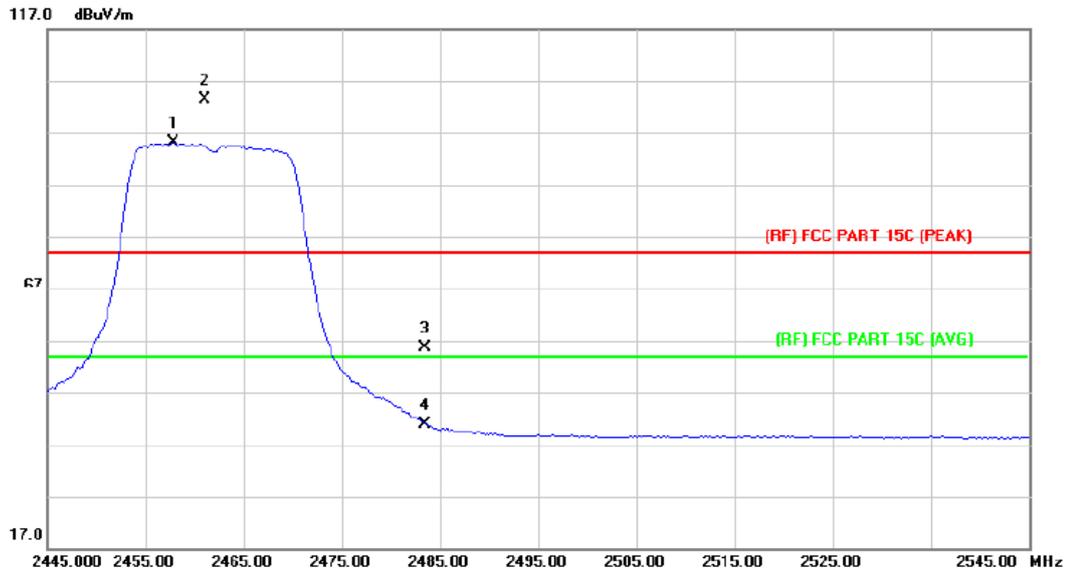


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2457.800	91.85	3.25	95.10	Fundamental Frequency		AVG
2	X	2461.000	100.19	3.27	103.46	Fundamental Frequency		peak
3		2483.500	52.23	3.40	55.63	74.00	-18.37	peak
4		2483.500	37.42	3.40	40.82	54.00	-13.18	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz ANT. A+ANT. B(Module#1)		
Remark:	Only show the worst case.		

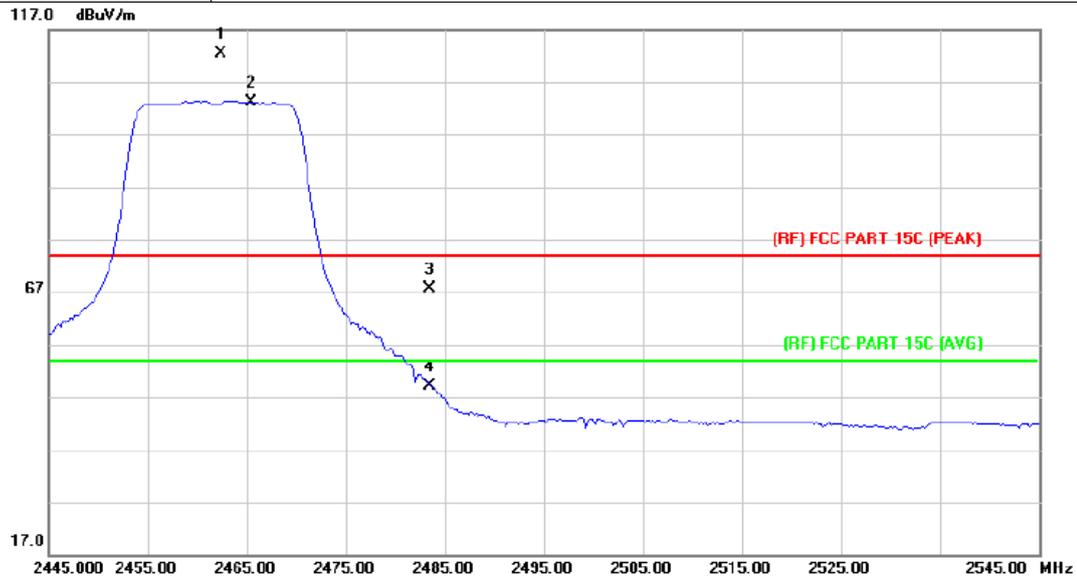


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2462.400	109.10	3.28	112.38	Fundamental Frequency		peak
2	*	2465.400	99.78	3.30	103.08	Fundamental Frequency		AVG
3		2483.500	64.12	3.40	67.52	74.00	-6.48	peak
4		2483.500	45.76	3.40	49.16	54.00	-4.84	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHz ANT. A.+ANT. B(Module#1)		
Remark:	N/A		

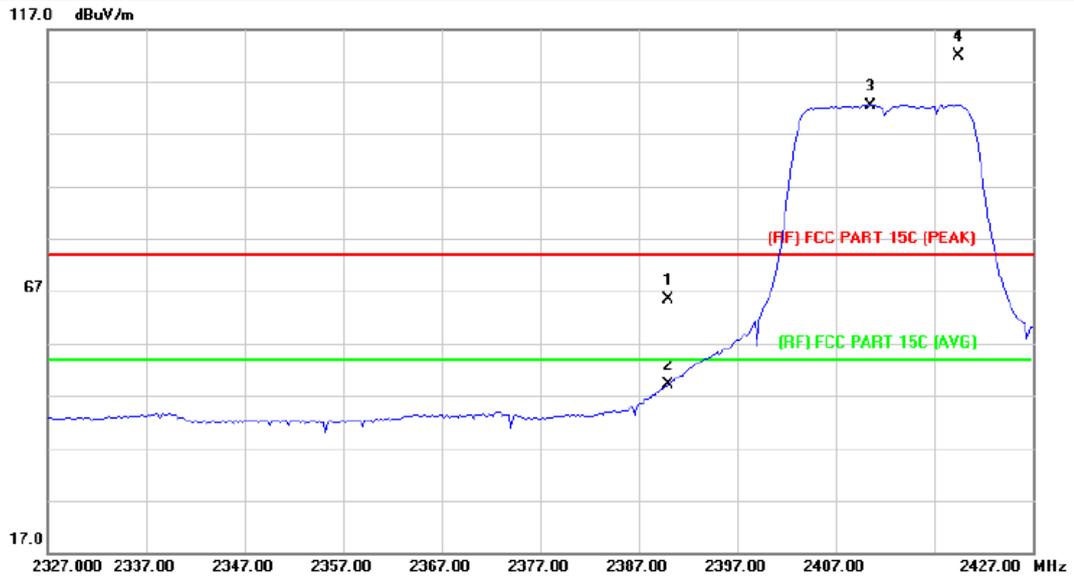


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	62.47	2.91	65.38	74.00	-8.62	peak
2		2390.000	46.16	2.91	49.07	54.00	-4.93	AVG
3	*	2410.600	99.37	2.99	102.36	Fundamental Frequency		AVG
4	X	2419.500	108.79	3.04	111.83	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHz ANT. A.+ANT. B (Module#1)		
Remark:	N/A		

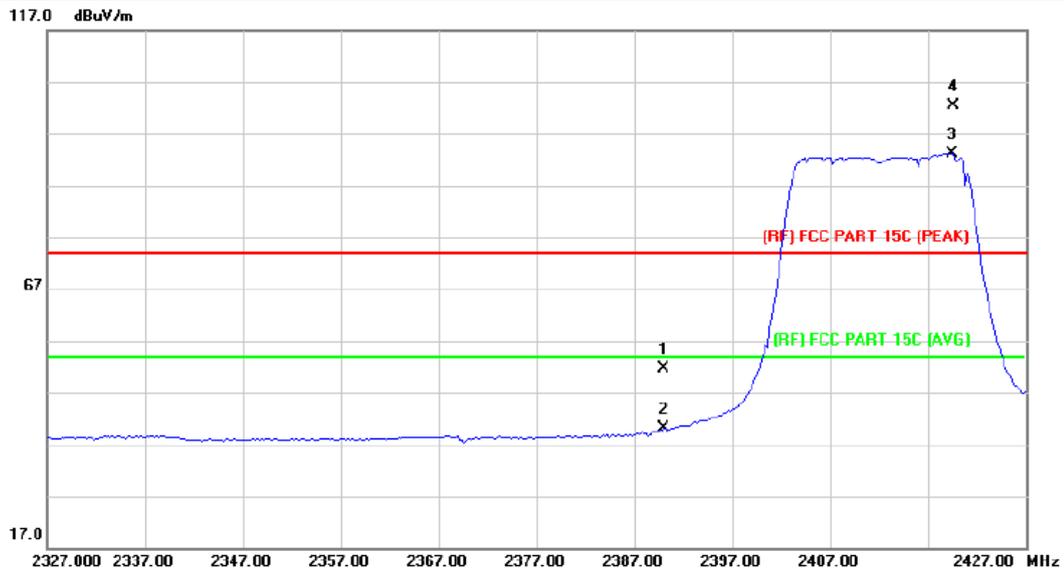


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	48.71	2.91	51.62	74.00	-22.38	peak
2		2390.000	37.13	2.91	40.04	54.00	-13.96	AVG
3	*	2419.400	90.18	3.04	93.22	Fundamental Frequency		AVG
4	X	2419.600	99.42	3.04	102.46	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz ANT. A.+ANT. B(Module#1)		
Remark:	N/A		

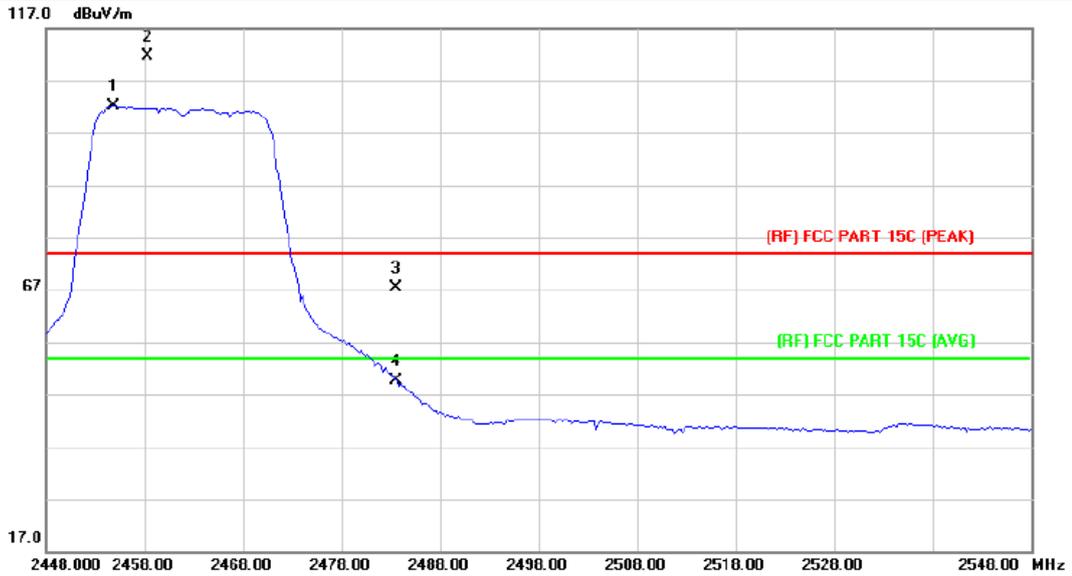


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2454.800	98.86	3.24	102.10	Fundamental Frequency		AVG
2	X	2458.300	108.27	3.25	111.52	Fundamental Frequency		peak
3		2483.500	63.98	3.40	67.38	74.00	-6.62	peak
4		2483.500	46.19	3.40	49.59	54.00	-4.41	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz ANT. A.+ANT. B(Module#1)		
Remark:	N/A		

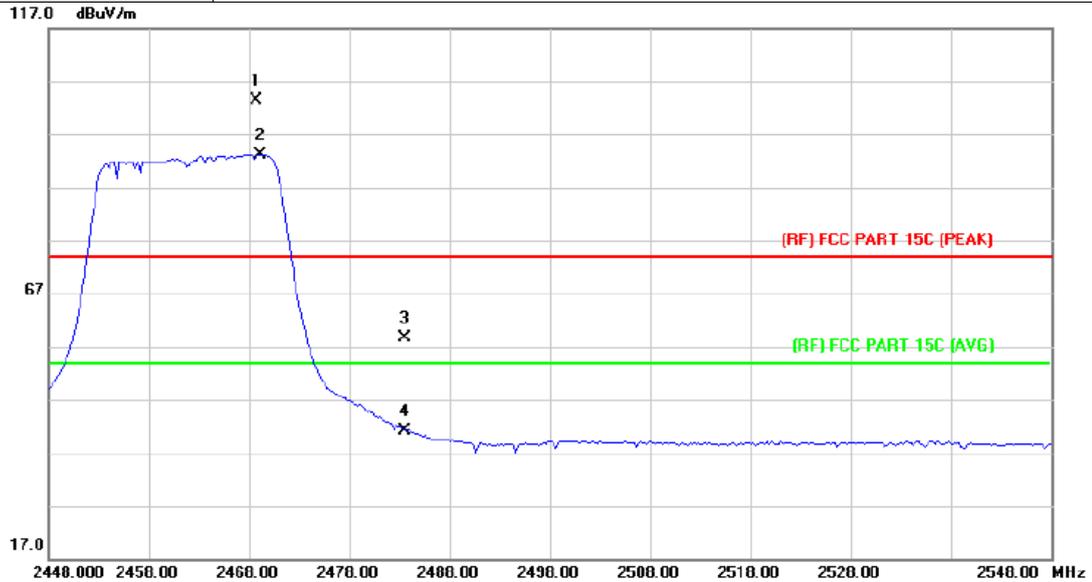


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2468.700	100.17	3.32	103.49	Fundamental Frequency		peak
2	*	2469.200	89.91	3.32	93.23	Fundamental Frequency		AVG
3		2483.500	55.33	3.40	58.73	74.00	-15.27	peak
4		2483.500	37.76	3.40	41.16	54.00	-12.84	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2422MHz ANT. A.+ANT. B(Module#1)		
Remark:	N/A		

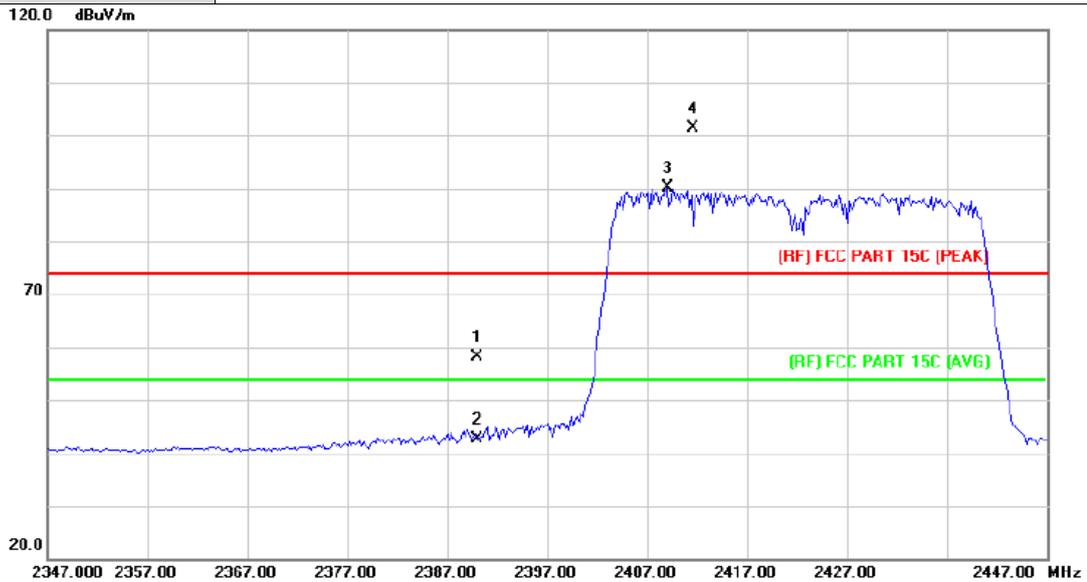


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	55.22	2.91	58.13	74.00	-15.87	peak
2		2390.000	39.82	2.91	42.73	54.00	-11.27	AVG
3	*	2409.000	87.08	2.98	90.06	Fundamental Frequency		AVG
4	X	2411.600	98.32	3.00	101.32	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2422MHz ANT. A.+ANT. B (Module#1)		
Remark:	N/A		

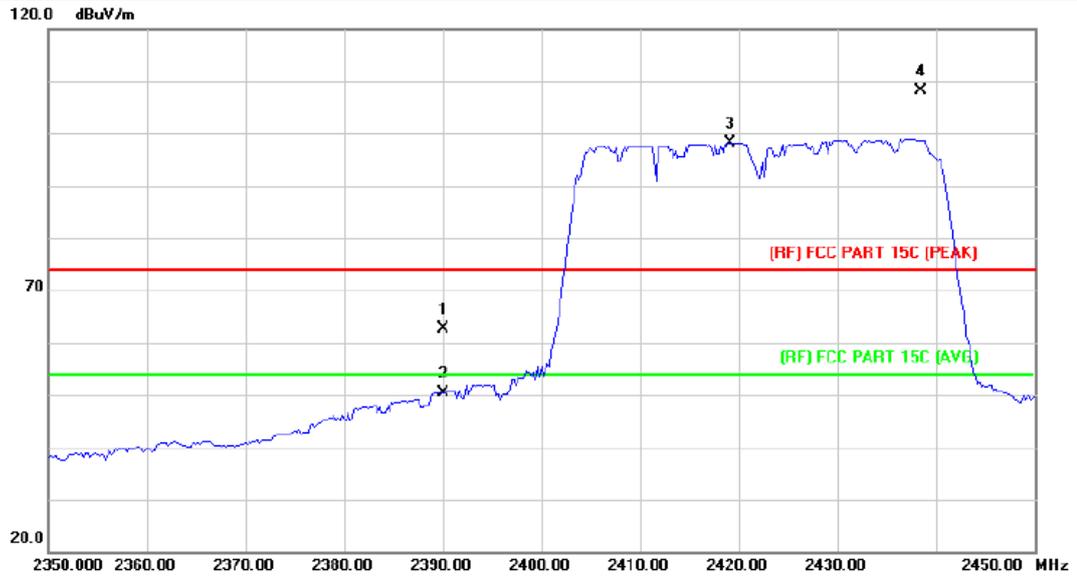


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	59.81	2.91	62.72	74.00	-11.28	peak
2		2390.000	47.56	2.91	50.47	54.00	-3.53	AVG
3	*	2419.200	95.19	3.04	98.23	Fundamental Frequency		AVG
4	X	2438.500	104.99	3.15	108.14	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2452MHz ANT. A.+ANT. B(Module#1)		
Remark:	N/A		

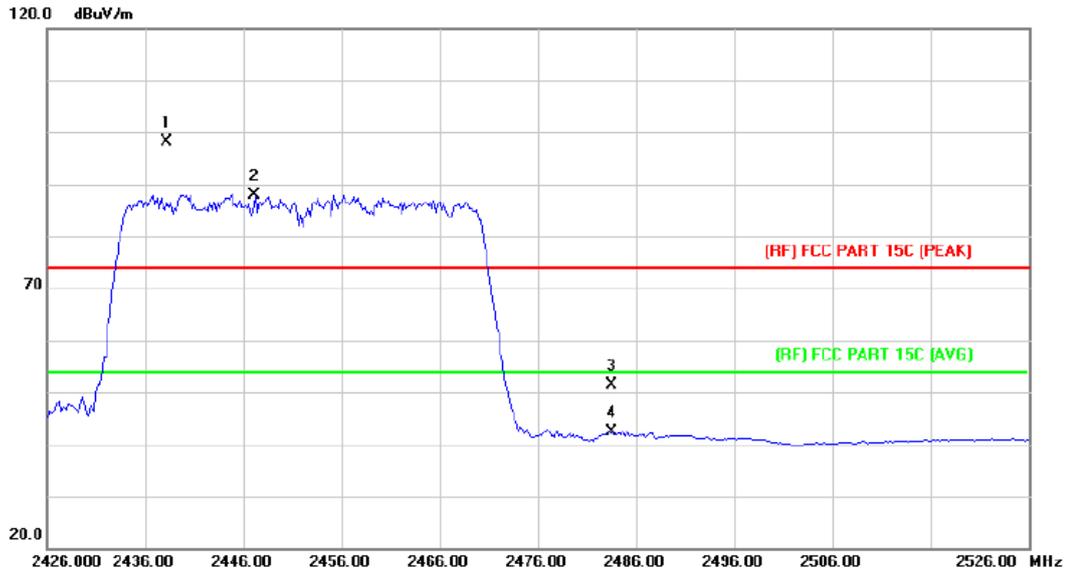


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2438.200	95.09	3.15	98.24	Fundamental Frequency		peak
2	*	2447.200	84.77	3.20	87.97	Fundamental Frequency		AVG
3		2483.500	47.90	3.40	51.30	74.00	-22.70	peak
4		2483.500	38.98	3.40	42.38	54.00	-11.62	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz ANT. A.+ANT. B(Module#1)		
Remark:	N/A		

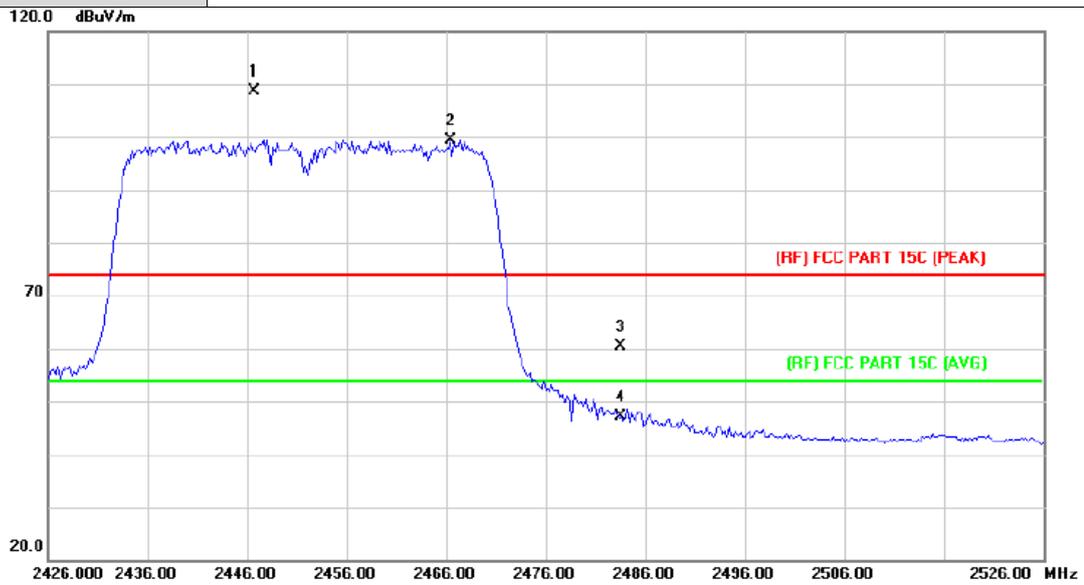


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2446.700	105.48	3.19	108.67	Fundamental Frequency		peak
2	*	2466.400	95.97	3.30	99.27	Fundamental Frequency		AVG
3		2483.500	57.06	3.40	60.46	74.00	-13.54	peak
4		2483.500	43.61	3.40	47.01	54.00	-6.99	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2412MHz ANT. A+ANT. B(Module#2)		
Remark:	Only show the worst case		

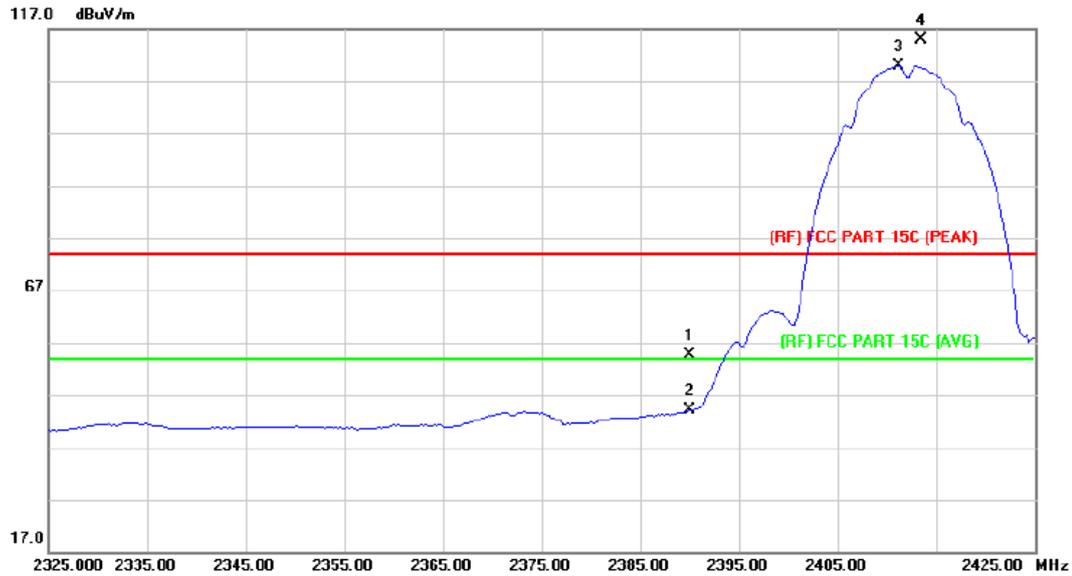


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	51.83	2.91	54.74	74.00	-19.26	peak
2		2390.000	41.11	2.91	44.02	54.00	-9.98	AVG
3	*	2411.200	106.97	3.00	109.97	Fundamental Frequency		AVG
4	X	2413.500	111.81	3.01	114.82	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2412MHz ANT. A+ANT. B(Module#2)		
Remark:	Only show the worst case		

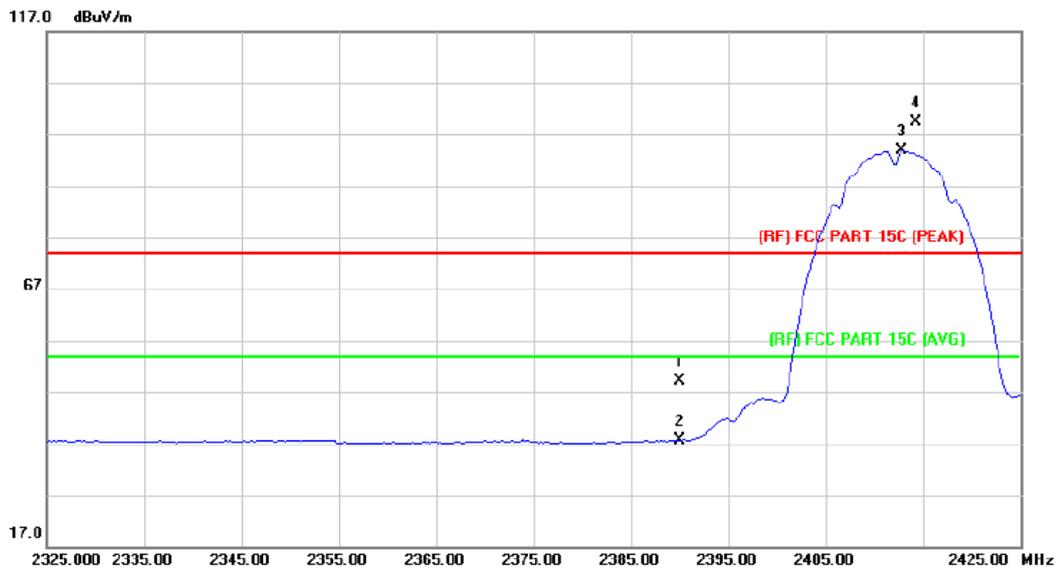


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	46.34	2.91	49.25	74.00	-24.75	peak
2		2390.000	34.69	2.91	37.60	54.00	-16.40	AVG
3	*	2412.800	90.77	3.00	93.77	Fundamental Frequency		AVG
4	X	2414.300	96.33	3.01	99.34	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX B Mode 2462MHz ANT. A+ANT. B(Module#2)		
Remark:	Only show the worst case		

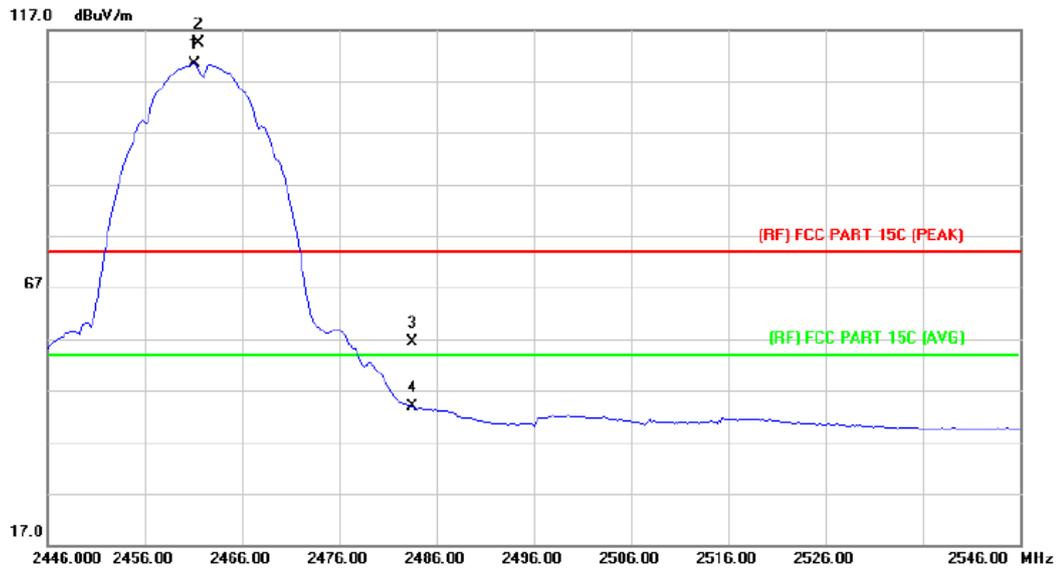


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2461.200	107.09	3.28	110.37	Fundamental Frequency		AVG
2	X	2461.500	111.18	3.28	114.46	Fundamental Frequency		peak
3		2483.500	52.95	3.40	56.35	74.00	-17.65	peak
4		2483.500	40.41	3.40	43.81	54.00	-10.19	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX B Mode 2462MHz ANT. A+ANT. B(Module#2)		
Remark:	Only show the worst case		

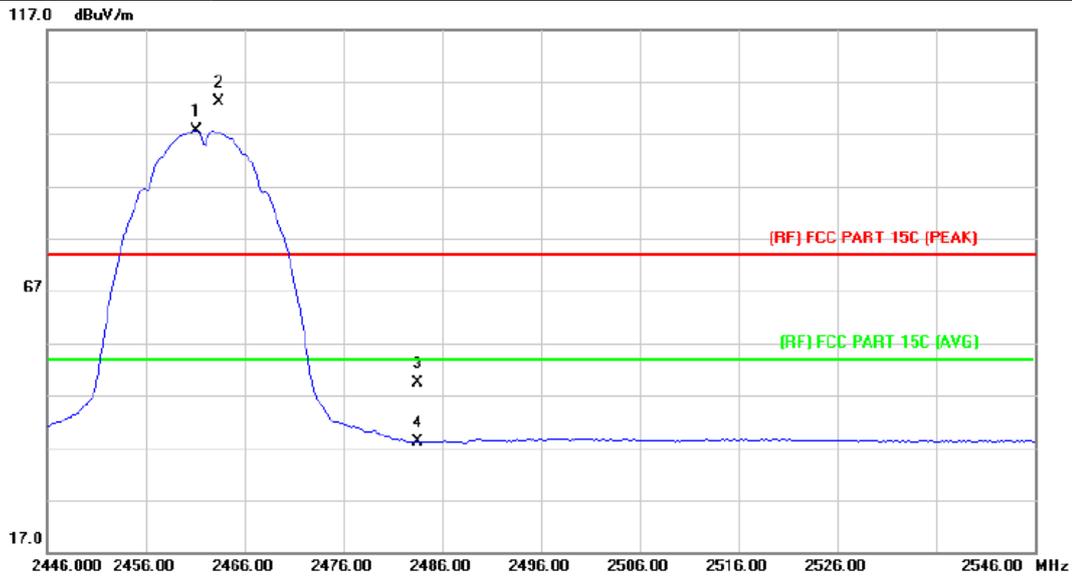


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2461.200	94.41	3.28	97.69	Fundamental Frequency		AVG
2	X	2463.400	99.95	3.29	103.24	Fundamental Frequency		peak
3		2483.500	45.94	3.40	49.34	74.00	-24.66	peak
4		2483.500	34.71	3.40	38.11	54.00	-15.89	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2412MHz ANT. A+ANT. B(Module#2)		
Remark:	Only show the worst case.		

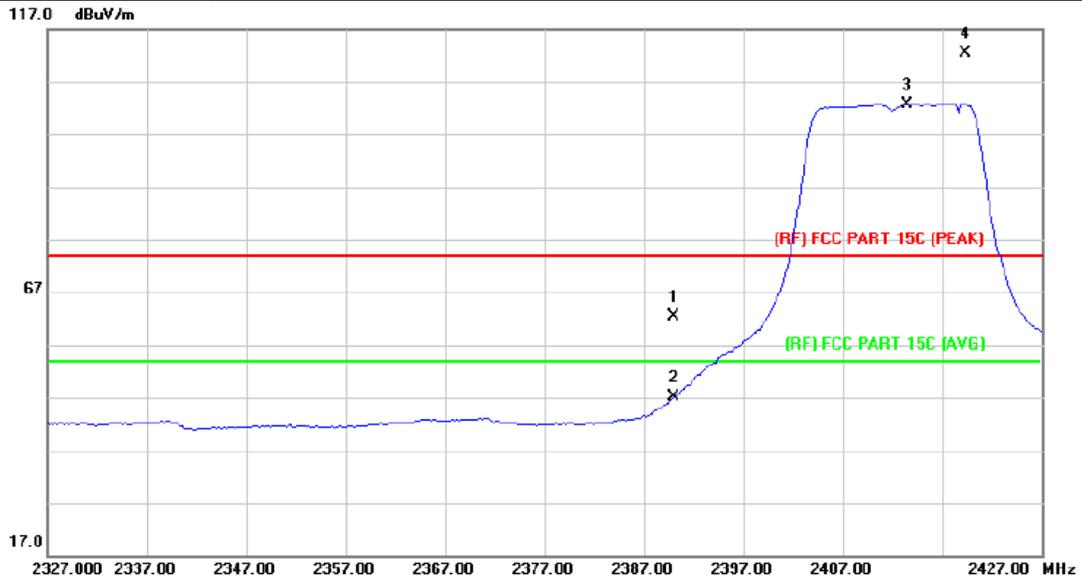


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	59.58	2.91	62.49	74.00	-11.51	peak
2		2390.000	44.17	2.91	47.08	54.00	-6.92	AVG
3	*	2413.400	99.65	3.01	102.66	Fundamental Frequency		AVG
4	X	2419.300	109.31	3.04	112.35	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2412MHz ANT. A+ANT. B(Module#2)		
Remark:	Only show the worst case.		

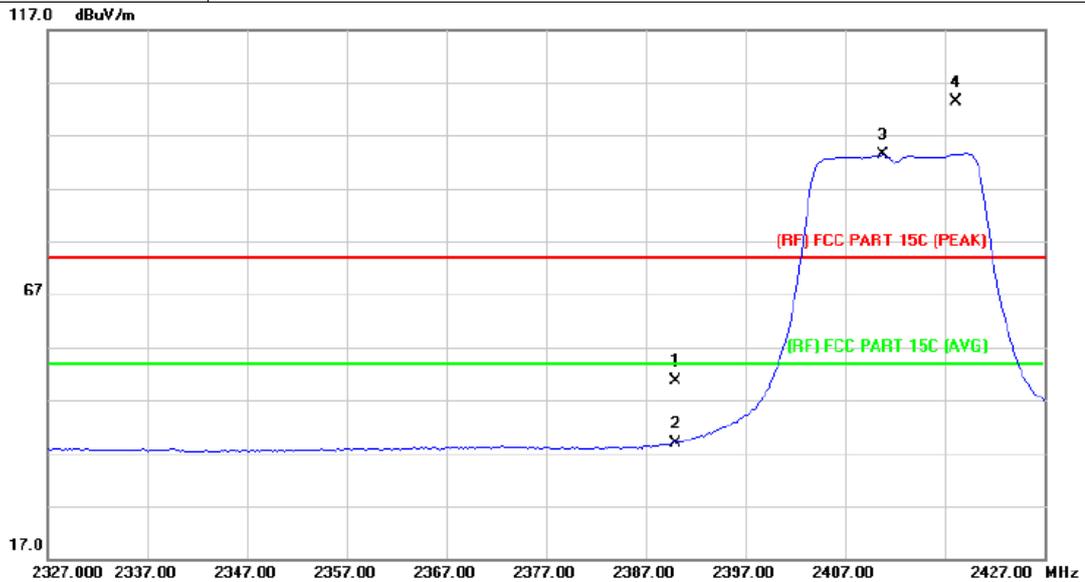


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	47.78	2.91	50.69	74.00	-23.31	peak
2		2390.000	36.07	2.91	38.98	54.00	-15.02	AVG
3	*	2410.800	90.30	2.99	93.29	Fundamental Frequency		AVG
4	X	2418.200	100.22	3.04	103.26	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX G Mode 2462MHz ANT. A+ANT. B(Module#2)		
Remark:	Only show the worst case.		

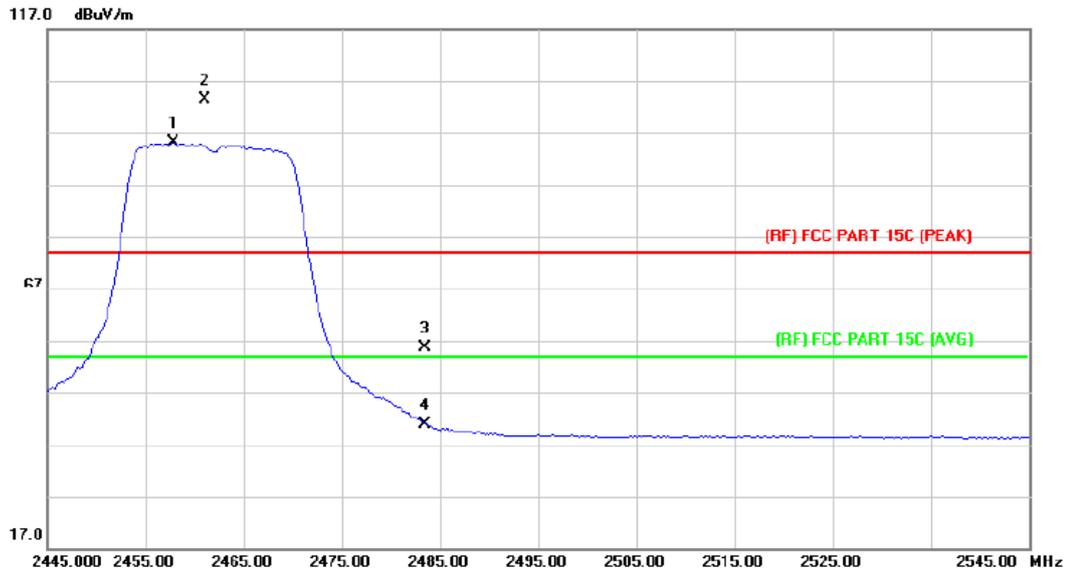


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2457.800	91.85	3.25	95.10	Fundamental Frequency		AVG
2	X	2461.000	100.19	3.27	103.46	Fundamental Frequency		peak
3		2483.500	52.23	3.40	55.63	74.00	-18.37	peak
4		2483.500	37.42	3.40	40.82	54.00	-13.18	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX G Mode 2462MHz ANT. A+ANT. B(Module#2)		
Remark:	Only show the worst case.		

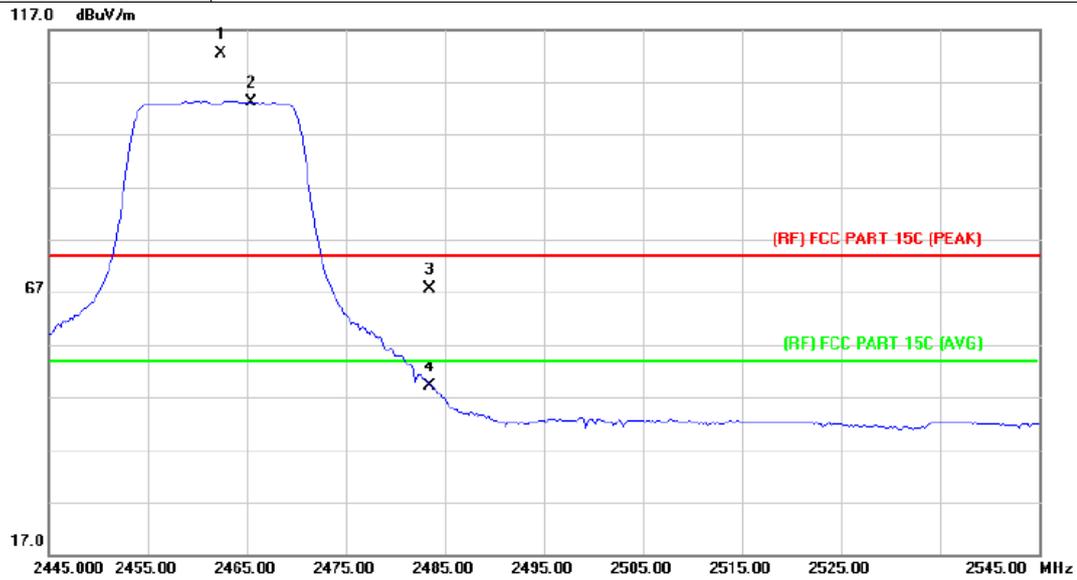


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2462.400	109.10	3.28	112.38	Fundamental Frequency		peak
2	*	2465.400	99.78	3.30	103.08	Fundamental Frequency		AVG
3		2483.500	64.12	3.40	67.52	74.00	-6.48	peak
4		2483.500	45.76	3.40	49.16	54.00	-4.84	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2412MHz ANT. A.+ANT. B(Module#2)		
Remark:	N/A		

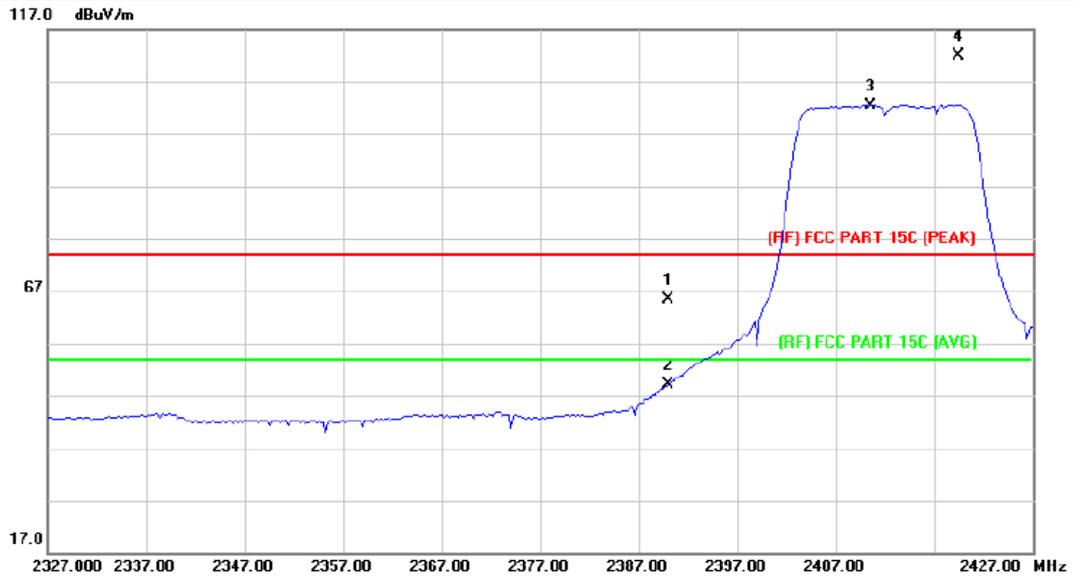


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	62.47	2.91	65.38	74.00	-8.62	peak
2		2390.000	46.16	2.91	49.07	54.00	-4.93	AVG
3	*	2410.600	99.37	2.99	102.36	Fundamental Frequency		AVG
4	X	2419.500	108.79	3.04	111.83	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2412MHz ANT. A.+ANT. B (Module#2)		
Remark:	N/A		

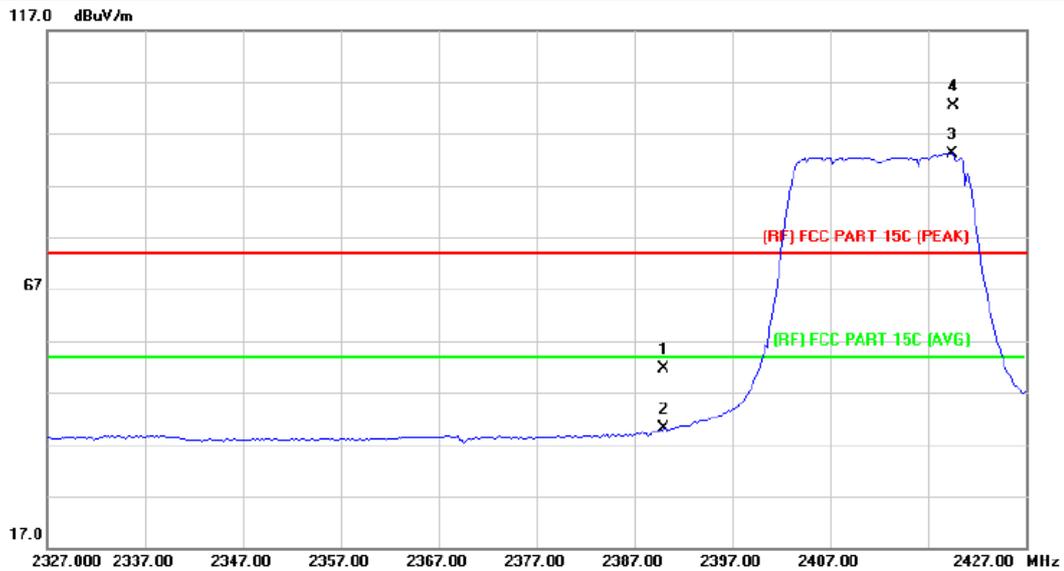


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	48.71	2.91	51.62	74.00	-22.38	peak
2		2390.000	37.13	2.91	40.04	54.00	-13.96	AVG
3	*	2419.400	90.18	3.04	93.22	Fundamental Frequency		AVG
4	X	2419.600	99.42	3.04	102.46	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT20) Mode 2462MHz ANT. A.+ANT. B(Module#2)		
Remark:	N/A		

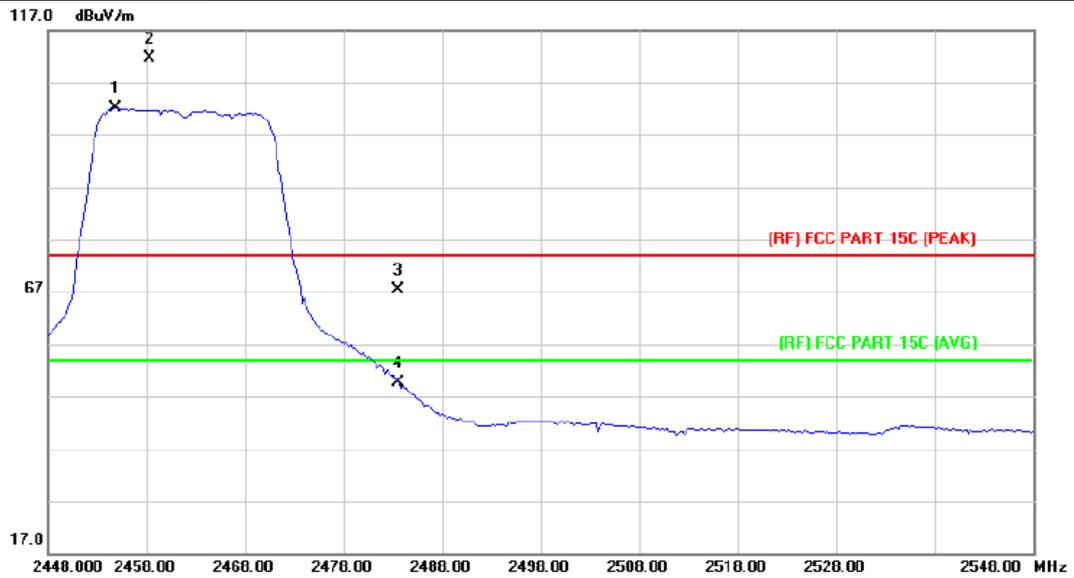


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2454.800	98.86	3.24	102.10	Fundamental Frequency		AVG
2	X	2458.300	108.27	3.25	111.52	Fundamental Frequency		peak
3		2483.500	63.98	3.40	67.38	74.00	-6.62	peak
4		2483.500	46.19	3.40	49.59	54.00	-4.41	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT20) Mode 2462MHz ANT. A.+ANT. B(Module#2)		
Remark:	N/A		

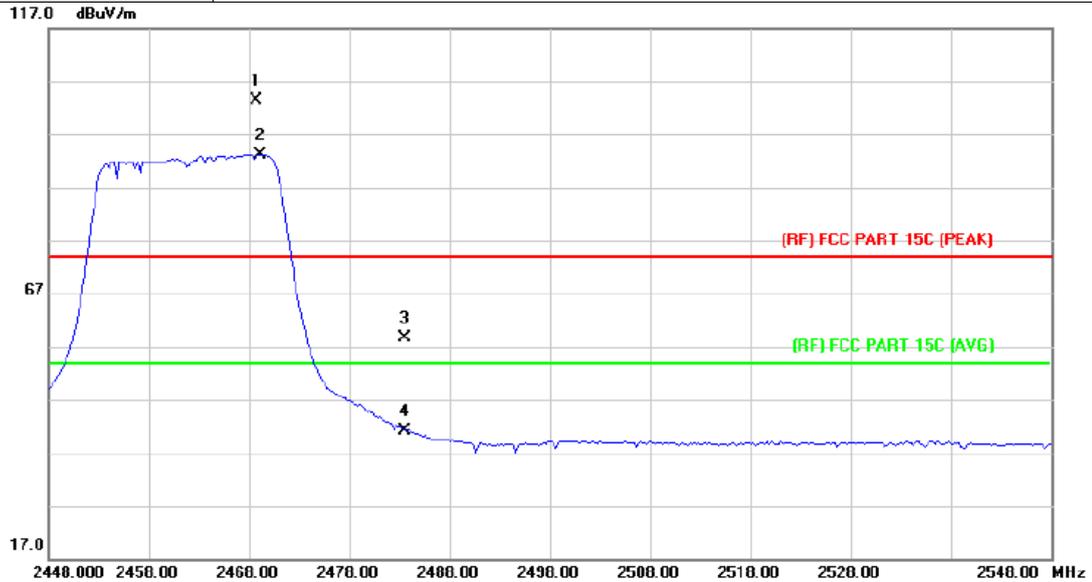


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2468.700	100.17	3.32	103.49	Fundamental Frequency		peak
2	*	2469.200	89.91	3.32	93.23	Fundamental Frequency		AVG
3		2483.500	55.33	3.40	58.73	74.00	-15.27	peak
4		2483.500	37.76	3.40	41.16	54.00	-12.84	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m) - Limit PK/AVG (dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2422MHz ANT. A.+ANT. B(Module#2)		
Remark:	N/A		

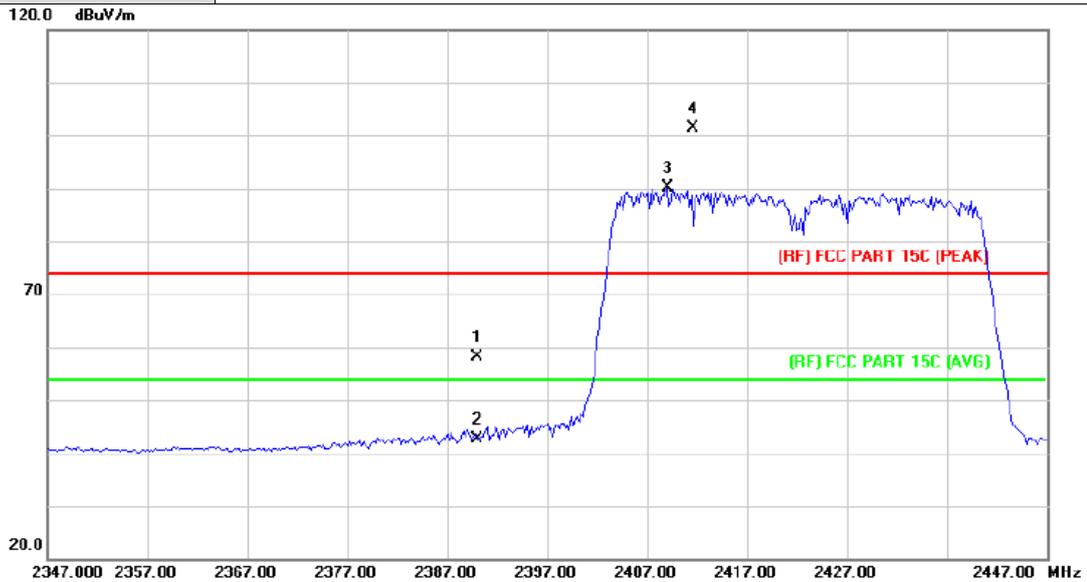


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	55.22	2.91	58.13	74.00	-15.87	peak
2		2390.000	39.82	2.91	42.73	54.00	-11.27	AVG
3	*	2409.000	87.08	2.98	90.06	Fundamental Frequency		AVG
4	X	2411.600	98.32	3.00	101.32	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2422MHz ANT. A.+ANT. B(Module#2)		
Remark:	N/A		

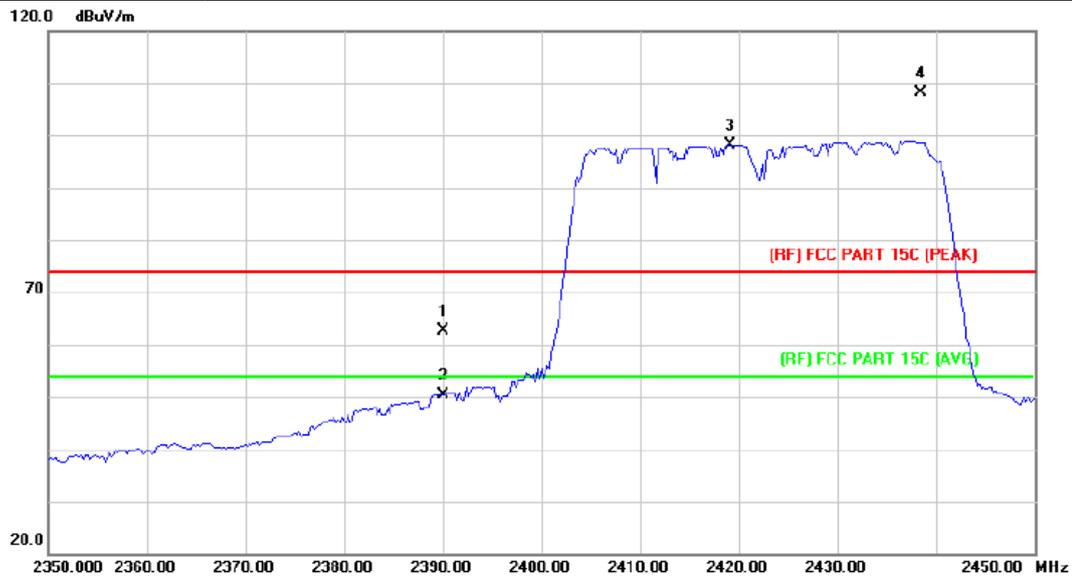


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	59.81	2.91	62.72	74.00	-11.28	peak
2		2390.000	47.56	2.91	50.47	54.00	-3.53	AVG
3	*	2419.200	95.19	3.04	98.23	Fundamental Frequency		AVG
4	X	2438.500	104.99	3.15	108.14	Fundamental Frequency		peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m)= Corr. (dB/m)+ Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m)-Limit PK/AVG(dBuV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Horizontal		
Test Mode:	TX N(HT40) Mode 2452MHz ANT. A.+ANT. B(Module#2)		
Remark:	N/A		

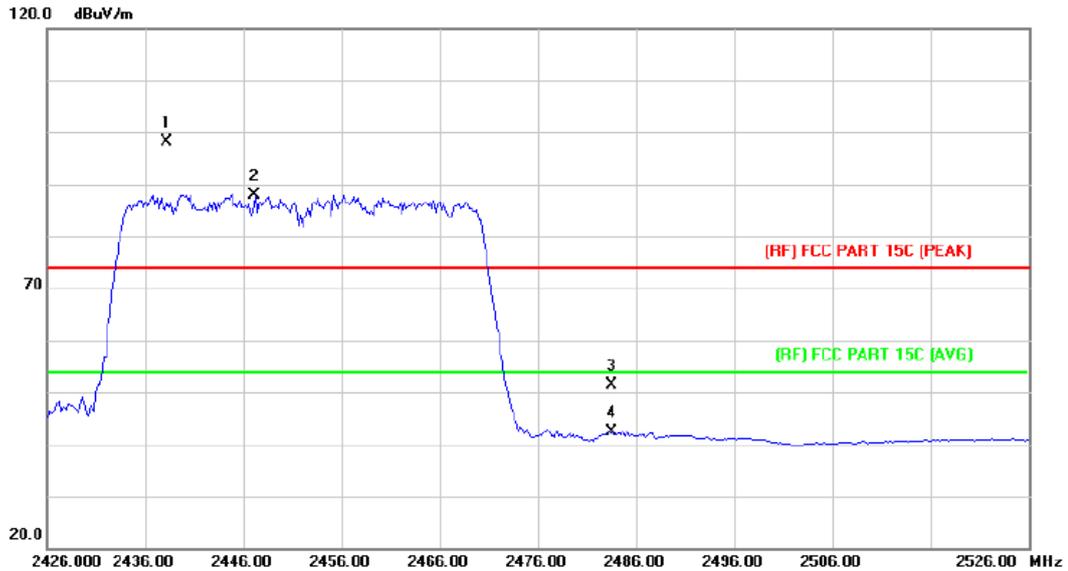


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2438.200	95.09	3.15	98.24	Fundamental Frequency		peak
2	*	2447.200	84.77	3.20	87.97	Fundamental Frequency		AVG
3		2483.500	47.90	3.40	51.30	74.00	-22.70	peak
4		2483.500	38.98	3.40	42.38	54.00	-11.62	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

Temperature:	23.4°C	Relative Humidity:	35%
Test Voltage:	AC 120V/60HZ		
Ant. Pol.	Vertical		
Test Mode:	TX N(HT40) Mode 2452MHz ANT. A.+ANT. B(Module#2)		
Remark:	N/A		

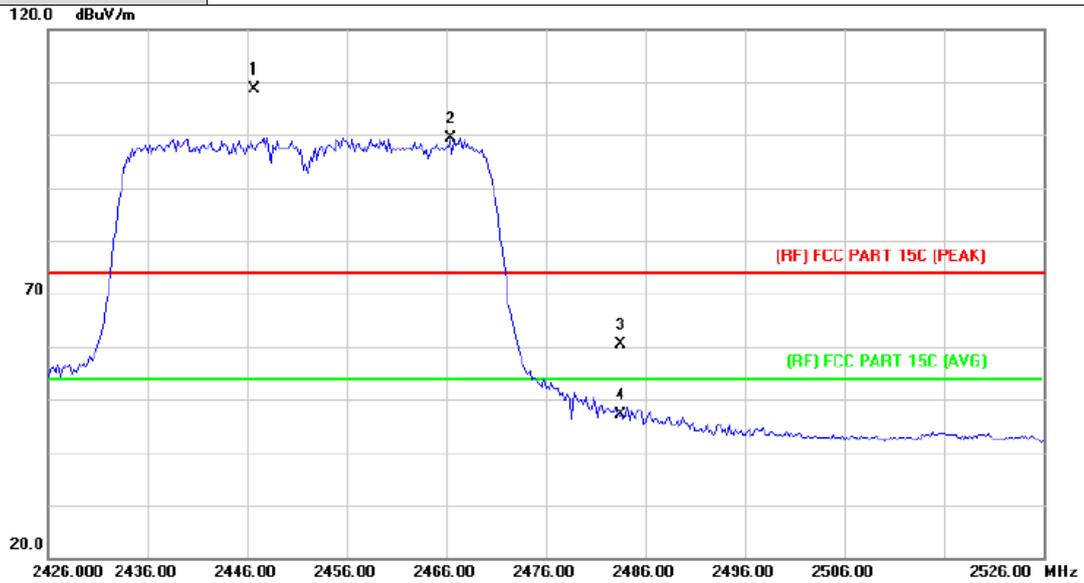



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2446.700	105.48	3.19	108.67	Fundamental Frequency		peak
2	*	2466.400	95.97	3.30	99.27	Fundamental Frequency		AVG
3		2483.500	57.06	3.40	60.46	74.00	-13.54	peak
4		2483.500	43.61	3.40	47.01	54.00	-6.99	AVG

Remark:



1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBμV/m)= Corr. (dB/m)+ Read Level (dBμV)
3. Margin (dB) = Peak/AVG (dBμV/m)-Limit PK/AVG(dBμV/m)

(2) Conducted Test



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX B Mode 2412MHz / TX B Mode 2462MHz ANT. A(Module#1)		
Remark:	The EUT is programmed in continuously transmitting mode		

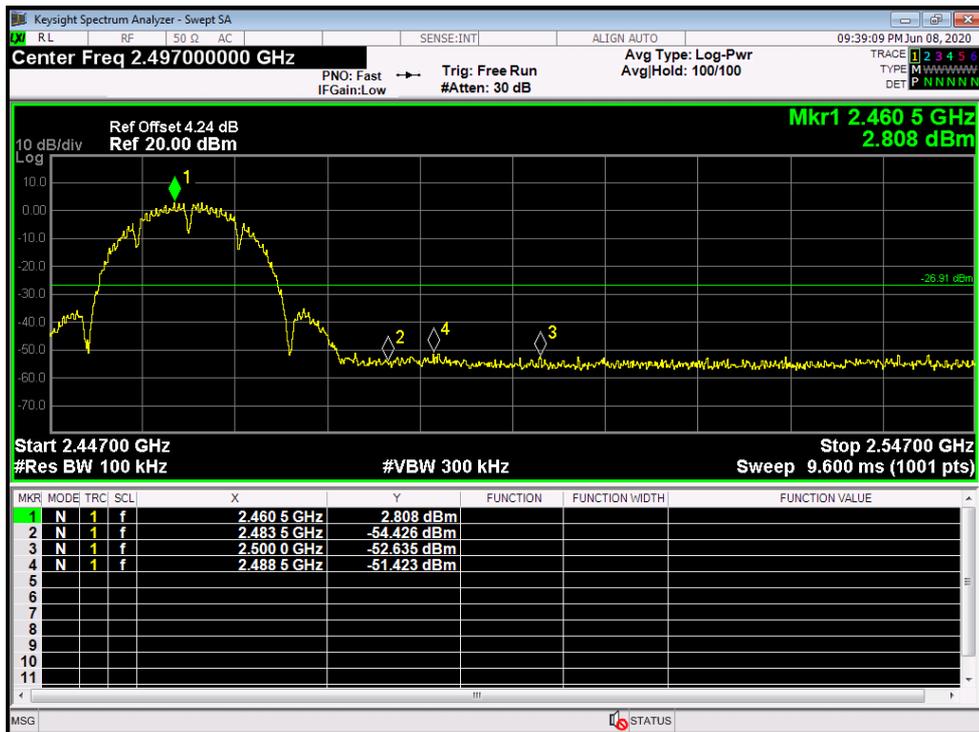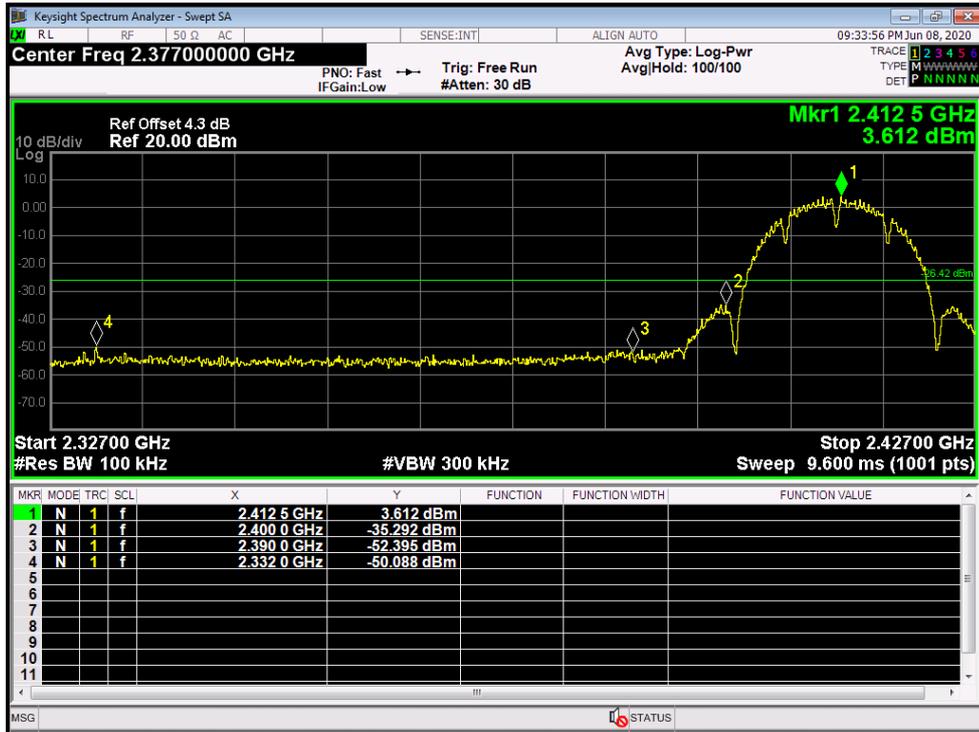



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX B Mode 2412MHz / TX B Mode 2462MHz ANT. B(Module#1)		
Remark:	The EUT is programmed in continuously transmitting mode		

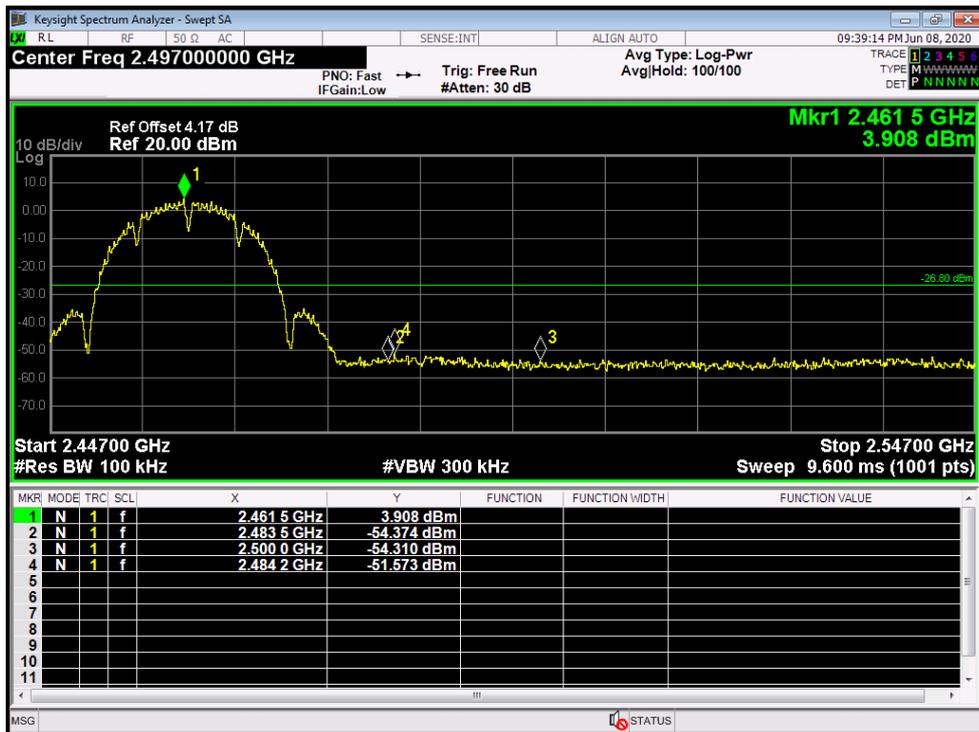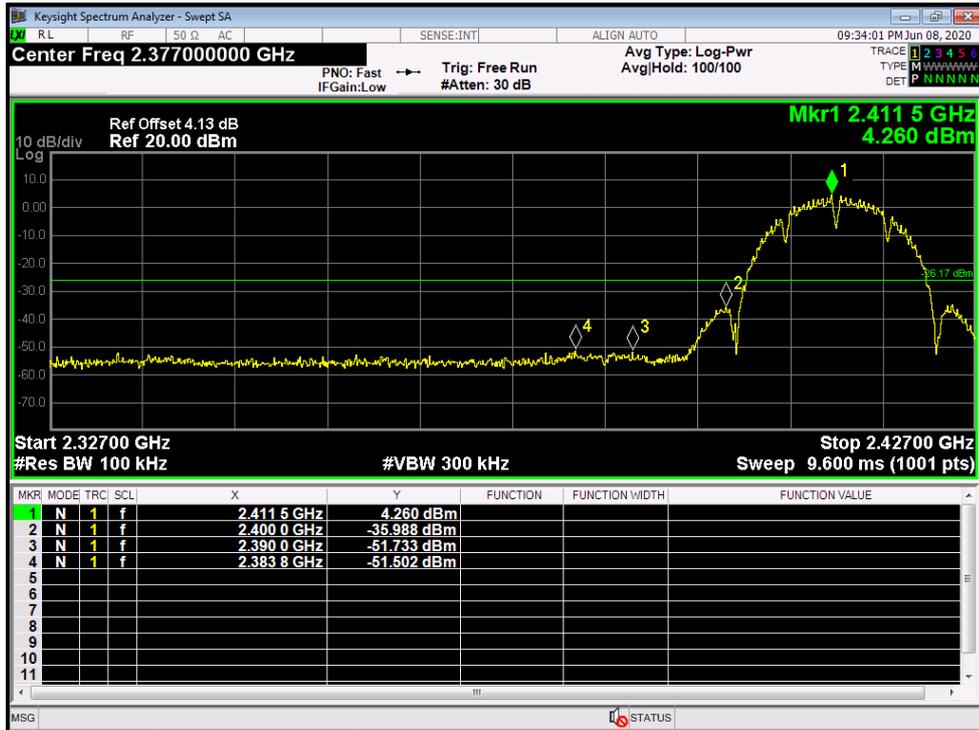



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX G Mode 2412MHz / TX G Mode 2462MHz ANT. A(Module#1)		
Remark:	The EUT is programmed in continuously transmitting mode		

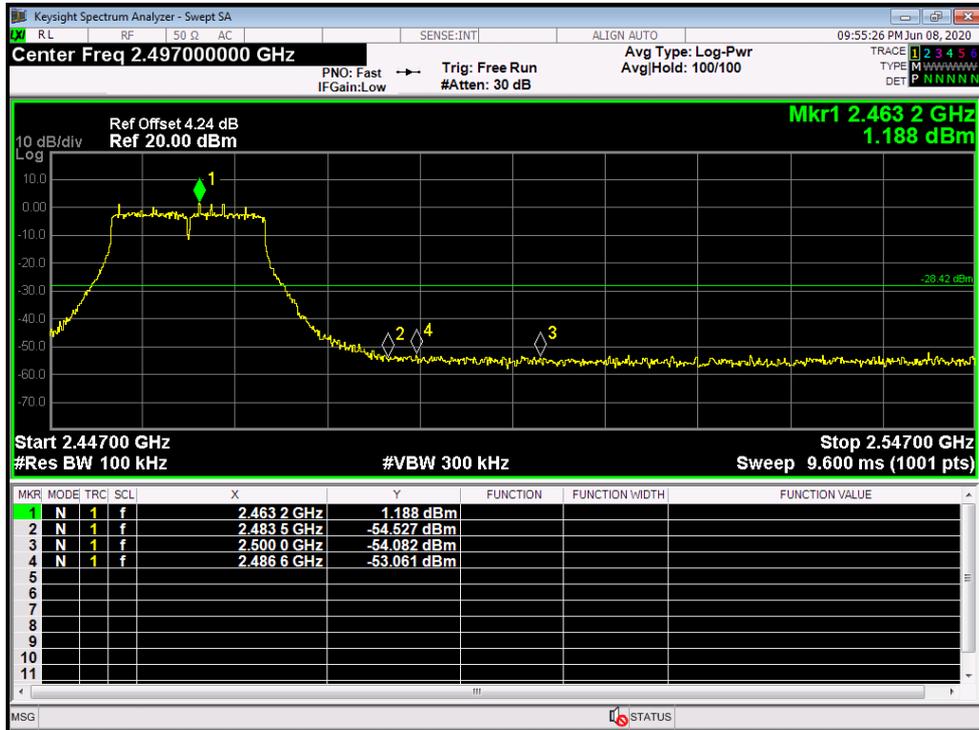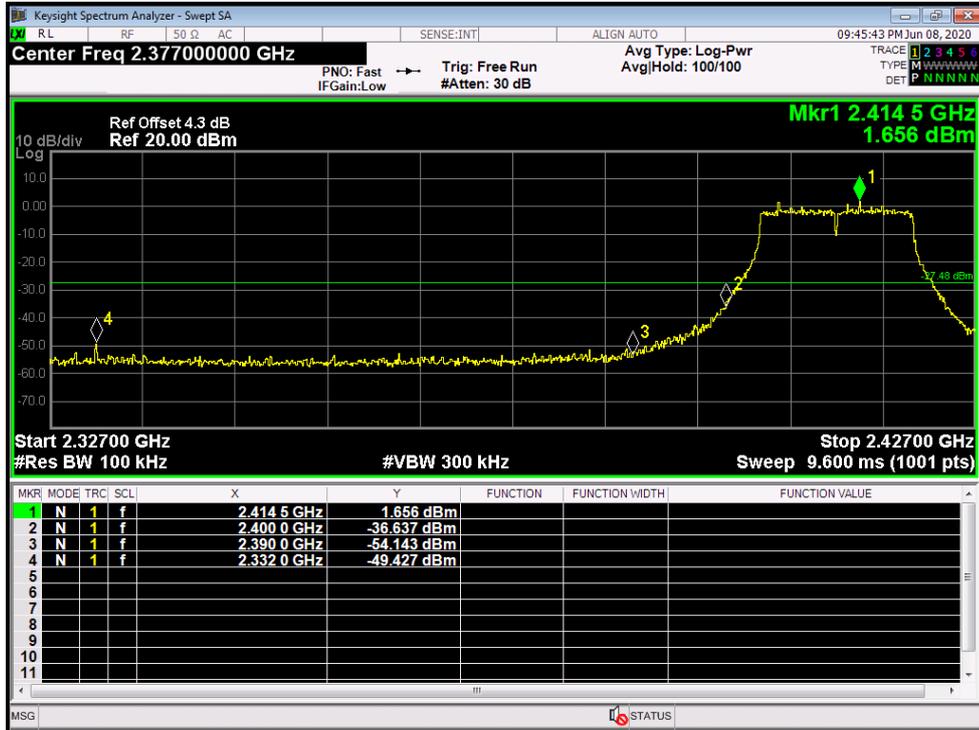



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX G Mode 2412MHz / TX G Mode 2462MHz ANT. B(Module#1)		
Remark:	The EUT is programmed in continuously transmitting mode		

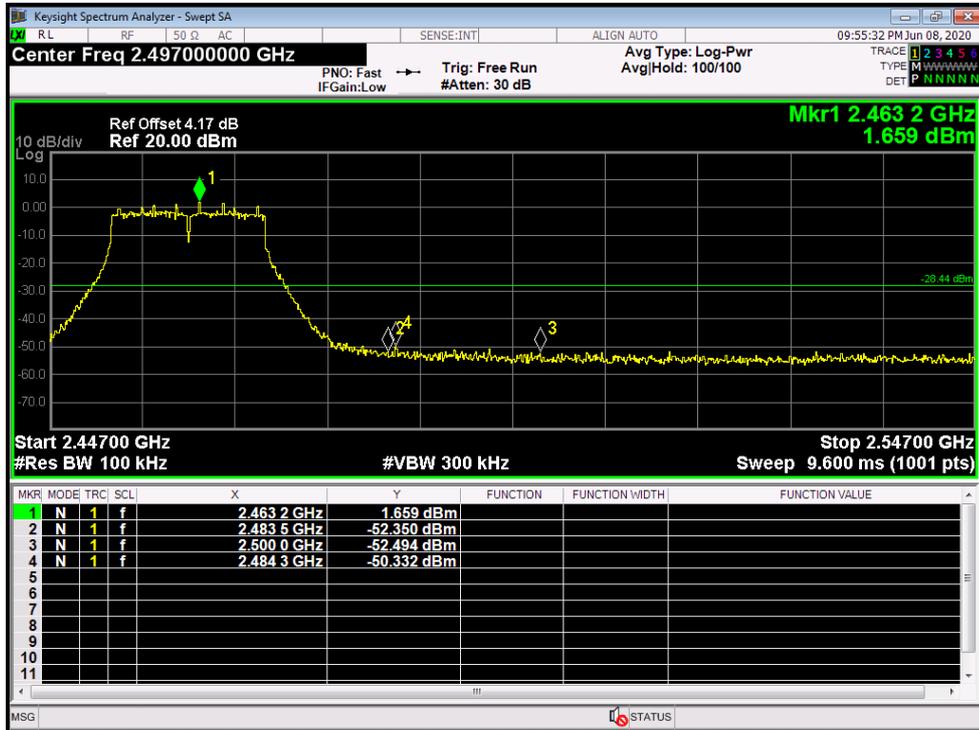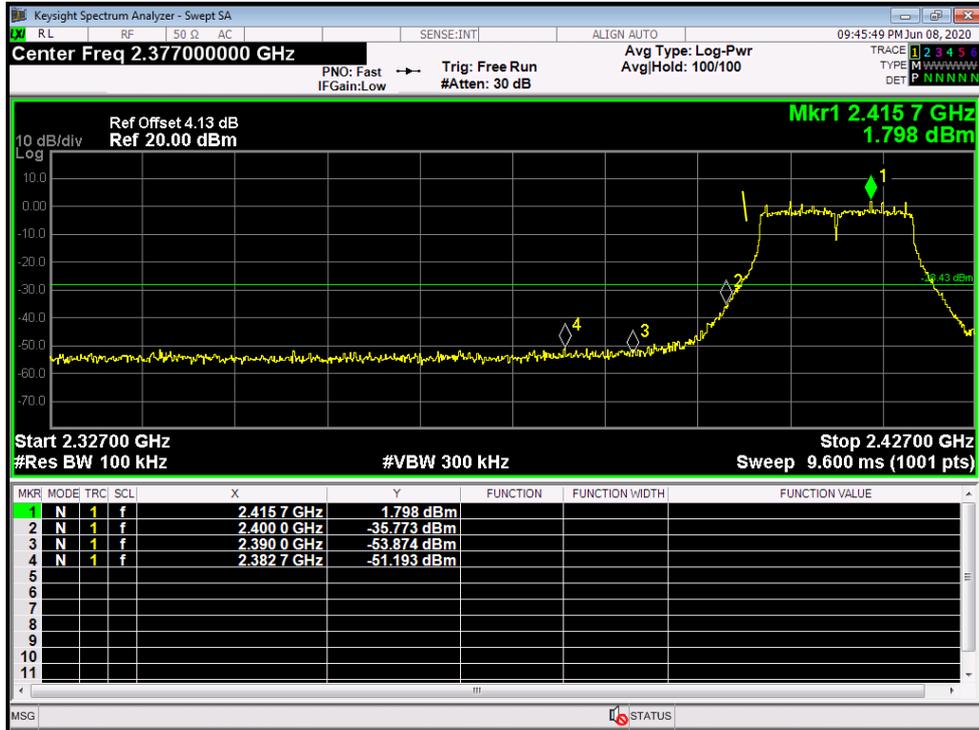



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz ANT.A(Module#1)		
Remark:	The EUT is programmed in continuously transmitting mode		

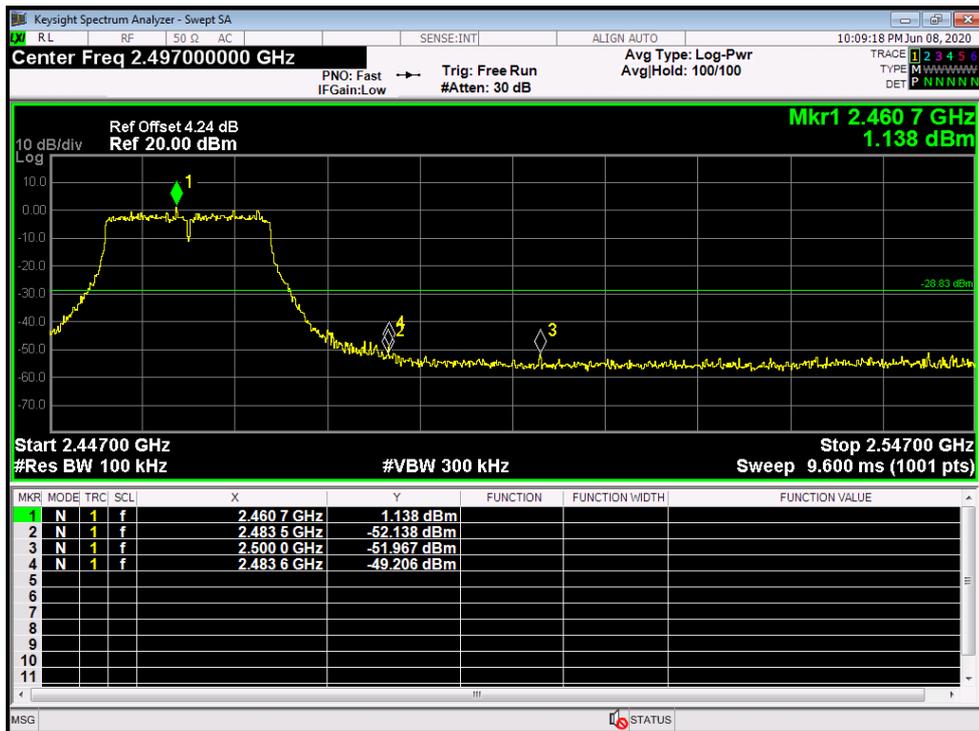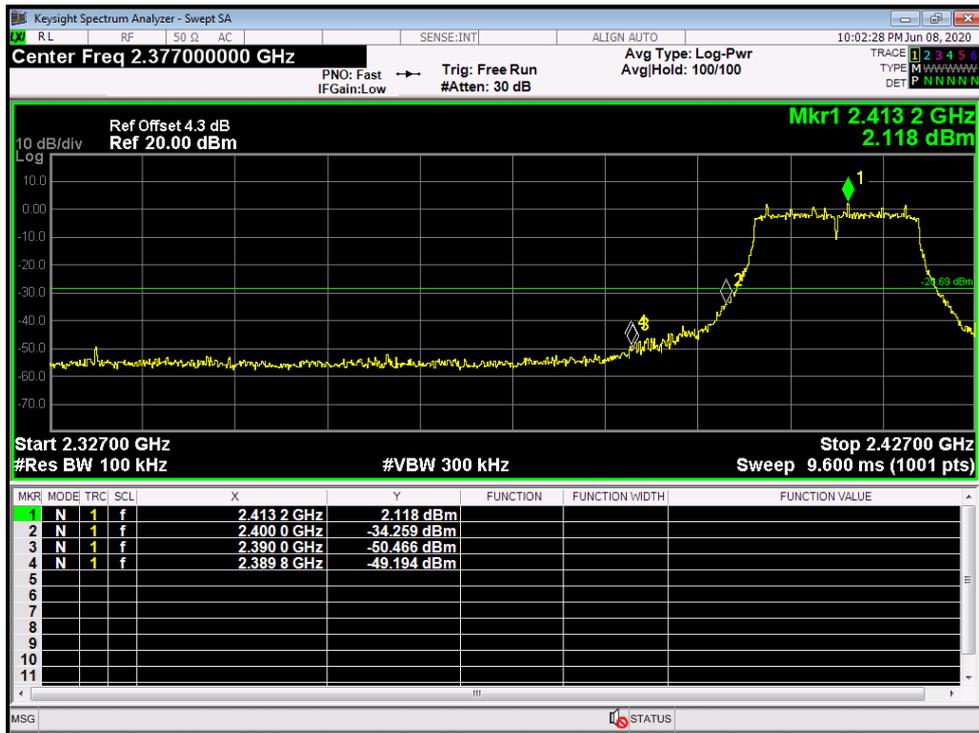



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz ANT. B (Module#1)		
Remark:	The EUT is programmed in continuously transmitting mode		

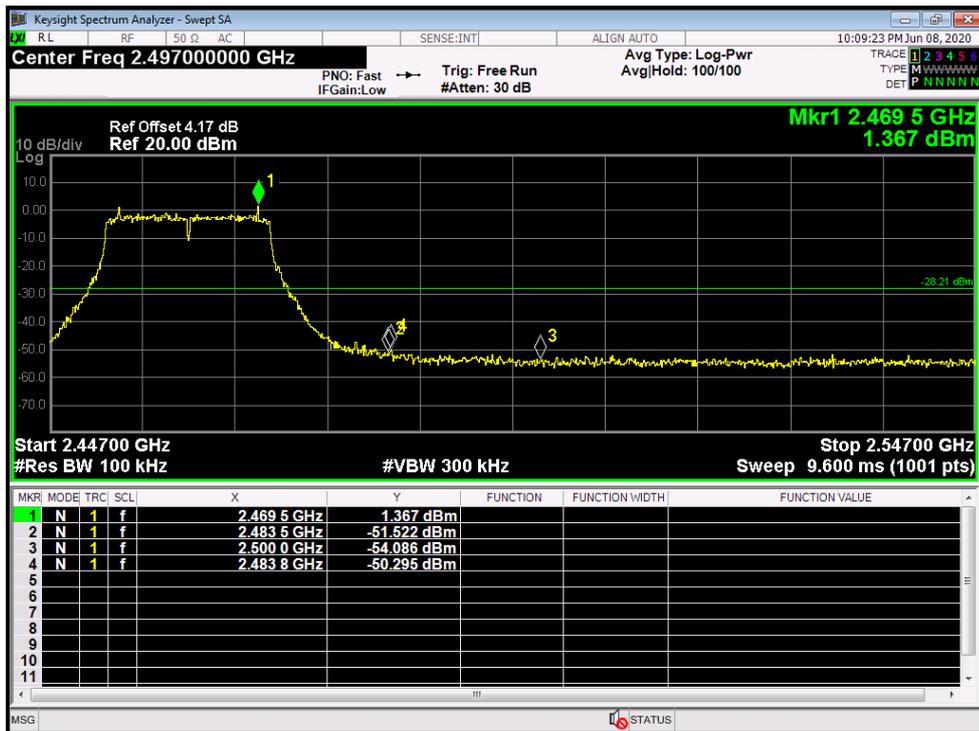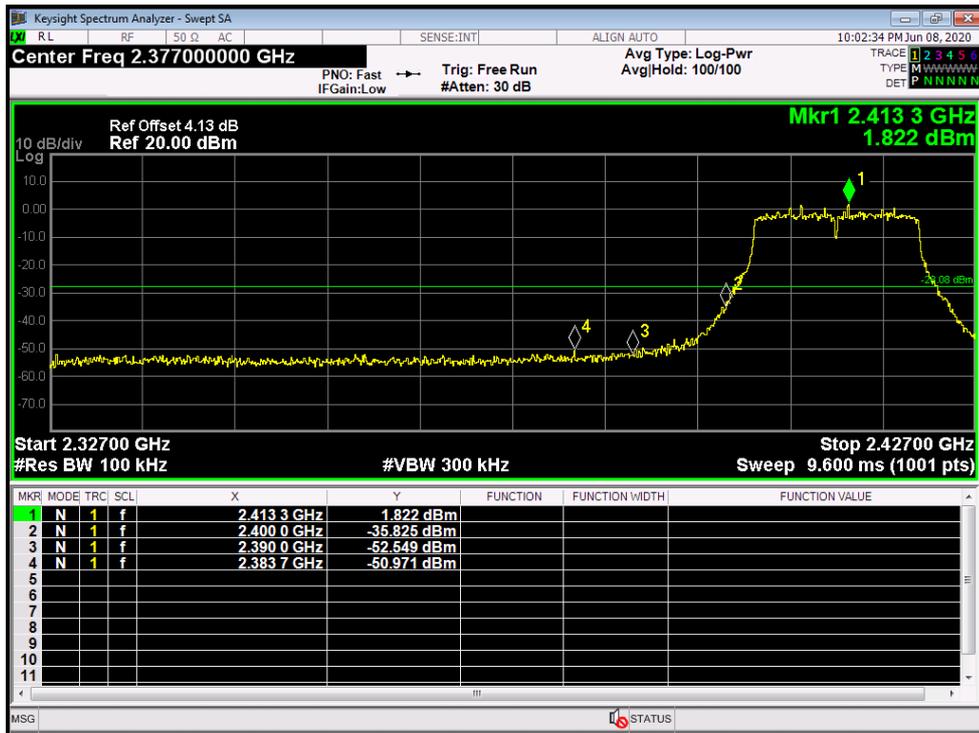



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX N(HT40) Mode 2422MHz / TX N(HT40) Mode 2452MHz ANT. A (Module#1)		
Remark:	The EUT is programmed in continuously transmitting mode		

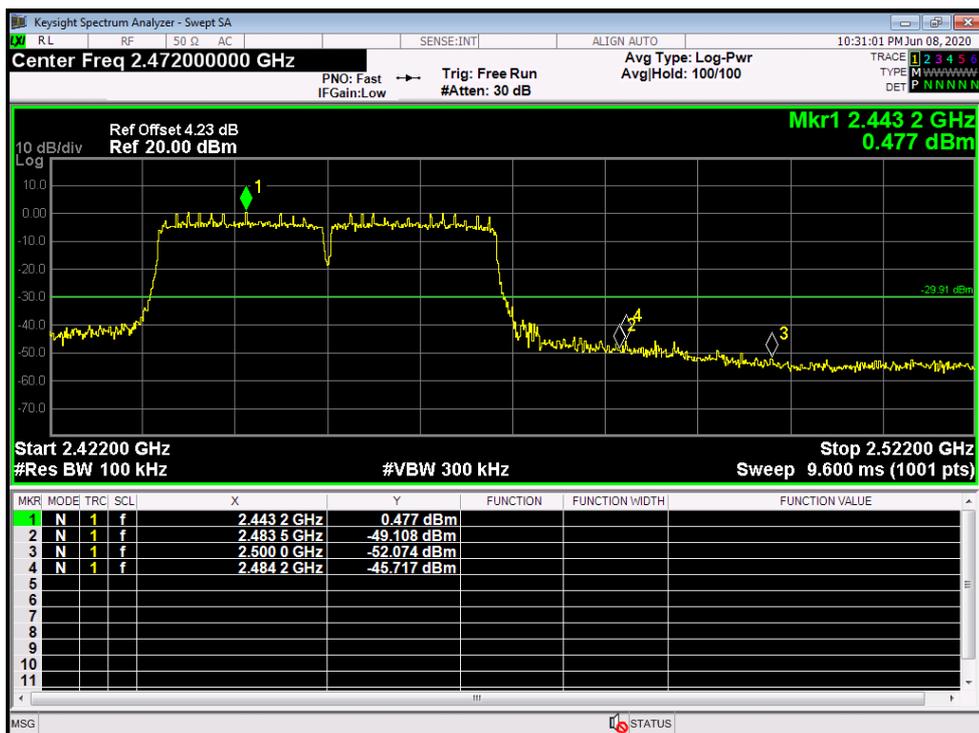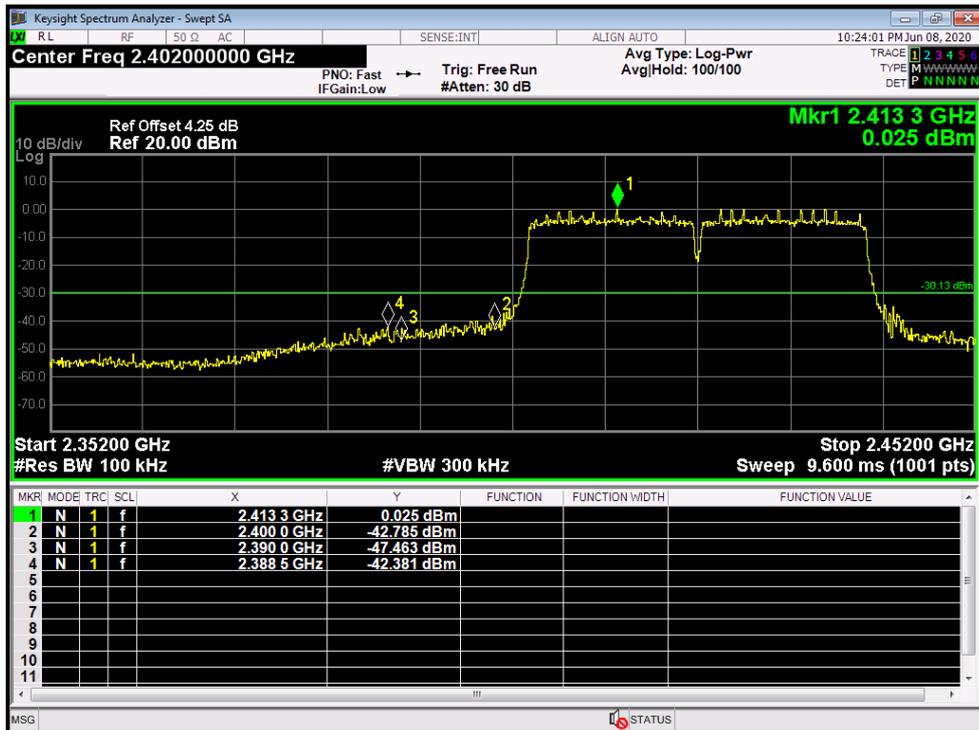


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX N(HT40) Mode 2422MHz / TX N(HT40) Mode 2452MHz ANT. B (Module#1)		
Remark:	The EUT is programmed in continuously transmitting mode		

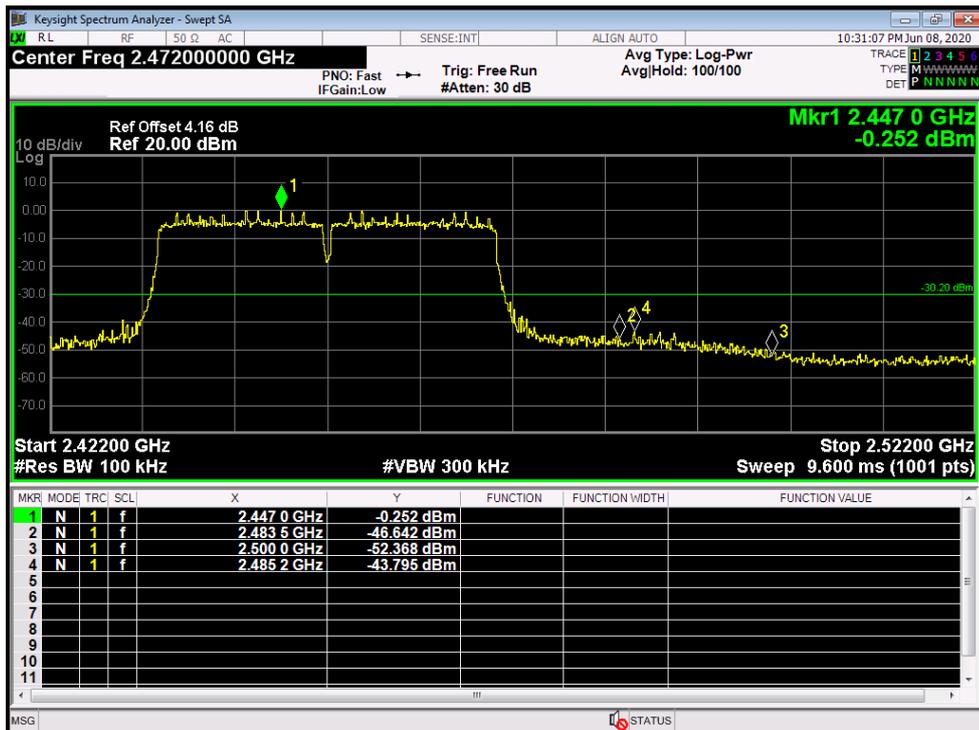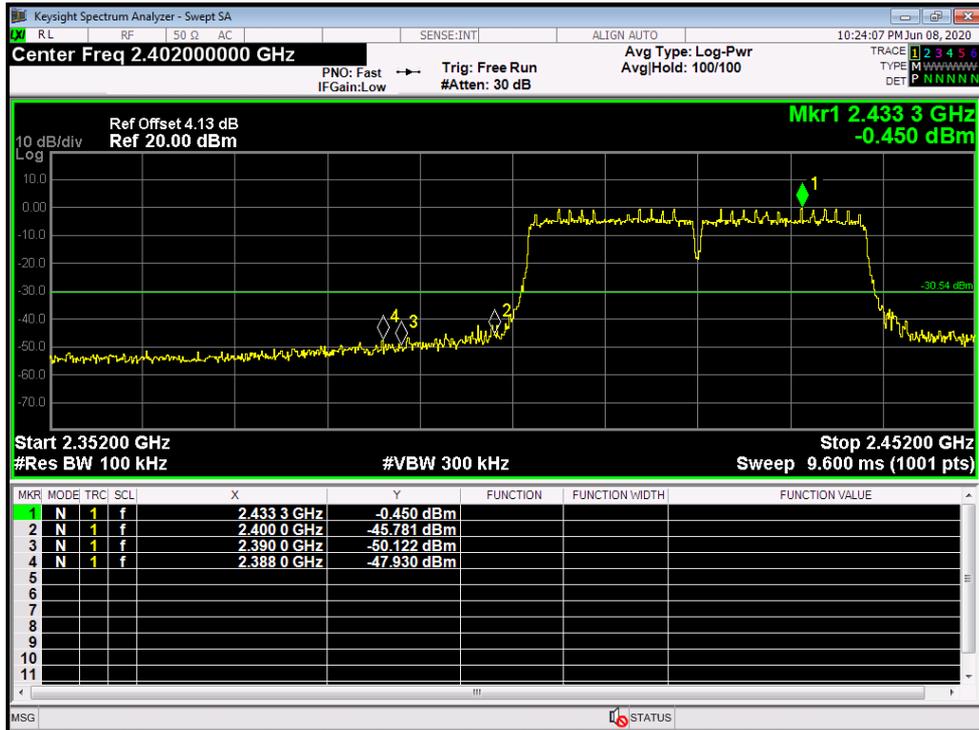



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX B Mode 2412MHz / TX B Mode 2462MHz ANT. B(Module#2)		
Remark:	The EUT is programmed in continuously transmitting mode		

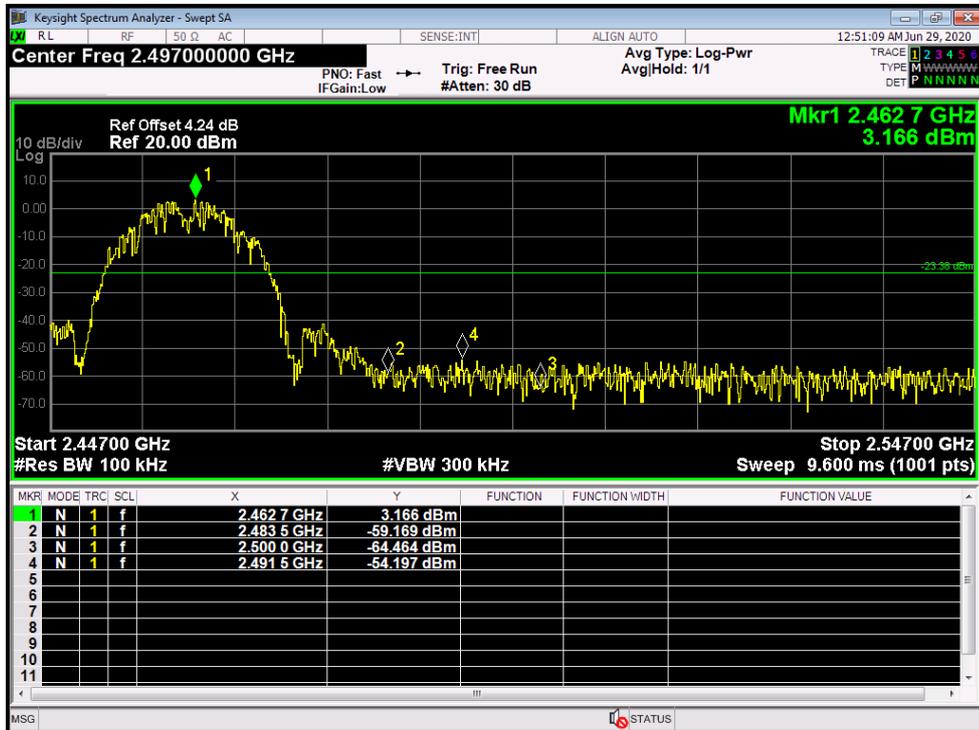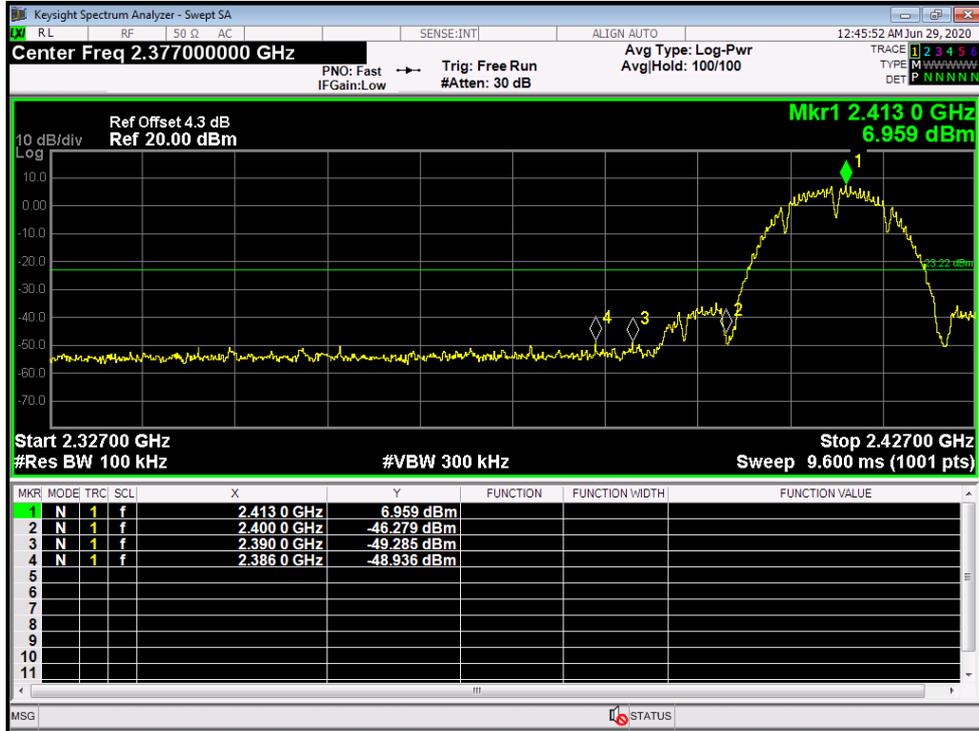



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX G Mode 2412MHz / TX G Mode 2462MHz ANT. A(Module#2)		
Remark:	The EUT is programmed in continuously transmitting mode		

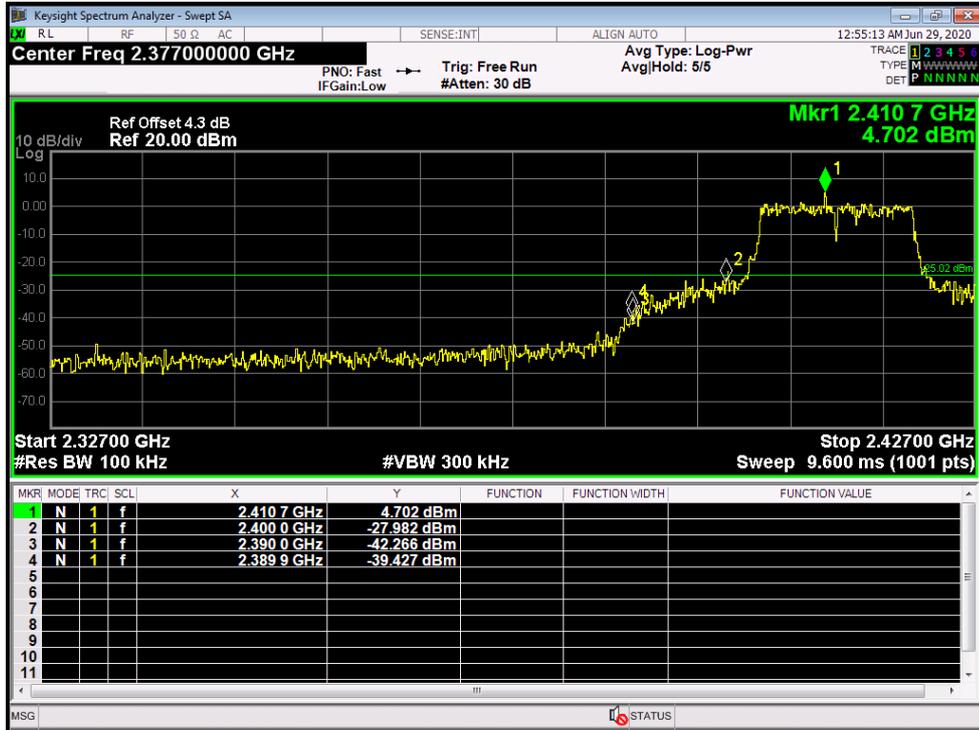


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX N(HT20) Mode 2412MHz / TX N(HT20) Mode 2462MHz ANT. B (Module#2)		
Remark:	The EUT is programmed in continuously transmitting mode		

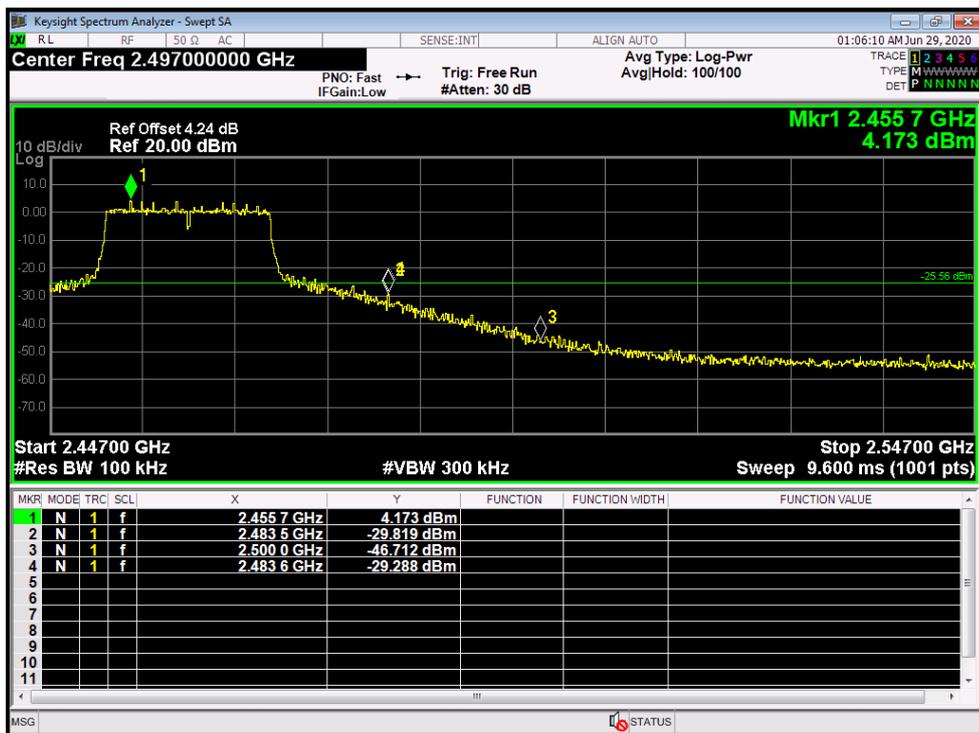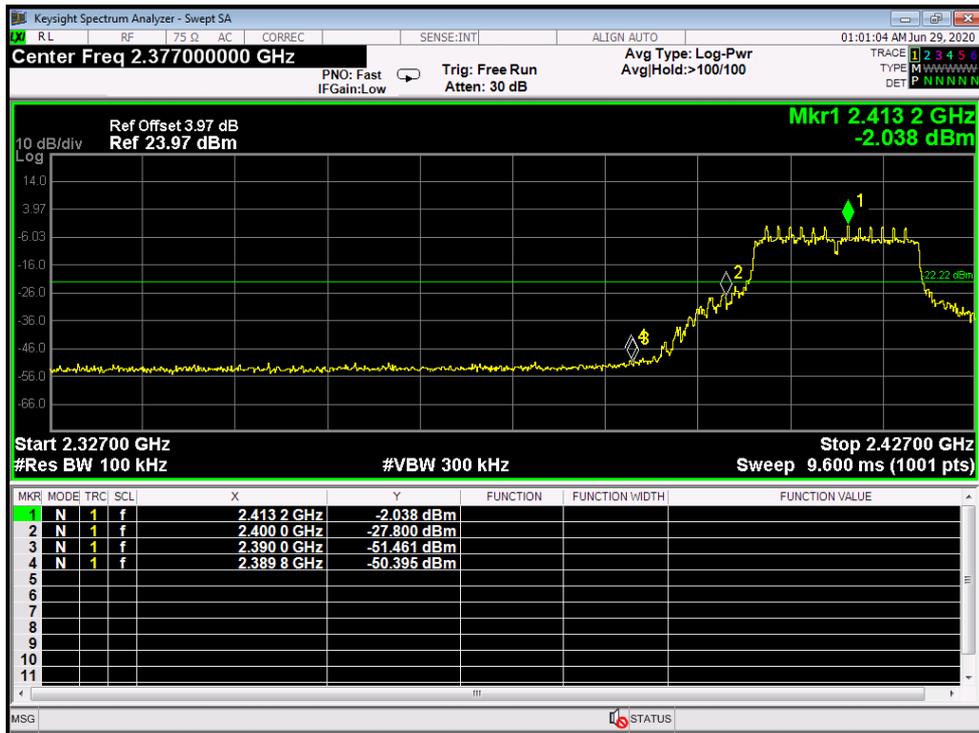


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX N(HT40) Mode 2422MHz / TX N(HT40) Mode 2452MHz ANT. B (Module#2)		
Remark:	The EUT is programmed in continuously transmitting mode		

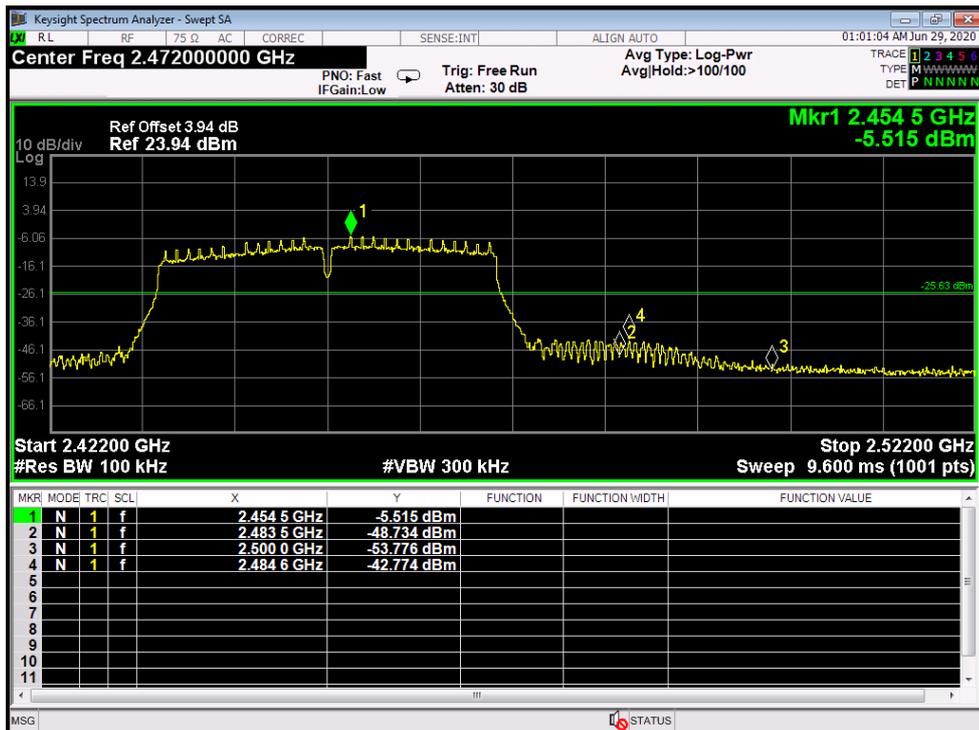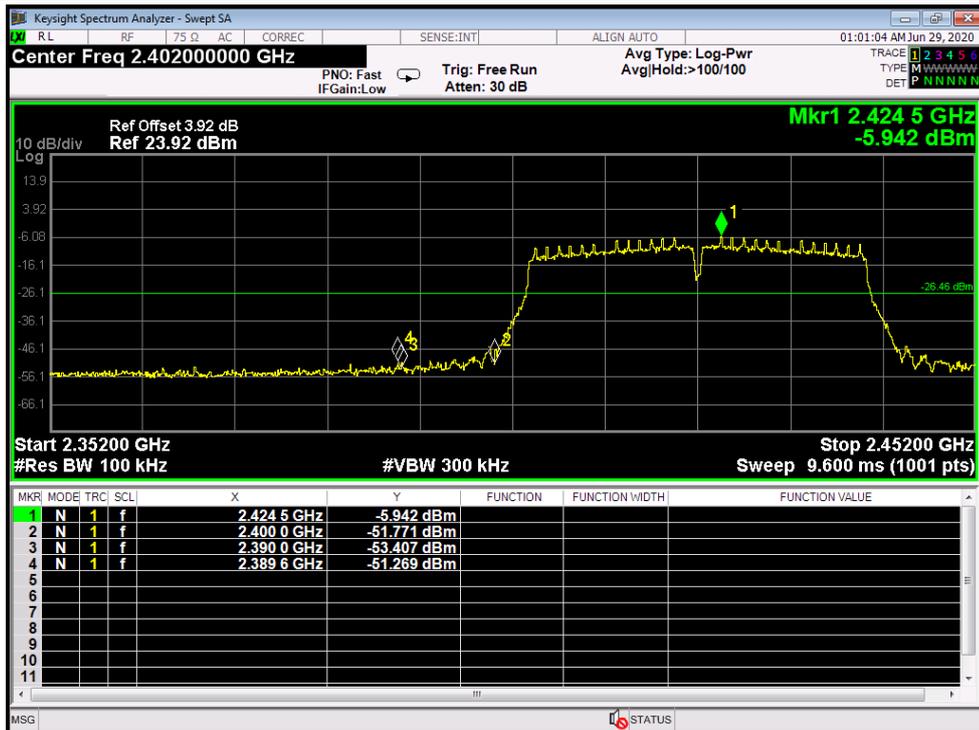


Attachment D-- Bandwidth Test Data

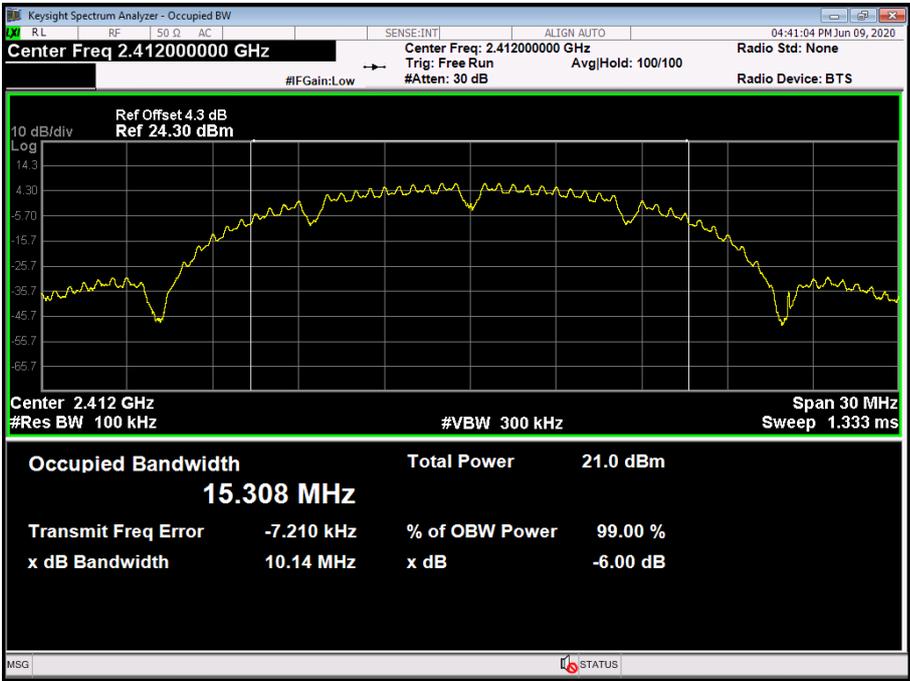Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11B Mode ANT. A(Module#1)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	10.14	15.308	>=0.5
2437	10.14	15.326	
2462	10.14	15.326	
802.11B Mode			
2412 MHz			
 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run #Atten: 30 dB</p> <p>Ref Offset 4.3 dB Ref 24.30 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 1.333 ms</p> <p>Occupied Bandwidth 15.308 MHz</p> <p>Total Power 21.0 dBm</p> <p>Transmit Freq Error -7.210 kHz % of OBW Power 99.00 %</p> <p>x dB Bandwidth 10.14 MHz x dB -6.00 dB</p>			

802.11B Mode
2437 MHz

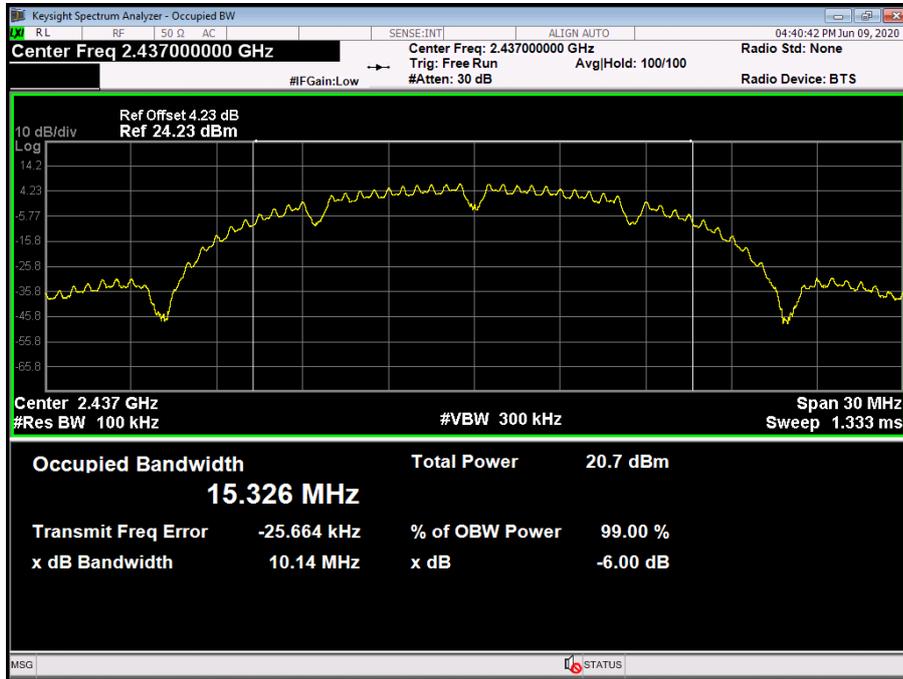


802.11B Mode
2462 MHz

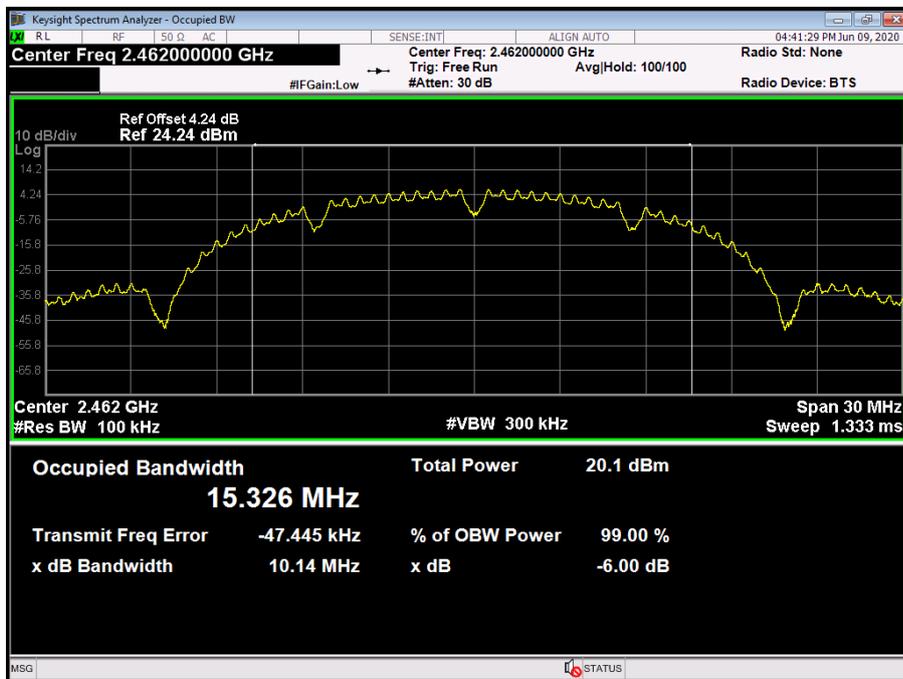


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11B Mode ANT. B(Module#1)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	10.14	15.259	>=0.5
2437	10.14	15.260	
2462	10.12	15.271	

802.11B Mode


2412 MHz

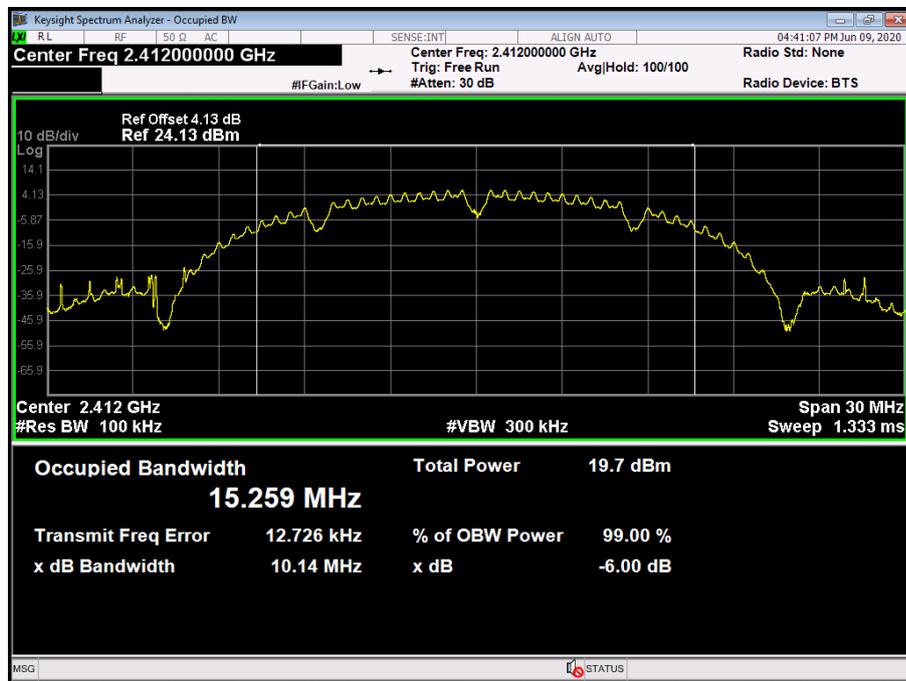

802.11B Mode
2437 MHz

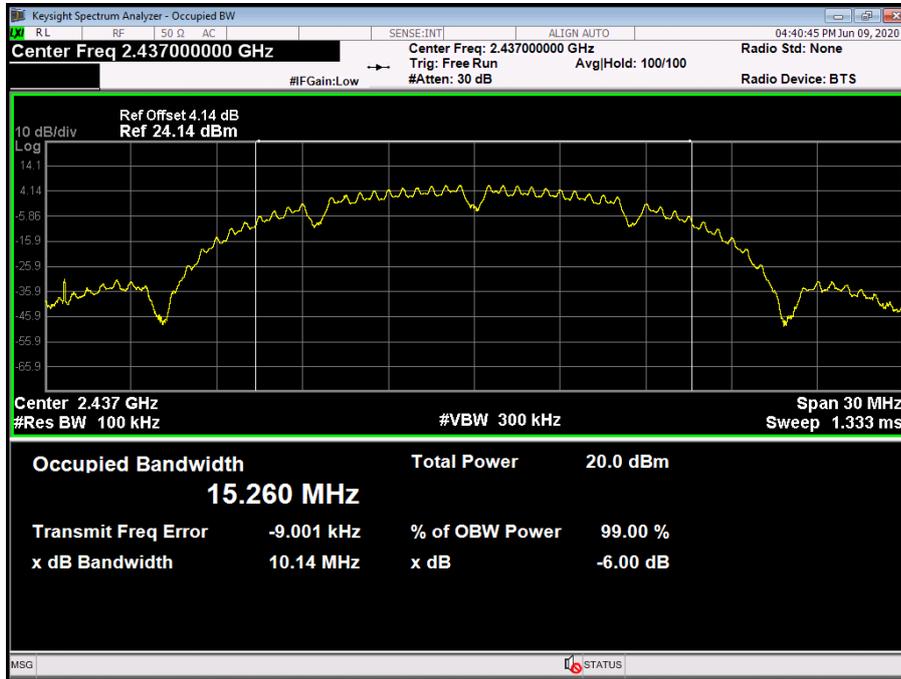


802.11B Mode
2462 MHz

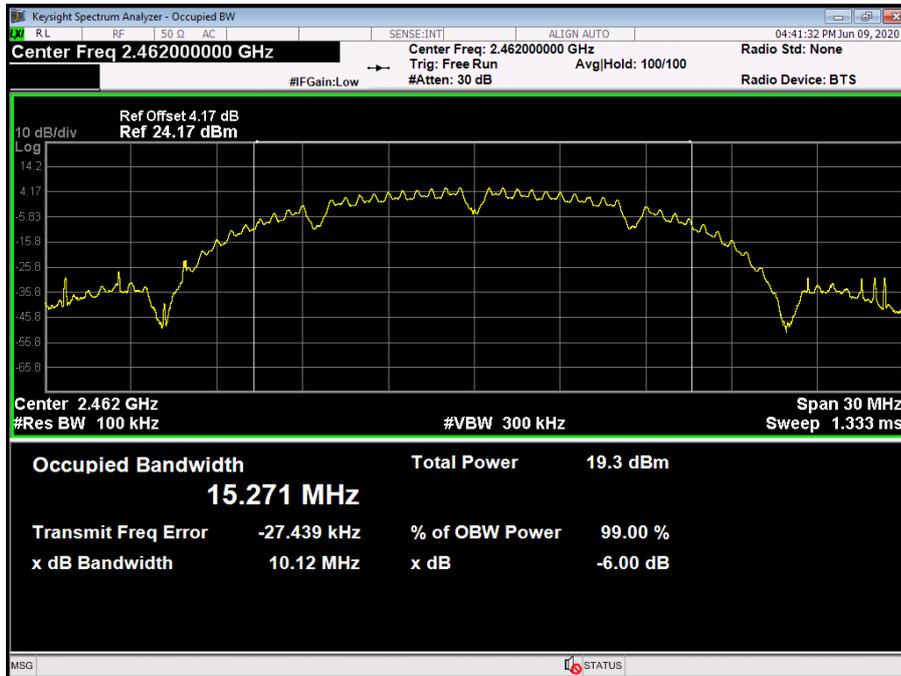


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11G Mode ANT. A(Module#1)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	16.37	16.561	>=0.5
2437	16.39	16.545	
2462	16.39	16.562	

802.11G Mode


2412 MHz

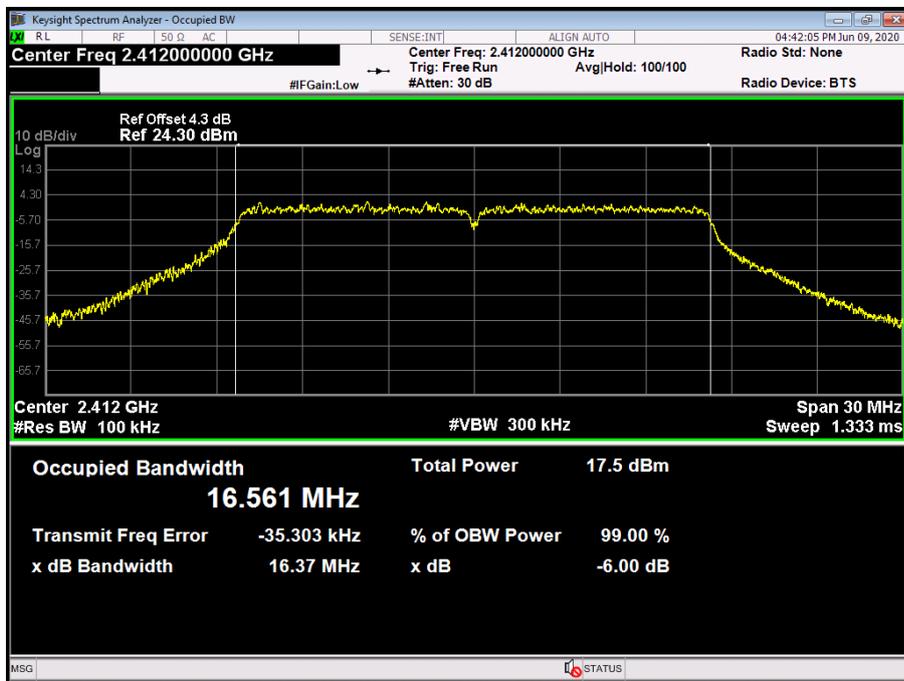

802.11G Mode
2437 MHz

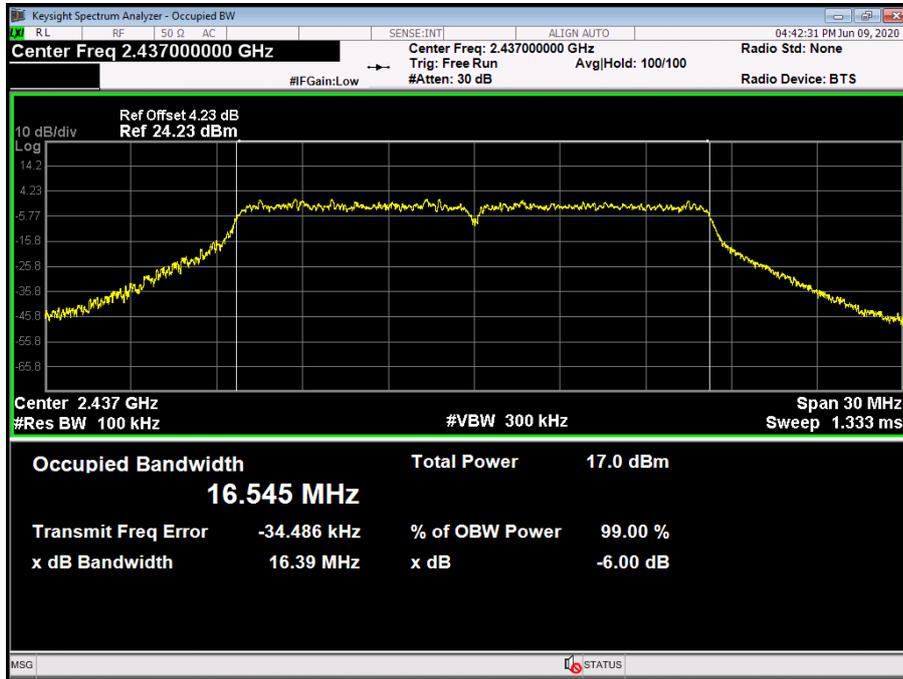


802.11G Mode
2462 MHz

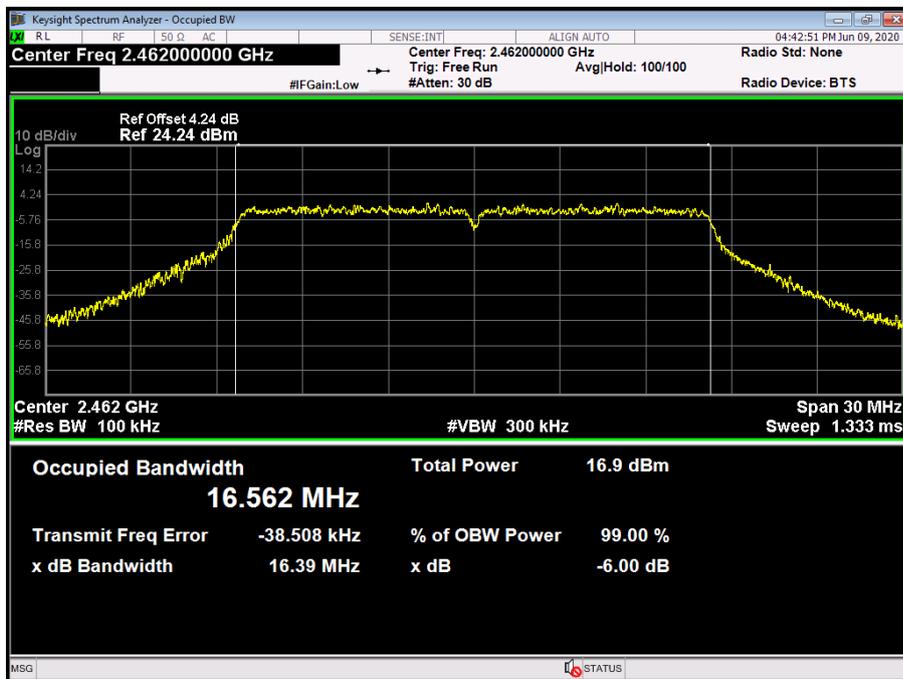


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11G Mode ANT. B(Module#1)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	16.40	16.537	>=0.5
2437	16.38	16.546	
2462	16.44	16.531	

802.11G Mode


2412 MHz

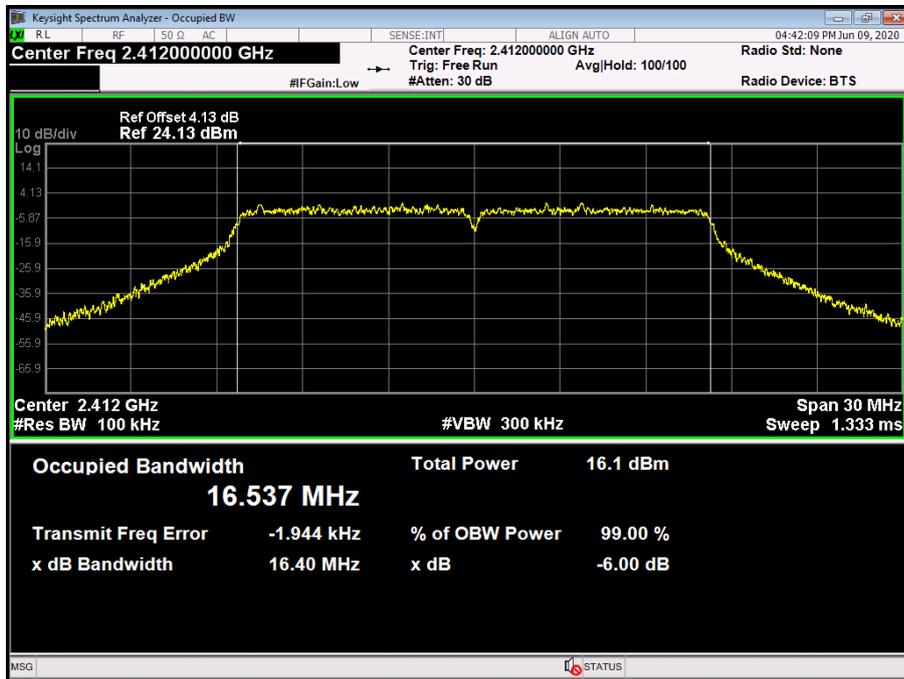


802.11G Mode
2437 MHz

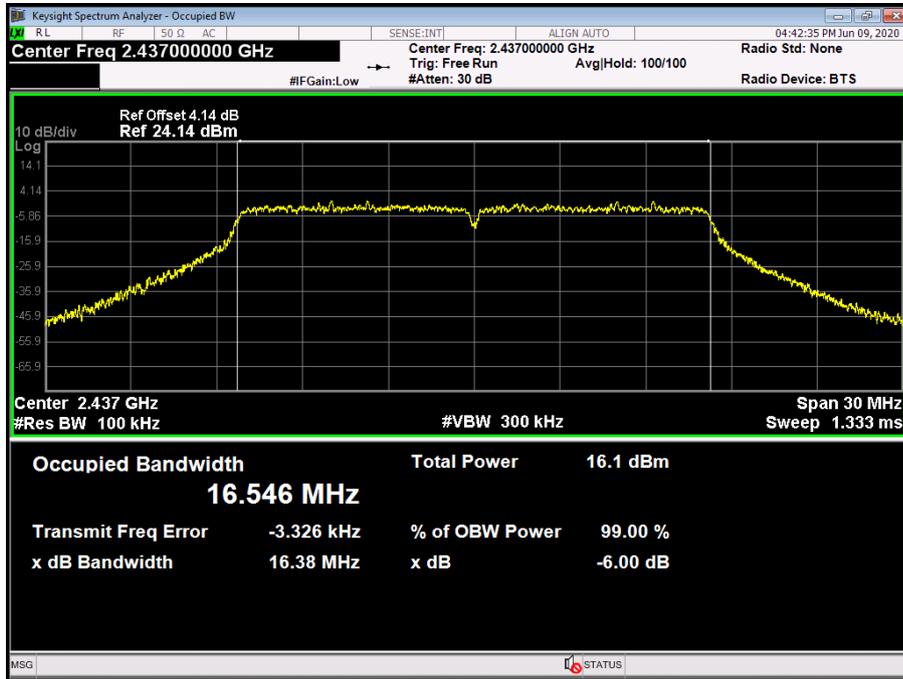


802.11G Mode
2462 MHz

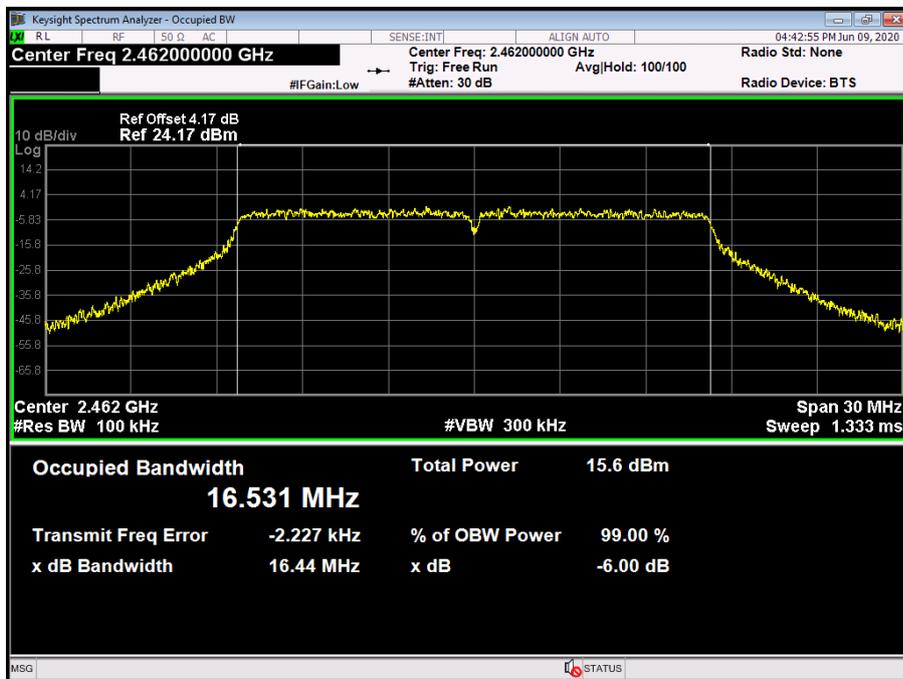


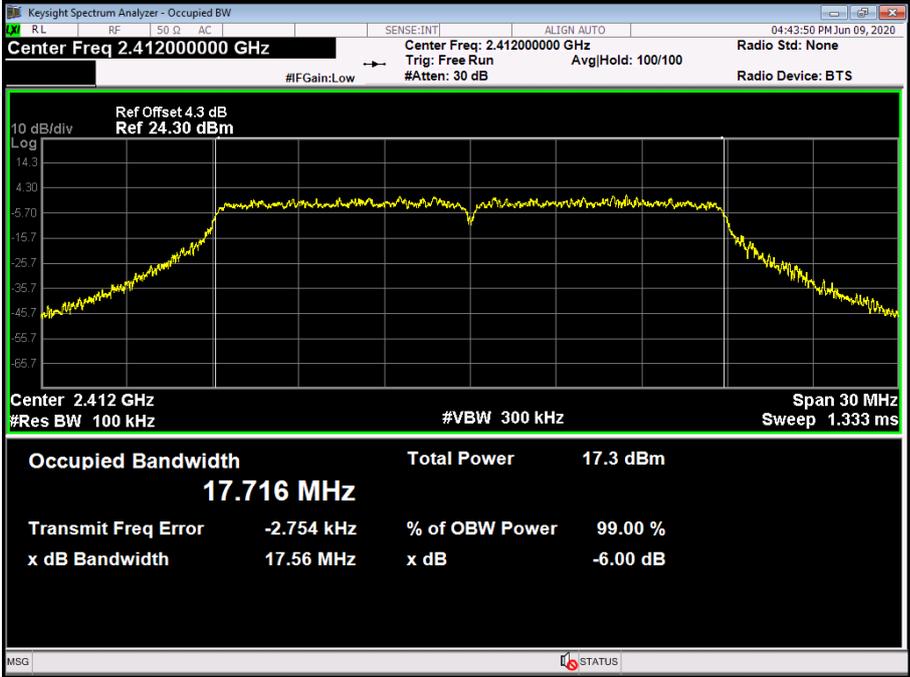Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11N(HT20) Mode ANT. A(Module#1)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	17.56	17.716	≥0.5
2437	17.59	17.690	
2462	17.44	17.687	
802.11N(HT20) Mode			
2412 MHz			
			

802.11N(HT20) Mode
2437 MHz

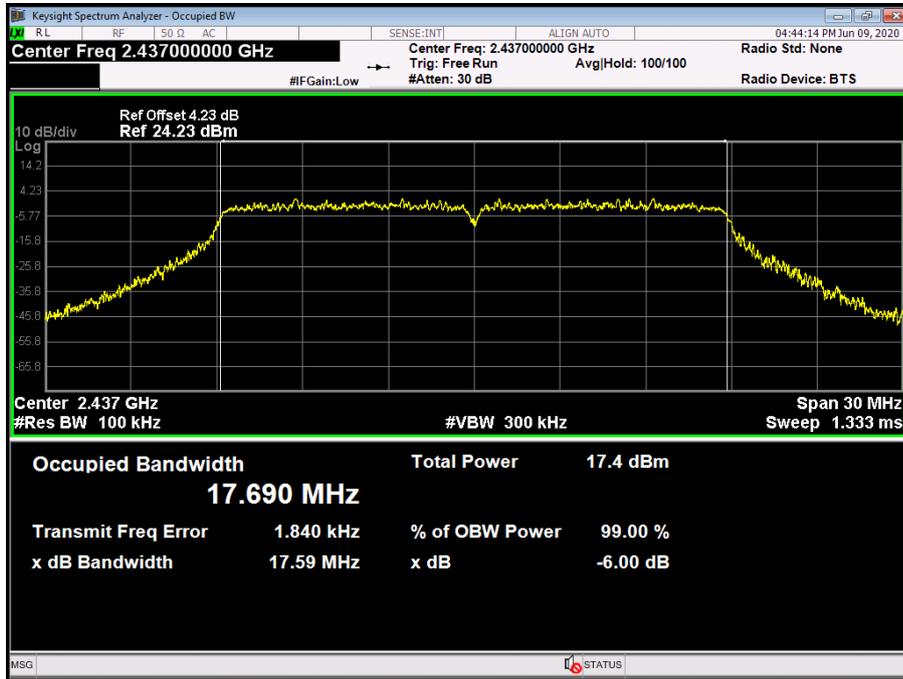


802.11N(HT20) Mode
2462 MHz

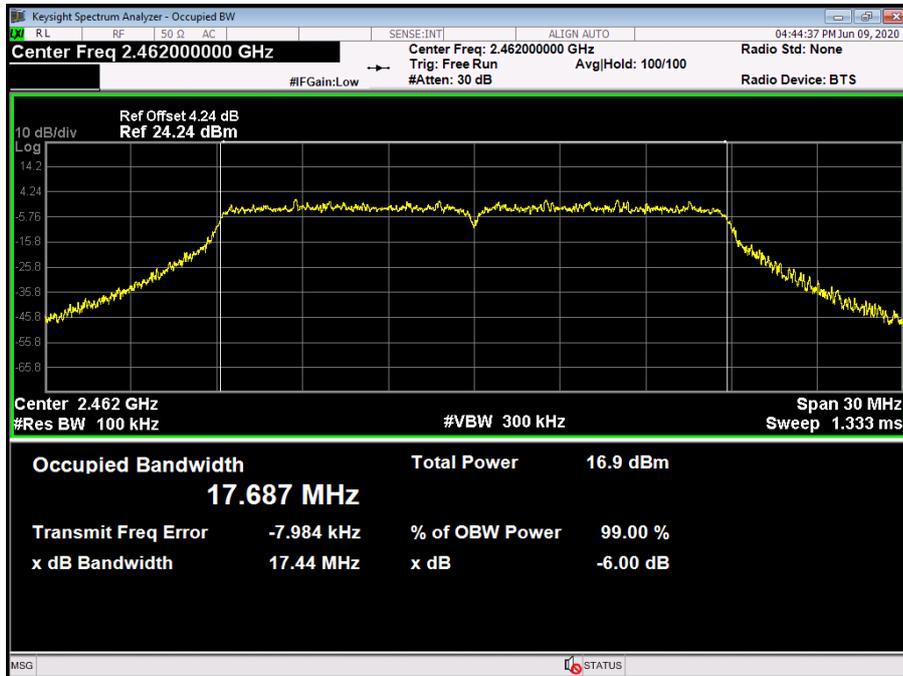



Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11N(HT20) Mode ANT. B(Module#1)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	17.59	17.684	>=0.5
2437	17.59	17.670	
2462	17.54	17.709	
802.11N(HT20) Mode			
2412 MHz			

802.11N(HT20) Mode
2437 MHz

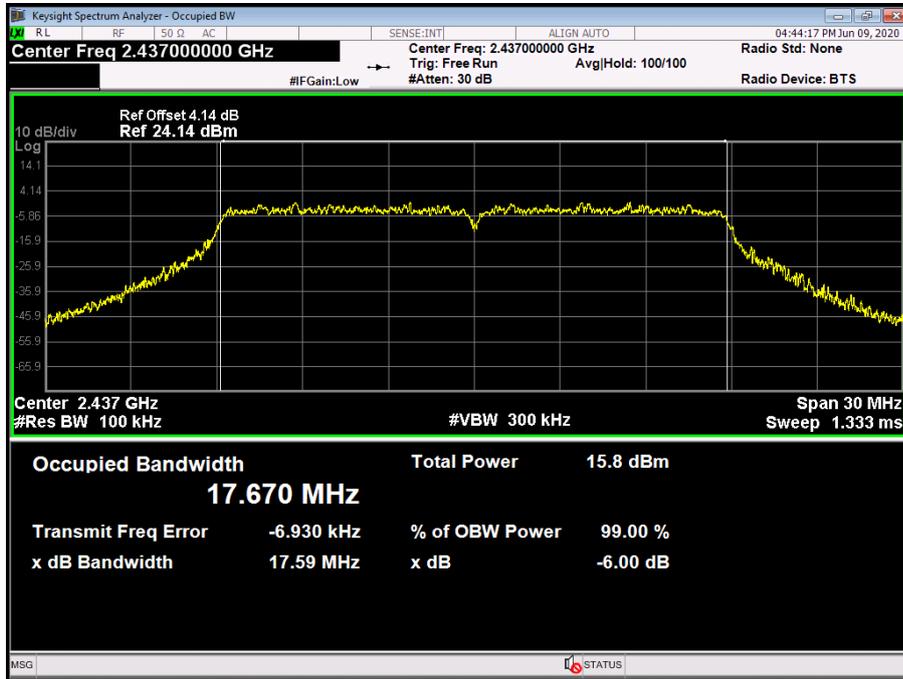


802.11N(HT20) Mode
2462 MHz

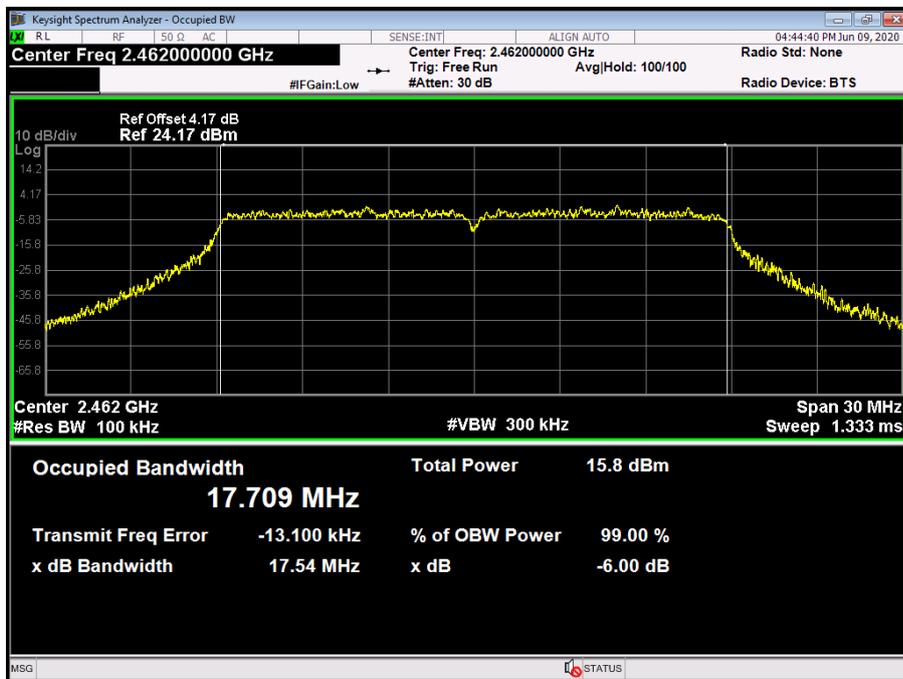


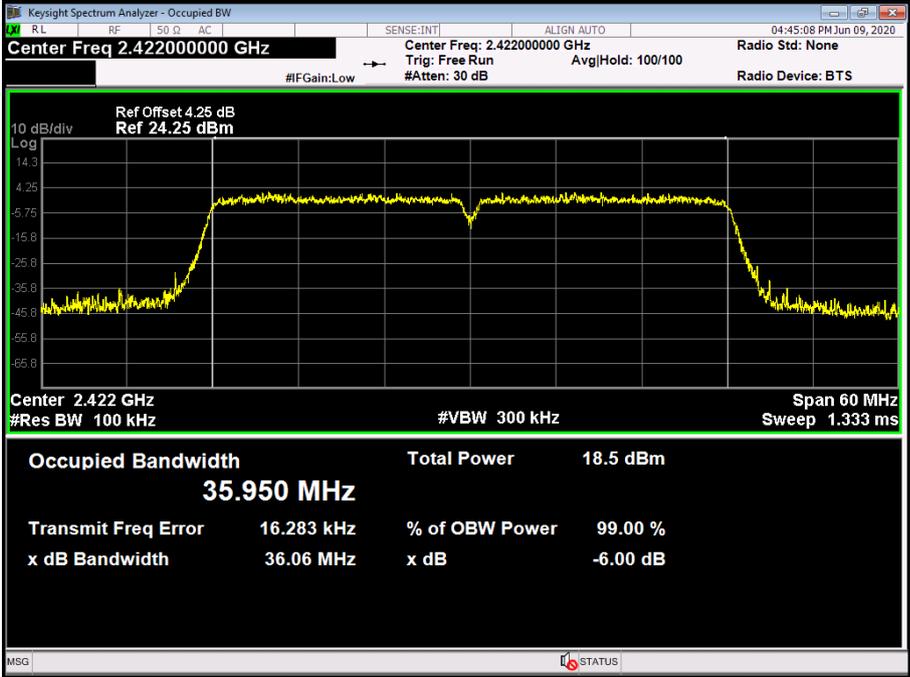
Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11N(HT40) Mode ANT. A(Module#1)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2422	36.06	35.950	≥0.5
2437	35.93	35.942	
2452	36.00	35.927	
802.11N(HT40) Mode			
2422 MHz			
			

802.11N(HT40) Mode
2437 MHz

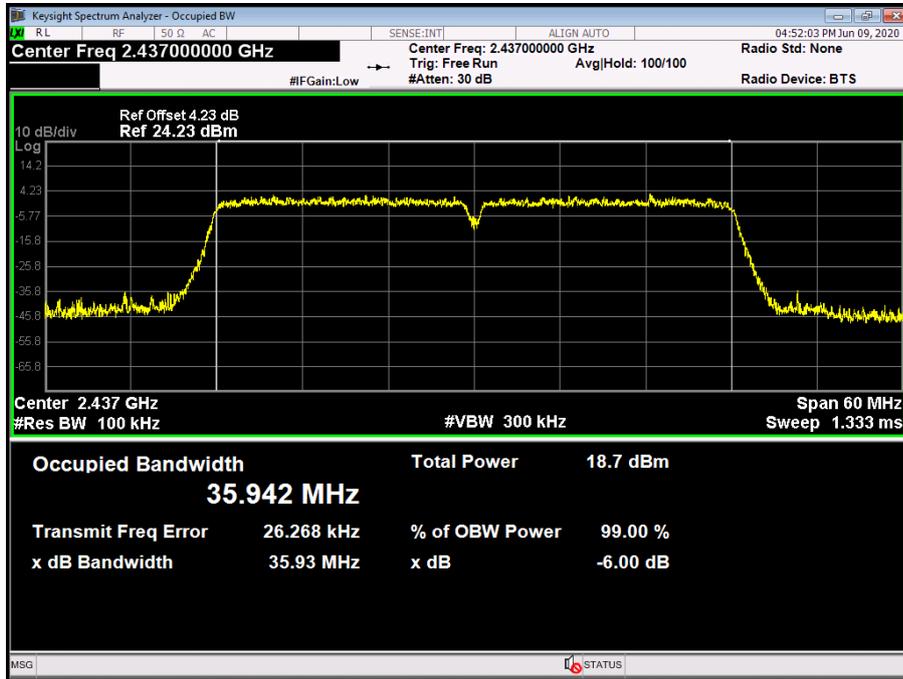


802.11N(HT40) Mode
2452 MHz

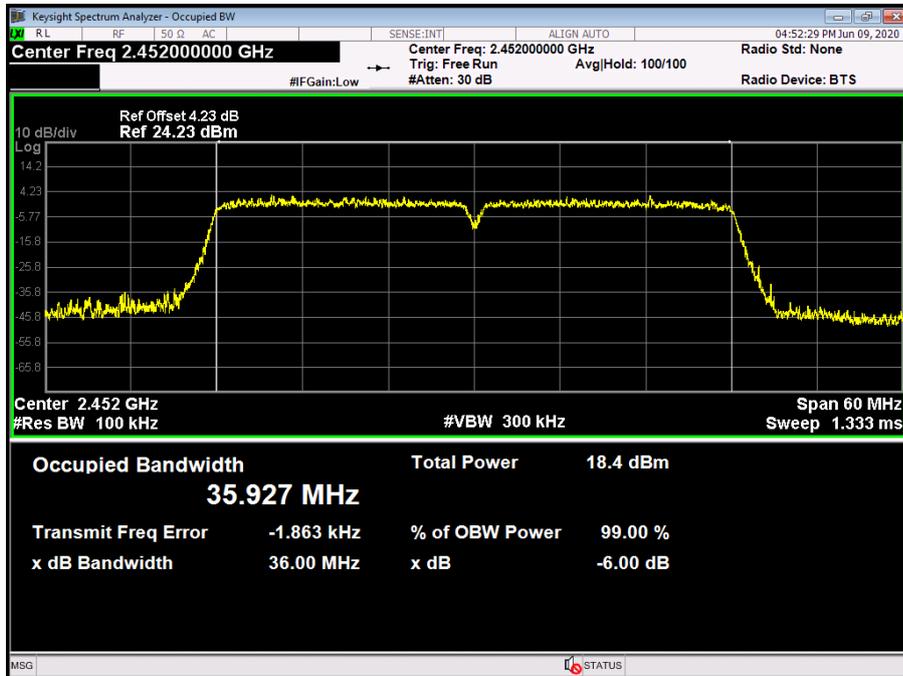


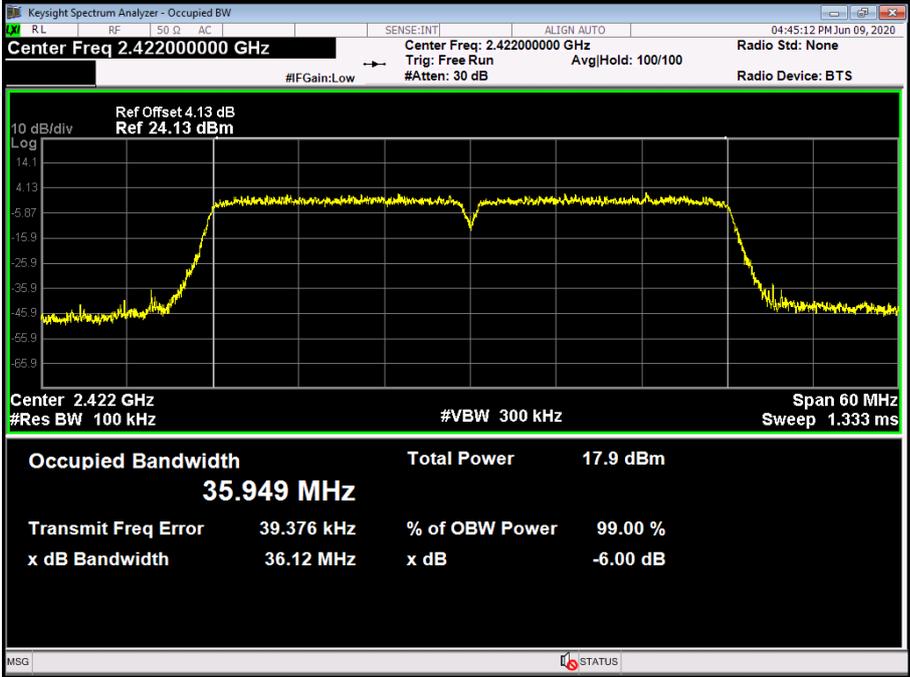Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11N(HT40) Mode ANT. B(Module#1)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2422	36.12	35.949	≥0.5
2437	35.88	35.923	
2452	36.07	35.939	
802.11N(HT40) Mode			
2422 MHz			
 <p>Keysight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Center Freq: 2.422000000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 4.13 dB</p> <p>Ref 24.13 dBm</p> <p>10 dB/div</p> <p>Log</p> <p>Center 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 1.333 ms</p> <p>Occupied Bandwidth 35.949 MHz</p> <p>Total Power 17.9 dBm</p> <p>Transmit Freq Error 39.376 kHz</p> <p>% of OBW Power 99.00 %</p> <p>x dB Bandwidth 36.12 MHz</p> <p>x dB -6.00 dB</p>			

**802.11N(HT40) Mode
2437 MHz**

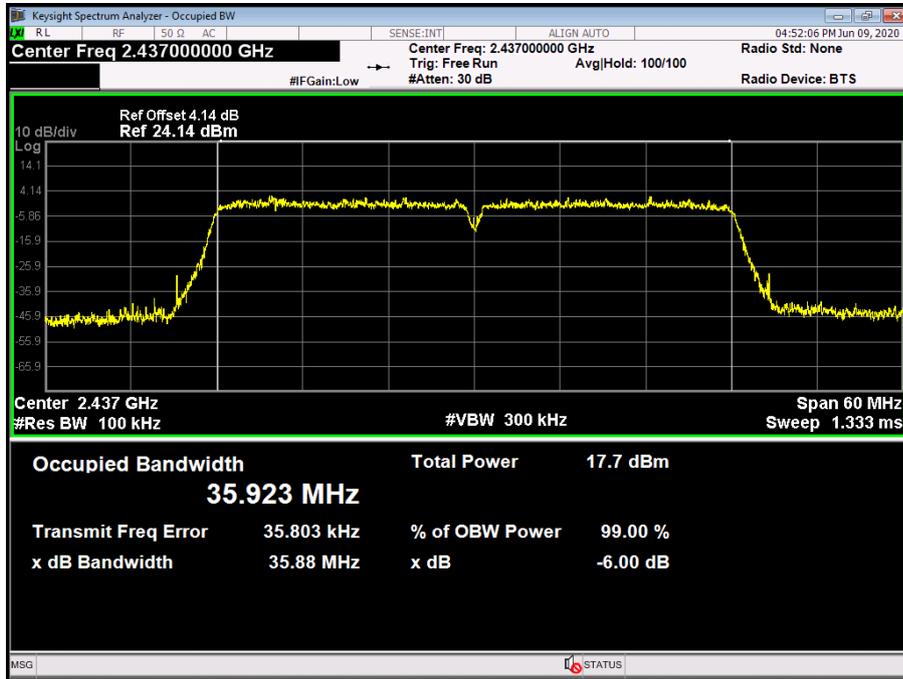


**802.11N(HT40) Mode
2452 MHz**

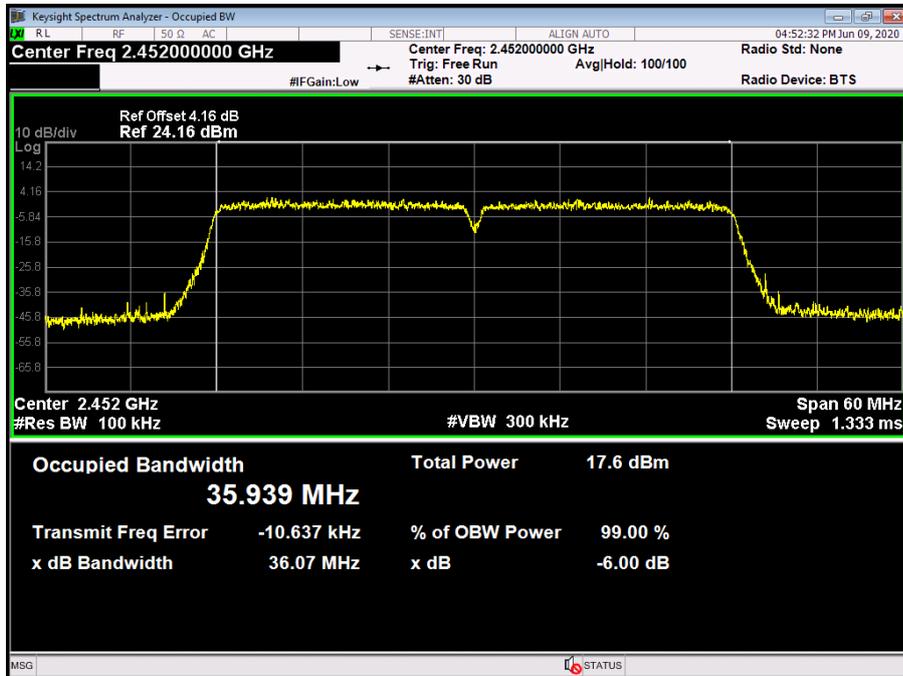

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11B Mode ANT. A(Module#2)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	10.04	14.562	>=0.5
2437	10.05	14.542	
2462	10.05	14.556	


802.11B Mode

2412 MHz

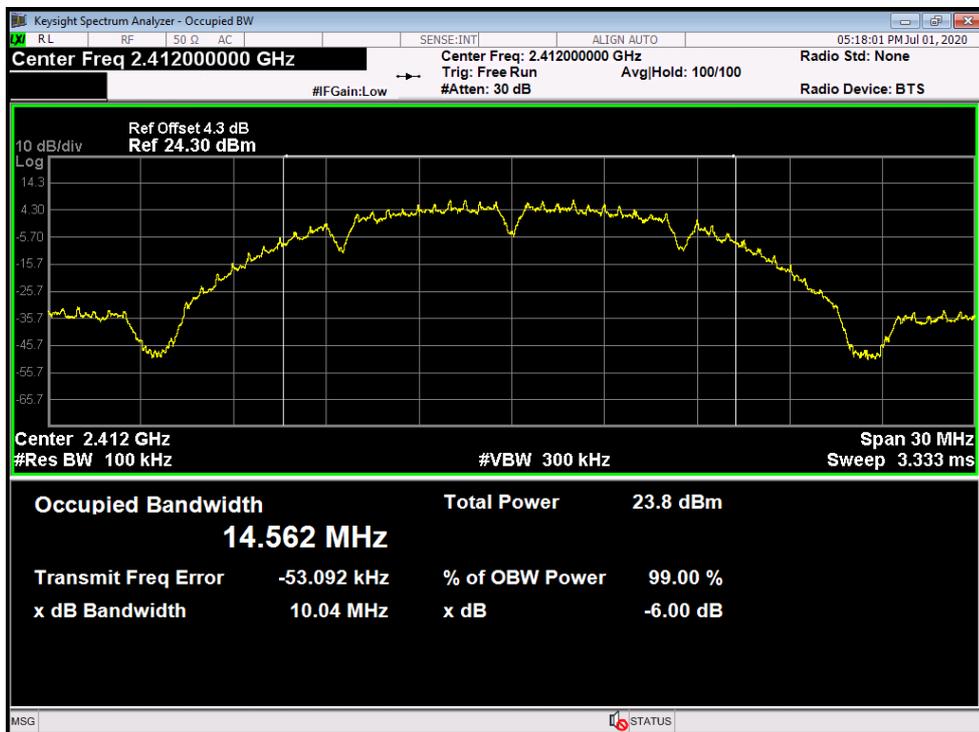


802.11B Mode

2437 MHz

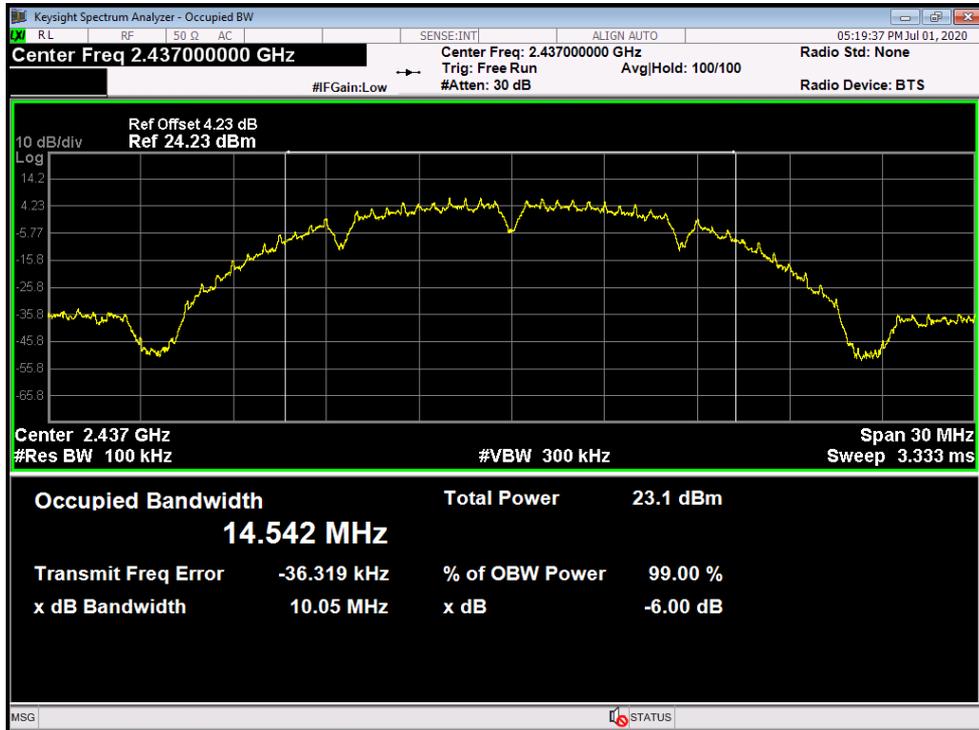

802.11B Mode


2462 MHz

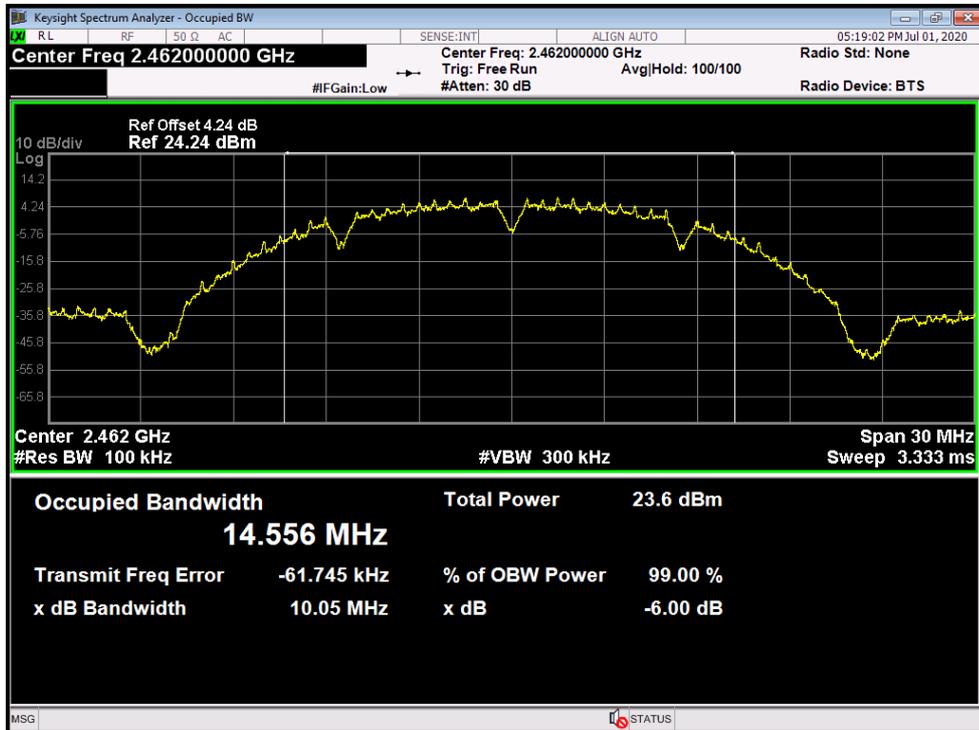

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11G Mode ANT. A(Module#2)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	16.33	16.518	>=0.5
2437	16.36	16.500	
2462	16.45	16.544	


802.11G Mode

2412 MHz

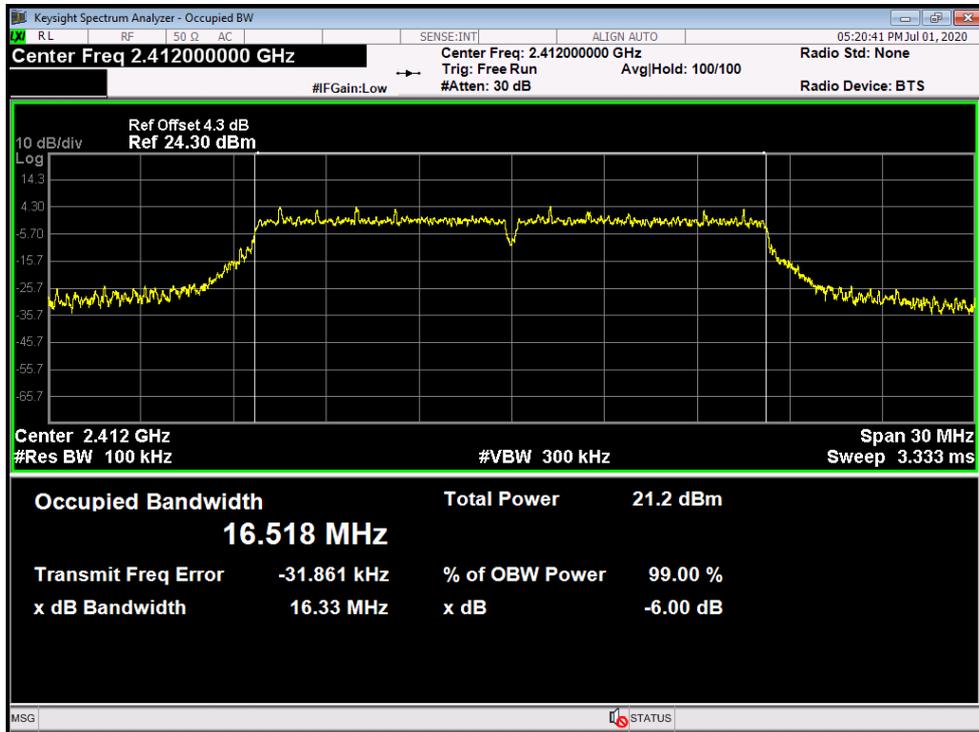


802.11G Mode

2437 MHz

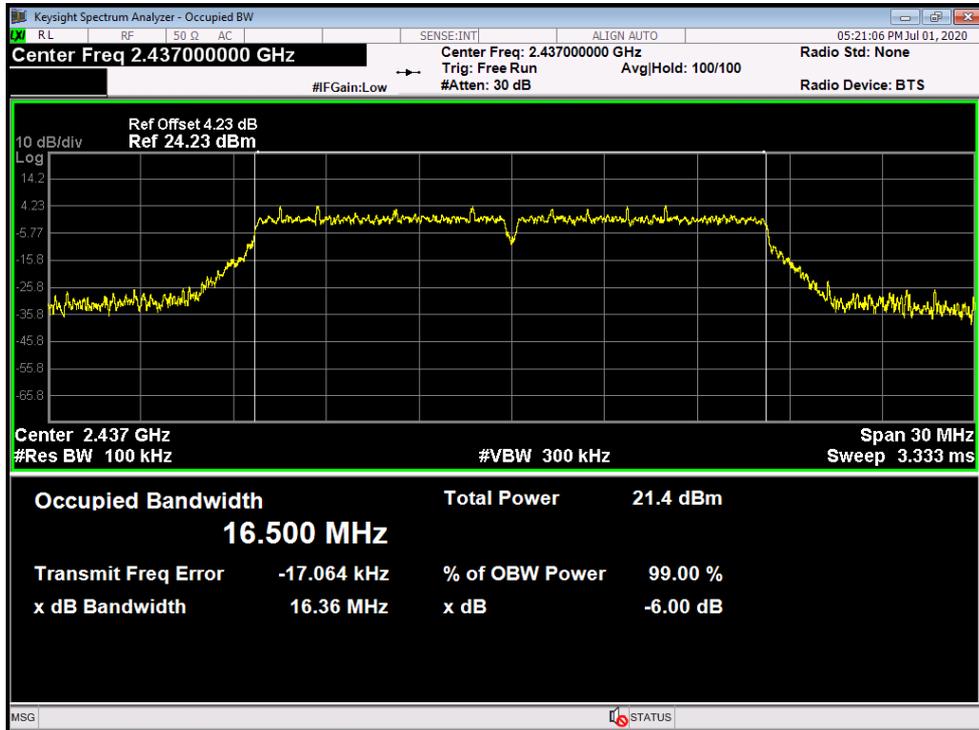

802.11G Mode


2462 MHz

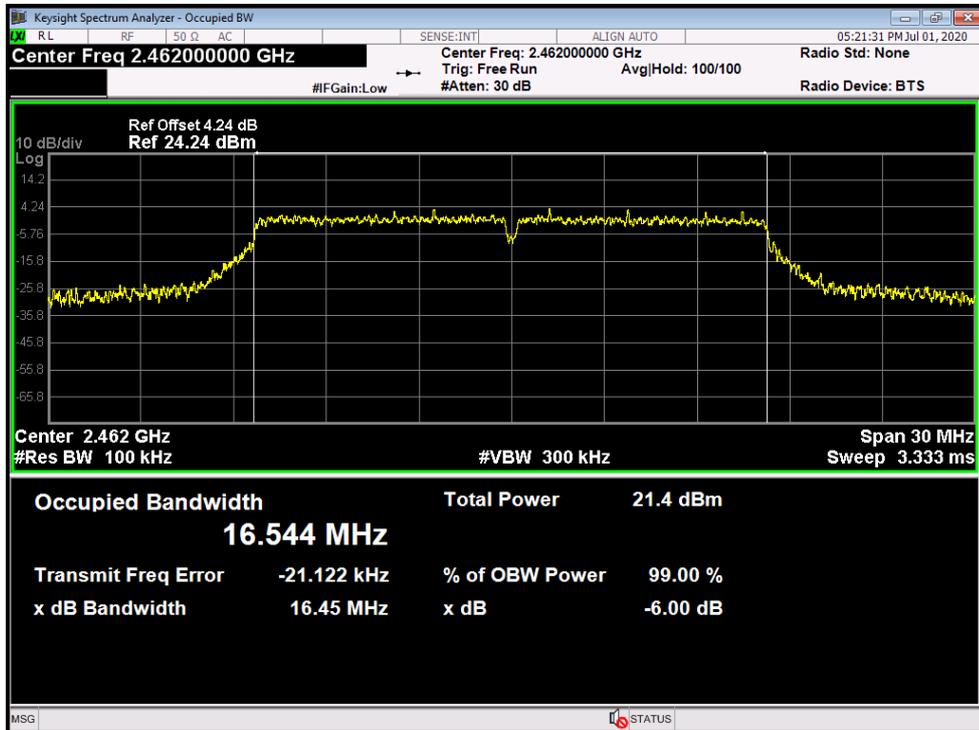

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11N(HT20) Mode ANT. A(Module#2)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2412	17.61	17.659	>=0.5
2437	17.60	17.661	
2462	17.57	17.667	


802.11N(HT20) Mode

2412 MHz

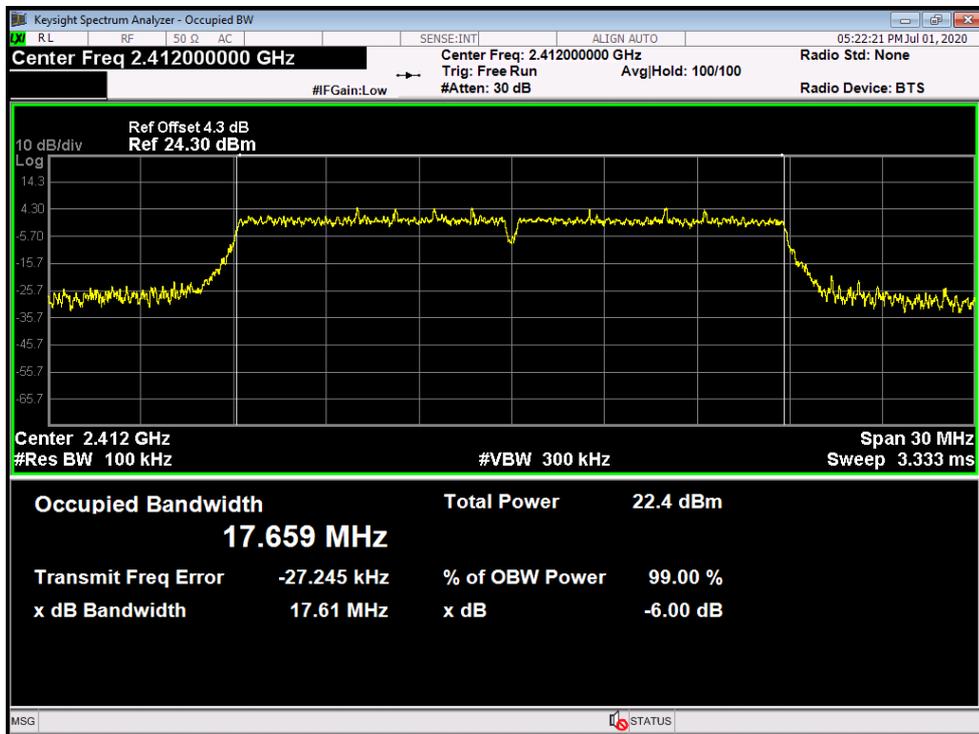


802.11N(HT20) Mode

2437 MHz

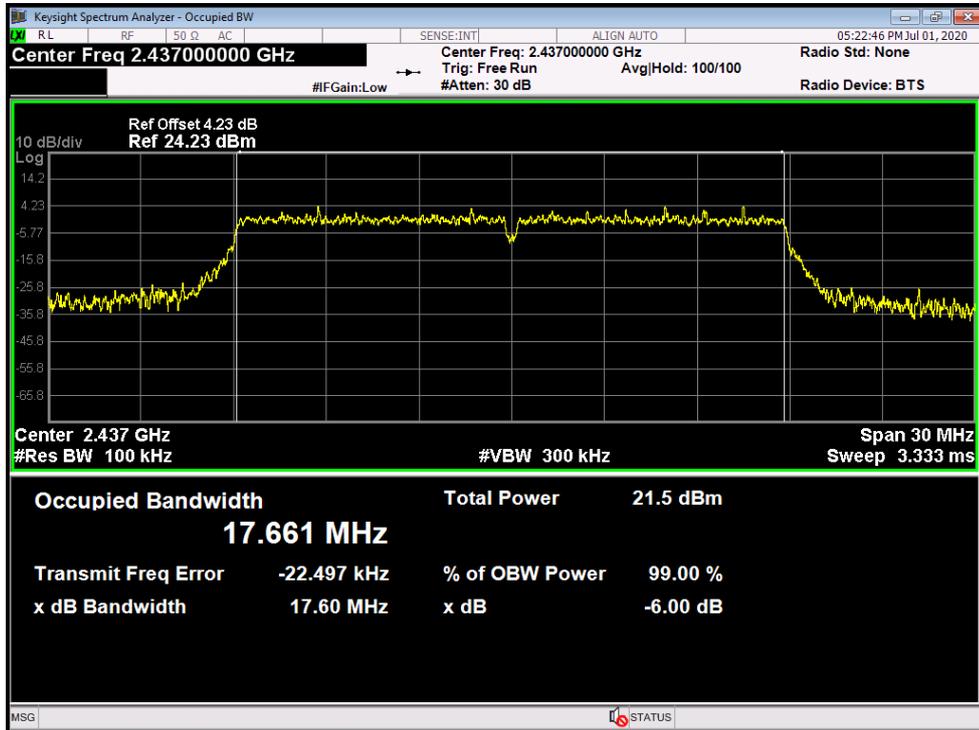

802.11N(HT20) Mode


2462 MHz

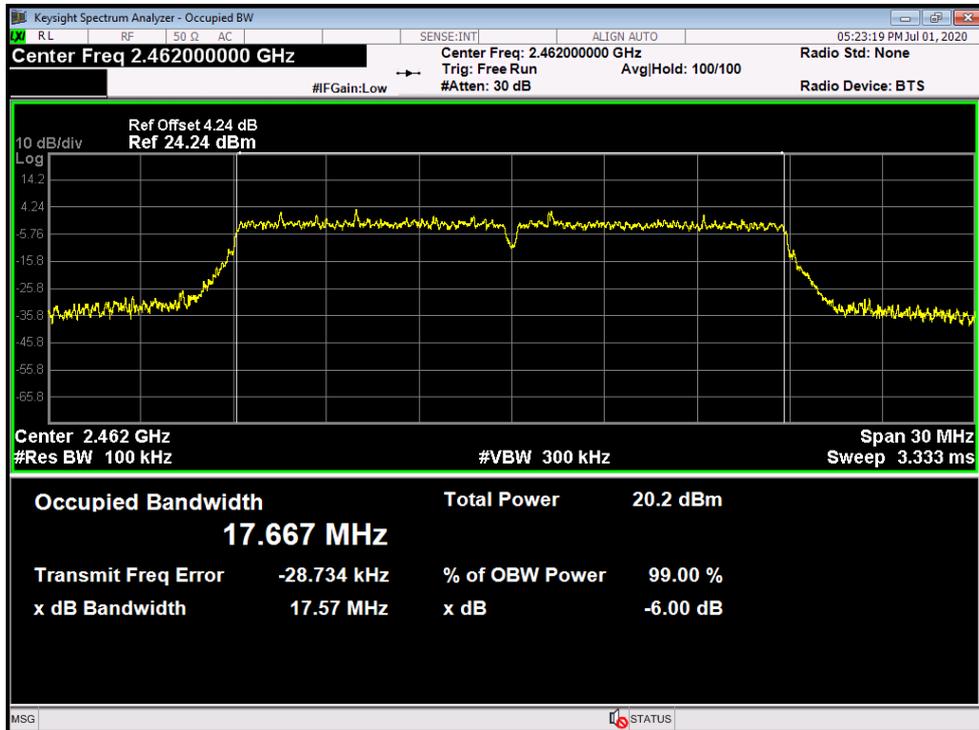

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60HZ		
Test Mode:	TX 802.11N(HT40) Mode ANT. A(Module#2)		
Channel frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
2422	35.89	36.102	>=0.5
2437	36.07	36.084	
2452	35.48	36.071	


802.11N(HT40) Mode

2422 MHz

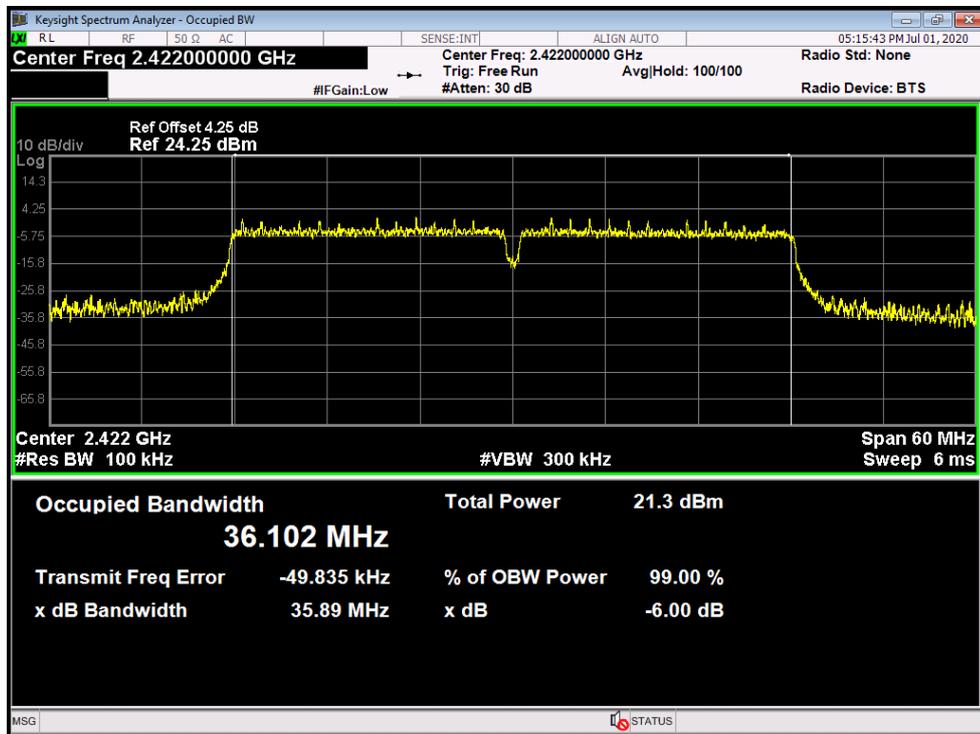


802.11N(HT40) Mode

2437 MHz

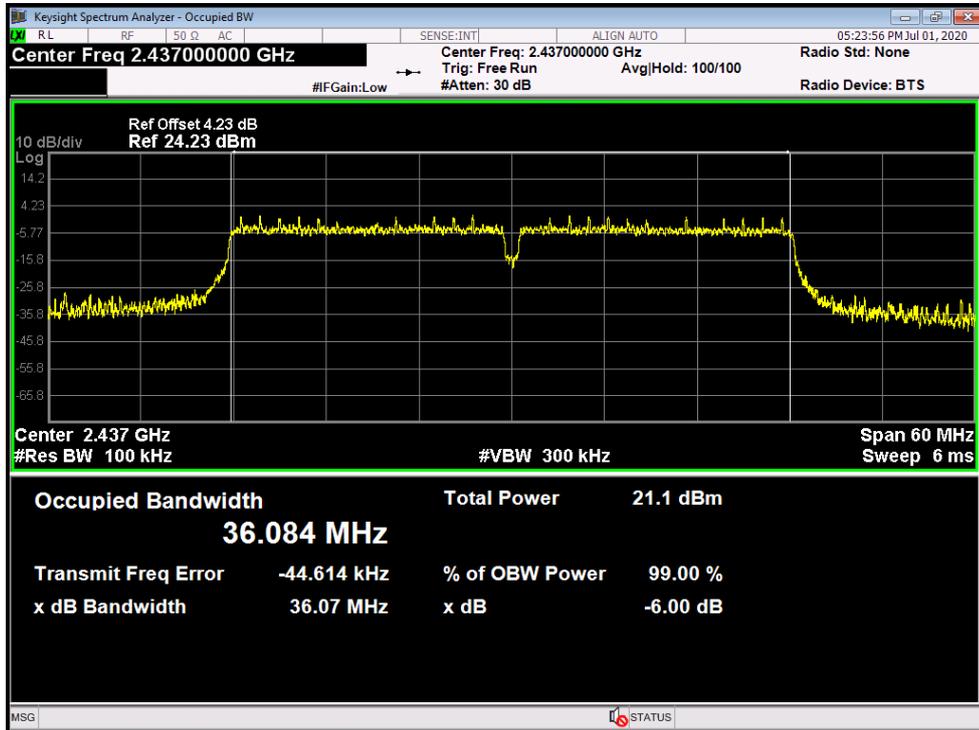

802.11N(HT40) Mode

2452 MHz

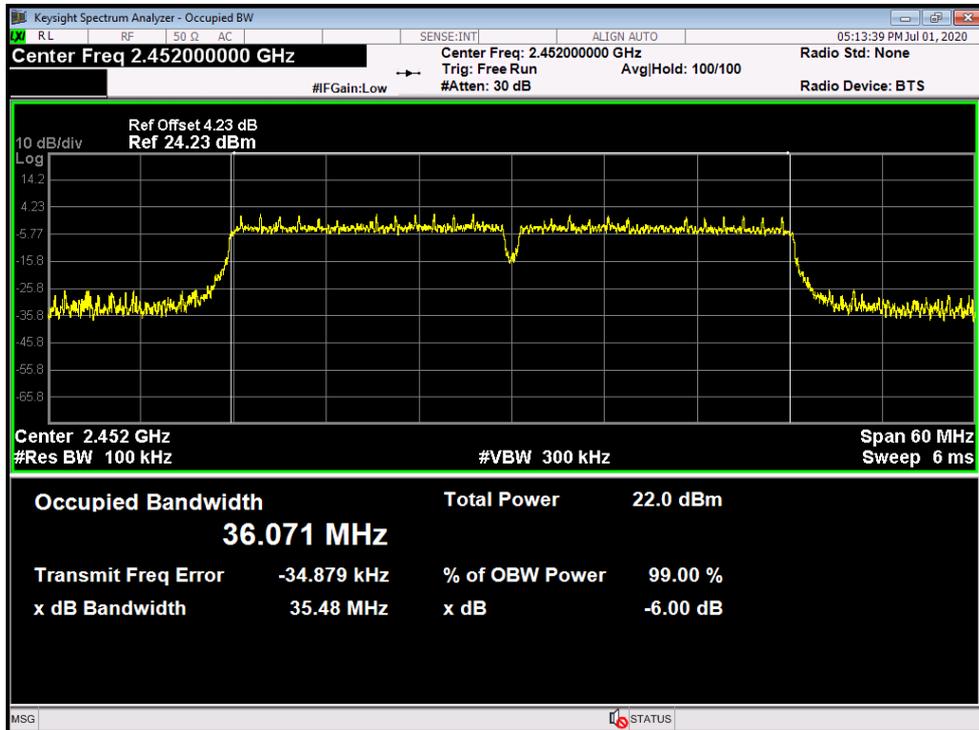

Attachment E-- Peak Output Power Test Data


Conducted Power(Module#1)					
802.11b Power					
Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)
		ANT. A.	ANT. B	Total	
1	2412 MHz	13.148	13.427	16.300	27.99
6	2437 MHz	12.844	13.096	15.982	
11	2462 MHz	12.185	13.148	15.703	
802.11g Power					
Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)
		ANT. A.	ANT. B	Total	
1	2412 MHz	12.521	13.019	15.787	27.99
6	2437 MHz	12.692	12.951	15.834	
11	2462 MHz	13.256	11.304	15.399	
802.11n(HT20) Power					
Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)
		ANT. A.	ANT. B	Total	
1	2412 MHz	13.346	12.695	16.043	27.99
6	2437 MHz	13.178	12.824	16.015	
11	2462 MHz	12.387	12.421	15.414	
802.11n(HT40) Power					
Channel	Frequency	Conducted Power (dBm)			Max. Limit (dBm)
		ANT. A.	ANT. B	Total	
3	2422 MHz	13.838	12.937	16.421	27.99
6	2437 MHz	13.720	12.999	16.385	
9	2452 MHz	13.142	12.960	16.273	
<p>Note: The ANT. A. and ANT. B will transmitting simultaneously for the 802.11b/g/n(HT20)/n(HT40) Mode, the T Directional Gain = Ant. Gain + 10*LOG(N_{ANT}) = 8.01 dBi > 6 dBi. So P_{out} = P_{limit} - (G_{TX} - 6) = 30 - 2.01 = 27.99 dBm</p>					

Conducted Power(Module#2)			
802.11b Power			
Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)
		ANT. A.	
1	2412 MHz	16.430	30
6	2437 MHz	16.151	
11	2462 MHz	15.843	
802.11g Power			
Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)
		ANT. A.	
1	2412 MHz	15.933	30
6	2437 MHz	16.112	
11	2462 MHz	16.193	
802.11n(HT20) Power			
Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)
		ANT. A.	
1	2412 MHz	15.971	30
6	2437 MHz	16.052	
11	2462 MHz	15.967	
802.11n(HT40) Power			
Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)
		ANT. A.	
3	2422 MHz	16.277	30
6	2437 MHz	16.146	
9	2452 MHz	16.008	


Duty Cycle(Module#1)/ (Module#2)		
Mode	Channel frequency (MHz)	Test Result
802.11b	2412	>98%
	2437	
	2462	
802.1g	2412	
	2437	
	2462	
802.11n (HT20)	2412	
	2437	
	2462	
802.11n (HT40)	2422	
	2437	
	2452	

Please see below plots


802.11 B Mode 2437 MHz (Module#1)

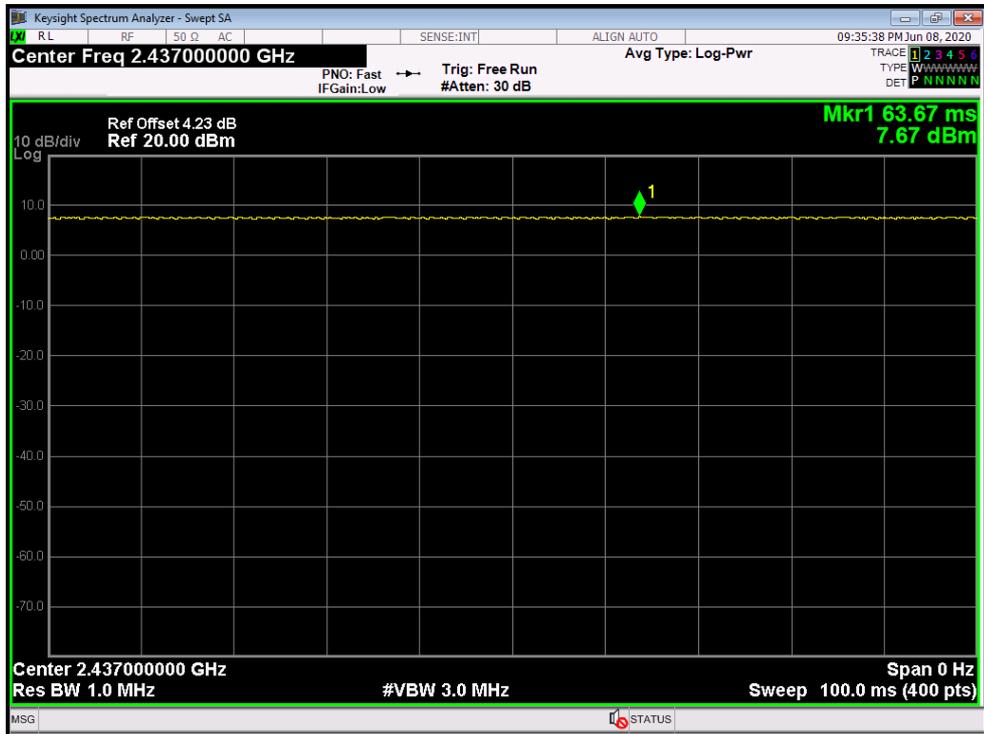


802.11 G Mode 2437 MHz (Module#1)

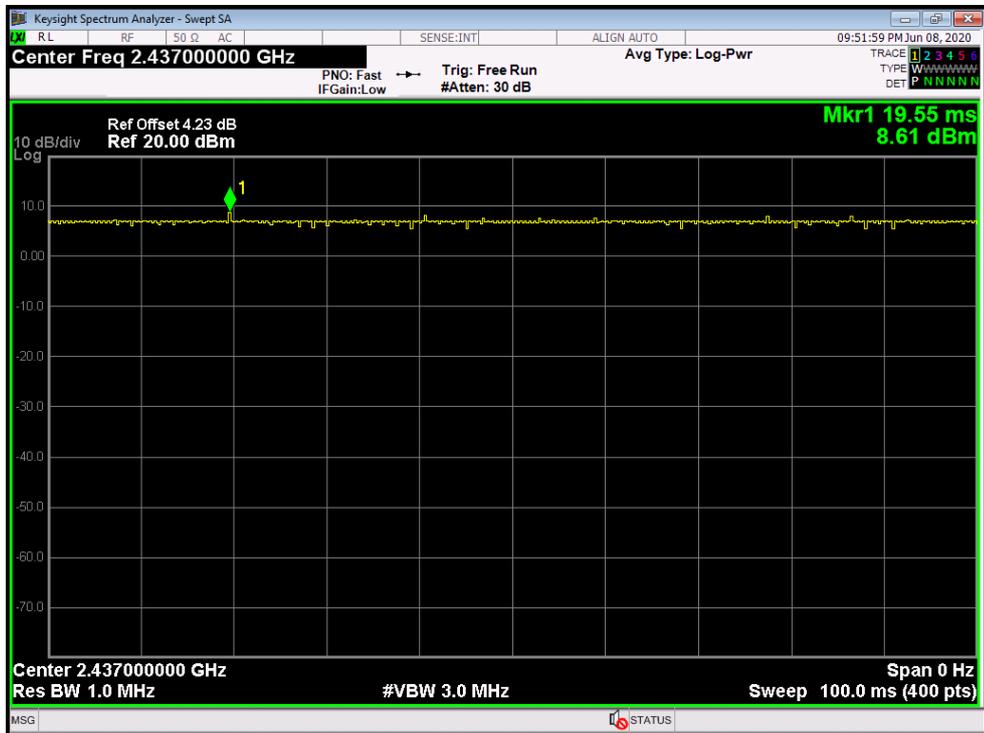


802.11 N(HT20) Mode 2437 MHz (Module#1)

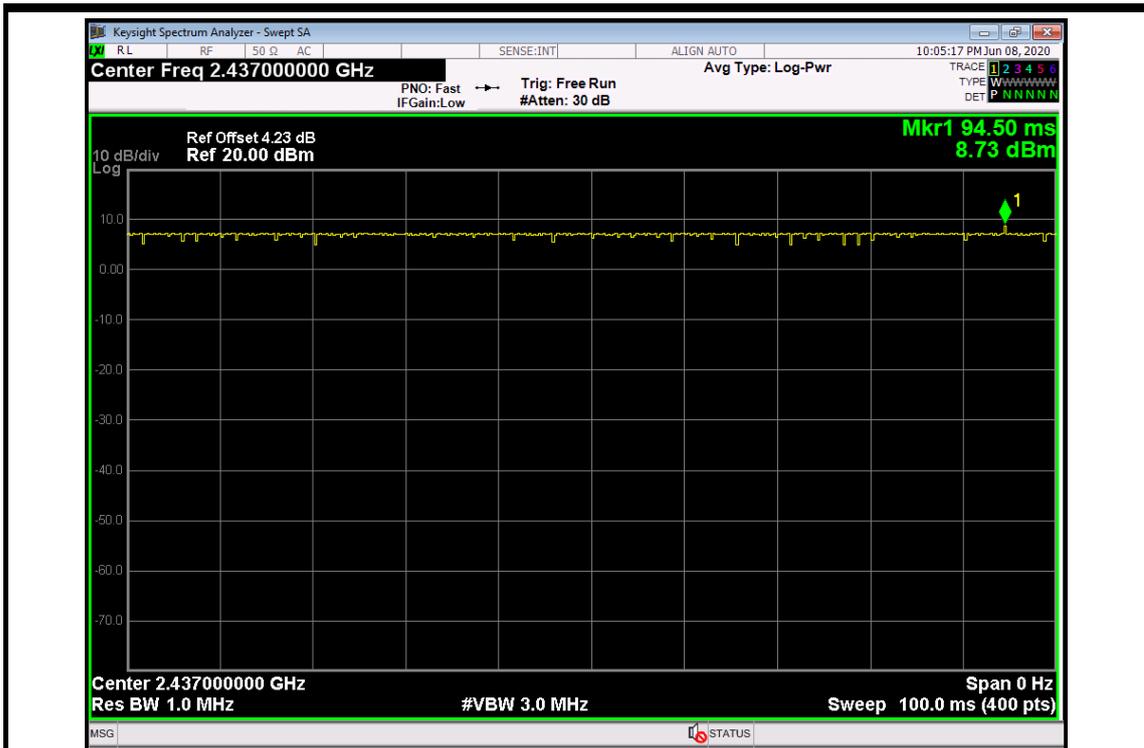


802.11 N(HT40) Mode 2437 MHz (Module#1)

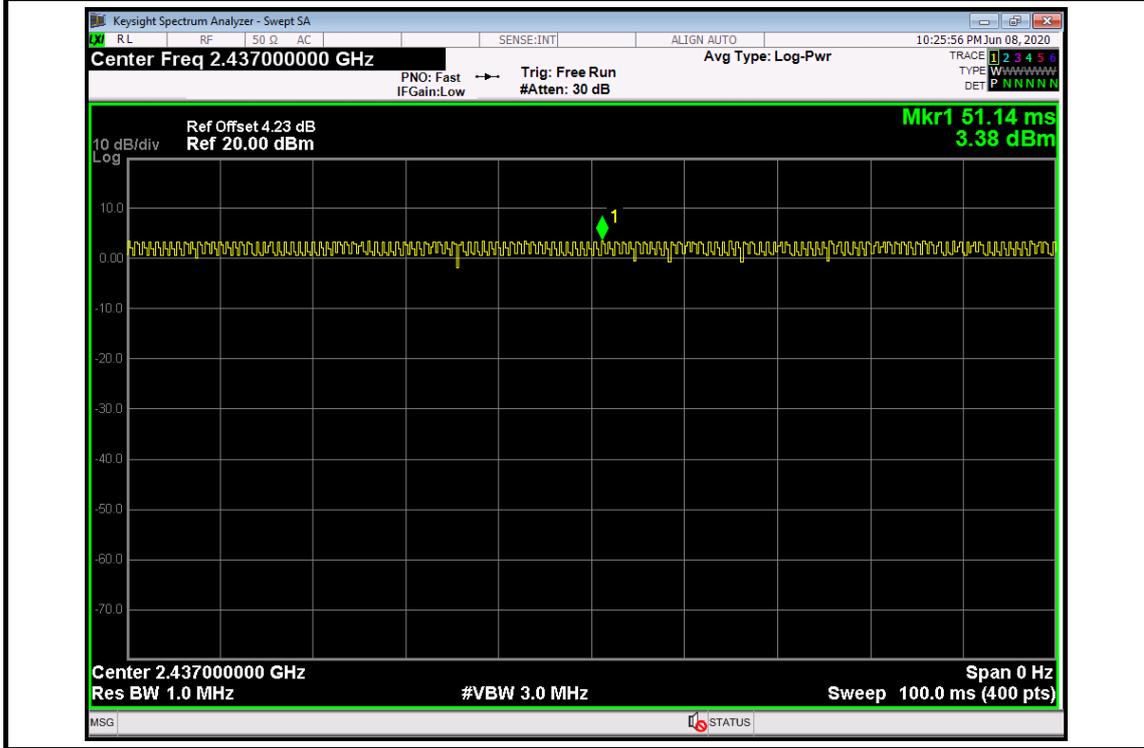


802.11 B Mode 2437 MHz (Module#1)

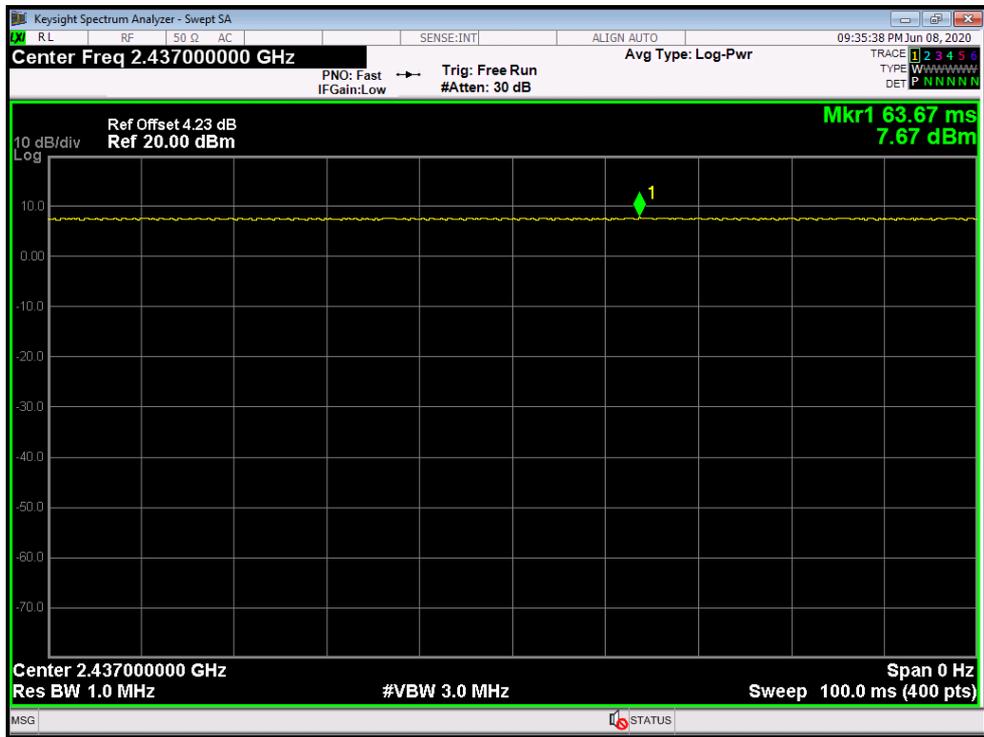


802.11 G Mode 2437 MHz (Module#1)

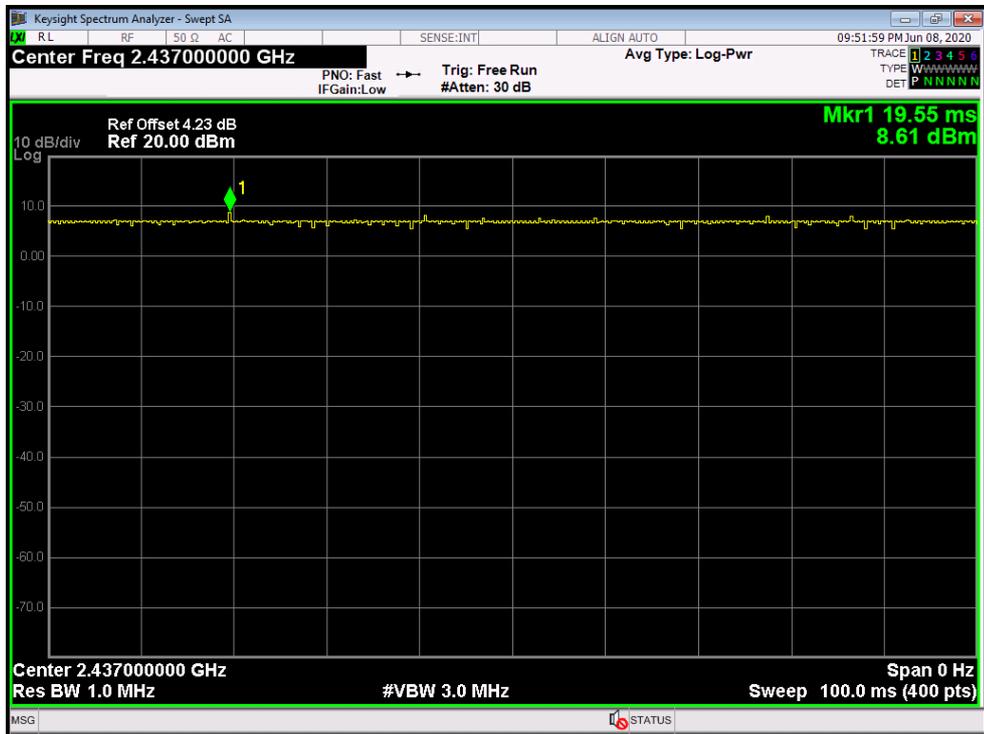


802.11 N(HT20) Mode 2437 MHz (Module#1)

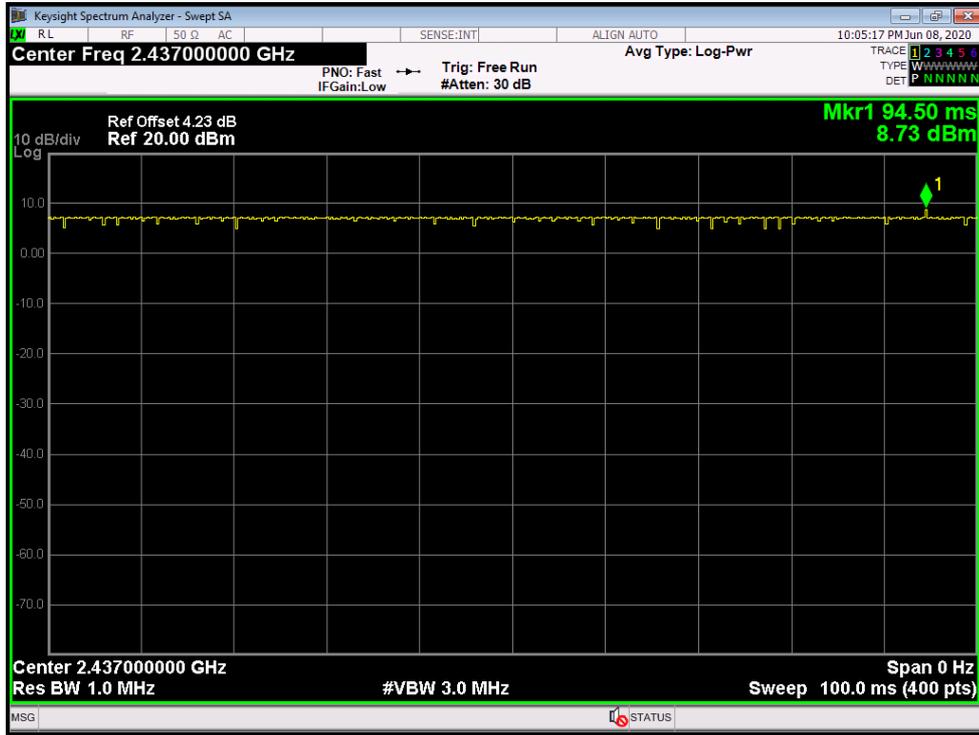


802.11 N(HT40) Mode 2437 MHz (Module#1)

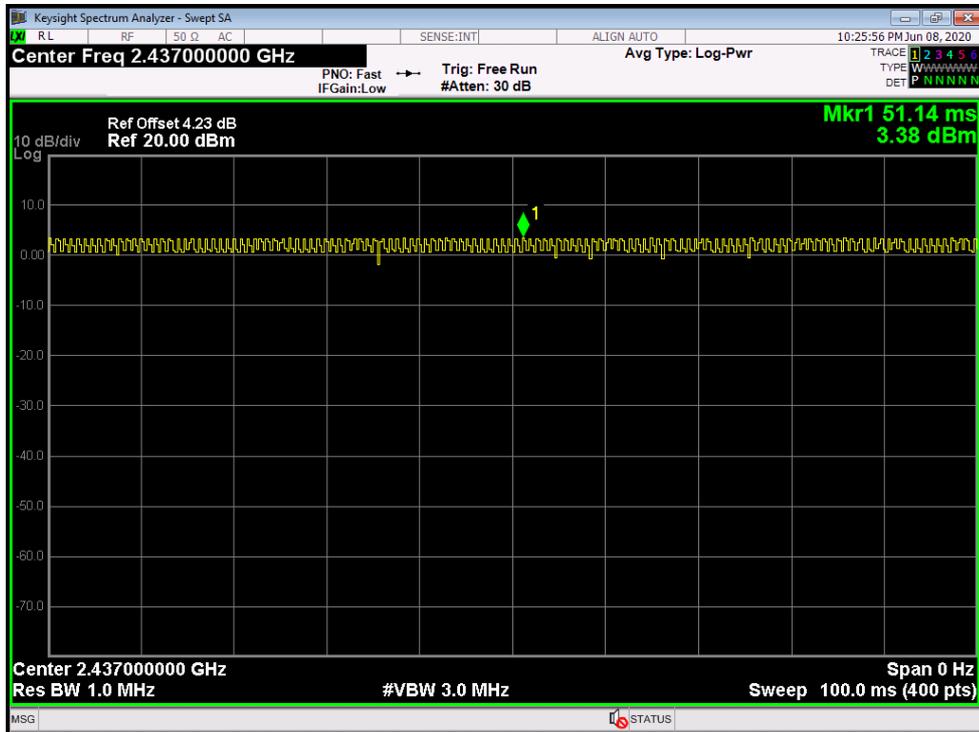


802.11 B Mode 2437 MHz (Module#2)

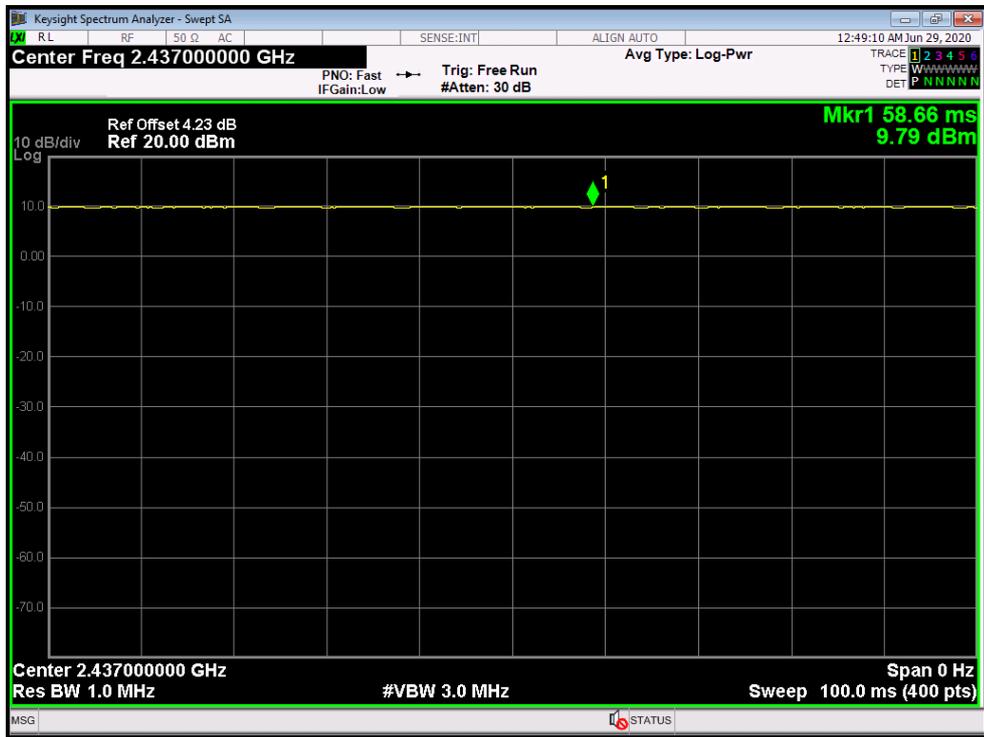


802.11 G Mode 2437 MHz (Module#2)

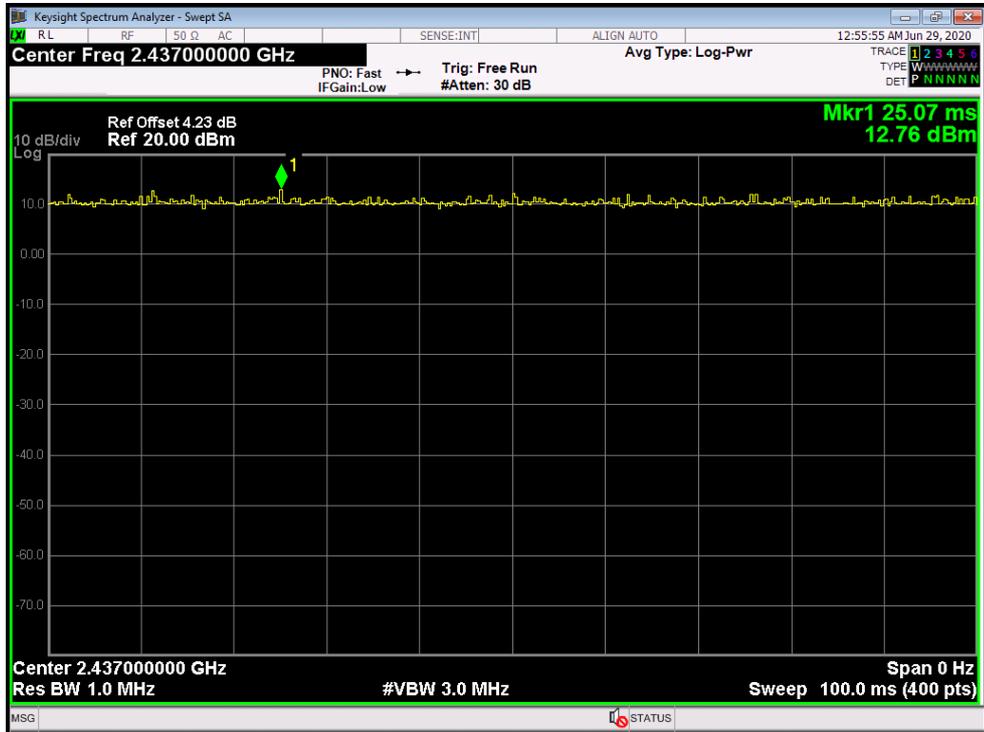

802.11 N(HT20) Mode 2437 MHz(Module#2)

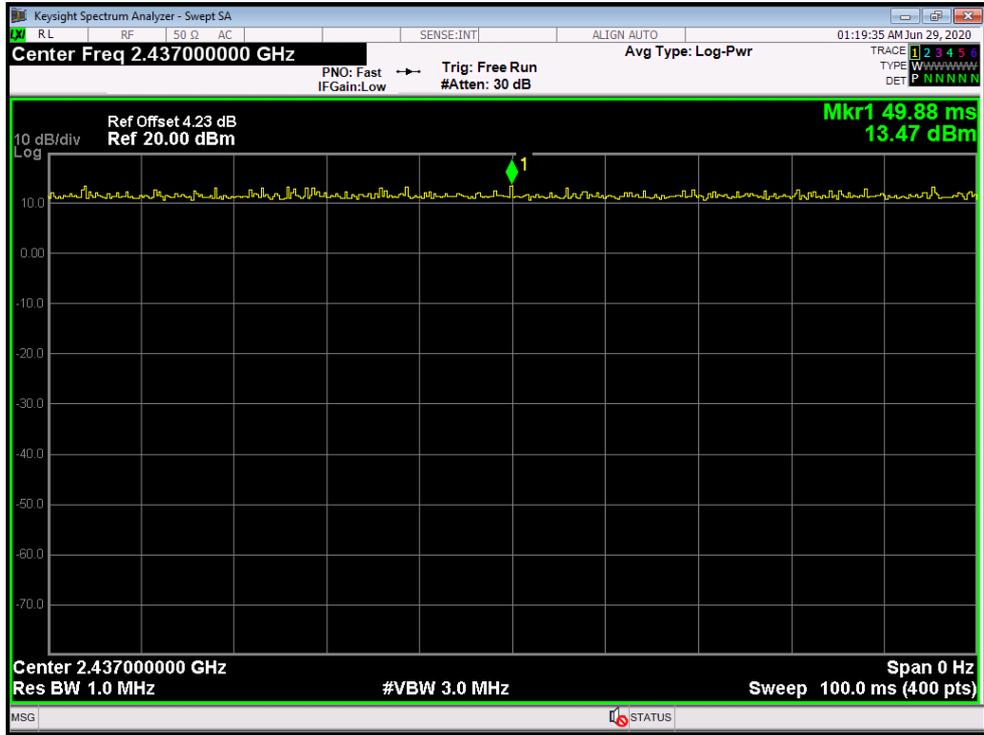

802.11 N(HT40) Mode 2437 MHz(Module#2)

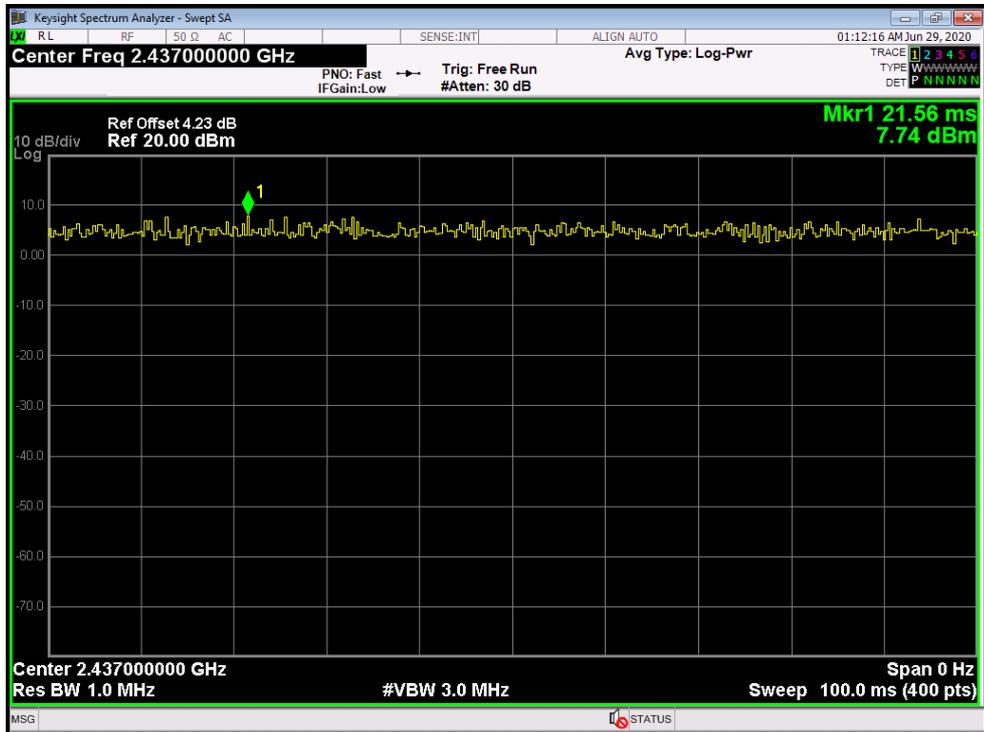

Attachment F-- Power Spectral Density Test Data

802.11b Mode(Module#1)					
Channel	Frequency	Conducted PSD (dBm/3KHz)			Max. Limit (dBm/3KHz)
		Ant. A	Ant. B	Total	
1	2412 MHz	-11.564	-11.195	-8.365	5.99
6	2437 MHz	-10.948	-13.837	-9.146	
11	2462 MHz	-13.780	-12.873	-10.293	
802.11g Mode					
Channel	Frequency	Conducted PSD (dBm/3KHz)			Max. Limit (dBm/3KHz)
		Ant. A	Ant. B	Total	
1	2412 MHz	-15.469	-15.619	-12.533	5.99
6	2437 MHz	-15.779	-14.906	-12.310	
11	2462 MHz	-15.752	-15.753	-12.742	
802.11n(HT20) Mode					
Channel	Frequency	Conducted PSD (dBm/3KHz)			Max. Limit (dBm/3KHz)
		Ant. A	Ant. B	Total	
1	2412 MHz	-13.774	-14.396	-11.064	5.99
6	2437 MHz	-14.575	-15.219	-11.875	
11	2462 MHz	-14.363	-14.027	-11.181	
802.11n(HT40) Mode					
Channel	Frequency	Conducted PSD (dBm/3KHz)			Max. Limit (dBm/3KHz)
		Ant. A	Ant. B	Total	
3	2422 MHz	-15.875	-16.391	-13.115	5.99
6	2437 MHz	-16.181	-16.236	-13.198	
9	2452 MHz	-16.122	-17.192	-13.614	
Note: The ANT. A. and ANT. B will transmitting simultaneously for the 802.11b/g/n(HT20)/n(HT40) Mode, the T Directional Gain = Ant. Gain + 10*LOG(N _{ANT}) = 8.01 dBi > 6 dBi. So P _{out} = P _{limit} - (G _{TX} - 6) = 8 - 2.01 = 5.99 dBm					
Test plots please refer to below pages:					


802.11 b 2412 MHz (ANT. A)




802.11 b 2437 MHz(ANT. A)




802.11 b 2462MHz(ANT. A)

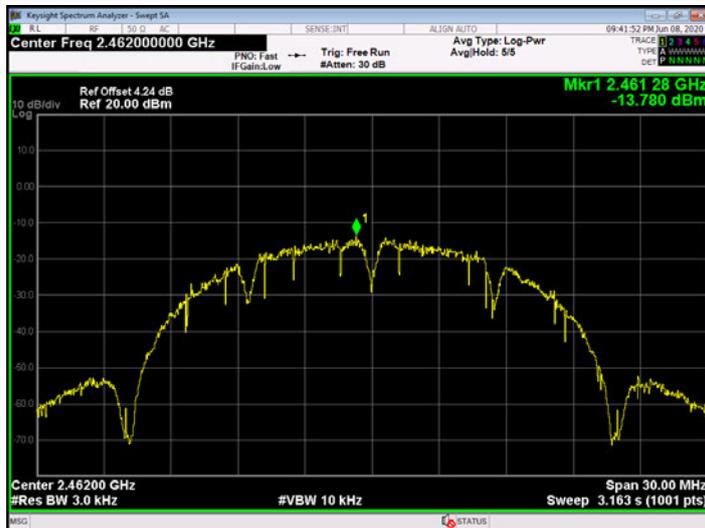

802.11 b 2412 MHz (ANT. B)

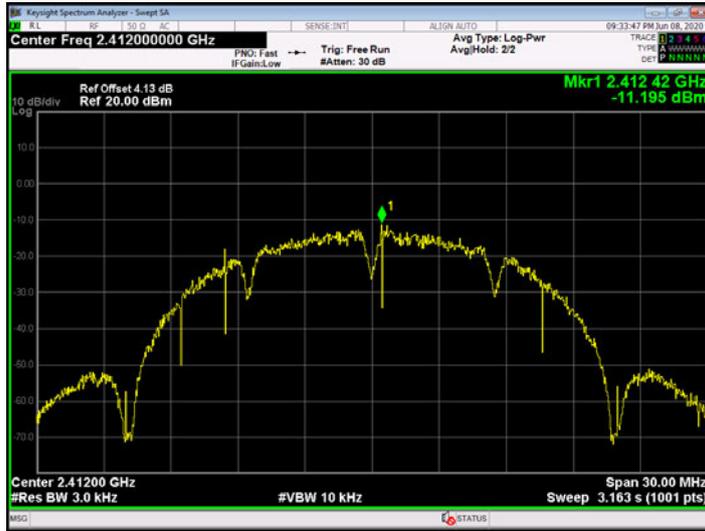


802.11 b 2437 MHz(ANT. B)

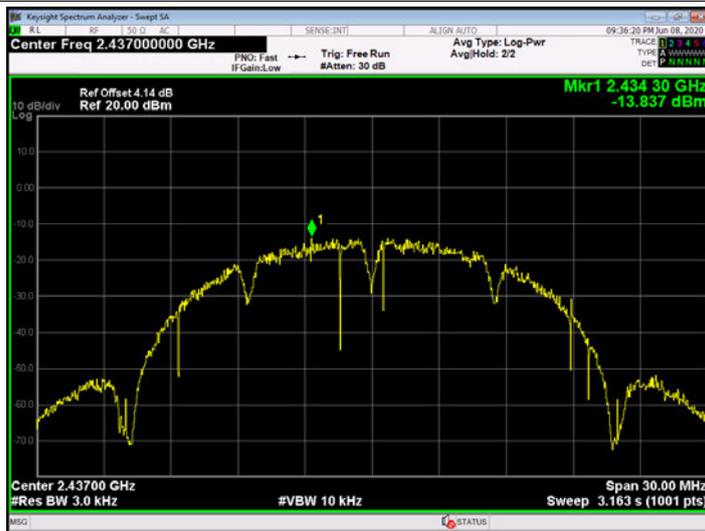

802.11 b 2462MHz(ANT. B)




802.11 g 2412 MHz (ANT. A)

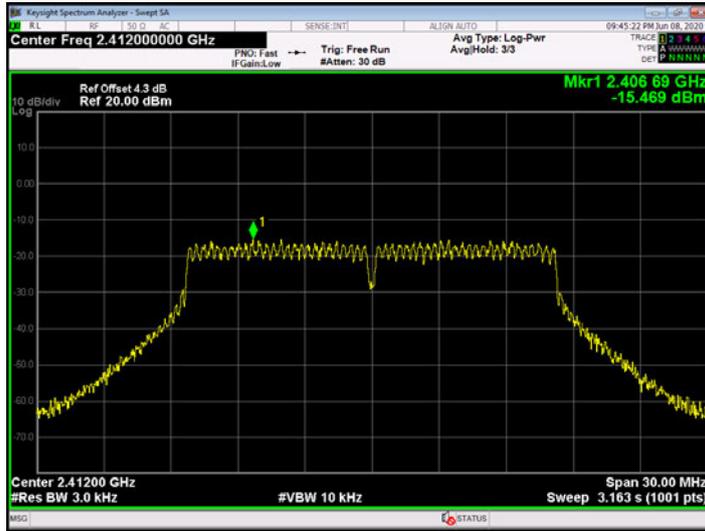


802.11 g 2437 MHz (ANT. A)




802.11 g 2462MHz (ANT. A)

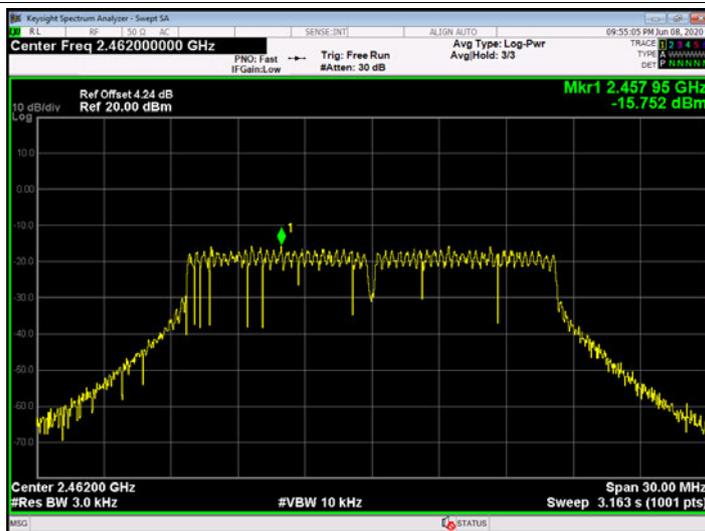


802.11 g 2412 MHz (ANT. B)

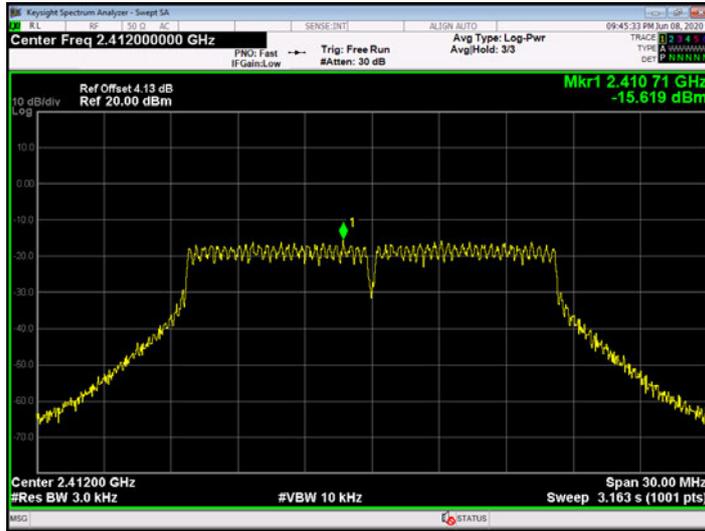


802.11 g 2437 MHz (ANT. B)

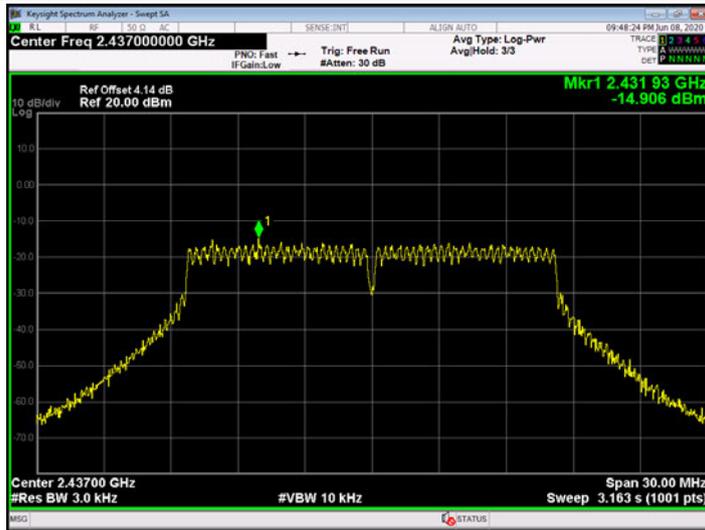


802.11 g 2462 MHz (ANT. B)

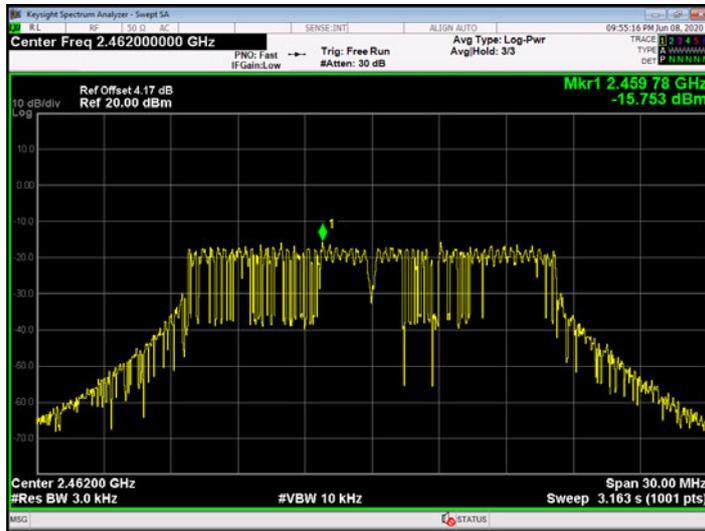

802.11 n(HT20) 2412 MHz (ANT. A)

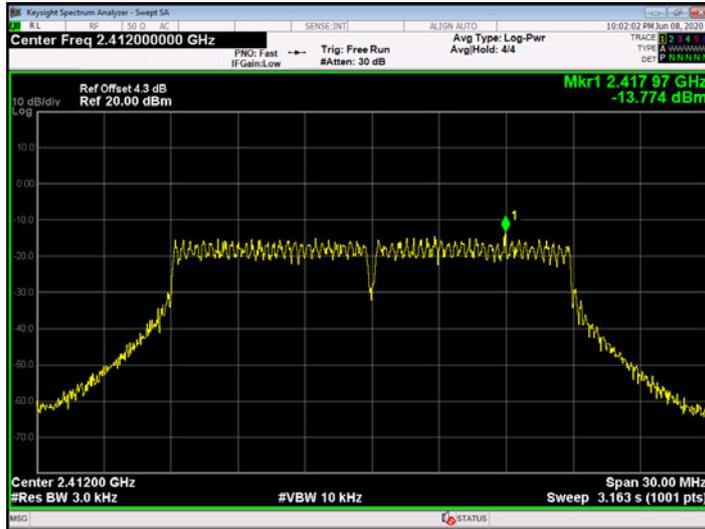


802.11 n(HT20) 2437 MHz (ANT. A)

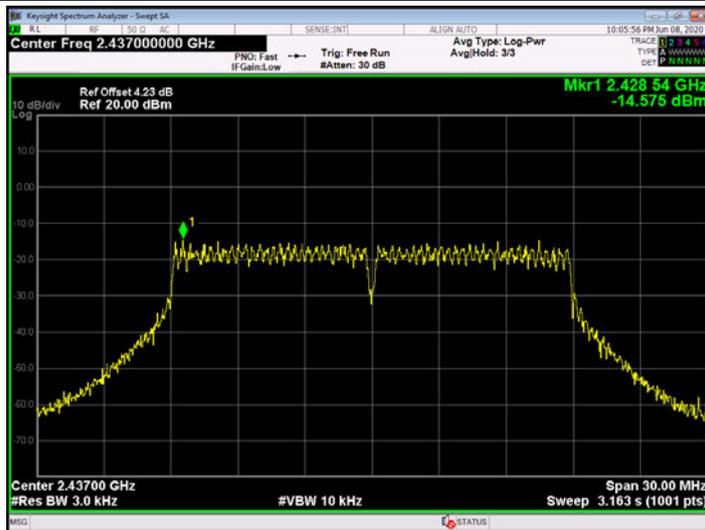


802.11 n(HT20) 2462MHz (ANT. A)




802.11 n(HT20) 2412 MHz (ANT. B)

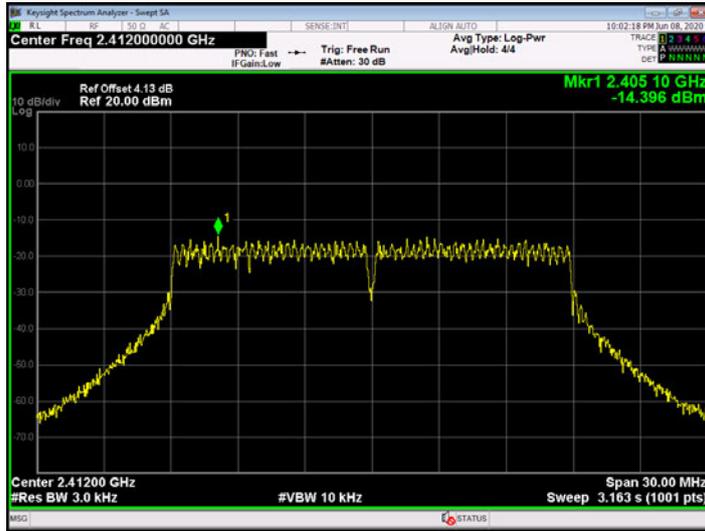


802.11 n(HT20) 2437 MHz (ANT. B)

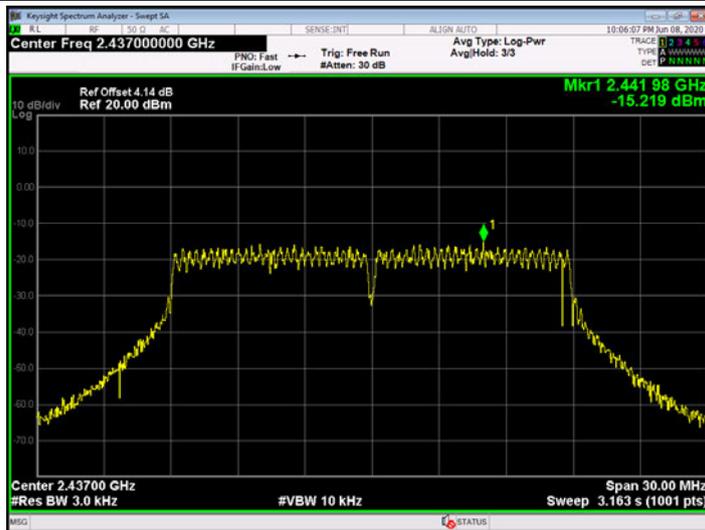


802.11 n(HT20) 2462MHz (ANT. B)

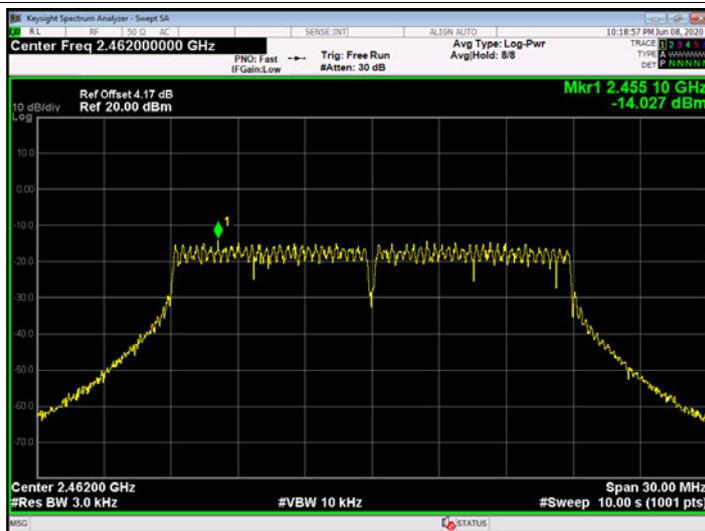

802.11 n(HT40) 2422 MHz (ANT. A)

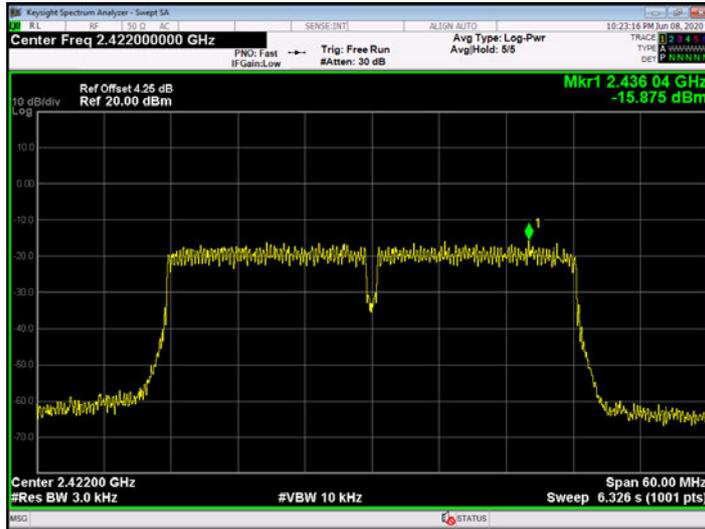


802.11 n(HT40) 2437 MHz (ANT. A)

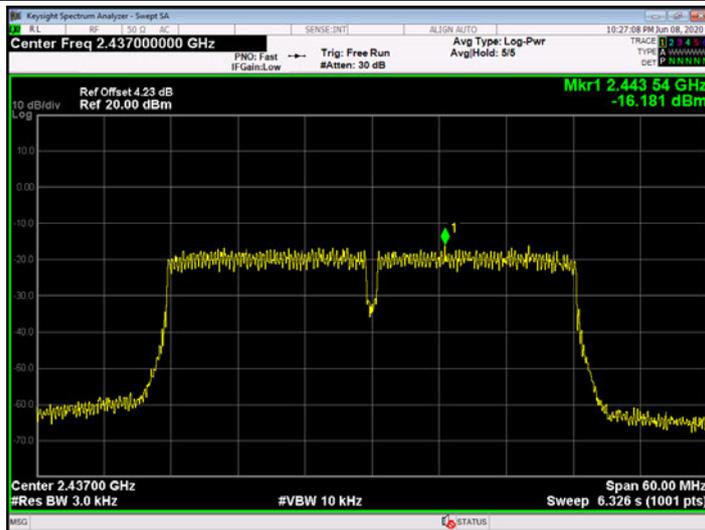


802.11 n(HT40) 2452MHz (ANT. A)



802.11 n(HT40) 2422 MHz (ANT. B)

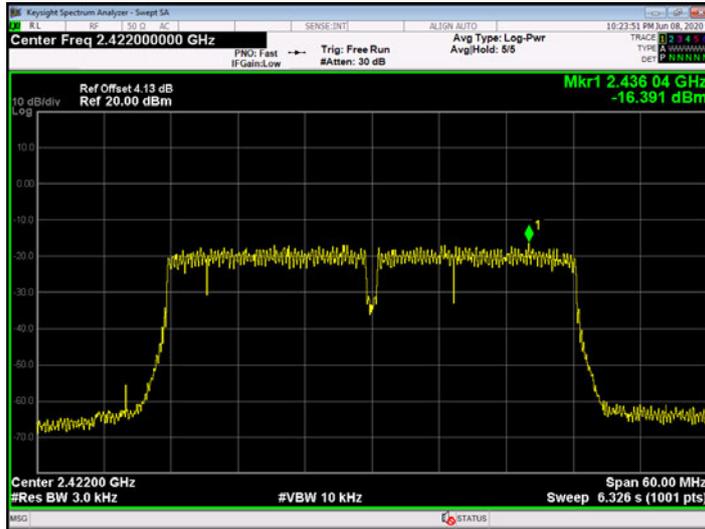

802.11 n(HT40) 2437 MHz (ANT. B)

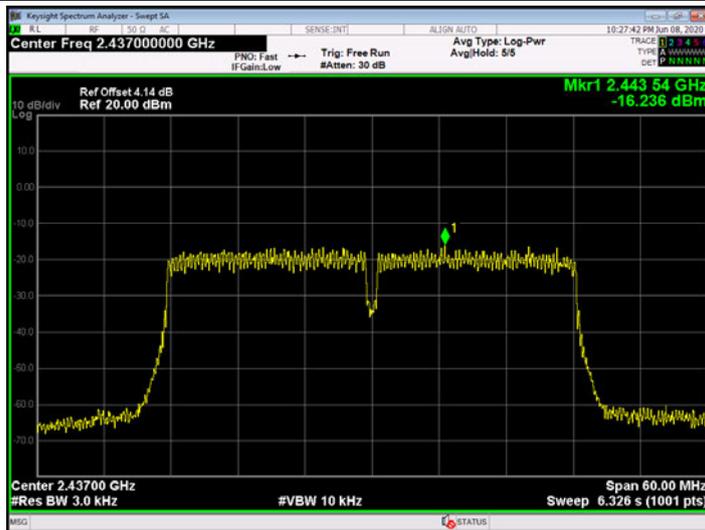

802.11 n(HT40) 2452MHz (ANT. B)



802.11b Mode(Module#2)			
Channel	Frequency	Conducted PSD (dBm/3KHz)	Max. Limit (dBm/3KHz)
		Ant. A	
1	2412 MHz	-7.111	8
6	2437 MHz	-5.921	
11	2462 MHz	-8.273	
802.11g Mode			
Channel	Frequency	Conducted PSD (dBm/3KHz)	Max. Limit (dBm/3KHz)
		Ant. A	
1	2412 MHz	-10.410	8
6	2437 MHz	-9.708	
11	2462 MHz	-10.123	
802.11n(HT20) Mode			
Channel	Frequency	Conducted PSD (dBm/3KHz)	Max. Limit (dBm/3KHz)
		Ant. A	
1	2412 MHz	-10.057	8
6	2437 MHz	-10.591	
11	2462 MHz	-9.252	
802.11n(HT40) Mode			
Channel	Frequency	Conducted PSD (dBm/3KHz)	Max. Limit (dBm/3KHz)
		Ant. A	
3	2422 MHz	-12.470	8
6	2437 MHz	-13.034	
9	2452 MHz	-12.446	
Note: The ANT. A. and ANT. B will transmitting simultaneously for the 802.11b/g/n(HT20)/n(HT40) Mode, the T Directional Gain = Ant. Gain + 10*LOG(N _{ANT}) = 8.01 dBi > 6 dBi. So P _{out} = P _{limit} - (G _{TX} - 6) = 8 - 2.01 = 5.99 dBm			
Test plots please refer to below pages:			


802.11 b 2412 MHz (ANT. A)




802.11 b 2437 MHz(ANT. A)



802.11 b 2462MHz(ANT. A)

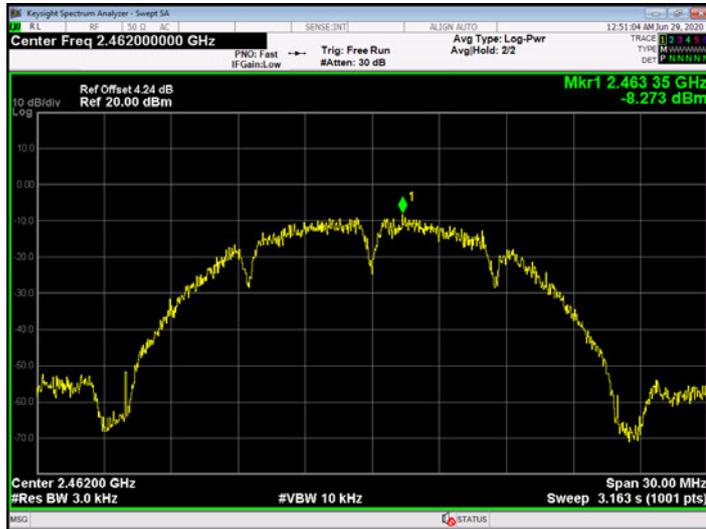

802.11 g 2412 MHz (ANT. A)

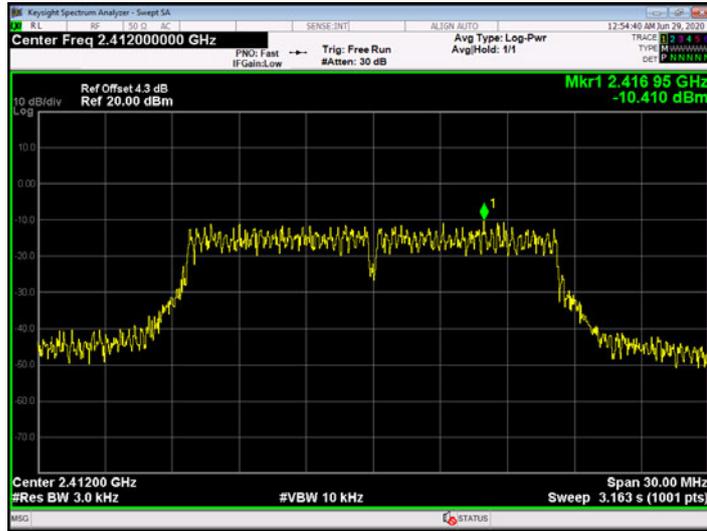

802.11 g 2437 MHz (ANT. A)




802.11 g 2462MHz (ANT. A)




802.11 n(HT20) 2412 MHz (ANT. A)




802.11 n(HT20) 2437 MHz (ANT. A)

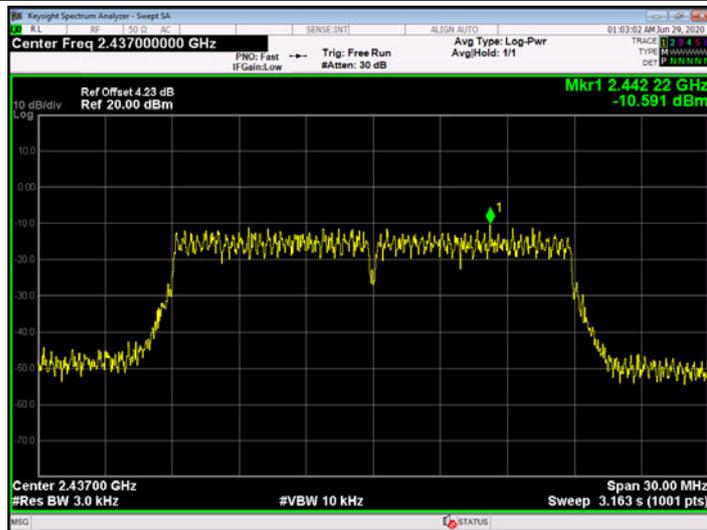


802.11 n(HT20) 2462MHz (ANT. A)

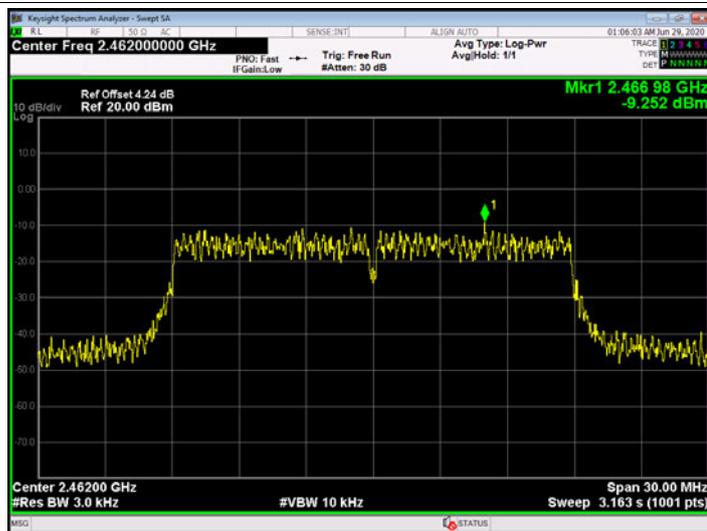


802.11 n(HT40) 2422 MHz (ANT. A)

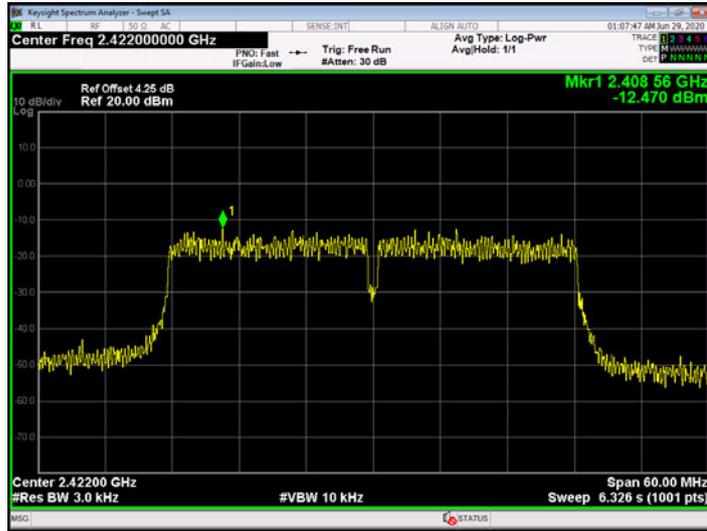

802.11 n(HT40) 2437 MHz (ANT. A)

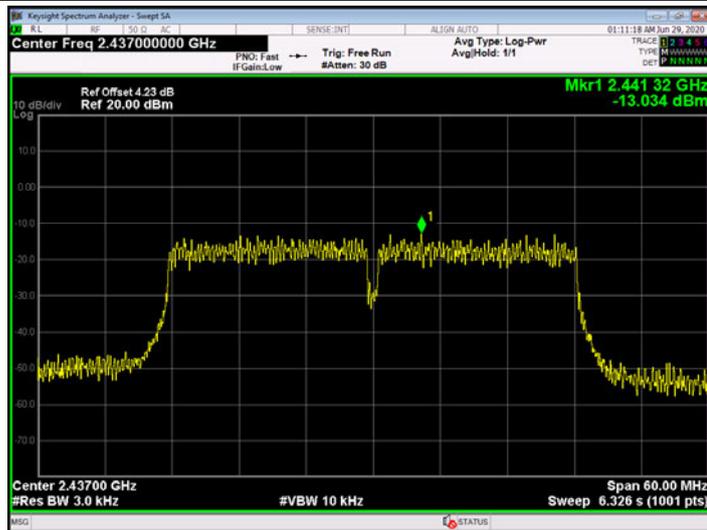

802.11 n(HT40) 2452MHz (ANT. A)

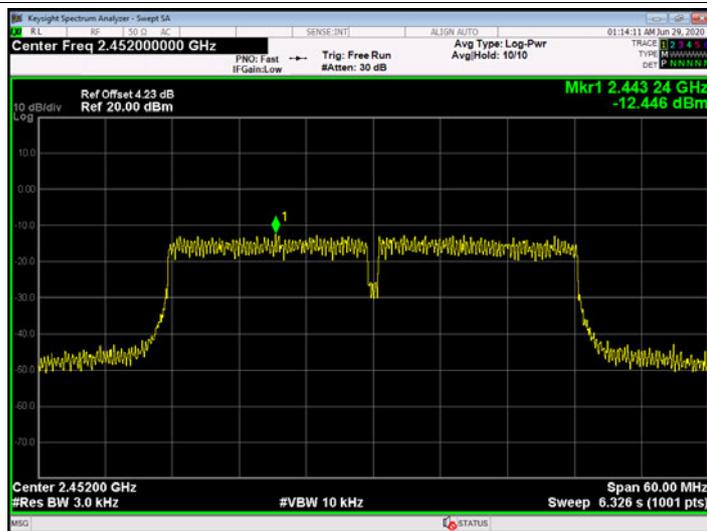

-----END OF REPORT-----