STRANGULATION HAZARD — Children have STRANGLED in cords. Keep this cord out of reach of children (more than 3 feet/1 meter away from the crib). Never use extension cords with AC adapters. Only use the WARNING AC Adapters provided.

WARNING Adult assembly required. Keep small parts away from children when assembling.

Warning Information

* Keep this instruction manual for future reference. * For adult use only


INSTRUCTION MANUAL

Setup and use your digital video baby monitor

Installing Baby Unit


A. Place Baby Unit on a flat surface, such as a desk or shelf or mount the camera on a wall.





Never place the baby unit or the cord within 1 meter of the crib

B. Connect the small plug of the power adapter to the Baby Unit and the other end to a suitable electrical outlet. Only use the enclosed adapter (5V DC 1000mA). The baby unit is turned on and the power LED will be green.





Connecting the power supply for the Parent Unit Connect the small plug of the power adapter to the base bracket or the parent unit and the other end to a electrical outlet. Only use the enclosed adapter(5V DC/1000mA).

Recommend charging time of at least 3 hours before first use.







Precaution: use of battery for Parent Unit

Only charge the battery when the battery life indicator is low. Constant recharging of your battery before the low battery indicator light comes on will decrease the life of your batteries.

When battery is low, the power on off LED (icon) will flash red and on screen display battery icon will flash red indicating that the battery needs to be charged.




If you use the parent unit for the first time, when you turn on the parent unit. some boot menus will pop-up on the screen, we try to explation status and function on these menus, please according to the tips to switch to the monitor system interface. When you are fimaliar with this monitor, you could switch off these on screen tips in menu.

3 Function of keys and LED indicators

Parent Unit

Sound Level indicator

Visual indicator for sound picked up from baby unit. The louder the sound is from Baby unit, the more LEDs are light on.



Power Saving on off status

Steady Green: Power saving mode is activated.

Power on off status LED

Steady Green: Parent Unit is powered on Steady Orange: Charging battery. Flash Red: Battery Low


> Power:Press and hold to switch "On/Off" the unit. -MENU Press to open and exit menu options Split Screen View Press and toggle between single and split screen. Use ◀▶ key to move red frame hetween 2 cameras Power Saving-on/off mode

Screen is switched off to save battery energy

When keep audio on in power saving mode, the screen will always be off. When keep audio off in power saving mode, when baby cry loud enough, screen is switched on to display baby's video. Baby cry level is adjustable from Menu setting (Sensitivity Level L, M, H).


Antenna

Lift up antenna to have better reception of audio and video.

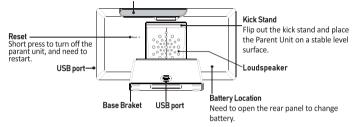

VOL- VOL+	Volume down/up	Press to decrease and increase volume.
Ф	Talk	Press and hold to talk to baby unit.
vox	Power Saving-on/off	Press to switch on/off Power Saving (voice activation mode).
ок	Select	Menu mode (Press to select menu option)
A T	Up/Down	Menu mode (Press to adjust menu settings)
4 •	Left/Right	Menu mode (Press to adjust menu settings)

Baby Unit



the camera is in pairing mode, and press it again to exit pairing mode

4

Start to use monitor



Talk function is activated

Lullaby is activated

Scan view is activated

Menu operation



Adjust Parent Unit LCD Brightness lighter or darker.

Signal strength reference

CAM1 Camera number



Adjust camera volume: Sound level from 1 to 5.



on lullaby, on Baby Unit side will always hear the ringtone from Parent Unit.



(Hand) ADD: Add additional camera. Two cameras can be added.

Step 1: Move the parent unit to the same area as the camera. Both parent and baby unit are switched on.

highlighted. Press "Select" to begin pairing.

Step 3: Within 10 seconds, press "Pairing button" of camera

Step 4: Once successfully paired, the camera light will stop flashing and video will appear on the monitor screen within 20 seconds

SCAN: Display paired camera one by one.


View: Select and display the camera. 0 Split screen view: **₽**₽ Monitor only play sound

from the camera which marked in red frame. * Use ◀▶ arrow key to move red

frame between 2 cameras. * Press "SPLIT" key to select and

switch to that camera view and exit split screen view.





c: Display temperature in Celsius scale.

Temperature calibration: calibrate room temperature display to your standardized one.

ON: Activate room temperature alarm function.

Baby's crying sound level

Activation sound level selection and leave audio off in power saving mode.

Loud: Baby cry louder to activate the Parent Unit.

Turn off screen and leave audio on: Keep audio continuously on when screen is off in power saving mode.



Sound Bar: This sound bar is disigned for deaf parents to reflect sound level picked up from camera. You can turn visual sound level indication

Cio Explanation On/Off: We try to explation status and function on the boot menu. You can turn the explanation on or off based on your usage.

▲ WARNING THIS PRODUCT CANNOT REPLACE RESPONSIBLE ADULT SUPERVISION

- When an AC Adapter is plugged into an electrical outlet, do not the exposed end.
- Test baby monitor before first use, periodically, and when changing location of the baby unit(Camera) Do not use monitor near water (Such as bathtub, Sink, etc) Keep parent unit away from heat sources (Such as stoves, radiators, etc)

- strongly recommended to have an adult directly checking on your baby. Premature babies or children considered at risk must be supervised by your pediatrician or other medical staff.

Battery Warning

- Use only the original rechargeable battery provided.

- Dispose of exhausted battery properly
- The apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such
- Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.

Precautions

PAIR

Do not overload wall outlets, extension cords, or integral conveceptacles as this can result in a risk of fire or electrics shock.

Do not attempt to service this product yourself as opening or emoving covers may expose you to dangerous voltage or other hazards Refer all servicing to qualified service personnel.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following Federal Communication Commission Interference

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



Status bar






⊕ Zoom in is activated


Monitor is muted

23 °C Baby room temperature

Battery level










OFF OFF: Deactivate Iullaby function.


Sten 2: Select ADD in Menu. The next available camera will automatically be











F: Display temperature in Fahrenheit scale.

OFF: Deactivate room temperature alarm function.

t unit from Power saving mode

Quiet: Baby cry a little bit to activate the Parent Unit. Medium: Baby cry moderate to activate the Parent Unit.







