


FCC Radio Test Report

FCC ID: 2AV2N-SR1021D

This report concerns: Original Grant

Project No. : 2008C176
Equipment : Smart Router
Brand Name : FiberHome
Test Model : SR1021D
Series Model : N/A
Applicant : Fiberhome Telecommunication Technologies Co., Ltd.
Address : No.88 Youkeyuan Road, Hongshan District, Wuhan, Hubei , China
Manufacturer : Fiberhome Telecommunication Technologies Co., Ltd.
Address : No.88 Youkeyuan Road, Hongshan District, Wuhan, Hubei , China
Factory : Fiberhome Telecommunication Technologies Co., Ltd.
Address : No.88 Youkeyuan Road, Hongshan District, Wuhan, Hubei , China
Date of Receipt : Sep. 02, 2020
Date of Test : Sep. 04, 2020 ~ Oct. 20, 2020
Issued Date : Nov. 02, 2020
Report Version : R00
Test Sample : Engineering Sample No.:DG2020092226 for conducted,
DG2020092227 for radiated.
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013
FCC KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Chella Zheng



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	9
2 . GENERAL INFORMATION	10
2.1 GENERAL DESCRIPTION OF EUT	10
2.2 DESCRIPTION OF TEST MODES	12
2.3 PARAMETERS OF TEST SOFTWARE	14
2.4 DUTY CYCLE	15
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
2.6 SUPPORT UNITS	16
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	17
3.1 LIMIT	17
3.2 TEST PROCEDURE	17
3.3 DEVIATION FROM TEST STANDARD	17
3.4 TEST SETUP	18
3.5 EUT OPERATION CONDITIONS	18
3.6 TEST RESULTS	18
4 . RADIATED EMISSIONS TEST	19
4.1 LIMIT	19
4.2 TEST PROCEDURE	20
4.3 DEVIATION FROM TEST STANDARD	20
4.4 TEST SETUP	21
4.5 EUT OPERATION CONDITIONS	22
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	22
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	22
4.8 TEST RESULTS - ABOVE 1000 MHZ	22
5 . BANDWIDTH TEST	23
5.1 LIMIT	23
5.2 TEST PROCEDURE	23
5.3 DEVIATION FROM STANDARD	23
5.4 TEST SETUP	23

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	23
5.6 TEST RESULTS	23
6 . MAXIMUM OUTPUT POWER TEST	24
6.1 LIMIT	24
6.2 TEST PROCEDURE	24
6.3 DEVIATION FROM STANDARD	24
6.4 TEST SETUP	24
6.5 EUT OPERATION CONDITIONS	24
6.6 TEST RESULTS	24
7 . CONDUCTED SPURIOUS EMISSIONS	25
7.1 LIMIT	25
7.2 TEST PROCEDURE	25
7.3 DEVIATION FROM STANDARD	25
7.4 TEST SETUP	25
7.5 EUT OPERATION CONDITIONS	25
7.6 TEST RESULTS	25
8 . POWER SPECTRAL DENSITY TEST	26
8.1 LIMIT	26
8.2 TEST PROCEDURE	26
8.3 DEVIATION FROM STANDARD	26
8.4 TEST SETUP	26
8.5 EUT OPERATION CONDITIONS	26
8.6 TEST RESULTS	26
9 . MEASUREMENT INSTRUMENTS LIST	27
10 . EUT TEST PHOTO	29
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	33
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	38
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	43
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	46
APPENDIX E - BANDWIDTH	95
APPENDIX F - MAXIMUM OUTPUT POWER	100
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	107

Table of Contents**Page****APPENDIX H - POWER SPECTRAL DENSITY****116**

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Nov. 02, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.68

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.26
		30MHz ~ 200MHz	H	3.38
		200MHz ~ 1,000MHz	V	3.98
		200MHz ~ 1,000MHz	H	3.94
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	±3.8 %
Maximum Output Power	±0.95 dB
Conducted Spurious Emission	±2.71 dB
Power Spectral Density	±0.86 dB
Temperature	±0.08 °C
Time	±0.58 %
Supply voltages	±0.3 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz AC 240V/50Hz	Kwok Guo
Radiated Emissions-9K-30MHz	25°C	60%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-30 MHz to 1GHz	26°C	52%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-Above 1000 MHz	26°C	52%	AC 120V/60Hz	Kwok Guo
Bandwidth	26°C	53%	DC 12V	Hayden Chen
Maximum Output Power	26°C	53%	DC 12V	Hayden Chen
Conducted Spurious Emissions	26°C	53%	DC 12V	Hayden Chen
Power Spectral Density	26°C	53%	DC 12V	Hayden Chen

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Router
Brand Name	FiberHome
Test Model	SR1021D
Series Model	N/A
Model Difference(s)	N/A
Power Source	DC voltage supplied from AC adapter. RD1201000-C55-35MGD
Power Rating	I/P: 100-240V ~50/60Hz 0.6A MAX O/P: 12V === 1.0A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps
Maximum Output Power _Non Beamforming	IEEE 802.11b: 23.09 dBm (0.2037 W) IEEE 802.11g: 23.32 dBm (0.2148 W) IEEE 802.11n (HT20): 23.25 dBm (0.2113 W) IEEE 802.11n (HT40): 22.85 dBm (0.1928 W)
Maximum Output Power Beamforming	IEEE 802.11n (HT20): 22.95 dBm (0.1972 W) IEEE 802.11n (HT40): 22.65 dBm (0.1841 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20) CH03 - CH09 for IEEE 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1		XD1C-C155P4D-01A	Internal	N/A	2.95
2		XD1C-C155P4D-01A	Internal	N/A	2.95

Note:

- This EUT supports CDD, and all antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$.
For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the Directional gain=2.95.
For power spectral density measurements, $N_{ANT}=2$, $N_{SS} = 1$.
So the Directional gain= $G_{ANT} + \text{Array Gain} = G_{ANT} + 10\log(N_{ANT}/N_{SS})\text{dBi} = 2.95 + 10\log(2/1)\text{dBi} = 5.96$.
- Beamforming Gain: 3 dB. So Directional gain=3+2.95=5.95.

4. Table for Antenna Configuration:
For Non Beamforming:

Operating Mode / TX Mode	2TX
IEEE 802.11b	V (Ant. 1+ Ant. 2)
IEEE 802.11g	V (Ant. 1+ Ant. 2)
IEEE 802.11n (HT20)	V (Ant. 1+ Ant. 2)
IEEE 802.11n (HT40)	V (Ant. 1+ Ant. 2)

For Beamforming:

Operating Mode / TX Mode	2TX
IEEE 802.11n (HT20)	V (Ant. 1+ Ant. 2)
IEEE 802.11n (HT40)	V (Ant. 1+ Ant. 2)

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX G Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 5	TX G Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 5	TX G Mode Channel 06

Radiated emissions test - Above 1GHz_Non Beamforming	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Maximum Output Power test_Non Beamforming	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Maximum Output Power test_Beamforming	
Final Test Mode	Description
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Other Conducted test_Non Beamforming	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

NOTE:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (3) For radiated emission below 1 GHz test, the IEEE 802.11g Channel 06 is found to be the worst case and recorded.
- (4) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (5) The measurements for RF Output Power were tested, the Non Beamforming and Beamforming are recorded in the report. The worst case was Non Beamforming and only worst case were documented for other test items.
- (6) For radiated spurious emissions below 1 GHz test, all adapters had been pre-tested and in this report only recorded the worst case.

2.3 PARAMETERS OF TEST SOFTWARE

Non Beamforming

Test Software	mp_tool		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	40/42	40/42	39/41
IEEE 802.11g	49/50	51/53	51/53
IEEE 802.11n (HT20)	47/49	51/53	48/50
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	41/43	48/50	47/49


Beamforming

Test Software	mp_tool		
Frequency (MHz)	2412	2437	2462
IEEE 802.11n (HT20)	46/47	50/52	47/48
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	40/41	47/48	46/47

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.


IEEE 802.11b

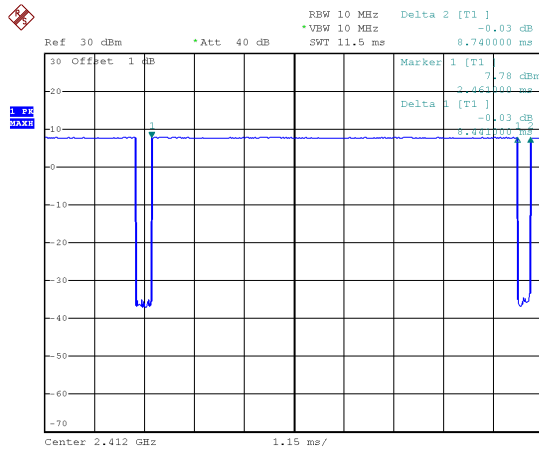

Date: 11.SEP.2020 13:43:33

Duty cycle = 8.441 ms / 8.740 ms = 96.58%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.15$


IEEE 802.11g

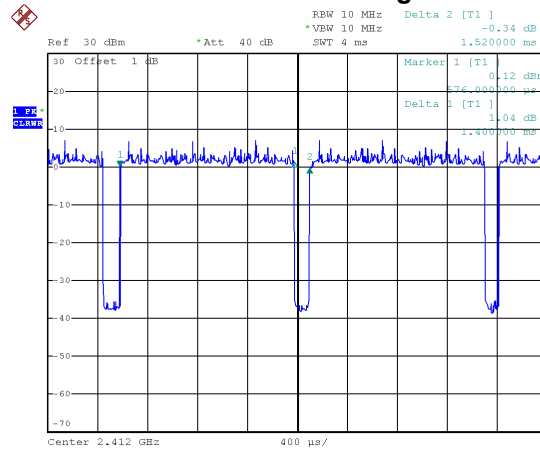

Date: 11.SEP.2020 13:43:46

Duty cycle = 1.400 ms / 1.520 ms = 92.11%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.36$


IEEE 802.11n (HT20)

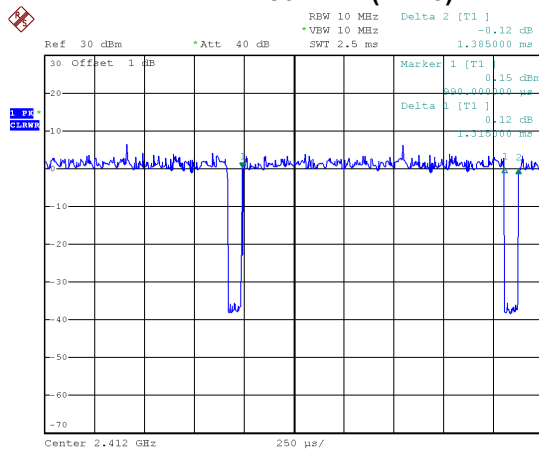

Date: 11.SEP.2020 13:43:59

Duty cycle = 1.315 ms / 1.385 ms = 94.95%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.23$

IEEE 802.11n (HT40)

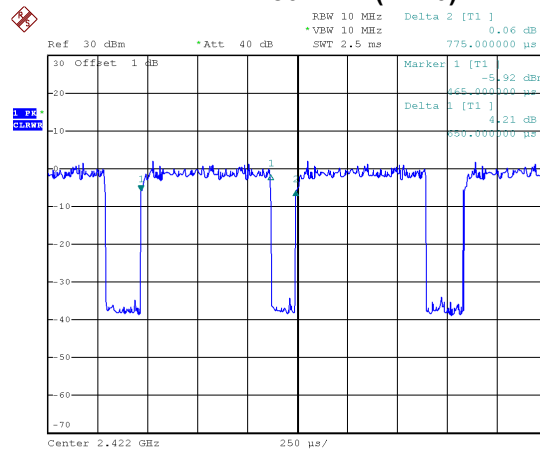

Date: 11.SEP.2020 13:44:11

Duty cycle = 0.650 ms / 0.775 ms = 83.87%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.76$

NOTE:


For IEEE 802.11b, IEEE 802.11g and IEEE 802.11n (HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle $< 98\%$).

For IEEE 802.11n (HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle $< 98\%$).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

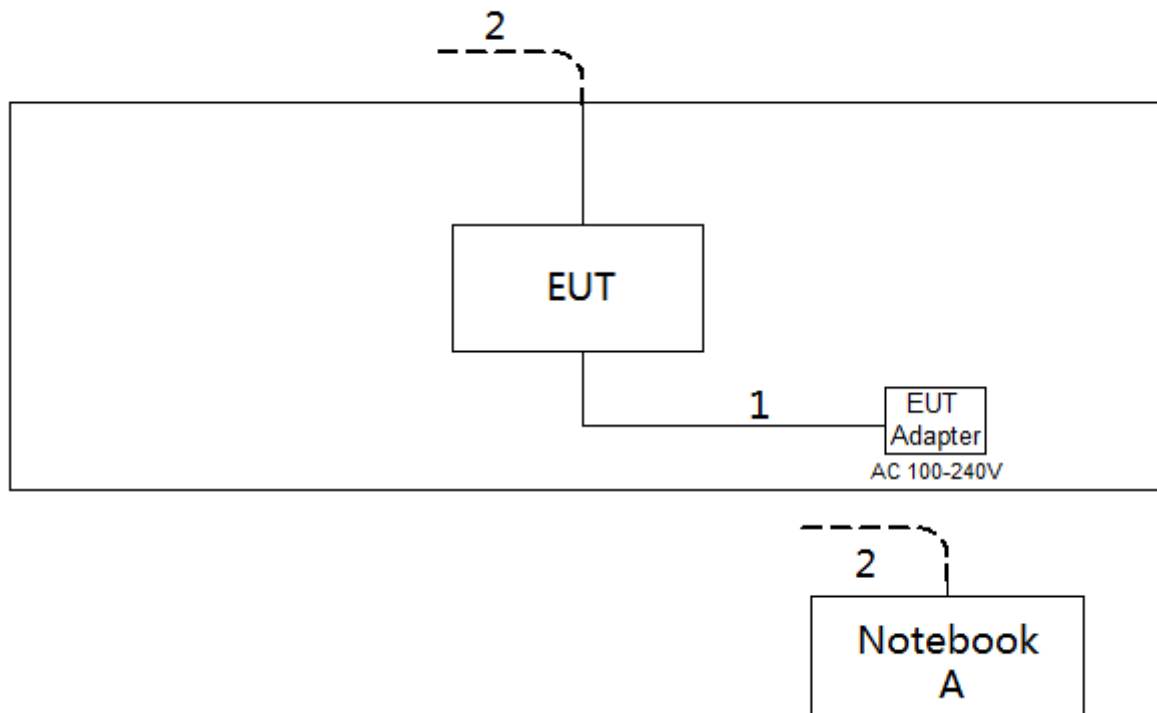

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

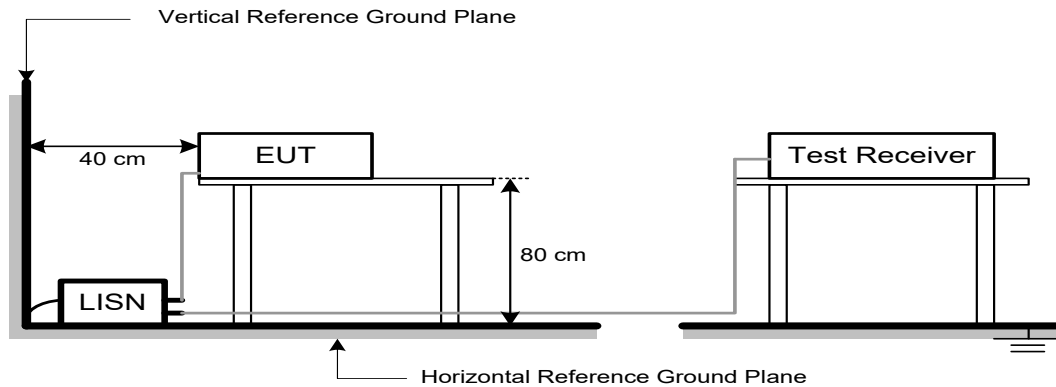

3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD


No deviation


4.4 TEST SETUP

9 kHz-30 MHz

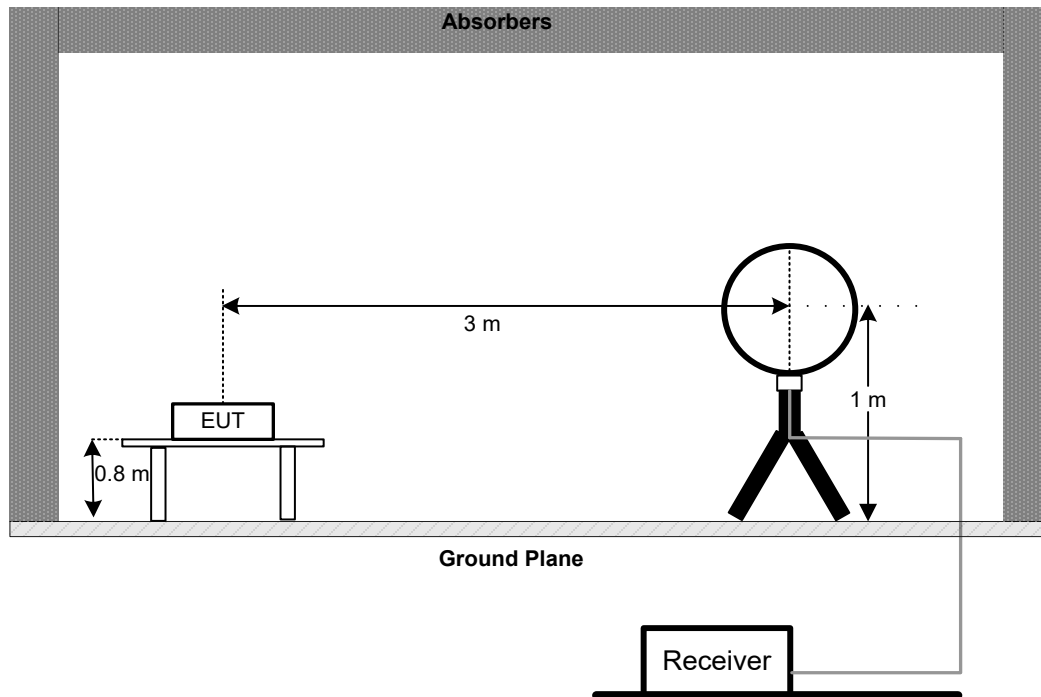

30 MHz to 1 GHz

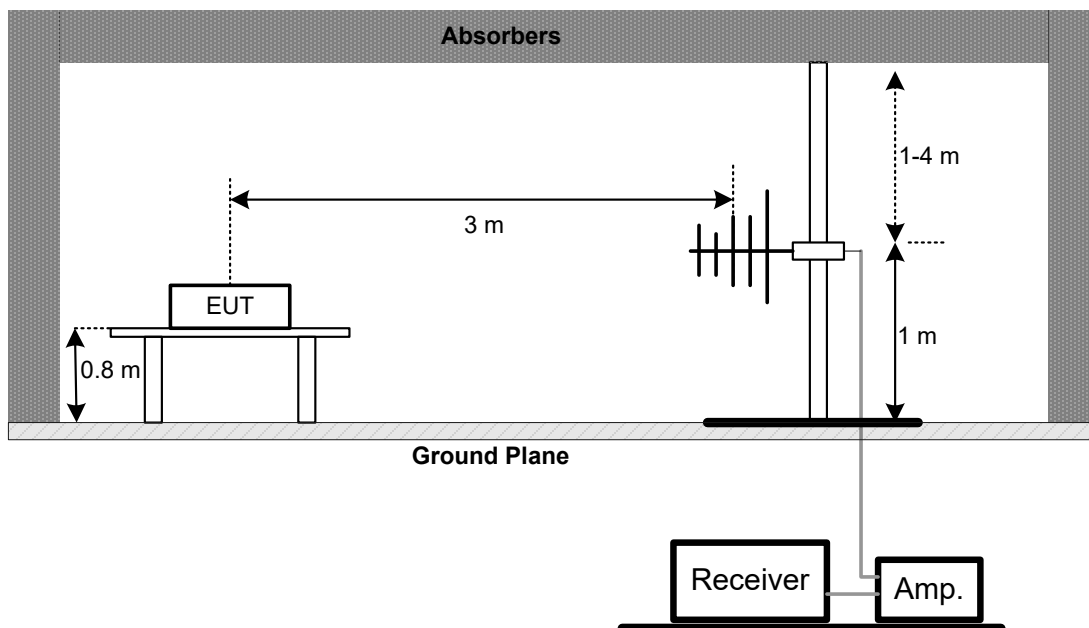

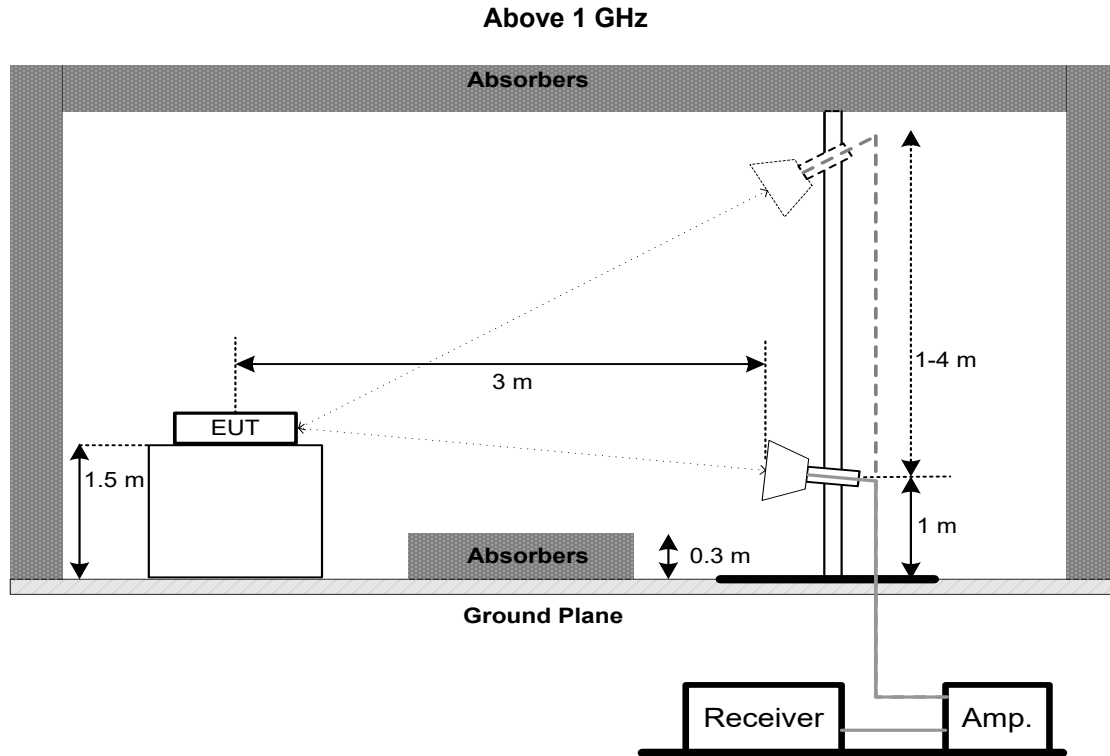

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:
 - For 6 dB Bandwidth: RBW= 100 kHz, VBW=300 kHz, Sweep time = auto.
 - For 99% Emission Bandwidth B/G/N-20 Mode: RBW= 300 kHz, VBW=1 MHz, Sweep time = 2.5 ms.
 - For 99% Emission Bandwidth N-40 Mode: RBW= 1 MHz, VBW=3 MHz, Sweep time = 2.5 ms.
- The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm

6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.


7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method 11.10.2 of ANSI C63.10-2013.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2021
2	LISN	EMCO	3816/2	52765	Mar. 01, 2021
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 28, 2021
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 01, 2021
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 10, 2021
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EM	EM-6876-1	230	Apr. 16, 2021
2	Cable	N/A	RG 213/U	N/A	May 29, 2021
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 28, 2021
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2021
2*	Amplifier	HP	8447D	2944A09673	Aug. 11, 2021
3	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 12, 2021
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jul. 07, 2021
3	Amplifier	Agilent	8449B	3008A02333	Mar. 01, 2021
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 07, 2021
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6 000	N/A	May 09, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Filter	STI	STI15-9912	N/A	Jul. 25, 2021
11	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Bandwidth & Antenna Conducted Spurious Emissions & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Jul. 25, 2021
2	RF Cable	Tongkaichuan	N/A	N/A	N/A
3	DC Block	Mini	N/A	N/A	N/A

Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 07, 2021
2	Wideband power sensor	Keysight	N1923A	MY58310004	Jul. 25, 2021
3	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 11, 2021
4	RF Cable	Tongkaichuan	N/A	N/A	N/A


Remark: "N/A" denotes no model name, serial no. or calibration specified.

"*" calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.

10. EUT TEST PHOTO

AC Power Line Conducted Emissions Test Photos

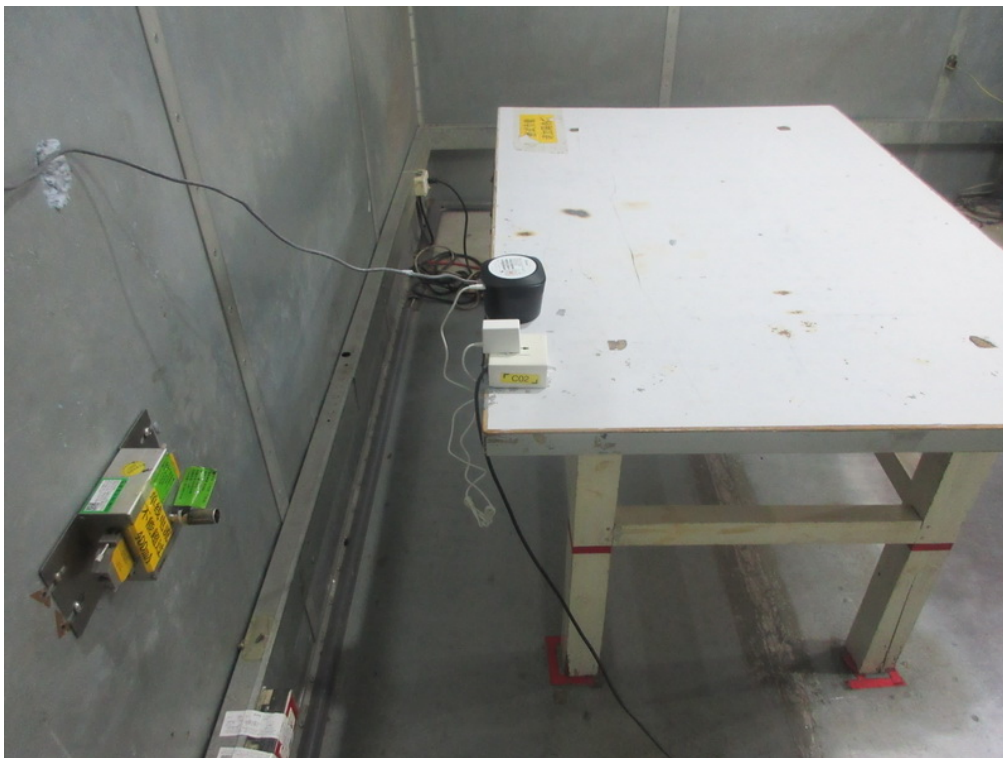



Radiated Emissions Test Photos

9 kHz to 30 MHz



Radiated Emissions Test Photos

30 MHz to 1 GHz

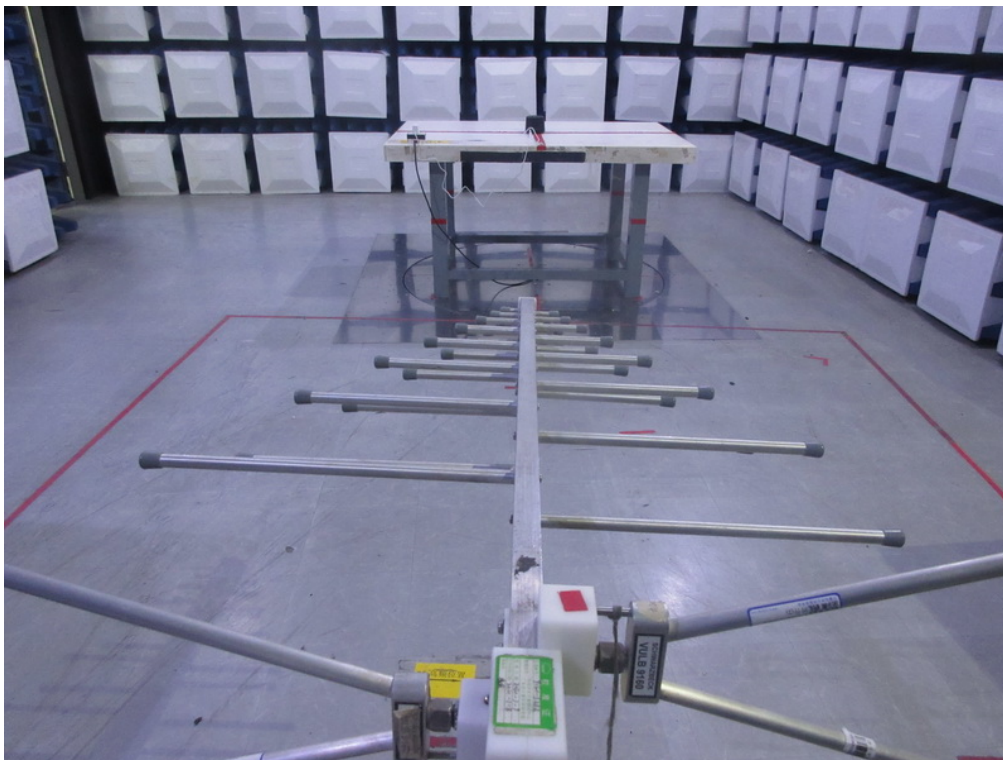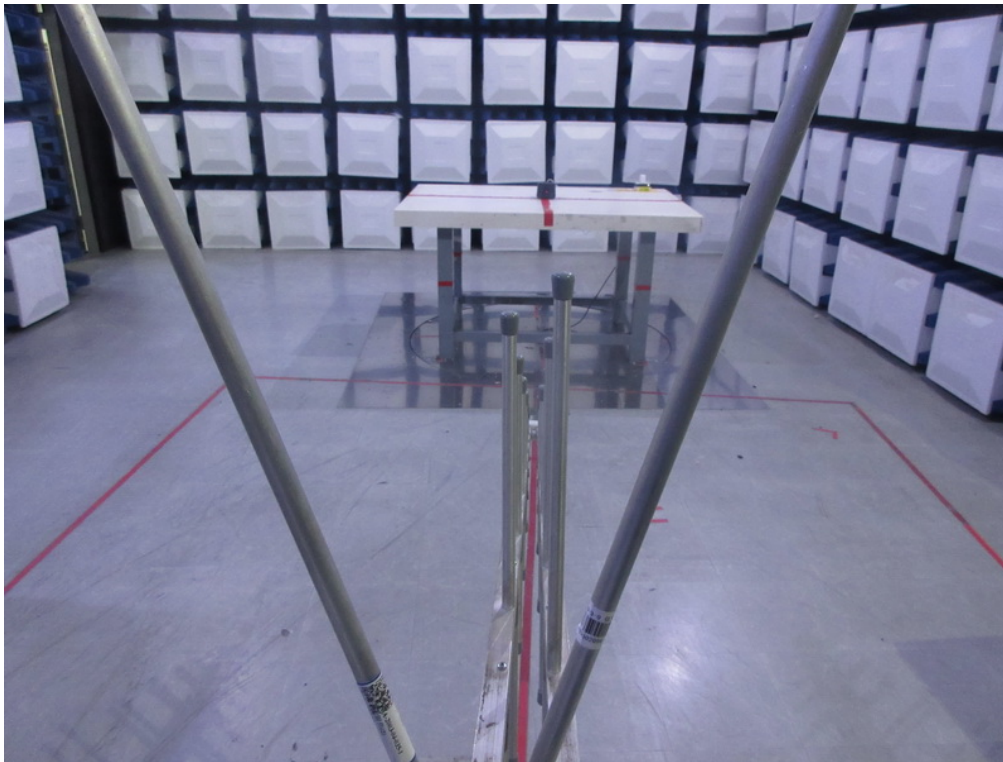


Radiated Emissions Test Photos

Above 1 GHz



APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Voltage	AC 120V/60Hz
Test Mode	TX G Mode Channel 06

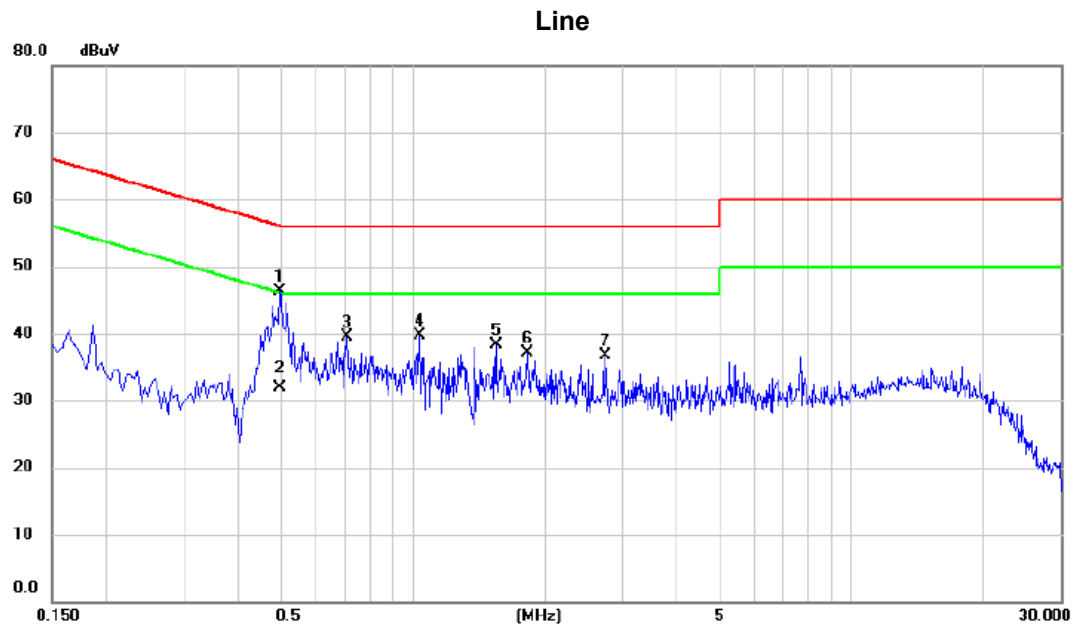


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.4965	36.44	9.95	46.39	56.06	-9.67	peak	
2		0.4965	22.00	9.95	31.95	46.06	-14.11	AVG	
3		0.7080	29.60	9.88	39.48	56.00	-16.52	peak	
4		1.0320	29.67	10.01	39.68	56.00	-16.32	peak	
5		1.5494	28.21	10.05	38.26	56.00	-17.74	peak	
6		1.8240	27.04	10.08	37.12	56.00	-18.88	peak	
7		2.7510	26.47	10.16	36.63	56.00	-19.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Voltage	AC 120V/60Hz
Test Mode	TX G Mode Channel 06

Neutral

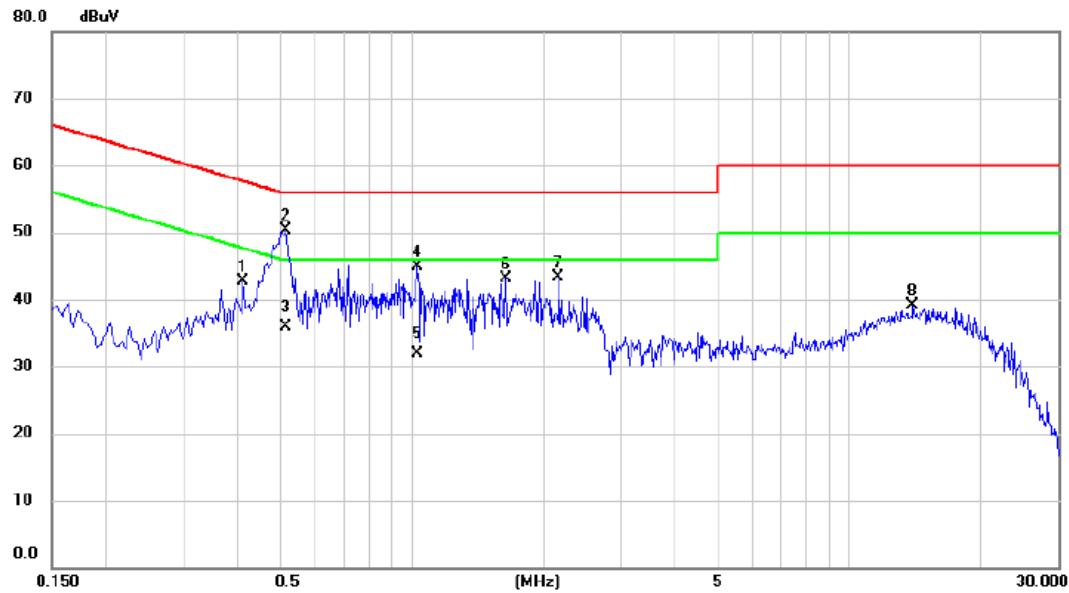


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4110	32.53	10.09	42.62	57.63	-15.01	peak	
2	*	0.5144	40.20	10.15	50.35	56.00	-5.65	peak	
3		0.5144	25.80	10.15	35.95	46.00	-10.05	AVG	
4		1.0275	34.59	10.30	44.89	56.00	-11.11	peak	
5		1.0275	21.70	10.30	32.00	46.00	-14.00	AVG	
6		1.6440	32.70	10.39	43.09	56.00	-12.91	peak	
7		2.1570	32.78	10.43	43.21	56.00	-12.79	peak	
8		13.9470	27.93	11.10	39.03	60.00	-20.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Voltage	AC 240V/50Hz
Test Mode	TX G Mode Channel 06

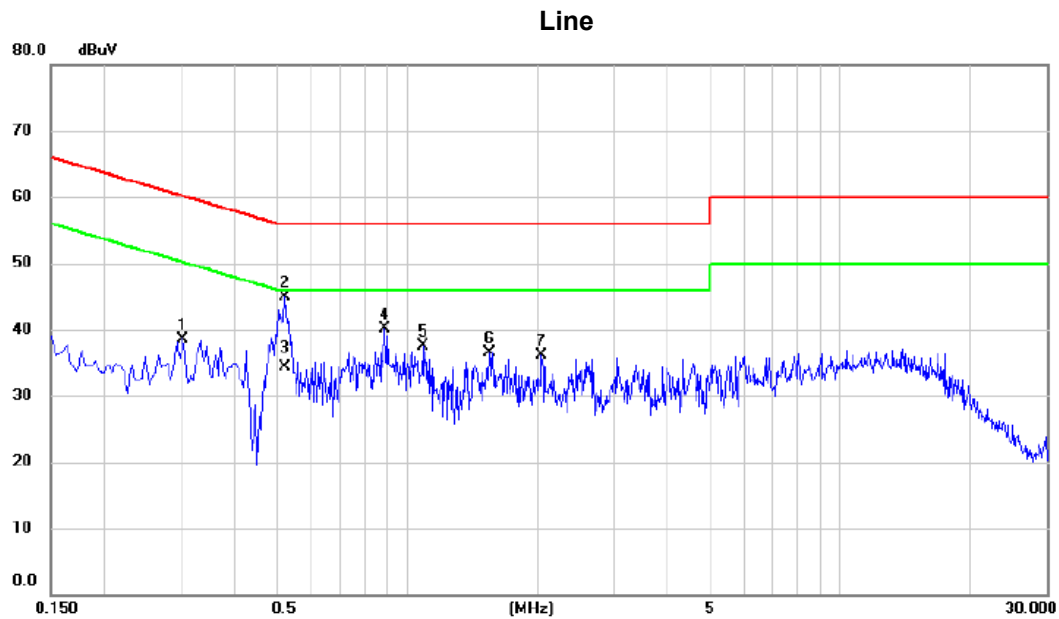


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3030	28.71	9.89	38.60	60.16	-21.56	peak	
2	*	0.5235	34.97	9.95	44.92	56.00	-11.08	peak	
3		0.5235	24.30	9.95	34.25	46.00	-11.75	AVG	
4		0.8880	30.08	10.00	40.08	56.00	-15.92	peak	
5		1.0860	27.56	10.02	37.58	56.00	-18.42	peak	
6		1.5494	26.38	10.05	36.43	56.00	-19.57	peak	
7		2.0445	25.98	10.09	36.07	56.00	-19.93	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Voltage	AC 240V/50Hz
Test Mode	TX G Mode Channel 06

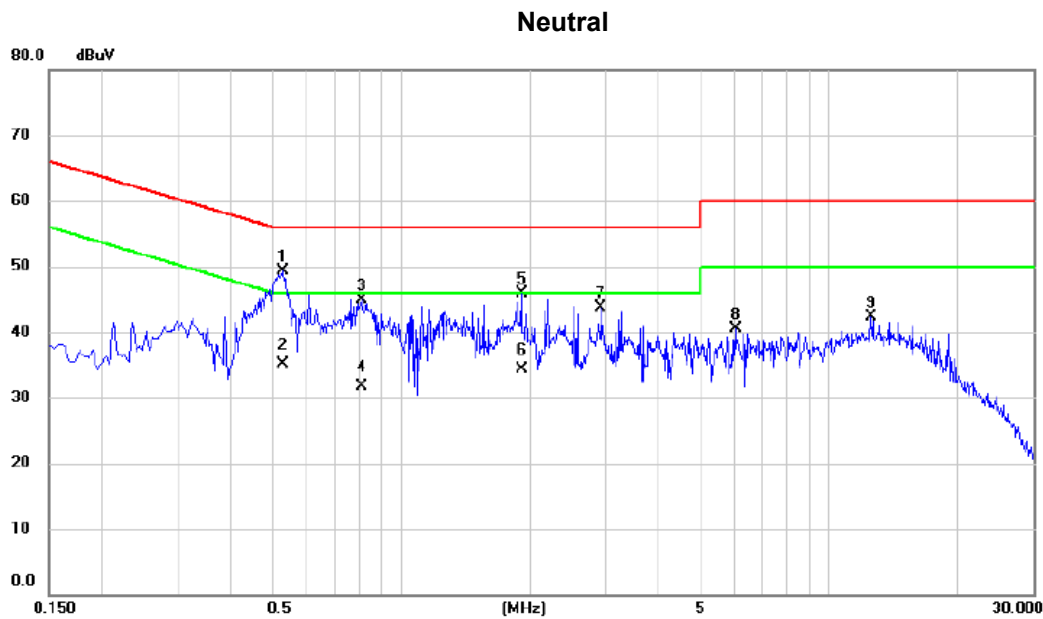

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.5280	39.20	10.15	49.35	56.00	-6.65	peak	
2	0.5280	24.90	10.15	35.05	46.00	-10.95	AVG	
3	0.8070	34.72	10.24	44.96	56.00	-11.04	peak	
4	0.8070	21.50	10.24	31.74	46.00	-14.26	AVG	
5	1.9095	35.43	10.41	45.84	56.00	-10.16	peak	
6	1.9095	23.80	10.41	34.21	46.00	-11.79	AVG	
7	2.9310	33.23	10.52	43.75	56.00	-12.25	peak	
8	6.0495	29.72	10.74	40.46	60.00	-19.54	peak	
9	12.5340	31.18	11.09	42.27	60.00	-17.73	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode: TX G Mode Channel 06

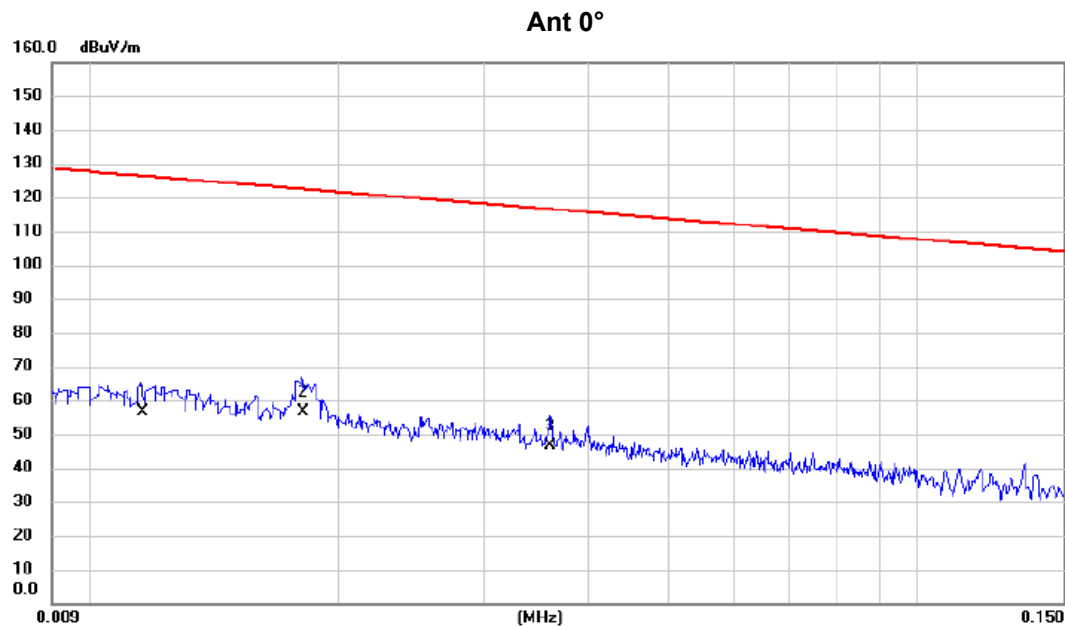


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		0.0116	40.77	15.82	56.59	126.32	-69.73	AVG		
2	*	0.0181	42.62	13.81	56.43	122.45	-66.02	AVG		
3		0.0360	33.62	12.79	46.41	116.48	-70.07	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode Channel 06

Ant 0°

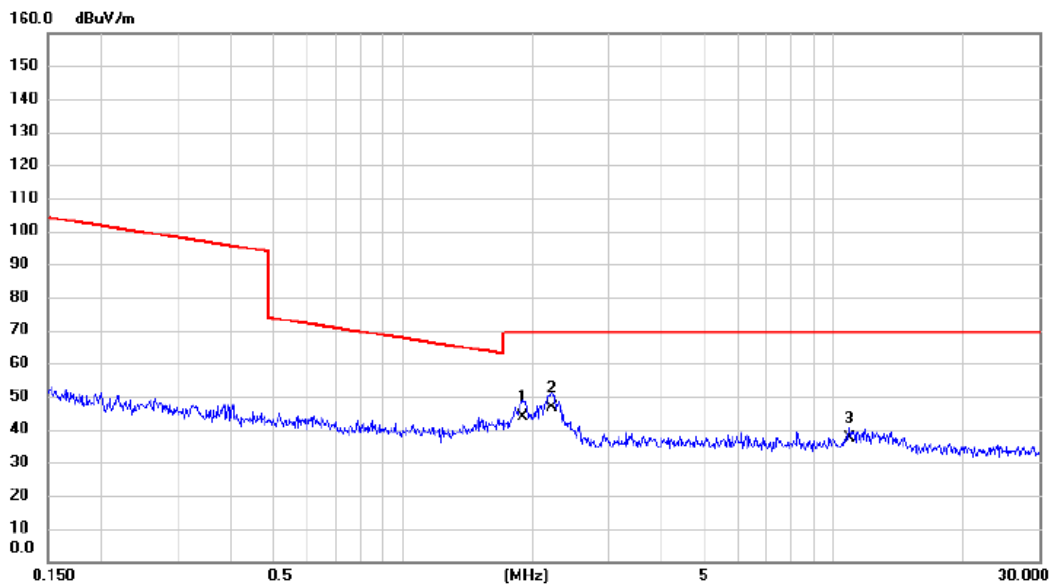

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1.8980	32.46	11.35	43.81	69.54	-25.73	QP		
2	*	2.2250	35.33	11.20	46.53	69.54	-23.01	QP		
3		10.9050	25.91	11.51	37.42	69.54	-32.12	QP		


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode Channel 06

Ant 90°

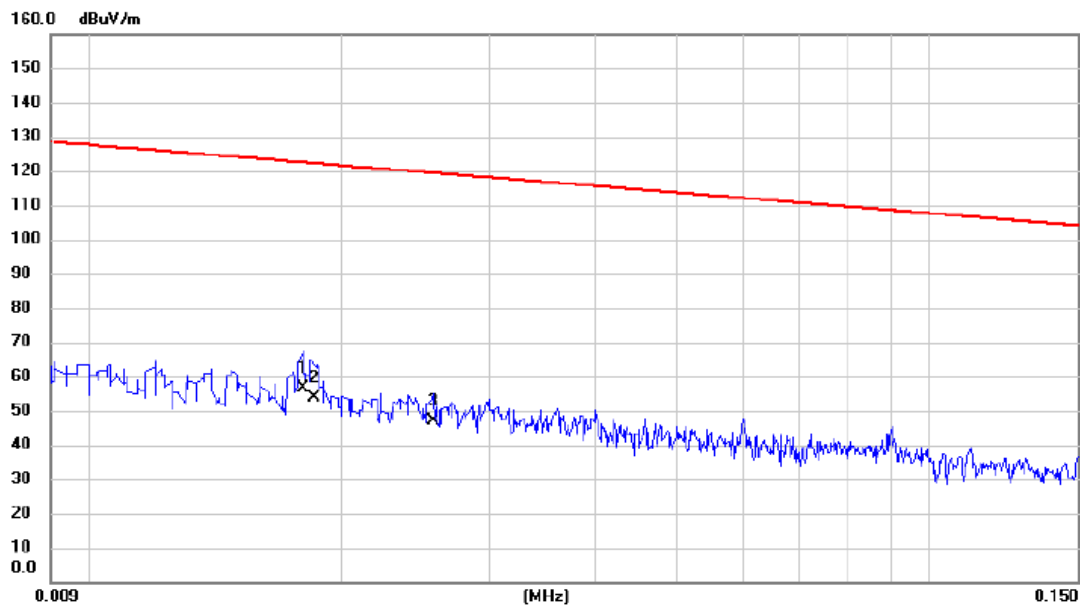


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	0.0180	42.62	13.84	56.46	122.50	-66.04	AVG		
2		0.0185	40.22	13.68	53.90	122.26	-68.36	AVG		
3		0.0257	33.95	13.07	47.02	119.41	-72.39	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode Channel 06

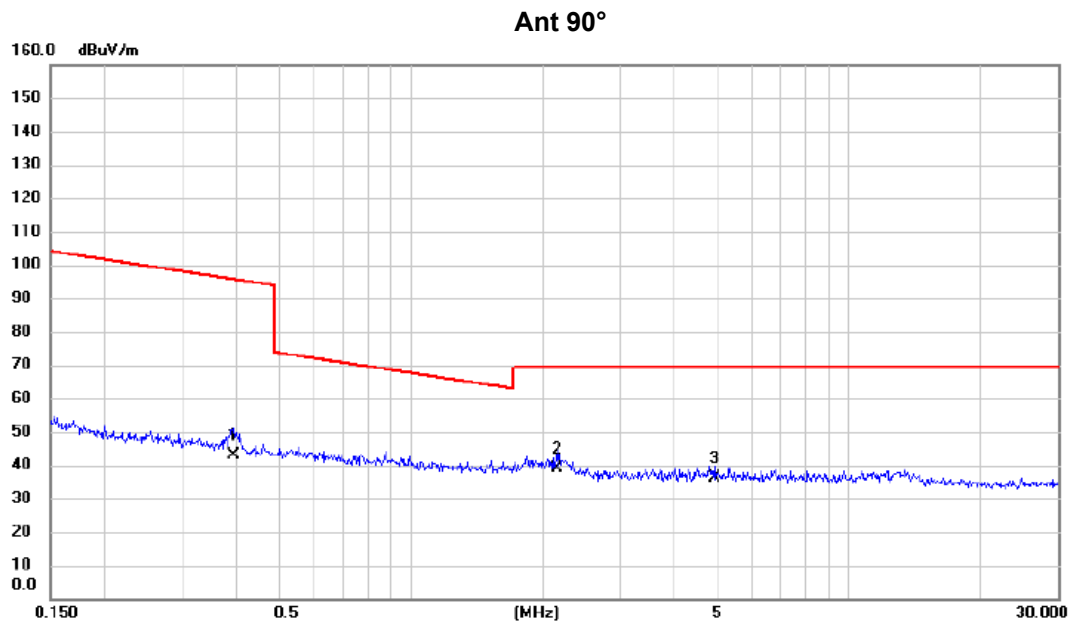

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.3933	30.66	12.28	42.94	95.71	-52.77	AVG		
2	*	2.1552	27.62	11.23	38.85	69.54	-30.69	QP		
3		4.9257	25.19	11.08	36.27	69.54	-33.27	QP		

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode: TX G Mode Channel 06

Vertical

80 dBuV/m

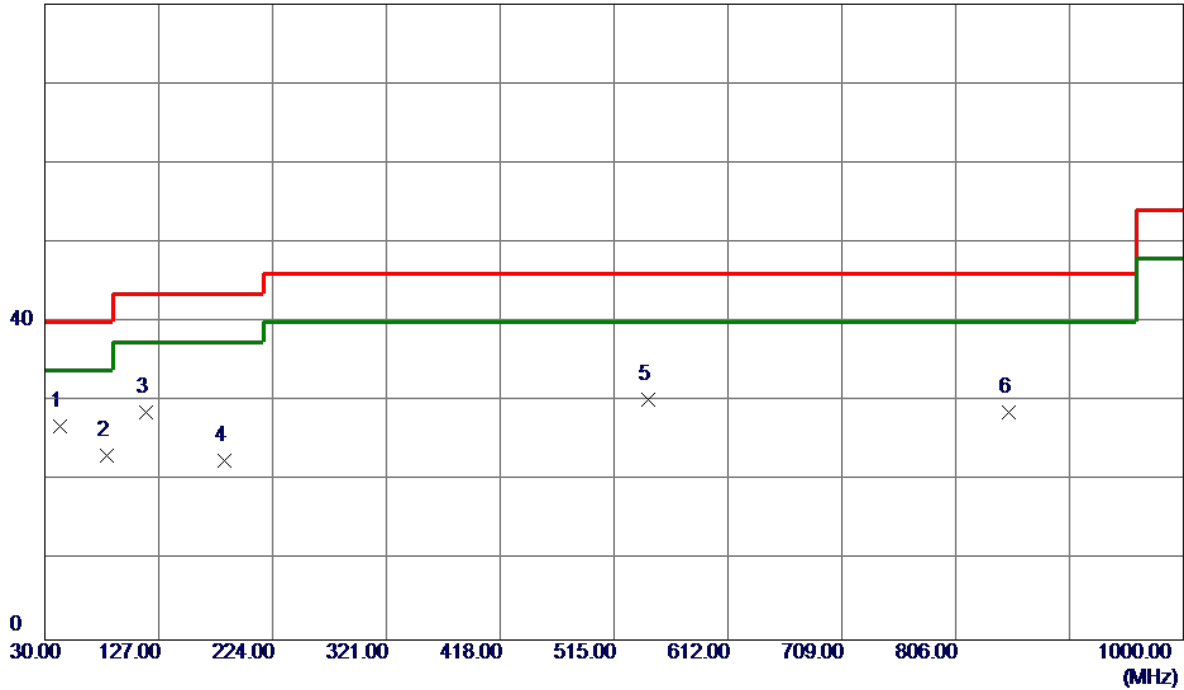

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	42.6100	41.06	-14.18	26.88	40.00	-13.12	Peak	
2	82.3800	40.49	-17.25	23.24	40.00	-16.76	Peak	
3	116.3300	41.91	-13.28	28.63	43.50	-14.87	Peak	
4	183.2600	35.78	-13.21	22.57	43.50	-20.93	Peak	
5	544.1000	37.14	-6.86	30.28	46.00	-15.72	Peak	
6	851.5900	30.33	-1.72	28.61	46.00	-17.39	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode Channel 06

Horizontal

80 dBuV/m

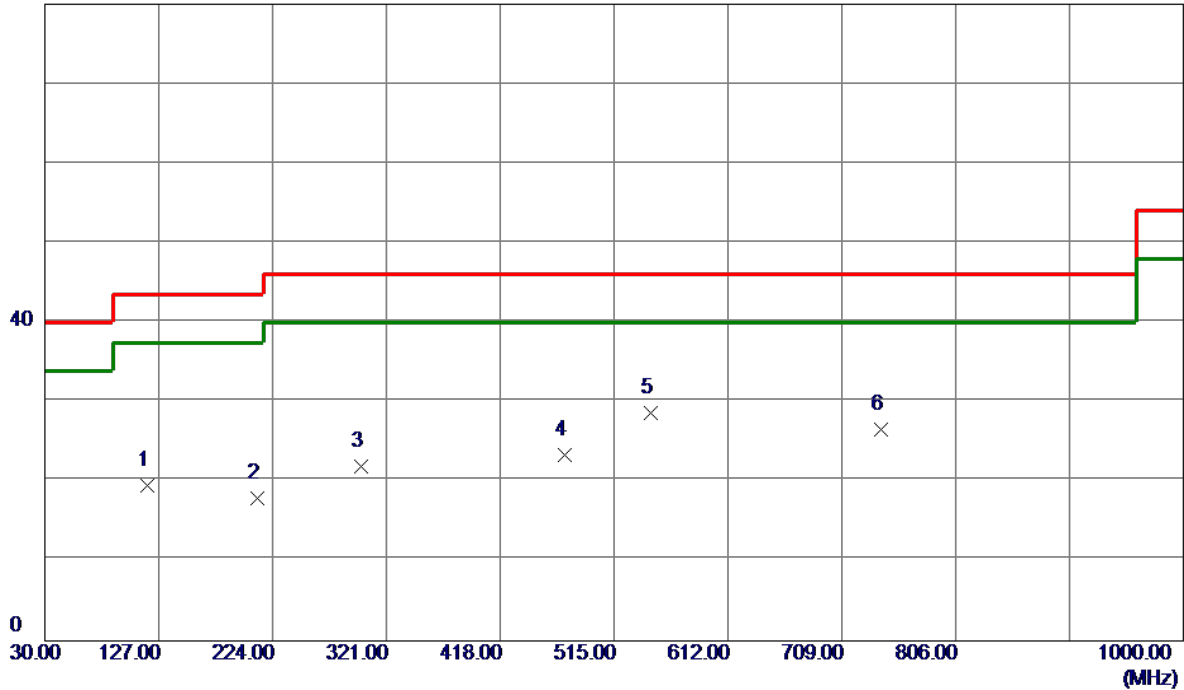

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	117.3000	32.71	-13.14	19.57	43.50	-23.93	Peak	
2	211.3900	32.99	-15.09	17.90	43.50	-25.60	Peak	
3	299.6600	33.00	-11.02	21.98	46.00	-24.02	Peak	
4	473.2900	30.88	-7.46	23.42	46.00	-22.58	Peak	
5 *	546.0400	35.54	-6.84	28.70	46.00	-17.30	Peak	
6	741.9800	29.76	-3.27	26.49	46.00	-19.51	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode: TX B Mode 2412 MHz

Vertical

130 dBuV/m

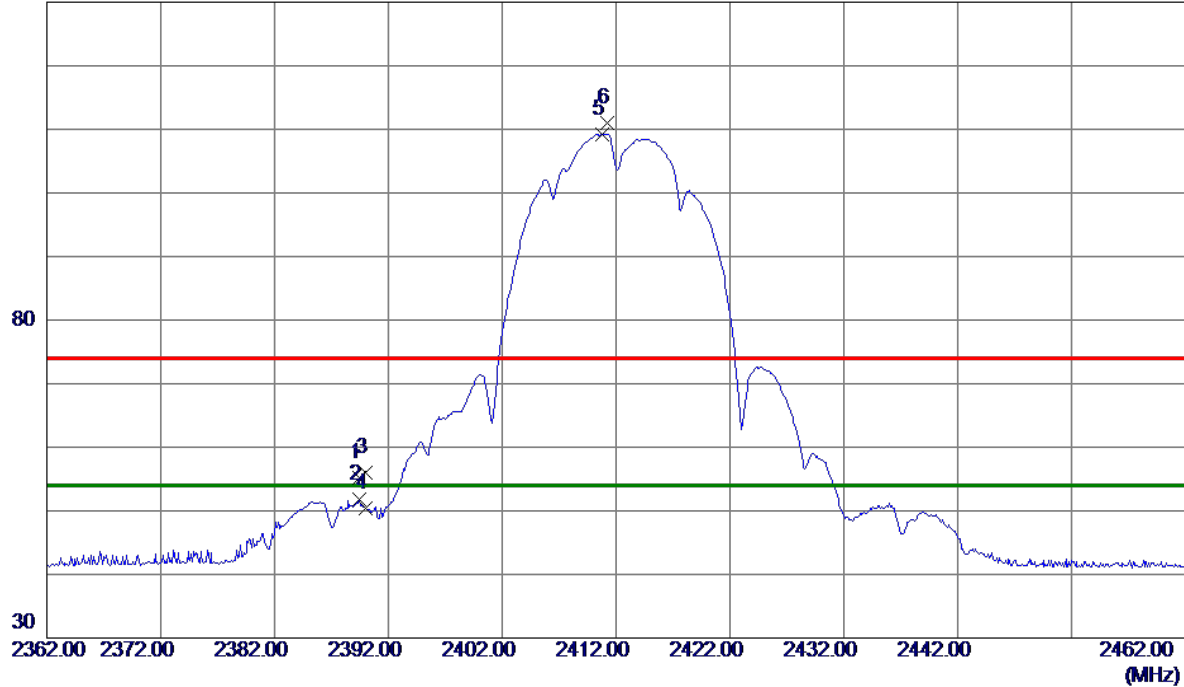

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.4000	46.93	8.29	55.22	74.00	-18.78	Peak	
2	2389.4000	43.51	8.29	51.80	54.00	-2.20	AVG	
3	2390.0000	47.70	8.29	55.99	74.00	-18.01	Peak	
4	2390.0000	42.18	8.29	50.47	54.00	-3.53	AVG	
5 *	2410.8000	100.87	8.31	109.18	54.00	55.18	AVG	No Limit
6	2411.2000	102.74	8.31	111.05	74.00	37.05	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Vertical

80 dBuV/m

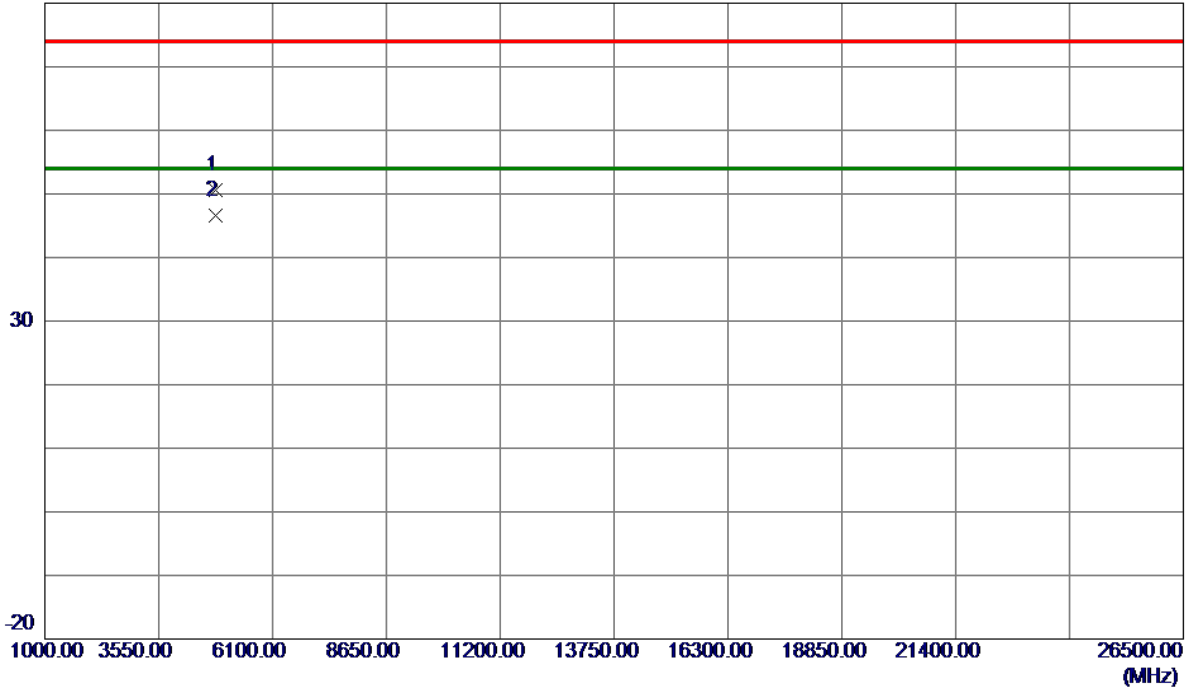

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.9980	45.31	5.32	50.63	74.00	-23.37	Peak	
2 *	4824.1120	41.31	5.32	46.63	54.00	-7.37	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Horizontal

130 dBuV/m

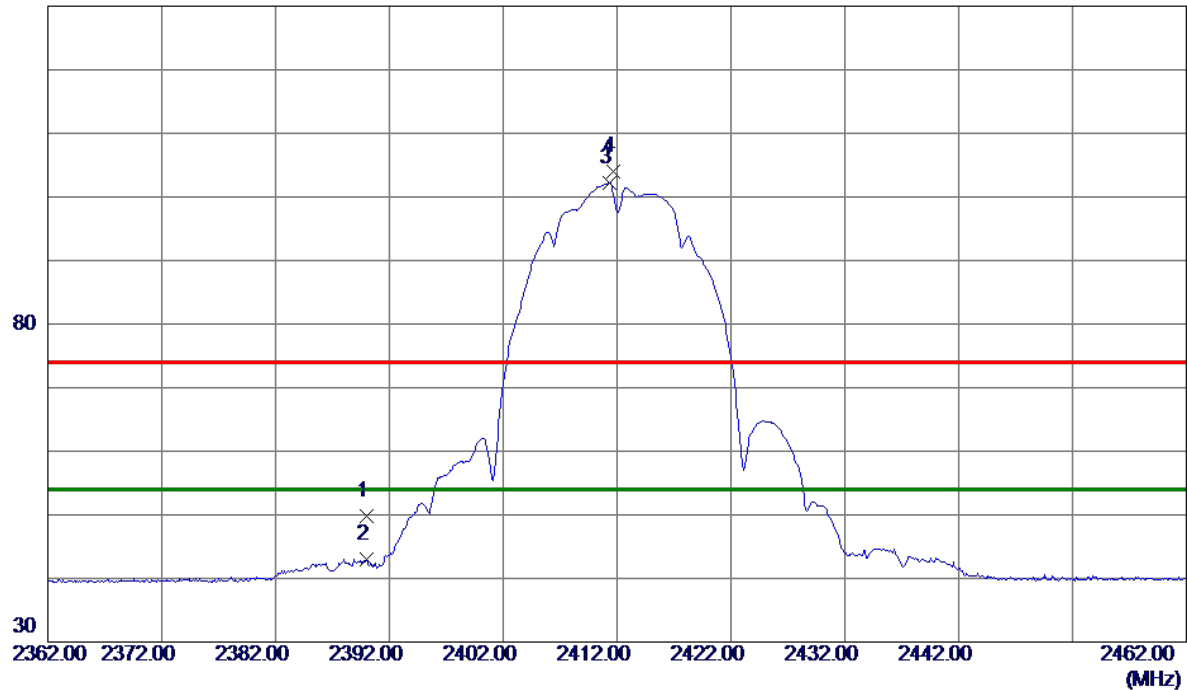

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	41.46	8.29	49.75	74.00	-24.25	Peak	
2	2390.0000	34.63	8.29	42.92	54.00	-11.08	AVG	
3 *	2411.3000	93.89	8.31	102.20	54.00	48.20	AVG	No Limit
4	2411.7000	95.75	8.31	104.06	74.00	30.06	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Horizontal

80 dBuV/m

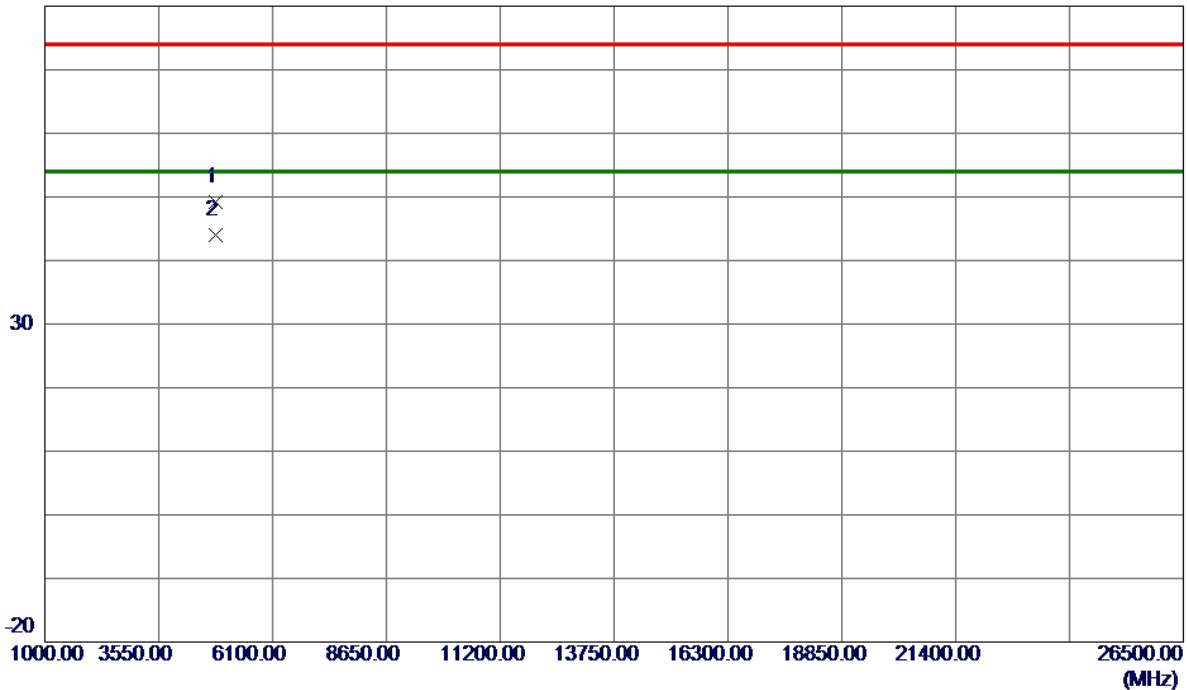

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.0440	43.90	5.32	49.22	74.00	-24.78	Peak	
2 *	4824.1380	38.63	5.32	43.95	54.00	-10.05	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical

130 dBuV/m

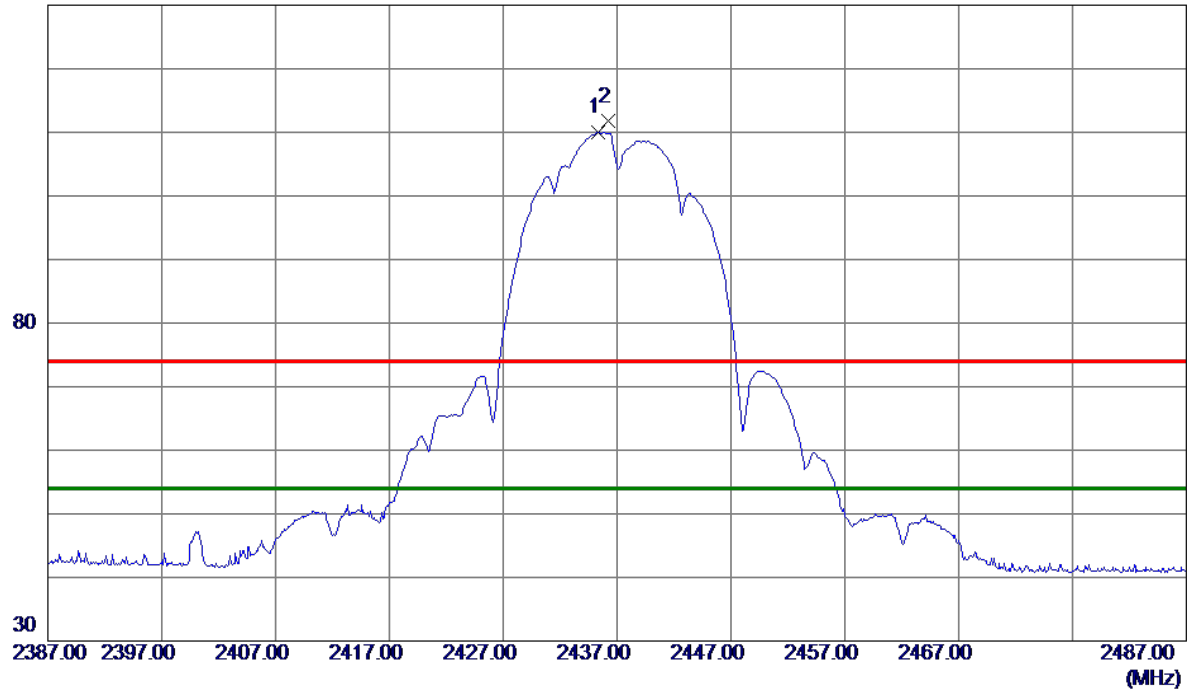

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2435.3000	101.67	8.34	110.01	54.00	56.01	AVG	No Limit
2	2436.2000	103.36	8.34	111.70	74.00	37.70	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical

80 dBuV/m

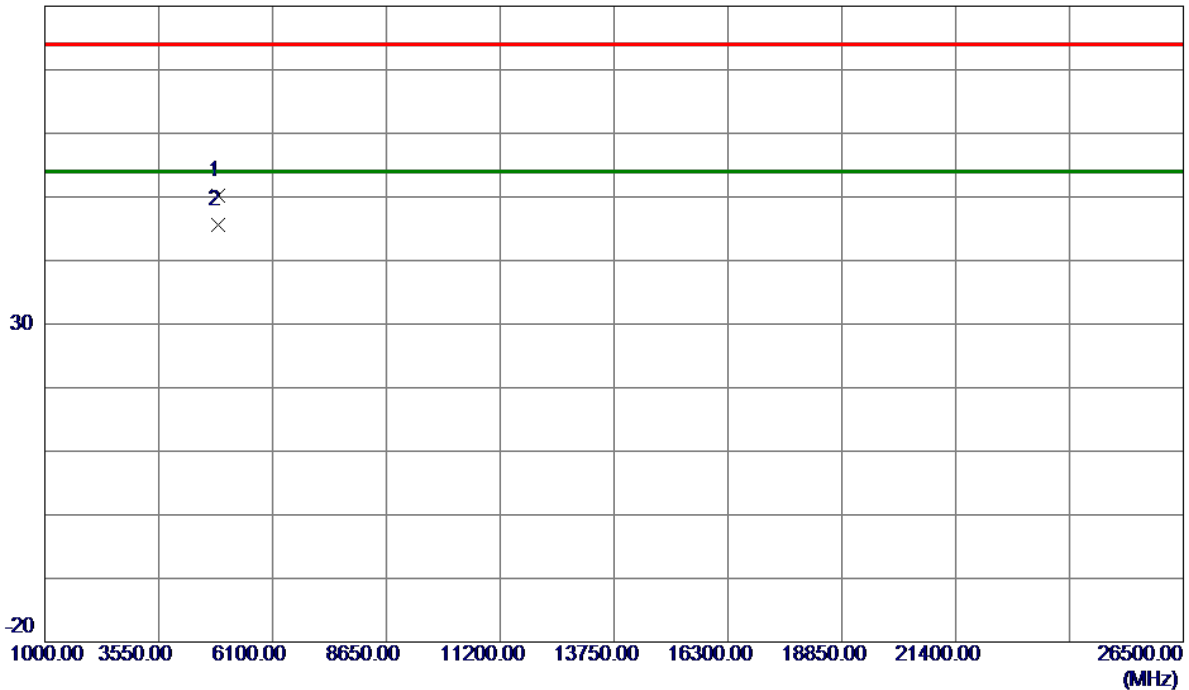


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9640	44.83	5.46	50.29	74.00	-23.71	Peak	
2 *	4874.1420	40.22	5.46	45.68	54.00	-8.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Horizontal

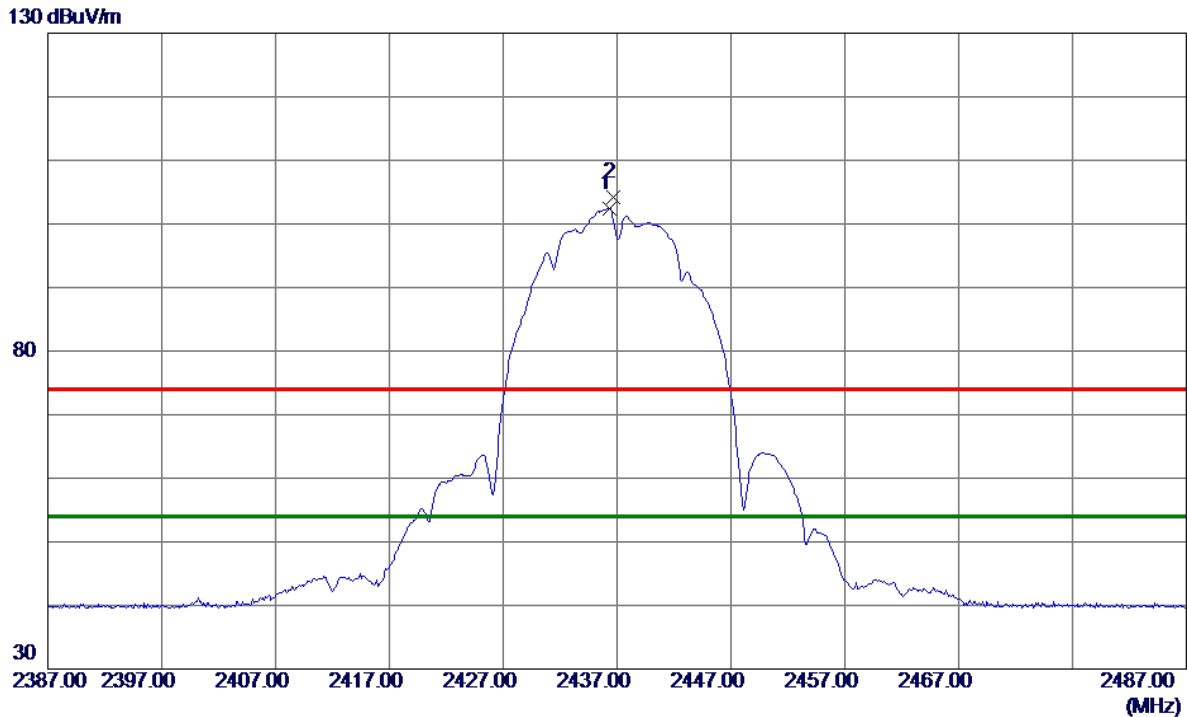

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2436.3000	94.14	8.34	102.48	54.00	48.48	AVG	No Limit
2	2436.7000	95.86	8.34	104.20	74.00	30.20	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2437 MHz
------------	--------------------

Horizontal

80 dBuV/m

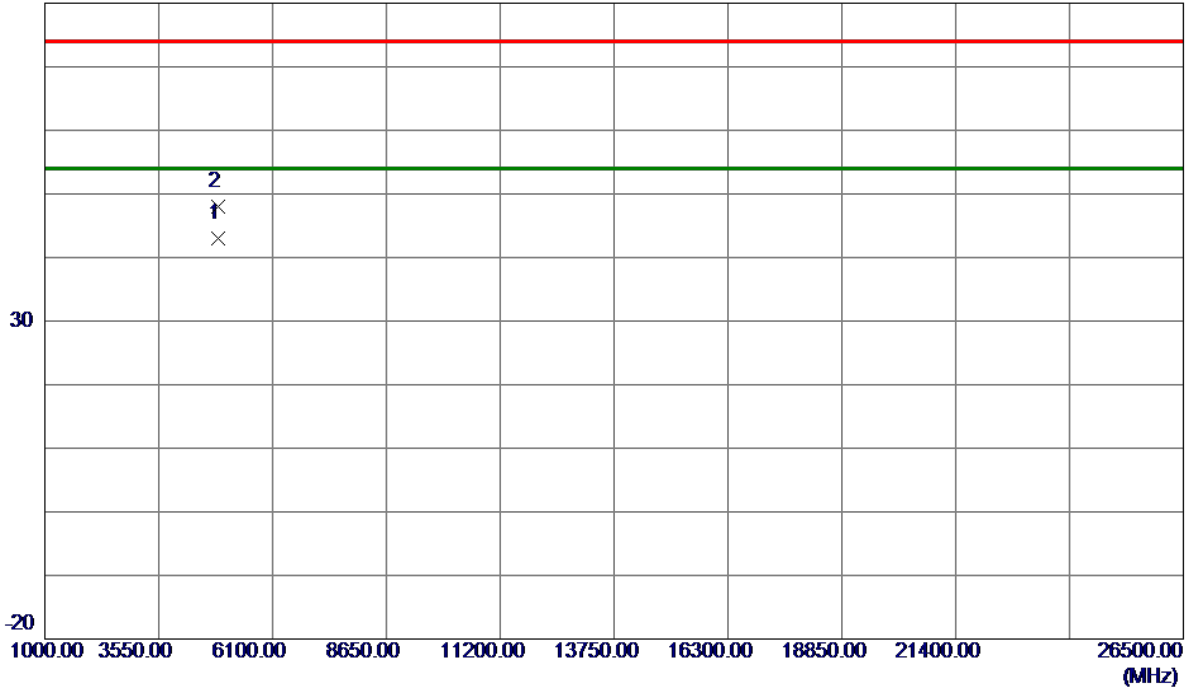

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.0740	37.63	5.46	43.09	54.00	-10.91	AVG	
2	4874.0860	42.62	5.46	48.08	74.00	-25.92	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Vertical

130 dBuV/m

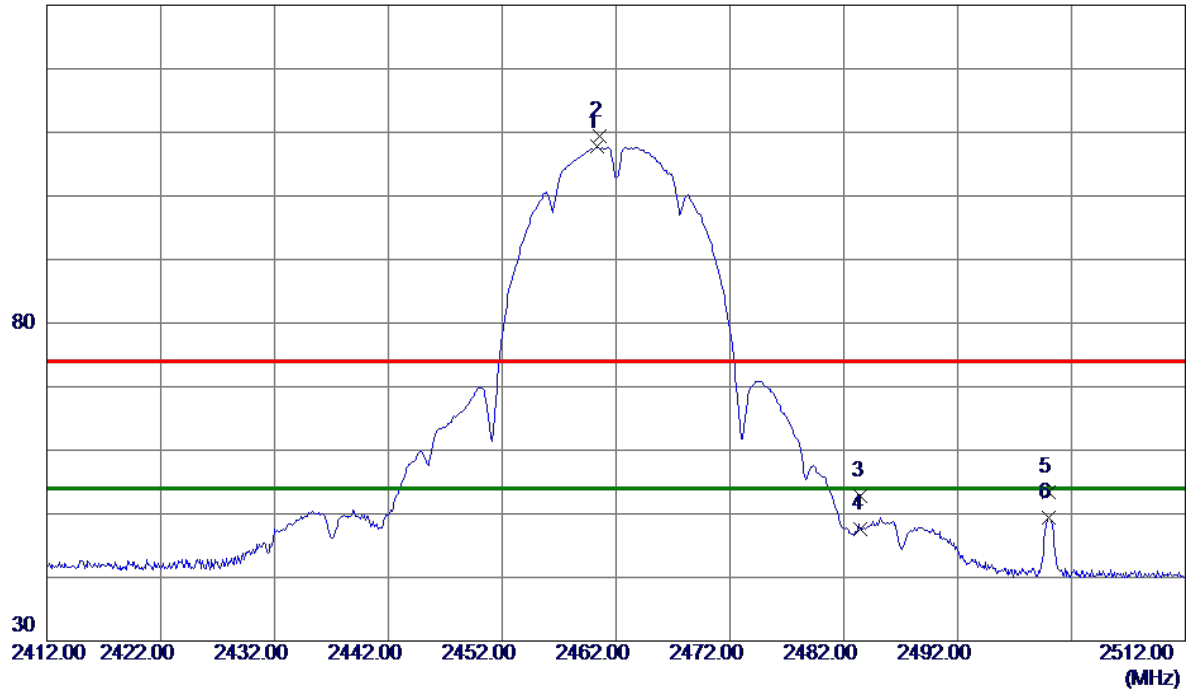

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.3000	99.34	8.36	107.70	54.00	53.70	AVG	No Limit
2	2460.6000	101.07	8.36	109.43	74.00	35.43	Peak	No Limit
3	2483.5000	44.33	8.39	52.72	74.00	-21.28	Peak	
4	2483.5000	39.23	8.39	47.62	54.00	-6.38	AVG	
5	2500.0000	44.99	8.41	53.40	74.00	-20.60	Peak	
6	2500.0000	41.06	8.41	49.47	54.00	-4.53	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Vertical

80 dBuV/m

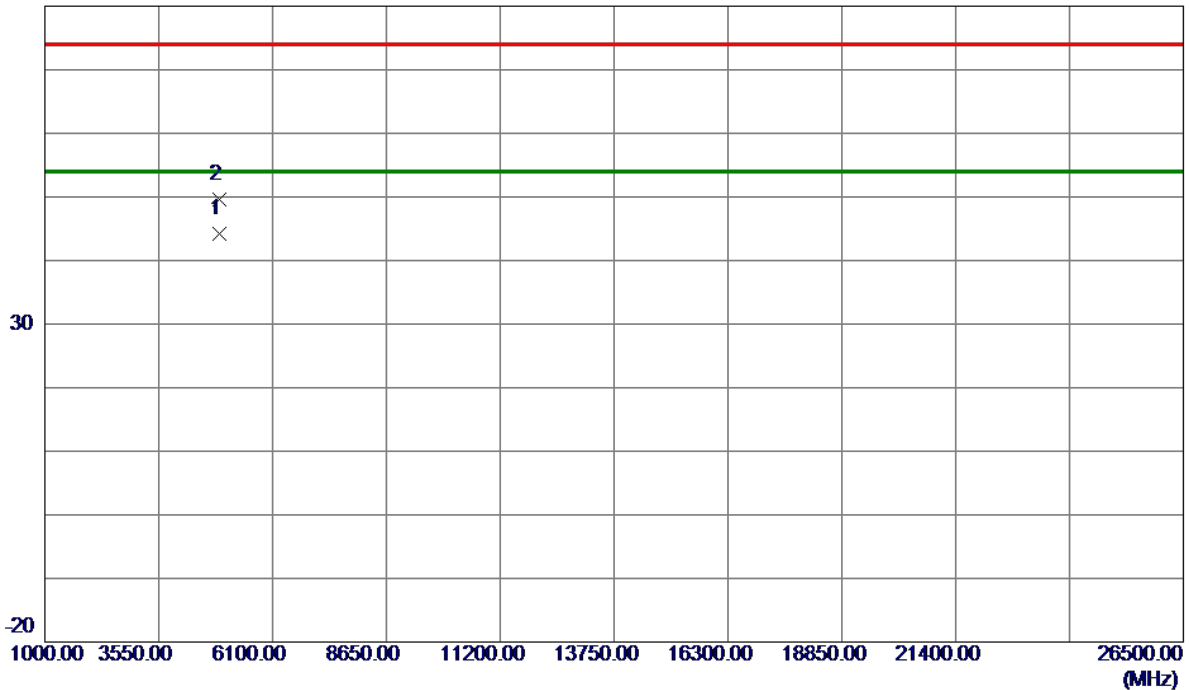

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.1080	38.52	5.59	44.11	54.00	-9.89	AVG	
2	4924.1200	43.99	5.59	49.58	74.00	-24.42	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Horizontal

130 dBuV/m

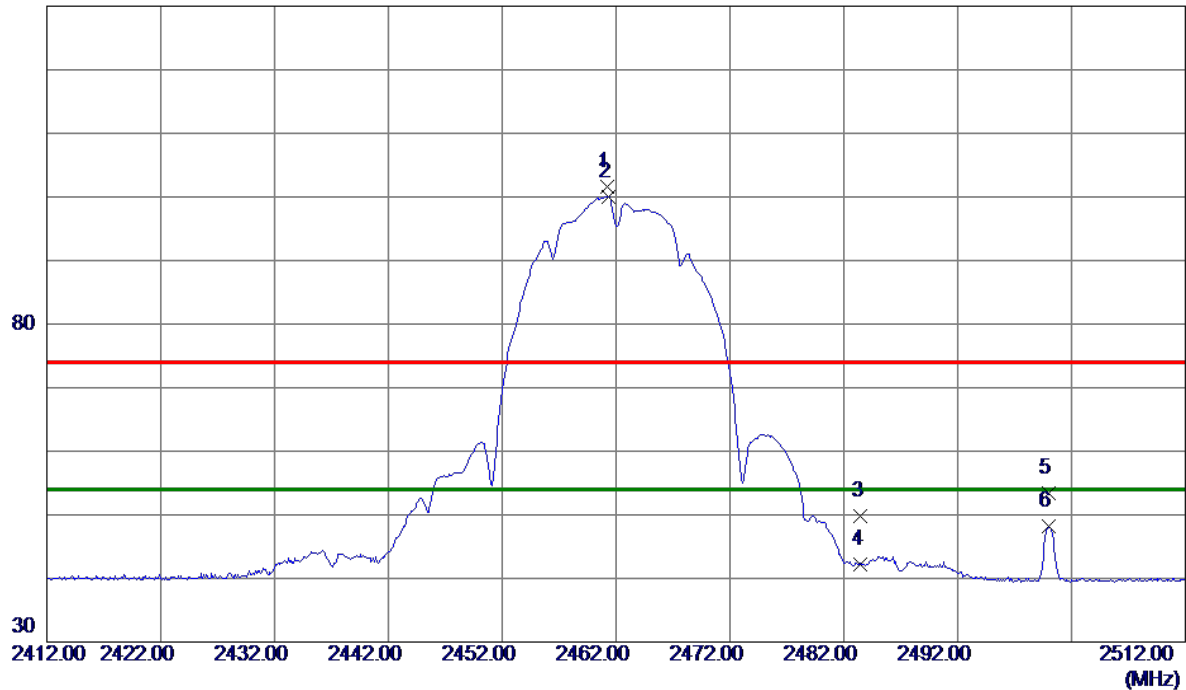

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.2000	93.29	8.36	101.65	74.00	27.65	Peak	No Limit
2 *	2461.3000	91.72	8.36	100.08	54.00	46.08	AVG	No Limit
3	2483.5000	41.34	8.39	49.73	74.00	-24.27	Peak	
4	2483.5000	33.89	8.39	42.28	54.00	-11.72	AVG	
5	2500.0000	45.03	8.41	53.44	74.00	-20.56	Peak	
6	2500.0000	39.71	8.41	48.12	54.00	-5.88	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2462 MHz
------------	--------------------

Horizontal

80 dBuV/m

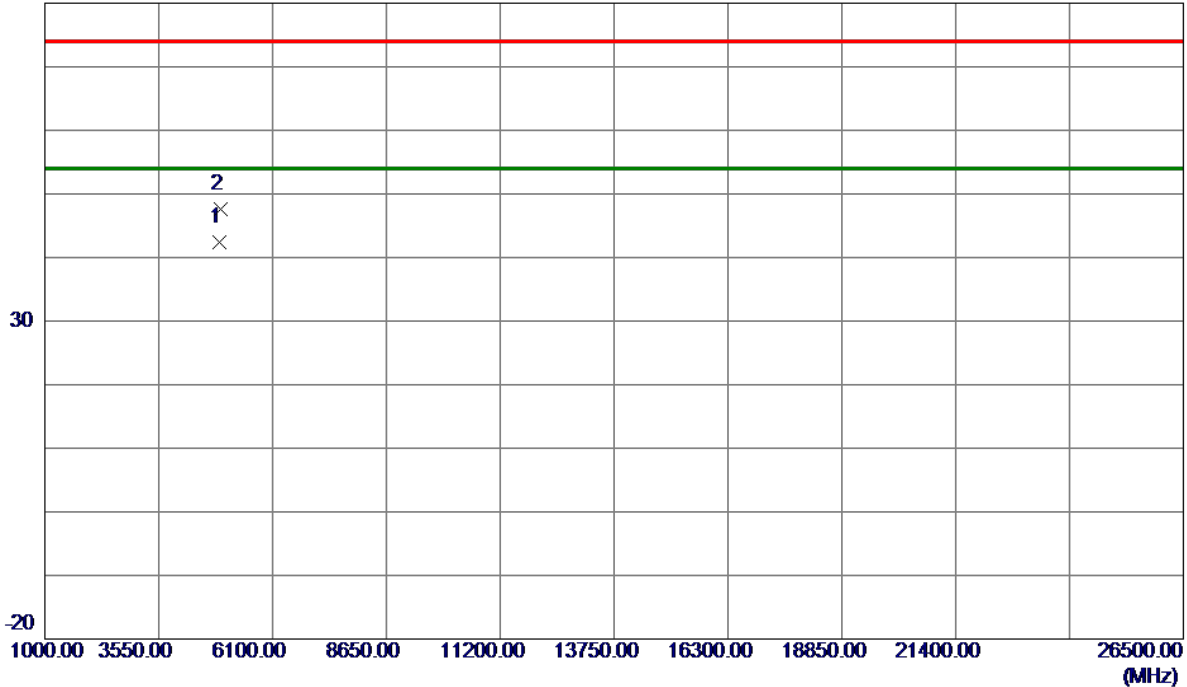

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.1360	36.79	5.59	42.38	54.00	-11.62	AVG	
2	4924.2100	41.93	5.59	47.52	74.00	-26.48	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Vertical

130 dBuV/m

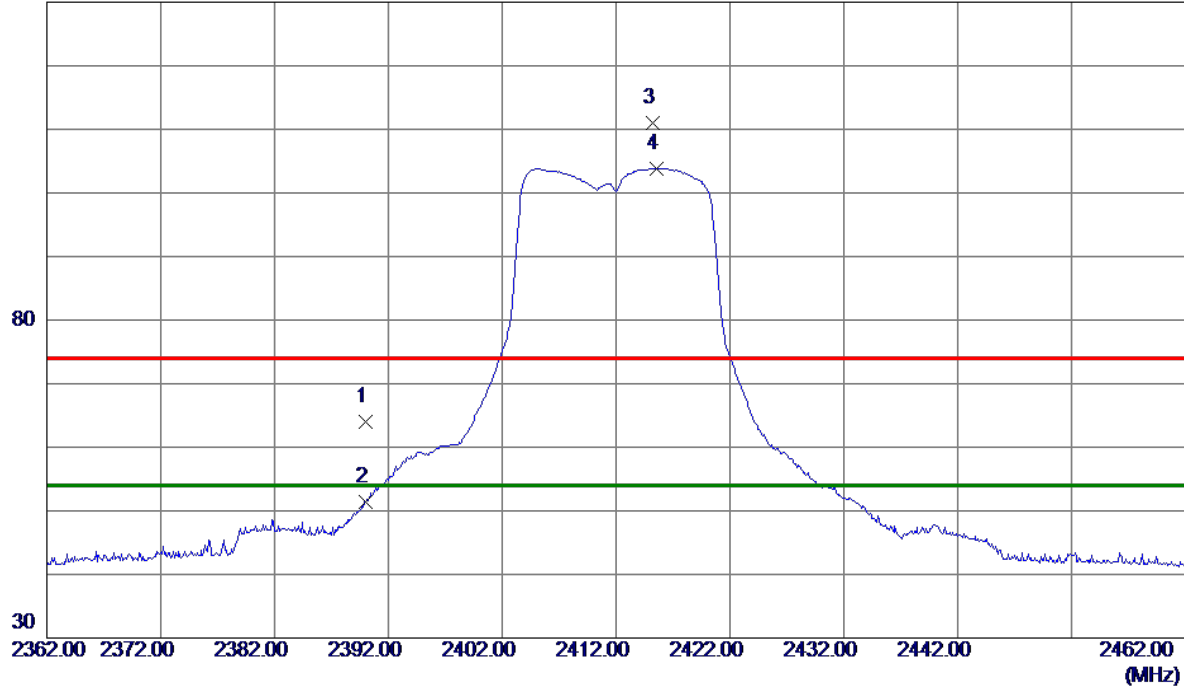

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.67	8.29	63.96	74.00	-10.04	Peak	
2	2390.0000	43.08	8.29	51.37	54.00	-2.63	AVG	
3	2415.2000	102.71	8.31	111.02	74.00	37.02	Peak	No Limit
4 *	2415.6000	95.58	8.31	103.89	54.00	49.89	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Vertical

80 dBuV/m

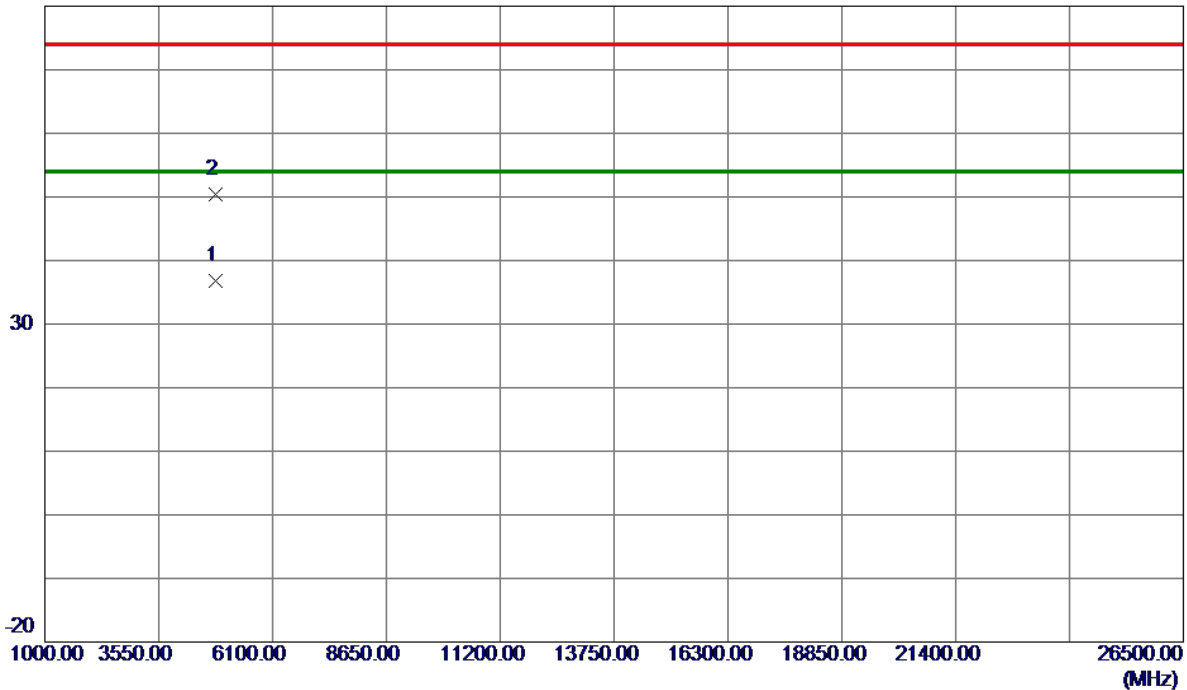

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4824.0800	31.52	5.32	36.84	54.00	-17.16	AVG	
2	4824.2740	45.11	5.32	50.43	74.00	-23.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

130 dBuV/m

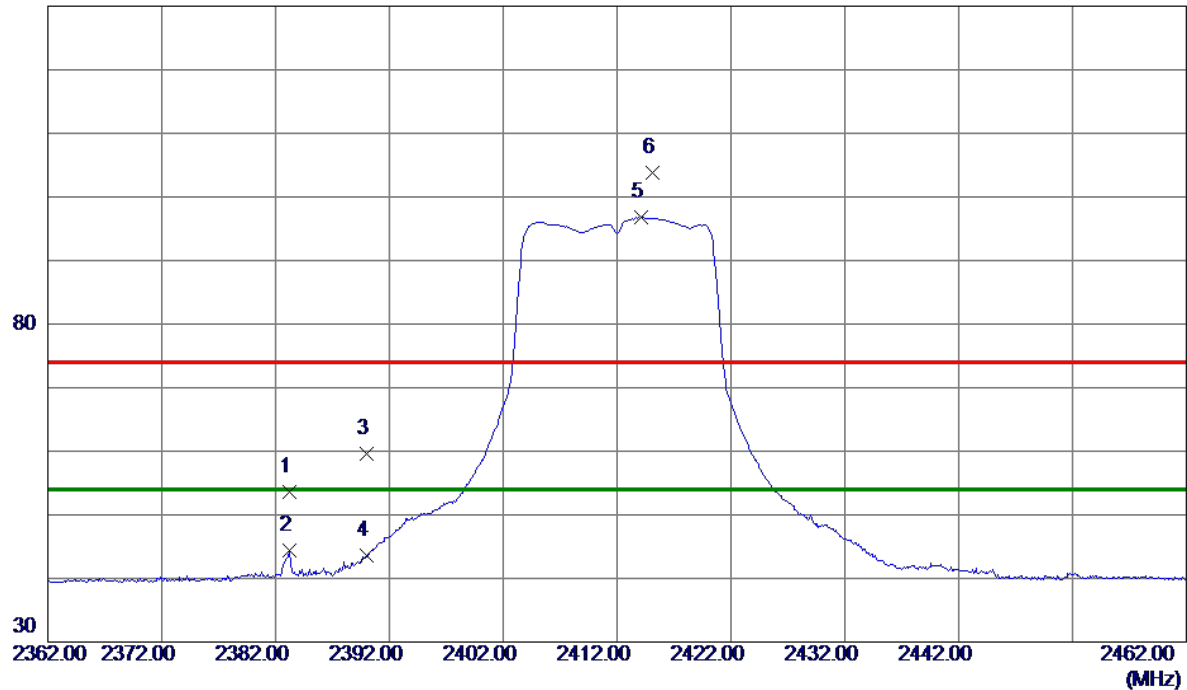

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2383.2000	45.31	8.28	53.59	74.00	-20.41	Peak	
2	2383.2000	36.18	8.28	44.46	54.00	-9.54	AVG	
3	2390.0000	51.37	8.29	59.66	74.00	-14.34	Peak	
4	2390.0000	35.25	8.29	43.54	54.00	-10.46	AVG	
5 *	2414.1000	88.46	8.31	96.77	54.00	42.77	AVG	No Limit
6	2415.1000	95.57	8.31	103.88	74.00	29.88	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

80 dBuV/m

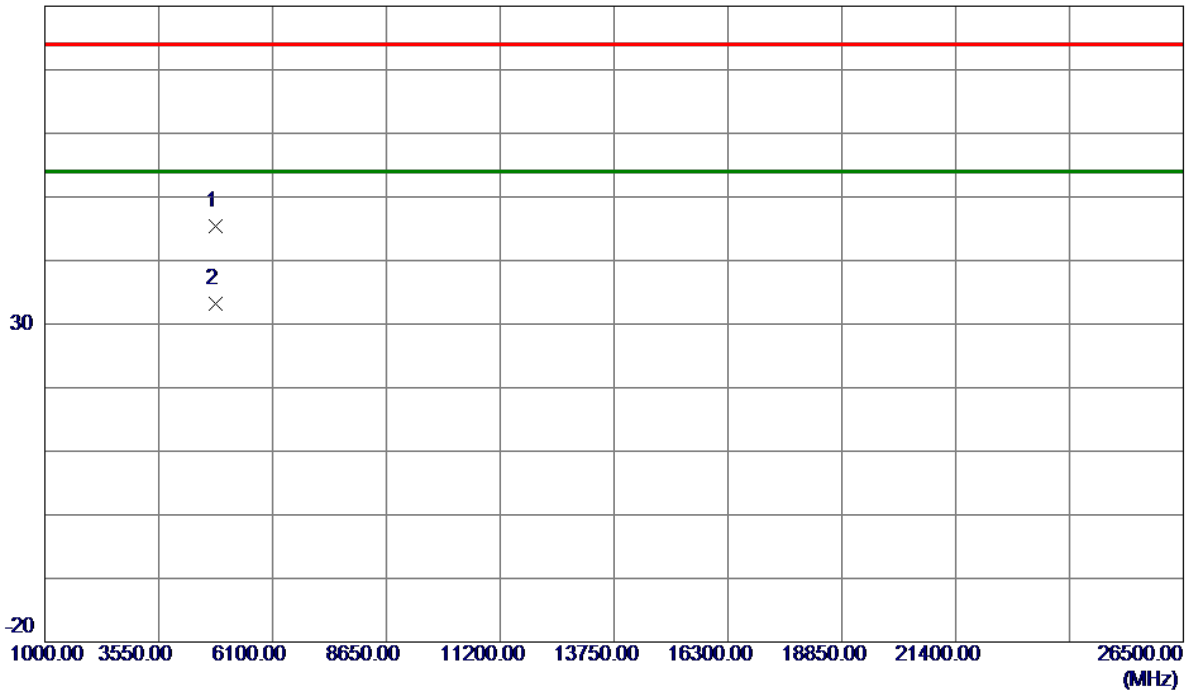


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.4480	40.13	5.32	45.45	74.00	-28.55	Peak	
2 *	4824.8100	27.93	5.33	33.26	54.00	-20.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX G Mode 2437 MHz
------------	--------------------

Vertical

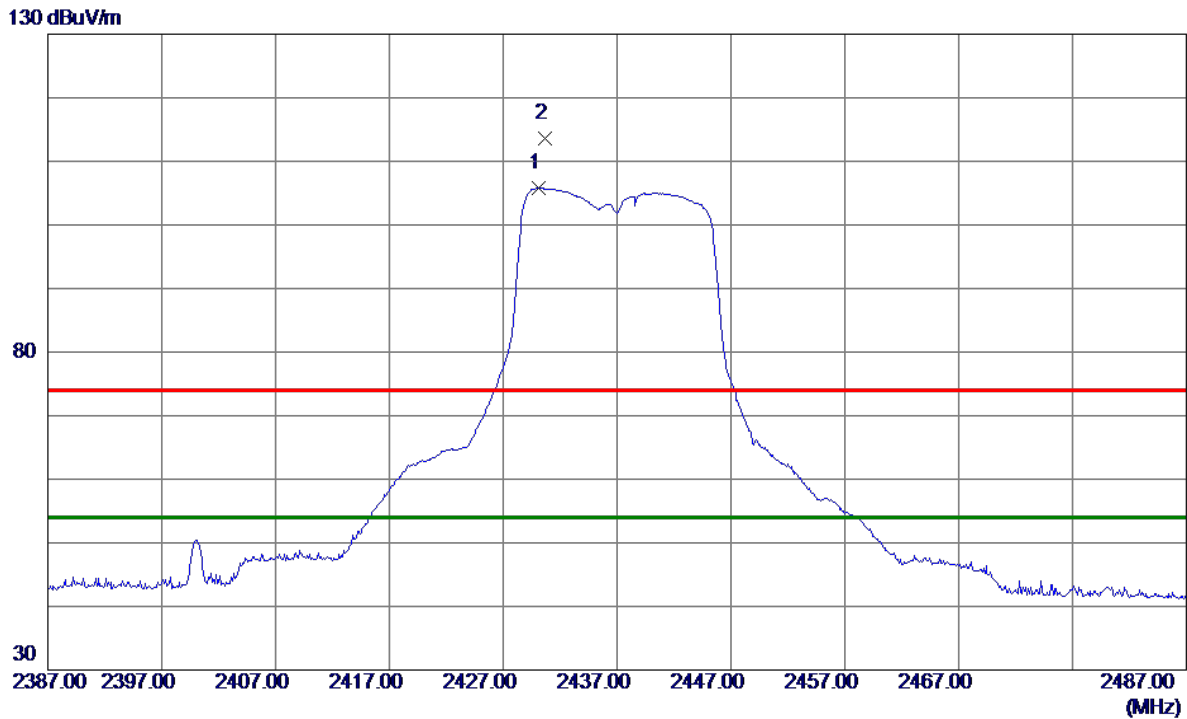

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2430.1000	97.50	8.33	105.83	54.00	51.83	AVG	No Limit
2	2430.7000	105.30	8.33	113.63	74.00	39.63	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

80 dBuV/m

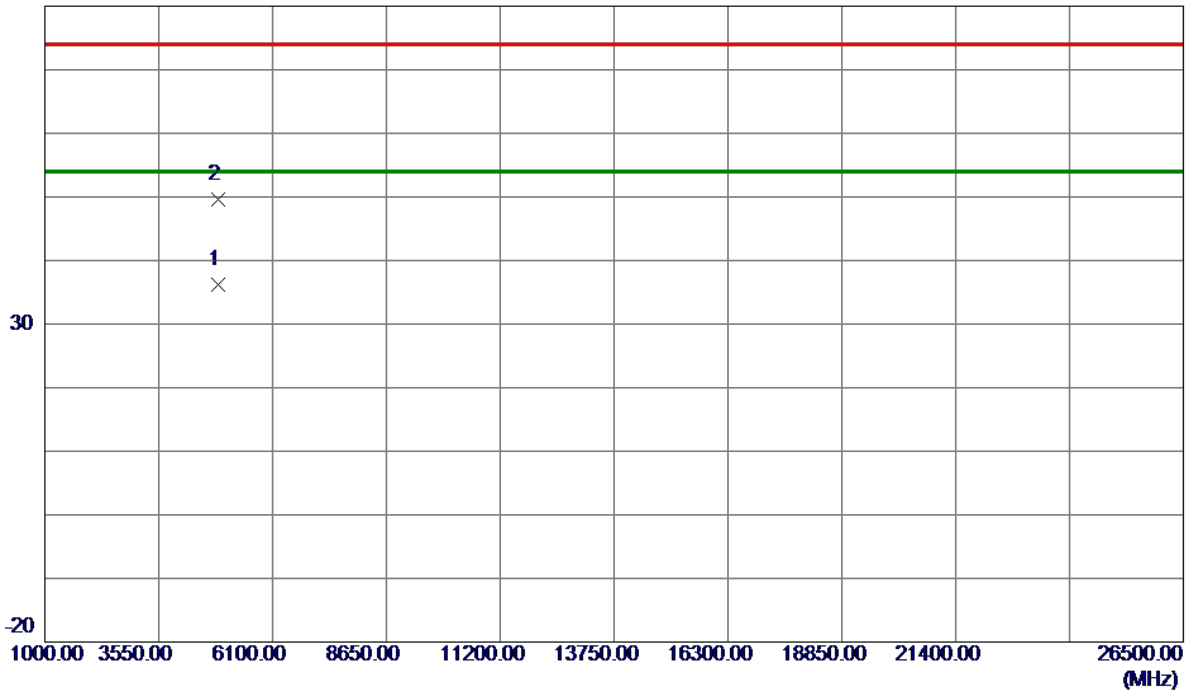

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.1240	30.74	5.46	36.20	54.00	-17.80	AVG	
2	4874.6220	44.11	5.46	49.57	74.00	-24.43	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

130 dBuV/m

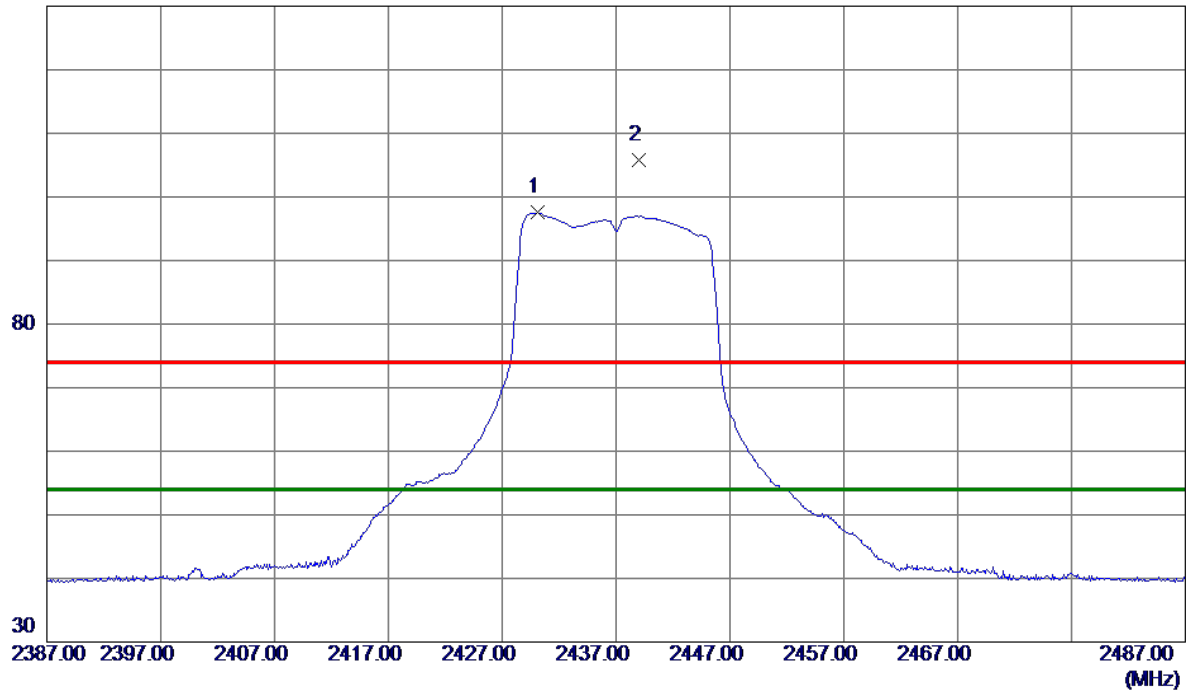

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2430.1000	89.18	8.33	97.51	54.00	43.51	AVG	No Limit
2	2439.0000	97.50	8.34	105.84	74.00	31.84	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX G Mode 2437 MHz
------------	--------------------

Horizontal

80 dBuV/m

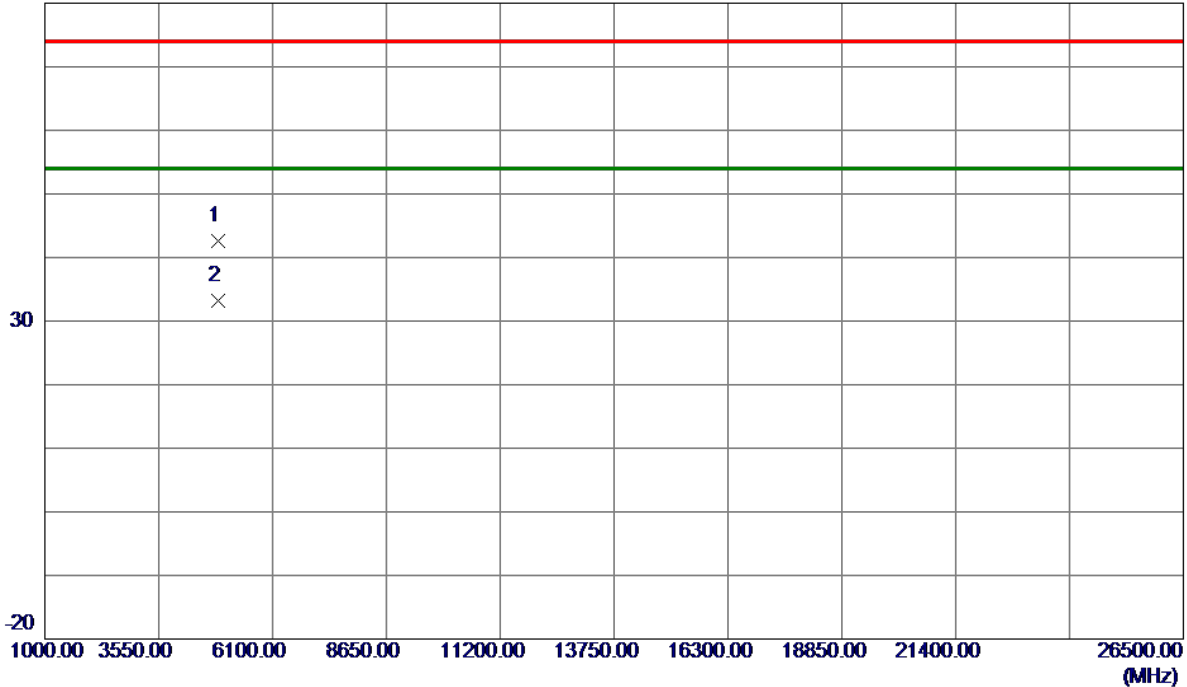


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.4000	37.17	5.46	42.63	74.00	-31.37	Peak	
2 *	4874.0880	27.72	5.46	33.18	54.00	-20.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

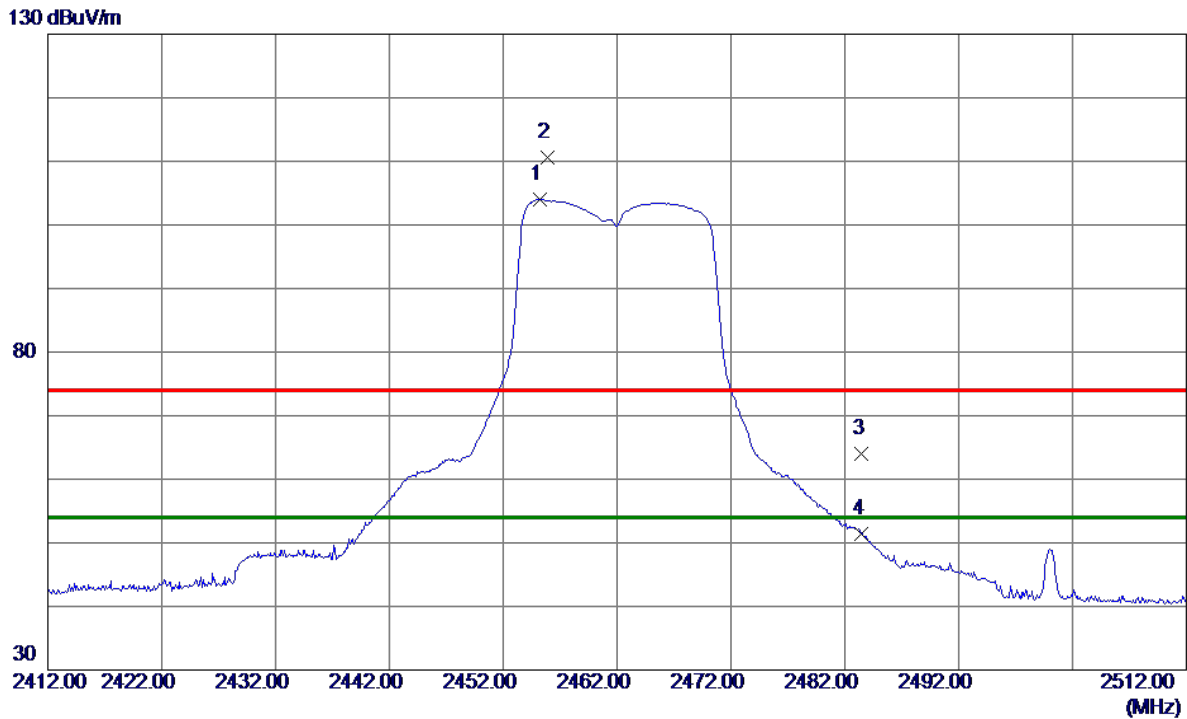

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2455.2000	95.65	8.36	104.01	54.00	50.01	AVG	No Limit
2	2455.9000	102.16	8.36	110.52	74.00	36.52	Peak	No Limit
3	2483.5000	55.58	8.39	63.97	74.00	-10.03	Peak	
4	2483.5000	42.97	8.39	51.36	54.00	-2.64	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

80 dBuV/m

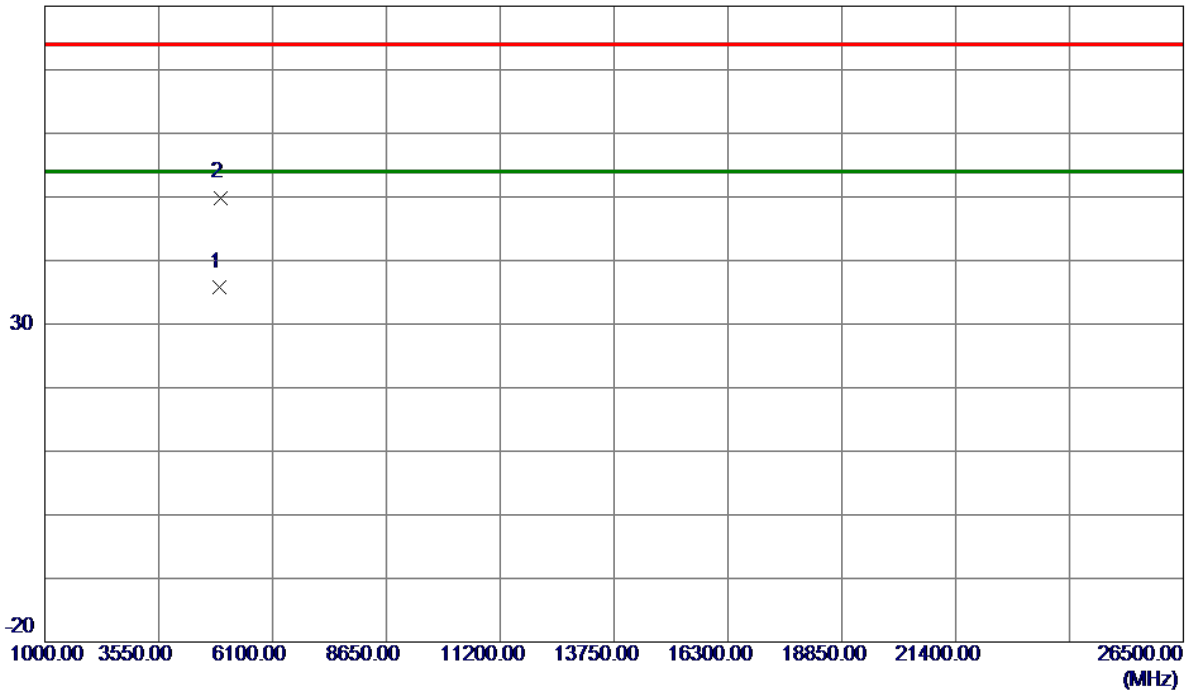

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0560	30.15	5.59	35.74	54.00	-18.26	AVG	
2	4924.2820	44.31	5.59	49.90	74.00	-24.10	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

130 dBuV/m

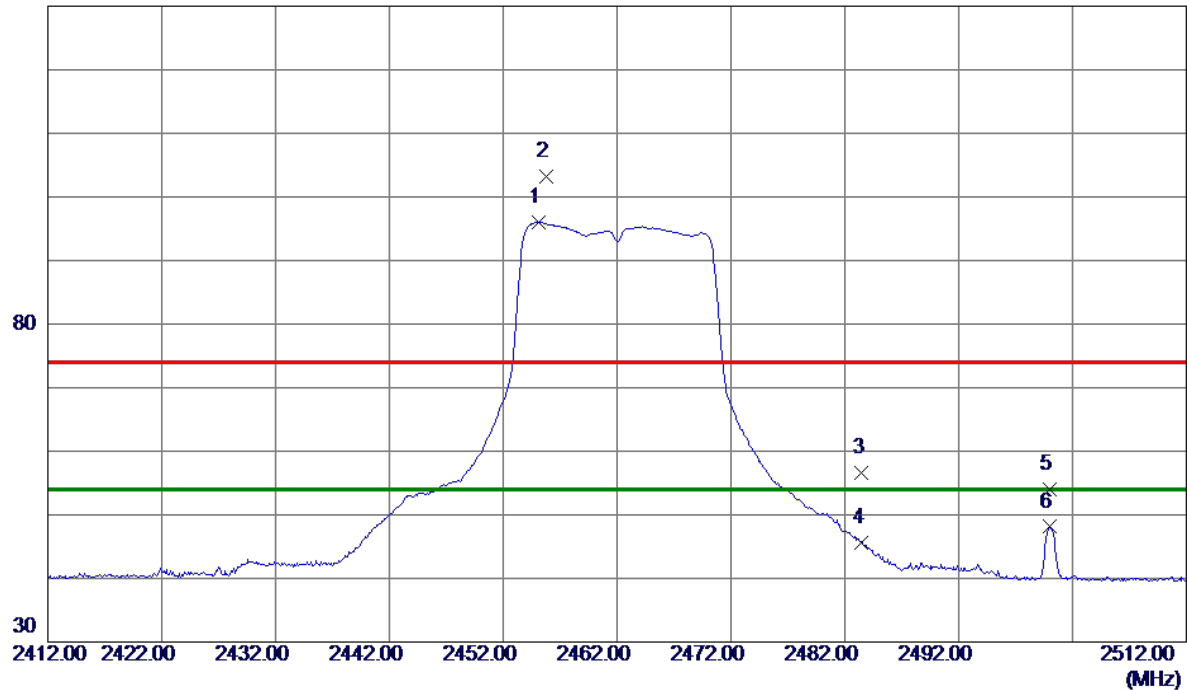

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2455.1000	87.63	8.36	95.99	54.00	41.99	AVG	No Limit
2	2455.8000	94.84	8.36	103.20	74.00	29.20	Peak	No Limit
3	2483.5000	48.16	8.39	56.55	74.00	-17.45	Peak	
4	2483.5000	37.12	8.39	45.51	54.00	-8.49	AVG	
5	2500.0000	45.51	8.41	53.92	74.00	-20.08	Peak	
6	2500.0000	39.69	8.41	48.10	54.00	-5.90	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

80 dBuV/m

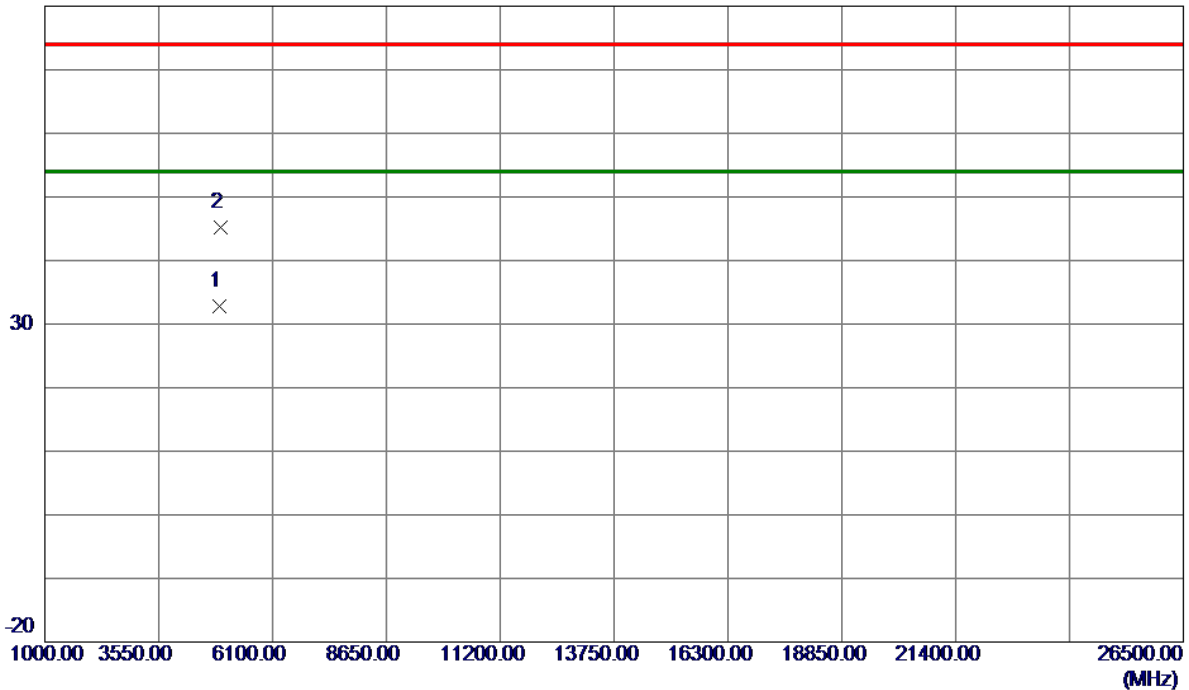

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4923.5780	27.14	5.59	32.73	54.00	-21.27	AVG	
2	4924.5280	39.57	5.60	45.17	74.00	-28.83	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

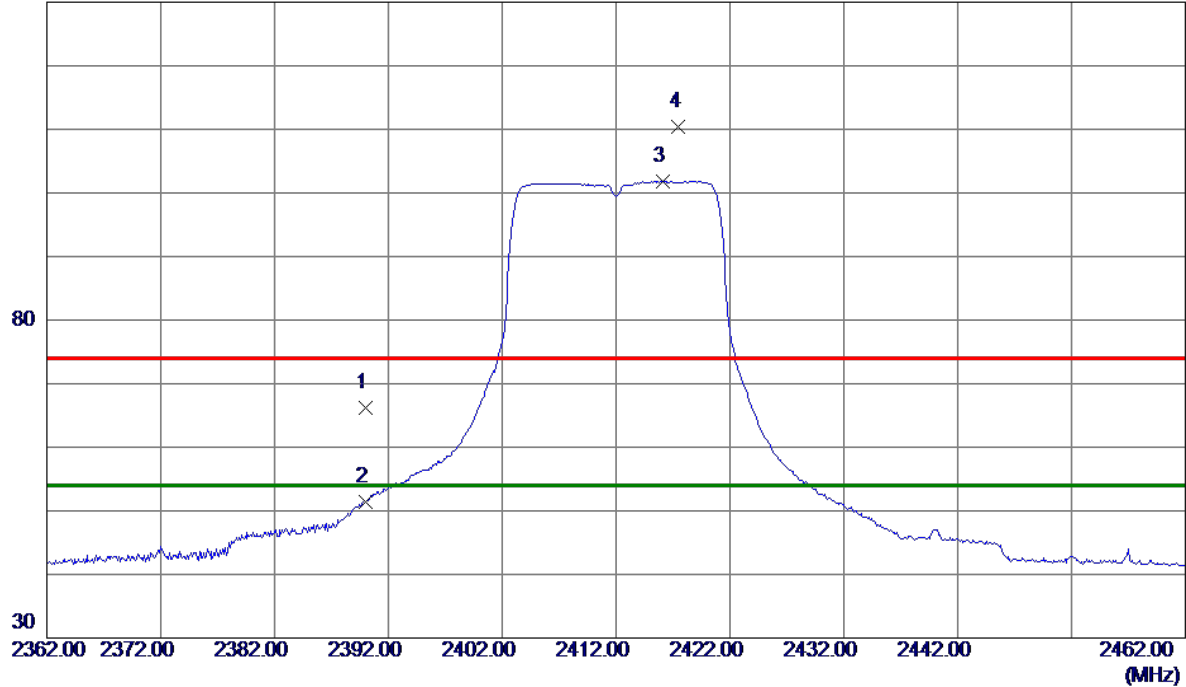

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	57.99	8.29	66.28	74.00	-7.72	Peak	
2	2390.0000	43.15	8.29	51.44	54.00	-2.56	AVG	
3 *	2416.1000	93.52	8.32	101.84	54.00	47.84	AVG	No Limit
4	2417.5000	102.00	8.32	110.32	74.00	36.32	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

80 dBuV/m

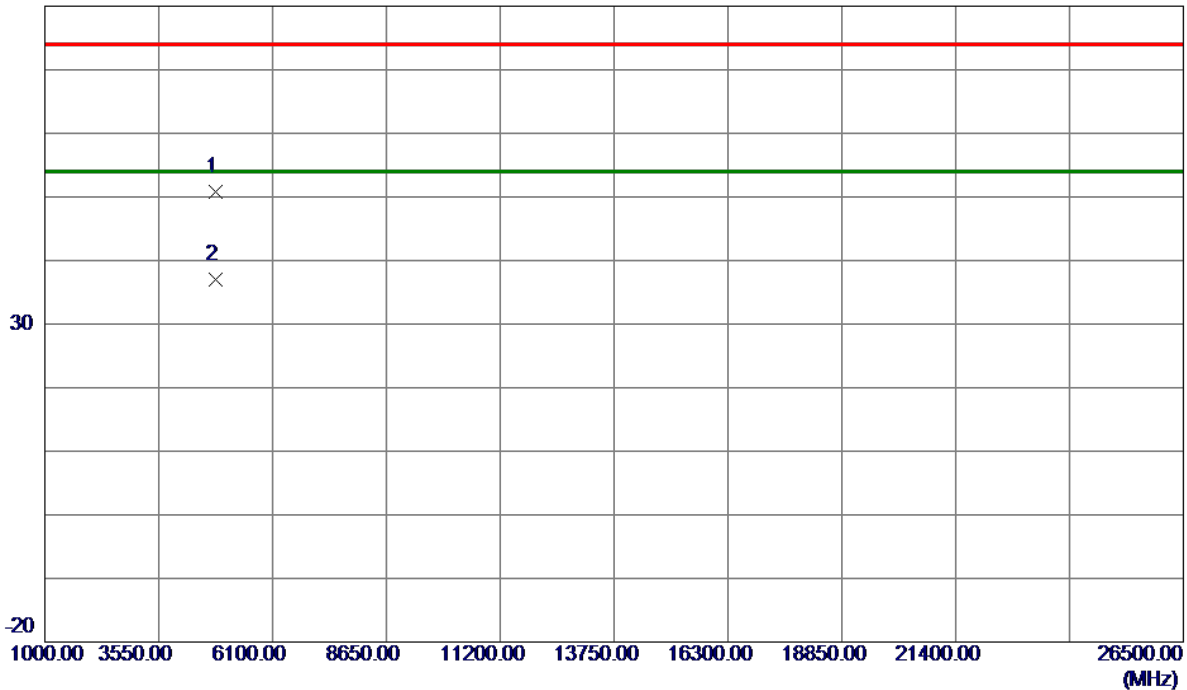

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4823.0160	45.50	5.32	50.82	74.00	-23.18	Peak	
2 *	4823.3720	31.63	5.32	36.95	54.00	-17.05	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

130 dBuV/m

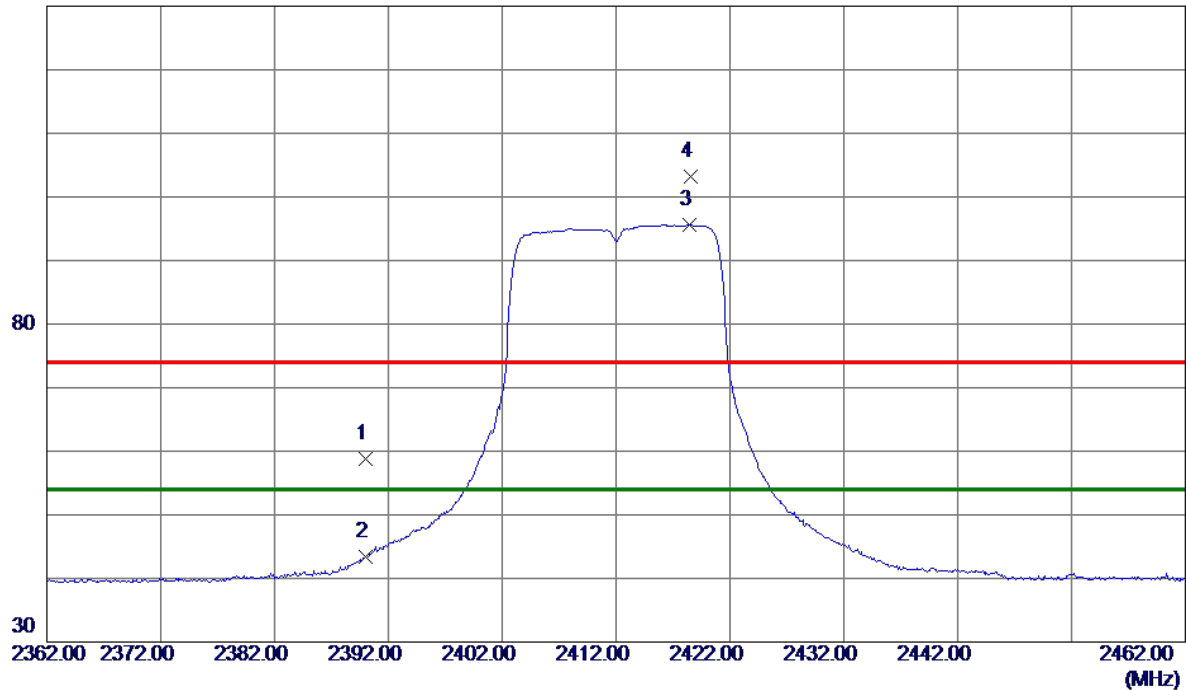

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	50.49	8.29	58.78	74.00	-15.22	Peak	
2	2390.0000	35.10	8.29	43.39	54.00	-10.61	AVG	
3 *	2418.4000	87.32	8.32	95.64	54.00	41.64	AVG	No Limit
4	2418.6000	94.81	8.32	103.13	74.00	29.13	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

80 dBuV/m

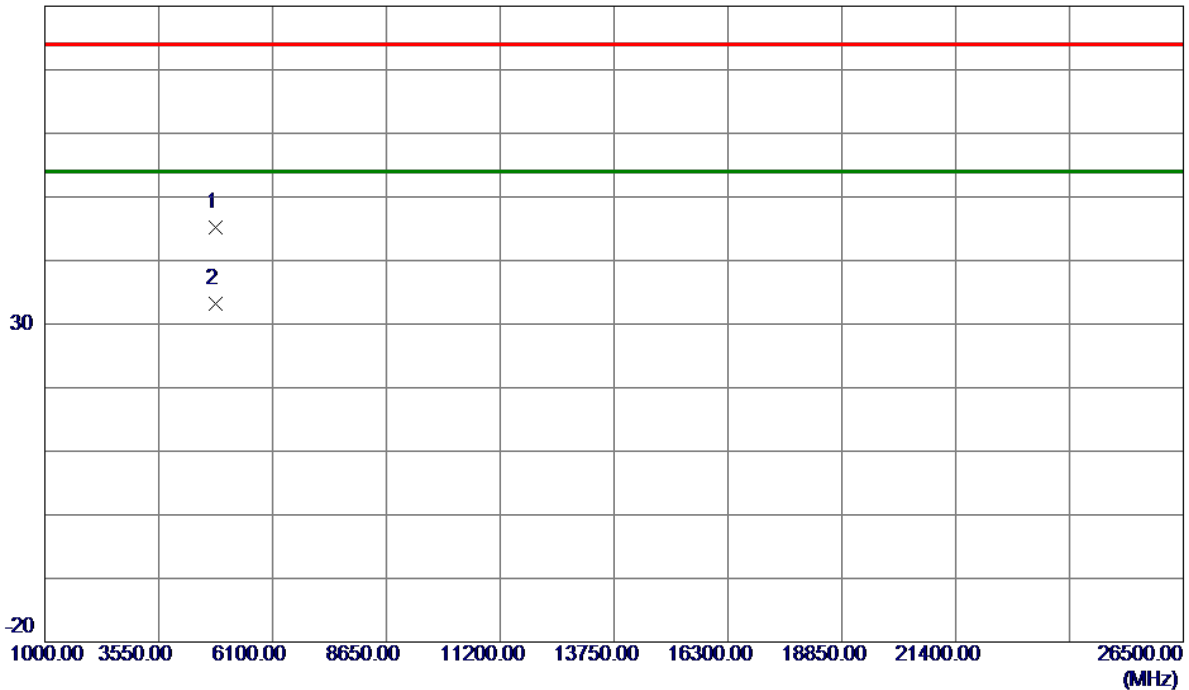

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.4120	39.84	5.32	45.16	74.00	-28.84	Peak	
2 *	4824.7679	27.96	5.33	33.29	54.00	-20.71	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

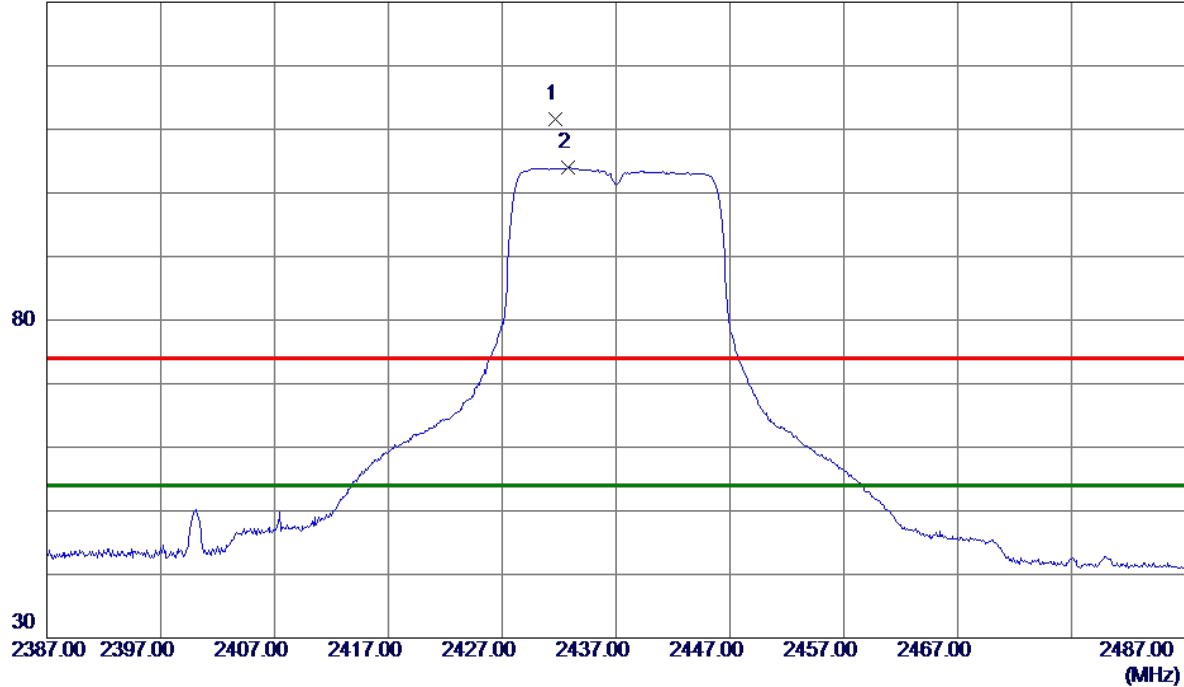

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2431.7000	103.27	8.33	111.60	74.00	37.60	Peak	No Limit
2 *	2432.8000	95.60	8.33	103.93	54.00	49.93	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

80 dBuV/m

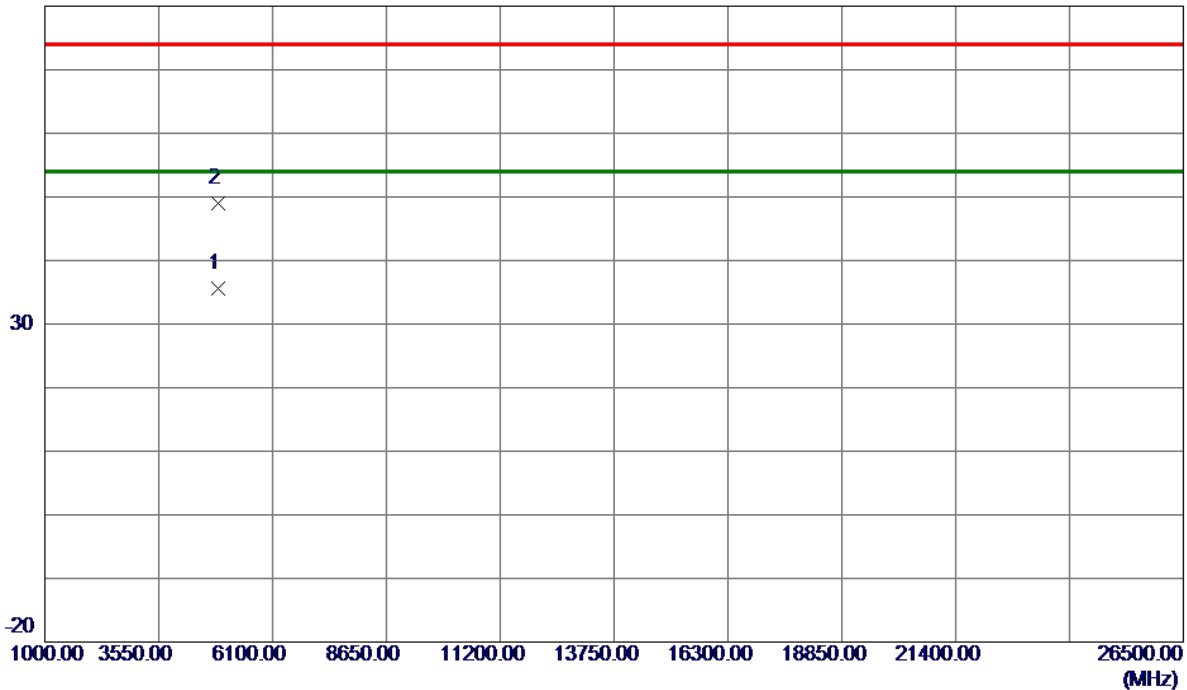

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.4740	30.13	5.46	35.59	54.00	-18.41	AVG	
2	4874.4940	43.48	5.46	48.94	74.00	-25.06	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

130 dBuV/m

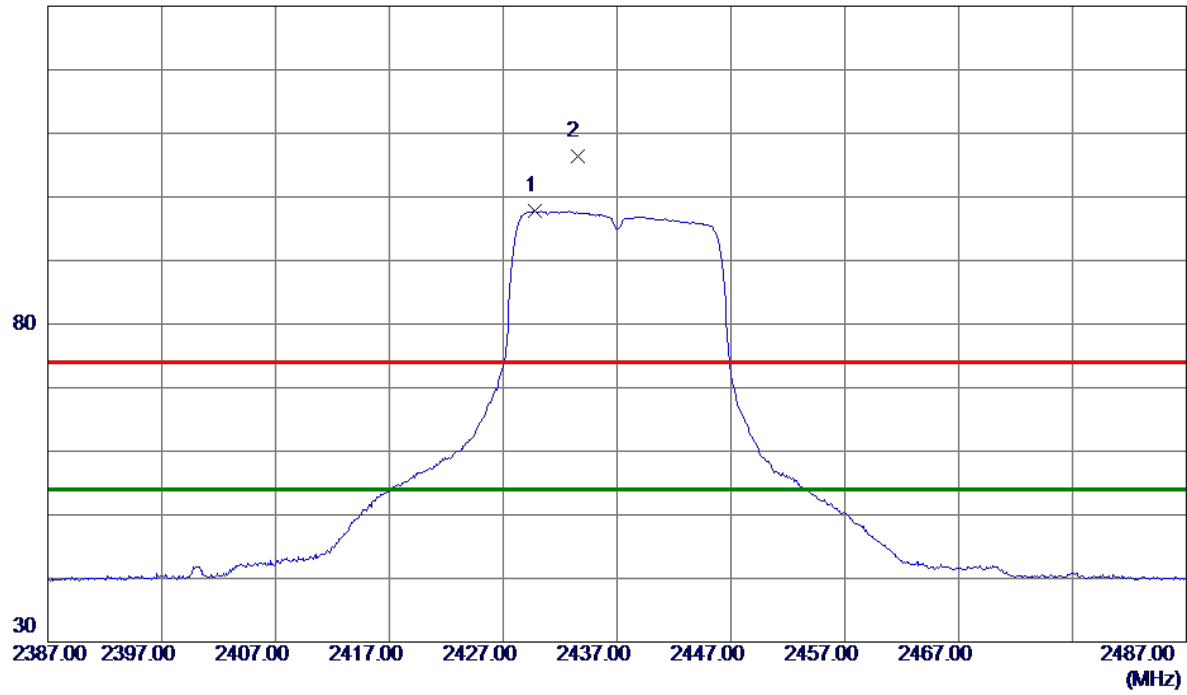

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2429.8000	89.42	8.33	97.75	54.00	43.75	AVG	No Limit
2	2433.5000	98.09	8.33	106.42	74.00	32.42	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

80 dBuV/m

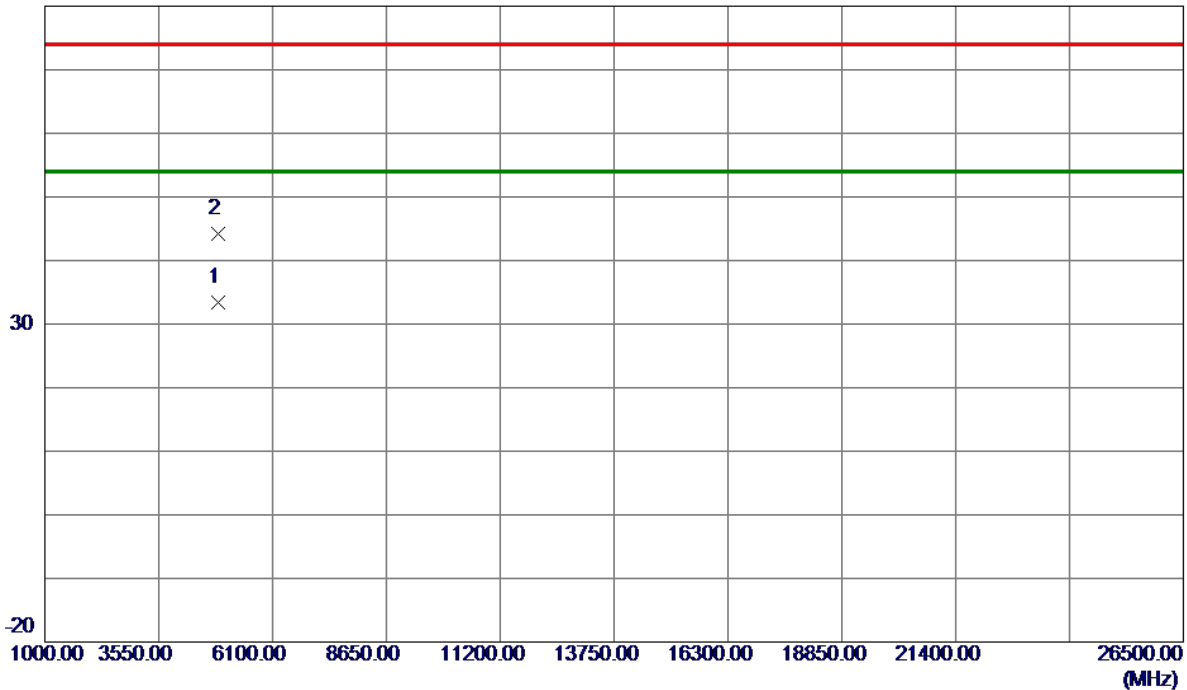

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.1280	27.89	5.46	33.35	54.00	-20.65	AVG	
2	4873.4200	38.80	5.46	44.26	74.00	-29.74	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

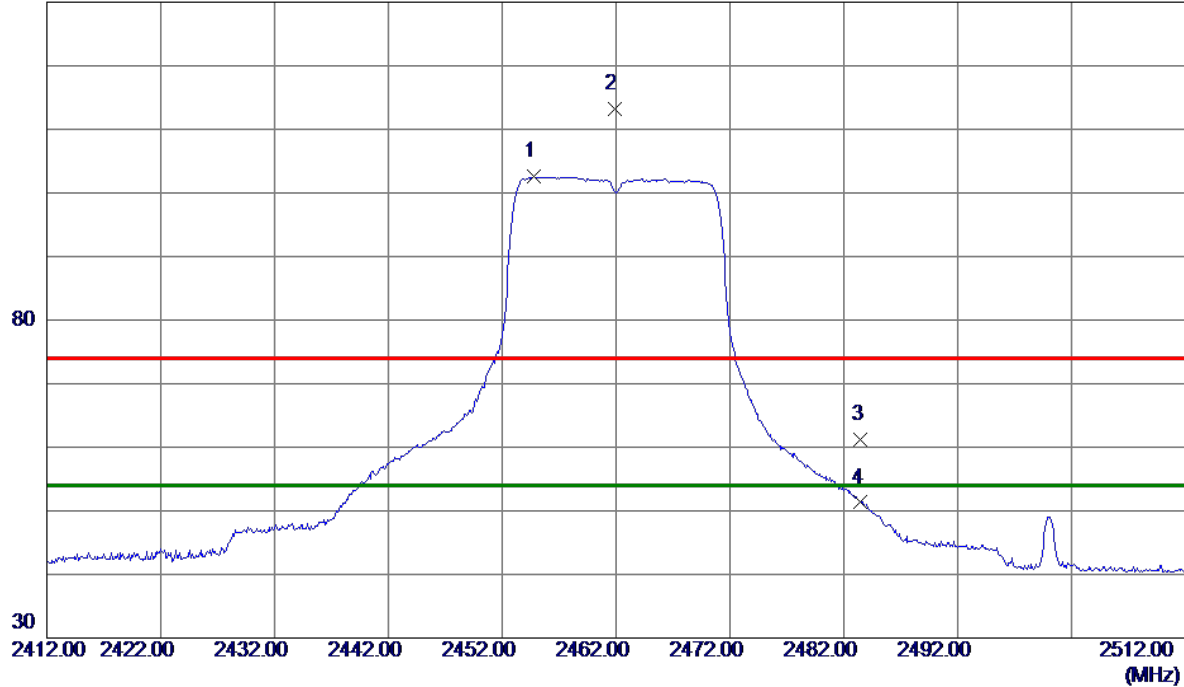

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2454.8000	94.15	8.36	102.51	54.00	48.51	AVG	No Limit
2	2461.9000	104.83	8.36	113.19	74.00	39.19	Peak	No Limit
3	2483.5000	52.74	8.39	61.13	74.00	-12.87	Peak	
4	2483.5000	42.91	8.39	51.30	54.00	-2.70	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

80 dBuV/m

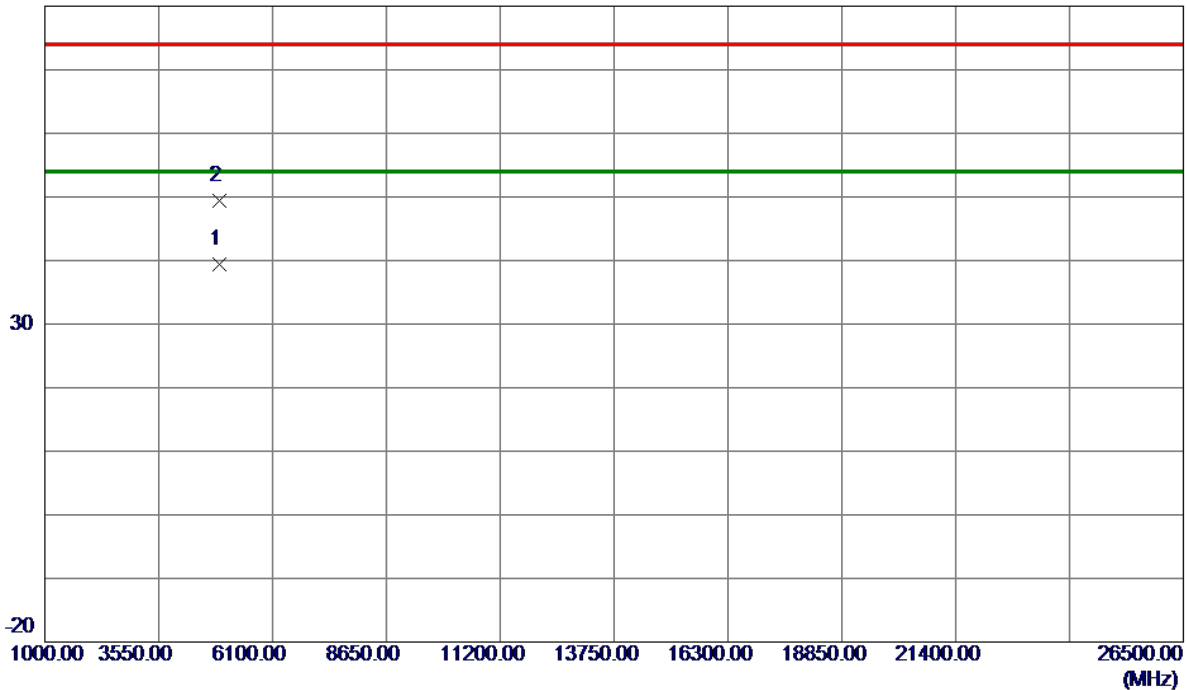

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.0200	33.75	5.59	39.34	54.00	-14.66	AVG	
2	4923.0219	43.81	5.59	49.40	74.00	-24.60	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

130 dBuV/m

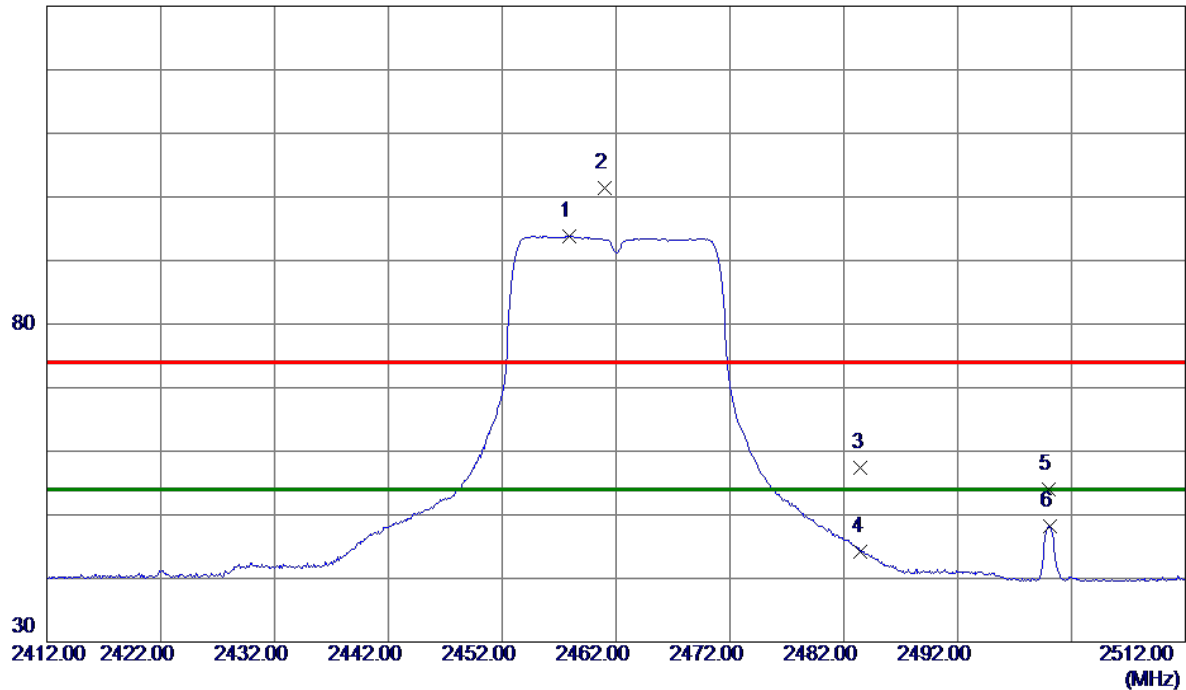

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2457.9000	85.45	8.36	93.81	54.00	39.81	AVG	No Limit
2	2461.0000	93.03	8.36	101.39	74.00	27.39	Peak	No Limit
3	2483.5000	48.96	8.39	57.35	74.00	-16.65	Peak	
4	2483.5000	35.78	8.39	44.17	54.00	-9.83	AVG	
5	2500.0000	45.65	8.41	54.06	74.00	-19.94	Peak	
6	2500.1000	39.86	8.41	48.27	54.00	-5.73	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

80 dBuV/m

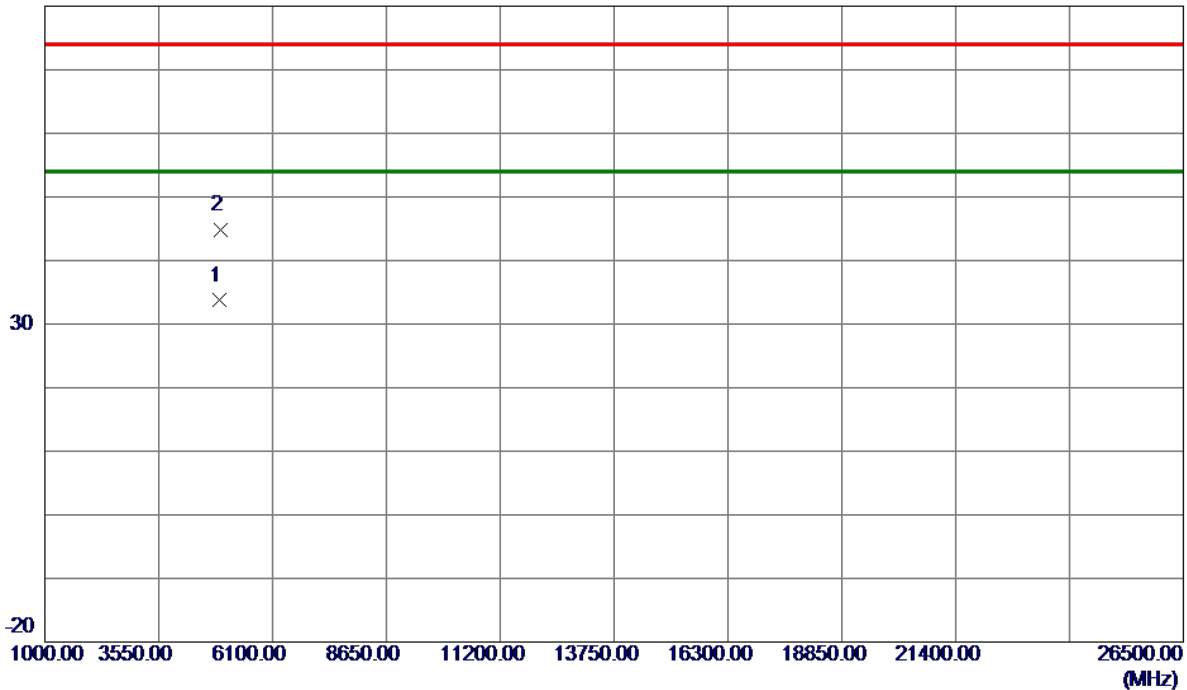

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.7440	28.11	5.59	33.70	54.00	-20.30	AVG	
2	4924.9060	39.18	5.60	44.78	74.00	-29.22	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

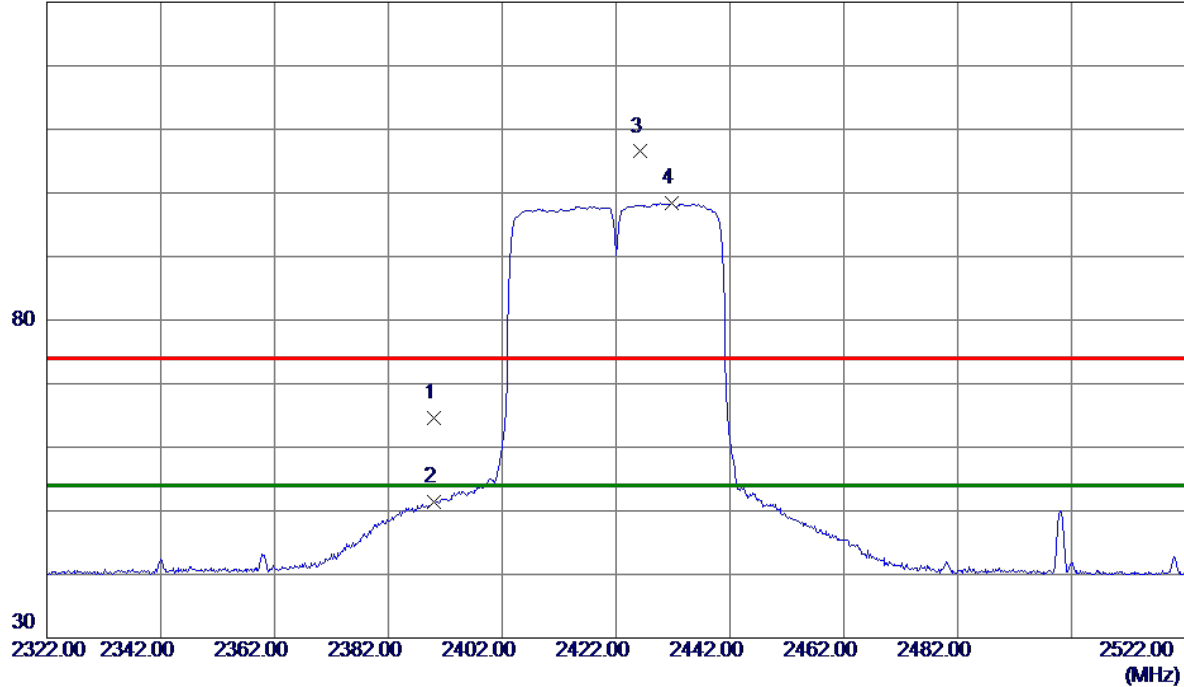

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	56.39	8.29	64.68	74.00	-9.32	Peak	
2	2390.0000	43.17	8.29	51.46	54.00	-2.54	AVG	
3	2426.2000	98.17	8.33	106.50	74.00	32.50	Peak	No Limit
4 *	2431.8000	89.99	8.33	98.32	54.00	44.32	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical

80 dBuV/m

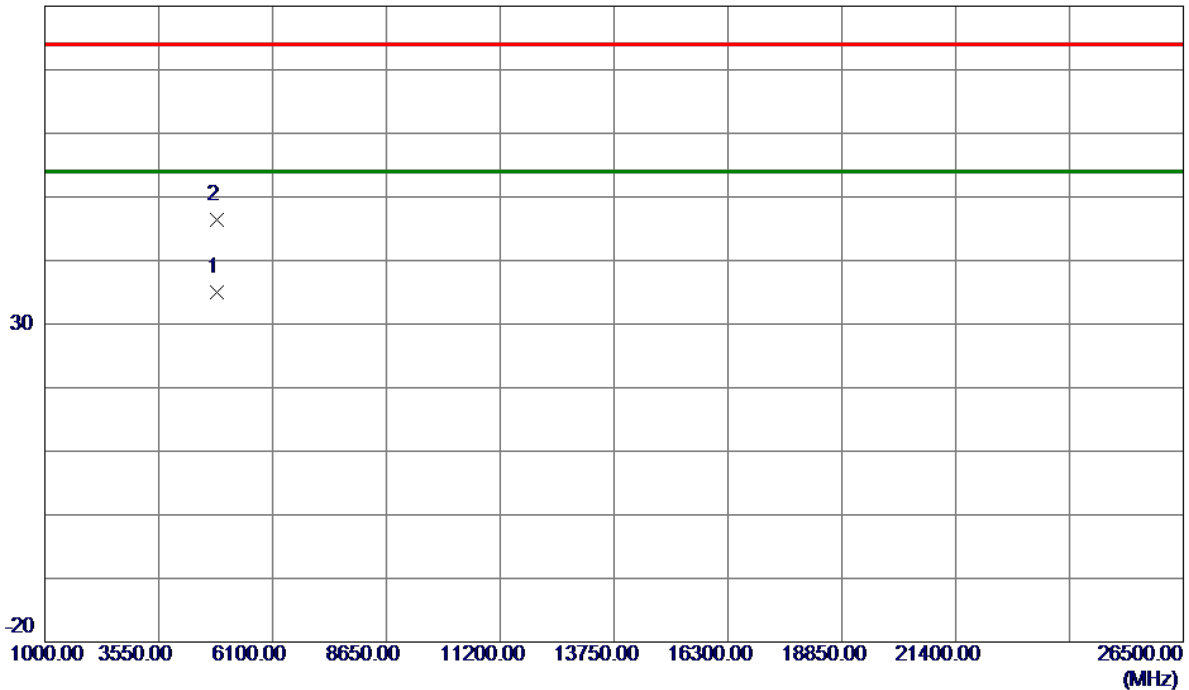

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	4843.2660	29.70	5.38	35.08	54.00	-18.92	AVG	
2	4844.8260	40.94	5.38	46.32	74.00	-27.68	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

130 dBuV/m

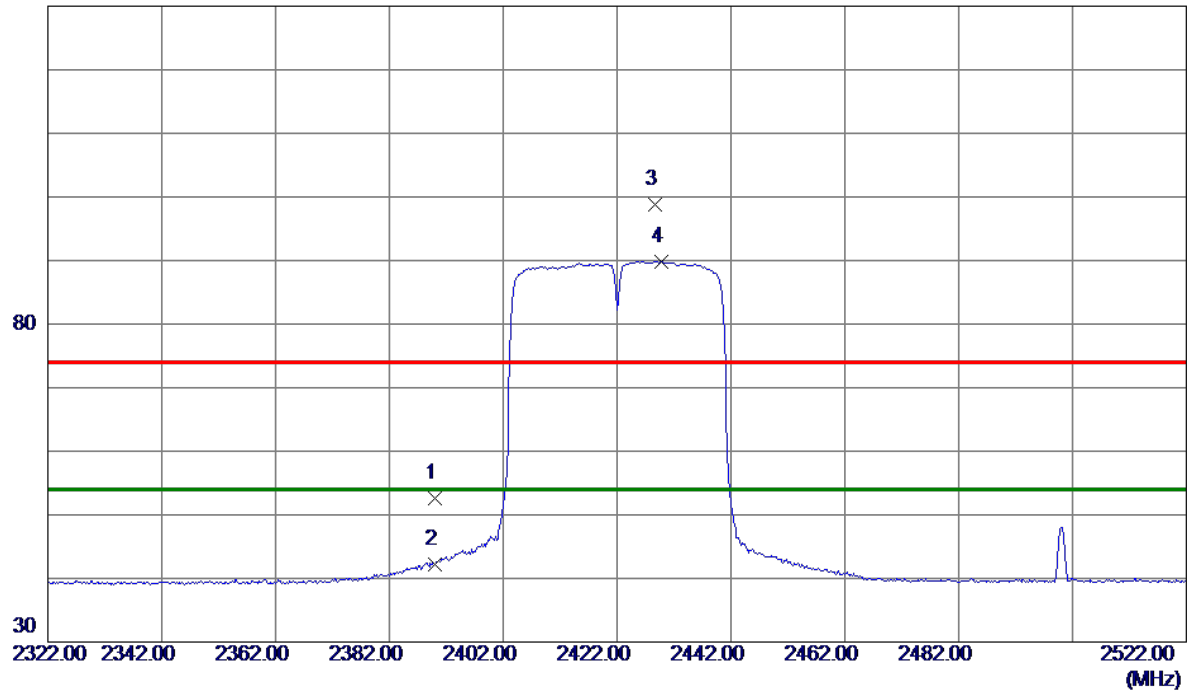

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	44.37	8.29	52.66	74.00	-21.34	Peak	
2	2390.0000	33.91	8.29	42.20	54.00	-11.80	AVG	
3	2428.6000	90.42	8.33	98.75	74.00	24.75	Peak	No Limit
4 *	2429.8000	81.49	8.33	89.82	54.00	35.82	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

80 dBuV/m

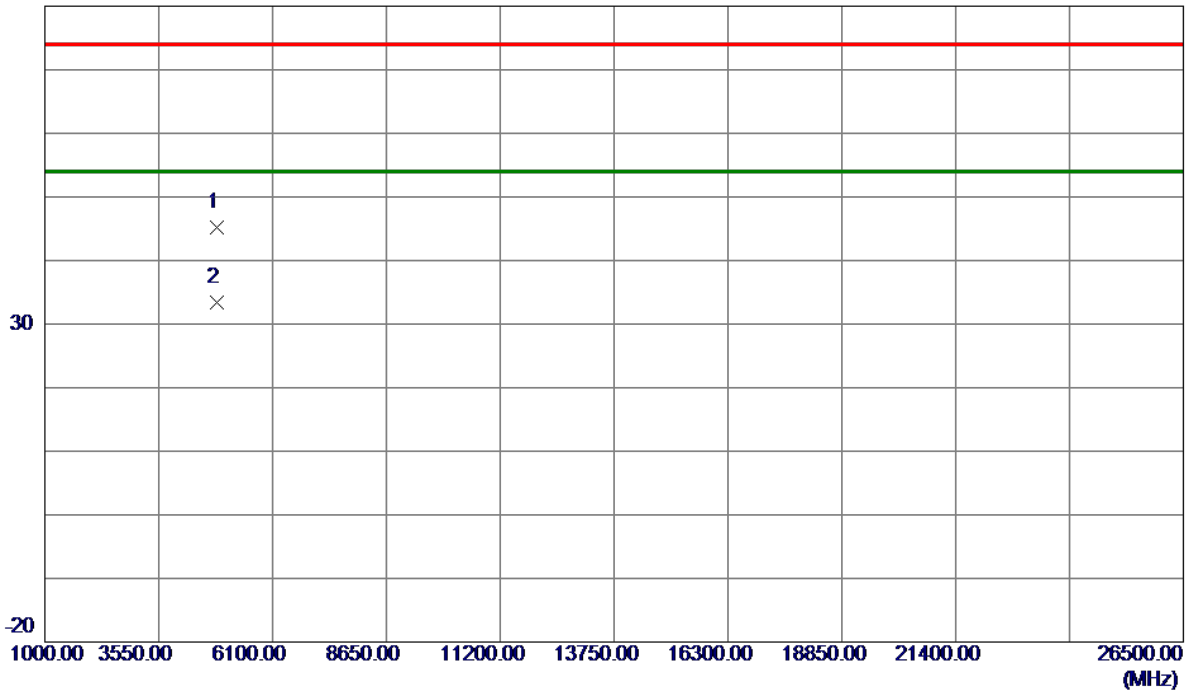

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	4843.9260	39.85	5.38	45.23	74.00	-28.77	Peak	
2 *	4844.4620	28.02	5.38	33.40	54.00	-20.60	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

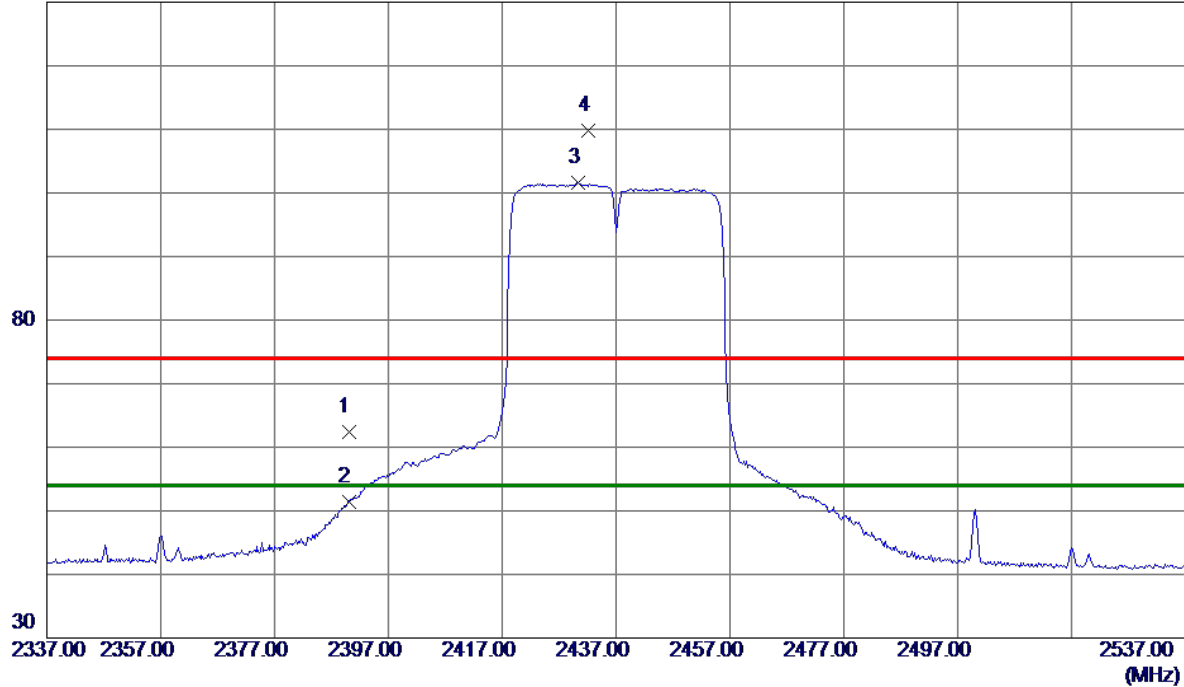

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	54.03	8.29	62.32	74.00	-11.68	Peak	
2	2390.0000	43.10	8.29	51.39	54.00	-2.61	AVG	
3 *	2430.4000	93.27	8.33	101.60	54.00	47.60	AVG	No Limit
4	2432.2000	101.42	8.33	109.75	74.00	35.75	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

80 dBuV/m

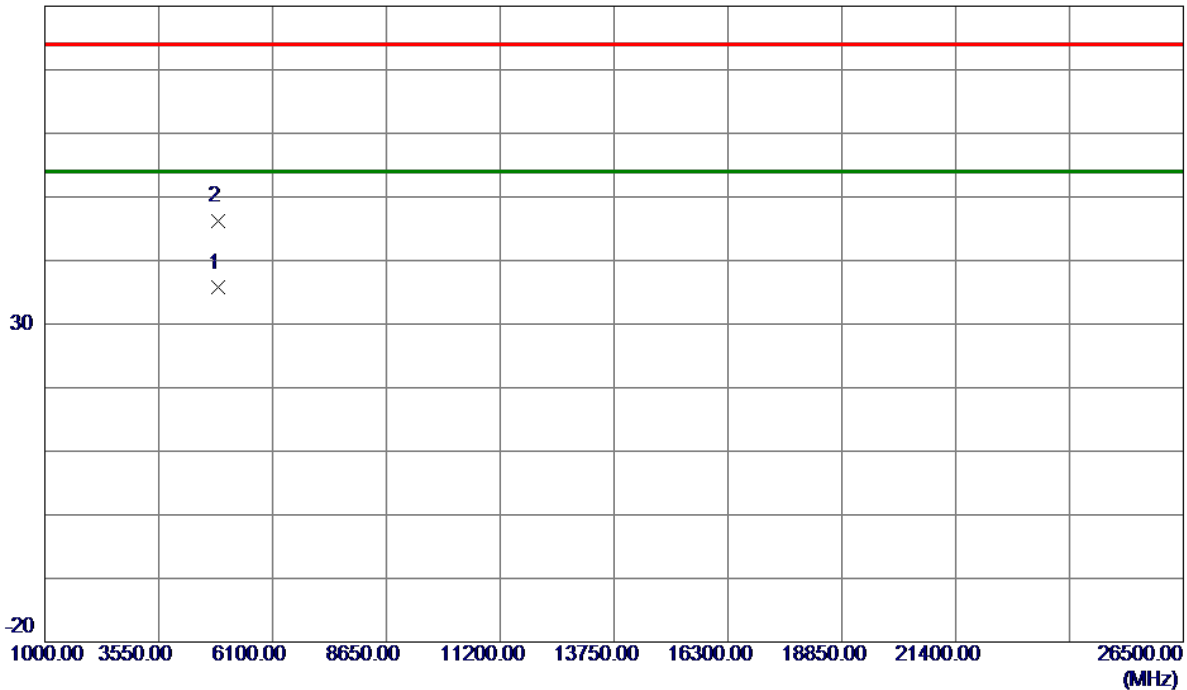

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.8020	30.24	5.46	35.70	54.00	-18.30	AVG	
2	4874.9180	40.74	5.46	46.20	74.00	-27.80	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

130 dBuV/m

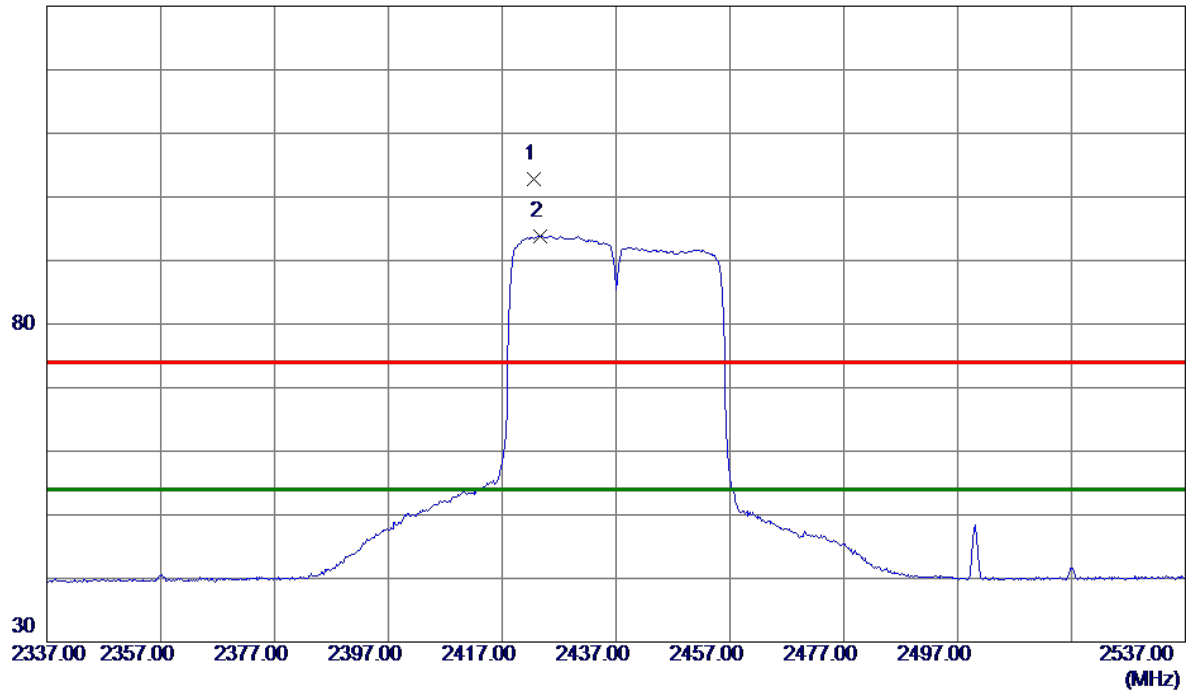

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2422.6000	94.41	8.32	102.73	74.00	28.73	Peak	No Limit
2	2423.6000	85.52	8.32	93.84	74.00	19.84	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

80 dBuV/m

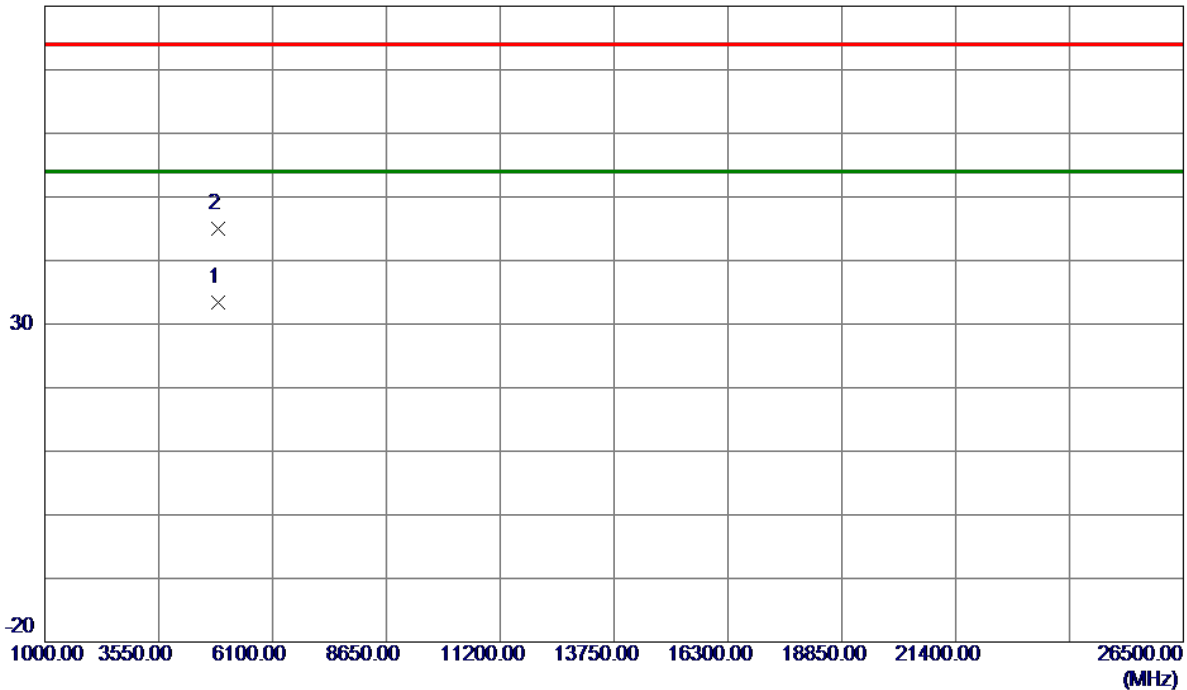

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4874.7220	27.85	5.46	33.31	54.00	-20.69	AVG	
2	4874.9840	39.46	5.46	44.92	74.00	-29.08	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

130 dBuV/m

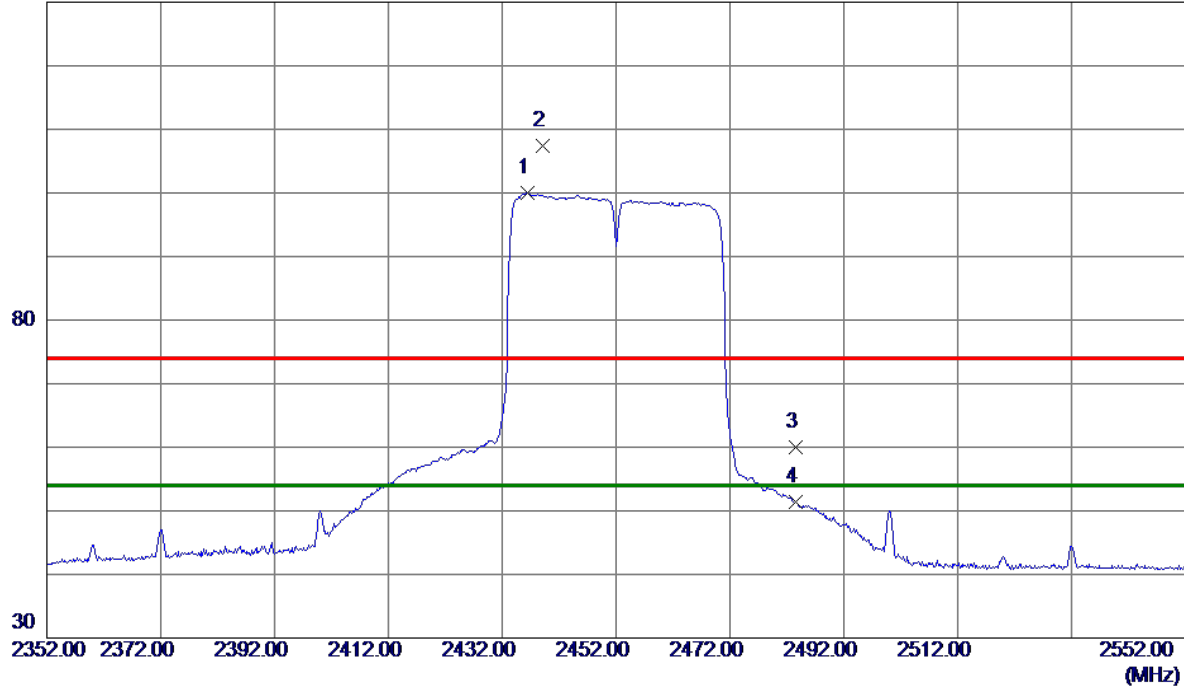

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2436.4000	91.61	8.34	99.95	54.00	45.95	AVG	No Limit
2	2439.2000	99.12	8.34	107.46	74.00	33.46	Peak	No Limit
3	2483.5000	51.63	8.39	60.02	74.00	-13.98	Peak	
4	2483.5000	42.92	8.39	51.31	54.00	-2.69	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

80 dBuV/m

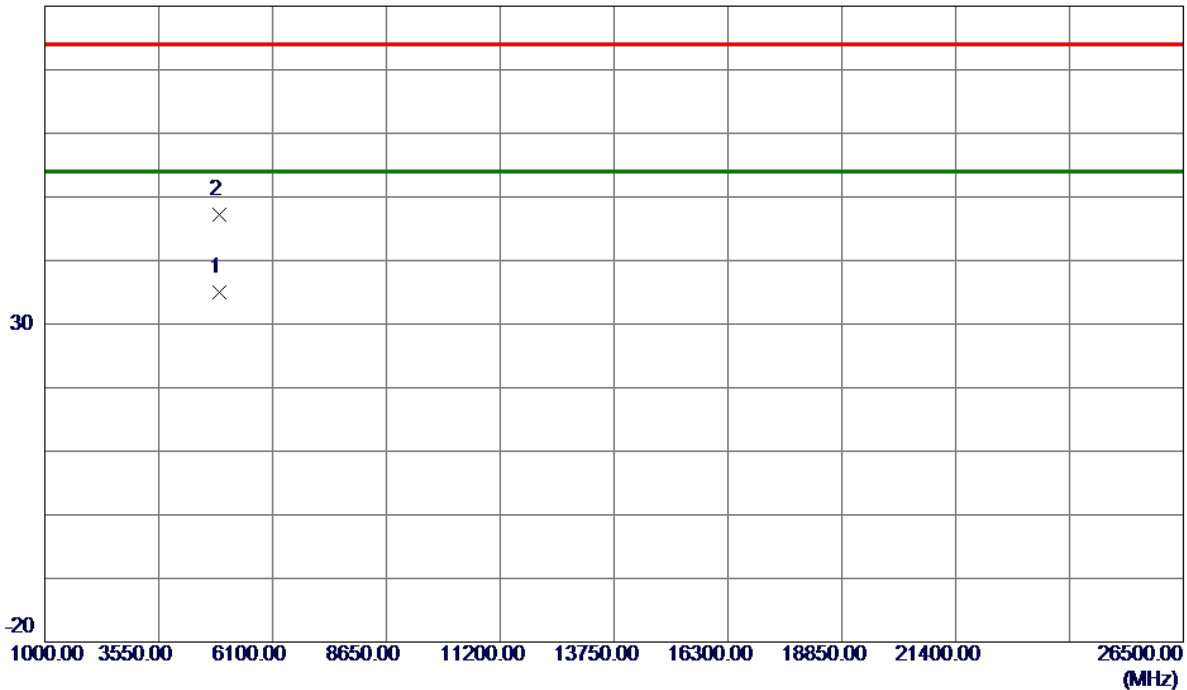

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4903.4560	29.53	5.54	35.07	54.00	-18.93	AVG	
2	4904.1640	41.60	5.54	47.14	74.00	-26.86	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

130 dBuV/m

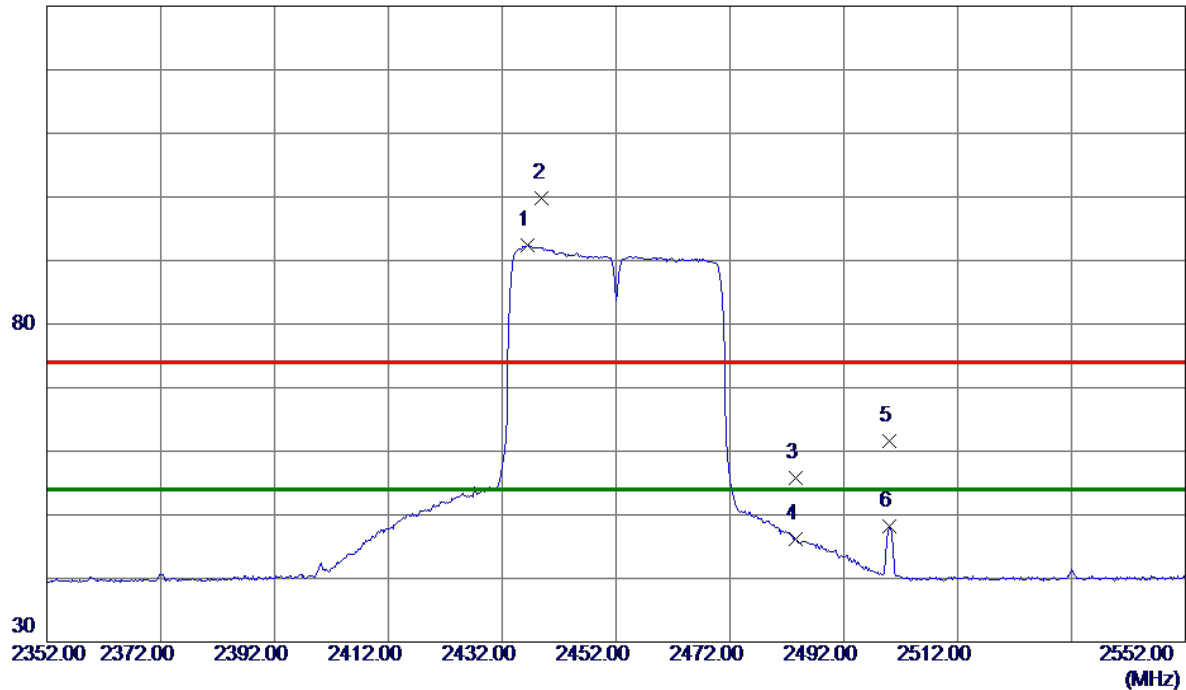

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2436.4000	84.00	8.34	92.34	54.00	38.34	AVG	No Limit
2	2439.0000	91.50	8.34	99.84	74.00	25.84	Peak	No Limit
3	2483.5000	47.37	8.39	55.76	74.00	-18.24	Peak	
4	2483.5000	37.73	8.39	46.12	54.00	-7.88	AVG	
5	2500.0000	53.12	8.41	61.53	74.00	-12.47	Peak	
6	2500.0000	39.82	8.41	48.23	54.00	-5.77	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-40M Mode 2452 MHz
------------	------------------------

Horizontal

80 dBuV/m

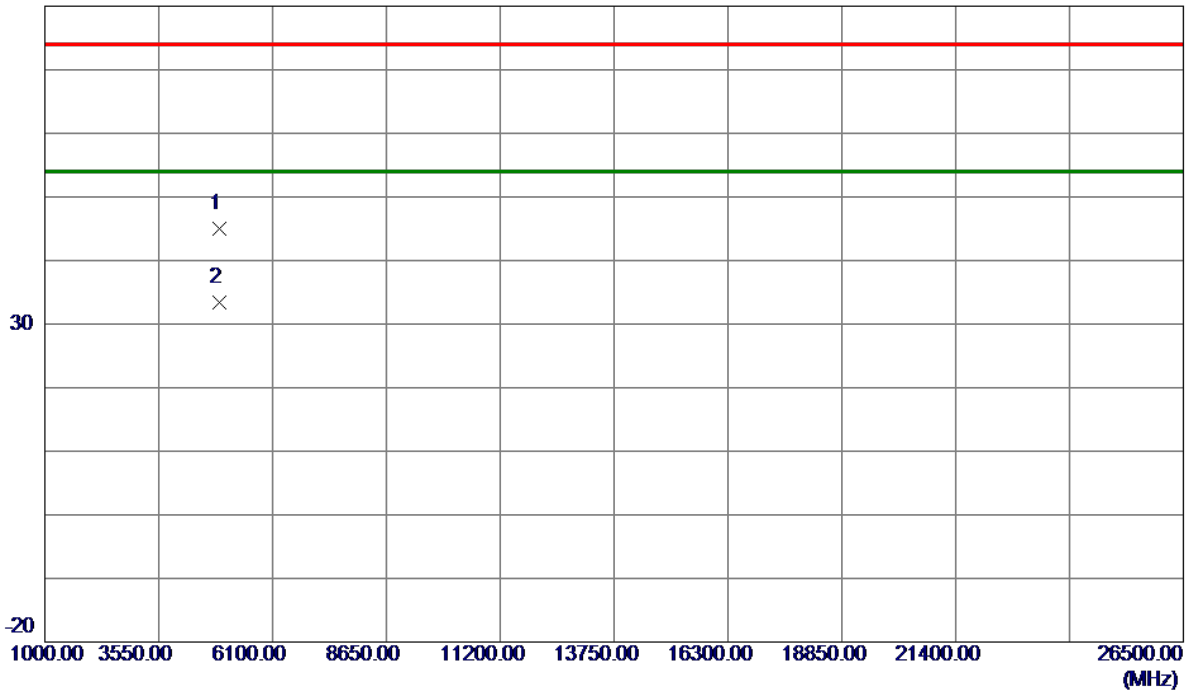

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4903.6140	39.40	5.54	44.94	74.00	-29.06	Peak	
2 *	4904.6920	27.92	5.54	33.46	54.00	-20.54	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	10.06	500	Complies
06	2437	10.11	500	Complies
11	2462	10.14	500	Complies

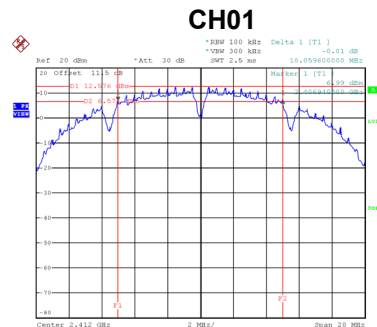

Date: 1.JAN.2003 21:16:22

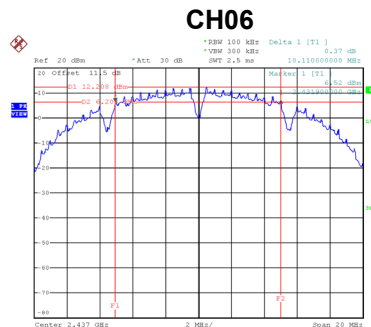


Date: 1.JAN.2003 21:41:13

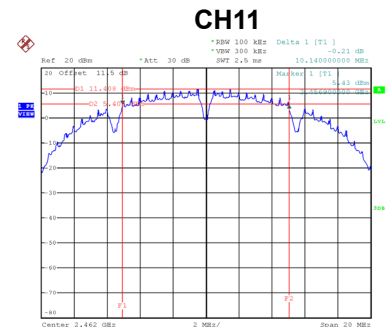


Date: 1.JAN.2003 21:50:17


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	15.52	Complies
06	2437	15.60	Complies
11	2462	15.52	Complies

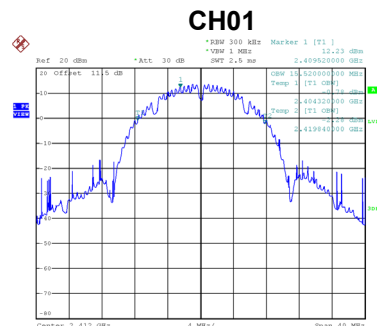

Date: 1.JAN.2003 21:16:28

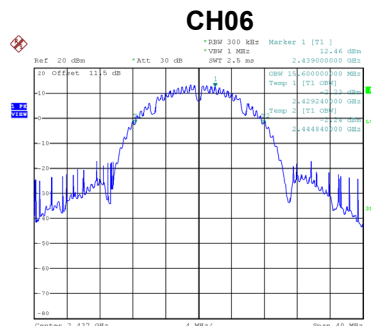


Date: 1.JAN.2003 21:41:19

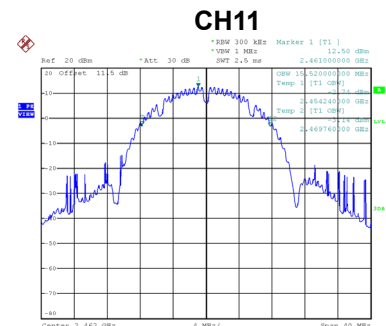


Date: 1.JAN.2003 21:50:23

Test Mode	TX G Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	16.38	500	Complies
06	2437	16.39	500	Complies
11	2462	16.38	500	Complies

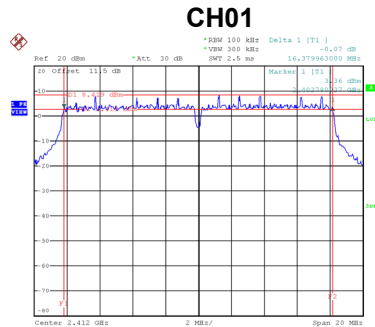

Date: 1.JAN.2003 22:00:56

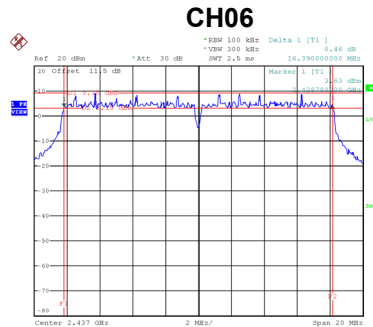


Date: 1.JAN.2003 22:10:39

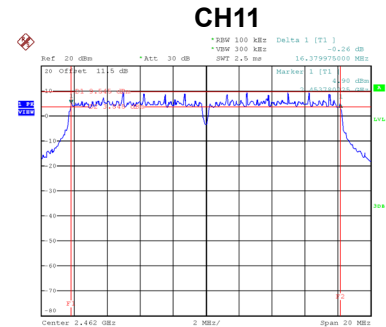


Date: 1.JAN.2003 22:22:34


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	16.96	Complies
06	2437	17.04	Complies
11	2462	17.04	Complies

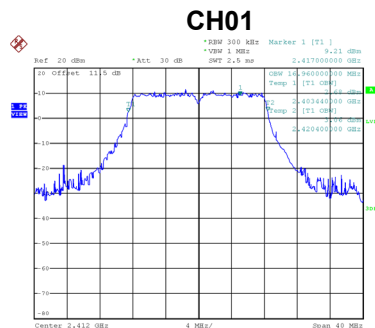

Date: 1.JAN.2003 22:01:02

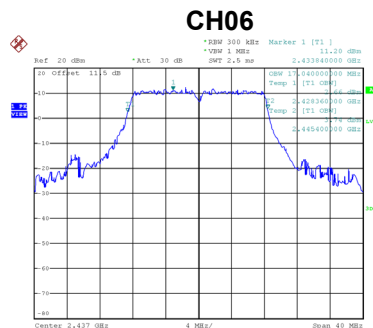


Date: 1.JAN.2003 22:10:46

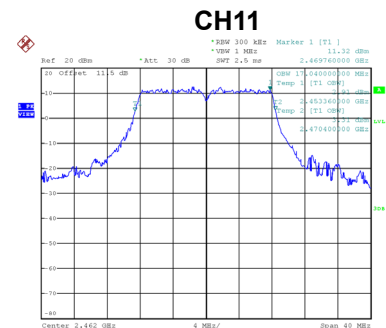


Date: 1.JAN.2003 22:22:42

Test Mode	TX N-20M Mode
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.63	500	Complies
06	2437	17.66	500	Complies
11	2462	17.65	500	Complies

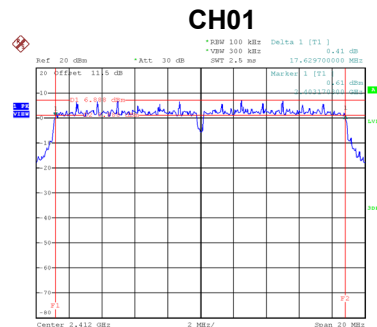

Date: 1.JAN.2003 22:49:55

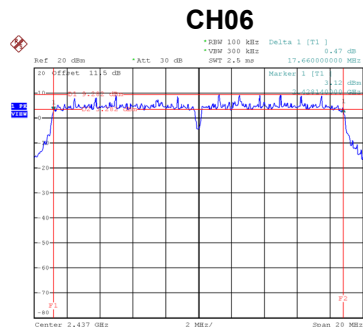


Date: 1.JAN.2003 22:52:17

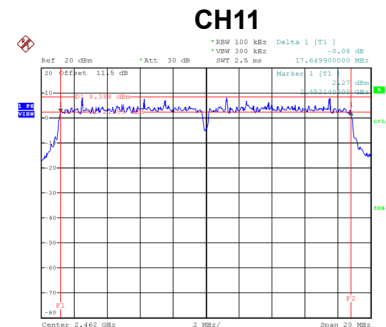


Date: 1.JAN.2003 23:01:57


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	18.16	Complies
06	2437	18.32	Complies
11	2462	18.16	Complies

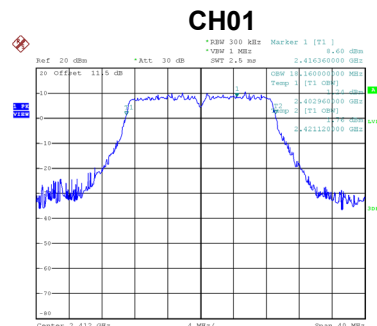

Date: 1.JAN.2003 22:50:02

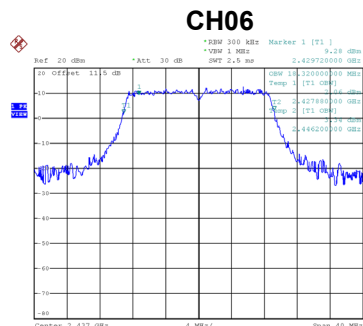


Date: 1.JAN.2003 22:52:23

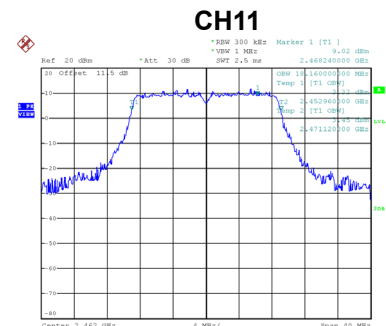


Date: 1.JAN.2003 23:02:04

Test Mode	TX N-40M Mode
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	36.12	500	Complies
06	2437	36.36	500	Complies
09	2452	36.12	500	Complies

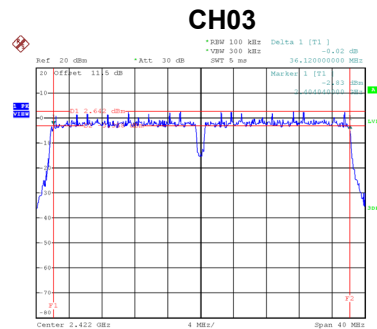

Date: 1.JAN.2003 23:29:25

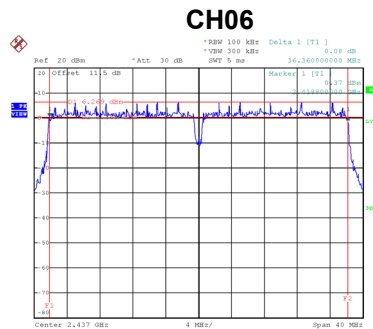


Date: 1.JAN.2003 23:51:46

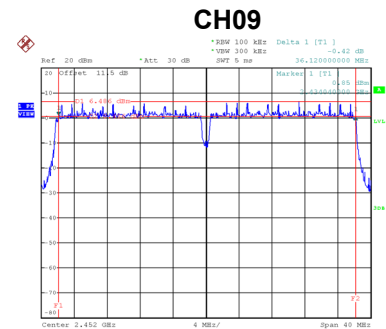


Date: 2.JAN.2003 00:09:13


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.32	Complies
06	2437	36.32	Complies
09	2452	36.32	Complies

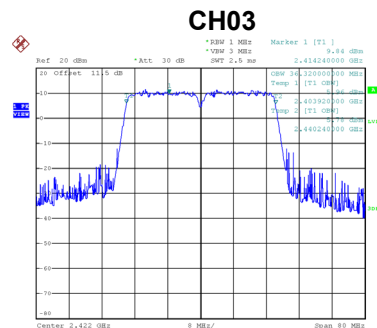

Date: 1.JAN.2003 23:29:32

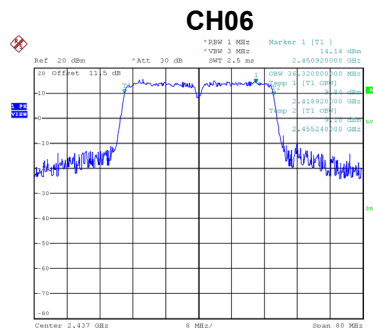

Date: 1.JAN.2003 23:51:53

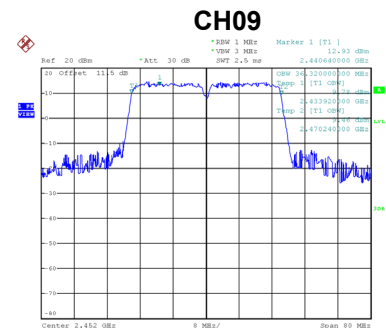

Date: 2.JAN.2003 00:09:20

APPENDIX F - MAXIMUM OUTPUT POWER

Non Beamforming

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.66	0.15	19.81	30.00	1.0000	Complies
06	2437	19.91	0.15	20.06	30.00	1.0000	Complies
11	2462	19.95	0.15	20.10	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.88	0.15	20.03	30.00	1.0000	Complies
06	2437	19.94	0.15	20.09	30.00	1.0000	Complies
11	2462	19.72	0.15	19.87	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.93	30.00	1.0000	Complies
06	2437	23.09	30.00	1.0000	Complies
11	2462	23.00	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.44	0.36	19.80	30.00	1.0000	Complies
06	2437	19.92	0.36	20.28	30.00	1.0000	Complies
11	2462	19.96	0.36	20.32	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.27	0.36	19.63	30.00	1.0000	Complies
06	2437	19.98	0.36	20.34	30.00	1.0000	Complies
11	2462	19.75	0.36	20.11	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.72	30.00	1.0000	Complies
06	2437	23.32	30.00	1.0000	Complies
11	2462	23.22	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.94	0.23	19.17	30.00	1.0000	Complies
06	2437	20.16	0.23	20.39	30.00	1.0000	Complies
11	2462	19.65	0.23	19.88	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.13	0.23	19.36	30.00	1.0000	Complies
06	2437	19.86	0.23	20.09	30.00	1.0000	Complies
11	2462	19.32	0.23	19.55	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.27	30.00	1.0000	Complies
06	2437	23.25	30.00	1.0000	Complies
11	2462	22.72	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	17.13	0.76	17.89	30.00	1.0000	Complies
06	2437	19.25	0.76	20.01	30.00	1.0000	Complies
09	2452	18.92	0.76	19.68	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.95	0.76	17.71	30.00	1.0000	Complies
06	2437	18.89	0.76	19.65	30.00	1.0000	Complies
09	2452	18.64	0.76	19.40	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.82	30.00	1.0000	Complies
06	2437	22.85	30.00	1.0000	Complies
09	2452	22.56	30.00	1.0000	Complies

Beamforming

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.65	0.23	18.88	30.00	1.0000	Complies
06	2437	19.88	0.23	20.11	30.00	1.0000	Complies
11	2462	19.25	0.23	19.48	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.13	0.23	19.36	30.00	1.0000	Complies
06	2437	19.54	0.23	19.77	30.00	1.0000	Complies
11	2462	19.32	0.23	19.55	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	22.13	30.00	1.0000	Complies
06	2437	22.95	30.00	1.0000	Complies
11	2462	22.52	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.77	0.76	17.53	30.00	1.0000	Complies
06	2437	18.86	0.76	19.62	30.00	1.0000	Complies
09	2452	18.51	0.76	19.27	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Duty Factor	Average Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	16.95	0.76	17.71	30.00	1.0000	Complies
06	2437	18.89	0.76	19.65	30.00	1.0000	Complies
09	2452	18.64	0.76	19.40	30.00	1.0000	Complies


Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Average Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	20.64	30.00	1.0000	Complies
06	2437	22.65	30.00	1.0000	Complies
09	2452	22.35	30.00	1.0000	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS


Test Mode TX B Mode_Ant. 1

Bandedge-CH01

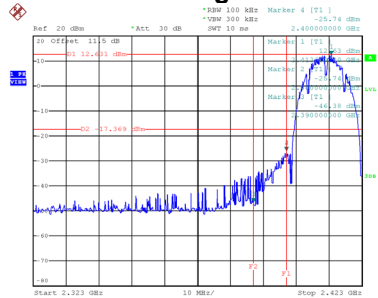


Date: 1.JAN.2003 21:16:00

Bandedge-CH11

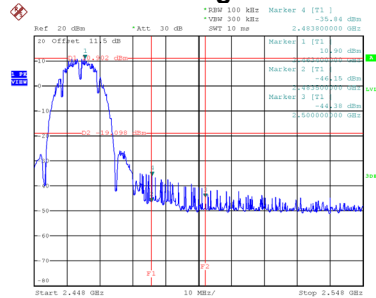


Date: 1.JAN.2003 21:50:31


CH01 – 10th Harmonic of the fundamental frequency

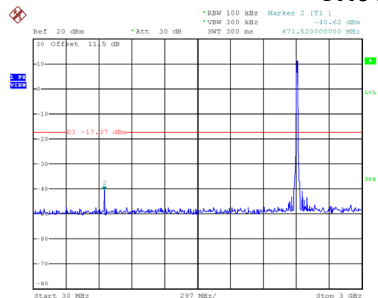

Date: 1.JAN.2003 21:16:41

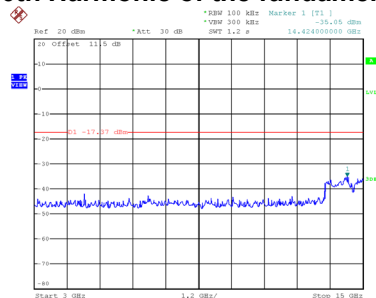


Date: 1.JAN.2003 21:16:48

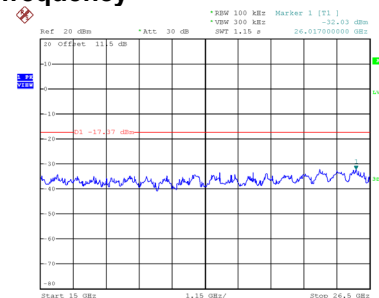


Date: 1.JAN.2003 21:16:55


CH06 – 10th Harmonic of the fundamental frequency

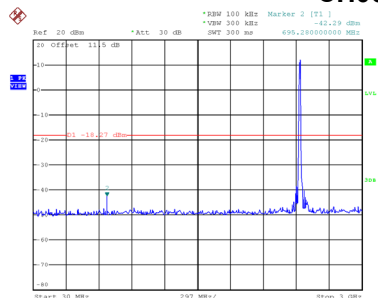

Date: 1.JAN.2003 21:41:39

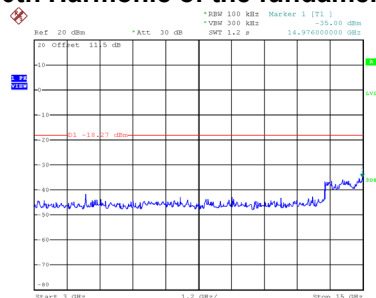


Date: 1.JAN.2003 21:41:46

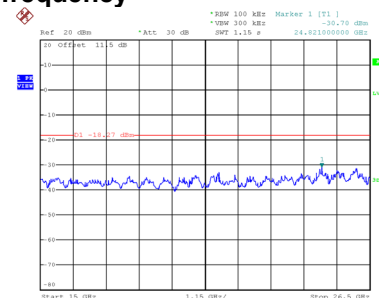


Date: 1.JAN.2003 21:41:53


CH11 – 10th Harmonic of the fundamental frequency

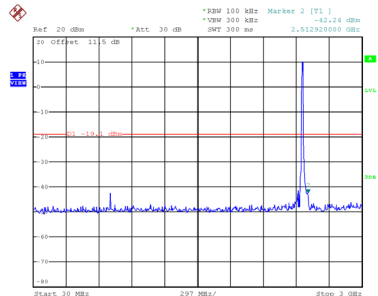

Date: 1.JAN.2003 21:50:44

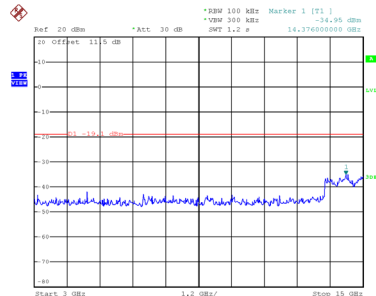


Date: 1.JAN.2003 21:50:50

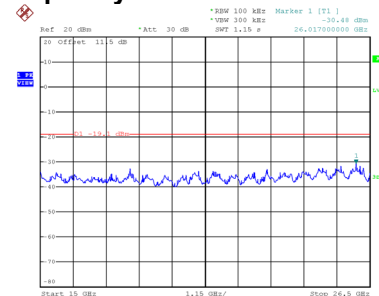

Date: 1.JAN.2003 21:50:57


Test Mode TX B Mode_Ant. 2

Bandedge-CH01

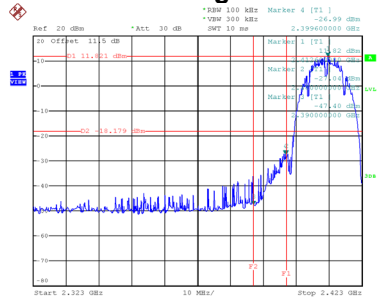


Date: 1.JAN.2003 21:28:25

Bandedge-CH11

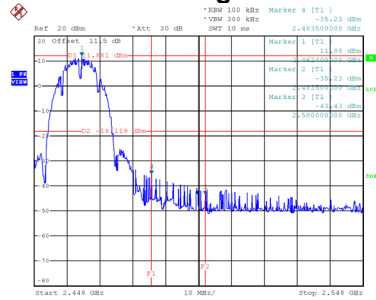


Date: 1.JAN.2003 21:46:28


CH01 – 10th Harmonic of the fundamental frequency

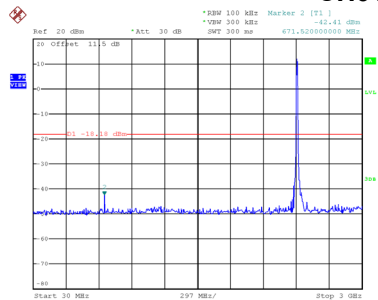

Date: 1.JAN.2003 21:28:38

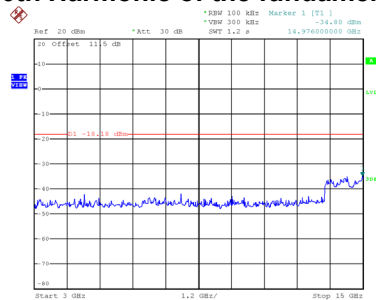


Date: 1.JAN.2003 21:28:44

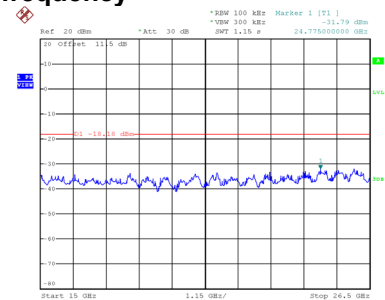


Date: 1.JAN.2003 21:28:51


CH06 – 10th Harmonic of the fundamental frequency

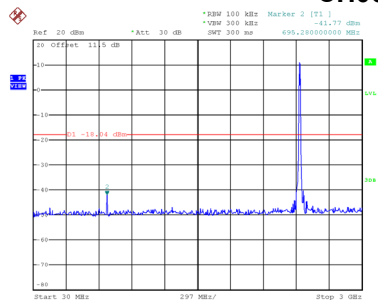

Date: 1.JAN.2003 21:44:23

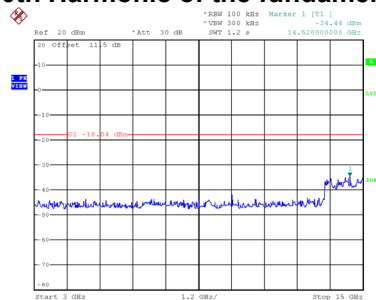


Date: 1.JAN.2003 21:44:30

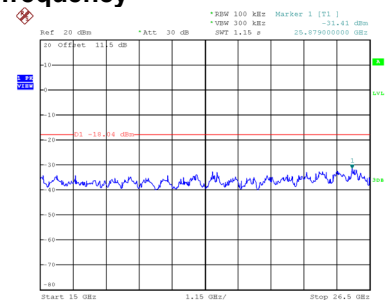


Date: 1.JAN.2003 21:44:37


CH11 – 10th Harmonic of the fundamental frequency

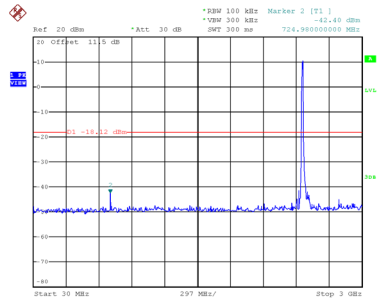

Date: 1.JAN.2003 21:46:41

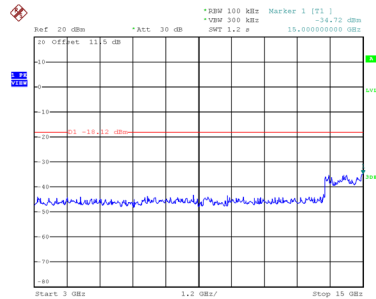

Date: 1.JAN.2003 21:46:47

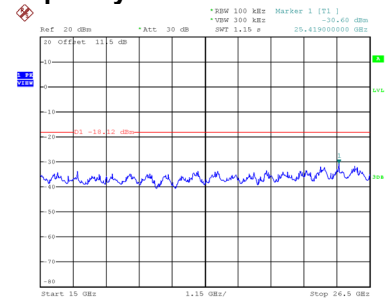

Date: 1.JAN.2003 21:46:54