

Mode: Mode 1/ IEEE 802.11 ac VHT80

Channel :5290MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1500.5	58.76	-19.38	39.38	74.00	34.62	Horizontal
2	3779.7	57.98	-14.16	43.82	74.00	30.18	Horizontal
3	6790.95	56.35	-4.00	52.35	74.00	21.65	Horizontal
4	8944.9	56.41	-1.08	55.33	74.00	18.67	Horizontal
5	11632.45	55.32	3.68	59.00	74.00	15.00	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1512.05	48.74	-19.35	29.39	54.00	24.61	Horizontal
2	3853.4	50.40	-13.54	36.86	54.00	17.14	Horizontal
3	6879.5	49.06	-3.07	45.99	54.00	8.01	Horizontal
4	9044.95	48.34	-0.69	47.65	54.00	6.35	Horizontal
5	11535.85	48.06	3.95	52.01	54.00	1.99	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1429	58.67	-19.36	39.31	74.00	34.69	Vertical
2	2890.9	58.38	-17.43	40.95	74.00	33.05	Vertical
3	6212.9	55.88	-4.69	51.19	74.00	22.81	Vertical
4	7683.35	56.37	-2.44	53.93	74.00	20.07	Vertical
5	9516.45	55.20	0.35	55.55	74.00	18.45	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1421.3	48.24	-19.34	28.90	54.00	25.10	Vertical
2	2892.55	48.52	-17.43	31.09	54.00	22.91	Vertical
3	6299.25	47.63	-3.66	43.97	54.00	10.03	Vertical
4	7766.15	48.29	-2.42	45.87	54.00	8.13	Vertical
5	9496.9	47.62	0.35	47.97	54.00	6.03	Vertical

Mode: Mode 1/ IEEE 802.11 ac VHT80

Channel :5530MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1378.95	59.18	-19.41	39.77	74.00	34.23	Horizontal
2	3119.7	58.72	-16.48	42.24	74.00	31.76	Horizontal
3	4781.25	58.76	-9.42	49.34	74.00	24.66	Horizontal
4	6822	57.09	-3.68	53.41	74.00	20.59	Horizontal
5	9222.05	56.45	-0.28	56.17	74.00	17.83	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1360.8	48.19	-19.47	28.72	54.00	25.28	Horizontal
2	3142.8	48.20	-16.49	31.71	54.00	22.29	Horizontal
3	4819.75	51.40	-9.41	41.99	54.00	12.01	Horizontal
4	6893.3	48.83	-2.92	45.91	54.00	8.09	Horizontal
5	9181.8	49.03	-0.35	48.68	54.00	5.32	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1560.45	58.67	-19.33	39.34	74.00	34.66	Vertical
2	2620.85	58.64	-18.41	40.23	74.00	33.77	Vertical
3	4330.8	58.60	-11.04	47.56	74.00	26.44	Vertical
4	7302.7	55.81	-2.75	53.06	74.00	20.94	Vertical
5	11039.05	56.34	3.54	59.88	74.00	14.12	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1577.5	48.01	-19.30	28.71	54.00	25.29	Vertical
2	2656.6	48.12	-18.11	30.01	54.00	23.99	Vertical
3	4348.95	51.49	-11.10	40.39	54.00	13.61	Vertical
4	7300.4	49.00	-2.75	46.25	54.00	7.75	Vertical
5	10367.45	48.42	2.69	51.11	54.00	2.89	Vertical

Mode: Mode 1/ IEEE 802.11 ac VHT80

Channel :5610MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1325.05	58.63	-19.62	39.01	74.00	34.99	Horizontal
2	2707.75	58.61	-17.73	40.88	74.00	33.12	Horizontal
3	4109.7	58.44	-11.97	46.47	74.00	27.53	Horizontal
4	7301.55	55.67	-2.76	52.91	74.00	21.09	Horizontal
5	10940.15	55.45	4.08	59.53	74.00	14.47	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1343.2	48.15	-19.55	28.60	54.00	25.40	Horizontal
2	2744.05	48.98	-17.61	31.37	54.00	22.63	Horizontal
3	4073.95	50.86	-11.98	38.88	54.00	15.12	Horizontal
4	7357.9	48.59	-2.85	45.74	54.00	8.26	Horizontal
5	10941.3	47.43	4.07	51.50	54.00	2.50	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1513.15	58.82	-19.41	39.41	74.00	34.59	Vertical
2	3521.2	59.20	-14.20	45.00	74.00	29.00	Vertical
3	6569	57.01	-4.28	52.73	74.00	21.27	Vertical
4	8305.5	56.63	-1.18	55.45	74.00	18.55	Vertical
5	9379.6	55.83	0.06	55.89	74.00	18.11	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1511.5	49.06	-19.41	29.65	54.00	24.35	Vertical
2	3489.3	48.51	-14.24	34.27	54.00	19.73	Vertical
3	6491.2	49.07	-3.52	45.55	54.00	8.45	Vertical
4	8285.95	49.26	-1.09	48.17	54.00	5.83	Vertical
5	9272.65	48.56	-0.18	48.38	54.00	5.62	Vertical

Mode: Mode 1/ IEEE 802.11 ac VHT80

Channel :5775MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1452.1	58.99	-19.33	39.66	74.00	34.34	Horizontal
2	2597.2	59.30	-18.65	40.65	74.00	33.35	Horizontal
3	4137.75	57.50	-11.94	45.56	74.00	28.44	Horizontal
4	6480.2	56.34	-2.99	53.35	74.00	20.65	Horizontal
5	9306	56.31	-0.11	56.20	74.00	17.80	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1452.1	48.16	-19.33	28.83	54.00	25.17	Horizontal
2	2581.25	48.78	-18.71	30.07	54.00	23.93	Horizontal
3	4114.1	50.94	-11.74	39.20	54.00	14.80	Horizontal
4	6453.25	49.79	-3.11	46.68	54.00	7.32	Horizontal
5	9284.15	49.44	-0.16	49.28	54.00	4.72	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1431.75	58.27	-19.31	38.96	74.00	35.04	Vertical
2	3025.65	58.94	-16.72	42.22	74.00	31.78	Vertical
3	4860.45	58.58	-9.74	48.84	74.00	25.16	Vertical
4	7682.2	56.48	-2.45	54.03	74.00	19.97	Vertical
5	9870.65	56.02	1.37	57.39	74.00	16.61	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1422.95	48.04	-19.29	28.75	54.00	25.25	Vertical
2	3076.25	48.50	-16.53	31.97	54.00	22.03	Vertical
3	4752.1	51.57	-9.42	42.15	54.00	11.85	Vertical
4	7715.55	48.45	-2.39	46.06	54.00	7.94	Vertical
5	9936.2	48.30	1.55	49.85	54.00	4.15	Vertical

Mode: Mode 1/ IEEE 802.11ax HE20

Channel :5180MHz

Temp. /Hum.:25°C/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1619.85	60.61	-19.26	41.35	74.00	32.65	Horizontal
2	3463.45	58.90	-14.81	44.09	74.00	29.91	Horizontal
3	6785.2	55.62	-4.06	51.56	74.00	22.44	Horizontal
4	9097.85	55.24	-0.50	54.74	74.00	19.26	Horizontal
5	11195.45	54.99	3.71	58.70	74.00	15.30	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1619.85	50.76	-19.26	31.50	54.00	22.50	Horizontal
2	3481.05	47.91	-14.58	33.33	54.00	20.67	Horizontal
3	6640.3	48.58	-4.65	43.93	54.00	10.07	Horizontal
4	9142.7	47.93	-0.42	47.51	54.00	6.49	Horizontal
5	11188.55	48.27	3.67	51.94	54.00	2.06	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1400.4	59.28	-19.34	39.94	74.00	34.06	Vertical
2	3162.05	59.11	-16.39	42.72	74.00	31.28	Vertical
3	6354.8	56.06	-3.44	52.62	74.00	21.38	Vertical
4	8757.45	55.21	-1.42	53.79	74.00	20.21	Vertical
5	11241.45	54.97	3.99	58.96	74.00	15.04	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1403.7	48.25	-19.34	28.91	54.00	25.09	Vertical
2	3143.9	48.09	-16.30	31.79	54.00	22.21	Vertical
3	6418.6	48.79	-3.19	45.60	54.00	8.40	Vertical
4	8690.75	48.06	-1.53	46.53	54.00	7.47	Vertical
5	11255.25	47.44	4.08	51.52	54.00	2.48	Vertical

Mode: Mode 1/ IEEE 802.11ax HE20

Temp. /Hum.:25°C/60%RH/101.1kPa

Test Engineer: Zhang Zishan

Channel :5200MHz

Power supply:AC120V/60Hz

Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1350.35	58.52	-19.56	38.96	74.00	35.04	Horizontal
2	2570.8	59.31	-18.70	40.61	74.00	33.39	Horizontal
3	4397.35	58.24	-11.30	46.94	74.00	27.06	Horizontal
4	6746.1	55.97	-4.48	51.49	74.00	22.51	Horizontal
5	9555.55	55.44	0.35	55.79	74.00	18.21	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1358.05	48.06	-19.53	28.53	54.00	25.47	Horizontal
2	2607.65	48.29	-18.49	29.80	54.00	24.20	Horizontal
3	4412.75	50.10	-11.15	38.95	54.00	15.05	Horizontal
4	6830.05	47.75	-3.59	44.16	54.00	9.84	Horizontal
5	9618.8	47.80	0.34	48.14	54.00	5.86	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1357.5	58.93	-19.53	39.40	74.00	34.60	Vertical
2	2208.9	58.50	-19.95	38.55	74.00	35.45	Vertical
3	6201.9	56.63	-4.82	51.81	74.00	22.19	Vertical
4	8180.15	55.80	-0.75	55.05	74.00	18.95	Vertical
5	10404.25	57.50	2.87	60.37	74.00	13.63	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1384.45	48.17	-19.41	28.76	54.00	25.24	Vertical
2	2204.5	48.00	-19.94	28.06	54.00	25.94	Vertical
3	6259.1	48.46	-4.14	44.32	54.00	9.68	Vertical
4	7940.95	49.02	-2.07	46.95	54.00	7.05	Vertical
5	9871.8	48.09	1.38	49.47	54.00	4.53	Vertical

Mode: Mode 1/ IEEE 802.11ax HE20

Temp. /Hum.:25°C/60%RH/101.1kPa

Test Engineer: Zhang Zishan

Channel :5240MHz

Power supply:AC120V/60Hz

Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1349.8	58.27	-19.57	38.70	74.00	35.30	Horizontal
2	2816.1	59.49	-17.50	41.99	74.00	32.01	Horizontal
3	4285.15	57.06	-11.35	45.71	74.00	28.29	Horizontal
4	5997.3	56.20	-5.96	50.24	74.00	23.76	Horizontal
5	9318.65	55.76	-0.08	55.68	74.00	18.32	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1350.35	48.38	-19.56	28.82	54.00	25.18	Horizontal
2	2818.85	48.07	-17.50	30.57	54.00	23.43	Horizontal
3	4284.6	50.28	-11.36	38.92	54.00	15.08	Horizontal
4	6034.7	49.72	-5.98	43.74	54.00	10.26	Horizontal
5	9264.6	48.36	-0.20	48.16	54.00	5.84	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1358.05	58.30	-19.53	38.77	74.00	35.23	Vertical
2	2532.85	59.00	-18.90	40.10	74.00	33.90	Vertical
3	6495.6	55.95	-2.90	53.05	74.00	20.95	Vertical
4	8788.5	56.28	-1.39	54.89	74.00	19.11	Vertical
5	10421.5	55.49	2.94	58.43	74.00	15.57	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1350.35	47.95	-19.56	28.39	54.00	25.61	Vertical
2	2483.9	49.57	-19.08	30.49	54.00	23.51	Vertical
3	6481.3	48.78	-2.95	45.83	54.00	8.17	Vertical
4	8783.9	47.97	-1.40	46.57	54.00	7.43	Vertical
5	10482.45	48.70	3.22	51.92	54.00	2.08	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5260MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1404.25	59.39	-19.34	40.05	74.00	33.95	Horizontal
2	2867.25	59.14	-17.45	41.69	74.00	32.31	Horizontal
3	5921.95	57.14	-5.86	51.28	74.00	22.72	Horizontal
4	7383.2	56.73	-2.90	53.83	74.00	20.17	Horizontal
5	9952.3	55.33	1.54	56.87	74.00	17.13	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1394.35	48.42	-19.37	29.05	54.00	24.95	Horizontal
2	2894.2	48.35	-17.42	30.93	54.00	23.07	Horizontal
3	5886.75	49.02	-5.80	43.22	54.00	10.78	Horizontal
4	7291.2	49.60	-2.78	46.82	54.00	7.18	Horizontal
5	10144.35	47.54	1.80	49.34	54.00	4.66	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1404.8	58.52	-19.34	39.18	74.00	34.82	Vertical
2	2747.35	58.73	-17.66	41.07	74.00	32.93	Vertical
3	4078.35	58.39	-11.79	46.60	74.00	27.40	Vertical
4	6872.6	56.00	-3.13	52.87	74.00	21.13	Vertical
5	9653.3	55.96	0.33	56.29	74.00	17.71	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1414.15	48.06	-19.34	28.72	54.00	25.28	Vertical
2	2774.85	49.30	-17.58	31.72	54.00	22.28	Vertical
3	4091	50.37	-11.78	38.59	54.00	15.41	Vertical
4	6900.2	48.90	-2.85	46.05	54.00	7.95	Vertical
5	9720	48.32	0.45	48.77	54.00	5.23	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5280MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1405.9	59.10	-19.34	39.76	74.00	34.24	Horizontal
2	2961.85	59.87	-16.97	42.90	74.00	31.10	Horizontal
3	6565.55	57.84	-4.27	53.57	74.00	20.43	Horizontal
4	8758.6	56.96	-1.42	55.54	74.00	18.46	Horizontal
5	11198.9	55.68	3.73	59.41	74.00	14.59	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1392.15	48.41	-19.38	29.03	54.00	24.97	Horizontal
2	2991.55	48.44	-16.76	31.68	54.00	22.32	Horizontal
3	6467	49.37	-3.01	46.36	54.00	7.64	Horizontal
4	8668.9	48.98	-1.67	47.31	54.00	6.69	Horizontal
5	11232.25	47.68	3.93	51.61	54.00	2.39	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1374	58.81	-19.45	39.36	74.00	34.64	Vertical
2	2333.2	58.42	-19.70	38.72	74.00	35.28	Vertical
3	6260.75	55.17	-4.11	51.06	74.00	22.94	Vertical
4	8703.4	55.93	-1.47	54.46	74.00	19.54	Vertical
5	10982.7	56.40	3.88	60.28	74.00	13.72	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1375.1	48.24	-19.46	28.78	54.00	25.22	Vertical
2	2366.2	48.29	-19.43	28.86	54.00	25.14	Vertical
3	6344.35	49.69	-3.47	46.22	54.00	7.78	Vertical
4	8699.95	48.57	-1.48	47.09	54.00	6.91	Vertical
5	10928.65	48.07	4.14	52.21	54.00	1.79	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5320MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1637.45	58.87	-19.40	39.47	74.00	34.53	Horizontal
2	2862.85	59.14	-17.46	41.68	74.00	32.32	Horizontal
3	6091.9	57.16	-6.01	51.15	74.00	22.85	Horizontal
4	8676.95	56.69	-1.62	55.07	74.00	18.93	Horizontal
5	11001.1	55.10	3.78	58.88	74.00	15.12	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1624.8	49.24	-19.30	29.94	54.00	24.06	Horizontal
2	2900.25	48.37	-17.42	30.95	54.00	23.05	Horizontal
3	6204.65	48.17	-4.78	43.39	54.00	10.61	Horizontal
4	8731	49.12	-1.45	47.67	54.00	6.33	Horizontal
5	11157.5	48.49	3.48	51.97	54.00	2.03	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1465.3	58.37	-19.36	39.01	74.00	34.99	Vertical
2	2498.75	59.47	-19.07	40.40	74.00	33.60	Vertical
3	4337.95	58.48	-11.22	47.26	74.00	26.74	Vertical
4	6885.25	56.73	-3.01	53.72	74.00	20.28	Vertical
5	9066.8	56.29	-0.62	55.67	74.00	18.33	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1438.9	48.35	-19.36	28.99	54.00	25.01	Vertical
2	2483.9	49.71	-19.08	30.63	54.00	23.37	Vertical
3	4288.45	51.09	-11.31	39.78	54.00	14.22	Vertical
4	6930.1	48.96	-2.94	46.02	54.00	7.98	Vertical
5	9143.85	49.03	-0.42	48.61	54.00	5.39	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5500MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1511.5	59.65	-19.41	40.24	74.00	33.76	Horizontal
2	3894.65	58.42	-12.90	45.52	74.00	28.48	Horizontal
3	7376.3	56.15	-2.89	53.26	74.00	20.74	Horizontal
4	9969.55	55.37	1.54	56.91	74.00	17.09	Horizontal
5	12455.85	55.64	2.72	58.36	74.00	15.64	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1521.95	48.15	-19.39	28.76	54.00	25.24	Horizontal
2	3936.45	51.16	-12.56	38.60	54.00	15.40	Horizontal
3	7309.6	48.43	-2.77	45.66	54.00	8.34	Horizontal
4	9958.05	48.32	1.55	49.87	54.00	4.13	Horizontal
5	12662.85	47.85	4.00	51.85	54.00	2.15	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1381.15	58.51	-19.40	39.11	74.00	34.89	Vertical
2	2620.3	59.57	-18.41	41.16	74.00	32.84	Vertical
3	3483.8	59.10	-14.36	44.74	74.00	29.26	Vertical
4	6423.55	56.16	-3.60	52.56	74.00	21.44	Vertical
5	8599.9	56.13	-2.07	54.06	74.00	19.94	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1415.25	48.29	-19.33	28.96	54.00	25.04	Vertical
2	2659.35	48.06	-18.10	29.96	54.00	24.04	Vertical
3	3564.1	49.02	-14.50	34.52	54.00	19.48	Vertical
4	6481.3	49.38	-3.53	45.85	54.00	8.15	Vertical
5	8696.5	48.51	-1.50	47.01	54.00	6.99	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5580MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1468.05	58.53	-19.39	39.14	74.00	34.86	Horizontal
2	3284.15	58.00	-16.14	41.86	74.00	32.14	Horizontal
3	6082	56.76	-6.09	50.67	74.00	23.33	Horizontal
4	8043.3	55.67	-1.03	54.64	74.00	19.36	Horizontal
5	10544.55	55.34	3.54	58.88	74.00	15.12	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1458.7	47.98	-19.38	28.60	54.00	25.40	Horizontal
2	3299.55	47.28	-16.07	31.21	54.00	22.79	Horizontal
3	6237.65	48.55	-4.48	44.07	54.00	9.93	Horizontal
4	8092.75	47.83	-0.56	47.27	54.00	6.73	Horizontal
5	10720.5	47.00	4.32	51.32	54.00	2.68	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1608.85	59.00	-19.32	39.68	74.00	34.32	Vertical
2	3132.35	59.56	-16.49	43.07	74.00	30.93	Vertical
3	5010.6	57.59	-9.38	48.21	74.00	25.79	Vertical
4	6949.65	57.36	-3.00	54.36	74.00	19.64	Vertical
5	9705.05	56.13	0.37	56.50	74.00	17.50	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1619.85	49.46	-19.39	30.07	54.00	23.93	Vertical
2	3148.3	48.05	-16.49	31.56	54.00	22.44	Vertical
3	5103.55	50.91	-8.49	42.42	54.00	11.58	Vertical
4	7045.1	49.52	-3.30	46.22	54.00	7.78	Vertical
5	9973	47.75	1.54	49.29	54.00	4.71	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5700MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1501.05	59.58	-19.42	40.16	74.00	33.84	Horizontal
2	2995.4	59.53	-16.83	42.70	74.00	31.30	Horizontal
3	5076.6	57.46	-8.97	48.49	74.00	25.51	Horizontal
4	7447.6	56.36	-3.02	53.34	74.00	20.66	Horizontal
5	9503.8	55.96	0.35	56.31	74.00	17.69	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1512.05	50.30	-19.41	30.89	54.00	23.11	Horizontal
2	3030.6	48.50	-16.73	31.77	54.00	22.23	Horizontal
3	5184.4	48.58	-6.89	41.69	54.00	12.31	Horizontal
4	7607.45	50.11	-2.73	47.38	54.00	6.62	Horizontal
5	9530.25	48.82	0.35	49.17	54.00	4.83	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1407.55	59.20	-19.33	39.87	74.00	34.13	Vertical
2	3686.2	58.00	-14.91	43.09	74.00	30.91	Vertical
3	6778.3	57.07	-4.13	52.94	74.00	21.06	Vertical
4	8282.5	55.88	-1.08	54.80	74.00	19.20	Vertical
5	9987.95	55.93	1.54	57.47	74.00	16.53	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1386.65	48.24	-19.38	28.86	54.00	25.14	Vertical
2	3642.2	51.01	-14.83	36.18	54.00	17.82	Vertical
3	6886.4	49.04	-3.00	46.04	54.00	7.96	Vertical
4	8395.2	48.80	-1.87	46.93	54.00	7.07	Vertical
5	10274.3	47.81	2.29	50.10	54.00	3.90	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5745MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1513.15	59.07	-19.37	39.70	74.00	34.30	Horizontal
2	2789.7	60.40	-17.43	42.97	74.00	31.03	Horizontal
3	4441.9	57.96	-10.96	47.00	74.00	27.00	Horizontal
4	6825.45	56.56	-3.64	52.92	74.00	21.08	Horizontal
5	8376.8	55.47	-1.73	53.74	74.00	20.26	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1512.05	50.65	-19.37	31.28	54.00	22.72	Horizontal
2	2779.8	48.42	-17.47	30.95	54.00	23.05	Horizontal
3	4362.15	50.26	-11.27	38.99	54.00	15.01	Horizontal
4	6903.65	48.55	-2.86	45.69	54.00	8.31	Horizontal
5	8287.1	49.25	-1.10	48.15	54.00	5.85	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1405.9	58.30	-19.28	39.02	74.00	34.98	Vertical
2	2361.25	58.97	-19.47	39.50	74.00	34.50	Vertical
3	3608.1	58.03	-14.91	43.12	74.00	30.88	Vertical
4	7022.1	57.24	-3.23	54.01	74.00	19.99	Vertical
5	9495.75	55.66	0.34	56.00	74.00	18.00	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1422.95	48.21	-19.29	28.92	54.00	25.08	Vertical
2	2371.7	48.05	-19.39	28.66	54.00	25.34	Vertical
3	3620.75	50.98	-14.92	36.06	54.00	17.94	Vertical
4	6965.75	49.24	-3.06	46.18	54.00	7.82	Vertical
5	9560.15	48.83	0.34	49.17	54.00	4.83	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5785MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1512.05	58.43	-19.37	39.06	74.00	34.94	Horizontal
2	2783.65	58.88	-17.46	41.42	74.00	32.58	Horizontal
3	4319.8	57.84	-11.19	46.65	74.00	27.35	Horizontal
4	6781.75	56.56	-4.10	52.46	74.00	21.54	Horizontal
5	9961.5	55.52	1.54	57.06	74.00	16.94	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1511.5	48.38	-19.37	29.01	54.00	24.99	Horizontal
2	2734.7	48.51	-17.63	30.88	54.00	23.12	Horizontal
3	4344.55	50.63	-11.23	39.40	54.00	14.60	Horizontal
4	6834.65	49.05	-3.54	45.51	54.00	8.49	Horizontal
5	9861.45	48.05	1.31	49.36	54.00	4.64	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1432.3	59.36	-19.31	40.05	74.00	33.95	Vertical
2	2590.6	59.44	-18.67	40.77	74.00	33.23	Vertical
3	4072.3	58.68	-11.74	46.94	74.00	27.06	Vertical
4	7698.3	56.06	-2.39	53.67	74.00	20.33	Vertical
5	10756.15	54.80	4.30	59.10	74.00	14.90	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1432.85	47.95	-19.31	28.64	54.00	25.36	Vertical
2	2588.4	48.10	-18.68	29.42	54.00	24.58	Vertical
3	4091.55	50.93	-11.66	39.27	54.00	14.73	Vertical
4	7784.55	48.88	-2.43	46.45	54.00	7.55	Vertical
5	10684.85	47.40	4.25	51.65	54.00	2.35	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE20

Channel :5825MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1368.5	59.26	-19.40	39.86	74.00	34.14	Horizontal
2	2519.1	62.16	-18.98	43.18	74.00	30.82	Horizontal
3	4731.75	58.55	-9.58	48.97	74.00	25.03	Horizontal
4	6985.3	57.48	-3.12	54.36	74.00	19.64	Horizontal
5	9044.95	56.05	-0.69	55.36	74.00	18.64	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1380.05	48.13	-19.36	28.77	54.00	25.23	Horizontal
2	2519.1	55.58	-18.98	36.60	54.00	17.40	Horizontal
3	4786.75	51.14	-9.14	42.00	54.00	12.00	Horizontal
4	6886.4	49.03	-3.00	46.03	54.00	7.97	Horizontal
5	9020.8	49.40	-0.77	48.63	54.00	5.37	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1411.95	58.36	-19.28	39.08	74.00	34.92	Vertical
2	2727.55	58.80	-17.65	41.15	74.00	32.85	Vertical
3	4282.95	58.23	-11.38	46.85	74.00	27.15	Vertical
4	6488.45	56.35	-2.96	53.39	74.00	20.61	Vertical
5	8177.85	55.95	-0.75	55.20	74.00	18.80	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1387.2	47.98	-19.33	28.65	54.00	25.35	Vertical
2	2774.85	49.42	-17.49	31.93	54.00	22.07	Vertical
3	4281.85	50.36	-11.41	38.95	54.00	15.05	Vertical
4	6427.95	49.48	-3.22	46.26	54.00	7.74	Vertical
5	8099.65	48.92	-0.49	48.43	54.00	5.57	Vertical

Mode: Mode 1/ IEEE 802.11ax HE40

Channel :5190MHz

Temp. /Hum.:25°C/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1362.45	59.12	-19.51	39.61	74.00	34.39	Horizontal
2	2558.7	59.10	-18.77	40.33	74.00	33.67	Horizontal
3	4213.1	59.18	-12.24	46.94	74.00	27.06	Horizontal
4	6490.1	56.19	-2.92	53.27	74.00	20.73	Horizontal
5	9841.9	55.34	1.19	56.53	74.00	17.47	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1359.15	48.21	-19.52	28.69	54.00	25.31	Horizontal
2	2581.25	48.28	-18.64	29.64	54.00	24.36	Horizontal
3	4247.2	49.89	-11.82	38.07	54.00	15.93	Horizontal
4	6481.3	48.81	-2.95	45.86	54.00	8.14	Horizontal
5	9976.45	47.77	1.55	49.32	54.00	4.68	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1287.65	58.90	-19.81	39.09	74.00	34.91	Vertical
2	2975.05	58.52	-16.88	41.64	74.00	32.36	Vertical
3	6435.1	55.56	-3.13	52.43	74.00	21.57	Vertical
4	8666.6	55.95	-1.67	54.28	74.00	19.72	Vertical
5	10713.6	54.31	4.32	58.63	74.00	15.37	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1311.85	48.35	-19.73	28.62	54.00	25.38	Vertical
2	2972.85	48.12	-16.90	31.22	54.00	22.78	Vertical
3	6511.5	48.67	-3.99	44.68	54.00	9.32	Vertical
4	8733.3	47.91	-1.45	46.46	54.00	7.54	Vertical
5	10730.85	47.02	4.31	51.33	54.00	2.67	Vertical

Mode: Mode 1/ IEEE 802.11ax HE40

Temp. /Hum.:25°C/60%RH/101.1kPa

Test Engineer: Zhang Zishan

Channel :5230MHz

Power supply:AC120V/60Hz

Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1385	58.67	-19.41	39.26	74.00	34.74	Horizontal
2	2743.5	59.28	-17.67	41.61	74.00	32.39	Horizontal
3	6101.25	56.24	-6.01	50.23	74.00	23.77	Horizontal
4	8389.45	55.80	-1.82	53.98	74.00	20.02	Horizontal
5	10829.75	55.87	4.29	60.16	74.00	13.84	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1405.9	48.21	-19.34	28.87	54.00	25.13	Horizontal
2	2743.5	48.83	-17.67	31.16	54.00	22.84	Horizontal
3	6150.75	49.34	-5.42	43.92	54.00	10.08	Horizontal
4	8314.7	48.77	-1.25	47.52	54.00	6.48	Horizontal
5	10721.65	47.45	4.32	51.77	54.00	2.23	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1358.6	58.78	-19.52	39.26	74.00	34.74	Vertical
2	2641.2	58.71	-18.23	40.48	74.00	33.52	Vertical
3	6382.85	56.66	-3.33	53.33	74.00	20.67	Vertical
4	9701.6	55.24	0.34	55.58	74.00	18.42	Vertical
5	12331.65	54.86	2.75	57.61	74.00	16.39	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1393.25	48.15	-19.37	28.78	54.00	25.22	Vertical
2	2623.05	48.05	-18.37	29.68	54.00	24.32	Vertical
3	6411.45	48.25	-3.22	45.03	54.00	8.97	Vertical
4	9807.4	47.43	0.99	48.42	54.00	5.58	Vertical
5	12294.85	47.53	2.76	50.29	54.00	3.71	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE40

Channel :5270MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1341	58.94	-19.61	39.33	74.00	34.67	Horizontal
2	2655.5	58.95	-18.12	40.83	74.00	33.17	Horizontal
3	6156.25	55.87	-5.35	50.52	74.00	23.48	Horizontal
4	8183.6	56.05	-0.76	55.29	74.00	18.71	Horizontal
5	9958.05	54.99	1.55	56.54	74.00	17.46	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1340.45	47.93	-19.61	28.32	54.00	25.68	Horizontal
2	2662.65	48.14	-18.06	30.08	54.00	23.92	Horizontal
3	6051.2	49.75	-6.00	43.75	54.00	10.25	Horizontal
4	8311.25	49.28	-1.23	48.05	54.00	5.95	Horizontal
5	9962.65	47.81	1.54	49.35	54.00	4.65	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1422.95	59.23	-19.34	39.89	74.00	34.11	Vertical
2	3026.75	58.89	-16.54	42.35	74.00	31.65	Vertical
3	6121.05	56.31	-5.78	50.53	74.00	23.47	Vertical
4	7814.45	55.80	-2.45	53.35	74.00	20.65	Vertical
5	9694.7	55.93	0.33	56.26	74.00	17.74	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1420.2	48.26	-19.34	28.92	54.00	25.08	Vertical
2	3019.6	48.53	-16.58	31.95	54.00	22.05	Vertical
3	6159	49.04	-5.32	43.72	54.00	10.28	Vertical
4	7686.8	49.08	-2.43	46.65	54.00	7.35	Vertical
5	9837.3	47.97	1.17	49.14	54.00	4.86	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE40

Channel :5310MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1490.6	58.69	-19.38	39.31	74.00	34.69	Horizontal
2	2635.7	58.56	-18.27	40.29	74.00	33.71	Horizontal
3	5990.7	56.62	-5.96	50.66	74.00	23.34	Horizontal
4	7694.85	55.88	-2.40	53.48	74.00	20.52	Horizontal
5	9847.65	57.60	1.23	58.83	74.00	15.17	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1511.5	51.08	-19.35	31.73	54.00	22.27	Horizontal
2	2668.7	48.15	-18.02	30.13	54.00	23.87	Horizontal
3	5944.5	48.59	-5.89	42.70	54.00	11.30	Horizontal
4	7720.15	48.33	-2.39	45.94	54.00	8.06	Horizontal
5	9847.65	51.21	1.23	52.44	54.00	1.56	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1349.25	58.60	-19.57	39.03	74.00	34.97	Vertical
2	2987.15	58.41	-16.79	41.62	74.00	32.38	Vertical
3	6453.25	56.15	-3.06	53.09	74.00	20.91	Vertical
4	8120.35	56.02	-0.55	55.47	74.00	18.53	Vertical
5	9956.9	55.59	1.55	57.14	74.00	16.86	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1349.25	48.17	-19.57	28.60	54.00	25.40	Vertical
2	2988.8	48.58	-16.78	31.80	54.00	22.20	Vertical
3	6474.7	49.71	-2.98	46.73	54.00	7.27	Vertical
4	8126.1	48.55	-0.58	47.97	54.00	6.03	Vertical
5	9968.4	47.88	1.54	49.42	54.00	4.58	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE40

Channel :5510MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1477.4	58.15	-19.41	38.74	74.00	35.26	Horizontal
2	2735.8	59.11	-17.63	41.48	74.00	32.52	Horizontal
3	6421.35	56.41	-3.60	52.81	74.00	21.19	Horizontal
4	8310.1	55.94	-1.22	54.72	74.00	19.28	Horizontal
5	10370.9	54.25	2.71	56.96	74.00	17.04	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1468.05	48.09	-19.39	28.70	54.00	25.30	Horizontal
2	2700.05	49.04	-17.76	31.28	54.00	22.72	Horizontal
3	6415.85	48.93	-3.61	45.32	54.00	8.68	Horizontal
4	8330.8	47.87	-1.38	46.49	54.00	7.51	Horizontal
5	10513.5	46.96	3.38	50.34	54.00	3.66	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1494.45	58.98	-19.43	39.55	74.00	34.45	Vertical
2	2893.65	59.43	-16.99	42.44	74.00	31.56	Vertical
3	4845.6	58.55	-9.66	48.89	74.00	25.11	Vertical
4	6543.7	56.73	-4.15	52.58	74.00	21.42	Vertical
5	9154.2	56.07	-0.40	55.67	74.00	18.33	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1511.5	48.42	-19.41	29.01	54.00	24.99	Vertical
2	2892.55	48.28	-17.00	31.28	54.00	22.72	Vertical
3	4814.25	50.76	-9.36	41.40	54.00	12.60	Vertical
4	6509.2	50.20	-3.98	46.22	54.00	7.78	Vertical
5	9297.95	49.45	-0.13	49.32	54.00	4.68	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE40

Channel :5550MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1557.15	59.42	-19.33	40.09	74.00	33.91	Horizontal
2	3272.6	58.08	-16.19	41.89	74.00	32.11	Horizontal
3	4539.8	58.04	-9.52	48.52	74.00	25.48	Horizontal
4	6871.45	57.26	-3.15	54.11	74.00	19.89	Horizontal
5	9019.65	56.09	-0.77	55.32	74.00	18.68	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1558.25	48.26	-19.33	28.93	54.00	25.07	Horizontal
2	3187.35	47.48	-16.50	30.98	54.00	23.02	Horizontal
3	4501.85	50.03	-10.05	39.98	54.00	14.02	Horizontal
4	6977.25	49.52	-3.09	46.43	54.00	7.57	Horizontal
5	9277.25	48.16	-0.17	47.99	54.00	6.01	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1458.15	59.13	-19.38	39.75	74.00	34.25	Vertical
2	3367.75	59.43	-16.00	43.43	74.00	30.57	Vertical
3	5132.15	58.89	-8.83	50.06	74.00	23.94	Vertical
4	6886.4	56.77	-3.00	53.77	74.00	20.23	Vertical
5	8943.75	57.38	-1.08	56.30	74.00	17.70	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1458.15	48.14	-19.38	28.76	54.00	25.24	Vertical
2	3450.25	48.53	-15.00	33.53	54.00	20.47	Vertical
3	5172.3	49.90	-7.47	42.43	54.00	11.57	Vertical
4	6957.7	49.73	-3.02	46.71	54.00	7.29	Vertical
5	8943.75	51.79	-1.08	50.71	54.00	3.29	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE40

Channel :5670MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1376.2	59.37	-19.42	39.95	74.00	34.05	Horizontal
2	3512.4	59.58	-14.13	45.45	74.00	28.55	Horizontal
3	6882.95	56.38	-3.03	53.35	74.00	20.65	Horizontal
4	9173.75	56.04	-0.37	55.67	74.00	18.33	Horizontal
5	10499.7	55.13	3.31	58.44	74.00	15.56	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1343.75	48.55	-19.55	29.00	54.00	25.00	Horizontal
2	3564.1	49.03	-14.50	34.53	54.00	19.47	Horizontal
3	6996.8	49.01	-3.15	45.86	54.00	8.14	Horizontal
4	9329	48.35	-0.06	48.29	54.00	5.71	Horizontal
5	10606.65	47.38	3.85	51.23	54.00	2.77	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1446.6	58.44	-19.37	39.07	74.00	34.93	Vertical
2	3464.55	59.10	-14.72	44.38	74.00	29.62	Vertical
3	5907.65	57.45	-5.64	51.81	74.00	22.19	Vertical
4	6979.55	57.70	-3.10	54.60	74.00	19.40	Vertical
5	8034.1	55.20	-1.11	54.09	74.00	19.91	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1440	48.22	-19.37	28.85	54.00	25.15	Vertical
2	3478.3	48.31	-14.46	33.85	54.00	20.15	Vertical
3	5899.95	49.56	-5.61	43.95	54.00	10.05	Vertical
4	7064.65	49.51	-3.36	46.15	54.00	7.85	Vertical
5	8106.55	48.65	-0.51	48.14	54.00	5.86	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE40

Channel :5755MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1512.05	58.46	-19.37	39.09	74.00	34.91	Horizontal
2	3574.55	58.60	-14.73	43.87	74.00	30.13	Horizontal
3	4752.1	58.78	-9.42	49.36	74.00	24.64	Horizontal
4	6985.3	56.35	-3.12	53.23	74.00	20.77	Horizontal
5	9386.5	56.33	0.08	56.41	74.00	17.59	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1512.05	49.90	-19.37	30.53	54.00	23.47	Horizontal
2	3635.6	51.13	-14.92	36.21	54.00	17.79	Horizontal
3	4684.45	50.98	-9.62	41.36	54.00	12.64	Horizontal
4	6904.8	49.08	-2.86	46.22	54.00	7.78	Horizontal
5	9292.2	49.22	-0.14	49.08	54.00	4.92	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1350.9	58.40	-19.49	38.91	74.00	35.09	Vertical
2	3292.95	57.41	-16.13	41.28	74.00	32.72	Vertical
3	5125	57.77	-8.45	49.32	74.00	24.68	Vertical
4	6818.55	56.34	-3.71	52.63	74.00	21.37	Vertical
5	8357.25	55.95	-1.57	54.38	74.00	19.62	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1344.85	48.02	-19.51	28.51	54.00	25.49	Vertical
2	3341.9	47.70	-16.09	31.61	54.00	22.39	Vertical
3	5205.3	50.35	-6.99	43.36	54.00	10.64	Vertical
4	6728.85	48.75	-4.65	44.10	54.00	9.90	Vertical
5	8187.05	48.63	-0.77	47.86	54.00	6.14	Vertical

Mode: Mode 1/ IEEE 802.11 ax HE40

Channel :5795MHz

Temp. /Hum.:25℃/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1344.85	59.05	-19.51	39.54	74.00	34.46	Horizontal
2	2312.3	58.86	-19.92	38.94	74.00	35.06	Horizontal
3	4670.7	59.27	-9.43	49.84	74.00	24.16	Horizontal
4	6642.6	57.50	-4.66	52.84	74.00	21.16	Horizontal
5	8741.35	56.46	-1.44	55.02	74.00	18.98	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1344.3	48.04	-19.52	28.52	54.00	25.48	Horizontal
2	2293.6	48.44	-20.03	28.41	54.00	25.59	Horizontal
3	4670.7	51.14	-9.43	41.71	54.00	12.29	Horizontal
4	6816.25	48.23	-3.74	44.49	54.00	9.51	Horizontal
5	8670.05	48.18	-1.66	46.52	54.00	7.48	Horizontal

PK Final Data List

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1429	58.84	-19.31	39.53	74.00	34.47	Vertical
2	2851.85	58.64	-17.32	41.32	74.00	32.68	Vertical
3	4338.5	58.01	-11.22	46.79	74.00	27.21	Vertical
4	6484.6	57.78	-2.98	54.80	74.00	19.20	Vertical
5	8367.6	56.26	-1.65	54.61	74.00	19.39	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Reading [dBμV/m]	Factor [dB]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1414.15	47.97	-19.28	28.69	54.00	25.31	Vertical
2	2863.4	48.43	-17.29	31.14	54.00	22.86	Vertical
3	4347.85	50.63	-11.24	39.39	54.00	14.61	Vertical
4	6551.75	48.76	-4.20	44.56	54.00	9.44	Vertical
5	8335.4	48.27	-1.41	46.86	54.00	7.14	Vertical

Mode: Mode 1/ IEEE 802.11ax HE80
 Temp./Hum.:25°C/60%RH/101.1kPa
 Test Engineer: Zhang Zishan

Channel :5210MHz
 Power supply:AC120V/60Hz
 Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1512.05	59.16	-19.35	39.81	74.00	34.19	Horizontal
2	3217.6	58.36	-16.49	41.87	74.00	32.13	Horizontal
3	6432.35	56.25	-3.14	53.11	74.00	20.89	Horizontal
4	8330.8	56.41	-1.38	55.03	74.00	18.97	Horizontal
5	10590.55	55.90	3.76	59.66	74.00	14.34	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1512.05	50.31	-19.35	30.96	54.00	23.04	Horizontal
2	3268.75	47.70	-16.31	31.39	54.00	22.61	Horizontal
3	6458.2	48.51	-3.04	45.47	54.00	8.53	Horizontal
4	8177.85	48.64	-0.75	47.89	54.00	6.11	Horizontal
5	10161.6	47.56	1.86	49.42	54.00	4.58	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1351.45	58.08	-19.56	38.52	74.00	35.48	Vertical
2	2706.65	58.68	-17.75	40.93	74.00	33.07	Vertical
3	6157.35	55.70	-5.34	50.36	74.00	23.64	Vertical
4	8690.75	55.71	-1.53	54.18	74.00	19.82	Vertical
5	11225.35	55.03	3.89	58.92	74.00	15.08	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1350.35	48.11	-19.56	28.55	54.00	25.45	Vertical
2	2700.05	48.34	-17.77	30.57	54.00	23.43	Vertical
3	6250.85	48.19	-4.23	43.96	54.00	10.04	Vertical
4	8690.75	48.93	-1.53	47.40	54.00	6.60	Vertical
5	11148.3	47.93	3.43	51.36	54.00	2.64	Vertical

Mode: Mode 1/ IEEE 802.11ax HE80
Temp./Hum.:25°C/60%RH/101.1kPa
Test Engineer: Zhang Zishan

Channel :5290MHz
Power supply:AC120V/60Hz
Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1443.3	58.19	-19.36	38.83	74.00	35.17	Horizontal
2	2881.55	59.13	-17.43	41.70	74.00	32.30	Horizontal
3	5877.95	55.69	-5.78	49.91	74.00	24.09	Horizontal
4	8105.4	55.80	-0.50	55.30	74.00	18.70	Horizontal
5	10447.95	55.16	3.07	58.23	74.00	15.77	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1465.85	48.15	-19.36	28.79	54.00	25.21	Horizontal
2	2863.4	48.31	-17.46	30.85	54.00	23.15	Horizontal
3	5975.85	48.95	-5.93	43.02	54.00	10.98	Horizontal
4	8091.6	49.07	-0.56	48.51	54.00	5.49	Horizontal
5	10470.95	47.96	3.17	51.13	54.00	2.87	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1456.5	58.94	-19.36	39.58	74.00	34.42	Vertical
2	2746.25	59.04	-17.66	41.38	74.00	32.62	Vertical
3	6355.9	56.74	-3.43	53.31	74.00	20.69	Vertical
4	8874.75	56.65	-1.30	55.35	74.00	18.65	Vertical
5	10303.05	55.40	2.40	57.80	74.00	16.20	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1455.95	48.29	-19.36	28.93	54.00	25.07	Vertical
2	2743.5	48.80	-17.67	31.13	54.00	22.87	Vertical
3	6379.55	48.60	-3.34	45.26	54.00	8.74	Vertical
4	8879.35	49.13	-1.30	47.83	54.00	6.17	Vertical
5	10435.3	47.48	3.01	50.49	54.00	3.51	Vertical

Mode: Mode 1/ IEEE 802.11ax HE80
 Temp. /Hum.:25°C/60%RH/101.1kPa
 Test Engineer: Zhang Zishan

Channel :5530MHz
 Power supply:AC120V/60Hz
 Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1582.45	59.49	-19.29	40.20	74.00	33.80	Horizontal
2	3996.4	58.73	-12.12	46.61	74.00	27.39	Horizontal
3	6452.15	56.94	-3.56	53.38	74.00	20.62	Horizontal
4	8044.45	55.34	-1.02	54.32	74.00	19.68	Horizontal
5	9529.1	55.38	0.35	55.73	74.00	18.27	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1559.9	48.24	-19.33	28.91	54.00	25.09	Horizontal
2	3995.85	53.59	-12.12	41.47	54.00	12.53	Horizontal
3	6498.35	48.97	-3.51	45.46	54.00	8.54	Horizontal
4	8184.75	48.34	-0.76	47.58	54.00	6.42	Horizontal
5	9332.45	48.45	-0.05	48.40	54.00	5.60	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1619.85	60.00	-19.39	40.61	74.00	33.39	Vertical
2	3456.85	59.55	-14.88	44.67	74.00	29.33	Vertical
3	6490.65	57.07	-3.52	53.55	74.00	20.45	Vertical
4	7630.45	56.74	-2.64	54.10	74.00	19.90	Vertical
5	8847.15	56.95	-1.33	55.62	74.00	18.38	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1619.85	51.18	-19.39	31.79	54.00	22.21	Vertical
2	3407.35	51.68	-15.83	35.85	54.00	18.15	Vertical
3	6467	50.16	-3.55	46.61	54.00	7.39	Vertical
4	7704.05	48.76	-2.38	46.38	54.00	7.62	Vertical
5	8847.15	50.22	-1.33	48.89	54.00	5.11	Vertical

Mode: Mode 1/ IEEE 802.11ax HE80
 Temp. /Hum.:25°C/60%RH/101.1kPa
 Test Engineer: Zhang Zishan

Channel :5610MHz

Power supply:AC120V/60Hz

Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4860.45	59.86	-9.80	50.06	74.00	23.94	Horizontal
2	7283.15	55.90	-2.81	53.09	74.00	20.91	Horizontal
3	9061.05	57.09	-0.63	56.46	74.00	17.54	Horizontal
4	10014.4	55.84	1.55	57.39	74.00	16.61	Horizontal
5	11140.25	52.65	3.38	56.03	74.00	17.97	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	4860.45	54.92	-9.80	45.12	54.00	8.88	Horizontal
2	7316.5	49.17	-2.78	46.39	54.00	7.61	Horizontal
3	9078.3	48.70	-0.57	48.13	54.00	5.87	Horizontal
4	10124.8	48.19	1.72	49.91	54.00	4.09	Horizontal
5	11140.25	45.77	3.38	49.15	54.00	4.85	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4625.05	59.62	-9.07	50.55	74.00	23.45	Vertical
2	6994.5	57.23	-3.14	54.09	74.00	19.91	Vertical
3	8911.55	56.68	-1.22	55.46	74.00	18.54	Vertical
4	10744.65	55.08	4.32	59.40	74.00	14.60	Vertical
5	12721.5	55.01	4.24	59.25	74.00	14.75	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	4625.05	54.97	-9.07	45.90	54.00	8.10	Vertical
2	6946.2	49.07	-3.00	46.07	54.00	7.93	Vertical
3	8751.7	49.08	-1.43	47.65	54.00	6.35	Vertical
4	10713.6	46.89	4.32	51.21	54.00	2.79	Vertical
5	12722.65	47.57	4.23	51.80	54.00	2.20	Vertical

Mode: Mode 1/ IEEE 802.11ax HE80
 Temp. /Hum.:25°C/60%RH/101.1kPa
 Test Engineer: Zhang Zishan

Channel :5775MHz

Power supply:AC120V/60Hz

Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1457.05	58.57	-19.34	39.23	74.00	34.77	Horizontal
2	2904.1	59.53	-17.21	42.32	74.00	31.68	Horizontal
3	4587.1	58.07	-8.72	49.35	74.00	24.65	Horizontal
4	7144	56.43	-3.31	53.12	74.00	20.88	Horizontal
5	9968.4	55.34	1.54	56.88	74.00	17.12	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1442.2	48.10	-19.32	28.78	54.00	25.22	Horizontal
2	2896.95	47.98	-17.24	30.74	54.00	23.26	Horizontal
3	4588.2	49.78	-8.70	41.08	54.00	12.92	Horizontal
4	7254.4	48.62	-2.91	45.71	54.00	8.29	Horizontal
5	9968.4	47.98	1.54	49.52	54.00	4.48	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1406.45	59.01	-19.28	39.73	74.00	34.27	Vertical
2	2499.3	58.68	-19.07	39.61	74.00	34.39	Vertical
3	3489.3	58.93	-14.44	44.49	74.00	29.51	Vertical
4	6498.9	56.91	-2.91	54.00	74.00	20.00	Vertical
5	8303.2	56.14	-1.16	54.98	74.00	19.02	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1424.05	48.01	-19.29	28.72	54.00	25.28	Vertical
2	2542.75	48.81	-18.88	29.93	54.00	24.07	Vertical
3	3503.6	48.33	-14.27	34.06	54.00	19.94	Vertical
4	6594.3	49.27	-4.41	44.86	54.00	9.14	Vertical
5	8298.6	48.65	-1.14	47.51	54.00	6.49	Vertical

Mode: Mode 1/ IEEE 802.11ax HE160

Temp./Hum.:25°C/60%RH/101.1kPa

Test Engineer: Zhang Zishan

Channel :5570MHz

Power supply:AC120V/60Hz

Test Date: 2023-02-17

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1547.8	58.67	-19.35	39.32	74.00	34.68	Horizontal
2	2969	58.89	-16.87	42.02	74.00	31.98	Horizontal
3	4599.75	58.17	-8.69	49.48	74.00	24.52	Horizontal
4	6635.7	57.08	-4.63	52.45	74.00	21.55	Horizontal
5	8745.95	57.29	-1.43	55.86	74.00	18.14	Horizontal

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1512.05	48.58	-19.41	29.17	54.00	24.83	Horizontal
2	2968.45	48.20	-16.88	31.32	54.00	22.68	Horizontal
3	4688.3	51.48	-10.04	41.44	54.00	12.56	Horizontal
4	6544.85	49.04	-4.16	44.88	54.00	9.12	Horizontal
5	8671.2	48.69	-1.65	47.04	54.00	6.96	Horizontal

NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1364.65	58.64	-19.46	39.18	74.00	34.82	Vertical
2	2880.45	58.52	-17.05	41.47	74.00	32.53	Vertical
3	4091.55	58.67	-11.96	46.71	74.00	27.29	Vertical
4	6562.1	56.55	-4.25	52.30	74.00	21.70	Vertical
5	9863.75	56.21	1.33	57.54	74.00	16.46	Vertical

NO.	Freq. [MHz]	Factor [dB]	AV Reading [dBμV/m]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Polarity
1	1388.3	48.03	-19.37	28.66	54.00	25.34	Vertical
2	2878.25	48.39	-17.06	31.33	54.00	22.67	Vertical
3	3995.85	54.86	-12.12	42.74	54.00	11.26	Vertical
4	6474.7	49.44	-3.54	45.90	54.00	8.10	Vertical
5	9982.2	48.04	1.54	49.58	54.00	4.42	Vertical

Above 18 GHz

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11n20)

Mode: Mode 1/ IEEE802.11n20

Channel :5180MHz

Temp. /Hum.:25°C/60%RH/101.1kPa

Power supply:AC120V/60Hz

Test Engineer: Zhang Zishan

Test Date: 2023-02-17

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19131.6316	50.75	-6.71	44.04	83.54	39.5	Horizontal
2	20518.5185	47.24	-6.95	40.29	83.54	43.25	Horizontal
3	21701.2012	52.60	-6.97	45.63	83.54	37.91	Horizontal
4	28337.8378	49.42	-8.52	40.90	83.54	42.64	Horizontal
5	31108.1081	52.01	-8.16	43.85	83.54	39.69	Horizontal
6	33256.7568	52.35	-8.41	43.94	83.54	39.6	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18901.9019	49.86	-6.69	43.17	83.54	40.37	Vertical
2	20475.976	47.99	-6.97	41.02	83.54	42.52	Vertical
3	21752.2523	52.38	-6.99	45.39	83.54	38.15	Vertical
4	28229.7297	48.98	-8.54	40.44	83.54	43.1	Vertical
5	30310.8108	49.80	-8.89	40.91	83.54	42.63	Vertical
6	32243.2432	52.94	-8.03	44.91	83.54	38.63	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 n20
Temp. /Hum.:25℃/60%RH/101.1kPa
Test Engineer: Zhang Zishan

Channel :5320MHz
Power supply:AC120V/60Hz
Test Date: 2023-02-17

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18978.4785	50.80	-6.65	44.15	83.54	39.39	Horizontal
2	21326.8268	50.90	-6.83	44.07	83.54	39.47	Horizontal
3	22569.0691	49.66	-6.03	43.63	83.54	39.91	Horizontal
4	28837.8378	51.27	-8.42	42.85	83.54	40.69	Horizontal
5	32324.3243	52.24	-8.08	44.16	83.54	39.38	Horizontal
6	34945.9459	51.07	-6.34	44.73	83.54	38.81	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18901.9019	49.35	-6.69	42.66	83.54	40.88	Vertical
2	20994.995	50.72	-6.71	44.01	83.54	39.53	Vertical
3	21990.4905	51.93	-7.08	44.85	83.54	38.69	Vertical
4	28324.3243	49.39	-8.52	40.87	83.54	42.67	Vertical
5	30378.3784	50.48	-8.82	41.66	83.54	41.88	Vertical
6	31986.4865	52.36	-7.88	44.48	83.54	39.06	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 n20
Temp. /Hum.:25℃/60%RH/101.1kPa
Test Engineer: Zhang Zishan

Channel :5500MHz
Power supply:AC120V/60Hz
Test Date: 2023-02-17

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19148.6486	51.51	-6.72	44.79	83.54	38.75	Horizontal
2	21505.5055	53.28	-6.90	46.38	83.54	37.16	Horizontal
3	22569.0691	50.18	-6.03	44.15	83.54	39.39	Horizontal
4	27932.4324	49.95	-8.64	41.31	83.54	42.23	Horizontal
5	30310.8108	49.80	-8.89	40.91	83.54	42.63	Horizontal
6	32513.5135	52.46	-8.20	44.26	83.54	39.28	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19250.7508	50.34	-6.78	43.56	83.54	39.98	Vertical
2	20467.4675	48.06	-6.97	41.09	83.54	42.45	Vertical
3	21573.5736	52.73	-6.92	45.81	83.54	37.73	Vertical
4	19097.5976	50.56	-6.69	43.87	83.54	39.67	Vertical
5	21122.6226	51.05	-6.76	44.29	83.54	39.25	Vertical
6	22373.3734	51.32	-6.39	44.93	83.54	38.61	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 n20
Temp. /Hum.:25℃/60%RH/101.1kPa
Test Engineer: Zhang Zishan

Channel :5700MHz
Power supply:AC120V/60Hz
Test Date: 2023-02-17

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18774.2743	49.98	-6.76	43.22	83.54	40.32	Horizontal
2	19718.7187	49.10	-7.04	42.06	83.54	41.48	Horizontal
3	20441.9419	47.69	-6.98	40.71	83.54	42.83	Horizontal
4	21173.6737	49.73	-6.77	42.96	83.54	40.58	Horizontal
5	22245.7457	50.98	-6.63	44.35	83.54	39.19	Horizontal
6	23377.3774	49.55	-5.47	44.08	83.54	39.46	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18706.2062	48.59	-6.79	41.80	83.54	41.74	Vertical
2	19471.972	49.77	-6.90	42.87	83.54	40.67	Vertical
3	21037.5375	51.40	-6.72	44.68	83.54	38.86	Vertical
4	22390.3904	50.27	-6.36	43.91	83.54	39.63	Vertical
5	24109.1091	46.97	-5.75	41.22	83.54	42.32	Vertical
6	26253.2533	48.39	-4.87	43.52	83.54	40.02	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 n20
Temp. /Hum.:25℃/60%RH/101.1kPa
Test Engineer: Zhang Zishan

Channel :5745MHz
Power supply:AC120V/60Hz
Test Date: 2023-02-17

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19097.5976	50.56	-6.69	43.87	83.54	39.67	Horizontal
2	21122.6226	51.05	-6.76	44.29	83.54	39.25	Horizontal
3	22373.3734	51.32	-6.39	44.93	83.54	38.61	Horizontal
4	28108.1081	49.06	-8.56	40.50	83.54	43.04	Horizontal
5	30824.3243	49.40	-8.37	41.03	83.54	42.51	Horizontal
6	33040.5405	51.76	-8.49	43.27	83.54	40.27	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19157.1572	51.72	-6.73	44.99	83.54	38.55	Vertical
2	20612.1121	47.42	-6.90	40.52	83.54	43.02	Vertical
3	21496.997	52.79	-6.89	45.90	83.54	37.64	Vertical
4	27932.4324	49.95	-8.64	41.31	83.54	42.23	Vertical
5	30310.8108	49.80	-8.89	40.91	83.54	42.63	Vertical
6	32513.5135	52.46	-8.20	44.26	83.54	39.28	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 n20
Temp. /Hum.:25℃/60%RH/101.1kPa
Test Engineer: Zhang Zishan

Channel :5785MHz
Power supply:AC120V/60Hz
Test Date: 2023-02-17

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19131.6316	50.61	-6.71	43.90	83.54	39.64	Horizontal
2	20484.4845	48.12	-6.96	41.16	83.54	42.38	Horizontal
3	21479.98	52.02	-6.89	45.13	83.54	38.41	Horizontal
4	28202.7027	48.65	-8.54	40.11	83.54	43.43	Horizontal
5	30459.4595	50.13	-8.74	41.39	83.54	42.15	Horizontal
6	32621.6216	52.00	-8.27	43.73	83.54	39.81	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19250.7508	50.48	-6.78	43.70	83.54	39.84	Vertical
2	20569.5696	47.46	-6.92	40.54	83.54	43	Vertical
3	21896.8969	52.76	-7.04	45.72	83.54	37.82	Vertical
4	28189.1892	48.44	-8.54	39.90	83.54	43.64	Vertical
5	29702.7027	49.87	-8.97	40.90	83.54	42.64	Vertical
6	32459.4595	52.76	-8.17	44.59	83.54	38.95	Vertical

----- The following blanks -----

Mode: Mode 1/ IEEE 802.11 n20
Temp. /Hum.:25℃/60%RH/101.1kPa
Test Engineer: Zhang Zishan

Channel :5825MHz
Power supply:AC120V/60Hz
Test Date: 2023-02-17

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	19097.5976	50.56	-6.69	43.87	83.54	39.67	Horizontal
2	20390.8909	48.44	-7.01	41.43	83.54	42.11	Horizontal
3	21735.2352	52.39	-6.98	45.41	83.54	38.13	Horizontal
4	28013.5135	48.24	-8.58	39.66	83.54	43.88	Horizontal
5	30824.3243	50.35	-8.37	41.98	83.54	41.56	Horizontal
6	32702.7027	53.11	-8.32	44.79	83.54	38.75	Horizontal

Suspected Data List							
NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	18952.953	50.75	-6.66	44.09	83.54	39.45	Vertical
2	20390.8909	48.97	-7.01	41.96	83.54	41.58	Vertical
3	21505.5055	52.22	-6.90	45.32	83.54	38.22	Vertical
4	28743.2432	50.41	-8.44	41.97	83.54	41.57	Vertical
5	31864.8649	52.65	-7.92	44.73	83.54	38.81	Vertical
6	33810.8108	51.38	-8.19	43.19	83.54	40.35	Vertical

----- The following blanks -----

7. RESTRICTED BANDS OF OPERATION

7.1. LIMITS


Section 15.407(b)(7) The provisions of §15.205 apply to intentional radiators operating under this section. 15.205(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

7.2. TEST PROCEDURES

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) PEAK Measurement: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - b) AVERAGE Measurement: RBW=1MHz, Sweep=AUTO, There are two cases of VBW.
If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW=10Hz. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$, Where T is defined in section 2.8.
- 5) Repeat the procedures until all the PEAK and AVERAGE versus polarization are measured.

7.3. TEST SETUP

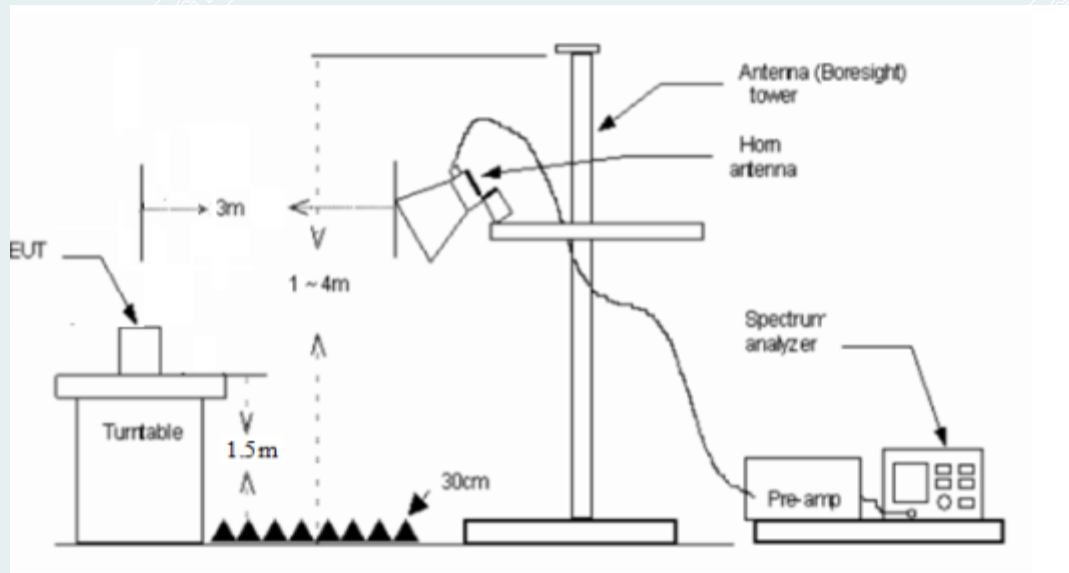

----- The following blanks -----

7.4. TEST RESULTS


Temp: 25°C; Humi:60%	Power supply: AC120V/60Hz
Test Engineer: Zhang Zishan	Test Date: 2023-02-16 to 2023-02-21

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11a / 802.11n HT20 / 802.11n HT40 / 802.11ac VHT80 / 802.11ax HE20 / 802.11ax HE40 / 802.11ax HE80 / 802.11ax HE160).

802.11a mode/5180MHz Ant1


Detector mode: Peak

Polarity: Horizontal

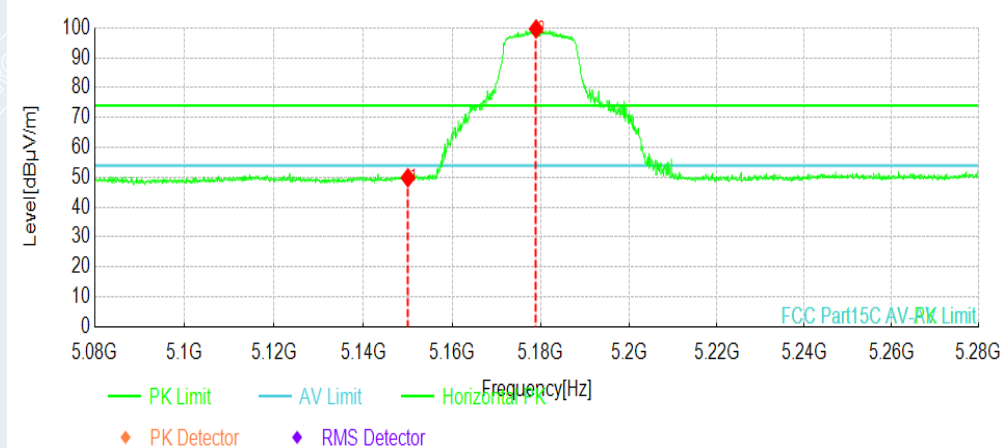

Detector mode: Peak

Polarity: Vertical

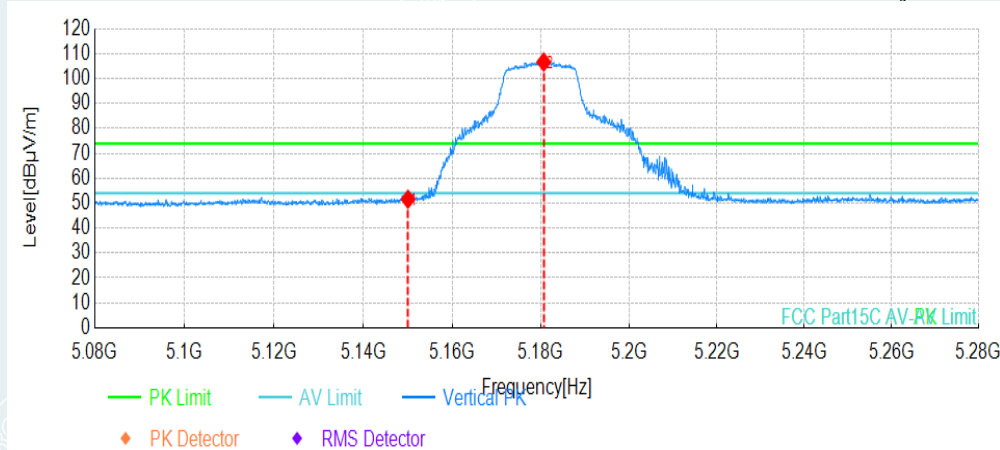


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	35.71	14.14	49.85	74.00	24.15	150	357	Horizontal
2	5178.9495	85.29	14.34	99.63	/	-25.63	150	12.5	Horizontal
1	5150.035	37.48	14.14	51.62	74.00	22.38	150	4	Vertical
2	5180.6503	92.33	14.36	106.69	/	-32.69	150	1	Vertical

802.11a mode/5180MHz Ant1


Detector mode: Average

Polarity: Horizontal

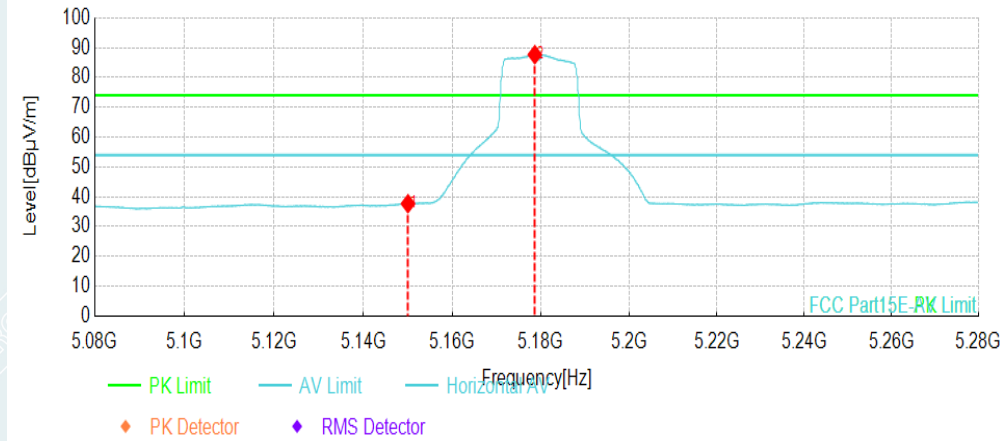

Detector mode: Average

Polarity: Vertical

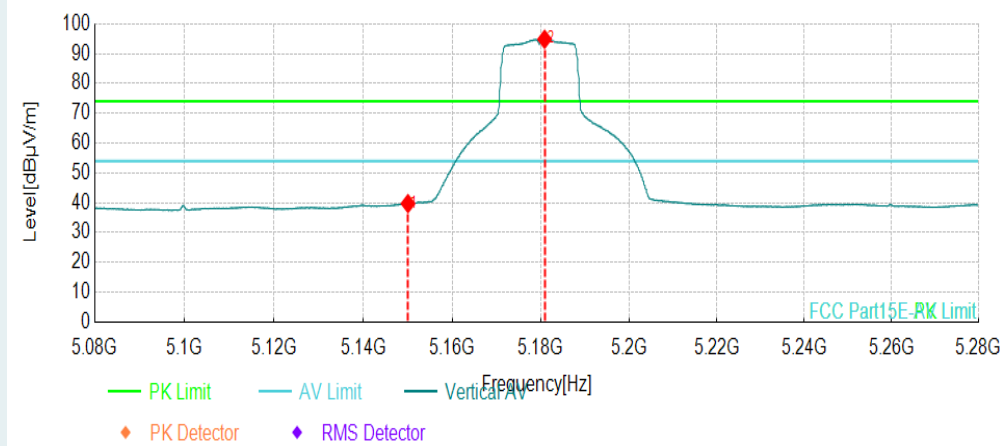


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	23.55	14.14	37.69	54.00	16.31	150	125	Horizontal
2	5178.6493	73.29	14.34	87.63	/	/	150	121	Horizontal
1	5150.035	25.57	14.14	39.71	54.00	14.29	150	2	Vertical
2	5180.8504	80.44	14.37	94.81	/	/	150	357	Vertical

----- The following blanks -----

802.11a mode Ant 3/5200MHz


Detector mode: Peak

Polarity: Horizontal

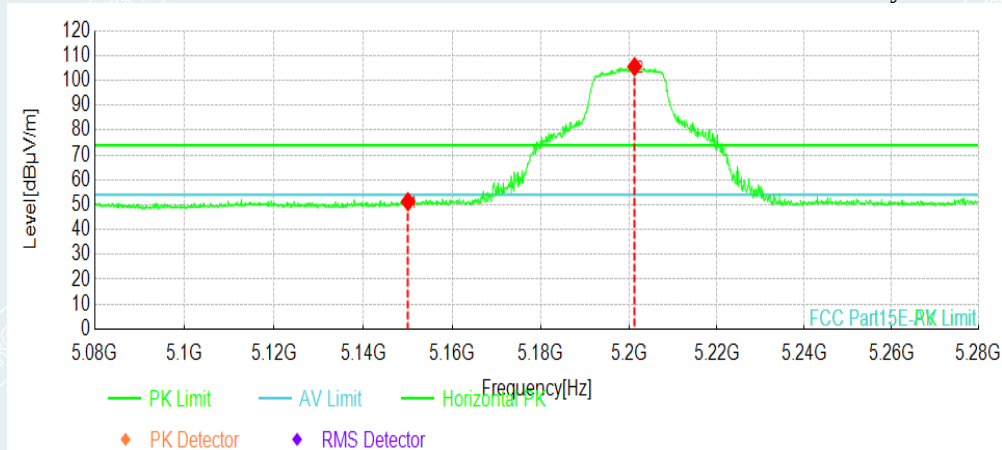

Detector mode: Peak

Polarity: Vertical

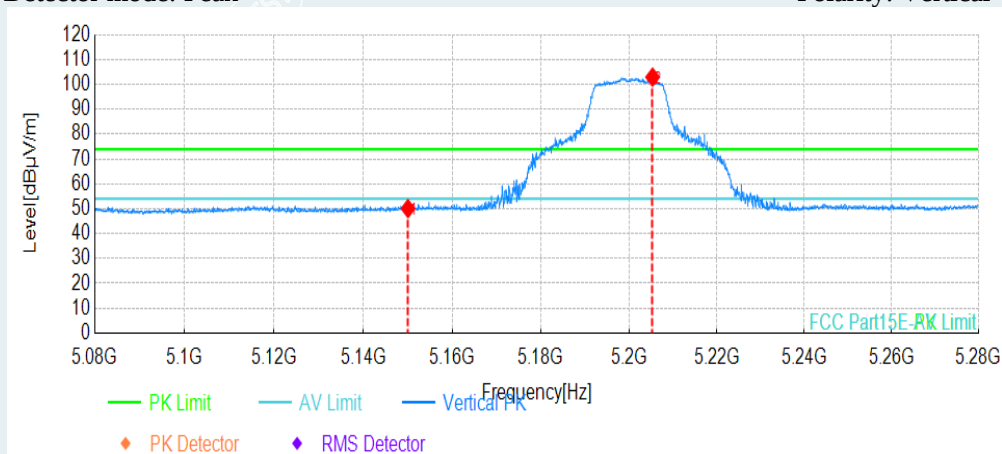


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	37.09	14.14	51.23	74.00	22.77	150	330	Horizontal
2	5201.2606	91.04	14.51	105.55	/	/	150	175	Horizontal
1	5150.035	35.92	14.14	50.06	74.00	23.94	150	355	Vertical
2	5205.3627	88.45	14.53	102.98	/	/	150	41	Vertical

----- The following blanks -----

802.11a mode Ant 3/5200MHz


Detector mode: Average

Polarity: Horizontal

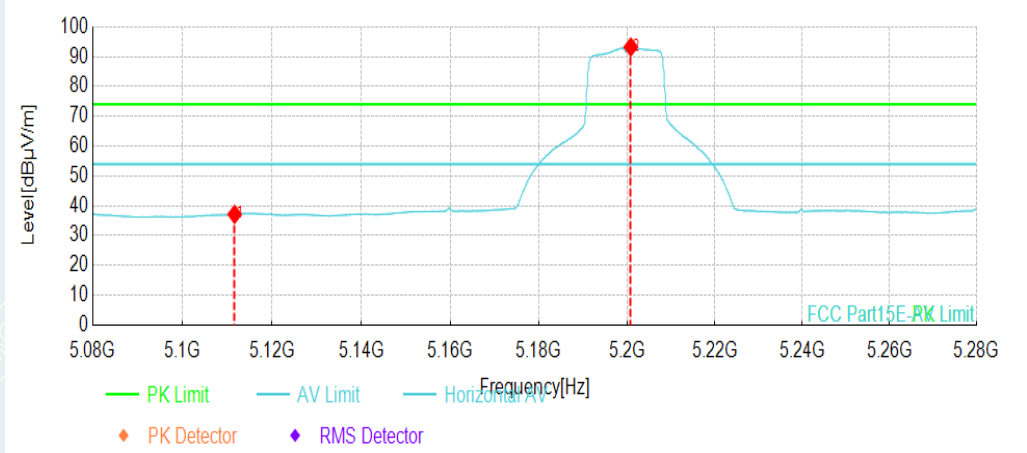

Detector mode: Average

Polarity: Vertical

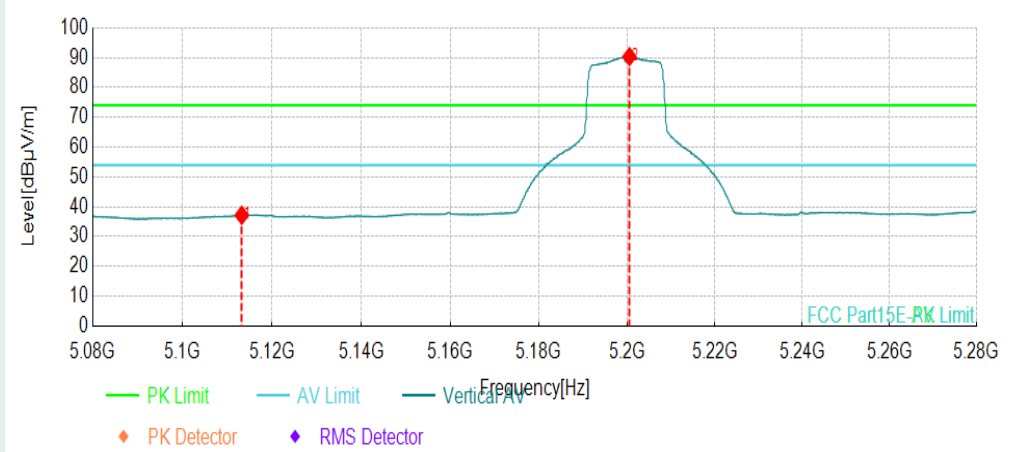


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5111.6158	23.27	13.86	37.13	54.00	16.87	150	62	Horizontal
2	5200.8604	78.72	14.50	93.22	/	/	150	51	Horizontal
1	5113.2166	23.26	13.88	37.14	54.00	16.86	150	33	Vertical
2	5200.5603	75.83	14.50	90.33	/	/	150	48	Vertical

----- The following blanks -----

802.11a mode Ant 3/5240MHz


Detector mode: Peak

Polarity: Horizontal

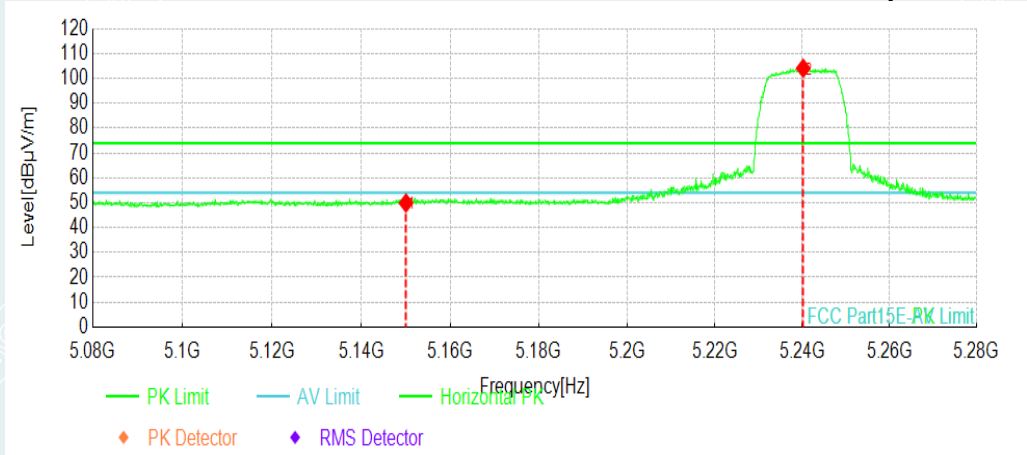

Detector mode: Peak

Polarity: Vertical

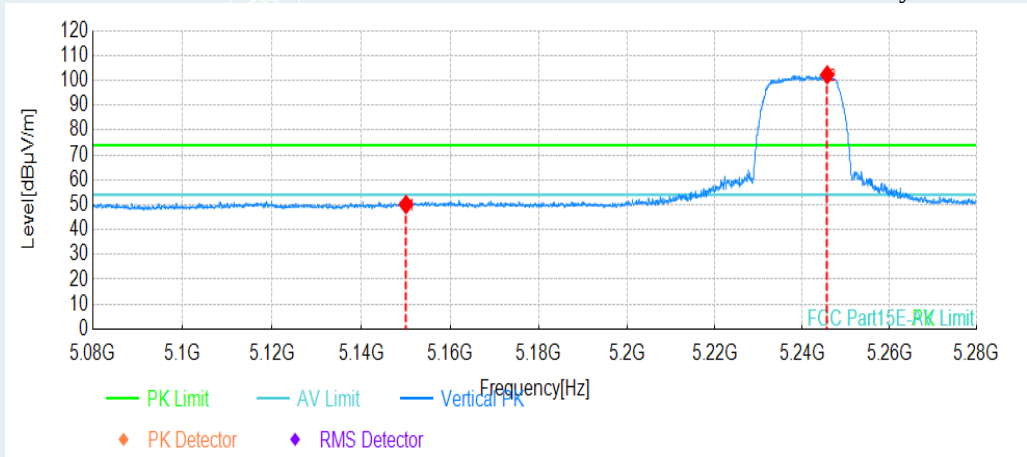


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	35.76	14.14	49.90	74.00	24.10	150	210	Horizontal
2	5240.1801	89.40	14.73	104.13	/	/	150	51	Horizontal
1	5150.035	35.96	14.14	50.10	74.00	23.90	150	48	Vertical
2	5245.6828	87.50	14.76	102.26	/	/	150	133	Vertical

----- The following blanks -----

802.11a mode Ant 3/5240MHz


Detector mode: Average

Polarity: Horizontal

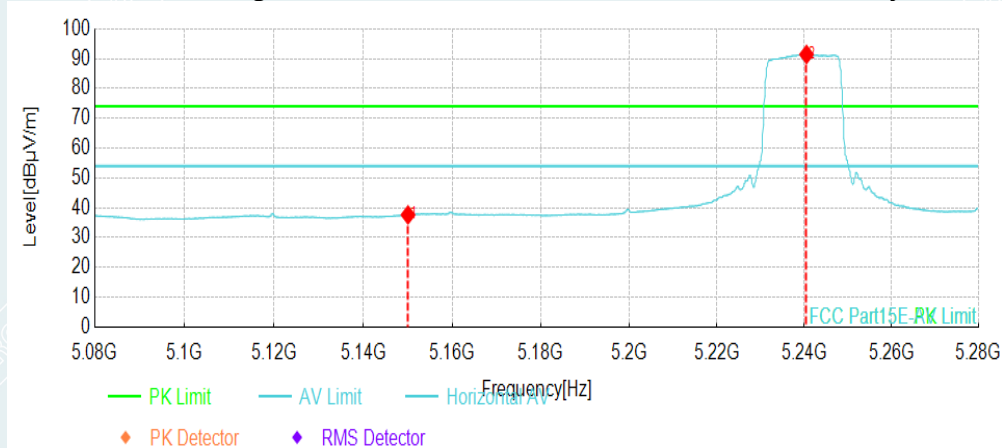

Detector mode: Average

Polarity: Vertical

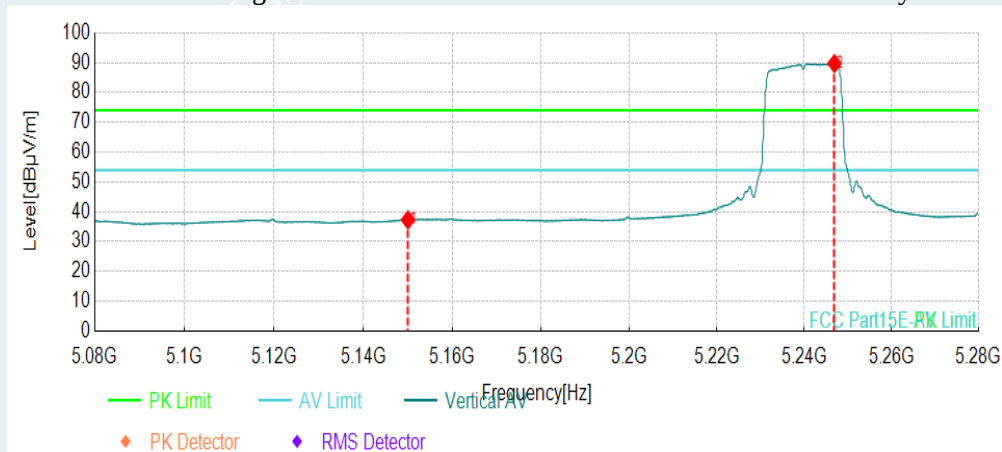


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	23.48	14.14	37.62	54.00	16.38	150	47	Horizontal
2	5240.4802	76.65	14.74	91.39	/	/	150	55	Horizontal
1	5150.035	23.15	14.14	37.29	54.00	16.71	150	124	Vertical
2	5246.8834	74.91	14.78	89.69	/	/	150	40	Vertical

----- The following blanks -----

802.11a mode Ant 2/5260MHz


Detector mode: Peak

Polarity: Horizontal

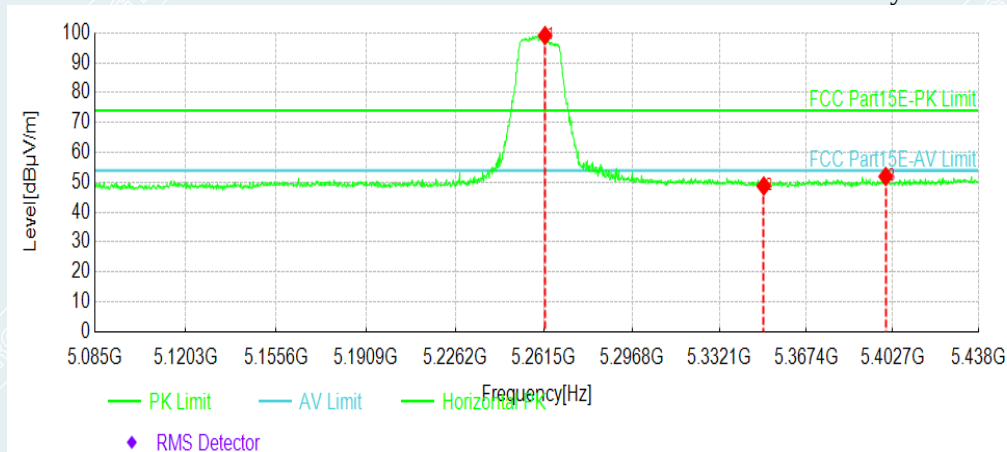

Detector mode: Peak

Polarity: Vertical

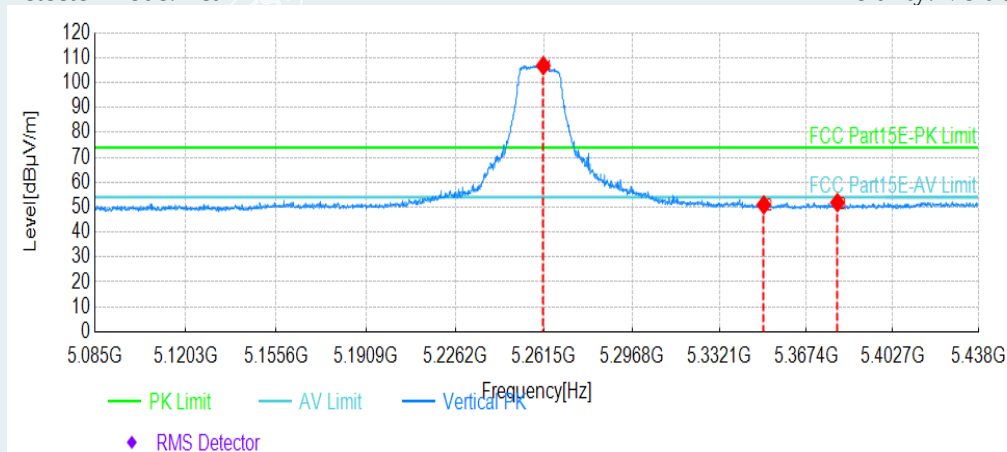


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5261.9415	84.25	14.85	99.10	/	/	150	90	Horizontal
2	5350.059	33.60	15.15	48.75	74.00	25.25	150	23	Horizontal
3	5399.8569	36.73	15.21	51.94	74.00	22.06	150	210	Horizontal
1	5261.2351	91.98	14.85	106.83	/	/	150	76	Vertical
2	5350.059	35.80	15.15	50.95	74.00	23.05	150	224	Vertical
3	5380.079	36.66	15.19	51.85	74.00	22.15	150	185	Vertical

----- The following blanks -----

802.11a mode Ant 2/5260MHz


Detector mode: Average

Polarity: Horizontal

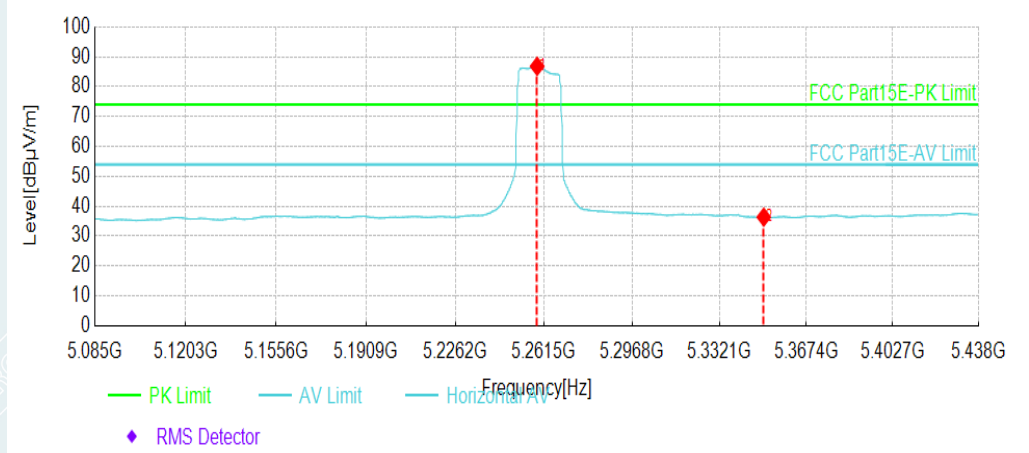

Detector mode: Average

Polarity: Vertical

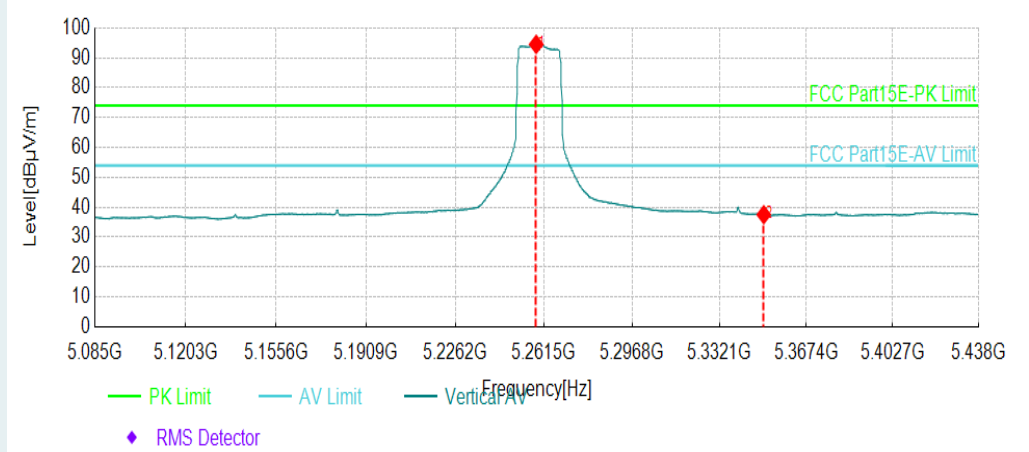


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5258.7629	71.97	14.84	86.81	/	/	150	95	Horizontal
2	5350.059	21.20	15.15	36.35	54.00	17.65	150	62	Horizontal
1	5258.4097	79.66	14.84	94.50	/	/	150	180	Vertical
2	5350.059	22.34	15.15	37.49	54.00	16.51	150	212	Vertical

----- The following blanks -----

802.11a mode Ant 2/5280MHz


Detector mode: Peak

Polarity: Horizontal

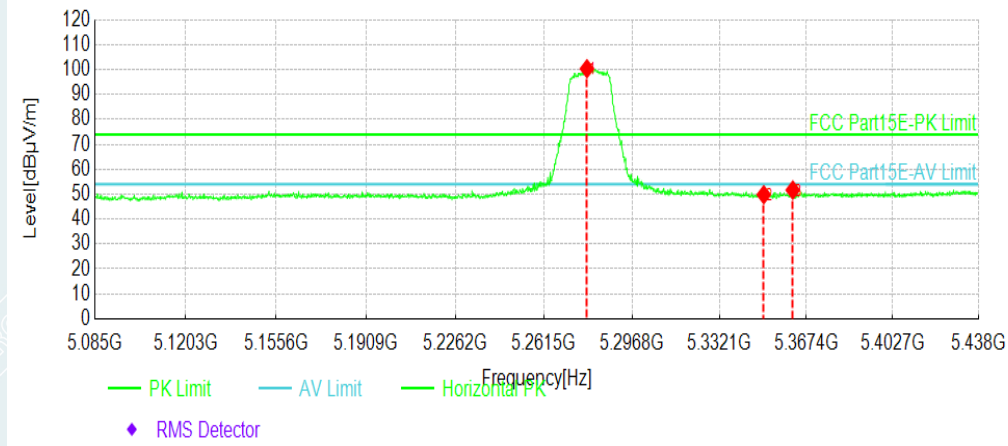

Detector mode: Peak

Polarity: Vertical

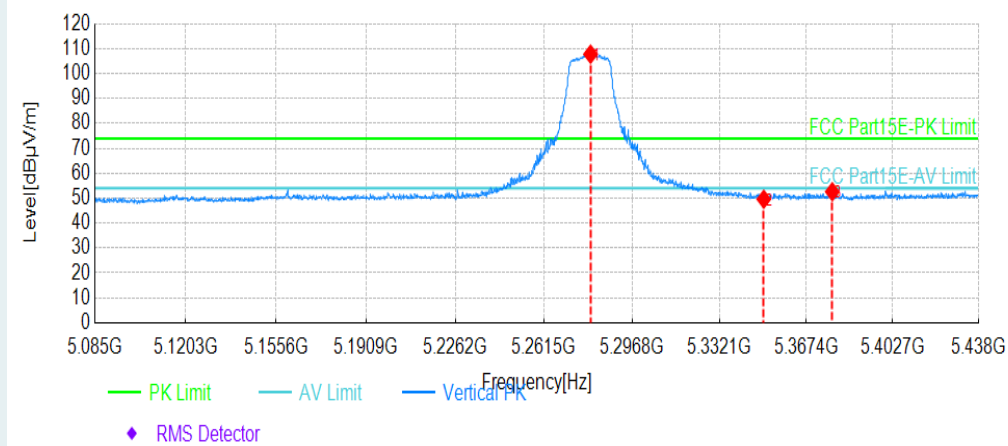


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5278.7174	85.45	14.95	100.40	/	/	150	78	Horizontal
2	5350.059	34.66	15.15	49.81	74.00	24.19	150	106	Horizontal
3	5361.8904	36.51	15.16	51.67	74.00	22.33	150	262	Horizontal
1	5280.1301	92.84	14.97	107.81	/	/	150	225	Vertical
2	5350.059	34.44	15.15	49.59	74.00	24.41	150	52	Vertical
3	5377.96	37.43	15.18	52.61	74.00	21.39	150	177	Vertical

----- The following blanks -----

802.11a mode Ant 2/5280MHz


Detector mode: Average

Polarity: Horizontal

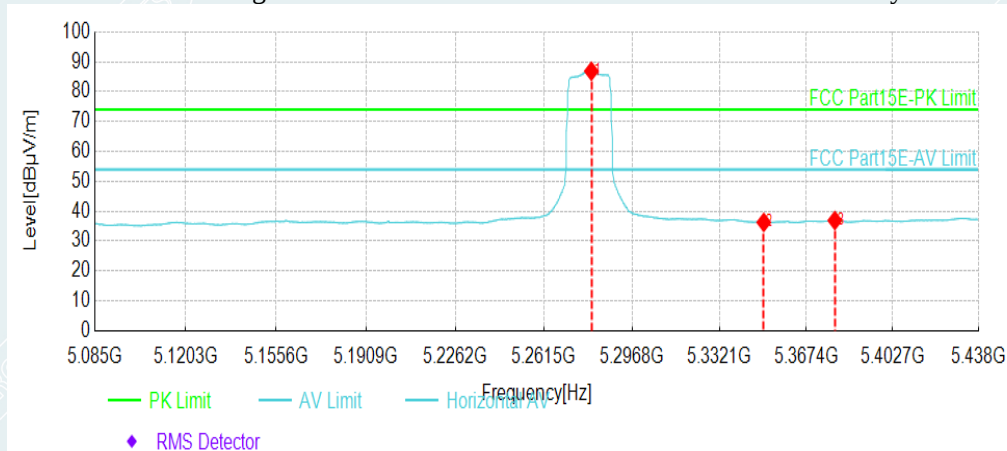

Detector mode: Average

Polarity: Vertical

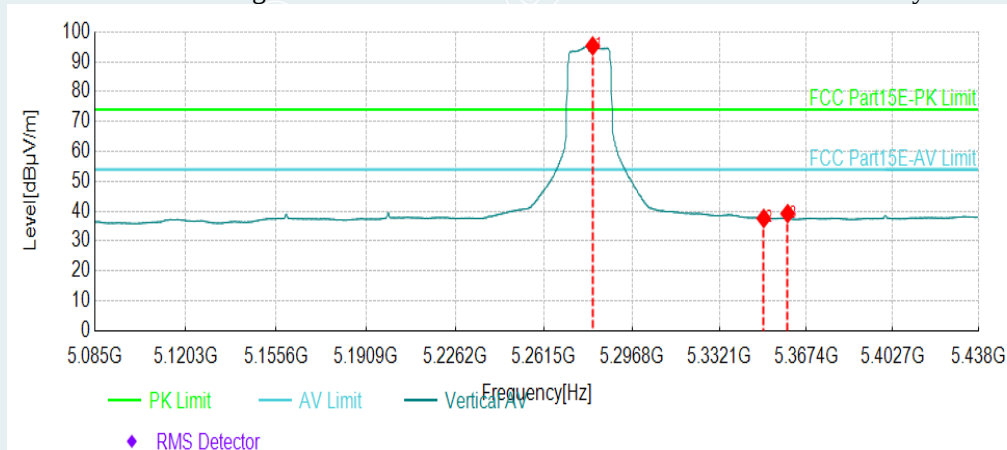


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5280.4832	71.86	14.97	86.83	/	/	150	94	Horizontal
2	5350.059	21.12	15.15	36.27	54.00	17.73	150	63	Horizontal
3	5379.0195	21.71	15.18	36.89	54.00	17.11	150	66	Horizontal
1	5281.013	80.30	14.97	95.27	/	/	150	220	Vertical
2	5350.059	22.43	15.15	37.58	54.00	16.42	150	212	Vertical
3	5359.7714	24.05	15.16	39.21	54.00	14.79	150	85	Vertical

----- The following blanks -----

802.11a mode Ant 2/5320MHz


Detector mode: Peak

Polarity: Horizontal

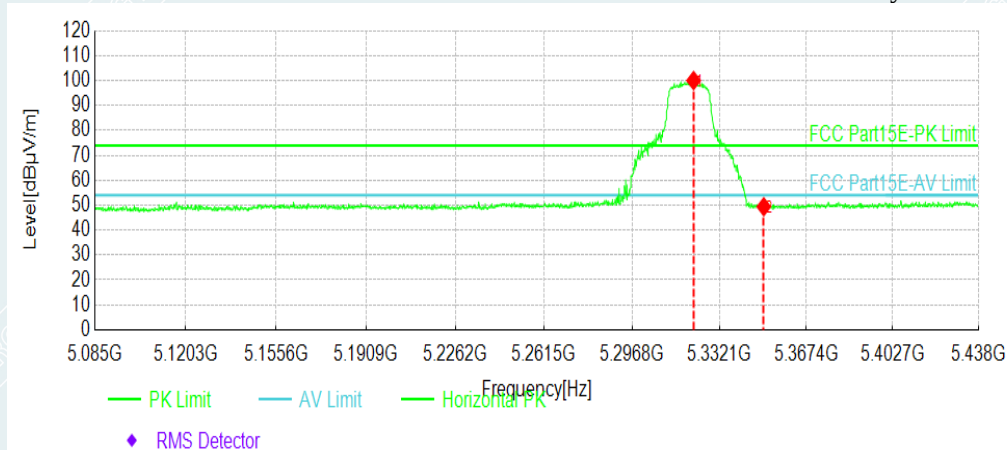

Detector mode: Peak

Polarity: Vertical

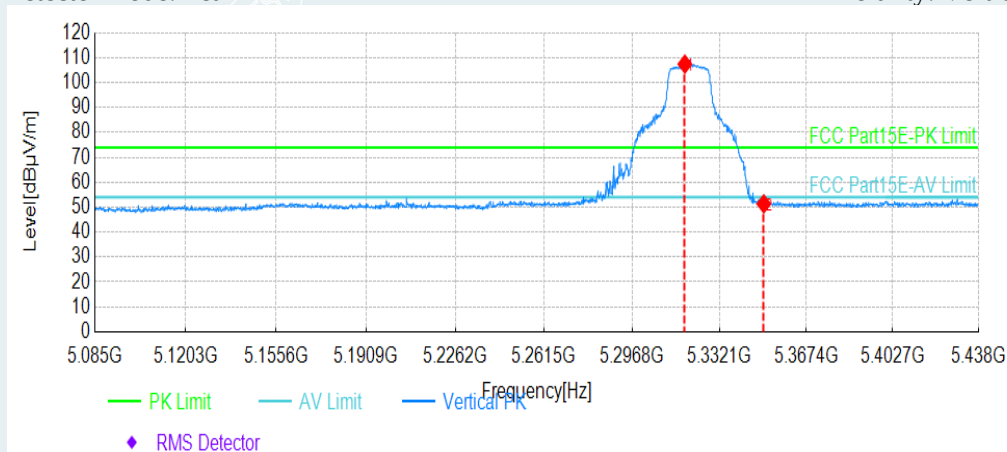


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5321.6283	84.93	15.11	100.04	/	/	150	74	Horizontal
2	5350.059	34.26	15.15	49.41	74.00	24.59	150	94	Horizontal
1	5318.0965	92.36	15.10	107.46	/	/	150	188	Vertical
2	5350.059	36.21	15.15	51.36	74.00	22.64	150	84	Vertical

----- The following blanks -----

802.11a mode Ant 2/5320MHz


Detector mode: Average

Polarity: Horizontal

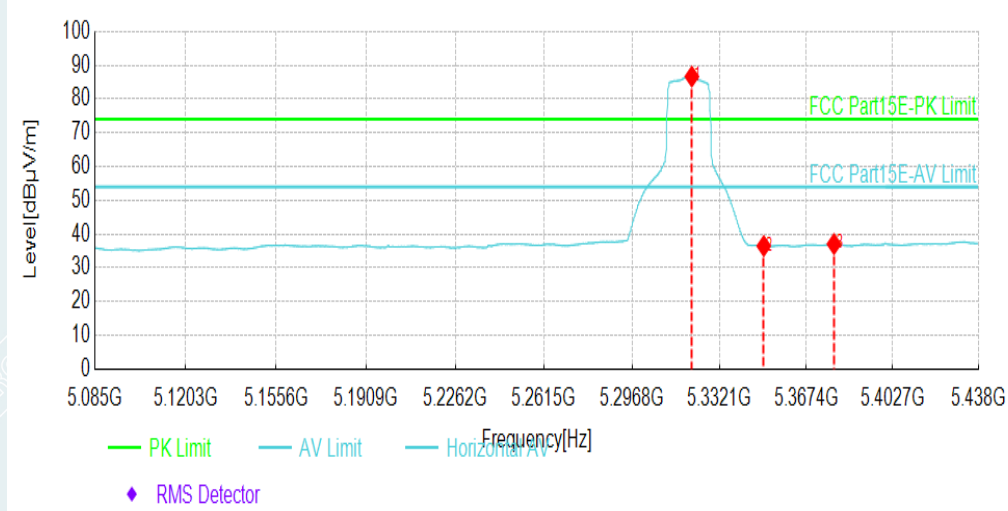

Detector mode: Average

Polarity: Vertical

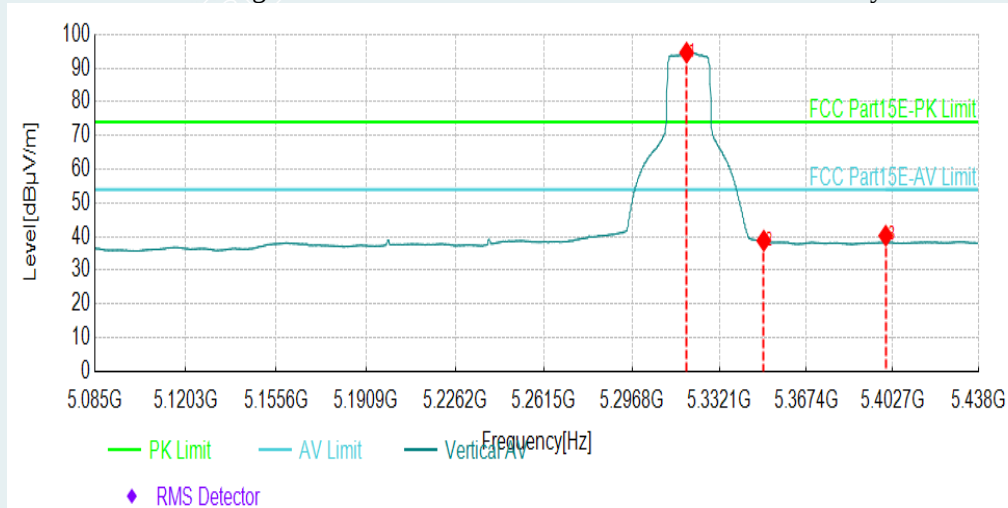


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5320.922	71.54	15.11	86.65	/	/	150	103	Horizontal
2	5350.059	21.33	15.15	36.48	54.00	17.52	150	63	Horizontal
3	5378.6663	21.87	15.18	37.05	54.00	16.95	150	67	Horizontal
1	5318.8029	79.46	15.10	94.56	/	/	150	88	Vertical
2	5350.059	23.64	15.15	38.79	54.00	15.21	150	212	Vertical
3	5399.8569	25.05	15.21	40.26	54.00	13.74	150	80	Vertical

----- The following blanks -----

802.11a mode Ant 1/5500MHz


Detector mode: Peak

Polarity: Horizontal

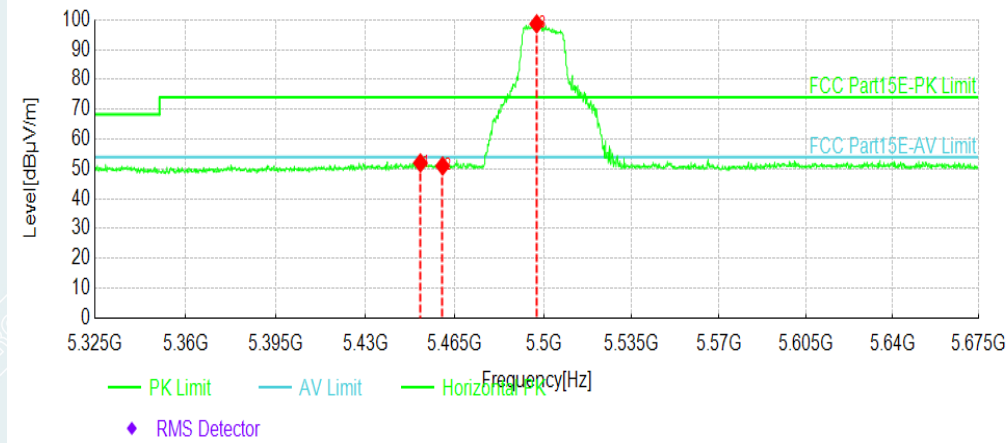

Detector mode: Peak

Polarity: Vertical

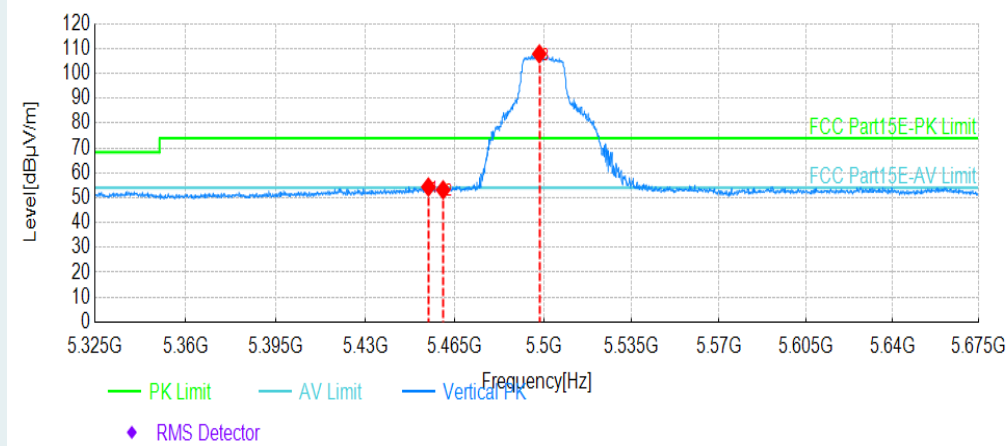


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5451.4132	36.39	15.61	52.00	74.00	22.00	150	66	Horizontal
2	5460.1676	35.29	15.68	50.97	74.00	23.03	150	335	Horizontal
3	5497.2861	82.66	15.97	98.63	/	/	150	78	Horizontal
1	5454.5648	38.69	15.64	54.33	74.00	19.67	150	200	Vertical
2	5460.3427	37.51	15.68	53.19	74.00	20.81	150	108	Vertical
3	5498.3367	91.88	15.98	107.86	/	/	150	9	Vertical

----- The following blanks -----


802.11a mode Ant 1/5500MHz
Detector mode: Average

Polarity: Horizontal

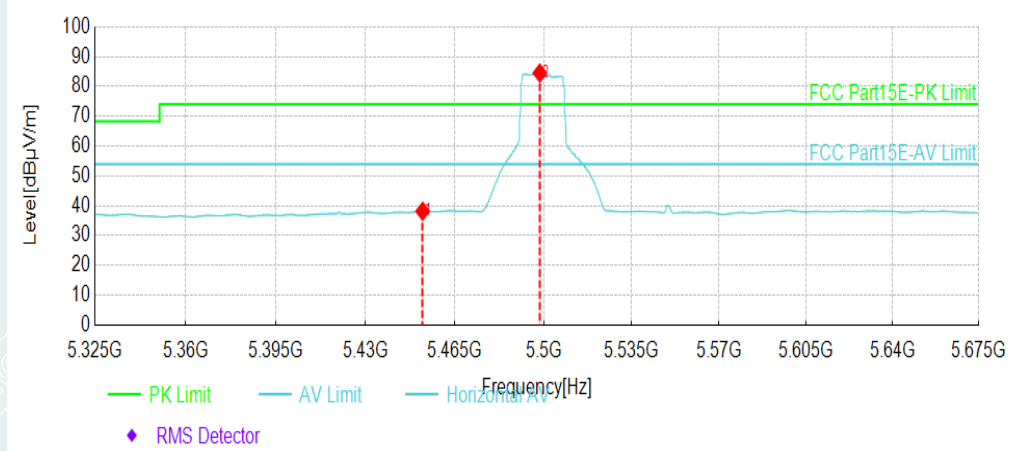

Detector mode: Average

Polarity: Vertical

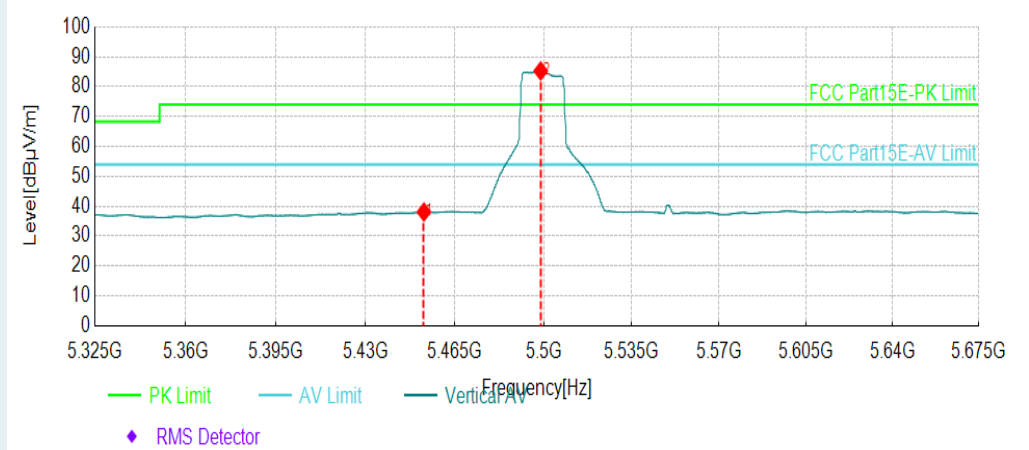


NO.	Freq. [MHz]	Reading [dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5452.2886	22.56	15.62	38.18	54.00	15.82	150	334	Horizontal
2	5498.5118	68.53	15.98	84.51	/	/	150	90	Horizontal
1	5452.8139	22.44	15.62	38.06	54.00	15.94	150	313	Vertical
2	5498.8619	69.25	15.98	85.23	/	/	150	308	Vertical

----- The following blanks -----

802.11a mode Ant 1/5600MHz


Detector mode: Peak

Polarity: Horizontal

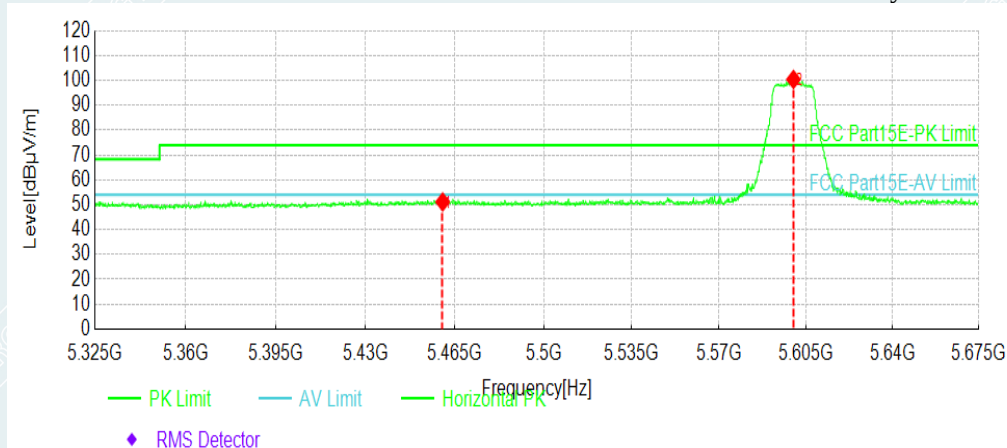

Detector mode: Peak

Polarity: Vertical

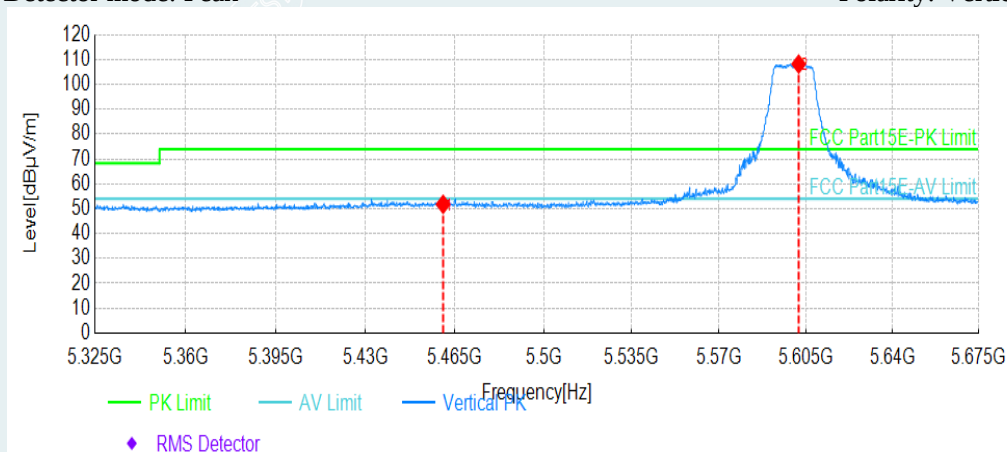


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5460.1676	35.46	15.68	51.14	74.00	22.86	150	354	Horizontal
2	5599.8874	84.28	16.15	100.43	/	/	150	91	Horizontal
1	5460.3427	36.11	15.68	51.79	74.00	22.21	150	221	Vertical
2	5601.9885	92.05	16.15	108.20	/	/	150	85	Vertical

----- The following blanks -----


802.11a mode Ant 1/5600MHz
Detector mode: Average

Polarity: Horizontal

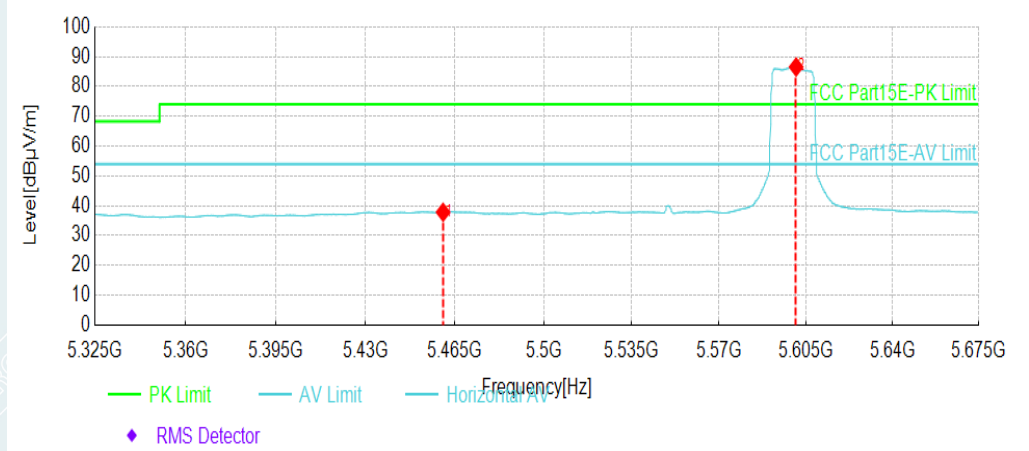

Detector mode: Average

Polarity: Vertical

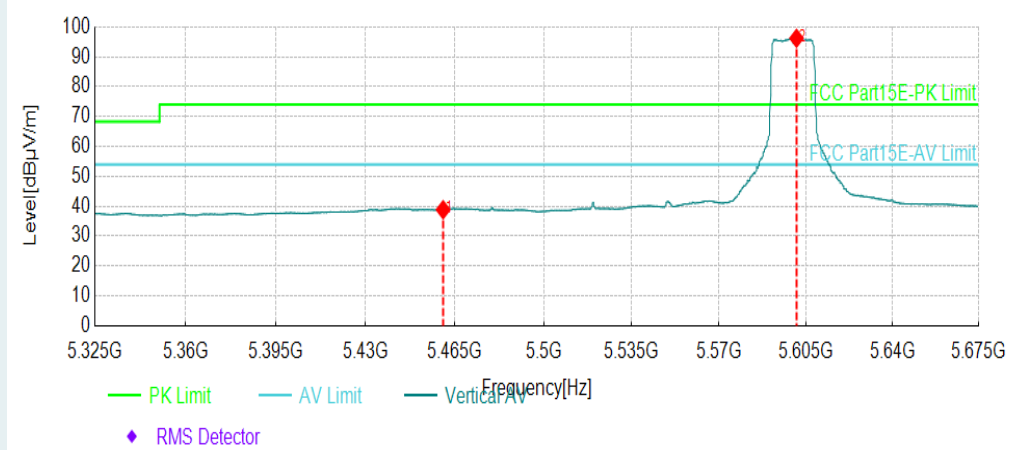


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5460.3427	22.14	15.68	37.82	54.00	16.18	150	86	Horizontal
2	5600.938	70.37	16.15	86.52	/	/	150	102	Horizontal
1	5460.3427	23.14	15.68	38.82	54.00	15.18	150	105	Vertical
2	5601.1131	80.02	16.15	96.17	/	/	150	5	Vertical

----- The following blanks -----

802.11a mode Ant 1/5700MHz


Detector mode: Peak

Polarity: Horizontal

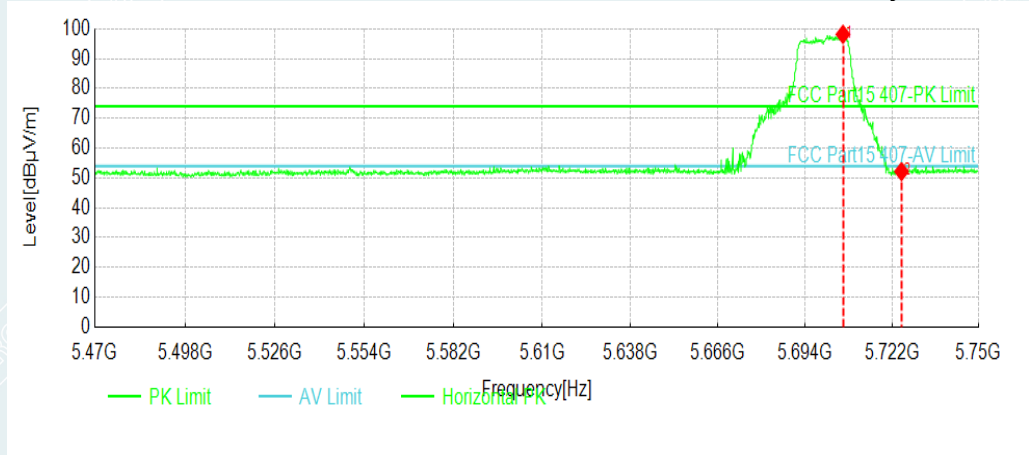

Detector mode: Peak

Polarity: Vertical

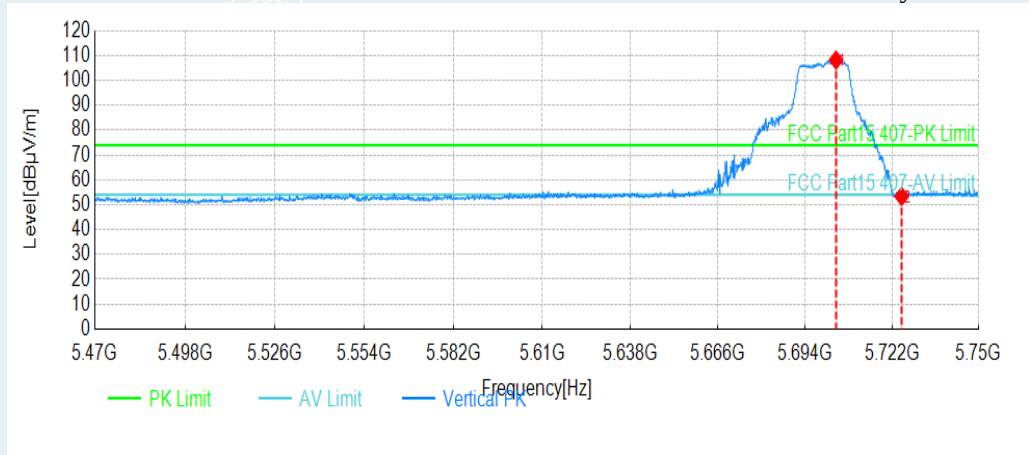


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5706.1581	82.01	16.14	98.15	/	/	150	91	Horizontal
2	5725.0675	35.97	16.17	52.14	74.00	21.86	150	99	Horizontal
1	5703.917	92.06	16.14	108.20	/	/	150	84	Vertical
2	5725.0675	37.22	16.17	53.39	74.00	20.61	150	144	Vertical

----- The following blanks -----


802.11a mode Ant 1/5700MHz
Detector mode: Average

Polarity: Horizontal

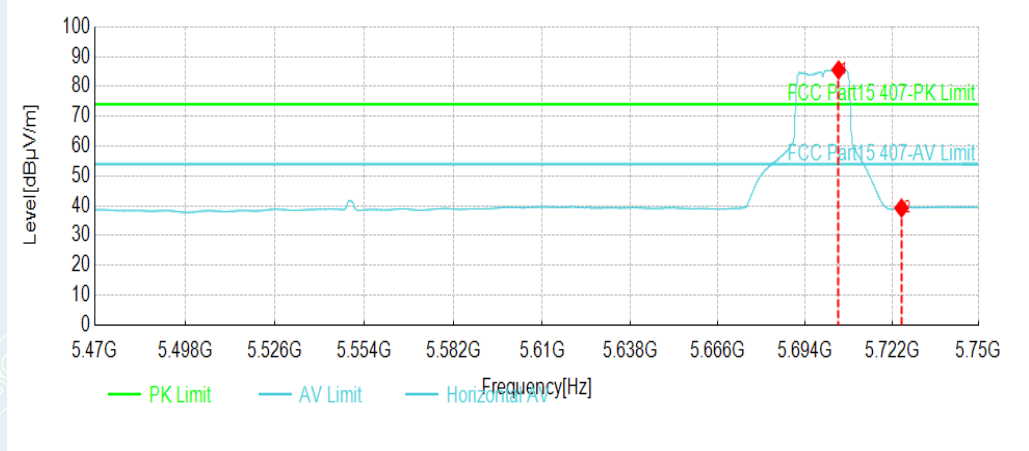

Detector mode: Average

Polarity: Vertical

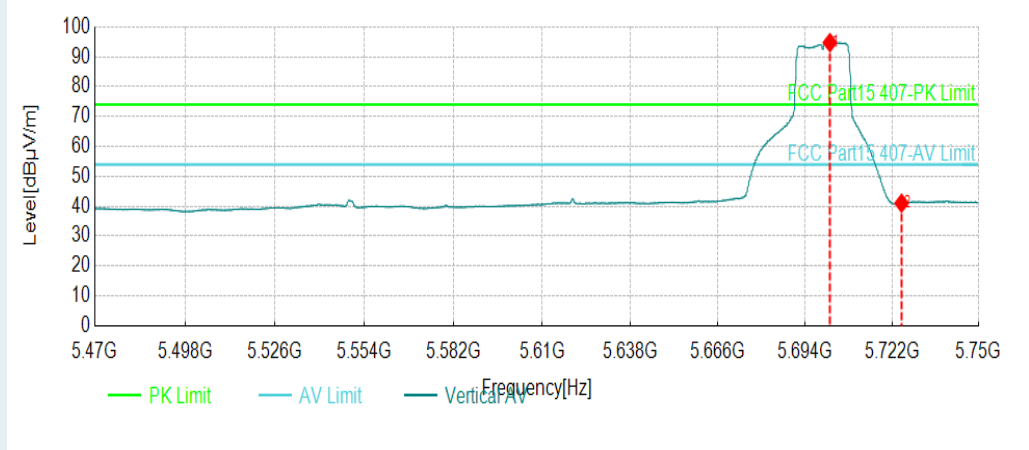


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5704.7574	69.39	16.14	85.53	/	/	150	83	Horizontal
2	5725.0675	23.04	16.17	39.21	54.00	14.79	150	87	Horizontal
1	5701.956	78.60	16.13	94.73	/	/	150	276	Vertical
2	5725.0675	24.83	16.17	41.00	54.00	13.00	150	8	Vertical

----- The following blanks -----

802.11n HT20 mode/5180MHz MIMO


Detector mode: Peak

Polarity: Horizontal

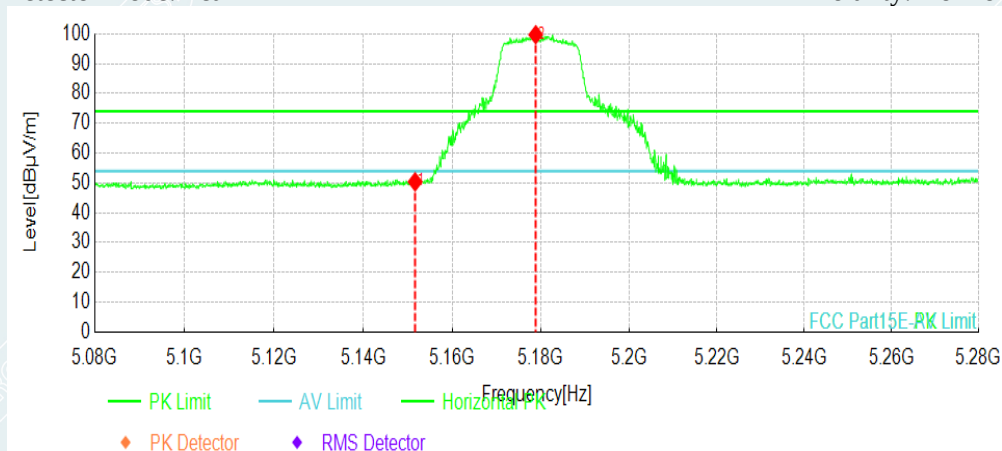

Detector mode: Peak

Polarity: Vertical

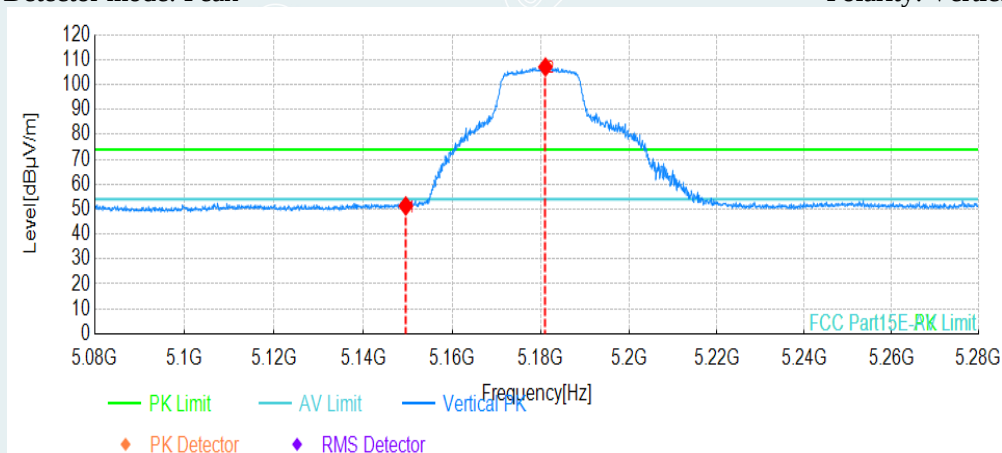


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5151.6358	36.20	14.15	50.35	74.00	23.65	150	162	Horizontal
2	5178.8494	85.34	14.34	99.68	/	/	150	126	Horizontal
1	5149.5348	37.18	14.14	51.32	74.00	22.68	150	358	Vertical
2	5181.0505	92.72	14.37	107.09	/	/	150	352	Vertical

----- The following blanks -----

802.11n HT20 mode/5180MHz MIMO


Detector mode: Average

Polarity: Horizontal

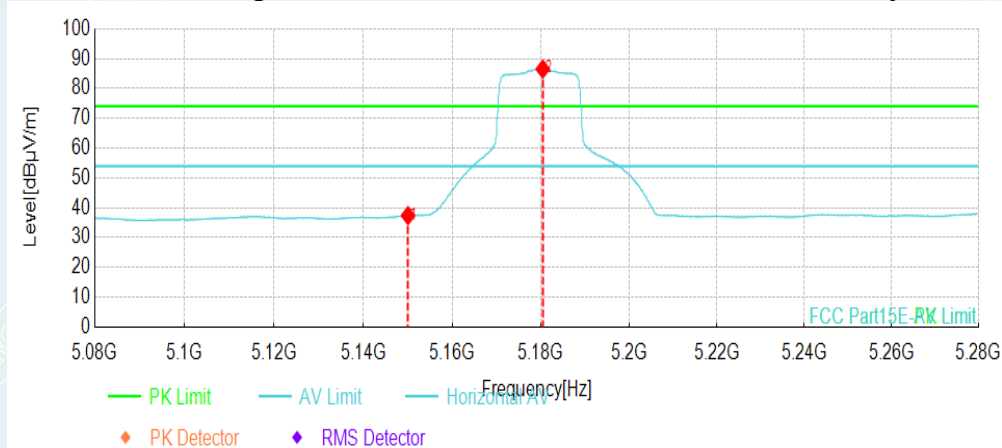

Detector mode: Average

Polarity: Vertical

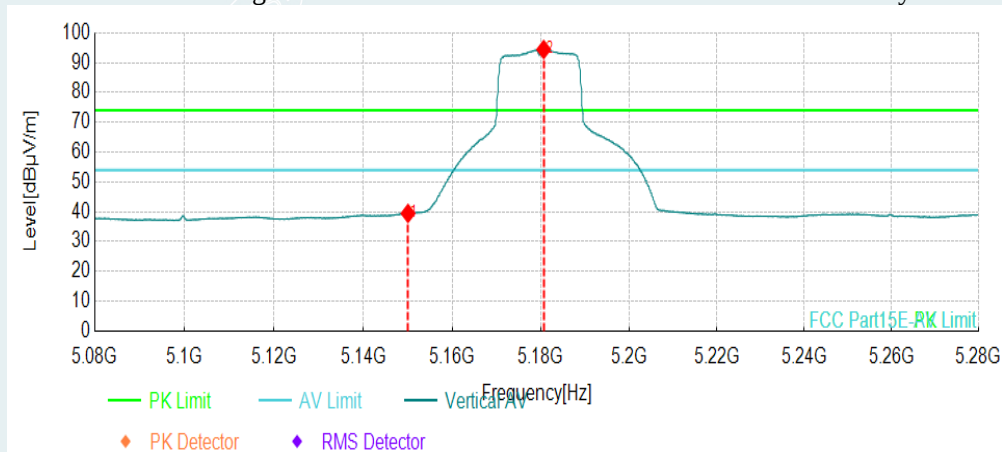


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	23.24	14.14	37.38	54.00	16.62	150	115	Horizontal
2	5180.4502	72.13	14.36	86.49	/	/	150	119	Horizontal
1	5150.035	25.30	14.14	39.44	54.00	14.56	150	357	Vertical
2	5180.6503	80.04	14.36	94.40	/	/	150	357	Vertical

----- The following blanks -----

802.11n HT20 mode/5200MHz MIMO


Detector mode: Peak

Polarity: Horizontal

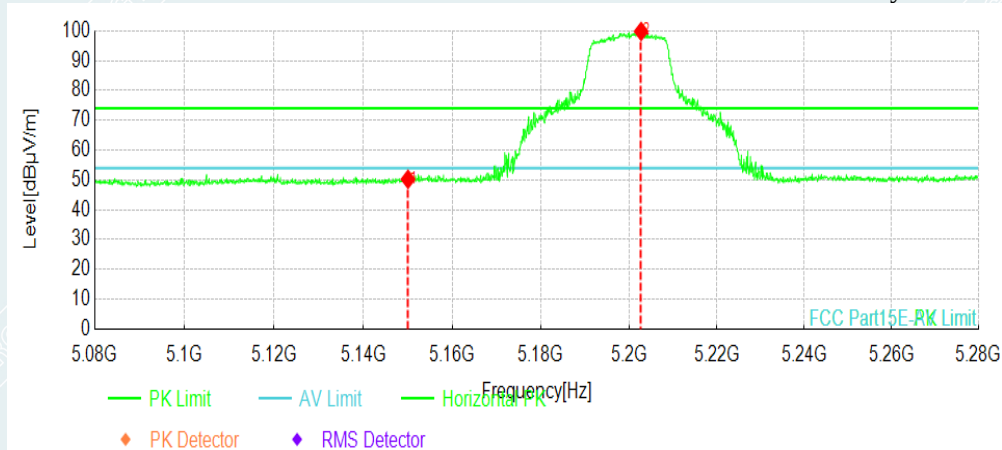

Detector mode: Peak

Polarity: Vertical

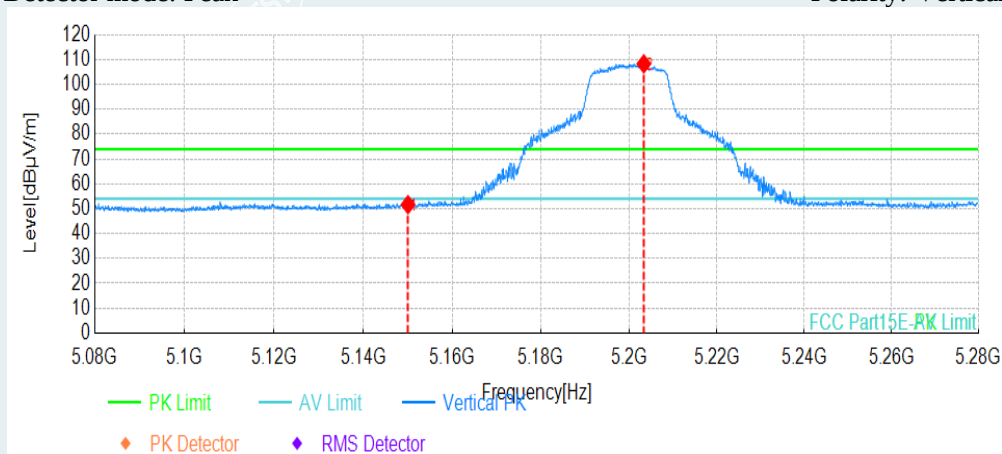


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	36.07	14.14	50.21	74.00	23.79	150	186	Horizontal
2	5202.7614	85.29	14.51	99.80	/	/	150	122	Horizontal
1	5150.035	37.51	14.14	51.65	74.00	22.35	150	8	Vertical
2	5203.3617	93.77	14.52	108.29	/	/	150	357	Vertical

----- The following blanks -----

802.11n HT20 mode/5200MHz MIMO


Detector mode: Average

Polarity: Horizontal

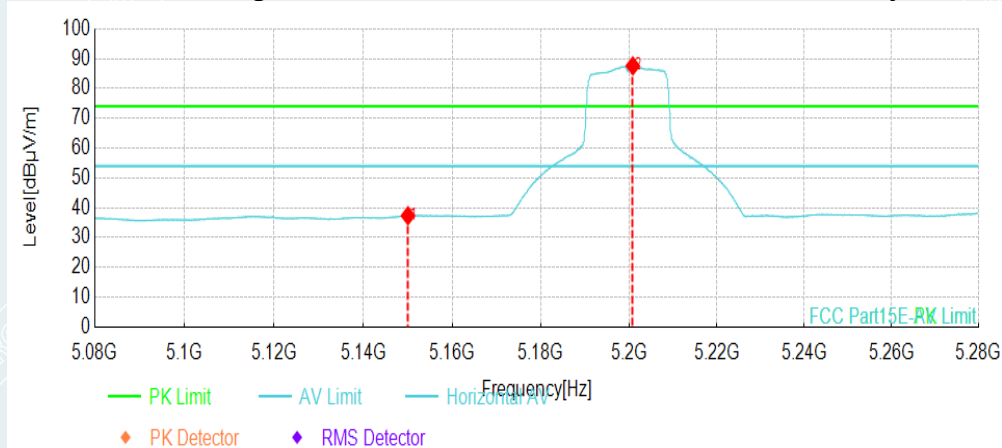

Detector mode: Average

Polarity: Vertical

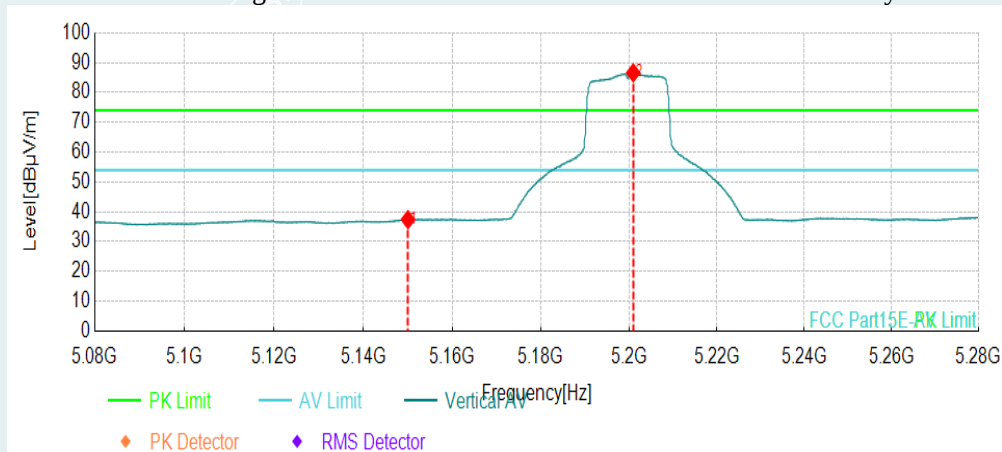


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	23.21	14.14	37.35	54.00	16.65	150	115	Horizontal
2	5200.8604	73.07	14.50	87.57	/	/	150	123	Horizontal
1	5150.035	23.22	14.14	37.36	54.00	16.64	150	125	Vertical
2	5200.9605	72.07	14.50	86.57	/	/	150	117	Vertical

----- The following blanks -----

802.11n HT20 mode/5240MHz MIMO


Detector mode: Peak

Polarity: Horizontal

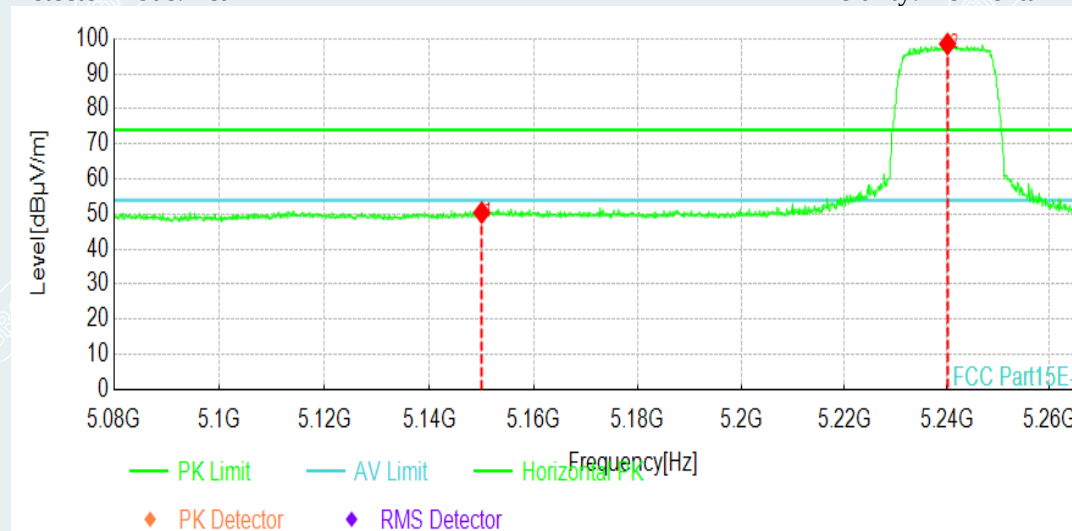

Detector mode: Peak

Polarity: Vertical

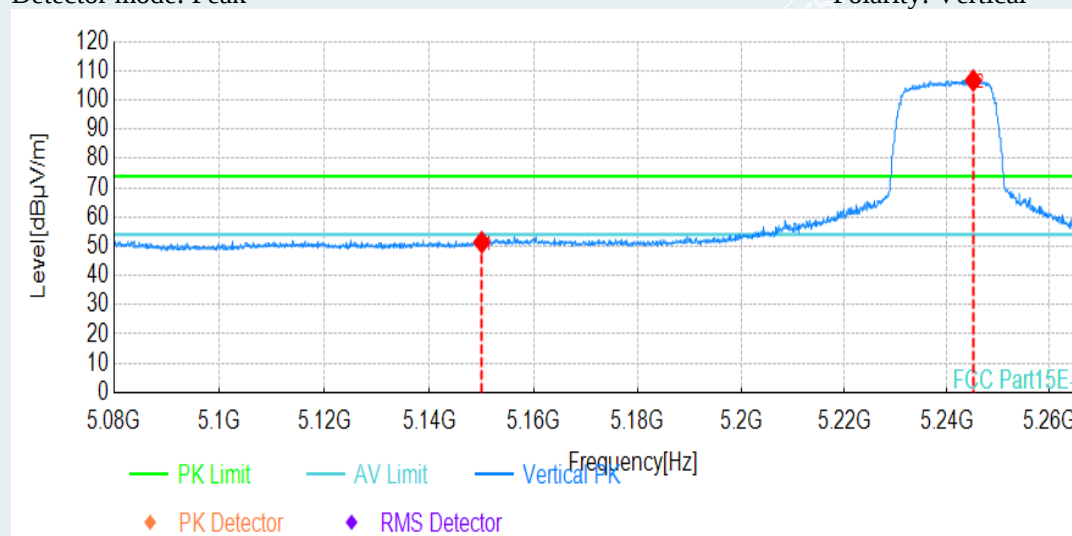


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	36.27	14.14	50.41	74.00	23.59	150	262	Horizontal
2	5240.08	83.77	14.73	98.50	/	/	150	135	Horizontal
1	5150.035	37.23	14.14	51.37	74.00	22.63	150	240	Vertical
2	5245.0825	91.96	14.76	106.72	/	/	150	357	Vertical

802.11n HT20 mode/5240MHz MIMO


Detector mode: Average

Polarity: Horizontal

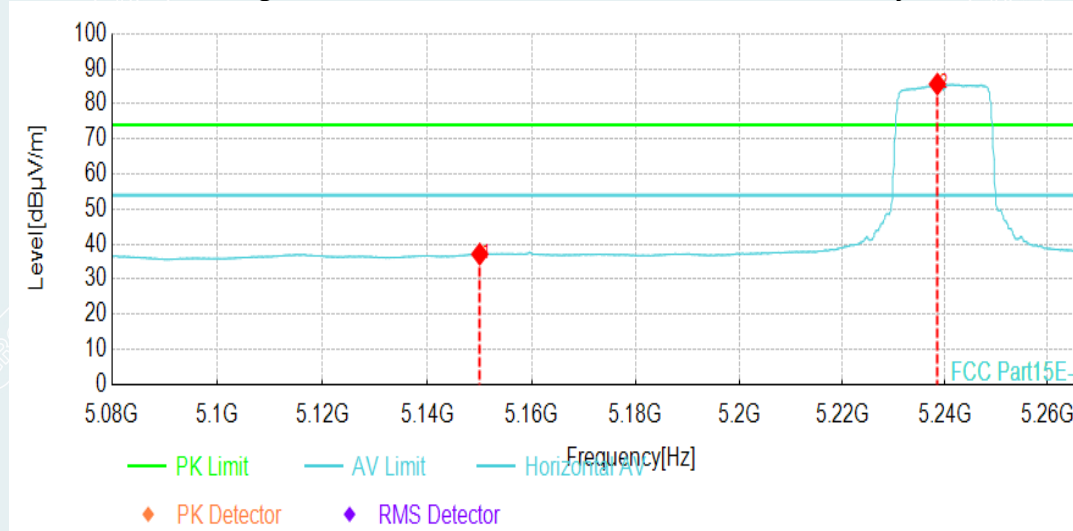

Detector mode: Average

Polarity: Vertical

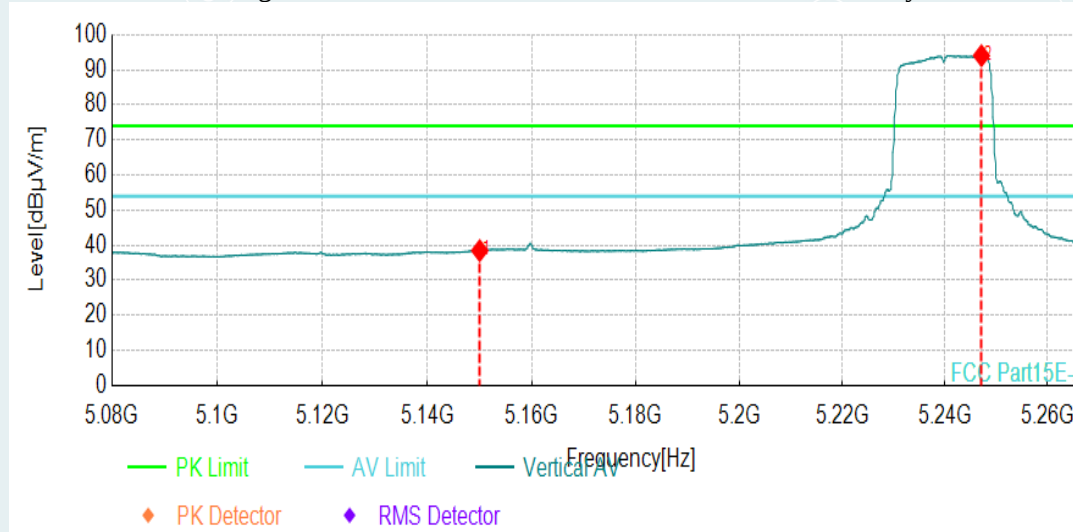


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	36.27	14.14	50.41	74.00	23.59	150	262	Horizontal
2	5240.08	83.77	14.73	98.50	/	/	150	135	Horizontal
1	5150.035	37.23	14.14	51.37	74.00	22.63	150	240	Vertical
2	5245.0825	91.96	14.76	106.72	/	/	150	357	Vertical

802.11n HT20/5260MHz


Detector mode: Peak

Polarity: Horizontal

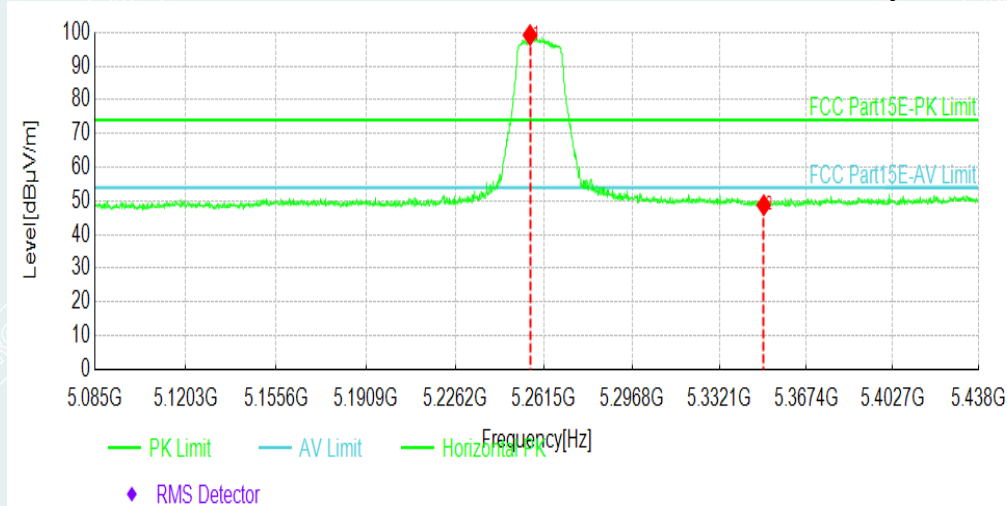

Detector mode: Peak

Polarity: Vertical

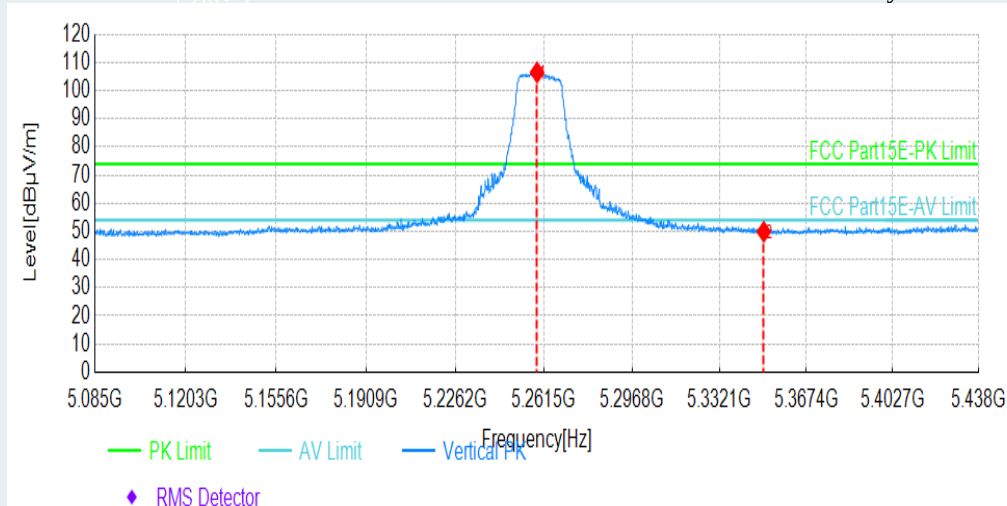


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5255.9375	84.37	14.83	99.20	/	/	150	134	Horizontal
2	5350.059	33.59	15.15	48.74	74.00	25.26	150	143	Horizontal
1	5258.7629	91.64	14.84	106.48	/	/	150	352	Vertical
2	5350.059	34.72	15.15	49.87	74.00	24.13	150	108	Vertical

----- The following blanks -----

802.11n HT20/5260MHz


Detector mode: Average

Polarity: Horizontal

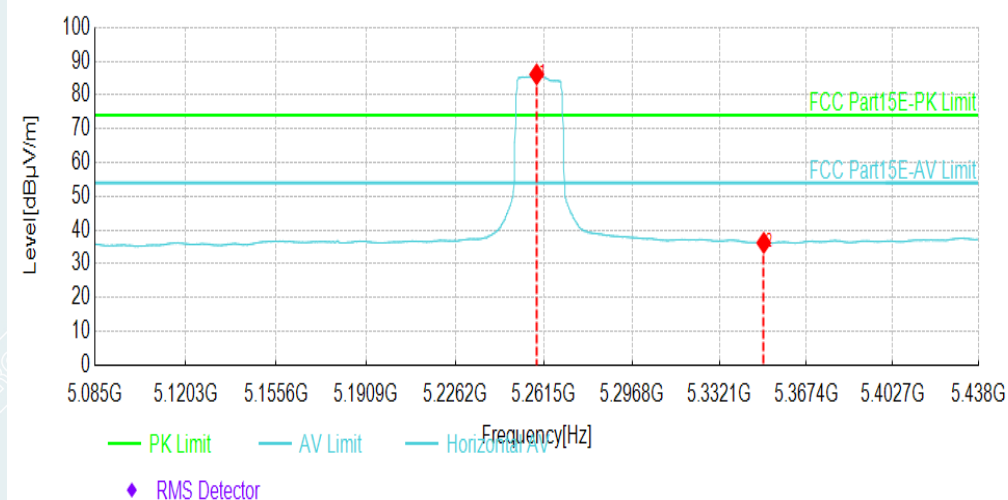

Detector mode: Average

Polarity: Vertical

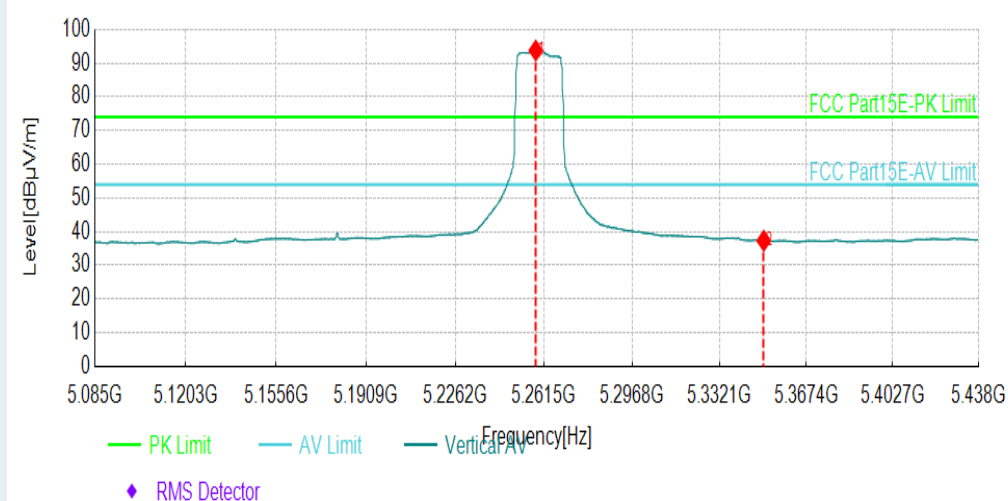


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5258.5863	71.26	14.84	86.10	/	/	150	135	Horizontal
2	5350.059	21.05	15.15	36.20	54.00	17.80	150	147	Horizontal
1	5258.2331	78.90	14.84	93.74	/	/	150	96	Vertical
2	5350.059	22.14	15.15	37.29	54.00	16.71	150	4	Vertical

----- The following blanks -----

802.11n HT20/5280MHz


Detector mode: Peak

Polarity: Horizontal

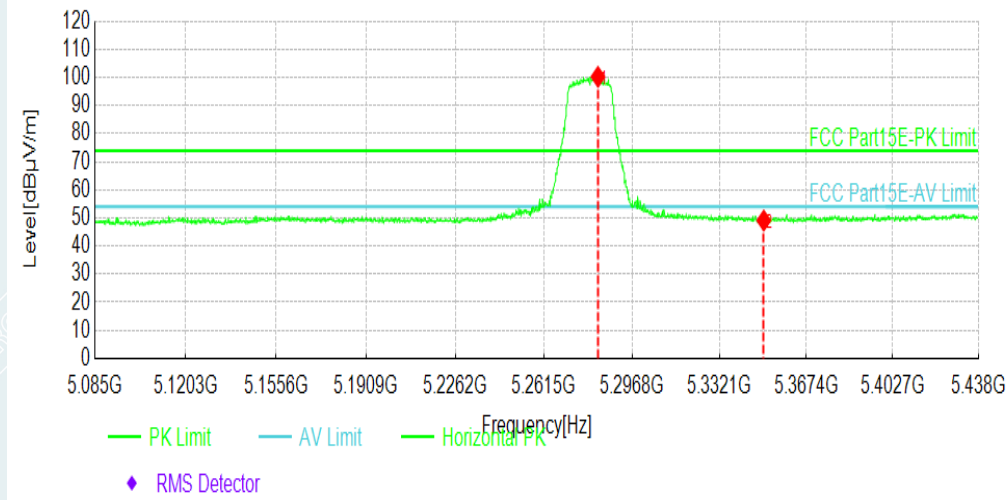

Detector mode: Peak

Polarity: Vertical

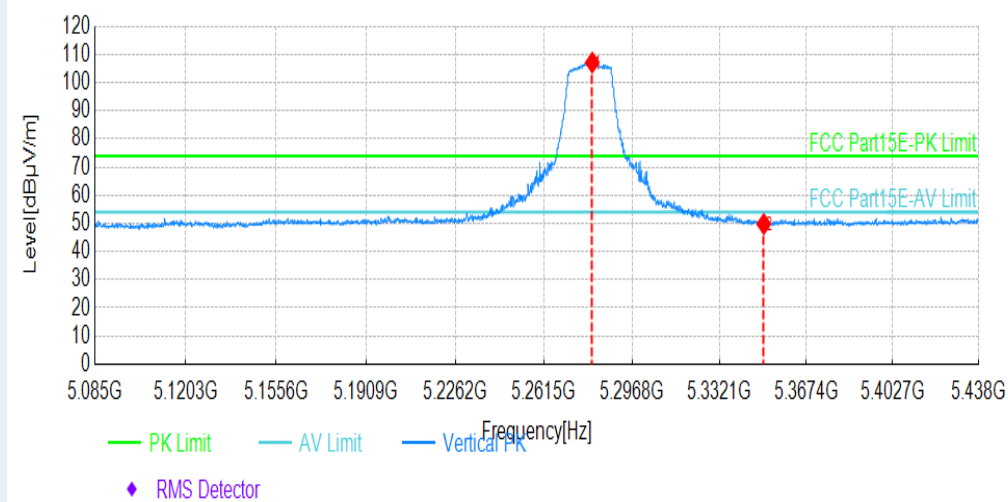


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5283.1321	85.28	14.98	100.26	/	/	150	139	Horizontal
2	5350.059	33.94	15.15	49.09	74.00	24.91	150	183	Horizontal
1	5280.8364	92.21	14.97	107.18	/	/	150	88	Vertical
2	5350.059	34.64	15.15	49.79	74.00	24.21	150	304	Vertical

----- The following blanks -----

802.11n HT20/5280MHz


Detector mode: Average

Polarity: Horizontal

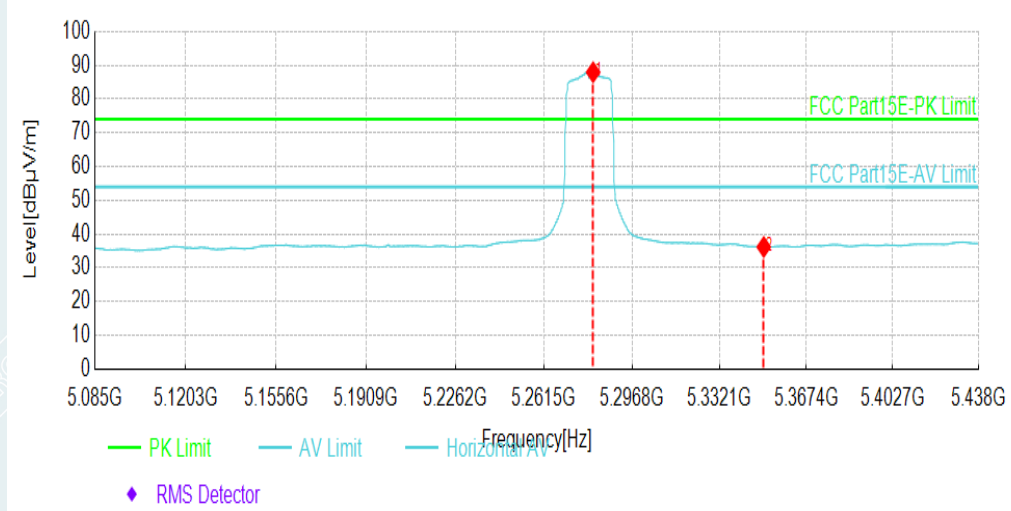

Detector mode: Average

Polarity: Vertical

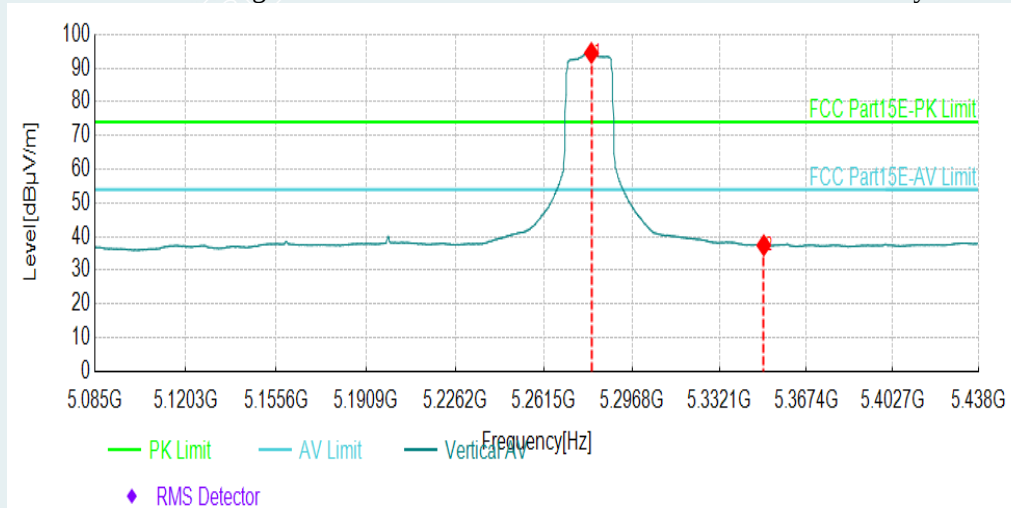


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5281.1896	72.96	14.97	87.93	/	/	150	139	Horizontal
2	5350.059	21.03	15.15	36.18	54.00	17.82	150	63	Horizontal
1	5280.4832	79.49	14.97	94.46	/	/	150	96	Vertical
2	5350.059	22.25	15.15	37.40	54.00	16.60	150	4	Vertical

----- The following blanks -----

802.11n HT20/5320MHz


Detector mode: Peak

Polarity: Horizontal

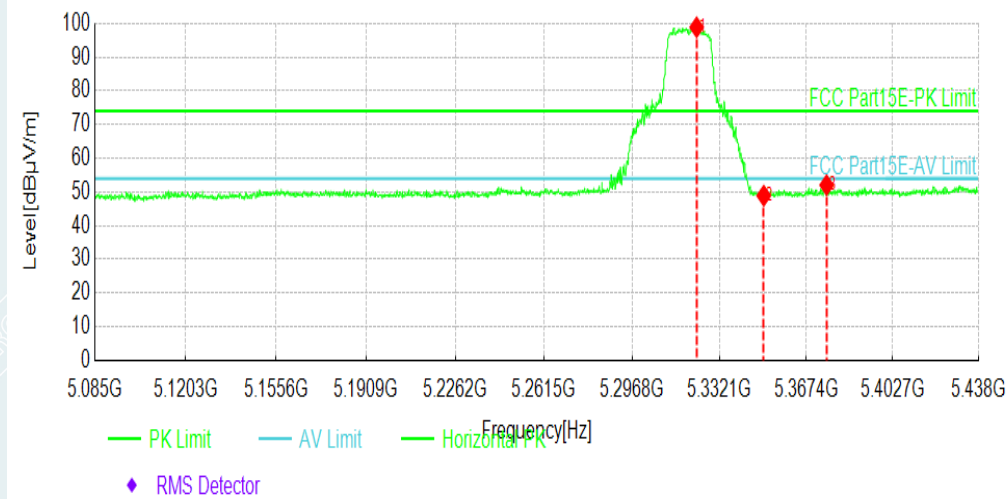

Detector mode: Peak

Polarity: Vertical

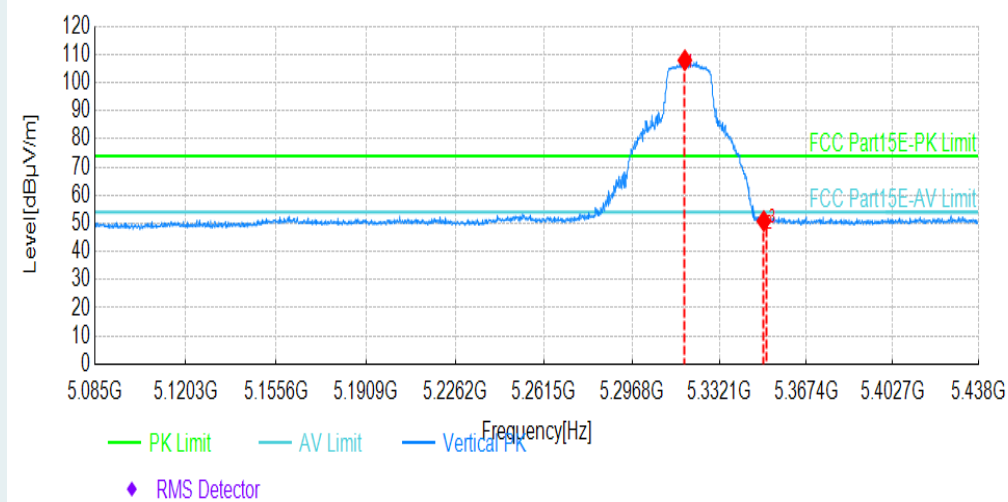


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5322.8644	83.74	15.11	98.85	/	/	150	122	Horizontal
2	5350.059	33.71	15.15	48.86	74.00	25.14	150	334	Horizontal
3	5375.6643	36.82	15.18	52.00	74.00	22.00	150	55	Horizontal
1	5318.0965	92.87	15.10	107.97	/	/	150	88	Vertical
2	5350.059	35.69	15.15	50.84	74.00	23.16	150	5	Vertical
3	5351.2951	37.44	15.15	52.59	74.00	21.41	150	68	Vertical

----- The following blanks -----

802.11n HT20/5320MHz


Detector mode: Average

Polarity: Horizontal

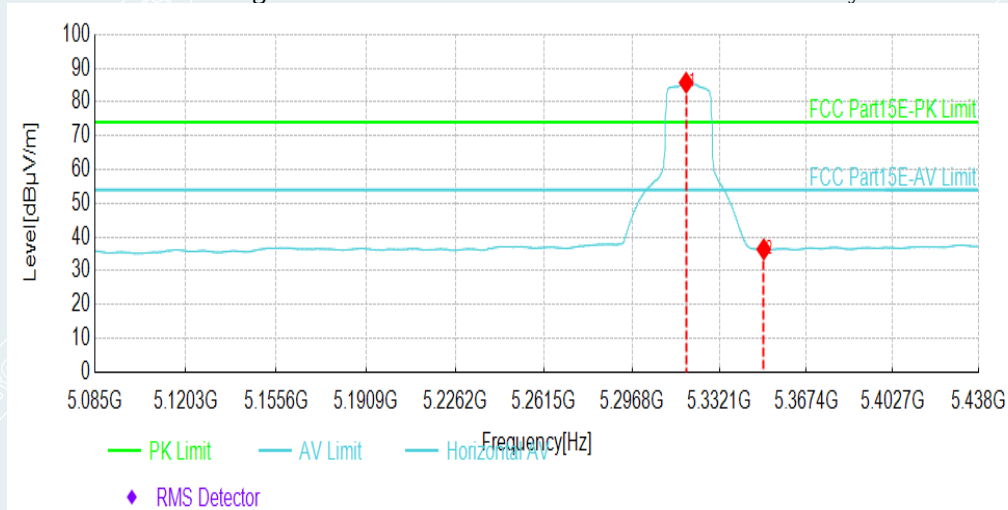

Detector mode: Average

Polarity: Vertical

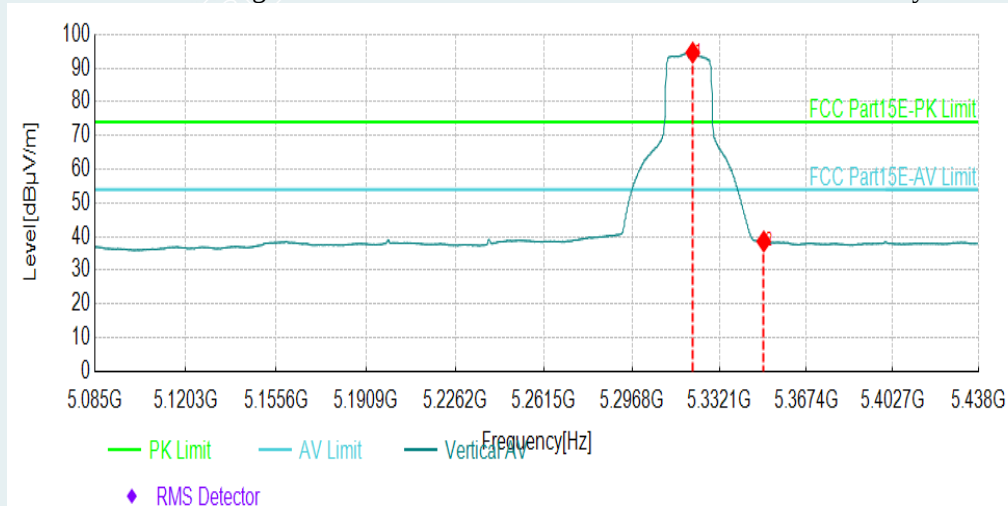


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5318.6263	70.60	15.10	85.70	/	/	150	142	Horizontal
2	5350.059	21.22	15.15	36.37	54.00	17.63	150	146	Horizontal
1	5321.2751	79.47	15.11	94.58	/	/	150	88	Vertical
2	5350.059	23.42	15.15	38.57	54.00	15.43	150	88	Vertical

----- The following blanks -----

802.11n HT20/5500MHz


Detector mode: Peak

Polarity: Horizontal

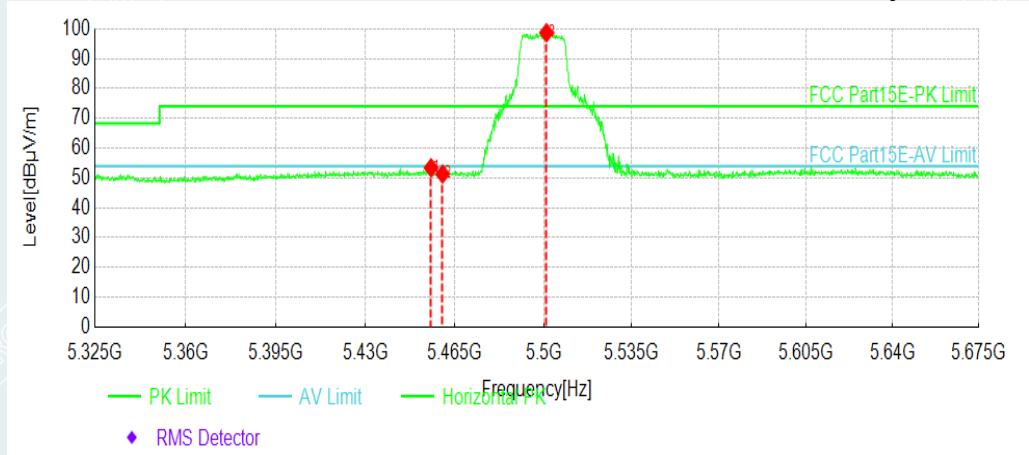

Detector mode: Peak

Polarity: Vertical

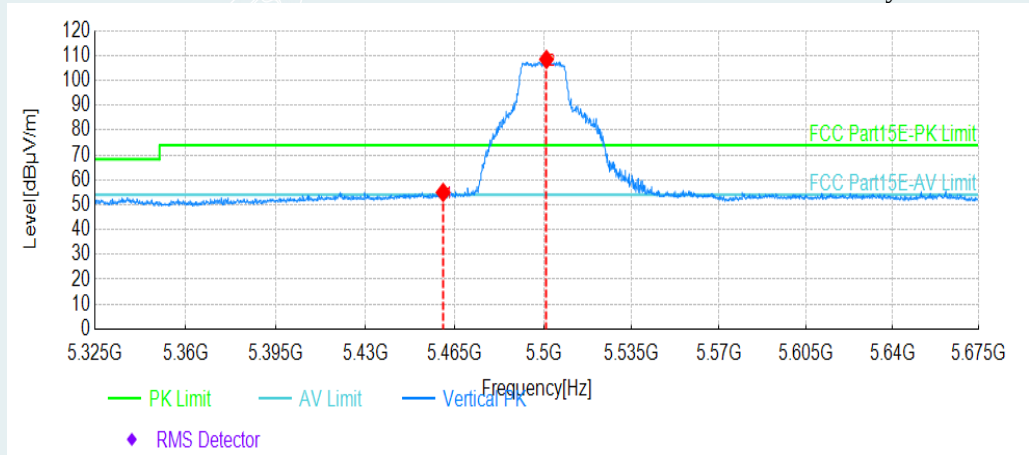


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5455.6153	37.75	15.65	53.40	74.00	20.60	150	56	Horizontal
2	5460.1676	35.62	15.68	51.30	74.00	22.70	150	80	Horizontal
3	5501.1381	82.68	15.99	98.67	/	/	150	336	Horizontal
1	5460.3427	39.28	15.68	54.96	74.00	19.04	150	7	Vertical
2	5501.1381	92.49	15.99	108.48	/	/	150	95	Vertical

----- The following blanks -----

802.11n HT20/5500MHz


Detector mode: Average

Polarity: Horizontal

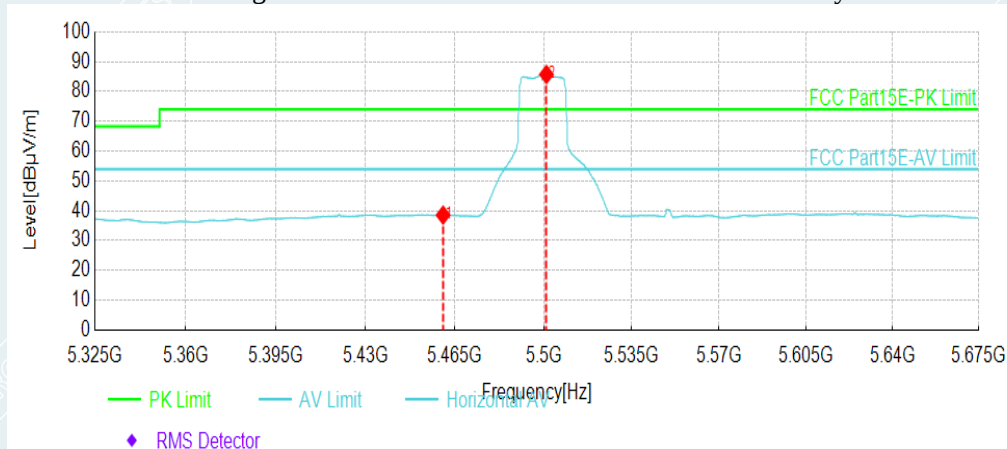

Detector mode: Average

Polarity: Vertical

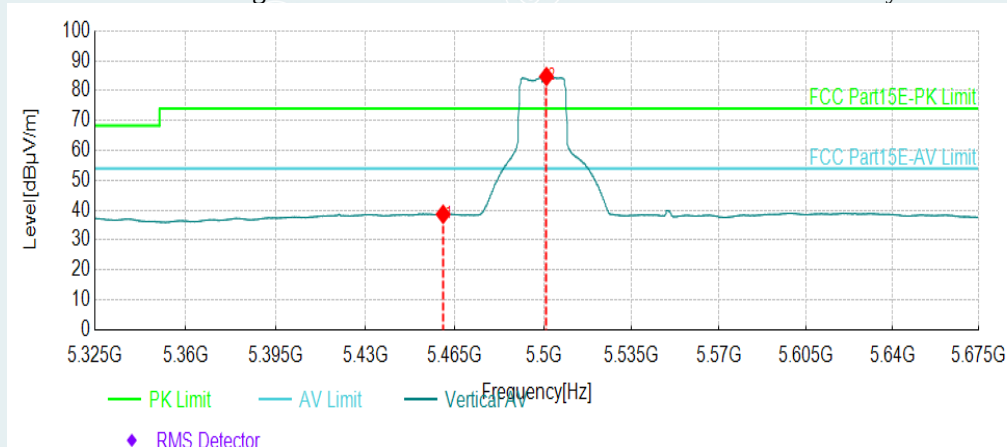


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5460.3427	22.87	15.68	38.55	54.00	15.45	150	312	Horizontal
2	5501.1381	69.72	15.99	85.71	/	/	150	308	Horizontal
1	5460.3427	22.96	15.68	38.64	54.00	15.36	150	338	Vertical
2	5501.1381	68.73	15.99	84.72	/	/	150	94	Vertical

----- The following blanks -----

802.11n HT20/5600MHz


Detector mode: Peak

Polarity: Horizontal

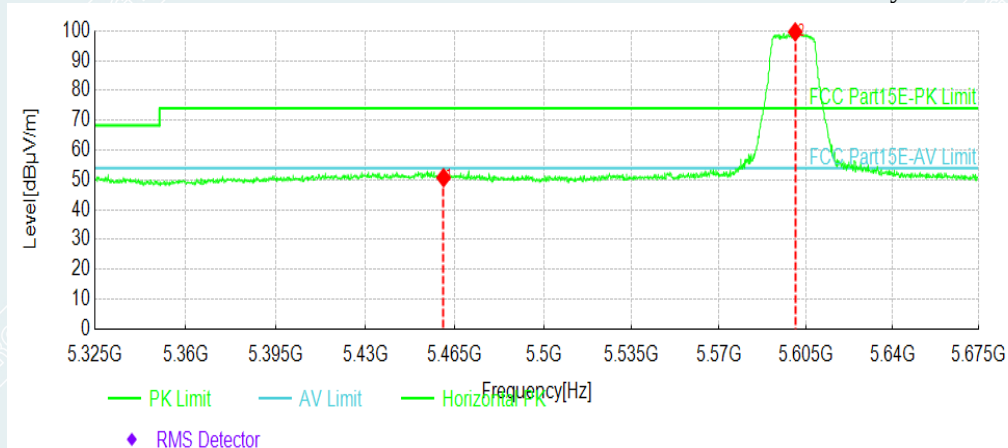

Detector mode: Peak

Polarity: Vertical

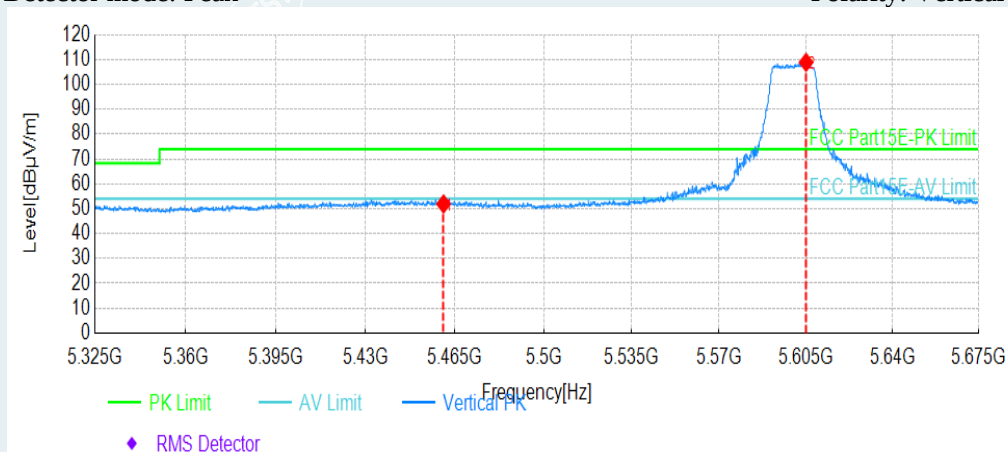


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5460.5178	35.06	15.68	50.74	74.00	23.26	150	336	Horizontal
2	5600.5878	83.47	16.15	99.62	/	/	150	89	Horizontal
1	5460.5178	36.25	15.68	51.93	74.00	22.07	150	23	Vertical
2	5604.965	92.76	16.15	108.91	/	/	150	7	Vertical

----- The following blanks -----


802.11n HT20/5600MHz
Detector mode: Average

Polarity: Horizontal

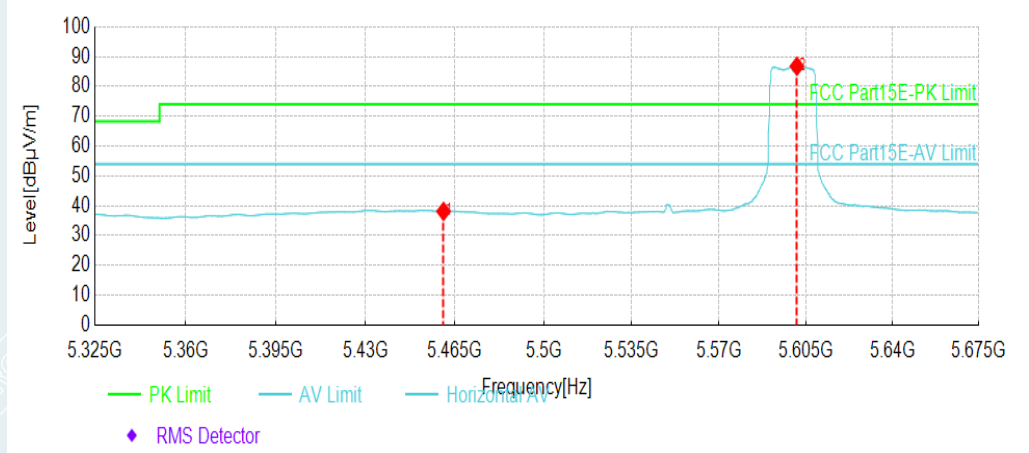

Detector mode: Average

Polarity: Vertical

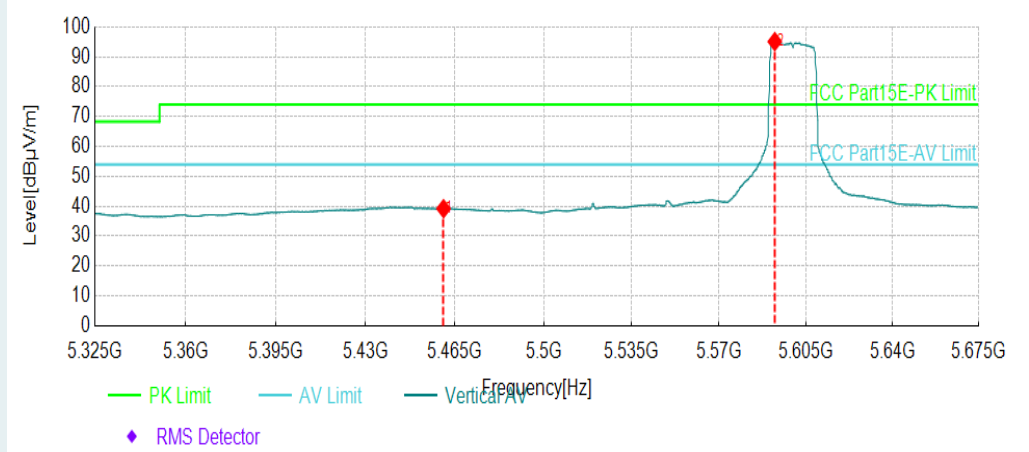


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5460.5178	22.44	15.68	38.12	54.00	15.88	150	188	Horizontal
2	5601.2881	70.61	16.15	86.76	/	/	150	88	Horizontal
1	5460.5178	23.50	15.68	39.18	54.00	14.82	150	87	Vertical
2	5592.3587	78.94	16.14	95.08	/	/	150	102	Vertical

----- The following blanks -----

802.11n HT20/5700MHz


Detector mode: Peak

Polarity: Horizontal

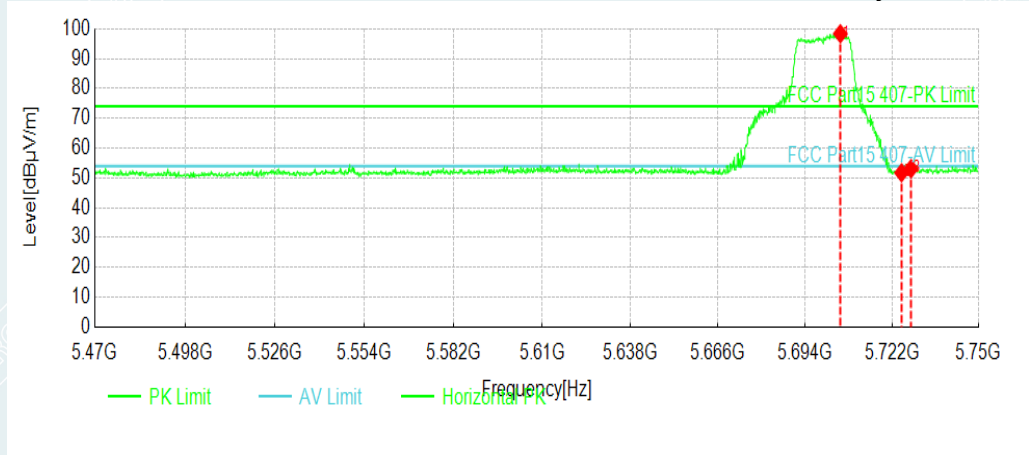

Detector mode: Peak

Polarity: Vertical

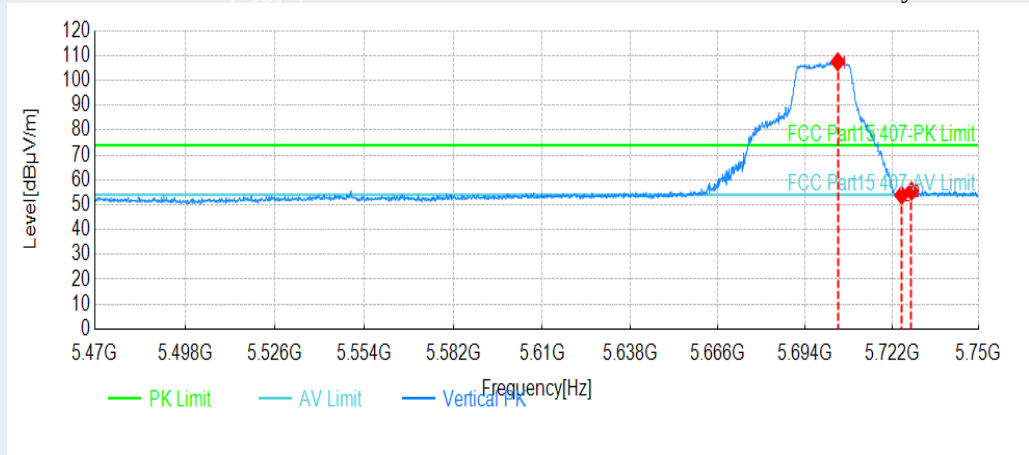


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5705.3177	82.19	16.14	98.33	/	/	150	89	Horizontal
2	5725.0675	35.56	16.17	51.73	74.00	22.27	150	33	Horizontal
3	5728.1491	36.90	16.17	53.07	74.00	20.93	150	348	Horizontal
1	5704.4772	91.39	16.14	107.53	/	/	150	86	Vertical
2	5725.0675	37.68	16.17	53.85	74.00	20.15	150	26	Vertical
3	5728.2891	39.30	16.17	55.47	74.00	18.53	150	138	Vertical

----- The following blanks -----

802.11n HT20/5700MHz


Detector mode: Average

Polarity: Horizontal

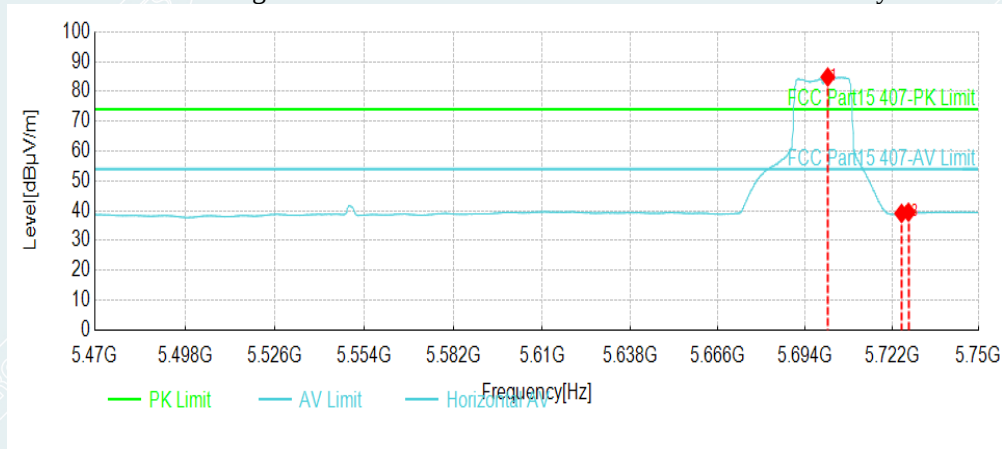

Detector mode: Average

Polarity: Vertical

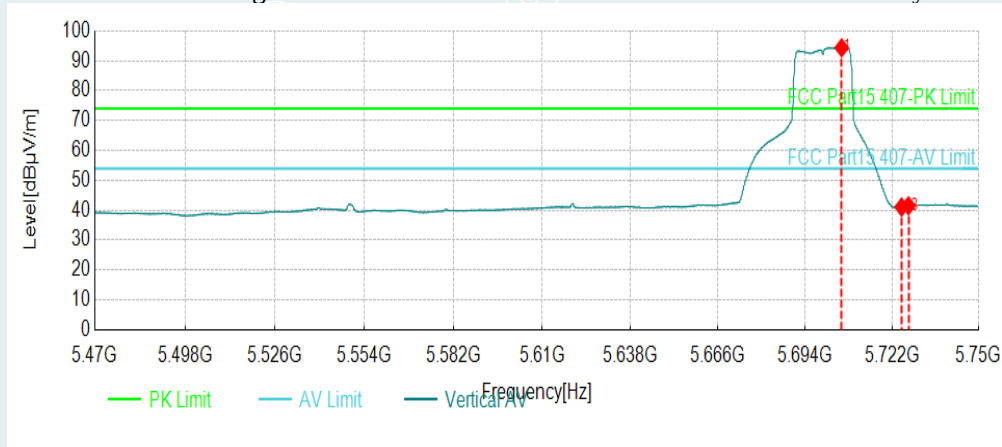


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5701.2556	68.71	16.13	84.84	/	/	150	81	Horizontal
2	5725.0675	22.93	16.17	39.10	54.00	14.90	150	108	Horizontal
3	5727.3087	23.32	16.17	39.49	54.00	14.51	150	76	Horizontal
1	5705.7379	78.18	16.14	94.32	/	/	150	83	Vertical
2	5725.0675	24.88	16.17	41.05	54.00	12.95	150	87	Vertical
3	5727.3087	25.30	16.17	41.47	54.00	12.53	150	282	Vertical

----- The following blanks -----

802.11n HT40 mode/5190MHz MIMO


Detector mode: Peak

Polarity: Horizontal

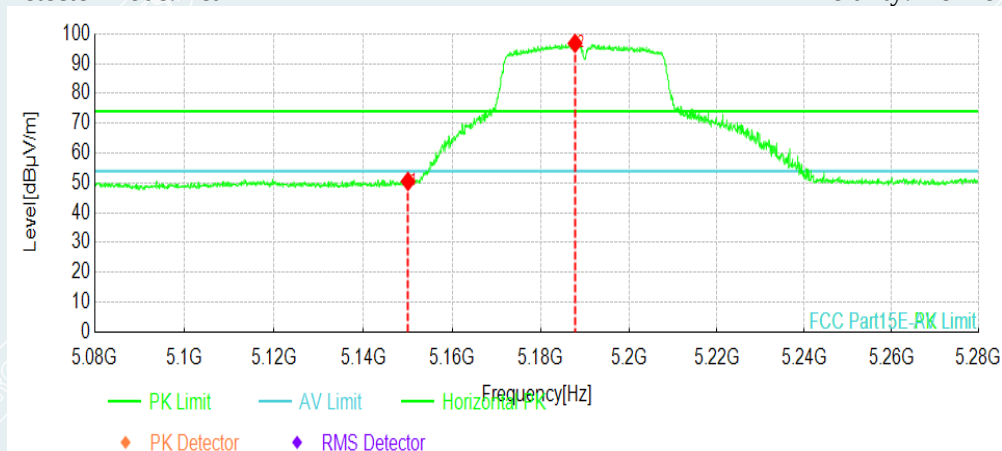

Detector mode: Peak

Polarity: Vertical

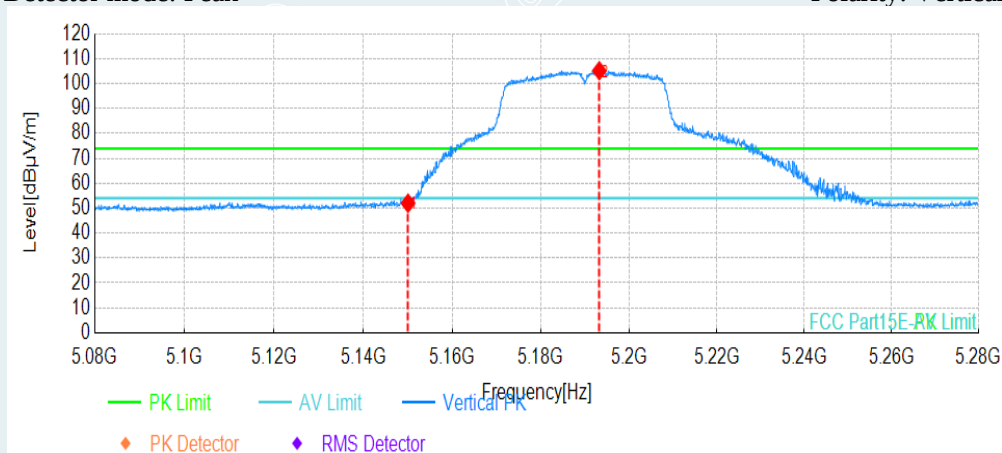


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	36.36	14.14	50.50	74.00	23.50	150	110	Horizontal
2	5187.7539	82.37	14.42	96.79	/	/	150	135	Horizontal
1	5150.035	37.86	14.14	52.00	74.00	22.00	150	357	Vertical
2	5193.2566	90.74	14.45	105.19	/	/	150	357	Vertical

----- The following blanks -----

802.11n HT40 mode/5190MHz MIMO


Detector mode: Average

Polarity: Horizontal

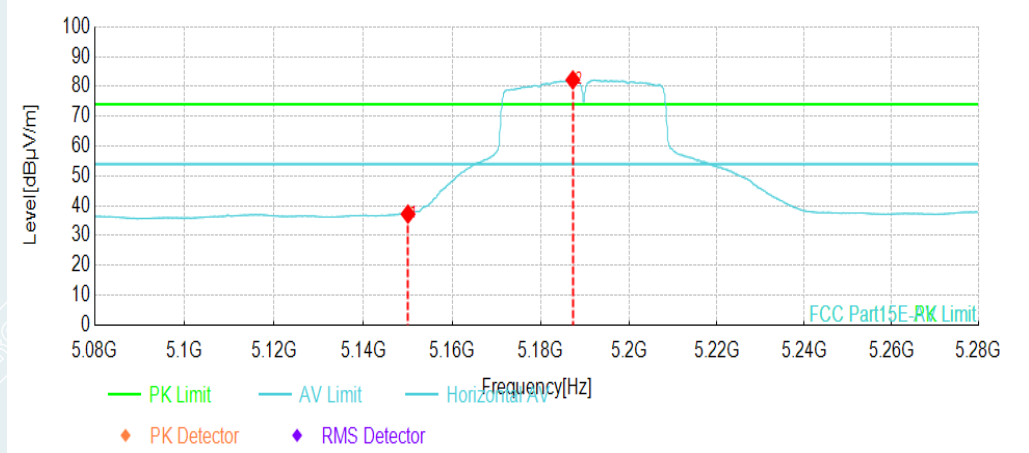

Detector mode: Average

Polarity: Vertical

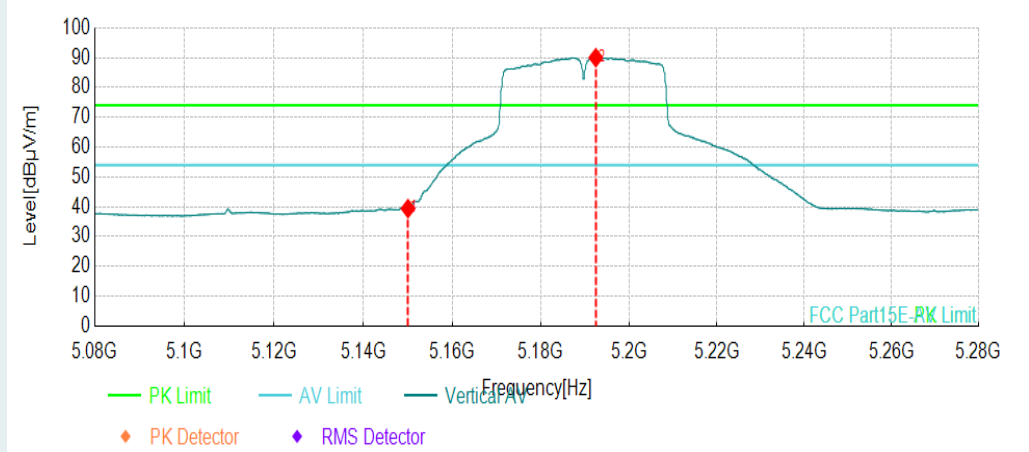


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	23.06	14.14	37.20	54.00	16.80	150	91	Horizontal
2	5187.2536	67.78	14.40	82.18	/	/	150	122	Horizontal
1	5150.035	25.24	14.14	39.38	54.00	14.62	150	358	Vertical
2	5192.4562	75.54	14.44	89.98	/	/	150	2	Vertical

----- The following blanks -----

802.11n HT40 mode/5230MHz MIMO


Detector mode: Peak

Polarity: Horizontal

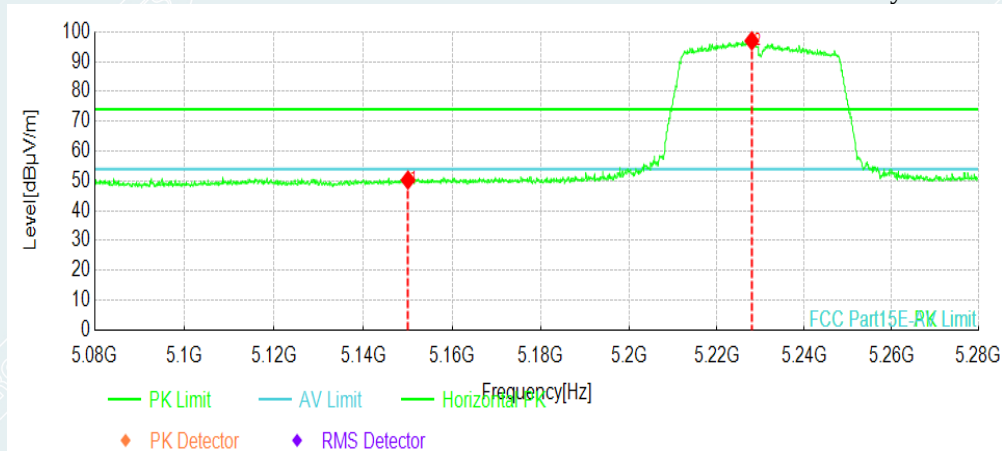

Detector mode: Peak

Polarity: Vertical

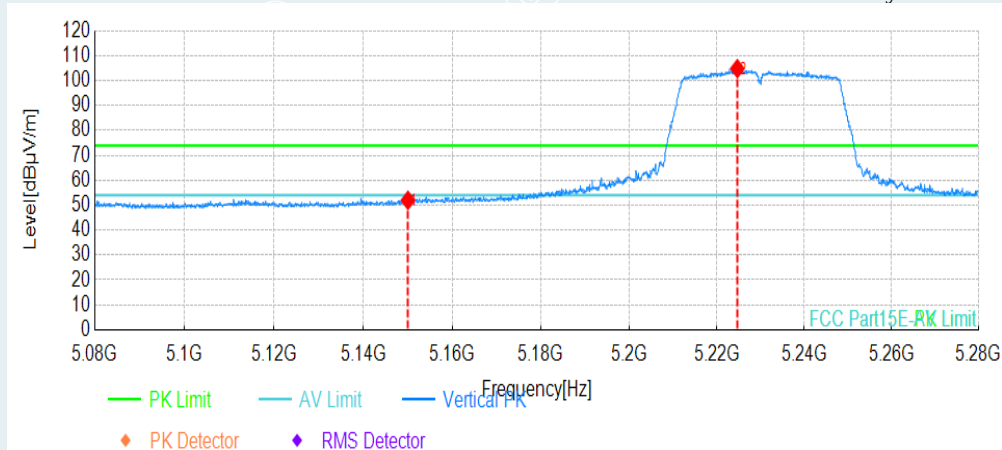


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	36.16	14.14	50.30	74.00	23.70	150	314	Horizontal
2	5227.974	82.30	14.66	96.96	/	/	150	135	Horizontal
1	5150.035	37.84	14.14	51.98	74.00	22.02	150	180	Vertical
2	5224.6723	90.20	14.64	104.84	/	/	150	357	Vertical

----- The following blanks -----

802.11n HT40 mode/5230MHz MIMO


Detector mode: Average

Polarity: Horizontal

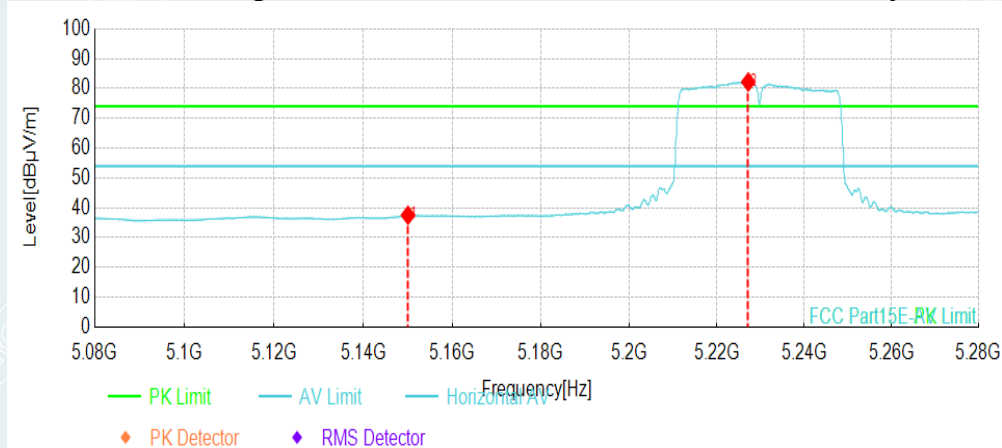

Detector mode: Average

Polarity: Vertical

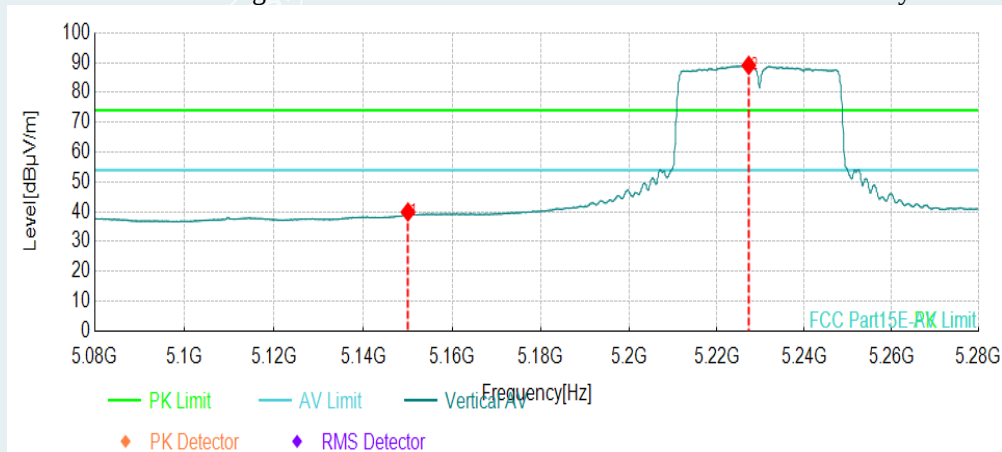

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5150.035	23.37	14.14	37.51	54.00	16.49	150	114	Horizontal
2	5227.1736	67.52	14.65	82.17	/	/	150	126	Horizontal
1	5150.035	25.78	14.14	39.92	54.00	14.08	150	357	Vertical
2	5227.2736	74.40	14.66	89.06	/	/	150	0	Vertical


----- The following blanks -----

802.11 n HT40/5270MHz

Detector mode: Peak

Polarity:


Horizontal

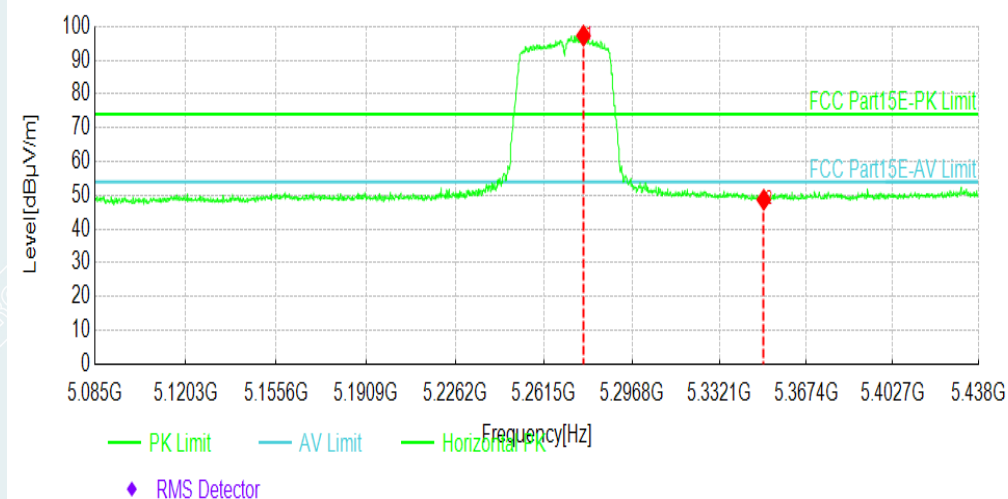

Detector mode: Peak

Polarity:

Vertical

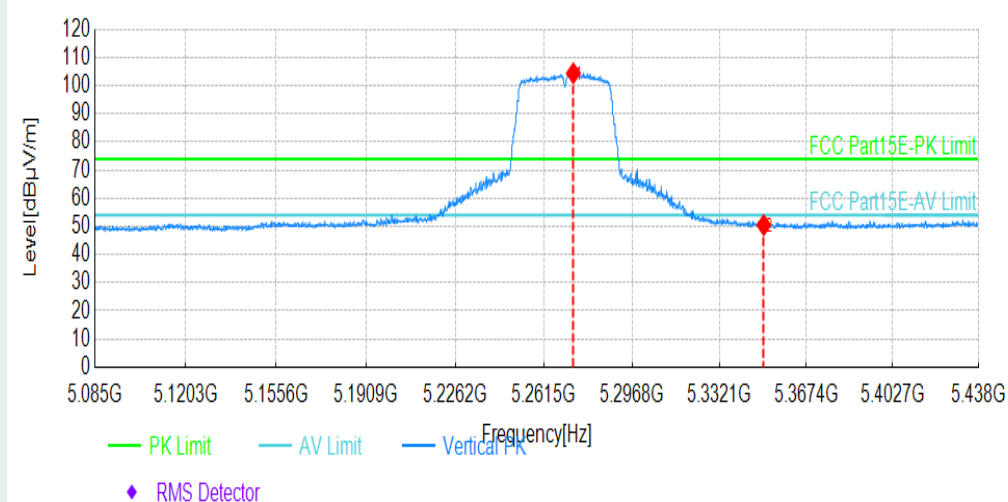


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5277.3047	82.32	14.95	97.27	/	/	150	131	Horizontal
2	5350.059	33.53	15.15	48.68	74.00	25.32	150	15	Horizontal
1	5273.2431	89.51	14.93	104.44	/	/	150	92	Vertical
2	5350.059	35.33	15.15	50.48	74.00	23.52	150	69	Vertical

----- The following blanks -----

802.11 n HT40/5270MHz


Detector mode: Average

Polarity: Horizontal

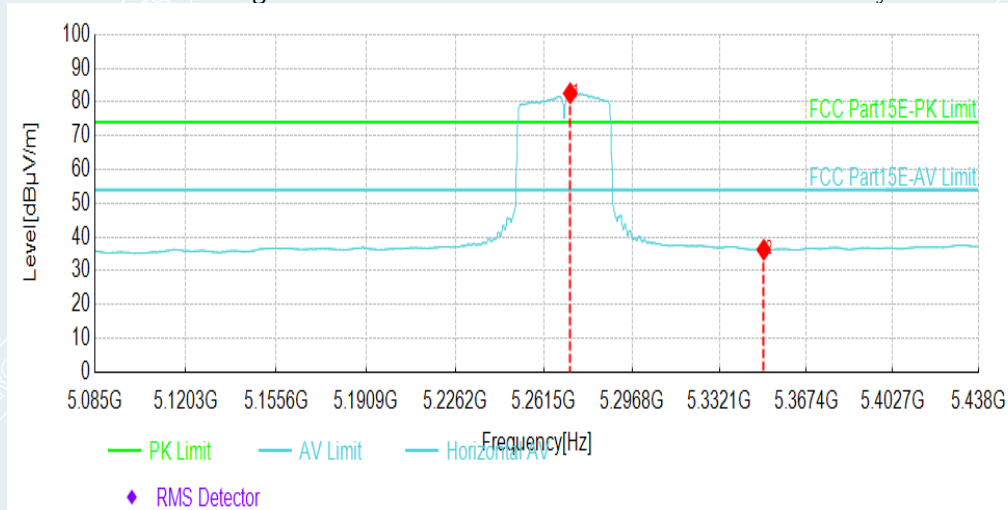

Detector mode: Average

Polarity: Vertical

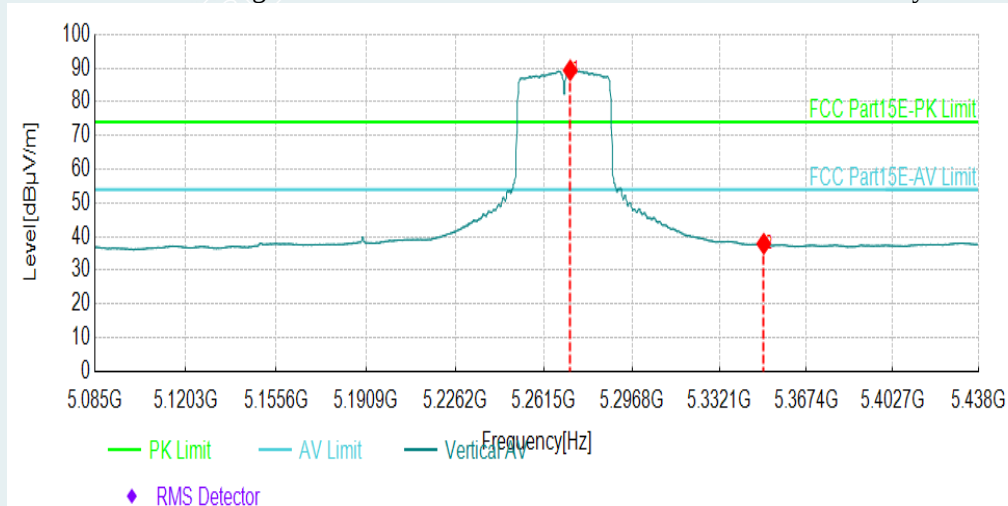


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5272.007	67.66	14.92	82.58	/	/	150	138	Horizontal
2	5350.059	21.10	15.15	36.25	54.00	17.75	150	146	Horizontal
1	5272.007	74.43	14.92	89.35	/	/	150	96	Vertical
2	5350.059	22.72	15.15	37.87	54.00	16.13	150	88	Vertical

----- The following blanks -----

802.11 n HT40/5310MHz


Detector mode: Peak

Polarity: Horizontal

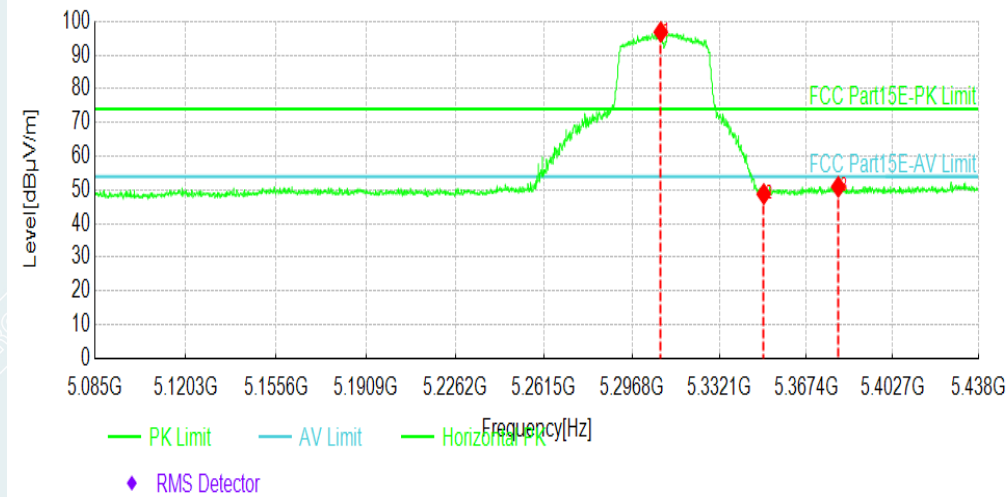

Detector mode: Peak

Polarity: Vertical

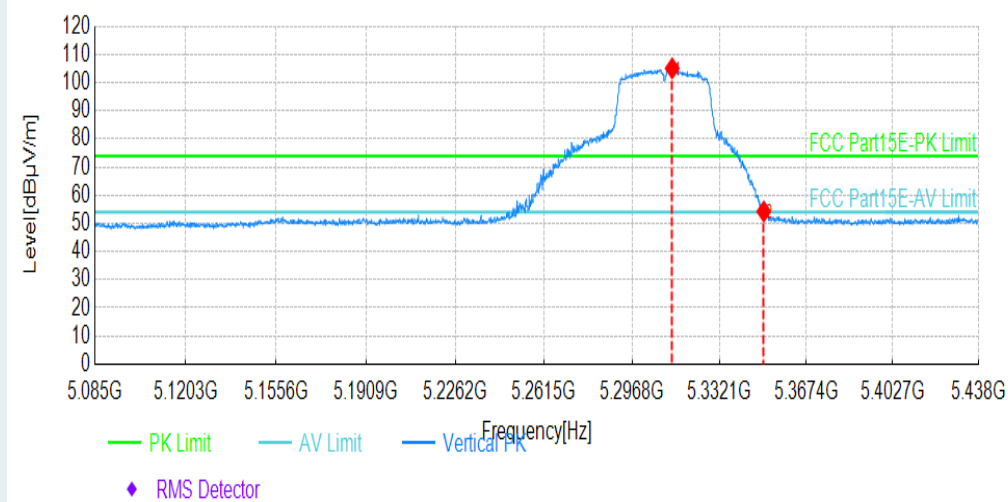


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5308.3842	81.75	15.09	96.84	/	/	150	126	Horizontal
2	5350.059	33.60	15.15	48.75	74.00	25.25	150	99	Horizontal
3	5380.4322	35.72	15.19	50.91	74.00	23.09	150	155	Horizontal
1	5312.9755	90.01	15.10	105.11	/	/	150	357	Vertical
2	5350.059	39.09	15.15	54.24	74.00	19.76	150	192	Vertical

----- The following blanks -----

802.11 n HT40/5310MHz


Detector mode: Average

Polarity: Horizontal

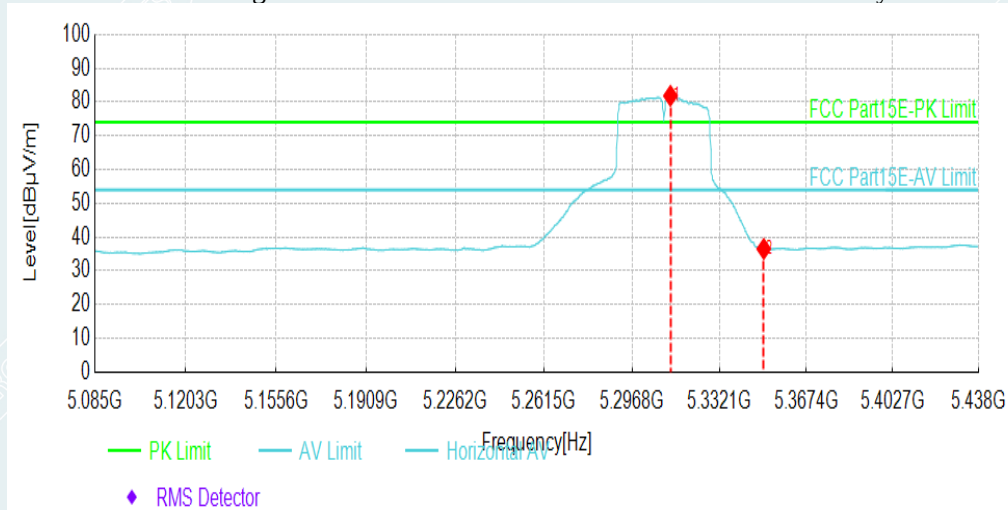

Detector mode: Average

Polarity: Vertical

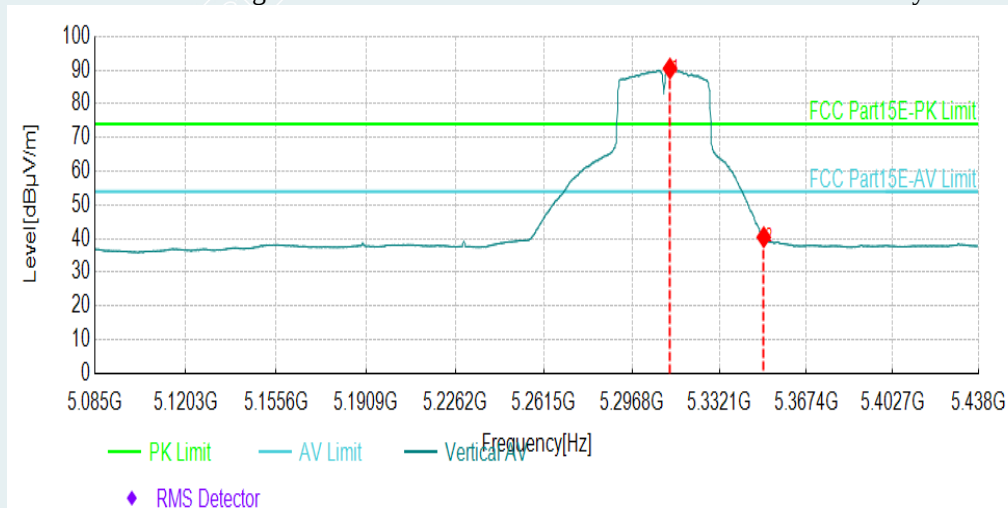


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5312.2691	66.74	15.09	81.83	/	/	150	143	Horizontal
2	5350.059	21.35	15.15	36.50	54.00	17.50	150	147	Horizontal
1	5312.0925	75.38	15.09	90.47	/	/	150	93	Vertical
2	5350.059	25.28	15.15	40.43	54.00	13.57	150	89	Vertical

----- The following blanks -----

802.11 n HT40/5510MHz


Detector mode: Peak

Polarity: Horizontal

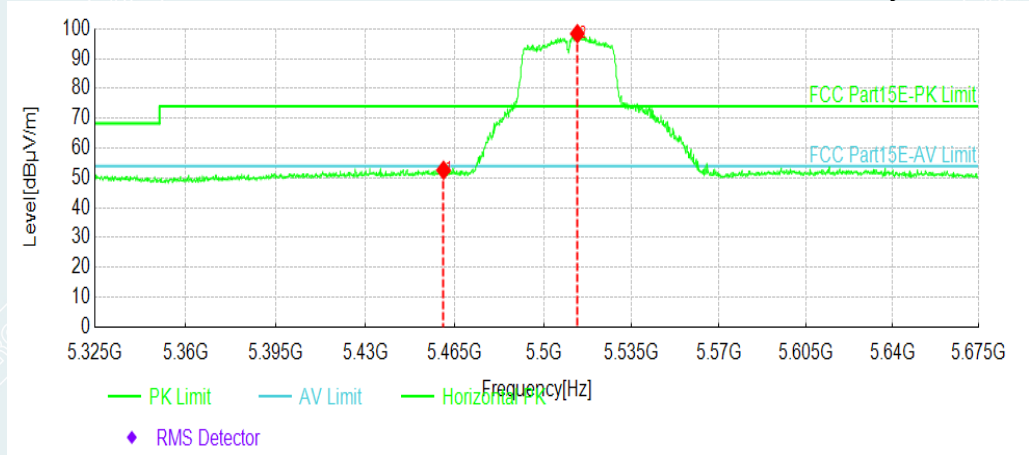

Detector mode: Peak

Polarity: Vertical

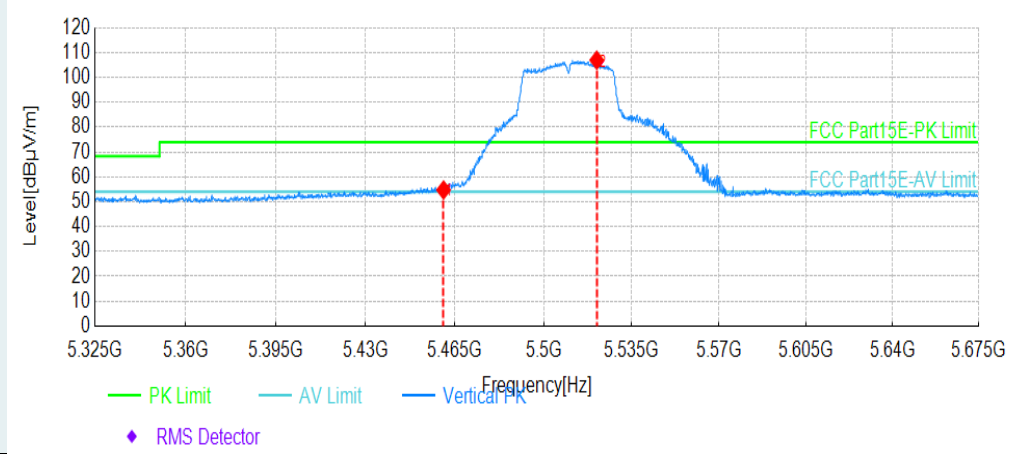

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	5460.5178	36.91	15.68	52.59	74.00	21.41	150	329	Horizontal
2	5513.3942	82.35	16.01	98.36	/	/	150	76	Horizontal
1	5460.5178	39.06	15.68	54.74	74.00	19.26	150	82	Vertical
2	5521.098	90.93	16.03	106.96	/	/	150	98	Vertical

----- The following blanks -----