

# FCC TEST REPORT

Client Name : Shenzhen RadioMaster Technology Co., Ltd  
Address : 5th Flr, Building 9, Mabian Industrial Park, No. 72,  
Xingdong community, Bao'an District, Shenzhen, China  
Product Name : TX8  
Date : Apr. 26, 2020



**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of Channels.....	6
1.6. Description of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	12
4. Radiated Emission and Band Edge.....	13
4.1. Test Standard and Limit.....	13
4.2. Test Setup.....	14
4.3. Test Procedure.....	15
4.4. Test Data.....	16
5. 20dB Bandwidth Test.....	51
5.1. Test Standard and Limit.....	51
5.2. Test Setup.....	51
5.3. Test Procedure.....	51
5.4. Test Data.....	51
6. Antenna Requirement.....	59
6.1. Test Standard and Requirement.....	59
6.2. Antenna Connected Construction.....	59
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	60
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	61
APPENDIX III -- INTERNAL PHOTOGRAPH.....	64



# TEST REPORT

Applicant : Shenzhen RadioMaster Technology Co., Ltd  
Manufacturer : Shenzhen RadioMaster Technology Co., Ltd  
Product Name : TX8  
Model No. : TX8  
Trade Mark : Radiomaster  
Rating(s) : Input: DC 8.4V

**Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.249**

**Test Method(s) : ANSI C63.10: 2013**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Apr. 08, 2020

Date of Test

Apr. 08~23, 2020

Prepared by

*Dolly mo*

---

(Engineer / Dolly Mo)

Reviewer

*Bibo Zhang*

---

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

*Tom Chen*

---

(Manager / Tom Chen)



## 1. General Information

### 1.1. Client Information

Applicant	:	Shenzhen RadioMaster Technology Co., Ltd
Address	:	5th Flr, Building 9, Mabian Industrial Park, No. 72, Xingdong community, Bao'an District, Shenzhen, China
Manufacturer	:	Shenzhen RadioMaster Technology Co., Ltd
Address	:	5th Flr, Building 9, Mabian Industrial Park, No. 72, Xingdong community, Bao'an District, Shenzhen, China
Factory	:	Shenzhen RadioMaster Technology Co., Ltd
Address	:	5th Flr, Building 9, Mabian Industrial Park, No. 72, Xingdong community, Bao'an District, Shenzhen, China

### 1.2. Description of Device (EUT)

Product Name	:	TX8	
Model No.	:	TX8	
Trade Mark	:	Radiomaster	
Test Power Supply	:	DC 8.4V battery inside	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	2416~2466MHz
	:	Number of Channel:	47Channels
	:	Modulation Type:	DSSS
	:	Antenna Type:	Cylindrical Antenna
	:	Antenna Gain(Peak):	2 dBi

**Remark:** 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

### 1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	CH01
Mode 2	CH24
Mode 3	CH47

For Radiated Emission	
Final Test Mode	Description
Mode 1	CH01
Mode 2	CH24
Mode 3	CH47

Note:


1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.

**1.5. List of Channels**

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
01	2416	02	2418	03	2419	04	2421
05	2422	06	2423	07	2424	08	2425
09	2426	10	2427	11	2428	12	2429
13	2430	14	2431	15	2432	16	2433
17	2434	18	2435	19	2436	20	2437
21	2438	22	2439	23	2440	24	2441
25	2442	26	2443	27	2444	28	2445
29	2446	30	2447	31	2448	32	2449
33	2450	34	2451	35	2452	36	2453
37	2454	38	2455	39	2456	40	2457
41	2458	42	2459	43	2460	44	2461
45	2462	46	2463	47	2466	/	/



## 1.6. Description of Test Setup

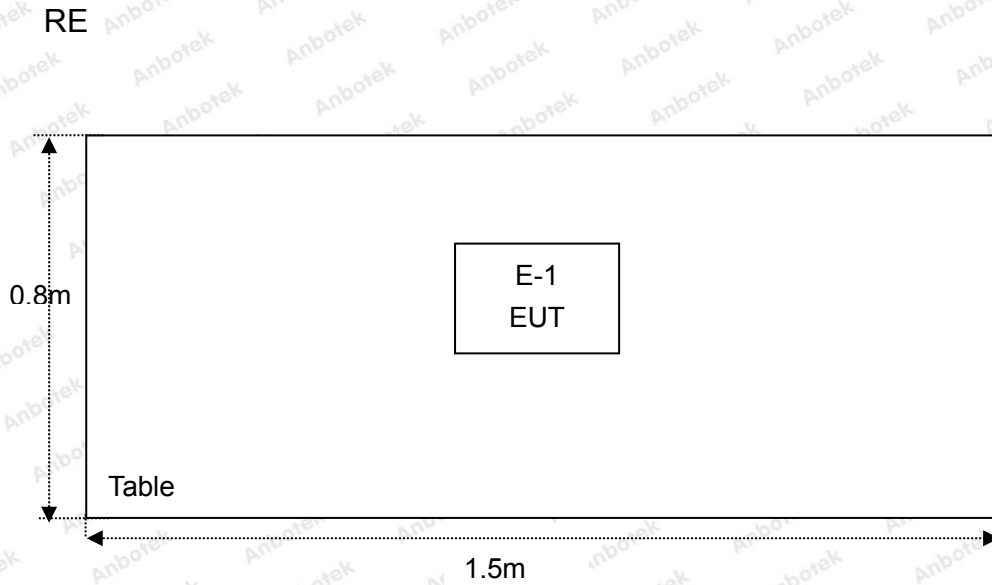

## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 04, 2019	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 04, 2019	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 04, 2019	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 04, 2019	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 01, 2019	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 01, 2019	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 01, 2019	1 Year
9.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 01, 2019	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Nov. 04, 2019	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 04, 2019	1 Year
13.	Power Sensor	DAER	RPR3006W	15100041SN045	Nov. 04, 2019	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN046	Nov. 04, 2019	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 04, 2019	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 04, 2019	1 Year
18.	DC Power Supply	LW	TPR-6420D	374470	Nov. 04, 2019	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 04, 2019	1 Year



## 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 27, 2019.

### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, March 07, 2019.

### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	N/A
15.249	Radiated Emission	PASS
15.215(c)	20dB Bandwidth	PASS
15.249(c)	Band Edge	PASS

**Remark:** "N/A" is an abbreviation for Not Applicable.




## 3. Conducted Emission Test

### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

**Remark:** (1) \*Decreasing linearly with logarithm of the frequency.  
 (2) The lower limit shall apply at the transition frequency.

### 3.2. Test Setup

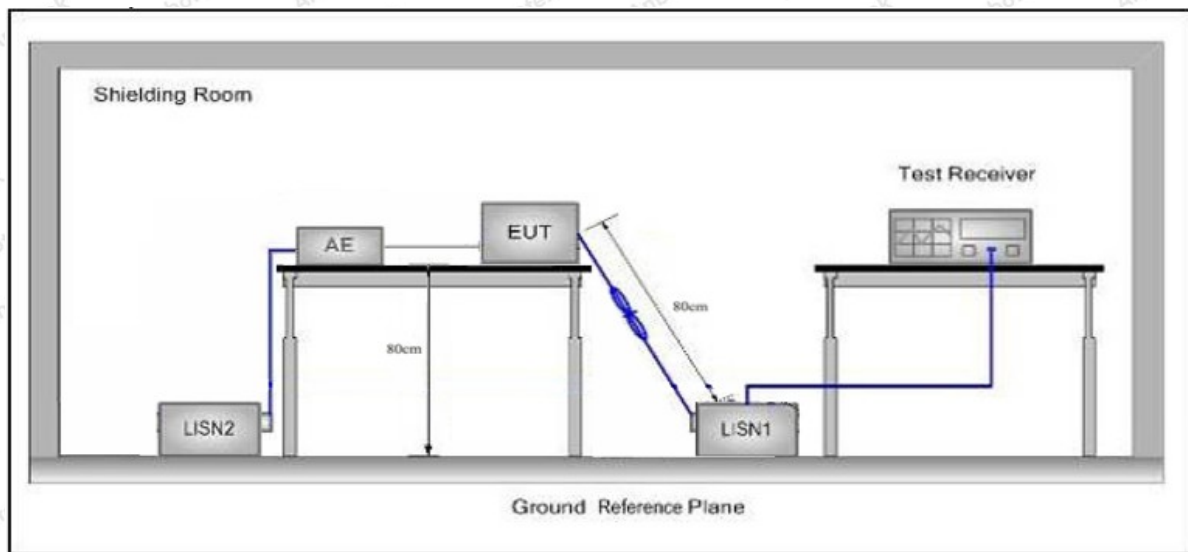

### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.



### 3.4. Test Data

The EUT is powered by DC 8.4V battery inside, so there is no need to conduct this test.

## 4. Radiated Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Test Standard	FCC Part15 C Section 15.249					
Test Limit	Frequency (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	2400~2483.5	50	-	114.0	Peak	3
	2400~2483.5	50	-	94.0	Average	3
	2400~2483.5	-	500	74.0	Peak	3
	2400~2483.5	-	500	54.0	Average	3

**Remark:**

(1) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

## 4.2. Test Setup

Figure 1. Below 30MHz

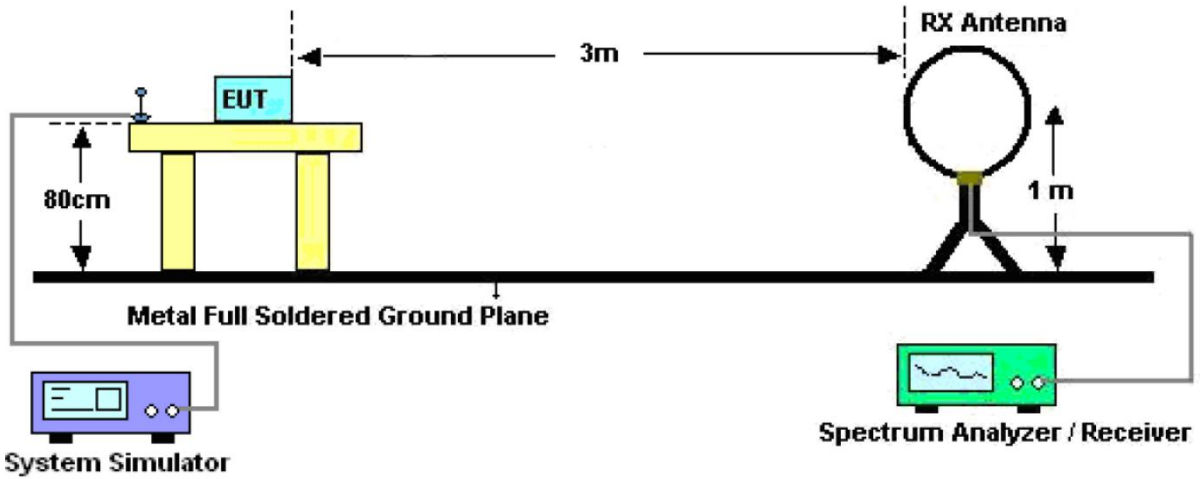


Figure 2. 30MHz to 1GHz


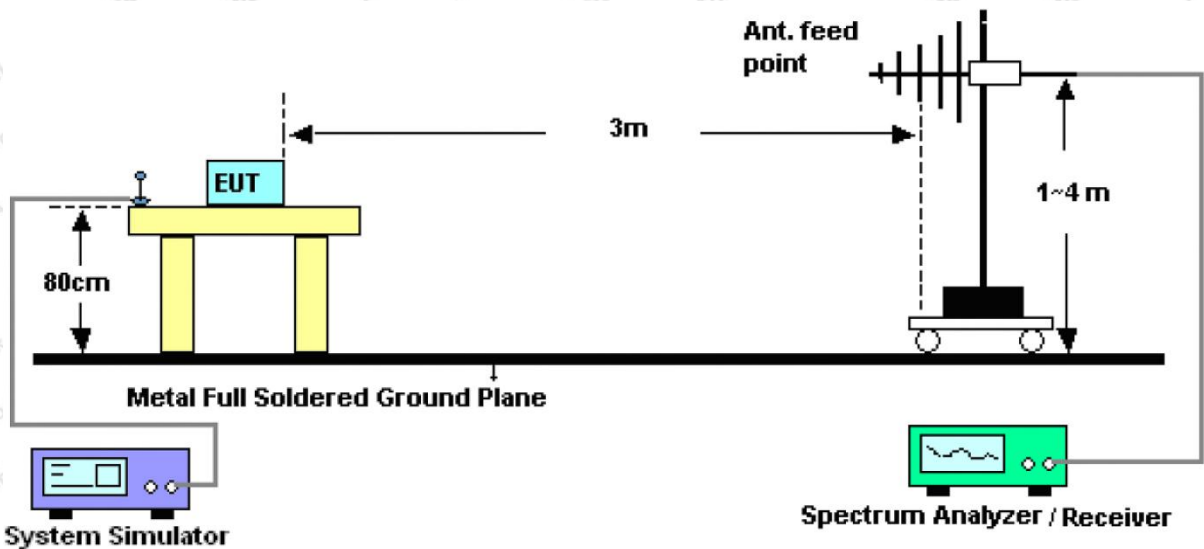


Figure 3. Above 1 GHz



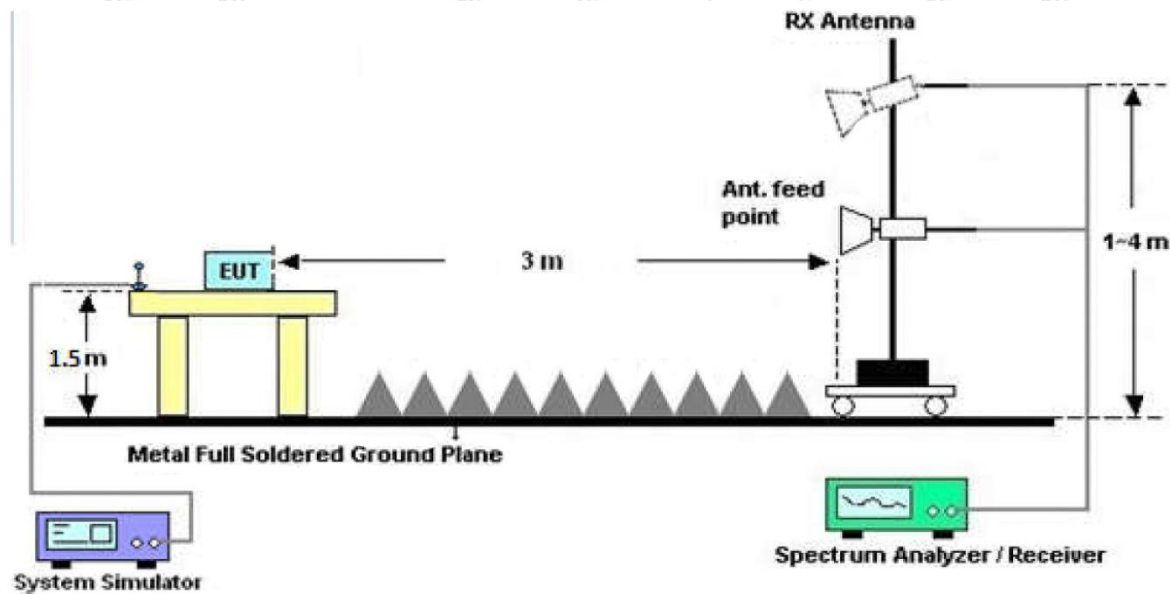

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector = Quasi-Peak, Trace mode = Max hold, Sweep = auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector = Peak, Trace mode = Max hold, Sweep = auto couple.

RBW = 1MHz, VBW = 10Hz, Detector = Average, Trace mode = Max hold, Sweep = auto couple.

#### 4.4. Test Data

##### PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all the modes, and found the Middle channel which is the worst case, only the worst case is recorded in the report

Module 1

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 2  
 Test Specification: DC 8.4V battery inside  
 Comment: Live Line  
 Tem.: 25.6°C Hum.: 51%

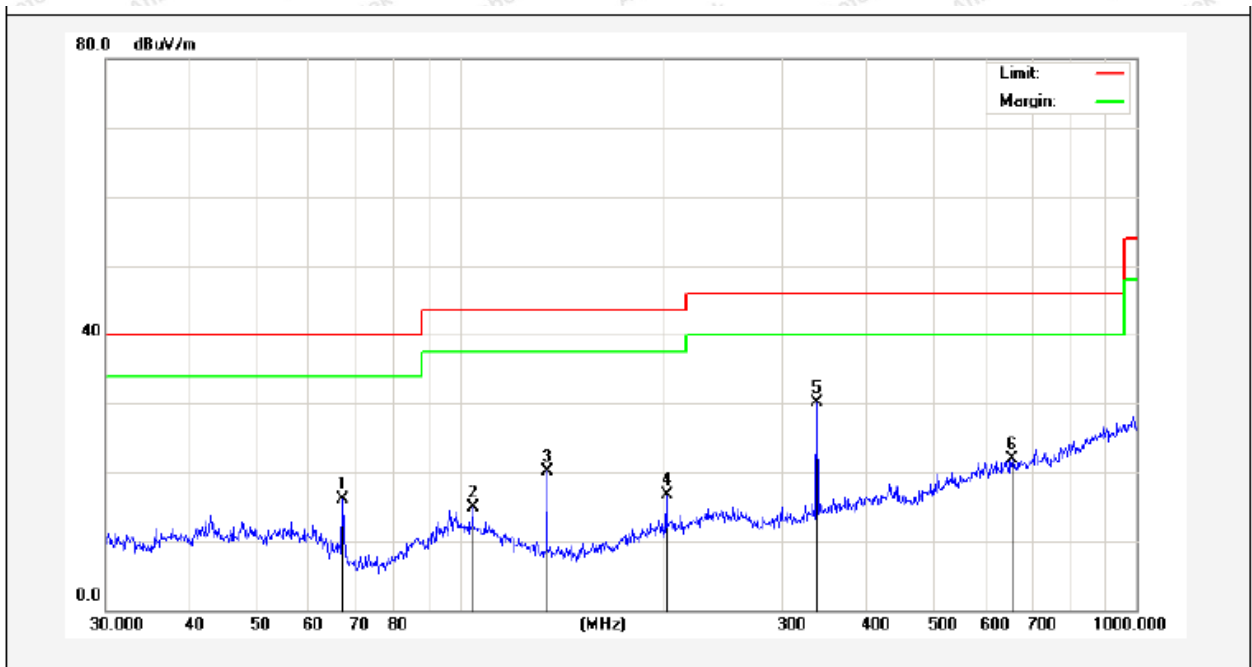


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	67.2022	37.50	-21.30	16.20	40.00	-23.80	QP	100	0	
2	104.5361	37.73	-22.89	14.84	43.50	-28.66	QP	100	360	
3	134.5592	45.26	-25.23	20.03	43.50	-23.47	QP	100	0	
4	202.1005	38.85	-22.08	16.77	43.50	-26.73	QP	100	360	
5	337.2155	46.77	-16.60	30.17	46.00	-15.83	QP	100	0	
6	654.2318	33.30	-11.42	21.88	46.00	-24.12	QP	100	360	



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 2  
 Test Specification: DC 8.4V battery inside  
 Comment: Neutral Line  
 Tem.: 25.6°C Hum.: 51%

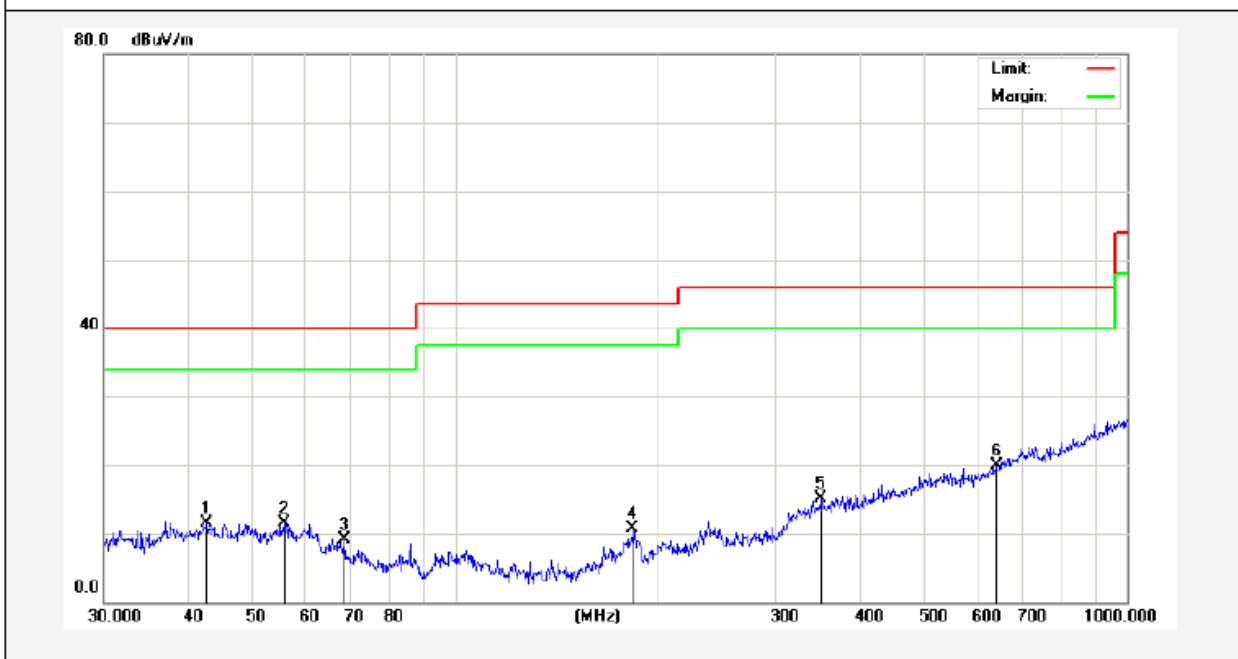


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.7496	28.37	-16.79	11.58	40.00	-28.42	QP	100	0	
2	55.6094	28.70	-17.24	11.46	40.00	-28.54	QP	100	360	
3	68.3908	29.96	-20.79	9.17	40.00	-30.83	QP	100	0	
4	183.8440	29.40	-18.78	10.62	43.50	-32.88	QP	100	360	
5	350.4768	30.25	-15.19	15.06	46.00	-30.94	QP	100	0	
6	638.3686	30.47	-10.60	19.87	46.00	-26.13	QP	100	360	

Module 2

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 2  
 Test Specification: DC 8.4V battery inside  
 Comment: Live Line  
 Tem.: 25.6°C Hum.: 51%

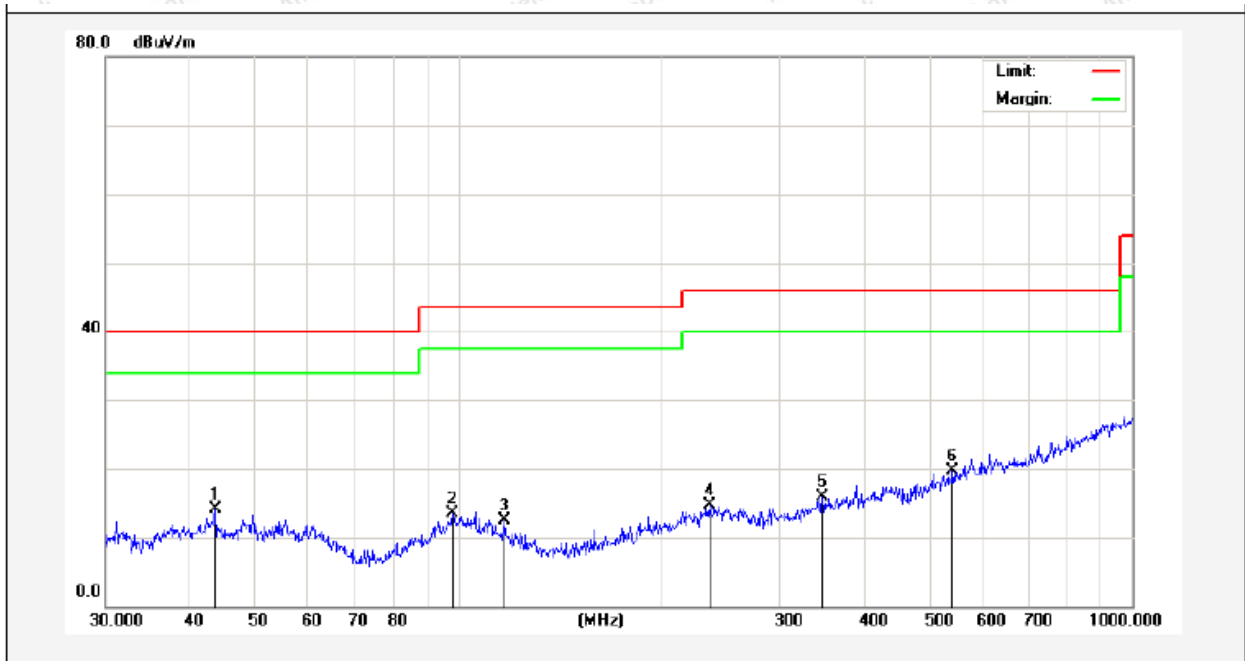

No.	Freq. (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	43.6584	31.90	-17.79	14.11	40.00	-25.89	QP	100	0	
2	98.1419	36.18	-22.66	13.52	43.50	-29.98	QP	100	360	
3	117.3603	37.14	-24.55	12.59	43.50	-30.91	QP	100	0	
4	235.8164	35.27	-20.63	14.64	46.00	-31.36	QP	100	360	
5	346.8092	32.10	-16.28	15.82	46.00	-30.18	QP	100	0	
6	541.3725	32.73	-12.98	19.75	46.00	-26.25	QP	100	360	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 2  
 Test Specification: DC 8.4V battery inside  
 Comment: Neutral Line  
 Tem.: 25.6°C Hum.: 51%

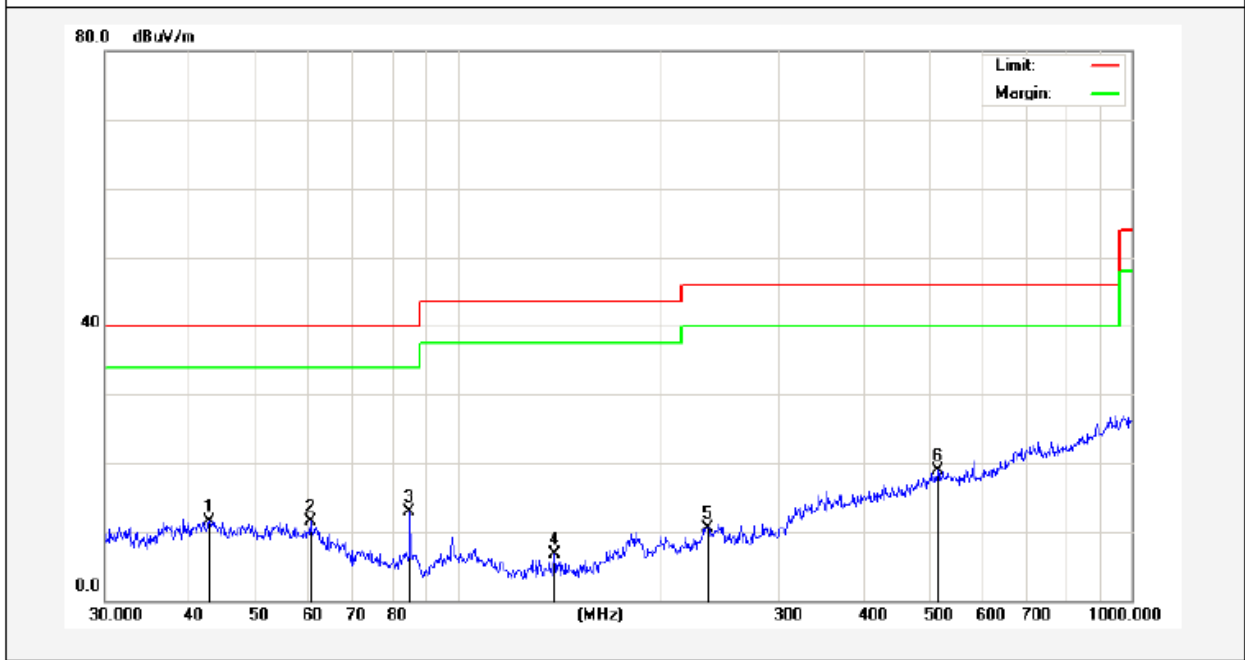


No.	Freq. (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.8998	28.28	-16.79	11.49	40.00	-28.51	QP	100	0	
2	60.4919	29.18	-17.63	11.55	40.00	-28.45	QP	100	360	
3	84.9995	32.34	-19.53	12.81	40.00	-27.19	QP	1001	0	
4	139.3613	27.71	-21.03	6.68	43.50	-36.82	QP	100	360	
5	234.9909	27.06	-16.46	10.60	46.00	-35.40	QP	100	0	
6	515.4374	31.59	-12.72	18.87	46.00	-27.13	QP	100	360	



Module 3

**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: Mode 2  
 Test Specification: DC 8.4V battery inside  
 Comment: Live Line  
 Tem.: 25.6°C Hum.: 51%

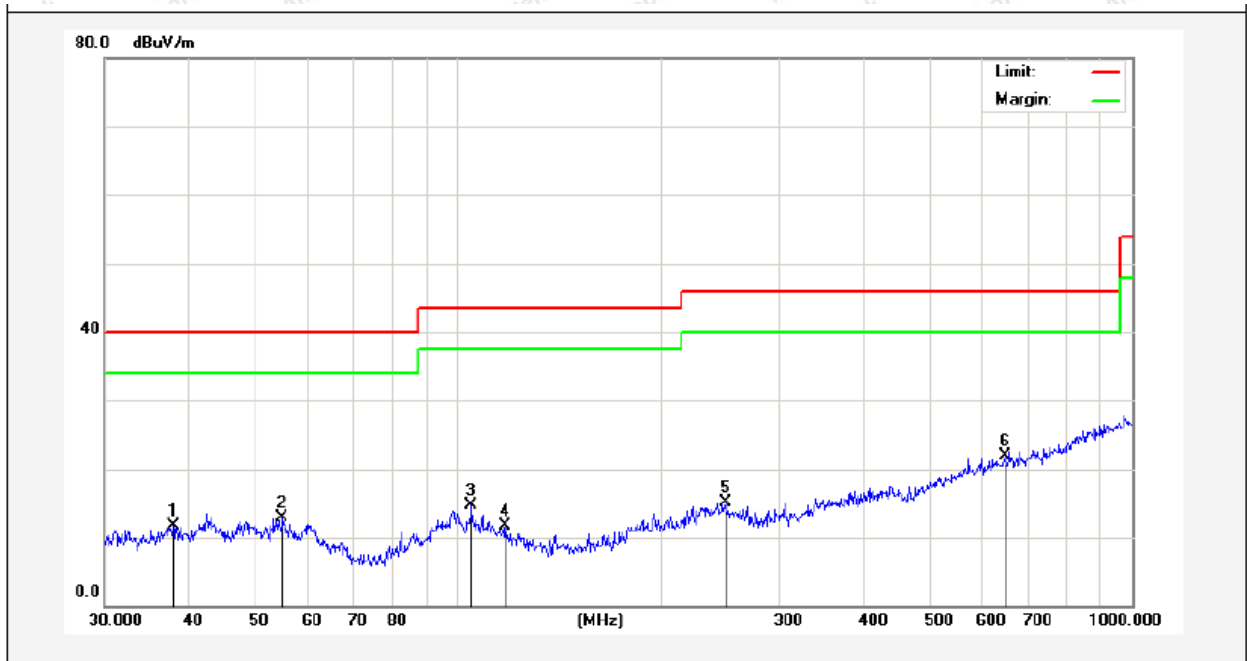

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.9450	30.09	-18.35	11.74	40.00	-28.26	QP	100	0	
2	55.0274	31.03	-18.22	12.81	40.00	-27.19	QP	100	360	
3	104.9033	37.56	-22.93	14.63	43.50	-28.87	QP	100	0	
4	117.7725	36.26	-24.63	11.63	43.50	-31.87	QP	100	360	
5	249.4250	35.73	-20.60	15.13	46.00	-30.87	QP	100	0	
6	647.3856	33.57	-11.60	21.97	46.00	-24.03	QP	100	360	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 2  
 Test Specification: DC 8.4V battery inside  
 Comment: Neutral Line  
 Tem.: 25.6°C Hum.: 51%

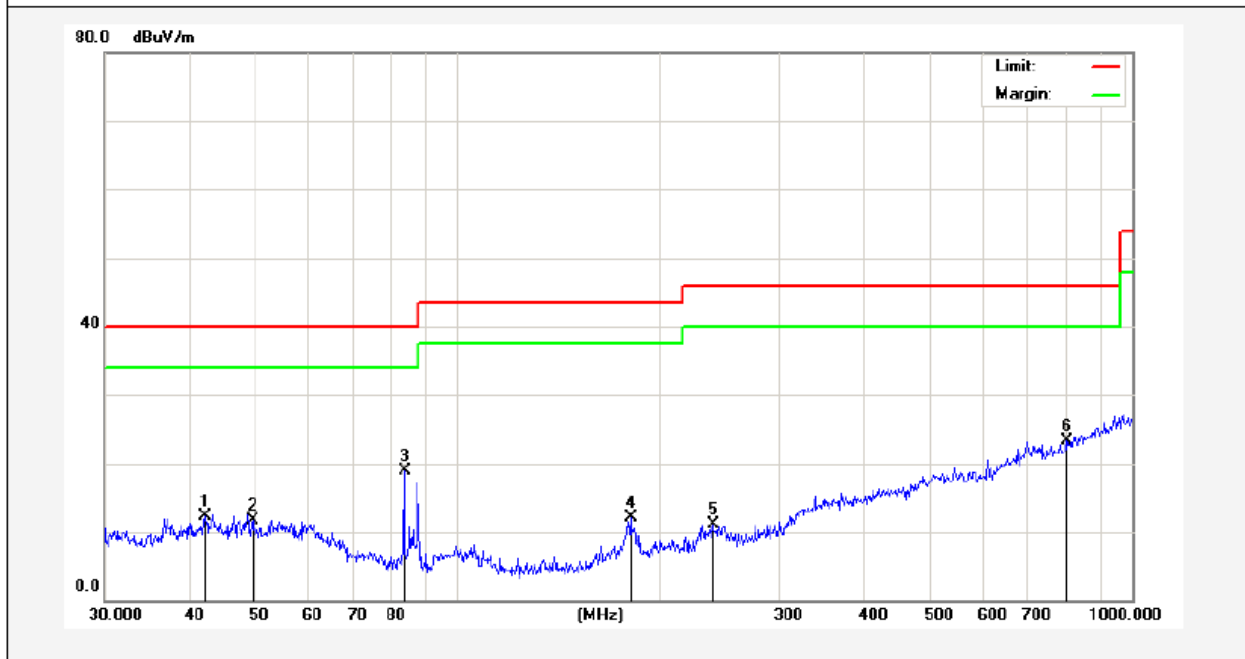


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.3021	29.04	-16.78	12.26	40.00	-27.74	QP	100	0	
2	49.7068	28.84	-17.08	11.76	40.00	-28.24	QP	100	360	
3	83.5221	39.05	-20.09	18.96	40.00	-21.04	QP	100	0	
4	180.6487	31.26	-19.10	12.16	43.50	-31.34	QP	100	360	
5	239.1473	27.37	-16.24	11.13	46.00	-34.87	QP	100	0	
6	798.9796	30.89	-7.55	23.34	46.00	-22.66	QP	100	360	

Module 4

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 2  
 Test Specification: DC 8.4V battery inside  
 Comment: Live Line  
 Tem.: 25.6°C Hum.: 51%

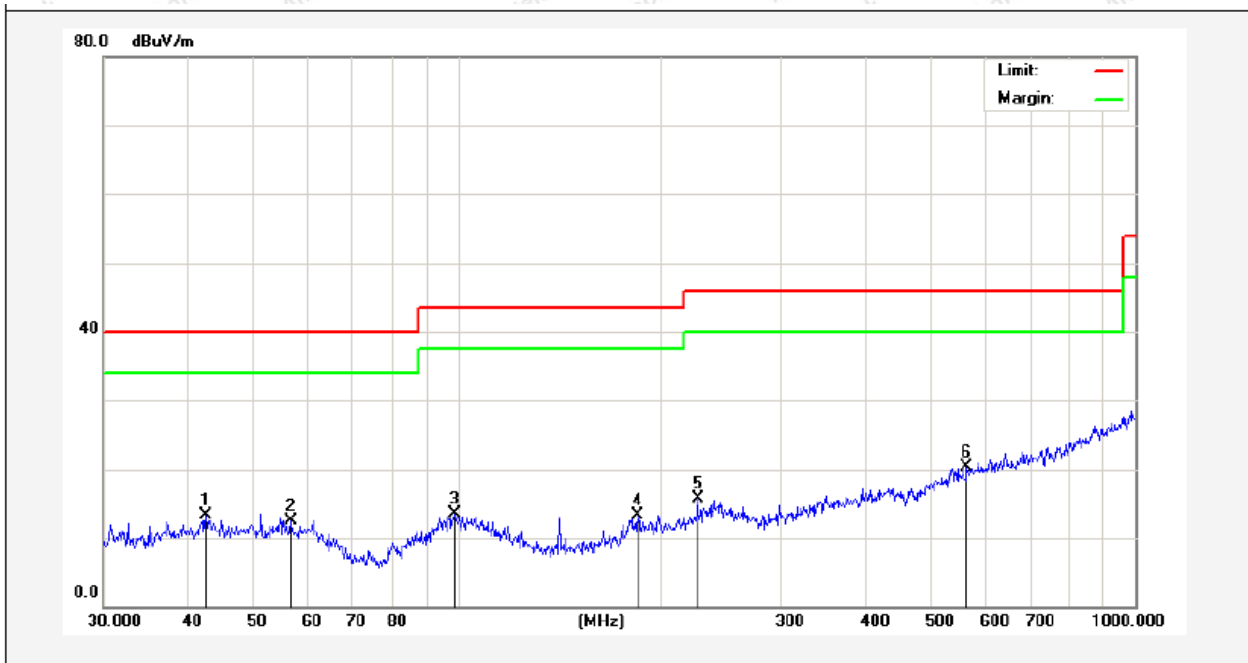


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.4508	31.08	-17.78	13.30	40.00	-26.70	QP	100	0	
2	56.7917	30.89	-18.30	12.59	40.00	-27.41	QP	100	360	
3	99.1797	36.11	-22.59	13.52	43.50	-29.98	QP	100	0	
4	184.4898	36.52	-23.16	13.36	43.50	-30.14	QP	100	360	
5	226.0994	37.28	-21.62	15.66	46.00	-30.34	QP	100	0	
6	564.6389	33.32	-12.93	20.39	46.00	-25.61	QP	100	360	



### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 2  
 Test Specification: DC 8.4V battery inside  
 Comment: Neutral Line  
 Tem.: 25.6°C Hum.: 51%

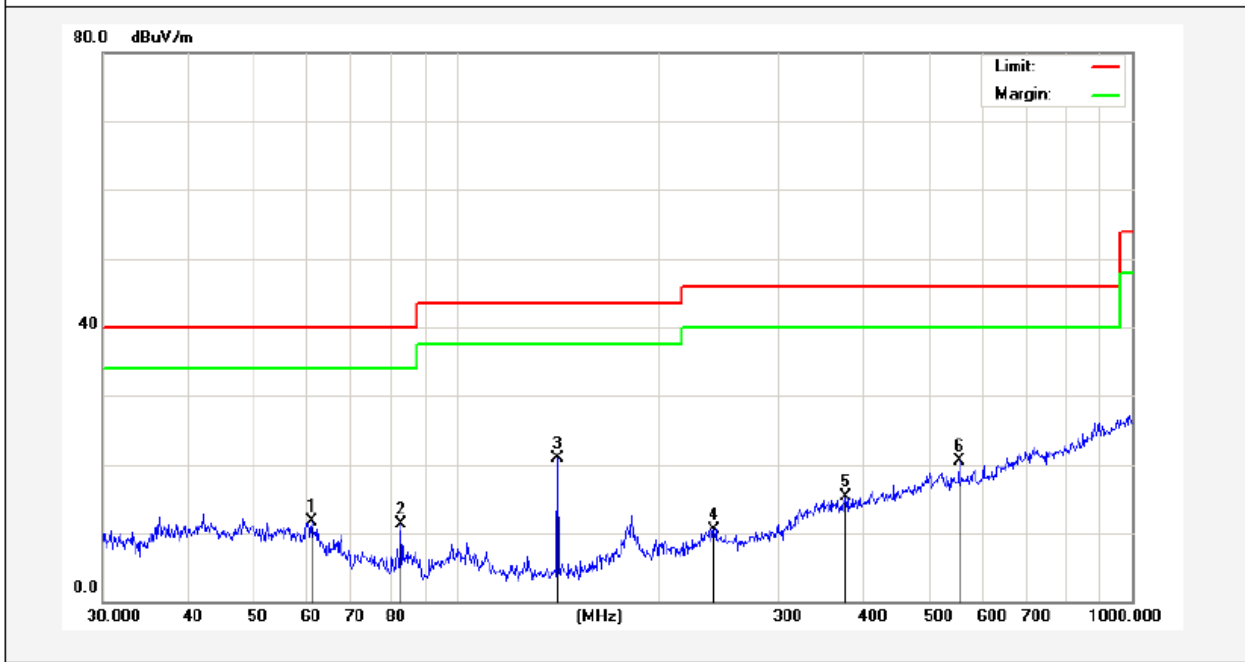

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	61.1316	29.63	-17.88	11.75	40.00	-28.25	QP	100	0	
2	82.9385	31.59	-20.30	11.29	40.00	-28.71	QP	100	360	
3	141.3298	41.97	-21.05	20.92	43.50	-22.58	QP	100	0	
4	240.8304	26.75	-16.19	10.56	46.00	-35.44	QP	100	360	
5	377.2591	29.95	-14.65	15.30	46.00	-30.70	QP	100	0	
6	554.8254	32.43	-11.85	20.58	46.00	-25.42	QP	100	360	

Module 1

**Test Results (1GHz-25GHz)**

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2416.0000	94.11	31.21	2.17	35.30	92.19	114.00	-21.81	V	Peak
2416.0000	83.52	31.21	2.17	35.30	81.60	94.00	-12.40	V	AVG
4832.0000	49.63	34.01	2.56	34.71	51.49	74.00	-22.51	V	Peak
4832.0000	40.23	34.01	2.56	34.71	42.09	54.00	-11.91	V	AVG
7248.0000	43.14	36.16	2.98	35.15	47.13	74.00	-26.87	V	Peak
7248.0000	33.67	36.16	2.98	35.15	37.66	54.00	-16.34	V	AVG
9664.0000	*								
12080.0000	*								
14496.0000	*								
16912.0000	*								
2416.0000	94.39	31.21	2.17	35.30	92.47	114.00	-21.53	H	Peak
2416.0000	80.10	31.21	2.17	35.30	78.18	94.00	-15.82	H	AVG
4832.0000	45.99	34.01	2.56	34.71	47.85	74.00	-26.15	H	Peak
4832.0000	40.12	34.01	2.56	34.71	41.98	54.00	-12.02	H	AVG
7248.0000	42.28	36.16	2.98	35.15	46.27	74.00	-27.73	H	Peak
7248.0000	33.60	36.16	2.98	35.15	37.59	54.00	-16.41	H	AVG
9664.0000	*								
12080.0000	*								
14496.0000	*								
16912.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH24(Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2441.0000	93.10	31.10	2.11	34.43	91.88	114.00	-22.12	V	Peak
2441.0000	80.39	31.10	2.11	34.43	79.17	94.00	-14.83	V	AVG
4882.0000	46.25	34.87	2.47	34.11	49.48	74.00	-24.52	V	Peak
4882.0000	41.10	34.87	2.47	34.11	44.33	54.00	-9.67	V	AVG
7323.0000	40.71	35.81	3.01	34.54	44.99	74.00	-29.01	V	Peak
7323.0000	35.10	35.81	3.01	34.54	39.38	54.00	-14.62	V	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								
2441.0000	92.25	31.10	2.11	34.43	91.03	114.00	-22.97	H	Peak
2441.0000	76.36	31.10	2.11	34.43	75.14	94.00	-18.86	H	AVG
4882.0000	44.17	34.87	2.47	34.11	47.40	74.00	-26.60	H	Peak
4882.0000	41.92	34.87	2.47	34.11	45.15	54.00	-8.85	H	AVG
7323.0000	44.41	35.81	3.01	34.54	48.69	74.00	-25.31	H	Peak
7323.0000	35.25	35.81	3.01	34.54	39.53	54.00	-14.47	H	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								

**Note:**

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Test Mode: CH47 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2466.0000	92.10	31.64	2.18	35.89	90.03	114.00	-23.97	V	Peak
2466.0000	85.14	31.64	2.18	35.89	83.07	94.00	-10.93	V	AVG
4932.0000	53.39	35.10	2.52	34.87	56.14	74.00	-17.86	V	Peak
4932.0000	42.24	35.10	2.52	34.87	44.99	54.00	-9.01	V	AVG
7398.0000	43.10	36.18	3.18	34.96	47.50	74.00	-26.50	V	Peak
7398.0000	35.51	36.18	3.18	34.96	39.91	54.00	-14.09	V	AVG
9864.0000	*								
12330.0000	*								
14796.0000	*								
17262.0000	*								
2466.0000	94.66	31.64	2.18	35.89	92.59	114.00	-21.41	H	Peak
2466.0000	76.28	31.64	2.18	35.89	74.21	94.00	-19.79	H	AVG
4932.0000	48.10	35.10	2.52	34.87	50.85	74.00	-23.15	H	Peak
4932.0000	42.96	35.10	2.52	34.87	45.71	54.00	-8.29	H	AVG
7398.0000	44.57	36.18	3.18	34.96	48.97	74.00	-25.03	H	Peak
7398.0000	35.10	36.18	3.18	34.96	39.50	54.00	-14.50	H	AVG
9864.0000	*								
12330.0000	*								
14796.0000	*								
17262.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Module 2

**Test Results (1GHz-25GHz)**

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2416.0000	93.82	31.12	2.18	35.33	91.79	114.00	-22.21	V	Peak
2416.0000	84.83	31.12	2.18	35.33	82.80	94.00	-11.20	V	AVG
4832.0000	47.09	34.01	2.58	34.65	49.03	74.00	-24.97	V	Peak
4832.0000	38.28	34.01	2.58	34.65	40.22	54.00	-13.78	V	AVG
7248.0000	48.92	36.16	2.97	35.07	52.98	74.00	-21.02	V	Peak
7248.0000	35.38	36.16	2.97	35.07	39.44	54.00	-14.56	V	AVG
9664.0000	*								
12080.0000	*								
14496.0000	*								
16912.0000	*								
2416.0000	94.96	31.12	2.18	35.33	92.93	114.00	-21.07	H	Peak
2416.0000	84.06	31.12	2.18	35.33	82.03	94.00	-11.97	H	AVG
4832.0000	47.45	34.01	2.58	34.65	49.39	74.00	-24.61	H	Peak
4832.0000	39.52	34.01	2.58	34.65	41.46	54.00	-12.54	H	AVG
7248.0000	45.93	36.16	2.97	35.07	49.99	74.00	-24.01	H	Peak
7248.0000	35.12	36.16	2.97	35.07	39.18	54.00	-14.82	H	AVG
9664.0000	*								
12080.0000	*								
14496.0000	*								
16912.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH24(Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2441.0000	94.75	31.12	2.20	34.51	93.56	114.00	-20.44	V	Peak
2441.0000	83.88	31.22	2.20	34.51	82.79	94.00	-11.21	V	AVG
4882.0000	50.23	34.98	2.49	34.14	53.56	74.00	-20.44	V	Peak
4882.0000	40.60	34.98	2.49	34.14	43.93	54.00	-10.07	V	AVG
7323.0000	45.93	36.01	3.01	34.56	50.39	74.00	-23.61	V	Peak
7323.0000	36.66	36.01	3.01	34.56	41.12	54.00	-12.88	V	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								
2441.0000	96.75	31.12	2.20	34.51	95.56	114.00	-18.44	H	Peak
2441.0000	83.78	31.12	2.20	34.51	82.59	94.00	-11.41	H	AVG
4882.0000	47.56	34.98	2.49	34.14	50.89	74.00	-23.11	H	Peak
4882.0000	39.76	34.98	2.49	34.14	43.09	54.00	-10.91	H	AVG
7323.0000	48.17	36.01	3.01	34.56	52.63	74.00	-21.37	H	Peak
7323.0000	35.34	36.01	3.01	34.56	39.80	54.00	-14.20	H	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Test Mode: CH47 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2466.0000	96.39	31.65	2.23	36.07	94.20	114.00	-19.80	V	Peak
2466.0000	83.28	31.65	2.23	36.07	81.09	94.00	-12.91	V	AVG
4932.0000	48.62	35.06	2.60	34.93	51.35	74.00	-22.65	V	Peak
4932.0000	39.06	35.06	2.60	34.93	41.79	54.00	-12.21	V	AVG
7398.0000	47.44	36.19	3.12	35.11	51.64	74.00	-22.36	V	Peak
7398.0000	37.77	36.19	3.12	35.11	41.97	54.00	-12.03	V	AVG
9864.0000	*								
12330.0000	*								
14796.0000	*								
17262.0000	*								
2466.0000	95.53	31.65	2.23	36.07	93.34	114.00	-20.66	H	Peak
2466.0000	83.89	31.65	2.23	36.07	81.70	94.00	-12.30	H	AVG
4932.0000	50.96	35.06	2.60	34.93	53.69	74.00	-20.31	H	Peak
4932.0000	41.50	35.06	2.60	34.93	44.23	54.00	-9.77	H	AVG
7398.0000	47.77	36.19	3.12	35.11	51.97	74.00	-22.03	H	Peak
7398.0000	35.26	36.19	3.12	35.11	39.46	54.00	-14.54	H	AVG
9864.0000	*								
12330.0000	*								
14796.0000	*								
17262.0000	*								

**Note:**

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Module 3

**Test Results (1GHz-25GHz)**

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2416.0000	96.75	31.12	2.18	35.33	94.72	114.00	-19.28	V	Peak
2416.0000	83.51	31.12	2.18	35.33	81.48	94.00	-12.52	V	AVG
4832.0000	50.31	34.01	2.58	34.65	52.25	74.00	-21.75	V	Peak
4832.0000	40.23	34.01	2.58	34.65	42.17	54.00	-11.83	V	AVG
7248.0000	48.82	36.16	2.97	35.07	52.88	74.00	-21.12	V	Peak
7248.0000	36.22	36.16	2.97	35.07	40.28	54.00	-13.72	V	AVG
9664.0000	*								
12080.0000	*								
14496.0000	*								
16912.0000	*								
2416.0000	94.11	31.12	2.18	35.33	92.08	114.00	-21.92	H	Peak
2416.0000	85.92	31.12	2.18	35.33	83.89	94.00	-10.11	H	AVG
4832.0000	50.60	34.01	2.58	34.65	52.54	74.00	-21.46	H	Peak
4832.0000	40.44	34.01	2.58	34.65	42.38	54.00	-11.62	H	AVG
7248.0000	47.80	36.16	2.97	35.07	51.86	74.00	-22.14	H	Peak
7248.0000	36.63	36.16	2.97	35.07	40.69	54.00	-13.31	H	AVG
9664.0000	*								
12080.0000	*								
14496.0000	*								
16912.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH24(Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2441.0000	96.16	31.12	2.20	34.51	94.97	114.00	-19.03	V	Peak
2441.0000	82.47	31.22	2.20	34.51	81.38	94.00	-12.62	V	AVG
4882.0000	49.52	34.98	2.49	34.14	52.85	74.00	-21.15	V	Peak
4882.0000	41.57	34.98	2.49	34.14	44.90	54.00	-9.10	V	AVG
7323.0000	48.57	36.01	3.01	34.56	53.03	74.00	-20.97	V	Peak
7323.0000	35.13	36.01	3.01	34.56	39.59	54.00	-14.41	V	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								
2441.0000	96.42	31.12	2.20	34.51	95.23	114.00	-18.77	H	Peak
2441.0000	82.06	31.12	2.20	34.51	80.87	94.00	-13.13	H	AVG
4882.0000	49.36	34.98	2.49	34.14	52.69	74.00	-21.31	H	Peak
4882.0000	39.80	34.98	2.49	34.14	43.13	54.00	-10.87	H	AVG
7323.0000	48.81	36.01	3.01	34.56	53.27	74.00	-20.73	H	Peak
7323.0000	36.41	36.01	3.01	34.56	40.87	54.00	-13.13	H	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



Test Mode: CH47 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2466.0000	96.73	31.65	2.23	36.07	94.54	114.00	-19.46	V	Peak
2466.0000	83.91	31.65	2.23	36.07	81.72	94.00	-12.28	V	AVG
4932.0000	49.42	35.06	2.60	34.93	52.15	74.00	-21.85	V	Peak
4932.0000	41.23	35.06	2.60	34.93	43.96	54.00	-10.04	V	AVG
7398.0000	45.51	36.19	3.12	35.11	49.71	74.00	-24.29	V	Peak
7398.0000	36.61	36.19	3.12	35.11	40.81	54.00	-13.19	V	AVG
9864.0000	*								
12330.0000	*								
14796.0000	*								
17262.0000	*								
2466.0000	95.56	31.65	2.23	36.07	93.37	114.00	-20.63	H	Peak
2466.0000	82.22	31.65	2.23	36.07	80.03	94.00	-13.97	H	AVG
4932.0000	48.40	35.06	2.60	34.93	51.13	74.00	-22.87	H	Peak
4932.0000	39.33	35.06	2.60	34.93	42.06	54.00	-11.94	H	AVG
7398.0000	46.00	36.19	3.12	35.11	50.20	74.00	-23.80	H	Peak
7398.0000	38.86	36.19	3.12	35.11	43.06	54.00	-10.94	H	AVG
9864.0000	*								
12330.0000	*								
14796.0000	*								
17262.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Module 4

**Test Results (1GHz-25GHz)**

Test Mode: CH01 (Low channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2416.0000	94.31	31.12	2.18	35.33	92.28	114.00	-21.72	V	Peak
2416.0000	85.81	31.12	2.18	35.33	83.78	94.00	-10.22	V	AVG
4832.0000	48.36	34.01	2.58	34.65	50.30	74.00	-23.70	V	Peak
4832.0000	41.58	34.01	2.58	34.65	43.52	54.00	-10.48	V	AVG
7248.0000	48.94	36.16	2.97	35.07	53.00	74.00	-21.00	V	Peak
7248.0000	35.28	36.16	2.97	35.07	39.34	54.00	-14.66	V	AVG
9664.0000	*								
12080.0000	*								
14496.0000	*								
16912.0000	*								
2416.0000	94.72	31.12	2.18	35.33	92.69	114.00	-21.31	H	Peak
2416.0000	83.13	31.12	2.18	35.33	81.10	94.00	-12.90	H	AVG
4832.0000	48.92	34.01	2.58	34.65	50.86	74.00	-23.14	H	Peak
4832.0000	40.39	34.01	2.58	34.65	42.33	54.00	-11.67	H	AVG
7248.0000	48.90	36.16	2.97	35.07	52.96	74.00	-21.04	H	Peak
7248.0000	36.28	36.16	2.97	35.07	40.34	54.00	-13.66	H	AVG
9664.0000	*								
12080.0000	*								
14496.0000	*								
16912.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Mode: CH24(Middle channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2441.0000	93.66	31.12	2.20	34.51	92.47	114.00	-21.53	V	Peak
2441.0000	83.08	31.22	2.20	34.51	81.99	94.00	-12.01	V	AVG
4882.0000	47.94	34.98	2.49	34.14	51.27	74.00	-22.73	V	Peak
4882.0000	38.31	34.98	2.49	34.14	41.64	54.00	-12.36	V	AVG
7323.0000	46.37	36.01	3.01	34.56	50.83	74.00	-23.17	V	Peak
7323.0000	36.65	36.01	3.01	34.56	41.11	54.00	-12.89	V	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								
2441.0000	95.68	31.12	2.20	34.51	94.49	114.00	-19.51	H	Peak
2441.0000	83.23	31.12	2.20	34.51	82.04	94.00	-11.96	H	AVG
4882.0000	50.06	34.98	2.49	34.14	53.39	74.00	-20.61	H	Peak
4882.0000	39.00	34.98	2.49	34.14	42.33	54.00	-11.67	H	AVG
7323.0000	48.94	36.01	3.01	34.56	53.40	74.00	-20.60	H	Peak
7323.0000	35.59	36.01	3.01	34.56	40.05	54.00	-13.95	H	AVG
9764.0000	*								
12205.0000	*								
14646.0000	*								
17087.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.




Test Mode: CH47 (High channel)									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.	Detector
2466.0000	96.32	31.65	2.23	36.07	94.13	114.00	-19.87	V	Peak
2466.0000	82.30	31.65	2.23	36.07	80.11	94.00	-13.89	V	AVG
4932.0000	50.30	35.06	2.60	34.93	53.03	74.00	-20.97	V	Peak
4932.0000	39.94	35.06	2.60	34.93	42.67	54.00	-11.33	V	AVG
7398.0000	48.21	36.19	3.12	35.11	52.41	74.00	-21.59	V	Peak
7398.0000	35.50	36.19	3.12	35.11	39.70	54.00	-14.30	V	AVG
9864.0000	*								
12330.0000	*								
14796.0000	*								
17262.0000	*								
2466.0000	96.50	31.65	2.23	36.07	94.31	114.00	-19.69	H	Peak
2466.0000	84.47	31.65	2.23	36.07	82.28	94.00	-11.72	H	AVG
4932.0000	49.08	35.06	2.60	34.93	51.81	74.00	-22.19	H	Peak
4932.0000	38.07	35.06	2.60	34.93	40.80	54.00	-13.20	H	AVG
7398.0000	48.80	36.19	3.12	35.11	53.00	74.00	-21.00	H	Peak
7398.0000	37.79	36.19	3.12	35.11	41.99	54.00	-12.01	H	AVG
9864.0000	*								
12330.0000	*								
14796.0000	*								
17262.0000	*								

**Note:**

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Module 1

Radiated Band Edge:

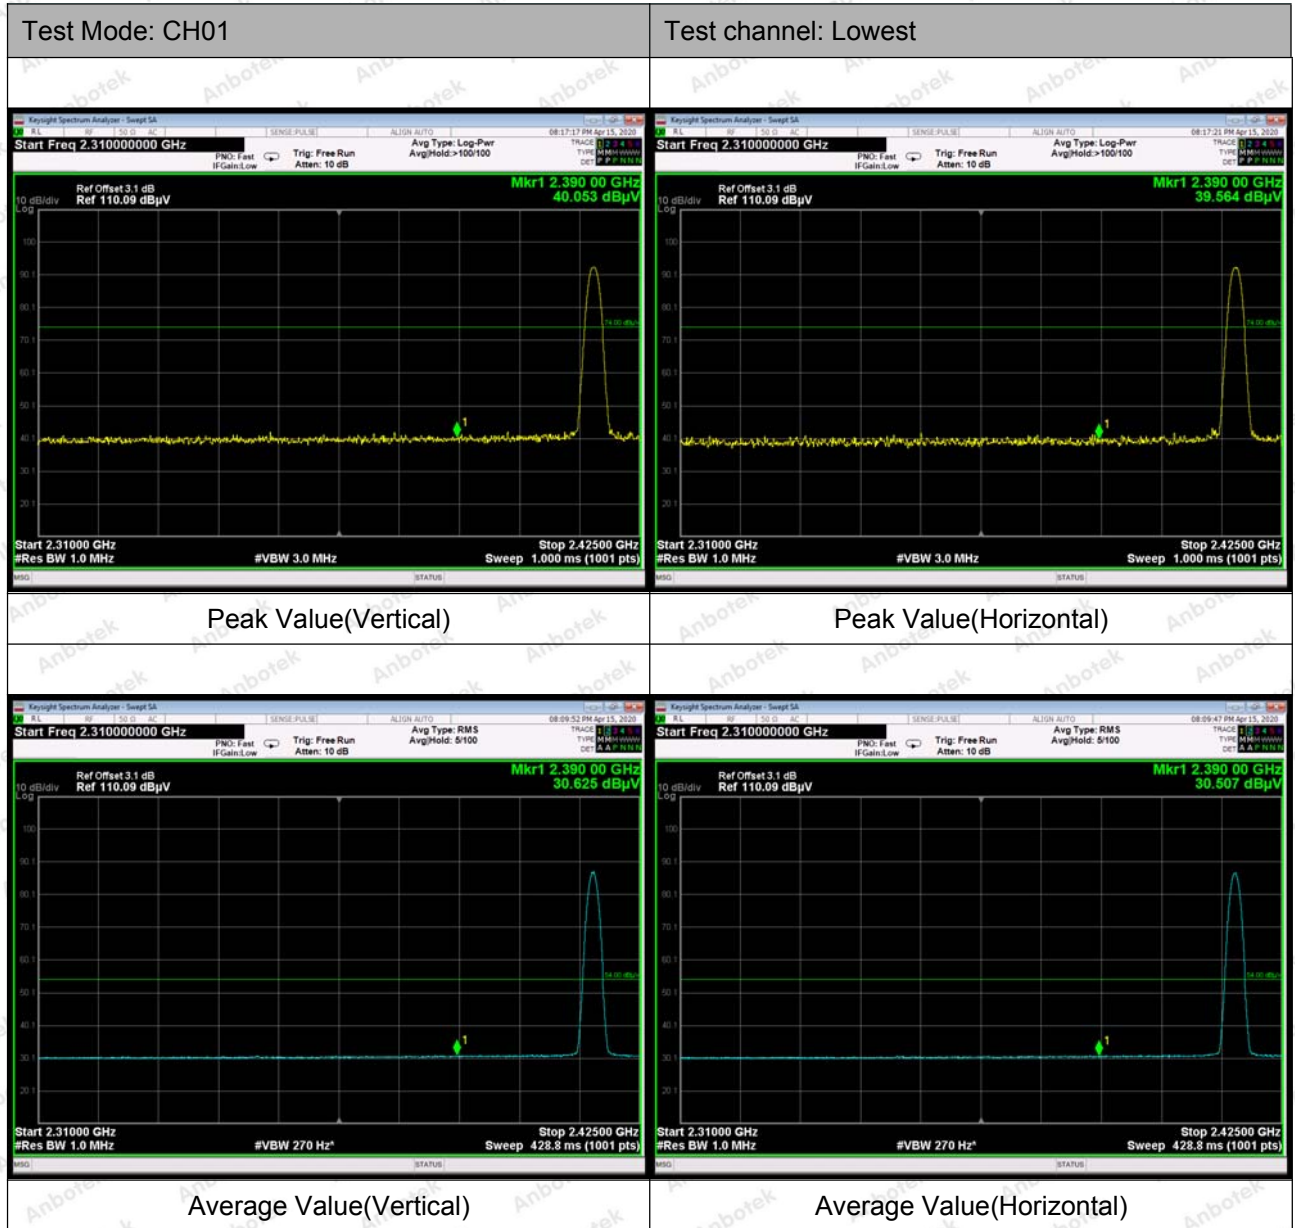



Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor



Module 2

Radiated Band Edge:





Remark:

- Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

Module 3

Radiated Band Edge:







Remark:

- Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

Module 4

Radiated Band Edge:






Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor




Module 1


Conducted Emission Method

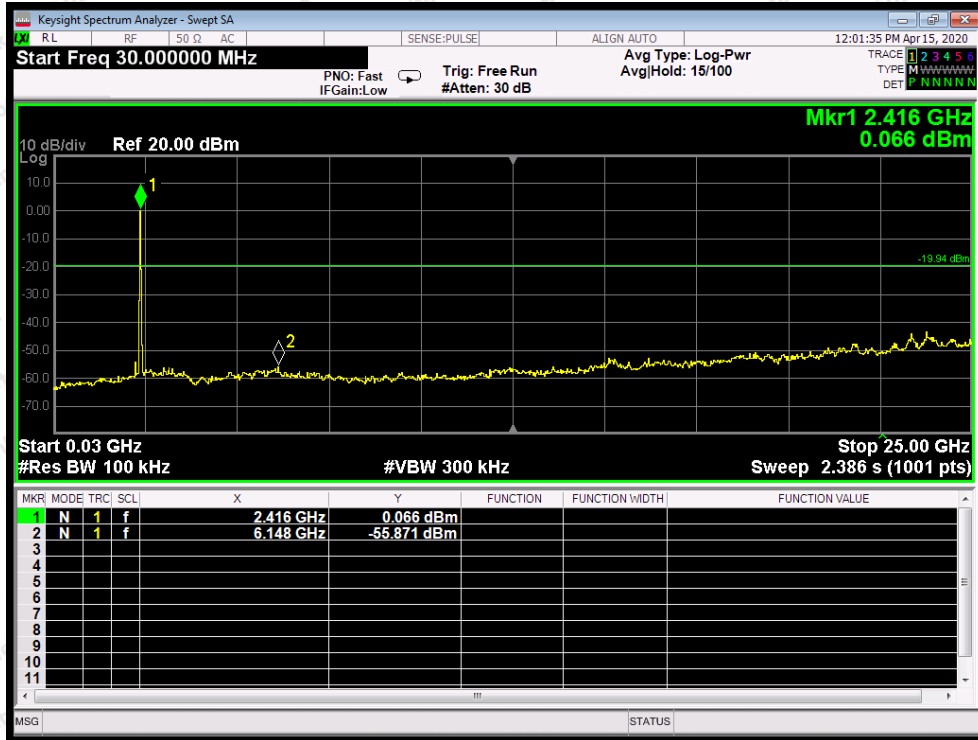

CH: Low

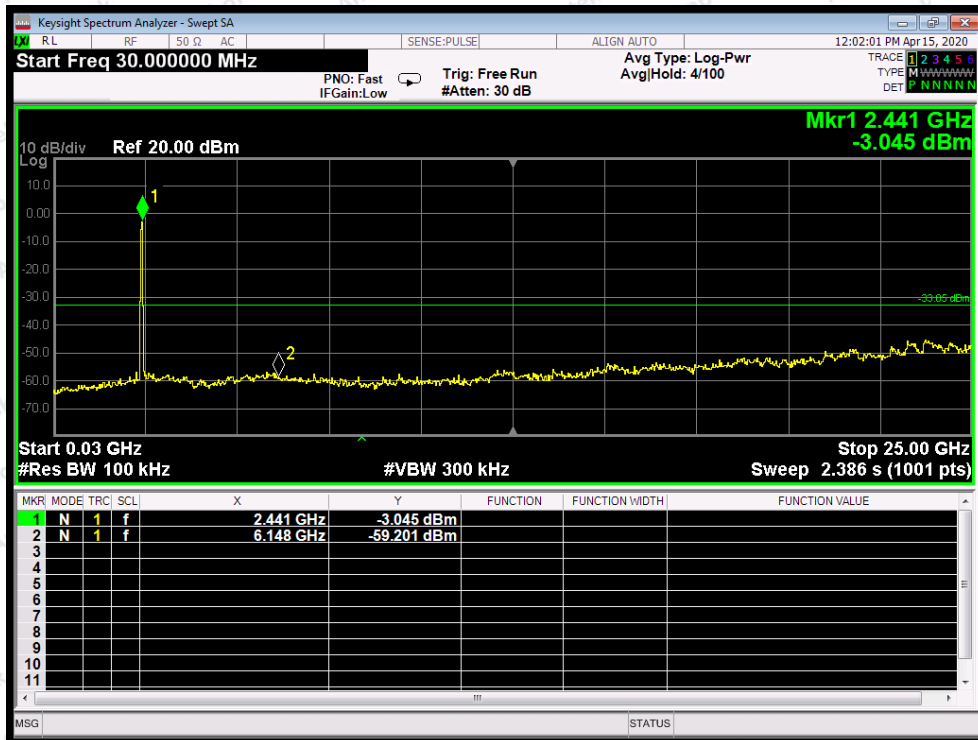


CH: Middle

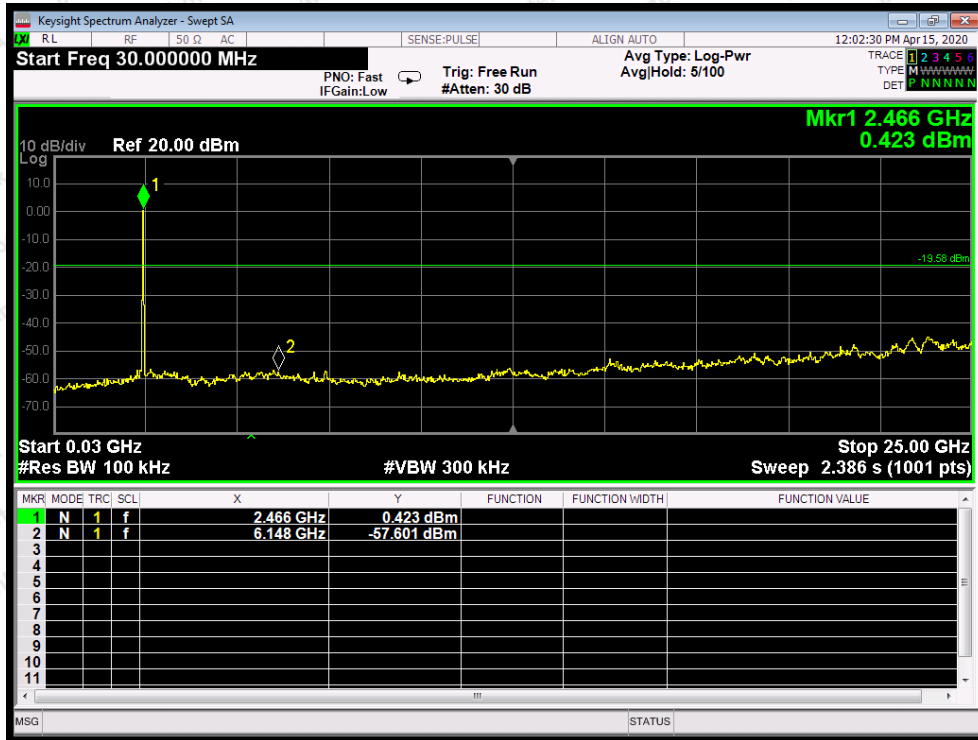


CH: High

Module 2


Conducted Emission Method

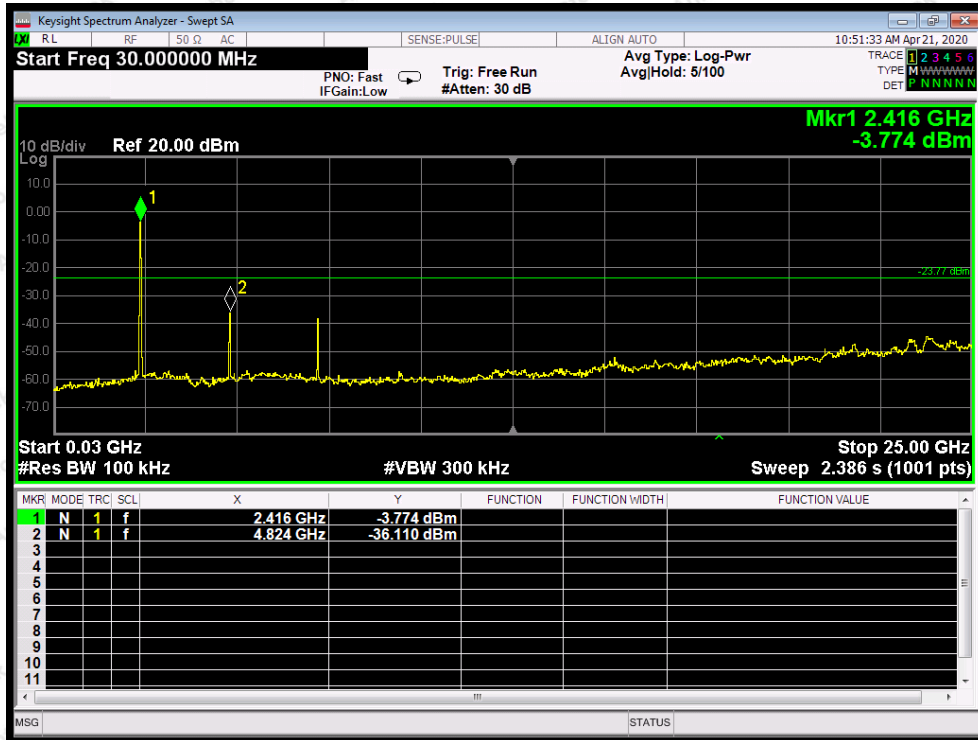

CH: Low

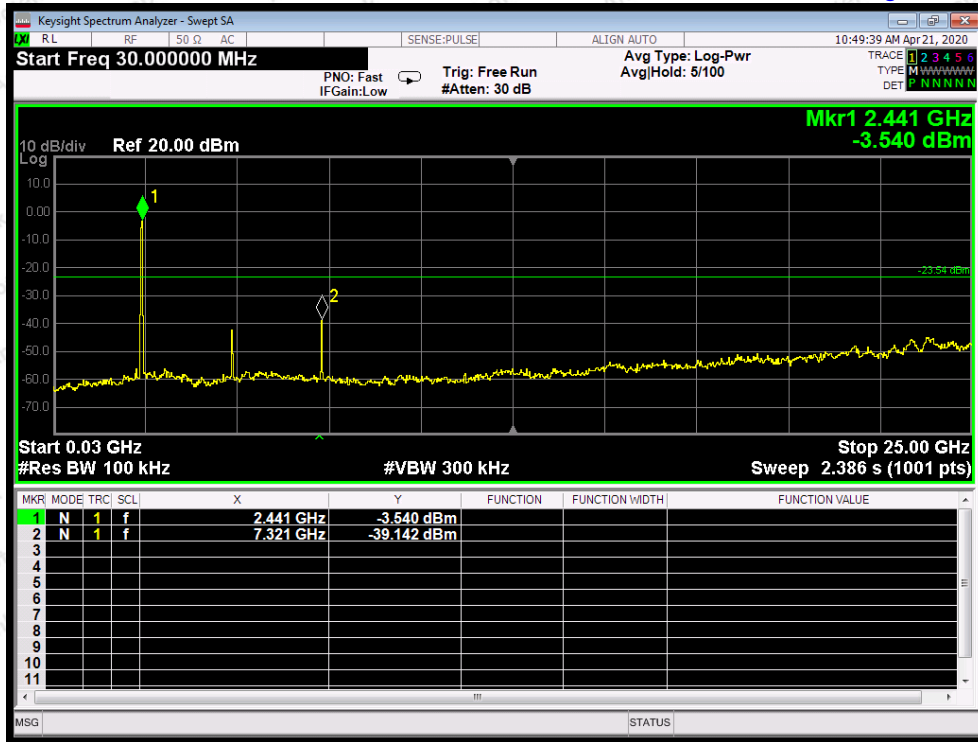


CH: Middle

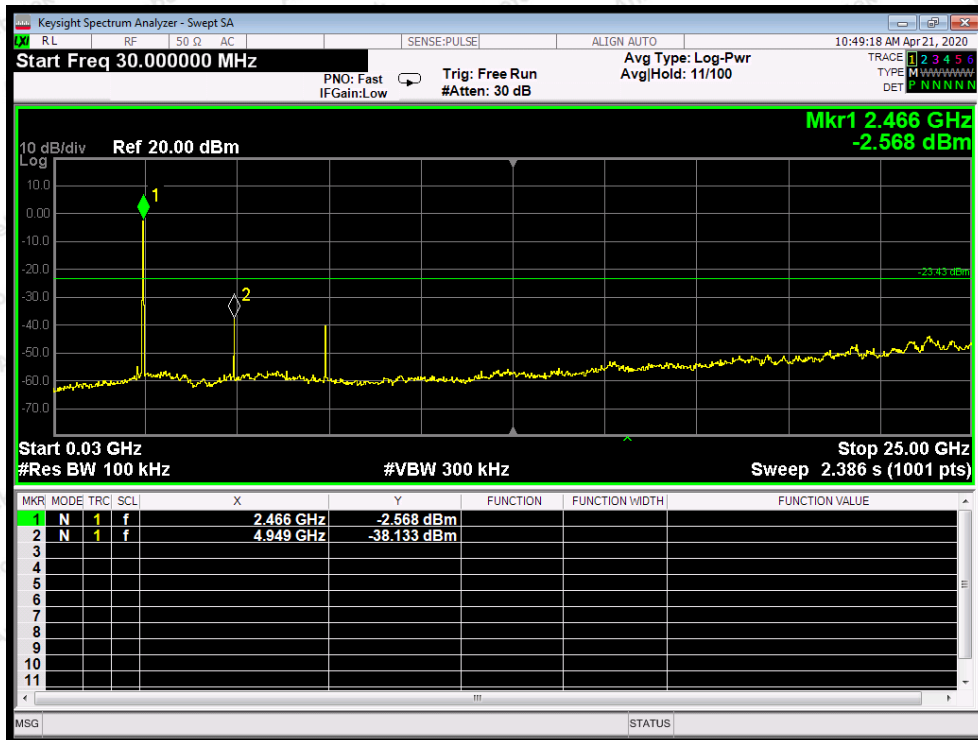


CH: High




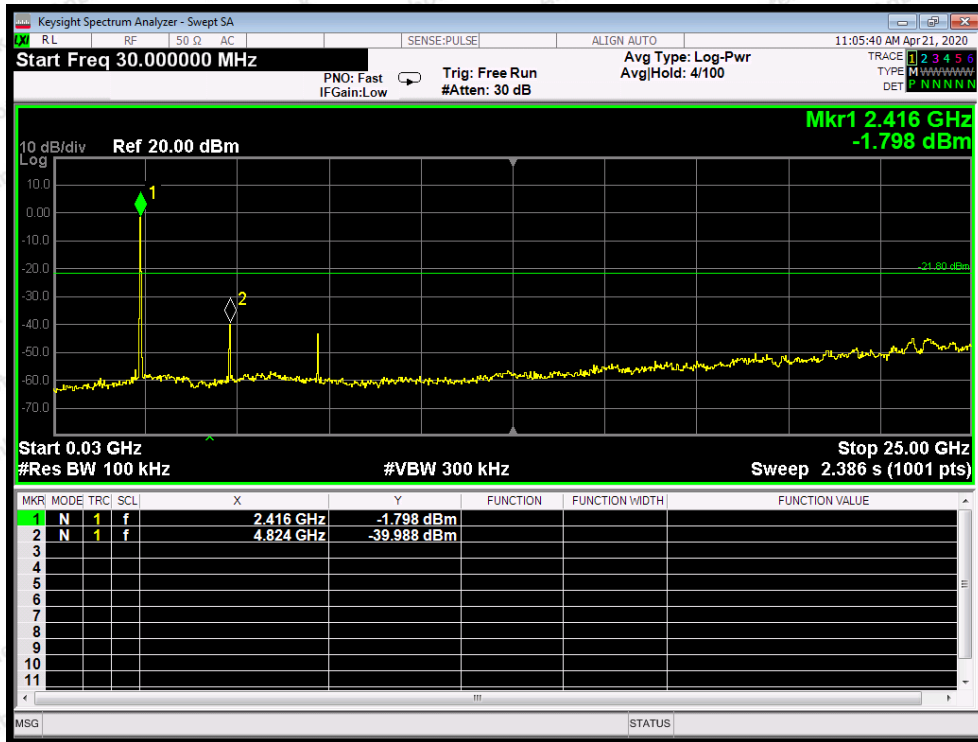

CH: Low

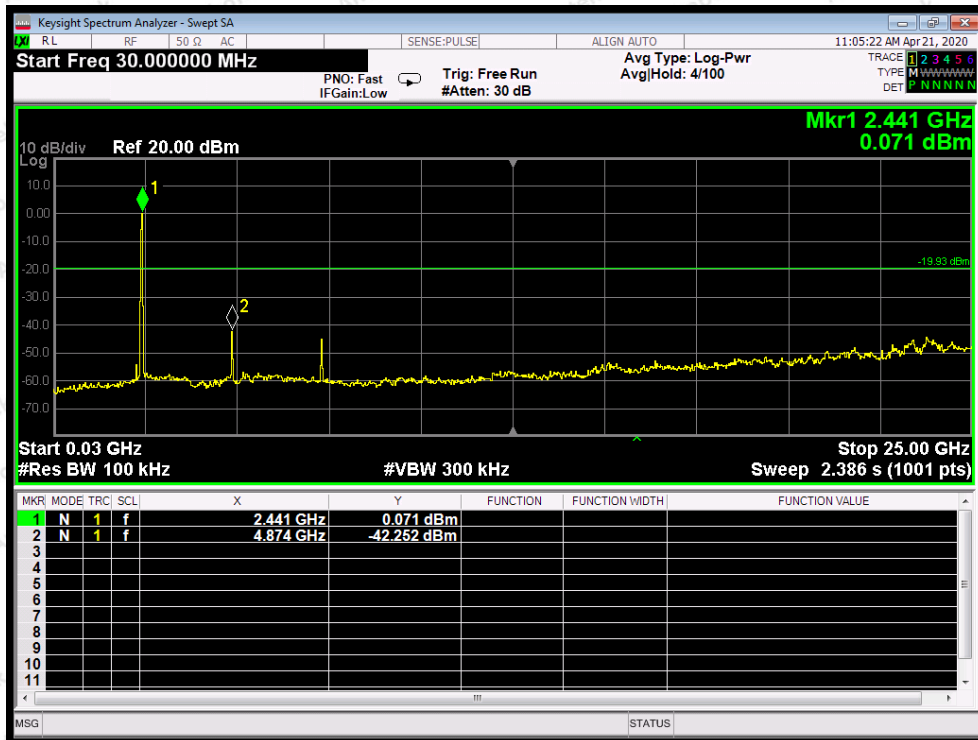


CH: Middle

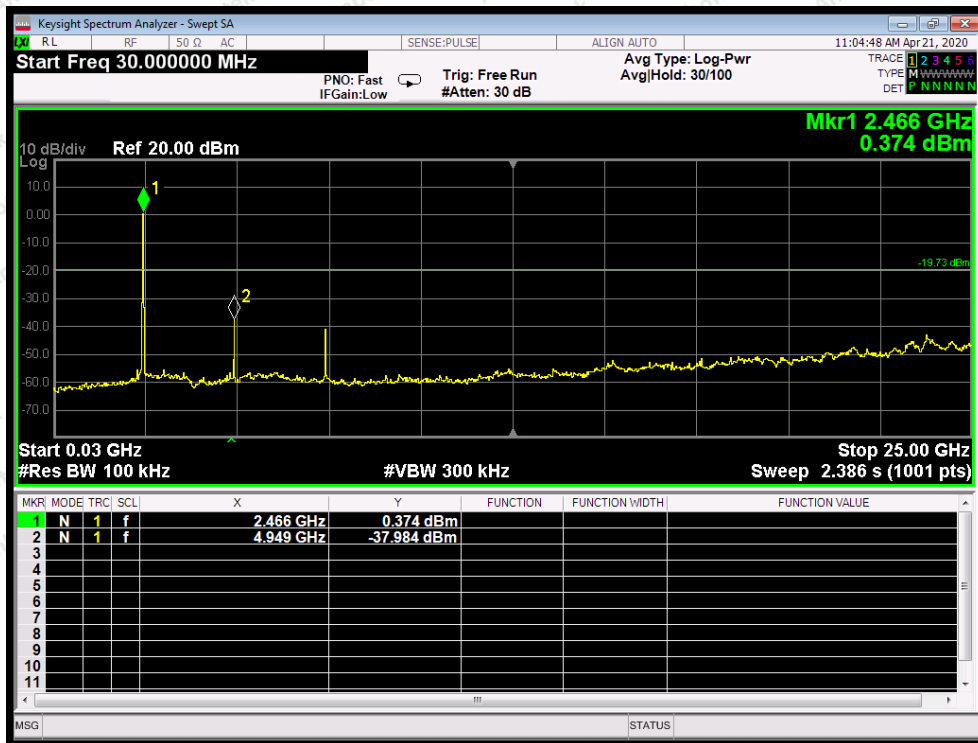

CH: High

Module 4

Conducted Emission Method

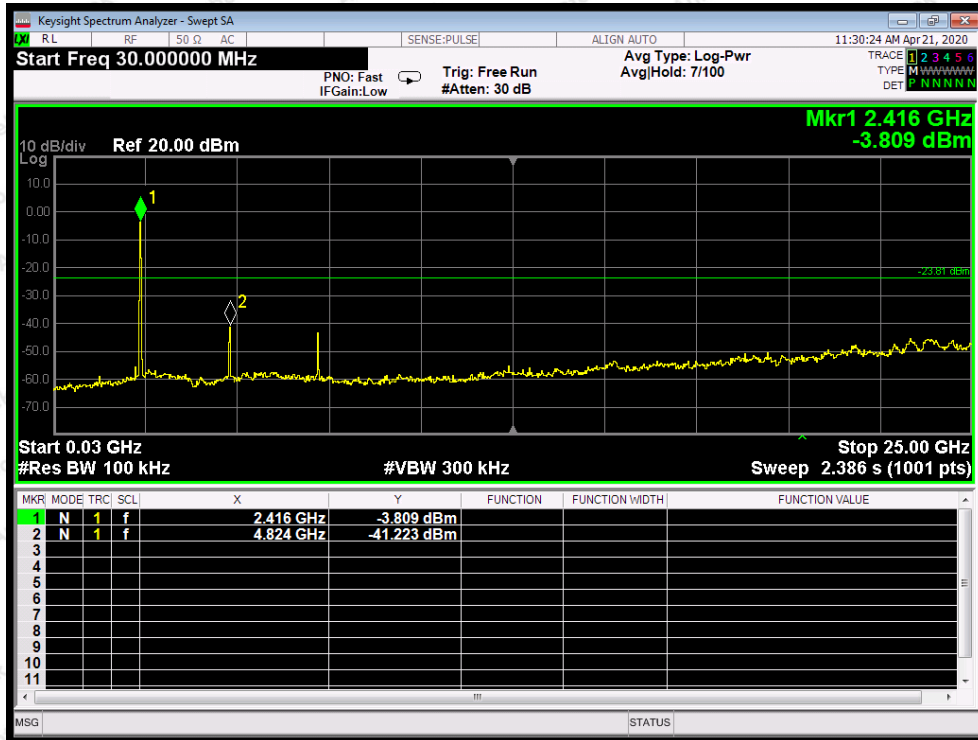


CH: Low

Shenzhen Anbotek Compliance Laboratory Limited


Code:AB-RF-05-a

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Hotline  
 400-003-0500  
 www.anbotek.com

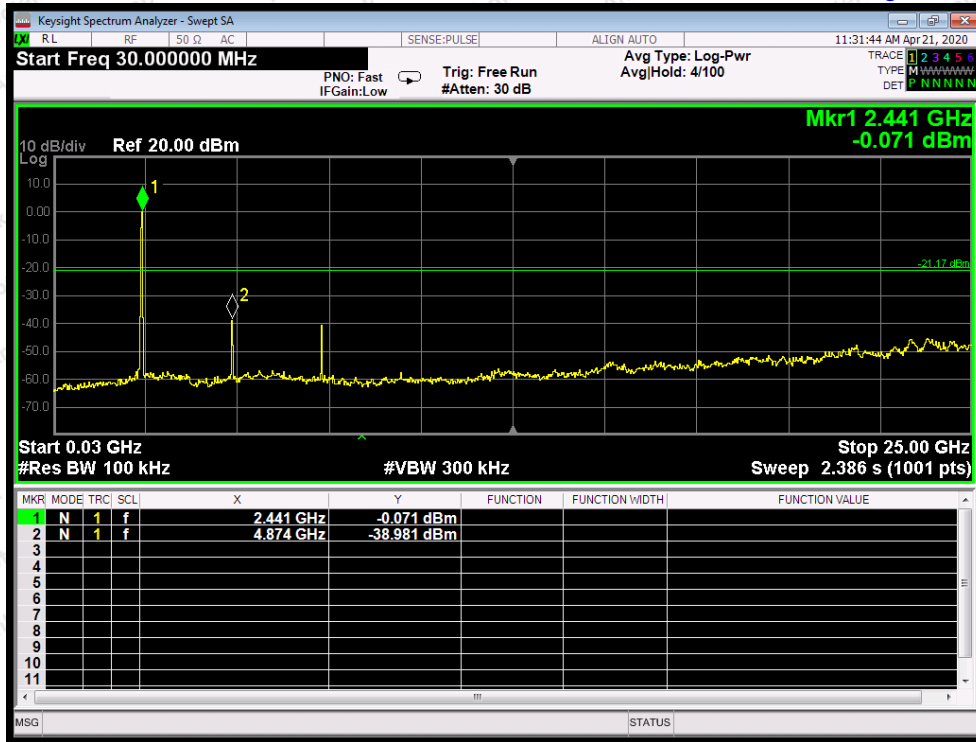

CH: Middle

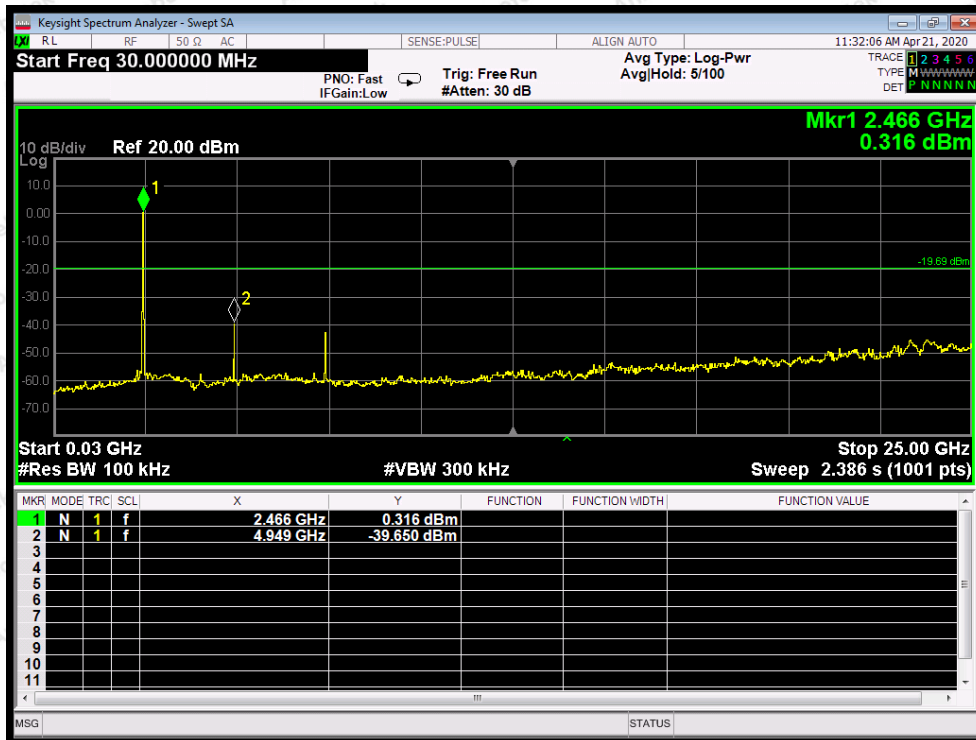

CH: High




## 5. 20dB Bandwidth Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.249
---------------	-----------------------------

### 5.2. Test Setup

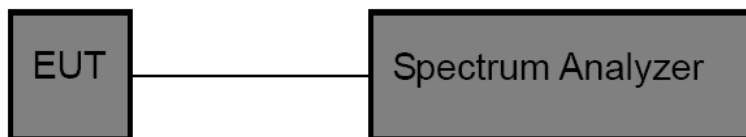

### 5.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
RBW = 30kHz, VBW $\geq$ 3\*RBW =100kHz,  
Detector= Average  
Trace mode= Max hold.  
Sweep- auto couple.
4. Mark the peak frequency and  $-20$ dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 5.4. Test Data

Test Item	:	20dB Bandwidth
Test Voltage	:	DC 8.4V battery inside
Test Result	:	PASS

Test Mode	:	Mode 1
Temperature	:	22.4°C
Humidity	:	55%RH

## Module 1

Frequency (MHz)	Bandwidth (kHz)	Result
2416MHZ	2077	PASS
2441MHZ	2075	PASS
2466MHZ	2077	PASS

## Module 2


Frequency (MHz)	Bandwidth (kHz)	Result
2416MHZ	2080	PASS
2441MHZ	2079	PASS
2466MHZ	2078	PASS

## Module 3


Frequency (MHz)	Bandwidth (kHz)	Result
2416MHZ	2077	PASS
2441MHZ	2073	PASS
2466MHZ	2078	PASS

## Module 4

Frequency (MHz)	Bandwidth (kHz)	Result
2416MHZ	2075	PASS
2441MHZ	2079	PASS
2466MHZ	2076	PASS

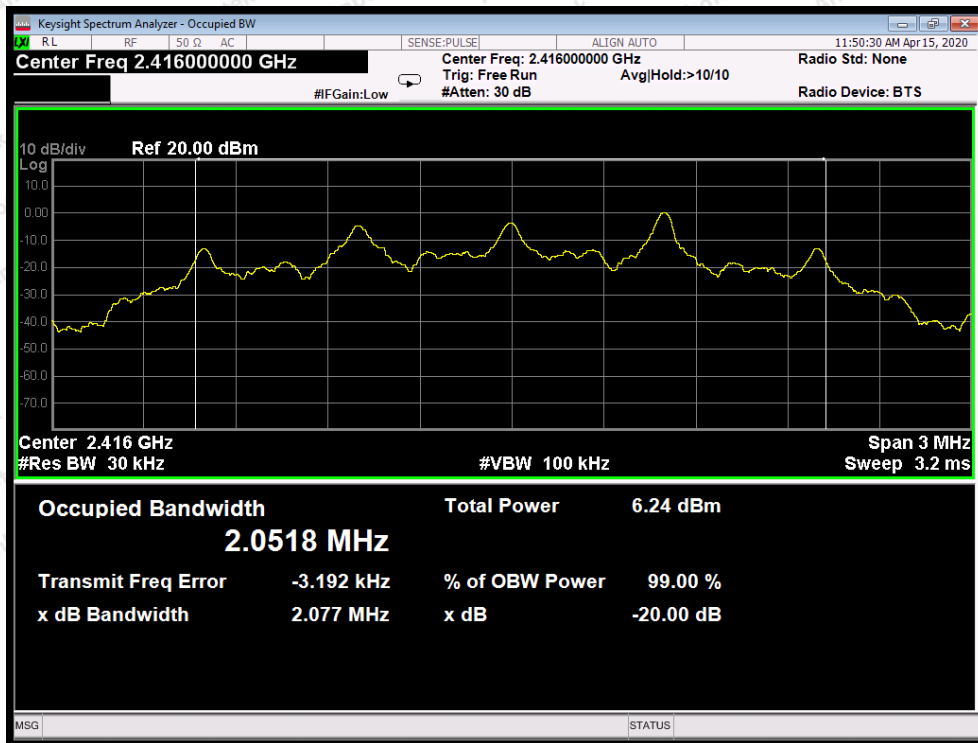


Test Mode: Low

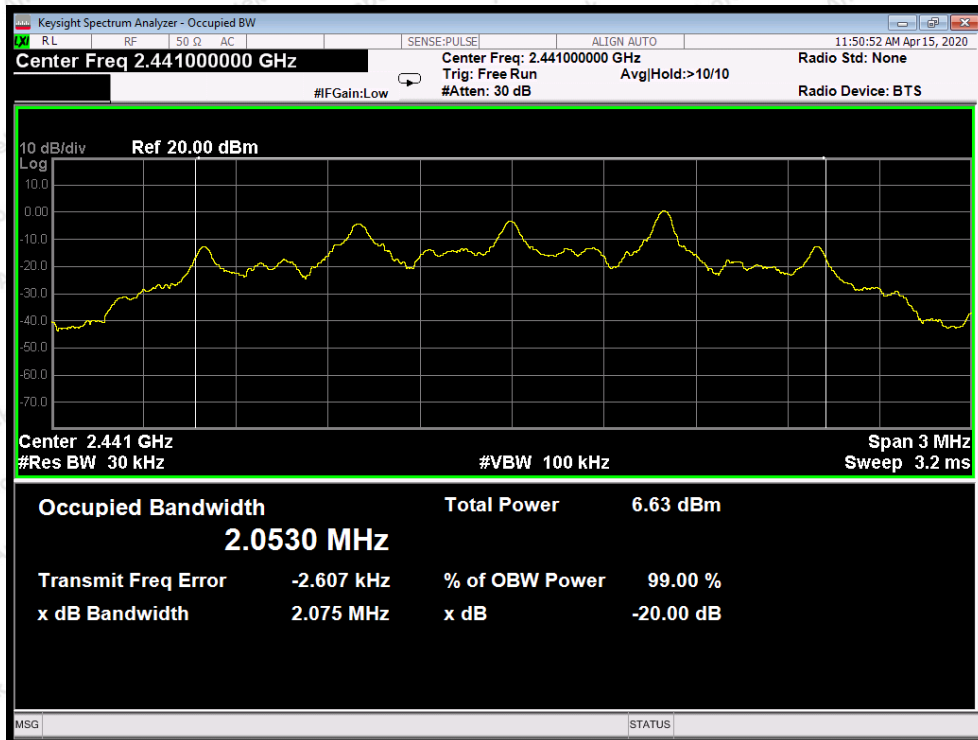


Test Mode: Middle



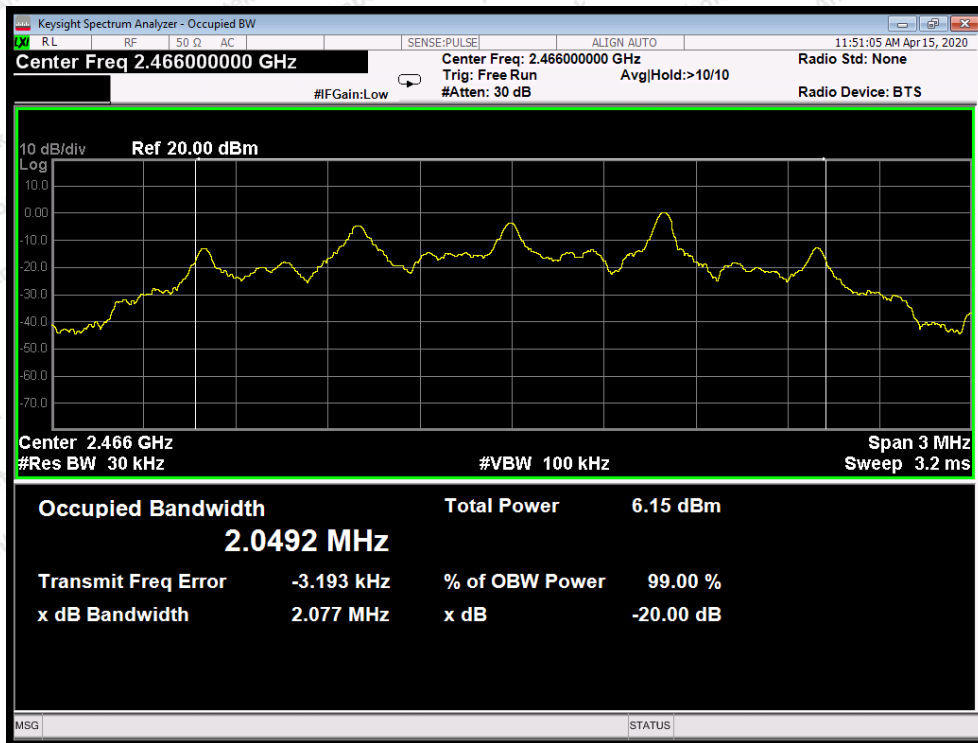


Test Mode: High


Module 2

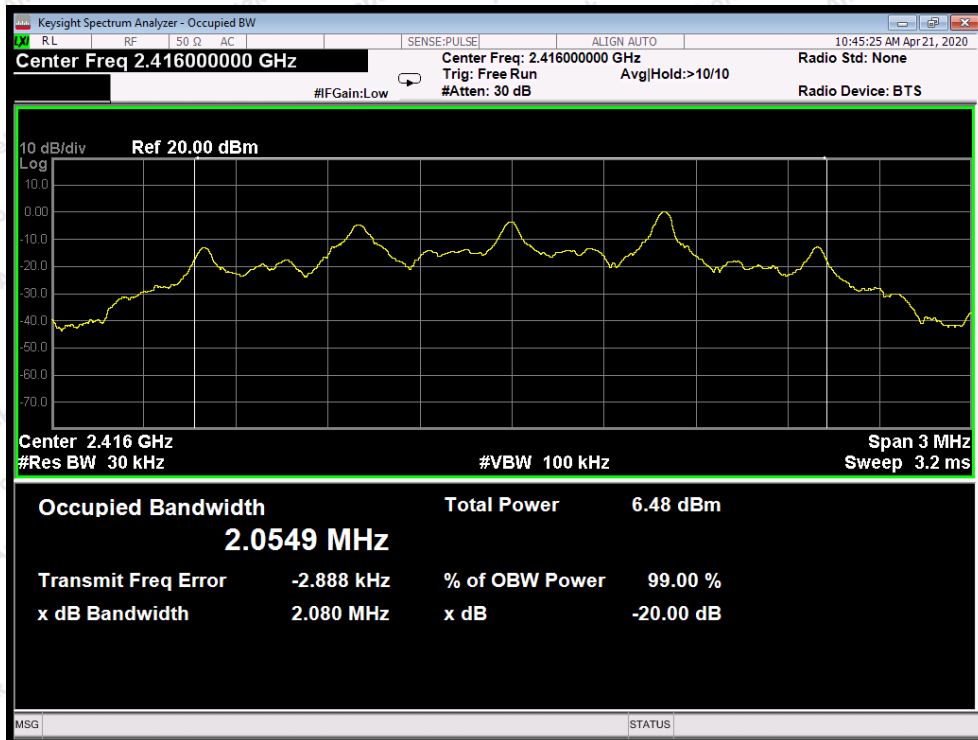


Test Mode: Low

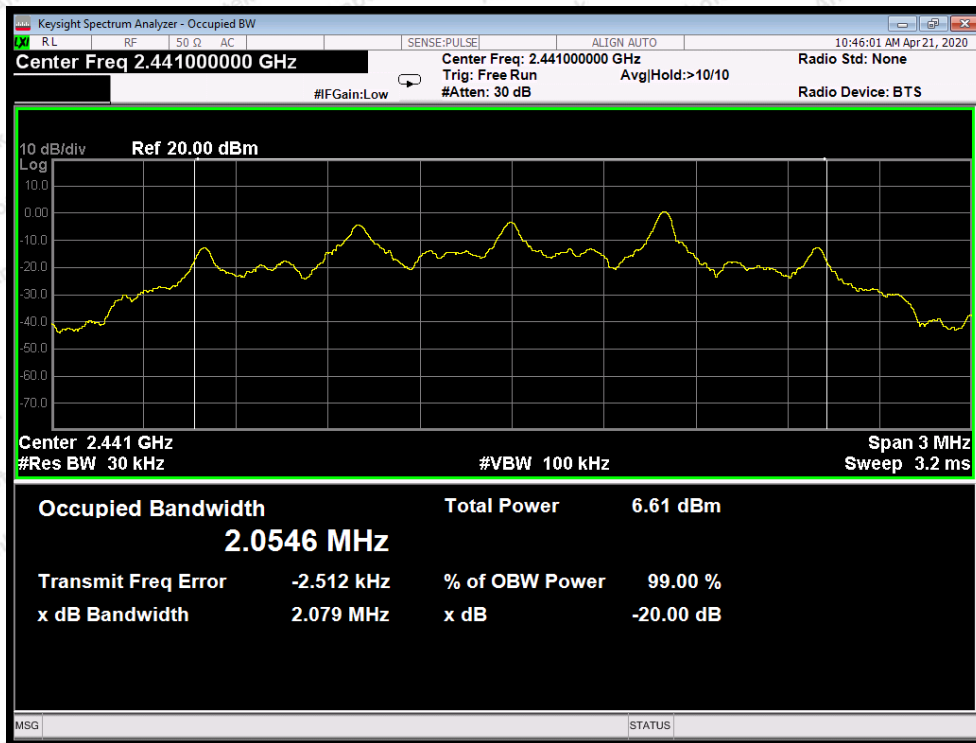


Test Mode: Middle

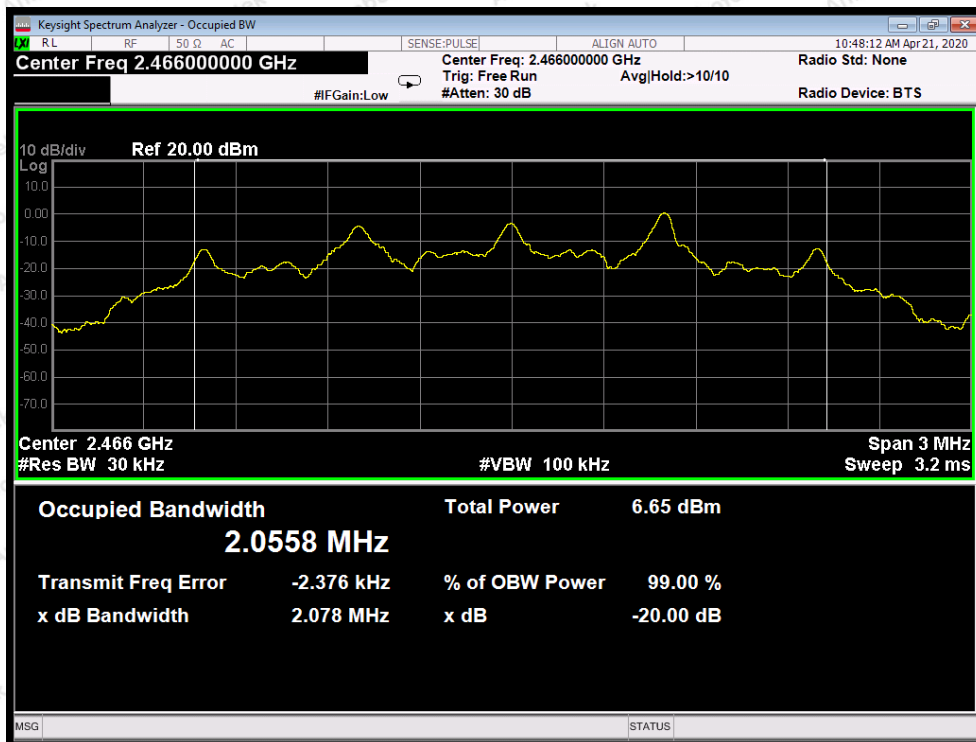

Test Mode: High

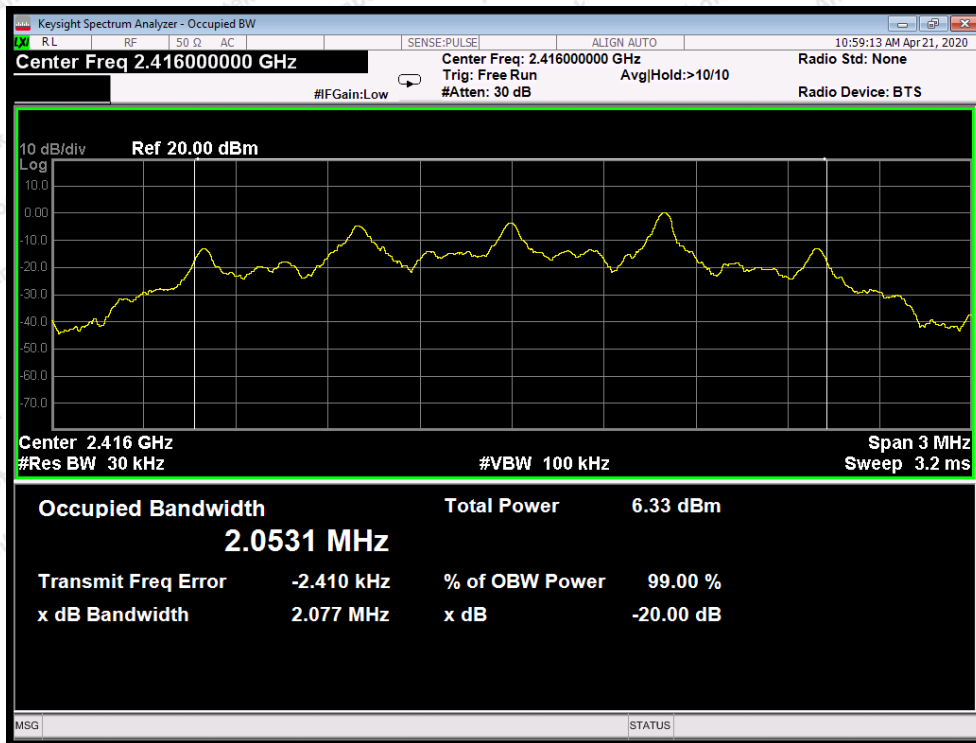


Test Mode: Low

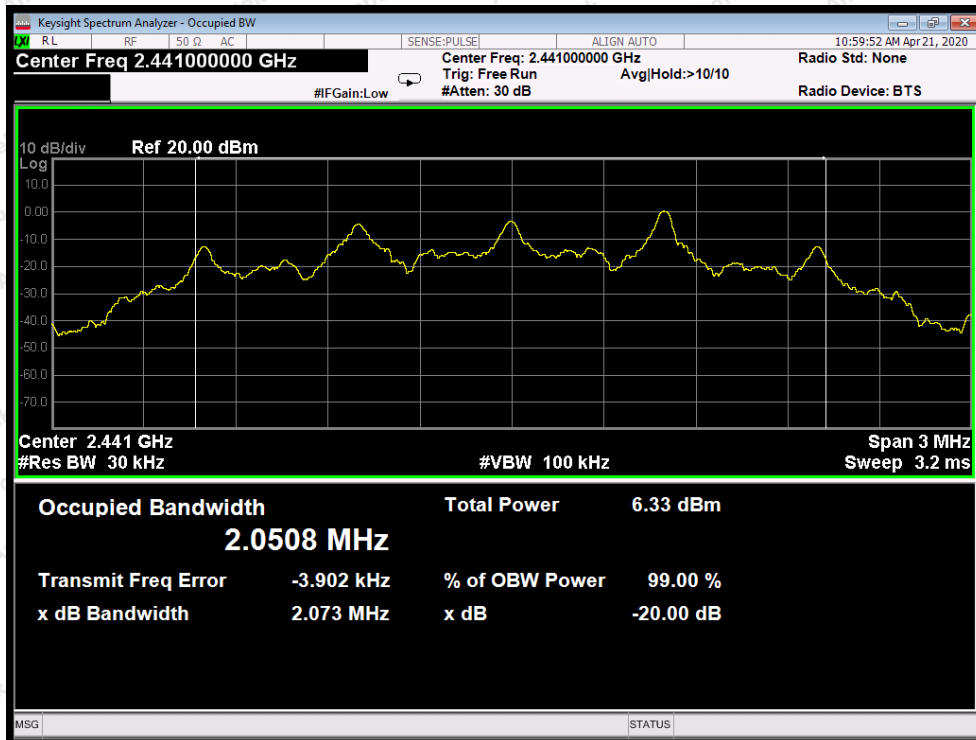


Test Mode: Middle



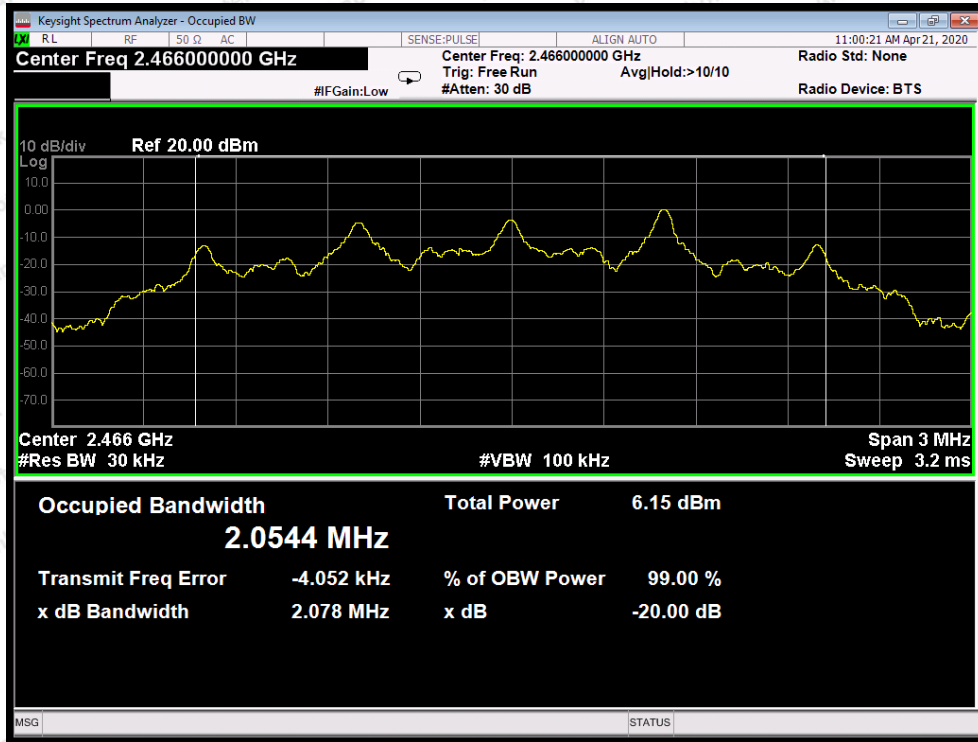


Test Mode: High


Module 4

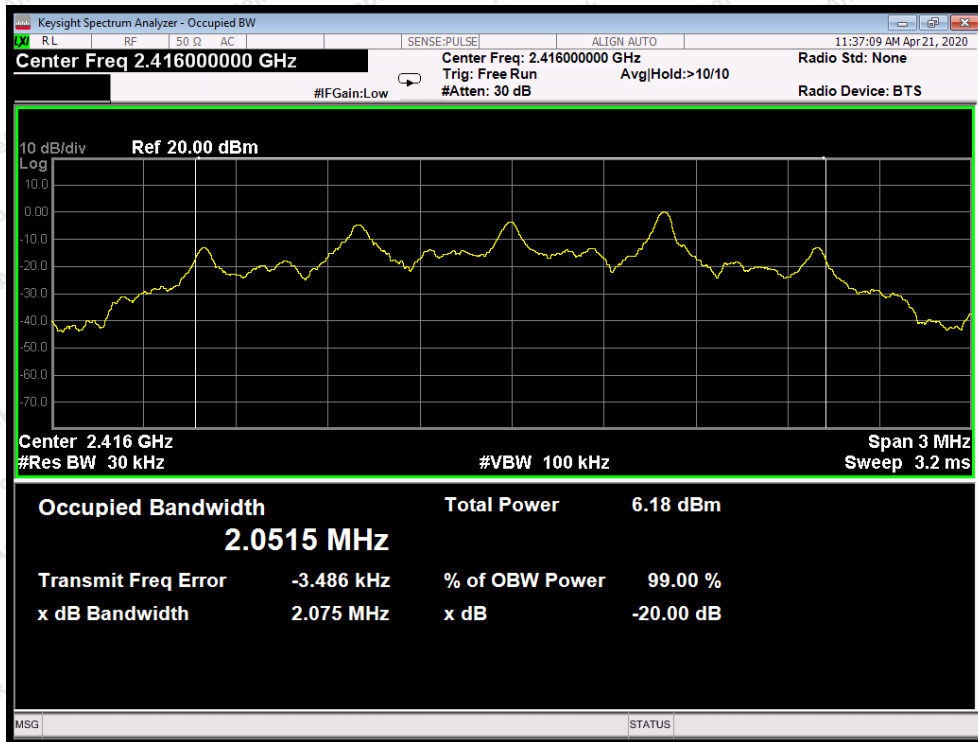

Test Mode: Low

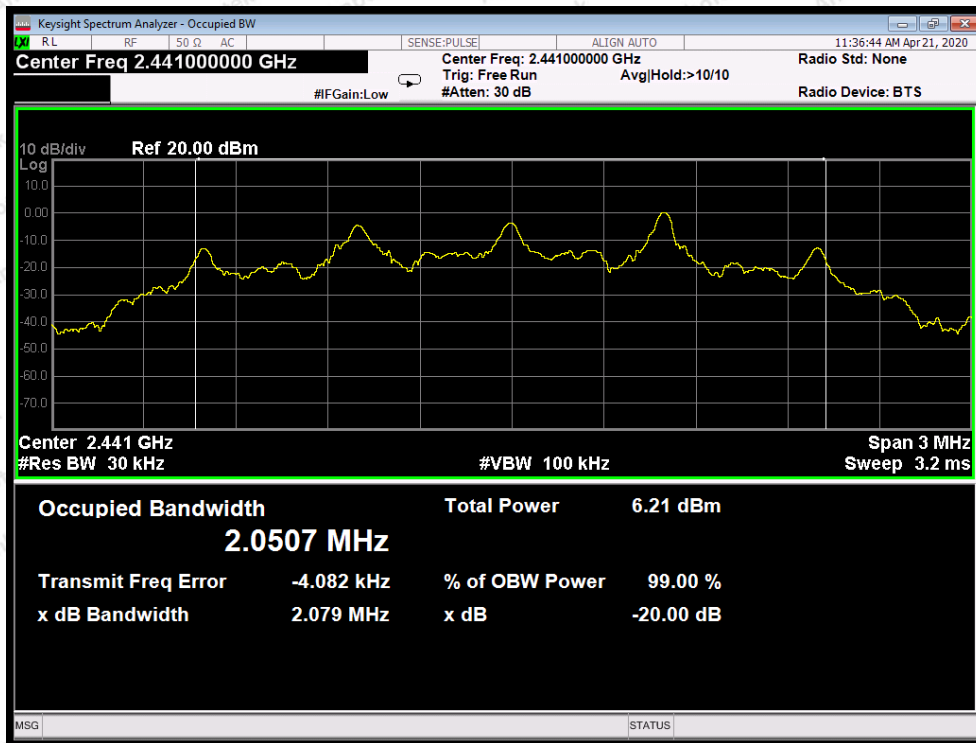

Test Mode: Middle

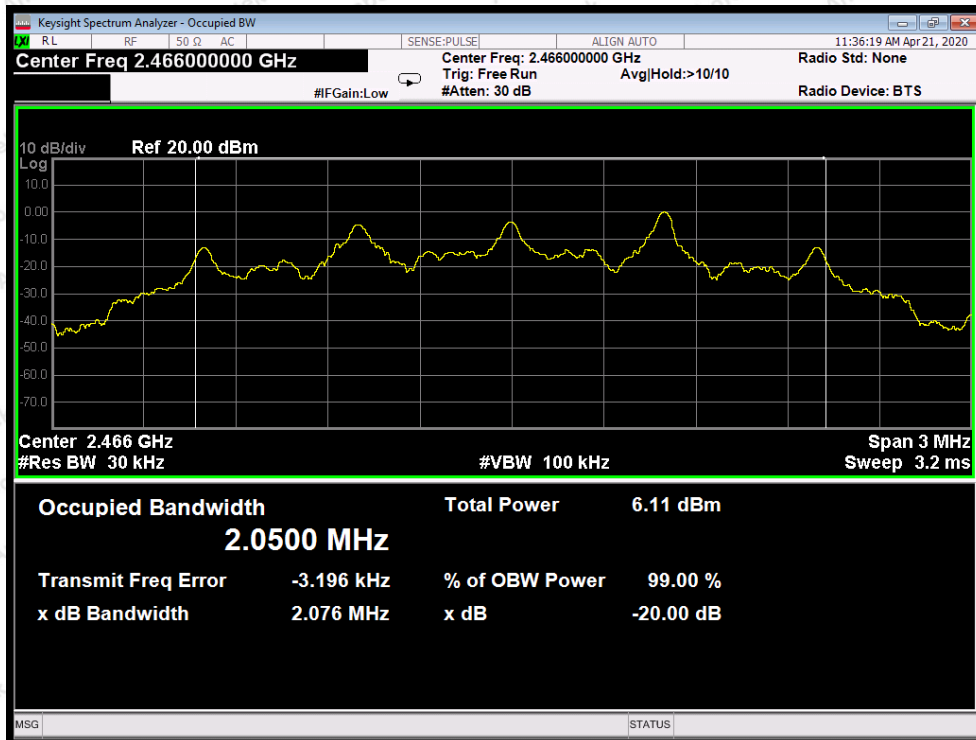

Test Mode: High

## 6. Antenna Requirement

### 6.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	<p>1) 15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>

### 6.2. Antenna Connected Construction

The antenna is a Cylindrical Antenna which permanently attached, and the best case gain of the antenna is 2 dBi. It complies with the standard requirement.





## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test




## APPENDIX II -- EXTERNAL PHOTOGRAPH










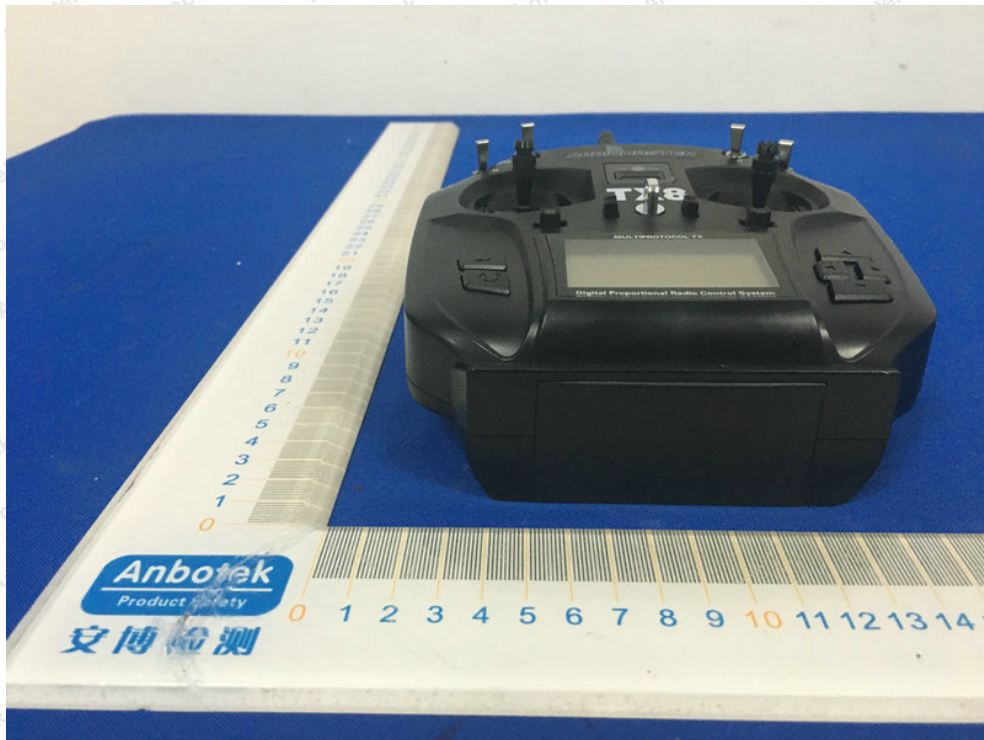






## APPENDIX III -- INTERNAL PHOTOGRAPH







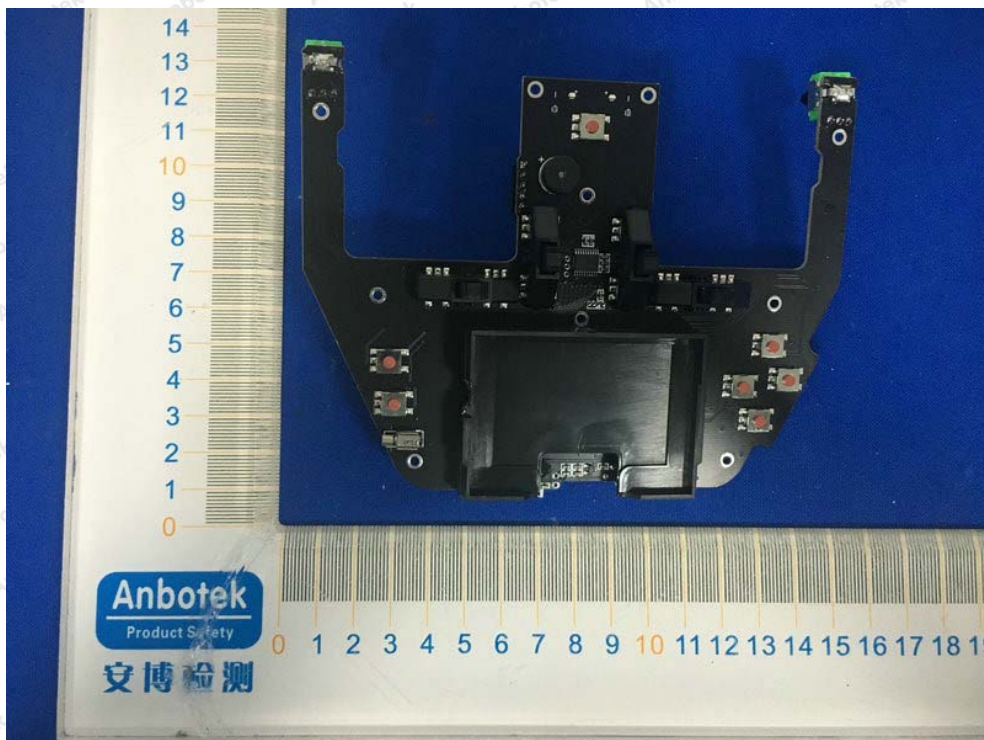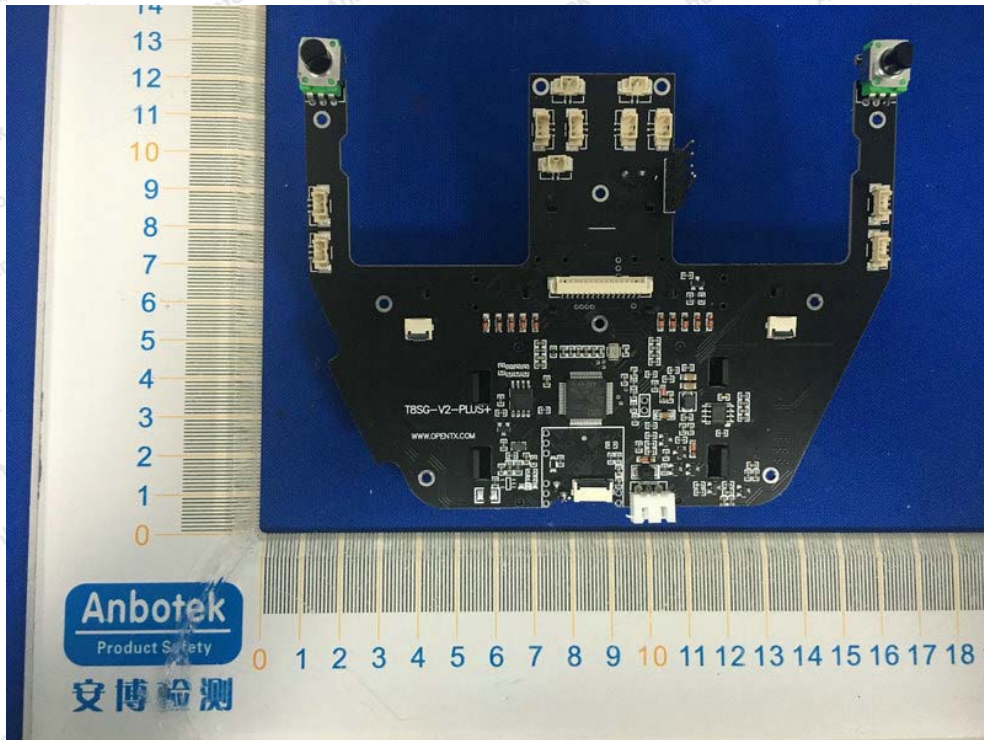





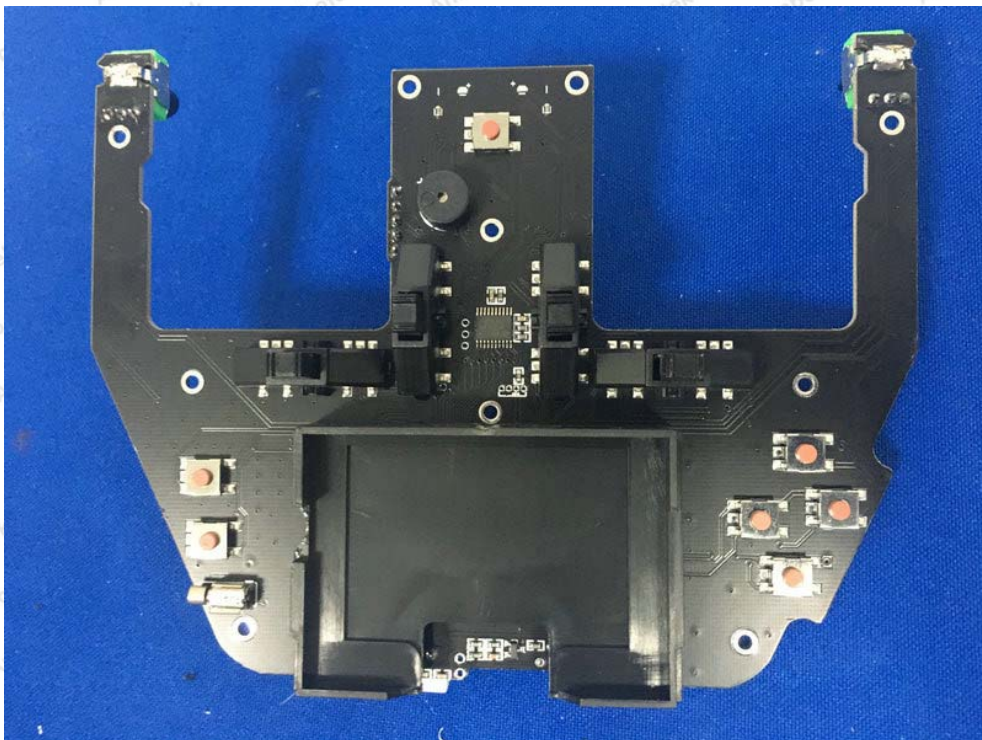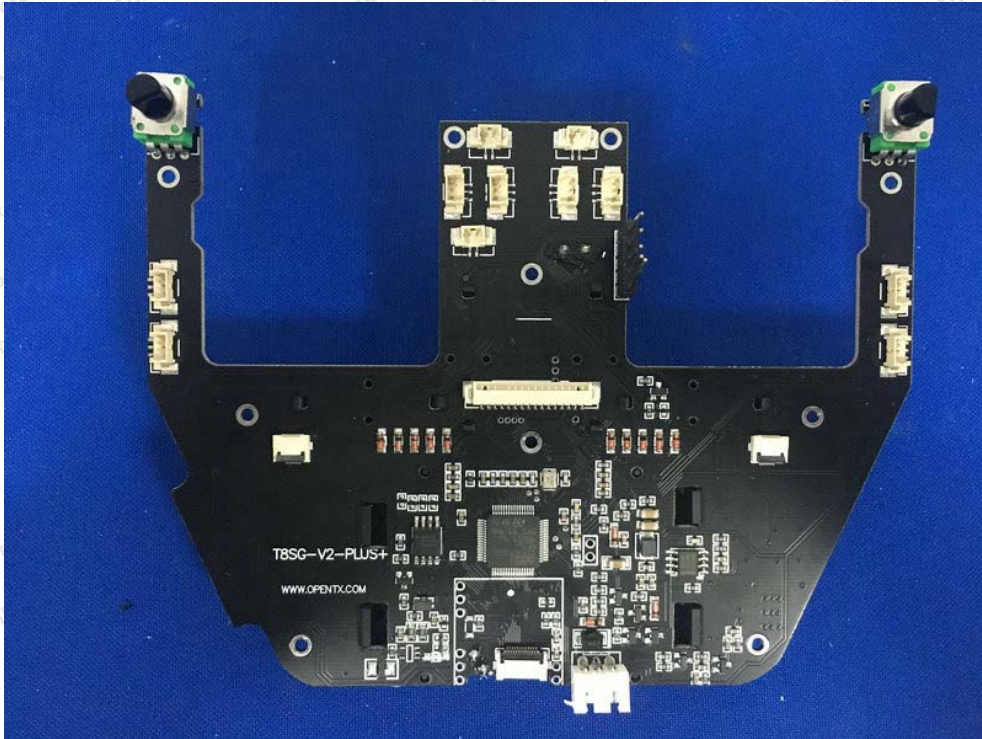



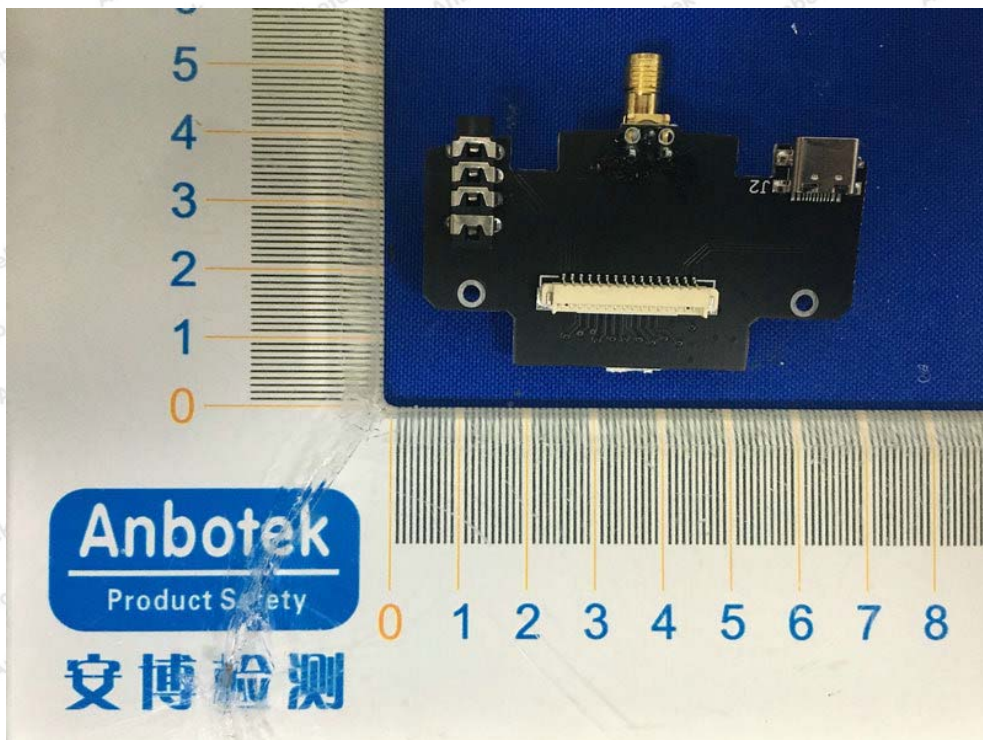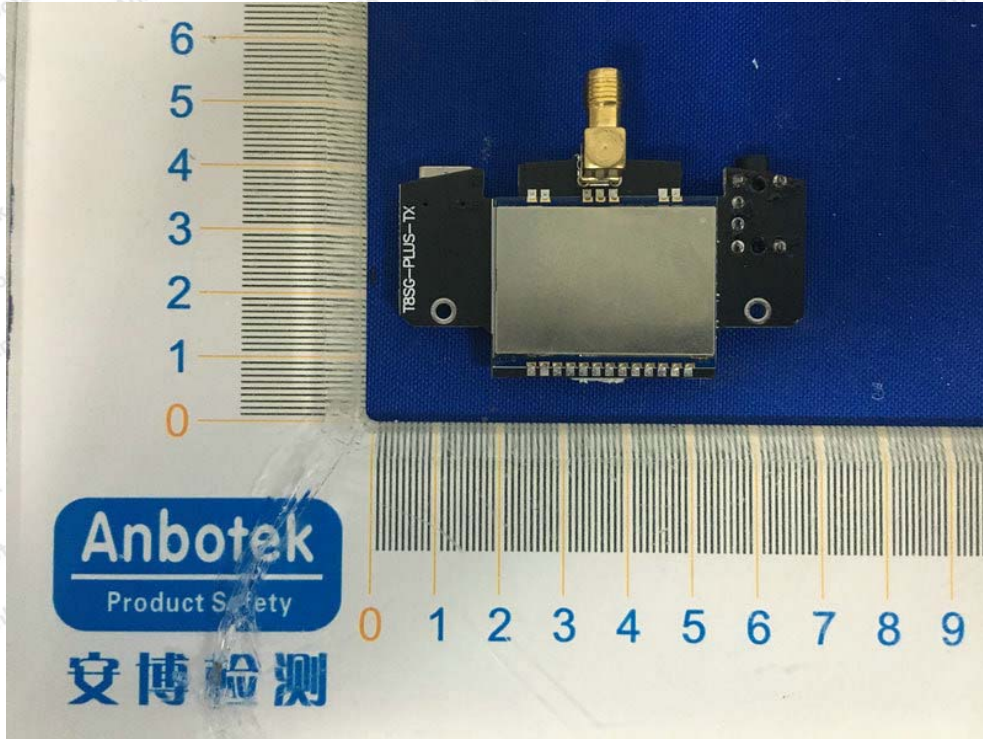



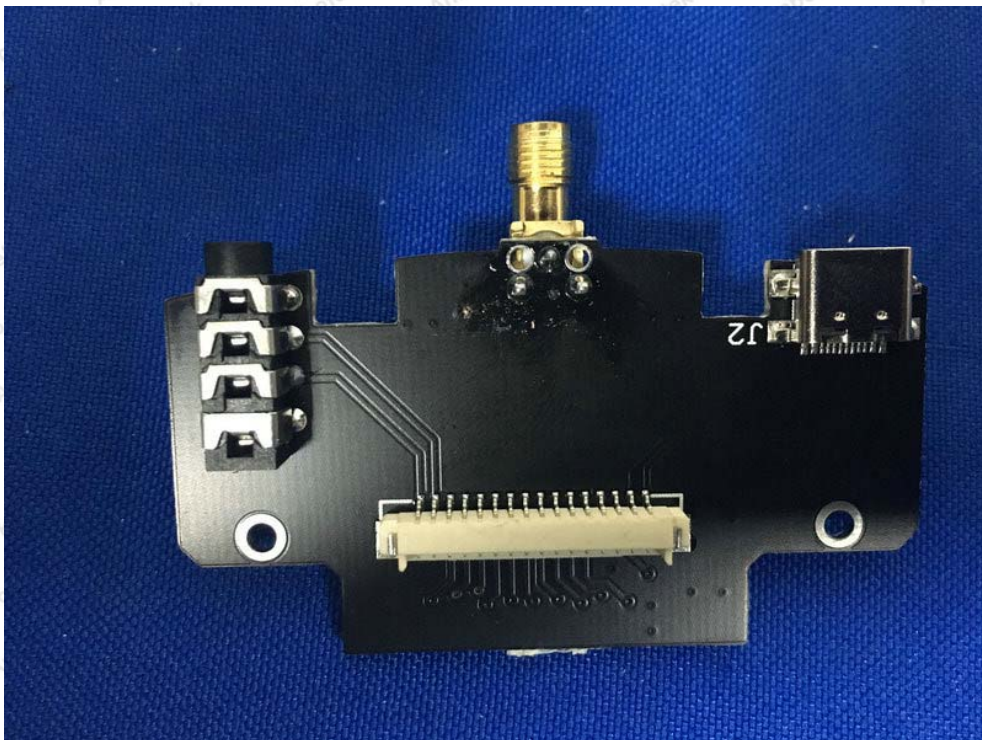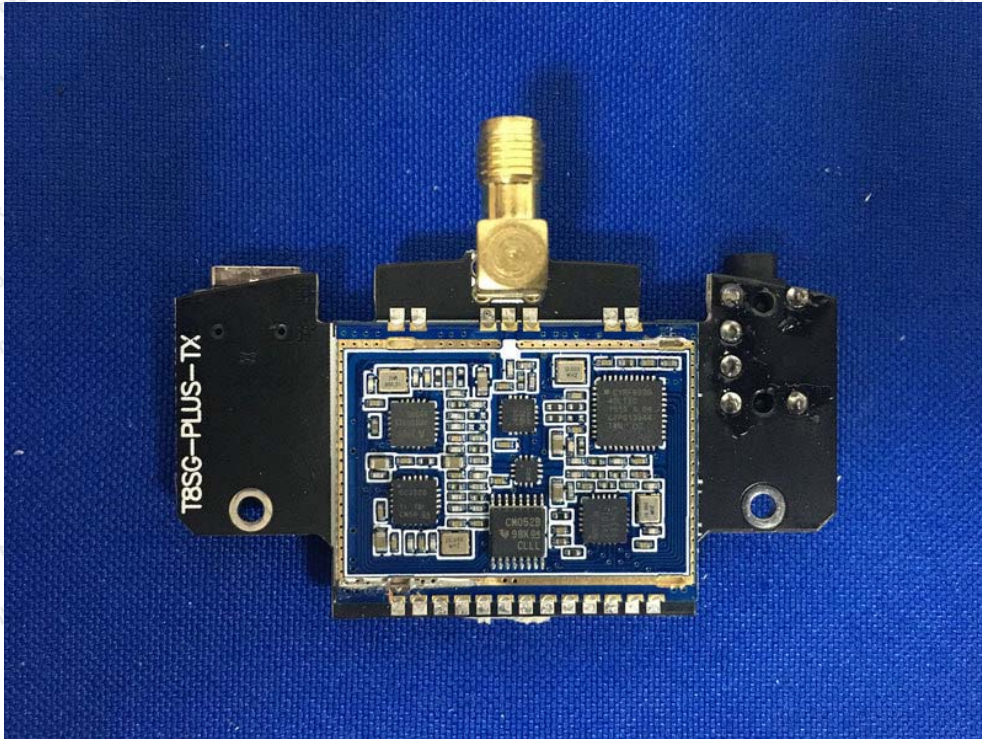

----- End of Report -----

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

**Code:AB-RF-05-a**

Hotline  
400-003-0500  
www.anbotek.com