


Rev: B (12-18-2023) -- Revised recommended Operating Temperature Range to 0-25C



Model No.: U280-Q01TST-BK
 Type-C Input: 5V/2A, 9V/2.22A, 12V/1.67A (20W Max)
 Output: Qi 15W/10W/7W/5W (15W Max)
 FCC ID: 2AV4C-U280Q01TST
 IC : 29811-U280Q01TST
 Made in Vietnam

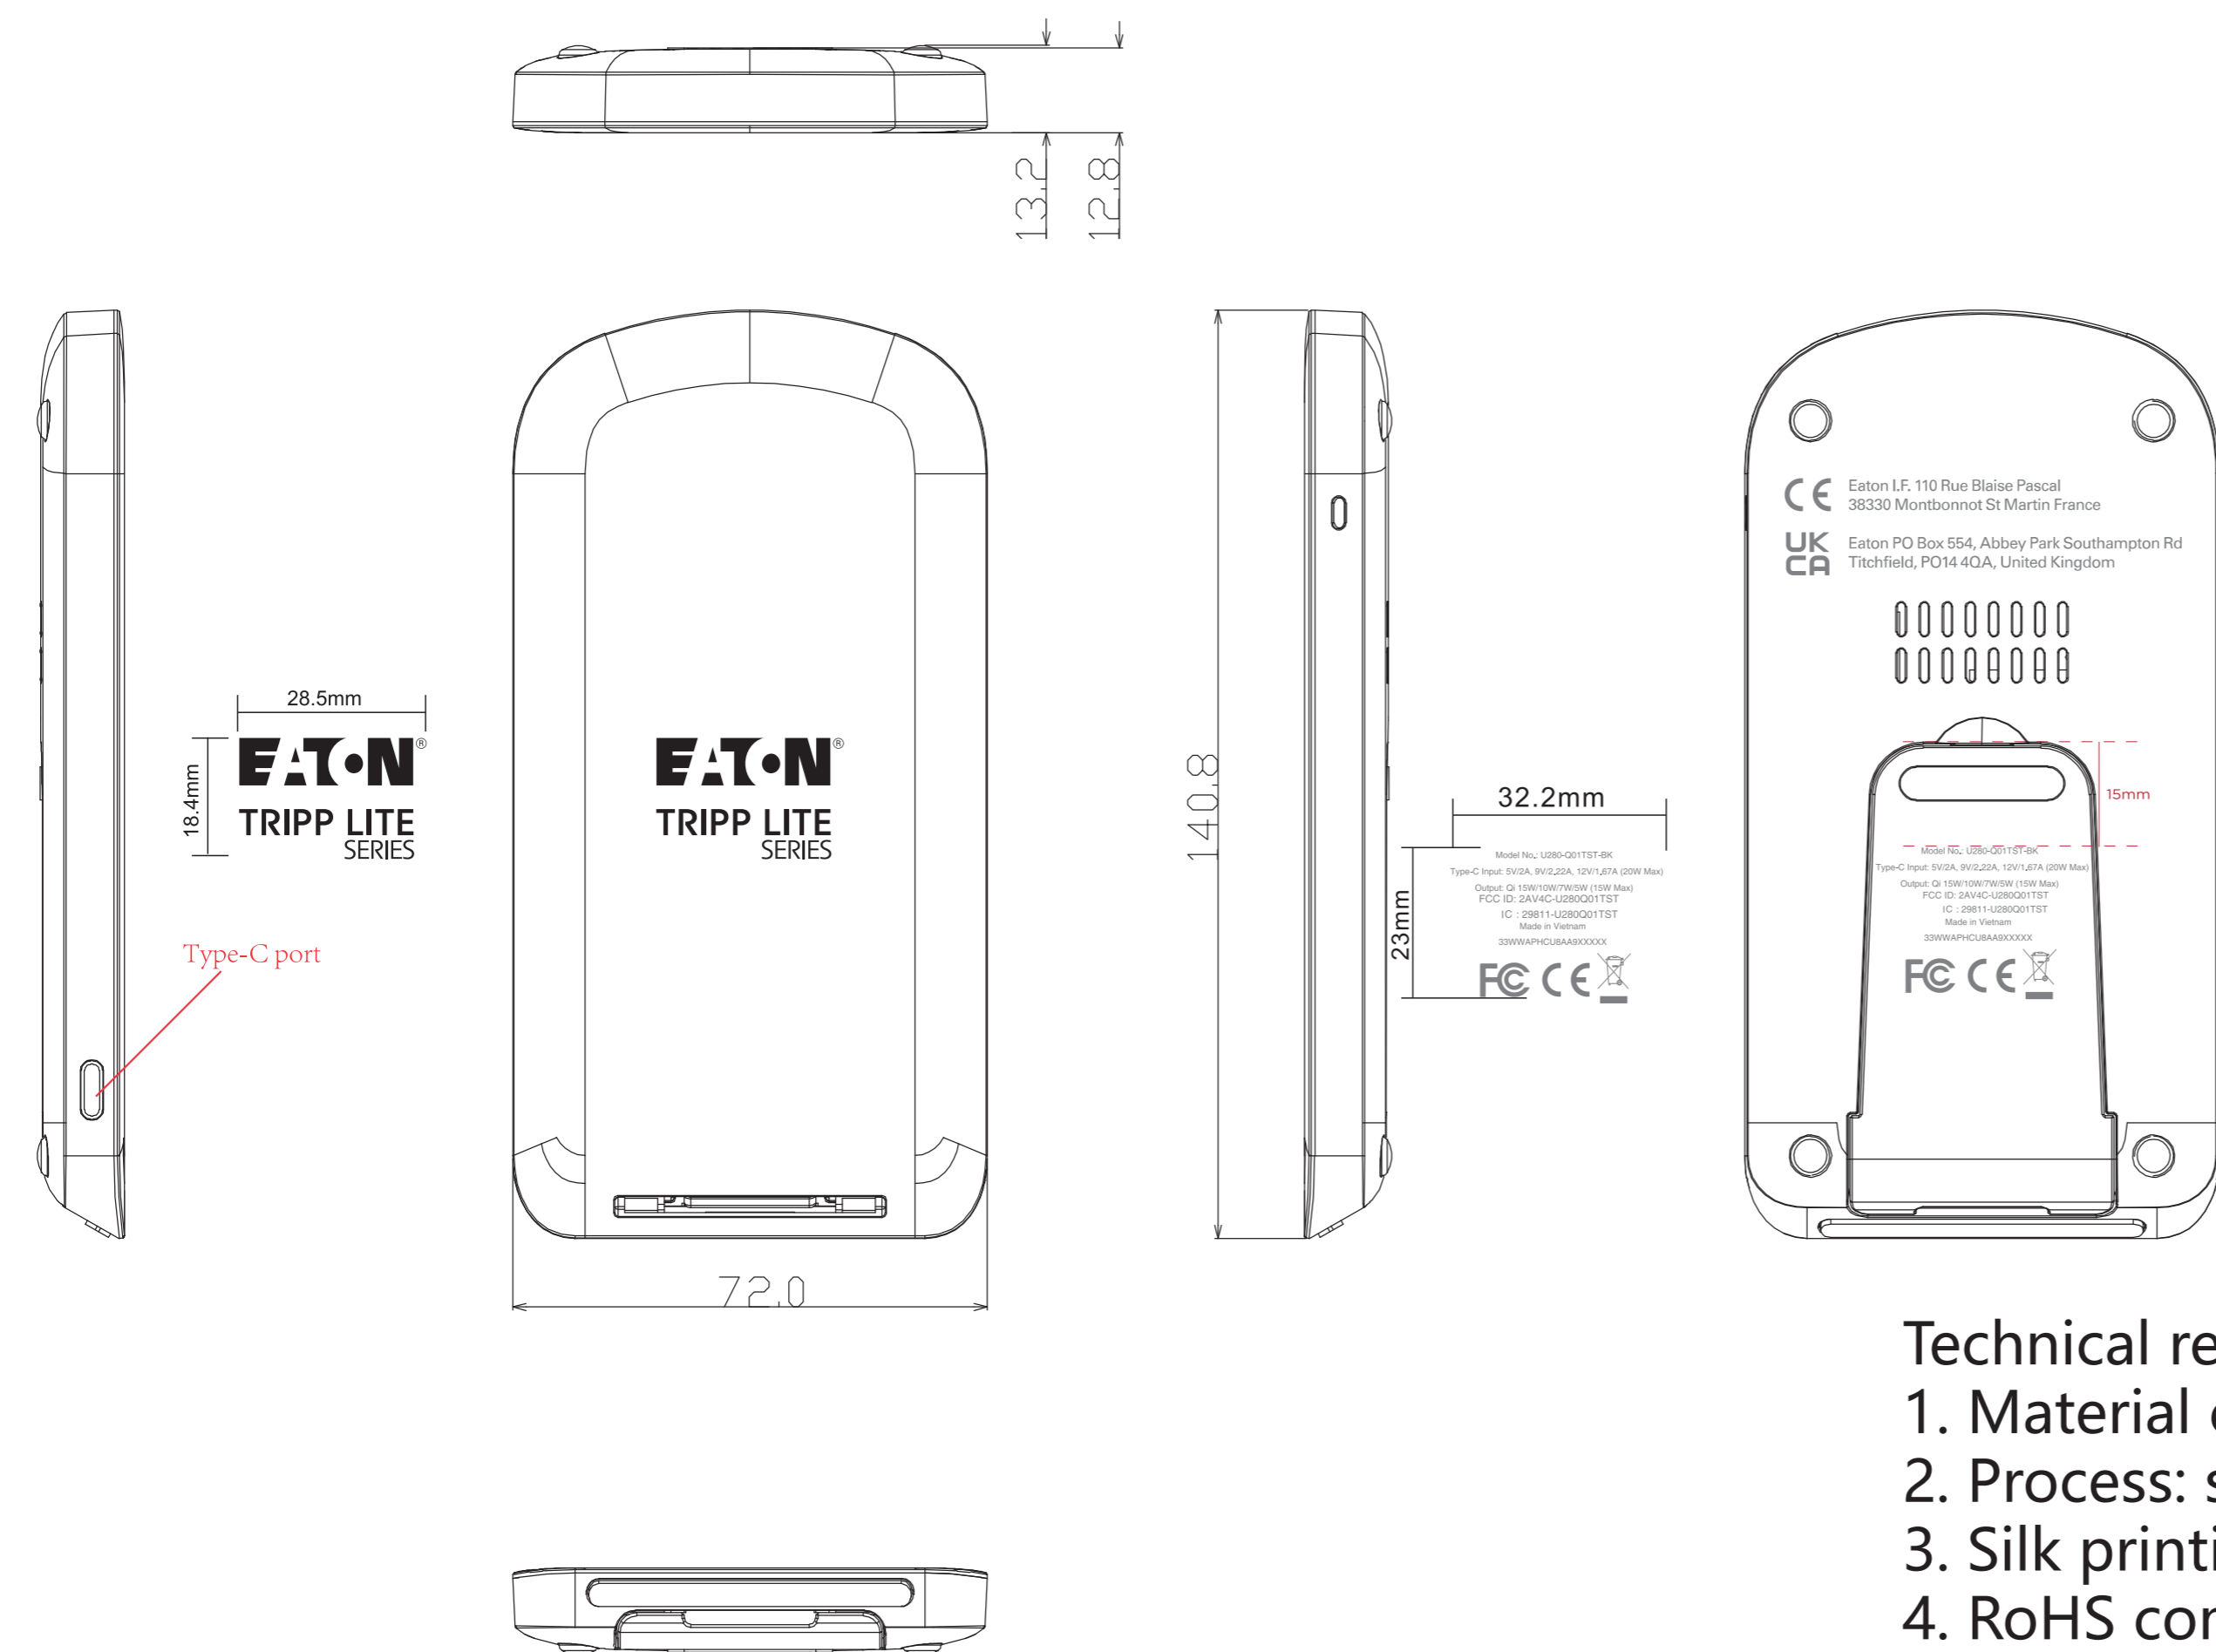

Enlarged View

- Technical requirements:
1. Material color: ABS, Black
 2. Process: silk printing/laser engraving
 3. Silk printing and laser engraving clear, no ghosting
 4. RoHS compliant
 5. Friction test: use cotton cloth(special) dipped in anhydrous alcohol(concentration ≥95%) to apply 300g load, wipe manually 20 times, the pattern content is still intact and clearly recognizable.

Operating Temperature Range: 0°C ~ 25°C
 Storage Temperature Range: -20°C ~ 60°C
 Operating Humidity: 5 ~ 95% ; Storage Humidity: 0 ~ 95%
 LED: Green/Red

Power on: the red LED keeps on
 Charging: the green LED flashes slowly
 Full charged: the green LED keeps on
 Foreign Object Debris: the red LED flashes
 Over Temperature Protection: the red and green LED flashes synchronously
 Under-Voltage/Over-Voltage and other abnormalities:
 the green LED flashes and the red LED keeps on
 Chipset Model: CV90331 ; Chipset Vendor: CVSMicro

Tripp Lite / Eaton								Serial No.:				
Dimensions								33WWAPHCU8AA9XXXXX				
Tolerances unless otherwise mentioned	V	A	0<X≤6	6<X≤30	30<X≤80	80<X≤180	180<X≤320	320<X≤600	>600	Description:		
	B	A	' 0.05	' 0.1	' 0.15	' 0.2	' 0.25	' 0.35	' 0.5		Schematic Part No.	
	B	A	' 0.1	' 0.15	' 0.2	' 0.25	' 0.4	' 0.5	' 0.65			9943BD
	C	A	' 0.2	' 0.3	' 0.4	' 0.6	' 0.8	' 1	' 2			
D	A	' 0.5	' 1	' 1.5	' 2.2	' 3.5	' 5	' 6.5	B			
Holes: ' 0.1 Angles: ' 0.5 ~								Third Angle Projection				
Size		A3	Unit	mm	Scale	Free	Sheet 1 Of 1					

Revised History

Designed By/Date

Checked By

Approved By

文件编号: QR-EG-075 版本号: E/0