

TEST REPORT

Reference No...... : WTX22X09197569W002
FCC ID : 2AV4C-UPB-04K0-1CM
Applicant : Trippe Manufacturing Company
Address : 1111 W. 35th Street, Chicago IL 60609, USA
Manufacturer : DONGGUAN CE LINK LIMITED
Address : 22 Dongkang Road, Dalingshan Town, Dongguan City, Guangdong Province, China.
Product Name : Magnetic Wireless Charger with Power Bank
Model No...... : UPB-04K0-1CM
Standards : KDB 680106 D01 V03
Date of Receipt sample : 2022-09-29
Date of Test..... : 2022-09-29 to 2023-03-23
Date of Issue : 2023-03-23
Test Report Form No. : WTX_KDB 680106 D01 V03W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Jack Huang

Jack Huang

Approved by:

Silin Chen

Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION.....4
 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4
 1.2 AUXILIARY EQUIPMENT LIST AND DETAILS5
 1.3 TEST EQUIPMENT LIST AND DETAILS6

2. RF EXPOSURE TEST REPORT7
 2.1 STANDARD APPLICABLE.....7
 2.2 TEST CONDITIONS8
 2.3 TEST PROCEDURE.....9
 2.4 TEST RESULT.....10
 2.5 MEASUREMENT UNCERTAINTY23
 2.6 TEST PHOTOS24

APPENDIX PHOTOGRAPHS.....26

Report version

Version No.	Date of issue	Description
Rev.00	2023-03-23	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Factory 1#: SuiChuan CE LINK LIMITED
 Address of factory: SuiChuan county industrial park east zone, Ji'an city
 Jiangxi province, China.

Factory 2#: CE LINK VIET NAM COMPANY LIMITED.
 Address of factory: Lot CNSG04&CNSG06 Van Trung Industrial Zone,
 Viet Yen district, Bac Giang Province, Vietnam

General Description of EUT	
Product Name:	Magnetic Wireless Charger with Power Bank
Trade Name:	Tripp Lite
Model No.:	UPB-04K0-1CM
Adding Model(s):	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	110~205kHz
Modulation Type:	/
Antenna Type:	Coil Antenna
Antenna Gain:	0dBi
Rated Voltage:	Type C Input: 5V, 9V Type C output: 5V, 9V Wireless Charger: 5W/7.5W/10W
Rated Current:	Input : 3A/ 1.67A Output : 3A/ 2A
Rated Power:	Wireless Output: 5W, 7.5W, 10W

1.2 Auxiliary Equipment List and Details

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
wireless charging tester	YBZ	YBZ wireless charging tester	/
Adapter	Xiaomi	MDY-08-ES	/
Smart phone	Apple	IPhone 12 Pro Max	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.20	Unshielded	Without Ferrite

1.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
ELECTRIC AND MAGNETIC FIELD ANALYZER	Narda	EHP-200AC	180ZX10226	2021-05-20	2024-05-19

2. RF Exposure Test Report

2.1 Standard Applicable

According to §1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)



Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density

2.2 Test Conditions

Test Mode	Description	Remark
AC adapter Mode:		
TM1	Wireless Charging	Input : 5V/3A, 9V1.67A Wireless Output : 5W
TM2	Wireless Charging	Input : 5V/3A, 9V1.67A Wireless Output : 10W
Battery Mode(0~20cm):		
TM3	Wireless Charging	Wireless Output : 5W
TM4	Wireless Charging	Wireless Output : 10W
<p>Note:</p> <p>For test AC Adapter, the device is designed for desktop, the test should be performed on each points (only A, B, C, D, E,F) at test distance (15 cm for A,B,C,D,F and 20 cm for E).</p> <p>For test by Battery, the device is designed for portable, the test should be performed on each points (A, B, C, D, E, F) at test distance (0~20cm).</p> <p>The EUT was tested with empty load, half load, and full load, and recorded the worst mode (full load) data in the report.</p>		
Measurement Distance:	0~20cm	

2.3 Test Procedure

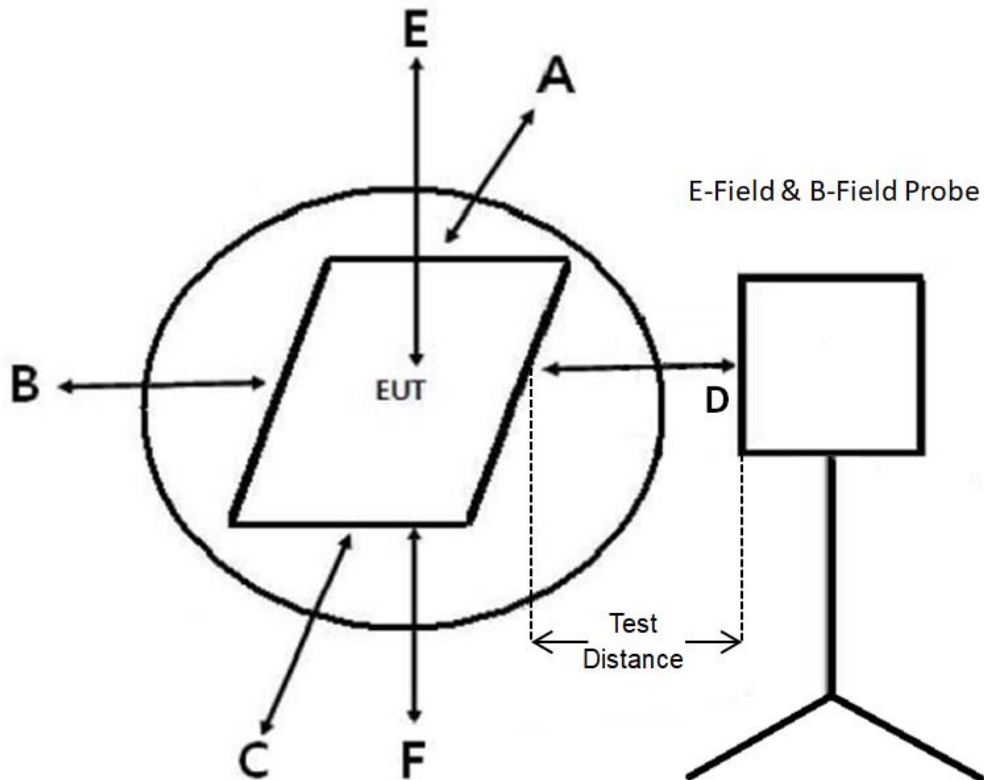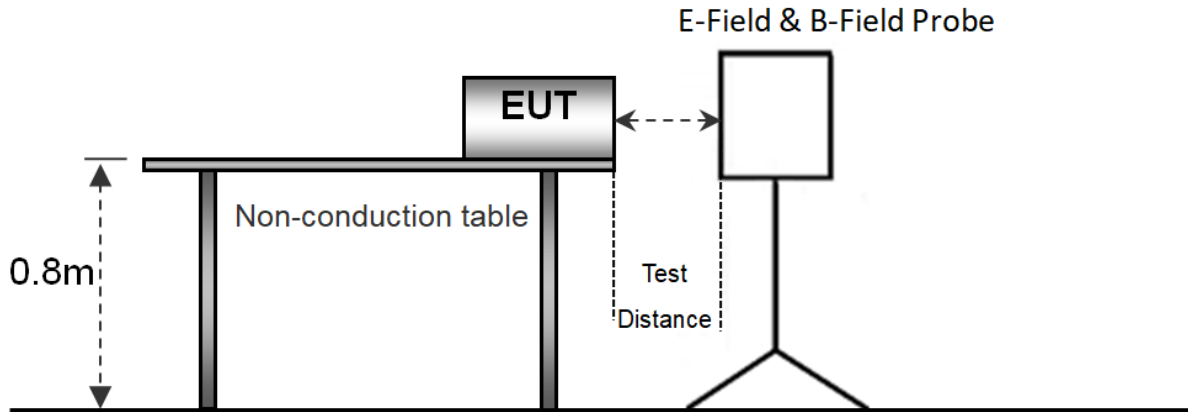

- Probe Model: EHP-200AC; The probe sensor is on the probe surface.
- The measurement probe was placed at test distance, which is between the edge of the charger and the edge of probe.
- E- and H-field data are taken along all three axes the device, from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device, with one axis coincident with the axis of the main coil.
- The highest emission level was recorded at the measurement points (A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 v03r01.

2.4 Test Result

The EUT complies with item 5.2 of KDB 680106 D01 v03r01

1. Power transfer frequency is less than 1 MHz
Yes, the device operates in the frequency range from 110kHz to 205kHz.
2. Output power from each primary coil is less than or equal to 15 watts
Yes, the maximum output power of the primary coil is less than 15W.
3. The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
Yes, the client device includes only single primary coils.
4. Client device is inserted in or placed directly in contact with the transmitter
Yes, Client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
No, It also supports portable exposure conditions.
6. The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test TM1, TM2 list, and the coils can't be transmitted simultaneously.

Test Mode: TM1

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	0.4241	614	153.5
Point F	0.3304	614	153.5
Point A	0.3841	614	153.5
Point B	0.2776	614	153.5
Point C	0.1250	614	153.5
Point D	0.2913	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3298	1.63	0.4075
Point F	0.2867	1.63	0.4075
Point A	0.2525	1.63	0.4075
Point B	0.3144	1.63	0.4075
Point C	0.0029	1.63	0.4075
Point D	0.1685	1.63	0.4075

Test Mode: TM2

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	0.4446	614	153.5
Point F	0.3292	614	153.5
Point A	0.0545	614	153.5
Point B	0.1040	614	153.5
Point C	0.3685	614	153.5
Point D	0.2919	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3506	1.63	0.4075
Point F	0.2786	1.63	0.4075
Point A	0.0231	1.63	0.4075
Point B	0.1769	1.63	0.4075
Point C	0.2518	1.63	0.4075
Point D	0.1466	1.63	0.4075

Test Mode: TM3

Test distance 0cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	3.8600	614	153.5
Point F	1.2293	614	153.5
Point A	0.2279	614	153.5
Point B	0.2477	614	153.5
Point C	0.5576	614	153.5
Point D	0.4969	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.2417	1.63	0.4075
Point F	0.0911	1.63	0.4075
Point A	0.1978	1.63	0.4075
Point B	0.2244	1.63	0.4075
Point C	0.1040	1.63	0.4075
Point D	0.0840	1.63	0.4075

Test distance 2cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	3.0036	614	153.5
Point F	1.2072	614	153.5
Point A	0.2227	614	153.5
Point B	0.2411	614	153.5
Point C	0.5028	614	153.5
Point D	0.4929	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.2305	1.63	0.4075
Point F	0.0850	1.63	0.4075
Point A	0.1892	1.63	0.4075
Point B	0.2154	1.63	0.4075
Point C	0.1008	1.63	0.4075
Point D	0.0822	1.63	0.4075

Test distance 4cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	2.5395	614	153.5
Point F	1.0313	614	153.5
Point A	0.2099	614	153.5
Point B	0.2227	614	153.5
Point C	0.4344	614	153.5
Point D	0.4692	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.2165	1.63	0.4075
Point F	0.0793	1.63	0.4075
Point A	0.1880	1.63	0.4075
Point B	0.2050	1.63	0.4075
Point C	0.0965	1.63	0.4075
Point D	0.0626	1.63	0.4075

Test distance 6cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	2.0902	614	153.5
Point F	0.8957	614	153.5
Point A	0.1971	614	153.5
Point B	0.2131	614	153.5
Point C	0.4207	614	153.5
Point D	0.4618	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.2025	1.63	0.4075
Point F	0.0704	1.63	0.4075
Point A	0.1736	1.63	0.4075
Point B	0.1977	1.63	0.4075
Point C	0.0837	1.63	0.4075
Point D	0.0458	1.63	0.4075

Test distance 8cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	1.6115	614	153.5
Point F	0.8196	614	153.5
Point A	0.1865	614	153.5
Point B	0.2013	614	153.5
Point C	0.4111	614	153.5
Point D	0.4492	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.1914	1.63	0.4075
Point F	0.0585	1.63	0.4075
Point A	0.1631	1.63	0.4075
Point B	0.1861	1.63	0.4075
Point C	0.0794	1.63	0.4075
Point D	0.0401	1.63	0.4075

Test distance 10cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	1.5067	614	153.5
Point F	0.7641	614	153.5
Point A	0.1824	614	153.5
Point B	0.1990	614	153.5
Point C	0.3772	614	153.5
Point D	0.4328	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.1828	1.63	0.4075
Point F	0.0502	1.63	0.4075
Point A	0.1614	1.63	0.4075
Point B	0.1848	1.63	0.4075
Point C	0.0724	1.63	0.4075
Point D	0.0358	1.63	0.4075

Test distance 12cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	1.3294	614	153.5
Point F	0.7286	614	153.5
Point A	0.1778	614	153.5
Point B	0.1890	614	153.5
Point C	0.3357	614	153.5
Point D	0.4279	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.1794	1.63	0.4075
Point F	0.0446	1.63	0.4075
Point A	0.1600	1.63	0.4075
Point B	0.1783	1.63	0.4075
Point C	0.0660	1.63	0.4075
Point D	0.0334	1.63	0.4075

Test distance 14cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	1.0624	614	153.5
Point F	0.6686	614	153.5
Point A	0.1688	614	153.5
Point B	0.1801	614	153.5
Point C	0.3289	614	153.5
Point D	0.4222	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.1697	1.63	0.4075
Point F	0.0399	1.63	0.4075
Point A	0.1514	1.63	0.4075
Point B	0.1762	1.63	0.4075
Point C	0.0568	1.63	0.4075
Point D	0.0287	1.63	0.4075

Test distance 16cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	0.7577	614	153.5
Point F	0.5909	614	153.5
Point A	0.1621	614	153.5
Point B	0.1762	614	153.5
Point C	0.3074	614	153.5
Point D	0.4029	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.1659	1.63	0.4075
Point F	0.0389	1.63	0.4075
Point A	0.1464	1.63	0.4075
Point B	0.1739	1.63	0.4075
Point C	0.0528	1.63	0.4075
Point D	0.0262	1.63	0.4075

Test distance 18cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	0.6417	614	153.5
Point F	0.5162	614	153.5
Point A	0.1549	614	153.5
Point B	0.1726	614	153.5
Point C	0.2780	614	153.5
Point D	0.3933	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.1602	1.63	0.4075
Point F	0.0359	1.63	0.4075
Point A	0.1418	1.63	0.4075
Point B	0.1721	1.63	0.4075
Point C	0.0516	1.63	0.4075
Point D	0.0205	1.63	0.4075

Test distance 20cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	0.4628	614	153.5
Point F	0.4762	614	153.5
Point A	0.1467	614	153.5
Point B	0.1703	614	153.5
Point C	0.2660	614	153.5
Point D	0.3801	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.1555	1.63	0.4075
Point F	0.0296	1.63	0.4075
Point A	0.1385	1.63	0.4075
Point B	0.1666	1.63	0.4075
Point C	0.0459	1.63	0.4075
Point D	0.0190	1.63	0.4075

Test Mode: TM4

Test distance 0cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	4.2214	614	153.5
Point F	0.2566	614	153.5
Point A	0.7736	614	153.5
Point B	0.7727	614	153.5
Point C	0.8909	614	153.5
Point D	0.7832	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.4332	1.63	0.4075
Point F	0.1939	1.63	0.4075
Point A	0.2264	1.63	0.4075
Point B	0.1031	1.63	0.4075
Point C	0.0840	1.63	0.4075
Point D	0.0911	1.63	0.4075

Test distance 2cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	3.4700	614	153.5
Point F	0.2475	614	153.5
Point A	0.6597	614	153.5
Point B	0.7596	614	153.5
Point C	0.7720	614	153.5
Point D	0.7708	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3991	1.63	0.4075
Point F	0.1822	1.63	0.4075
Point A	0.2022	1.63	0.4075
Point B	0.0957	1.63	0.4075
Point C	0.0713	1.63	0.4075
Point D	0.0822	1.63	0.4075

Test distance 4cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	2.7816	614	153.5
Point F	0.2413	614	153.5
Point A	0.5734	614	153.5
Point B	0.7059	614	153.5
Point C	0.7098	614	153.5
Point D	0.7334	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3783	1.63	0.4075
Point F	0.1748	1.63	0.4075
Point A	0.1996	1.63	0.4075
Point B	0.0780	1.63	0.4075
Point C	0.0539	1.63	0.4075
Point D	0.0775	1.63	0.4075

Test distance 6cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	2.3309	614	153.5
Point F	0.2356	614	153.5
Point A	0.5345	614	153.5
Point B	0.6080	614	153.5
Point C	0.6447	614	153.5
Point D	0.6642	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3732	1.63	0.4075
Point F	0.1655	1.63	0.4075
Point A	0.1839	1.63	0.4075
Point B	0.0672	1.63	0.4075
Point C	0.0445	1.63	0.4075
Point D	0.0620	1.63	0.4075

Test distance 8cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	1.9465	614	153.5
Point F	0.2296	614	153.5
Point A	0.4681	614	153.5
Point B	0.6008	614	153.5
Point C	0.5868	614	153.5
Point D	0.6404	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3599	1.63	0.4075
Point F	0.1648	1.63	0.4075
Point A	0.1778	1.63	0.4075
Point B	0.0633	1.63	0.4075
Point C	0.0434	1.63	0.4075
Point D	0.0585	1.63	0.4075

Test distance 10cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	1.8146	614	153.5
Point F	0.2249	614	153.5
Point A	0.4137	614	153.5
Point B	0.5786	614	153.5
Point C	0.5752	614	153.5
Point D	0.6240	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3477	1.63	0.4075
Point F	0.1586	1.63	0.4075
Point A	0.1691	1.63	0.4075
Point B	0.0565	1.63	0.4075
Point C	0.0359	1.63	0.4075
Point D	0.0514	1.63	0.4075

Test distance 12cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	1.4608	614	153.5
Point F	0.2167	614	153.5
Point A	0.3643	614	153.5
Point B	0.5338	614	153.5
Point C	0.5230	614	153.5
Point D	0.6051	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3452	1.63	0.4075
Point F	0.1565	1.63	0.4075
Point A	0.1592	1.63	0.4075
Point B	0.0505	1.63	0.4075
Point C	0.0348	1.63	0.4075
Point D	0.0425	1.63	0.4075

Test distance 14cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	1.2783	614	153.5
Point F	0.2149	614	153.5
Point A	0.3161	614	153.5
Point B	0.5202	614	153.5
Point C	0.5016	614	153.5
Point D	0.5902	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3295	1.63	0.4075
Point F	0.1544	1.63	0.4075
Point A	0.1564	1.63	0.4075
Point B	0.0438	1.63	0.4075
Point C	0.0290	1.63	0.4075
Point D	0.0396	1.63	0.4075

Test distance 16cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	0.9784	614	153.5
Point F	0.2089	614	153.5
Point A	0.2515	614	153.5
Point B	0.4684	614	153.5
Point C	0.4949	614	153.5
Point D	0.5524	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3117	1.63	0.4075
Point F	0.1501	1.63	0.4075
Point A	0.1531	1.63	0.4075
Point B	0.0341	1.63	0.4075
Point C	0.0226	1.63	0.4075
Point D	0.0305	1.63	0.4075

Test distance 18cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	0.6871	614	153.5
Point F	0.2005	614	153.5
Point A	0.2421	614	153.5
Point B	0.4428	614	153.5
Point C	0.4359	614	153.5
Point D	0.5135	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.3041	1.63	0.4075
Point F	0.1469	1.63	0.4075
Point A	0.1473	1.63	0.4075
Point B	0.0297	1.63	0.4075
Point C	0.0185	1.63	0.4075
Point D	0.0242	1.63	0.4075

Test distance 20cm

Electric Field Emissions			
Test Position	Measure Value (V/m)	Limit(V/m)	25% Limit (V/m)
Point E	0.2950	614	153.5
Point F	0.1977	614	153.5
Point A	0.2190	614	153.5
Point B	0.3937	614	153.5
Point C	0.3732	614	153.5
Point D	0.4786	614	153.5
Magnetic Field Emissions			
Test Position	Measure Value (A/m)	Limit(A/m)	25% Limit (A/m)
Point E	0.2887	1.63	0.4075
Point F	0.1410	1.63	0.4075
Point A	0.1459	1.63	0.4075
Point B	0.0234	1.63	0.4075
Point C	0.0121	1.63	0.4075
Point D	0.0142	1.63	0.4075

2.5 Measurement Uncertainty


Measurement uncertainty		
Parameter	Conditions	Uncertainty
Electric Field Emissions	Radiated	± 1.56 (V/m)
Magnetic Field Emissions	Radiated	± 0.08 (A/m)

2.6 Test Photos

AC adapter Mode:



Battery Mode(0cm):

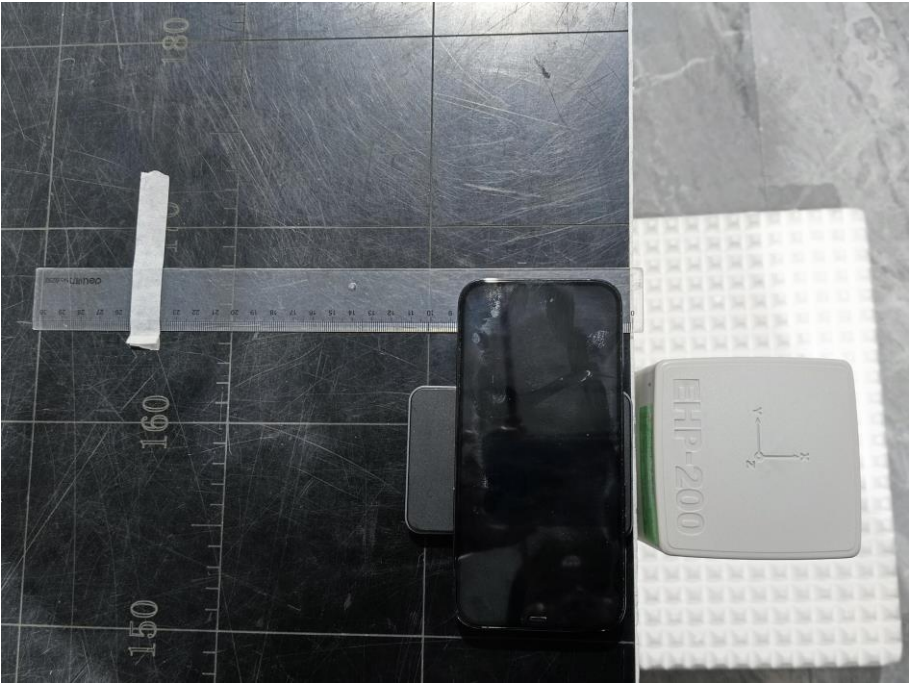

Battery Mode:



APPENDIX PHOTOGRAPHS

Please refer to "ANNEX"

**** END OF REPORT ****