



**FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 Issue 2**

CERTIFICATION TEST REPORT

For

Smart Cordless Floor Washer

MODEL NUMBER: FW250100US

**ADDITIONAL MODEL NUMBER (ONLY FOR FCC): FW25xyyzz(xx could be 00-99
or AA-ZZ, indicate for different accessories; yy could be 00-99 indicate for
different sales channels; zz could be AA-ZZ indicate for different countries)**

PROJECT NUMBER: 4790882283

REPORT NUMBER: 4790882283-1

FCC ID: 2AV7A-FW25

IC: 26039-FW25

ISSUE DATE: Jul. 17, 2023

Prepared for

Tineco Intelligent Technology Co.,Ltd.

Prepared by

UL-CCIC COMPANY LIMITED

No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China

Tel: +86 512-6808 6400

Fax: +86 512-6808 4099

Website: www.ul.com

Form-ULID-008536-9 V3.0

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	07/17/2023	Initial Issue	

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	4
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION.....	6
4.	CALIBRATION AND UNCERTAINTY.....	7
4.1.	MEASURING INSTRUMENT CALIBRATION.....	7
4.2.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT.....	8
5.2.	MAXIMUM OUTPUT POWER.....	9
5.3.	CHANNEL LIST	9
5.4.	TEST CHANNEL CONFIGURATION	10
5.5.	THE WORSE CASE POWER SETTING PARAMETER	10
5.6.	DESCRIPTION OF AVAILABLE ANTENNAS	11
5.7.	THE WORSE CASE CONFIGURATIONS.....	11
5.8.	DESCRIPTION OF TEST SETUP	12
5.9.	MEASURING INSTRUMENT AND SOFTWARE USED	14
6.	MEASUREMENT METHODS.....	16
7.	ANTENNA PORT TEST RESULTS	17
7.1.	ON TIME AND DUTY CYCLE	17
7.2.	6 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	21
7.3.	CONDUCTED OUTPUT POWER	39
7.4.	POWER SPECTRAL DENSITY	49
7.5.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	59
8.	RADIATED TEST RESULTS.....	91
8.1.	LIMITS AND PROCEDURE	91
8.2.	TEST ENVIRONMENT.....	98
8.3.	RESTRICTED BANDEDGE	98
8.4.	SPURIOUS EMISSIONS.....	119
9.	AC POWER LINE CONDUCTED EMISSIONS.....	188
10.	ANTENNA REQUIREMENTS.....	191

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Tineco Intelligent Technology Co.,Ltd.
Address: No. 108 Shihu Road West, Wuzhong Zone Suzhou ,Jiangsu,China
215128

Manufacturer Information

Company Name: Tineco Intelligent Technology Co.,Ltd.
Address: No. 108 Shihu Road West, Wuzhong Zone Suzhou ,Jiangsu,China
215128

EUT Description

Product Name: Smart Cordless Floor Washer
Model Number: FW250100US
Additional Model Number (Only for FCC): FW25xxyyzz (xx could be 00-99 or AA-ZZ, indicate for different accessories; yy could be 00-99 indicate for different sales channels; zz could be AA-ZZ indicate for different countries)
Sample Number: 6177090
Data of Receipt Sample: Jun. 14, 2023
Date Tested: Jun. 14, 2023~ Jul. 06, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a) RSS-Gen Clause 6.7	PASS
2	Conducted Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 (d) RSS-Gen Clause 6.12	PASS
3	Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	PASS
4	Conducted Band edge And Spurious emission	FCC 15.247 (d) RSS-247 Clause 5.5 RSS-GEN Clause 6.13	PASS
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 6.13	PASS
6	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	PASS
7	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	PASS
<p>Note: The measurement result for the sample received is <Pass> according to < ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15C, RSS-Gen and RSS 247> when <Accuracy Method> decision rule is applied.</p>			

Prepared By:

Tom Tang

Tom Tang

Reviewed By:

Leon Wu

Leon Wu

Authorized By:

Chris Zhong

Chris Zhong
EMC&RF Lab Operations Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4829.01) UL-CCIC COMPANY LIMITED has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1247) UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p> <p>IC (IC Designation No.: 25056; CAB No.: CN0073) UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</p>
---------------------------	---

Note 1: All tests measurement facilities use to collect the measurement data are located at No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China

Note 2: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. These measurements below 30MHz had been correlated to measurements performed on an OFS.

Note 3: The test anechoic chamber in UL-CCIC COMPANY LIMITED had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.1dB
Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	3.4dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	3.4dB
Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	3.5dB (1GHz-18Gz)
	3.9dB (18GHz-26.5Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Product Name:	Smart Cordless Floor Washer
Model No.:	FW250100US
Operating Frequency:	IEEE 802.11B/G/N/AX(HT20): 2412MHz to 2462MHz IEEE 802.11N(HT40): 2422MHz to 2452MHz
Type of Modulation:	IEEE for 802.11B: DSSS (CCK, DQPSK, DBPSK) IEEE for 802.11G: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11N(HT20 and HT40): OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11AX20: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Channels Step:	Channels with 5MHz step
Test software of EUT:	RD Tool
Antenna Type:	PCB antenna
Antenna Gain:	-0.66 dBi
	Note: This data is provided by customer and our lab isn't responsible for this data.

5.2. MAXIMUM OUTPUT POWER

Number of Transmit Chains (NTX)	IEE Std. 802.11	Channel Number	Max AVG Conducted Power (dBm)
1	IEEE 802.11B	1-11[11]	14.94
1	IEEE 802.11G	1-11[11]	14.18
1	IEEE 802.11N HT20	1-11[11]	13.88
1	IEEE 802.11N HT40	3-9[7]	12.76
1	IEEE 802.11AX20	1-11[11]	13.60

5.3. CHANNEL LIST

Channel List for 802.11B/G/N/AX(20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452		

Channel List for 802.11N(40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447		

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel (MHz)
IEEE 802.11B	LCH: CH01 2412
	MCH: CH06 2437
	HCH: CH11 2462
IEEE 802.11G	LCH: CH01 2412
	MCH: CH06 2437
	HCH: CH11 2462
IEEE 802.11N HT20	LCH: CH01 2412
	MCH: CH06 2437
	HCH: CH11 2462
IEEE 802.11N HT40	LCH: CH03 2422
	MCH: CH06 2437
	HCH: CH09 2452
IEEE 802.11AX20	LCH: CH01 2412
	MCH: CH06 2437
	HCH: CH11 2462

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		RD Tool					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11B	1	default	default	default	/		
802.11G	1	default	default	default			
802.11N HT20	1	default	default	default			
802.11N HT40	1	/			default	default	default
802.11AX20	1	default	default	default	/		

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2400-2483.5	PCB antenna	-0.66

Note: This data is provided by customer and our lab isn't responsible for this data.

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11B	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
IEEE 802.11G	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
IEEE 802.11N HT20	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
IEEE 802.11N HT40	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
IEEE 802.11AX20	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.

5.7. THE WORSE CASE CONFIGURATIONS

For WIFI module, the worst-case data rates as provided by the client were:

802.11B mode: 1 Mbps

802.11G mode: 6 Mbps

802.11N HT20 mode: MCS0

802.11N HT40 mode: MCS0

802.11AX20 mode: MCS0

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Description
1	Laptop	ThinkPad	E590	N/A
2	Fixed Frequency Board	N/A	N/A	Supply by Customer
3	USB Cable	N/A	N/A	Supply by UL Lab(100cm length)

I/O PORT

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	N/A	N/A	N/A	N/A	N/A

ACCESSORY


Item	Accessory	Brand Name	Model Name	Description
1	AC/DC ADAPTER	Class 2 Power Supply	MODEL: YLJX2I-T300100	INPUT: 100-240V~50/60Hz 1.0A Max, OUTPUT:30.0V= 1.0A
2	Handheld Accessory Devices	Handheld Accessory Devices	N/A	Supply by Customer

Remark: Pre-testing with these accessories and Handheld Accessory Devices, only the data of the worst case is included in this report.

TEST SETUP

The EUT can work in an engineer mode with a software through a table PC.

SETUP DIAGRAM FOR TESTS

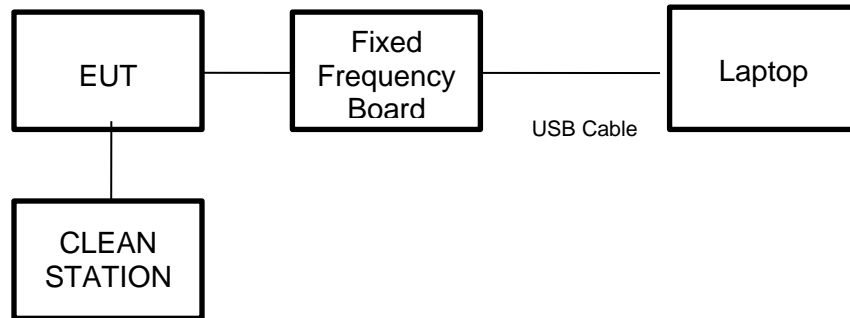

5.9. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	126700	2021-12-04	2022-12-19	2023-12-18
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	126701	2021-12-04	2022-12-03	2023-12-02
Software							
Used	Description		Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance		R&S	EMC32	Ver. 9.25		
Radiated Emissions (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9010B	155727	2022-04-09	2023-04-08	2024-04-07
<input checked="" type="checkbox"/>	EMI test receiver	R&S	ESR7	221694	2022-05-20	2023-04-08	2024-04-07
<input checked="" type="checkbox"/>	EMI test receiver	R&S	ESR26	126703	2020-12-05	2022-12-03	2023-12-02
<input checked="" type="checkbox"/>	Receiver Antenna (9kHz-30MHz)	Schwarzbeck	FMZB 1513	155456	2018-06-15	2021-06-03	2024-06-02
<input checked="" type="checkbox"/>	Receiver Antenna (30MHz-1GHz)	Schwarzbeck	VULB 9163	126704	2019-02-15	2022-01-18	2025-01-17
<input checked="" type="checkbox"/>	Receiver Antenna (1GHz-18GHz)	R&S	HF907	126705	2018-01-29	2022-02-28	2025-02-27
<input checked="" type="checkbox"/>	Receiver Antenna (18GHz-26.5GHz)	ETS	3160-10	155565	2019-01-05	2021-07-15	2024-07-14
<input checked="" type="checkbox"/>	Pre-amplification (To 18GHz)	R&S	SCU-18D	134667	2021-12-04	2022-12-03	2023-12-02
<input checked="" type="checkbox"/>	Pre-amplification (To 18GHz)	Tonsend	TAP01018050	224539	/	2022-10-20	2023-10-19
<input checked="" type="checkbox"/>	Pre-amplification (To 26.5GHz)	R&S	SCU-26D	135391	2021-12-05	2022-12-03	2023-12-02
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	1	2022-04-09	2023-04-08	2024-04-07
<input checked="" type="checkbox"/>	Highpass Filter	Wainwright	WHKX10-2700-3000-18000-40SS	2	2022-04-09	2023-04-08	2024-04-07
<input checked="" type="checkbox"/>	Attenuator	Wainwright	BW-N1-W5+	3	2022-04-09	2023-04-08	2024-04-07
<input checked="" type="checkbox"/>	Chamber A	Albatross	9*6*6	126721	2019-05-31	2022-05-30	2025-05-29
<input checked="" type="checkbox"/>	Chamber B	SAEMC	9*6*6	220350	/	2022-07-03	2025-06-01
<input checked="" type="checkbox"/>	Temperature and Humidity Datalogger	Omega Engineering Inc.	iTHX-SD-5	183135	/	2022-07-20	2023-07-19
Software							
Used	Description		Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance		Tonscend	JS36-RSE	4.0.0.1		

Other instruments

Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9010B	155368	2022-04-09	2023-04-08	2024-04-07
<input checked="" type="checkbox"/>	Attenuator	PASTERNAK	PE7087-6	1624	2022-05-23	2023-04-08	2024-04-07
<input checked="" type="checkbox"/>	Shielding Room	Albatross	/	126723	2019-12-27	2022-05-30	2025-05-29
<input checked="" type="checkbox"/>	Temperature and Humidity Datalogger	Omega Engineering Inc.	iTHX-SD-5	199847	2021-10-15	2022-10-14	2023-10-13

6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth	KDB 558074 D01 15.247 Meas Guidance v05r02	8.2
2	Conducted Output Power	KDB 558074 D01 15.247 Meas Guidance v05r02	8.3.2.2 (Method AVGSA-2)
3	Power Spectral Density	KDB 558074 D01 15.247 Meas Guidance v05r02	8.4 (Method PKPSD)
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.6
6	Band-edge	KDB 558074 D01 15.247 Meas Guidance v05r02	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

FCC KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



TEST ENVIRONMENT

Temperature	25.5°C	Relative Humidity	50.5%
Atmosphere Pressure	102.1kpa	Test Voltage	AC120V/60Hz


TEST RESULTS TABLE

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (kHz)	Final VBW (kHz)
11B	100	100	1	100	0	0.01	0.01
11G	100	100	1	100	0	0.01	0.01
802.11N HT20	100	100	1	100	0	0.01	0.01
802.11N HT40	100	100	1	100	0	0.01	0.01
802.11AX20	100	100	1	100	0	0.01	0.01


- Note: 1) Duty Cycle Correction Factor=10log(1/x).
 2) Where: x is Duty Cycle (Linear)
 3) Where: T is On Time (transmit duration)
 4) If the duty cycle is above 98%, the Final VBW is 10Hz.

TEST GRAPHS


11B ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

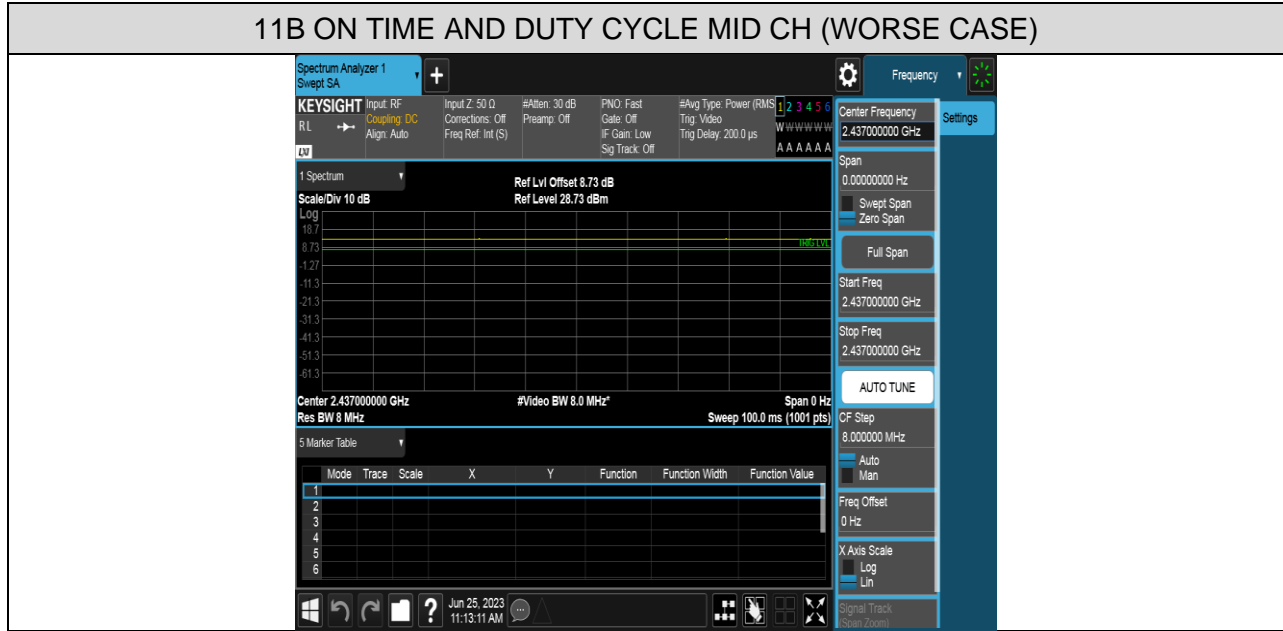


11G ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

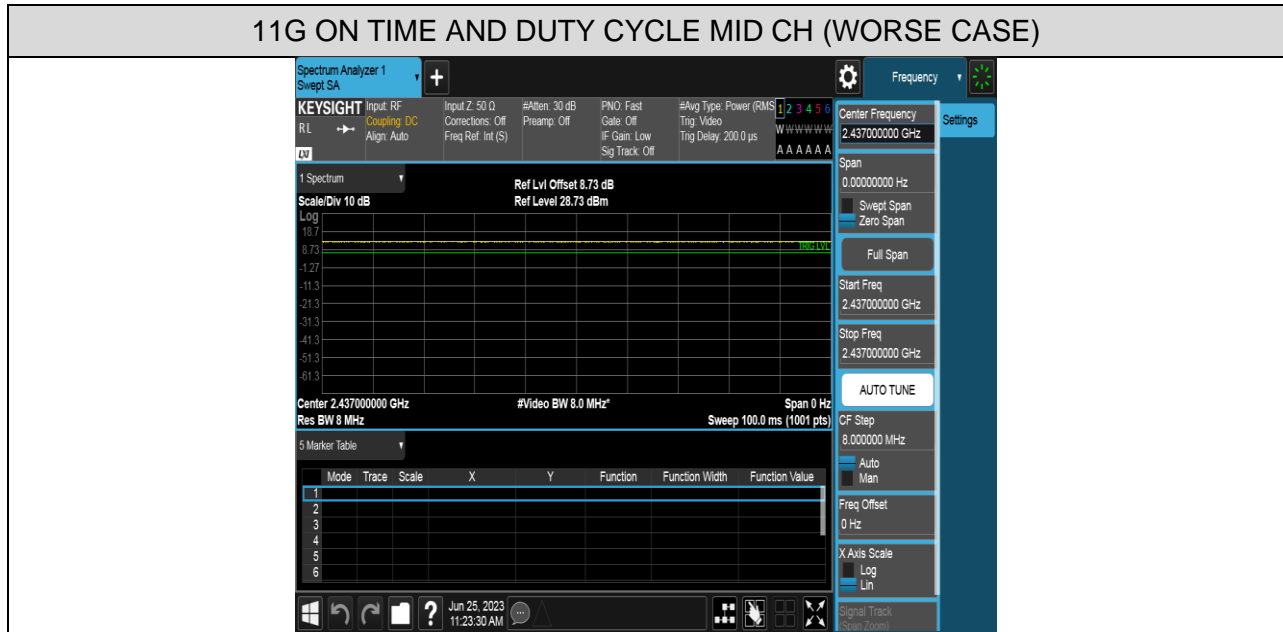


11N HT20 ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

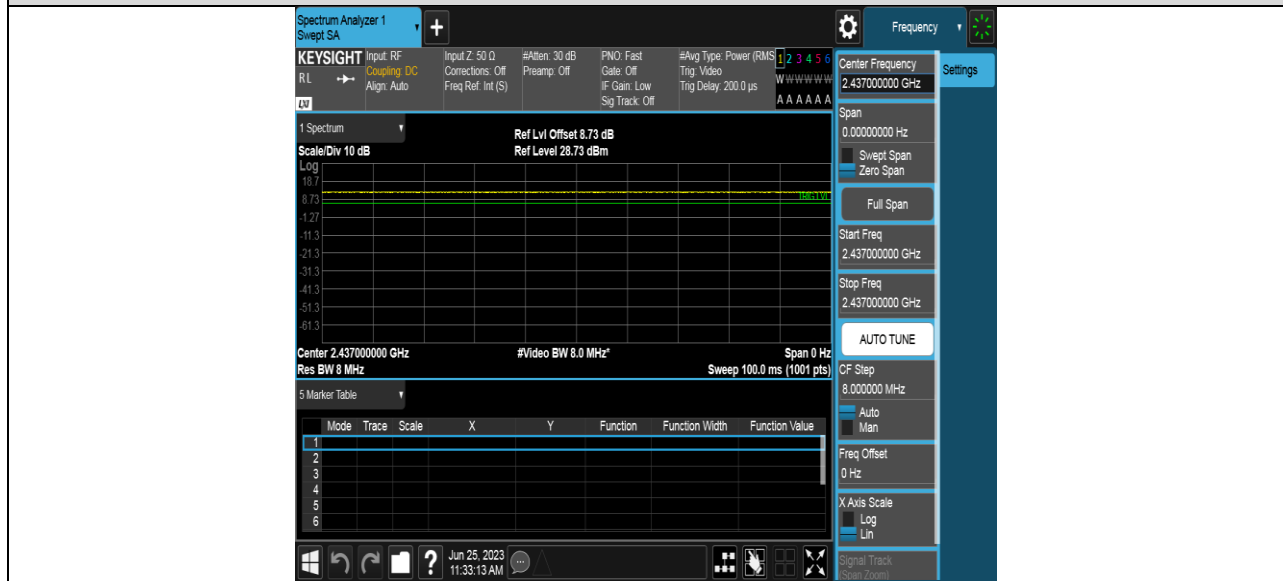

11N HT40 ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

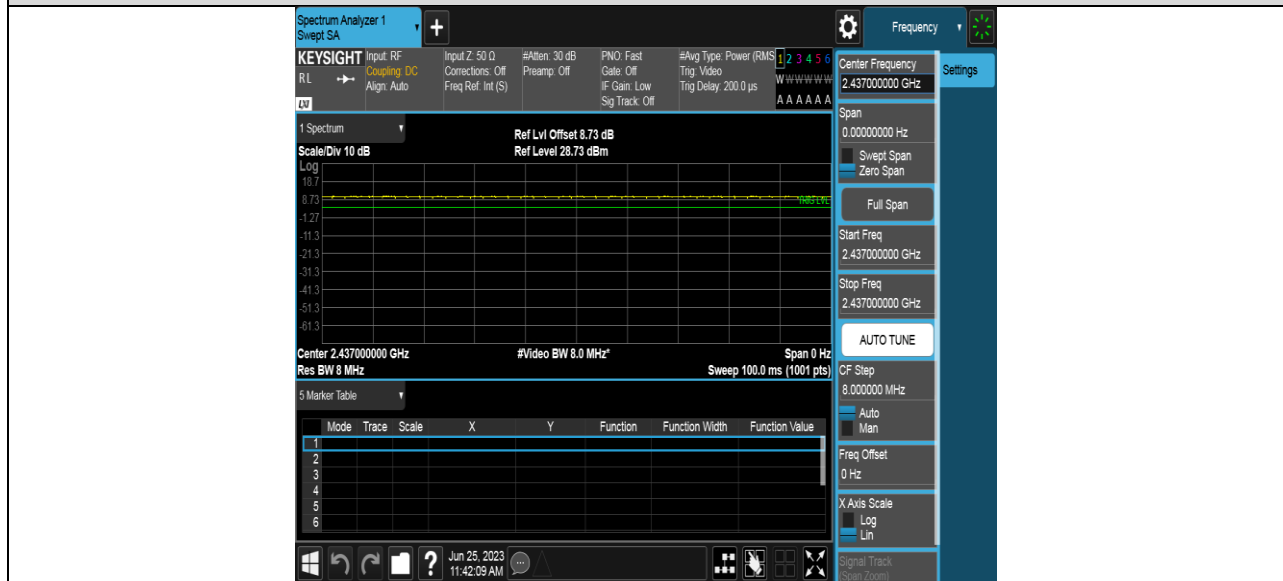

11AX20 ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

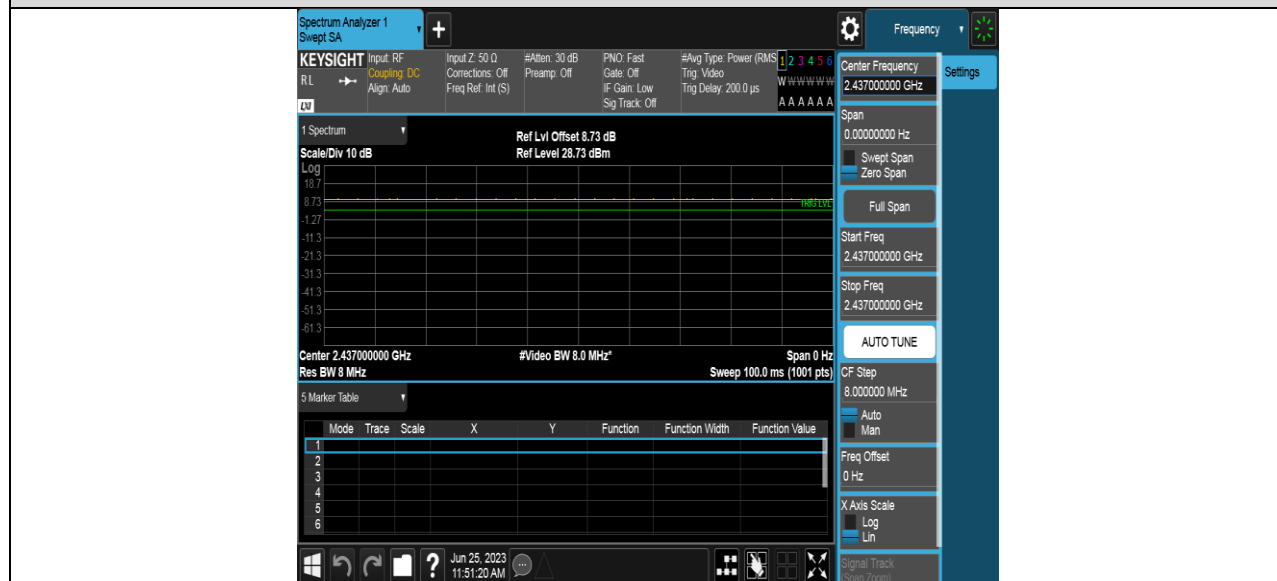

7.2. 6 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C, ISED RSS-Gen			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6dB Bandwidth	$\geq 500\text{kHz}$	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 99 % Occupied Bandwidth: $\geq 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

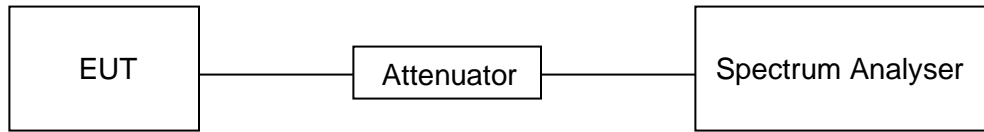

TEST ENVIRONMENT



Temperature	25.5°C	Relative Humidity	50.5%
Atmosphere Pressure	102.1kpa	Test Voltage	AC120V/60Hz


TEST RESULTS TABLE



Test Mode	Test Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Result
11B	LCH	10.072	15.869	Pass
	MCH	10.019	15.688	Pass
	HCH	10.007	15.614	Pass
11G	LCH	5.337	15.601	Pass
	MCH	6.351	15.518	Pass
	HCH	6.308	15.505	Pass
11N HT20	LCH	7.541	16.693	Pass
	MCH	5.380	16.590	Pass
	HCH	7.528	16.602	Pass
11N HT40	LCH	10.069	33.550	Pass
	MCH	7.907	33.210	Pass
	HCH	7.613	33.500	Pass
11AX20	LCH	14.901	19.119	Pass
	MCH	15.272	19.055	Pass
	HCH	18.576	19.034	Pass


TEST GRAPHS

For 6dB Bandwidth Part:

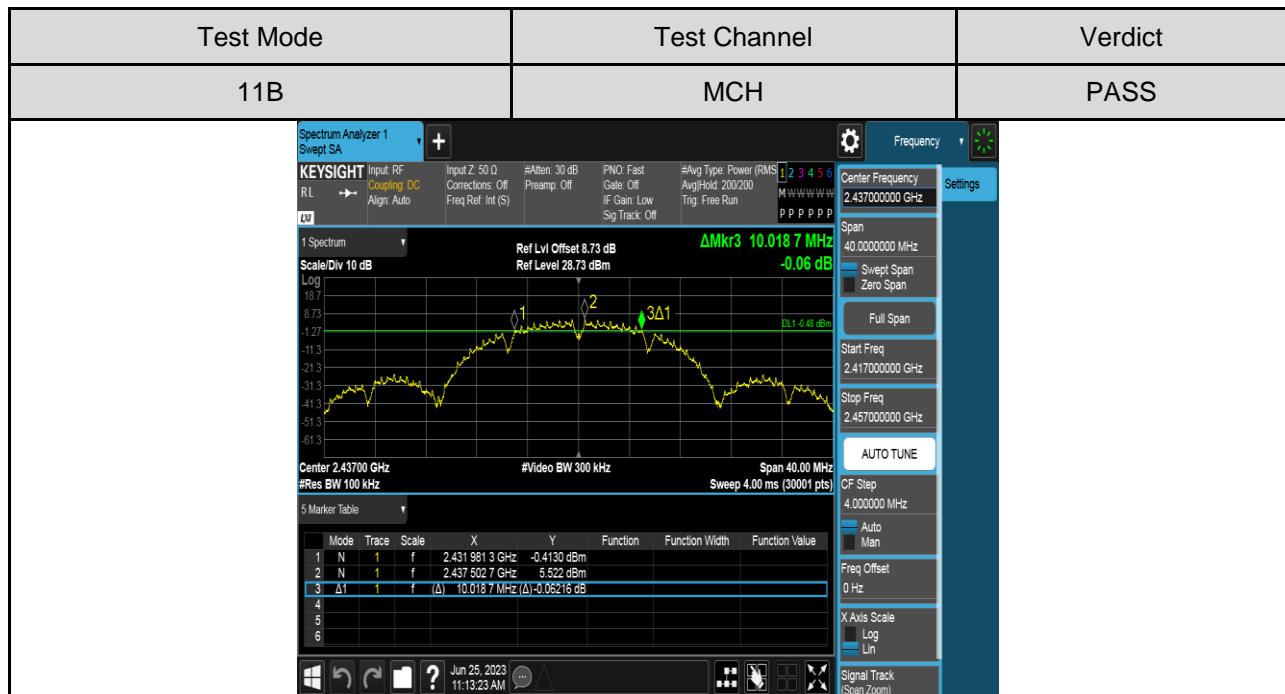
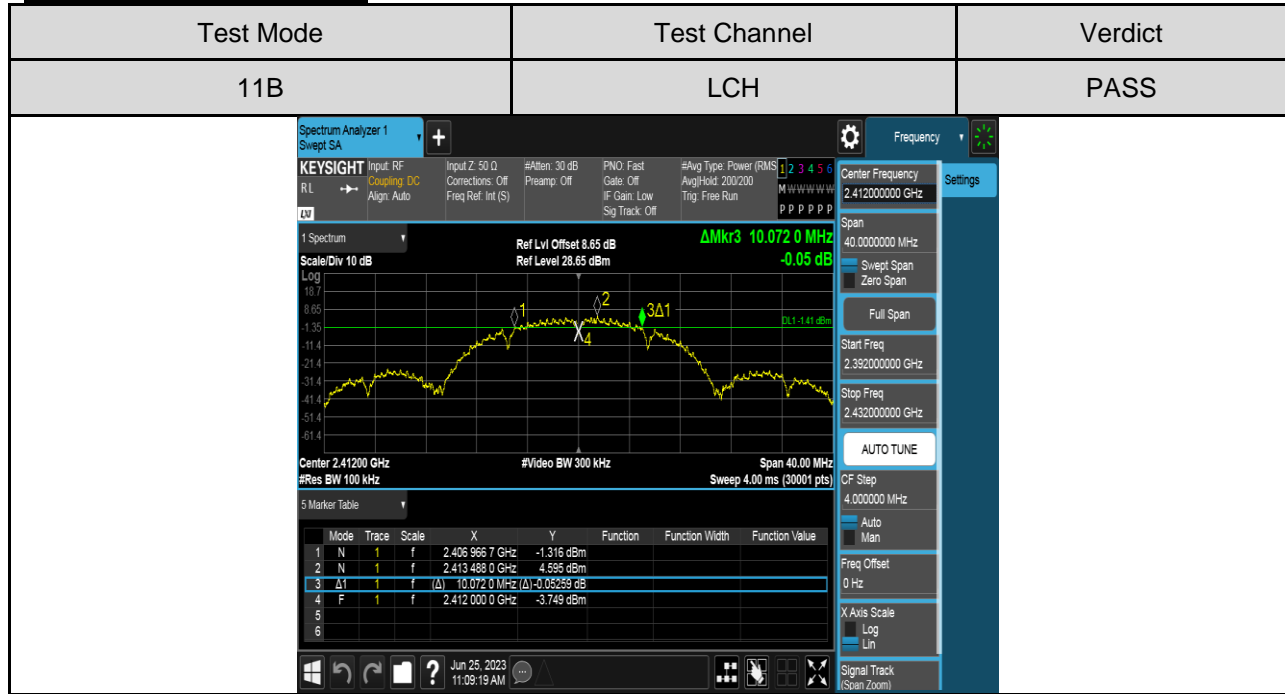


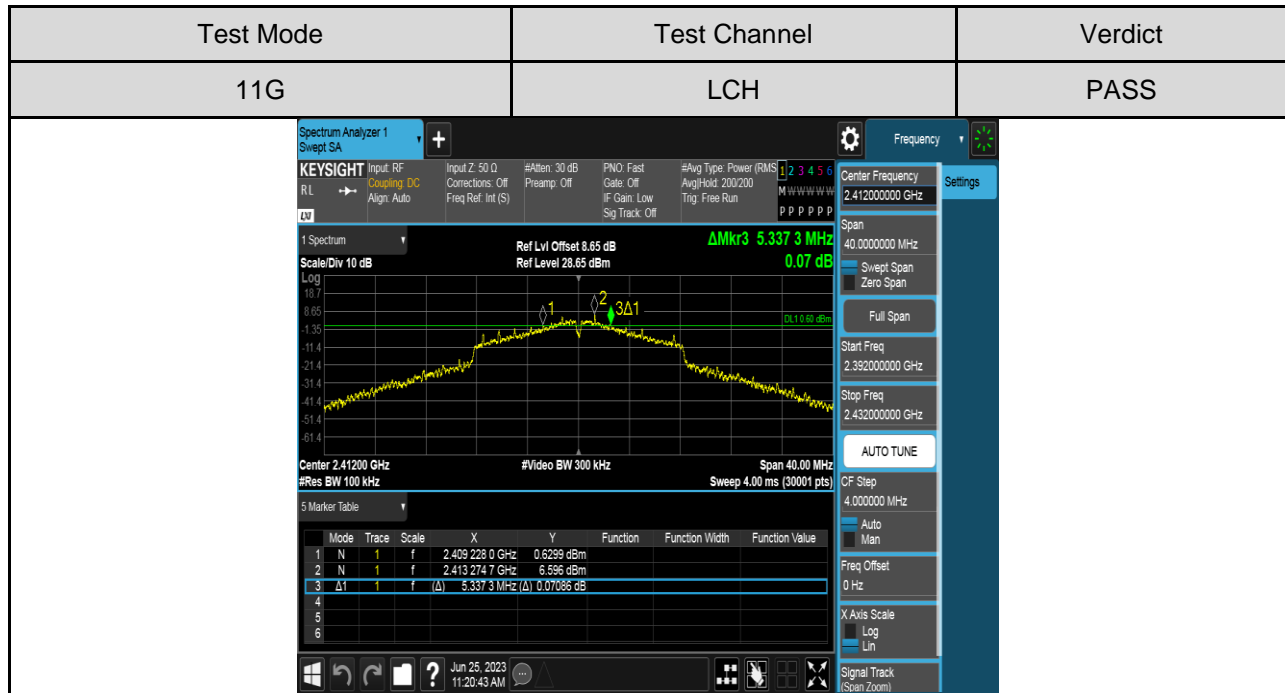


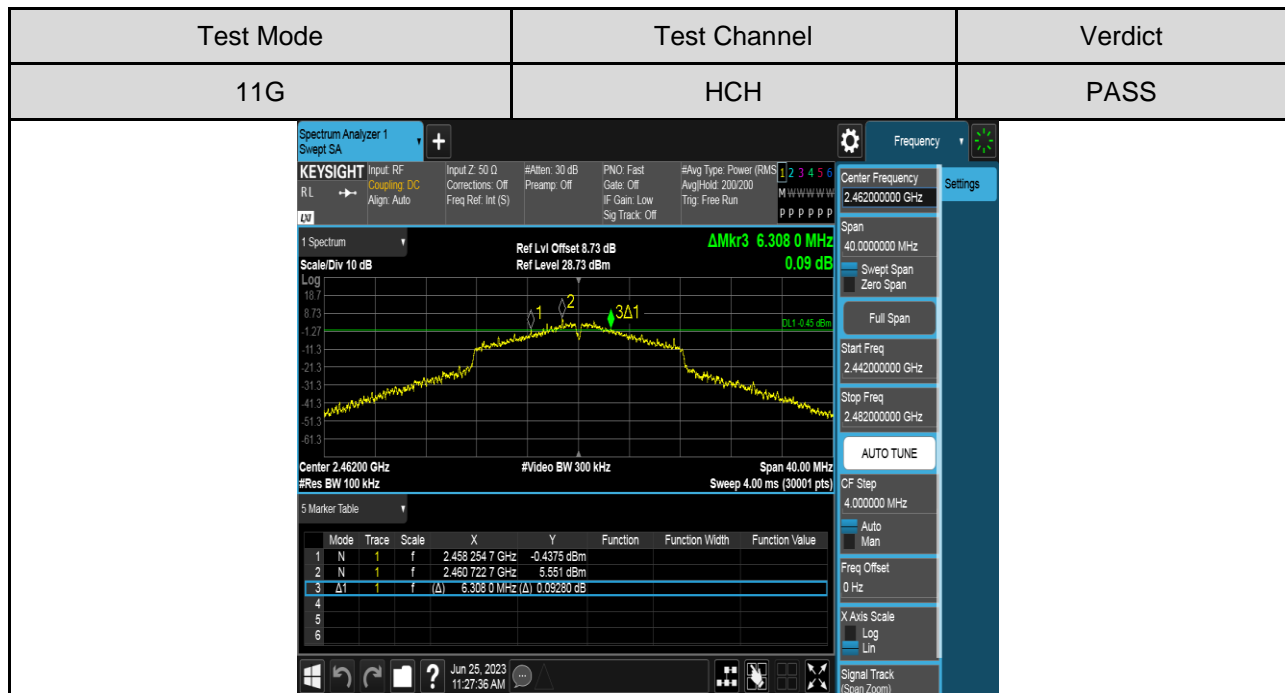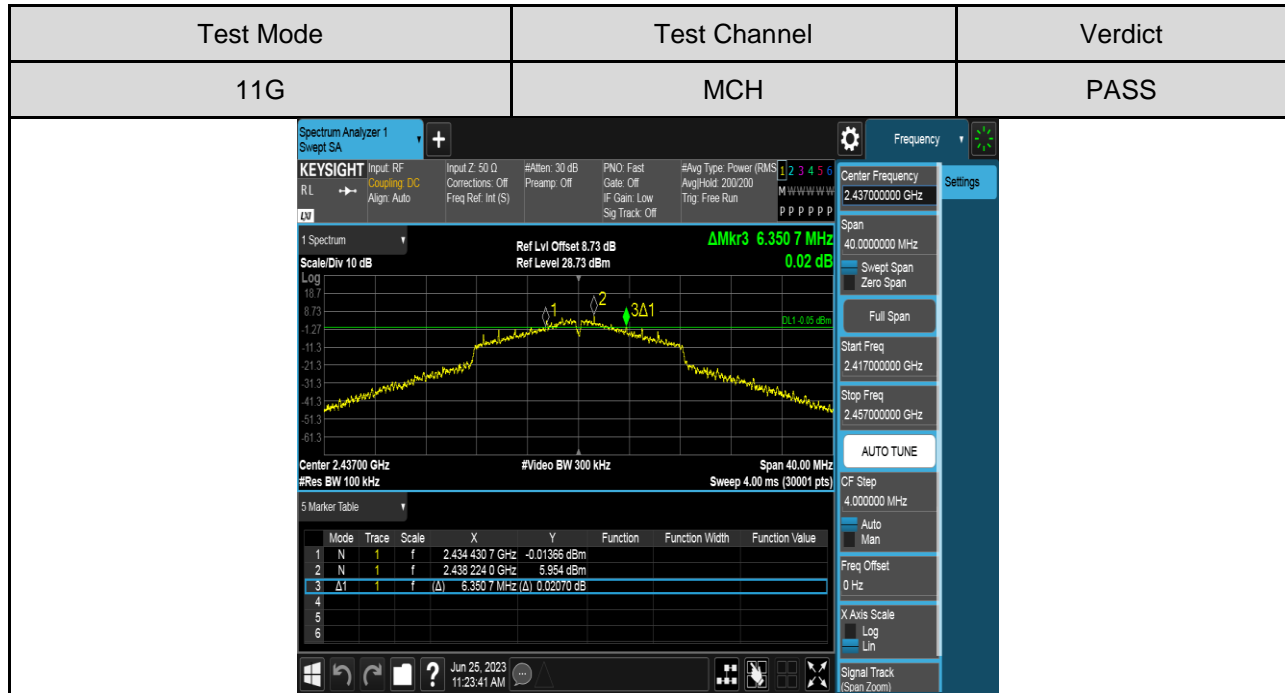

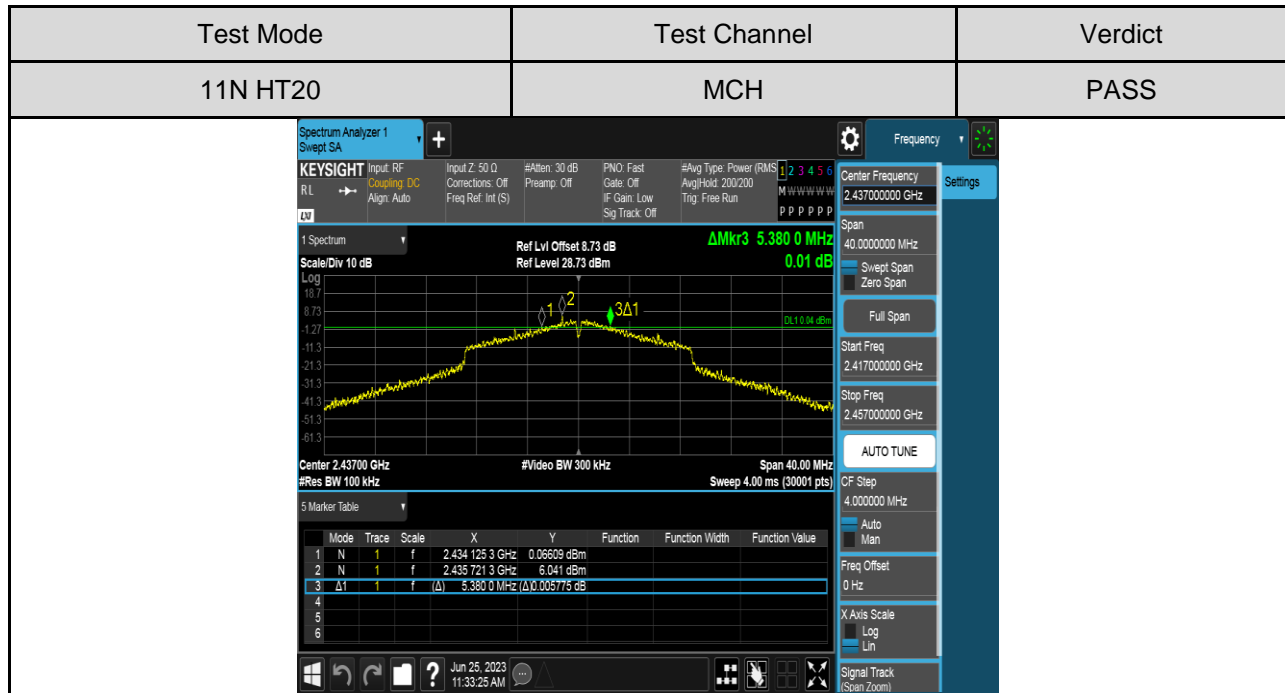





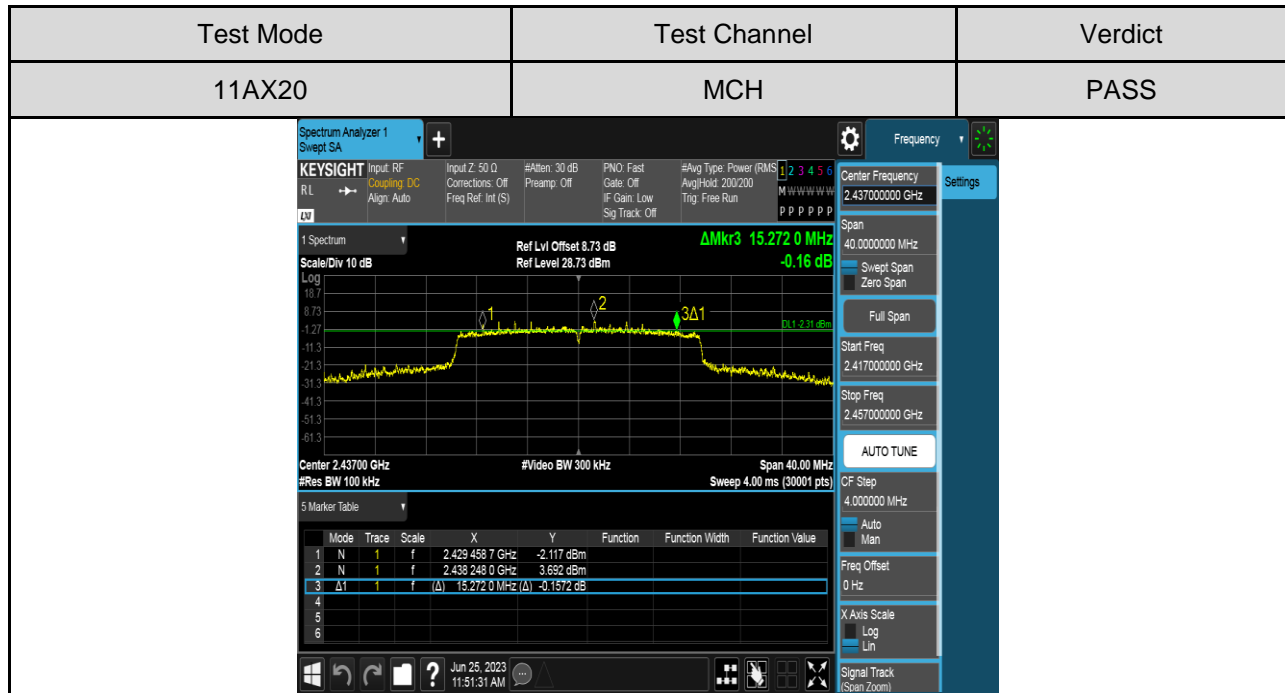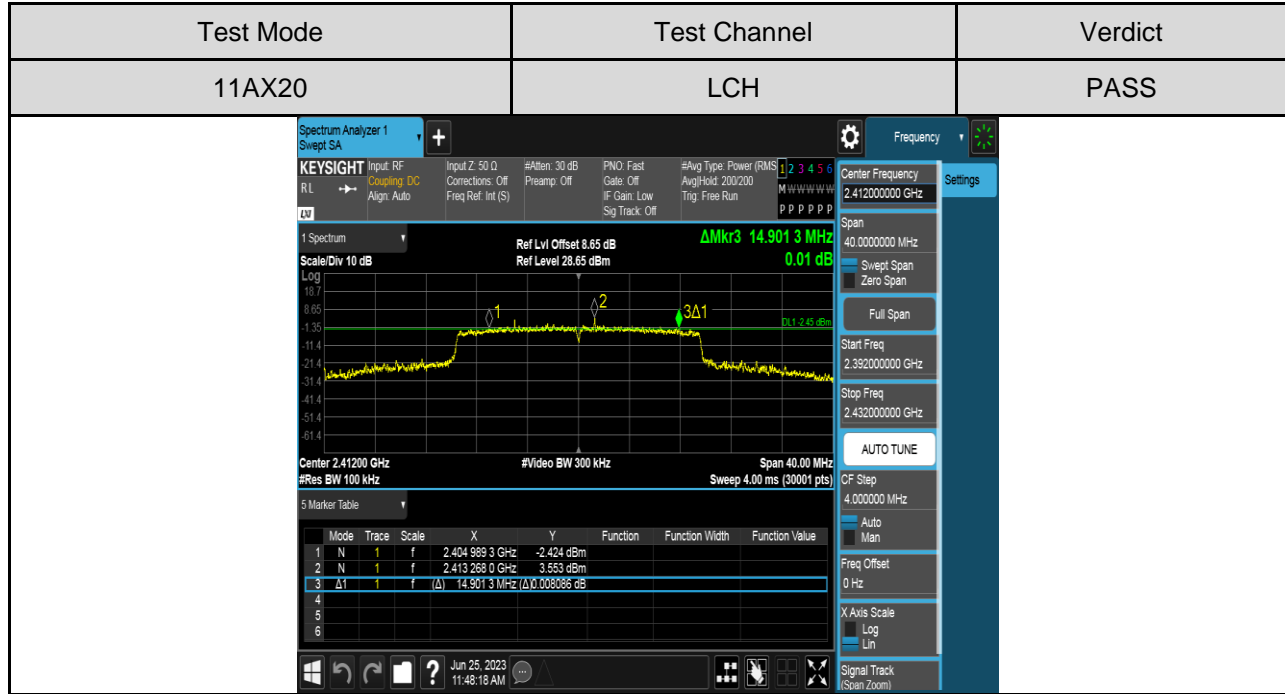


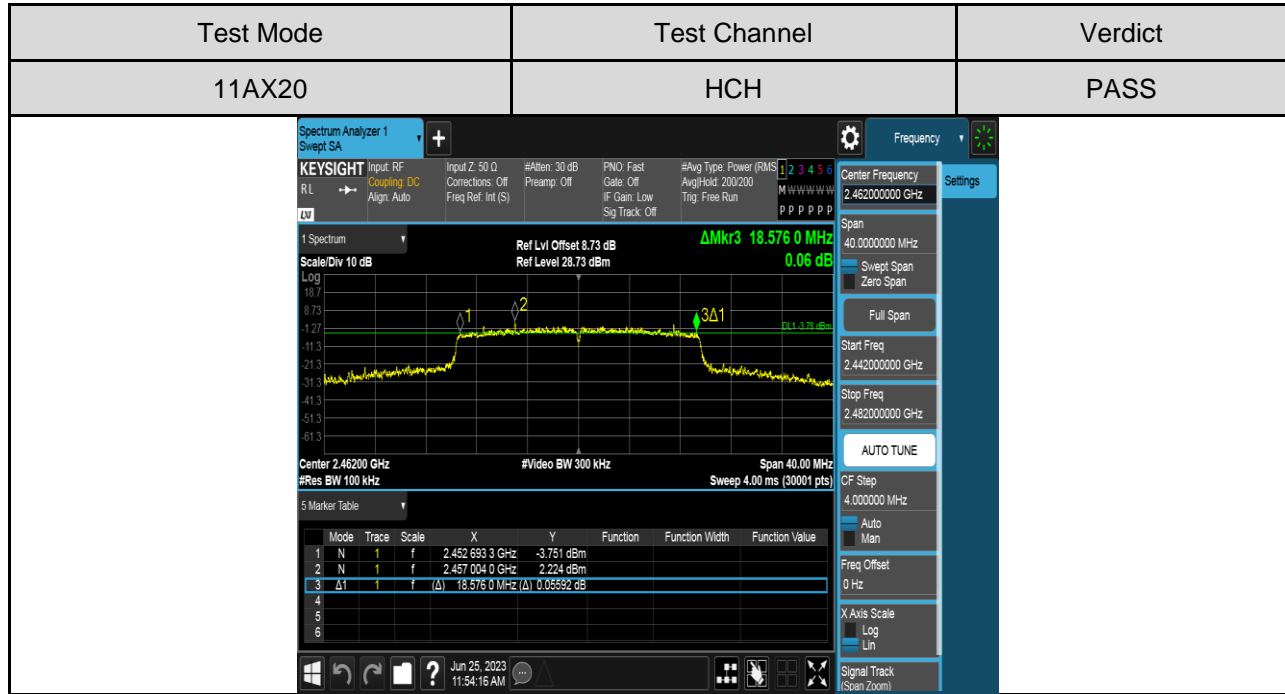


For 99% Bandwidth Part:

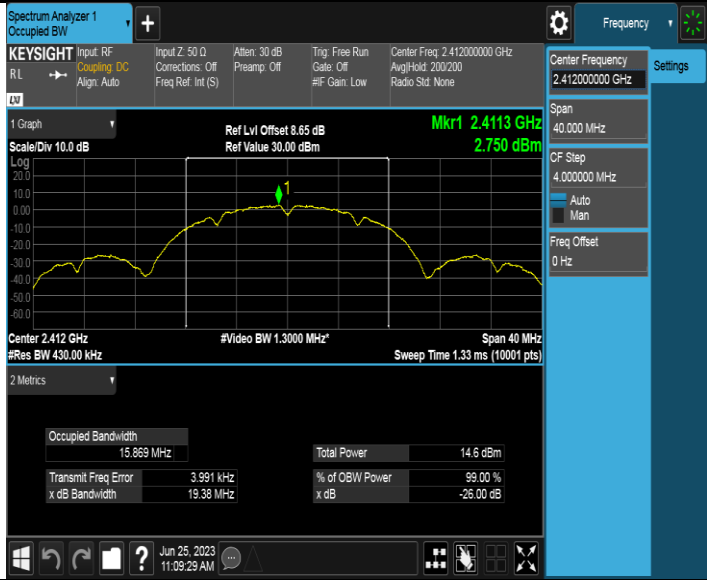
Test Mode	Test Channel	Verdict
11B	LCH	PASS
		

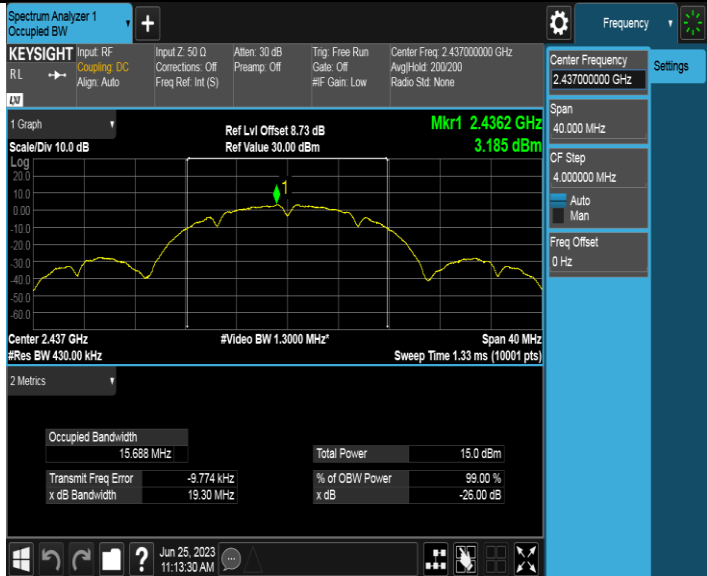
Test Mode	Test Channel	Verdict
11B	MCH	PASS
		

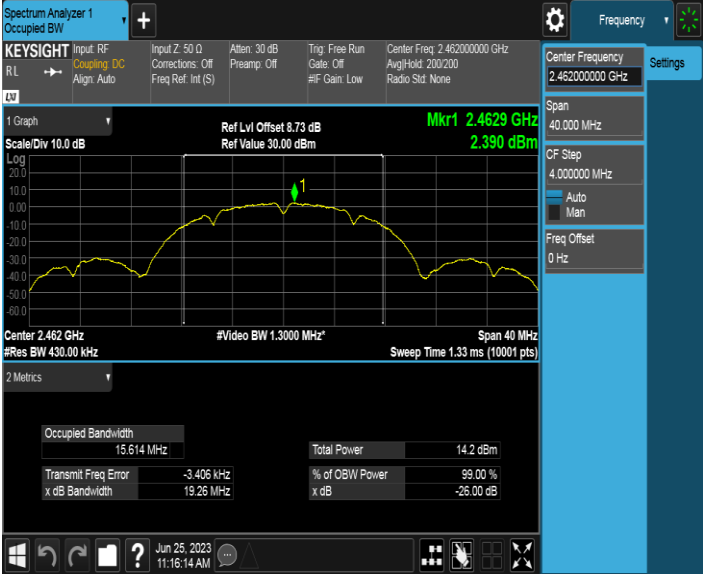
Test Mode	Test Channel	Verdict
11B	HCH	PASS
 <p>Keysight Spectrum Analyzer 1 Occupied BW</p> <p>Center Freq: 2.46200000 GHz Span: 40.000 MHz Scale Div: 10.0 dB Mkr1: 2.4629 GHz, 2.390 dBm</p> <p>Occupied Bandwidth: 15.614 MHz Total Power: 14.2 dBm Transmit Freq Error: -3.406 kHz % of OBW Power: 99.00 %</p>		

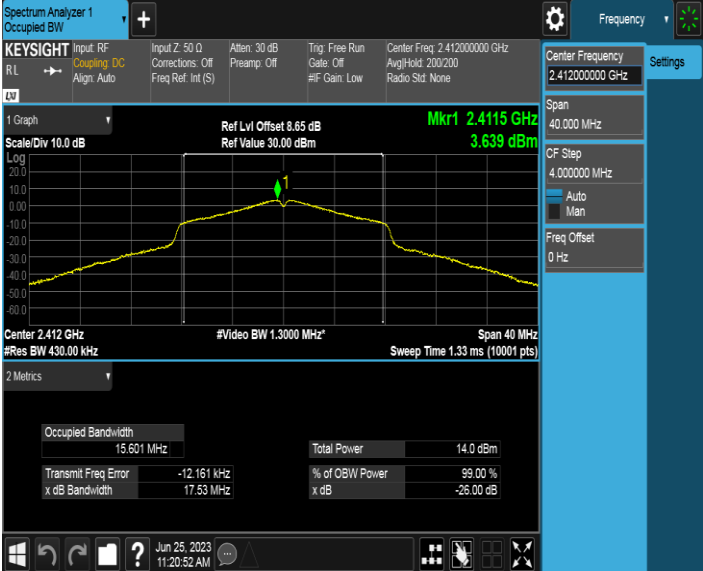
Test Mode	Test Channel	Verdict
11G	LCH	PASS
 <p>Keysight Spectrum Analyzer 1 Occupied BW</p> <p>Center Freq: 2.41200000 GHz Span: 40.000 MHz Scale Div: 10.0 dB Mkr1: 2.4115 GHz, 3.639 dBm</p> <p>Occupied Bandwidth: 15.601 MHz Total Power: 14.0 dBm Transmit Freq Error: -12.161 kHz % of OBW Power: 99.00 %</p>		


Test Mode	Test Channel	Verdict												
11G	MCH	PASS												
 <p>Keysight Spectrum Analyzer 1 Occupied BW</p> <p>Center Freq: 2.43700000 GHz Span: 40.000 MHz Mkr1: 2.4375 GHz, 3.872 dBm</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>15.518 MHz</td> <td>Total Power</td> <td>14.2 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-6.587 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.45 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>			Occupied Bandwidth	15.518 MHz	Total Power	14.2 dBm	Transmit Freq Error	-6.587 kHz	% of OBW Power	99.00 %	x dB Bandwidth	17.45 MHz	x dB	-26.00 dB
Occupied Bandwidth	15.518 MHz	Total Power	14.2 dBm											
Transmit Freq Error	-6.587 kHz	% of OBW Power	99.00 %											
x dB Bandwidth	17.45 MHz	x dB	-26.00 dB											

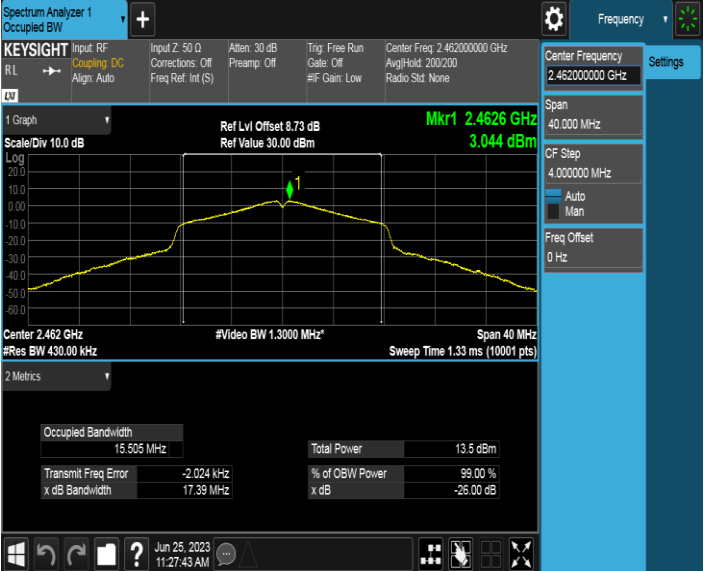Test Mode	Test Channel	Verdict												
11G	HCH	PASS												
 <p>Keysight Spectrum Analyzer 1 Occupied BW</p> <p>Center Freq: 2.46200000 GHz Span: 40.000 MHz Mkr1: 2.4626 GHz, 3.044 dBm</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>15.505 MHz</td> <td>Total Power</td> <td>13.5 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-2.024 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>17.39 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>			Occupied Bandwidth	15.505 MHz	Total Power	13.5 dBm	Transmit Freq Error	-2.024 kHz	% of OBW Power	99.00 %	x dB Bandwidth	17.39 MHz	x dB	-26.00 dB
Occupied Bandwidth	15.505 MHz	Total Power	13.5 dBm											
Transmit Freq Error	-2.024 kHz	% of OBW Power	99.00 %											
x dB Bandwidth	17.39 MHz	x dB	-26.00 dB											


Test Mode	Test Channel	Verdict												
11N HT20	LCH	PASS												
 <p>Metrics Table:</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>16.693 MHz</td> <td>Total Power</td> <td>13.6 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-18.605 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>18.57 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>			Occupied Bandwidth	16.693 MHz	Total Power	13.6 dBm	Transmit Freq Error	-18.605 kHz	% of OBW Power	99.00 %	x dB Bandwidth	18.57 MHz	x dB	-26.00 dB
Occupied Bandwidth	16.693 MHz	Total Power	13.6 dBm											
Transmit Freq Error	-18.605 kHz	% of OBW Power	99.00 %											
x dB Bandwidth	18.57 MHz	x dB	-26.00 dB											


Test Mode	Test Channel	Verdict												
11N HT20	MCH	PASS												
 <p>Metrics Table:</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>16.590 MHz</td> <td>Total Power</td> <td>13.9 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-22.161 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>18.50 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>			Occupied Bandwidth	16.590 MHz	Total Power	13.9 dBm	Transmit Freq Error	-22.161 kHz	% of OBW Power	99.00 %	x dB Bandwidth	18.50 MHz	x dB	-26.00 dB
Occupied Bandwidth	16.590 MHz	Total Power	13.9 dBm											
Transmit Freq Error	-22.161 kHz	% of OBW Power	99.00 %											
x dB Bandwidth	18.50 MHz	x dB	-26.00 dB											

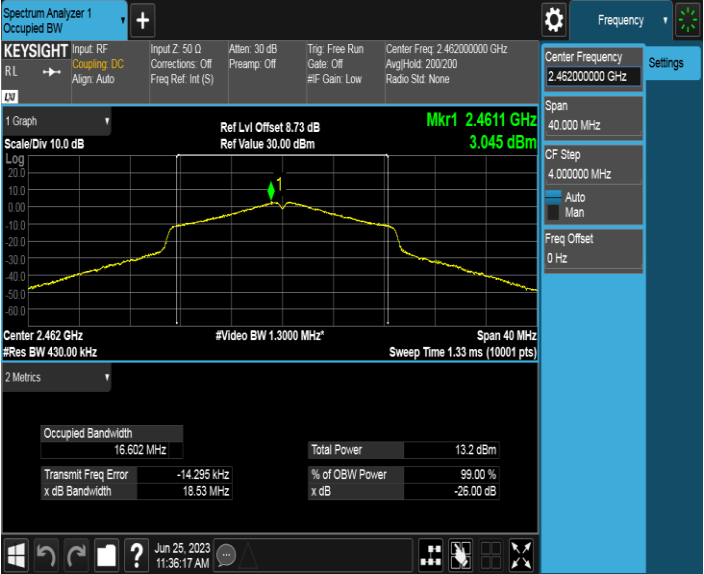
Test Mode	Test Channel	Verdict
11N HT20	HCH	PASS
		

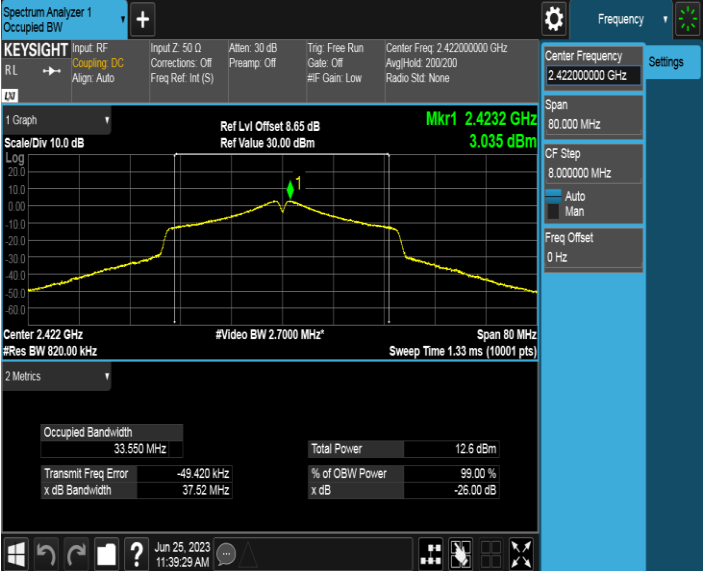Test Mode	Test Channel	Verdict
11N HT40	LCH	PASS
		

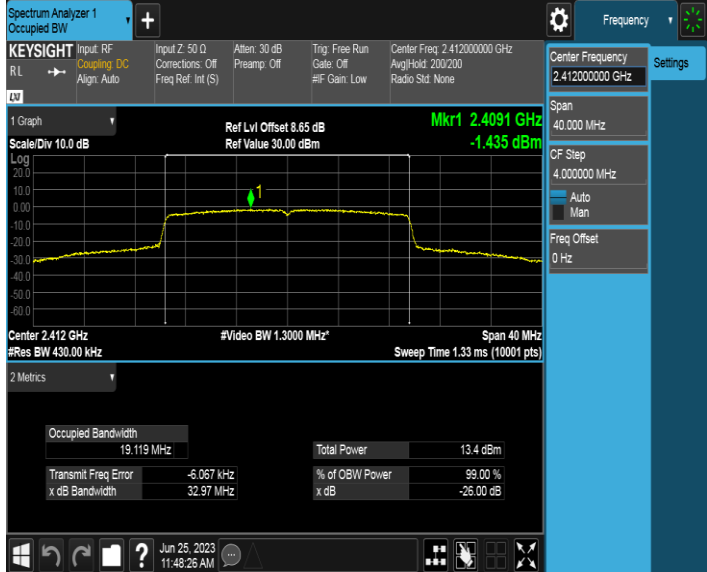

Test Mode	Test Channel	Verdict												
11AX20	LCH	PASS												
 <p>Keysight Spectrum Analyzer 1 Occupied BW</p> <p>Center Freq: 2.41200000 GHz Span: 40.000 MHz Mkr1: 2.4091 GHz, -1.435 dBm</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>19.119 MHz</td> <td>Total Power</td> <td>13.4 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-5.067 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>32.97 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>			Occupied Bandwidth	19.119 MHz	Total Power	13.4 dBm	Transmit Freq Error	-5.067 kHz	% of OBW Power	99.00 %	x dB Bandwidth	32.97 MHz	x dB	-26.00 dB
Occupied Bandwidth	19.119 MHz	Total Power	13.4 dBm											
Transmit Freq Error	-5.067 kHz	% of OBW Power	99.00 %											
x dB Bandwidth	32.97 MHz	x dB	-26.00 dB											

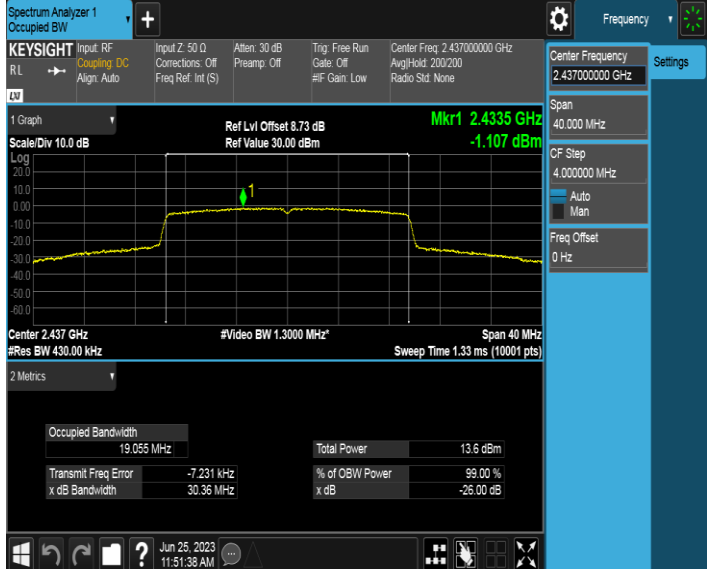Test Mode	Test Channel	Verdict												
11AX20	MCH	PASS												
 <p>Keysight Spectrum Analyzer 1 Occupied BW</p> <p>Center Freq: 2.43700000 GHz Span: 40.000 MHz Mkr1: 2.4335 GHz, -1.107 dBm</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>19.055 MHz</td> <td>Total Power</td> <td>13.6 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-7.231 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>30.36 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>			Occupied Bandwidth	19.055 MHz	Total Power	13.6 dBm	Transmit Freq Error	-7.231 kHz	% of OBW Power	99.00 %	x dB Bandwidth	30.36 MHz	x dB	-26.00 dB
Occupied Bandwidth	19.055 MHz	Total Power	13.6 dBm											
Transmit Freq Error	-7.231 kHz	% of OBW Power	99.00 %											
x dB Bandwidth	30.36 MHz	x dB	-26.00 dB											

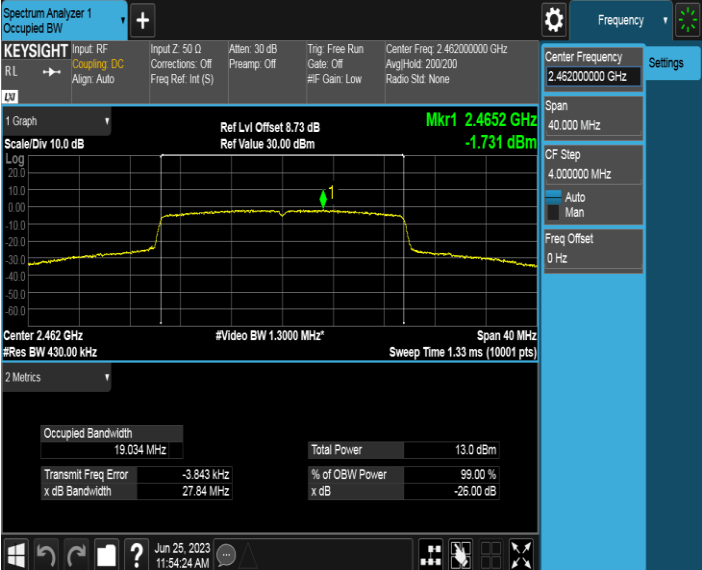Test Mode	Test Channel	Verdict												
11AX20	HCH	PASS												
 <p>The screenshot displays the Keysight Spectrum Analyzer 1 interface. The main display shows a signal trace with a marker at 2.4652 GHz and a level of -1.731 dBm. The center frequency is set to 2.462000000 GHz, and the span is 40.000 MHz. The video bandwidth is 1.3000 MHz, and the resolution bandwidth is 430.00 kHz. The metrics table at the bottom provides the following data:</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>19.034 MHz</td> <td>Total Power</td> <td>13.0 dBm</td> </tr> <tr> <td>Transmit Freq Error</td> <td>-3.843 kHz</td> <td>% of OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>27.84 MHz</td> <td>x dB</td> <td>-26.00 dB</td> </tr> </table>			Occupied Bandwidth	19.034 MHz	Total Power	13.0 dBm	Transmit Freq Error	-3.843 kHz	% of OBW Power	99.00 %	x dB Bandwidth	27.84 MHz	x dB	-26.00 dB
Occupied Bandwidth	19.034 MHz	Total Power	13.0 dBm											
Transmit Freq Error	-3.843 kHz	% of OBW Power	99.00 %											
x dB Bandwidth	27.84 MHz	x dB	-26.00 dB											

7.3. CONDUCTED OUTPUT POWER

LIMITS

FCC Part15 (15.247) Subpart C, RSS-Gen			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3) ISED RSS-247 5.4 (d) RSS-Gen Clause 6.12	Output Power	1 watt or 30dBm	2400-2483.5


TEST PROCEDURE

Method AVGSA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by

duty cycle correction. The procedure for this method is as follows:

- a) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- d) Set VBW \geq [3 x RBW].
- e) Number of points in sweep \geq [2 x span / RBW]. (This gives bin-to-bin spacing \leq RBW / 2, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run.”
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.

TEST SETUP

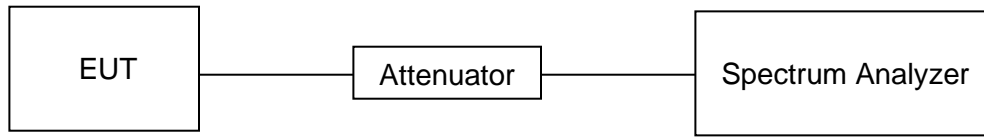

TEST ENVIRONMENT

Temperature	25.5°C	Relative Humidity	50.5%
Atmosphere Pressure	102.1kpa	Test Voltage	AC120V/60Hz


TEST RESULTS TABLE

Test Mode	Test Channel	Maximum Conducted Output Power (AV)	LIMIT
		dBm	dBm
11B	LCH	14.63	30
	MCH	14.94	30
	HCH	14.19	30
11G	LCH	13.95	30
	MCH	14.18	30
	HCH	13.49	30
11N HT20	LCH	13.59	30
	MCH	13.88	30
	HCH	13.22	30
11N HT40	LCH	12.60	30
	MCH	12.76	30
	HCH	12.36	30
11AX20	LCH	13.36	30
	MCH	13.60	30
	HCH	12.98	30

Remark:

- 1) For all the test results has been adjusted the duty cycle factor.
- 2) For Correction Factor is refer to the result in section 7.1

TEST GRAPHS

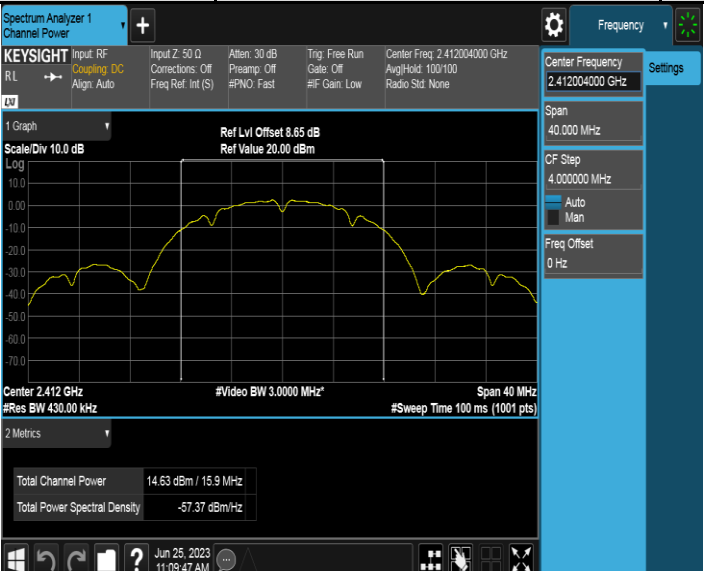Test Mode	Test Channel	Verdict
11B	LCH	PASS
		

Test Mode	Test Channel	Verdict
11B	MCH	PASS
