

# FCC TEST REPORT

Client Name : GUANGZHOU RANTION TECHNOLOGY CO., LTD.

Address : Room 432, Building 4, No. 50 Nanxiang 1st Road,  
Huangpu District, Guangzhou,China.

Product Name : RV KEYPAD LOCK

Date : May 07, 2022

**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	6
1.5. Description of Test Configuration.....	6
1.6. Description Of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	14
4.1. Test Standard and Limit.....	14
4.2. Test Setup.....	14
4.3. Test Procedure.....	15
4.4. Test Data.....	16
5. Maximum Peak Output Power Test.....	24
5.1. Test Standard and Limit.....	24
5.2. Test Setup.....	24
5.3. Test Procedure.....	24
5.4. Test Data.....	24
6. 6DB Occupy Bandwidth Test.....	25
6.1. Test Standard and Limit.....	25
6.2. Test Setup.....	25
6.3. Test Procedure.....	25
6.4. Test Data.....	25
7. Power Spectral Density Test.....	26
7.1. Test Standard and Limit.....	26
7.2. Test Setup.....	26
7.3. Test Procedure.....	26
7.4. Test Data.....	26
8. 100kHz Bandwidth of Frequency Band Edge Requirement.....	27
8.1. Test Standard and Limit.....	27
8.2. Test Setup.....	27

8.3. Test Procedure.....27

8.4. Test Data.....27

9. Antenna Requirement.....28

9.1. Test Standard and Requirement.....28

9.2. Antenna Connected Construction.....28

APPENDIX I -- TEST SETUP PHOTOGRAPH.....29

APPENDIX II -- EXTERNAL PHOTOGRAPH.....31

APPENDIX III -- INTERNAL PHOTOGRAPH.....31

APPENDIX IV – Appendix Test Data.....32

# TEST REPORT

Applicant : GUANGZHOU RANTION TECHNOLOGY CO., LTD.  
Manufacturer : GUANGZHOU RANTION TECHNOLOGY CO., LTD.  
Product Name : RV KEYPAD LOCK  
Model No. : HY1235  
Trade Mark : KOHREE  
Rating(s) : Input: DC 6V (4 AA batteries)

**Test Standard(s) : FCC Part15 Subpart C, Section 15.247**

**Test Method(s) : ANSI C63.10: 2020, KDB558074 D01 DTS Meas Guidance v05r02**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Apr. 21, 2022

Date of Test

Apr. 21~28, 2022

Prepared By



(Cookie Lin)

Approved & Authorized Signer



(KingKong Jin)

# 1. General Information

## 1.1. Client Information

Applicant	:	GUANGZHOU RANTION TECHNOLOGY CO., LTD.
Address	:	Room 432, Building 4, No. 50 Nanxiang 1st Road, Huangpu District, Guangzhou,China.
Manufacturer	:	GUANGZHOU RANTION TECHNOLOGY CO., LTD.
Address	:	Room 432, Building 4, No. 50 Nanxiang 1st Road, Huangpu District, Guangzhou,China.
Factory	:	GUANGZHOU RANTION TECHNOLOGY CO., LTD.
Address	:	Room 432, Building 4, No. 50 Nanxiang 1st Road, Huangpu District, Guangzhou,China.

## 1.2. Description of Device (EUT)

Product Name	:	RV KEYPAD LOCK
Model No.	:	HY1235
Trade Mark	:	KOHREE
Test Power Supply	:	AC 120V, 60Hz for adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	BLE: 2402~2480MHz SRD: 2402~2480MHz
	Number of Channel:	BLE: 40 Channels SRD: 79 Channels
	Modulation Type:	BLE / SRD: GFSK
	Antenna Type:	BLE & SRD: PCB Antenna
	Antenna Gain(Peak):	BLE / SRD: 0 dBi (Provided by customer)
	Adapter:	N.A.
<p><b>Remark:</b> 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for SRD module.</p>		

## 1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: A2023 Input: AC 100-240V, 0.7A, 50-60Hz USB1 Output: DC 5V, 2.4A USB2 Output: DC 5V, 2.4A
---------	---	---

## 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	CH00	TX Only/TX+Charging
Mode 2	CH39	
Mode 3	CH78	

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.



## 1.5 Description of Test Configuration

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	1	2403	2	2404	3	2405	4	2406
5	2407	6	2408	7	2409	8	2410	9	2411
10	2412	11	2413	12	2414	13	2415	14	2416
15	2417	16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425	24	2426
25	2427	26	2428	27	2429	28	2430	29	2431
30	2432	31	2433	32	2434	33	2435	34	2436
35	2437	36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445	44	2446
45	2447	46	2448	47	2449	48	2450	49	2451
50	2452	51	2453	52	2454	53	2455	54	2456
55	2457	56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465	64	2466
65	2467	66	2468	67	2469	68	2470	69	2471
70	2472	71	2473	72	2474	73	2475	74	2476
75	2477	76	2478	77	2479	78	2480	/	/

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT was tested with channel 0, 39 and 78

### 1.6. Description Of Test Setup

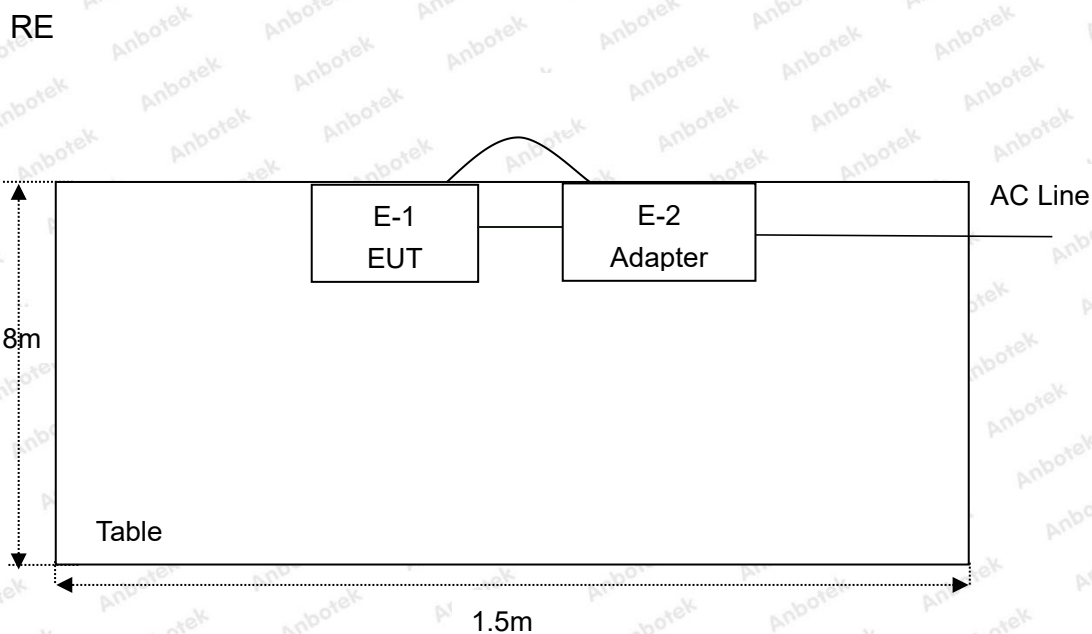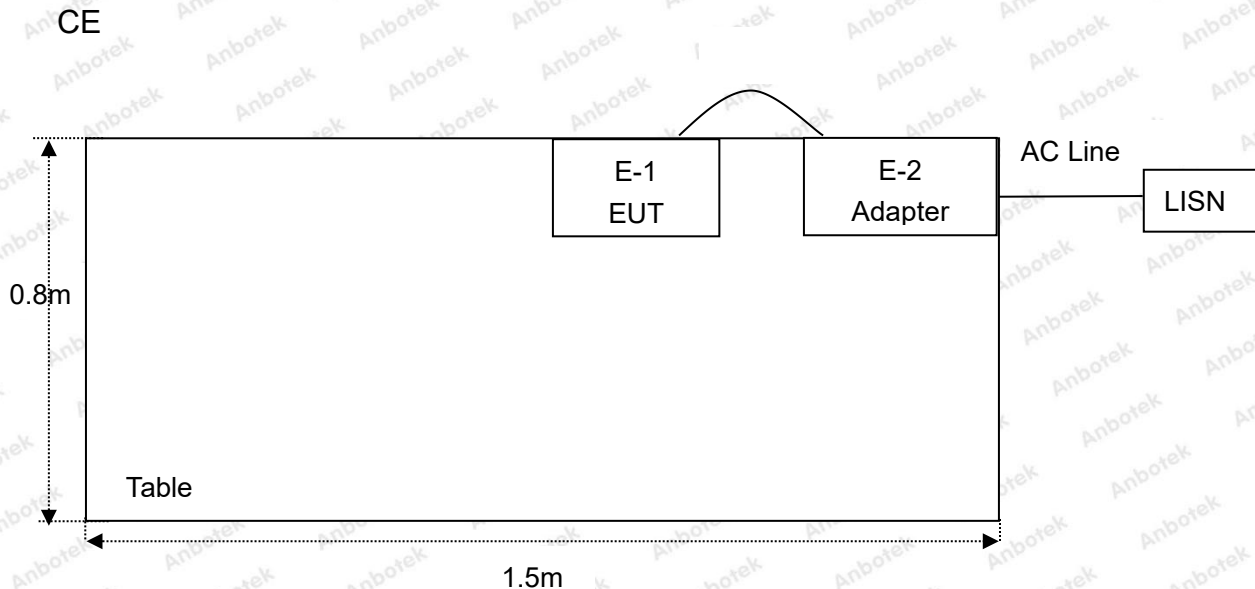

## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15100041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15100041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 22, 2021	1 Year



### 1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

### 1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

#### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

#### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

## 2. Summary of Test Results


Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
<b>Remark:</b> "N/A" is an abbreviation for Not Applicable.		

### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
<b>Remark:</b> (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

#### 3.2. Test Setup

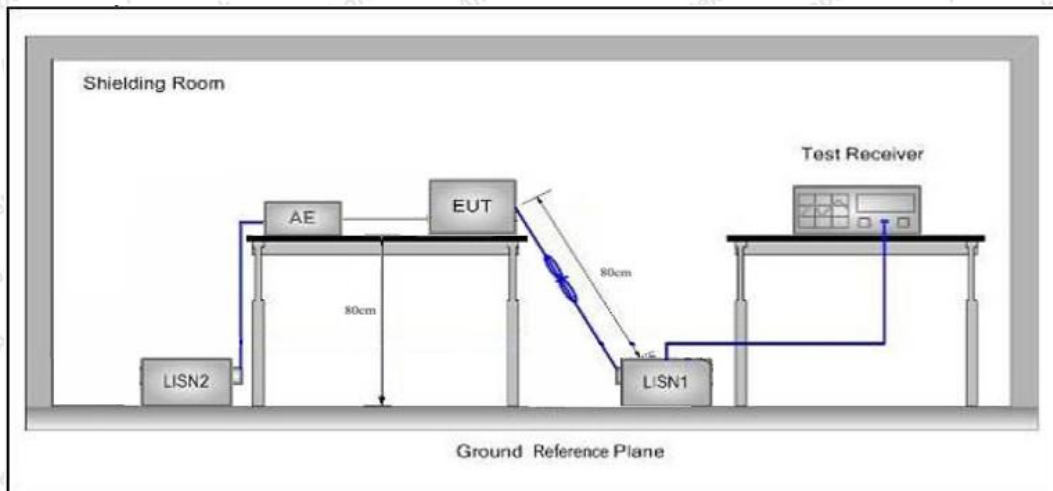

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

During the test, pre-scan all modes, only the worst case is recorded in the report.

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 3  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 23.2°C Hum.: 46%

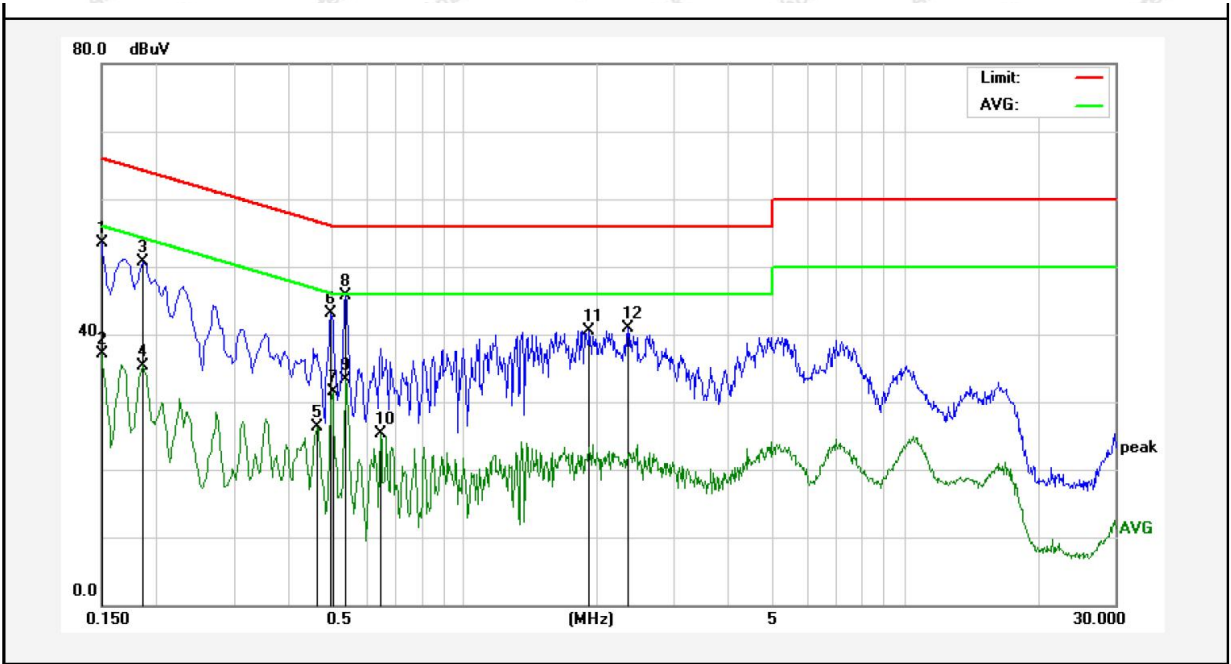

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	53.48	0.11	53.59	65.99	-12.40	QP	
2	0.1500	36.93	0.11	37.04	55.99	-18.95	AVG	
3	0.1860	50.64	0.12	50.76	64.21	-13.45	QP	
4	0.1860	35.28	0.12	35.40	54.21	-18.81	AVG	
5	0.4660	26.15	0.14	26.29	46.58	-20.29	AVG	
6	0.4980	42.86	0.15	43.01	56.03	-13.02	QP	
7	0.5020	31.42	0.15	31.57	46.00	-14.43	AVG	
8	0.5380	45.51	0.15	45.66	56.00	-10.34	QP	
9	0.5380	33.06	0.15	33.21	46.00	-12.79	AVG	
10	0.6460	25.19	0.15	25.34	46.00	-20.66	AVG	
11	1.9220	40.41	0.12	40.53	56.00	-15.47	QP	
12	2.3540	40.83	0.12	40.95	56.00	-15.05	QP	

### Conducted Emission Test Data

Test Site: 1# Shielded Room  
 Operating Condition: Mode 3  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 23.2°C Hum.: 46%

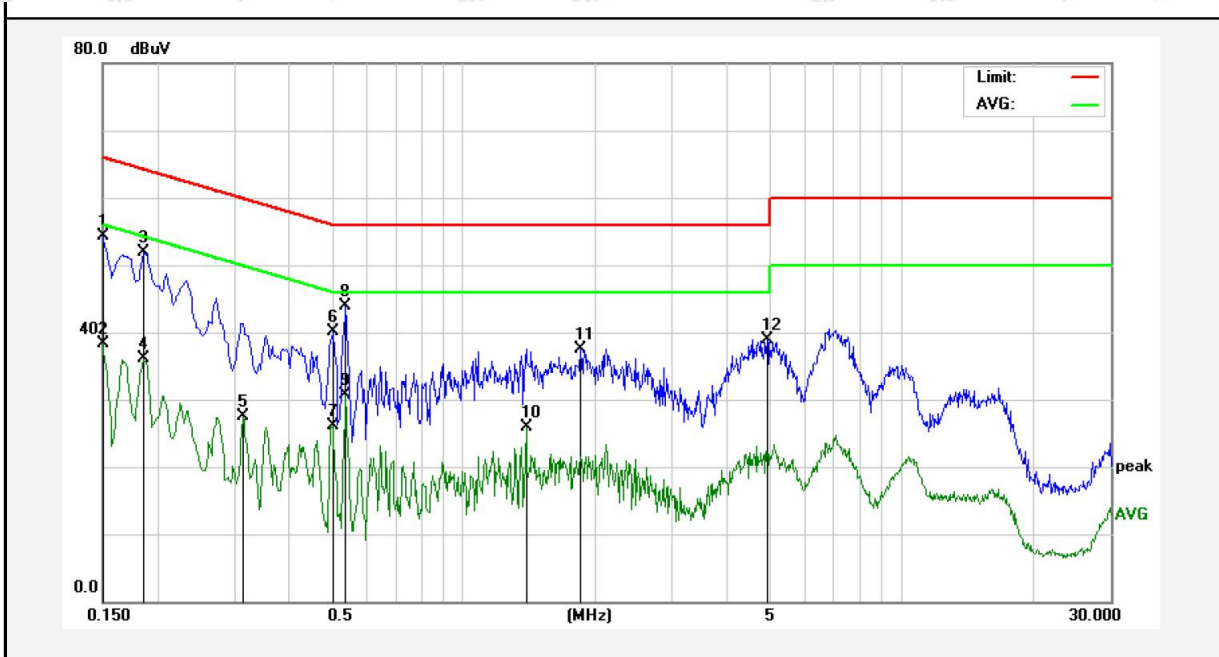

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	54.17	0.11	54.28	65.99	-11.71	QP	
2	0.1500	38.22	0.11	38.33	55.99	-17.66	AVG	
3	0.1860	51.79	0.12	51.91	64.21	-12.30	QP	
4	0.1860	36.07	0.12	36.19	54.21	-18.02	AVG	
5	0.3140	27.34	0.13	27.47	49.86	-22.39	AVG	
6	0.5060	40.01	0.15	40.16	56.00	-15.84	QP	
7	0.5060	25.98	0.15	26.13	46.00	-19.87	AVG	
8	0.5380	43.79	0.15	43.94	56.00	-12.06	QP	
9	0.5380	30.49	0.15	30.64	46.00	-15.36	AVG	
10	1.3900	25.73	0.14	25.87	46.00	-20.13	AVG	
11	1.8540	37.44	0.12	37.56	56.00	-18.44	QP	
12	4.9300	38.86	0.11	38.97	56.00	-17.03	QP	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

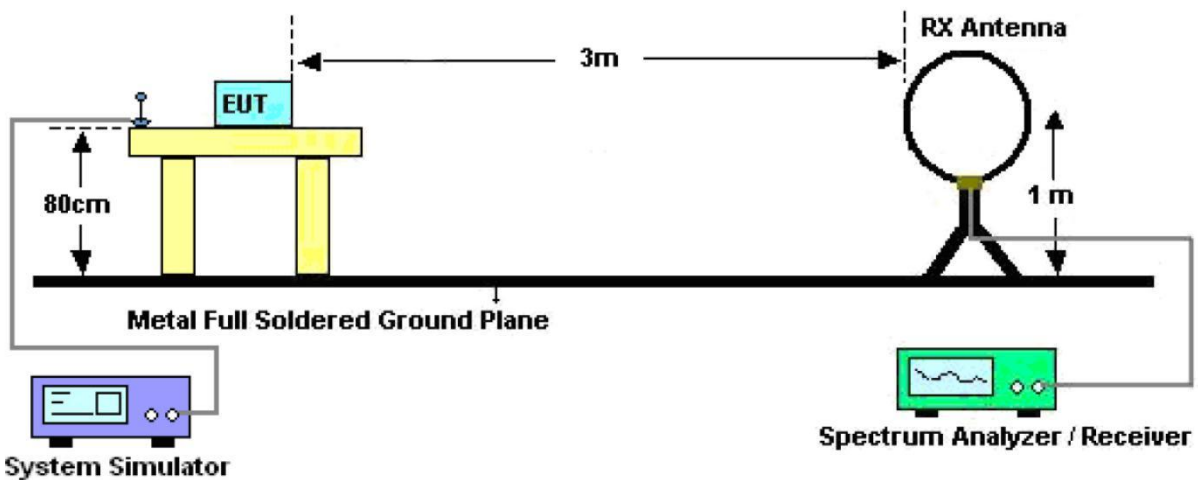


Figure 1. Below 30MHz

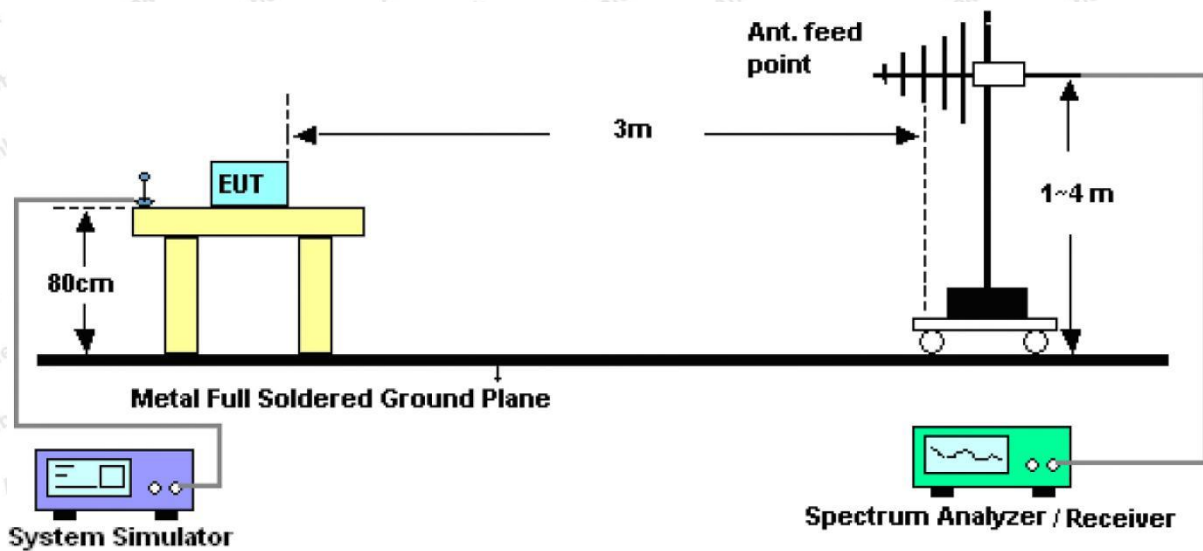


Figure 2. 30MHz to 1GHz

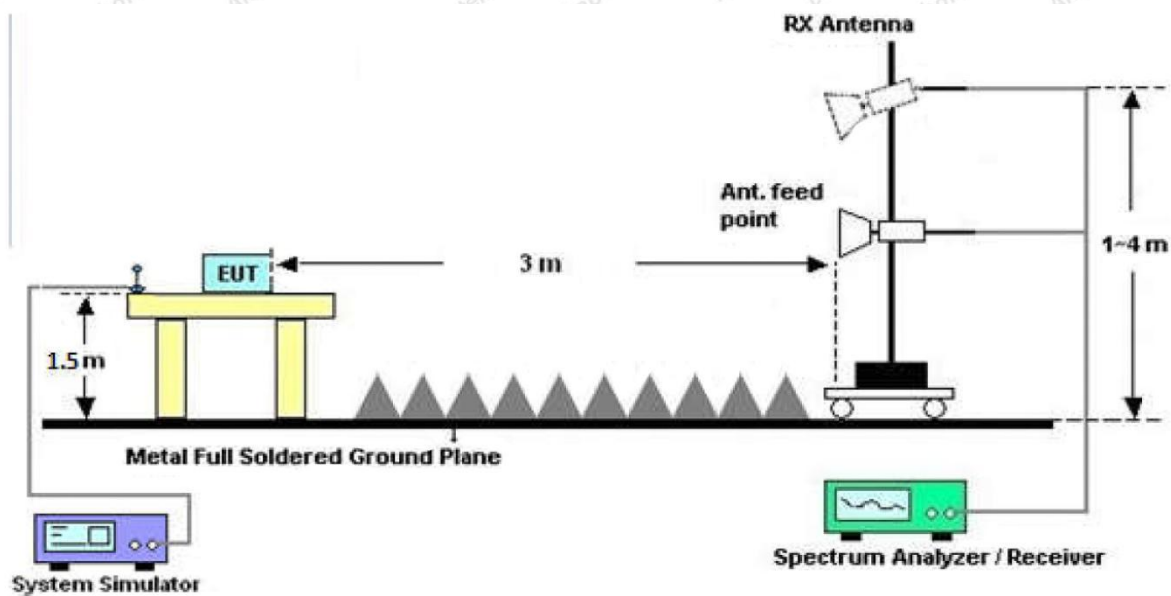


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

#### 4.4. Test Data

##### PASS

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.


During the test, pre-scan all modes, only the worst case is recorded in the report.





**Test Results (30~1000MHz)**


Test Mode: Mode 3  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 23.6°C/47%RH

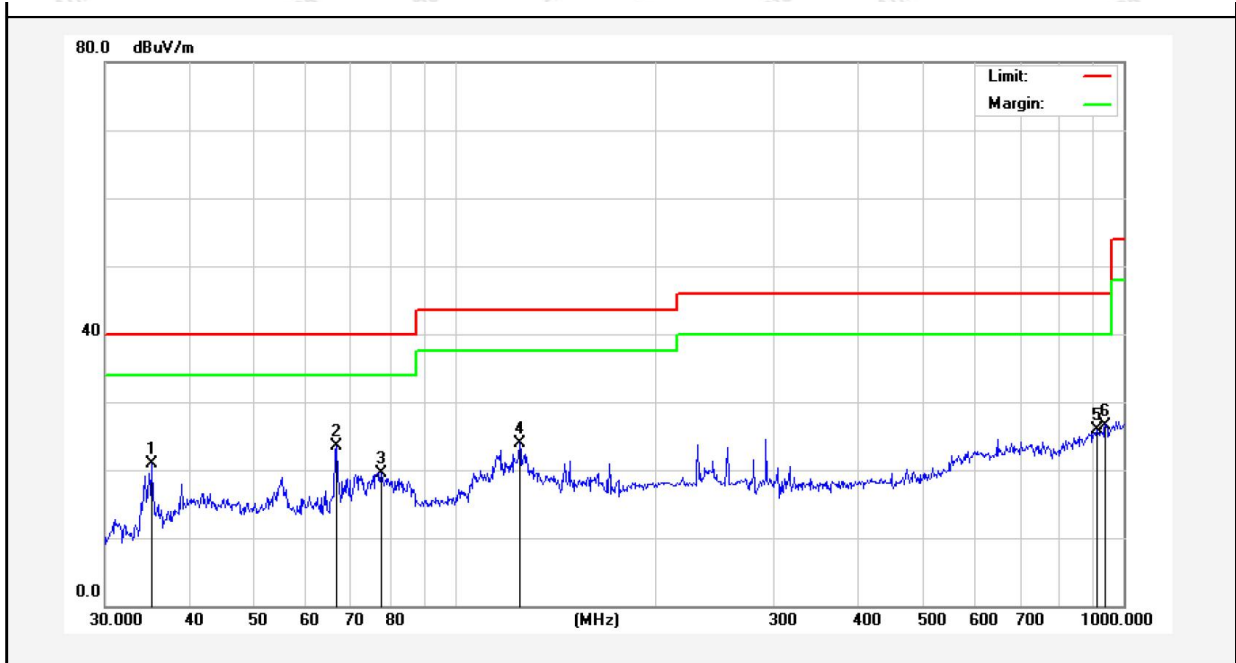

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	35.2511	39.27	-18.32	20.95	40.00	-19.05	QP			
2	66.4989	43.75	-20.20	23.55	40.00	-16.45	QP			
3	77.5926	42.25	-22.70	19.55	40.00	-20.45	QP			
4	125.0066	47.08	-23.22	23.86	43.50	-19.64	QP			
5	912.8618	32.03	-6.08	25.95	46.00	-20.05	QP			
6	938.8324	32.37	-5.77	26.60	46.00	-19.40	QP			

**Test Results (30~1000MHz)**

Test Mode: Mode 3  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 23.6°C/47%RH

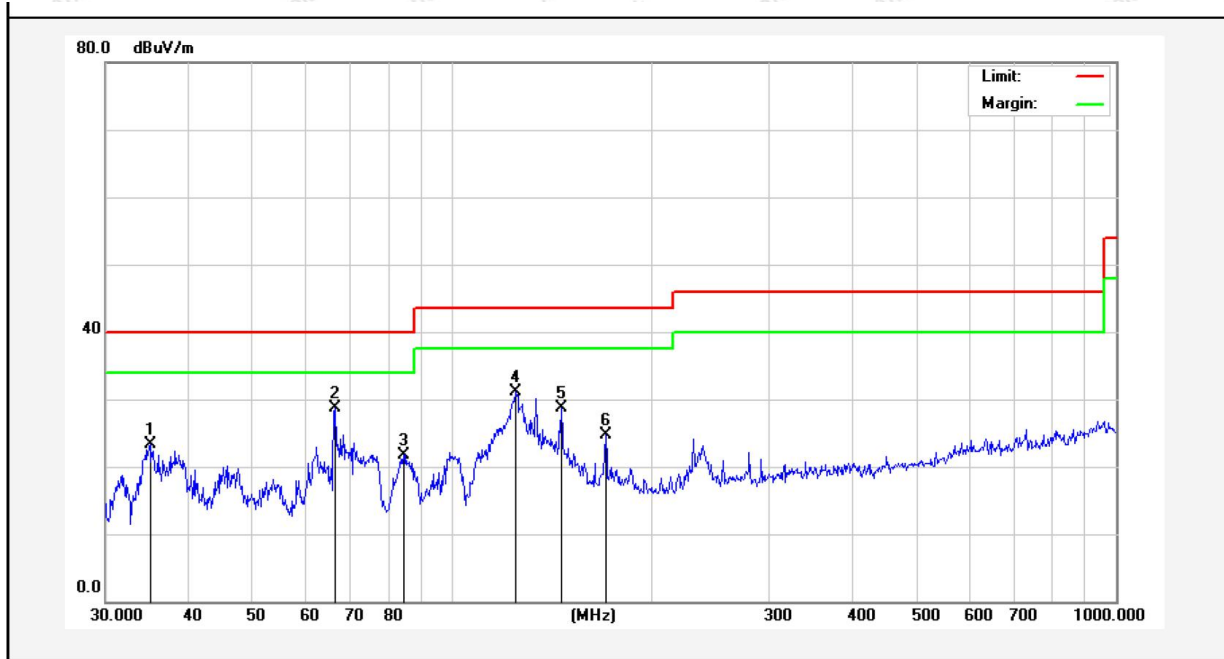

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	35.0048	40.39	-17.15	23.24	40.00	-16.76	QP			
2	66.4989	48.20	-19.51	28.69	40.00	-11.31	QP			
3	84.4054	40.38	-18.64	21.74	40.00	-18.26	QP			
4	124.5690	51.82	-20.63	31.19	43.50	-12.31	QP			
5	145.8608	50.74	-22.13	28.61	43.50	-14.89	QP			
6	170.1947	45.87	-21.12	24.75	43.50	-18.75	QP			

**Test Results (1GHz-25GHz)**

Test channel: Lowest

**Peak value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	27.37	15.27	42.64	74.00	-31.36	Vertical
7206.00	27.62	18.09	45.71	74.00	-28.29	Vertical
9608.00	28.10	23.76	51.86	74.00	-22.14	Vertical
12010.00	*			74.00		Vertical
14412.00	*			74.00		Vertical
4804.00	27.13	15.27	42.40	74.00	-31.60	Horizontal
7206.00	27.74	18.09	45.83	74.00	-28.17	Horizontal
9608.00	27.65	23.76	51.41	74.00	-22.59	Horizontal
12010.00	*			74.00		Horizontal
14412.00	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4804.00	15.64	15.27	30.91	54.00	-23.09	Vertical
7206.00	16.67	18.09	34.76	54.00	-19.24	Vertical
9608.00	17.57	23.76	41.33	54.00	-12.67	Vertical
12010.00	*			54.00		Vertical
14412.00	*			54.00		Vertical
4804.00	15.46	15.27	30.73	54.00	-23.27	Horizontal
7206.00	16.77	18.09	34.86	54.00	-19.14	Horizontal
9608.00	17.16	23.76	40.92	54.00	-13.08	Horizontal
12010.00	*			54.00		Horizontal
14412.00	*			54.00		Horizontal

**Test Results (1GHz-25GHz)**

Test channel: Middle

**Peak value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	26.92	15.42	42.34	74.00	-31.66	Vertical
7323.00	27.59	18.02	45.61	74.00	-28.39	Vertical
9764.00	27.60	23.80	51.40	74.00	-22.60	Vertical
12205.00	*			74.00		Vertical
14646.00	*			74.00		Vertical
4882.00	26.94	15.42	42.36	74.00	-31.64	Horizontal
7323.00	27.61	18.02	45.63	74.00	-28.37	Horizontal
9764.00	27.37	23.80	51.17	74.00	-22.83	Horizontal
12205.00	*			74.00		Horizontal
14646.00	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4882.00	15.73	15.42	31.15	54.00	-22.85	Vertical
7323.00	16.53	18.02	34.55	54.00	-19.45	Vertical
9764.00	17.42	23.80	41.22	54.00	-12.78	Vertical
12205.00	*			54.00		Vertical
14646.00	*			54.00		Vertical
4882.00	15.57	15.42	30.99	54.00	-23.01	Horizontal
7323.00	17.12	18.02	35.14	54.00	-18.86	Horizontal
9764.00	17.46	23.80	41.26	54.00	-12.74	Horizontal
12205.00	*			54.00		Horizontal
14646.00	*			54.00		Horizontal

**Test Results (1GHz-25GHz)**

Test channel: Highest

**Peak value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	27.05	15.58	42.63	74.00	-31.37	Vertical
7440.00	27.75	17.93	45.68	74.00	-28.32	Vertical
9920.00	28.30	23.83	52.13	74.00	-21.87	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	27.08	15.58	42.66	74.00	-31.34	Horizontal
7440.00	27.82	17.93	45.75	74.00	-28.25	Horizontal
9920.00	27.75	23.83	51.58	74.00	-22.42	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal

**Average value:**


Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	16.85	15.58	32.43	54.00	-21.57	Vertical
7440.00	17.80	17.93	35.73	54.00	-18.27	Vertical
9920.00	18.07	23.83	41.90	54.00	-12.10	Vertical
12400.00	*			54.00		Vertical
14880.00	*			54.00		Vertical
4960.00	16.75	15.58	32.33	54.00	-21.67	Horizontal
7440.00	17.92	17.93	35.85	54.00	-18.15	Horizontal
9920.00	17.61	23.83	41.44	54.00	-12.56	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal


Remark:

1.Result =Reading + Factor

2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Band Edge:**

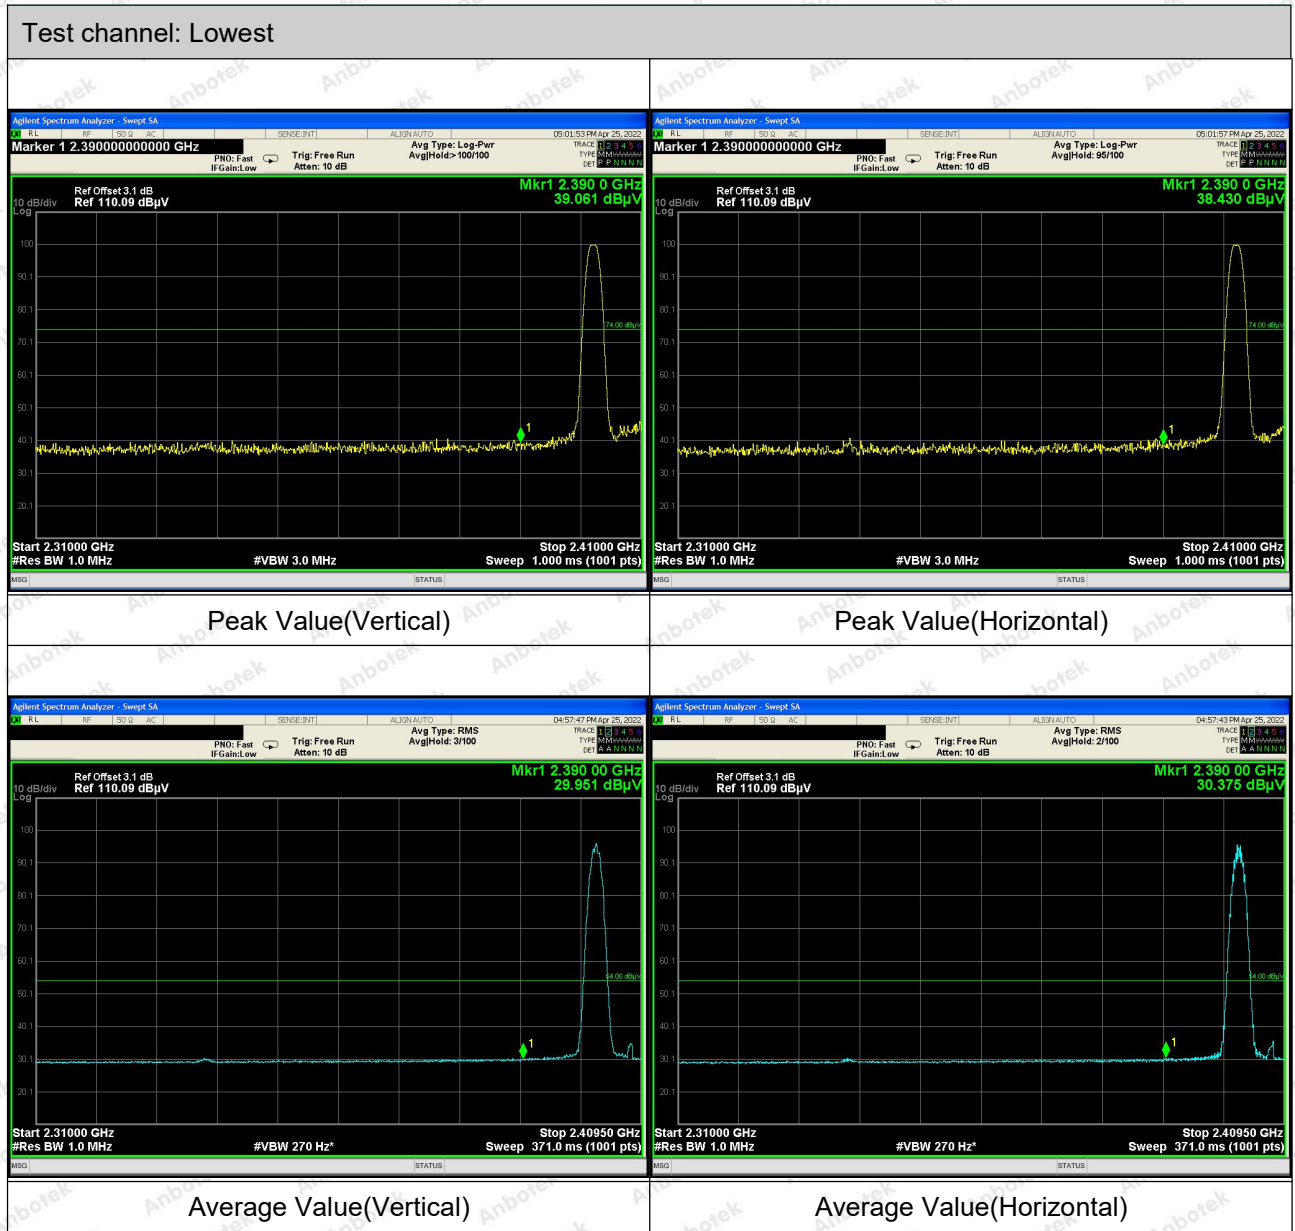

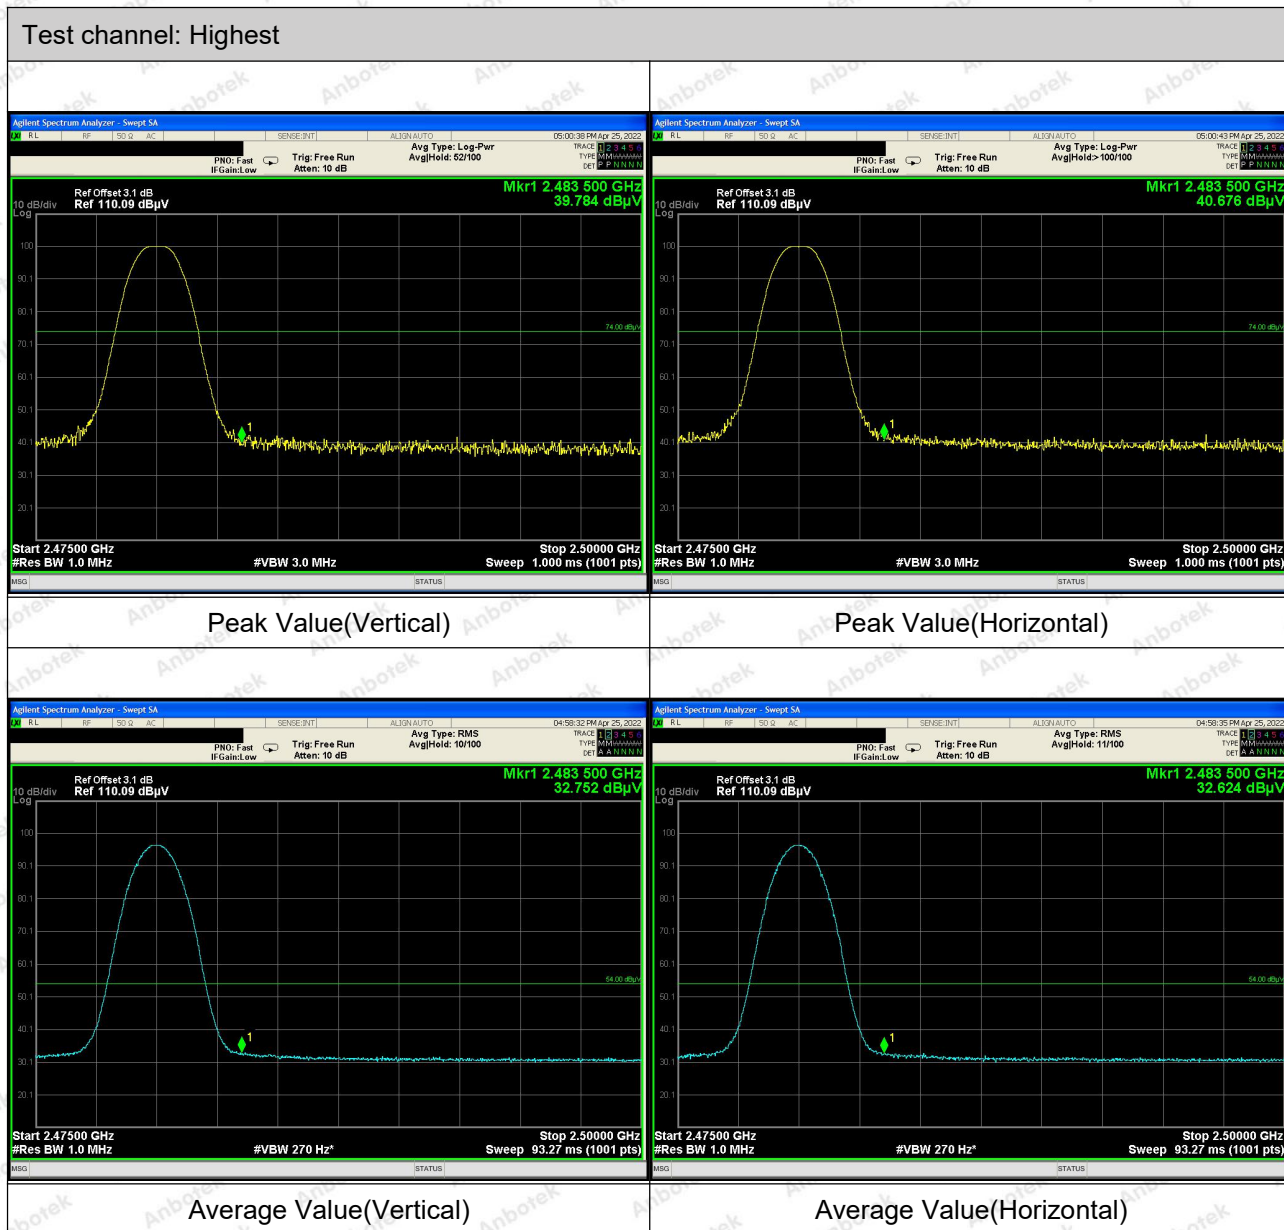


## 5. Maximum Peak Output Power Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

### 5.2. Test Setup

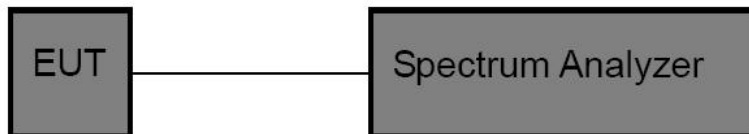

### 5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set the VBW  $\geq 3 \times$  RBW.
3. Set the span  $\geq 3 \times$  RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

### 5.4. Test Data

Pass

Please refer to Appendix C of the Appendix Test Data.

#### Additional test for duty cycle.

Please refer to Appendix G of the Appendix Test Data.




## 6. 6DB Occupy Bandwidth Test

### 6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

### 6.2. Test Setup

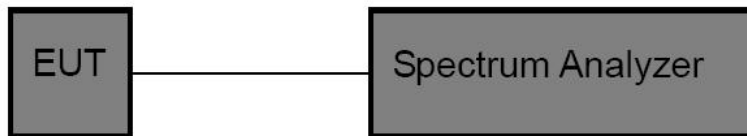

### 6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
 RBW = 100kHz, VBW $\geq$ 3\*RBW =300kHz,  
 Detector= Peak  
 Trace mode= Max hold.  
 Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

### 6.4. Test Data

Pass


Please refer to Appendix B of the Appendix Test Data.

## 7. Power Spectral Density Test

### 7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

### 7.2. Test Setup

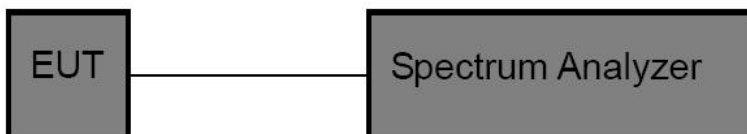

### 7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTSS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### 7.4. Test Data

Pass


Please refer to Appendix D of the Appendix Test Data.

## 8. 100kHz Bandwidth of Frequency Band Edge Requirement

### 8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 8.2. Test Setup

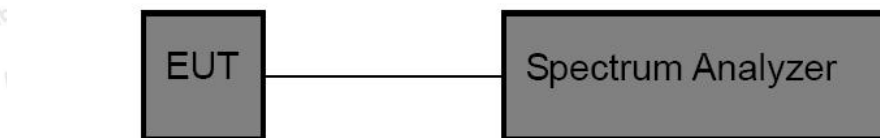

### 8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

### 8.4. Test Data

Pass

Please refer to Appendix E&F of the Appendix Test Data

## 9. Antenna Requirement

### 9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

### 9.2. Antenna Connected Construction

The antenna is a PCB antenna which permanently attached, and the best case gain of the antenna is 0dBi . It complies with the standard requirement.

## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement


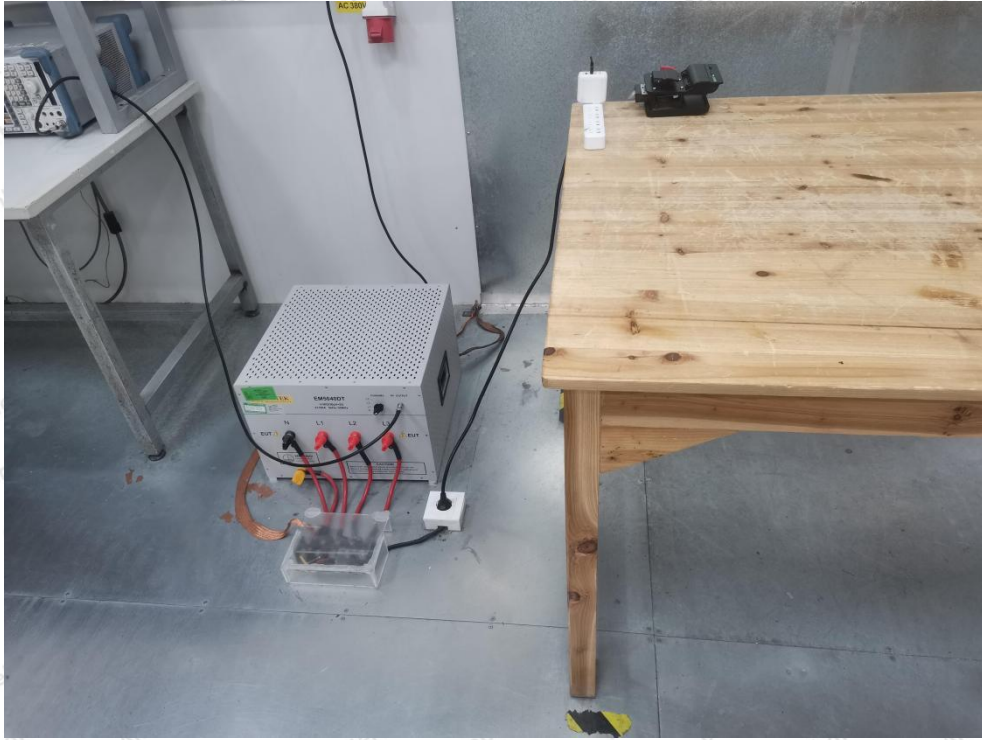


Photo of Radiation Emission Test



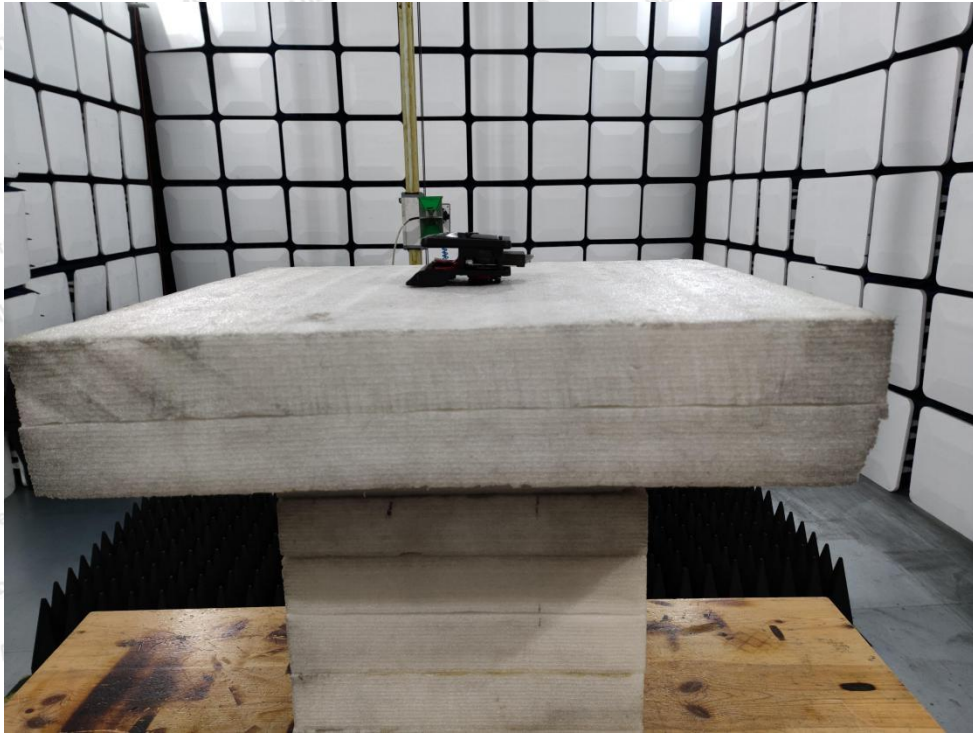

## **APPENDIX II -- EXTERNAL PHOTOGRAPH**

Reference to the test report 18220WC20087301.

## **APPENDIX III -- INTERNAL PHOTOGRAPH**

Reference to the test report 18220WC20087301.

## APPENDIX IV – Appendix Test Data