

S

T

S

L

A

B



# RADIO TEST REPORT

Report No.: STS2007355W01

Issued for


K-MOBILE TECHNOLOGY CO., LTD

NO 1109-1110, C1 Block, bantian international center, NO 5 huancheng south road, longgang district, Shenzhen, China.

<b>Product Name:</b>	Multi Mode 4G Android PTT Phone
<b>Brand Name:</b>	Estalky
<b>Model Name:</b>	E966
<b>Series Model:</b>	E966P
<b>FCC ID:</b>	2AVAF-E966
<b>IC:</b>	26705-E966
<b>Test Standard:</b>	FCC Part 22H and 24E, 27 RSS-132 Issue 3 January 2013 RSS-133 Issue 6 January 2018 RSS-139 Issue 3, July 2015

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.  
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,  
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China  
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com

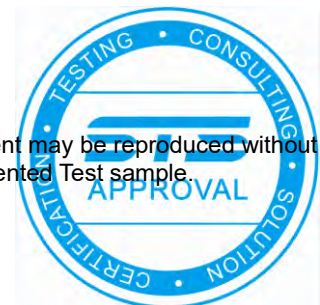



TEST RESULT CERTIFICATION

Applicant's Name .....: K-MOBILE TECHNOLOGY CO., LTD
Address.....: NO 1109-1110, C1 Block, bantian international center, NO 5 huancheng south road, longgang district, Shenzhen, China.
Manufacturer's Name .....: K-MOBILE TECHNOLOGY CO., LTD
Address.....: NO 1109-1110, C1 Block, bantian international center, NO 5 huancheng south road, longgang district, Shenzhen, China.

Product Description

Product Name .....: Multi Mode 4G Android PTT Phone
Brand Name .....: Estalky
Model Name.....: E966
Series Model .....: E966P
Test Standards .....: FCC Part 22H and 24E, 27
RSS-132 Issue 3 January 2013
RSS-133 Issue 6 January 2018
RSS-139 Issue 3, July 2015
Test Procedure.....: KDB 971168 D01 v03r01,ANSI C63.26( 2015)

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC/IC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document..

Date of Test.....:
Date of receipt of test item .....: 25 Aug. 2020
Date (s) of performance of tests : 25 Aug. 2020 ~ 04 Sept. 2020
Date of Issue .....: 04 Sept. 2020
Test Result .....: Pass

Testing Engineer :

Chris Chen

(Chris Chen)

Technical Manager :

Sean She

(Sean she)

Authorized Signatory :

Vita Li

(Vita Li)





Table of Contents	Page
<b>1 INTRODUCTION</b>	<b>6</b>
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 PRODUCT INFORMATION</b>	<b>7</b>
<b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>	<b>9</b>
<b>4 MEASUREMENT INSTRUMENTS</b>	<b>10</b>
<b>5 TEST ITEMS</b>	<b>11</b>
5.1 CONDUCTED OUTPUT POWER	11
5.2 PEAK TO AVERAGE RATIO	12
5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)	13
5.4 OCCUPIED BANDWIDTH	14
5.5 FREQUENCY STABILITY	15
5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	16
5.7 BAND EDGE	17
5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	18
5.9. RECEIVER SPURIOUS EMISSIONS	20
<b>APPENDIX A.TESTRESULT</b>	<b>22</b>
A1. CONDUCTED OUTPUT POWER	22
A2. PEAK-TO-AVERAGE RADIO	27
A3. TRANSMITTER RADIATED POWER (EIRP/ERP)	39
A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26DB BANDWIDTH)	43
A5. FREQUENCY STABILITY	54
A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS	59
A7. BAND EDGE	69
A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	76
A9. RECEIVER SPURIOUS EMISSIONS	91
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>107</b>

**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	04 Sept. 2020	STS2007355W01	ALL	Initial Issue





SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The radiated emission testing was performed according to the procedures of KDB 971168 D01 v03r01 and ANSI C63.26( 2015)

Item Number	Item Description		FCC Rules	IC Rules
1	Output Power	Conducted output power	2.1046	RSS-132 Issue 3 (5.4) RSS-133 Issue 6 (6.4) RSS-139 Issue 3 (6.5)
		Radiated output power	22.913	
		Peak to Average Ratio	24.232 27.50	
2	Spurious Emission	Conducted spurious emission	2.1051 22.917	RSS-132 Issue 3 (5.5) RSS-133 Issue 6 (6.5) RSS-139 Issue 3 (6.6)
		Radiated spurious emission	24.238 27.53	
3	Frequency Stability		2.1055 22.355 24.235 27.54	RSS-132 Issue 3 (5.3) RSS-133 Issue 6 (6.3) RSS-139 Issue 3 (6.4)
4	Occupied Bandwidth		2.1049 22.917	RSS-132 Issue 3 (3.1) RSS-133 Issue 6 (3.1) RSS-139 Issue 3 (3.1)
	Emission Bandwidth		24.238 27.53	
5	Band Edge		2.1051 22.917 24.238 27.53	RSS-132 Issue 3 (5.5) RSS-133 Issue 6 (6.5.1) RSS-139 Issue 3 (6.6)
6	Receiver spurious emissions		--	RSS-132 Issue 3 (5.6) RSS-133 Issue 6 (6.6) RSS-Gen Issue 5 (7.3)



## 1 INTRODUCTION

### 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68$ dB
2	Unwanted Emissions, conducted	$\pm 2.988$ dB
3	All emissions, radiated 30-1GHz	$\pm 5.6$ dB
4	All emissions, radiated 1G-6GHz	$\pm 5.5$ dB
5	All emissions, radiated >6G	$\pm 5.8$ dB
6	Conducted Emission (9KHz-150KHz)	$\pm 3.37$ dB
7	Conducted Emission (150KHz-30MHz)	$\pm 3.83$ dB



2 PRODUCT INFORMATION

Product Name	Multi Mode 4G Android PTT Phone
Trade Name	Estalky
Model Name	E966
Series Model	E966P
Model Difference	Only different in model name
Tx Frequency:	GSM/GPRS/EDGE: 850: 824 MHz ~ 849MHz 1900: 1850 MHz ~ 1910MHz WCDMA: Band V: 824 MHz ~ 849 MHz Band II: 1850 MHz ~ 1910 MHz Band IV: 1710 MHz ~ 1755 MHz
Rx Frequency:	GSM/GPRS/EDGE: 850: 869 MHz ~ 894 MHz 1900: 1930 MHz ~ 1990MHz WCDMA: Band V: 869 MHz ~ 894 MHz Band II: 1930 MHz ~ 1990 MHz Band IV: 2110 MHz ~ 2155 MHz
Max RF Output Power:	GSM850:32.00dBm, PCS1900:28.91dBm GPRS850(1-Slot):31.94dBm, GPRS1900(1-Slot):28.94dBm GPRS850(2-Slot):31.50dBm, GPRS1900(2-Slot):28.46dBm GPRS850(3-Slot):31.07dBm, GPRS1900(3-Slot):28.02dBm GPRS850(4-Slot):30.57dBm, GPRS1900(4-Slot):27.57dBm EDGE 850(1-Slot):27.07dBm, EDGE 1900(1-Slot):25.87dBm EDGE 850(2-Slot):26.34dBm, EDGE 1900(2-Slot):25.17dBm EDGE 850(3-Slot):25.61dBm, EDGE 1900(3-Slot):24.37dBm EDGE 850(4-Slot):24.88dBm, EDGE 1900(4-Slot):23.59dBm WCDMA Band V:21.86dBm, WCDMA Band II:21.98dBm WCDMA Band IV:22.69dBm
Type of Emission:	GSM(850): 248KGXW; PCS(1900): 246KGXW GPRS(850): 247KGXW; GPRS(1900): 248KGXW EDGE(850): 243KG7W; EDGE(1900): 247KG7W WCDMA850: 4M17F9W WCDMA1900: 4M18F9W WCDMA1700: 4M18F9W
Modulation Characteristics:	GMSK for GSM/GPRS; GMSK and 8PSK for EDGE WCDMA: QPSK; HSDPA:QPSK/16QAM; HSUPA.BPSK
SIM Card:	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested.
Antenna:	PIFA
Antenna gain:	GSM 850: 0.3dBi ,PCS 1900: 0.6dBi WCDMA 850: 0.3dBi, WCDMA1900: 0.6dBi, WCDMA1700: 0.7dBi



Battery parameter:	Rated Voltage: 3.8V Charge Limit: 4.35V Capacity: 4500mA
Adapter:	Input: AC 100-240V, 50/60Hz, 0.5A Output: 5V, 3A
GPRS/EDGE Class:	Multi-Class12
Extreme Vol. Limits:	DC 3.47V~ DC 4.35V(Normal: DC 3.8V)
Extreme Temp. Tolerance:	-30°C to +50°C
Hardware version number:	Y6128A-V2.0
Software version number:	Y6128A_E966_DMR_D01_2020081114
<p><b>** Note: The High Voltage 3.47V and Low Voltage 4.35V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.</b></p>	

RF Function	Band	Mode	Modulation	Power Class	Ant Gain(dBi)	Ant Type	SIM Card
GSM	850	GPRS (Class12)	GMSK	4	GSM850:0.3 PCS1900:0.6	PIFA	2 SIM 1 is used to tested.
		EDGE(Class12)	GMSK, 8PSK	E2			
		GSM	GMSK	1(power control level 0)			
		GPRS (Class12)	GMSK	1			
		EDGE(Class12)	GMSK, 8PSK	E2			
		GPRS (Class12)	GMSK	4			
RF Function	Band	Mode	Modulation	Power Class	Ant Gain(dBi)	Ant Type	SIM Card
WCDMA	2/4/5	WCDMA	QPSK	3	WCDMA1900:0.6 WCDMA1700:0.7 WCDMA850:0.3	PIFA	2 SIM 1 is used to tested.
		HSDPA	QPSK, 16QAM				
		HSUPA	BPSK				





### 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 and ANSI C63.26 2015 Power Meas. License Digital Systems with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850 and WCDMA Band V.
2. 30 MHz to 10th harmonic for WCDMA Band IV.
3. 30 MHz to 10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

BAND	TEST MODES	
	RADIATED TCS	CONDUCTED TCS
GSM 850	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
GSM 1900	GSM LINK GPRS/EDGE CLASS 12 LINK	GSM LINK GPRS/EDGE CLASS 12 LINK
WCDMA BAND V	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND II	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK
WCDMA BAND IV	RMC 12.2KBPS LINK	RMC 12.2KBPS LINK



4 MEASUREMENT INSTRUMENTS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.10.09	2020.10.08
Signal Analyzer	Agilent	N9020A	MY51110105	2020.03.05	2021.03.04
Wireless Communications Test Set	R&S	CMW 500	133884	2020.03.05	2021.03.04
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.01
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2019.10.09	2020.10.08
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2019.10.12	2020.10.11
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2019.10.12	2020.10.11
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Temperature & Humidity	HH660	Mieo	N/A	2019.10.17	2020.10.16
Test SW	BULUN	BL410-E/18.905			

RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Universal Radio communication tester	R&S	CMU200	119907	2020.10.11	2021.10.10
Wireless Communications Test Set	R&S	CMW 500	133884	2020.03.05	2021.03.04
Signal Analyzer	Agilent	N9020A	MY49100060	2019.10.09	2020.10.08
Temperature & Humidity	HH660	Mieo	N/A	2019.10.17	2020.10.16
Test SW	FARAD	LZ-RF /LzRf-3A3			

Equipment with a calibration date of “NCR” shown in this list was not used to make direct calibrated measurements.

## 5 TEST ITEMS

### 5.1 CONDUCTED OUTPUT POWER

#### TEST OVERVIEW

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

#### TEST PROCEDURES

1. The transmitter output port was connected to the system simulator.
2. Set eut at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

#### TEST SETUP



#### TEST RESULT

Note: Test data See Appendix 1.

## 5.2 PEAK TO AVERAGE RATIO


### TEST OVERVIEW

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 db.

### TEST PROCEDURES

1. The testing follows fckdb 971168 v03r01 section.
2. The eut was connected to the peak and av system simulator& spectrum analyzer.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure average power of the spectrum analysis,

### TEST SETUP

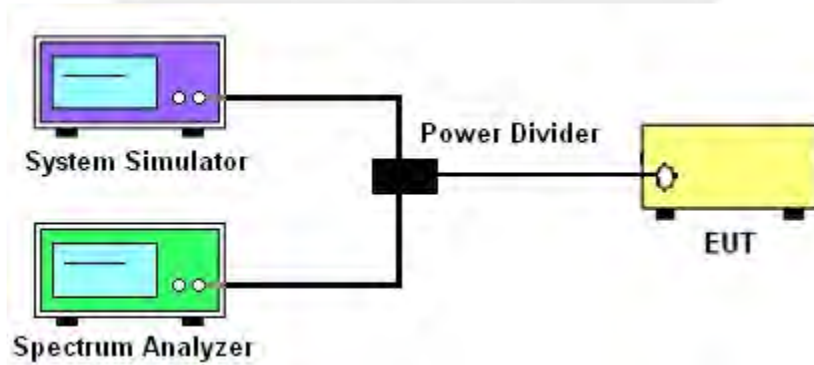

### TEST RESULT

Note: Test data See Appendix 2.



### 5.3 TRANSMITTER RADIATED POWER (EIRP/ERP)

#### TEST OVERVIEW

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26 2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

#### TEST PROCEDURE

1. The testing follows FCC KDB 971168 Section 5.8 and ANSI C63.26-2015 Section 5.2.
2. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
3. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
4. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
5. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a nonradiating cable. The absolute levels of the spurious emissions were measured by the substitution.
6. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to ANSI C63.26-2015. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.  
 $EIRP = S.G \text{ Level} + \text{Gain} - \text{Cable loss}$ ;  $ERP = S.G \text{ Level} + \text{Gain} - \text{Cable loss} - 2.15$ .

#### TEST RESULT

Note: Test data See Appendix 3.

## 5.4 OCCUPIED BANDWIDTH

### TEST OVERVIEW

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.


The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

All modes of operation were investigated and the worst case configuration results are reported in this section.

### TEST PROCEDURE

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### TEST SETUP

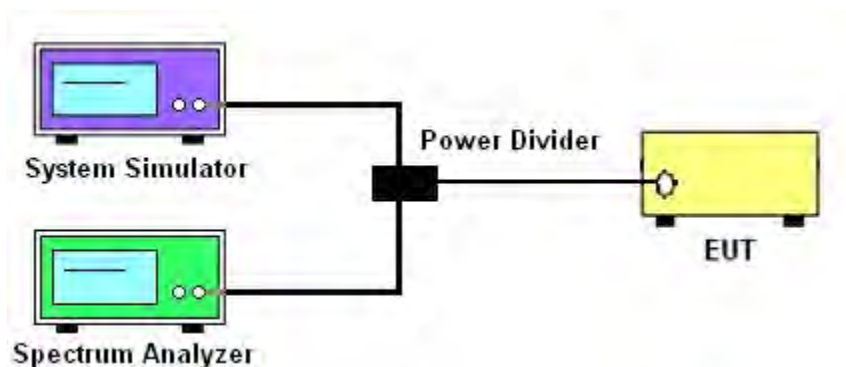

### TEST RESULT

Note: Test data See Appendix 4.

## 5.5 FREQUENCY STABILITY

### TEST OVERVIEW

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26 2015. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  in  $10^{\circ}\text{C}$  increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### TEST PROCEDURE


#### Temperature Variation

1. The testing follows fccdb 971168 D01 section 9.0
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### Voltage Variation

1. The testing follows FCC KDB 971168 D01 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

### TEST SETUP

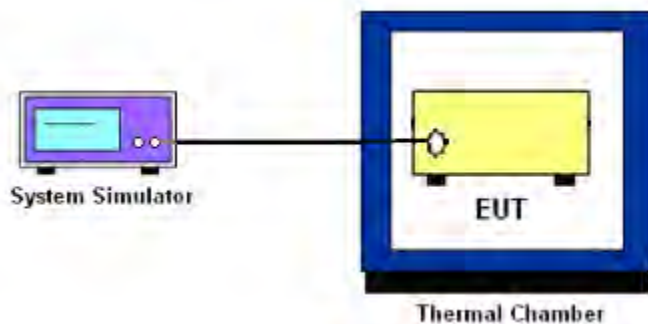

### TEST RESULT

Note: Test data See Appendix 5.

## 5.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### TEST OVERVIEW

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0. and ANSI C63.26-2015-Section 5.7.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm.}$$

### TEST SETUP

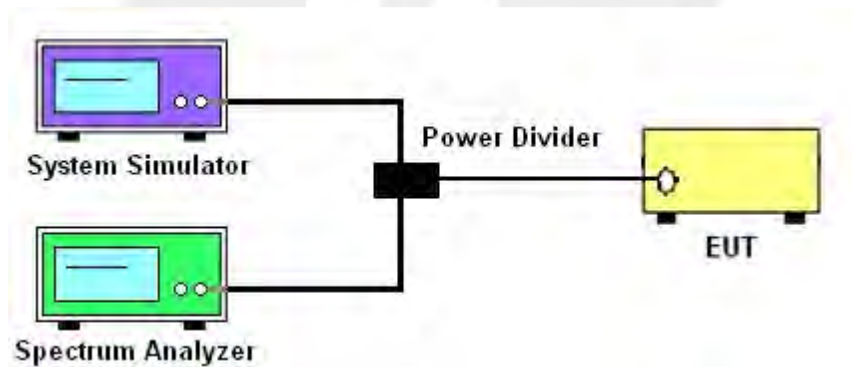

### TEST RESULT

Note: Test data See Appendix 6.



## 5.7 BAND EDGE

### TEST OVERVIEW


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P[\text{Watts}])$ , where P is the transmitter power in Watts.

### TEST PROCEDURE

1. The testing FCC KDB 971168 D01 v03r01 Section 6.0 and ANSI C63.26-2015-Section 5.7
2. Start and stop frequency were set such that the band edge would be placed in the center of the Plot.
3. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
4. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
5. The band edges of low and high channels for the highest RF powers were measured.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(\text{W}) - [43 + 10\log(P)] (\text{dB})$   
 $= [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB})$   
 $= -13\text{dBm}.$

### TEST SETUP

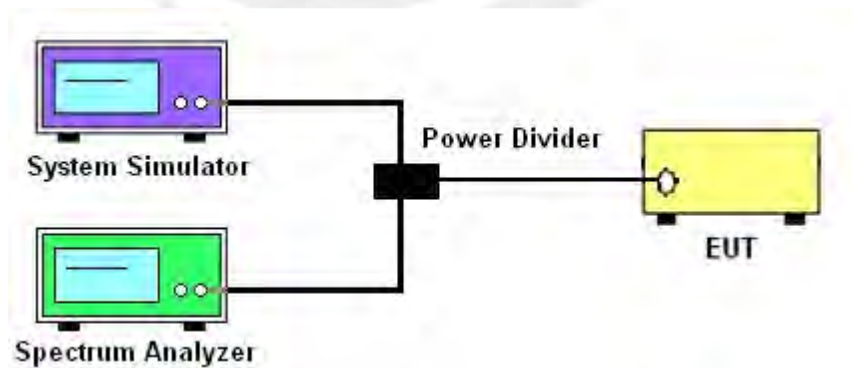

### TEST RESULT

Note: Test data See Appendix 7.



## 5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

### TEST OVERVIEW

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power and at the appropriate frequencies.


It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

### TEST PROCEDURE


1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW  $\geq 3 \times$  RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $> 2 \times$  span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna.  
 $P_{Mea} = S.G \text{ Level} + \text{Ant-Cable loss}$ ;  $\text{Margin} = P_{Mea} - \text{Limit}$ .

**TEST SETUP**

For radiated test from 30MHz to 1GHz

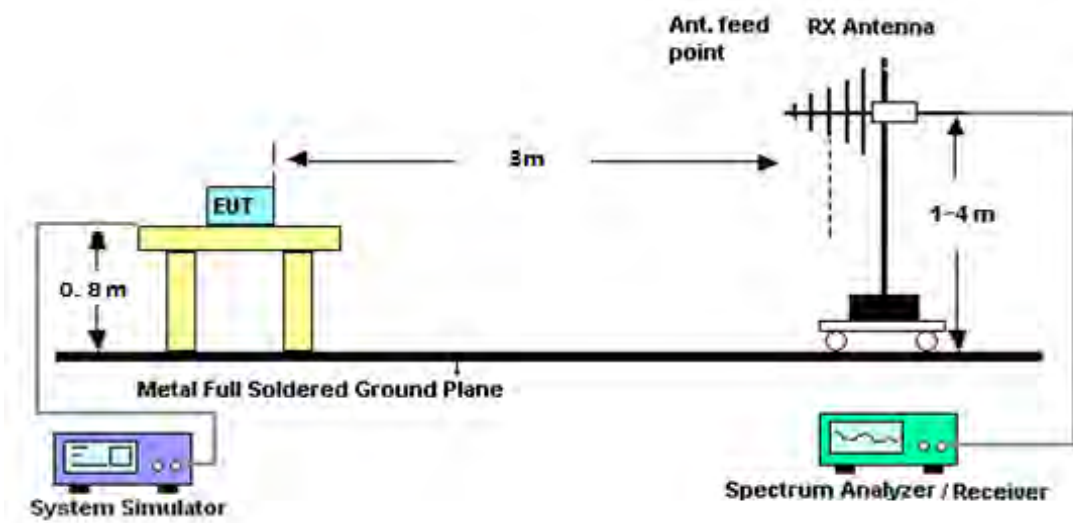

For radiated test from above 1GHz

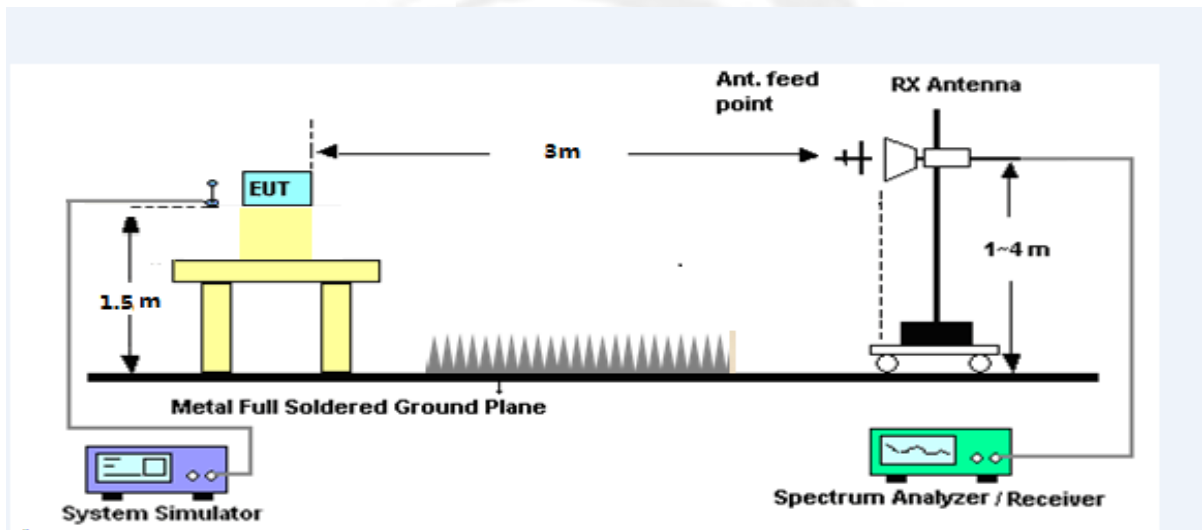

**TEST RESULT**

Note: Test data See Appendix 8.



## 5.9. RECEIVER SPURIOUS EMISSIONS

### 5.9.1 TEST LIMIT

Radiated emission measurements shall be performed with the receiver antenna connected to the receiver antenna ports. The search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is higher, to at least five times the highest tunable or local oscillator frequency, whichever is higher, without exceeding 40 GHz.

Spurious emissions from receivers shall not exceed the radiated emissions limits shown in table 3.

Table 3 – Receiver radiated emissions limits

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ at 3 metres)Note 1
30-88	100
88-216	150
216-960	200
Above 960	500

Note 1: Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with section 6.6.

### 5.9.2 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

**Note:**


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 5.9.3 TEST SETUP

For radiated test from 30MHz to 1GHz

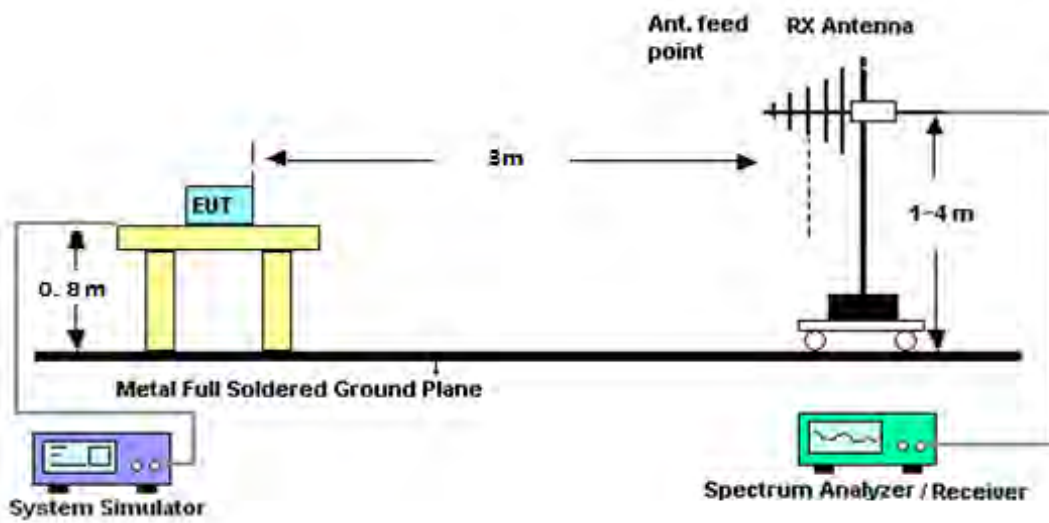

For radiated test from above 1GHz

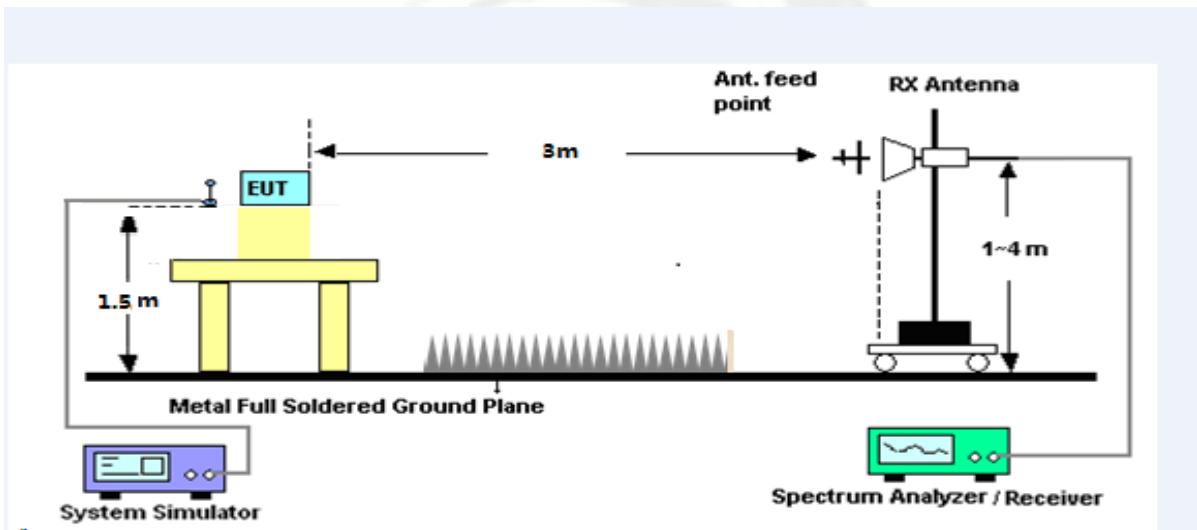



APPENDIX A.TESTRESULT  
A1. CONDUCTED OUTPUT POWER  
GSM 850:

GSM 850		
Mode	Frequency (MHz)	AVG Power(dBm)
GSM (GMSK,1-Slot)	824.2	31.85
	836.6	31.90
	848.8	32.00
GPRS (GMSK,1-Slot)	824.2	31.87
	836.6	31.94
	848.8	31.72
GPRS (GMSK,2-Slot)	824.2	31.39
	836.6	31.50
	848.8	31.31
GPRS (GMSK,3-Slot)	824.2	30.94
	836.6	31.07
	848.8	30.82
GPRS (GMSK,4-Slot)	824.2	30.50
	836.6	30.57
	848.8	30.34
EGPRS (8PSK,1-Slot)	824.2	26.96
	836.6	27.07
	848.8	27.06
EGPRS (8PSK,2-Slot)	824.2	26.21
	836.6	26.34
	848.8	26.33
EGPRS (8PSK,3-Slot)	824.2	25.48
	836.6	25.60
	848.8	25.61
EGPRS (8PSK,4-Slot)	824.2	24.73
	836.6	24.88
	848.8	24.86



PCS 1900:

PCS 1900		
Mode	Frequency (MHz)	AVG Power(dBm)
GSM (GMSK,1-Slot)	1850.2	28.38
	1880.0	28.58
	1909.8	28.91
GPRS (GMSK,1-Slot)	1850.2	28.38
	1880.0	28.61
	1909.8	28.94
GPRS (GMSK,2-Slot)	1850.2	27.98
	1880.0	28.16
	1909.8	28.46
GPRS (GMSK,3-Slot)	1850.2	27.53
	1880.0	27.74
	1909.8	28.02
GPRS (GMSK,4-Slot)	1850.2	27.04
	1880.0	27.24
	1909.8	27.57
EGPRS (8PSK,1-Slot)	1850.2	25.16
	1880.0	25.41
	1909.8	25.87
EGPRS (8PSK,2-Slot)	1850.2	24.36
	1880.0	24.61
	1909.8	25.17
EGPRS (8PSK,3-Slot)	1850.2	23.65
	1880.0	23.91
	1909.8	24.37
EGPRS (8PSK,4-Slot)	1850.2	22.85
	1880.0	23.17
	1909.8	23.59



## UMTS BAND V

UMTS BAND V		
Mode	Frequency(MHz)	AVG Power
WCDMA 850 RMC	826.4	21.34
	836.6	21.86
	846.6	21.73
HSDPA Subtest 1	826.4	20.24
	836.6	20.65
	846.6	20.64
HSDPA Subtest 2	826.4	19.77
	836.6	20.25
	846.6	20.24
HSDPA Subtest 3	826.4	19.34
	836.6	19.77
	846.6	19.93
HSDPA Subtest 4	826.4	18.91
	836.6	19.38
	846.6	19.60
HSUPA Subtest 1	826.4	20.16
	836.6	20.60
	846.6	20.45
HSUPA Subtest 2	826.4	19.25
	836.6	19.69
	846.6	19.48
HSUPA Subtest 3	826.4	19.23
	836.6	19.24
	846.6	19.08
HSUPA Subtest 4	826.4	18.88
	836.6	18.86
	846.6	18.67
HSUPA Subtest 5	826.4	17.45
	836.6	17.43
	846.6	17.18





## UMTS BAND II

UMTS BAND II		
Mode	Frequency(MHz)	AVG Power
WCDMA 1900 RMC	1852.4	21.67
	1880	21.89
	1907.6	21.98
HSDPA Subtest 1	1852.4	19.53
	1880	19.72
	1907.6	19.77
HSDPA Subtest 2	1852.4	19.12
	1880	19.30
	1907.6	19.29
HSDPA Subtest 3	1852.4	18.69
	1880	18.86
	1907.6	18.98
HSDPA Subtest 4	1852.4	18.21
	1880	18.48
	1907.6	18.53
HSUPA Subtest 1	1852.4	19.57
	1880	19.72
	1907.6	19.82
HSUPA Subtest 2	1852.4	18.61
	1880	18.78
	1907.6	18.90
HSUPA Subtest 3	1852.4	18.47
	1880	18.31
	1907.6	18.44
HSUPA Subtest 4	1852.4	18.12
	1880	17.82
	1907.6	18.03
HSUPA Subtest 5	1852.4	16.67
	1880	16.41
	1907.6	16.62



## UMTS BAND IV

UMTS BAND IV		
Mode	Frequency(MHz)	AVG Power
WCDMA 1700 RMC	1712.6	22.01
	1740	21.76
	1752.4	21.78
HSDPA Subtest 1	1712.6	21.84
	1740	22.00
	1752.4	22.69
HSDPA Subtest 2	1712.6	21.43
	1740	21.53
	1752.4	22.22
HSDPA Subtest 3	1712.6	21.11
	1740	21.12
	1752.4	21.76
HSDPA Subtest 4	1712.6	20.64
	1740	20.67
	1752.4	21.40
HSUPA Subtest 1	1712.6	21.71
	1740	22.00
	1752.4	22.61
HSUPA Subtest 2	1712.6	20.84
	1740	21.01
	1752.4	21.64
HSUPA Subtest 3	1712.6	20.74
	1740	20.56
	1752.4	21.17
HSUPA Subtest 4	1712.6	20.40
	1740	20.10
	1752.4	20.72
HSUPA Subtest 5	1712.6	18.93
	1740	18.65
	1752.4	19.22



## A2. PEAK-TO-AVERAGE RADIO


GSM 850		
Mode	Frequency (MHz)	PAR
GSM 850	824.2	2.63
	836.6	2.60
	848.8	2.63
GPRS 850	824.2	2.63
	836.6	2.63
	848.8	2.63
EGPRS 850	824.2	2.62
	836.6	2.62
	848.8	2.62
PCS 1900		
Mode	Frequency (MHz)	PAR
PCS1900	1850.2	2.63
	1880	2.63
	1909.8	2.63
GPRS1900	1850.2	2.63
	1880	2.63
	1909.8	2.64
EGPRS1900	1850.2	2.63
	1880	2.63
	1909.8	2.63




UMTS Band II		
Mode	Frequency (MHz)	PAR
WCDMA 1900 RMC	1852.4	3.00
	1880	2.93
	1907.6	2.94
HSDPA 1900	1852.4	3.78
	1880	3.45
	1907.6	3.00
HSUPA 1900	1852.4	3.68
	1880	3.27
	1907.6	3.28

UMTS Band V		
Mode	Frequency (MHz)	PAR
WCDMA 850 RMC	826.4	3.01
	836.6	3.04
	846.6	2.98
HSDPA 850	826.4	3.26
	836.6	3.34
	846.6	3.40
HSUPA 850	826.4	3.37
	836.6	3.40
	846.6	3.20


UMTS Band IV		
Mode	Frequency (MHz)	PAR
WCDMA 1700 RMC	1712.6	3.00
	1740	2.94
	1752.4	3.06
HSDPA 1700	1712.6	3.29
	1740	3.02
	1752.4	3.25
HSUPA 1700	1712.6	3.41
	1740	3.12
	1752.4	3.46

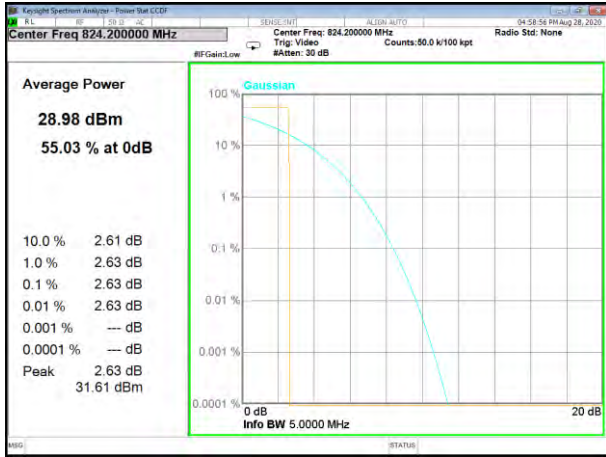


GSM850 Lower

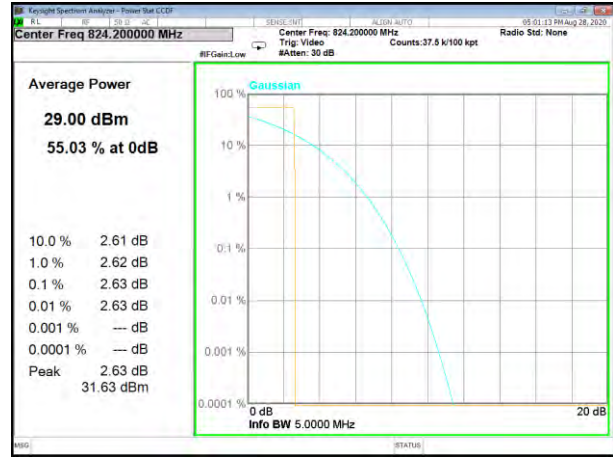


GPRS850 Lower

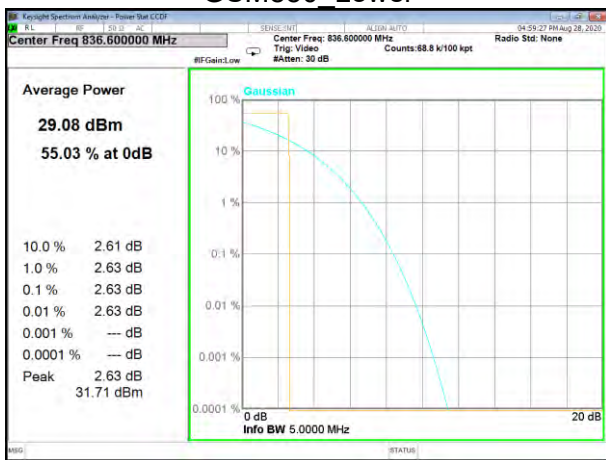


GSM850 Middle

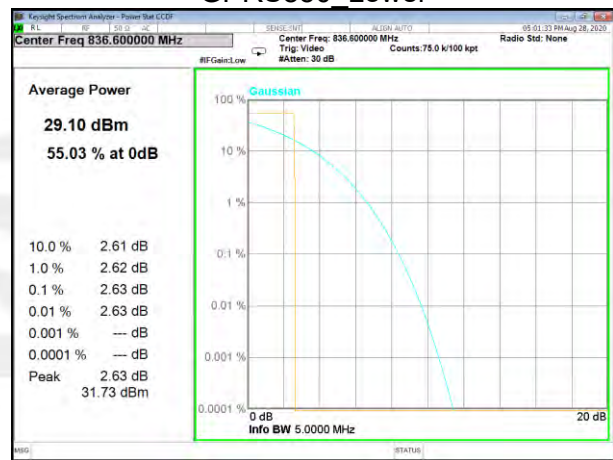


GPRS850 Middle

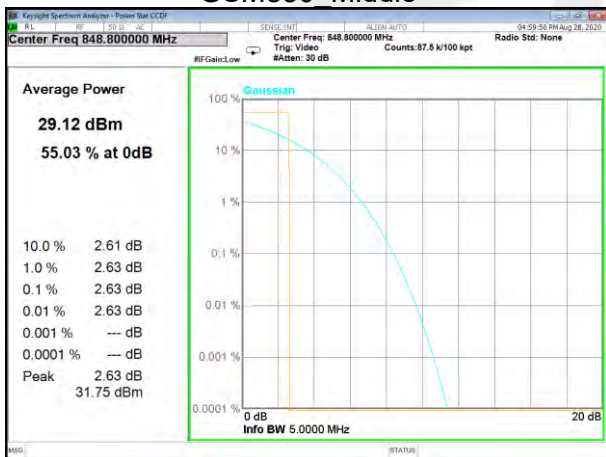


GSM850 Higher

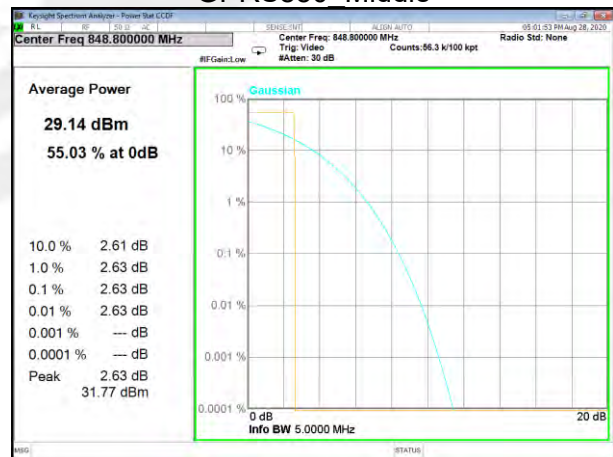


GPRS850 Higher

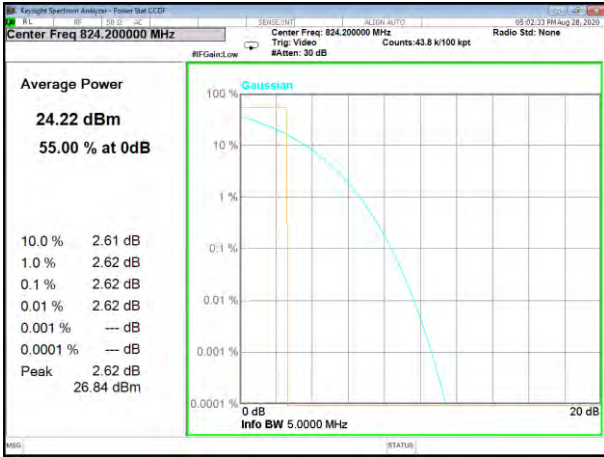


EGPRS850\_Lower

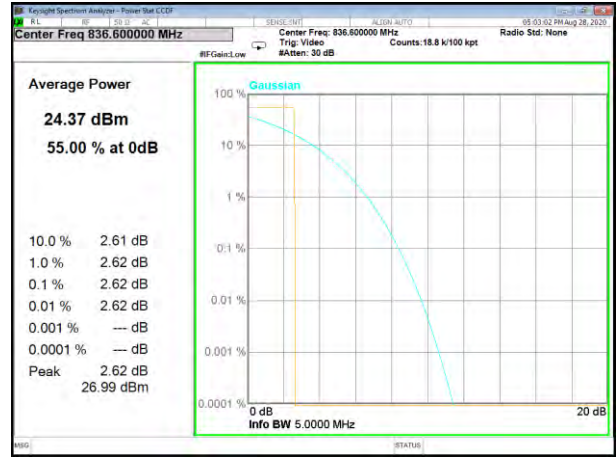


EGPRS850\_Middle

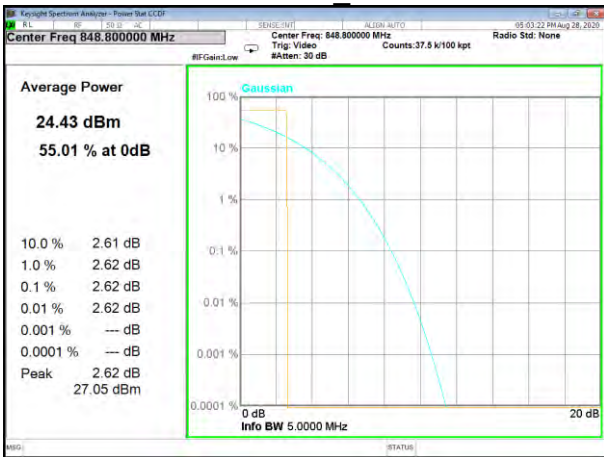


EGPRS850\_Higher

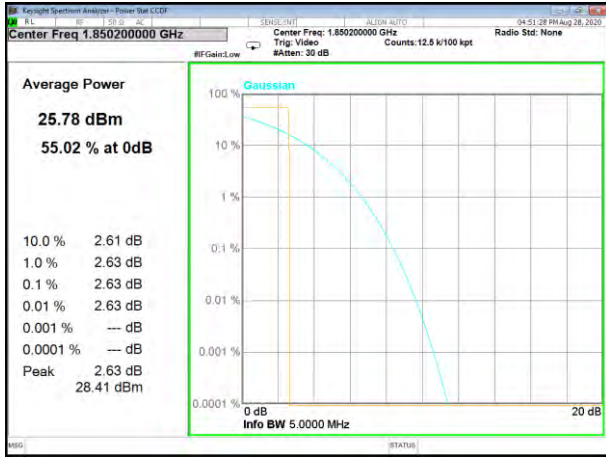


GSM1900 Lower

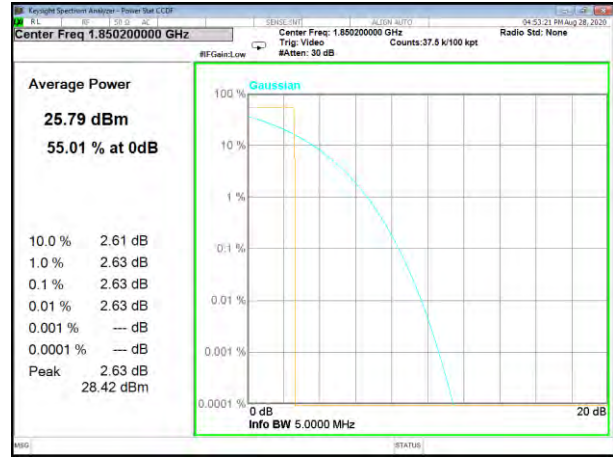

GPRS1900 Lower

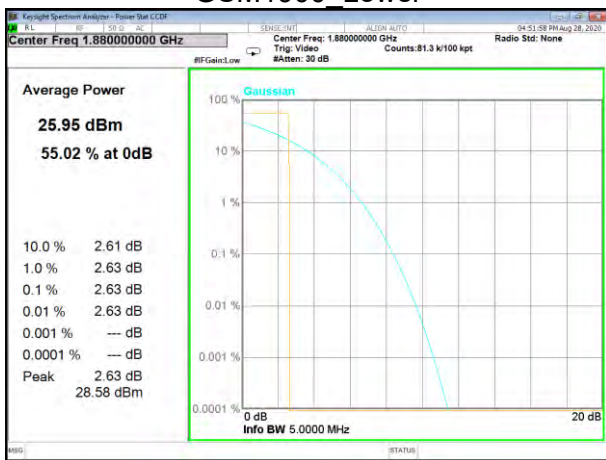


GSM1900 Middle

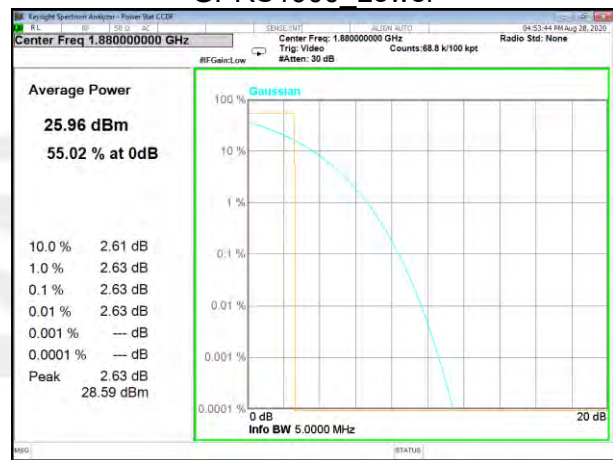


GPRS1900 Middle




GSM1900 Higher

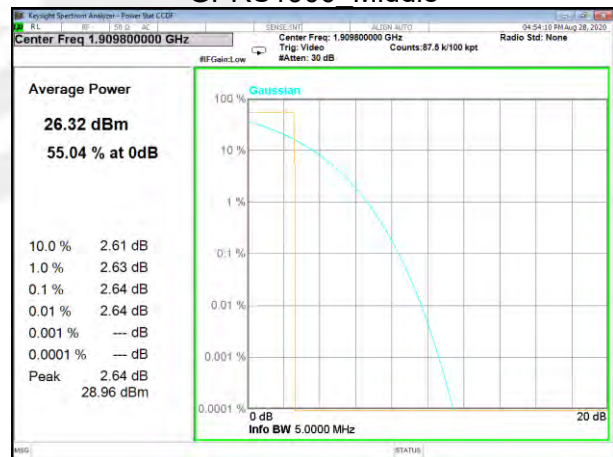


GPRS1900 Higher

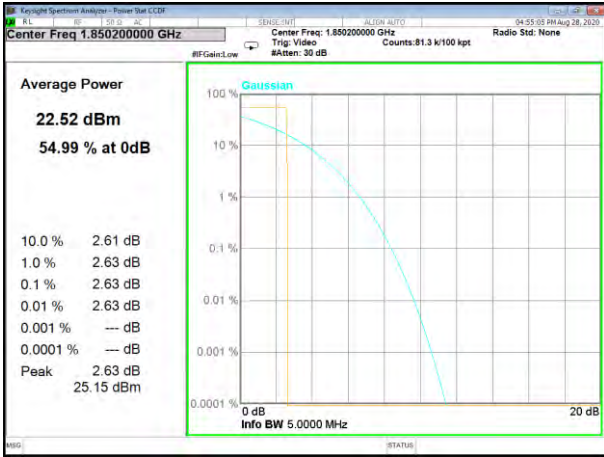

EGPRS1900\_Lower

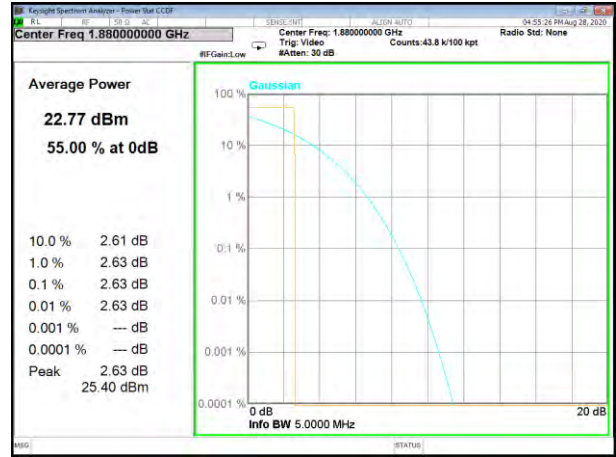


EGPRS1900\_Middle

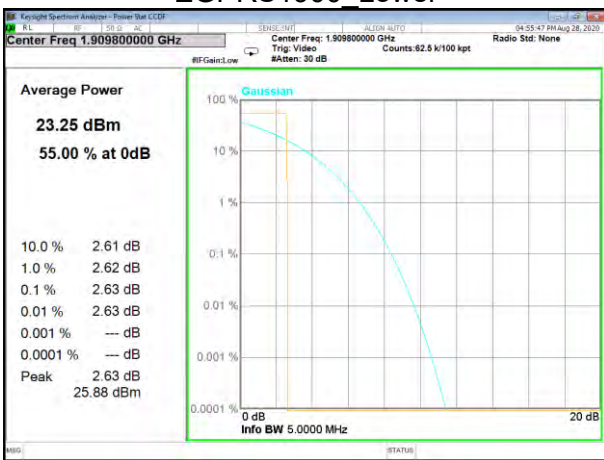


EGPRS1900\_Higher




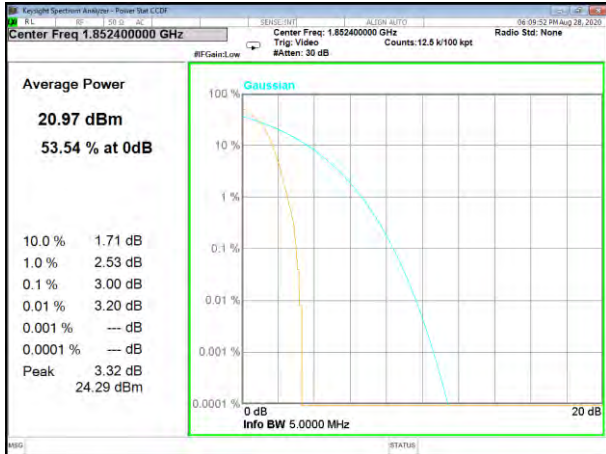

WCDMA B2 Low

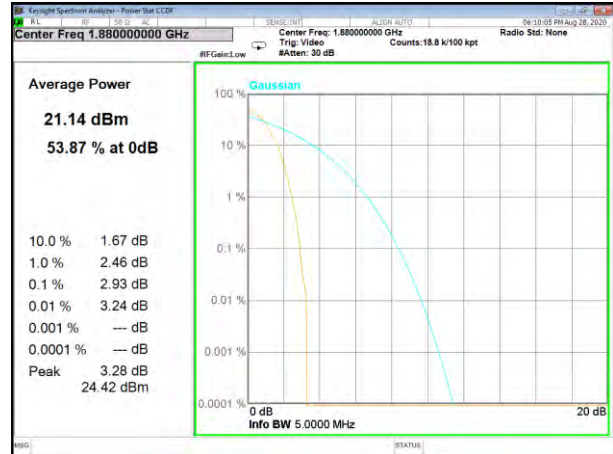


WCDMA B2 Middle

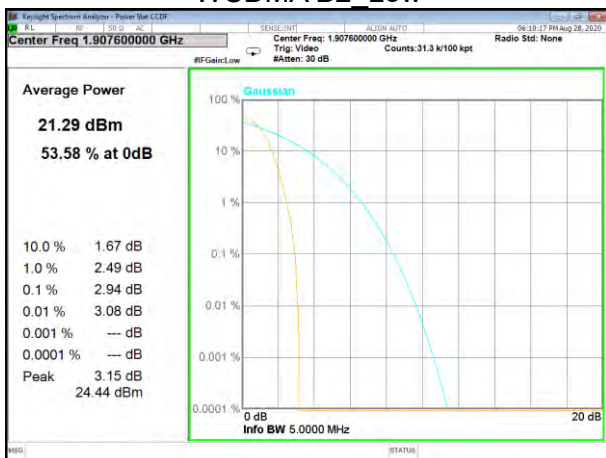


WCDMA B2 High




HSDPA B2 Low

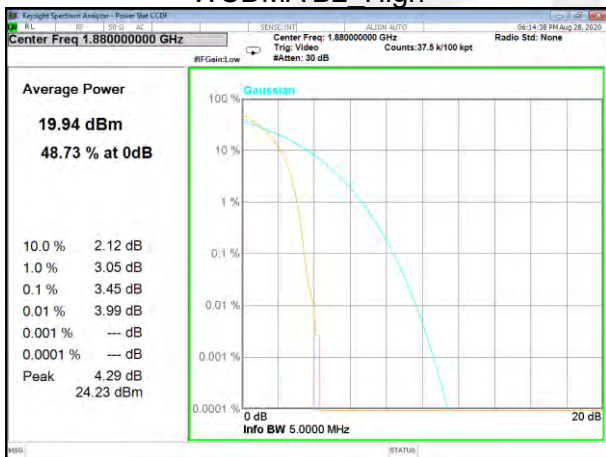


HSDPA B2\_Middle

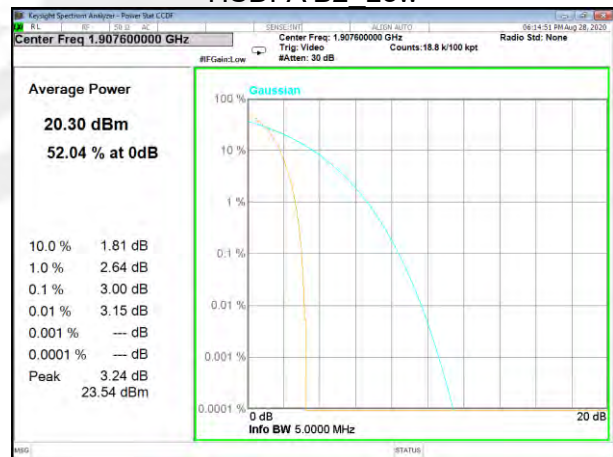


HSDPA B2\_High

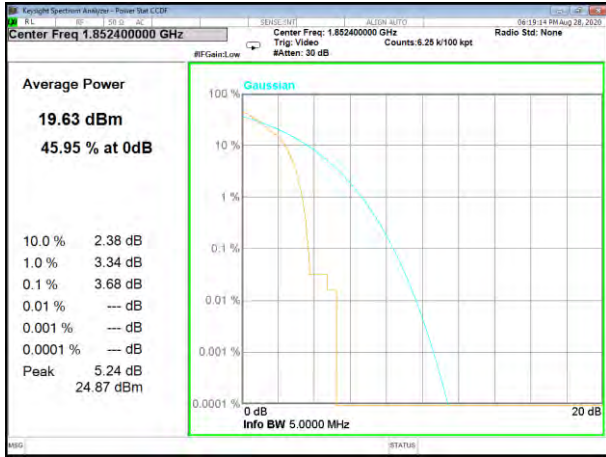


HSPA B2\_Low

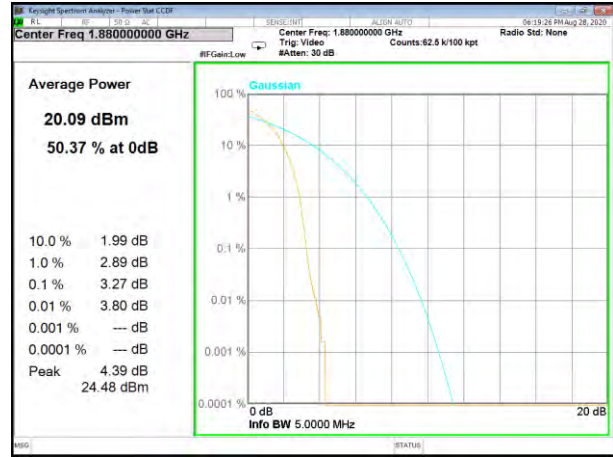


HSPA B2\_Middle

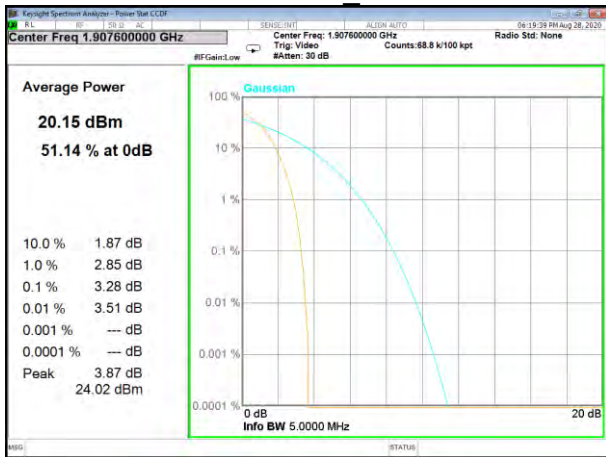

HSPA B2\_High

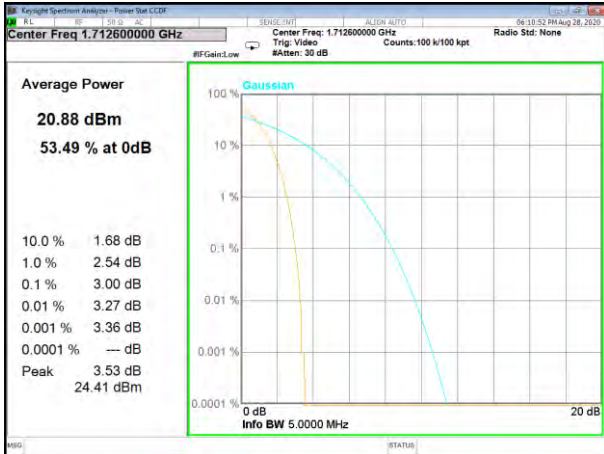


WCDMA B4\_Low

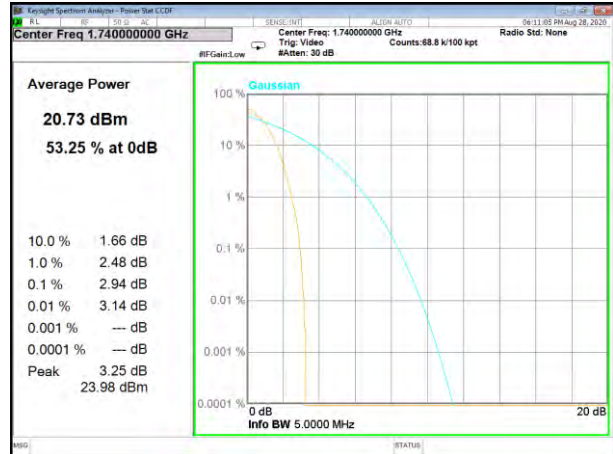


WCDMA B4\_Middle




WCDMA B4\_High

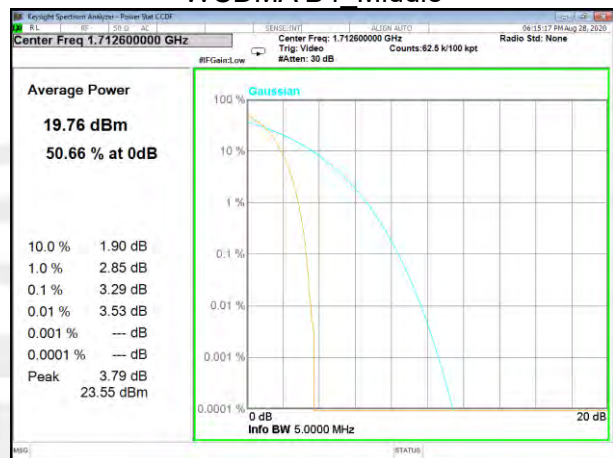


HSDPA B4\_Low

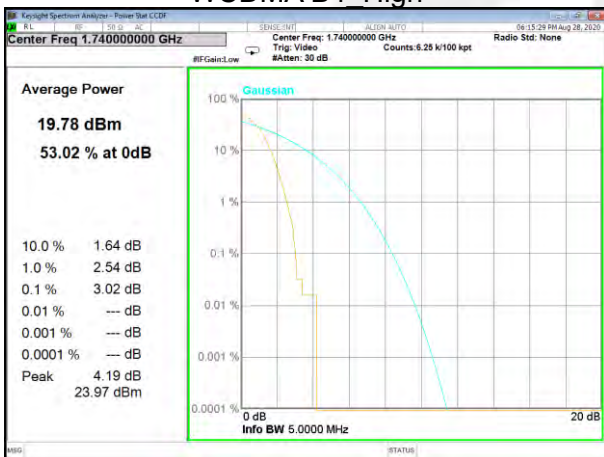


HSDPA B4\_Middle

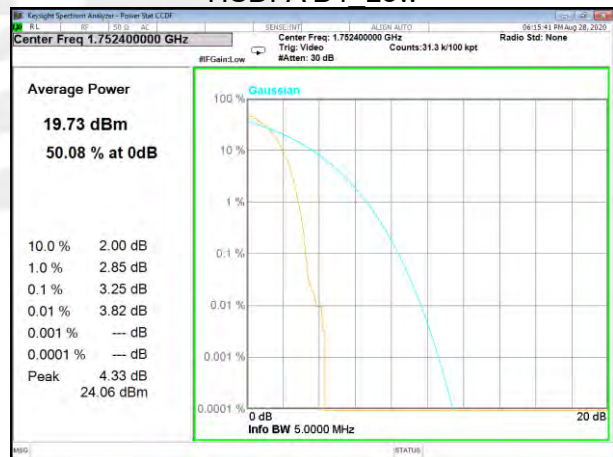

HSDPA B4\_High

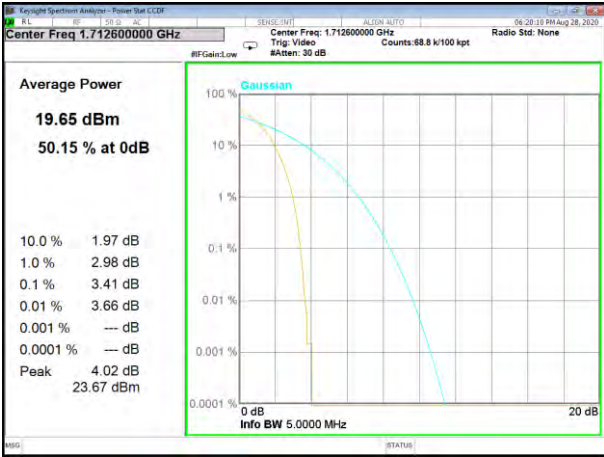


HSUPA B4\_Low

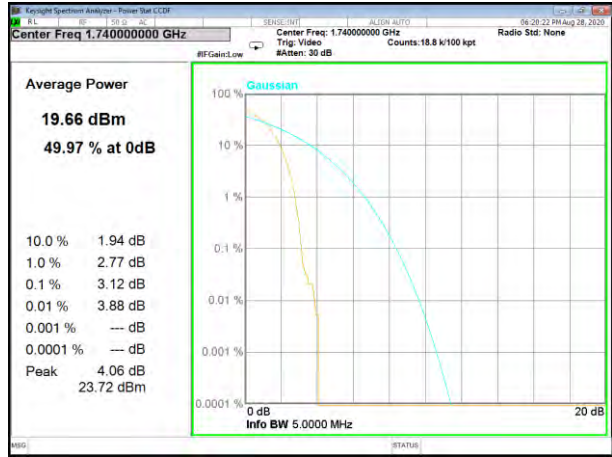


HSUPA B4\_Middle




HSUPA B4\_High

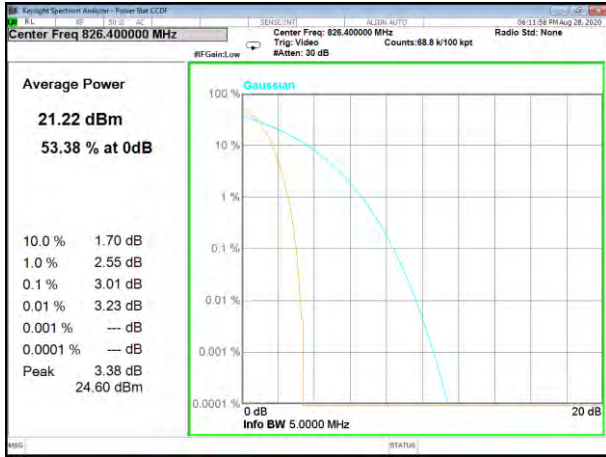


WCDMA B5 Low

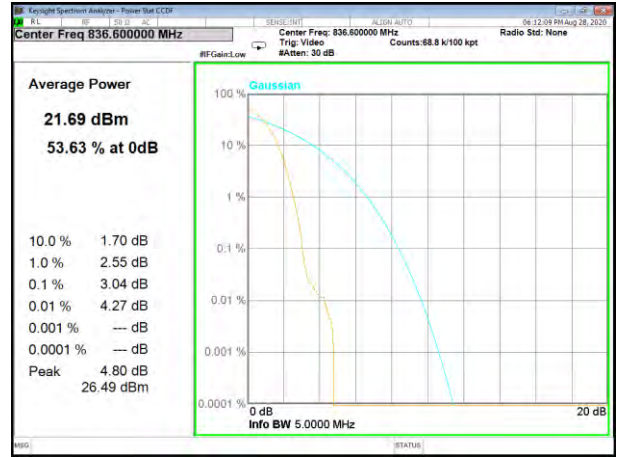


WCDMA B5 Middle

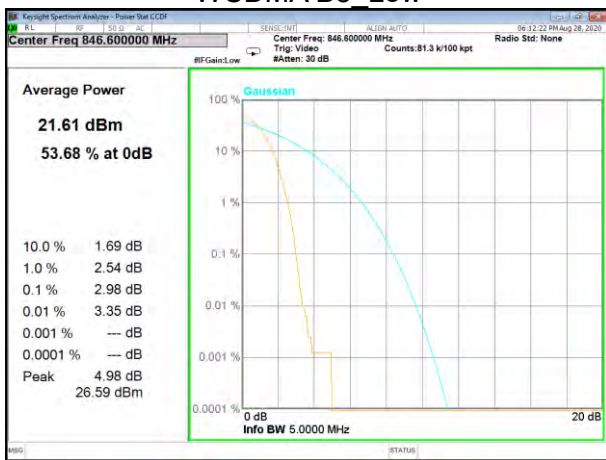


WCDMA B5 High

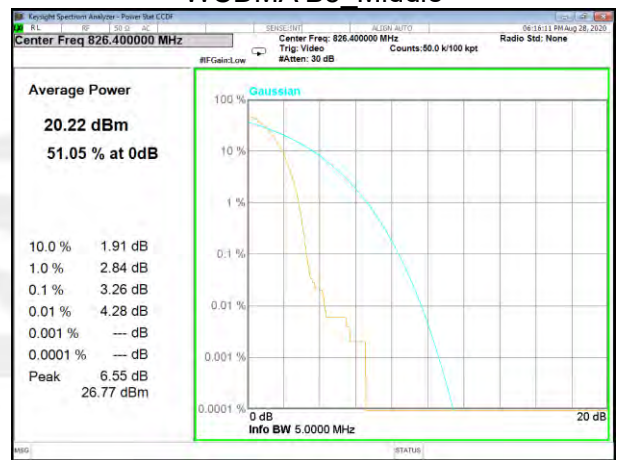


HSDPA B5 Low

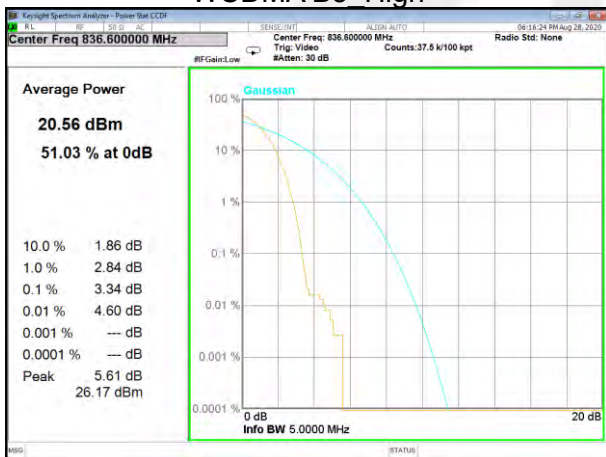


HSDPA B5\_Middle

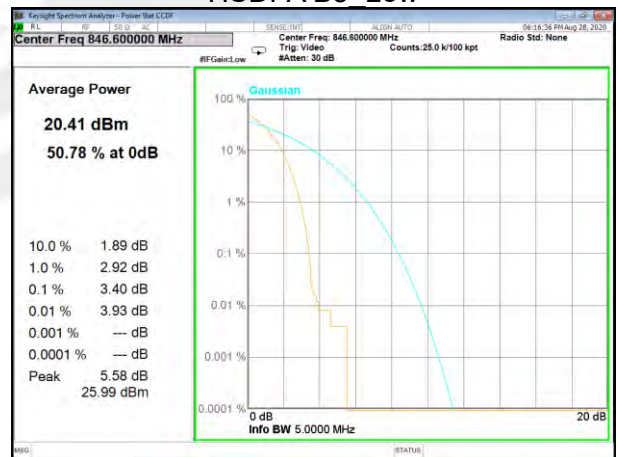


HSDPA B5\_High

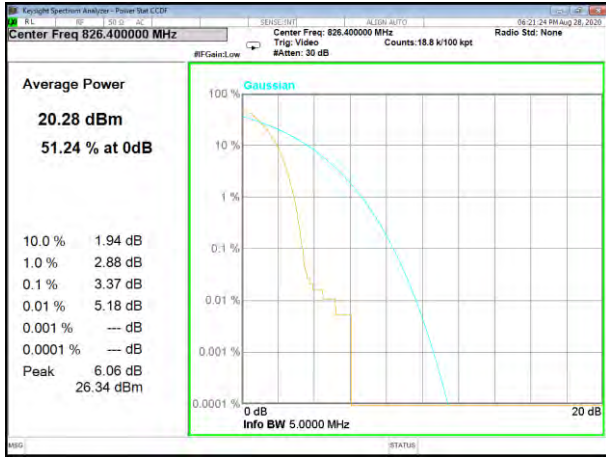

HSPA B5\_Low

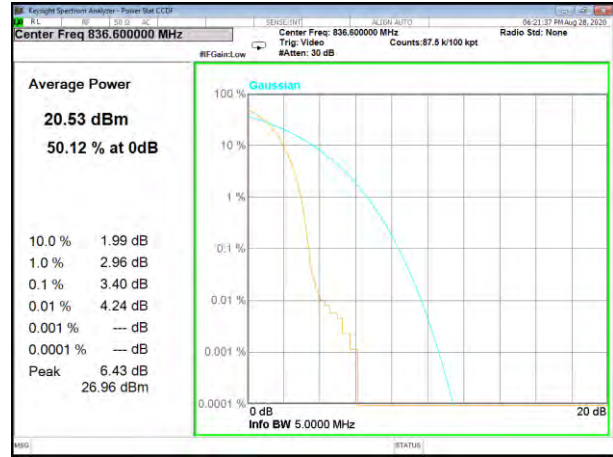

HSPA B5\_Middle

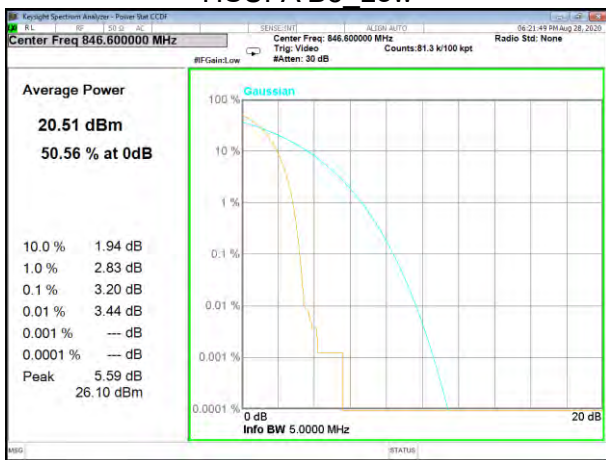

HSPA B5\_High



A3. TRANSMITTER RADIATED POWER (EIRP/ERP)

Note: Test is divided into three directions, X/Y/Z. X pattern for the worst.

Radiated Power (ERP) for GSM 850 MHZ								
Mode	Frequency	Result					Polarization Of Max. ERP	Conclusion
		S G.Level (dBm)	Cable loss	Gain(dBi)	correction factor(dB)	PMeas E.R.P(dBm)		
GSM850	824.2	25.33	0.44	6.5	2.15	29.24	Horizontal	Pass
	824.2	27.21	0.44	6.5	2.15	31.12	Vertical	Pass
	836.6	25.52	0.45	6.5	2.15	29.42	Horizontal	Pass
	836.6	27.49	0.45	6.5	2.15	31.39	Vertical	Pass
	848.8	25.62	0.46	6.5	2.15	29.51	Horizontal	Pass
	848.8	27.61	0.46	6.5	2.15	31.50	Vertical	Pass
GPRS850	824.2	25.22	0.44	6.5	2.15	29.13	Horizontal	Pass
	824.2	27.33	0.44	6.5	2.15	31.24	Vertical	Pass
	836.6	24.99	0.45	6.5	2.15	28.89	Horizontal	Pass
	836.6	27.33	0.45	6.5	2.15	31.23	Vertical	Pass
	848.8	25.03	0.46	6.5	2.15	28.92	Horizontal	Pass
	848.8	27.05	0.46	6.5	2.15	30.94	Vertical	Pass
EGPRS850	824.2	20.08	0.44	6.5	2.15	23.99	Horizontal	Pass
	824.2	22.41	0.44	6.5	2.15	26.32	Vertical	Pass
	836.6	20.30	0.45	6.5	2.15	24.20	Horizontal	Pass
	836.6	22.43	0.45	6.5	2.15	26.33	Vertical	Pass
	848.8	20.13	0.46	6.5	2.15	24.02	Horizontal	Pass
	848.8	22.49	0.46	6.5	2.15	26.38	Vertical	Pass
Limit	ERP<7W=38.45dBm							

Radiated Power (EIRP) for GSM 850 MHZ								
Mode	Frequency	Result					Polarization Of Max. EIRP	Conclusion
		S G.Level (dBm)	Cable loss	Gain(dBi)	PMeas E.I.R.P(dBm)			
GSM850	824.2	25.33	0.44	6.5	31.39	Horizontal	Pass	
	824.2	27.21	0.44	6.5	33.27	Vertical	Pass	
	836.6	25.52	0.45	6.5	31.57	Horizontal	Pass	
	836.6	27.49	0.45	6.5	33.54	Vertical	Pass	
	848.8	25.62	0.46	6.5	31.66	Horizontal	Pass	
	848.8	27.61	0.46	6.5	33.65	Vertical	Pass	
GPRS850	824.2	25.22	0.44	6.5	31.28	Horizontal	Pass	
	824.2	27.33	0.44	6.5	33.39	Vertical	Pass	
	836.6	24.99	0.45	6.5	31.04	Horizontal	Pass	
	836.6	27.33	0.45	6.5	33.38	Vertical	Pass	
	848.8	25.03	0.46	6.5	31.07	Horizontal	Pass	
	848.8	27.05	0.46	6.5	33.09	Vertical	Pass	
EGPRS850	824.2	20.08	0.44	6.5	26.14	Horizontal	Pass	
	824.2	22.41	0.44	6.5	28.47	Vertical	Pass	
	836.6	20.30	0.45	6.5	26.35	Horizontal	Pass	
	836.6	22.43	0.45	6.5	28.48	Vertical	Pass	
	848.8	20.13	0.46	6.5	26.17	Horizontal	Pass	
	848.8	22.49	0.46	6.5	28.53	Vertical	Pass	
Limit	EIRP<11.5W=40.6dBm							



Radiated Power (EIRP) for PCS 1900 MHZ							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max. EIRP	
PCS1900	1850.2	17.84	2.41	10.35	25.78	Horizontal	Pass
	1850.2	19.6	2.41	10.35	27.54	Vertical	Pass
	1880	18.14	2.42	10.35	26.07	Horizontal	Pass
	1880	20.06	2.42	10.35	27.99	Vertical	Pass
	1909.8	18.63	2.43	10.35	26.55	Horizontal	Pass
	1909.8	20.37	2.43	10.35	28.29	Vertical	Pass
GPRS1900	1850.2	17.02	2.41	10.35	24.96	Horizontal	Pass
	1850.2	19.32	2.41	10.35	27.26	Vertical	Pass
	1880	17.43	2.42	10.35	25.36	Horizontal	Pass
	1880	19.55	2.42	10.35	27.48	Vertical	Pass
	1909.8	17.4	2.43	10.35	25.32	Horizontal	Pass
	1909.8	19.85	2.43	10.35	27.77	Vertical	Pass
EGPRS1900	1850.2	14.1	2.41	10.35	22.04	Horizontal	Pass
	1850.2	16.48	2.41	10.35	24.42	Vertical	Pass
	1880	14.69	2.42	10.35	22.62	Horizontal	Pass
	1880	16.92	2.42	10.35	24.85	Vertical	Pass
	1909.8	15.14	2.43	10.35	23.06	Horizontal	Pass
	1909.8	17.3	2.43	10.35	25.22	Vertical	Pass
Limit	EIRP<2W=33dBm						







Radiated Power (EIRP) for WCDMA Band II								
Mode	Frequency	Result					Polarization Of Max. EIRP	Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)			
WCDMA	1852.4	11.23	2.41	10.35	19.17	Horizontal	Pass	
	1852.4	13.19	2.41	10.35	21.13	Vertical	Pass	
	1880	11.51	2.42	10.35	19.44	Horizontal	Pass	
	1880	13.29	2.42	10.35	21.22	Vertical	Pass	
	1907.4	11.62	2.43	10.35	19.54	Horizontal	Pass	
	1907.4	13.37	2.43	10.35	21.29	Vertical	Pass	
HSUPA	1852.4	8.89	2.41	10.35	16.83	Horizontal	Pass	
	1852.4	10.71	2.41	10.35	18.65	Vertical	Pass	
	1880	9.05	2.42	10.35	16.98	Horizontal	Pass	
	1880	10.96	2.42	10.35	18.89	Vertical	Pass	
	1907.4	9.43	2.43	10.35	17.35	Horizontal	Pass	
	1907.4	11.25	2.43	10.35	19.17	Vertical	Pass	
HSDPA	1852.4	8.92	2.41	10.35	16.86	Horizontal	Pass	
	1852.4	10.9	2.41	10.35	18.84	Vertical	Pass	
	1880	9.48	2.42	10.35	17.41	Horizontal	Pass	
	1880	11.19	2.42	10.35	19.12	Vertical	Pass	
	1907.4	9.18	2.43	10.35	17.10	Horizontal	Pass	
	1907.4	11.08	2.43	10.35	19.00	Vertical	Pass	
Limit	EIRP<2W=33dBm							

Radiated Power (ERP) for WCDMA Band V								
Mode	Frequency	Result					Polarization Of Max. ERP	Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	correction factor(dB)	PMeas E.R.P(dBm)		
WCDMA	826.4	15.02	0.44	6.5	2.15	18.93	Horizontal	Pass
	826.4	16.76	0.44	6.5	2.15	20.67	Vertical	Pass
	836.6	15.60	0.45	6.5	2.15	19.50	Horizontal	Pass
	836.6	17.43	0.45	6.5	2.15	21.33	Vertical	Pass
	846.4	15.41	0.46	6.5	2.15	19.30	Horizontal	Pass
	846.4	17.29	0.46	6.5	2.15	21.18	Vertical	Pass
HSUPA	826.4	13.74	0.44	6.5	2.15	17.65	Horizontal	Pass
	826.4	15.70	0.44	6.5	2.15	19.61	Vertical	Pass
	836.6	14.33	0.45	6.5	2.15	18.23	Horizontal	Pass
	836.6	16.09	0.45	6.5	2.15	19.99	Vertical	Pass
	846.4	14.04	0.46	6.5	2.15	17.93	Horizontal	Pass
	846.4	16.00	0.46	6.5	2.15	19.89	Vertical	Pass
HSDPA	826.4	13.65	0.44	6.5	2.15	17.56	Horizontal	Pass
	826.4	15.46	0.44	6.5	2.15	19.37	Vertical	Pass
	836.6	14.05	0.45	6.5	2.15	17.95	Horizontal	Pass
	836.6	15.96	0.45	6.5	2.15	19.86	Vertical	Pass
	846.4	14.27	0.46	6.5	2.15	18.16	Horizontal	Pass
	846.4	16.01	0.46	6.5	2.15	19.90	Vertical	Pass
Limit	ERP<7W=38.45dBm							



Radiated Power (EIRP) for WCDMA Band V							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max. EIRP	
WCDMA	826.4	15.02	0.44	6.5	21.08	Horizontal	Pass
	826.4	16.76	0.44	6.5	22.82	Vertical	Pass
	836.6	15.60	0.45	6.5	21.65	Horizontal	Pass
	836.6	17.43	0.45	6.5	23.48	Vertical	Pass
	846.4	15.41	0.46	6.5	21.45	Horizontal	Pass
	846.4	17.29	0.46	6.5	23.33	Vertical	Pass
HSUPA	826.4	13.74	0.44	6.5	19.80	Horizontal	Pass
	826.4	15.70	0.44	6.5	21.76	Vertical	Pass
	836.6	14.33	0.45	6.5	20.38	Horizontal	Pass
	836.6	16.09	0.45	6.5	22.14	Vertical	Pass
	846.4	14.04	0.46	6.5	20.08	Horizontal	Pass
	846.4	16.00	0.46	6.5	22.04	Vertical	Pass
HSDPA	826.4	13.65	0.44	6.5	19.71	Horizontal	Pass
	826.4	15.46	0.44	6.5	21.52	Vertical	Pass
	836.6	14.05	0.45	6.5	20.10	Horizontal	Pass
	836.6	15.96	0.45	6.5	22.01	Vertical	Pass
	846.4	14.27	0.46	6.5	20.31	Horizontal	Pass
	846.4	16.01	0.46	6.5	22.05	Vertical	Pass
Limit	EIRP<11.5W=40.6dBm						

Radiated Power (EIRP) for WCDMA Band IV							
Mode	Frequency	Result					Conclusion
		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.I.R.P.(dBm)	Polarization Of Max. EIRP	
WCDMA	1712.6	11.51	2.07	10.13	19.57	Horizontal	Pass
	1712.6	13.34	2.07	10.13	21.40	Vertical	Pass
	1740	11.43	2.08	10.13	19.48	Horizontal	Pass
	1740	13.2	2.08	10.13	21.25	Vertical	Pass
	1752.4	10.98	2.09	10.13	19.02	Horizontal	Pass
	1752.4	12.96	2.09	10.13	21.00	Vertical	Pass
HSUPA	1712.6	11.12	2.07	10.13	19.18	Horizontal	Pass
	1712.6	12.96	2.07	10.13	21.02	Vertical	Pass
	1740	11.57	2.08	10.13	19.62	Horizontal	Pass
	1740	13.37	2.08	10.13	21.42	Vertical	Pass
	1752.4	12.21	2.09	10.13	20.25	Horizontal	Pass
	1752.4	14.04	2.09	10.13	22.08	Vertical	Pass
HSDPA	1712.6	11.18	2.07	10.13	19.24	Horizontal	Pass
	1712.6	12.88	2.07	10.13	20.94	Vertical	Pass
	1740	11.42	2.08	10.13	19.47	Horizontal	Pass
	1740	13.26	2.08	10.13	21.31	Vertical	Pass
	1752.4	12.06	2.09	10.13	20.10	Horizontal	Pass
	1752.4	13.8	2.09	10.13	21.84	Vertical	Pass
Limit	EIRP<3W=34.78dBm						



A4. OCCUPIED BANDWIDTH (99% OCCUPIED BANDWIDTH/26dB BANDWIDTH)


GSM Bandwidth [KHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
GSM850	247.73	322.2	248.01	317	248.15	318
GPRS850	242.17	315.1	247.04	315.7	244.24	314.6
EGPRS850	247.32	321.8	242.61	318.5	246.33	313.8

GSM Bandwidth [KHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
GSM1900	242.71	321.3	246.48	315.8	241.7	313.1
GPRS1900	246.55	314.8	244.04	324.7	245.22	316.7
EGPRS1900	248.22	312.1	247.53	317.4	247.1	319.4


WCDMA Bandwidth [MHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
WCDMA II	4.169	4.68	4.171	4.697	4.175	4.691
HSDPA II	4.174	4.689	4.174	4.693	4.171	4.693
HSUPA II	4.182	4.677	4.172	4.677	4.172	4.69

WCDMA Bandwidth [MHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
WCDMA V	4.163	4.662	4.171	4.67	4.158	4.678
HSDPA V	4.17	4.676	4.17	4.664	4.1631	4.676
HSUPA V	4.172	4.671	4.163	4.676	4.168	4.673


WCDMA Bandwidth [MHz]						
Mode	Lowest		Middle		Highest	
	99% BW	26dB BW	99% BW	26dB BW	99% BW	26dB BW
WCDMA IV	4.1551	4.678	4.166	4.689	4.157	4.678
HSDPA IV	4.165	4.681	4.16	4.692	4.171	4.677
HSUPA IV	4.1677	4.696	4.165	4.693	4.178	4.671

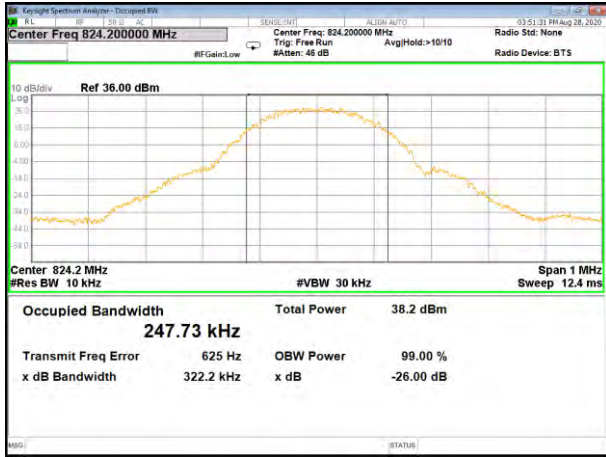


GSM850 Low

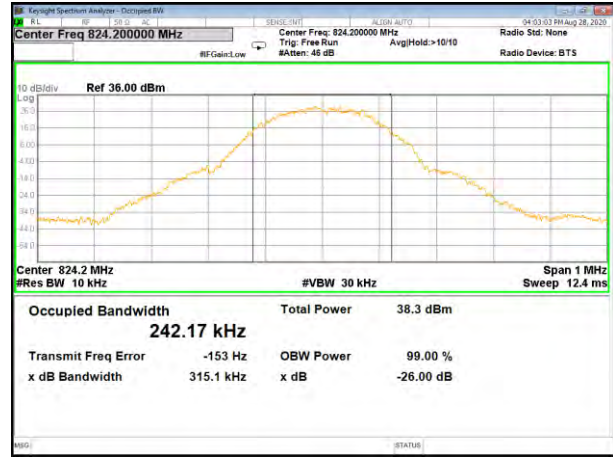


GPRS850 Low

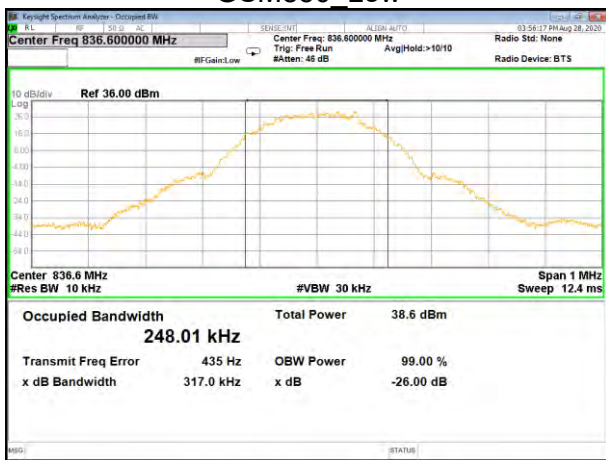


GSM850 Middle

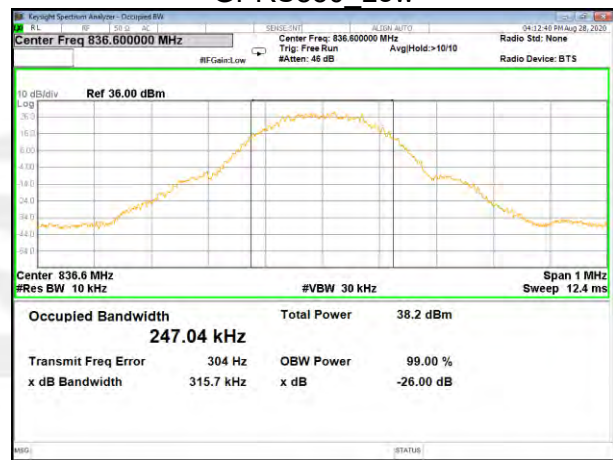


GPRS850 Middle

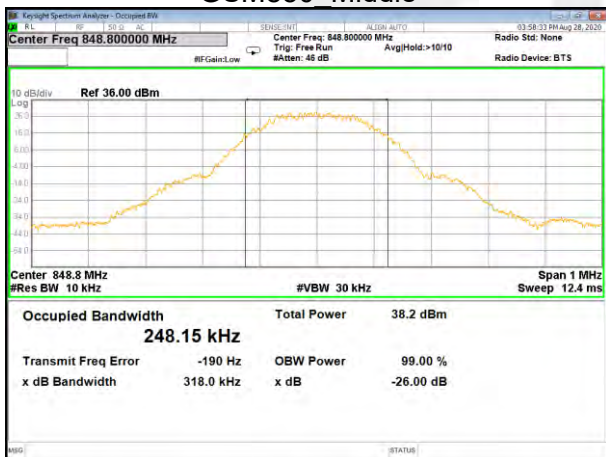


GSM850\_High

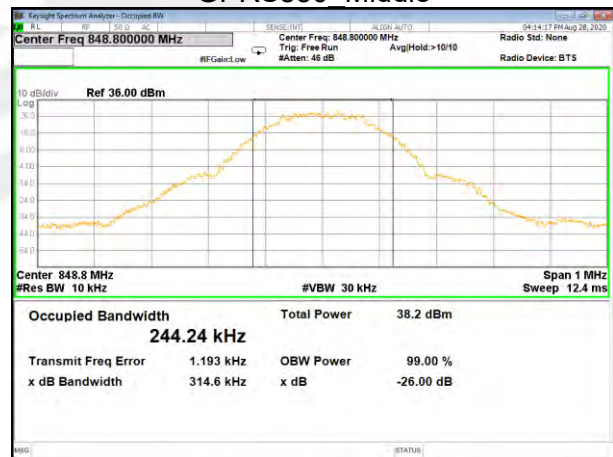


GPRS850\_High

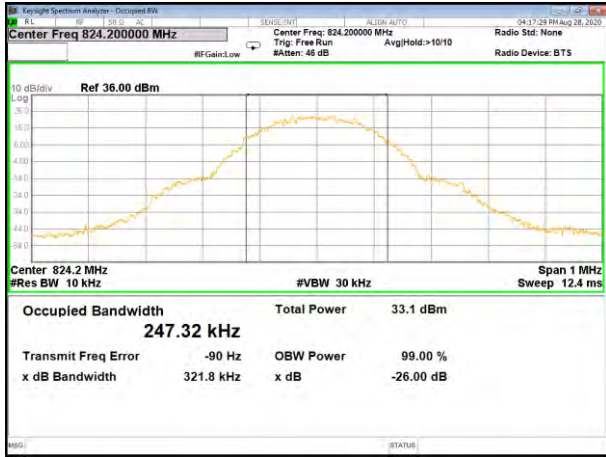


EGPRS850\_Low

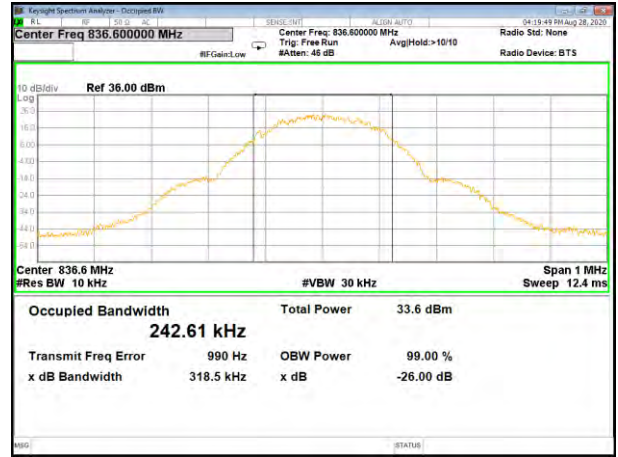


EGPRS850\_Middle

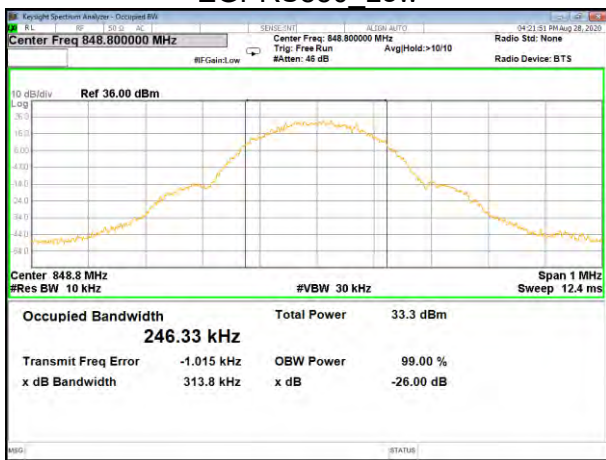


EGPRS850\_High

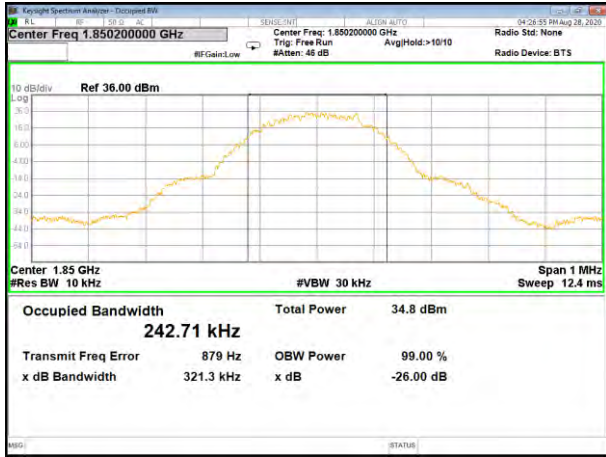


GSM1900 Low

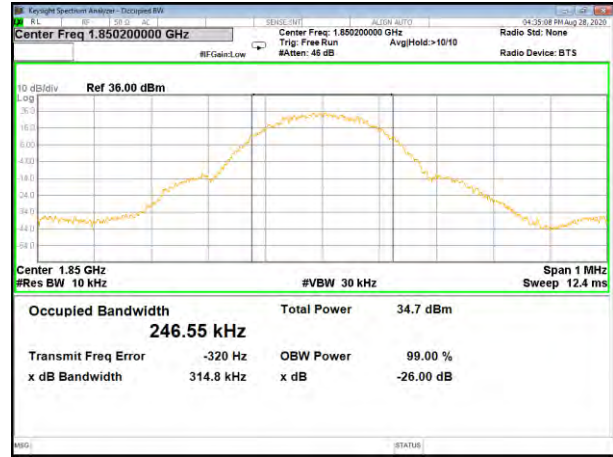


GPRS1900 Low

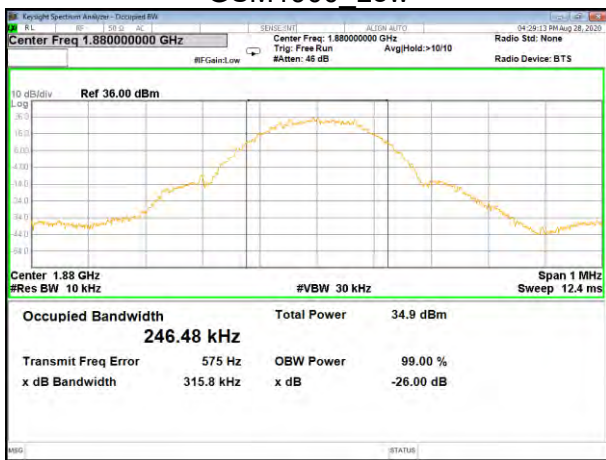


GSM1900 Middle

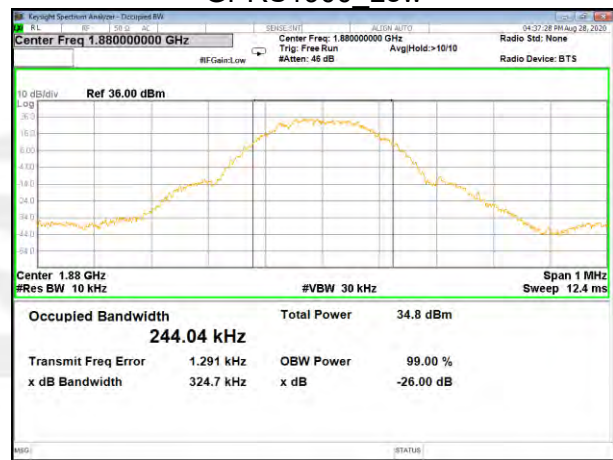


GPRS1900 Middle

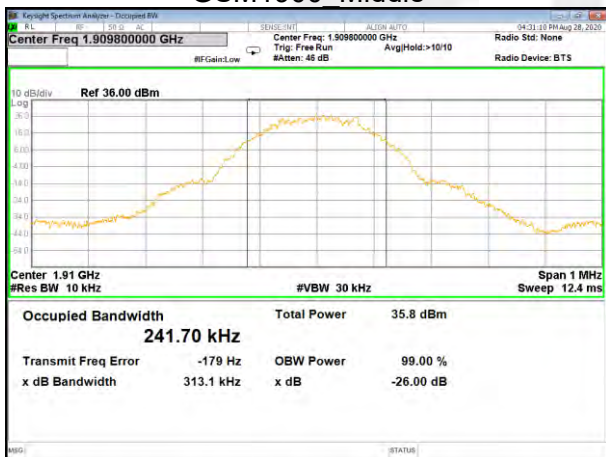


GSM1900\_High

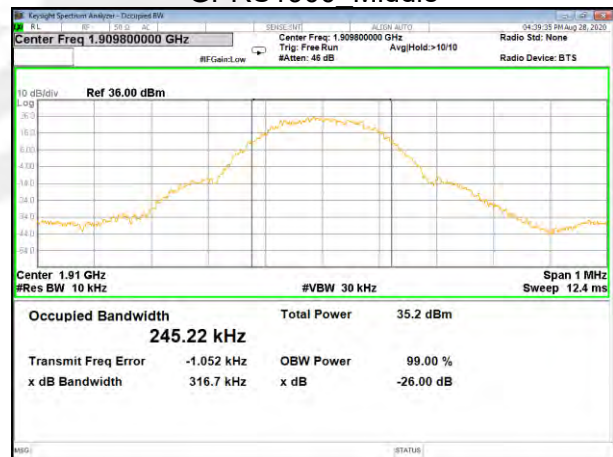

GPRS1900\_High

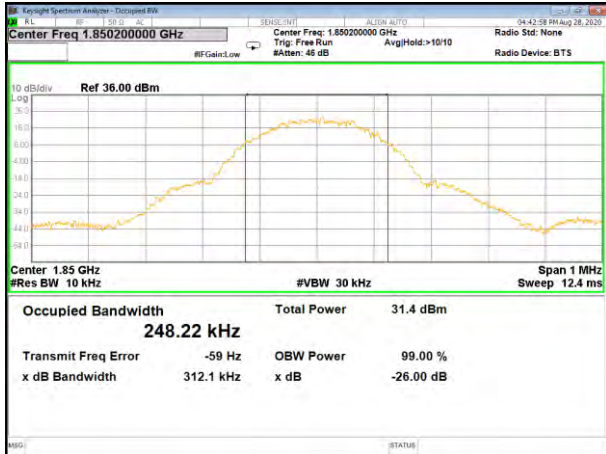


EGPRS1900\_Low

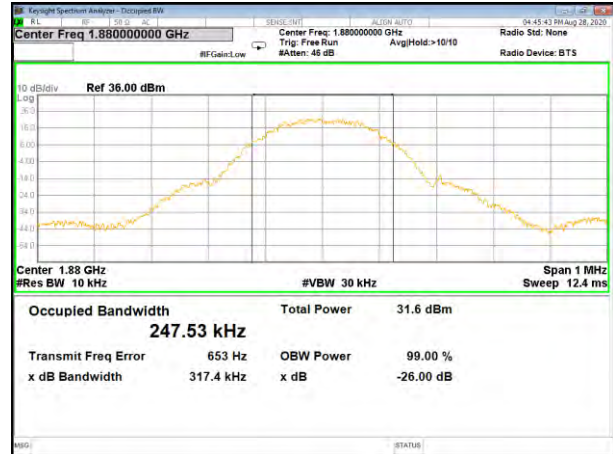


EGPRS1900\_Middle



EGPRS1900\_High

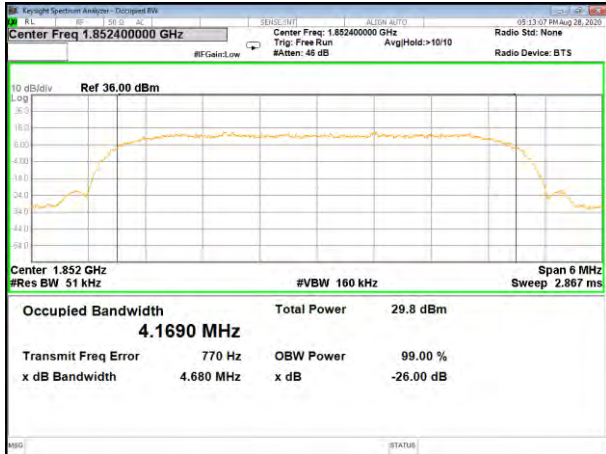


WCDMA Band2 Low

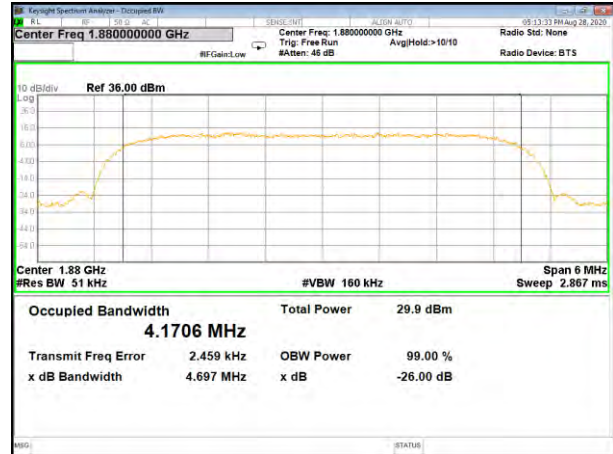


WCDMA Band2 Middle




WCDMA Band2 High

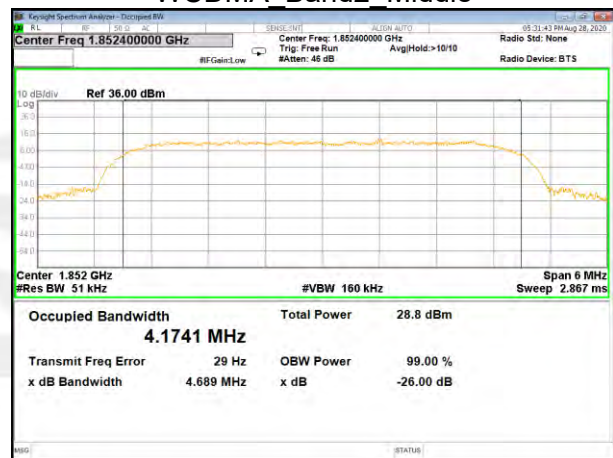

HSDPA Band2 Low

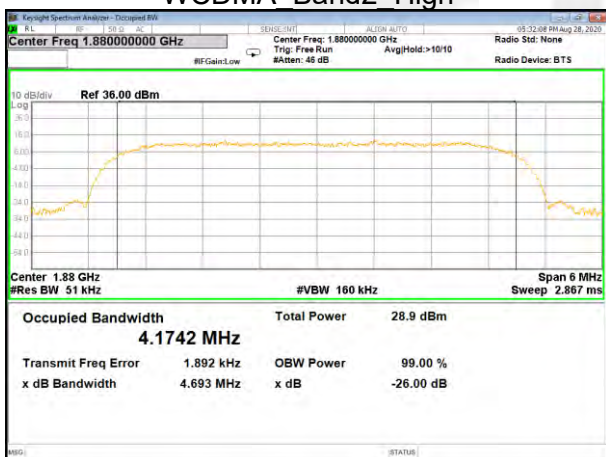


HSDPA\_Band2\_Middle

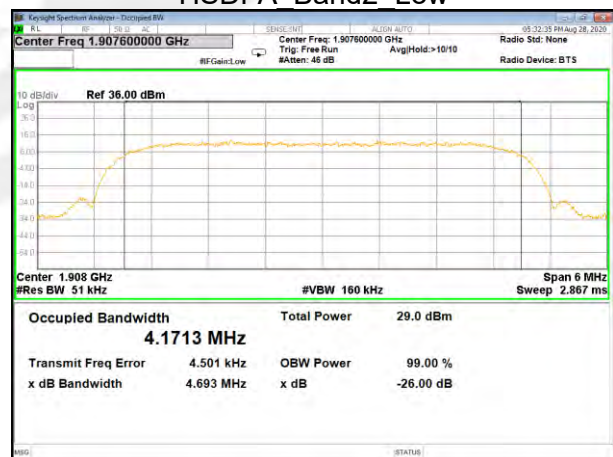


HSDPA\_Band2\_High




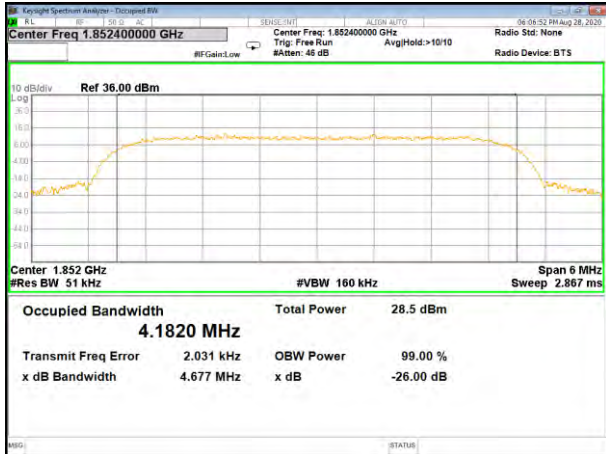


HSUPA\_Band2\_Low

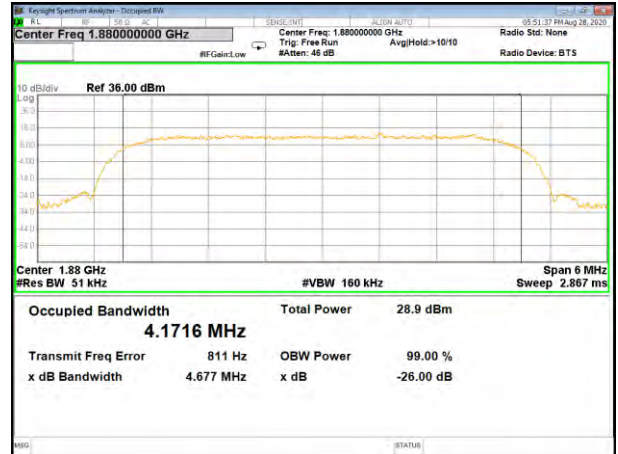


HSUPA\_Band2\_Middle

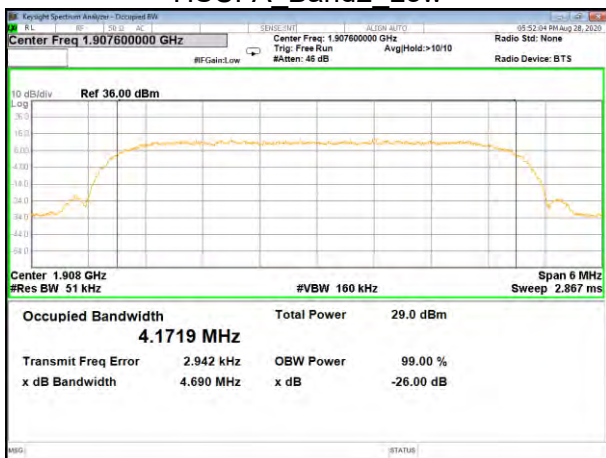


HSUPA\_Band2\_High

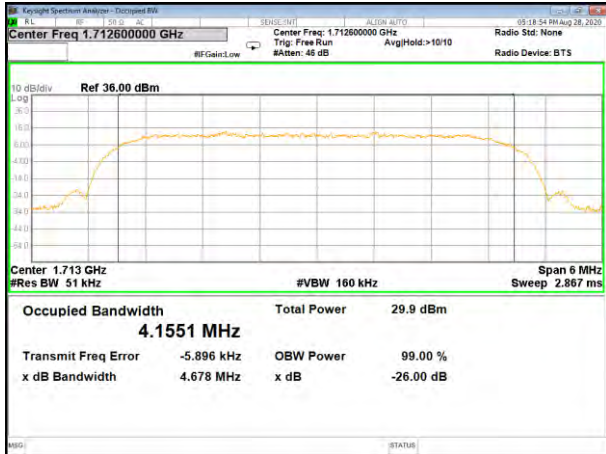


WCDMA Band4 Low

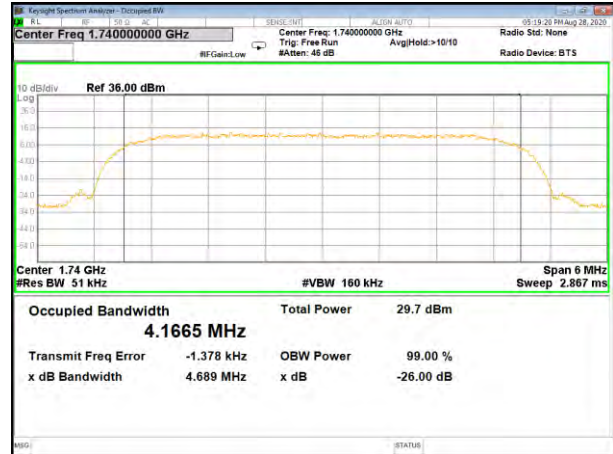


WCDMA Band4 Middle

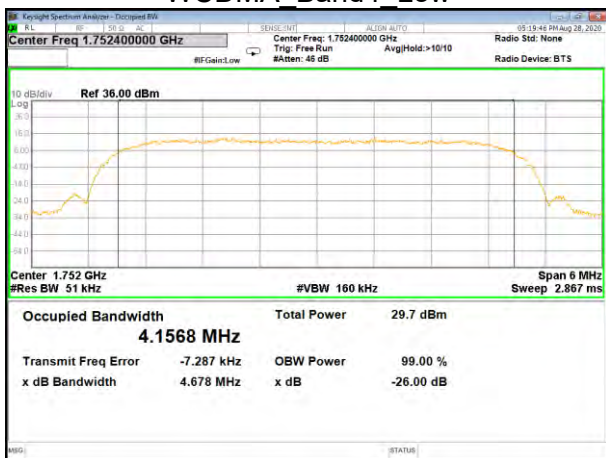


WCDMA Band4 High

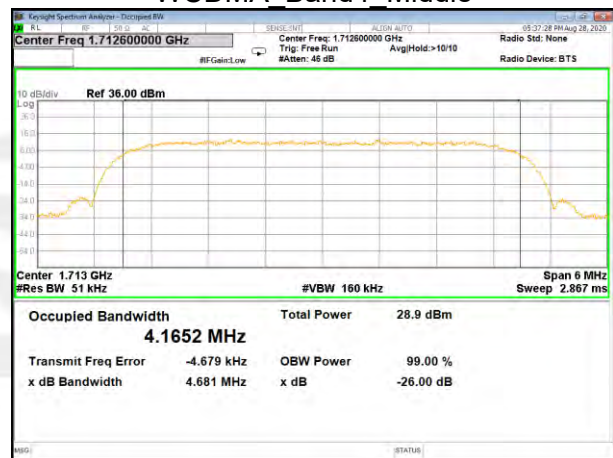


HSDPA Band4 Low

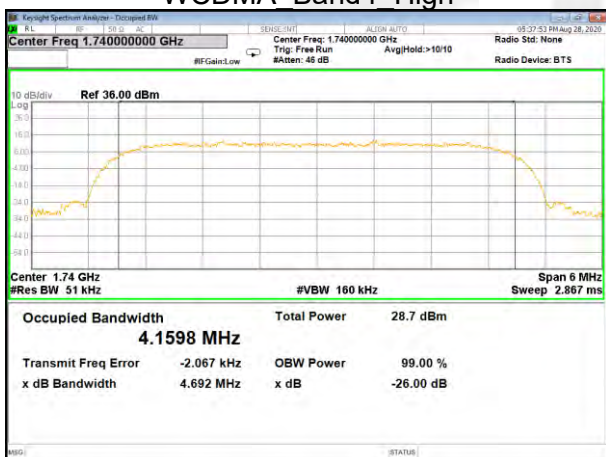


HSDPA\_Band4\_Middle

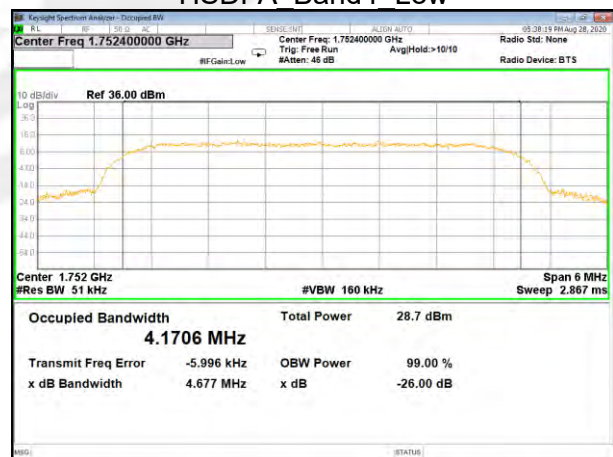


HSDPA\_Band4\_High

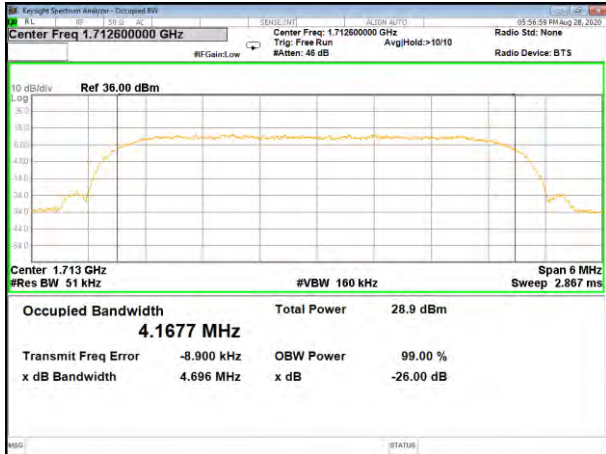


HSUPA\_Band4\_Low

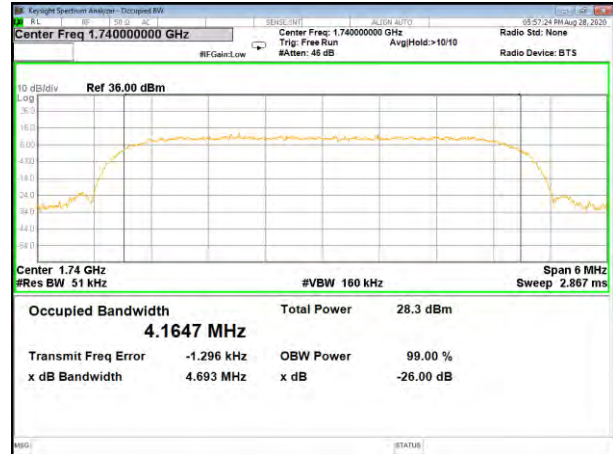


HSUPA\_Band4\_Middle

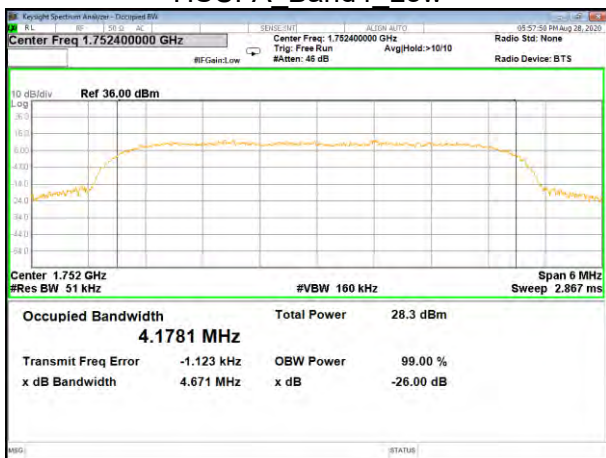


HSUPA\_Band4\_High

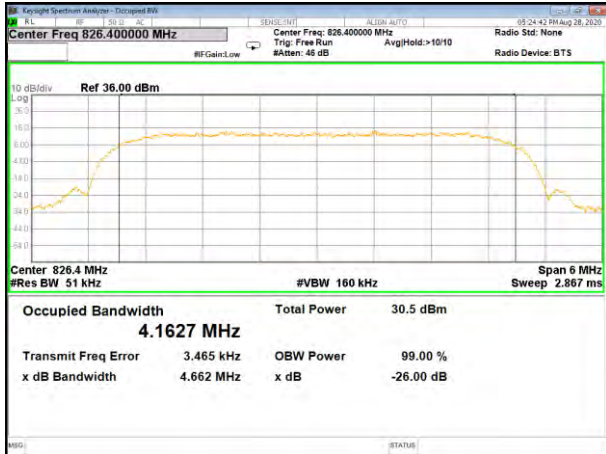


WCDMA Band5 Low

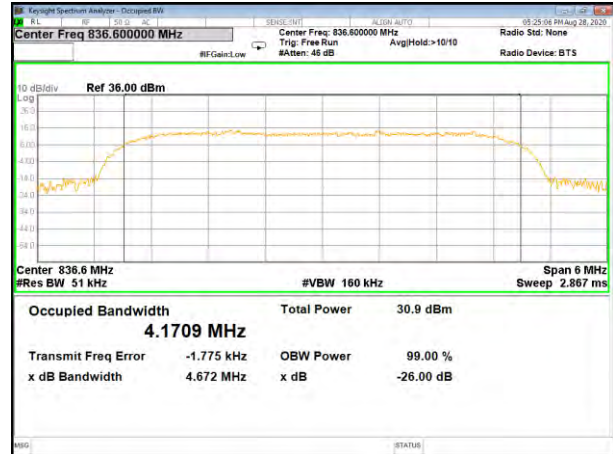


WCDMA Band5 Middle

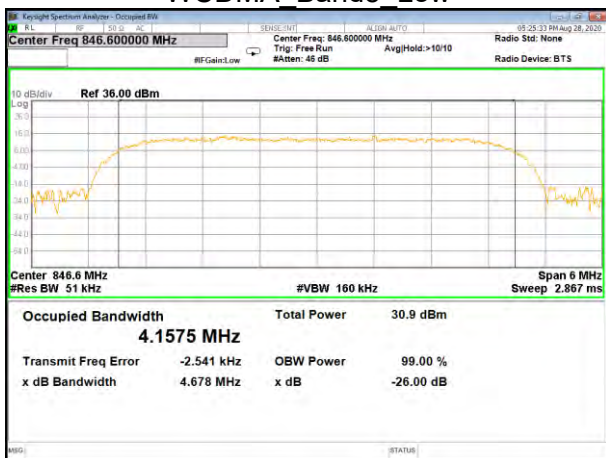


WCDMA Band5 High

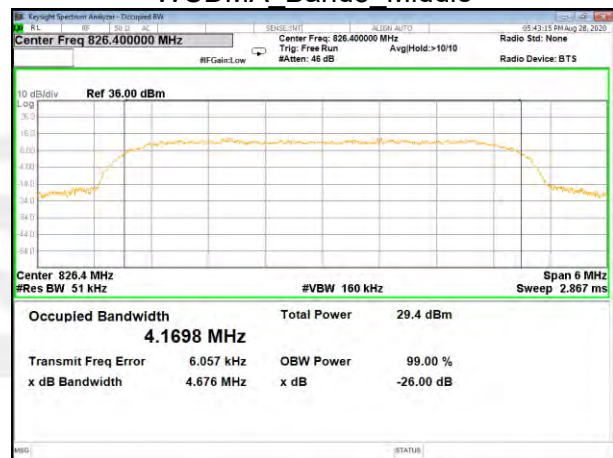


HSDPA Band5 Low

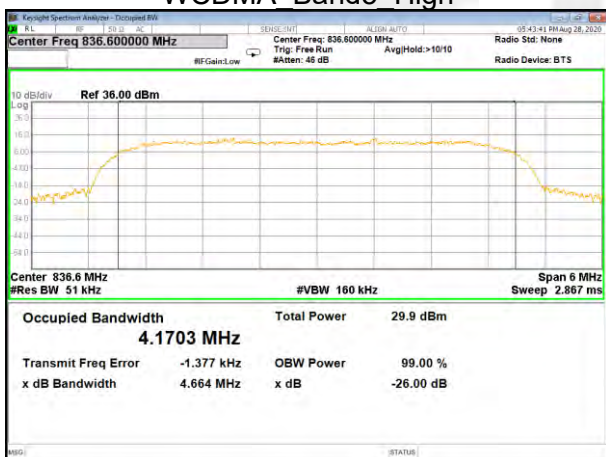


HSDPA\_Band5\_Middle

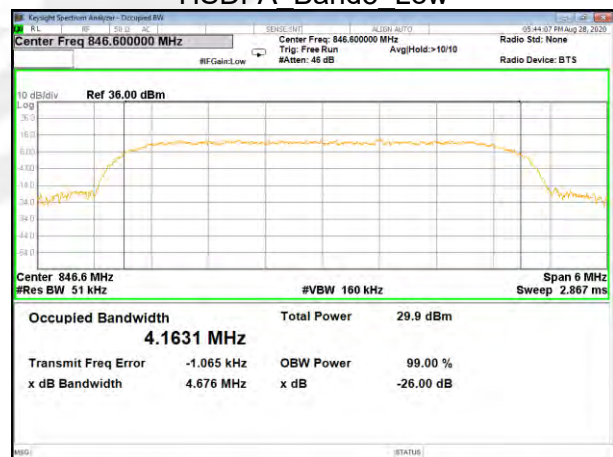


HSDPA\_Band5\_High

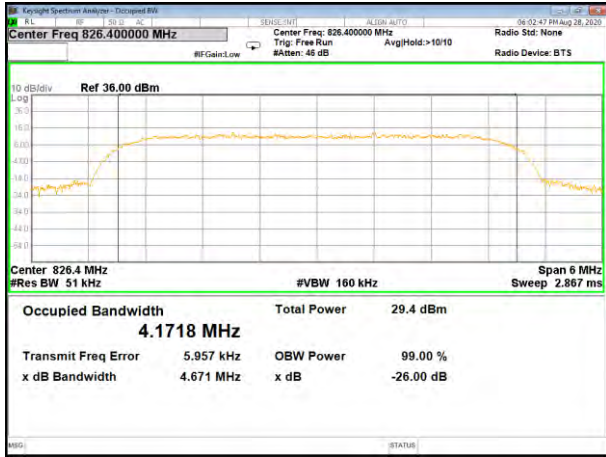

HSUPA\_Band5\_Low

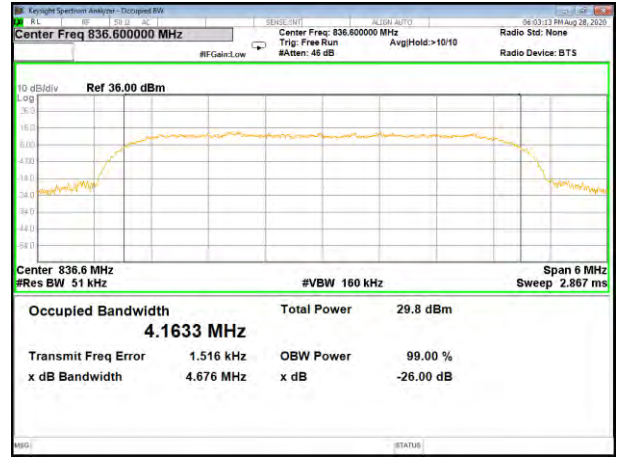

HSUPA\_Band5\_Middle

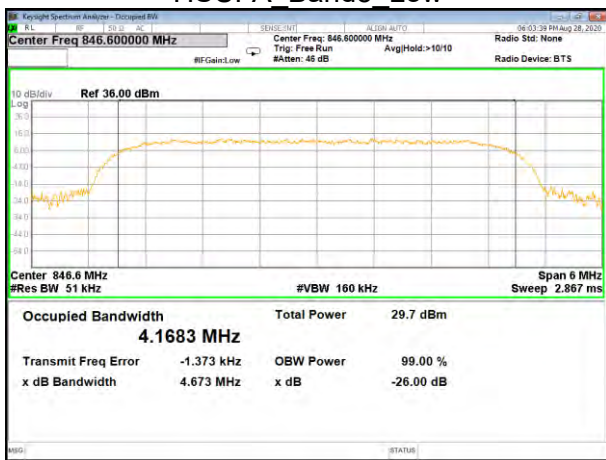

HSUPA\_Band5\_High



A5. FREQUENCY STABILITY

Normal Voltage = 3.8V; Battery End Point (BEP) = 4.35V; Maximum Voltage =3.47V

GSM 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	30.65	0.037	2.5ppm	PASS
40		17.20	0.021		
30		22.38	0.027		
20		20.13	0.024		
10		31.37	0.037		
0		13.12	0.016		
-10		34.44	0.041		
-20		32.57	0.039		
-30		15.94	0.019		
20		Maximum Voltage	36.24		
20	BEP	29.74	0.036		

GPRS 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	30.03	0.036	2.5ppm	PASS
40		31.34	0.037		
30		24.94	0.030		
20		27.33	0.033		
10		34.65	0.041		
0		12.22	0.015		
-10		29.54	0.035		
-20		29.59	0.035		
-30		29.51	0.035		
20		Maximum Voltage	32.50		
20	BEP	14.21	0.017		

EGPRS 850 /836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	18.68	0.022	2.5ppm	PASS
40		28.58	0.034		
30		16.53	0.020		
20		34.74	0.042		
10		14.74	0.018		
0		29.51	0.035		
-10		35.50	0.042		
-20		18.50	0.022		
-30		25.51	0.030		
20		Maximum Voltage	26.79		
20	BEP	35.15	0.042		



GSM 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	29.20	0.016	Within Authorized Band	PASS
40		30.61	0.016		
30		29.26	0.016		
20		17.38	0.009		
10		34.17	0.018		
0		26.42	0.014		
-10		12.86	0.007		
-20		22.60	0.012		
-30		32.59	0.017		
20		Maximum Voltage	24.66		
20	BEP	28.46	0.015		

GPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	16.24	0.009	Within Authorized Band	PASS
40		32.36	0.017		
30		24.22	0.013		
20		16.45	0.009		
10		19.15	0.010		
0		22.60	0.012		
-10		31.82	0.017		
-20		17.72	0.009		
-30		26.60	0.014		
20		Maximum Voltage	18.85		
20	BEP	14.89	0.008		

EGPRS 1900 / 1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	30.29	0.016	Within Authorized Band	PASS
40		13.80	0.007		
30		22.40	0.012		
20		14.18	0.008		
10		26.10	0.014		
0		12.89	0.007		
-10		31.89	0.017		
-20		23.10	0.012		
-30		18.28	0.010		
20		Maximum Voltage	34.64		
20	BEP	18.35	0.010		



UMTS Band II /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	29.35	0.016	Within Authorized Band	PASS
40		11.72	0.006		
30		30.59	0.016		
20		24.70	0.013		
10		35.07	0.019		
0		34.20	0.018		
-10		20.96	0.011		
-20		27.60	0.015		
-30		19.50	0.010		
20		Maximum Voltage	22.82		
20	BEP	33.64	0.018		

HSDPA Band II /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	21.63	0.012	Within Authorized Band	PASS
40		17.35	0.009		
30		25.38	0.014		
20		21.77	0.012		
10		25.22	0.013		
0		13.12	0.007		
-10		13.76	0.007		
-20		13.48	0.007		
-30		12.21	0.006		
20		Maximum Voltage	31.73		
20	BEP	14.22	0.008		

HSUPA Band II /1880MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	36.19	0.019	Within Authorized Band	PASS
40		15.56	0.008		
30		26.99	0.014		
20		36.09	0.019		
10		23.79	0.013		
0		15.52	0.008		
-10		14.82	0.008		
-20		25.66	0.014		
-30		30.40	0.016		
20		Maximum Voltage	23.14		
20	BEP	30.56	0.016		





UMTS Band V / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	29.32	0.035	2.5ppm	PASS
40		21.86	0.026		
30		31.16	0.037		
20		19.18	0.023		
10		21.92	0.026		
0		16.99	0.020		
-10		24.90	0.030		
-20		19.23	0.023		
-30		22.32	0.027		
20		Maximum Voltage	13.64		
20	BEP	29.30	0.035		

HSDPA Band V / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	26.20	0.031	2.5ppm	PASS
40		20.02	0.024		
30		12.61	0.015		
20		21.49	0.026		
10		33.21	0.040		
0		18.47	0.022		
-10		29.53	0.035		
-20		23.65	0.028		
-30		29.94	0.036		
20		Maximum Voltage	14.83		
20	BEP	33.34	0.040		

HSUPA Band V / 836.6MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	20.10	0.024	2.5ppm	PASS
40		27.09	0.032		
30		19.64	0.023		
20		23.85	0.029		
10		16.20	0.019		
0		31.13	0.037		
-10		13.65	0.016		
-20		12.90	0.015		
-30		32.79	0.039		
20		Maximum Voltage	22.13		
20	BEP	29.38	0.035		



UMTS Band IV /1740MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	21.78	0.012	Within Authorized Band	PASS
40		13.31	0.007		
30		30.34	0.016		
20		29.34	0.016		
10		18.36	0.010		
0		15.14	0.008		
-10		14.65	0.008		
-20		22.06	0.012		
-30		31.28	0.017		
20		Maximum Voltage	18.03		
20	BEP	19.69	0.010		

HSDPA Band IV /1740MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	35.34	0.019	Within Authorized Band	PASS
40		31.66	0.017		
30		33.06	0.018		
20		26.76	0.014		
10		27.02	0.014		
0		36.14	0.019		
-10		26.32	0.014		
-20		34.40	0.018		
-30		27.89	0.015		
20		Maximum Voltage	22.52		
20	BEP	23.09	0.012		

HSUPA Band IV /1740MHz					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	17.59	0.009	Within Authorized Band	PASS
40		14.58	0.008		
30		18.09	0.010		
20		15.09	0.008		
10		30.03	0.016		
0		29.30	0.016		
-10		21.69	0.012		
-20		32.22	0.017		
-30		30.12	0.016		
20		Maximum Voltage	15.01		
20	BEP	22.93	0.012		


1. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



A6. SPURIOUS EMISSIONS AT ANTENNA TERMINALS



GSM850 Low

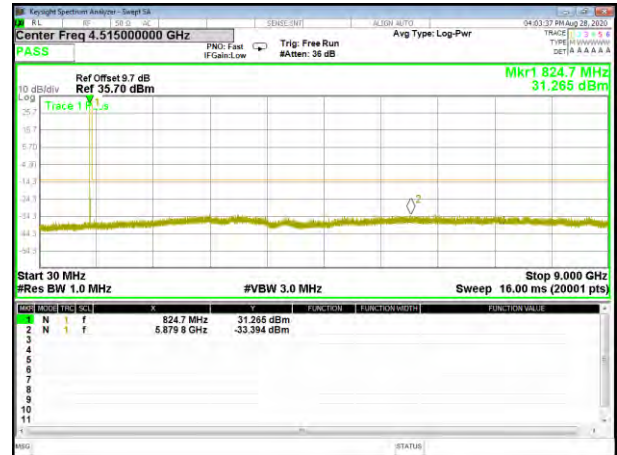


GPRS850 Low




GSM850 Middle



GPRS850 Middle

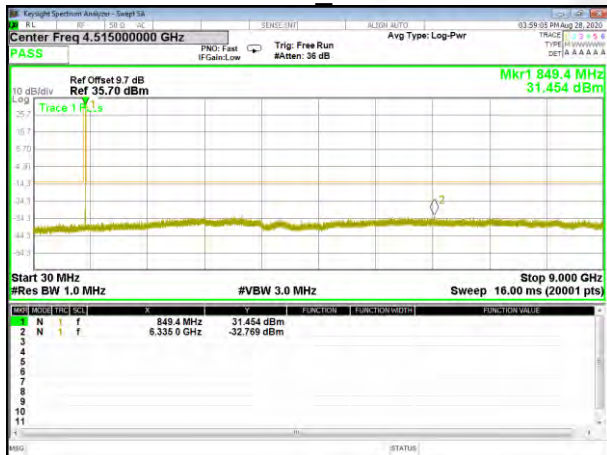


GSM850 High

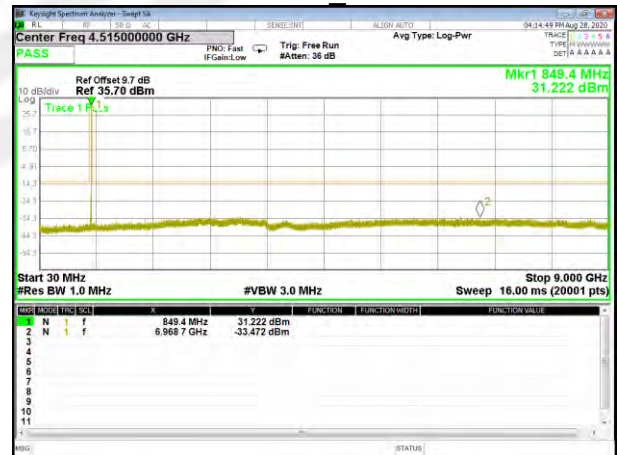

GPRS850 High




EGPRS850\_Low

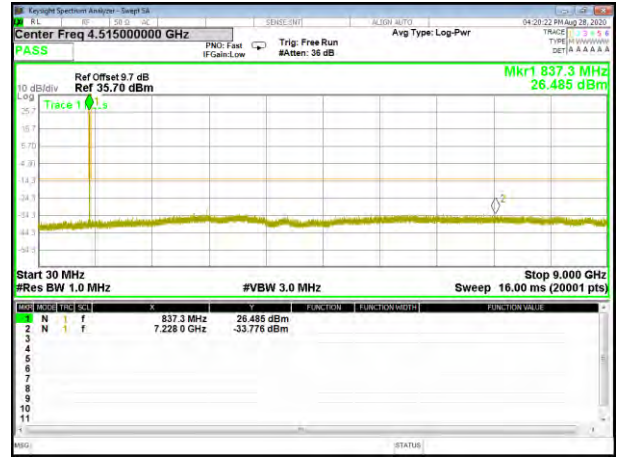


EGPRS850\_Middle




EGPRS850\_High

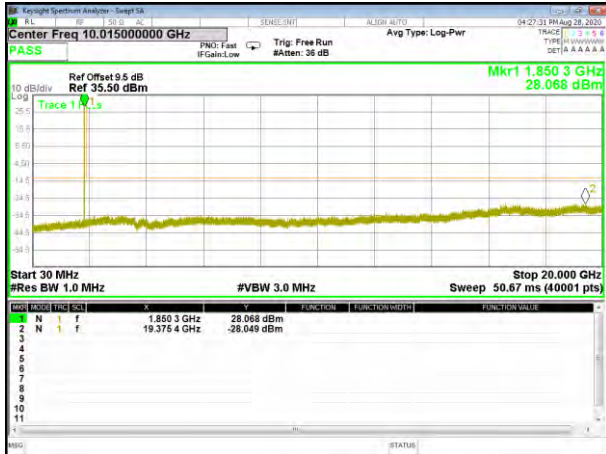


GSM1900 Low

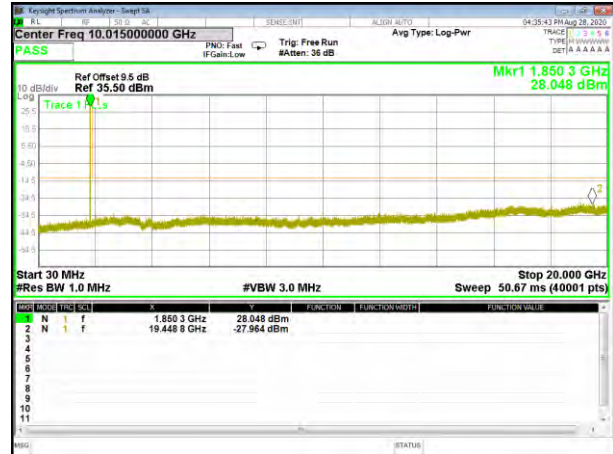


GPRS1900 Low

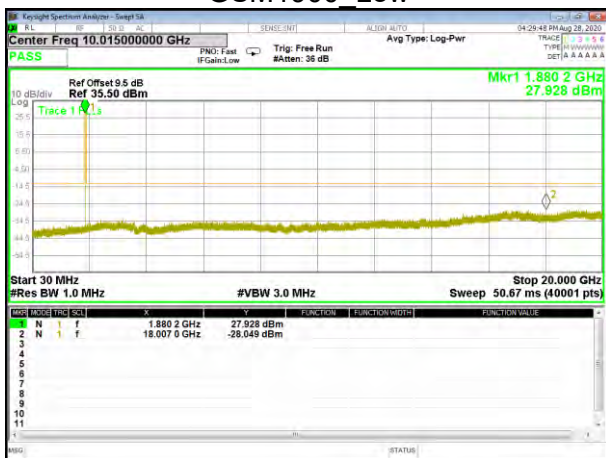


GSM1900 Middle

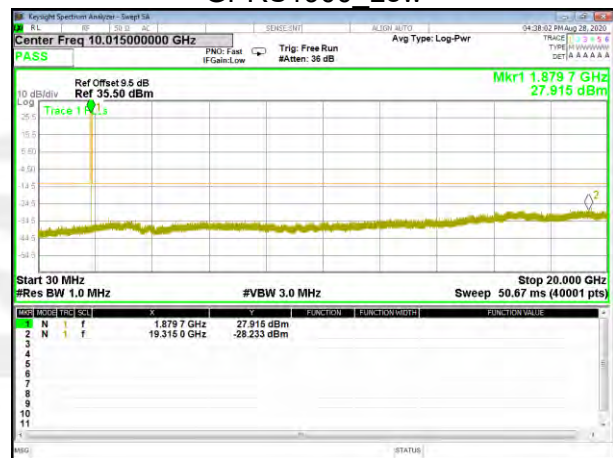


GPRS1900 Middle

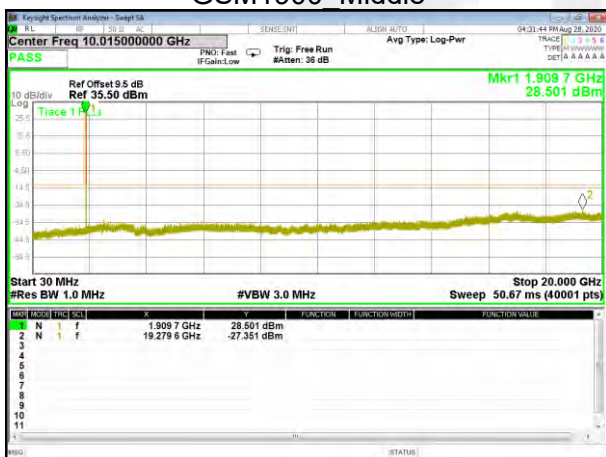


GSM1900\_High

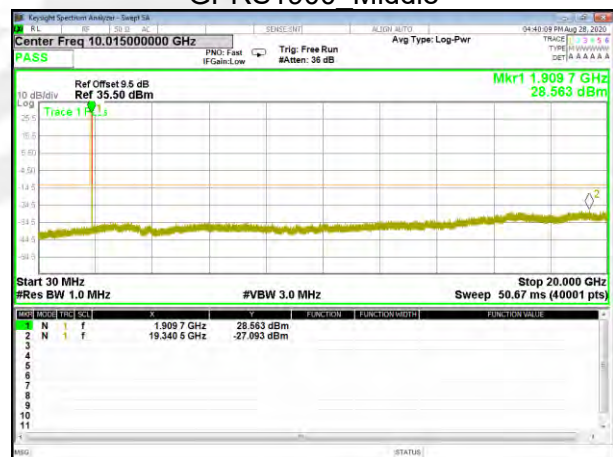


GPRS1900\_High

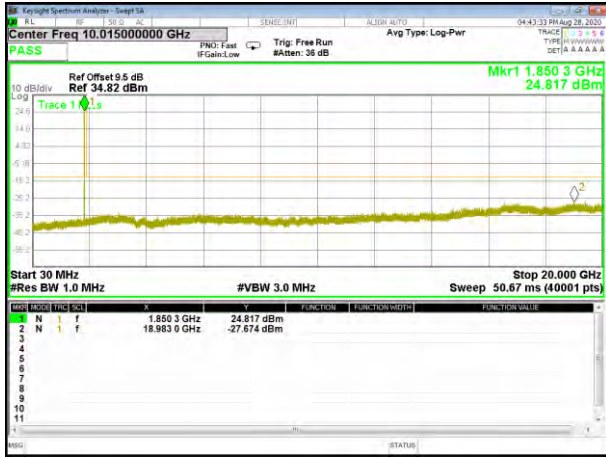


EGPRS1900\_Low

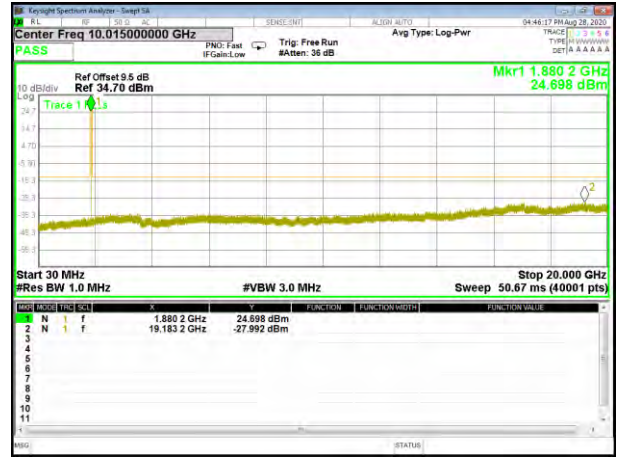


EGPRS1900\_Middle

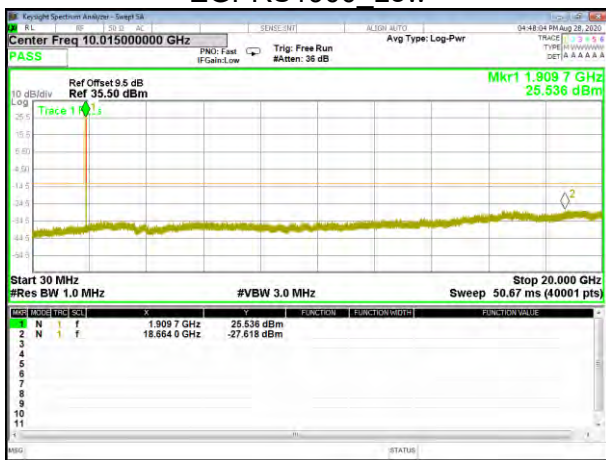


EGPRS1900\_High

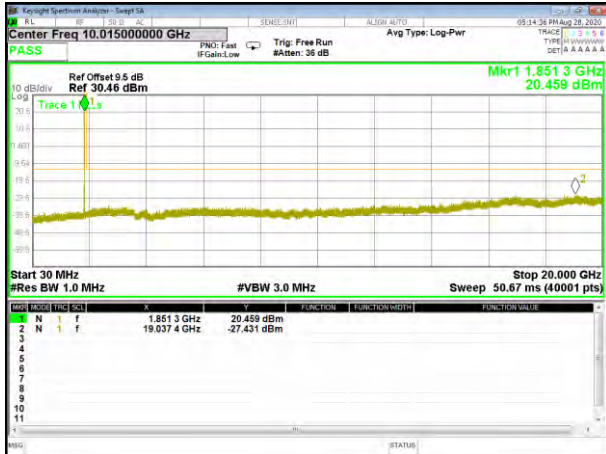


WCDMA Band2 Low

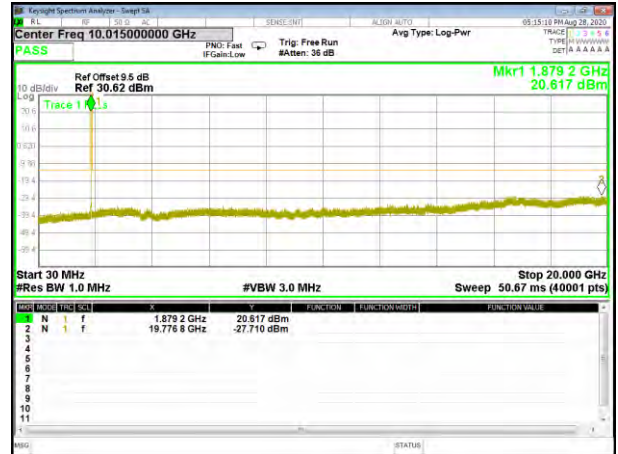


WCDMA Band2 Middle

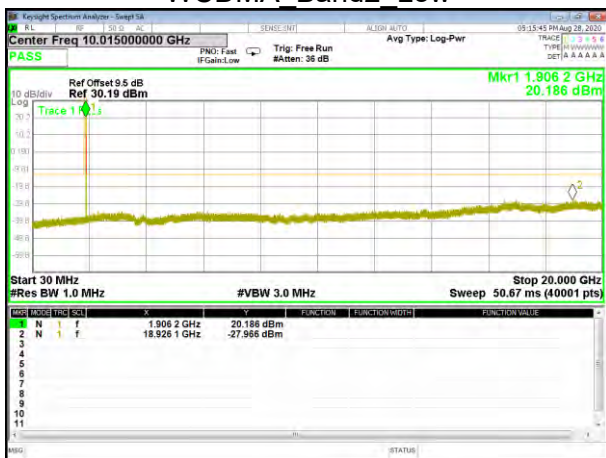


WCDMA Band2 High

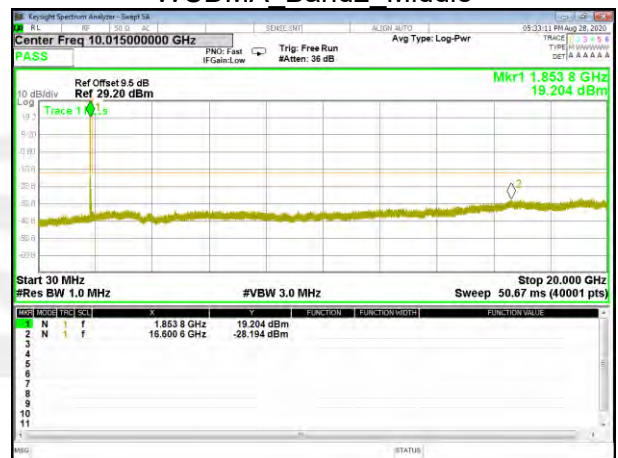


HSDPA Band2 Low

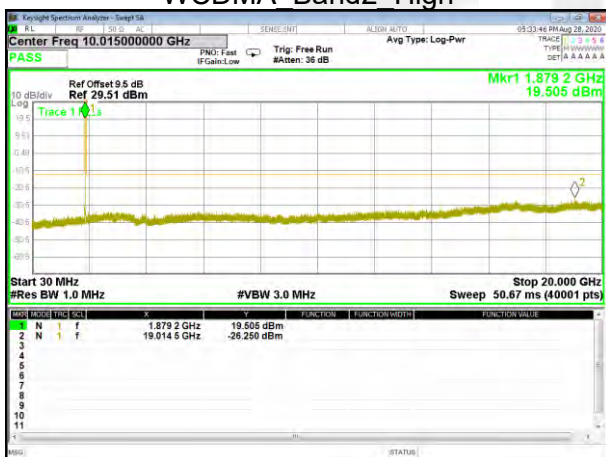


HSDPA\_Band2\_Middle

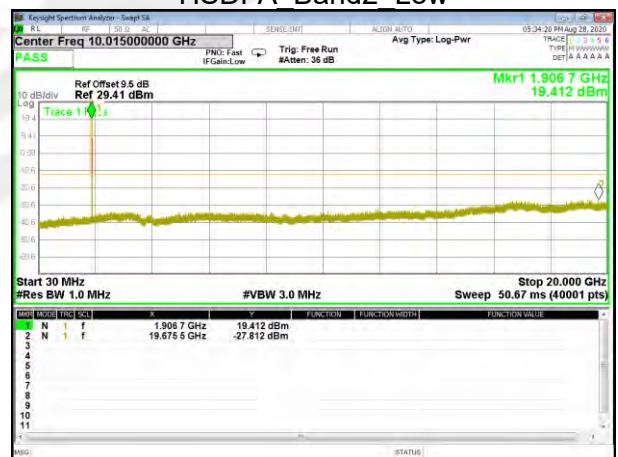

HSDPA\_Band2\_High

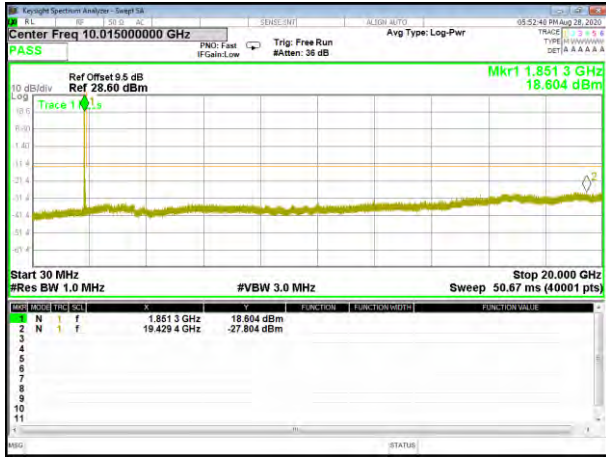

HSUPA\_Band2\_Low

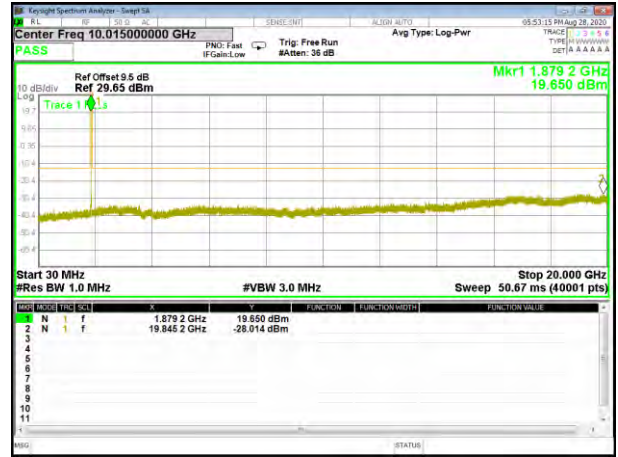


HSUPA\_Band2\_Middle




HSUPA\_Band2\_High




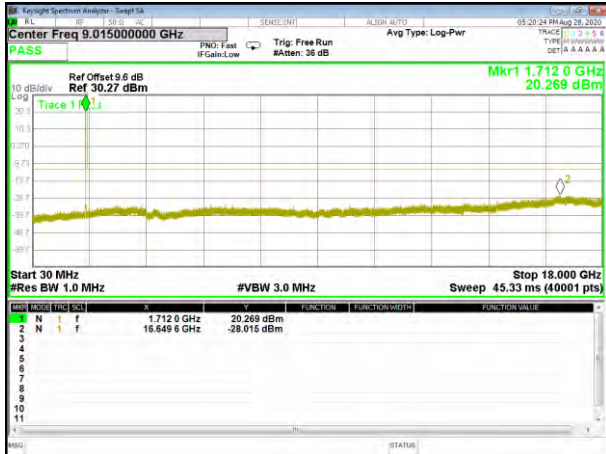

WCDMA Band4 Low

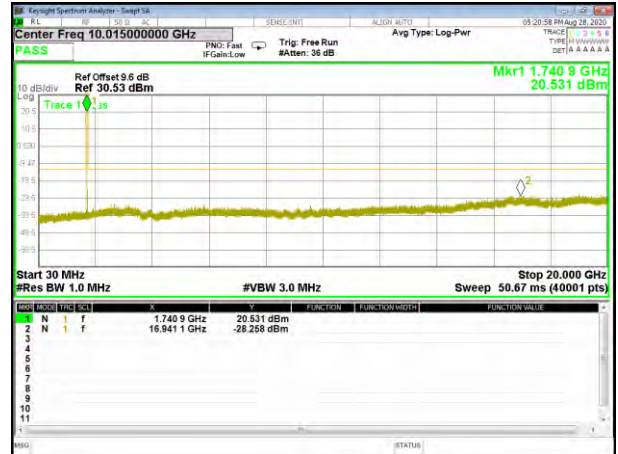


WCDMA Band4 Middle

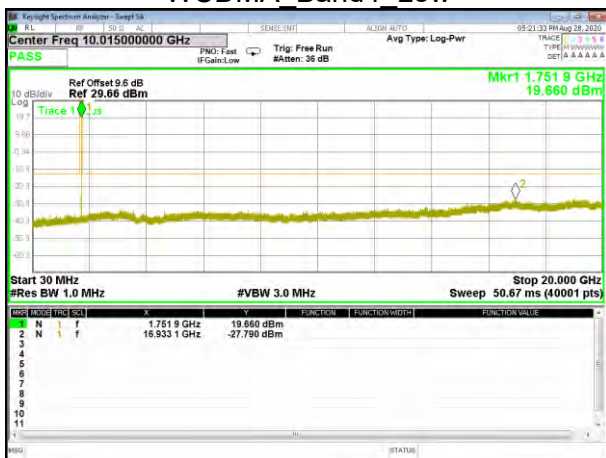


WCDMA Band4 High




HSDPA Band4 Low

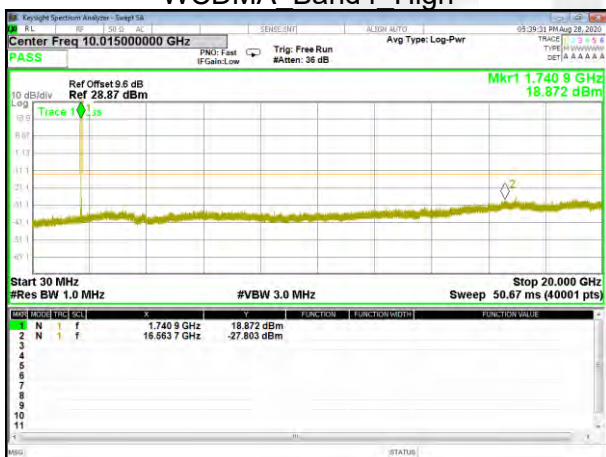


HSDPA\_Band4\_Middle

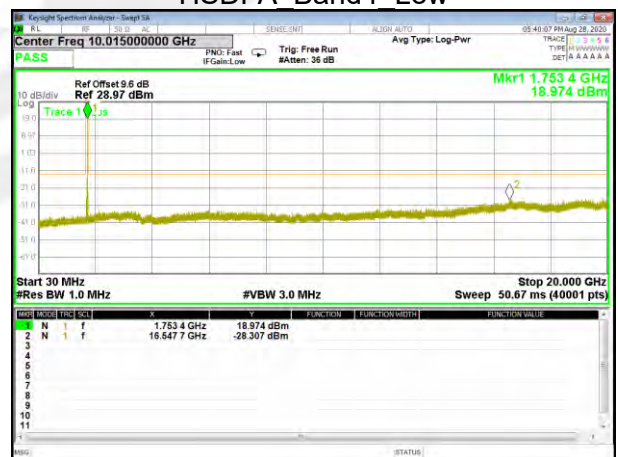


HSDPA\_Band4\_High

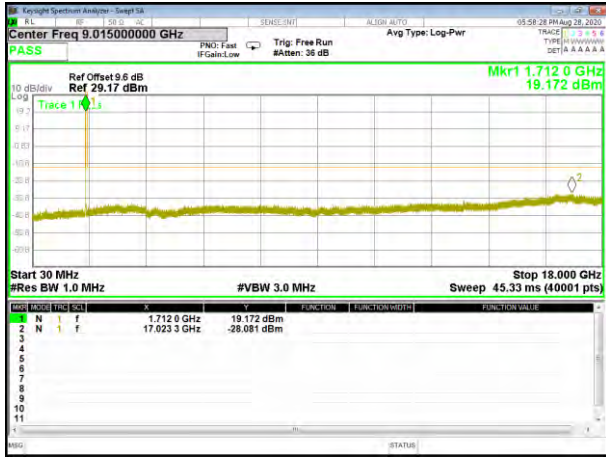

HSUPA\_Band4\_Low

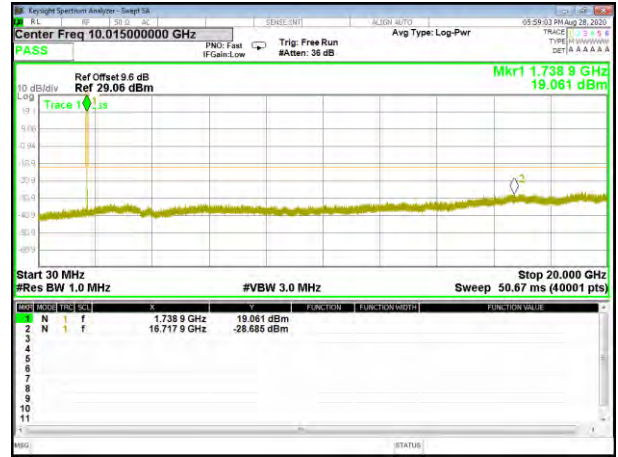

HSUPA\_Band4\_Middle

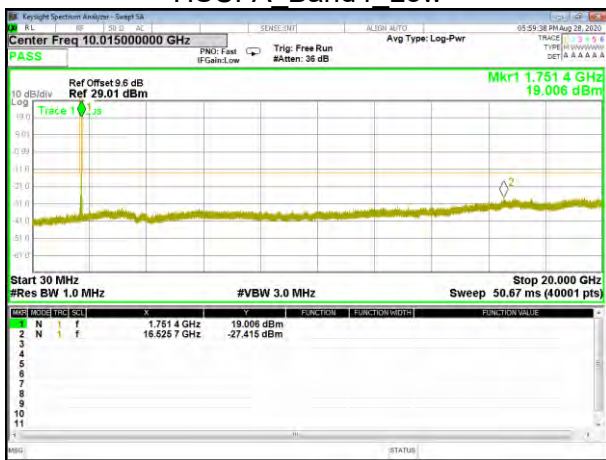

HSUPA\_Band4\_High



WCDMA Band5 Low



WCDMA Band5 Middle



WCDMA Band5 High




HSDPA Band5 Low




HSDPA\_Band5\_Middle




HSDPA\_Band5\_High

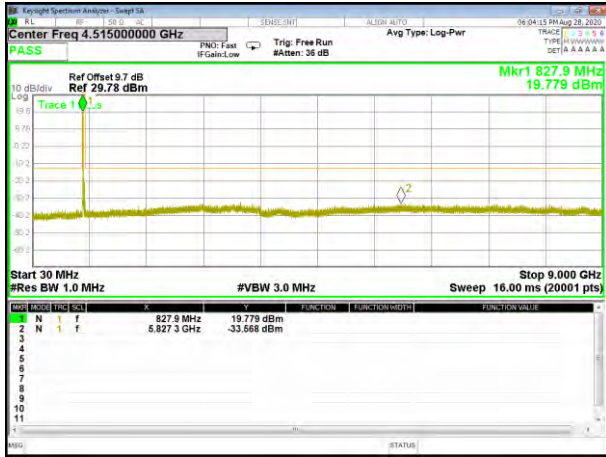

HSUPA\_Band5\_Low

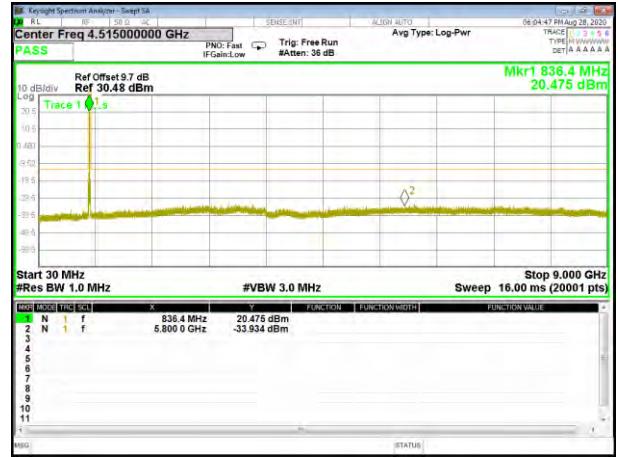


HSUPA\_Band5\_Middle

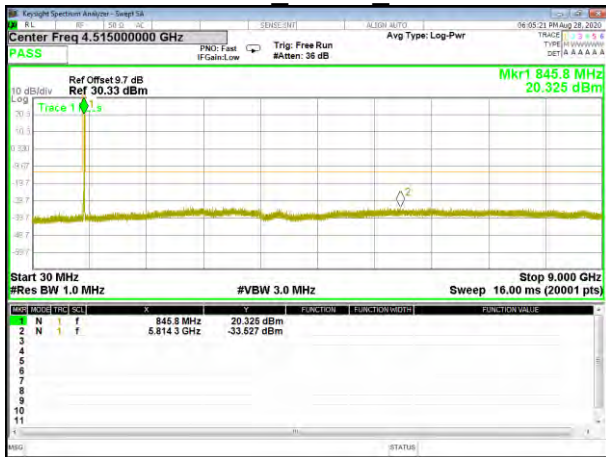


HSUPA\_Band5\_High



### A7. BAND EDGE

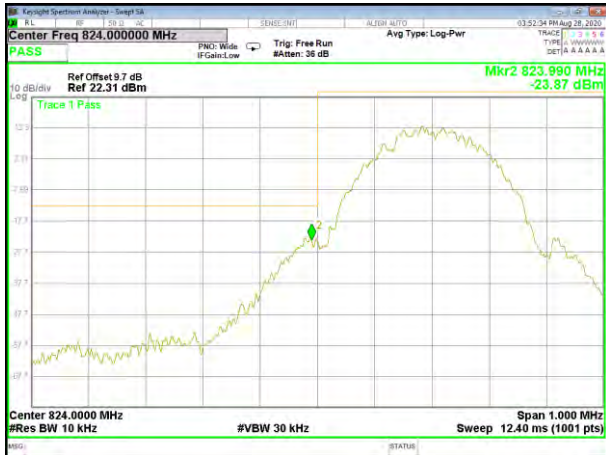


GSM850 Low

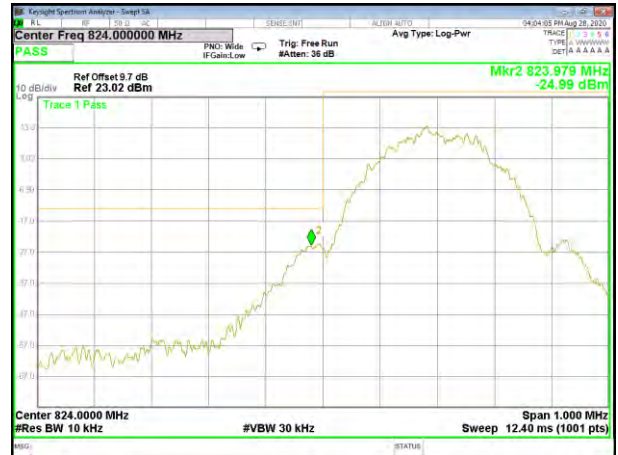


GPRS850 Low



GSM850 High

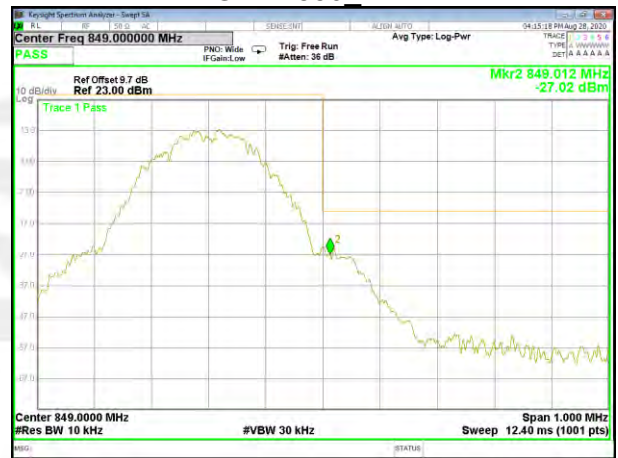

GPRS850 High

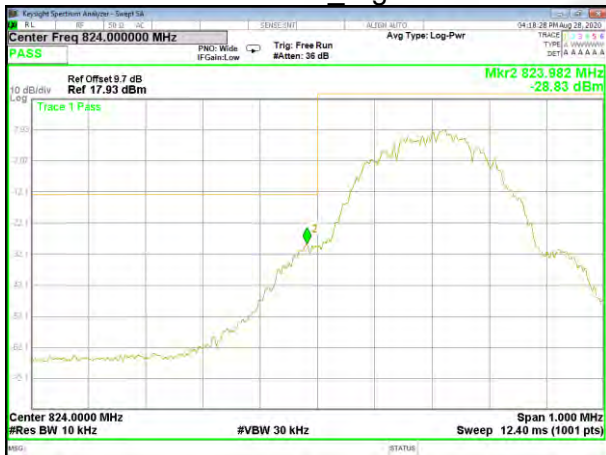


EGPRS850\_Low



EGPRS850\_High



GSM1900 Low

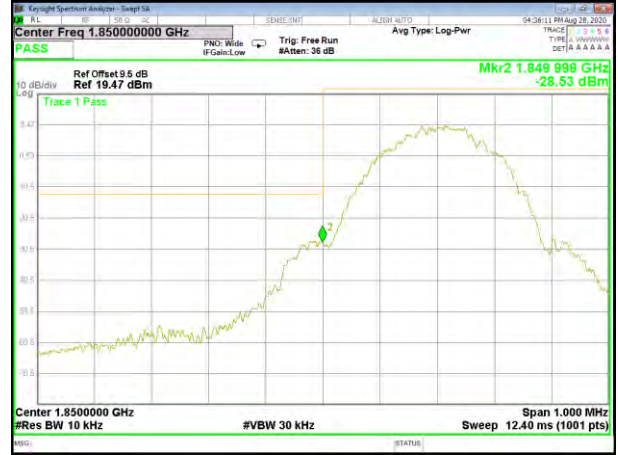


GPRS1900 Low



GSM1900 High




GPRS1900 High

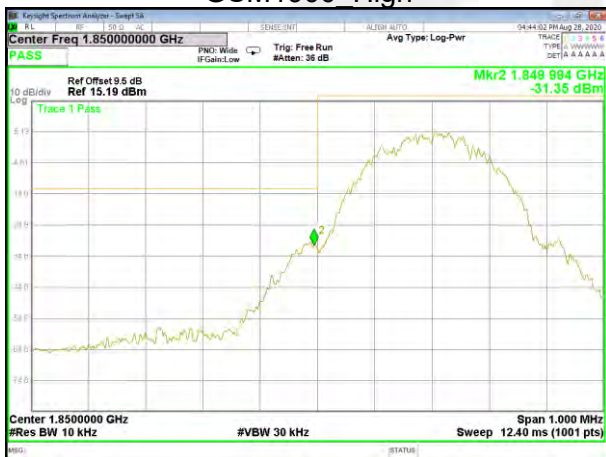


EGPRS1900\_Low




EGPRS1900\_High

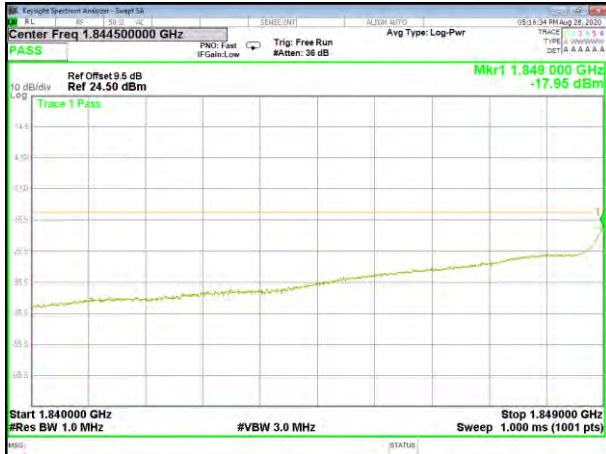

WCDMA Band2 Low

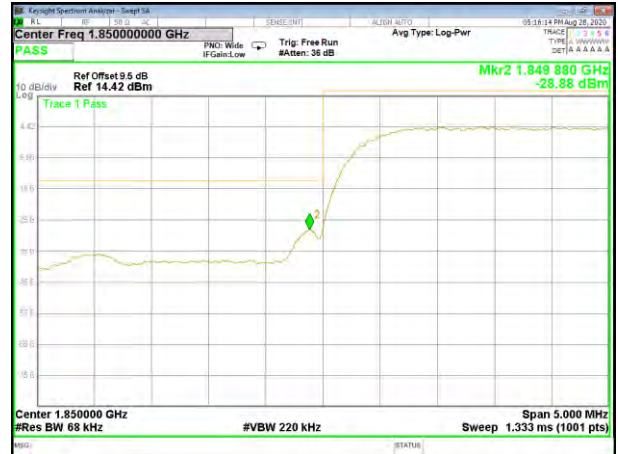


WCDMA Band2 Low

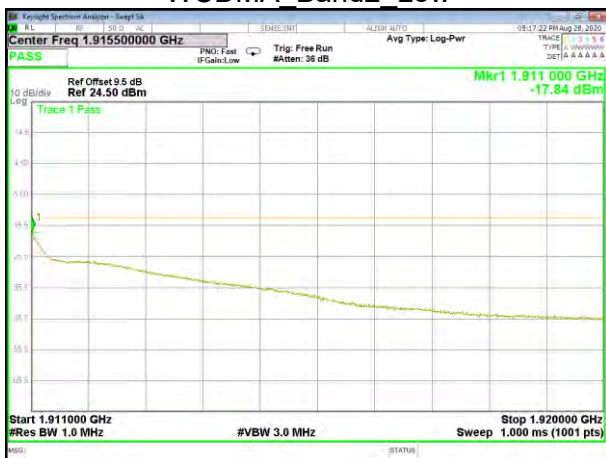

WCDMA Band2 High




WCDMA Band2 High

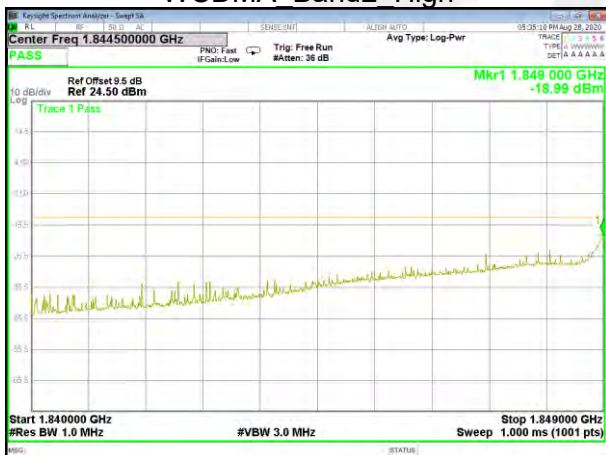

HSDPA\_Band2\_Low




HSDPA\_Band2\_Low

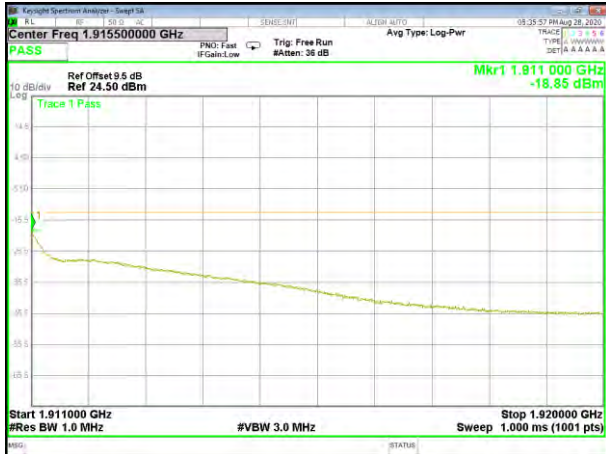

HSDPA Band2 High




HSDPA Band2 High

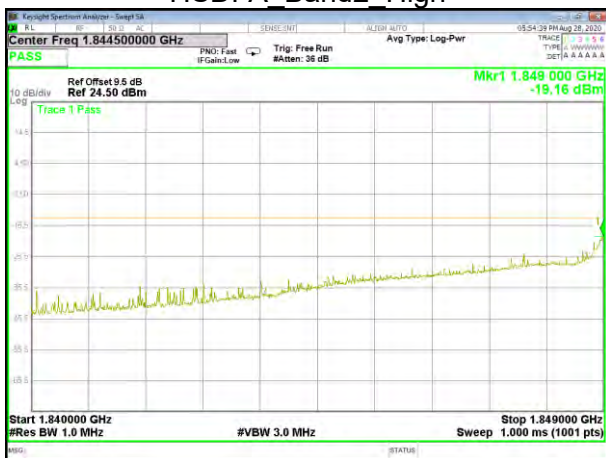

HSUPA Band2 Low



HSUPA Band2 Low

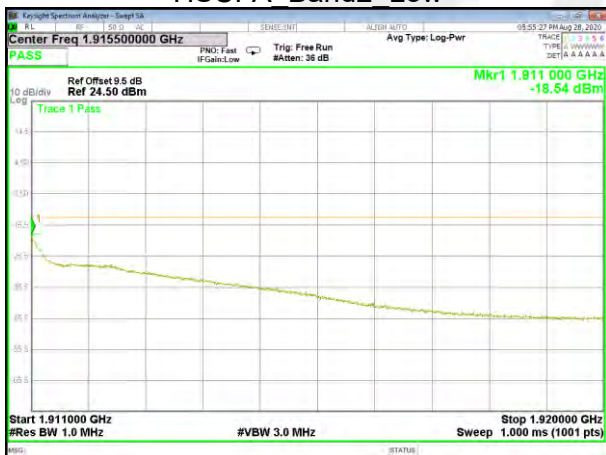


HSUPA\_Band2\_High



HSUPA\_Band2\_High




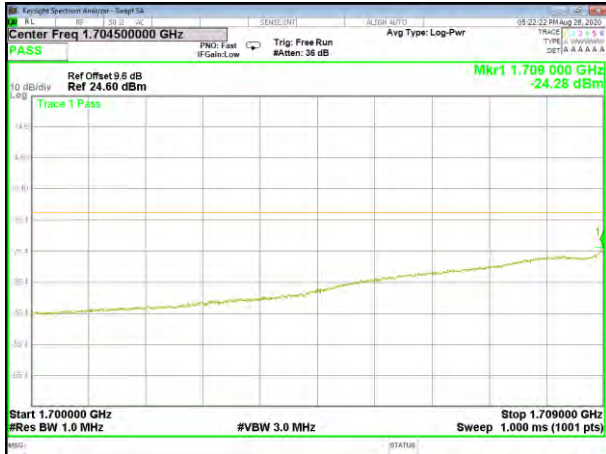

WCDMA Band4 Low




WCDMA Band4 Low

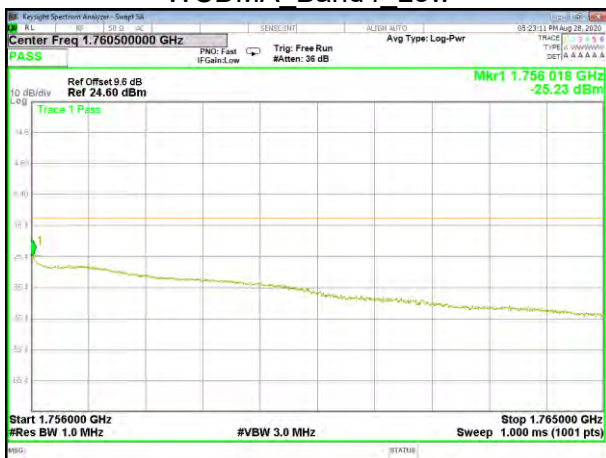

WCDMA Band4 High




WCDMA Band4 High

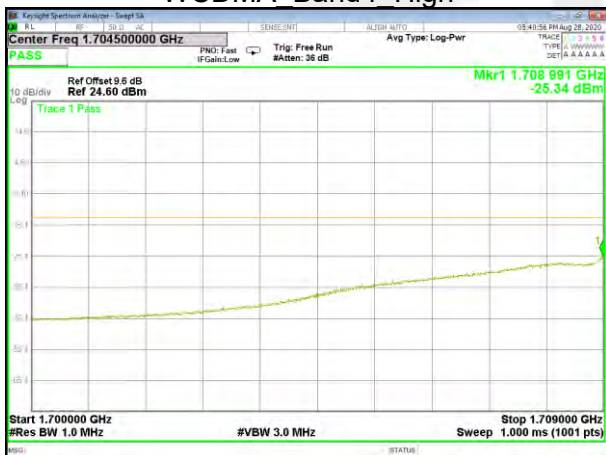

HSDPA\_Band4\_Low




HSDPA\_Band4\_Low

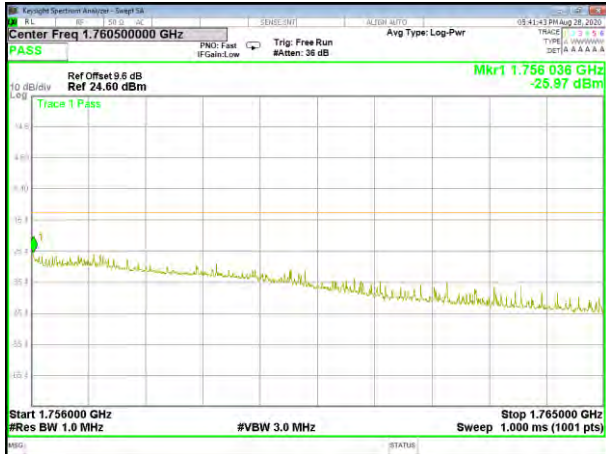

HSDPA Band4 High




HSDPA Band4 High

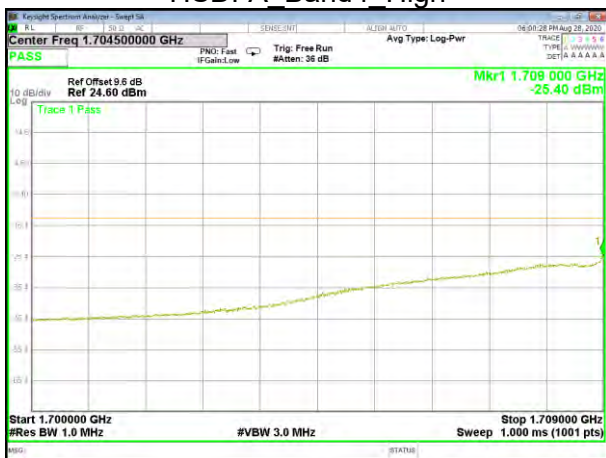

HSUPA Band4 Low



HSUPA Band4 Low

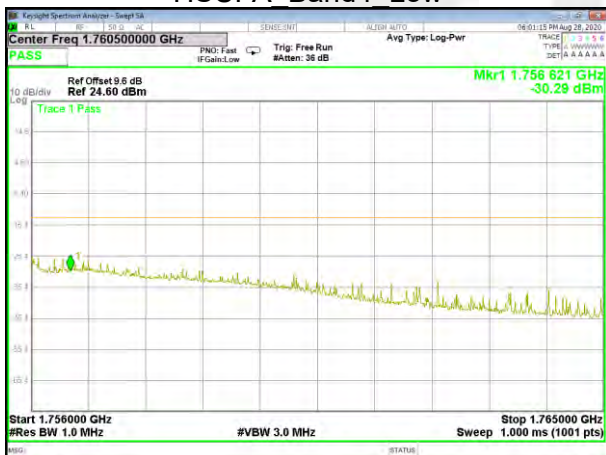

HSUPA\_Band4\_High



HSUPA\_Band4\_High



WCDMA Band5 Low




WCDMA Band5 High



HSDPA Band5 Low



HSDPA Band5 High

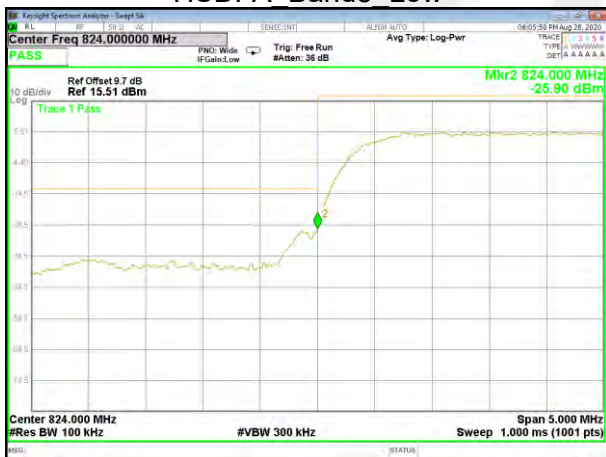

HSUPA\_Band5\_Low



HSUPA\_Band5\_High



A8. FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

**Note:** (1) Spurious emissions which are attenuated by more than 20dB below the permissible value for frequency below 1000MHz.

(2) Above 3.5GHz amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value

(3) Test is divided into three directions, X/Y/Z. X pattern for the worst.

GSM 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1648.33	-40.37	9.40	4.75	-35.72	-13.00	-22.72	H
2472.43	-39.18	10.60	8.39	-36.97	-13.00	-23.97	H
3296.90	-31.04	12.00	11.79	-30.83	-13.00	-17.83	H
1648.15	-43.25	9.40	4.75	-38.60	-13.00	-25.60	V
2472.44	-44.74	10.60	8.39	-42.53	-13.00	-29.53	V
3296.49	-43.57	12.00	11.79	-43.36	-13.00	-30.36	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.14	-40.73	9.50	4.76	-35.99	-13.00	-22.99	H
2509.89	-39.90	10.70	8.40	-37.60	-13.00	-24.60	H
3346.27	-32.31	12.20	11.80	-31.91	-13.00	-18.91	H
1672.99	-43.38	9.40	4.75	-38.73	-13.00	-25.73	V
2509.55	-44.18	10.60	8.39	-41.97	-13.00	-28.97	V
3346.06	-43.81	12.20	11.82	-43.43	-13.00	-30.43	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1697.33	-40.81	9.60	4.77	-35.98	-13.00	-22.98	H
2546.47	-39.26	10.80	8.50	-36.96	-13.00	-23.96	H
3395.06	-31.05	12.50	11.90	-30.45	-13.00	-17.45	H
1697.36	-43.71	9.60	4.77	-38.88	-13.00	-25.88	V
2546.16	-45.43	10.80	8.50	-43.13	-13.00	-30.13	V
3395.21	-43.87	12.50	11.90	-43.27	-13.00	-30.27	V



GPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1648.20	-41.36	9.40	4.75	-36.71	-13.00	-23.71	H
2472.51	-40.12	10.60	8.39	-37.91	-13.00	-24.91	H
3296.77	-31.96	12.00	11.79	-31.75	-13.00	-18.75	H
1648.50	-43.26	9.40	4.75	-38.61	-13.00	-25.61	V
2472.32	-44.96	10.60	8.39	-42.75	-13.00	-29.75	V
3296.79	-43.59	12.00	11.79	-43.38	-13.00	-30.38	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1673.14	-41.37	9.50	4.76	-36.63	-13.00	-23.63	H
2509.85	-40.27	10.70	8.40	-37.97	-13.00	-24.97	H
3346.24	-31.11	12.20	11.80	-30.71	-13.00	-17.71	H
1672.83	-44.47	9.40	4.75	-39.82	-13.00	-26.82	V
2509.77	-44.97	10.60	8.39	-42.76	-13.00	-29.76	V
3346.33	-43.00	12.20	11.82	-42.62	-13.00	-29.62	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
1697.52	-40.85	9.60	4.77	-36.02	-13.00	-23.02	H
2546.44	-39.76	10.80	8.50	-37.46	-13.00	-24.46	H
3394.97	-31.58	12.50	11.90	-30.98	-13.00	-17.98	H
1697.61	-43.19	9.60	4.77	-38.36	-13.00	-25.36	V
2546.08	-44.37	10.80	8.50	-42.07	-13.00	-29.07	V
3394.98	-43.81	12.50	11.90	-43.21	-13.00	-30.21	V



EGPRS 850: (30-9000)MHz							
The Worst Test Results Channel 128/824.2 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1648.31	-40.49	9.40	4.75	-35.84	-13.00	-22.84	H
2472.26	-39.79	10.60	8.39	-37.58	-13.00	-24.58	H
3296.48	-31.14	12.00	11.79	-30.93	-13.00	-17.93	H
1648.01	-44.53	9.40	4.75	-39.88	-13.00	-26.88	V
2472.67	-44.90	10.60	8.39	-42.69	-13.00	-29.69	V
3296.70	-42.95	12.00	11.79	-42.74	-13.00	-29.74	V
The Worst Test Results Channel 190/836.6 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.15	-41.11	9.50	4.76	-36.37	-13.00	-23.37	H
2509.54	-40.00	10.70	8.40	-37.70	-13.00	-24.70	H
3346.33	-32.23	12.20	11.80	-31.83	-13.00	-18.83	H
1672.87	-43.85	9.40	4.75	-39.20	-13.00	-26.20	V
2509.69	-44.80	10.60	8.39	-42.59	-13.00	-29.59	V
3346.00	-42.63	12.20	11.82	-42.25	-13.00	-29.25	V
The Worst Test Results Channel 251/848.8 MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1697.57	-41.59	9.60	4.77	-36.76	-13.00	-23.76	H
2546.32	-40.50	10.80	8.50	-38.20	-13.00	-25.20	H
3394.97	-32.13	12.50	11.90	-31.53	-13.00	-18.53	H
1697.19	-43.82	9.60	4.77	-38.99	-13.00	-25.99	V
2546.48	-45.09	10.80	8.50	-42.79	-13.00	-29.79	V
3395.26	-42.75	12.50	11.90	-42.15	-13.00	-29.15	V



DCS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.16	-33.82	12.60	12.93	-34.15	-13.00	-21.15	H
5550.35	-34.74	13.10	17.11	-38.75	-13.00	-25.75	H
7400.90	-32.62	11.50	22.20	-43.32	-13.00	-30.32	H
3700.42	-35.80	12.60	12.93	-36.13	-13.00	-23.13	V
5550.25	-34.77	13.10	17.11	-38.78	-13.00	-25.78	V
7400.74	-31.91	11.50	22.20	-42.61	-13.00	-29.61	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.99	-34.89	12.60	12.93	-35.22	-13.00	-22.22	H
5639.97	-34.15	13.10	17.11	-38.16	-13.00	-25.16	H
7520.08	-33.31	11.50	22.20	-44.01	-13.00	-31.01	H
3760.26	-34.98	12.60	12.93	-35.31	-13.00	-22.31	V
5640.14	-34.38	13.10	17.11	-38.39	-13.00	-25.39	V
7520.17	-32.44	11.50	22.20	-43.14	-13.00	-30.14	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.70	-34.80	12.60	12.93	-35.13	-13.00	-22.13	H
5729.49	-34.68	13.10	17.11	-38.69	-13.00	-25.69	H
7638.91	-32.44	11.50	22.20	-43.14	-13.00	-30.14	H
3819.57	-34.56	12.60	12.93	-34.89	-13.00	-21.89	V
5729.36	-34.01	13.10	17.11	-38.02	-13.00	-25.02	V
7639.23	-33.09	11.50	22.20	-43.79	-13.00	-30.79	V



GPRS1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3700.39	-34.69	12.60	12.93	-35.02	-13.00	-22.02	H
5550.50	-35.22	13.10	17.11	-39.23	-13.00	-26.23	H
7400.53	-32.78	11.50	22.20	-43.48	-13.00	-30.48	H
3700.16	-35.80	12.60	12.93	-36.13	-13.00	-23.13	V
5550.51	-34.65	13.10	17.11	-38.66	-13.00	-25.66	V
7400.71	-32.61	11.50	22.20	-43.31	-13.00	-30.31	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3700.39	-34.69	12.60	12.93	-35.02	-13.00	-22.02	H
5550.50	-35.22	13.10	17.11	-39.23	-13.00	-26.23	H
7400.53	-32.78	11.50	22.20	-43.48	-13.00	-30.48	H
3700.16	-35.80	12.60	12.93	-36.13	-13.00	-23.13	V
5550.51	-34.65	13.10	17.11	-38.66	-13.00	-25.66	V
7400.71	-32.61	11.50	22.20	-43.31	-13.00	-30.31	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3819.52	-33.59	12.60	12.93	-33.92	-13.00	-20.92	H
5729.16	-34.01	13.10	17.11	-38.02	-13.00	-25.02	H
7638.85	-33.03	11.50	22.20	-43.73	-13.00	-30.73	H
3819.50	-35.70	12.60	12.93	-36.03	-13.00	-23.03	V
5729.20	-34.00	13.10	17.11	-38.01	-13.00	-25.01	V
7639.07	-32.90	11.50	22.20	-43.60	-13.00	-30.60	V





EGPRS 1900: (30-20000)MHz							
The Worst Test Results for Channel 512/1850.2MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3700.24	-34.52	12.60	12.93	-34.85	-13.00	-21.85	H
5550.26	-34.22	13.10	17.11	-38.23	-13.00	-25.23	H
7400.55	-33.57	11.50	22.20	-44.27	-13.00	-31.27	H
3700.44	-35.85	12.60	12.93	-36.18	-13.00	-23.18	V
5550.42	-35.05	13.10	17.11	-39.06	-13.00	-26.06	V
7400.66	-32.17	11.50	22.20	-42.87	-13.00	-29.87	V
The Worst Test Results for Channel 661/1880.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.82	-33.71	12.60	12.93	-34.04	-13.00	-21.04	H
5640.08	-34.68	13.10	17.11	-38.69	-13.00	-25.69	H
7520.16	-33.59	11.50	22.20	-44.29	-13.00	-31.29	H
3759.97	-34.96	12.60	12.93	-35.29	-13.00	-22.29	V
5639.91	-35.03	13.10	17.11	-39.04	-13.00	-26.04	V
7520.07	-32.13	11.50	22.20	-42.83	-13.00	-29.83	V
The Worst Test Results for Channel 810/1909.8MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3819.57	-33.86	12.60	12.93	-34.19	-13.00	-21.19	H
5729.25	-34.87	13.10	17.11	-38.88	-13.00	-25.88	H
7639.05	-33.19	11.50	22.20	-43.89	-13.00	-30.89	H
3819.46	-35.49	12.60	12.93	-35.82	-13.00	-22.82	V
5729.27	-34.06	13.10	17.11	-38.07	-13.00	-25.07	V
7639.17	-32.51	11.50	22.20	-43.21	-13.00	-30.21	V



WCDMA Band V: (30-9000)MHz							
The most testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.24	-41.00	9.40	4.75	-36.35	-13.00	-23.35	H
2479.66	-39.99	10.60	8.39	-37.78	-13.00	-24.78	H
3305.76	-31.11	12.00	11.79	-30.90	-13.00	-17.90	H
1652.22	-43.36	9.40	4.75	-38.71	-13.00	-25.71	V
2479.29	-44.77	10.60	8.39	-42.56	-13.00	-29.56	V
3305.56	-43.46	12.00	11.79	-43.25	-13.00	-30.25	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.12	-40.79	9.40	4.75	-36.14	-13.00	-23.14	H
2509.62	-39.27	10.60	8.39	-37.06	-13.00	-24.06	H
3346.40	-31.60	12.00	11.79	-31.39	-13.00	-18.39	H
1673.28	-44.00	9.40	4.75	-39.35	-13.00	-26.35	V
2509.73	-44.85	10.60	8.39	-42.64	-13.00	-29.64	V
3346.22	-43.13	12.00	11.79	-42.92	-13.00	-29.92	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.32	-40.24	9.40	4.75	-35.59	-13.00	-22.59	H
2539.55	-40.11	10.60	8.39	-37.90	-13.00	-24.90	H
3386.16	-31.84	12.00	11.79	-31.63	-13.00	-18.63	H
1693.50	-43.57	9.40	4.75	-38.92	-13.00	-25.92	V
2539.33	-44.62	10.60	8.39	-42.41	-13.00	-29.41	V
3386.10	-43.80	12.00	11.79	-43.59	-13.00	-30.59	V



HSUPA Band V: (30-9000)MHz							
The most testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.48	-40.65	9.40	4.75	-36.00	-13.00	-23.00	H
2479.33	-39.71	10.60	8.39	-37.50	-13.00	-24.50	H
3305.77	-31.18	12.00	11.79	-30.97	-13.00	-17.97	H
1652.29	-43.67	9.40	4.75	-39.02	-13.00	-26.02	V
2479.62	-44.30	10.60	8.39	-42.09	-13.00	-29.09	V
3305.54	-42.64	12.00	11.79	-42.43	-13.00	-29.43	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.25	-41.15	9.40	4.75	-36.50	-13.00	-23.50	H
2509.92	-39.22	10.60	8.39	-37.01	-13.00	-24.01	H
3345.96	-30.99	12.00	11.79	-30.78	-13.00	-17.78	H
1672.91	-43.39	9.40	4.75	-38.74	-13.00	-25.74	V
2509.47	-44.32	10.60	8.39	-42.11	-13.00	-29.11	V
3346.01	-43.48	12.00	11.79	-43.27	-13.00	-30.27	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.23	-41.47	9.40	4.75	-36.82	-13.00	-23.82	H
2539.24	-40.60	10.60	8.39	-38.39	-13.00	-25.39	H
3385.85	-31.15	12.00	11.79	-30.94	-13.00	-17.94	H
1693.28	-43.15	9.40	4.75	-38.50	-13.00	-25.50	V
2539.16	-44.92	10.60	8.39	-42.71	-13.00	-29.71	V
3386.32	-43.74	12.00	11.79	-43.53	-13.00	-30.53	V



HSDPA Band V: (30-9000)MHz							
The most testresults channel 4132/826.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1652.10	-40.22	9.40	4.75	-35.57	-13.00	-22.57	H
2479.42	-39.29	10.60	8.39	-37.08	-13.00	-24.08	H
3305.54	-32.34	12.00	11.79	-32.13	-13.00	-19.13	H
1652.36	-44.18	9.40	4.75	-39.53	-13.00	-26.53	V
2479.56	-45.03	10.60	8.39	-42.82	-13.00	-29.82	V
3305.56	-43.67	12.00	11.79	-43.46	-13.00	-30.46	V
The Worst Test Results Channel 4183/836.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1673.10	-40.55	9.40	4.75	-35.90	-13.00	-22.90	H
2509.78	-39.51	10.60	8.39	-37.30	-13.00	-24.30	H
3346.24	-31.18	12.00	11.79	-30.97	-13.00	-17.97	H
1673.01	-43.35	9.40	4.75	-38.70	-13.00	-25.70	V
2509.91	-44.85	10.60	8.39	-42.64	-13.00	-29.64	V
3346.28	-43.63	12.00	11.79	-43.42	-13.00	-30.42	V
The Worst Test Results Channel 4233/846.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
1693.63	-40.19	9.40	4.75	-35.54	-13.00	-22.54	H
2539.08	-39.40	10.60	8.39	-37.19	-13.00	-24.19	H
3386.18	-30.86	12.00	11.79	-30.65	-13.00	-17.65	H
1693.46	-44.21	9.40	4.75	-39.56	-13.00	-26.56	V
2539.24	-44.67	10.60	8.39	-42.46	-13.00	-29.46	V
3386.07	-42.62	12.00	11.79	-42.41	-13.00	-29.41	V



WCDMA Band II: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3704.17	-34.94	12.60	12.93	-35.27	-13.00	-22.27	H
5557.41	-34.81	13.10	17.11	-38.82	-13.00	-25.82	H
7409.86	-33.27	11.50	22.20	-43.97	-13.00	-30.97	H
3704.28	-35.01	12.60	12.93	-35.34	-13.00	-22.34	V
5557.54	-34.83	13.10	17.11	-38.84	-13.00	-25.84	V
7409.59	-32.74	11.50	22.20	-43.44	-13.00	-30.44	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.04	-34.48	12.60	12.93	-34.81	-13.00	-21.81	H
5640.12	-35.24	13.10	17.11	-39.25	-13.00	-26.25	H
7520.13	-32.79	11.50	22.20	-43.49	-13.00	-30.49	H
3760.22	-35.82	12.60	12.93	-36.15	-13.00	-23.15	V
5640.29	-34.35	13.10	17.11	-38.36	-13.00	-25.36	V
7520.11	-31.89	11.50	22.20	-42.59	-13.00	-29.59	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.45	-34.15	12.60	12.93	-34.48	-13.00	-21.48	H
5722.35	-34.88	13.10	17.11	-38.89	-13.00	-25.89	H
7630.14	-33.22	11.50	22.20	-43.92	-13.00	-30.92	H
3815.40	-34.79	12.60	12.93	-35.12	-13.00	-22.12	V
5722.27	-34.96	13.10	17.11	-38.97	-13.00	-25.97	V
7630.07	-31.83	11.50	22.20	-42.53	-13.00	-29.53	V



HSUPA Band II: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3704.40	-33.73	12.60	12.93	-34.06	-13.00	-21.06	H
5557.26	-34.73	13.10	17.11	-38.74	-13.00	-25.74	H
7409.52	-33.12	11.50	22.20	-43.82	-13.00	-30.82	H
3704.35	-35.97	12.60	12.93	-36.30	-13.00	-23.30	V
5557.29	-35.01	13.10	17.11	-39.02	-13.00	-26.02	V
7409.64	-31.93	11.50	22.20	-42.63	-13.00	-29.63	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3760.11	-33.67	12.60	12.93	-34.00	-13.00	-21.00	H
5640.08	-34.71	13.10	17.11	-38.72	-13.00	-25.72	H
7520.07	-33.06	11.50	22.20	-43.76	-13.00	-30.76	H
3760.24	-35.12	12.60	12.93	-35.45	-13.00	-22.45	V
5639.96	-34.73	13.10	17.11	-38.74	-13.00	-25.74	V
7520.30	-32.27	11.50	22.20	-42.97	-13.00	-29.97	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3815.51	-34.11	12.60	12.93	-34.44	-13.00	-21.44	H
5722.11	-35.47	13.10	17.11	-39.48	-13.00	-26.48	H
7630.12	-32.35	11.50	22.20	-43.05	-13.00	-30.05	H
3815.70	-35.54	12.60	12.93	-35.87	-13.00	-22.87	V
5722.40	-34.00	13.10	17.11	-38.01	-13.00	-25.01	V
7630.22	-32.86	11.50	22.20	-43.56	-13.00	-30.56	V



HSDPA Band II: (30-20000)MHz							
The Worst Test Results for Channel 9262/1852.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3704.35	-33.98	12.60	12.93	-34.31	-13.00	-21.31	H
5557.52	-34.84	13.10	17.11	-38.85	-13.00	-25.85	H
7409.55	-33.12	11.50	22.20	-43.82	-13.00	-30.82	H
3704.37	-35.38	12.60	12.93	-35.71	-13.00	-22.71	V
5557.55	-34.35	13.10	17.11	-38.36	-13.00	-25.36	V
7409.84	-32.23	11.50	22.20	-42.93	-13.00	-29.93	V
The Worst Test Results for Channel 9400/1880MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3759.91	-33.96	12.60	12.93	-34.29	-13.00	-21.29	H
5640.30	-34.09	13.10	17.11	-38.10	-13.00	-25.10	H
7519.90	-33.09	11.50	22.20	-43.79	-13.00	-30.79	H
3759.88	-35.48	12.60	12.93	-35.81	-13.00	-22.81	V
5639.86	-35.24	13.10	17.11	-39.25	-13.00	-26.25	V
7520.28	-32.07	11.50	22.20	-42.77	-13.00	-29.77	V
The Worst Test Results for Channel 9538/1907.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3815.71	-34.10	12.60	12.93	-34.43	-13.00	-21.43	H
5722.33	-35.20	13.10	17.11	-39.21	-13.00	-26.21	H
7630.13	-32.65	11.50	22.20	-43.35	-13.00	-30.35	H
3815.48	-34.88	12.60	12.93	-35.21	-13.00	-22.21	V
5722.04	-34.39	13.10	17.11	-38.40	-13.00	-25.40	V
7630.29	-33.10	11.50	22.20	-43.80	-13.00	-30.80	V



WCDMA Band IV: (30-20000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3424.95	-33.47	12.90	12.05	-32.62	-13.00	-19.62	H
5137.30	-34.74	12.80	16.27	-38.21	-13.00	-25.21	H
6850.18	-32.41	12.30	20.13	-40.24	-13.00	-27.24	H
3424.90	-35.68	12.90	12.05	-34.83	-13.00	-21.83	V
5137.53	-34.95	12.80	16.27	-38.42	-13.00	-25.42	V
6849.93	-31.84	12.30	20.13	-39.67	-13.00	-26.67	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3479.60	-34.48	12.90	12.05	-33.63	-13.00	-20.63	H
5220.00	-35.19	12.80	16.27	-38.66	-13.00	-25.66	H
6959.63	-32.38	12.30	20.13	-40.21	-13.00	-27.21	H
3479.84	-35.06	12.90	12.05	-34.21	-13.00	-21.21	V
5219.93	-33.84	12.80	16.27	-37.31	-13.00	-24.31	V
6959.94	-33.08	12.30	20.13	-40.91	-13.00	-27.91	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3504.54	-34.52	12.90	12.05	-33.67	-13.00	-20.67	H
5256.91	-34.04	12.80	16.27	-37.51	-13.00	-24.51	H
7009.43	-33.54	12.30	20.13	-41.37	-13.00	-28.37	H
3504.38	-35.12	12.90	12.05	-34.27	-13.00	-21.27	V
5256.84	-35.06	12.80	16.27	-38.53	-13.00	-25.53	V
7009.28	-32.55	12.30	20.13	-40.38	-13.00	-27.38	V





HSUPA Band IV: (30-20000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3424.88	-33.74	12.90	12.05	-32.89	-13.00	-19.89	H
5137.74	-33.99	12.80	16.27	-37.46	-13.00	-24.46	H
6850.17	-33.07	12.30	20.13	-40.90	-13.00	-27.90	H
3425.05	-35.77	12.90	12.05	-34.92	-13.00	-21.92	V
5137.44	-34.51	12.80	16.27	-37.98	-13.00	-24.98	V
6850.25	-33.02	12.30	20.13	-40.85	-13.00	-27.85	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3479.83	-34.40	12.90	12.05	-33.55	-13.00	-20.55	H
5219.88	-34.24	12.80	16.27	-37.71	-13.00	-24.71	H
6959.69	-32.78	12.30	20.13	-40.61	-13.00	-27.61	H
3479.55	-34.96	12.90	12.05	-34.11	-13.00	-21.11	V
5219.91	-34.86	12.80	16.27	-38.33	-13.00	-25.33	V
6959.93	-33.01	12.30	20.13	-40.84	-13.00	-27.84	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3504.39	-33.66	12.90	12.05	-32.81	-13.00	-19.81	H
5256.81	-34.37	12.80	16.27	-37.84	-13.00	-24.84	H
7009.26	-32.50	12.30	20.13	-40.33	-13.00	-27.33	H
3504.64	-35.65	12.90	12.05	-34.80	-13.00	-21.80	V
5256.76	-33.92	12.80	16.27	-37.39	-13.00	-24.39	V
7009.26	-32.34	12.30	20.13	-40.17	-13.00	-27.17	V



HSDPA Band IV: (30-20000)MHz							
The Worst Test Results for Channel 1313/1712.6MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3425.06	-34.16	12.90	12.05	-33.31	-13.00	-20.31	H
5137.70	-35.24	12.80	16.27	-38.71	-13.00	-25.71	H
6850.09	-33.59	12.30	20.13	-41.42	-13.00	-28.42	H
3424.86	-34.83	12.90	12.05	-33.98	-13.00	-20.98	V
5137.44	-35.04	12.80	16.27	-38.51	-13.00	-25.51	V
6849.91	-32.62	12.30	20.13	-40.45	-13.00	-27.45	V
The Worst Test Results for Channel 1450/1740.0MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3479.88	-34.15	12.90	12.05	-33.30	-13.00	-20.30	H
5219.77	-35.18	12.80	16.27	-38.65	-13.00	-25.65	H
6959.85	-32.59	12.30	20.13	-40.42	-13.00	-27.42	H
3479.70	-34.60	12.90	12.05	-33.75	-13.00	-20.75	V
5219.96	-34.70	12.80	16.27	-38.17	-13.00	-25.17	V
6959.55	-31.93	12.30	20.13	-39.76	-13.00	-26.76	V
The Worst Test Results for Channel 1512/1752.4MHz							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3504.53	-33.58	12.90	12.05	-32.73	-13.00	-19.73	H
5256.98	-35.15	12.80	16.27	-38.62	-13.00	-25.62	H
7009.54	-32.21	12.30	20.13	-40.04	-13.00	-27.04	H
3504.39	-35.44	12.90	12.05	-34.59	-13.00	-21.59	V
5256.79	-33.77	12.80	16.27	-37.24	-13.00	-24.24	V
7009.16	-32.92	12.30	20.13	-40.75	-13.00	-27.75	V




**A9. RECEIVER SPURIOUS EMISSIONS**

Note: All mode has been tested, only show the worst case in this report.

GSM850 (30MHz -1GHz):

**Mid channel  
Horizontal**

RE\_IC Test Case\_RSS 132 Below 1G

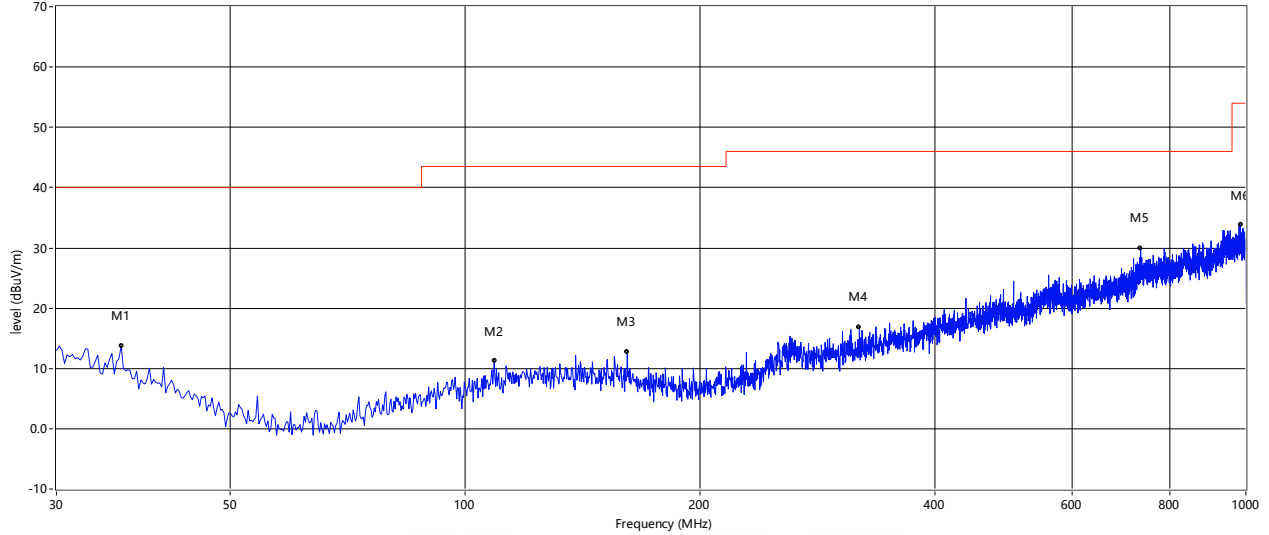


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
36.305	13.73	--	--	-15.19	--	40.0	--	-26.27	Horizontal	Pass
109.055	11.20	--	--	-17.89	--	43.5	--	-32.30	Horizontal	Pass
161.435	12.81	--	--	-17.48	--	43.5	--	-30.69	Horizontal	Pass
320.030	16.91	--	--	-11.94	--	46.0	--	-29.09	Horizontal	Pass
733.492	29.89	--	--	0.56	--	46.0	--	-16.11	Horizontal	Pass
984.480	33.81	--	--	5.75	--	54.0	--	-20.19	Horizontal	Pass



Vertical

RE\_IC Test Case\_RSS 132 Below 1G

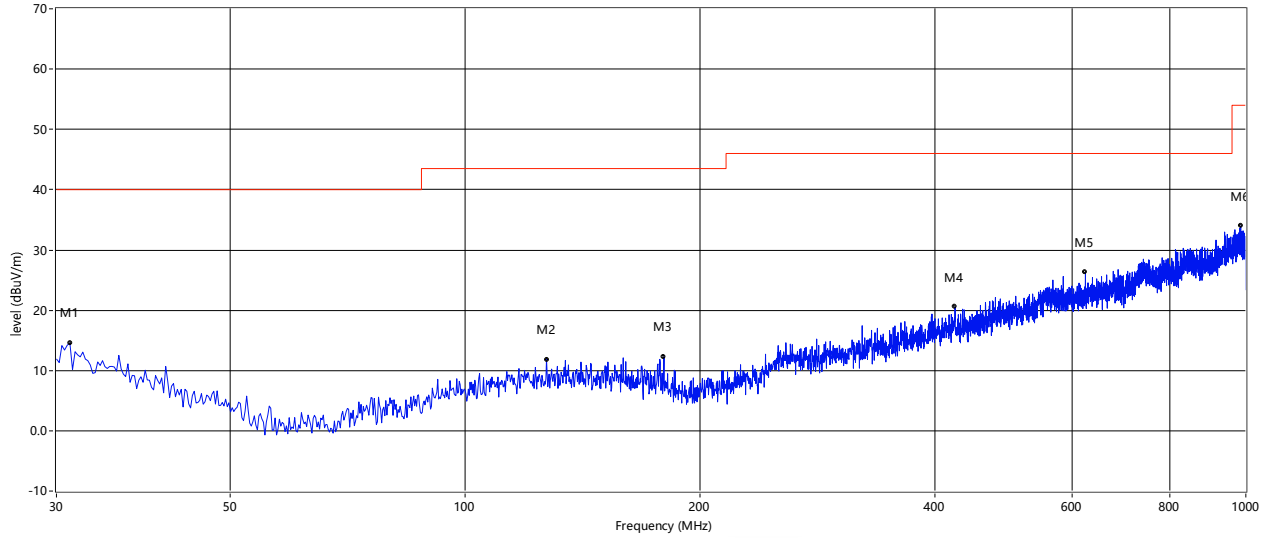


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
31.212	14.59	--	--	-12.62	--	40.0	--	-25.41	Vertical	Pass
127.243	11.83	--	--	-16.84	--	43.5	--	-31.67	Vertical	Pass
179.865	12.28	--	--	-18.37	--	43.5	--	-31.22	Vertical	Pass
424.305	20.54	--	--	-7.75	--	46.0	--	-25.46	Vertical	Pass
623.155	26.29	--	--	-2.69	--	46.0	--	-19.71	Vertical	Pass
984.965	33.98	--	--	5.72	--	54.0	--	-20.02	Vertical	Pass



GSM850 (Above 1GHz):

Mid channel  
Horizontal

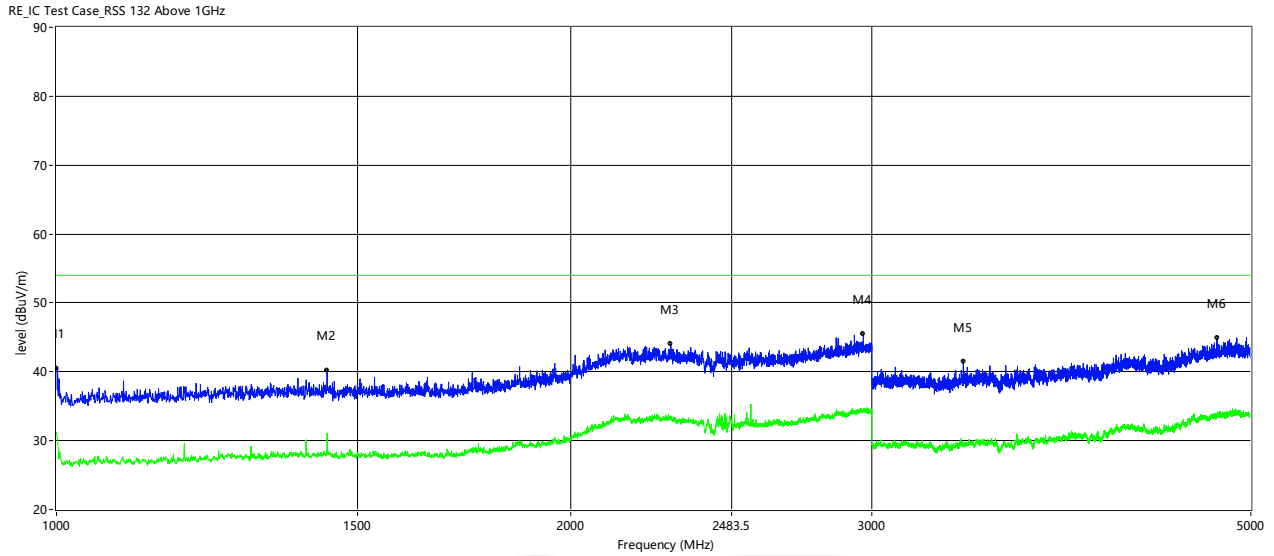


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1000.000	40.27	--	31.27	-1.95	74.0	--	54.0	-22.73	Horizontal	Pass
1440.000	40.18	--	31.07	-0.60	74.0	--	54.0	-22.93	Horizontal	Pass
2288.500	44.04	--	33.29	4.59	74.0	--	54.0	-20.71	Horizontal	Pass
2966.000	45.53	--	34.36	5.96	74.0	--	54.0	-19.64	Horizontal	Pass
3394.000	41.44	--	29.68	-11.73	74.0	--	54.0	-24.32	Horizontal	Pass
4777.000	44.89	--	33.91	-7.08	74.0	--	54.0	-20.09	Horizontal	Pass



Vertical

RE\_IC Test Case\_RSS 132 Above 1GHz

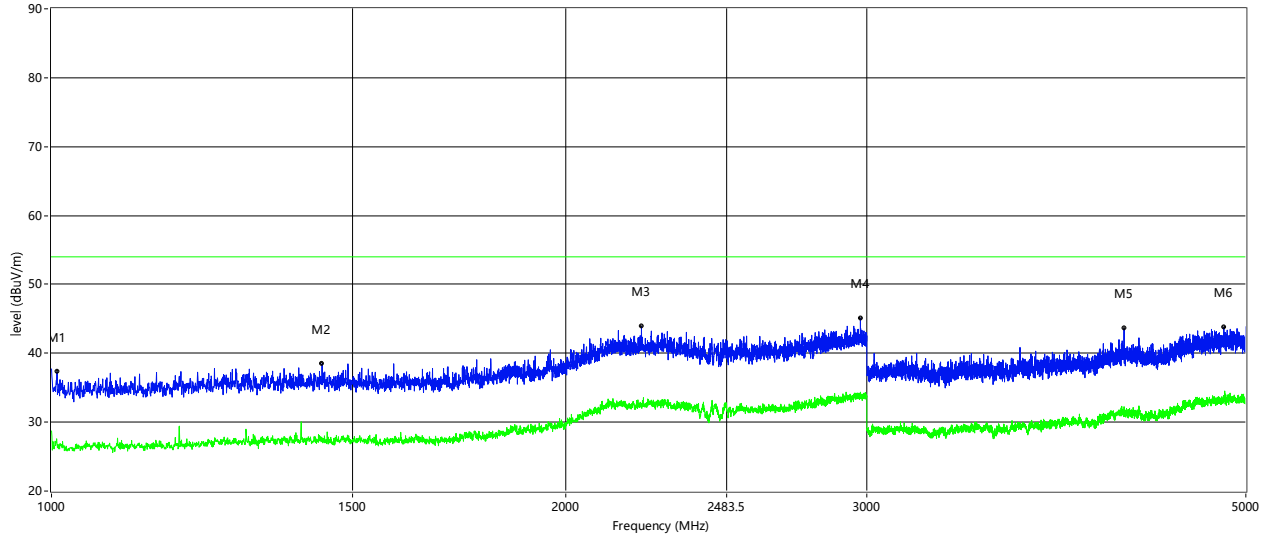


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1007.500	37.31	--	26.87	-1.93	74.0	--	54.0	-27.13	Vertical	Pass
1440.000	38.49	--	27.72	-0.60	74.0	--	54.0	-26.28	Vertical	Pass
2214.500	43.87	--	32.66	4.26	74.0	--	54.0	-21.34	Vertical	Pass
2974.500	45.04	--	34.36	6.00	74.0	--	54.0	-19.64	Vertical	Pass
4243.000	43.56	--	32.25	-9.01	74.0	--	54.0	-21.75	Vertical	Pass
4854.000	43.75	--	33.51	-6.66	74.0	--	54.0	-20.49	Vertical	Pass



GSM1900 (30MHz -1GHz):

Mid channel  
Horizontal

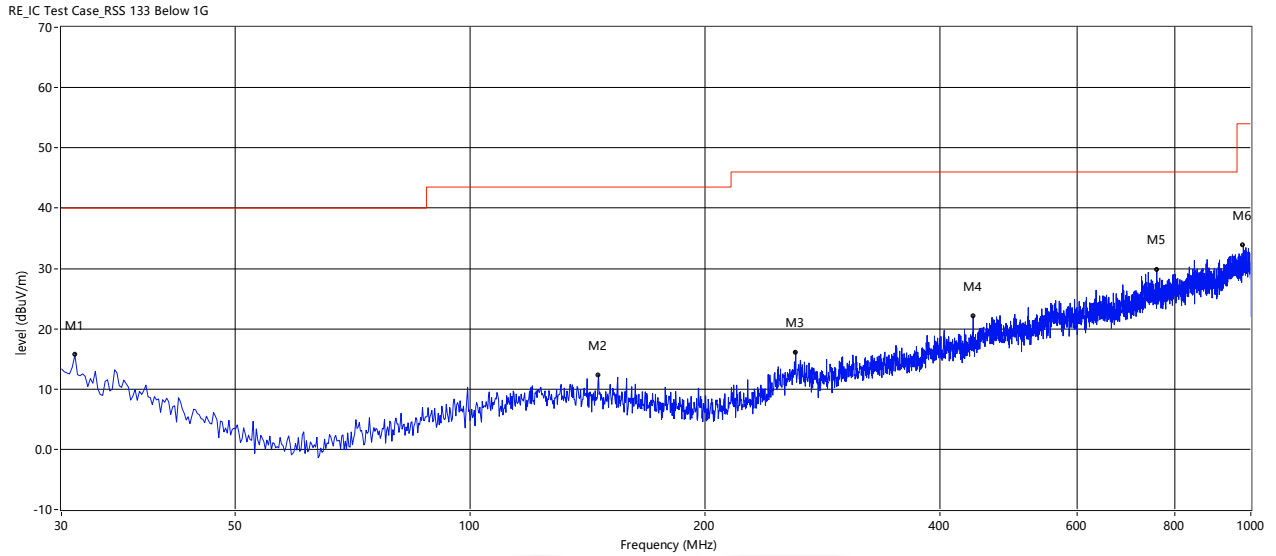


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
30.727	12.49	--	--	-12.37	--	40.0	--	-27.51	Horizontal	Pass
146.158	12.21	--	--	-16.92	--	43.5	--	-31.29	Horizontal	Pass
261.345	16.09	--	--	-12.79	--	46.0	--	-29.91	Horizontal	Pass
441.038	22.01	--	--	-7.68	--	46.0	--	-23.99	Horizontal	Pass
757.742	29.74	--	--	0.76	--	46.0	--	-16.26	Horizontal	Pass
978.175	33.82	--	--	5.90	--	54.0	--	-20.18	Horizontal	Pass



Vertical

RE\_IC Test Case\_RSS 133 Below 1G

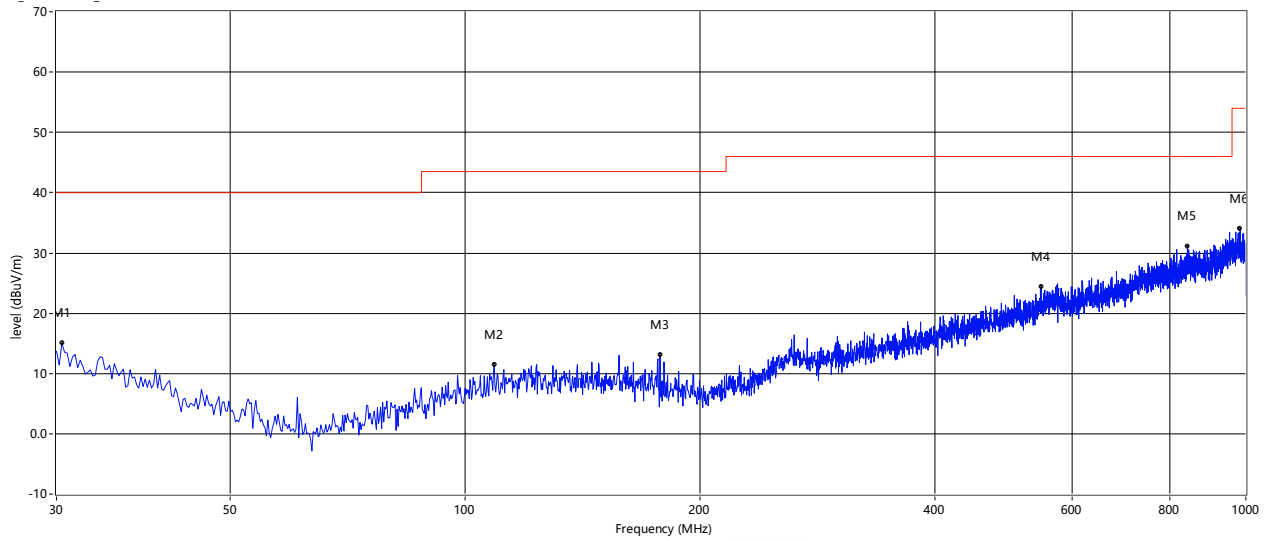


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
30.000	13.77	--	--	-12.01	--	40.0	--	-26.23	Vertical	Pass
109.055	11.36	--	--	-17.89	--	43.5	--	-32.14	Vertical	Pass
177.925	13.09	--	--	-18.40	--	43.5	--	-30.41	Vertical	Pass
546.767	24.40	--	--	-3.59	--	46.0	--	-21.60	Vertical	Pass
841.648	31.06	--	--	2.81	--	46.0	--	-14.94	Vertical	Pass
983.268	34.03	--	--	5.83	--	54.0	--	-19.97	Vertical	Pass





GSM1900 (Above 1GHz):

Mid channel  
Horizontal

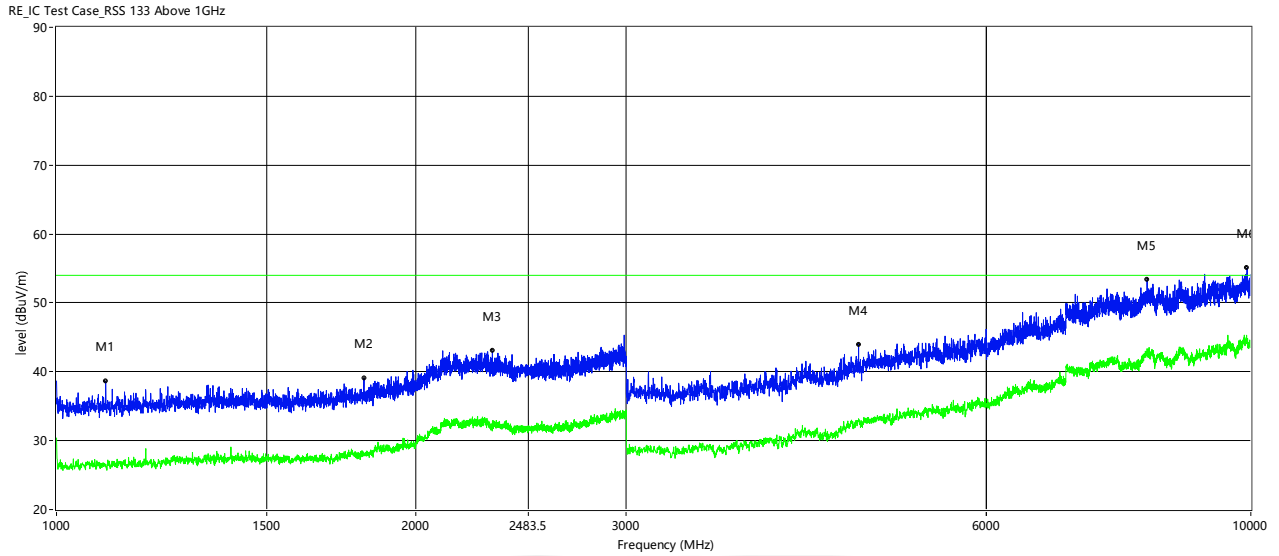


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1099.500	38.61	--	26.61	-1.49	74.0	--	54.0	-27.39	Horizontal	Pass
1809.000	39.04	--	27.94	0.07	74.0	--	54.0	-26.06	Horizontal	Pass
2317.000	43.01	--	32.32	4.51	74.0	--	54.0	-21.68	Horizontal	Pass
4694.000	43.96	--	33.19	-7.43	74.0	--	54.0	-20.81	Horizontal	Pass
8187.000	53.37	--	43.36	3.30	74.0	--	54.0	-10.64	Horizontal	Pass
9928.250	55.09	--	44.66	4.87	74.0	--	54.0	-9.34	Horizontal	Pass



Vertical

RE\_IC Test Case\_RSS 133 Above 1GHz

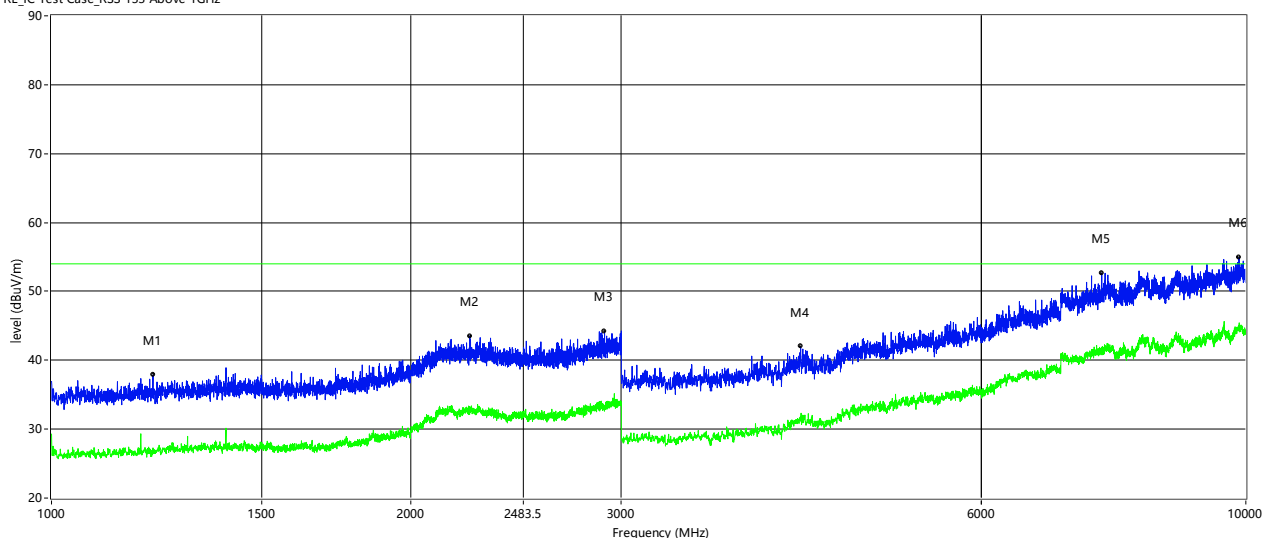


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1216.000	37.85	--	27.29	-1.11	74.0	--	54.0	-26.71	Vertical	Pass
2240.000	43.55	--	33.28	4.53	74.0	--	54.0	-20.72	Vertical	Pass
2904.500	44.19	--	33.33	5.64	74.0	--	54.0	-20.67	Vertical	Pass
4239.000	41.98	--	31.80	-9.02	74.0	--	54.0	-22.20	Vertical	Pass
7574.500	52.69	--	41.85	2.16	74.0	--	54.0	-12.15	Vertical	Pass
9868.750	54.94	--	44.29	5.13	74.0	--	54.0	-9.71	Vertical	Pass



WCDMA BAND 5 (30MHz -1GHz):

Mid channel  
Horizontal

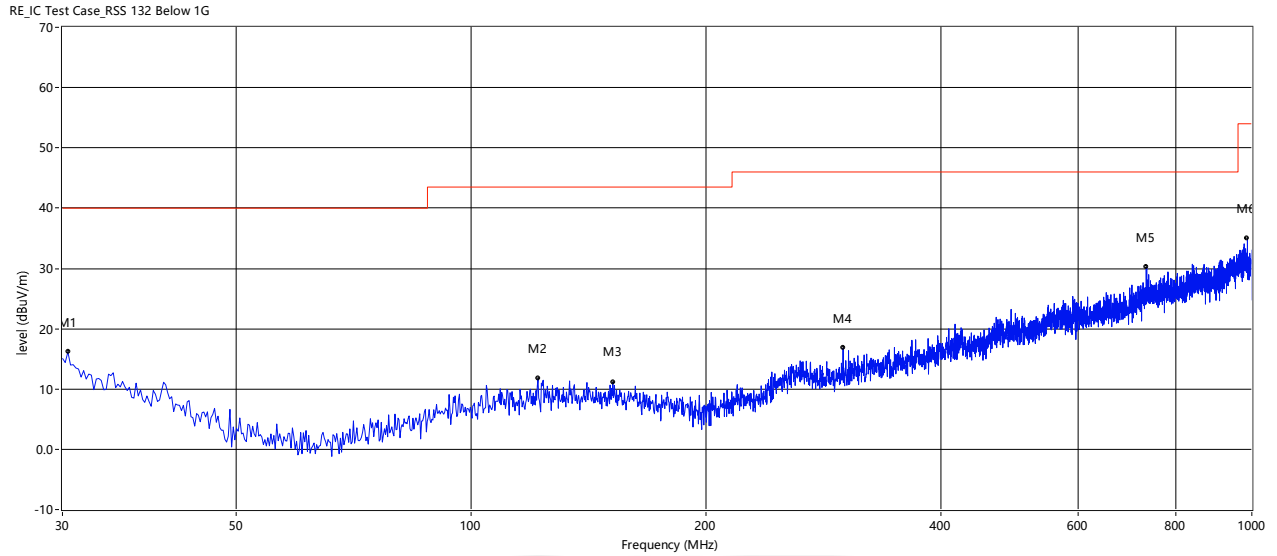


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
30.000	15.10	--	--	-12.01	--	40.0	--	-24.90	Horizontal	Pass
121.908	11.69	--	--	-16.91	--	43.5	--	-31.81	Horizontal	Pass
151.977	11.14	--	--	-17.10	--	43.5	--	-32.36	Horizontal	Pass
299.660	16.79	--	--	-12.84	--	46.0	--	-29.21	Horizontal	Pass
733.492	30.17	--	--	0.56	--	46.0	--	-15.83	Horizontal	Pass
986.905	34.94	--	--	5.61	--	54.0	--	-19.06	Horizontal	Pass



Vertical

RE\_IC Test Case\_RSS 132 Below 1G

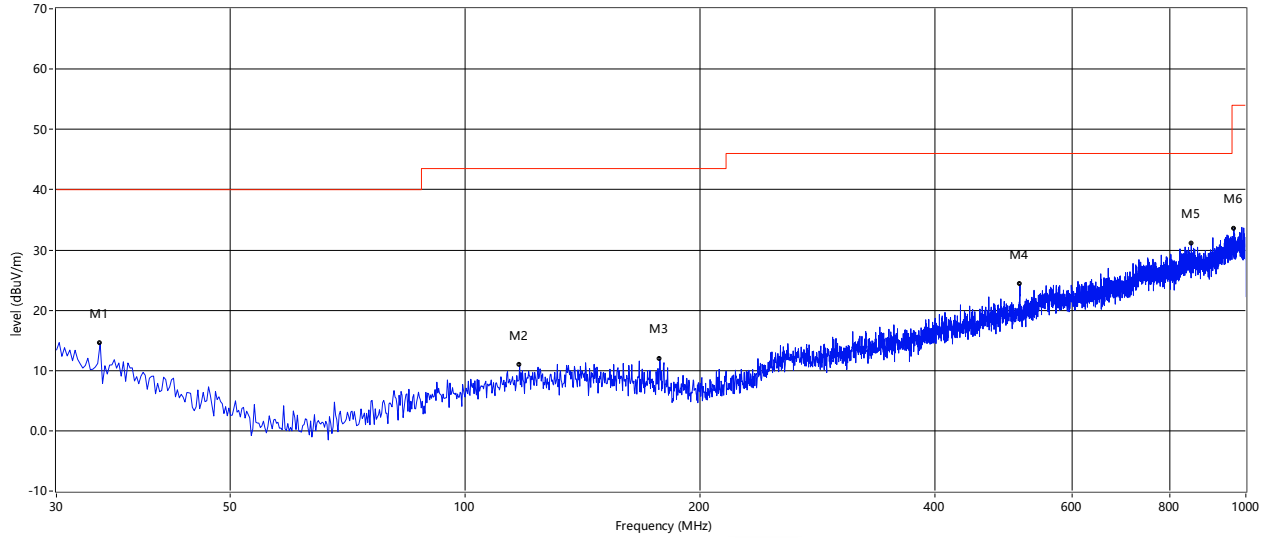


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
34.123	14.52	--	--	-14.01	--	40.0	--	-25.48	Vertical	Pass
117.543	10.88	--	--	-17.10	--	43.5	--	-32.62	Vertical	Pass
177.682	11.94	--	--	-18.41	--	43.5	--	-31.56	Vertical	Pass
513.787	24.31	--	--	-5.46	--	46.0	--	-21.69	Vertical	Pass
851.347	31.01	--	--	2.50	--	46.0	--	-14.99	Vertical	Pass
965.322	33.51	--	--	5.24	--	54.0	--	-20.49	Vertical	Pass



WCDMA BAND 5 (Above 1GHz):

Mid channel  
Horizontal

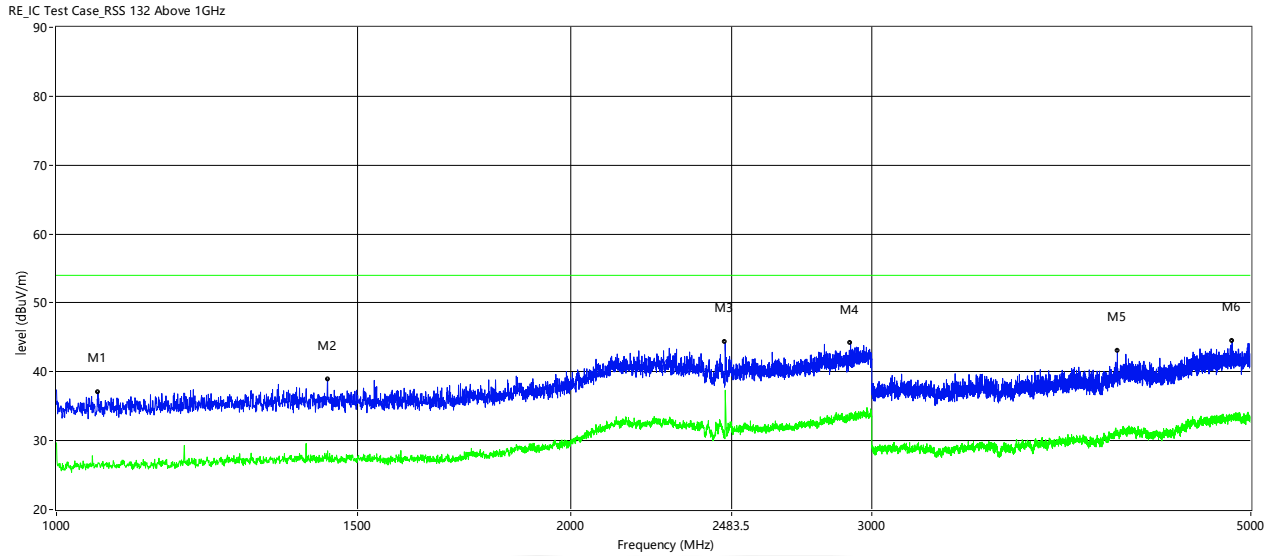


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1057.500	37.00	--	26.78	-1.78	74.0	--	54.0	-27.22	Horizontal	Pass
1441.000	38.83	--	28.54	-0.60	74.0	--	54.0	-25.46	Horizontal	Pass
2462.000	44.31	--	35.74	4.03	74.0	--	54.0	-18.26	Horizontal	Pass
2915.500	44.13	--	33.36	5.70	74.0	--	54.0	-20.64	Horizontal	Pass
4177.000	43.01	--	31.22	-9.26	74.0	--	54.0	-22.78	Horizontal	Pass
4875.500	44.45	--	33.66	-6.53	74.0	--	54.0	-20.34	Horizontal	Pass



Vertical

RE\_IC Test Case\_RSS 132 Above 1GHz

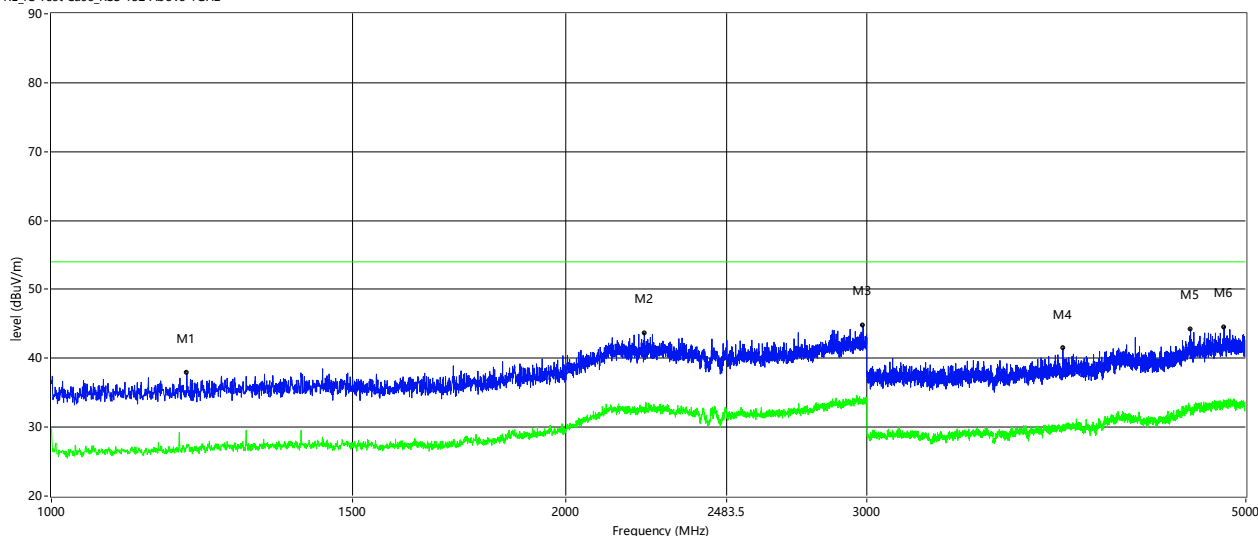


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1200.000	37.85	--	27.55	-1.21	74.0	--	54.0	-26.45	Vertical	Pass
2223.000	43.64	--	32.57	4.35	74.0	--	54.0	-21.43	Vertical	Pass
2985.000	44.72	--	33.63	6.05	74.0	--	54.0	-20.37	Vertical	Pass
3908.000	41.41	--	30.27	-10.69	74.0	--	54.0	-23.73	Vertical	Pass
4641.000	44.20	--	32.61	-7.52	74.0	--	54.0	-21.39	Vertical	Pass
4855.000	44.48	--	33.05	-6.66	74.0	--	54.0	-20.95	Vertical	Pass



WCDMA BAND 2 (30MHz -1GHz):

Mid channel  
Horizontal

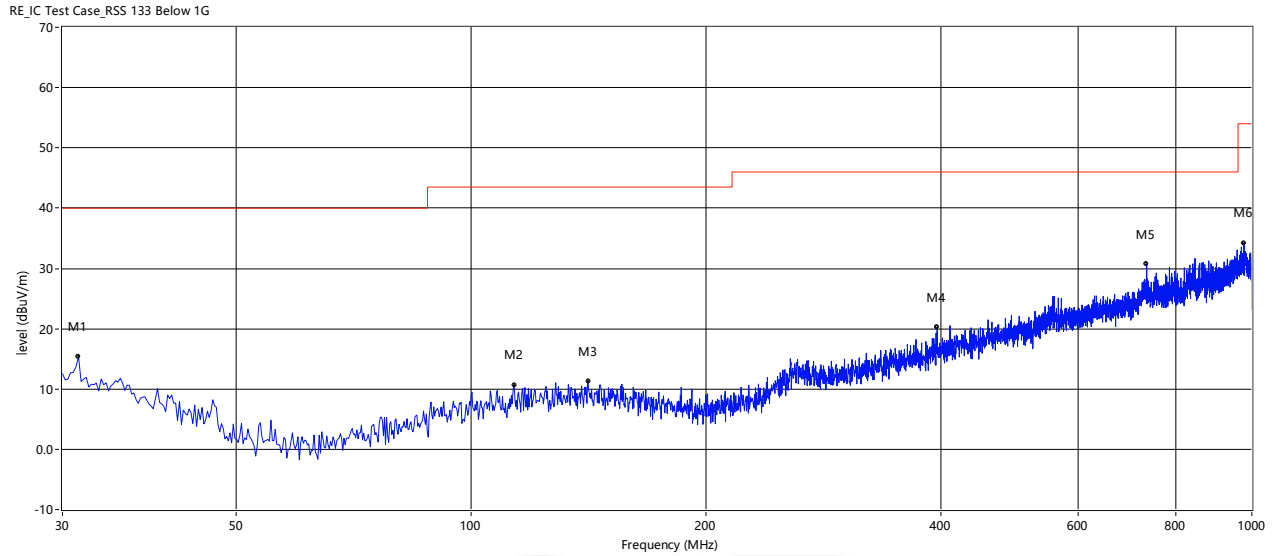


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
30.485	11.62	--	--	-12.25	--	40.0	--	-28.38	Horizontal	Pass
113.662	10.64	--	--	-17.38	--	43.5	--	-32.86	Horizontal	Pass
141.307	11.19	--	--	-16.66	--	43.5	--	-32.31	Horizontal	Pass
395.448	20.19	--	--	-9.02	--	46.0	--	-25.81	Horizontal	Pass
733.492	30.66	--	--	0.56	--	46.0	--	-15.34	Horizontal	Pass
977.205	34.21	--	--	5.83	--	54.0	--	-19.79	Horizontal	Pass



Vertical

RE\_IC Test Case\_RSS 133 Below 1G

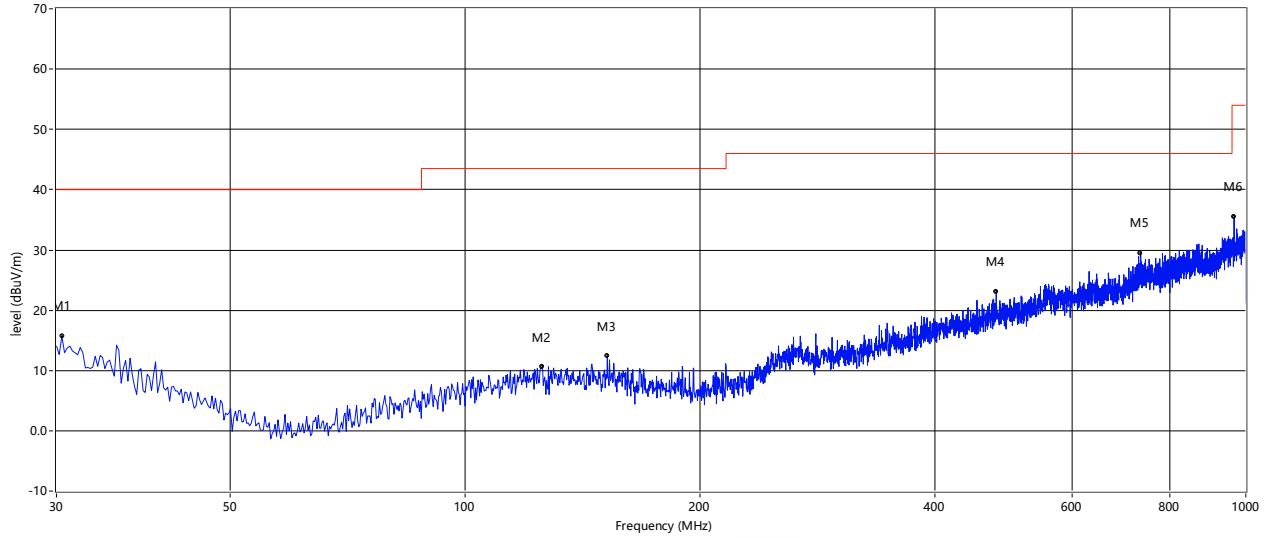


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
30.000	14.08	--	--	-12.01	--	40.0	--	-25.92	Vertical	Pass
125.545	10.57	--	--	-16.83	--	43.5	--	-32.93	Vertical	Pass
152.220	12.36	--	--	-17.11	--	43.5	--	-31.14	Vertical	Pass
479.110	23.06	--	--	-6.34	--	46.0	--	-22.94	Vertical	Pass
733.492	29.46	--	--	0.56	--	46.0	--	-16.54	Vertical	Pass
966.050	35.50	--	--	5.26	--	54.0	--	-18.50	Vertical	Pass





WCDMA BAND 2 (Above 1GHz):

Mid channel  
Horizontal

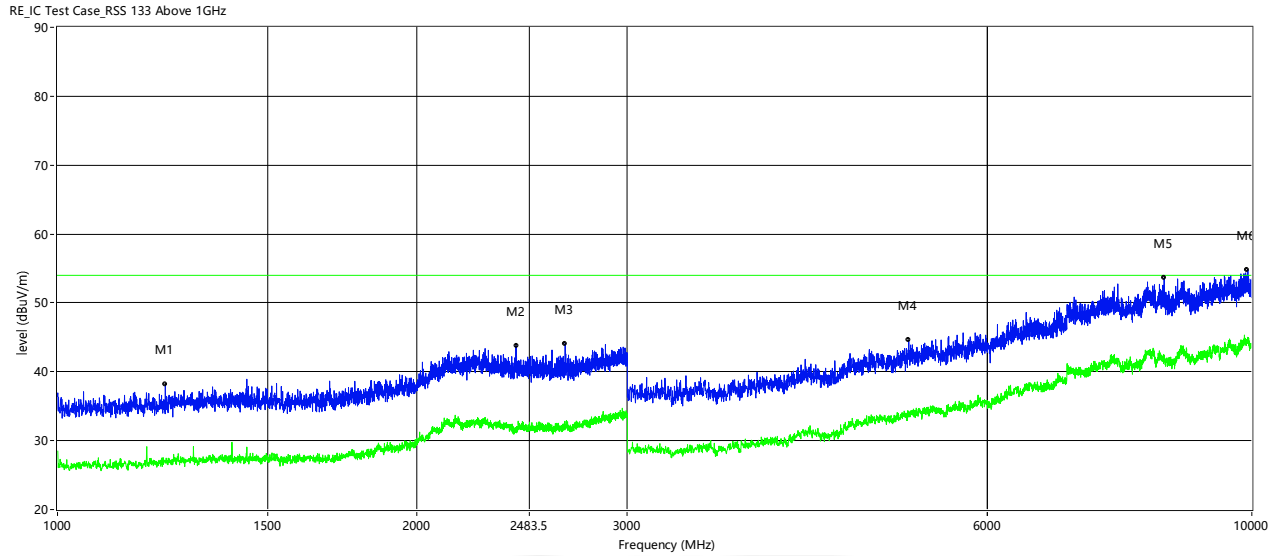


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1231.000	38.14	--	26.71	-1.03	74.0	--	54.0	-27.29	Horizontal	Pass
2420.500	43.80	--	31.27	4.01	74.0	--	54.0	-22.73	Horizontal	Pass
2661.000	44.12	--	32.02	4.51	74.0	--	54.0	-21.98	Horizontal	Pass
5161.250	44.58	--	33.98	-5.14	74.0	--	54.0	-20.02	Horizontal	Pass
8444.250	53.62	--	42.34	3.32	74.0	--	54.0	-11.66	Horizontal	Pass
9914.250	54.82	--	44.68	5.01	74.0	--	54.0	-9.32	Horizontal	Pass



Vertical

RE\_IC Test Case\_RSS 133 Above 1GHz

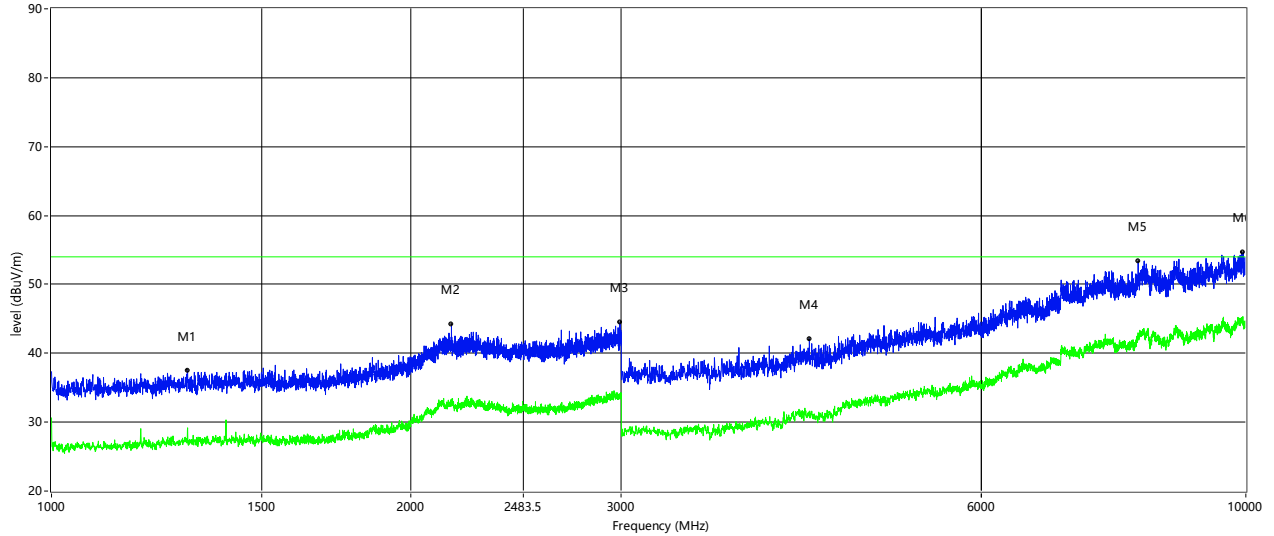

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	ANT	Verdict
1299.500	37.46	--	28.88	-0.93	74.0	--	54.0	-25.12	Vertical	Pass
2162.000	44.22	--	32.73	4.51	74.0	--	54.0	-21.27	Vertical	Pass
2992.000	44.43	--	33.78	6.08	74.0	--	54.0	-20.22	Vertical	Pass
4310.750	42.10	--	31.34	-8.94	74.0	--	54.0	-22.66	Vertical	Pass
8125.750	53.32	--	42.43	3.14	74.0	--	54.0	-11.57	Vertical	Pass
9951.000	54.70	--	44.40	4.63	74.0	--	54.0	-9.60	Vertical	Pass



#### APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*

