



# FCC Test Report

**APPLICANT** : Continental Aftermarket & Services GmbH  
**EQUIPMENT** : RVD 4G OBD Dongle  
**BRAND NAME** : Continental  
**MODEL NAME** : GD504  
**FCC ID** : 2AVAW-GD504  
**STANDARD** : 47 CFR Part 15 Subpart B  
**CLASSIFICATION** : Certification

The product was completed on Dec. 13, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



**Sportun International (ShenZhen) Inc.**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen, 518055  
People's Republic of China**



## TABLE OF CONTENTS

<b>REVISION HISTORY.....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1. GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1. Applicant.....	5
1.2. Manufacturer .....	5
1.3. Product Feature of Equipment Under Test .....	5
1.4. Product Specification of Equipment Under Test .....	6
1.5. Modification of EUT .....	6
1.6. Test Location.....	7
1.7. Test Software .....	7
1.8. Applicable Standards .....	7
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>8</b>
2.1. Test Mode .....	8
2.2. Connection Diagram of Test System .....	10
2.3. Support Unit used in test configuration and system.....	10
2.4. EUT Operation Test Setup .....	11
<b>3. TEST RESULT.....</b>	<b>12</b>
3.1. Test of AC Conducted Emission Measurement .....	12
3.2. Test of Radiated Emission Measurement .....	16
<b>4. LIST OF MEASURING EQUIPMENT .....</b>	<b>20</b>
<b>5. UNCERTAINTY OF EVALUATION.....</b>	<b>21</b>

### APPENDIX A. SETUP PHOTOGRAPHS



## REVISION HISTORY



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 13.72 dB at 0.280 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 8.52 dB at 59.100 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



## 1. General Description

### 1.1. Applicant

Continental Aftermarket & Services GmbH

Sodener Strasse 9, 65824 Schwalbach am Taunus, Germany

### 1.2. Manufacturer

Continental Aftermarket & Services GmbH

Sodener Strasse 9, 65824 Schwalbach am Taunus, Germany

### 1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	RVD 4G OBD Dongle
Brand Name	Continental
Model Name	GD504
FCC ID	2AVAW-GD504
EUT supports Radios application	WCDMA/LTE/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
IMEI Code	Conduction/ Radiation: 861473040025428
HW Version	GD504.H02
SW Version	03.01.01
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two samples under test, the difference between sample 1 and sample 2 is that sample 2 is E-SIM sample, all the others are the same. According to the difference, sample 1 perform full test and sample 2 verify the worst case.



## 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 25 : 1850.7 MHz ~ 1914.3 MHz LTE Band 26 : 824.7 MHz ~ 848.3 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz
<b>Rx Frequency</b>	WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 25 : 1930.7 MHz ~ 1994.3 MHz LTE Band 26 : 869.7 MHz ~ 893.3 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz GNSS : 1559 MHz ~ 1610 MHz
<b>Antenna Type</b>	WWAN : Fixed Internal Antenna WLAN : Fixed Internal Antenna GNSS: Fixed Internal Antenna
<b>Type of Modulation</b>	WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM (16QAM uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM /256QAM) GNSS : BPSK

## 1.5. Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6. Test Location

Sportun International (Shenzhen) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sportun International (Shenzhen) Inc.		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sportun Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-SZ	CN1256	421272

<b>Test Firm</b>	Sportun International (Shenzhen) Inc.		
<b>Test Site Location</b>	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan Shenzhen, 518055 People's Republic of China TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sportun Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-SZ	CN1256	421272

## 1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b

## 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Test Items	Function Type
AC Conducted Emission	Mode 1: WCDMA Band V Idle(Middle CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 1 Mode 2: LTE Band 5 Idle(Middle CH) + WLAN(5G) Idle + GNSS RX + Adapter + sample 1 Mode 3: LTE Band 5 Idle(Low CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 1 Mode 4: LTE Band 12 Idle(High CH) + WLAN(5G) Idle + GNSS RX + Adapter + sample 1 Mode 5: LTE Band 13 Idle(High CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 1 Mode 6: LTE Band 17 Idle(High CH) + WLAN(5G) Idle + GNSS RX + Adapter + sample 1 Mode 7: LTE Band 26 Idle(High CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 1 Mode 8: LTE Band 26 Idle(High CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 2



Radiated Emissions	<p>Mode 1: WCDMA Band V Idle(Middle CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 1</p> <p>Mode 2: LTE Band 5 Idle(Middle CH) + WLAN(5G) Idle + GNSS RX + Adapter + sample 1</p> <p>Mode 3: LTE Band 5 Idle(Low CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 1</p> <p>Mode 4: LTE Band 12 Idle(High CH) + WLAN(5G) Idle + GNSS RX + Adapter + sample 1</p> <p>Mode 5: LTE Band 13 Idle(High CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 1</p> <p>Mode 6: LTE Band 17 Idle(High CH) + WLAN(5G) Idle + GNSS RX + Adapter + sample 1</p> <p>Mode 7: LTE Band 26 Idle(High CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 1</p> <p>Mode 8: WCDMA Band V Idle(Middle CH) + WLAN(2.4G) Idle + GNSS RX + Adapter + sample 2</p>
<b>Remark:</b>	
<ol style="list-style-type: none"><li>1. The worst case of AC is mode 7; only the test data of this mode is reported.</li><li>2. The worst case of RE is mode 1; only the test data of this mode is reported.</li><li>3. Pre-scanned Low/Middle/High channel, the worst channel was recorded in this report.</li></ol>	



## 2.2. Connection Diagram of Test System

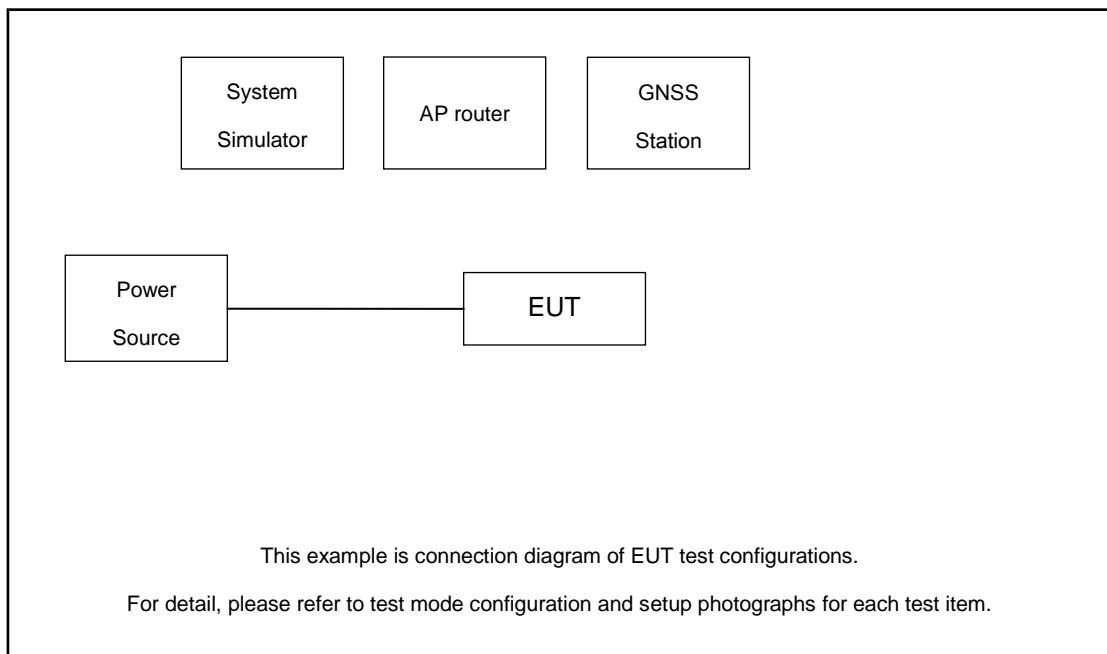

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

## 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	GNSS Station	RACELOGIC	RLLS03-2P	Fcc DoC	N/A	Unshielded, 1.8m
3.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
4.	Adapter	N/A	N/A	N/A	Unshielded, 1.2m	N/A
5.	Test Jig	N/A	N/A	N/A	N/A	N/A



## 2.4. EUT Operation Test Setup

The EUT was in WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

###### <Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup

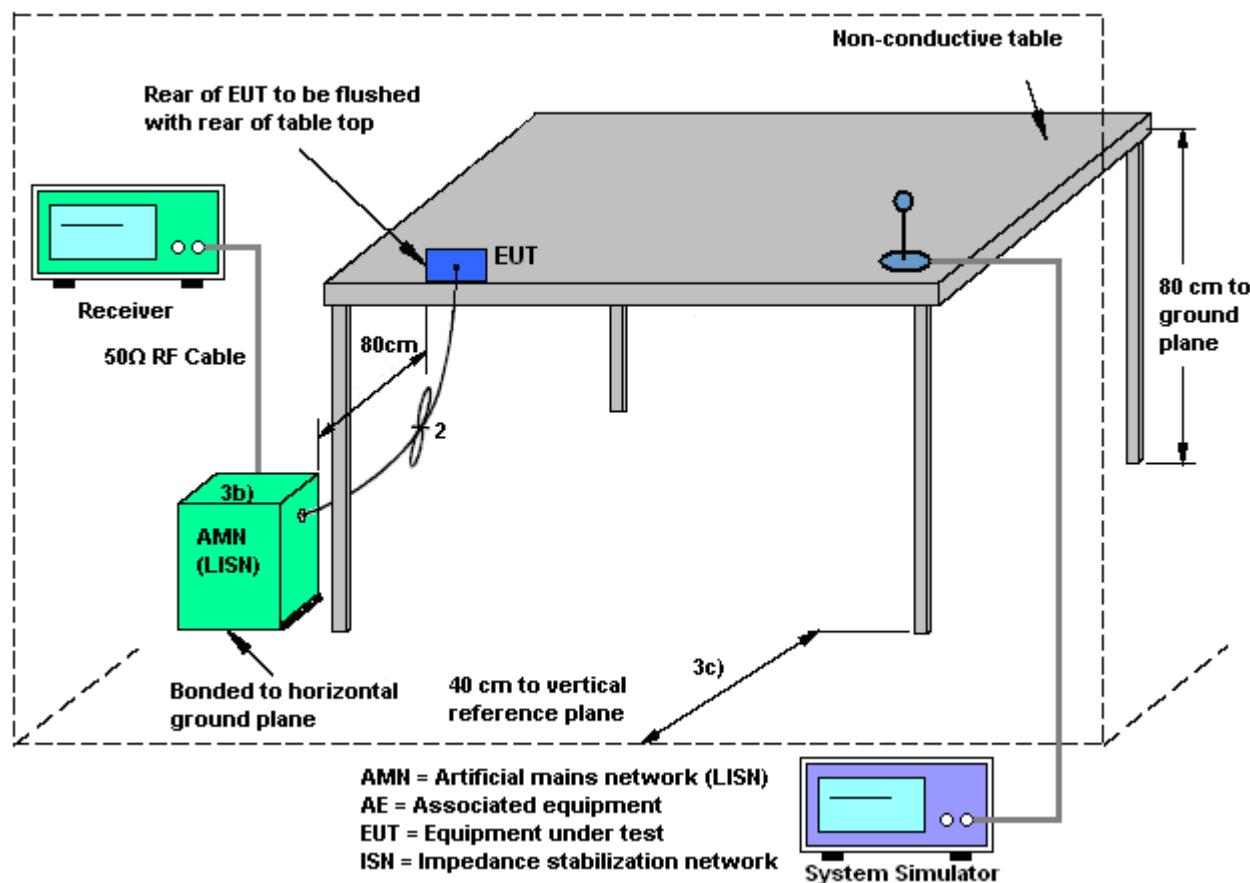



## 3.1.5 Test Result of AC Conducted Emission

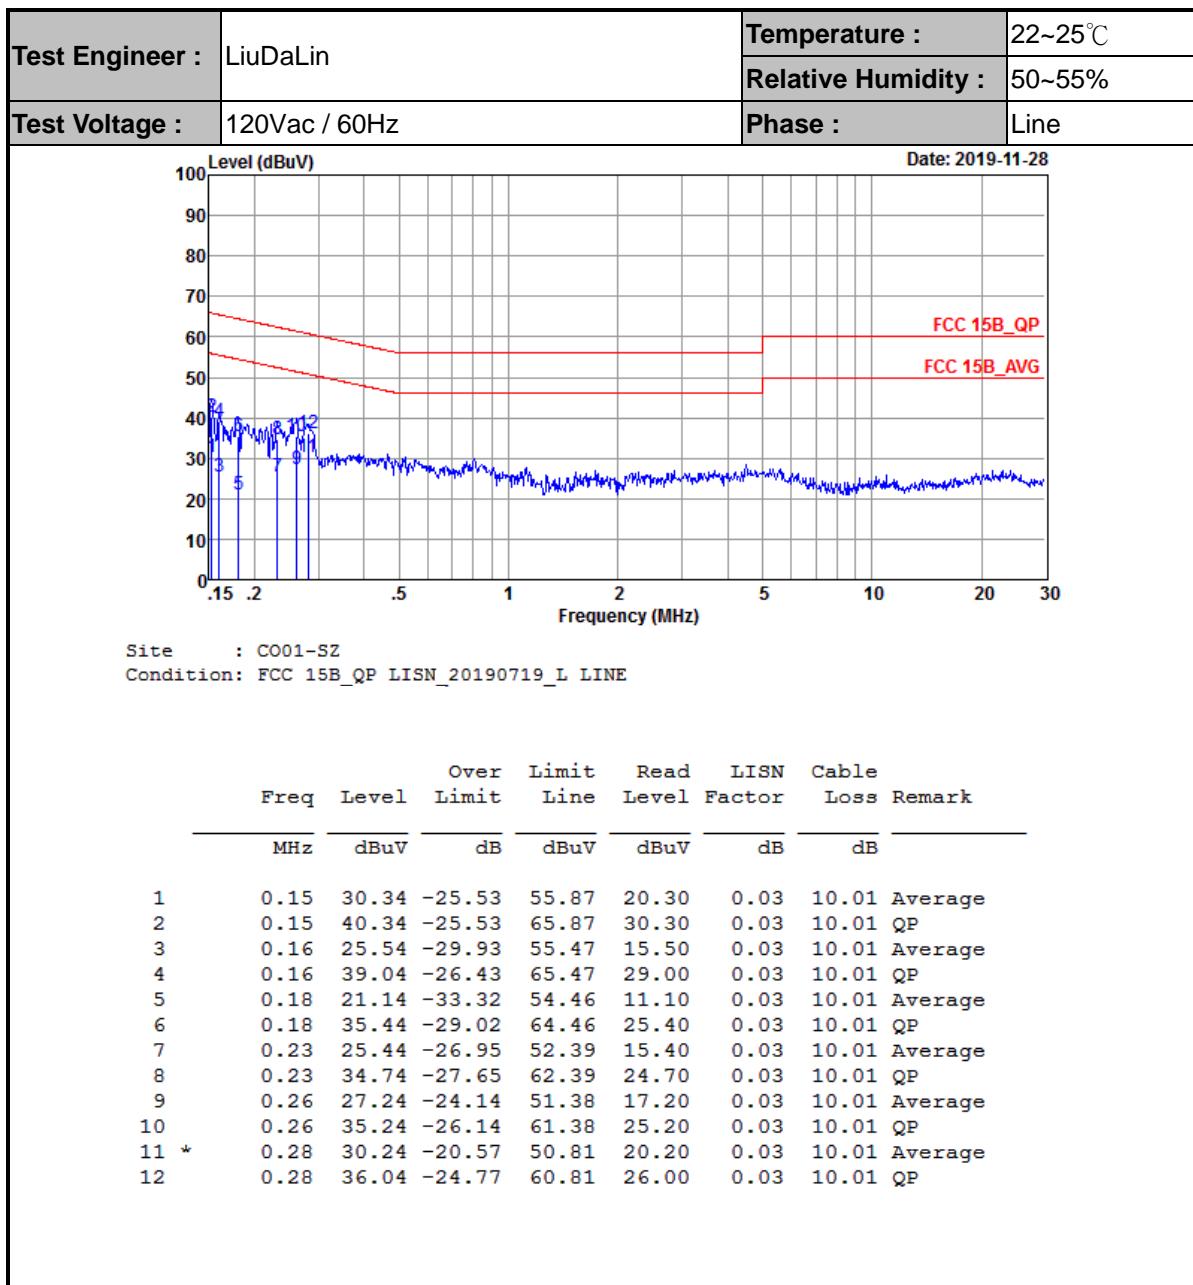

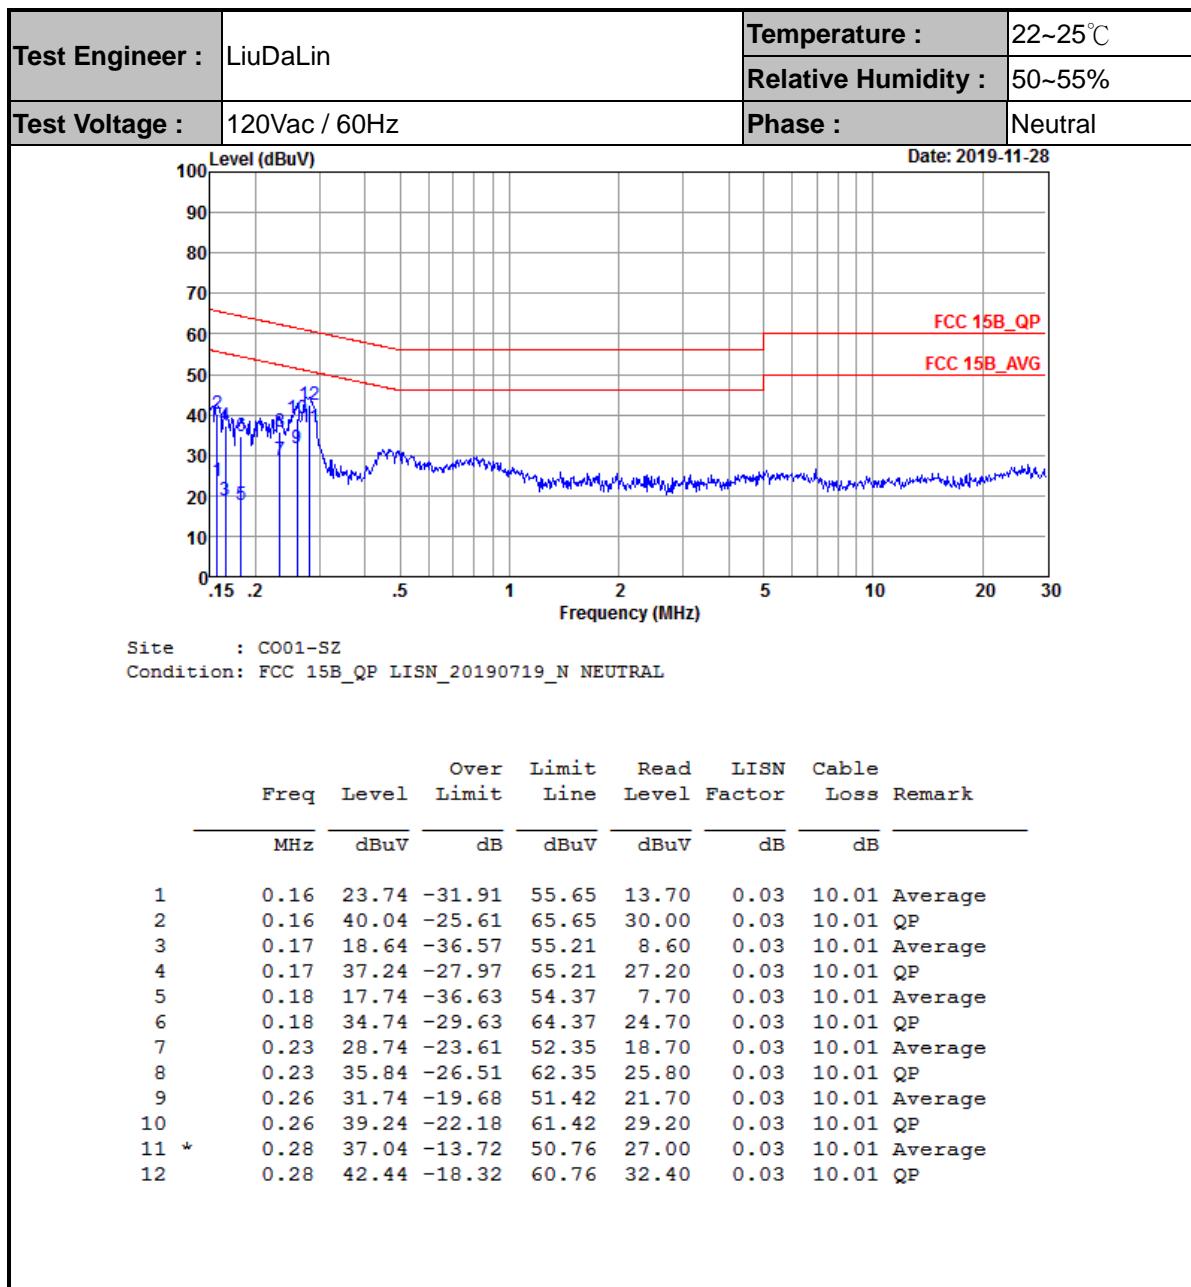

## Note:

1. Level(dB $\mu$ V) = Read Level(dB $\mu$ V) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dB $\mu$ V) - Limit Line(dB $\mu$ V)



## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

#### <Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

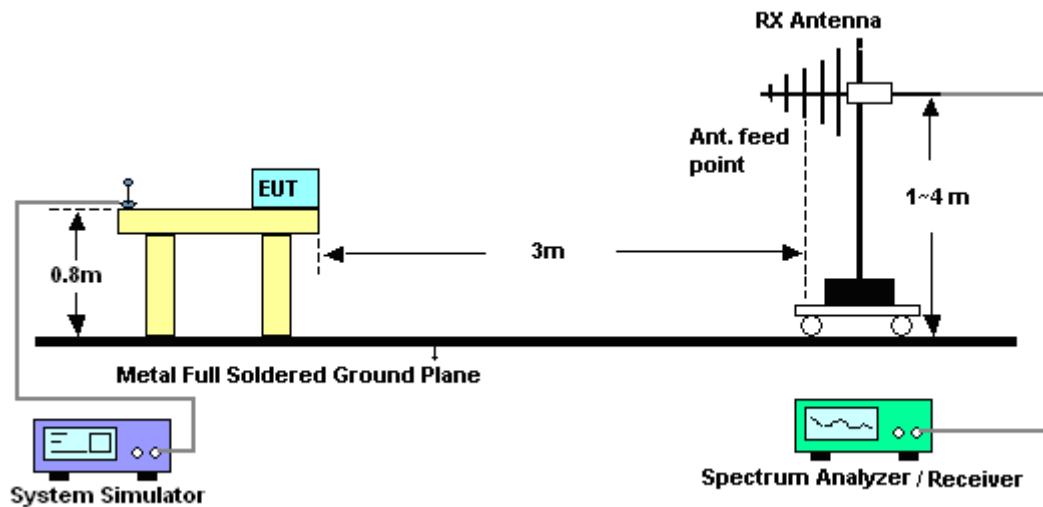


For radiated emissions above 1GHz

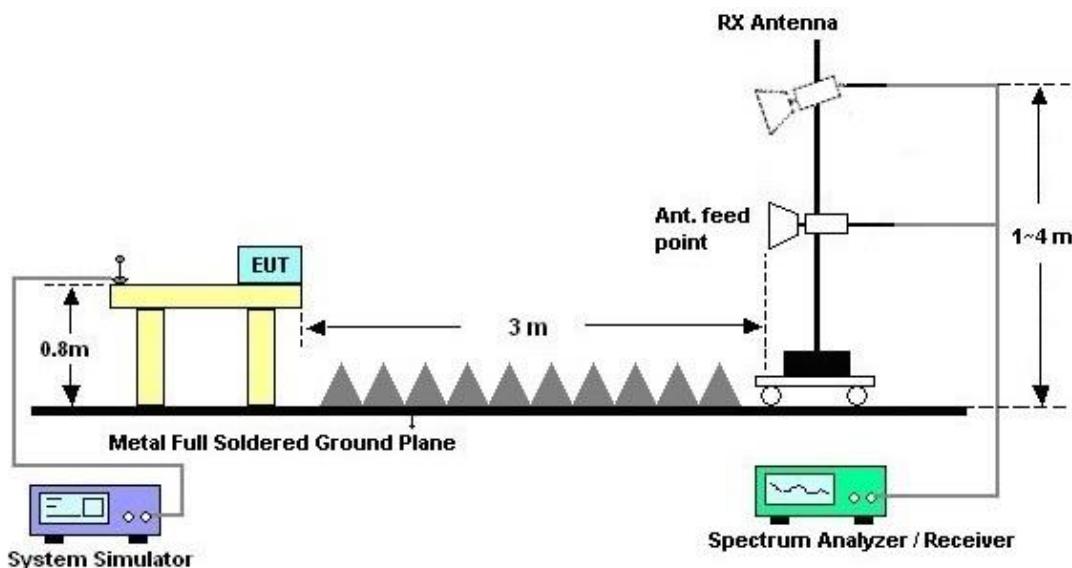



## 3.2.5. Test Result of Radiated Emission

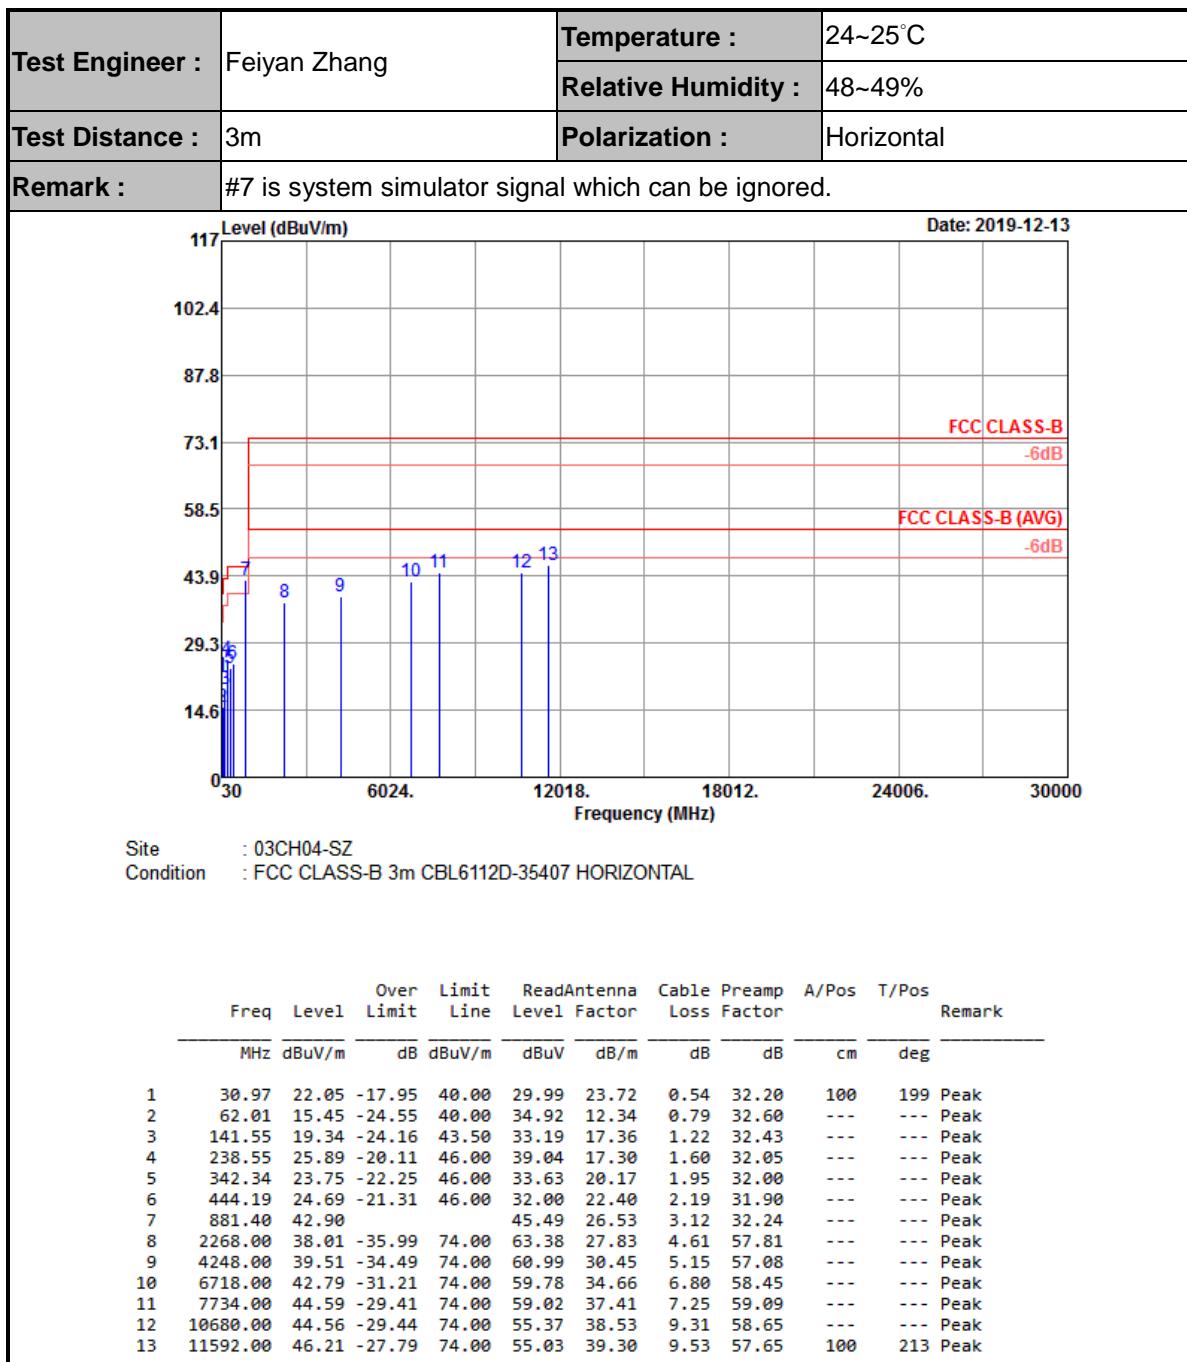



<b>Test Engineer :</b>	Feiyan Zhang	<b>Temperature :</b>		24~25°C																																																																																																																																																																														
		<b>Relative Humidity :</b>		48~49%																																																																																																																																																																														
<b>Test Distance :</b>	3m	<b>Polarization :</b>		Vertical																																																																																																																																																																														
<b>Remark :</b>	#7 is system simulator signal which can be ignored.																																																																																																																																																																																	
Site	: 03CH04-SZ																																																																																																																																																																																	
Condition	: FCC CLASS-B 3m CBL6112D-35407 VERTICAL																																																																																																																																																																																	
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>24.17</td> <td>-15.83</td> <td>40.00</td> <td>32.04</td> <td>24.20</td> <td>0.53</td> <td>32.60</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>59.10</td> <td>31.48</td> <td>-8.52</td> <td>40.00</td> <td>50.81</td> <td>12.50</td> <td>0.77</td> <td>32.60</td> <td>100</td> <td>124 Peak</td> </tr> <tr> <td>3</td> <td>156.10</td> <td>25.70</td> <td>-17.80</td> <td>43.50</td> <td>40.52</td> <td>16.29</td> <td>1.27</td> <td>32.38</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>4</td> <td>240.49</td> <td>30.49</td> <td>-15.51</td> <td>46.00</td> <td>43.42</td> <td>17.50</td> <td>1.61</td> <td>32.04</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>5</td> <td>376.29</td> <td>24.76</td> <td>-21.24</td> <td>46.00</td> <td>33.65</td> <td>21.02</td> <td>2.04</td> <td>31.95</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>6</td> <td>459.71</td> <td>24.49</td> <td>-21.51</td> <td>46.00</td> <td>31.54</td> <td>22.67</td> <td>2.22</td> <td>31.94</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>7</td> <td>881.40</td> <td>43.18</td> <td>---</td> <td>45.77</td> <td>26.53</td> <td>3.12</td> <td>32.24</td> <td>---</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>8</td> <td>2852.00</td> <td>38.97</td> <td>-35.03</td> <td>74.00</td> <td>63.12</td> <td>28.23</td> <td>5.03</td> <td>57.41</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>9</td> <td>4672.00</td> <td>39.76</td> <td>-34.24</td> <td>74.00</td> <td>60.35</td> <td>31.40</td> <td>5.38</td> <td>57.37</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>10</td> <td>6912.00</td> <td>43.35</td> <td>-30.65</td> <td>74.00</td> <td>59.56</td> <td>35.39</td> <td>7.10</td> <td>58.70</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>11</td> <td>7232.00</td> <td>44.46</td> <td>-29.54</td> <td>74.00</td> <td>59.41</td> <td>36.62</td> <td>7.32</td> <td>58.89</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>12</td> <td>9468.00</td> <td>44.80</td> <td>-29.20</td> <td>74.00</td> <td>56.54</td> <td>38.80</td> <td>8.65</td> <td>59.19</td> <td>100</td> <td>25 Peak</td> </tr> <tr> <td>13</td> <td>12330.00</td> <td>44.57</td> <td>-29.43</td> <td>74.00</td> <td>52.80</td> <td>39.49</td> <td>9.71</td> <td>57.43</td> <td>---</td> <td>--- Peak</td> </tr> </tbody> </table>					Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Limit	Line	Level	Factor	Loss	Factor	cm	deg		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB				1	30.00	24.17	-15.83	40.00	32.04	24.20	0.53	32.60	---	--- Peak	2	59.10	31.48	-8.52	40.00	50.81	12.50	0.77	32.60	100	124 Peak	3	156.10	25.70	-17.80	43.50	40.52	16.29	1.27	32.38	---	--- Peak	4	240.49	30.49	-15.51	46.00	43.42	17.50	1.61	32.04	---	--- Peak	5	376.29	24.76	-21.24	46.00	33.65	21.02	2.04	31.95	---	--- Peak	6	459.71	24.49	-21.51	46.00	31.54	22.67	2.22	31.94	---	--- Peak	7	881.40	43.18	---	45.77	26.53	3.12	32.24	---	---	--- Peak	8	2852.00	38.97	-35.03	74.00	63.12	28.23	5.03	57.41	---	--- Peak	9	4672.00	39.76	-34.24	74.00	60.35	31.40	5.38	57.37	---	--- Peak	10	6912.00	43.35	-30.65	74.00	59.56	35.39	7.10	58.70	---	--- Peak	11	7232.00	44.46	-29.54	74.00	59.41	36.62	7.32	58.89	---	--- Peak	12	9468.00	44.80	-29.20	74.00	56.54	38.80	8.65	59.19	100	25 Peak	13	12330.00	44.57	-29.43	74.00	52.80	39.49	9.71	57.43	---	--- Peak
Freq	Level	Over	Limit	Read			Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																						
		Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																																																																																																																											
1	30.00	24.17	-15.83	40.00	32.04	24.20	0.53	32.60	---	--- Peak																																																																																																																																																																								
2	59.10	31.48	-8.52	40.00	50.81	12.50	0.77	32.60	100	124 Peak																																																																																																																																																																								
3	156.10	25.70	-17.80	43.50	40.52	16.29	1.27	32.38	---	--- Peak																																																																																																																																																																								
4	240.49	30.49	-15.51	46.00	43.42	17.50	1.61	32.04	---	--- Peak																																																																																																																																																																								
5	376.29	24.76	-21.24	46.00	33.65	21.02	2.04	31.95	---	--- Peak																																																																																																																																																																								
6	459.71	24.49	-21.51	46.00	31.54	22.67	2.22	31.94	---	--- Peak																																																																																																																																																																								
7	881.40	43.18	---	45.77	26.53	3.12	32.24	---	---	--- Peak																																																																																																																																																																								
8	2852.00	38.97	-35.03	74.00	63.12	28.23	5.03	57.41	---	--- Peak																																																																																																																																																																								
9	4672.00	39.76	-34.24	74.00	60.35	31.40	5.38	57.37	---	--- Peak																																																																																																																																																																								
10	6912.00	43.35	-30.65	74.00	59.56	35.39	7.10	58.70	---	--- Peak																																																																																																																																																																								
11	7232.00	44.46	-29.54	74.00	59.41	36.62	7.32	58.89	---	--- Peak																																																																																																																																																																								
12	9468.00	44.80	-29.20	74.00	56.54	38.80	8.65	59.19	100	25 Peak																																																																																																																																																																								
13	12330.00	44.57	-29.43	74.00	52.80	39.49	9.71	57.43	---	--- Peak																																																																																																																																																																								

Note:

1. Level(dB $\mu$ V/m) = Read Level(dB $\mu$ V) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
2. Over Limit(dB) = Level(dB $\mu$ V/m) – Limit Line(dB $\mu$ V/m)



## 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2018	Nov. 28, 2019	Dec. 25, 2019	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Oct. 17, 2019	Nov. 28, 2019	Oct. 16, 2020	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Dec. 27, 2018	Nov. 28, 2019	Dec. 26, 2019	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 23, 2019	Nov. 28, 2019	Jul. 22, 2020	Conduction (CO01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Apr. 18, 2019	Dec. 13, 2019	Apr. 17, 2020	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Apr. 18, 2019	Dec. 13, 2019	Apr. 17, 2020	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Aug. 27, 2019	Dec. 13, 2019	Aug. 26, 2020	Radiation (03CH04-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1474	1GHz~18GHz	Apr. 01, 2019	Dec. 13, 2019	Mar. 31, 2020	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Apr. 19, 2019	Dec. 13, 2019	Apr. 18, 2020	Radiation (03CH04-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2019	Dec. 13, 2019	Oct. 17, 2020	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2019	Dec. 13, 2019	Oct. 17, 2020	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 22, 2019	Dec. 13, 2019	Jul. 21, 2020	Radiation (03CH04-SZ)
AC Power Source	Chroma	61601	N/A	N/A	NCR	Dec. 13, 2019	NCR	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 13, 2019	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 13, 2019	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	2.6dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	4.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	4.6dB
---	-------