



EMC TEST REPORT

Report No.: 20240717G12724X-W1

Product Name: commercial LCD displays, multimedia LCD displays, LCD displays, touch displays, commercial videowall displays, double-sided digital posters, double-sided window posters, ultra-high brightness suspended double-sided displays, interactive LCD displays, double-sided multimedia LCD displays, commercial LCD displays, multimedia LCD displays, LCD displays, digital signage displays, indoor signage, indoor signage, semi-outdoor signage

Main Model No. : D55R1

Series Model No. : UDS55HD10, ASLU55HD10, ASHU55HD10, D55*****, UDS55*****, ASLU55*****, ASHU55*****, D*****, UDS*****, TC55*****, M55*****, L55*****, OH*****,OM*****("*" = 0~9 or A~Z or blank)

FCC ID: 2AVB8-0010010038877

Applicant: Shanghai Goodview Electronics Technology Co., Ltd.

Address: Room 118, 1st Floor, No. 2, Lane 3999, Xiupu Road, Pudong District, Shanghai

Received Date: 2024.06.21

Dates of Testing: 2024.06.26~2024.07.04

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

Tel: 86-755-26627338 **E-Mail:** manager@ccic-set.com

This test report consists of **19** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

commercial LCD displays, multimedia LCD displays, LCD displays, touch displays, commercial videowall displays, double-sided digital posters, double-sided window posters, ultra-high brightness suspended double-sided displays, interactive LCD displays, double-sided multimedia LCD displays, commercial LCD displays, multimedia LCD displays, LCD displays, digital signage displays, indoor signage, indoor signage, semi-outdoor signage

Product Name double-sided displays, interactive LCD displays, double-sided multimedia LCD displays, commercial LCD displays, multimedia LCD displays, LCD displays, digital signage displays, indoor signage, indoor signage, semi-outdoor signage

Model No. D55R1

Trade name Goodview

Applicant..... Shanghai Goodview Electronics Technology Co., Ltd.

Applicant Address Room 118, 1st Floor, No. 2, Lane 3999, Xiupu Road, Pudong District, Shanghai

Manufacturer..... Shanghai Goodview Electronics Technology Co., Ltd.

Manufacturer Address Room 118, 1st Floor, No. 2, Lane 3999, Xiupu Road, Pudong District, Shanghai

Test Standards 47 CFR Part 15 Subpart B

Test Result..... PASS

Tested by Sun Jiaohui
Sun Jiaohui, Test Engineer 2024.08.27

Reviewed by Chris You
Chris You, Senior Engineer 2024.08.27

Approved by wang shijie
Wang Shijie, Manager 2024.08.27



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- 2.3 Test Setup and Equipments List8**
- 2.3.1 Conducted Emission8
- 2.3.2 Radiated Emission9
- 3. 47 CFR PART 15B REQUIREMENTS11**
- 3.1 Conducted Emission11**
- 3.1.1 Requirement11
- 3.1.2 Test Description11
- 3.1.3 Test Result11
- 3.2 Radiated Emission14**
- 3.2.1 Requirement14
- 3.2.2 Test Description15
- 3.2.3 Test Result15

Change History		
Issue	Date	Reason for change
1.0	2024.08.27	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name	commercial LCD displays, multimedia LCD displays, LCD displays, touch displays, commercial videowall displays, double-sided digital posters, double-sided window posters, ultra-high brightness suspended double-sided displays, interactive LCD displays, double-sided multimedia LCD displays, commercial LCD displays, multimedia LCD displays, LCD displays, digital signage displays, indoor signage, indoor signage, semi-outdoor signage
Trade Name.....	Goodview
Brand Name.....	Goodview
Power supply.....	AC 100 – 240V, 50/60Hz, 3A

Note1: The EUT is a commercial LCD displays, multimedia LCD displays, LCD displays, touch displays, commercial videowall displays, double-sided digital posters, double-sided window posters, ultra-high brightness suspended double-sided displays, interactive LCD displays, double-sided multimedia LCD displays, commercial LCD displays, multimedia LCD displays, LCD displays, digital signage displays, indoor signage, indoor signage, semi-outdoor signage;

Note2: For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until Jun 30, 2025.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Jun 30, 2025.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.2 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 5.8 dB (k=2)
Uncertainty of Radiated Emission: (1~6GHz)	Uc = 5.1 dB (k=2)
Uncertainty of Radiated Emission: (6~18GHz)	Uc = 5.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	Lenovo	ThinkPad E14	/	/
Mouse	DELL	MOC5UO	/	/
Keyboard	Logitech	K120	/	/

Support Cable:

Description	Shield Type	Ferrite Core	Length
AC Power Cable	Un- shielding	/	1.2m

2.2 Test Mode

Note 1: The EUT have the following typical setups during the test:

Setup1: 2.4G WIFI + Notebook (HDMI in) + charger;

Setup2: 5G WIFI + Notebook (HDMI in) + charger;

Setup3: Bluetooth + Notebook (HDMI in) + charger;

Setup4: EUT + PC + LAN Port Traffic + charger;


Note 2: All models are different only in appearance color, software version, and customer code, which have no impact on RF, safety and EMC performance. Among all models in this application, the screen size is 55 inches, and the external structure, internal structure, used circuit board and devices are all the same, which does not affect the RF, safety and EMC performance of the product.

Note 3: Only the worst test patterns are recorded in the report.

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

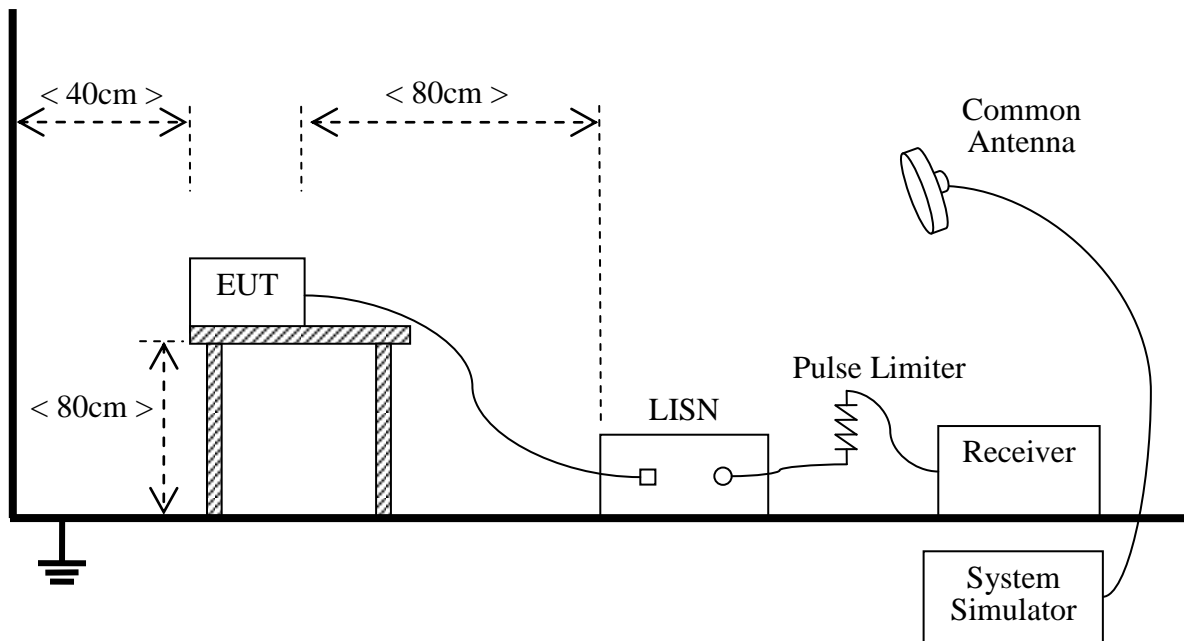

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	ROHDE&SCHWARZ	ESR3	A181103297	2024.03.20	2025.03.19
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2024.05.23	2025.05.22
Cable	MATCHING PAD	W7	/	2023.08.02	2024.08.02


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

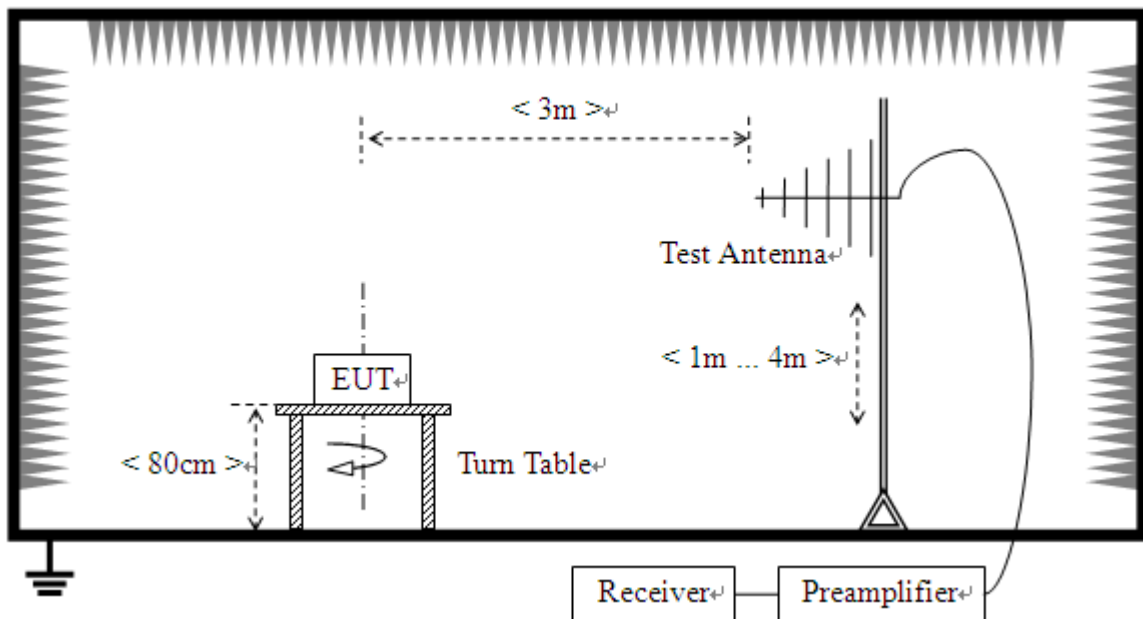

- 2) For radiated emissions above 1GHz

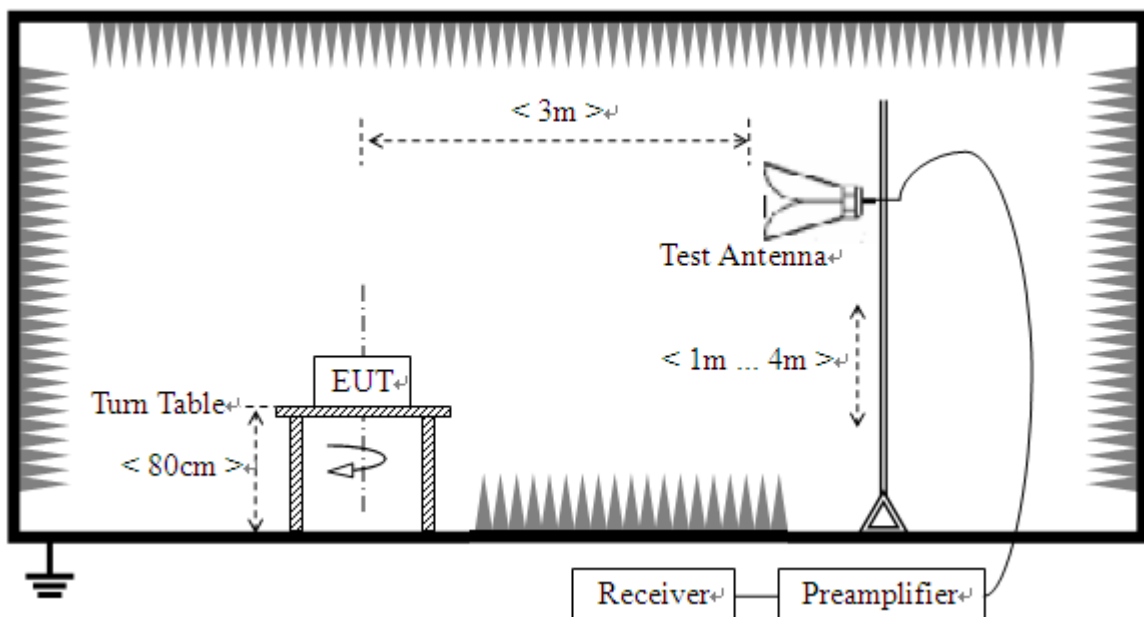

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2024.02.29	2025.02.28
Broadband Ant.	ETC	MCTD2786	A150402239	2024.06.01	2025.05.31
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2024.02.28	2027.02.27
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2024.05.24	2025.05.23
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2024.06.08	2027.06.07
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2024.04.11	2025.04.10



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.


Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 230V AC, 50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.



Test voltage and frequency (230V AC, 60Hz)

A. Mains terminal disturbance voltage, L phase, Setup 1

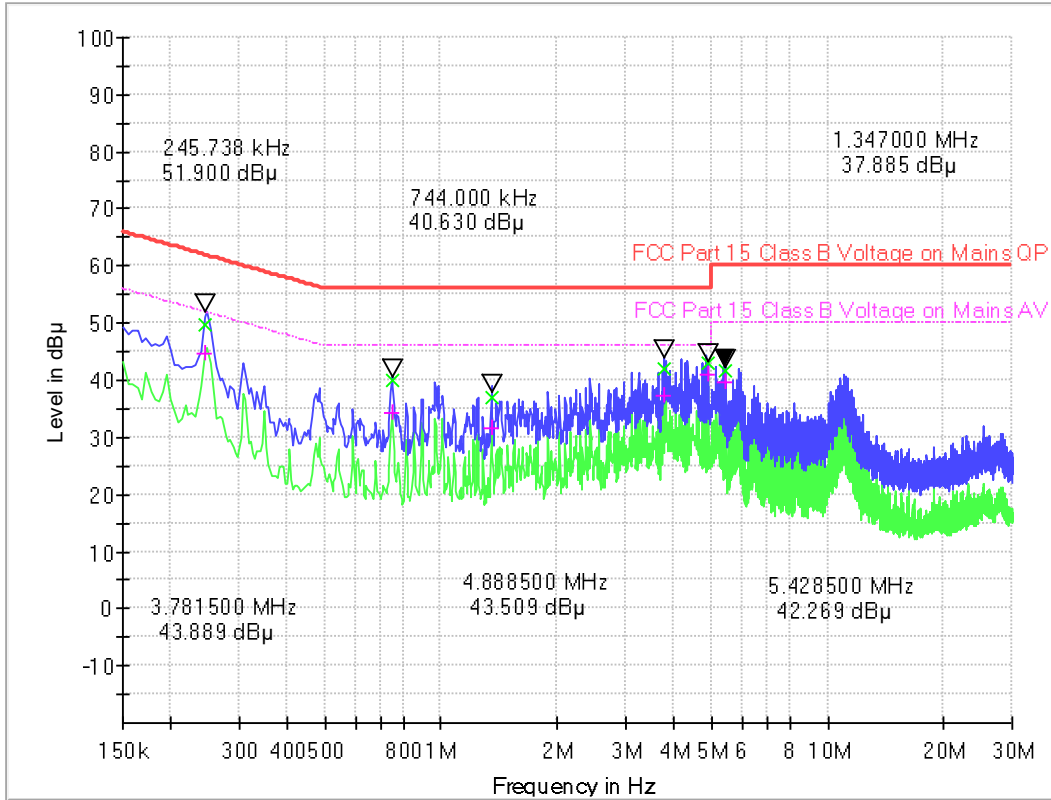


(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.244500	49.66	44.54	0.1	10.1	12.28	61.9	7.40	51.9
0.744000	39.87	34.19	0.1	10.1	16.13	56.0	11.81	46.0
1.347000	36.98	31.61	0.2	10.2	19.02	56.0	14.39	46.0
3.781500	41.91	37.28	0.5	10.5	14.09	56.0	8.72	46.0
4.888500	42.95	41.12	0.5	10.5	13.05	56.0	4.88	46.0
5.428500	41.54	39.81	0.5	10.5	18.46	60.0	10.19	50.0



B. Mains terminal disturbance voltage, N phase, Setup 1

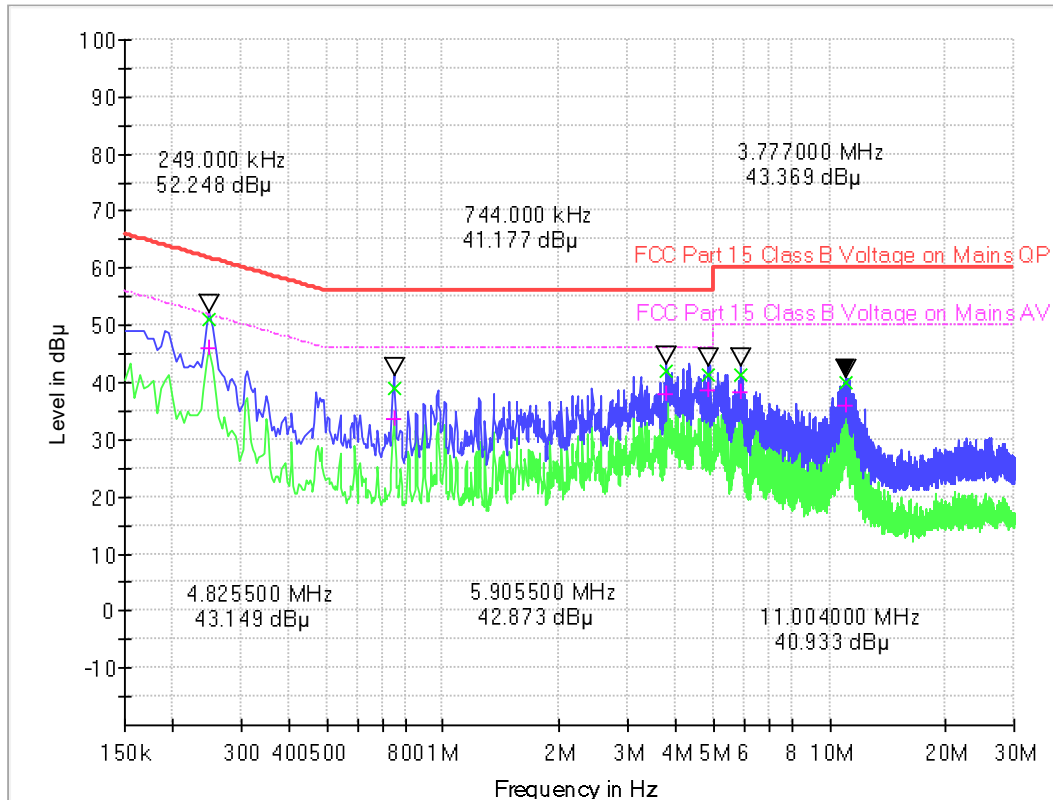

(Plot B: N Phase)

Frequency (MHz)	QuasiPea k	CAverage (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.249000	51.16	45.97	0.1	10.1	10.63	61.8	5.82	51.8
0.744000	39.11	33.53	0.1	10.1	16.89	56.0	12.47	46.0
3.777000	41.98	37.83	0.5	10.5	14.02	56.0	8.17	46.0
4.825500	41.25	38.66	0.5	10.5	14.75	56.0	7.34	46.0
5.905500	41.22	38.35	0.5	10.5	18.78	60.0	11.65	50.0
11.004000	39.90	35.98	0.5	10.5	20.10	60.0	14.02	50.0



3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G: QP detector RBW 120kHz ,VBW 300kHz.

For Above 1G: PK detector RBW 1MHz, VBW 3MHz for PK value; AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$



3.2.2 Test Description

See section 2.3.2 of this report.

3.2.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.



A. Radiation disturbances, antenna polarization: Vertical, Setup1

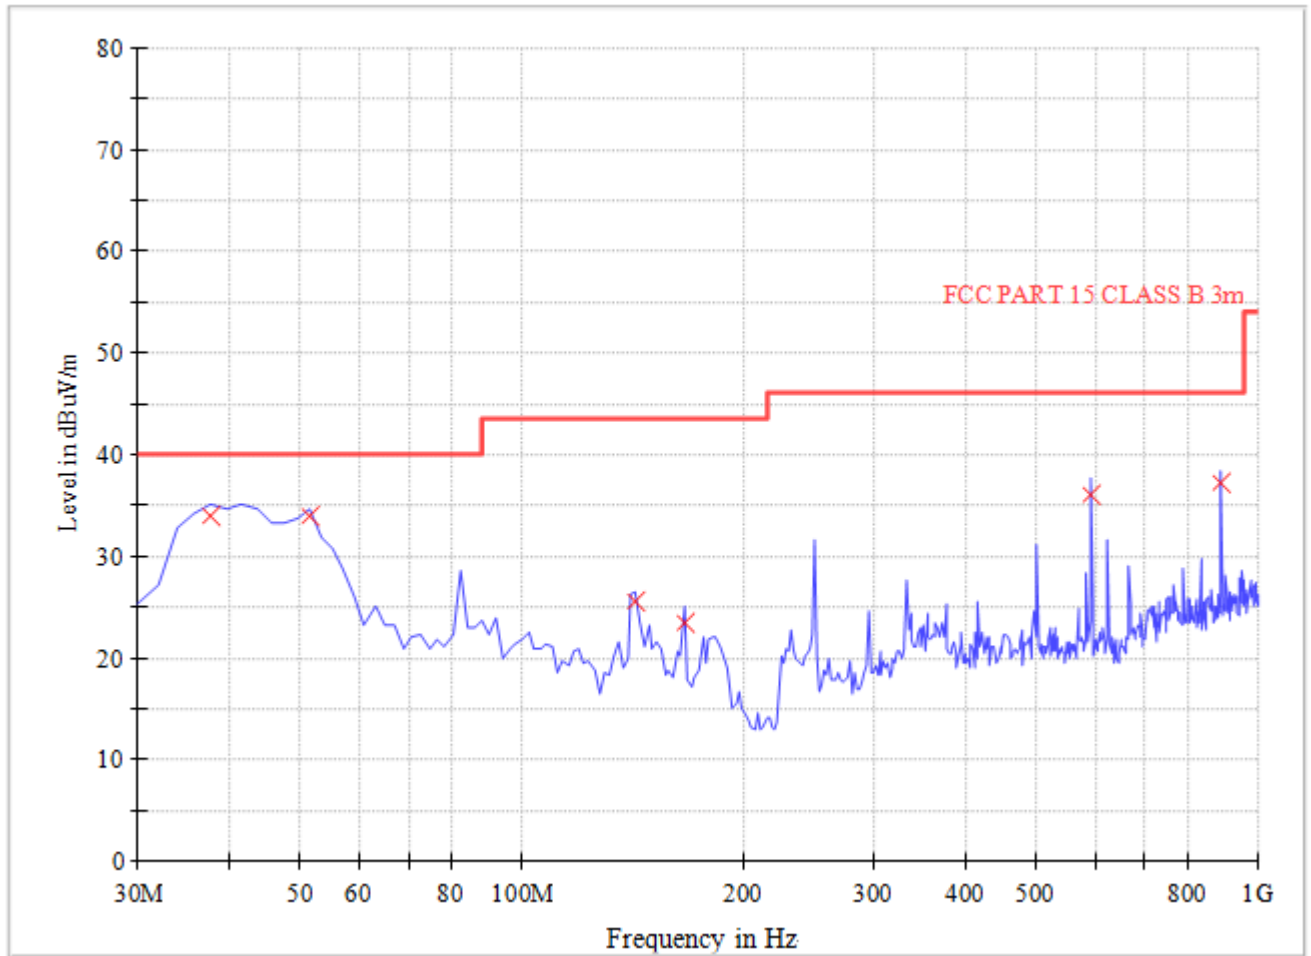


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
37.76	33.83	120.000	106	40.0	6.17	Vertical	0.5	14.1	Pass
51.40	33.82	120.000	103	40.0	6.18	Vertical	0.5	7.9	Pass
142.76	25.55	120.000	107	43.5	17.95	Vertical	1.0	11.5	Pass
166.08	23.35	120.000	102	43.5	20.15	Vertical	1.2	10.9	Pass
593.72	36.08	120.000	105	46.0	9.92	Vertical	1.5	18.4	Pass
891.16	37.19	120.000	106	46.0	8.81	Vertical	2.1	22.0	Pass



B. Radiation disturbances, antenna polarization: Horizontal, Setup1

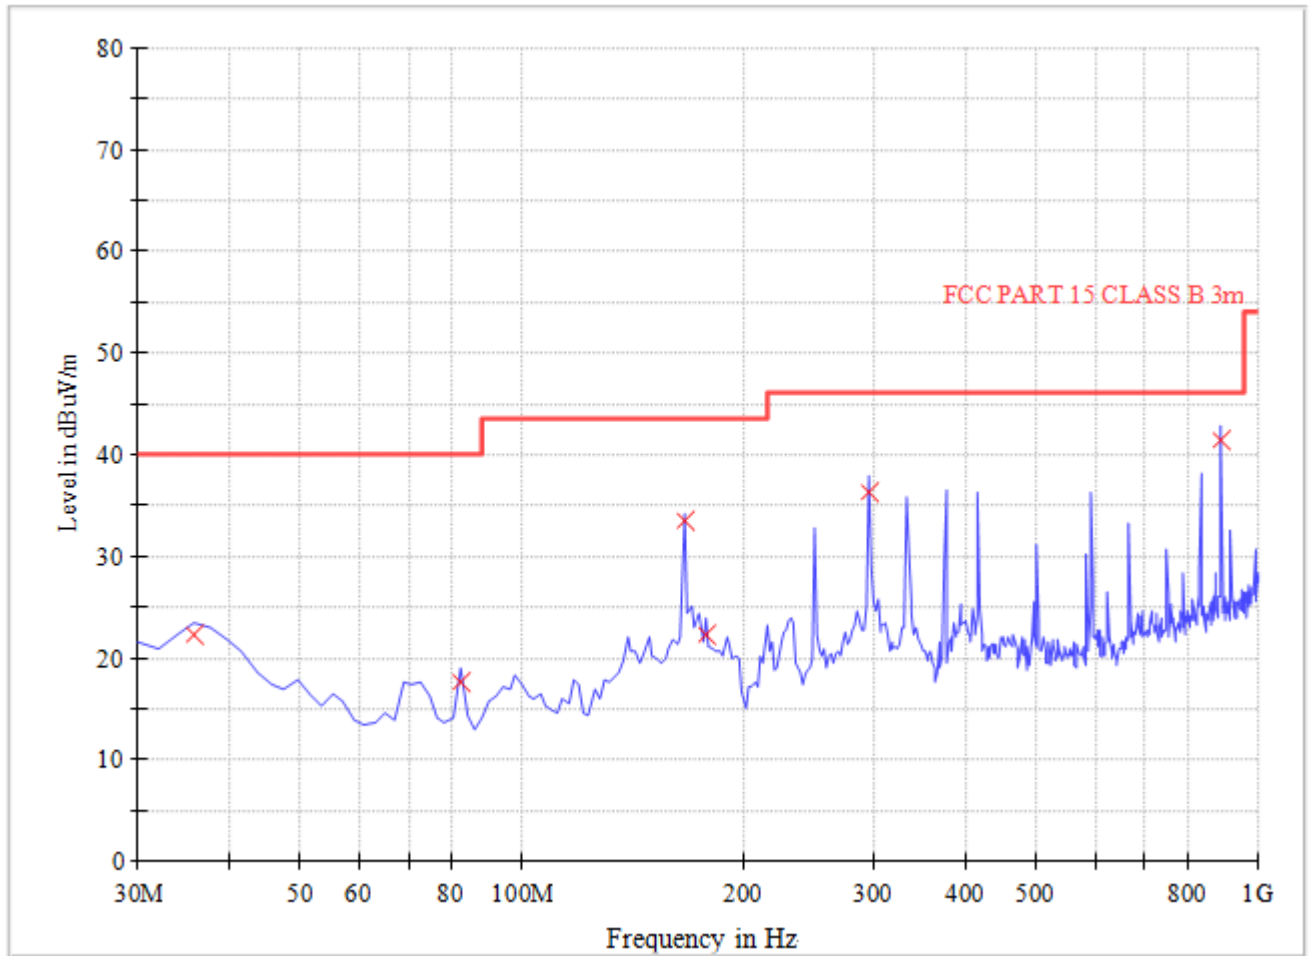


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
35.84	22.27	120.000	106	40.0	17.73	Horizontal	0.5	16.0	Pass
82.48	17.60	120.000	102	40.0	22.40	Horizontal	0.8	8.0	Pass
166.08	33.46	120.000	105	43.5	10.04	Horizontal	1.2	10.9	Pass
177.72	22.31	120.000	108	43.5	21.19	Horizontal	1.2	10.2	Pass
296.32	36.31	120.000	101	46.0	9.69	Horizontal	1.3	14.2	Pass
891.16	41.29	120.000	104	46.0	4.71	Horizontal	2.1	22.0	Pass



A. Radiation disturbances, antenna polarization: Horizontal, Setup1

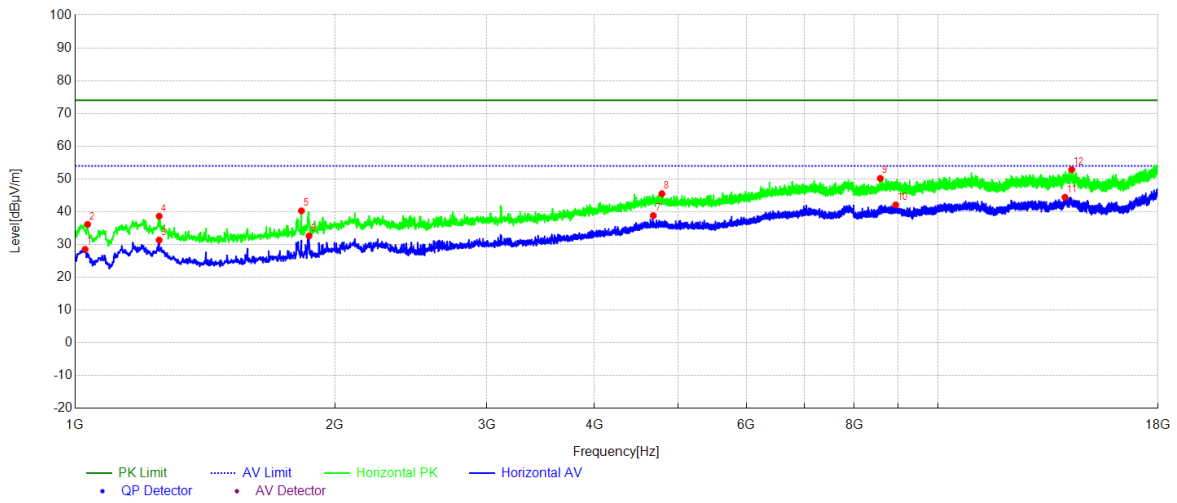


(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin[dB µV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1027.20	28.53	-15.34	54.00	25.47	AV	107	234	Horizontal
2	1034.00	36.15	-15.33	74.00	37.85	PK	103	303	Horizontal
3	1251.63	31.36	-14.88	54.00	22.64	AV	104	284	Horizontal
4	1251.63	38.65	-14.88	74.00	35.35	PK	109	301	Horizontal
5	1829.68	40.29	-12.60	74.00	33.71	PK	102	159	Horizontal
6	1867.09	32.64	-12.43	54.00	21.36	AV	106	233	Horizontal
7	4679.17	38.83	-1.18	54.00	15.17	AV	108	182	Horizontal
8	4787.98	45.50	-0.86	74.00	28.50	PK	101	157	Horizontal
9	8575.96	50.18	4.51	74.00	23.82	PK	106	343	Horizontal
10	8936.39	42.09	4.48	54.00	11.91	AV	104	174	Horizontal
11	14038.60	44.40	9.39	54.00	9.60	AV	102	202	Horizontal
12	14295.33	52.87	9.87	74.00	21.13	PK	107	277	Horizontal



B. Radiation disturbances, antenna polarization: Vertical, Setup1

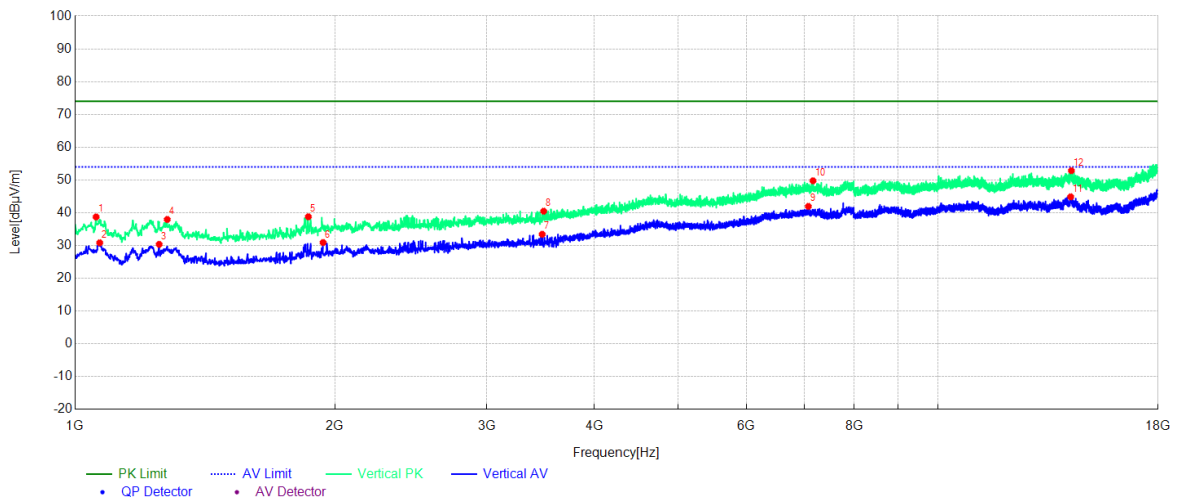

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin[dB µV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1057.81	38.72	-15.29	74.00	35.28	PK	103	215	Vertical
2	1068.01	30.84	-15.28	54.00	23.16	AV	106	102	Vertical
3	1251.63	30.37	-14.88	54.00	23.63	AV	104	117	Vertical
4	1278.83	37.96	-14.80	74.00	36.04	PK	108	356	Vertical
5	1863.69	38.78	-12.45	74.00	35.22	PK	102	244	Vertical
6	1938.49	30.92	-12.13	54.00	23.08	AV	104	352	Vertical
7	3478.85	33.44	-7.34	54.00	20.56	AV	103	153	Vertical
8	3492.45	40.48	-7.32	74.00	33.52	PK	109	88	Vertical
9	7078.11	41.95	3.41	54.00	12.05	AV	105	244	Vertical
10	7166.52	49.75	3.47	74.00	24.25	PK	101	186	Vertical
11	14254.53	44.86	9.68	54.00	9.14	AV	104	202	Vertical
12	14281.73	52.84	9.81	74.00	21.16	PK	103	145	Vertical

-----End of Report-----