

Test Report

Applicant : Dongguan Xintai instrument Co.,Ltd.
Address : Room 201, Building 16, # 3, Yongtai Road, Tangxia Town,
Dongguan City,Guangdong Province,China,523710
Product Name : Thermal Imagers
Brand Mark : N/A
Model : HT A201
Series model : HT A202, HT A203
FCC ID : 2AVBO-A201
Report Number : BLA-EMC-202412-A6101
Date of Receipt : Dec. 19, 2024
Date of Test : Dec. 19, 2024 to Jan. 08, 2025
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Compiled by:

charlie

Review by:

Sueels

Approved by:

Jing Zheng

Issued Date:

Jan. 20, 2025



BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

Address: Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	5
1.1 General information	5
1.2 General description of EUT	5
2 Test summary	7
3 Test Configuration	8
3.1 Test mode	8
3.2 Operation Frequency each of channel	8
3.3 Test channel	9
3.4 Auxiliary equipment	9
3.5 Test environment	9
4 Laboratory information	10
4.1 Laboratory and accreditations	10
4.2 Measurement uncertainty	10
5 Test equipment	11
6 Test result	14
6.1 Antenna requirement	14
6.2 Conducted emissions at AC power line (150 kHz-30 MHz)	15
6.3 Conducted peak output Power	19
6.4 Minimum 6dB bandwidth	20
6.5 Power spectrum density	21
6.6 Conducted Band Edges Measurement	22
6.7 Conducted spurious emissions	23
6.8 Radiated spurious emissions	24
6.9 Radiated emissions which fall in the restricted bands	35
7 Appendix A	54
7.1 Maximum Conducted Output Power	54
7.2 -6dB Bandwidth	55
7.3 Occupied Channel Bandwidth	62
7.4 Maximum Power Spectral Density Level	69
7.5 Band Edge	76

7.6 Conducted RF Spurious Emission	85
Appendix B: photographs of test setup	98
Appendix C: photographs of EUT	100

BlueAsia

Revise Record

Version No.	Date	Description
01	Jan. 20, 2025	Original

BlueAsia

1 General information

1.1 General information

Applicant	Dongguan Xintai instrument Co.,Ltd.
Address	Room 201, Building 16, # 3, Yongtai Road, Tangxia Town, Dongguan City,Guangdong Province,China,523710
Manufacturer	Dongguan Xintai instrument Co.,Ltd.
Address	Room 201, Building 16, # 3, Yongtai Road, Tangxia Town, Dongguan City,Guangdong Province,China,523710
Factory	Dongguan Xintai instrument Co.,Ltd.
Address	Room 201, Building 16, # 3, Yongtai Road, Tangxia Town, Dongguan City,Guangdong Province,China,523710

1.2 General description of EUT

Product Name	Thermal Imagers
Model No.	HT A201
Series model	HT A202, HT A203
Differences of Series model	Their electrical circuit design layout, components used and internal wiring are identical, only the model name are different.
Operation Frequency:	2412MHz-2462MHz
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS(CCK/QPSK/BPSK) 802.11g: OFDM(BPSK/QPSK/16QAM/64QAM) 802.11n (HT20 and HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	5MHz
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7
Antenna Type:	PCB antenna
Antenna Gain:	3dBi(Provided by customer)
Power supply:	Battery DC 3.70V
Hardware Version	N/A

Software Version	N/A
<i>Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.</i>	

BlueAsia

2 Test summary

No.	Test item	FCC standard	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2013 Clause 6.2	Pass
3	Conducted Peak Output Power	§15.247 (b)(3)	ANSI C63.10-2013, Clause 11.9.1.3	Pass
4	Minimum 6dB Bandwidth	§15.247 (a)(2)	ANSI C63.10-2013, Clause 11.8.1	Pass
5	Power Spectrum Density	§15.247 (e)	ANSI C63.10-2013, Clause 11.10.2	Pass
6	Conducted Band Edges Measurement	§15.247(d)	ANSI C63.10-2013, Clause 11.13.3.2	Pass
7	Conducted Spurious Emissions	§15.247(d)	ANSI C63.10-2013, Clause 11.11	Pass
8	Radiated Spurious Emissions	§15.247 (d) §15.209	ANSI C63.10-2013 Clause 6.4&6.5&6.6	Pass
9	Radiated Emissions which fall in the restricted bands	§15.247 (d) §15.205	ANSI C63.10-2013 Clause 6.10.5	Pass

3 Test Configuration

3.1 Test mode

Test Mode ^{Note 1}	Description
TX	Keep the EUT in continuously transmitting mode with modulation. (Duty cycle>98%)
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use; the EUT was operated in the engineering mode ^{Note 2} to fix the TX or Rx frequency that was for the purpose of the measurements.

Note 2: Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

Power level setup in software			
Test Software Name	SecureCRT		
Mode	Channel	Frequency (MHz)	Soft Set
802.11b/g/n(HT20)/n(HT40)	1	2412	TX level : Default
	6	2437	
	11	2462	
	3	2422	
	9	2452	

3.2 Operation Frequency each of channel

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	5	2432MHz	9	2452MHz	13	2462MHz
2	2417MHz	6	2437MHz	10	2457MHz	--	--
3	2422MHz	7	2442MHz	11	2462MHz	--	--
4	2427MHz	8	2447MHz	12	2467MHz	--	--

Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz	11	2462MHz	--	--
4	2427MHz	8	2447MHz	--	--	--	--
5	2432MHz	9	2452MHz	--	--	--	--
6	2437MHz	10	2457MHz	--	--	--	--

3.3 Test channel

For 802.11b/g/n (HT20), the lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz); 802.11n HT40, the lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	Lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)
AC adapter	PISEN	ZY2207-A521H	N/A	From lab
Note: "--" mean no any auxiliary device during testing.				

3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 3.70V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Address:	Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{ dB}$
Power Spectral Density, conducted	$\pm 3.0\text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{ dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2024/08/08	2025/08/07
BLA-EMC-012	Broadband antenna	VULB9168	Schwarzbeck	00836 P:00227	2022/10/12	2025/10/11
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA201804 3003	2024/08/08	2025/08/07
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2024/06/28	2025/06/27
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2024/06/28	2025/06/27
BLA-EMC-066	Amplifier	LNPA_30M01 G-30	SKET	SK202106 0801	2024/06/28	2025/06/27
BLA-EMC-086	Amplifier	LNPA_18G40 G-50dB	SKET	SK202207 1301	2024/06/28	2025/06/27
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28

BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

Conducted Emissions

Equipment	Name	Model	Manufacturer	S/N	Cal. Date	Due. Date
BLA-EMC-003-001	Shield room	8*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2024/08/08	2025/08/07
BLA-EMC-011	LISN	ENV216	R&S	101372	2024/08/08	2025/08/07
BLA-EMC-033	Impedance transformer	DC-2GHz	DFXP	N/A	2024/06/28	2025/06/27
BLA-EMC-041	LISN	AT166-2	ATTEN	AKK180600 0003	2024/08/08	2025/08/07
BLA-EMC-045	Impedance stable network	ISNT8-cat 6	TESEQ	53580	2024/08/08	2025/08/07
BLA-EMC-095	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01045	2024/06/28	2025/06/27
BLA-EMC-096	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01075	2024/06/28	2025/06/27
BLA-XC-05	Coaxial Cable	N/A	BlueAsia	V05	N/A	N/A

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2025/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2024/06/28	2025/06/27
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2024/08/08	2025/08/07
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889SN042	2024/08/08	2025/08/07
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2024/08/08	2025/08/07
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2024/06/28	2025/06/27
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2024/08/08	2025/08/07
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS141094	2024/06/28	2025/06/27

Test software

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE(Below 1GHz)
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE(Above 1GHz)
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement


Test Standard	47 CFR Part 15, Subpart C 15.203
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is PCB antenna. The best case gain of the antenna is 3dBi.

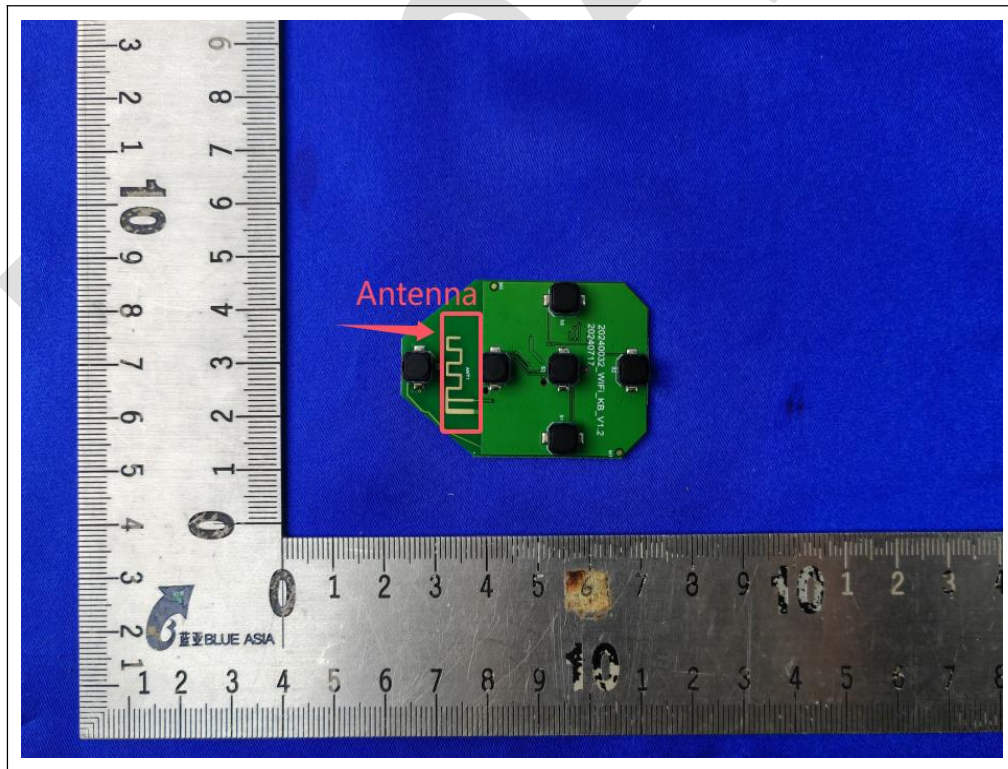

6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


Test Standard	47 CFR Part 15, Subpart C 15.207
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2.2 Test setup

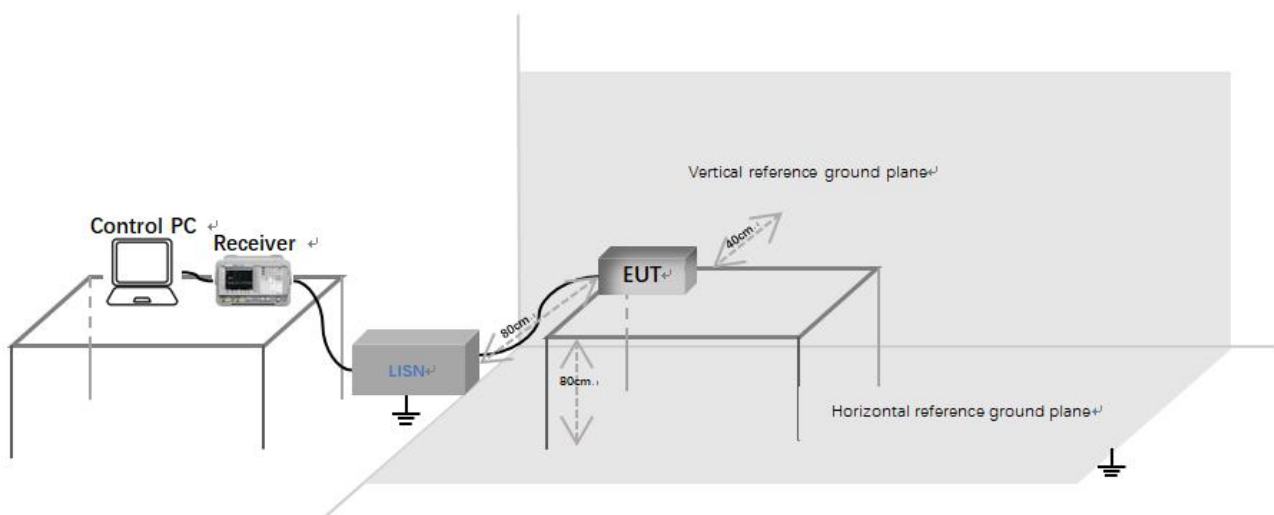

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.


6.2.3 Procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor

6.2.4 Test data


[Test mode: TX]; [Line: Line];[Power:AC 120V/60Hz]

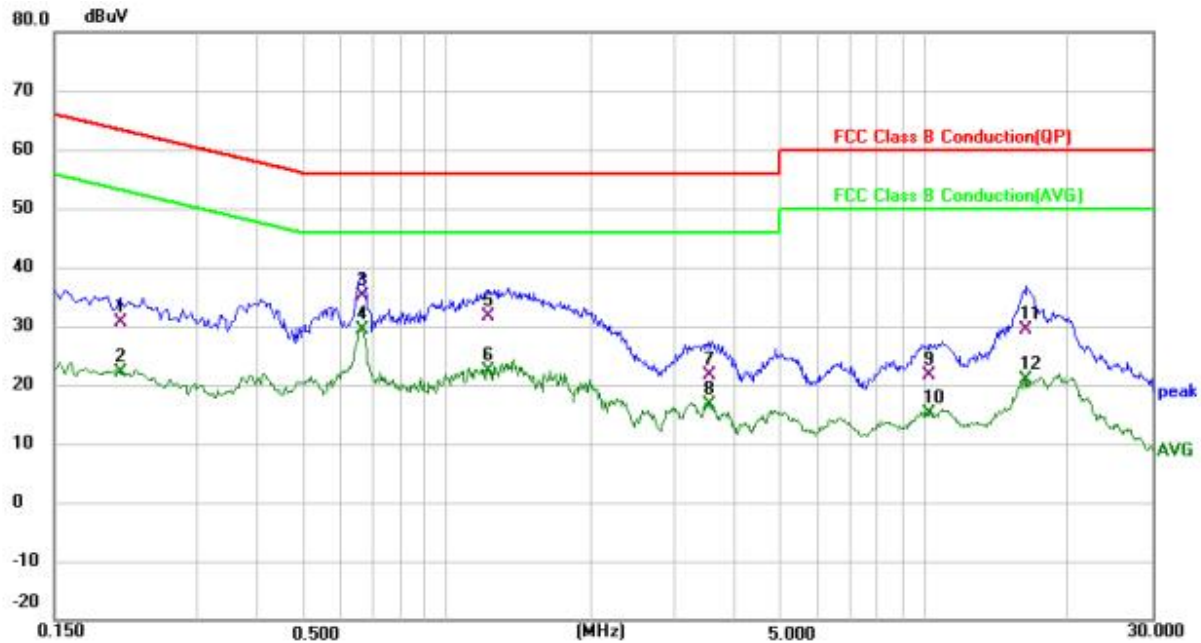

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2060	20.30	10.28	30.58	63.37	-32.79	QP
2		0.2060	11.82	10.28	22.10	53.37	-31.27	AVG
3		0.6660	25.41	9.79	35.20	56.00	-20.80	QP
4	*	0.6660	19.65	9.79	29.44	46.00	-16.56	AVG
5		1.2220	21.85	9.81	31.66	56.00	-24.34	QP
6		1.2220	12.63	9.81	22.44	46.00	-23.56	AVG
7		3.5340	11.58	10.09	21.67	56.00	-34.33	QP
8		3.5340	6.62	10.09	16.71	46.00	-29.29	AVG
9		10.2100	21.08	0.50	21.58	60.00	-38.42	QP
10		10.2100	14.52	0.50	15.02	50.00	-34.98	AVG
11		16.3180	17.10	12.17	29.27	60.00	-30.73	QP
12		16.3180	8.62	12.17	20.79	50.00	-29.21	AVG

Test Result: Pass

[Test mode: TX]; [Line: Neutral];[Power:AC 120V/60Hz]

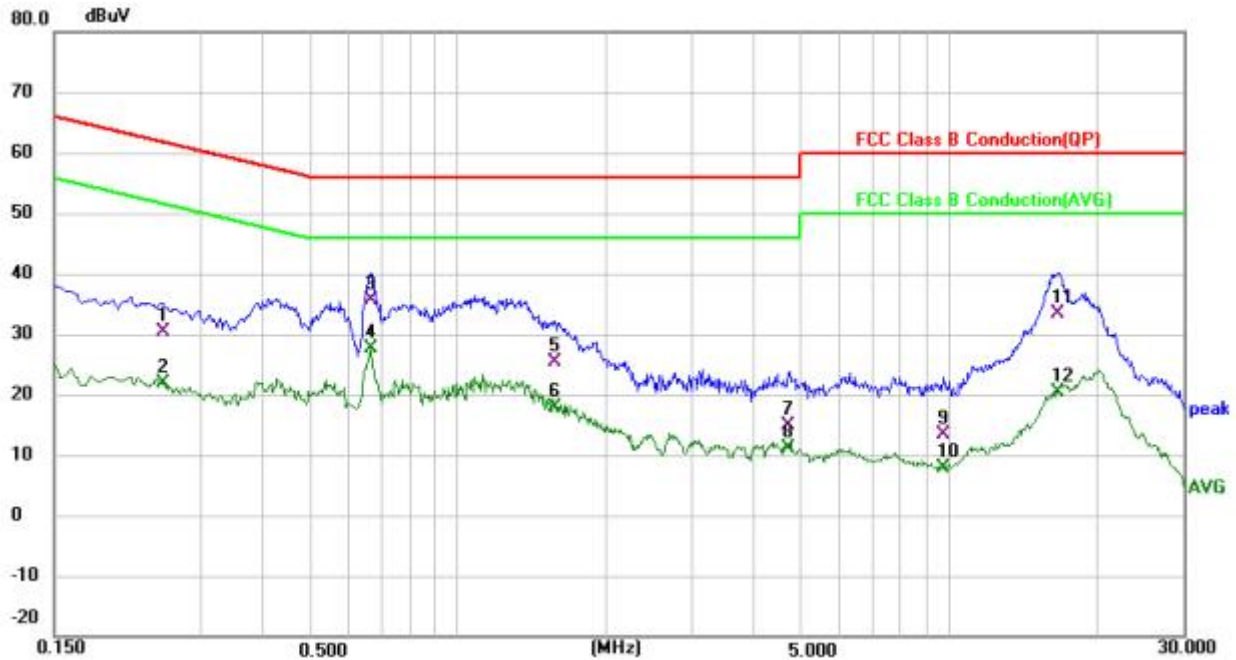

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2500	20.03	10.26	30.29	61.76	-31.47	QP
2		0.2500	11.57	10.26	21.83	51.76	-29.93	AVG
3		0.6620	25.86	9.73	35.59	56.00	-20.41	QP
4	*	0.6620	17.88	9.73	27.61	46.00	-18.39	AVG
5		1.5740	15.68	9.78	25.46	56.00	-30.54	QP
6		1.5740	8.13	9.78	17.91	46.00	-28.09	AVG
7		4.7100	4.71	10.10	14.81	56.00	-41.19	QP
8		4.7100	1.14	10.10	11.24	46.00	-34.76	AVG
9		9.7500	2.83	10.65	13.48	60.00	-46.52	QP
10		9.7500	-2.88	10.65	7.77	50.00	-42.23	AVG
11		16.6060	21.18	12.18	33.36	60.00	-26.64	QP
12		16.6060	8.25	12.18	20.43	50.00	-29.57	AVG

Test Result: Pass


6.3 Conducted peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method	ANSI C63.10 (2013) Section 11.9.1.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.3.2 Test setup

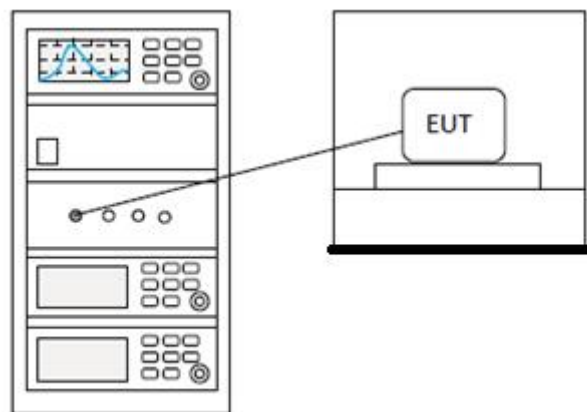

6.3.3 Test data

Note: PK power sensor is used to read PK Conducted power power directly

Pass: Please refer to appendix A for details


6.4 Minimum 6dB bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247(a)(2)
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Limit

≥500 kHz

6.4.2 Test setup

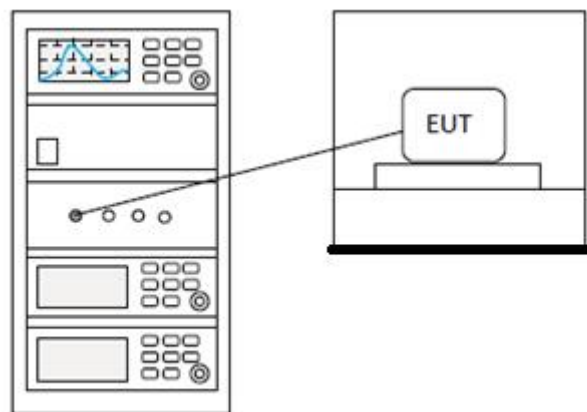

6.4.3 Test data

Pass: Please refer to appendix A for details