

TEST REPORT

Reference No...... : WTD20S03011503W001 V1
FCC ID : 2AVCN-BMP40
Applicant..... : PVS N.V.
Address..... : Kolmenstraat 149, Stevoort, Belgium 3512
Manufacturer : PVS N.V.
Address..... : Kolmenstraat 149, Stevoort, Belgium 3512
Product..... : SourceCon Module
Model(s) : BMP40
Standards..... : FCC CFR47 Part 15.247
Date of Receipt sample : 2020-03-19
Date of Test : 2020-03-20 to 2021-06-15
Date of Issue..... : 2021-08-20
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.


Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China
Tel: +86-769-2267 6998
Fax: +86-769-2267 6828

Compiled by:



Andy Feng / Project Engineer

Approved by:

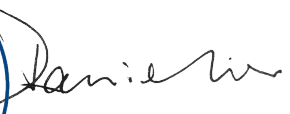

Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST.....	6
4.4 TEST MODE	6
4.5 TEST FACILITY.....	7
5 TEST SUMMARY	8
6 EQUIPMENT USED DURING TEST	9
6.1 EQUIPMENTS LIST	9
6.2 DESCRIPTION OF SUPPORT UNITS	10
6.3 MEASUREMENT UNCERTAINTY	10
6.4 TEST EQUIPMENT CALIBRATION	10
7 CONDUCTED EMISSION	11
7.1 E.U.T. OPERATION	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION	11
7.4 CONDUCTED EMISSION TEST RESULT	12
8 RADIATED SPURIOUS EMISSIONS.....	14
8.1 EUT OPERATION.....	14
8.2 TEST SETUP	15
8.3 SPECTRUM ANALYZER SETUP	16
8.4 TEST PROCEDURE	17
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
8.6 SUMMARY OF TEST RESULTS	18
9 DUTY CYCLE.....	21
10 CONDUCTED SPURIOUS EMISSIONS.....	22
10.1 TEST PROCEDURE.....	22
10.2 TEST RESULT	23
11 BAND EDGE MEASUREMENT	32
11.1 TEST PROCEDURE.....	32
11.2 TEST RESULT	33
12 20 DB BANDWIDTH MEASUREMENT	36
12.1 TEST PROCEDURE.....	36
12.2 TEST RESULT	36
13 MAXIMUM PEAK OUTPUT POWER	42
13.1 TEST PROCEDURE.....	42
13.2 TEST RESULT	42
14 HOPPING CHANNEL SEPARATION	48

14.1	TEST PROCEDURE.....	48
14.2	TEST RESULT	48
15	NUMBER OF HOPPING FREQUENCY.....	54
15.1	TEST PROCEDURE.....	54
15.2	TEST RESULT	54
16	DWELL TIME	56
16.1	TEST PROCEDURE.....	56
16.2	TEST RESULT	56
17	ANTENNA REQUIREMENT	62
18	RF EXPOSURE.....	63
19	PHOTOGRAPHS OF TEST SETUP AND EUT.....	63

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD20S03011503 W001	2020-03-19	2020-03-20 to 2021-06-15	2021-06-15	Original	-	Replaced
WTD20S03011503 W001 V1	2020-03-19	2020-03-20 to 2021-06-15	2021-08-20	Version 1	Updated	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	SourceCon Module
Model(s):	BMP40
Model Description:	N/A
Bluetooth Version:	Bluetooth v3.0+EDR
Hardware Version:	1.4
Software Version:	1.0

4.2 Details of E.U.T.

Operation Frequency:	Bluetooth: 2402~2480MHz
Max. RF output power:	Bluetooth: 5.70dBm
Type of Modulation:	Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK
Antenna installation:	Bluetooth: Dipole antenna
Antenna Gain:	Bluetooth: 2.0dBi
Ratings:	DC 3.3V

4.3 Channel List

Normal

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

4.5 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	Complies
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2019-09-12 2020-07-30	2020-09-11 2021-07-29
2.	LISN	R&S	ENV216	100115	2019-09-12 2020-07-30	2020-09-11 2021-07-29
3.	Cable	Top	TYPE16(3.5M)	-	2019-09-12 2020-07-30	2020-09-11 2021-07-29
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2019-09-12 2020-07-30	2020-09-11 2021-07-29
2.	LISN	SCHWARZBECK	NSLK 8128	8128-259	2019-09-12 2020-07-30	2020-09-11 2021-07-29
3.	Limiter	CYBERTEK	EM5010	261115-001-0024	2019-09-12 2020-07-30	2020-09-11 2021-07-29
4.	Cable	Laplace	RF300	-	2019-09-12 2020-07-30	2020-09-11 2021-07-29
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2019-04-29 2021-04-19	2020-04-28 2022-04-18
2	Amplifier	Agilent	8447D	2944A10178	2019-04-29 2021-04-19	2020-04-28 2022-04-18
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22	2021-08-21
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2019-04-29 2021-04-19	2020-04-28 2022-04-18
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2019-04-29 2021-04-24	2020-04-28 2022-04-23
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2019-04-29 2021-04-19	2020-04-28 2022-04-18
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019-04-29 2021-04-19	2020-04-28 2022-04-18
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2019-04-29 2021-04-19	2020-04-28 2022-04-18
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date

1	Test Receiver	R&S	ESCI	101296	2019-04-29 2021-04-19	2020-04-28 2022-04-18
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2019-04-29 2021-04-24	2020-04-28 2022-04-23
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2019-06-14 2020-05-06	2020-06-13 2021-05-05
4	Amplifier	ANRITSU	MH648A	M43381	2019-04-29 2021-04-19	2020-04-28 2022-04-18
5	Cable	HUBER+SUHNER	CBL2	525178	2019-04-29 2021-04-19	2020-04-28 2022-04-18
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2019-04-29 2021-04-19	2020-04-28 2022-04-18
2.	Spectrum Analyzer	R&S	FSP30	100091	2019-04-29 2021-04-19	2020-04-28 2022-04-18
3.	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2019-04-29 2021-04-19	2020-04-28 2022-04-18

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)
Conducted Spurious Emissions test	± 3.12 dB (9kHz~30MHz)
	± 4.21 dB (30M~1000MHz)
	± 5.14 dB (1000M~26500MHz)

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46 *
0.5 to 5	56	46
5 to 30	60	50

7.1 E.U.T. Operation

Operating Environment :

Temperature: 22.8 °C

Humidity: 52.6 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013.

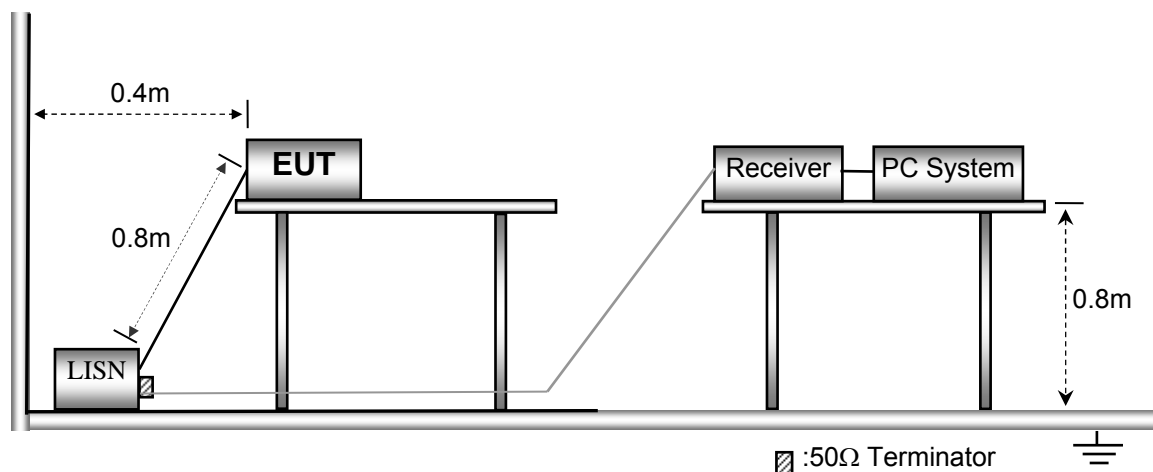


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


Remark: only the worst data (GFSK modulation Low channel mode) were reported

Live line:

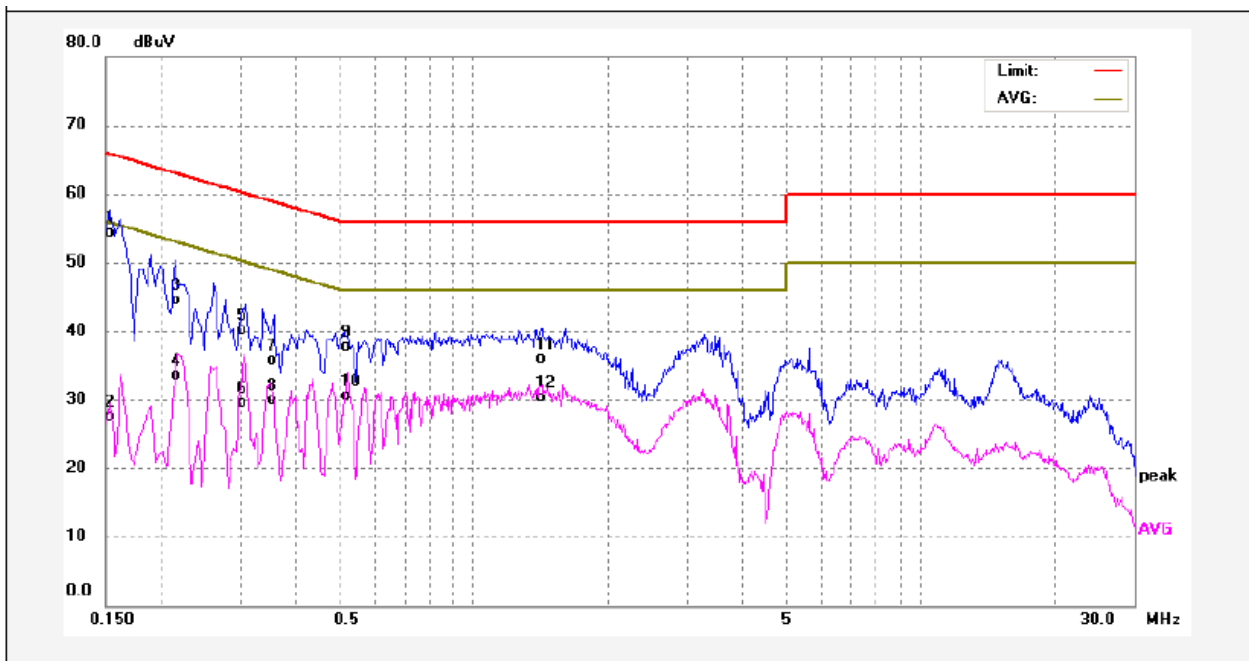

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	43.46	10.81	54.27	65.78	-11.51	QP	
2	0.1539	16.66	10.81	27.47	55.78	-28.31	AVG	
3	0.2175	33.90	10.66	44.56	62.91	-18.35	QP	
4	0.2175	22.94	10.66	33.60	52.91	-19.31	AVG	
5	0.3060	29.49	10.62	40.11	60.08	-19.97	QP	
6	0.3060	18.97	10.62	29.59	50.08	-20.49	AVG	
7	0.3580	25.02	10.59	35.61	58.77	-23.16	QP	
8	0.3580	19.34	10.59	29.93	48.77	-18.84	AVG	
9	0.5140	27.10	10.53	37.63	56.00	-18.37	QP	
10	0.5140	20.07	10.53	30.60	46.00	-15.40	AVG	
11	1.4180	25.39	10.60	35.99	56.00	-20.01	QP	
12	1.4180	19.77	10.60	30.37	46.00	-15.63	AVG	

Neutral line:

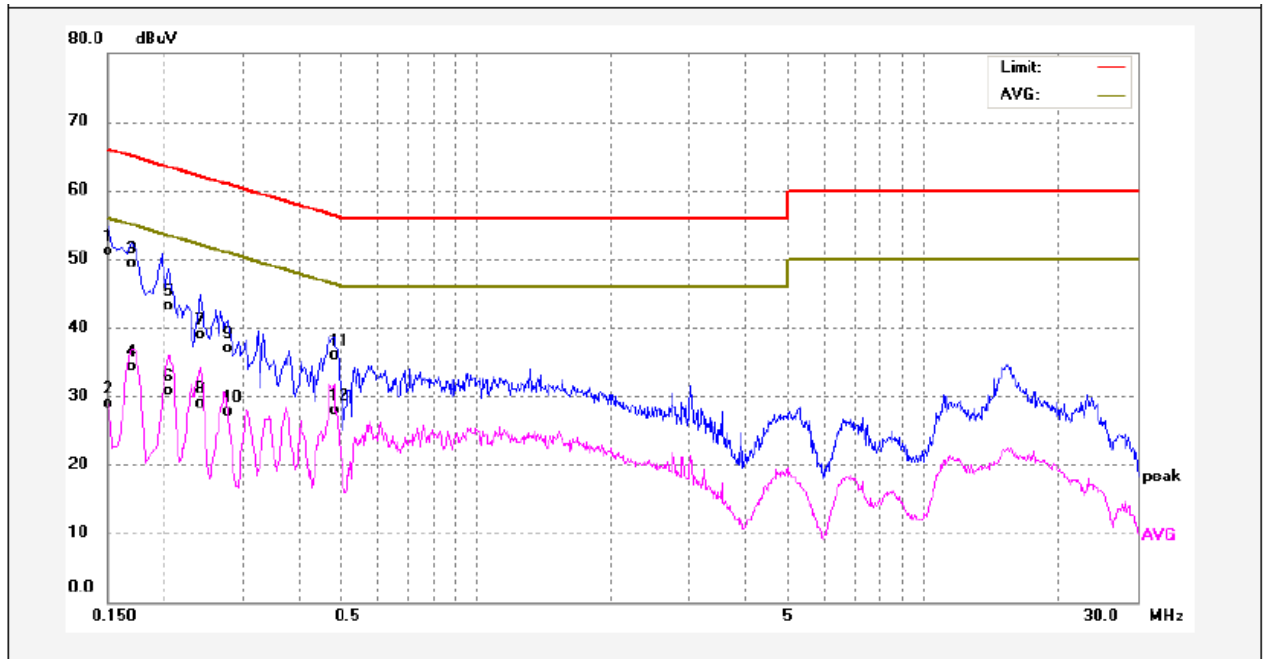

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	40.23	10.82	51.05	65.99	-14.94	QP	
2	0.1500	18.14	10.82	28.96	55.99	-27.03	AVG	
3	0.1700	38.49	10.76	49.25	64.96	-15.71	QP	
4	0.1700	23.48	10.76	34.24	54.96	-20.72	AVG	
5	0.2060	32.37	10.67	43.04	63.36	-20.32	QP	
6	0.2060	19.98	10.67	30.65	53.36	-22.71	AVG	
7	0.2420	28.17	10.65	38.82	62.02	-23.20	QP	
8	0.2420	18.35	10.65	29.00	52.02	-23.02	AVG	
9	0.2788	26.37	10.63	37.00	60.85	-23.85	QP	
10	0.2788	17.08	10.63	27.71	50.85	-23.14	AVG	
11	0.4820	25.33	10.53	35.86	56.30	-20.44	QP	
12	0.4820	17.38	10.53	27.91	46.30	-18.39	AVG	

8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

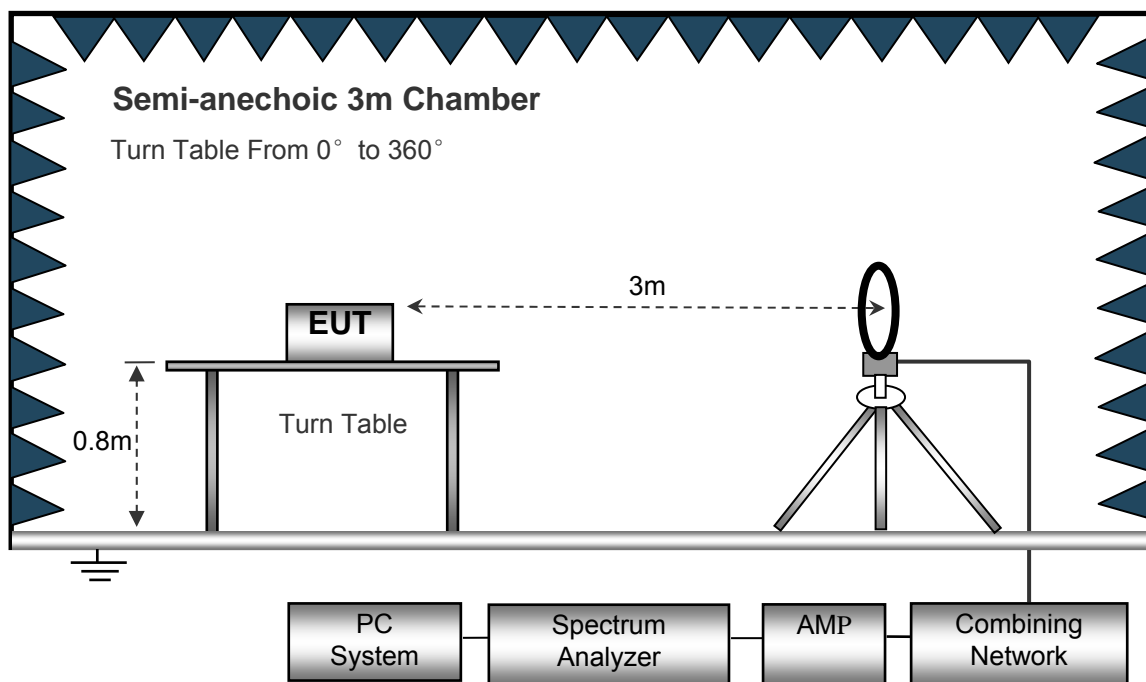

The test setup for emission measurement from 30 MHz to 1 GHz.

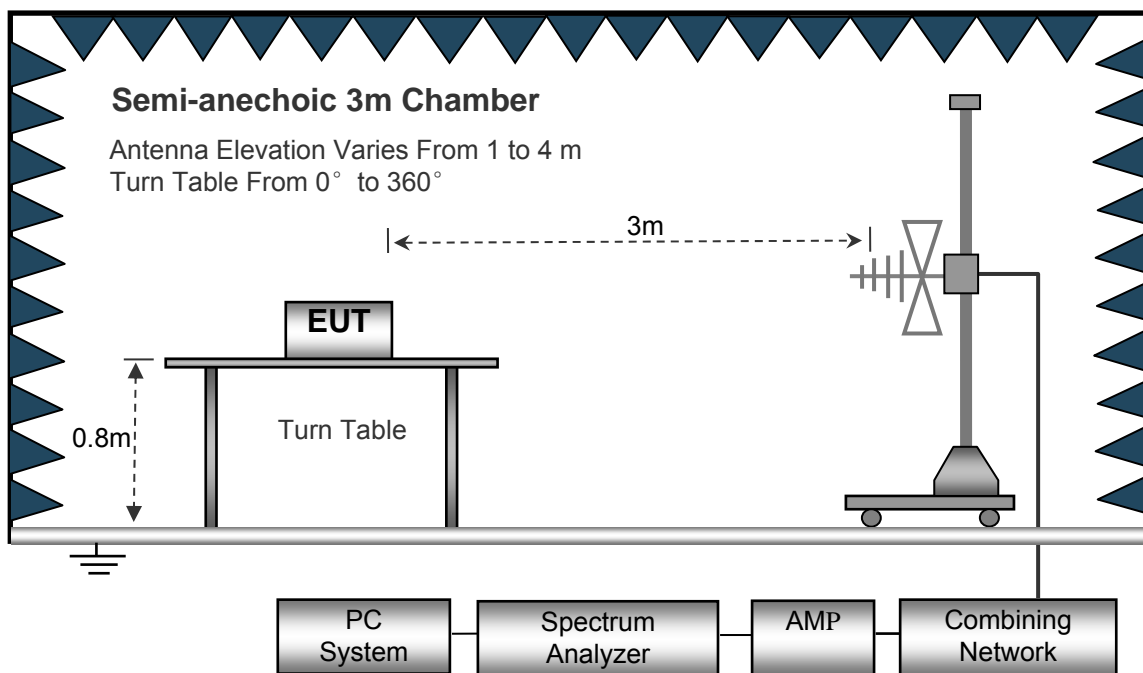

The test setup for emission measurement above 1 GHz.

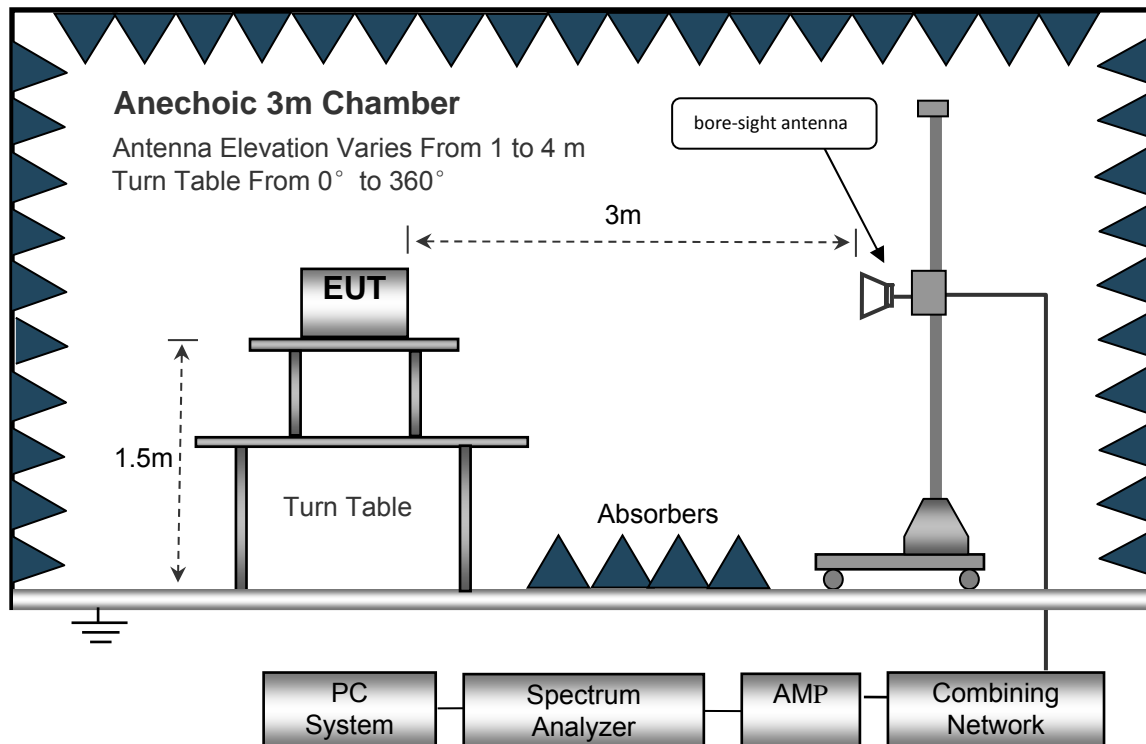

8.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed Auto
- IF Bandwidth..... 10kHz
- Video Bandwidth..... 10kHz
- Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 100kHz
- Video Bandwidth..... 300kHz

Above 1GHz

- Sweep Speed Auto
- Detector PK
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 3MHz
- Detector Ave.
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 9kHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 18GHz

Only the worst case 8DPSK mode were record in the report.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
8DPSK Low Channel 2402MHz									
560.69	43.75	QP	32	1.2	H	-13.22	30.53	43.53	-13.00
560.69	42.58	QP	212	1.8	V	-13.22	29.36	43.53	-14.17
4804.00	54.85	PK	106	1.8	V	-1.06	53.79	74.00	-20.21
4804.00	42.20	Ave	106	1.8	V	-1.06	41.14	54.00	-12.86
7206.00	50.79	PK	310	1.5	H	1.32	52.11	74.00	-21.89
7206.00	41.58	Ave	310	1.5	H	1.32	42.90	54.00	-11.10
2342.97	45.70	PK	222	1.7	V	-13.26	32.44	74.00	-41.56
2342.97	38.29	Ave	222	1.7	V	-13.26	25.03	54.00	-28.97
2387.29	44.92	PK	58	1.9	H	-13.02	31.90	74.00	-42.10
2387.29	37.63	Ave	58	1.9	H	-13.02	24.61	54.00	-29.39
2491.79	44.51	PK	137	1.6	V	-13.20	31.31	74.00	-42.69
2491.79	36.78	Ave	137	1.6	V	-13.20	23.58	54.00	-30.42

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
8DPSK Middle Channel 2441MHz									
560.69	21.29	QP	179	1.7	H	-13.22	8.07	43.53	-35.46
560.69	20.01	QP	32	1.5	V	-13.22	6.79	43.53	-36.74
4882.00	53.17	PK	214	1.3	V	-0.62	52.55	74.00	-21.45
4882.00	43.73	Ave	214	1.3	V	-0.62	43.11	54.00	-10.89
7323.00	50.40	PK	281	1.2	H	2.21	52.61	74.00	-21.39
7323.00	43.64	Ave	281	1.2	H	2.21	45.85	54.00	-8.15
2342.62	45.61	PK	184	1.1	V	-13.19	32.42	74.00	-41.58
2342.62	37.43	Ave	184	1.1	V	-13.19	24.24	54.00	-29.76
2370.55	43.28	PK	209	1.3	H	-13.14	30.14	74.00	-43.86
2370.55	37.13	Ave	209	1.3	H	-13.14	23.99	54.00	-30.01
2497.61	44.43	PK	28	1.3	V	-13.08	31.35	74.00	-42.65
2497.61	36.95	Ave	28	1.3	V	-13.08	23.87	54.00	-30.13

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
8DPSK High Channel 2480MHz									
560.69	22.91	QP	285	1.7	H	-13.22	9.69	43.53	-33.84
560.69	19.90	QP	323	1.6	V	-13.22	6.68	43.53	-36.85
4960.00	52.18	PK	198	1.3	V	-0.24	51.94	74.00	-22.06
4960.00	43.74	Ave	198	1.3	V	-0.24	43.50	54.00	-10.50
7440.00	53.04	PK	137	1.6	H	2.84	55.88	74.00	-18.12
7440.00	40.74	Ave	137	1.6	H	2.84	43.58	54.00	-10.42
2326.72	45.31	PK	80	1.5	V	-13.19	32.12	74.00	-41.88
2326.72	39.30	Ave	80	1.5	V	-13.19	26.11	54.00	-27.89
2355.55	44.22	PK	213	1.7	H	-13.14	31.08	74.00	-42.92
2355.55	36.06	Ave	213	1.7	H	-13.14	22.92	54.00	-31.08
2491.42	43.94	PK	20	1.0	V	-13.08	30.86	74.00	-43.14
2491.42	37.86	Ave	20	1.0	V	-13.08	24.78	54.00	-29.22

Test Frequency: 18GHz~25GHz


The measurements were more than 20 dB below the limit and not reported.

9 Duty Cycle

Modulation	On time(ms)	Period(ms)	Duty Cycle(%)	Duty Cycle Factor(dB)	Average Factor(dB)
GFSK	2.883	3.734	77.21	1.124	-2.247

Remark:

- 1) Duty Cycle=On Time/Period
- 2) Duty Cycle Factor= $10 \cdot \log(1/\text{Duty cycle})$
- 3) Average Factor= $20 \log_{10} \text{Duty Cycle}$

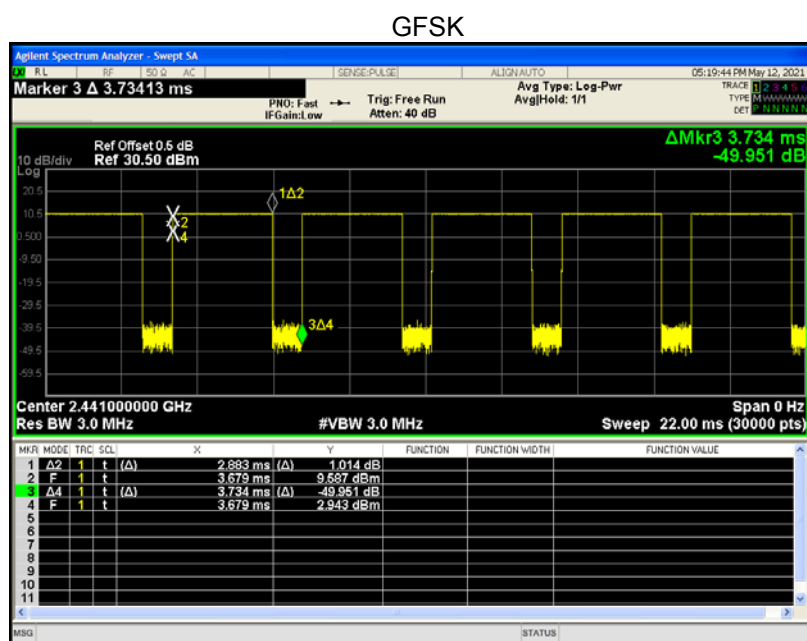

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 1GHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 1GHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto


Detector function = peak, Trace = max hold

10.2 Test Result

9KHz - 30MHz


GFSK

Low Channel

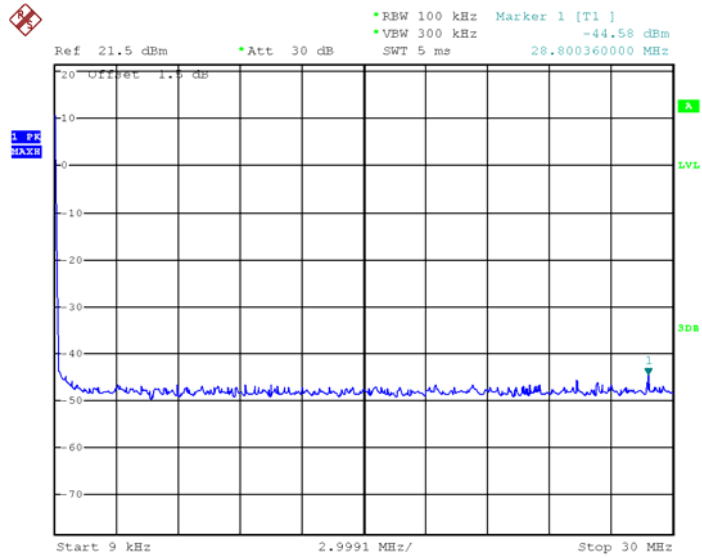


Date: 23.MAR.2020 19:00:18

Middle Channel

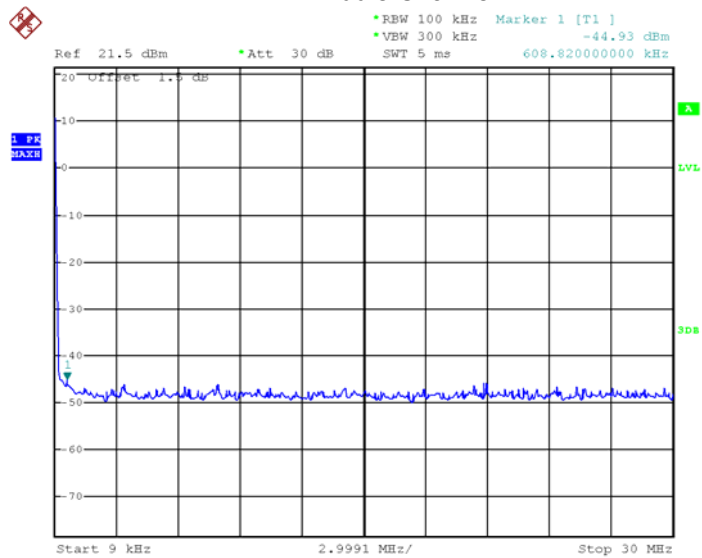

Date: 23.MAR.2020 18:59:33


High Channel

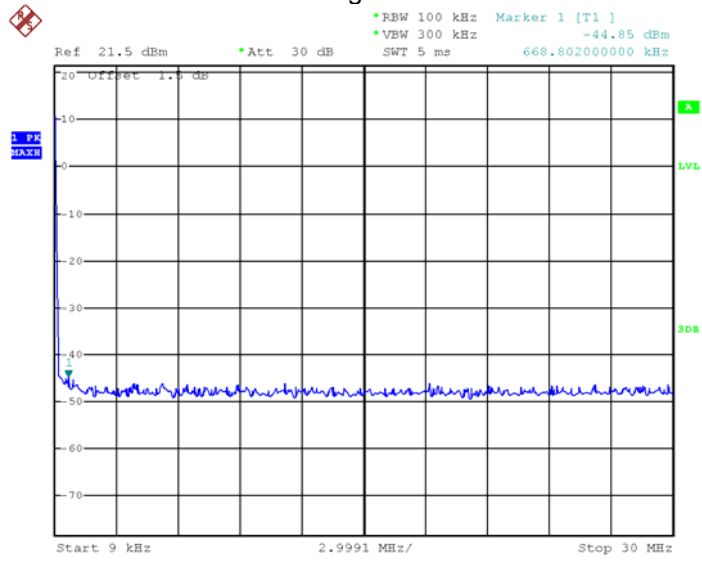


Date: 23.MAR.2020 18:59:07

Pi/4DQPSK


Low Channel

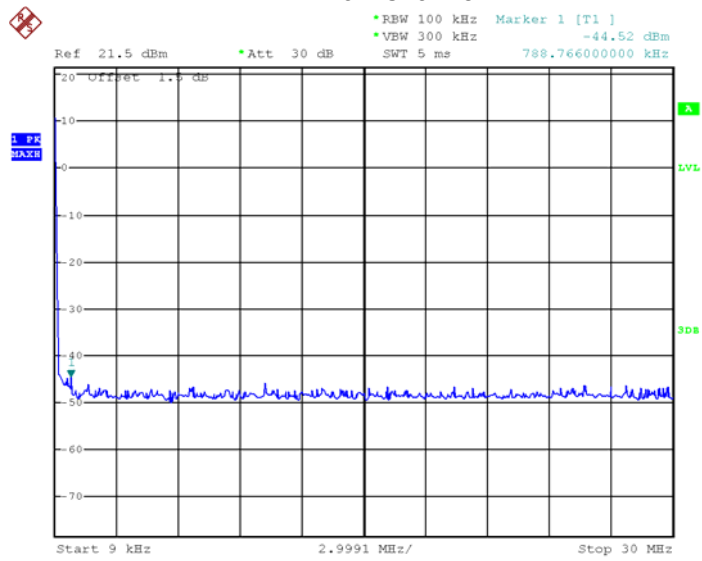

Date: 23.MAR.2020 18:57:44

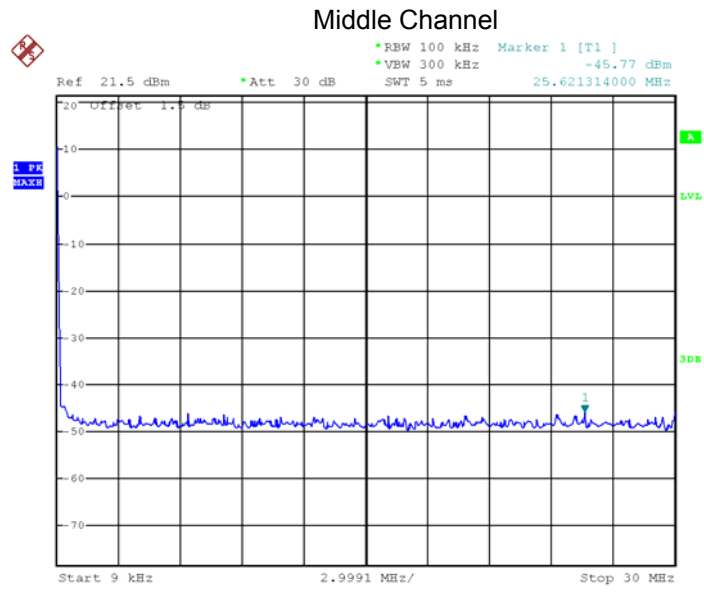


Date: 23.MAR.2020 18:57:19

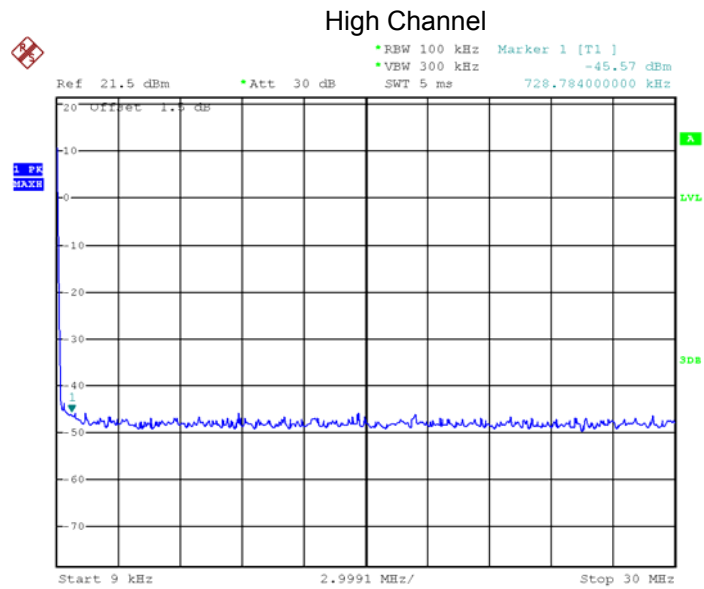

Date: 23.MAR.2020 18:58:22


8DPSK

Low Channel

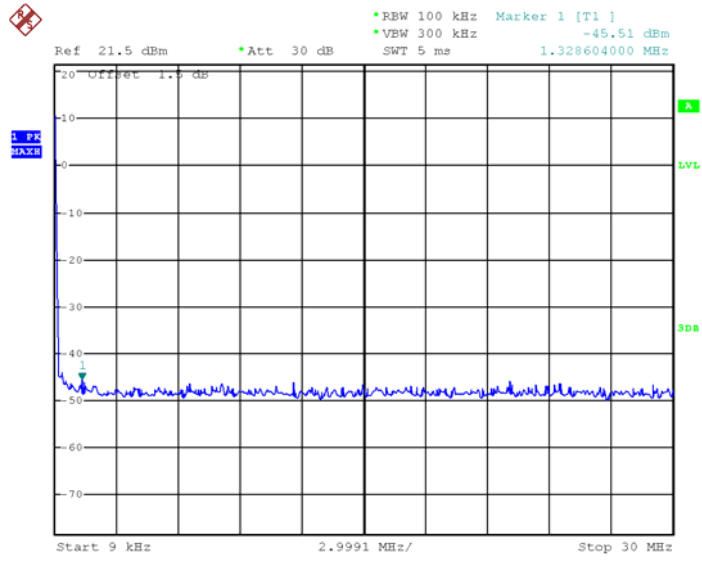


Date: 23.MAR.2020 18:56:33

Middle Channel

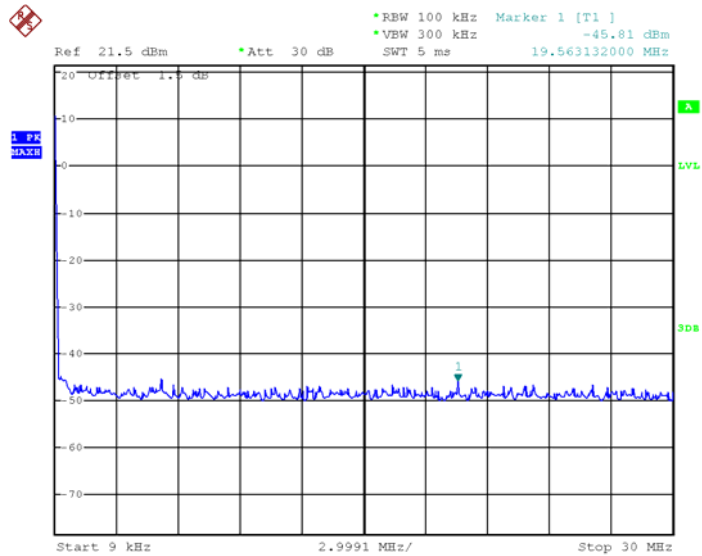

Date: 23.MAR.2020 18:56:49


High Channel

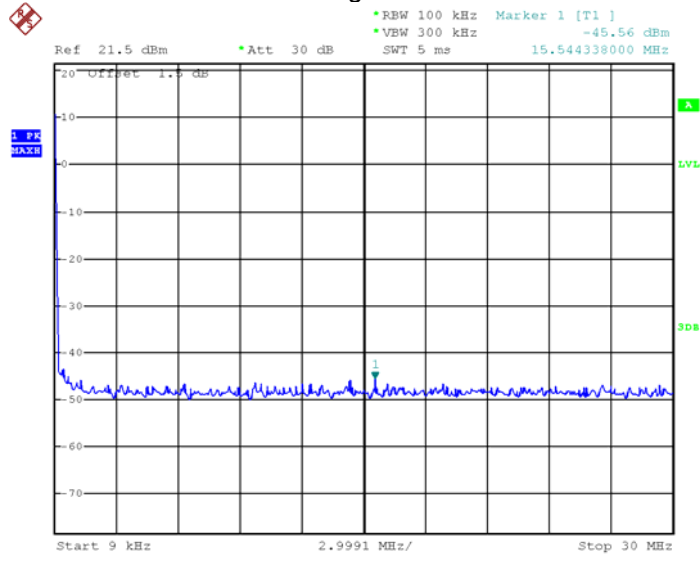

Date: 23.MAR.2020 18:56:02


30MHz – 25GHz GFSK Low Channel

Fundamental

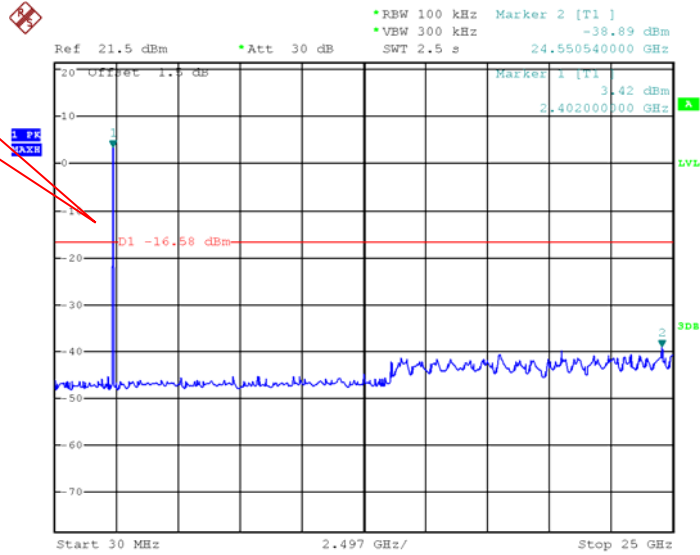


Date: 23.MAR.2020 18:38:10

GFSK Middle Channel

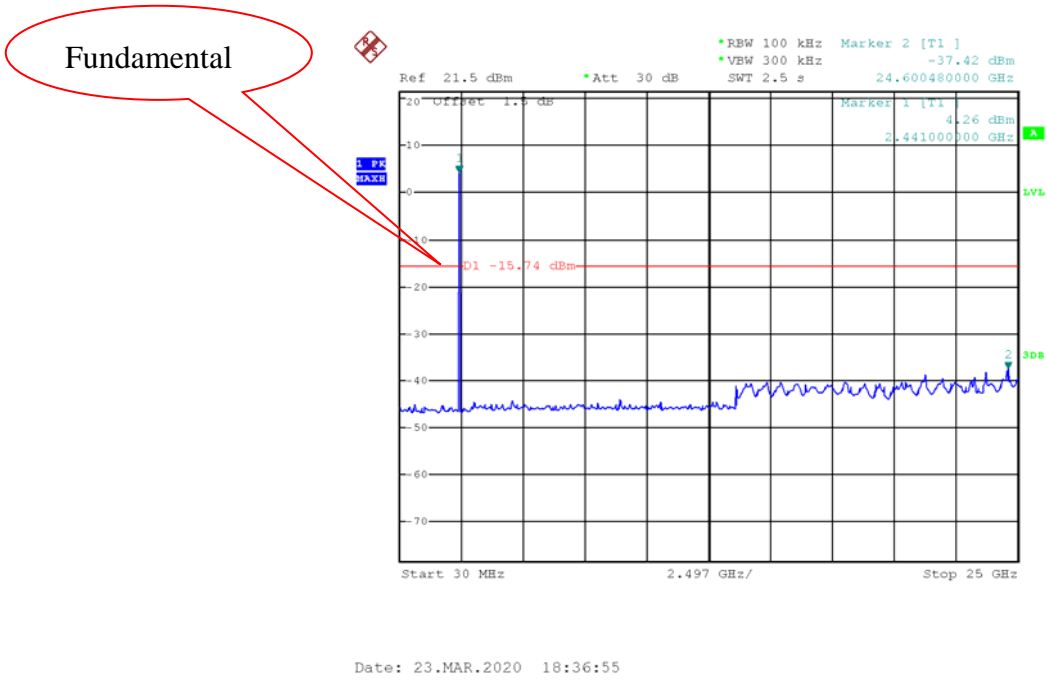


GFSK High Channel

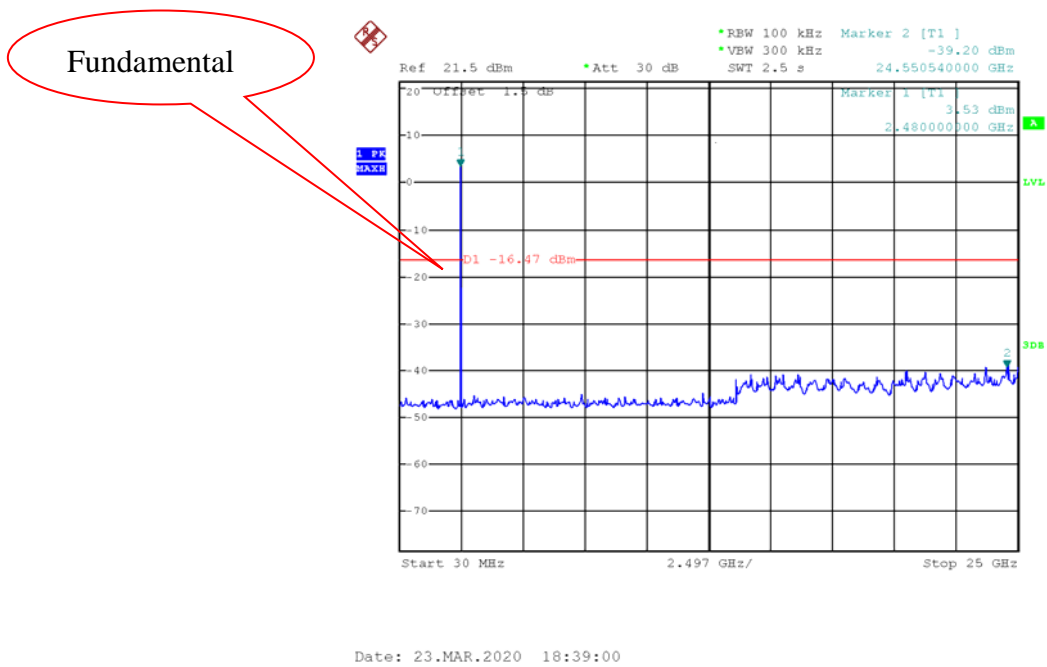


Pi/4 DQPSK Low Channel




Pi/4 DQPSK Middle Channel

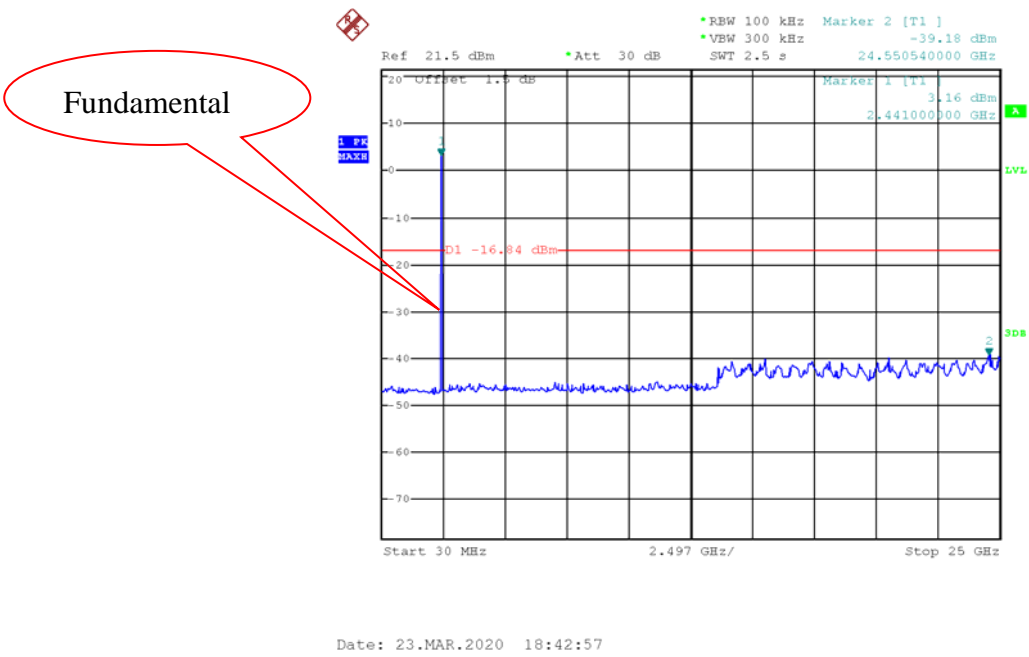


Pi/4 DQPSK High Channel

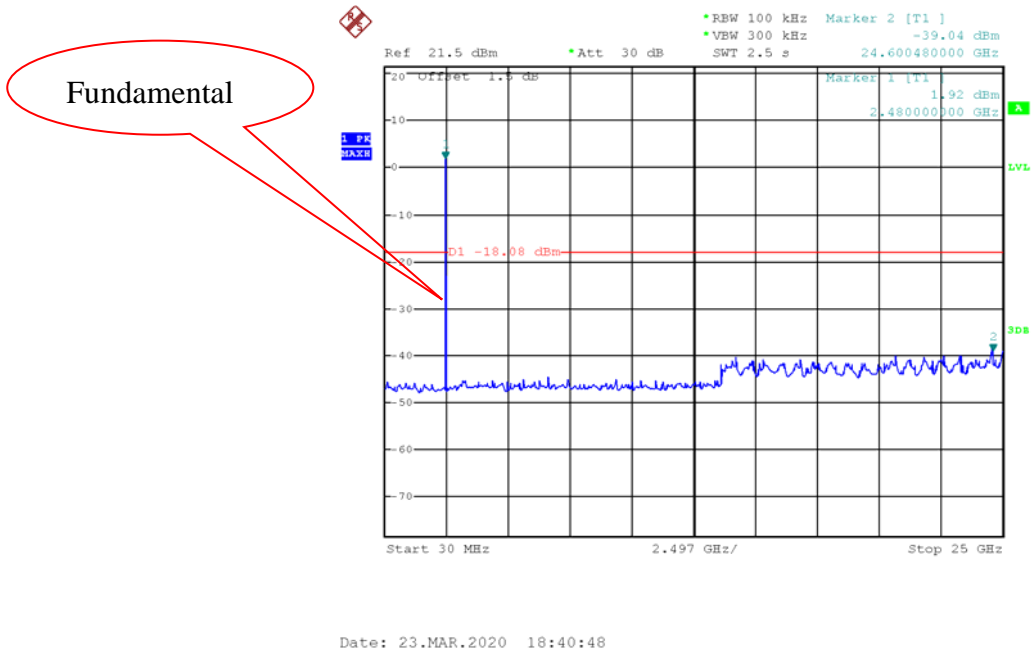

8DPSK Low Channel

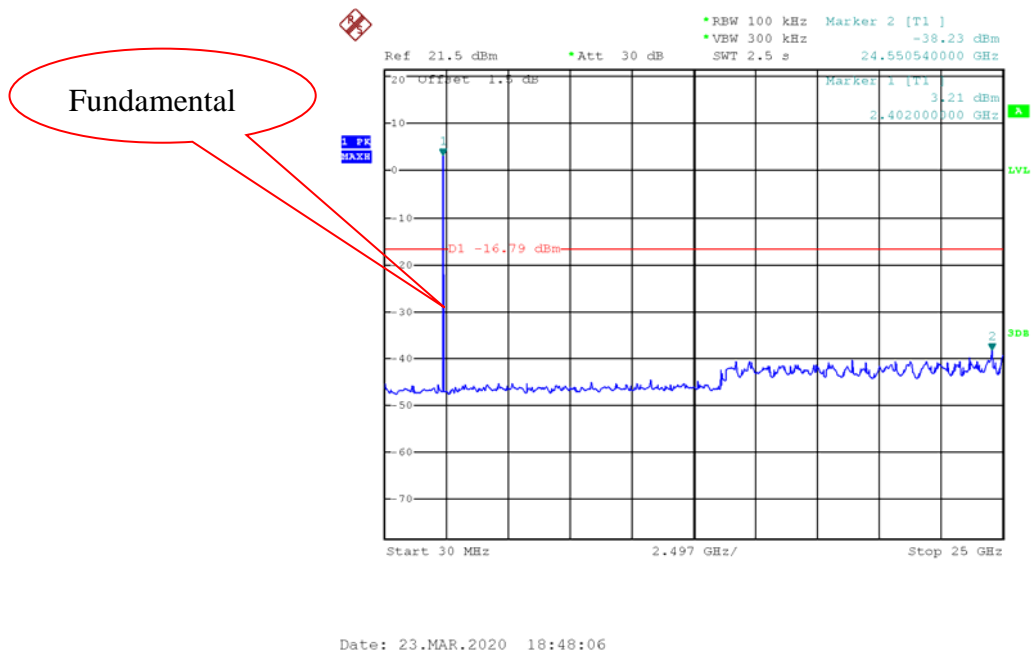


8DPSK Middle Channel

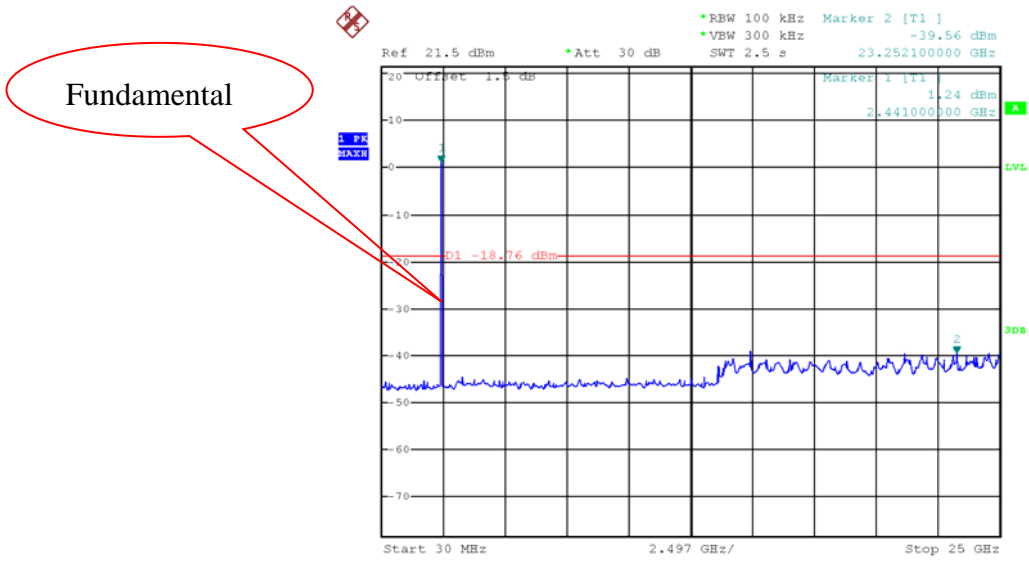

Date: 23.MAR.2020 18:51:17

8DPSK High Channel

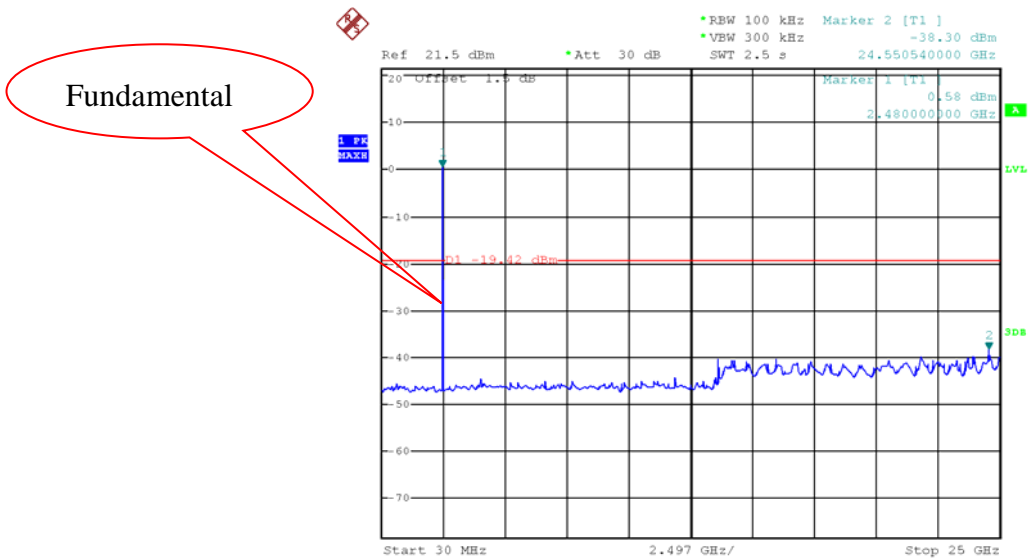

Date: 23.MAR.2020 18:54:23

11 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

11.2 Test Result


Test plots

Modulation: GFSK


Transmitting Band edge-left side

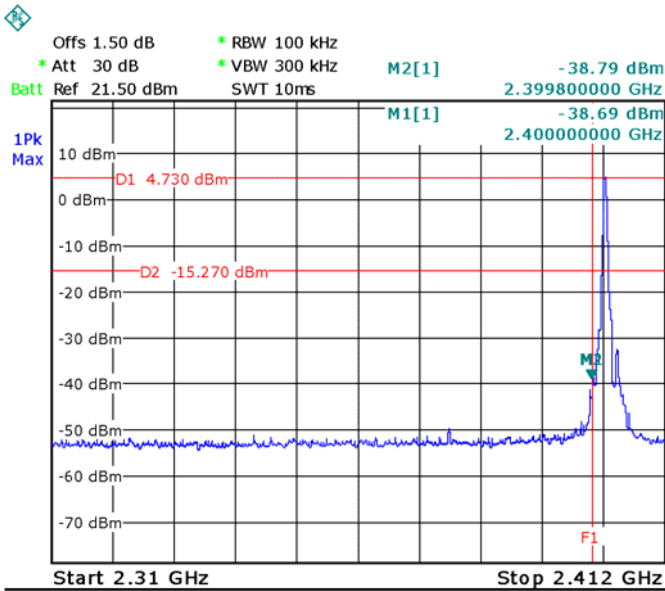


Hopping Band edge-left side

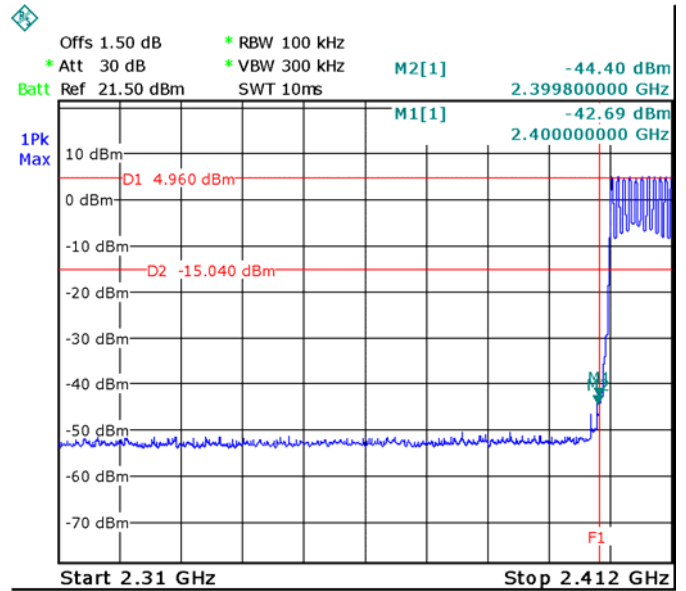

Transmitting Band edge-right side

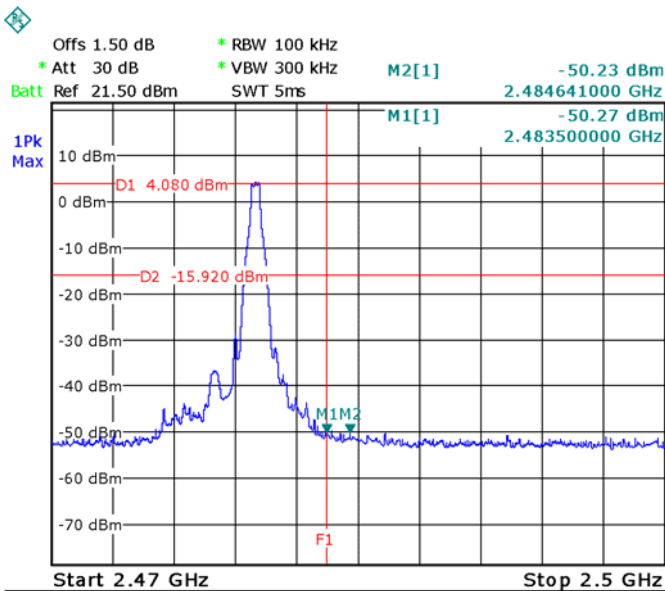


Hopping Band edge-right side

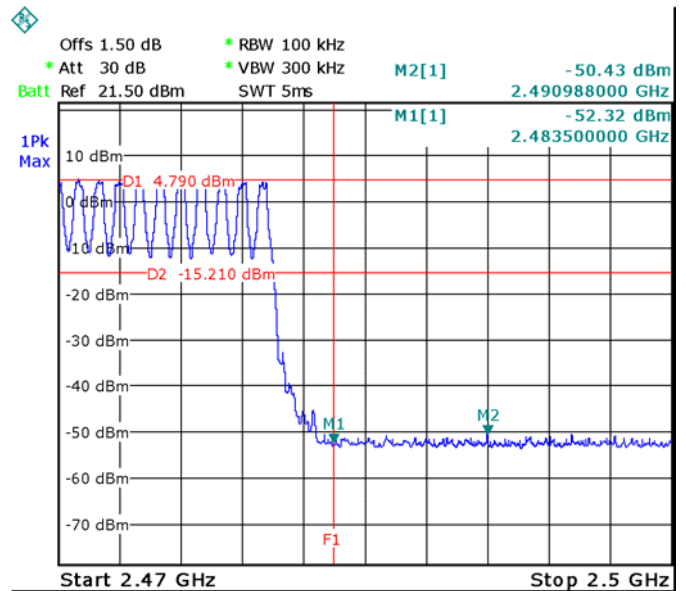


Modulation: $\pi/4$ DQPSK


Transmitting Band edge-left side

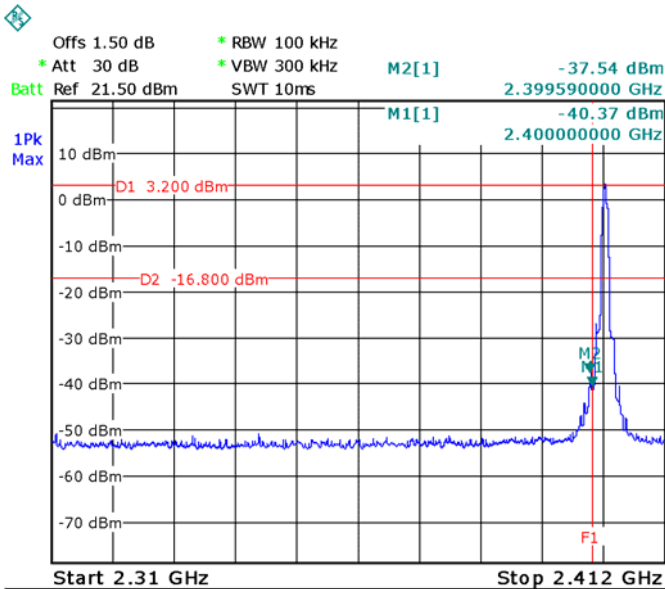


Hopping Band edge-left side

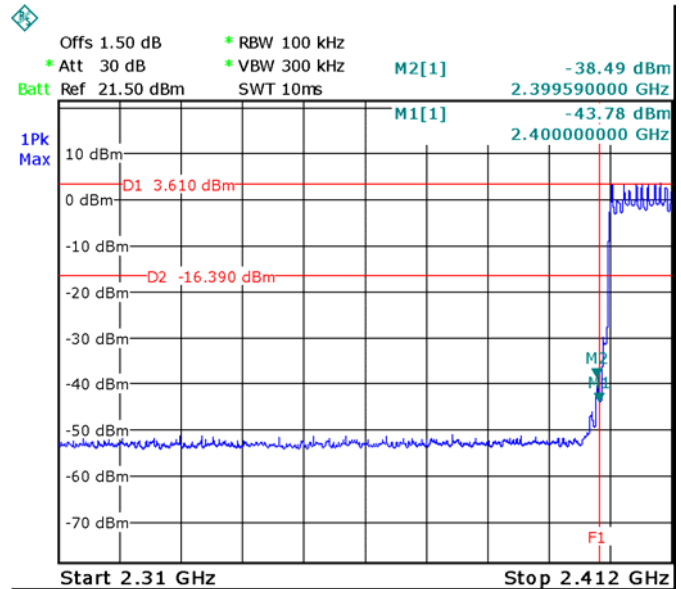

Transmitting Band edge-right side

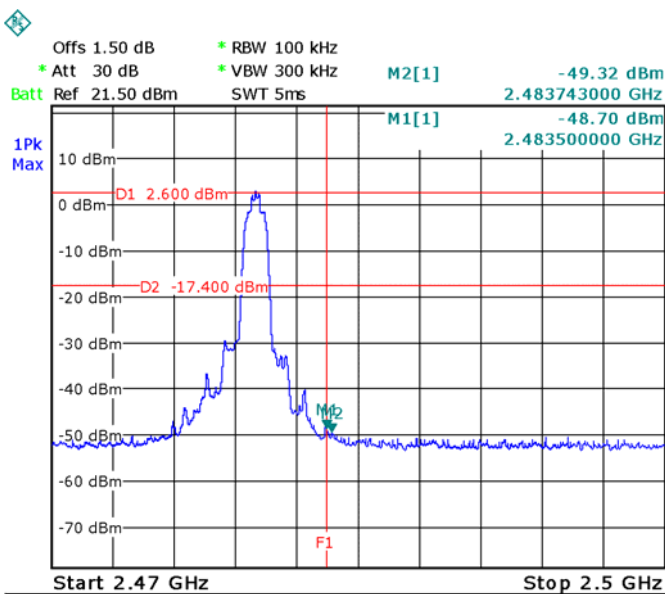



Hopping Band edge-right side

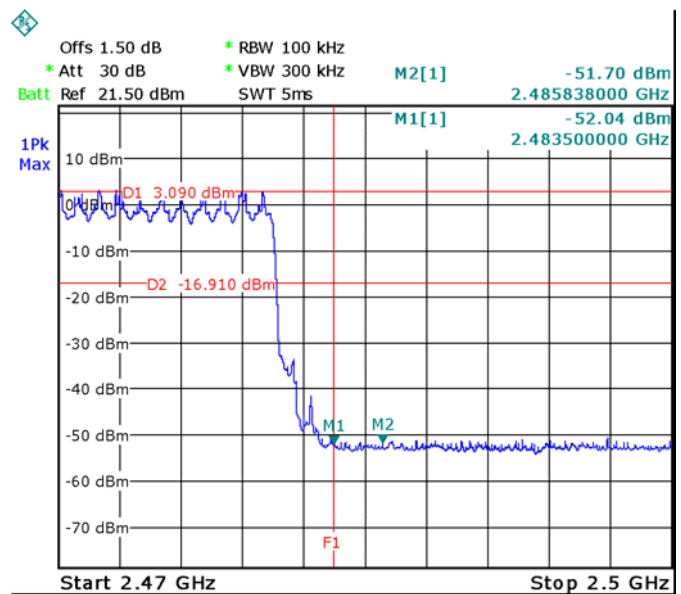

Modulation: 8DPSK



Transmitting Band edge-left side

Hopping Band edge-left side

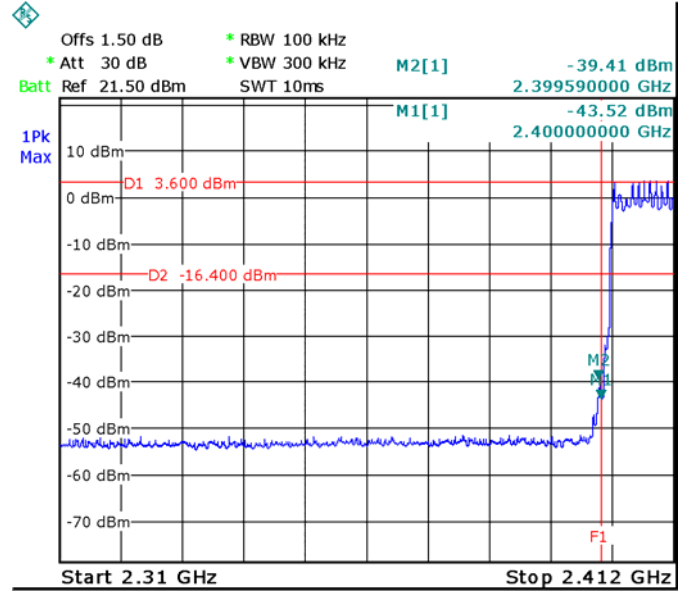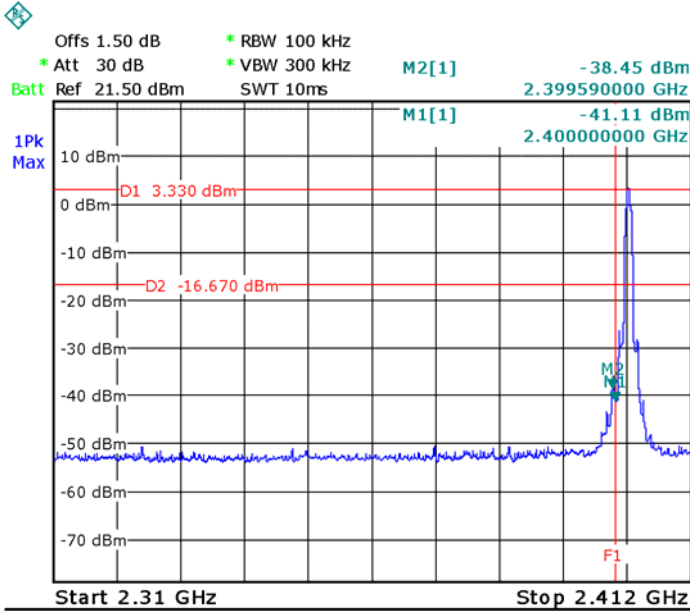

Transmitting Band edge-right side

Hopping Band edge-right side

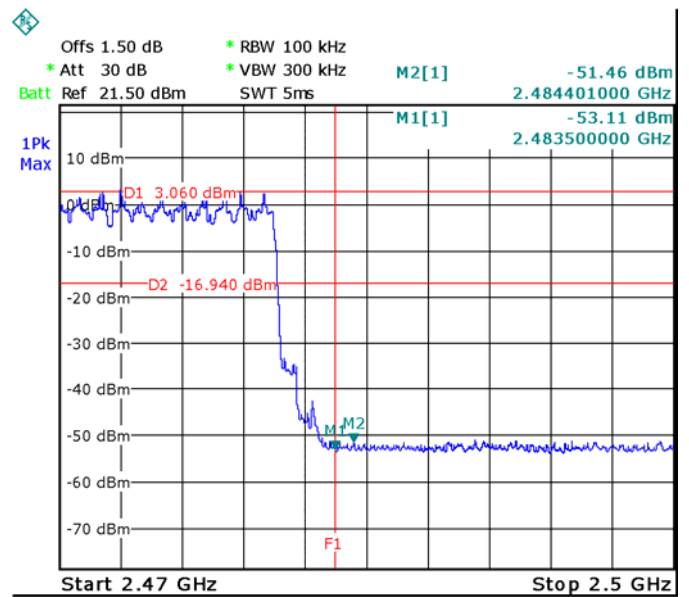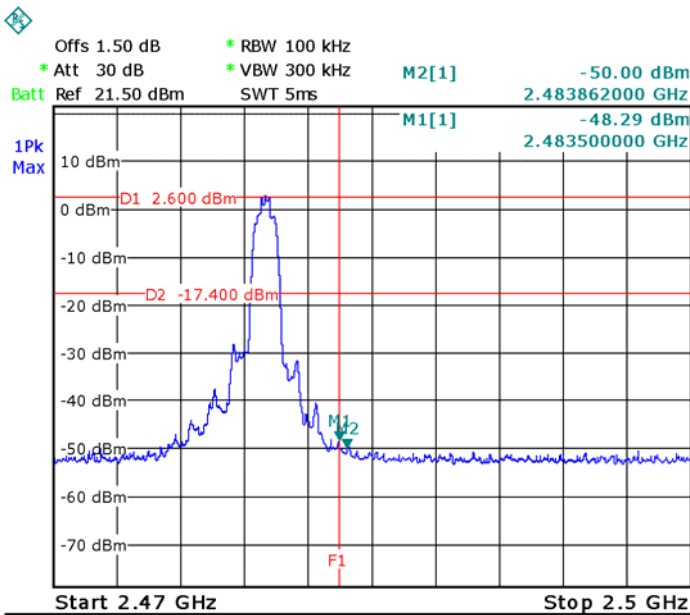

12 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

12.2 Test Result


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.928
GFSK	Middle	0.946
GFSK	High	0.934
Pi/4 DQPSK	Low	1.252
Pi/4 DQPSK	Middle	1.270
Pi/4 DQPSK	High	1.270
8DPSK	Low	1.287
8DPSK	Middle	1.287
8DPSK	High	1.264

Test plots


GFSK Low Channel

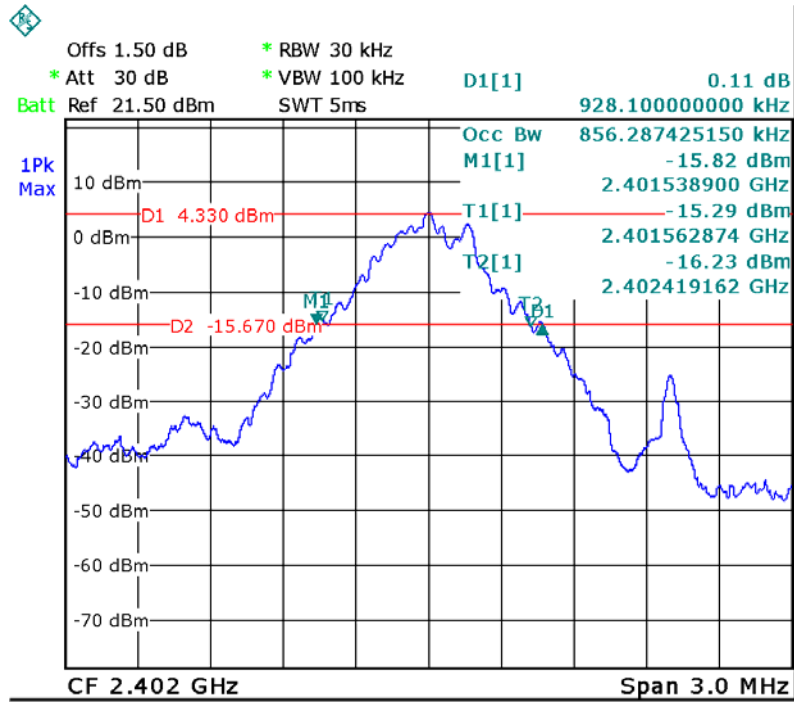


GFSK Middle Channel

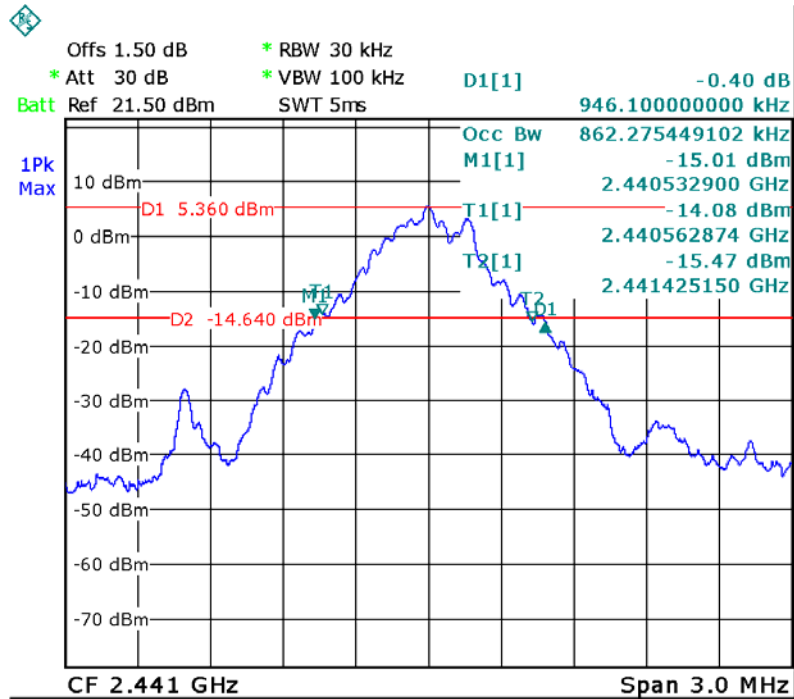


GFSK High Channel

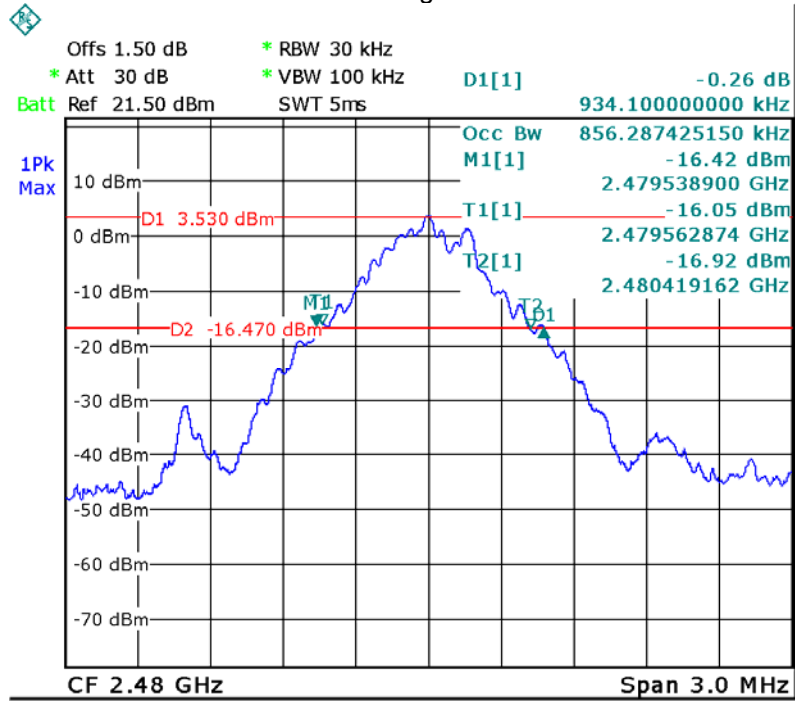


Pi/4 DQPSK Low Channel

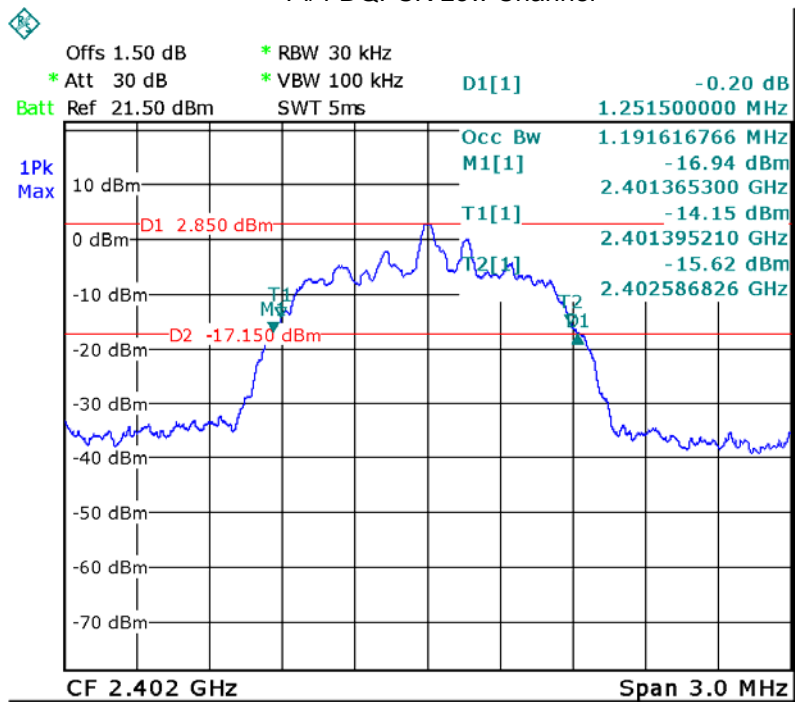


Pi/4 DQPSK Middle Channel

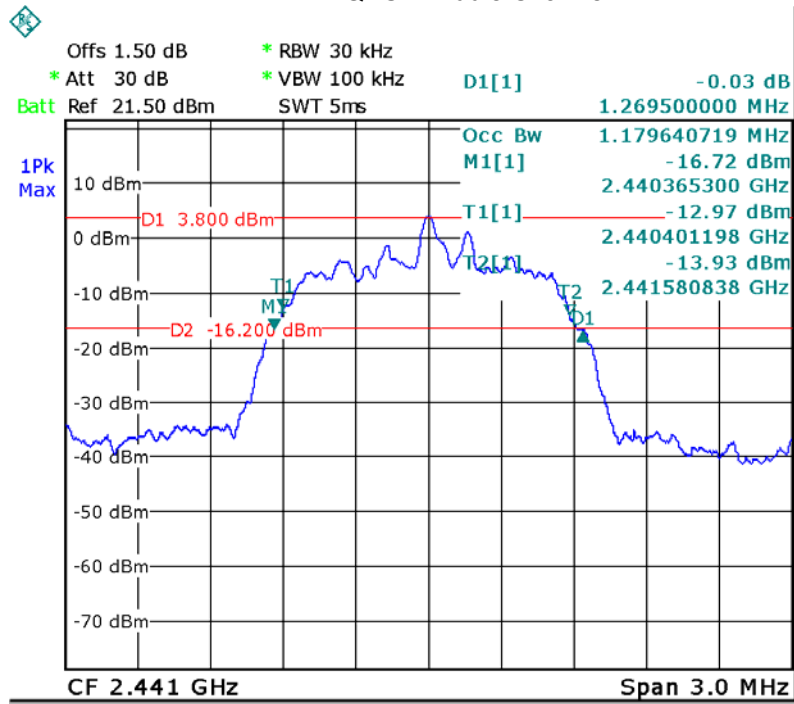


Pi/4 DQPSK High Channel

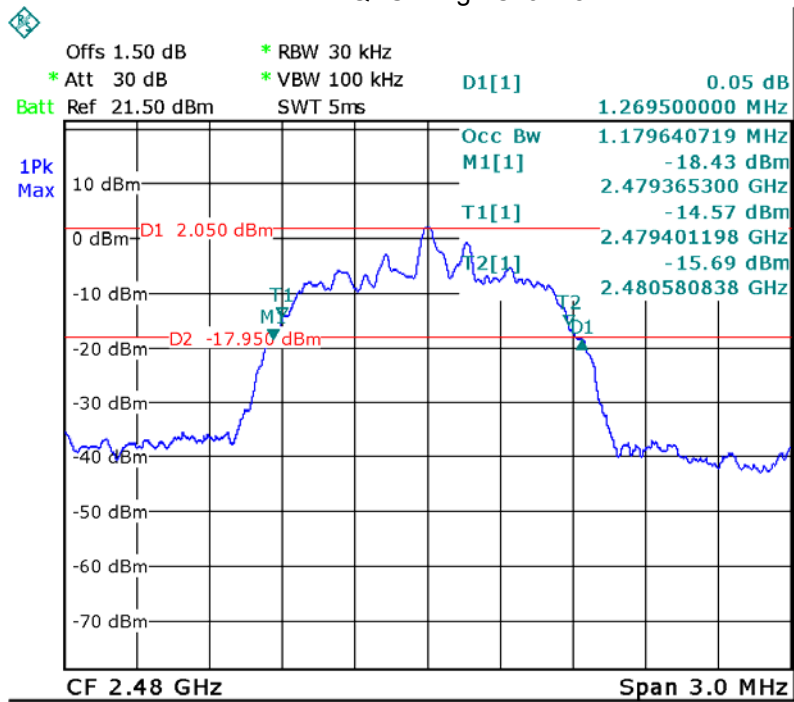


8DPSK Low Channel

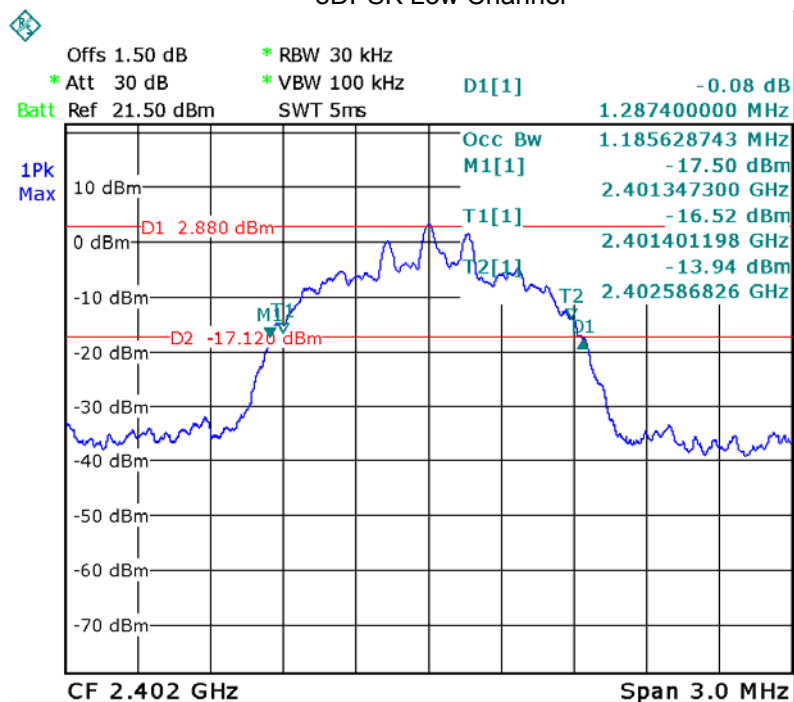

8DPSK Middle Channel

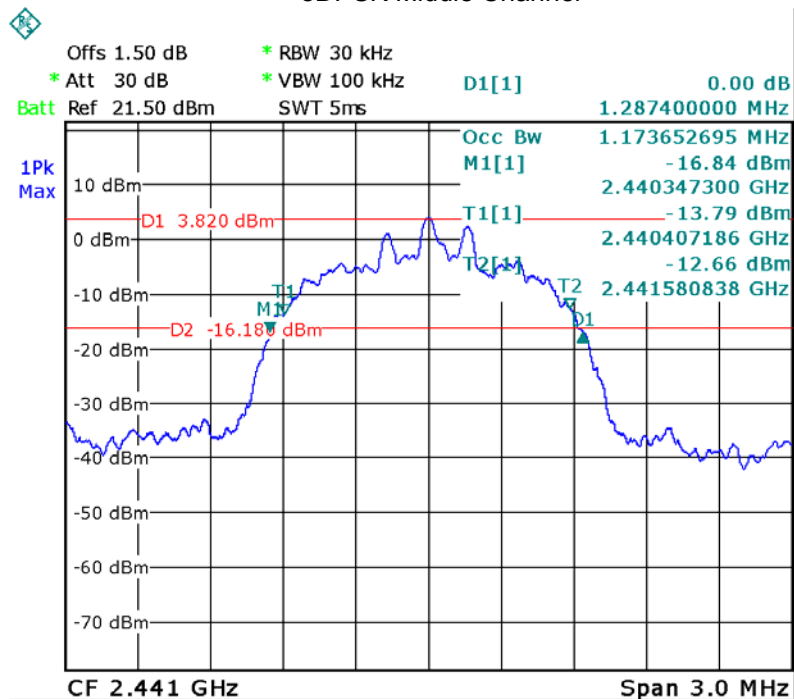

8DPSK High Channel

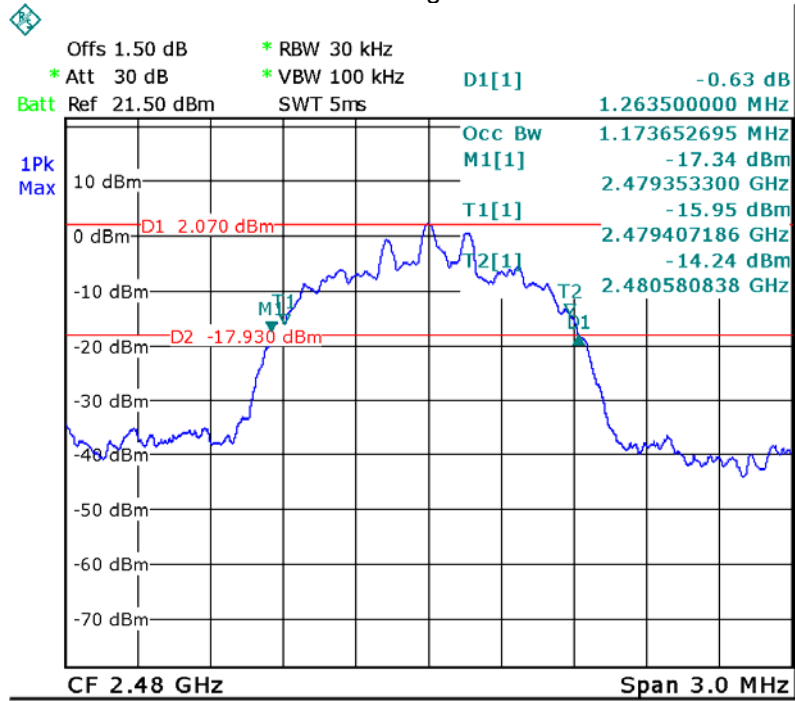

13 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test mode:	Test in fixing frequency transmitting mode.

13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.///

13.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	4.51	30
GFSK	Middle	5.70	30
GFSK	High	3.85	30
Pi/4 DQPSK	Low	3.86	21
Pi/4 DQPSK	Middle	5.03	21
Pi/4 DQPSK	High	3.32	21
8DPSK	Low	4.06	21
8DPSK	Middle	5.23	21
8DPSK	High	3.45	21

Test plots


GFSK Low Channel

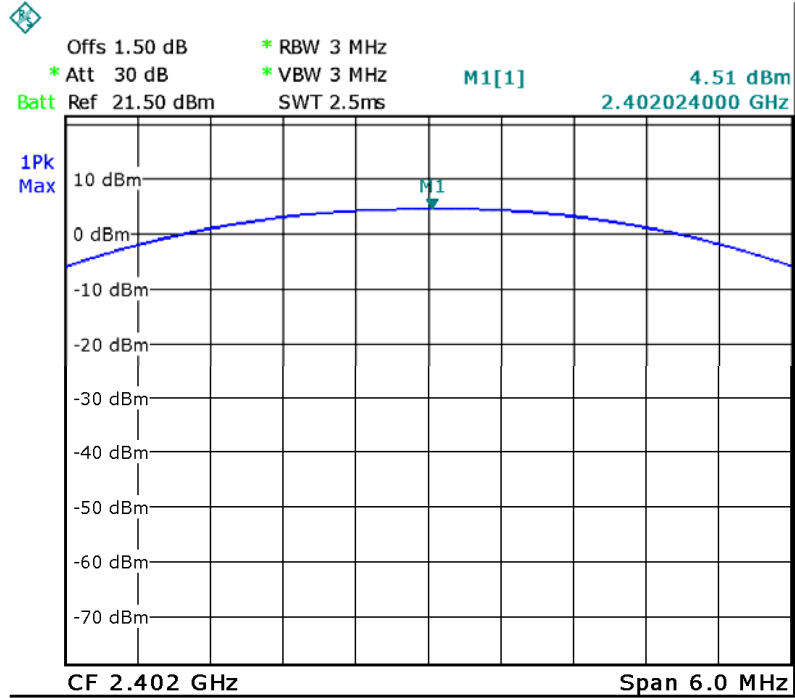


GFSK Middle Channel

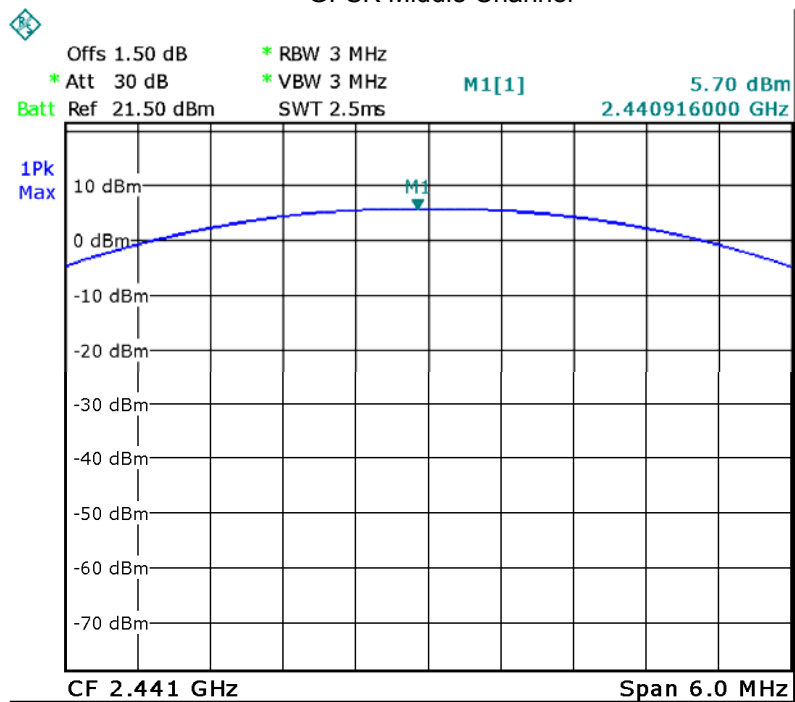


GFSK High Channel

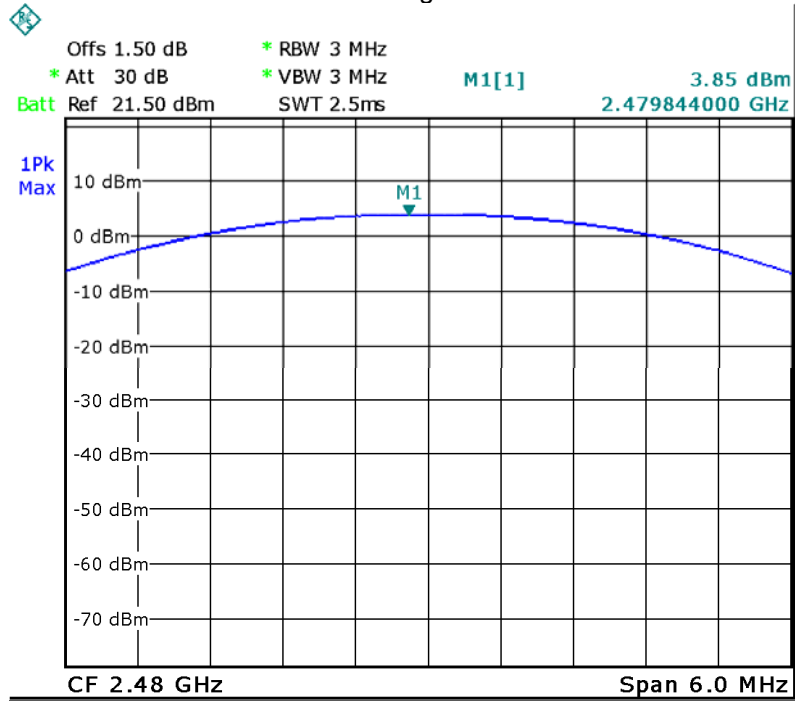


Pi/4 DQPSK Low Channel

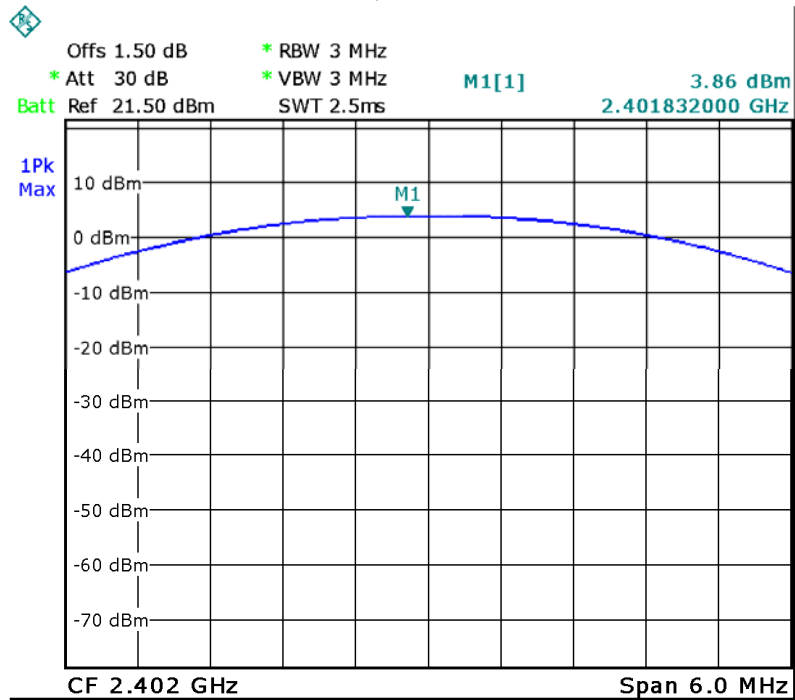


Pi/4 DQPSK Middle Channel

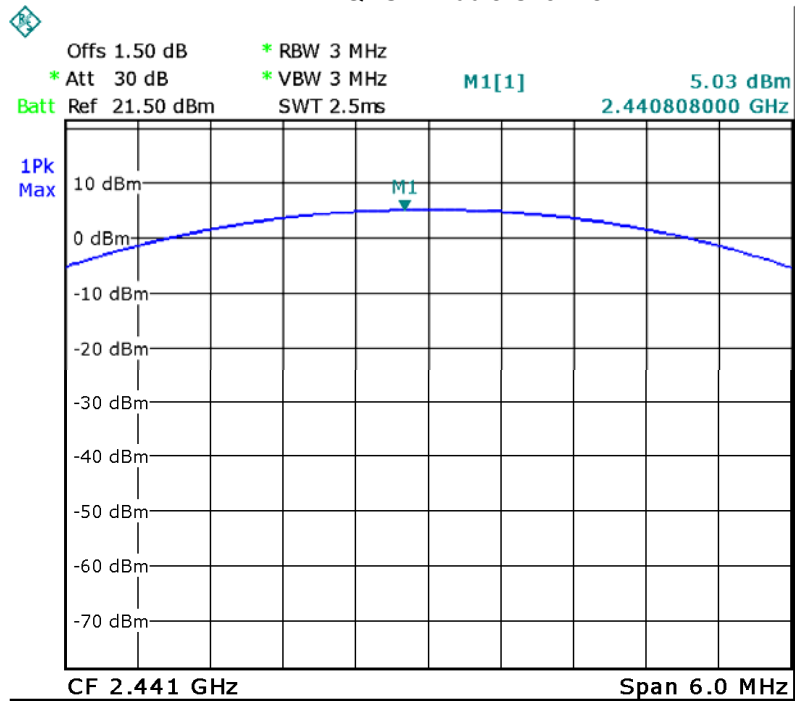


Pi/4 DQPSK High Channel

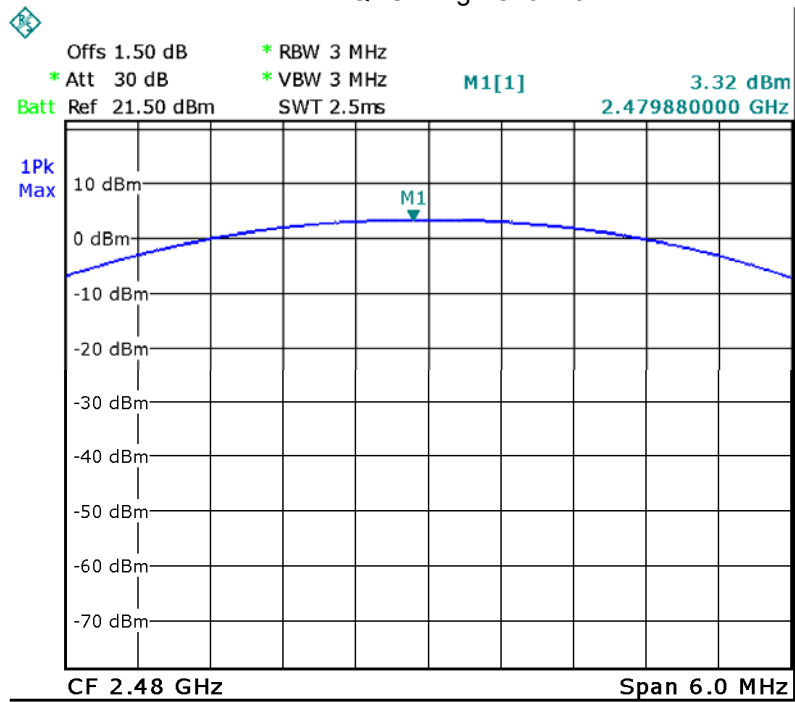


8DPSK Low Channel

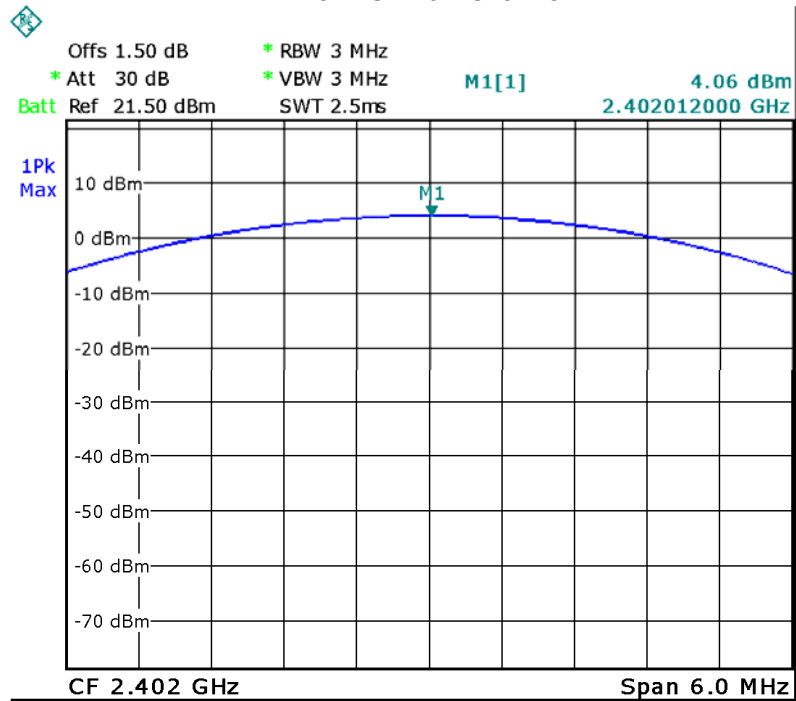

8DPSK Middle Channel

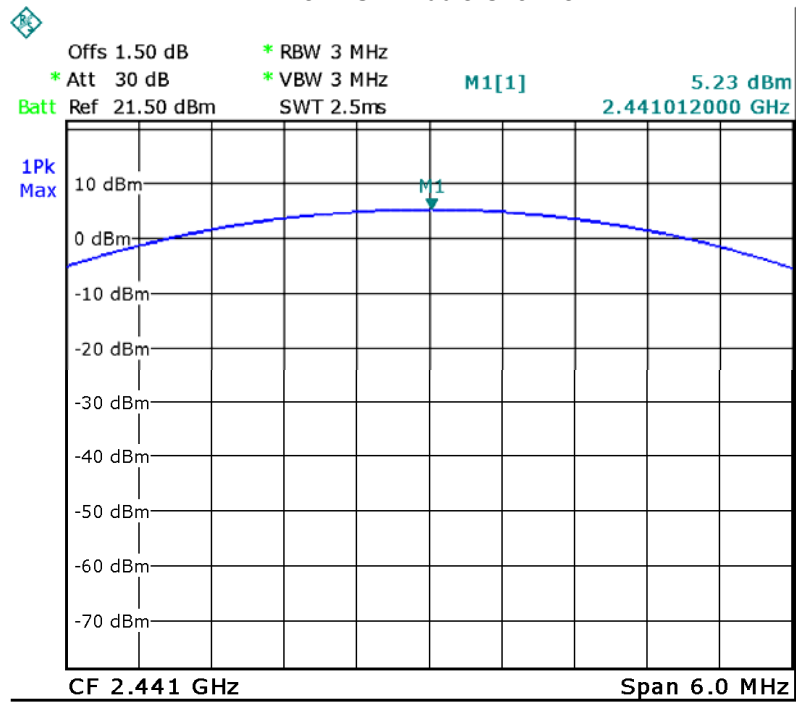

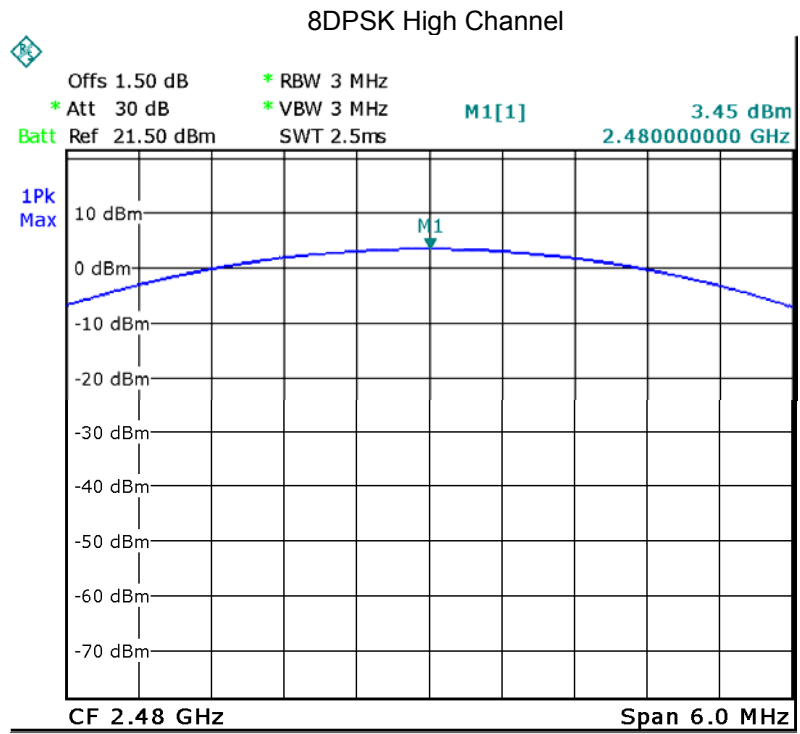

14 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

14.2 Test Result


Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.619	PASS
GFSK	Middle	1.000	0.631	PASS
GFSK	High	1.000	0.623	PASS
Pi/4 DQPSK	Low	0.994	0.835	PASS
Pi/4 DQPSK	Middle	1.000	0.847	PASS
Pi/4 DQPSK	High	0.994	0.847	PASS
8DPSK	Low	1.000	0.858	PASS
8DPSK	Middle	0.994	0.858	PASS
8DPSK	High	1.000	0.843	PASS

Test plots


GFSK Low Channel

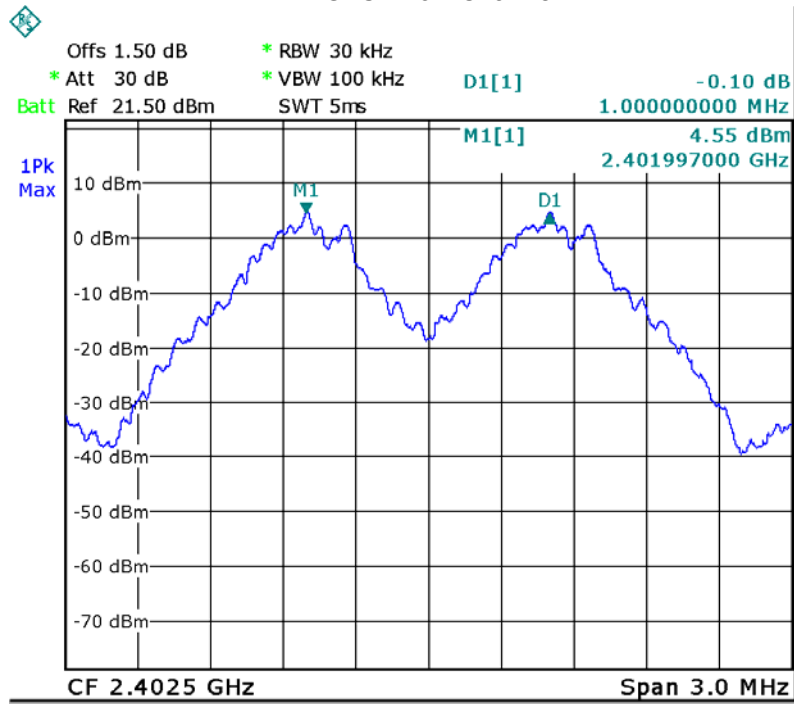


GFSK Middle Channel


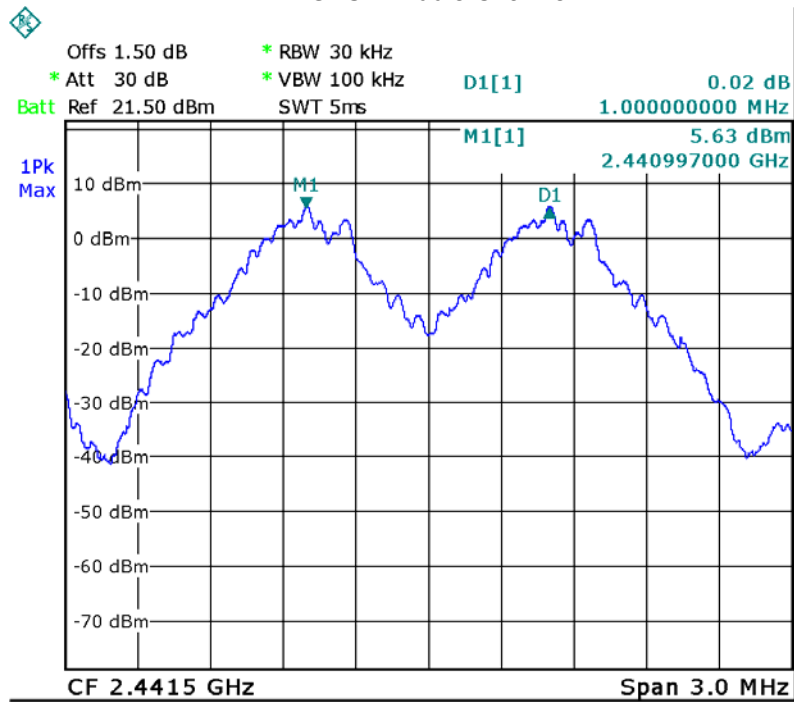


GFSK High Channel

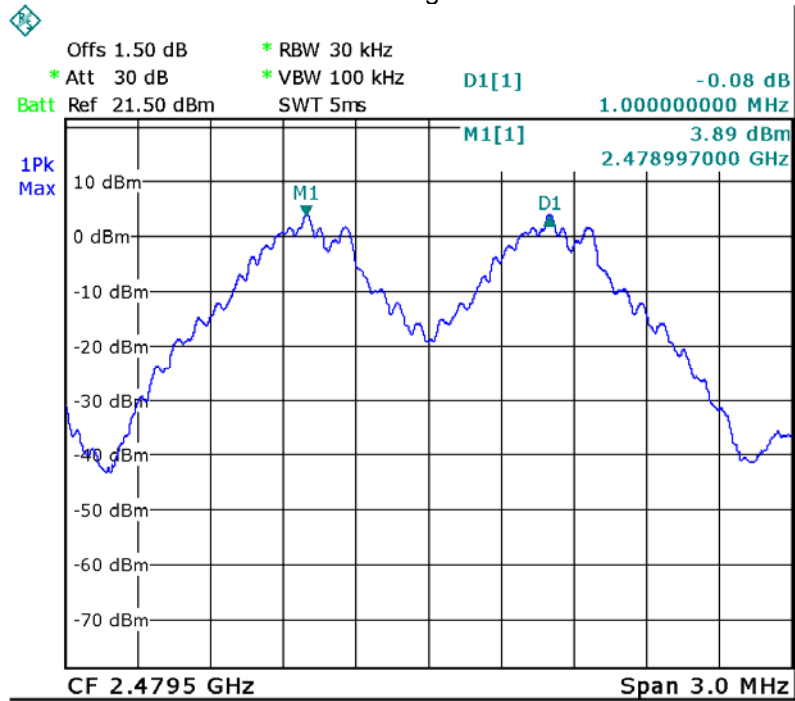


Pi/4 DQPSK Low Channel

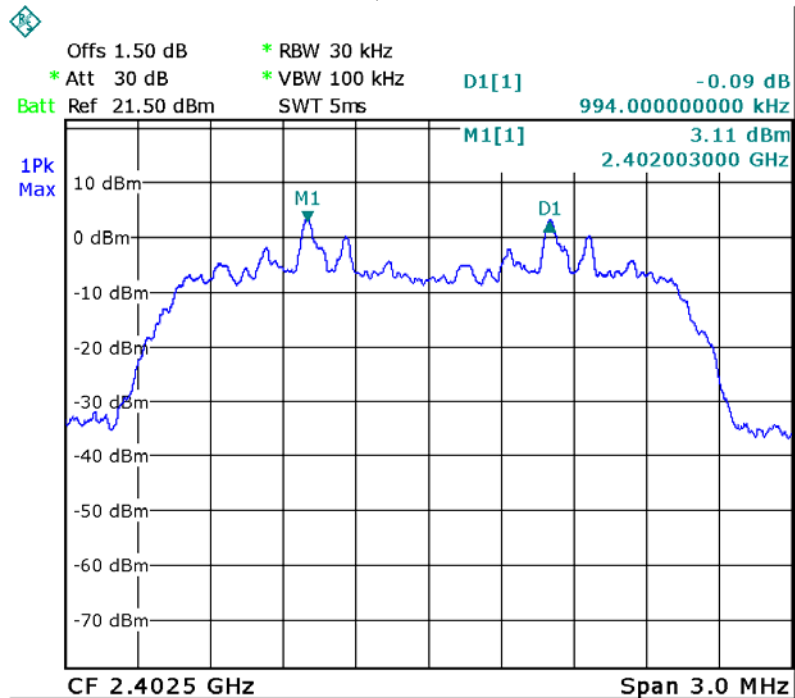


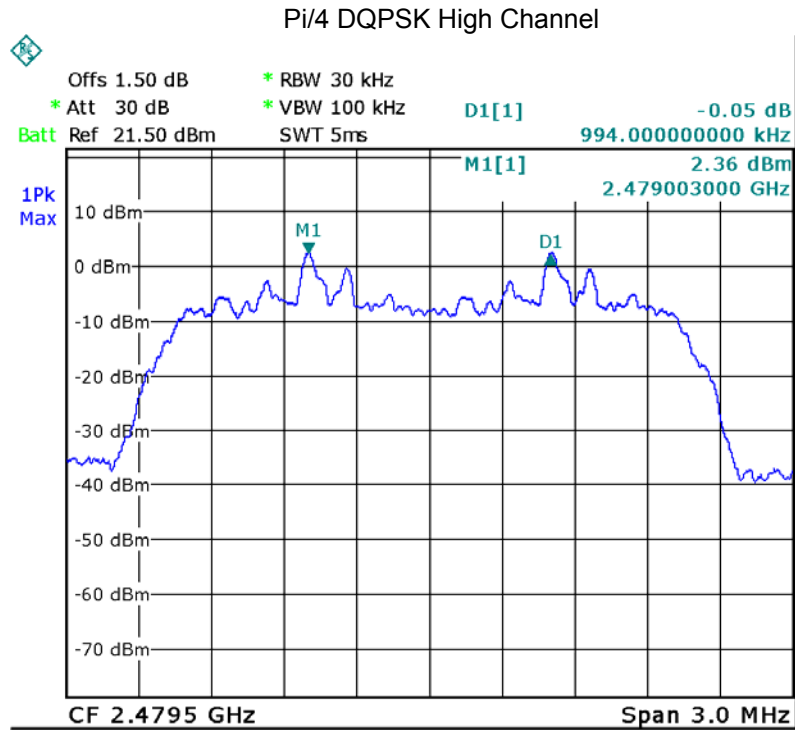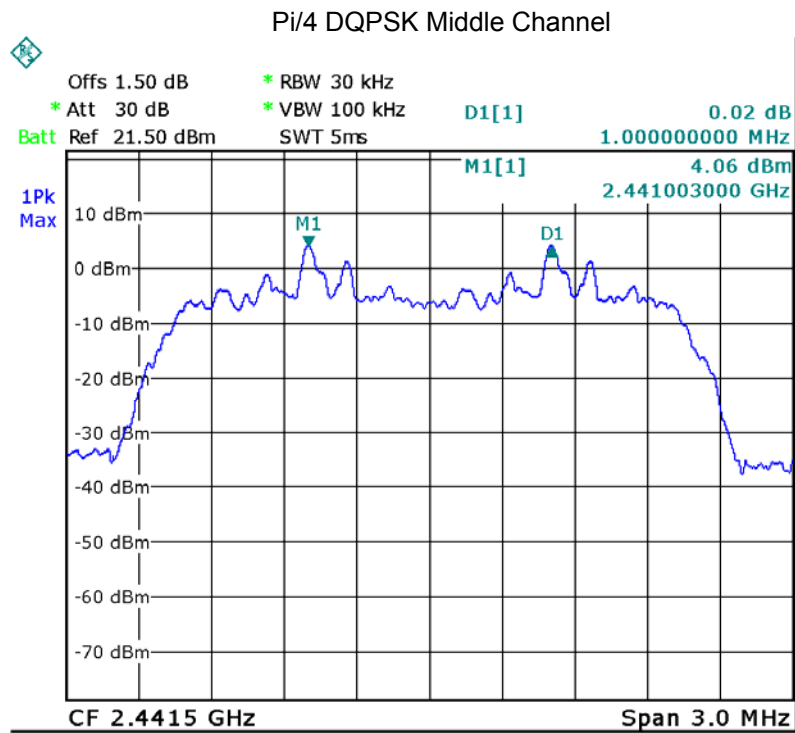


8DPSK Low Channel

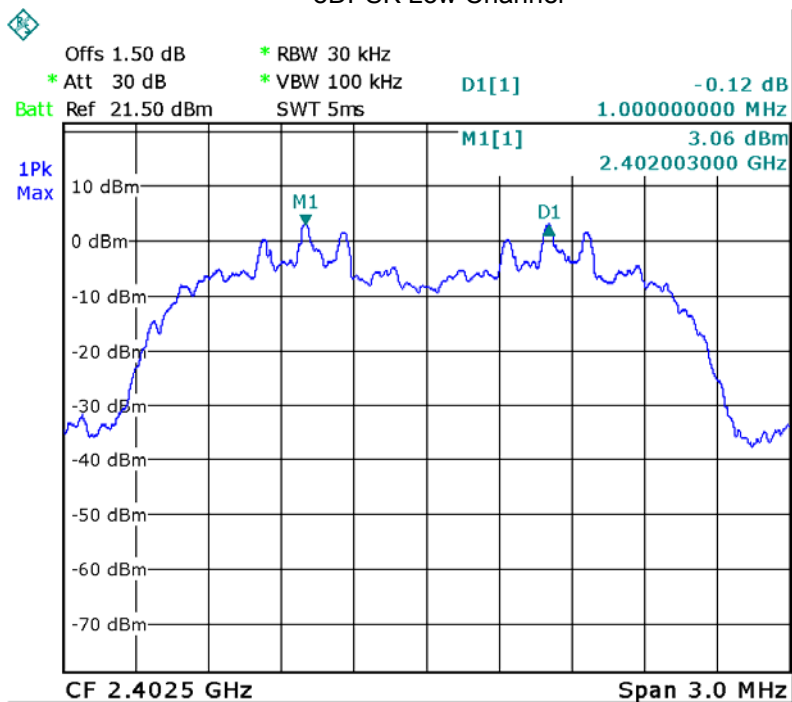

8DPSK Middle Channel

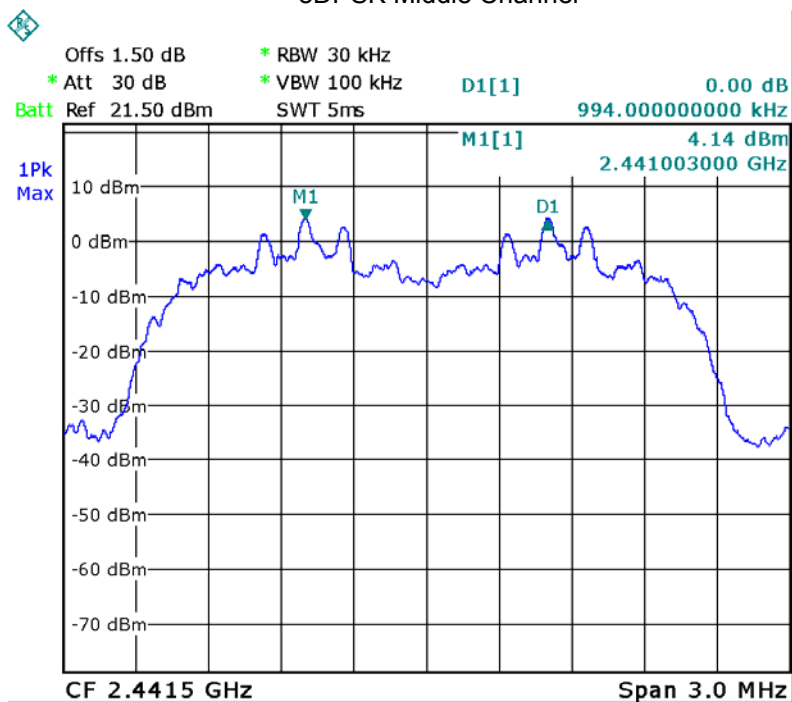

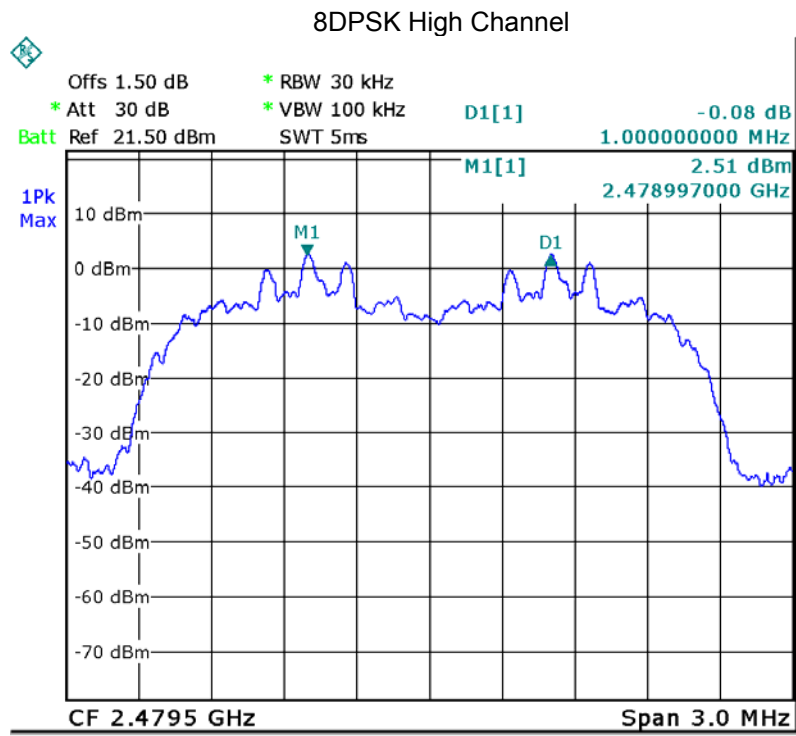

15 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

15.2 Test Result


Test Plots:

79 Channels in total


GFSK

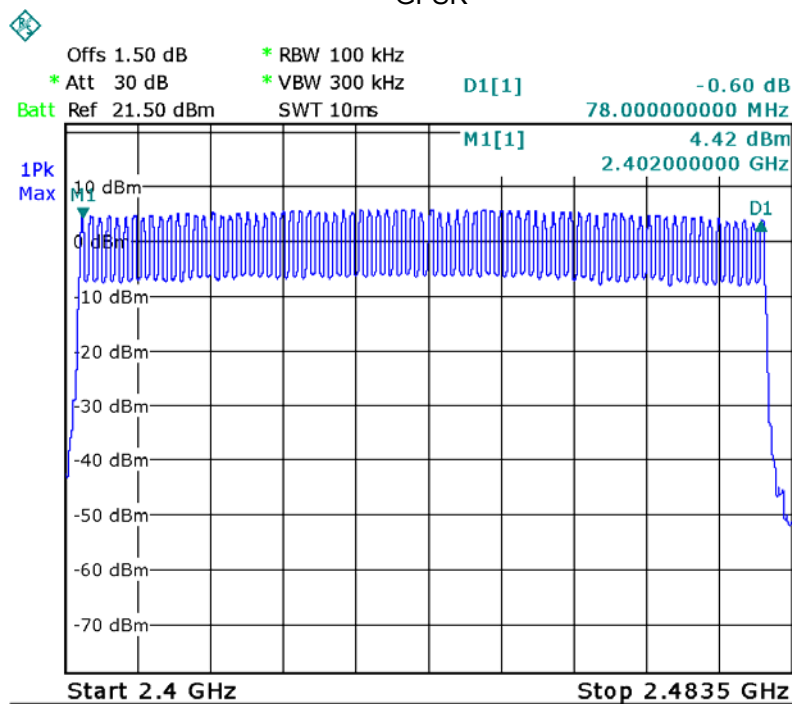

Pi/4 DQPSK

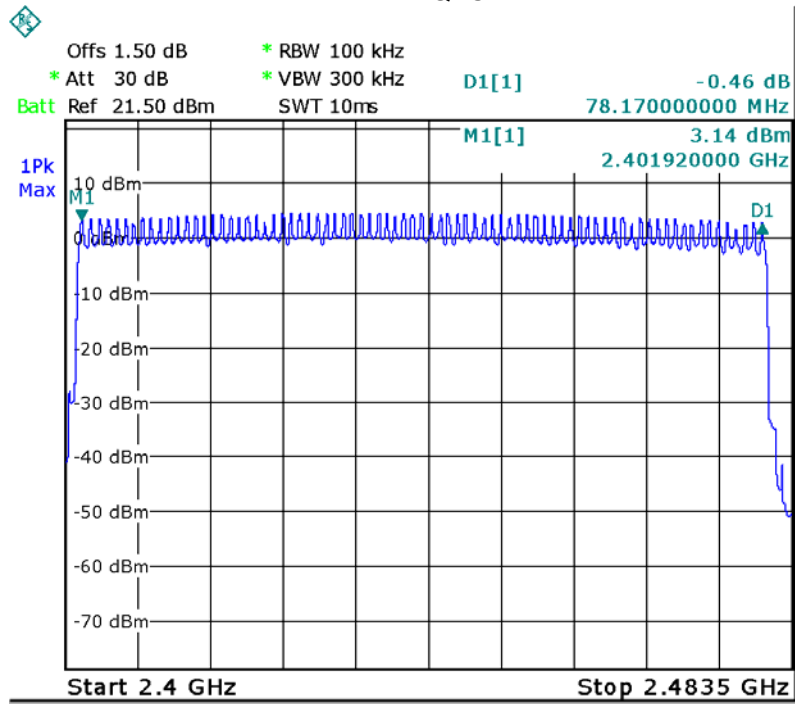

8DPSK

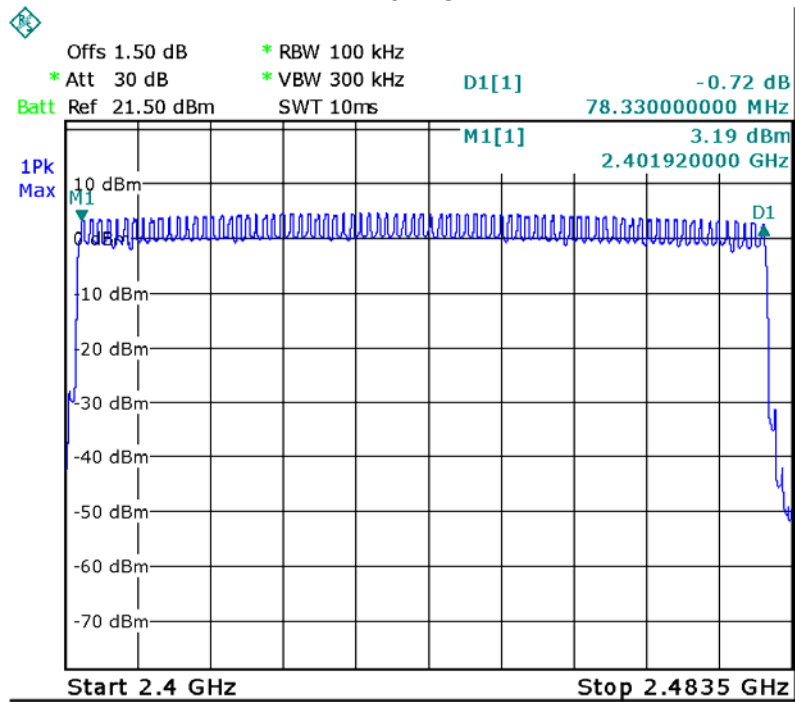

16 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

16.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

16.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.904	0.310	0.4
		middle	2.904	0.310	0.4
		High	2.904	0.310	0.4
Pi/4DQPSK	DH5	Low	2.912	0.311	0.4
		middle	2.912	0.311	0.4
		High	2.912	0.311	0.4
8DPSK	DH5	Low	2.912	0.311	0.4
		middle	2.912	0.311	0.4
		High	2.912	0.311	0.4


Test Plots
GFSK DH5 Low Channel

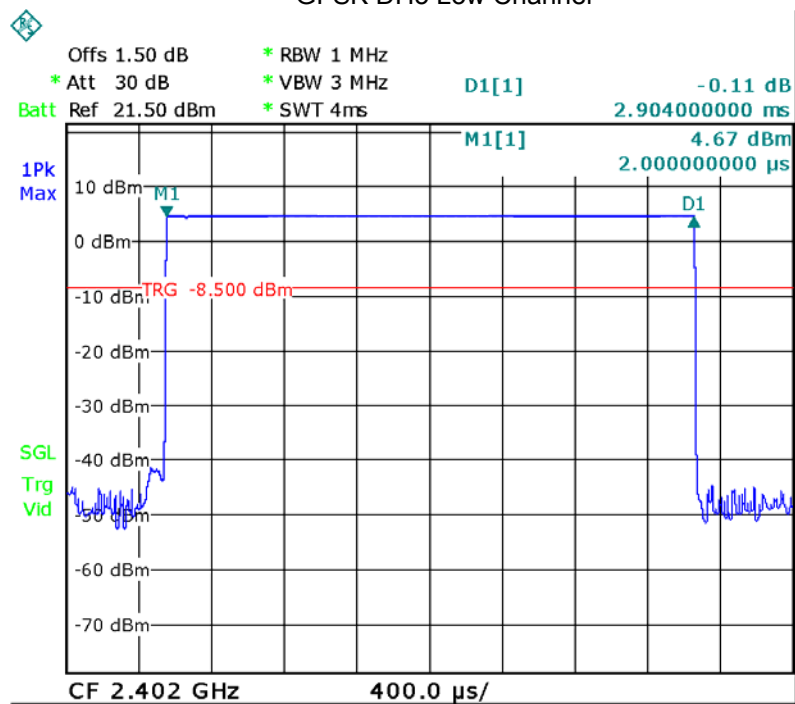


GFSK DH5 Middle Channel

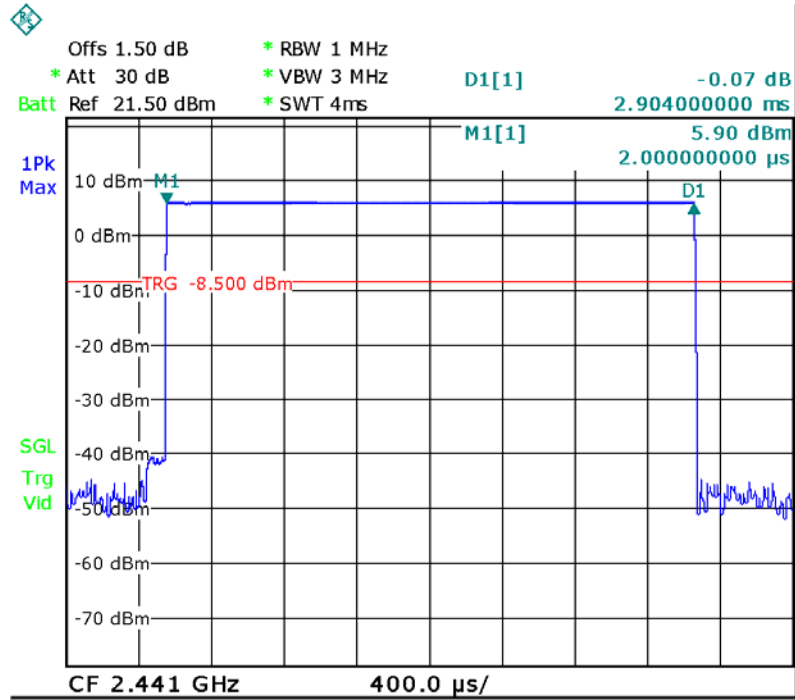


GFSK DH5 High Channel

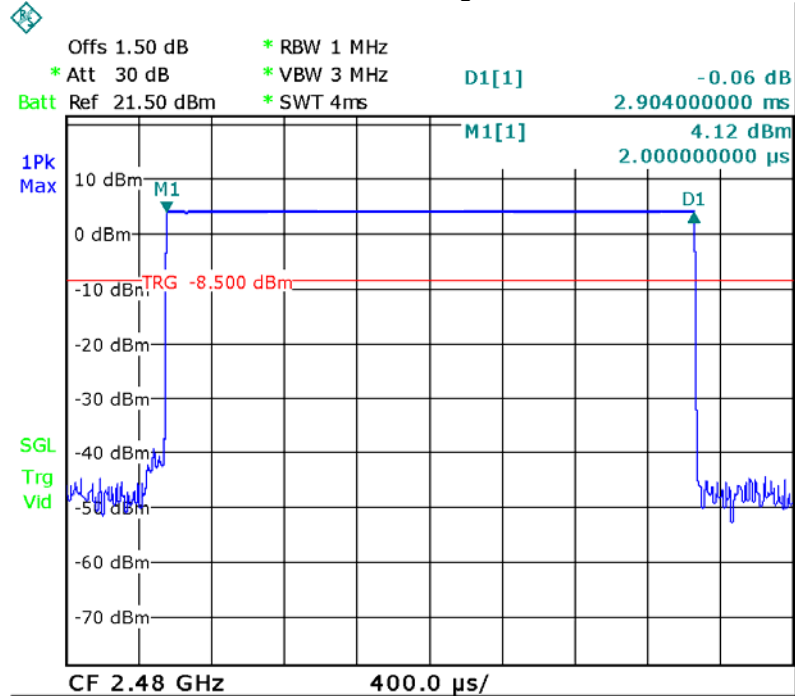


Pi/4DQPSK DH5 Low Channel

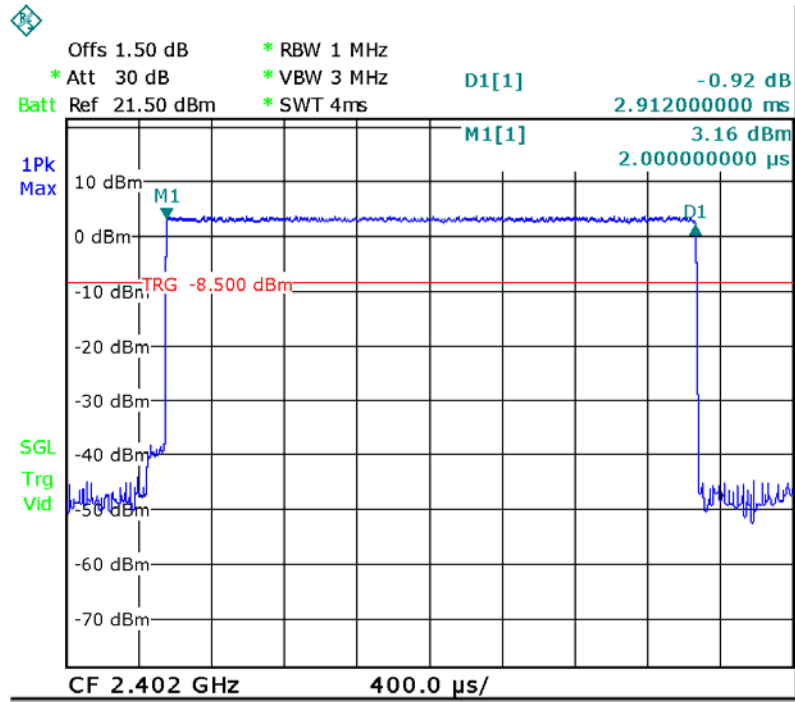


Pi/4DQPSK DH5 Middle Channel

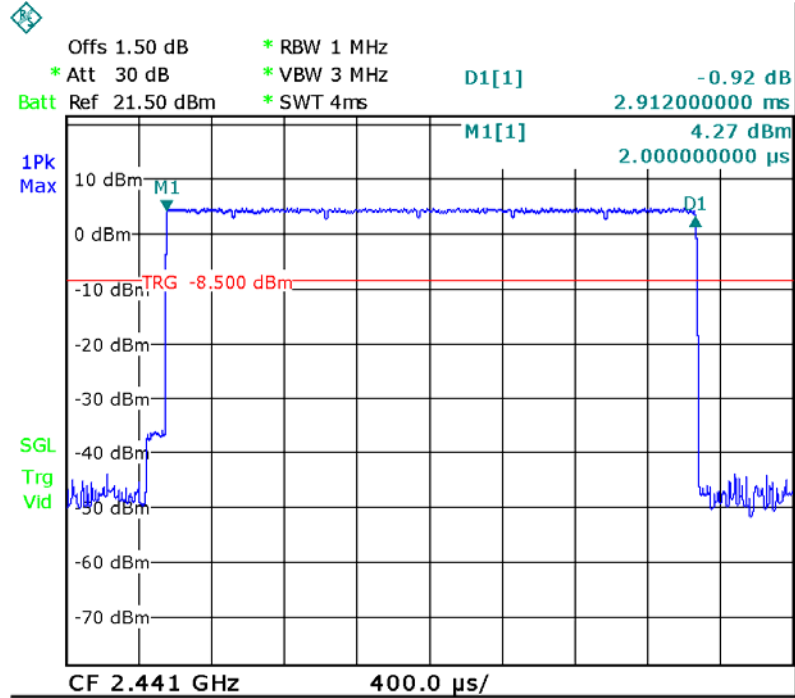


Pi/4DQPSK DH5 High Channel

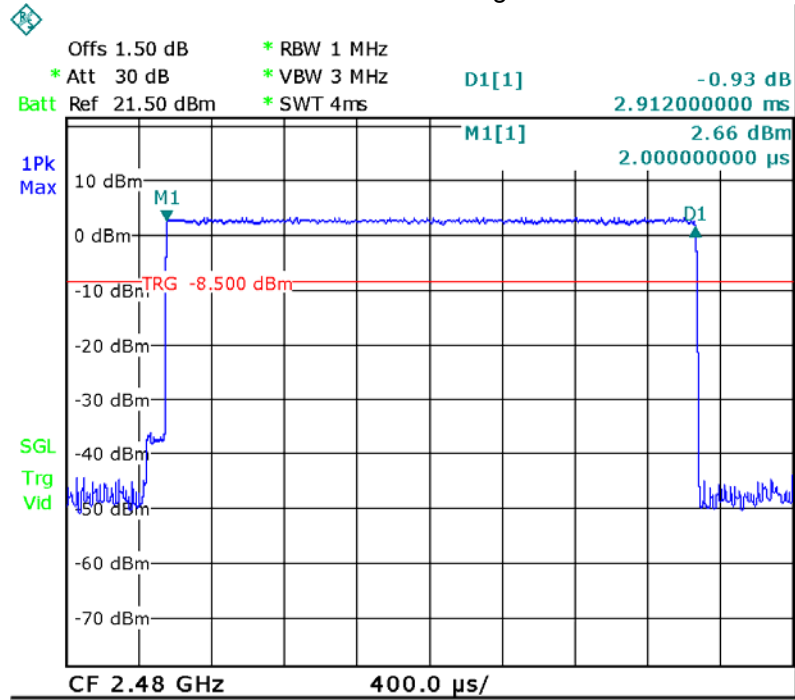


8DPSK DH5 Low Channel

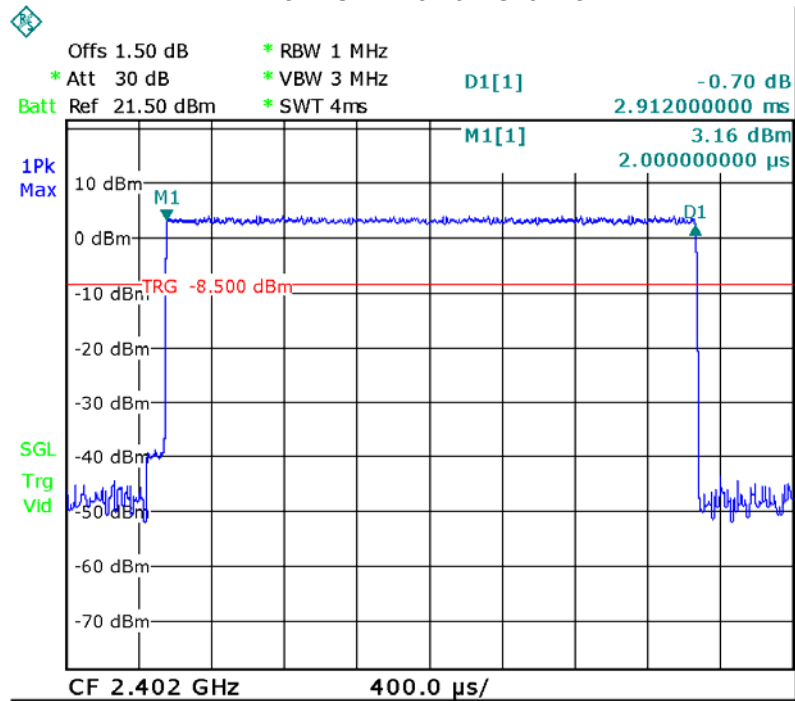

8DPSK DH5 Middle Channel

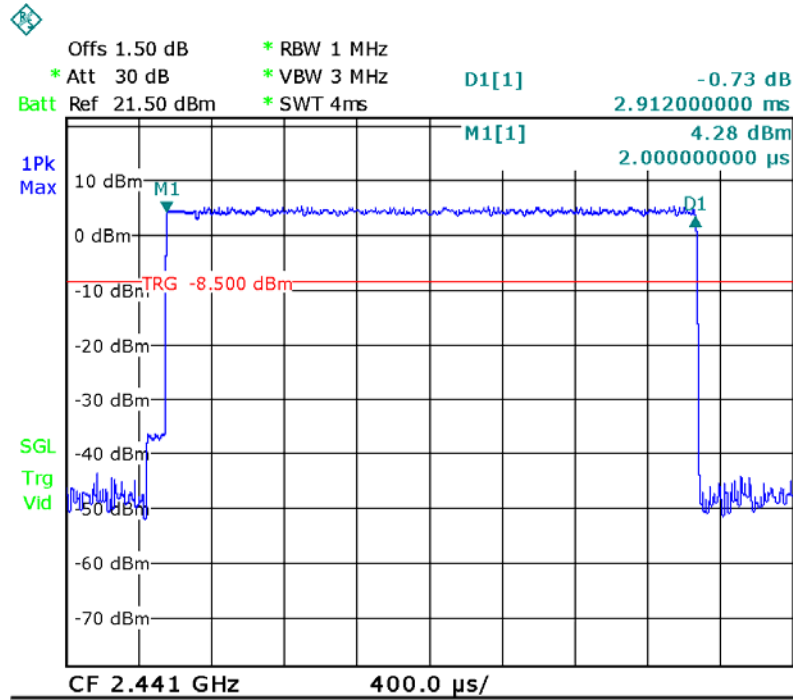


8DPSK DH5 High Channel

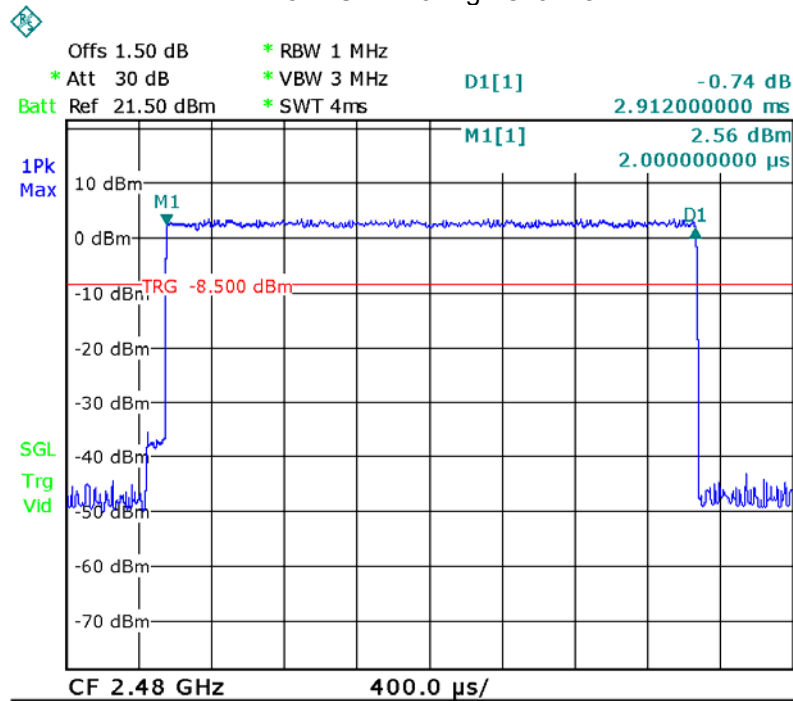

17 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an dipole antenna which use the Non-standard connector, fulfil the requirement of this section.

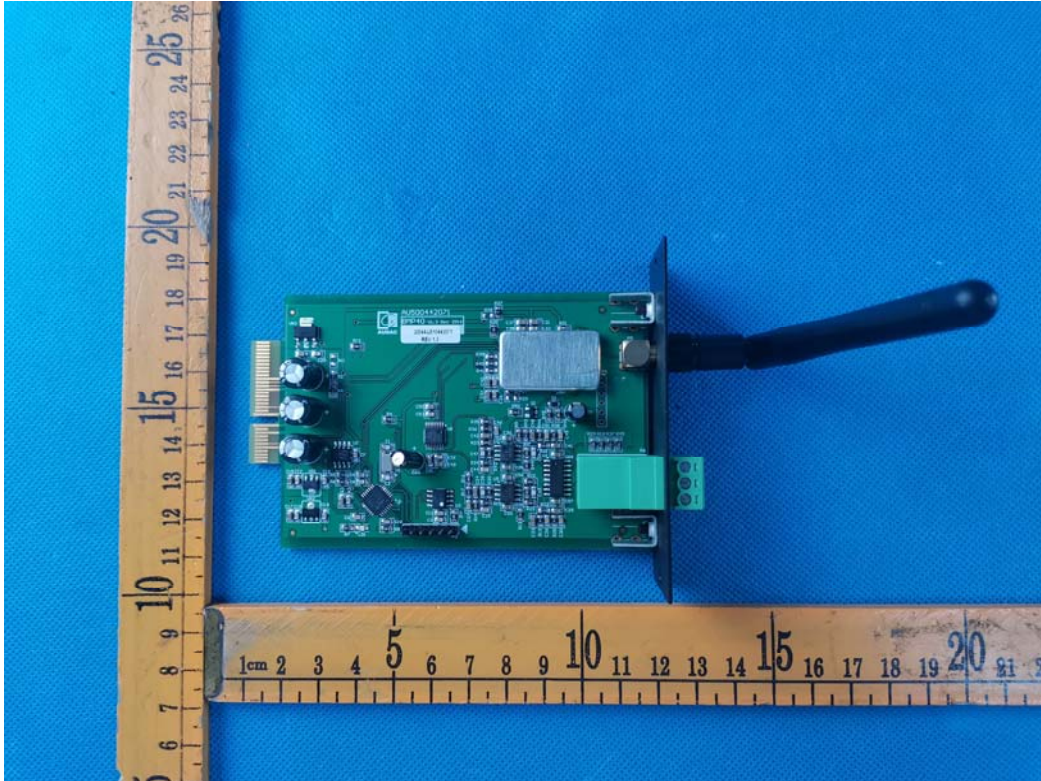

18 RF Exposure

Remark: refer to MPE test report: WTD20S03011503W002_FCC MPE report

19 Photographs of test setup and EUT.

Note: Please refer to appendix-BMP40-Photo.

=====**End of Report**=====