




RADIO EXPOSURE TEST REPORT

FCC ID : 2AVCWMWC-922M
Equipment : 5G NR-U Wireless Module
Brand Name : Miliwave
Model Name : MWC-922m
Applicant : Miliwave Co., Ltd.
504, 106-40 Gwahakdanji-ro, Gangneung-si,
Gangwon-do, 25440 South Korea
Manufacturer : Miliwave Co., Ltd.
504, 106-40 Gwahakdanji-ro, Gangneung-si,
Gangwon-do, 25440 South Korea
Standard : 47 CFR Part 2.1091

The product was received on Dec. 28, 2023, and testing was started from Jan. 03, 2024 and completed on Jan. 15, 2024. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

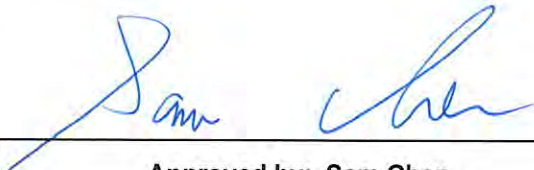

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Antenna Information	6
1.3 Accessories	6
1.4 Applicable Standards	6
1.5 Testing Location	6
2 Maximum Permissible Exposure	7
2.1 Limit of Maximum Permissible Exposure	7
2.2 MPE Calculation Method	7
2.3 MPE Exemption	8
2.4 Calculated Result and Limit.....	9
Photographs of EUT v01	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sam Chen

Report Producer: Lavender Zeng



1 General Description

1.1 EUT General Information

The Channel Plan(s)		
Evaluation Mode	Operating Frequency (GHz)	Modulation Type
57-71 GHz	Channel 1: 58.32 GHz Channel 2: 60.48 GHz Channel 3: 62.64 GHz Channel 4: 64.80 GHz Channel 5: 66.96 GHz Channel 6: 69.12 GHz	BPSK, QPSK, 16-QAM



1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	Miliwave Reflector	MWC-922 Reflector Antenna	Dish type reflector antenna	N/A	Note 1

Note 1:

Gain (dBi)					
Channel 1	Channel 2	Channel 3	Channel 4	Channel 5	Channel 6
41.0165	40.5424	41.1639	41.6721	42.0269	41.1283

Note 2: The above information was declared by manufacturer.

1.3 Accessories

N/A

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2.1091
- ♦ KDB 447498 D04 Interim General RF Exposure Guidance v01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ 47 CFR Part 1.1307
- ♦ 47 CFR Part 1.1310

1.5 Testing Location

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065 FAX: 886-3-656-9085
	Test site Designation No. TW3787 with FCC.
	Conformity Assessment Body Identifier (CABID) TW3787 with ISED.



2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 760 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 MPE Exemption

Option (A): 1.1307(b)(3)(i)(A): Available maximum time-averaged power is < 1 mW

Option (B): 1.1307(b)(3)(i)(B): Device operates between 300 MHz and 6 GHz and the maximum time-averaged power or effective radiated power (ERP), whichever is greater, <= Pth.

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

d = the separation distance (cm);

Option (C): 1.1307(b)(3)(i)(C): ERP is below a threshold calculated based on the distance R between the person and the antenna / radiating structure, where $R > \lambda / 2 \pi$.

Single RF Sources Subject to Routine Environmental Evaluation	
RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	1,920 R ² .
1.34-30	3,450 R ² /f ² .
30-300	3.83 R ² .
300-1,500	0.0128 R ² f.
1,500-100,000	19.2R ² .

Note: R is in meters, f is in MHz.



2.4 Calculated Result and Limit

Worst-case Integrated Band Power of Unwanted Emission (30MHz ~ 40GHz)						
Start (MHz)	Stop (MHz)	Limit (dBuV/m at 3m)	Limit (mW EIRP)	RBW (MHz)	Num Intervals	Integrated Band Power (mW)
30	88	40	3.01995E-06	0.1	580	0.002
88	216	43.5	6.76083E-06	0.1	1280	0.009
216	960	46	1.20226E-05	0.1	7440	0.089
960	1000	54	7.58578E-05	0.1	400	0.030
1000	40000	54	7.58578E-05	1	39000	2.958
Total						3.089

Total Integrated Band Power of All Emission (30MHz ~ 200GHz)				
Test Frequency (GHz)	30MHz ~ 40GHz Integrated Band Power (mW)	40 ~ 200GHz EIRP (dBm)	40 ~ 200GHz EIRP (mW)	30MHz ~200GHz Total Integrated Band Power (mW)
58.32	3.089	60.49	1119392.85	1119395.942
60.48		60.07	1016625.65	1016628.742
62.64		61.01	1261220.43	1261223.519
64.8		62.01	1588757.12	1588760.213
66.96		62.50	1778354.71	1778357.797
69.12		61.69	1474806.21	1474809.300



Maximum Permissible Exposure of Fundamental Emissions							
Separation Distance (cm)		760					
Maximum EIRP Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Tolerance (dB)	Tune-up Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
66.96	42.0269	62.50	0.01	62.51	1782454.24	0.246	1.00

Maximum Permissible Exposure of Fundamental + Unwanted Emissions								
Separation Distance (cm)		760						
Maximum EIRP Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Average EIRP Power (mW)	Tolerance (dB)	Tune-up Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
66.96	42.0269	62.50	1782454.24	0.01	62.51	1786563.22	0.246	1.00

MPE Exemption Option C							
Frequency (MHz)	$\lambda/2\pi$ (m)	R (m)	Tune-up EIRP (dBm)	Tune-up ERP (dBm)	Tune-up ERP (W)	ERP Threshold (W)	MPE Exemption
66960	0.0007	7.6	62.51	60.36	1086.426	1108.992	Complies

————THE END————