



LTE Band 14 / 10MHz / 64QAM

Middle Channel / 1RB

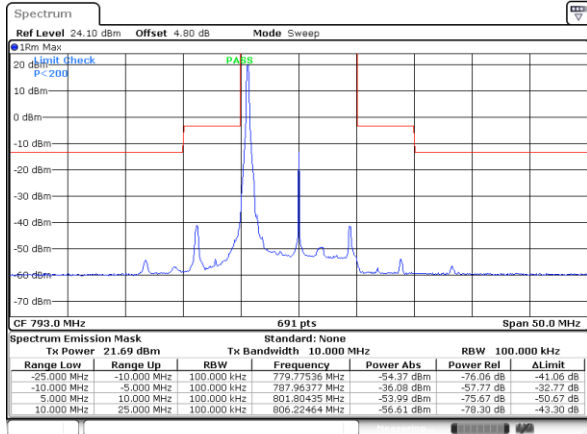


Date: 6 AUG 2020 23:40:07

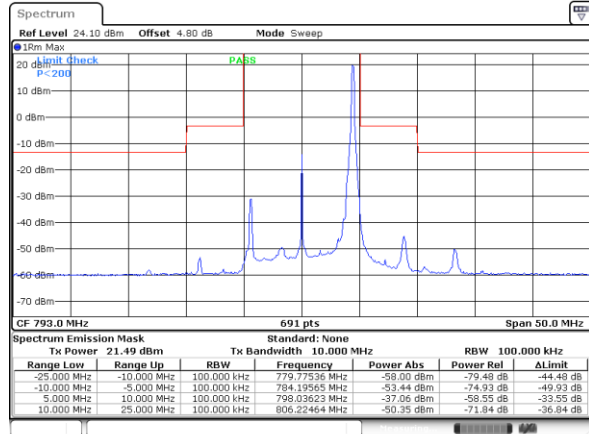

Date: 6 AUG 2020 23:37:39

Middle Channel / Full RB

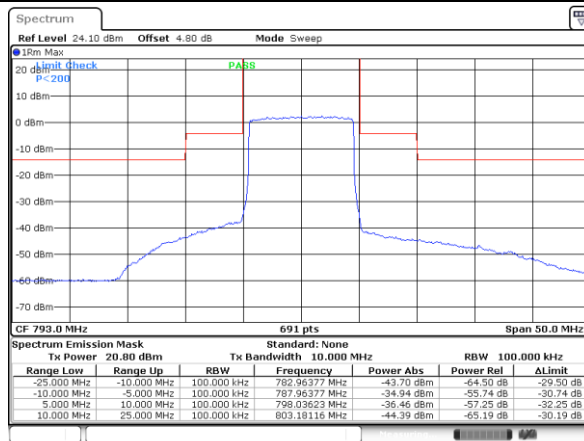

Date: 6 AUG 2020 23:40:37

Frequency Stability

Test Conditions		LTE Band 14 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	1.25ppm
		Deviation (ppm)	Result
50	Normal Voltage	0.0044	PASS
40	Normal Voltage	0.0035	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0026	
0	Normal Voltage	0.0040	
-10	Normal Voltage	0.0011	
-20	Normal Voltage	0.0044	
-30	Normal Voltage	0.0006	
20	Maximum Voltage	0.0037	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0026	

Note: Normal Voltage =4.0 V. ; Battery End Point (BEP) =3.8 V. ; Maximum Voltage =4.4 V.

Appendix B. Test Results of Radiated Test

Field Strength of Spurious Radiated

LTE Band 14 / QPSK / RB Size 1 Offset 0								
Bandwidth	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
10MHz	1578	-68.37	-42.15	-26.22	-71.00	1.09	5.87	H
	2366	-66.48	-13	-53.48	-68.88	1.37	5.92	H
	3156	-64.75	-13	-51.75	-68.64	1.64	7.68	H
	1578	-68.01	-42.15	-25.86	-70.64	1.09	5.87	V
	2366	-66.46	-13	-53.46	-68.86	1.37	5.92	V
	3156	-64.75	-13	-51.75	-68.64	1.64	7.68	V
Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.								
Test Result					PASS			