


# FCC SAR TEST REPORT

**FCC ID** : 2AVD3V740S  
**Equipment** : SMARTPHONE  
**Brand Name** : Vsmart  
**Model Name** : V740S  
**Applicant** : VinSmart Research and Manufacture Joint Stock Company  
Lot CN1-06B-1&2, Hi-tech Industrial Park 1, Hoa Lac  
Hi-tech Park, Ha Bang, Thach That, Hanoi, Vietnam  
**Manufacturer** : VinSmart Research and Manufacture Joint Stock Company  
Lot CN1-06B-1&2, Hi-tech Industrial Park 1, Hoa Lac  
Hi-tech Park, Ha Bang, Thach That, Hanoi, Vietnam  
**Standard** : FCC 47 CFR Part 2 (2.1093)

The product was received on Dec. 25, 2020 and testing was started from Dec. 31, 2020 and completed on Jan. 07, 2021. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been pass the FCC requirement.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager



**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information ..... 5
3.1 General Information ..... 5
3.2 General LTE SAR Test and Reporting Considerations ..... 6
4. RF Exposure Limits..... 8
4.1 Uncontrolled Environment..... 8
4.2 Controlled Environment..... 8
5. Specific Absorption Rate (SAR)..... 9
5.1 Introduction ..... 9
5.2 SAR Definition..... 9
6. System Description and Setup .....10
6.1 Test Site Location.....10
6.2 E-Field Probe .....11
6.3 Data Acquisition Electronics (DAE) .....11
6.4 Phantom.....12
6.5 Device Holder.....13
7. Measurement Procedures .....14
7.1 Spatial Peak SAR Evaluation .....14
7.2 Power Reference Measurement.....15
7.3 Area Scan .....15
7.4 Zoom Scan.....16
7.5 Volume Scan Procedures.....16
7.6 Power Drift Monitoring.....16
8. Test Equipment List .....17
9. System Verification .....18
9.1 Tissue Verification .....18
9.2 System Performance Check Results.....19
10. RF Exposure Positions .....20
10.1 Ear and handset reference point .....20
10.2 Definition of the cheek position .....21
10.3 Definition of the tilt position .....22
10.4 Body Worn Accessory .....23
10.5 Product Specific Exposure .....23
10.6 Wireless Router.....23
11. GSM/UMTS/LTE Output Power (Unit: dBm) .....24
12. WiFi/Bluetooth Output Power (Unit: dBm) .....59
13. Antenna Location .....63
14. SAR Test Results .....64
14.1 Head SAR .....66
14.2 Hotspot SAR .....69
14.3 Body Worn Accessory SAR.....72
14.4 Product Specific SAR.....74
14.5 Repeated SAR Measurement .....75
15. Simultaneous Transmission Analysis.....75
15.1 Head Exposure Conditions .....76
15.2 Hotspot Exposure Conditions.....77
15.3 Body-Worn Accessory Exposure Conditions .....78
15.4 Product Specific Exposure Conditions .....79
16. Uncertainty Assessment .....80
17. References.....80
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



### History of this test report

Report No.	Version	Description	Issued Date
FA0D0916	01	Initial issue of report	Jan. 20, 2021



**1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for VinSmart Research and Manufacture Joint Stock Company, SMARTPHONE, V740S, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary				Highest Simultaneous Transmission 1g SAR (W/kg)	Highest Simultaneous Transmission 10g SAR (W/kg)
		Head (Separation 0mm)	Body-worn (Separation 15mm)	Hotspot (Separation 10mm)	Product Specific (Separation 0mm)		
		1g SAR (W/kg)					
Licensed	GSM850	0.14	0.23	0.38		1.33	3.70
	GSM1900	0.04	0.24	1.08			
	WCDMA II	0.14	0.78	1.33	2.13		
	WCDMA IV	0.16	0.70	1.27	3.34		
	WCDMA V	0.15	0.25	0.43			
	LTE Band 2	0.14	0.56	1.30	2.29		
	LTE Band 5	0.15	0.20	0.37			
	LTE Band 12 / 17	0.10	0.20	0.21			
	LTE Band 41	0.02	0.30	0.87			
	LTE Band 4 / 66	0.13	0.82	1.30	3.10		
DTS	2.4GHz WLAN	0.40	0.05	0.12		1.33	3.34
NII	5GHz WLAN	0.59	0.05	0.12	0.48	1.33	3.70
DSS	Bluetooth	0.07	0.01	0.03		1.33	3.70
Date of Testing:		2020/12/31 ~ 2021/1/7					

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No.TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

**Reviewed by: Jason Wang**  
**Report Producer: Paula Chen**

**2. Guidance Applied**

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards, the below KDB standard may not including in the TAF code without accreditation.

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 941225 D07 UMPC Mini Tablet v01r02



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	SMARTPHONE
Brand Name	Vsmart
Model Name	V740S
FCC ID	2AVD3V740S
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz WLAN 2.4GHz Band: 2400 MHz ~ 2483.5 MHz WLAN 5.2GHz Band: 5150 MHz ~ 5250 MHz WLAN 5.3GHz Band: 5250 MHz ~ 5350 MHz WLAN 5.6GHz Band: 5470 MHz ~ 5725 MHz WLAN 5.8GHz Band: 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
HW Version	REV 1.0
SW Version	V740S_USA_U_A1_201218
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.</li> <li>When hotspot mode is enabled, power reduction will be activated to limit the maximum power of WCDMA B2 / B4 and LTE B2 / B4 / B66.</li> </ol>	



3.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	2AVD3V740S																																																														
Equipment Name	SMARTPHONE																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE MPR permanently built-in by design	<p><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	1. Yes, when operating in hotspot mode that LTE B2 / B4 / B66 power reduction applied to satisfy SAR compliance.																																																														
LTE Carrier Aggregation Combinations	Inter-Band possible combinations and the detail power measurement please referred to section 11.																																																														
LTE Carrier Aggregation Additional Information	2. This device supports maximum of 2 carriers in the downlink Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)



L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
<b>LTE Band 12</b>												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
<b>LTE Band 17</b>												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
<b>LTE Band 41</b>												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506				
L	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5				
M	40620	2593	40620	2593	40620	2593	40620	2593				
H	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5				
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680				
<b>LTE Band 66</b>												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770



### 4. RF Exposure Limits

#### 4.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

#### 4.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.





## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

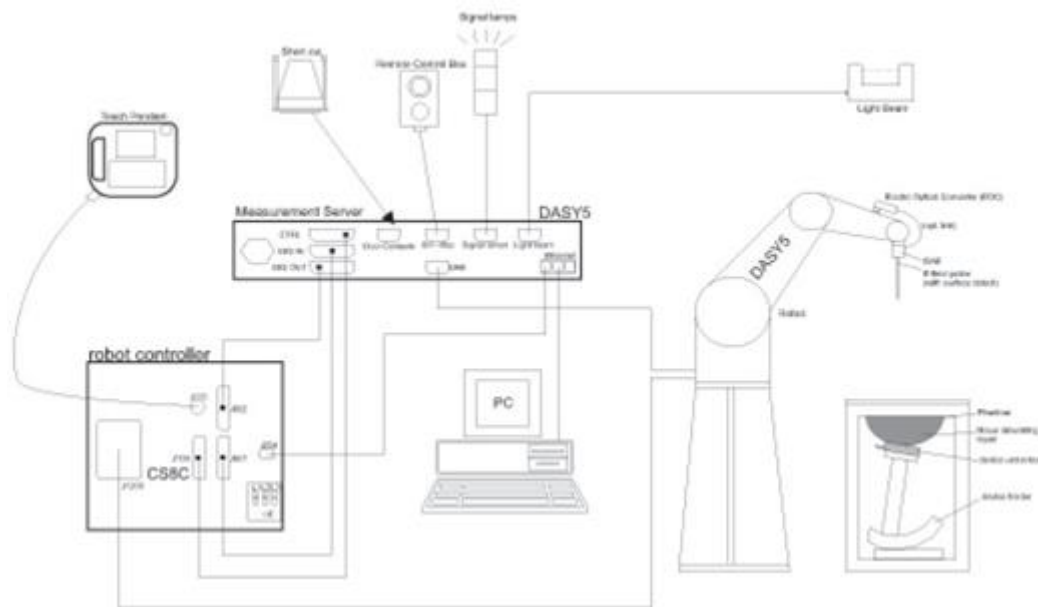

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

### 6.1 Test Site Location


The SAR measurement facilities used to collect data are within both Sporton Lab list below test site location are accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190 and 0007) and the FCC designation No.TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory			
Test Site Location	TW1190 No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, CHINESE TAIPEI		TW0007 No. 58, Aly. 75, Ln. 564, Wehnuia 3rd, Rd., Guishan Dist., Taoyuan City, CHINESE TAIPEI	
	SAR01-HY	SAR03-HY	SAR08-HY	SAR09-HY
Test Site No.	SAR04-HY	SAR05-HY	SAR11-HY	SAR12-HY
	SAR06-HY	SAR10-HY		


**6.2 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz – 4 GHz)	
<b>Directivity</b>	$\pm 0.2$ dB in TSL (rotation around probe axis) $\pm 0.3$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g – >100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: $\pm 0.2$ dB (30 MHz – 6 GHz)	
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g – >100 mW/g Linearity: $\pm 0.2$ dB (noise: typically <1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.3 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**6.4 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.5 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
<p>Note: <math>\delta</math> is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is <math>\leq 1.4</math> W/kg, <math>\leq 8</math> mm, <math>\leq 7</math> mm and <math>\leq 5</math> mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.





### 8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit <sup>(2)</sup>	D750V3	1107	Mar. 08, 2019	Mar. 06, 2021
SPEAG	835MHz System Validation Kit <sup>(2)</sup>	D835V2	4d167	Nov. 25, 2019	Nov. 23, 2021
SPEAG	1750MHz System Validation Kit <sup>(2)</sup>	D1750V2	1112	Mar. 07, 2019	Mar. 05, 2021
SPEAG	1900MHz System Validation Kit <sup>(2)</sup>	D1900V2	5d041	Sep. 11, 2018	Sep. 08, 2021
SPEAG	2450MHz System Validation Kit <sup>(2)</sup>	D2450V2	736	Aug. 31, 2018	Aug. 28, 2021
SPEAG	2600MHz System Validation Kit <sup>(2)</sup>	D2600V2	1008	Aug. 31, 2018	Aug. 28, 2021
SPEAG	2600MHz System Validation Kit <sup>(2)</sup>	D2600V2	1078	Mar. 06, 2019	Mar. 04, 2021
SPEAG	5GHz System Validation Kit <sup>(2)</sup>	D5GHzV2	1006	Sep. 27, 2018	Sep. 24, 2021
SPEAG	Data Acquisition Electronics	DAE4	376	Nov. 23, 2020	Nov. 22, 2021
SPEAG	Data Acquisition Electronics	DAE4	915	Jun. 22, 2020	Jun. 21, 2021
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 23, 2020	Jul. 22, 2021
SPEAG	Dosimetric E-Field Probe	ES3DV3	3169	May. 27, 2020	May. 26, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	3976	Jan. 27, 2020	Jan. 26, 2021
SPEAG	Dosimetric E-Field Probe	EX3DV4	7346	May. 20, 2020	May. 19, 2021
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 10, 2020	Nov. 09, 2021
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 10, 2020	Nov. 09, 2021
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Nov. 10, 2020	Nov. 09, 2021
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Mar. 18, 2020	Mar. 17, 2021
R&S	BT Base Station	CBT	100815	Feb. 15, 2020	Feb. 14, 2021
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	SMA100A	101091	Jul. 20, 2020	Jul. 19, 2021
Agilent	ENA Network Analyzer	E5071C	MY46101588	Jun. 10, 2020	Jun. 09, 2021
SPEAG	Dielectric Probe Kit	DAK-3.5	1146	Jul. 22, 2020	Jul. 21, 2021
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3252	Jun. 23, 2020	Jun. 22, 2021
Anritsu	Power Meter	ML2495A	1419002	Aug. 19, 2020	Aug. 18, 2021
Anritsu	Power Sensor	MA2411B	1911176	Aug. 18, 2020	Aug. 17, 2021
Anritsu	Power Meter	ML2495A	1804003	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Power Sensor	MA2411B	1726150	Oct. 21, 2020	Oct. 20, 2021
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 30, 2020	Jun. 29, 2021
Anritsu	Spectrum Analyzer	N9010A	MY53470118	Mar. 12, 2020	Mar. 11, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	321501827	Aug. 06, 2020	Aug. 05, 2021
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 07, 2020	May. 06, 2021
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	

**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.



### 9. System Verification

#### 9.1 Tissue Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18°C to 25°C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements.

The liquid tissue depth was at least 15cm in the phantom for all SAR testing


#### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
750	22.3	0.890	43.010	0.89	41.90	0.00	2.65	±5	2020/12/31
750	22.3	0.893	42.549	0.89	41.90	0.34	1.55	±5	2021/1/4
750	22.4	0.888	41.436	0.89	41.90	-0.22	-1.11	±5	2021/1/6
835	22.3	0.890	42.011	0.90	41.50	-1.11	1.23	±5	2020/12/31
835	22.2	0.871	40.832	0.90	41.50	-3.22	-1.61	±5	2021/1/2
835	22.4	0.921	41.140	0.90	41.50	2.33	-0.87	±5	2021/1/6
1750	22.1	1.360	40.072	1.37	40.10	-0.73	-0.07	±5	2021/1/1
1750	22.2	1.345	40.411	1.37	40.10	-1.82	0.78	±5	2021/1/2
1750	22.3	1.387	40.175	1.37	40.10	1.24	0.19	±5	2021/1/4
1750	22.6	1.400	40.100	1.37	40.10	2.19	0.00	±5	2021/1/6
1750	22.4	1.376	40.379	1.37	40.10	0.44	0.70	±5	2021/1/7
1900	22.1	1.399	40.035	1.40	40.00	-0.07	0.09	±5	2021/1/1
1900	22.4	1.437	40.395	1.40	40.00	2.64	0.99	±5	2021/1/3
1900	22.3	1.389	40.540	1.40	40.00	-0.79	1.35	±5	2021/1/4
1900	22.6	1.430	39.200	1.40	40.00	2.14	-2.00	±5	2021/1/6
1900	22.4	1.454	38.831	1.40	40.00	3.86	-2.92	±5	2021/1/7
2450	22.4	1.823	38.894	1.80	39.20	1.28	-0.78	±5	2021/1/6
2600	22.4	1.984	38.231	1.96	39.00	1.22	-1.97	±5	2021/1/1
2600	22.3	1.963	38.891	1.96	39.00	0.15	-0.28	±5	2021/1/4
2600	22.4	1.999	38.288	1.96	39.00	1.99	-1.83	±5	2021/1/6
5250	22.4	4.721	35.714	4.71	35.95	0.23	-0.66	±5	2021/1/5
5600	22.4	5.055	35.249	5.07	35.50	-0.30	-0.71	±5	2021/1/5
5750	22.4	5.212	35.052	5.22	35.35	-0.15	-0.84	±5	2021/1/5

**9.2 System Performance Check Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2020/12/31	750	50	D750V3-1107	ES3DV3 - SN3169	DAE4 Sn915	0.414	8.32	8.28	-0.48	0.274	5.61	5.48	-2.32
2021/1/4	750	250	D750V3-1107	EX3DV4 - SN3976	DAE4 Sn376	2.07	8.32	8.28	-0.48	1.39	5.61	5.56	-0.89
2021/1/6	750	250	D750V3-1107	EX3DV4 - SN7346	DAE4 Sn853	2.10	8.32	8.40	0.96	1.41	5.61	5.64	0.53
2020/12/31	835	250	D835V2-4d167	ES3DV3 - SN3169	DAE4 Sn915	2.50	9.55	10.00	4.71	1.64	6.21	6.56	5.64
2021/1/2	835	250	D835V2-4d167	ES3DV3 - SN3169	DAE4 Sn915	2.47	9.55	9.88	3.46	1.63	6.21	6.52	4.99
2021/1/6	835	250	D835V2-4d167	EX3DV4 - SN7346	DAE4 Sn853	2.48	9.55	9.92	3.87	1.59	6.21	6.36	2.42
2021/1/1	1750	50	D1750V2-1112	ES3DV3 - SN3169	DAE4 Sn915	1.96	36.70	39.20	6.81	1.06	19.40	21.2	9.28
2021/1/2	1750	50	D1750V2-1112	ES3DV3 - SN3169	DAE4 Sn915	1.94	36.70	38.80	5.72	1.05	19.40	21	8.25
2021/1/4	1750	250	D1750V2-1112	EX3DV4 - SN3976	DAE4 Sn376	9.39	36.70	37.56	2.34	4.99	19.40	19.96	2.89
2021/1/6	1750	50	D1750V2-1112	ES3DV3 - SN3169	DAE4 Sn915	2.01	36.70	40.20	9.54	1.06	19.40	21.2	9.28
2021/1/7	1750	250	D1750V2-1112	EX3DV4 - SN7346	DAE4 Sn853	8.92	36.70	35.68	-2.78	4.81	19.40	19.24	-0.82
2021/1/1	1900	50	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn915	2.15	40.20	43.00	6.97	1.13	21.20	22.6	6.60
2021/1/3	1900	50	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn915	2.21	40.20	44.20	9.95	1.16	21.20	23.2	9.43
2021/1/4	1900	250	D1900V2-5d041	EX3DV4 - SN3976	DAE4 Sn376	11.00	40.20	44.00	9.45	5.68	21.20	22.72	7.17
2021/1/6	1900	50	D1900V2-5d041	ES3DV3 - SN3169	DAE4 Sn915	2.20	40.20	44.00	9.45	1.16	21.20	23.2	9.43
2021/1/7	1900	250	D1900V2-5d041	EX3DV4 - SN7346	DAE4 Sn853	9.69	40.20	38.76	-3.58	5.05	21.20	20.2	-4.72
2021/1/6	2450	250	D2450V2-736	EX3DV4 - SN7346	DAE4 Sn853	12.50	52.70	50.00	-5.12	5.92	24.60	23.68	-3.74
2021/1/1	2600	250	D2600V2-1078	ES3DV3 - SN3169	DAE4 Sn915	14.30	57.60	57.20	-0.69	6.60	25.50	26.4	3.53
2021/1/4	2600	250	D2600V2-1008	EX3DV4 - SN3976	DAE4 Sn376	14.80	56.40	59.20	4.96	6.50	25.30	26	2.77
2021/1/6	2600	250	D2600V2-1008	EX3DV4 - SN7346	DAE4 Sn853	14.70	56.40	58.80	4.26	6.54	25.30	26.16	3.40
2021/1/5	5250	100	D5GHzV2-1006-5250	EX3DV4 - SN7346	DAE4 Sn853	8.07	80.70	80.70	0.00	2.24	23.20	22.4	-3.45
2021/1/5	5600	100	D5GHzV2-1006-5600	EX3DV4 - SN7346	DAE4 Sn853	8.46	83.30	84.60	1.56	2.35	23.80	23.5	-1.26
2021/1/5	5750	100	D5GHzV2-1006-5750	EX3DV4 - SN7346	DAE4 Sn853	7.93	80.40	79.30	-1.37	2.27	22.90	22.7	-0.87

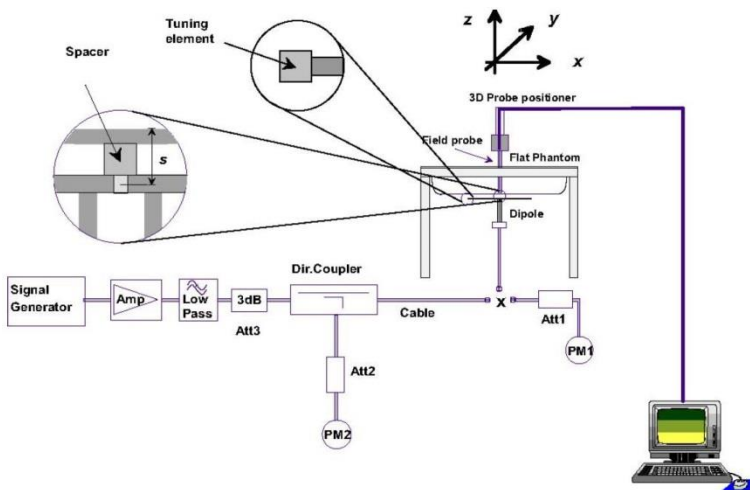

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 10. RF Exposure Positions

### 10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

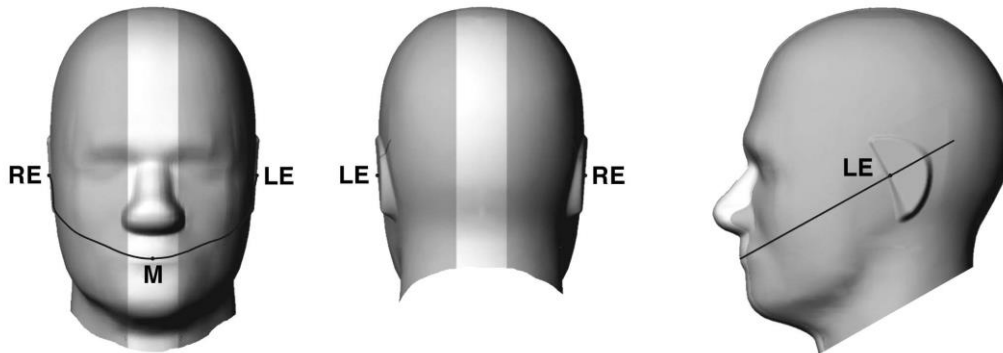


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.

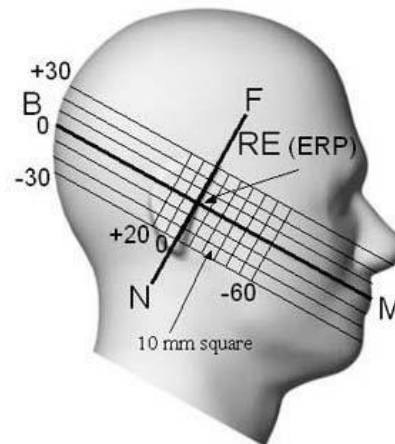



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**10.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.



**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

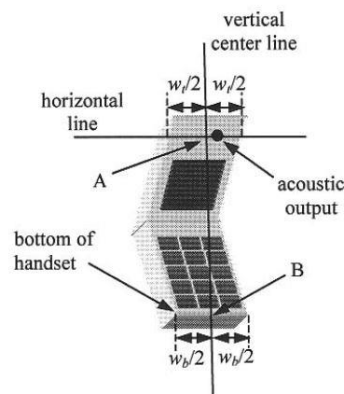


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

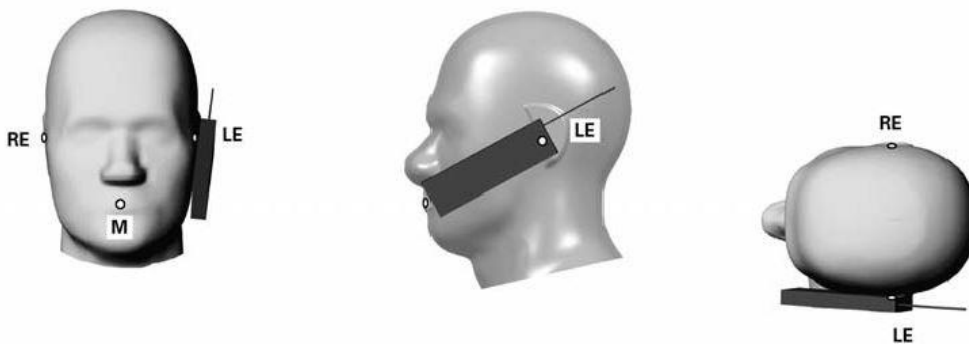

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**10.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

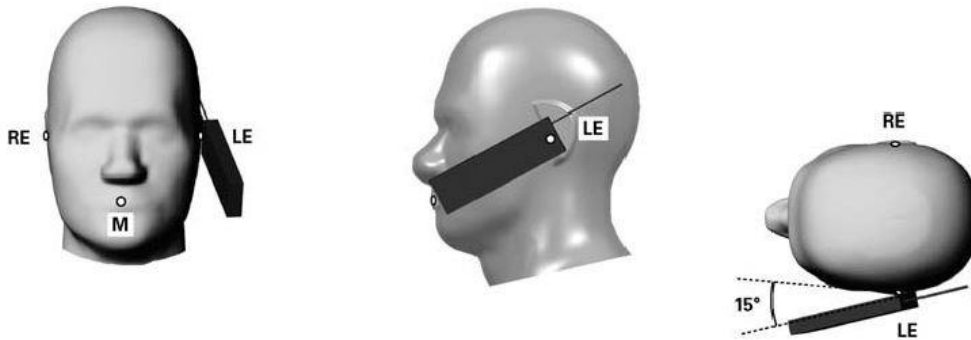


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**



**10.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

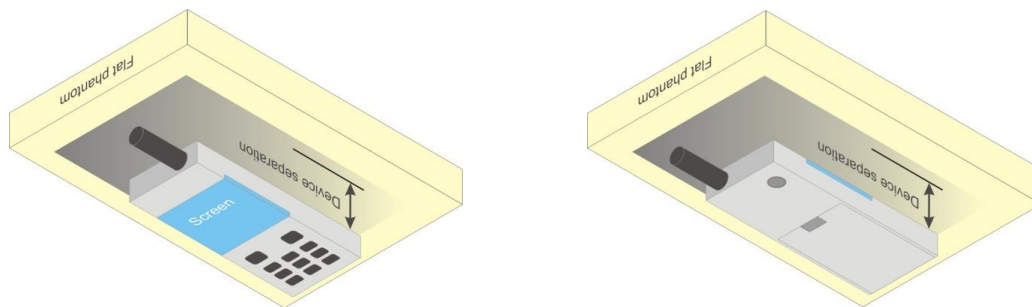

**Fig 9.4 Body Worn Position**

**10.5 Product Specific Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

**10.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

**11. GSM/UMTS/LTE Output Power (Unit: dBm)**

**<GSM Conducted Power>**

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (3 Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.53	32.32	32.17	33.00	23.53	23.32	23.17	24.00
GPRS 1 Tx slot	32.24	32.07	32.16	33.00	23.24	23.07	23.16	24.00
GPRS 2 Tx slots	30.20	30.07	29.90	30.50	24.20	24.07	23.90	24.50
GPRS 3 Tx slots	28.62	28.57	28.76	29.00	24.36	24.31	24.50	24.74
GPRS 4 Tx slots	26.87	26.84	26.75	27.00	23.87	23.84	23.75	24.00
EDGE 1 Tx slot	26.92	26.83	27.05	27.50	17.92	17.83	18.05	18.50
EDGE 2 Tx slots	24.13	24.20	24.22	24.50	18.13	18.20	18.22	18.50
EDGE 3 Tx slots	23.88	23.94	23.99	24.00	19.62	19.68	19.73	19.74
EDGE 4 Tx slots	23.45	23.39	23.46	23.50	20.45	20.39	20.46	20.50

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.70	29.89	29.71	30.00	20.70	20.89	20.71	21.00
GPRS 1 Tx slot	29.69	29.88	29.76	30.00	20.69	20.88	20.76	21.00
GPRS 2 Tx slots	27.03	27.10	27.14	27.50	21.03	21.10	21.14	21.50
GPRS 3 Tx slots	25.80	25.81	25.92	26.00	21.54	21.55	21.66	21.74
GPRS 4 Tx slots	23.05	22.97	23.08	24.50	20.05	19.97	20.08	21.50
EDGE 1 Tx slot	25.47	25.39	25.45	26.00	16.47	16.39	16.45	17.00
EDGE 2 Tx slots	22.64	22.58	22.66	23.00	16.64	16.58	16.66	17.00
EDGE 3 Tx slots	22.44	22.31	22.34	22.50	18.18	18.05	18.08	18.24
EDGE 4 Tx slots	21.93	21.88	21.99	22.00	18.93	18.88	18.99	19.00



**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

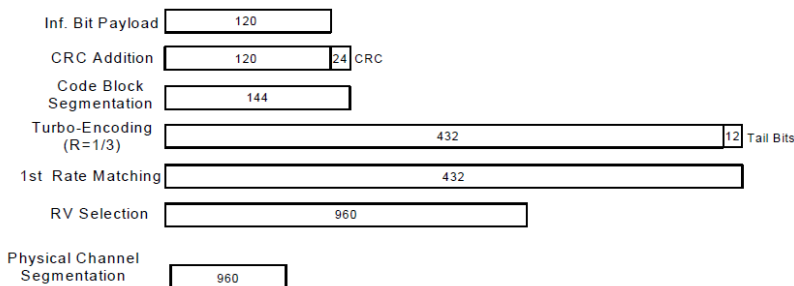

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**

**HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
  - iii. Set Channel Parm
  - iv. Set Cell Power = -86 dBm
  - v. Set Channel Type = HSPA
  - vi. Set UE Target Power =21 dBm
  - vii. Power Ctrl Mode= All Up Bits
  - viii. Set Manual Uplink DPCH Bc/Bd = Manual
  - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
  - x. Set HSPA Conn DL Channel Levels
  - xi. Set HS-SCCH Configs
  - xii. Set RB Test Mode Setup
  - xiii. Set Common HSUPA Parameters
  - xiv. Set Serving Grant
  - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

**Table C.11.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM**

Sub-test	$\beta_c$ (Note 3)	$\beta_d$	$\beta_{HS}$ (Note 1)	$\beta_{ec}$	$\beta_{ed}$ (2xSF2) (Note 4)	$\beta_{ed}$ (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}$ : 30/15 $\beta_{ed2}$ : 30/15	$\beta_{ed3}$ : 24/15 $\beta_{ed4}$ : 24/15	3.5	2.5	14	105	105

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.

Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**Default Power Mode**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel	Rx Channel	9262	9400	9538		1312	1413	1513		4132	4182	4233	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	826.4	836.4	846.6		
3GPP Rel 99	AMR 12.2Kbps	23.30	23.25	23.03	24.00	23.19	23.21	23.10	23.50	23.15	23.21	23.16	24.00
3GPP Rel 99	RMC 12.2Kbps	23.46	23.40	23.14	24.00	23.26	23.29	23.20	23.50	23.27	23.31	23.28	24.00
3GPP Rel 6	HSDPA Subtest-1	22.23	22.24	21.97	22.50	22.13	22.15	22.05	22.50	22.22	22.28	22.21	22.50
3GPP Rel 6	HSDPA Subtest-2	22.28	22.27	22.00	22.50	22.10	22.12	22.08	22.50	22.21	22.27	22.22	22.50
3GPP Rel 6	HSDPA Subtest-3	21.73	21.72	21.52	22.00	21.64	21.65	21.58	22.00	21.74	21.79	21.71	22.00
3GPP Rel 6	HSDPA Subtest-4	21.79	21.77	21.53	22.00	21.61	21.65	21.57	22.00	21.72	21.77	21.72	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	22.28	22.18	21.93	22.50	22.05	22.08	22.11	22.50	22.16	22.38	22.20	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	22.37	22.22	21.93	22.50	22.16	22.17	22.12	22.50	22.21	22.32	22.32	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.74	21.62	21.47	22.00	21.65	21.70	21.55	22.00	21.72	21.73	21.68	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.84	21.82	21.44	22.00	21.63	21.70	21.59	22.00	21.78	21.72	21.68	22.00
3GPP Rel 6	HSUPA Subtest-1	22.17	22.17	21.93	22.50	22.07	22.11	22.05	22.50	22.26	22.32	22.25	22.50
3GPP Rel 6	HSUPA Subtest-2	20.17	20.16	19.90	20.50	20.08	20.12	20.04	20.50	20.25	20.32	20.25	20.50
3GPP Rel 6	HSUPA Subtest-3	21.17	21.17	20.93	21.50	21.09	21.10	21.03	21.50	21.28	21.31	21.25	21.50
3GPP Rel 6	HSUPA Subtest-4	20.23	20.20	19.84	20.50	20.09	20.12	20.06	20.50	20.28	20.33	20.25	20.50
3GPP Rel 6	HSUPA Subtest-5	22.10	22.20	21.90	22.50	22.10	22.10	22.00	22.50	22.30	22.30	22.20	22.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	19.52	19.65	19.39	20.00	19.69	19.52	19.41	20.00	19.90	19.80	19.62	20.00


**Reduced Power Mode**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel	Rx Channel	9262	9400	9538		1312	1413	1513	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6	
3GPP Rel 99	AMR 12.2Kbps	20.01	20.09	19.96	21.00	20.03	19.95	19.87	21.00
3GPP Rel 99	RMC 12.2Kbps	20.07	20.11	19.98	21.00	20.08	20.11	20.01	21.00
3GPP Rel 6	HSDPA Subtest-1	18.90	18.76	18.61	19.50	18.88	19.01	18.76	19.50
3GPP Rel 6	HSDPA Subtest-2	18.87	18.81	18.55	19.50	18.96	18.91	18.92	19.50
3GPP Rel 6	HSDPA Subtest-3	18.33	18.40	18.10	19.00	18.34	18.45	18.29	19.00
3GPP Rel 6	HSDPA Subtest-4	18.48	18.38	18.07	19.00	18.31	18.41	18.40	19.00
3GPP Rel 8	DC-HSDPA Subtest-1	18.85	18.69	18.54	19.50	18.79	18.92	18.94	19.50
3GPP Rel 8	DC-HSDPA Subtest-2	18.95	18.77	18.43	19.50	18.96	18.91	18.95	19.50
3GPP Rel 8	DC-HSDPA Subtest-3	18.31	18.26	18.08	19.00	18.52	18.51	18.39	19.00
3GPP Rel 8	DC-HSDPA Subtest-4	18.34	18.36	18.04	19.00	18.42	18.58	18.33	19.00
3GPP Rel 6	HSUPA Subtest-1	18.76	18.75	18.59	19.50	18.89	18.98	18.86	19.50
3GPP Rel 6	HSUPA Subtest-2	16.67	16.80	16.44	17.50	16.86	16.96	16.84	17.50
3GPP Rel 6	HSUPA Subtest-3	17.68	17.81	17.43	18.50	17.87	17.91	17.80	18.50
3GPP Rel 6	HSUPA Subtest-4	16.80	16.89	16.49	17.50	16.87	16.94	16.80	17.50
3GPP Rel 6	HSUPA Subtest-5	18.71	18.87	18.52	19.50	18.87	18.87	18.89	19.50
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	16.26	16.33	15.95	17.00	16.29	16.30	16.37	17.00


**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 4/17 SAR test was covered by Band 66/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

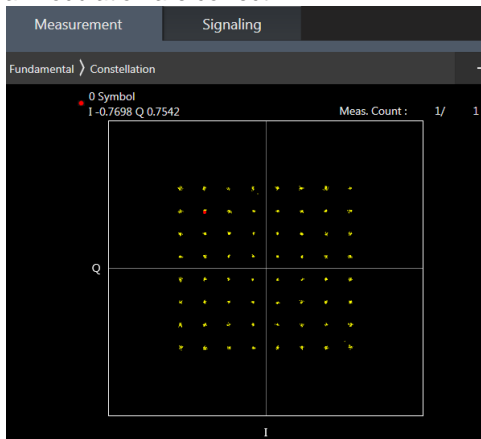

**64QAM**

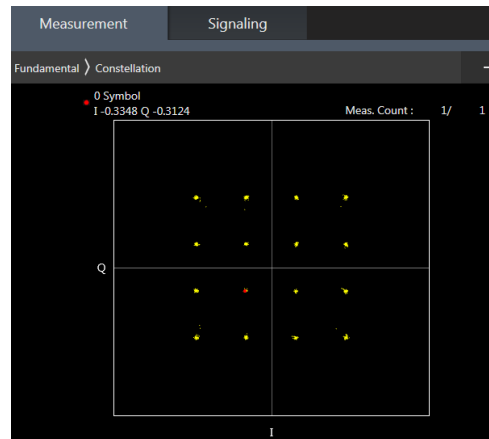

**16QAM**





**Default Power Mode**

**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.24	22.25	22.11	23.5	0
20	QPSK	1	49	22.16	22.12	21.96		
20	QPSK	1	99	22.12	22.04	21.85		
20	QPSK	50	0	21.22	21.27	21.16	22.5	1
20	QPSK	50	24	21.21	21.19	21.14		
20	QPSK	50	50	21.18	21.19	21.01		
20	QPSK	100	0	21.20	21.25	21.11		
20	16QAM	1	0	21.55	21.54	21.45	22.5	1
20	16QAM	1	49	21.62	21.46	21.28		
20	16QAM	1	99	21.40	21.38	21.17		
20	16QAM	50	0	20.39	20.23	20.26	21.5	2
20	16QAM	50	24	20.31	20.25	20.20		
20	16QAM	50	50	20.28	20.28	20.12		
20	16QAM	100	0	20.28	20.17	20.16		
20	64QAM	1	0	20.47	20.48	20.41	21.5	2
20	64QAM	1	49	20.60	20.41	20.26		
20	64QAM	1	99	20.38	20.34	20.16		
20	64QAM	50	0	19.42	19.25	19.28	20.5	3
20	64QAM	50	24	19.37	19.30	19.25		
20	64QAM	50	50	19.30	19.32	19.11		
20	64QAM	100	0	19.29	19.32	19.17		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.20	22.14	22.09	23.5	0
15	QPSK	1	37	22.13	22.08	21.86		
15	QPSK	1	74	22.06	21.96	21.80		
15	QPSK	36	0	21.26	21.11	21.16	22.5	1
15	QPSK	36	20	21.19	21.13	21.11		
15	QPSK	36	39	21.17	21.09	20.94		
15	QPSK	75	0	21.16	21.14	21.07		
15	16QAM	1	0	21.50	21.48	21.43	22.5	1
15	16QAM	1	37	21.56	21.38	21.21		
15	16QAM	1	74	21.34	21.29	21.13		
15	16QAM	36	0	20.30	20.18	20.24	21.5	2
15	16QAM	36	20	20.22	20.18	20.17		
15	16QAM	36	39	20.25	20.20	20.04		
15	16QAM	75	0	20.19	20.12	20.13		
15	64QAM	1	0	20.47	20.40	20.33	21.5	2
15	64QAM	1	37	20.51	20.38	20.24		
15	64QAM	1	74	20.38	20.29	20.10		
15	64QAM	36	0	19.38	19.21	19.27	20.5	3
15	64QAM	36	20	19.36	19.29	19.15		
15	64QAM	36	39	19.21	19.27	19.03		
15	64QAM	75	0	19.31	19.18	19.15		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.24	22.20	22.03	23.5	0
10	QPSK	1	25	22.09	22.06	21.92		
10	QPSK	1	49	22.06	21.96	21.85		
10	QPSK	25	0	21.26	21.18	21.11	22.5	1



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

10	QPSK	25	12	21.14	21.17	21.12		
10	QPSK	25	25	21.15	21.09	20.91		
10	QPSK	50	0	21.20	21.09	21.08		
10	16QAM	1	0	21.48	21.53	21.41	22.5	1
10	16QAM	1	25	21.60	21.46	21.26		
10	16QAM	1	49	21.40	21.28	21.12		
10	16QAM	25	0	20.35	20.20	20.21	21.5	2
10	16QAM	25	12	20.27	20.22	20.11		
10	16QAM	25	25	20.18	20.24	20.10		
10	16QAM	50	0	20.24	20.09	20.08		
10	64QAM	1	0	20.39	20.42	20.40	21.5	2
10	64QAM	1	25	20.58	20.33	20.26		
10	64QAM	1	49	20.36	20.29	20.11		
10	64QAM	25	0	19.33	19.21	19.18	20.5	3
10	64QAM	25	12	19.33	19.25	19.20		
10	64QAM	25	25	19.30	19.24	19.07		
10	64QAM	50	0	19.31	19.18	19.12		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.15	22.14	22.01	23.5	0
5	QPSK	1	12	22.10	22.12	21.95		
5	QPSK	1	24	22.02	21.96	21.79		
5	QPSK	12	0	21.25	21.15	21.10	22.5	1
5	QPSK	12	7	21.19	21.10	21.05		
5	QPSK	12	13	21.15	21.13	20.93		
5	QPSK	25	0	21.20	21.15	21.11		
5	16QAM	1	0	21.45	21.51	21.38	22.5	1
5	16QAM	1	12	21.58	21.42	21.26		
5	16QAM	1	24	21.31	21.36	21.16		
5	16QAM	12	0	20.33	20.22	20.17	21.5	2
5	16QAM	12	7	20.23	20.22	20.19		
5	16QAM	12	13	20.24	20.24	20.04		
5	16QAM	25	0	20.22	20.14	20.13		
5	64QAM	1	0	20.39	20.42	20.39	21.5	2
5	64QAM	1	12	20.53	20.36	20.21		
5	64QAM	1	24	20.36	20.24	20.08		
5	64QAM	12	0	19.35	19.16	19.25	20.5	3
5	64QAM	12	7	19.32	19.21	19.18		
5	64QAM	12	13	19.21	19.22	19.01		
5	64QAM	25	0	19.22	19.14	19.11		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.15	22.17	22.01	23.5	0
3	QPSK	1	8	22.13	22.02	21.92		
3	QPSK	1	14	22.05	22.03	21.81		
3	QPSK	8	0	21.26	21.09	21.15	22.5	1
3	QPSK	8	4	21.19	21.11	21.10		
3	QPSK	8	7	21.09	21.19	20.96		
3	QPSK	15	0	21.11	21.13	21.10		
3	16QAM	1	0	21.55	21.54	21.36	22.5	1
3	16QAM	1	8	21.52	21.43	21.20		
3	16QAM	1	14	21.37	21.34	21.14		
3	16QAM	8	0	20.38	20.20	20.25	21.5	2
3	16QAM	8	4	20.25	20.20	20.15		
3	16QAM	8	7	20.21	20.22	20.08		
3	16QAM	15	0	20.22	20.09	20.07		





**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

3	64QAM	1	0	20.38	20.38	20.40	21.5	2
3	64QAM	1	8	20.58	20.40	20.18		
3	64QAM	1	14	20.31	20.29	20.15		
3	64QAM	8	0	19.34	19.19	19.26	20.5	3
3	64QAM	8	4	19.35	19.21	19.19		
3	64QAM	8	7	19.23	19.22	19.06		
3	64QAM	15	0	19.31	19.14	19.14		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.17	22.20	22.07	23.5	0
1.4	QPSK	1	3	22.11	22.07	21.93		
1.4	QPSK	1	5	22.08	21.96	21.81		
1.4	QPSK	3	0	22.20	22.14	22.02		
1.4	QPSK	3	1	22.16	22.02	21.93		
1.4	QPSK	3	3	22.09	21.96	21.82		
1.4	QPSK	6	0	21.12	21.06	21.09	22.5	1
1.4	16QAM	1	0	21.49	21.48	21.43	22.5	1
1.4	16QAM	1	3	21.55	21.43	21.24		
1.4	16QAM	1	5	21.35	21.37	21.09		
1.4	16QAM	3	0	21.52	21.47	21.40		
1.4	16QAM	3	1	21.52	21.38	21.26		
1.4	16QAM	3	3	21.31	21.37	21.07		
1.4	16QAM	6	0	20.25	20.14	20.08	21.5	2
1.4	64QAM	1	0	20.42	20.39	20.39	21.5	2
1.4	64QAM	1	3	20.51	20.33	20.25		
1.4	64QAM	1	5	20.36	20.33	20.10		
1.4	64QAM	3	0	20.41	20.41	20.39		
1.4	64QAM	3	1	20.52	20.38	20.19		
1.4	64QAM	3	3	20.37	20.34	20.12		
1.4	64QAM	6	0	19.32	19.15	19.07		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	22.62	22.62	22.73	23.5	0
20	QPSK	1	49	22.49	22.53	22.50		
20	QPSK	1	99	22.58	22.40	22.40		
20	QPSK	50	0	21.76	21.75	21.68	22.5	1
20	QPSK	50	24	21.76	21.62	21.58		
20	QPSK	50	50	21.71	21.52	21.60		
20	QPSK	100	0	21.72	21.63	21.59	22.5	1
20	16QAM	1	0	21.67	21.99	21.94		
20	16QAM	1	49	21.82	21.91	21.64		
20	16QAM	1	99	21.98	21.59	21.53	21.5	2
20	16QAM	50	0	20.84	20.88	20.74		
20	16QAM	50	24	20.82	20.72	20.58		
20	16QAM	50	50	20.82	20.60	20.59	21.5	2
20	16QAM	100	0	20.78	20.72	20.56		
20	64QAM	1	0	20.66	20.93	20.95		
20	64QAM	1	49	20.83	20.85	20.68	21.5	2
20	64QAM	1	99	20.98	20.56	20.49		
20	64QAM	50	0	19.80	19.87	19.75		
20	64QAM	50	24	19.81	19.76	19.62	20.5	3
20	64QAM	50	50	19.87	19.63	19.55		
20	64QAM	100	0	19.83	19.75	19.59		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	22.59	22.64	22.65	23.5	0
15	QPSK	1	37	22.43	22.43	22.48		
15	QPSK	1	74	22.54	22.35	22.34		
15	QPSK	36	0	21.73	21.69	21.58	22.5	1
15	QPSK	36	20	21.67	21.52	21.48		
15	QPSK	36	39	21.63	21.43	21.55		
15	QPSK	75	0	21.62	21.59	21.53	22.5	1
15	16QAM	1	0	21.67	21.96	21.93		
15	16QAM	1	37	21.77	21.89	21.57		
15	16QAM	1	74	21.95	21.50	21.51	21.5	2
15	16QAM	36	0	20.78	20.87	20.74		
15	16QAM	36	20	20.79	20.66	20.51		
15	16QAM	36	39	20.76	20.55	20.52	21.5	2
15	16QAM	75	0	20.74	20.62	20.48		
15	64QAM	1	0	20.64	20.88	20.90		
15	64QAM	1	37	20.76	20.84	20.61	21.5	2
15	64QAM	1	74	20.95	20.54	20.41		
15	64QAM	36	0	19.76	19.85	19.66		
15	64QAM	36	20	19.78	19.74	19.62	20.5	3
15	64QAM	36	39	19.84	19.63	19.46		
15	64QAM	75	0	19.73	19.72	19.51		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.60	22.71	22.70	23.5	0
10	QPSK	1	25	22.48	22.48	22.46		
10	QPSK	1	49	22.48	22.34	22.38		
10	QPSK	25	0	21.67	21.71	21.61	22.5	1
10	QPSK	25	12	21.66	21.52	21.53		



10	QPSK	25	25	21.65	21.49	21.50		
10	QPSK	50	0	21.70	21.56	21.49		
10	16QAM	1	0	21.65	21.90	21.85	22.5	1
10	16QAM	1	25	21.76	21.90	21.54		
10	16QAM	1	49	21.96	21.49	21.43		
10	16QAM	25	0	20.84	20.85	20.66	21.5	2
10	16QAM	25	12	20.79	20.62	20.53		
10	16QAM	25	25	20.77	20.60	20.50		
10	16QAM	50	0	20.69	20.67	20.47	21.5	2
10	64QAM	1	0	20.60	20.83	20.89		
10	64QAM	1	25	20.77	20.80	20.65		
10	64QAM	1	49	20.94	20.51	20.47	20.5	3
10	64QAM	25	0	19.79	19.84	19.75		
10	64QAM	25	12	19.76	19.71	19.60		
10	64QAM	25	25	19.83	19.57	19.45	20.5	3
10	64QAM	50	0	19.76	19.72	19.51		
Channel				19975	20175	20375		
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.56	22.69	22.62	23.5	0
5	QPSK	1	12	22.39	22.50	22.40		
5	QPSK	1	24	22.52	22.31	22.37		
5	QPSK	12	0	21.72	21.71	21.65	22.5	1
5	QPSK	12	7	21.76	21.59	21.56		
5	QPSK	12	13	21.69	21.42	21.58		
5	QPSK	25	0	21.64	21.58	21.59	22.5	1
5	16QAM	1	0	21.59	21.92	21.93		
5	16QAM	1	12	21.74	21.91	21.63		
5	16QAM	1	24	21.90	21.56	21.48	21.5	2
5	16QAM	12	0	20.80	20.78	20.73		
5	16QAM	12	7	20.82	20.68	20.49		
5	16QAM	12	13	20.73	20.52	20.51	21.5	2
5	16QAM	25	0	20.73	20.72	20.48		
5	64QAM	1	0	20.61	20.90	20.86		
5	64QAM	1	12	20.77	20.84	20.60	21.5	2
5	64QAM	1	24	20.92	20.48	20.45		
5	64QAM	12	0	19.80	19.86	19.70		
5	64QAM	12	7	19.80	19.70	19.57	20.5	3
5	64QAM	12	13	19.84	19.57	19.50		
5	64QAM	25	0	19.73	19.68	19.58		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.55	22.65	22.62	23.5	0
3	QPSK	1	8	22.39	22.52	22.46		
3	QPSK	1	14	22.51	22.38	22.36		
3	QPSK	8	0	21.67	21.72	21.58	22.5	1
3	QPSK	8	4	21.75	21.60	21.56		
3	QPSK	8	7	21.61	21.49	21.60		
3	QPSK	15	0	21.63	21.62	21.52	22.5	1
3	16QAM	1	0	21.67	21.97	21.91		
3	16QAM	1	8	21.81	21.82	21.56		
3	16QAM	1	14	21.93	21.56	21.47	21.5	2
3	16QAM	8	0	20.82	20.82	20.66		
3	16QAM	8	4	20.73	20.63	20.49		
3	16QAM	8	7	20.76	20.60	20.55	21.5	2
3	16QAM	15	0	20.77	20.62	20.56		
3	64QAM	1	0	20.57	20.90	20.90		



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

3	64QAM	1	8	20.79	20.80	20.60	20.5	3
3	64QAM	1	14	20.91	20.49	20.44		
3	64QAM	8	0	19.77	19.77	19.67		
3	64QAM	8	4	19.72	19.72	19.59		
3	64QAM	8	7	19.83	19.58	19.52		
3	64QAM	15	0	19.76	19.71	19.56		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.55	22.65	22.64	23.5	0
1.4	QPSK	1	3	22.42	22.47	22.43		
1.4	QPSK	1	5	22.52	22.37	22.36		
1.4	QPSK	3	0	22.52	22.64	22.66		
1.4	QPSK	3	1	22.40	22.46	22.46		
1.4	QPSK	3	3	22.50	22.40	22.32		
1.4	QPSK	6	0	21.63	21.56	21.56	22.5	1
1.4	16QAM	1	0	21.64	21.94	21.89	22.5	1
1.4	16QAM	1	3	21.72	21.91	21.60		
1.4	16QAM	1	5	21.95	21.53	21.48		
1.4	16QAM	3	0	21.61	21.90	21.85		
1.4	16QAM	3	1	21.82	21.87	21.54		
1.4	16QAM	3	3	21.90	21.57	21.43		
1.4	16QAM	6	0	20.74	20.62	20.49	21.5	2
1.4	64QAM	1	0	20.58	20.91	20.95	21.5	2
1.4	64QAM	1	3	20.75	20.83	20.68		
1.4	64QAM	1	5	20.91	20.46	20.41		
1.4	64QAM	3	0	20.64	20.92	20.85		
1.4	64QAM	3	1	20.75	20.84	20.59		
1.4	64QAM	3	3	20.92	20.51	20.43		
1.4	64QAM	6	0	19.81	19.72	19.54	20.5	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.32	22.41	22.33	23.5	0
10	QPSK	1	25	22.34	22.31	22.36		
10	QPSK	1	49	22.34	22.37	22.29		
10	QPSK	25	0	21.46	21.48	21.38	22.5	1
10	QPSK	25	12	21.40	21.50	21.43		
10	QPSK	25	25	21.45	21.35	21.41		
10	QPSK	50	0	21.46	21.47	21.43	22.5	1
10	16QAM	1	0	21.63	21.74	21.67		
10	16QAM	1	25	21.70	21.78	21.63		
10	16QAM	1	49	21.71	21.69	21.53	21.5	2
10	16QAM	25	0	20.49	20.59	20.51		
10	16QAM	25	12	20.56	20.51	20.50		
10	16QAM	25	25	20.58	20.48	20.48	21.5	2
10	16QAM	50	0	20.56	20.47	20.50		
10	64QAM	1	0	20.66	20.70	20.66		
10	64QAM	1	25	20.64	20.69	20.64	21.5	2
10	64QAM	1	49	20.62	20.72	20.50		
10	64QAM	25	0	19.53	19.60	19.52		
10	64QAM	25	12	19.59	19.54	19.53	20.5	3
10	64QAM	25	25	19.60	19.48	19.48		
10	64QAM	50	0	19.58	19.48	19.53		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.25	22.32	22.23	23.5	0
5	QPSK	1	12	22.33	22.29	22.26		
5	QPSK	1	24	22.32	22.31	22.21		
5	QPSK	12	0	21.41	21.43	21.28	22.5	1
5	QPSK	12	7	21.50	21.30	21.40		
5	QPSK	12	13	21.38	21.25	21.38		
5	QPSK	25	0	21.44	21.29	21.39	22.5	1
5	16QAM	1	0	21.57	21.68	21.65		
5	16QAM	1	12	21.61	21.74	21.60		
5	16QAM	1	24	21.65	21.61	21.49	21.5	2
5	16QAM	12	0	20.41	20.57	20.41		
5	16QAM	12	7	20.52	20.46	20.45		
5	16QAM	12	13	20.58	20.48	20.39	21.5	2
5	16QAM	25	0	20.49	20.40	20.48		
5	64QAM	1	0	20.61	20.65	20.62		
5	64QAM	1	12	20.64	20.64	20.60	21.5	2
5	64QAM	1	24	20.58	20.64	20.48		
5	64QAM	12	0	19.49	19.50	19.49		
5	64QAM	12	7	19.55	19.48	19.53	20.5	3
5	64QAM	12	13	19.55	19.46	19.44		
5	64QAM	25	0	19.56	19.39	19.44		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.22	22.32	22.32	23.5	0
3	QPSK	1	8	22.24	22.21	22.26		
3	QPSK	1	14	22.28	22.27	22.29		
3	QPSK	8	0	21.42	21.45	21.36	22.5	1
3	QPSK	8	4	21.48	21.39	21.43		



3	QPSK	8	7	21.40	21.26	21.40		
3	QPSK	15	0	21.47	21.26	21.39		
3	16QAM	1	0	21.53	21.71	21.59	22.5	1
3	16QAM	1	8	21.64	21.68	21.61		
3	16QAM	1	14	21.61	21.68	21.52		
3	16QAM	8	0	20.39	20.51	20.46	21.5	2
3	16QAM	8	4	20.53	20.42	20.43		
3	16QAM	8	7	20.51	20.48	20.45		
3	16QAM	15	0	20.46	20.38	20.41		
3	64QAM	1	0	20.63	20.68	20.58	21.5	2
3	64QAM	1	8	20.56	20.66	20.59		
3	64QAM	1	14	20.56	20.66	20.41		
3	64QAM	8	0	19.48	19.51	19.46	20.5	3
3	64QAM	8	4	19.59	19.50	19.47		
3	64QAM	8	7	19.59	19.45	19.41		
3	64QAM	15	0	19.48	19.39	19.53		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.22	22.40	22.24	23.5	0
1.4	QPSK	1	3	22.34	22.31	22.33		
1.4	QPSK	1	5	22.31	22.33	22.21		
1.4	QPSK	3	0	22.25	22.36	22.26		
1.4	QPSK	3	1	22.32	22.21	22.26		
1.4	QPSK	3	3	22.28	22.30	22.23		
1.4	QPSK	6	0	21.37	21.32	21.38	22.5	1
1.4	16QAM	1	0	21.53	21.64	21.57	22.5	1
1.4	16QAM	1	3	21.68	21.72	21.61		
1.4	16QAM	1	5	21.61	21.59	21.53		
1.4	16QAM	3	0	21.62	21.67	21.59		
1.4	16QAM	3	1	21.67	21.74	21.54		
1.4	16QAM	3	3	21.68	21.66	21.52		
1.4	16QAM	6	0	20.46	20.46	20.49	21.5	2
1.4	64QAM	1	0	20.66	20.66	20.63	21.5	2
1.4	64QAM	1	3	20.57	20.68	20.63		
1.4	64QAM	1	5	20.54	20.69	20.40		
1.4	64QAM	3	0	20.57	20.65	20.64		
1.4	64QAM	3	1	20.58	20.61	20.61		
1.4	64QAM	3	3	20.61	20.64	20.44		
1.4	64QAM	6	0	19.48	19.40	19.52	20.5	3



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.42	22.37	22.46	23.5	0
10	QPSK	1	25	22.41	22.35	22.38		
10	QPSK	1	49	22.44	22.33	22.37		
10	QPSK	25	0	21.56	21.54	21.53	22.5	1
10	QPSK	25	12	21.58	21.57	21.59		
10	QPSK	25	25	21.57	21.54	21.54		
10	QPSK	50	0	21.55	21.52	21.57	22.5	1
10	16QAM	1	0	21.80	21.77	21.93		
10	16QAM	1	25	21.93	21.93	21.87		
10	16QAM	1	49	21.99	21.91	21.93	21.5	2
10	16QAM	25	0	20.66	20.64	20.62		
10	16QAM	25	12	20.70	20.68	20.66		
10	16QAM	25	25	20.68	20.68	20.62	21.5	2
10	16QAM	50	0	20.66	20.69	20.65		
10	64QAM	1	0	20.77	20.66	20.81		
10	64QAM	1	25	20.86	20.88	20.81	21.5	2
10	64QAM	1	49	20.87	20.82	20.85		
10	64QAM	25	0	19.67	19.69	19.66		
10	64QAM	25	12	19.72	19.72	19.68	20.5	3
10	64QAM	25	25	19.69	19.68	19.62		
10	64QAM	50	0	19.65	19.67	19.65		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.40	22.36	22.45	23.5	0
5	QPSK	1	12	22.35	22.36	22.30		
5	QPSK	1	24	22.40	22.39	22.31		
5	QPSK	12	0	21.56	21.45	21.51	22.5	1
5	QPSK	12	7	21.52	21.52	21.54		
5	QPSK	12	13	21.50	21.51	21.44		
5	QPSK	25	0	21.56	21.44	21.46	22.5	1
5	16QAM	1	0	21.71	21.77	21.92		
5	16QAM	1	12	21.87	21.83	21.79		
5	16QAM	1	24	21.94	21.85	21.90	21.5	2
5	16QAM	12	0	20.61	20.64	20.60		
5	16QAM	12	7	20.68	20.63	20.60		
5	16QAM	12	13	20.68	20.60	20.59	21.5	2
5	16QAM	25	0	20.63	20.65	20.58		
5	64QAM	1	0	20.75	20.56	20.80		
5	64QAM	1	12	20.78	20.85	20.76	21.5	2
5	64QAM	1	24	20.78	20.77	20.75		
5	64QAM	12	0	19.58	19.68	19.60		
5	64QAM	12	7	19.70	19.63	19.66	20.5	3
5	64QAM	12	13	19.66	19.59	19.53		
5	64QAM	25	0	19.55	19.65	19.64		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.41	22.28	22.40	23.5	0
3	QPSK	1	8	22.35	22.38	22.29		
3	QPSK	1	14	22.40	22.38	22.36		
3	QPSK	8	0	21.56	21.50	21.52	22.5	1
3	QPSK	8	4	21.54	21.47	21.54		





3	QPSK	8	7	21.54	21.51	21.51		
3	QPSK	15	0	21.51	21.47	21.46		
3	16QAM	1	0	21.78	21.72	21.90	22.5	1
3	16QAM	1	8	21.83	21.88	21.83		
3	16QAM	1	14	21.99	21.83	21.92		
3	16QAM	8	0	20.65	20.60	20.62	21.5	2
3	16QAM	8	4	20.69	20.67	20.65		
3	16QAM	8	7	20.58	20.61	20.56		
3	16QAM	15	0	20.60	20.60	20.62		
3	64QAM	1	0	20.67	20.62	20.78	21.5	2
3	64QAM	1	8	20.80	20.83	20.81		
3	64QAM	1	14	20.81	20.80	20.78		
3	64QAM	8	0	19.64	19.69	19.58	20.5	3
3	64QAM	8	4	19.65	19.68	19.60		
3	64QAM	8	7	19.61	19.65	19.57		
3	64QAM	15	0	19.62	19.61	19.62		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.42	22.31	22.40	23.5	0
1.4	QPSK	1	3	22.37	22.32	22.29		
1.4	QPSK	1	5	22.41	22.31	22.31		
1.4	QPSK	3	0	22.34	22.33	22.35		
1.4	QPSK	3	1	22.31	22.42	22.38		
1.4	QPSK	3	3	22.38	22.36	22.35		
1.4	QPSK	6	0	21.55	21.49	21.44	22.5	1
1.4	16QAM	1	0	21.72	21.74	21.89	22.5	1
1.4	16QAM	1	3	21.85	21.91	21.77		
1.4	16QAM	1	5	21.97	21.84	21.85		
1.4	16QAM	3	0	21.71	21.76	21.85		
1.4	16QAM	3	1	21.85	21.92	21.87		
1.4	16QAM	3	3	21.96	21.86	21.93		
1.4	16QAM	6	0	20.63	20.69	20.59	21.5	2
1.4	64QAM	1	0	20.70	20.59	20.76	21.5	2
1.4	64QAM	1	3	20.76	20.85	20.75		
1.4	64QAM	1	5	20.82	20.72	20.85		
1.4	64QAM	3	0	20.75	20.62	20.78		
1.4	64QAM	3	1	20.78	20.83	20.76		
1.4	64QAM	3	3	20.77	20.78	20.75		
1.4	64QAM	6	0	19.61	19.58	19.55	20.5	3



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.39	22.42	22.43	23.5	0
10	QPSK	1	25	22.39	22.41	22.38		
10	QPSK	1	49	22.35	22.40	22.39		
10	QPSK	25	0	21.49	21.49	21.49	22.5	1
10	QPSK	25	12	21.53	21.52	21.51		
10	QPSK	25	25	21.51	21.49	21.49		
10	QPSK	50	0	21.50	21.50	21.49	22.5	1
10	16QAM	1	0	21.84	21.80	21.86		
10	16QAM	1	25	21.86	21.87	21.86		
10	16QAM	1	49	21.81	21.78	21.73	21.5	2
10	16QAM	25	0	20.64	20.64	20.60		
10	16QAM	25	12	20.66	20.62	20.63		
10	16QAM	25	25	20.63	20.63	20.59	21.5	2
10	16QAM	50	0	20.63	20.62	20.61		
10	64QAM	1	0	20.76	20.77	20.77		
10	64QAM	1	25	20.82	20.78	20.85	21.5	2
10	64QAM	1	49	20.74	20.76	20.68		
10	64QAM	25	0	19.61	19.63	19.64		
10	64QAM	25	12	19.66	19.64	19.64	20.5	3
10	64QAM	25	25	19.63	19.59	19.64		
10	64QAM	50	0	19.63	19.62	19.63		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.39	22.34	22.39	23.5	0
5	QPSK	1	12	22.29	22.41	22.37		
5	QPSK	1	24	22.31	22.31	22.38		
5	QPSK	12	0	21.46	21.44	21.45	22.5	1
5	QPSK	12	7	21.48	21.47	21.49		
5	QPSK	12	13	21.48	21.46	21.45		
5	QPSK	25	0	21.40	21.40	21.49	22.5	1
5	16QAM	1	0	21.82	21.72	21.81		
5	16QAM	1	12	21.78	21.80	21.86		
5	16QAM	1	24	21.81	21.72	21.72	21.5	2
5	16QAM	12	0	20.63	20.64	20.59		
5	16QAM	12	7	20.59	20.54	20.62		
5	16QAM	12	13	20.59	20.62	20.58	21.5	2
5	16QAM	25	0	20.53	20.62	20.57		
5	64QAM	1	0	20.68	20.67	20.75		
5	64QAM	1	12	20.75	20.69	20.77	21.5	2
5	64QAM	1	24	20.70	20.68	20.65		
5	64QAM	12	0	19.51	19.56	19.56		
5	64QAM	12	7	19.63	19.58	19.61	20.5	3
5	64QAM	12	13	19.55	19.59	19.61		
5	64QAM	25	0	19.56	19.57	19.58		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	23.5	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	22.71	22.69	22.75	23.5	0
20	QPSK	1	49	22.60	22.56	22.61		
20	QPSK	1	99	22.50	22.39	22.42		
20	QPSK	50	0	21.62	21.61	21.68	22.5	1
20	QPSK	50	24	21.56	21.54	21.51		
20	QPSK	50	50	21.60	21.46	21.47		
20	QPSK	100	0	21.56	21.55	21.58	22.5	1
20	16QAM	1	0	21.64	21.93	21.80		
20	16QAM	1	49	21.97	21.66	21.92		
20	16QAM	1	99	21.93	21.47	21.73	21.5	2
20	16QAM	50	0	20.73	20.62	20.66		
20	16QAM	50	24	20.65	20.54	20.61		
20	16QAM	50	50	20.67	20.43	20.55	21.5	2
20	16QAM	100	0	20.65	20.50	20.67		
20	64QAM	1	0	20.62	20.85	20.83		
20	64QAM	1	49	20.96	20.66	20.98	21.5	2
20	64QAM	1	99	20.83	20.47	20.67		
20	64QAM	50	0	19.71	19.64	19.68		
20	64QAM	50	24	19.68	19.54	19.61	20.5	3
20	64QAM	50	50	19.70	19.46	19.56		
20	64QAM	100	0	19.70	19.54	19.69		
Channel				132047	132322	132597	23.5	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	22.44	22.57	22.60	23.5	0
15	QPSK	1	37	22.54	22.52	22.60		
15	QPSK	1	74	22.47	22.34	22.42		
15	QPSK	36	0	21.60	21.55	21.48	22.5	1
15	QPSK	36	20	21.47	21.48	21.46		
15	QPSK	36	39	21.56	21.44	21.44		
15	QPSK	75	0	21.55	21.46	21.57	22.5	1
15	16QAM	1	0	21.63	21.89	21.73		
15	16QAM	1	37	21.94	21.58	21.88		
15	16QAM	1	74	21.88	21.38	21.72	21.5	2
15	16QAM	36	0	20.71	20.55	20.59		
15	16QAM	36	20	20.56	20.49	20.56		
15	16QAM	36	39	20.62	20.41	20.48	21.5	2
15	16QAM	75	0	20.61	20.47	20.67		
15	64QAM	1	0	20.53	20.78	20.76		
15	64QAM	1	37	20.90	20.64	20.91	21.5	2
15	64QAM	1	74	20.76	20.39	20.67		
15	64QAM	36	0	19.66	19.59	19.66		
15	64QAM	36	20	19.61	19.53	19.54	20.5	3
15	64QAM	36	39	19.66	19.38	19.53		
15	64QAM	75	0	19.64	19.47	19.61		
Channel				132022	132322	132622	23.5	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.50	22.49	22.62	23.5	0
10	QPSK	1	25	22.60	22.54	22.58		
10	QPSK	1	49	22.42	22.34	22.32		
10	QPSK	25	0	21.68	21.57	21.50	22.5	1
10	QPSK	25	12	21.53	21.53	21.47		



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

10	QPSK	25	25	21.56	21.40	21.41		
10	QPSK	50	0	21.48	21.55	21.58		
10	16QAM	1	0	21.61	21.89	21.78	22.5	1
10	16QAM	1	25	21.93	21.57	21.91		
10	16QAM	1	49	21.83	21.42	21.71		
10	16QAM	25	0	20.67	20.54	20.63	21.5	2
10	16QAM	25	12	20.58	20.50	20.59		
10	16QAM	25	25	20.63	20.37	20.53		
10	16QAM	50	0	20.60	20.44	20.57	21.5	2
10	64QAM	1	0	20.58	20.83	20.73		
10	64QAM	1	25	20.96	20.62	20.90		
10	64QAM	1	49	20.82	20.44	20.61	20.5	3
10	64QAM	25	0	19.68	19.63	19.65		
10	64QAM	25	12	19.68	19.46	19.60		
10	64QAM	25	25	19.63	19.42	19.56		
10	64QAM	50	0	19.68	19.48	19.64		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.50	22.58	22.54	23.5	0
5	QPSK	1	12	22.59	22.49	22.58		
5	QPSK	1	24	22.43	22.34	22.35		
5	QPSK	12	0	21.58	21.59	21.57	22.5	1
5	QPSK	12	7	21.51	21.53	21.47		
5	QPSK	12	13	21.54	21.44	21.43		
5	QPSK	25	0	21.52	21.53	21.55	22.5	1
5	16QAM	1	0	21.56	21.84	21.71		
5	16QAM	1	12	21.90	21.61	21.84		
5	16QAM	1	24	21.86	21.46	21.65	21.5	2
5	16QAM	12	0	20.73	20.61	20.62		
5	16QAM	12	7	20.65	20.48	20.61		
5	16QAM	12	13	20.58	20.34	20.50	21.5	2
5	16QAM	25	0	20.57	20.43	20.62		
5	64QAM	1	0	20.61	20.85	20.76		
5	64QAM	1	12	20.96	20.57	20.94	21.5	2
5	64QAM	1	24	20.82	20.37	20.65		
5	64QAM	12	0	19.70	19.54	19.66		
5	64QAM	12	7	19.60	19.53	19.60	20.5	3
5	64QAM	12	13	19.63	19.41	19.46		
5	64QAM	25	0	19.66	19.47	19.64		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.48	22.56	22.59	23.5	0
3	QPSK	1	8	22.54	22.56	22.56		
3	QPSK	1	14	22.40	22.33	22.40		
3	QPSK	8	0	21.64	21.59	21.57	22.5	1
3	QPSK	8	4	21.49	21.52	21.46		
3	QPSK	8	7	21.55	21.43	21.37		
3	QPSK	15	0	21.54	21.53	21.52	22.5	1
3	16QAM	1	0	21.64	21.92	21.78		
3	16QAM	1	8	21.91	21.57	21.89		
3	16QAM	1	14	21.83	21.43	21.66	21.5	2
3	16QAM	8	0	20.67	20.53	20.59		
3	16QAM	8	4	20.64	20.47	20.52		
3	16QAM	8	7	20.67	20.38	20.51	21.5	2
3	16QAM	15	0	20.55	20.41	20.57		
3	64QAM	1	0	20.58	20.81	20.75	21.5	2



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

3	64QAM	1	8	20.88	20.58	20.93	20.5	3
3	64QAM	1	14	20.80	20.41	20.61		
3	64QAM	8	0	19.67	19.56	19.59		
3	64QAM	8	4	19.60	19.52	19.52		
3	64QAM	8	7	19.68	19.41	19.52		
3	64QAM	15	0	19.70	19.53	19.65		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.41	22.57	22.56	23.5	0
1.4	QPSK	1	3	22.57	22.53	22.55		
1.4	QPSK	1	5	22.47	22.29	22.35		
1.4	QPSK	3	0	22.42	22.55	22.55		
1.4	QPSK	3	1	22.53	22.55	22.58		
1.4	QPSK	3	3	22.41	22.39	22.42		
1.4	QPSK	6	0	21.56	21.45	21.55	22.5	1
1.4	16QAM	1	0	21.63	21.84	21.78	22.5	1
1.4	16QAM	1	3	21.91	21.63	21.89		
1.4	16QAM	1	5	21.92	21.40	21.73		
1.4	16QAM	3	0	21.62	21.84	21.78		
1.4	16QAM	3	1	21.91	21.59	21.90		
1.4	16QAM	3	3	21.93	21.41	21.63		
1.4	16QAM	6	0	20.65	20.49	20.63	21.5	2
1.4	64QAM	1	0	20.56	20.76	20.73	21.5	2
1.4	64QAM	1	3	20.96	20.60	20.94		
1.4	64QAM	1	5	20.73	20.42	20.61		
1.4	64QAM	3	0	20.55	20.84	20.74		
1.4	64QAM	3	1	20.90	20.58	20.91		
1.4	64QAM	3	3	20.80	20.44	20.59		
1.4	64QAM	6	0	19.68	19.46	19.59	20.5	3



**Reduced Power Mode**

**<LTE Band 2>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	20.37	20.38	20.18	21.5	0
20	QPSK	1	49	20.36	20.19	20.06		
20	QPSK	1	99	20.24	20.08	19.94		
20	QPSK	50	0	19.34	19.35	19.28	20.5	1
20	QPSK	50	24	19.33	19.29	19.24		
20	QPSK	50	50	19.28	19.30	19.11		
20	QPSK	100	0	19.28	19.29	19.21	20.5	1
20	16QAM	1	0	19.69	19.70	19.58		
20	16QAM	1	49	19.71	19.58	19.41		
20	16QAM	1	99	19.55	19.48	19.34	19.5	2
20	16QAM	50	0	18.43	18.35	18.35		
20	16QAM	50	24	18.39	18.37	18.28		
20	16QAM	50	50	18.37	18.39	18.19	19.5	2
20	16QAM	100	0	18.34	18.31	18.24		
20	64QAM	1	0	18.69	18.60	18.46		
20	64QAM	1	49	18.65	18.49	18.31	19.5	2
20	64QAM	1	99	18.51	18.42	18.28		
20	64QAM	50	0	17.44	17.37	17.36		
20	64QAM	50	24	17.42	17.37	17.30	18.5	3
20	64QAM	50	50	17.37	17.40	17.24		
20	64QAM	100	0	17.33	17.33	17.26		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	20.30	20.22	20.08	21.5	0
15	QPSK	1	37	20.21	20.18	19.94		
15	QPSK	1	74	20.07	19.95	19.74		
15	QPSK	36	0	19.23	19.17	19.09	20.5	1
15	QPSK	36	20	19.16	19.23	19.07		
15	QPSK	36	39	19.23	19.20	19.10		
15	QPSK	75	0	19.28	19.16	19.14	20.5	1
15	16QAM	1	0	19.61	19.66	19.56		
15	16QAM	1	37	19.52	19.54	19.27		
15	16QAM	1	74	19.45	19.43	19.22	19.5	2
15	16QAM	36	0	18.33	18.15	18.29		
15	16QAM	36	20	18.27	18.24	18.22		
15	16QAM	36	39	18.23	18.33	17.99	19.5	2
15	16QAM	75	0	18.27	18.29	18.11		
15	64QAM	1	0	18.69	18.48	18.40		
15	64QAM	1	37	18.49	18.38	18.28	19.5	2
15	64QAM	1	74	18.41	18.41	18.23		
15	64QAM	36	0	17.37	17.19	17.23		
15	64QAM	36	20	17.34	17.31	17.18	18.5	3
15	64QAM	36	39	17.28	17.22	17.18		
15	64QAM	75	0	17.25	17.24	17.25		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	20.27	20.31	20.00	21.5	0
10	QPSK	1	25	20.36	20.02	19.95		
10	QPSK	1	49	20.10	20.04	19.78		
10	QPSK	25	0	19.29	19.35	19.20	20.5	1



10	QPSK	25	12	19.19	19.28	19.24		
10	QPSK	25	25	19.24	19.17	18.96		
10	QPSK	50	0	19.21	19.28	19.01		
10	16QAM	1	0	19.53	19.56	19.41	20.5	1
10	16QAM	1	25	19.52	19.43	19.25		
10	16QAM	1	49	19.55	19.41	19.19		
10	16QAM	25	0	18.27	18.21	18.16	19.5	2
10	16QAM	25	12	18.30	18.22	18.18		
10	16QAM	25	25	18.34	18.31	18.07		
10	16QAM	50	0	18.30	18.24	18.20		
10	64QAM	1	0	18.67	18.46	18.27	19.5	2
10	64QAM	1	25	18.45	18.45	18.21		
10	64QAM	1	49	18.45	18.23	18.11		
10	64QAM	25	0	17.24	17.17	17.22	18.5	3
10	64QAM	25	12	17.26	17.17	17.11		
10	64QAM	25	25	17.31	17.24	17.15		
10	64QAM	50	0	17.16	17.14	17.10		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	20.24	20.38	19.98	21.5	0
5	QPSK	1	12	20.31	20.03	20.03		
5	QPSK	1	24	20.22	20.05	19.77		
5	QPSK	12	0	19.25	19.16	19.19	20.5	1
5	QPSK	12	7	19.15	19.25	19.22		
5	QPSK	12	13	19.25	19.27	19.02		
5	QPSK	25	0	19.16	19.21	19.05		
5	16QAM	1	0	19.53	19.69	19.48	20.5	1
5	16QAM	1	12	19.59	19.40	19.27		
5	16QAM	1	24	19.35	19.30	19.27		
5	16QAM	12	0	18.41	18.22	18.31	19.5	2
5	16QAM	12	7	18.33	18.21	18.08		
5	16QAM	12	13	18.19	18.39	18.06		
5	16QAM	25	0	18.33	18.26	18.12		
5	64QAM	1	0	18.57	18.51	18.40	19.5	2
5	64QAM	1	12	18.47	18.41	18.16		
5	64QAM	1	24	18.43	18.24	18.26		
5	64QAM	12	0	17.41	17.32	17.23	18.5	3
5	64QAM	12	7	17.38	17.35	17.23		
5	64QAM	12	13	17.19	17.29	17.14		
5	64QAM	25	0	17.26	17.24	17.06		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	20.28	20.25	20.13	21.5	0
3	QPSK	1	8	20.16	20.13	19.95		
3	QPSK	1	14	20.12	19.90	19.81		
3	QPSK	8	0	19.31	19.25	19.13	20.5	1
3	QPSK	8	4	19.15	19.18	19.18		
3	QPSK	8	7	19.09	19.23	19.06		
3	QPSK	15	0	19.22	19.21	19.15		
3	16QAM	1	0	19.60	19.66	19.52	20.5	1
3	16QAM	1	8	19.54	19.44	19.37		
3	16QAM	1	14	19.40	19.36	19.22		
3	16QAM	8	0	18.41	18.30	18.26	19.5	2
3	16QAM	8	4	18.36	18.29	18.16		
3	16QAM	8	7	18.18	18.35	18.07		
3	16QAM	15	0	18.31	18.20	18.04		





**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

3	64QAM	1	0	18.61	18.40	18.27	19.5	2
3	64QAM	1	8	18.53	18.48	18.20		
3	64QAM	1	14	18.31	18.41	18.24		
3	64QAM	8	0	17.25	17.20	17.20	18.5	3
3	64QAM	8	4	17.24	17.37	17.10		
3	64QAM	8	7	17.28	17.31	17.18		
3	64QAM	15	0	17.19	17.29	17.18		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	20.37	20.31	20.11	21.5	0
1.4	QPSK	1	3	20.16	20.07	19.99		
1.4	QPSK	1	5	20.23	19.93	19.85		
1.4	QPSK	3	0	20.20	20.34	20.02		
1.4	QPSK	3	1	20.34	20.05	20.03		
1.4	QPSK	3	3	20.10	19.90	19.86		
1.4	QPSK	6	0	19.20	19.21	19.27	20.5	1
1.4	16QAM	1	0	19.18	19.27	19.11	20.5	1
1.4	16QAM	1	3	19.30	19.14	19.09		
1.4	16QAM	1	5	19.13	19.17	19.00		
1.4	16QAM	3	0	19.27	19.16	19.14		
1.4	16QAM	3	1	19.66	19.60	19.49		
1.4	16QAM	3	3	19.64	19.58	19.35		
1.4	16QAM	6	0	18.26	18.26	18.18	19.5	2
1.4	64QAM	1	0	18.19	18.37	18.20	19.5	2
1.4	64QAM	1	3	18.22	18.33	18.18		
1.4	64QAM	1	5	18.33	18.26	18.24		
1.4	64QAM	3	0	18.60	18.41	18.45		
1.4	64QAM	3	1	18.54	18.47	18.14		
1.4	64QAM	3	3	18.38	18.24	18.19		
1.4	64QAM	6	0	17.24	17.27	17.22		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	20.64	20.80	20.79	21.5	0
20	QPSK	1	49	20.50	20.56	20.52		
20	QPSK	1	99	20.62	20.45	20.47		
20	QPSK	50	0	19.75	19.76	19.66	20.5	1
20	QPSK	50	24	19.74	19.61	19.59		
20	QPSK	50	50	19.69	19.52	19.57		
20	QPSK	100	0	19.74	19.75	19.61	20.5	1
20	16QAM	1	0	19.88	20.15	20.03		
20	16QAM	1	49	19.89	19.87	19.71		
20	16QAM	1	99	20.03	19.68	19.69	19.5	2
20	16QAM	50	0	18.75	18.84	18.72		
20	16QAM	50	24	18.80	18.75	18.62		
20	16QAM	50	50	18.81	18.59	18.54	19.5	2
20	16QAM	100	0	18.77	18.72	18.59		
20	64QAM	1	0	18.78	19.08	19.02		
20	64QAM	1	49	18.81	18.85	18.69	19.5	2
20	64QAM	1	99	18.94	18.65	18.63		
20	64QAM	50	0	17.80	17.87	17.73		
20	64QAM	50	24	17.83	17.75	17.60	18.5	3
20	64QAM	50	50	17.83	17.61	17.59		
20	64QAM	100	0	17.80	17.75	17.60		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	20.54	20.60	20.60	21.5	0
15	QPSK	1	37	20.33	20.45	20.47		
15	QPSK	1	74	20.58	20.43	20.29		
15	QPSK	36	0	19.59	19.71	19.57	20.5	1
15	QPSK	36	20	19.66	19.45	19.51		
15	QPSK	36	39	19.61	19.41	19.39		
15	QPSK	75	0	19.62	19.65	19.44	20.5	1
15	16QAM	1	0	19.79	20.09	19.91		
15	16QAM	1	37	19.70	19.85	19.60		
15	16QAM	1	74	19.83	19.53	19.61	19.5	2
15	16QAM	36	0	18.70	18.75	18.56		
15	16QAM	36	20	18.73	18.59	18.57		
15	16QAM	36	39	18.70	18.55	18.48	19.5	2
15	16QAM	75	0	18.63	18.53	18.59		
15	64QAM	1	0	18.62	18.92	18.87		
15	64QAM	1	37	18.61	18.75	18.69	19.5	2
15	64QAM	1	74	18.76	18.65	18.63		
15	64QAM	36	0	17.80	17.70	17.67		
15	64QAM	36	20	17.63	17.65	17.45	18.5	3
15	64QAM	36	39	17.74	17.56	17.52		
15	64QAM	75	0	17.79	17.72	17.49		
Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	20.55	20.79	20.68	21.5	0
10	QPSK	1	25	20.48	20.37	20.39		
10	QPSK	1	49	20.44	20.27	20.45		
10	QPSK	25	0	19.62	19.71	19.57	20.5	1
10	QPSK	25	12	19.54	19.52	19.43		



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

10	QPSK	25	25	19.55	19.38	19.52		
10	QPSK	50	0	19.65	19.75	19.57		
10	16QAM	1	0	19.82	20.04	19.88	20.5	1
10	16QAM	1	25	19.76	19.73	19.53		
10	16QAM	1	49	19.95	19.61	19.67		
10	16QAM	25	0	18.64	18.66	18.57	19.5	2
10	16QAM	25	12	18.65	18.57	18.55		
10	16QAM	25	25	18.77	18.55	18.53		
10	16QAM	50	0	18.63	18.72	18.40	19.5	2
10	64QAM	1	0	18.75	19.04	18.90		
10	64QAM	1	25	18.75	18.85	18.56		
10	64QAM	1	49	18.90	18.47	18.44	18.5	3
10	64QAM	25	0	17.79	17.85	17.56		
10	64QAM	25	12	17.73	17.68	17.41		
10	64QAM	25	25	17.69	17.52	17.54	18.5	3
10	64QAM	50	0	17.66	17.70	17.49		
Channel				19975	20175	20375		
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	20.47	20.70	20.78	21.5	0
5	QPSK	1	12	20.47	20.42	20.46		
5	QPSK	1	24	20.49	20.36	20.38		
5	QPSK	12	0	19.60	19.75	19.57	20.5	1
5	QPSK	12	7	19.60	19.42	19.57		
5	QPSK	12	13	19.61	19.50	19.46		
5	QPSK	25	0	19.57	19.73	19.43	20.5	1
5	16QAM	1	0	19.84	20.09	20.02		
5	16QAM	1	12	19.86	19.74	19.52		
5	16QAM	1	24	19.87	19.57	19.50	19.5	2
5	16QAM	12	0	18.69	18.68	18.52		
5	16QAM	12	7	18.74	18.67	18.59		
5	16QAM	12	13	18.78	18.42	18.50	19.5	2
5	16QAM	25	0	18.69	18.56	18.59		
5	64QAM	1	0	18.62	19.00	18.96		
5	64QAM	1	12	18.69	18.85	18.51	19.5	2
5	64QAM	1	24	18.86	18.55	18.58		
5	64QAM	12	0	17.69	17.85	17.65		
5	64QAM	12	7	17.74	17.61	17.55	18.5	3
5	64QAM	12	13	17.69	17.57	17.47		
5	64QAM	25	0	17.75	17.69	17.43		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	20.55	20.70	20.59	21.5	0
3	QPSK	1	8	20.37	20.44	20.52		
3	QPSK	1	14	20.62	20.45	20.45		
3	QPSK	8	0	19.72	19.56	19.65	20.5	1
3	QPSK	8	4	19.66	19.47	19.54		
3	QPSK	8	7	19.64	19.37	19.49		
3	QPSK	15	0	19.73	19.65	19.45	20.5	1
3	16QAM	1	0	19.70	20.08	19.94		
3	16QAM	1	8	19.78	19.71	19.65		
3	16QAM	1	14	20.00	19.56	19.54	19.5	2
3	16QAM	8	0	18.70	18.69	18.53		
3	16QAM	8	4	18.76	18.66	18.51		
3	16QAM	8	7	18.78	18.57	18.48	19.5	2
3	16QAM	15	0	18.75	18.65	18.43		
3	64QAM	1	0	18.60	19.04	18.87	19.5	2



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

3	64QAM	1	8	18.62	18.70	18.51	18.5	3
3	64QAM	1	14	18.74	18.47	18.43		
3	64QAM	8	0	17.64	17.70	17.72		
3	64QAM	8	4	17.68	17.71	17.49		
3	64QAM	8	7	17.77	17.59	17.57		
3	64QAM	15	0	17.67	17.68	17.60		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	20.60	20.70	20.79	21.5	0
1.4	QPSK	1	3	20.44	20.38	20.47		
1.4	QPSK	1	5	20.43	20.41	20.40		
1.4	QPSK	3	0	20.51	20.70	20.65		
1.4	QPSK	3	1	20.34	20.36	20.39		
1.4	QPSK	3	3	20.62	20.45	20.44		
1.4	QPSK	6	0	19.70	19.69	19.60	20.5	1
1.4	16QAM	1	0	19.61	19.59	19.39	20.5	1
1.4	16QAM	1	3	19.62	19.39	19.38		
1.4	16QAM	1	5	19.70	19.59	19.52		
1.4	16QAM	3	0	19.76	20.15	19.93		
1.4	16QAM	3	1	19.76	19.69	19.66		
1.4	16QAM	3	3	19.85	19.55	19.62		
1.4	16QAM	6	0	18.56	18.67	18.65	19.5	2
1.4	64QAM	1	0	18.70	18.65	18.53	19.5	2
1.4	64QAM	1	3	18.80	18.59	18.34		
1.4	64QAM	1	5	18.66	18.66	18.46		
1.4	64QAM	3	0	18.63	18.97	18.86		
1.4	64QAM	3	1	18.62	18.72	18.65		
1.4	64QAM	3	3	18.76	18.65	18.61		
1.4	64QAM	6	0	17.77	17.74	17.53	18.5	3



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572	21.5	0
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	20.73	20.62	20.76	21.5	0
20	QPSK	1	49	20.72	20.58	20.75		
20	QPSK	1	99	20.58	20.38	20.42		
20	QPSK	50	0	19.68	19.58	19.69	20.5	1
20	QPSK	50	24	19.58	19.56	19.44		
20	QPSK	50	50	19.60	19.47	19.45		
20	QPSK	100	0	19.58	19.53	19.59	20.5	1
20	16QAM	1	0	19.76	19.93	20.01		
20	16QAM	1	49	20.07	19.76	20.11		
20	16QAM	1	99	19.99	19.60	19.77	19.5	2
20	16QAM	50	0	18.72	18.66	18.66		
20	16QAM	50	24	18.65	18.56	18.54		
20	16QAM	50	50	18.68	18.42	18.55	19.5	2
20	16QAM	100	0	18.66	18.54	18.61		
20	64QAM	1	0	18.76	18.86	18.88		
20	64QAM	1	49	19.06	18.68	19.04	19.5	2
20	64QAM	1	99	18.89	18.56	18.65		
20	64QAM	50	0	17.75	17.68	17.66		
20	64QAM	50	24	17.67	17.60	17.59	18.5	3
20	64QAM	50	50	17.69	17.47	17.56		
20	64QAM	100	0	17.65	17.56	17.66		
Channel				132047	132322	132597	21.5	0
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	20.67	20.62	20.67	21.5	0
15	QPSK	1	37	20.72	20.48	20.63		
15	QPSK	1	74	20.49	20.28	20.23		
15	QPSK	36	0	19.61	19.57	19.52	20.5	1
15	QPSK	36	20	19.39	19.51	19.43		
15	QPSK	36	39	19.41	19.33	19.44		
15	QPSK	75	0	19.44	19.48	19.55	20.5	1
15	16QAM	1	0	19.71	19.92	19.89		
15	16QAM	1	37	19.99	19.60	20.04		
15	16QAM	1	74	19.87	19.42	19.75	19.5	2
15	16QAM	36	0	18.54	18.55	18.57		
15	16QAM	36	20	18.64	18.38	18.45		
15	16QAM	36	39	18.52	18.38	18.54	19.5	2
15	16QAM	75	0	18.56	18.53	18.52		
15	64QAM	1	0	18.61	18.76	18.87		
15	64QAM	1	37	18.95	18.60	19.01	19.5	2
15	64QAM	1	74	18.77	18.54	18.55		
15	64QAM	36	0	17.75	17.59	17.61		
15	64QAM	36	20	17.62	17.54	17.39	18.5	3
15	64QAM	36	39	17.64	17.43	17.36		
15	64QAM	75	0	17.58	17.42	17.64		
Channel				132022	132322	132622	21.5	0
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	20.59	20.53	20.71	21.5	0
10	QPSK	1	25	20.72	20.40	20.58		
10	QPSK	1	49	20.39	20.28	20.36		
10	QPSK	25	0	19.56	19.48	19.56	20.5	1
10	QPSK	25	12	19.44	19.45	19.42		



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

10	QPSK	25	25	19.59	19.44	19.34		
10	QPSK	50	0	19.40	19.39	19.58		
10	16QAM	1	0	19.66	19.85	19.94	20.5	1
10	16QAM	1	25	19.98	19.64	20.08		
10	16QAM	1	49	19.81	19.56	19.61		
10	16QAM	25	0	18.70	18.47	18.49	19.5	2
10	16QAM	25	12	18.59	18.41	18.49		
10	16QAM	25	25	18.67	18.35	18.45		
10	16QAM	50	0	18.57	18.36	18.50	19.5	2
10	64QAM	1	0	18.62	18.79	18.77		
10	64QAM	1	25	19.04	18.59	18.99		
10	64QAM	1	49	18.84	18.42	18.49	18.5	3
10	64QAM	25	0	17.63	17.62	17.46		
10	64QAM	25	12	17.67	17.59	17.42		
10	64QAM	25	25	17.57	17.28	17.48	18.5	3
10	64QAM	25	25	17.57	17.28	17.48		
10	64QAM	50	0	17.50	17.41	17.47		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	20.70	20.42	20.68	21.5	0
5	QPSK	1	12	20.71	20.38	20.57		
5	QPSK	1	24	20.40	20.27	20.39		
5	QPSK	12	0	19.57	19.39	19.67	20.5	1
5	QPSK	12	7	19.57	19.45	19.28		
5	QPSK	12	13	19.58	19.36	19.28		
5	QPSK	25	0	19.52	19.44	19.47	20.5	1
5	16QAM	1	0	19.75	19.93	19.88		
5	16QAM	1	12	20.05	19.75	20.07		
5	16QAM	1	24	19.98	19.54	19.66	19.5	2
5	16QAM	12	0	18.55	18.61	18.49		
5	16QAM	12	7	18.55	18.39	18.44		
5	16QAM	12	13	18.68	18.40	18.38	19.5	2
5	16QAM	25	0	18.54	18.48	18.47		
5	64QAM	1	0	18.70	18.79	18.86		
5	64QAM	1	12	19.02	18.63	18.86	19.5	2
5	64QAM	1	24	18.72	18.51	18.57		
5	64QAM	12	0	17.63	17.50	17.56		
5	64QAM	12	7	17.55	17.53	17.52	18.5	3
5	64QAM	12	13	17.59	17.37	17.50		
5	64QAM	25	0	17.57	17.54	17.60		
Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	20.72	20.55	20.67	21.5	0
3	QPSK	1	8	20.65	20.56	20.60		
3	QPSK	1	14	20.52	20.35	20.30		
3	QPSK	8	0	19.55	19.41	19.58	20.5	1
3	QPSK	8	4	19.47	19.53	19.40		
3	QPSK	8	7	19.59	19.42	19.32		
3	QPSK	15	0	19.42	19.34	19.49	20.5	1
3	16QAM	1	0	19.68	19.77	19.92		
3	16QAM	1	8	19.96	19.64	20.00		
3	16QAM	1	14	19.82	19.59	19.62	19.5	2
3	16QAM	8	0	18.70	18.53	18.56		
3	16QAM	8	4	18.59	18.43	18.38		
3	16QAM	8	7	18.55	18.28	18.39	19.5	2
3	16QAM	15	0	18.47	18.53	18.61		
3	64QAM	1	0	18.60	18.69	18.76		



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

3	64QAM	1	8	18.93	18.64	18.84	18.5	3
3	64QAM	1	14	18.87	18.41	18.54		
3	64QAM	8	0	17.66	17.62	17.53		
3	64QAM	8	4	17.55	17.53	17.44		
3	64QAM	8	7	17.62	17.31	17.44		
3	64QAM	15	0	17.46	17.44	17.60		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	20.71	20.47	20.68	21.5	0
1.4	QPSK	1	3	20.66	20.53	20.63		
1.4	QPSK	1	5	20.52	20.25	20.31		
1.4	QPSK	3	0	20.55	20.61	20.66		
1.4	QPSK	3	1	20.58	20.41	20.57		
1.4	QPSK	3	3	20.45	20.27	20.35		
1.4	QPSK	6	0	19.48	19.56	19.49	20.5	1
1.4	16QAM	1	0	19.54	19.55	19.28	20.5	1
1.4	16QAM	1	3	19.47	19.30	19.42		
1.4	16QAM	1	5	19.42	19.46	19.53		
1.4	16QAM	3	0	19.68	19.86	19.97		
1.4	16QAM	3	1	20.03	19.72	20.00		
1.4	16QAM	3	3	19.90	19.42	19.69		
1.4	16QAM	6	0	18.64	18.64	18.62	19.5	2
1.4	64QAM	1	0	18.52	18.53	18.49	19.5	2
1.4	64QAM	1	3	18.66	18.29	18.40		
1.4	64QAM	1	5	18.56	18.52	18.49		
1.4	64QAM	3	0	18.62	18.67	18.74		
1.4	64QAM	3	1	18.96	18.53	19.00		
1.4	64QAM	3	3	18.87	18.54	18.60		
1.4	64QAM	6	0	17.67	17.62	17.48	18.5	3




**<TDD LTE SAR Measurement>**

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- b. “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

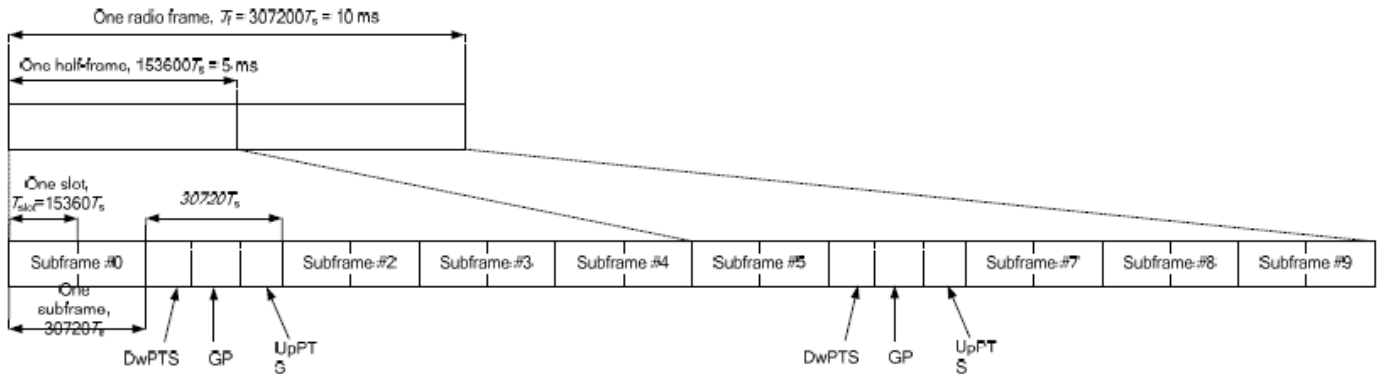

**Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).**

**Table 4.2-2: Uplink-downlink configurations.**

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

**Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).**

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$			$7680 \cdot T_s$				
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-			-	-
9	$13168 \cdot T_s$			-			-	-

<b>Special subframe (30720·T<sub>s</sub>): Normal cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~4</b>	7.13%	8.33%
	<b>5~9</b>	14.3%	16.7%

<b>Special subframe(30720·T<sub>s</sub>): Extended cyclic prefix in downlink (UpPTS)</b>			
	<b>Special subframe configuration</b>	<b>Normal cyclic prefix in uplink</b>	<b>Extended cyclic prefix in uplink</b>
<b>Uplink duty factor in one special subframe</b>	<b>0~3</b>	7.13%	8.33%
	<b>4~7</b>	14.3%	16.7%

The highest duty factor is resulted from:

- i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.167)/5 = 63.3\%$
- iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:  $(3+0.143)/5 = 62.9\%$
- v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.



**Default Power Mode**

**<LTE Band 41>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				39750	40185	40620	41055	41490		
Frequency (MHz)				2506	2549.5	2593	2636.5	2680		
20	QPSK	1	0	22.97	22.65	22.62	21.67	23.48	23.5	0
20	QPSK	1	49	22.77	22.44	22.59	22.54	22.70		
20	QPSK	1	99	23.02	22.44	22.85	22.61	22.13		
20	QPSK	50	0	22.14	21.47	21.88	22.06	22.15	22.5	1
20	QPSK	50	24	22.08	21.38	21.55	22.04	22.00		
20	QPSK	50	50	21.84	21.41	21.78	22.01	21.80		
20	QPSK	100	0	22.08	21.49	21.77	21.69	22.19	22.5	1
20	16QAM	1	0	22.43	21.45	21.83	21.72	22.45		
20	16QAM	1	49	22.37	21.22	21.85	21.70	22.11		
20	16QAM	1	99	22.23	21.27	21.71	21.77	21.06	21.5	2
20	16QAM	50	0	21.35	20.46	20.53	21.34	21.18		
20	16QAM	50	24	21.40	20.58	20.93	21.14	21.13		
20	16QAM	50	50	20.99	20.60	20.98	21.06	20.96	21.5	2
20	16QAM	100	0	21.31	20.60	20.87	21.18	21.05		
20	64QAM	1	0	21.26	20.50	20.48	20.52	21.36		
20	64QAM	1	49	20.90	20.32	20.46	20.71	21.07	21.5	2
20	64QAM	1	99	20.78	20.16	20.27	20.79	20.17		
20	64QAM	50	0	20.31	19.59	19.69	20.26	20.13		
20	64QAM	50	24	20.30	19.33	19.91	19.84	20.18	20.5	3
20	64QAM	50	50	20.16	19.55	19.72	20.08	20.27		
20	64QAM	100	0	20.29	19.32	19.81	20.23	20.17		
Channel				39725	40173	40620	41068	41515	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2503.5	2548.3	2593	2637.8	2682.5		
15	QPSK	1	0	22.93	22.61	22.55	21.59	23.40	23.5	0
15	QPSK	1	37	22.69	22.39	22.57	22.49	22.63		
15	QPSK	1	74	22.93	22.43	22.82	22.58	22.05		
15	QPSK	36	0	22.05	21.37	21.34	21.74	22.03	22.5	1
15	QPSK	36	20	21.98	21.34	21.49	22.11	21.90		
15	QPSK	36	39	21.74	21.32	21.73	21.97	21.77		
15	QPSK	75	0	22.03	21.46	21.70	21.69	22.10	22.5	1
15	16QAM	1	0	22.43	21.42	21.75	21.68	22.44		
15	16QAM	1	37	22.27	21.16	21.76	21.62	22.04		
15	16QAM	1	74	22.20	21.27	21.70	21.75	20.97	21.5	2
15	16QAM	36	0	21.30	20.45	20.47	21.33	21.12		
15	16QAM	36	20	21.36	20.52	20.85	21.08	21.09		
15	16QAM	36	39	20.98	20.52	20.97	21.00	20.89	21.5	2
15	16QAM	75	0	21.31	20.59	20.82	21.14	20.98		
15	64QAM	1	0	21.16	20.47	20.40	20.48	21.34		
15	64QAM	1	37	20.82	20.28	20.38	20.68	21.03	21.5	2
15	64QAM	1	74	20.76	20.10	20.18	20.74	20.08		
15	64QAM	36	0	20.30	19.50	19.63	20.16	20.10		
15	64QAM	36	20	20.21	19.30	19.90	19.81	20.15	20.5	3
15	64QAM	36	39	20.06	19.55	19.66	19.99	20.17		
15	64QAM	75	0	20.22	19.27	19.71	20.13	20.15		
Channel				39700	40160	40620	41080	41540	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2501	2547	2593	2639	2685		
10	QPSK	1	0	22.94	22.59	22.54	21.62	23.39	23.5	0
10	QPSK	1	25	22.69	22.36	22.58	22.51	22.62		
10	QPSK	1	49	22.95	22.43	22.81	22.52	22.11		
10	QPSK	25	0	22.11	21.41	21.30	21.76	22.00	22.5	1



**FCC SAR TEST REPORT**

**Report No. : FA0D0916**

10	QPSK	25	12	22.00	21.32	21.50	22.09	21.98		
10	QPSK	25	25	21.75	21.38	21.76	21.92	21.79		
10	QPSK	50	0	22.00	21.43	21.70	21.64	22.18		
10	16QAM	1	0	22.41	21.43	21.73	21.71	22.38	22.5	1
10	16QAM	1	25	22.34	21.15	21.77	21.70	22.02		
10	16QAM	1	49	22.23	21.22	21.66	21.71	20.97		
10	16QAM	25	0	21.28	20.36	20.45	21.30	21.09	21.5	2
10	16QAM	25	12	21.40	20.55	20.91	21.05	21.12		
10	16QAM	25	25	20.89	20.53	20.92	21.05	20.92		
10	16QAM	50	0	21.30	20.50	20.87	21.08	21.01	21.5	2
10	64QAM	1	0	21.18	20.41	20.47	20.46	21.31		
10	64QAM	1	25	20.87	20.30	20.40	20.61	21.06		
10	64QAM	1	49	20.68	20.16	20.21	20.71	20.11	20.5	3
10	64QAM	25	0	20.29	19.59	19.67	20.26	20.06		
10	64QAM	25	12	20.28	19.27	19.81	19.76	20.12		
10	64QAM	25	25	20.13	19.48	19.67	20.02	20.20	20.5	3
10	64QAM	50	0	20.21	19.25	19.76	20.17	20.15		
Channel				39675	40148	40620	41093	41565		
Frequency (MHz)				2498.5	2545.8	2593	2640.30	2687.5		
5	QPSK	1	0	22.92	22.56	22.56	21.64	23.43	23.5	0
5	QPSK	1	12	22.74	22.37	22.58	22.52	22.60		
5	QPSK	1	24	22.97	22.40	22.82	22.58	22.06		
5	QPSK	12	0	22.07	21.43	21.30	21.78	22.01	22.5	1
5	QPSK	12	7	22.04	21.34	21.45	22.14	21.98		
5	QPSK	12	13	21.81	21.33	21.73	21.94	21.79		
5	QPSK	25	0	22.03	21.45	21.77	21.69	22.11	22.5	1
5	16QAM	1	0	22.41	21.39	21.75	21.63	22.36		
5	16QAM	1	12	22.27	21.17	21.80	21.60	22.01		
5	16QAM	1	24	22.14	21.22	21.63	21.69	21.01	21.5	2
5	16QAM	12	0	21.27	20.46	20.52	21.29	21.11		
5	16QAM	12	7	21.33	20.49	20.90	21.14	21.11		
5	16QAM	12	13	20.89	20.51	20.90	21.05	20.87	21.5	2
5	16QAM	25	0	21.29	20.53	20.87	21.17	20.96		
5	64QAM	1	0	21.22	20.49	20.44	20.51	21.30		
5	64QAM	1	12	20.89	20.27	20.40	20.70	21.07	21.5	2
5	64QAM	1	24	20.70	20.07	20.17	20.71	20.13		
5	64QAM	12	0	20.23	19.49	19.65	20.20	20.13		
5	64QAM	12	7	20.30	19.25	19.87	19.81	20.13	20.5	3
5	64QAM	12	13	20.16	19.50	19.71	20.08	20.20		
5	64QAM	25	0	20.21	19.29	19.71	20.15	20.12		

**<LTE Carrier Aggregation combinations>**

**General Note:**

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.
3. All permutations exist. No restrictions on Pcell & SCell combinations. Only LTE Band 29A is limited to Scell.

2CC Downlink Carrier Aggregation	
Number	Combination
1	2A-2A
2	2A-5A
3	2A-12A
4	2A-17A
5	4A-12A
6	4A-17A
7	12A-66A

**<Power verification when LTE Carrier Aggregation Active>**

**General Note:**

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

**<Two Carrier power verification>**

Configure	PCC							SCC				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1880	18900	QPSK	1	0	2	5	1960	900	22.23	22.25
	2	20	1880	18900	QPSK	1	0	5	10	881.5	2525	22.21	22.25
	2	20	1880	18900	QPSK	1	0	12	10	737.5	5095	22.24	22.25
	2	20	1880	18900	QPSK	1	0	17	10	740	5790	22.18	22.25
	4	20	1745	20300	QPSK	1	0	12	10	737.5	5095	22.71	22.73
	4	20	1745	20300	QPSK	1	0	17	10	740	5790	22.68	22.73
	12	10	711	23130	QPSK	1	0	66	20	2155	66886	22.40	22.46



## **12. WiFi/Bluetooth Output Power (Unit: dBm)**

### **General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	16.98	17.00	99.17
		6	2437	14.41	15.00	
		11	2462	14.53	15.00	
	802.11g 6Mbps	1	2412	13.73	14.00	98.28
		6	2437	13.58	14.00	
		11	2462	13.82	14.00	
	802.11n-HT20 MCS0	1	2412	13.62	14.00	93.06
		6	2437	13.54	14.00	
		11	2462	13.70	14.00	
	802.11n-HT40 MCS0	3	2422	13.75	14.00	94.93
		6	2437	13.70	14.00	
		9	2452	13.73	14.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	14.76	15.50	98.28
		40	5200	15.20	15.50	
		44	5220	15.05	15.50	
		48	5240	15.28	15.50	
	802.11n-HT20 MCS0	36	5180	12.73	13.50	98.16
		40	5200	13.23	13.50	
		44	5220	13.03	13.50	
		48	5240	13.22	13.50	
	802.11n-HT40 MCS0	38	5190	12.82	13.00	95.77
		46	5230	12.91	13.00	
	802.11ac-VHT20 MCS0	36	5180	13.54	14.50	98.24
		40	5200	14.02	14.50	
		44	5220	13.86	14.50	
	802.11ac-VHT40 MCS0	48	5240	14.07	14.50	96.48
		38	5190	13.57	14.00	
	802.11ac-VHT80 MCS0	46	5230	13.80	14.00	93.06
		42	5210	12.38	13.00	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	15.54	16.00	98.28
		56	5280	15.04	16.00	
		60	5300	15.40	16.00	
		64	5320	14.91	16.00	
	802.11n-HT20 MCS0	52	5260	13.51	14.00	98.16
		56	5280	12.93	14.00	
		60	5300	13.34	14.00	
		64	5320	12.90	14.00	
	802.11n-HT40 MCS0	54	5270	12.74	13.00	95.77
		62	5310	12.74	13.00	
	802.11ac-VHT20 MCS0	52	5260	14.34	14.50	98.24
		56	5280	13.72	14.50	
		60	5300	14.19	14.50	
		64	5320	13.81	14.50	
	802.11ac-VHT40 MCS0	54	5270	13.94	14.00	96.48
		62	5310	13.85	14.00	
	802.11ac-VHT80 MCS0	58	5290	12.46	13.00	93.06





	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	15.37	16.00	98.28
		116	5580	15.75	16.00	
		124	5620	15.78	16.00	
		132	5660	14.94	16.00	
		144	5720	15.69	16.00	
	802.11n-HT20 MCS0	100	5500	13.34	14.00	98.16
		116	5580	13.79	14.00	
		124	5620	13.86	14.00	
		132	5660	12.98	14.00	
	802.11n-HT40 MCS0	102	5510	12.81	13.00	95.77
		110	5550	12.75	13.00	
		126	5630	12.85	13.00	
		134	5670	12.75	13.00	
	802.11ac-VHT20 MCS0	100	5500	14.25	15.00	98.24
		116	5580	14.66	15.00	
		124	5620	14.64	15.00	
		132	5660	13.79	15.00	
	802.11ac-VHT40 MCS0	102	5510	14.10	14.50	96.48
		110	5550	13.57	14.50	
		126	5630	14.22	14.50	
134		5670	13.80	14.50		
802.11ac-VHT80 MCS0	106	5530	12.25	13.00	93.06	
	122	5610	12.69	13.00		
	138	5690	12.84	13.00		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	14.76	16.00	98.28
		157	5785	15.06	16.00	
		165	5825	15.83	16.00	
	802.11n-HT20 MCS0	149	5745	12.84	14.00	98.16
		157	5785	13.09	14.00	
		165	5825	13.86	14.00	
	802.11n-HT40 MCS0	151	5755	12.91	13.00	95.77
		159	5795	12.91	13.00	
	802.11ac-VHT20 MCS0	149	5745	13.70	15.00	98.24
		157	5785	13.86	15.00	
		165	5825	14.53	15.00	
	802.11ac-VHT40 MCS0	151	5755	13.83	15.00	96.48
		159	5795	14.45	15.00	
	802.11ac-VHT80 MCS0	155	5775	12.63	13.00	93.06



<2.4GHz Bluetooth>


Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	14.39	12.25	12.77
	CH 39	2441	14.22	12.60	12.60
	CH 78	2480	13.12	12.94	12.76
Tune-up Limit			15.00	13.00	13.00

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	3.74	3.73
	CH 19	2440	3.82	3.84
	CH 39	2480	4.76	4.46
Tune-up Limit			5.00	5.00

General Note:


- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.84% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

BT Duty cycle

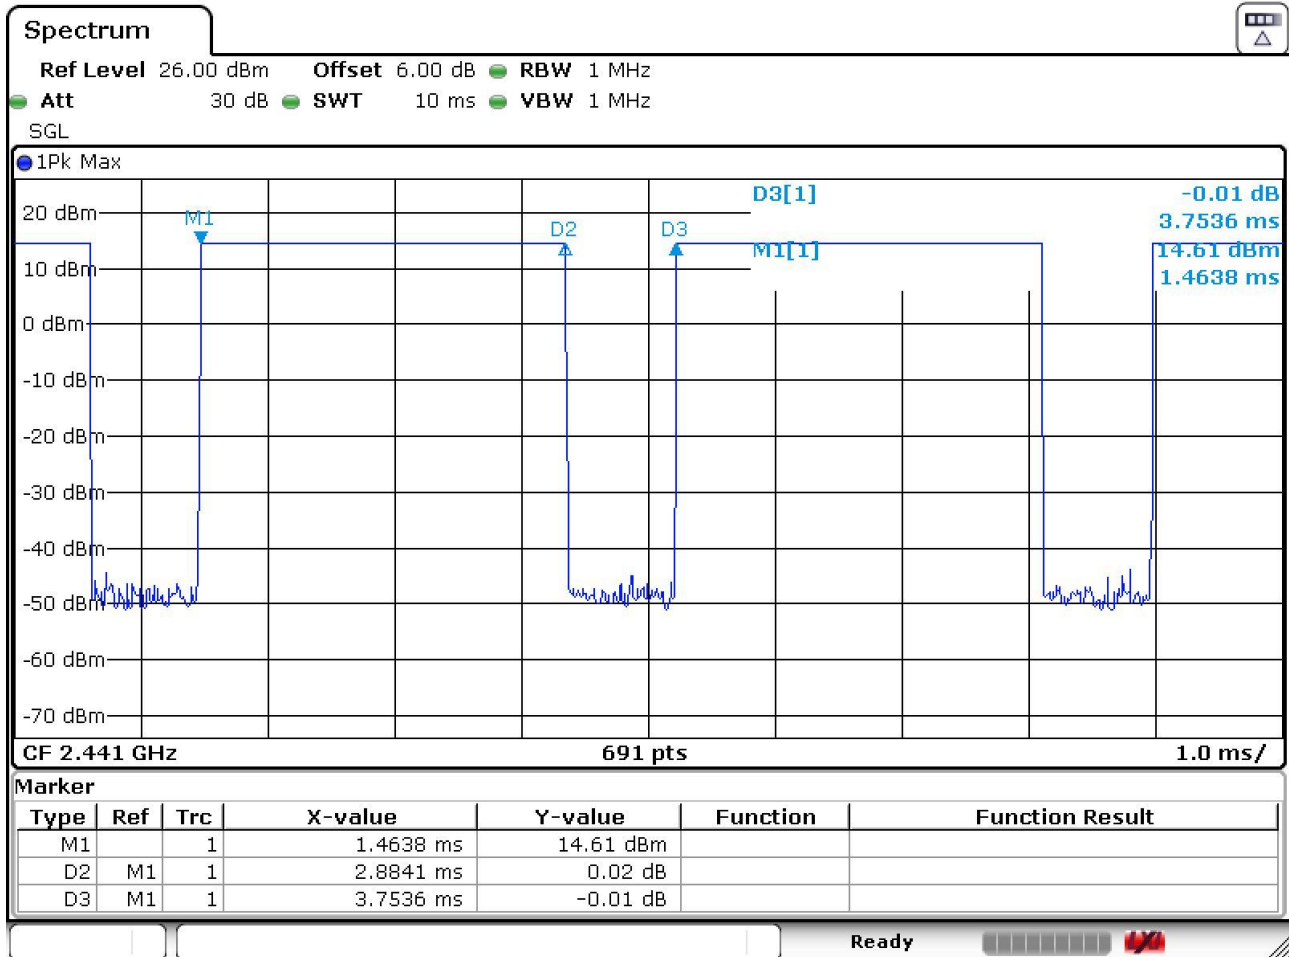

Date: 31.DEC.2020 00:08:08

### 13. Antenna Location

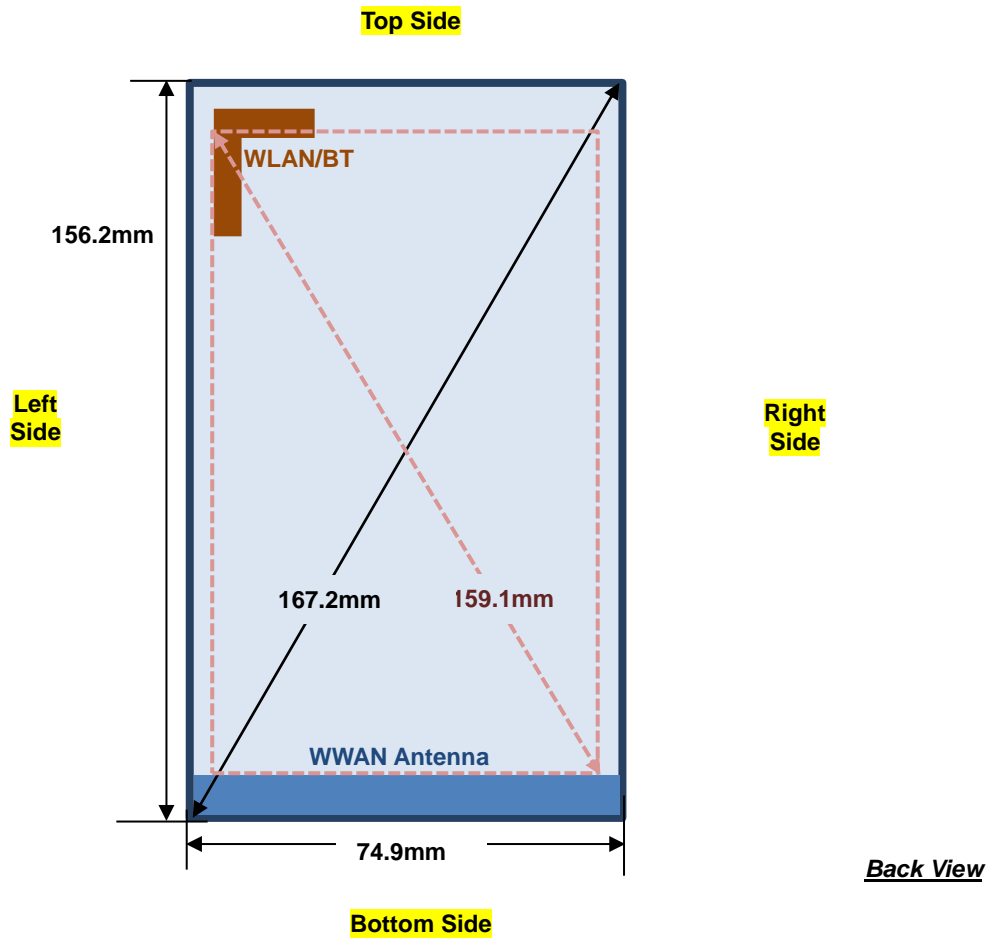

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## 14. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
  - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)\* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of WCDMA B2 / B4 and LTE B2 / B4 / B66.
5. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device only bottom side SAR for WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of WCDMA B2, B4 and LTE B2, B66 therefore product specific SAR is necessary.
7. For 5.3GHz / 5.5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is  $> 16$ cm.

### GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (3Tx slots) for GSM850/GSM1900 is considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

**UMTS Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5/B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 4/17 SAR test was covered by Band 66/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



**14.1 Head SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS (3 Tx slots)	Right Cheek	0mm	251	848.8	28.76	29.00	1.057	-0.13	0.134	0.142
	GSM850	GPRS (3 Tx slots)	Right Tilted	0mm	251	848.8	28.76	29.00	1.057	-0.08	0.073	0.077
	GSM850	GPRS (3 Tx slots)	Left Cheek	0mm	251	848.8	28.76	29.00	1.057	-0.02	0.108	0.114
	GSM850	GPRS (3 Tx slots)	Left Tilted	0mm	251	848.8	28.76	29.00	1.057	-0.04	0.064	0.068
	GSM1900	GPRS (3 Tx slots)	Right Cheek	0mm	810	1909.8	25.92	26.00	1.019	0.18	0.024	0.024
	GSM1900	GPRS (3 Tx slots)	Right Tilted	0mm	810	1909.8	25.92	26.00	1.019	0.07	0.022	0.022
02	GSM1900	GPRS (3 Tx slots)	Left Cheek	0mm	810	1909.8	25.92	26.00	1.019	0.17	0.039	0.040
	GSM1900	GPRS (3 Tx slots)	Left Tilted	0mm	810	1909.8	25.92	26.00	1.019	0.04	0.011	0.011

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	23.46	24.00	1.132	-0.05	0.079	0.089
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9262	1852.4	23.46	24.00	1.132	0.01	0.071	0.080
03	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9262	1852.4	23.46	24.00	1.132	-0.03	0.124	0.140
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9262	1852.4	23.46	24.00	1.132	0.14	0.053	0.060
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	23.29	23.50	1.050	0.17	0.086	0.090
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1413	1732.6	23.29	23.50	1.050	0.19	0.062	0.065
04	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	23.29	23.50	1.050	0.17	0.148	0.155
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1413	1732.6	23.29	23.50	1.050	-0.11	0.062	0.065
05	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4182	836.4	23.31	24.00	1.172	0.13	0.127	0.149
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4182	836.4	23.31	24.00	1.172	0.07	0.062	0.073
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4182	836.4	23.31	24.00	1.172	-0.13	0.126	0.148
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4182	836.4	23.31	24.00	1.172	-0.14	0.080	0.094



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Right Cheek	0mm	18900	1880	22.25	23.50	1.334	0.19	0.055	0.073
	LTE Band 2	20M	QPSK	50	0	Right Cheek	0mm	18900	1880	21.27	22.50	1.327	-0.13	0.042	0.056
	LTE Band 2	20M	QPSK	1	0	Right Tilted	0mm	18900	1880	22.25	23.50	1.334	0.17	0.049	0.065
	LTE Band 2	20M	QPSK	50	0	Right Tilted	0mm	18900	1880	21.27	22.50	1.327	-0.14	0.036	0.048
06	LTE Band 2	20M	QPSK	1	0	Left Cheek	0mm	18900	1880	22.25	23.50	1.334	-0.05	0.101	0.135
	LTE Band 2	20M	QPSK	50	0	Left Cheek	0mm	18900	1880	21.27	22.50	1.327	-0.02	0.078	0.104
	LTE Band 2	20M	QPSK	1	0	Left Tilted	0mm	18900	1880	22.25	23.50	1.334	0.12	0.034	0.045
	LTE Band 2	20M	QPSK	50	0	Left Tilted	0mm	18900	1880	21.27	22.50	1.327	0.17	0.026	0.035
07	LTE Band 5	10M	QPSK	1	0	Right Cheek	0mm	20525	836.5	22.41	23.50	1.285	-0.08	0.115	0.148
	LTE Band 5	10M	QPSK	25	12	Right Cheek	0mm	20525	836.5	21.50	22.50	1.259	-0.14	0.100	0.126
	LTE Band 5	10M	QPSK	1	0	Right Tilted	0mm	20525	836.5	22.41	23.50	1.285	0.09	0.049	0.063
	LTE Band 5	10M	QPSK	25	12	Right Tilted	0mm	20525	836.5	21.50	22.50	1.259	0.05	0.049	0.062
	LTE Band 5	10M	QPSK	1	0	Left Cheek	0mm	20525	836.5	22.41	23.50	1.285	-0.11	0.066	0.085
	LTE Band 5	10M	QPSK	25	12	Left Cheek	0mm	20525	836.5	21.50	22.50	1.259	0.09	0.058	0.073
	LTE Band 5	10M	QPSK	1	0	Left Tilted	0mm	20525	836.5	22.41	23.50	1.285	-0.1	0.051	0.066
	LTE Band 5	10M	QPSK	25	12	Left Tilted	0mm	20525	836.5	21.50	22.50	1.259	-0.09	0.044	0.055
08	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	22.37	23.50	1.297	-0.01	0.073	0.095
	LTE Band 12	10M	QPSK	25	12	Right Cheek	0mm	23095	707.5	21.57	22.50	1.239	-0.04	0.058	0.072
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	22.37	23.50	1.297	0.16	0.025	0.032
	LTE Band 12	10M	QPSK	25	12	Right Tilted	0mm	23095	707.5	21.57	22.50	1.239	0.12	0.020	0.025
	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	22.37	23.50	1.297	0.07	0.059	0.077
	LTE Band 12	10M	QPSK	25	12	Left Cheek	0mm	23095	707.5	21.57	22.50	1.239	-0.1	0.048	0.059
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	22.37	23.50	1.297	-0.12	0.002	0.003
	LTE Band 12	10M	QPSK	25	12	Left Tilted	0mm	23095	707.5	21.57	22.50	1.239	-0.02	0.002	0.002
	LTE Band 66	20M	QPSK	1	0	Right Cheek	0mm	132572	1770	22.75	23.50	1.189	-0.11	0.071	0.084
	LTE Band 66	20M	QPSK	50	0	Right Cheek	0mm	132572	1770	21.68	22.50	1.208	0	0.052	0.063
	LTE Band 66	20M	QPSK	1	0	Right Tilted	0mm	132572	1770	22.75	23.50	1.189	-0.01	0.044	0.052
	LTE Band 66	20M	QPSK	50	0	Right Tilted	0mm	132572	1770	21.68	22.50	1.208	-0.1	0.037	0.045
09	LTE Band 66	20M	QPSK	1	0	Left Cheek	0mm	132572	1770	22.75	23.50	1.189	-0.17	0.106	0.126
	LTE Band 66	20M	QPSK	50	0	Left Cheek	0mm	132572	1770	21.68	22.50	1.208	-0.19	0.086	0.104
	LTE Band 66	20M	QPSK	1	0	Left Tilted	0mm	132572	1770	22.75	23.50	1.189	-0.1	0.025	0.030
	LTE Band 66	20M	QPSK	50	0	Left Tilted	0mm	132572	1770	21.68	22.50	1.208	-0.17	0.020	0.024

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Right Cheek	0mm	41490	2680	23.48	23.50	1.005	62.9	1.006	-0.11	0.013	0.013
	LTE Band 41	20M	QPSK	50	0	Right Cheek	0mm	41490	2680	22.15	22.50	1.084	62.9	1.006	-0.14	0.006	0.007
	LTE Band 41	20M	QPSK	1	0	Right Tilted	0mm	41490	2680	23.48	23.50	1.005	62.9	1.006	-0.13	0.012	0.012
	LTE Band 41	20M	QPSK	50	0	Right Tilted	0mm	41490	2680	22.15	22.50	1.084	62.9	1.006	-0.15	0.010	0.011
10	LTE Band 41	20M	QPSK	1	0	Left Cheek	0mm	41490	2680	23.48	23.50	1.005	62.9	1.006	0.14	0.018	0.018
	LTE Band 41	20M	QPSK	50	0	Left Cheek	0mm	41490	2680	22.15	22.50	1.084	62.9	1.006	-0.1	0.011	0.012
	LTE Band 41	20M	QPSK	1	0	Left Tilted	0mm	41490	2680	23.48	23.50	1.005	62.9	1.006	0	0.001	0.001
	LTE Band 41	20M	QPSK	50	0	Left Tilted	0mm	41490	2680	22.15	22.50	1.084	62.9	1.006	0.14	0.001	0.001



**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	1	2412	16.98	17.00	1.005	99.17	1.008	0	0.211	0.214
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	1	2412	16.98	17.00	1.005	99.17	1.008	0.1	0.256	0.259
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	1	2412	16.98	17.00	1.005	99.17	1.008	-0.04	0.376	0.381
11	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	1	2412	16.98	17.00	1.005	99.17	1.008	-0.09	0.397	0.402
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	52	5260	15.54	16.00	1.112	98.28	1.018	0.05	0.277	0.313
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	52	5260	15.54	16.00	1.112	98.28	1.018	-0.19	0.337	0.381
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	52	5260	15.54	16.00	1.112	98.28	1.018	-0.15	0.489	0.553
12	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	52	5260	15.54	16.00	1.112	98.28	1.018	-0.14	0.521	0.590
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	124	5620	15.78	16.00	1.052	98.28	1.018	0.02	0.245	0.262
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	124	5620	15.78	16.00	1.052	98.28	1.018	-0.15	0.297	0.318
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	124	5620	15.78	16.00	1.052	98.28	1.018	-0.02	0.432	0.463
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	124	5620	15.78	16.00	1.052	98.28	1.018	-0.05	0.372	0.398
13	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	100	5500	15.37	16.00	1.156	98.28	1.018	-0.03	0.460	0.541
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	116	5580	15.75	16.00	1.059	98.28	1.018	-0.01	0.396	0.427
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	132	5660	14.94	16.00	1.276	98.28	1.018	-0.01	0.339	0.441
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	144	5720	15.69	16.00	1.074	98.28	1.018	-0.02	0.273	0.298
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	165	5825	15.83	16.00	1.040	98.28	1.018	-0.06	0.152	0.161
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	165	5825	15.83	16.00	1.040	98.28	1.018	-0.06	0.185	0.196
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	165	5825	15.83	16.00	1.040	98.28	1.018	0.1	0.269	0.285
14	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	165	5825	15.83	16.00	1.040	98.28	1.018	-0.13	0.287	0.304

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	00	2402	14.39	15.00	1.150	76.84	1.084	-0.12	0.031	0.039
	Bluetooth	1Mbps	Right Tilted	0mm	00	2402	14.39	15.00	1.150	76.84	1.084	-0.1	0.038	0.047
	Bluetooth	1Mbps	Left Cheek	0mm	00	2402	14.39	15.00	1.150	76.84	1.084	0.13	0.055	0.069
15	Bluetooth	1Mbps	Left Tilted	0mm	00	2402	14.39	15.00	1.150	76.84	1.084	-0.18	0.059	0.074



14.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (3 Tx slots)	Front	10mm	OFF	251	848.8	28.76	29.00	1.057	-0.18	0.235	0.248
16	GSM850	GPRS (3 Tx slots)	Back	10mm	OFF	251	848.8	28.76	29.00	1.057	-0.12	0.362	0.383
	GSM850	GPRS (3 Tx slots)	Left Side	10mm	OFF	251	848.8	28.76	29.00	1.057	-0.05	0.051	0.054
	GSM850	GPRS (3 Tx slots)	Right Side	10mm	OFF	251	848.8	28.76	29.00	1.057	-0.16	0.162	0.171
	GSM850	GPRS (3 Tx slots)	Bottom Side	10mm	OFF	251	848.8	28.76	29.00	1.057	-0.16	0.184	0.194
	GSM1900	GPRS (3 Tx slots)	Front	10mm	OFF	810	1909.8	25.92	26.00	1.019	0.02	0.022	0.022
	GSM1900	GPRS (3 Tx slots)	Back	10mm	OFF	810	1909.8	25.92	26.00	1.019	-0.1	0.440	0.448
	GSM1900	GPRS (3 Tx slots)	Left Side	10mm	OFF	810	1909.8	25.92	26.00	1.019	-0.02	0.038	0.039
	GSM1900	GPRS (3 Tx slots)	Right Side	10mm	OFF	810	1909.8	25.92	26.00	1.019	0.14	0.015	0.015
	GSM1900	GPRS (3 Tx slots)	Bottom Side	10mm	OFF	810	1909.8	25.92	26.00	1.019	0.04	0.861	0.877
17	GSM1900	GPRS (3 Tx slots)	Bottom Side	10mm	OFF	512	1850.2	25.80	26.00	1.047	0.03	1.030	1.079
	GSM1900	GPRS (3 Tx slots)	Bottom Side	10mm	OFF	661	1880	25.81	26.00	1.045	-0.1	0.886	0.926

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	ON	9400	1880	20.11	21.00	1.227	-0.07	0.040	0.049
	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9400	1880	20.11	21.00	1.227	0.07	0.629	0.772
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	ON	9400	1880	20.11	21.00	1.227	-0.18	0.084	0.103
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	ON	9400	1880	20.11	21.00	1.227	0.03	0.033	0.041
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9400	1880	20.11	21.00	1.227	-0.19	0.992	1.218
18	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9262	1852.4	20.07	21.00	1.239	-0.06	1.070	1.326
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9538	1907.6	19.98	21.00	1.265	0.18	0.789	0.998
	WCDMA IV	RMC 12.2Kbps	Front	10mm	ON	1413	1732.6	20.11	21.00	1.227	-0.01	0.374	0.459
	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1413	1732.6	20.11	21.00	1.227	-0.11	0.554	0.680
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	ON	1413	1732.6	20.11	21.00	1.227	-0.08	0.080	0.098
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	ON	1413	1732.6	20.11	21.00	1.227	0.15	0.021	0.026
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1413	1732.6	20.11	21.00	1.227	0.12	0.897	1.101
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1312	1712.4	20.08	21.00	1.236	0.17	0.859	1.062
19	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1513	1752.6	20.01	21.00	1.256	-0.02	1.010	1.269
	WCDMA V	RMC 12.2Kbps	Front	10mm	OFF	4182	836.4	23.31	24.00	1.172	-0.11	0.240	0.281
20	WCDMA V	RMC 12.2Kbps	Back	10mm	OFF	4182	836.4	23.31	24.00	1.172	-0.15	0.364	0.427
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	OFF	4182	836.4	23.31	24.00	1.172	0.09	0.055	0.064
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	OFF	4182	836.4	23.31	24.00	1.172	-0.14	0.222	0.260
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	OFF	4182	836.4	23.31	24.00	1.172	-0.16	0.223	0.261



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	10mm	ON	18900	1880	20.38	21.50	1.294	0.04	0.360	0.466
	LTE Band 2	20M	QPSK	50	0	Front	10mm	ON	18900	1880	19.35	20.50	1.303	-0.18	0.280	0.365
	LTE Band 2	20M	QPSK	1	0	Back	10mm	ON	18900	1880	20.38	21.50	1.294	-0.19	0.616	0.797
	LTE Band 2	20M	QPSK	50	0	Back	10mm	ON	18900	1880	19.35	20.50	1.303	0.03	0.426	0.555
	LTE Band 2	20M	QPSK	1	0	Left Side	10mm	ON	18900	1880	20.38	21.50	1.294	0.12	0.067	0.087
	LTE Band 2	20M	QPSK	50	0	Left Side	10mm	ON	18900	1880	19.35	20.50	1.303	-0.03	0.049	0.064
	LTE Band 2	20M	QPSK	1	0	Right Side	10mm	ON	18900	1880	20.38	21.50	1.294	-0.05	0.034	0.044
	LTE Band 2	20M	QPSK	50	0	Right Side	10mm	ON	18900	1880	19.35	20.50	1.303	0.13	0.027	0.035
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	18900	1880	20.38	21.50	1.294	0.17	0.990	1.281
21	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	18700	1860	20.37	21.50	1.297	-0.09	1.000	1.297
	LTE Band 2	20M	QPSK	1	0	Bottom Side	10mm	ON	19100	1900	20.18	21.50	1.355	-0.06	0.950	1.287
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	18900	1880	19.35	20.50	1.303	-0.14	0.845	1.101
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	18700	1860	19.34	20.50	1.306	-0.13	0.825	1.078
	LTE Band 2	20M	QPSK	50	0	Bottom Side	10mm	ON	19100	1900	19.28	20.50	1.324	0.18	0.793	1.050
	LTE Band 2	20M	QPSK	100	0	Bottom Side	10mm	ON	18900	1880	19.29	20.50	1.321	-0.17	0.806	1.065
	LTE Band 5	10M	QPSK	1	0	Front	10mm	OFF	20525	836.5	22.41	23.50	1.285	-0.03	0.183	0.235
	LTE Band 5	10M	QPSK	25	12	Front	10mm	OFF	20525	836.5	21.50	22.50	1.259	0.03	0.161	0.203
22	LTE Band 5	10M	QPSK	1	0	Back	10mm	OFF	20525	836.5	22.41	23.50	1.285	-0.07	0.290	0.373
	LTE Band 5	10M	QPSK	25	12	Back	10mm	OFF	20525	836.5	21.50	22.50	1.259	0.02	0.255	0.321
	LTE Band 5	10M	QPSK	1	0	Left Side	10mm	OFF	20525	836.5	22.41	23.50	1.285	0.05	0.065	0.084
	LTE Band 5	10M	QPSK	25	12	Left Side	10mm	OFF	20525	836.5	21.50	22.50	1.259	-0.12	0.050	0.063
	LTE Band 5	10M	QPSK	1	0	Right Side	10mm	OFF	20525	836.5	22.41	23.50	1.285	0.14	0.155	0.199
	LTE Band 5	10M	QPSK	25	12	Right Side	10mm	OFF	20525	836.5	21.50	22.50	1.259	0.11	0.135	0.170
	LTE Band 5	10M	QPSK	1	0	Bottom Side	10mm	OFF	20525	836.5	22.41	23.50	1.285	0.13	0.171	0.220
	LTE Band 5	10M	QPSK	25	12	Bottom Side	10mm	OFF	20525	836.5	21.50	22.50	1.259	-0.12	0.148	0.186
	LTE Band 12	10M	QPSK	1	0	Front	10mm	OFF	23095	707.5	22.37	23.50	1.297	0.19	0.097	0.126
	LTE Band 12	10M	QPSK	25	12	Front	10mm	OFF	23095	707.5	21.57	22.50	1.239	0.04	0.078	0.097
23	LTE Band 12	10M	QPSK	1	0	Back	10mm	OFF	23095	707.5	22.37	23.50	1.297	-0.09	0.161	0.209
	LTE Band 12	10M	QPSK	25	12	Back	10mm	OFF	23095	707.5	21.57	22.50	1.239	-0.13	0.130	0.161
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	OFF	23095	707.5	22.37	23.50	1.297	-0.16	0.078	0.101
	LTE Band 12	10M	QPSK	25	12	Left Side	10mm	OFF	23095	707.5	21.57	22.50	1.239	-0.11	0.061	0.076
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	OFF	23095	707.5	22.37	23.50	1.297	0.12	0.114	0.148
	LTE Band 12	10M	QPSK	25	12	Right Side	10mm	OFF	23095	707.5	21.57	22.50	1.239	0.06	0.095	0.118
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	OFF	23095	707.5	22.37	23.50	1.297	-0.06	0.075	0.097
	LTE Band 12	10M	QPSK	25	12	Bottom Side	10mm	OFF	23095	707.5	21.57	22.50	1.239	-0.03	0.059	0.073
	LTE Band 66	20M	QPSK	1	0	Front	10mm	ON	132572	1770	20.76	21.50	1.186	-0.1	0.587	0.696
	LTE Band 66	20M	QPSK	50	0	Front	10mm	ON	132572	1770	19.69	20.50	1.205	-0.15	0.462	0.557
	LTE Band 66	20M	QPSK	1	0	Back	10mm	ON	132572	1770	20.76	21.50	1.186	0.05	0.840	0.996
	LTE Band 66	20M	QPSK	1	0	Back	10mm	ON	132072	1720	20.73	21.50	1.194	-0.04	0.567	0.677
	LTE Band 66	20M	QPSK	1	0	Back	10mm	ON	132322	1745	20.62	21.50	1.225	-0.16	0.667	0.817
	LTE Band 66	20M	QPSK	50	0	Back	10mm	ON	132572	1770	19.69	20.50	1.205	0.12	0.666	0.803
	LTE Band 66	20M	QPSK	50	0	Back	10mm	ON	132072	1720	19.68	20.50	1.208	-0.06	0.489	0.591
	LTE Band 66	20M	QPSK	50	0	Back	10mm	ON	132322	1745	19.58	20.50	1.236	-0.01	0.558	0.690
	LTE Band 66	20M	QPSK	100	0	Back	10mm	ON	132572	1770	19.59	20.50	1.233	0.19	0.766	0.945
	LTE Band 66	20M	QPSK	1	0	Left Side	10mm	ON	132572	1770	20.76	21.50	1.186	0.09	0.126	0.149
	LTE Band 66	20M	QPSK	50	0	Left Side	10mm	ON	132572	1770	19.69	20.50	1.205	0.07	0.100	0.121
	LTE Band 66	20M	QPSK	1	0	Right Side	10mm	ON	132572	1770	20.76	21.50	1.186	0.16	0.064	0.076
	LTE Band 66	20M	QPSK	50	0	Right Side	10mm	ON	132572	1770	19.69	20.50	1.205	-0.09	0.049	0.059
24	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	ON	132572	1770	20.76	21.50	1.186	-0.02	1.100	1.304
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	ON	132072	1720	20.73	21.50	1.194	-0.15	0.867	1.035
	LTE Band 66	20M	QPSK	1	0	Bottom Side	10mm	ON	132322	1745	20.62	21.50	1.225	-0.07	1.040	1.274
	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	ON	132572	1770	19.69	20.50	1.205	-0.09	0.887	1.069
	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	ON	132072	1720	19.68	20.50	1.208	0.16	0.720	0.870
	LTE Band 66	20M	QPSK	50	0	Bottom Side	10mm	ON	132322	1745	19.58	20.50	1.236	0.17	0.867	1.072
	LTE Band 66	20M	QPSK	100	0	Bottom Side	10mm	ON	132572	1770	19.59	20.50	1.233	-0.18	0.966	1.191

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	10mm	OFF	41490	2680	23.48	23.50	1.005	62.9	1.006	0.18	0.323	0.326
	LTE Band 41	20M	QPSK	50	0	Front	10mm	OFF	41490	2680	22.15	22.50	1.084	62.9	1.006	-0.05	0.222	0.242
	LTE Band 41	20M	QPSK	1	0	Back	10mm	OFF	41490	2680	23.48	23.50	1.005	62.9	1.006	-0.09	0.795	0.803
25	LTE Band 41	20M	QPSK	1	0	Back	10mm	OFF	39750	2506	22.97	23.50	1.130	62.9	1.006	0.11	0.767	0.872
	LTE Band 41	20M	QPSK	1	0	Back	10mm	OFF	40185	2549.5	22.65	23.50	1.216	62.9	1.006	0.13	0.693	0.848
	LTE Band 41	20M	QPSK	1	0	Back	10mm	OFF	40620	2593	22.62	23.50	1.225	62.9	1.006	0.17	0.620	0.764
	LTE Band 41	20M	QPSK	1	0	Back	10mm	OFF	41055	2636.5	21.67	23.50	1.524	62.9	1.006	-0.16	0.349	0.535
	LTE Band 41	20M	QPSK	50	0	Back	10mm	OFF	41490	2680	22.15	22.50	1.084	62.9	1.006	-0.18	0.434	0.473
	LTE Band 41	20M	QPSK	50	0	Back	10mm	OFF	39750	2506	22.14	22.50	1.086	62.9	1.006	0.04	0.579	0.633
	LTE Band 41	20M	QPSK	50	0	Back	10mm	OFF	40185	2549.5	21.47	22.50	1.268	62.9	1.006	0.17	0.583	0.743
	LTE Band 41	20M	QPSK	50	0	Back	10mm	OFF	40620	2593	21.88	22.50	1.153	62.9	1.006	-0.07	0.703	0.816
	LTE Band 41	20M	QPSK	50	0	Back	10mm	OFF	41055	2636.5	22.06	22.50	1.107	62.9	1.006	0.12	0.361	0.402
	LTE Band 41	20M	QPSK	100	0	Back	10mm	OFF	41490	2680	22.19	22.50	1.074	62.9	1.006	-0.01	0.408	0.441
	LTE Band 41	20M	QPSK	1	0	Left Side	10mm	OFF	41490	2680	23.48	23.50	1.005	62.9	1.006	-0.15	0.089	0.090
	LTE Band 41	20M	QPSK	50	0	Left Side	10mm	OFF	41490	2680	22.15	22.50	1.084	62.9	1.006	0.11	0.059	0.064
	LTE Band 41	20M	QPSK	1	0	Right Side	10mm	OFF	41490	2680	23.48	23.50	1.005	62.9	1.006	0.14	0.056	0.057
	LTE Band 41	20M	QPSK	50	0	Right Side	10mm	OFF	41490	2680	22.15	22.50	1.084	62.9	1.006	0.02	0.038	0.041
	LTE Band 41	20M	QPSK	1	0	Bottom Side	10mm	OFF	41490	2680	23.48	23.50	1.005	62.9	1.006	0.02	0.505	0.510
	LTE Band 41	20M	QPSK	50	0	Bottom Side	10mm	OFF	41490	2680	22.15	22.50	1.084	62.9	1.006	-0.1	0.344	0.375

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	1	2412	16.98	17.00	1.005	99.17	1.008	0.09	0.061	0.062
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	16.98	17.00	1.005	99.17	1.008	-0.1	0.091	0.092
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	1	2412	16.98	17.00	1.005	99.17	1.008	-0.13	0.096	0.097
26	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	1	2412	16.98	17.00	1.005	99.17	1.008	-0.04	0.119	0.121
	WLAN5GHz	802.11a 6Mbps	Front	10mm	48	5240	15.28	15.50	1.052	98.28	1.018	0.01	0.052	0.056
	WLAN5GHz	802.11a 6Mbps	Back	10mm	48	5240	15.28	15.50	1.052	98.28	1.018	-0.07	0.065	0.070
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	48	5240	15.28	15.50	1.052	98.28	1.018	0.07	0.041	0.044
27	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	48	5240	15.28	15.50	1.052	98.28	1.018	-0.04	0.109	0.117
	WLAN5GHz	802.11a 6Mbps	Front	10mm	165	5825	15.83	16.00	1.040	98.28	1.018	-0.06	0.020	0.021
	WLAN5GHz	802.11a 6Mbps	Back	10mm	165	5825	15.83	16.00	1.040	98.28	1.018	0	0.032	0.034
	WLAN5GHz	802.11a 6Mbps	Right Side	10mm	165	5825	15.83	16.00	1.040	98.28	1.018	0.02	0.027	0.029
28	WLAN5GHz	802.11a 6Mbps	Top Side	10mm	165	5825	15.83	16.00	1.040	98.28	1.018	-0.12	0.036	0.038

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	00	2402	14.39	15.00	1.150	76.84	1.084	-0.1	0.012	0.015
	Bluetooth	1Mbps	Back	10mm	00	2402	14.39	15.00	1.150	76.84	1.084	0.13	0.018	0.022
	Bluetooth	1Mbps	Right Side	10mm	00	2402	14.39	15.00	1.150	76.84	1.084	-0.12	0.019	0.024
29	Bluetooth	1Mbps	Top Side	10mm	00	2402	14.39	15.00	1.150	76.84	1.084	0.09	0.024	0.030

**14.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (3 Tx slots)	Front	15mm	251	848.8	28.76	29.00	1.057	-0.18	0.143	0.151
30	GSM850	GPRS (3 Tx slots)	Back	15mm	251	848.8	28.76	29.00	1.057	0.03	0.221	0.234
	GSM1900	GPRS (3 Tx slots)	Front	15mm	810	1909.8	25.92	26.00	1.019	-0.14	0.131	0.133
31	GSM1900	GPRS (3 Tx slots)	Back	15mm	810	1909.8	25.92	26.00	1.019	-0.04	0.231	0.235

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	15mm	9262	1852.4	23.46	24.00	1.132	0.19	0.421	0.477
32	WCDMA II	RMC 12.2Kbps	Back	15mm	9262	1852.4	23.46	24.00	1.132	-0.09	0.684	0.775
	WCDMA IV	RMC 12.2Kbps	Front	15mm	1413	1732.6	23.29	23.50	1.050	-0.16	0.574	0.602
33	WCDMA IV	RMC 12.2Kbps	Back	15mm	1413	1732.6	23.29	23.50	1.050	0.02	0.669	0.702
	WCDMA V	RMC 12.2Kbps	Front	15mm	4182	836.4	23.31	24.00	1.172	0.04	0.142	0.166
34	WCDMA V	RMC 12.2Kbps	Back	15mm	4182	836.4	23.31	24.00	1.172	-0.02	0.215	0.252

**<FDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Front	15mm	18900	1880	22.25	23.50	1.334	-0.17	0.241	0.321
	LTE Band 2	20M	QPSK	50	0	Front	15mm	18900	1880	21.27	22.50	1.327	-0.06	0.187	0.248
35	LTE Band 2	20M	QPSK	1	0	Back	15mm	18900	1880	22.25	23.50	1.334	-0.06	0.419	0.559
	LTE Band 2	20M	QPSK	50	0	Back	15mm	18900	1880	21.27	22.50	1.327	-0.04	0.284	0.377
	LTE Band 5	10M	QPSK	1	0	Front	15mm	20525	836.5	22.41	23.50	1.285	0.01	0.101	0.130
	LTE Band 5	10M	QPSK	25	12	Front	15mm	20525	836.5	21.50	22.50	1.259	-0.09	0.088	0.111
36	LTE Band 5	10M	QPSK	1	0	Back	15mm	20525	836.5	22.41	23.50	1.285	-0.13	0.159	0.204
	LTE Band 5	10M	QPSK	25	12	Back	15mm	20525	836.5	21.50	22.50	1.259	0.06	0.139	0.175
	LTE Band 12	10M	QPSK	1	0	Front	15mm	23095	707.5	22.37	23.50	1.297	-0.01	0.090	0.117
	LTE Band 12	10M	QPSK	25	12	Front	15mm	23095	707.5	21.57	22.50	1.239	-0.08	0.073	0.090
37	LTE Band 12	10M	QPSK	1	0	Back	15mm	23095	707.5	22.37	23.50	1.297	-0.11	0.151	0.196
	LTE Band 12	10M	QPSK	25	12	Back	15mm	23095	707.5	21.57	22.50	1.239	0.09	0.122	0.151
	LTE Band 66	20M	QPSK	1	0	Front	15mm	132572	1770	22.75	23.50	1.189	0.02	0.481	0.572
	LTE Band 66	20M	QPSK	50	0	Front	15mm	132572	1770	21.68	22.50	1.208	0.18	0.378	0.457
38	LTE Band 66	20M	QPSK	1	0	Back	15mm	132572	1770	22.75	23.50	1.189	-0.14	0.688	0.818
	LTE Band 66	20M	QPSK	50	0	Back	15mm	132572	1770	21.68	22.50	1.208	0.04	0.546	0.659

**<TDD LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 41	20M	QPSK	1	0	Front	15mm	41490	2680	23.48	23.50	1.005	62.9	1.006	0.13	0.136	0.137
	LTE Band 41	20M	QPSK	50	0	Front	15mm	41490	2680	22.15	22.50	1.084	62.9	1.006	-0.11	0.093	0.101
39	LTE Band 41	20M	QPSK	1	0	Back	15mm	41490	2680	23.48	23.50	1.005	62.9	1.006	0.03	0.296	0.299
	LTE Band 41	20M	QPSK	50	0	Back	15mm	41490	2680	22.15	22.50	1.084	62.9	1.006	-0.01	0.183	0.200



**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	1	2412	16.98	17.00	1.005	99.17	1.008	0.02	0.021	0.021
40	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	1	2412	16.98	17.00	1.005	99.17	1.008	-0.11	0.044	0.045
	WLAN5GHz	802.11a 6Mbps	Front	15mm	52	5260	15.54	16.00	1.112	98.28	1.018	0.02	0.030	0.034
41	WLAN5GHz	802.11a 6Mbps	Back	15mm	52	5260	15.54	16.00	1.112	98.28	1.018	-0.17	0.041	0.046
	WLAN5GHz	802.11a 6Mbps	Front	15mm	124	5620	15.78	16.00	1.052	98.28	1.018	-0.05	0.036	0.039
42	WLAN5GHz	802.11a 6Mbps	Back	15mm	124	5620	15.78	16.00	1.052	98.28	1.018	-0.17	0.048	0.051
	WLAN5GHz	802.11a 6Mbps	Front	15mm	165	5825	15.83	16.00	1.040	98.28	1.018	0.02	0.012	0.013
43	WLAN5GHz	802.11a 6Mbps	Back	15mm	165	5825	15.83	16.00	1.040	98.28	1.018	0	0.020	0.021

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	15mm	00	2402	14.39	15.00	1.150	76.84	1.084	0.01	0.001	0.001
44	Bluetooth	1Mbps	Back	15mm	00	2402	14.39	15.00	1.150	76.84	1.084	-0.02	0.007	0.008





**14.4 Product Specific SAR**

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Back	0mm	9262	1852.4	23.46	24.00	1.132	-0.01	1.770	2.004
	WCDMA II	RMC 12.2Kbps	Back	0mm	9400	1880	23.40	24.00	1.148	-0.11	1.730	1.986
45	WCDMA II	RMC 12.2Kbps	Back	0mm	9538	1907.6	23.14	24.00	1.219	-0.06	1.750	2.133
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9262	1852.4	23.46	24.00	1.132	0.18	0.996	1.128
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9400	1880	23.40	24.00	1.148	-0.02	0.912	1.047
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9538	1907.6	23.14	24.00	1.219	-0.07	0.917	1.118
	WCDMA IV	RMC 12.2Kbps	Back	0mm	1413	1732.6	23.29	23.50	1.050	0	2.860	3.002
	WCDMA IV	RMC 12.2Kbps	Back	0mm	1312	1712.4	23.26	23.50	1.057	-0.14	3.010	3.181
46	WCDMA IV	RMC 12.2Kbps	Back	0mm	1513	1752.6	23.20	23.50	1.072	-0.11	3.120	3.343
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	1413	1732.6	23.29	23.50	1.050	0.19	1.730	1.816
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	1312	1712.4	23.26	23.50	1.057	-0.05	1.770	1.871
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	1513	1752.6	23.20	23.50	1.072	0.08	1.760	1.886

**<LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Back	0mm	18900	1880	22.25	23.50	1.334	-0.16	1.620	2.160
	LTE Band 2	20M	QPSK	1	0	Back	0mm	18700	1860	22.24	23.50	1.337	0.06	1.640	2.192
47	LTE Band 2	20M	QPSK	1	0	Back	0mm	19100	1900	22.11	23.50	1.377	-0.13	1.660	2.286
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	18900	1880	22.25	23.50	1.334	0.03	1.020	1.360
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	18700	1860	22.24	23.50	1.337	0.01	0.864	1.155
	LTE Band 2	20M	QPSK	1	0	Bottom Side	0mm	19100	1900	22.11	23.50	1.377	-0.07	1.140	1.570
	LTE Band 66	20M	QPSK	1	0	Back	0mm	132572	1770	22.75	23.50	1.189	-0.18	2.520	2.995
	LTE Band 66	20M	QPSK	1	0	Back	0mm	132072	1720	22.71	23.50	1.199	-0.13	2.540	3.047
48	LTE Band 66	20M	QPSK	1	0	Back	0mm	132322	1745	22.69	23.50	1.205	-0.1	2.570	3.097
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	132572	1770	22.75	23.50	1.189	0.02	1.530	1.818
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	132072	1720	22.71	23.50	1.199	0.11	1.930	2.315
	LTE Band 66	20M	QPSK	1	0	Bottom Side	0mm	132322	1745	22.69	23.50	1.205	-0.14	1.710	2.061

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front	0mm	52	5260	15.54	16.00	1.112	98.28	1.018	-0.06	0.343	0.388
	WLAN5GHz	802.11a 6Mbps	Back	0mm	52	5260	15.54	16.00	1.112	98.28	1.018	-0.05	0.315	0.356
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	52	5260	15.54	16.00	1.112	98.28	1.018	-0.1	0.113	0.128
49	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	52	5260	15.54	16.00	1.112	98.28	1.018	0.07	0.423	0.479
	WLAN5GHz	802.11a 6Mbps	Front	0mm	124	5620	15.78	16.00	1.052	98.28	1.018	0.13	0.270	0.289
	WLAN5GHz	802.11a 6Mbps	Back	0mm	124	5620	15.78	16.00	1.052	98.28	1.018	-0.1	0.174	0.186
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	124	5620	15.78	16.00	1.052	98.28	1.018	-0.01	0.078	0.084
50	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	124	5620	15.78	16.00	1.052	98.28	1.018	0.09	0.394	0.422

**14.5 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9262	1852.4	20.07	1.07		1.326
2nd	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9262	1852.4	20.07	1.02	1.049	1.264
1st	LTE Band 66	20M_QPSK_1_0	Bottom Side	10mm	ON	132572	1770	20.76	1.1		1.304
2nd	LTE Band 66	20M_QPSK_1_0	Bottom Side	10mm	ON	132572	1770	20.76	1.06	1.038	1.257
1st	WCDMA IV	RMC 12.2Kbps	Back	0mm		1513	1752.6	23.2	3.12		3.343
2nd	WCDMA IV	RMC 12.2Kbps	Back	0mm		1513	1752.6	23.2	3.08	1.013	3.3

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated measured SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**15. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes

**General Note:**

1. This device WLAN 2.4GHz / 5.2GHz / 5.8GHz supports Hotspot operation and Bluetooth support tethering applications.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation  $< 1.6W/kg$ .
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where  $(x1, y1, z1)$  and  $(x2, y2, z2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR  $< 1.6W/kg$ .





**15.1 Head Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Right Cheek	0.142	0.214	0.313	0.039	<b>0.356</b>	<b>0.494</b>
	Right Tilted	0.077	0.259	0.381	0.047	<b>0.336</b>	<b>0.505</b>
	Left Cheek	0.114	0.381	0.553	0.069	<b>0.495</b>	<b>0.736</b>
	Left Tilted	0.068	0.402	0.590	0.074	<b>0.470</b>	<b>0.732</b>
GSM1900	Right Cheek	0.024	0.214	0.313	0.039	<b>0.238</b>	<b>0.376</b>
	Right Tilted	0.022	0.259	0.381	0.047	<b>0.281</b>	<b>0.450</b>
	Left Cheek	0.040	0.381	0.553	0.069	<b>0.421</b>	<b>0.662</b>
	Left Tilted	0.011	0.402	0.590	0.074	<b>0.413</b>	<b>0.675</b>
WCDMA II	Right Cheek	0.089	0.214	0.313	0.039	<b>0.303</b>	<b>0.441</b>
	Right Tilted	0.080	0.259	0.381	0.047	<b>0.339</b>	<b>0.508</b>
	Left Cheek	0.140	0.381	0.553	0.069	<b>0.521</b>	<b>0.762</b>
	Left Tilted	0.060	0.402	0.590	0.074	<b>0.462</b>	<b>0.724</b>
WCDMA IV	Right Cheek	0.090	0.214	0.313	0.039	<b>0.304</b>	<b>0.442</b>
	Right Tilted	0.065	0.259	0.381	0.047	<b>0.324</b>	<b>0.493</b>
	Left Cheek	0.155	0.381	0.553	0.069	<b>0.536</b>	<b>0.777</b>
	Left Tilted	0.065	0.402	0.590	0.074	<b>0.467</b>	<b>0.729</b>
WCDMA V	Right Cheek	0.149	0.214	0.313	0.039	<b>0.363</b>	<b>0.501</b>
	Right Tilted	0.073	0.259	0.381	0.047	<b>0.332</b>	<b>0.501</b>
	Left Cheek	0.148	0.381	0.553	0.069	<b>0.529</b>	<b>0.770</b>
	Left Tilted	0.094	0.402	0.590	0.074	<b>0.496</b>	<b>0.758</b>
LTE Band 2	Right Cheek	0.073	0.214	0.313	0.039	<b>0.287</b>	<b>0.425</b>
	Right Tilted	0.065	0.259	0.381	0.047	<b>0.324</b>	<b>0.493</b>
	Left Cheek	0.135	0.381	0.553	0.069	<b>0.516</b>	<b>0.757</b>
	Left Tilted	0.045	0.402	0.590	0.074	<b>0.447</b>	<b>0.709</b>
LTE Band 5	Right Cheek	0.148	0.214	0.313	0.039	<b>0.362</b>	<b>0.500</b>
	Right Tilted	0.063	0.259	0.381	0.047	<b>0.322</b>	<b>0.491</b>
	Left Cheek	0.085	0.381	0.553	0.069	<b>0.466</b>	<b>0.707</b>
	Left Tilted	0.066	0.402	0.590	0.074	<b>0.468</b>	<b>0.730</b>
LTE Band 12	Right Cheek	0.095	0.214	0.313	0.039	<b>0.309</b>	<b>0.447</b>
	Right Tilted	0.032	0.259	0.381	0.047	<b>0.291</b>	<b>0.460</b>
	Left Cheek	0.077	0.381	0.553	0.069	<b>0.458</b>	<b>0.699</b>
	Left Tilted	0.003	0.402	0.590	0.074	<b>0.405</b>	<b>0.667</b>
LTE Band 41	Right Cheek	0.013	0.214	0.313	0.039	<b>0.227</b>	<b>0.365</b>
	Right Tilted	0.012	0.259	0.381	0.047	<b>0.271</b>	<b>0.440</b>
	Left Cheek	0.018	0.381	0.553	0.069	<b>0.399</b>	<b>0.640</b>
	Left Tilted	0.001	0.402	0.590	0.074	<b>0.403</b>	<b>0.665</b>
LTE Band 66	Right Cheek	0.084	0.214	0.313	0.039	<b>0.298</b>	<b>0.436</b>
	Right Tilted	0.052	0.259	0.381	0.047	<b>0.311</b>	<b>0.480</b>
	Left Cheek	0.126	0.381	0.553	0.069	<b>0.507</b>	<b>0.748</b>
	Left Tilted	0.030	0.402	0.590	0.074	<b>0.432</b>	<b>0.694</b>



15.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM850	Front	0.248	0.062	0.056	0.015	0.310	0.319
	Back	0.383	0.092	0.070	0.022	0.475	0.475
	Left side	0.054				0.054	0.054
	Right side	0.171	0.097	0.044	0.024	0.268	0.239
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	0.194				0.194	0.194
GSM1900	Front	0.022	0.062	0.056	0.015	0.084	0.093
	Back	0.448	0.092	0.070	0.022	0.540	0.540
	Left side	0.039				0.039	0.039
	Right side	0.015	0.097	0.044	0.024	0.112	0.083
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	1.079				1.079	1.079
WCDMA II	Front	0.049	0.062	0.056	0.015	0.111	0.120
	Back	0.772	0.092	0.070	0.022	0.864	0.864
	Left side	0.103				0.103	0.103
	Right side	0.041	0.097	0.044	0.024	0.138	0.109
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	1.326				1.326	1.326
WCDMA IV	Front	0.459	0.062	0.056	0.015	0.521	0.530
	Back	0.680	0.092	0.070	0.022	0.772	0.772
	Left side	0.098				0.098	0.098
	Right side	0.026	0.097	0.044	0.024	0.123	0.094
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	1.269				1.269	1.269
WCDMA V	Front	0.281	0.062	0.056	0.015	0.343	0.352
	Back	0.427	0.092	0.070	0.022	0.519	0.519
	Left side	0.064				0.064	0.064
	Right side	0.260	0.097	0.044	0.024	0.357	0.328
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	0.261				0.261	0.261
LTE Band 2	Front	0.466	0.062	0.056	0.015	0.528	0.537
	Back	0.797	0.092	0.070	0.022	0.889	0.889
	Left side	0.087				0.087	0.087
	Right side	0.044	0.097	0.044	0.024	0.141	0.112
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	1.297				1.297	1.297
LTE Band 5	Front	0.235	0.062	0.056	0.015	0.297	0.306
	Back	0.373	0.092	0.070	0.022	0.465	0.465
	Left side	0.084				0.084	0.084
	Right side	0.199	0.097	0.044	0.024	0.296	0.267
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	0.220				0.220	0.220
LTE Band 12	Front	0.126	0.062	0.056	0.015	0.188	0.197
	Back	0.209	0.092	0.070	0.022	0.301	0.301
	Left side	0.101				0.101	0.101
	Right side	0.148	0.097	0.044	0.024	0.245	0.216
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	0.097				0.097	0.097
LTE Band 41	Front	0.326	0.062	0.056	0.015	0.388	0.397
	Back	0.872	0.092	0.070	0.022	0.964	0.964
	Left side	0.090				0.090	0.090
	Right side	0.057	0.097	0.044	0.024	0.154	0.125
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	0.510				0.510	0.510
LTE Band 66	Front	0.696	0.062	0.056	0.015	0.758	0.767
	Back	0.996	0.092	0.070	0.022	1.088	1.088
	Left side	0.149				0.149	0.149
	Right side	0.076	0.097	0.044	0.024	0.173	0.144
	Top side		0.121	0.117	0.030	0.121	0.147
	Bottom side	1.304				1.304	1.304



**15.3 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
GSM850	Front	0.151	0.021	0.039	0.001	<b>0.172</b>	<b>0.191</b>
	Back	0.234	0.045	0.051	0.008	<b>0.279</b>	<b>0.293</b>
GSM1900	Front	0.133	0.021	0.039	0.001	<b>0.154</b>	<b>0.173</b>
	Back	0.235	0.045	0.051	0.008	<b>0.280</b>	<b>0.294</b>
WCDMA II	Front	0.477	0.021	0.039	0.001	<b>0.498</b>	<b>0.517</b>
	Back	0.775	0.045	0.051	0.008	<b>0.820</b>	<b>0.834</b>
WCDMA IV	Front	0.602	0.021	0.039	0.001	<b>0.623</b>	<b>0.642</b>
	Back	0.702	0.045	0.051	0.008	<b>0.747</b>	<b>0.761</b>
WCDMA V	Front	0.166	0.021	0.039	0.001	<b>0.187</b>	<b>0.206</b>
	Back	0.252	0.045	0.051	0.008	<b>0.297</b>	<b>0.311</b>
LTE Band 2	Front	0.321	0.021	0.039	0.001	<b>0.342</b>	<b>0.361</b>
	Back	0.559	0.045	0.051	0.008	<b>0.604</b>	<b>0.618</b>
LTE Band 5	Front	0.130	0.021	0.039	0.001	<b>0.151</b>	<b>0.170</b>
	Back	0.204	0.045	0.051	0.008	<b>0.249</b>	<b>0.263</b>
LTE Band 12	Front	0.117	0.021	0.039	0.001	<b>0.138</b>	<b>0.157</b>
	Back	0.196	0.045	0.051	0.008	<b>0.241</b>	<b>0.255</b>
LTE Band 41	Front	0.137	0.021	0.039	0.001	<b>0.158</b>	<b>0.177</b>
	Back	0.299	0.045	0.051	0.008	<b>0.344</b>	<b>0.358</b>
LTE Band 66	Front	0.572	0.021	0.039	0.001	<b>0.593</b>	<b>0.612</b>
	Back	0.818	0.045	0.051	0.008	<b>0.863</b>	<b>0.877</b>

**15.4 Product Specific Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)		
WCDMA II	Front			0.388		0.000	0.388
	Back	2.133		0.356		2.133	2.489
	Right side			0.128		0.000	0.128
	Top side			0.479		0.000	0.479
	Bottom side	1.128				1.128	1.128
WCDMA IV	Front			0.388		0.000	0.388
	Back	3.343		0.356		3.343	3.699
	Right side			0.128		0.000	0.128
	Top side			0.479		0.000	0.479
	Bottom side	1.886				1.886	1.886
LTE Band 2	Front			0.388		0.000	0.388
	Back	2.286		0.356		2.286	2.642
	Right side			0.128		0.000	0.128
	Top side			0.479		0.000	0.479
	Bottom side	1.570				1.570	1.570
LTE Band 66	Front			0.388		0.000	0.388
	Back	3.097		0.356		3.097	3.453
	Right side			0.128		0.000	0.128
	Top side			0.479		0.000	0.479
	Bottom side	2.315				2.315	2.315

**Test Engineer :** Hoodie HuZeng, Luke Lee, Sing Lim and Willie Huang



## **16. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## **17. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [12] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [13] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.