

TEST REPORT

Product Name : Discovery Mini
Brand Mark : N/A
Model No. : U23 BTE 11
Report Number : BLA-EMC-202206-A6203
FCC ID : 2AVDNU23BLE11
Date of Sample Receipt : 2022/6/16
Date of Test : 2022/6/16 to 2022/11/22
Date of Issue : 2022/11/22
Test Standard : 47 CFR Part 15, Subpart C 15.249
Test Result : Pass

Prepared for:

Sensor ID srl

Corso F. Amaturzio n. 122 - 86021 Bojano (CB)- Italy.

Prepared by:

BlueAsia Technical Services(Shenzhen) Co.,Ltd.

**No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict,
Bao'an District, Shenzhen,Guangdong ,China**

TEL: +86-755-23059481

Compiled by:

Jozu

Approved by:

Blue Zheng

Review by:

Sueels

Date:

2022/5/24



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/11/22	Original

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT	9
8	TEST FACILITY	9
9	LABORATORY LOCATION	9
10	TEST INSTRUMENTS LIST	10
11	RADIATED EMISSIONS	12
11.1	LIMITS	12
11.2	BLOCK DIAGRAM OF TEST SETUP	13
11.3	PROCEDURE	13
11.4	TEST DATA	14
12	RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY	23
12.1	LIMITS	23
12.2	BLOCK DIAGRAM OF TEST SETUP	24
12.3	PROCEDURE	24
12.4	TEST DATA	26
13	FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A))	31
13.1	LIMITS	31
13.2	BLOCK DIAGRAM OF TEST SETUP	32
13.3	PROCEDURE	32
13.4	TEST DATA	34
14	20DB BANDWIDTH	35
14.1	LIMITS	35
14.2	BLOCK DIAGRAM OF TEST SETUP	35
1.1	TEST DATA	35
1.2	TEST PLOTS	36

15	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	38
15.1	LIMITS	38
15.2	BLOCK DIAGRAM OF TEST SETUP	38
15.3	PROCEDURE	38
15.4	TEST DATA	40
16	ANTENNA REQUIREMENT	42
16.1	CONCLUSION	42
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		43
APPENDIX B: PHOTOGRAPHS OF EUT		45

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Emissions	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.209 & 15.249 (a),(d)	Pass
Restricted Band Around Fundamental Frequency	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.4&6.5&6.6	47 CFR Part 15, Subpart C 15.205 & 15.249(d) & 15.209	Pass
Field Strength of the Fundamental Signal (15.249(a))	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.5&6.6	47 CFR Part 15, Subpart C 15.249(a)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.249	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.249	N/A	47 CFR Part 15, Subpart C 15.203	Pass

2 GENERAL INFORMATION

Applicant	Sensor ID srl
Address	Corso F. Amaturzio n. 122 - 86021 Bojano (CB)- Italy.
Manufacturer	Sensor ID srl
Address	Via G. Mucciardi, n. 5 - 86020 Campochiaro (CB) - Italy.
Factory	Sensor ID srl
Address	Via G. Mucciardi, n. 5 - 86020 Campochiaro (CB) - Italy.
Product Name	Discovery Mini
Test Model No.	U23 BTE 11

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V3.0
Software Version	V1.5.3
Operation Frequency:	902.750 MHz-926.750 MHz
Channel numbers:	49
Channel Spacing:	500kHz
Modulation type:	ASK, PR-ASK
Antenna Type:	Internal antenna
Antenna gain:	4.5dBi (Provided by customer)
Battery information:	DC3.7V

Operation Frequency each of channel				
902.75MHz	907.75 MHz	912.75 MHz	917.75 MHz	922.75 MHz
903.25MHz	908.25 MHz	913.25 MHz	918.25 MHz	923.25 MHz
903.75 MHz	908.75 MHz	913.75 MHz	918.75 MHz	923.75 MHz
904.25 MHz	909.25 MHz	914.25 MHz	919.25 MHz	924.25 MHz
904.75 MHz	909.75 MHz	914.75 MHz	919.75 MHz	924.75 MHz
905.25 MHz	910.25 MHz	915.25 MHz	920.25 MHz	925.25 MHz
905.75 MHz	910.75 MHz	915.75 MHz	920.75 MHz	925.75 MHz
906.25 MHz	911.25 MHz	916.25 MHz	921.25 MHz	926.25 MHz
906.75 MHz	911.75 MHz	916.75 MHz	921.75 MHz	926.75 MHz
907.25 MHz	912.25 MHz	917.25 MHz	922.25 MHz	

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	902.75 MHz
The Middle channel	915.25 MHz
The Highest channel	926.75 MHz

BlueAsia

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.7V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
Remark: Full battery is used during all test except ac conducted emission, Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter (UGREEN)	UGREEN	CD112	N/A	N/A

8 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

FCC — Designation No.: CN1252

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Designation CN1252.

ISED — CAB identifier No.: CN0028

BlueAsia of Technical Services(Shenzhen) Co., Ltd has been registered by Certification and Engineering Bureau of ISED for radio equipment testing with CAB identifier CN0028

9 LABORATORY LOCATION

All tests were performed at:

BlueAsia Technical Services(Shenzhen) Co.,Ltd.

No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District,
Shenzhen,Guangdong ,China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

10 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2023/08/16

Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2023/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A


11 RADIATED EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.4&6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

11.1 LIMITS

Frequency(MHz)	Field strength (microvolts/meter)	Limit (dBuV/m)	Detector	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	-	300
0.490-1.705	24000/F(kHz)	-	-	30
1.705-30	30	-	-	30
30-88	100	40.0	QP	3
88-216	150	43.5	QP	3
216-960	200	46.0	QP	3
960-1000	500	54.0	QP	3
Above 1000	500	54.0	AV	3

11.2 BLOCK DIAGRAM OF TEST SETUP

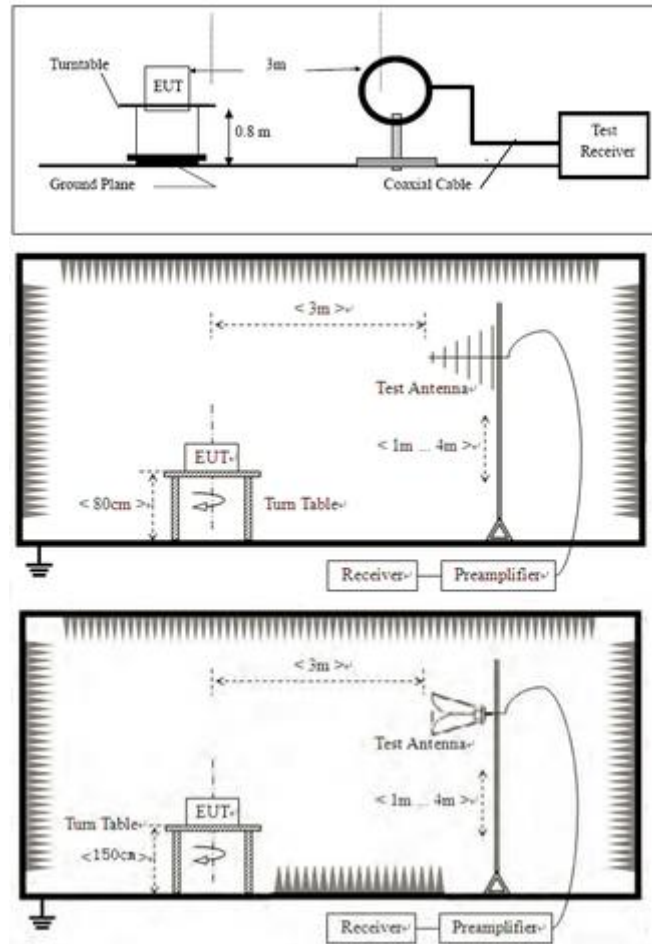

11.3 PROCEDURE

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane. Only the worst position of vertical was shown in the report.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

11.4 TEST DATA


[TestMode: TX below 1G]; [Polarity: Vertical]

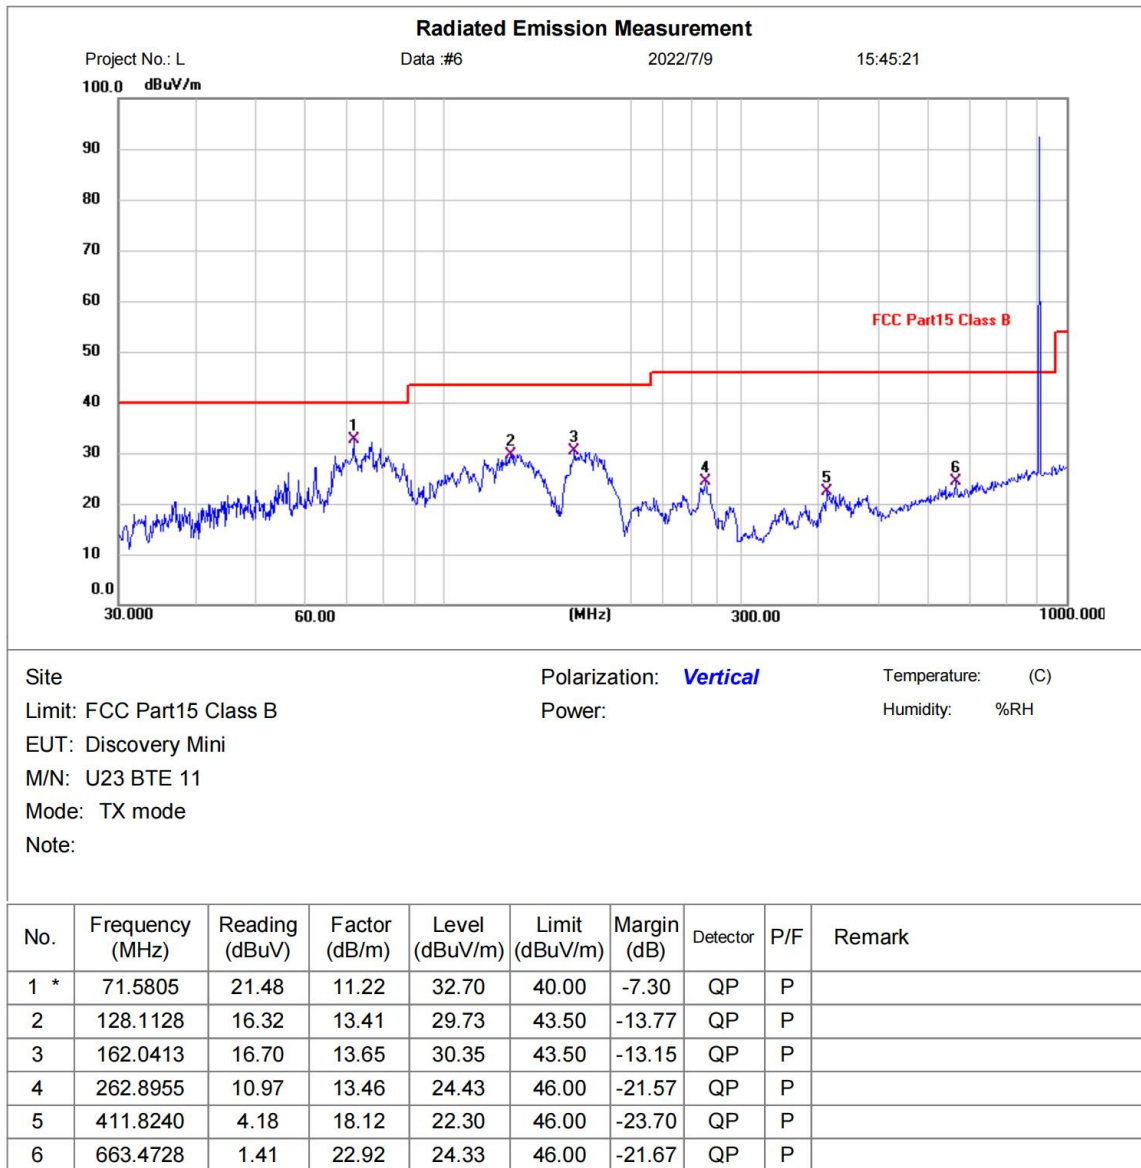

*:Maximum data x:Over limit !:over margin

Test Result: Pass


[TestMode: TX below 1G]; [Polarity: Horizontal]

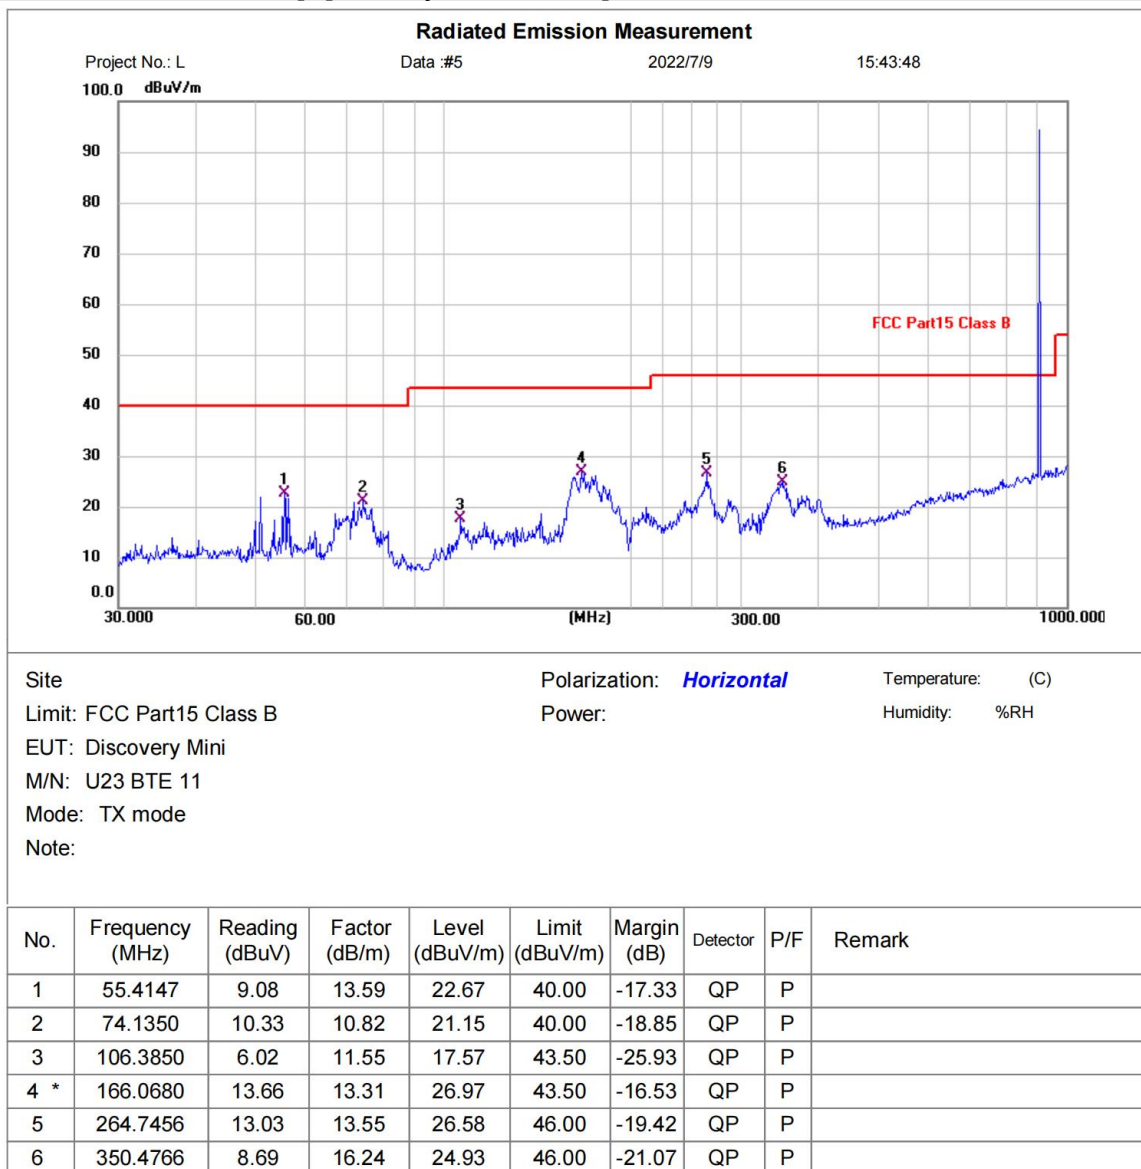

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

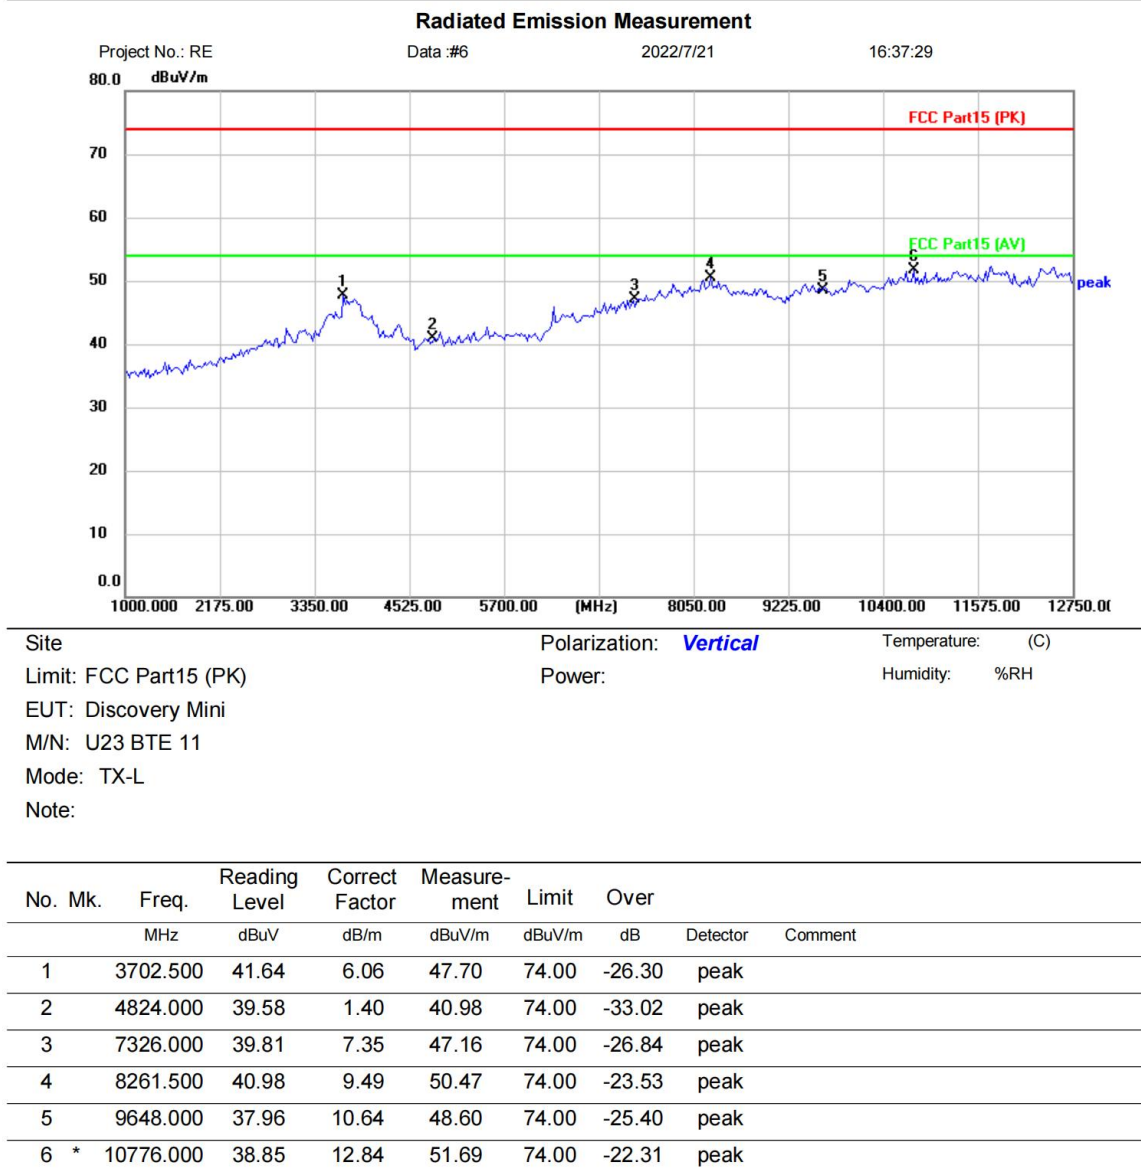


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Horizontal]

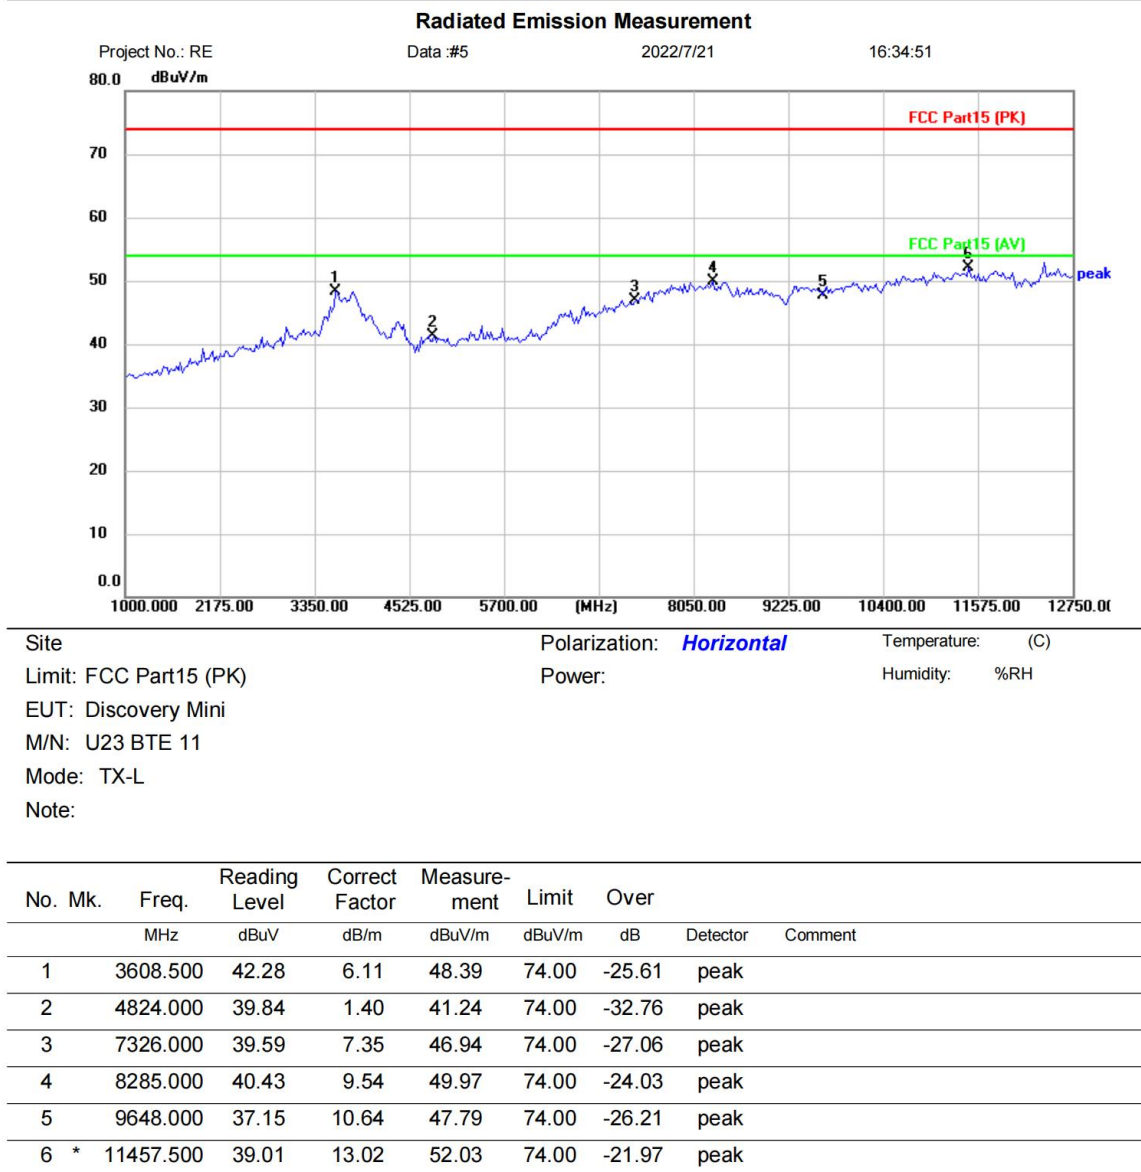


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Vertical]

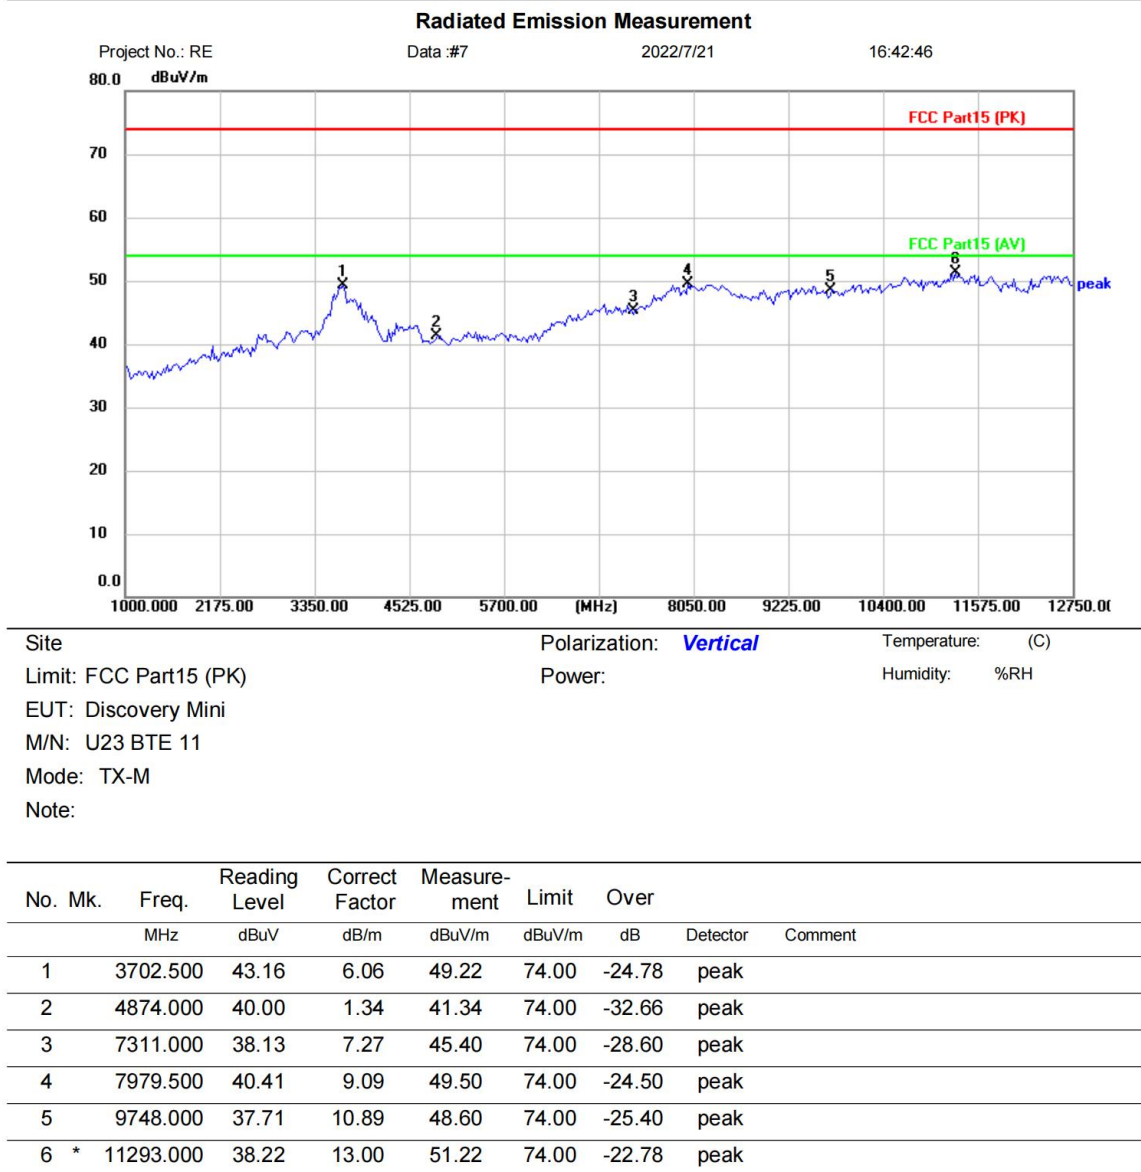


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Horizontal]

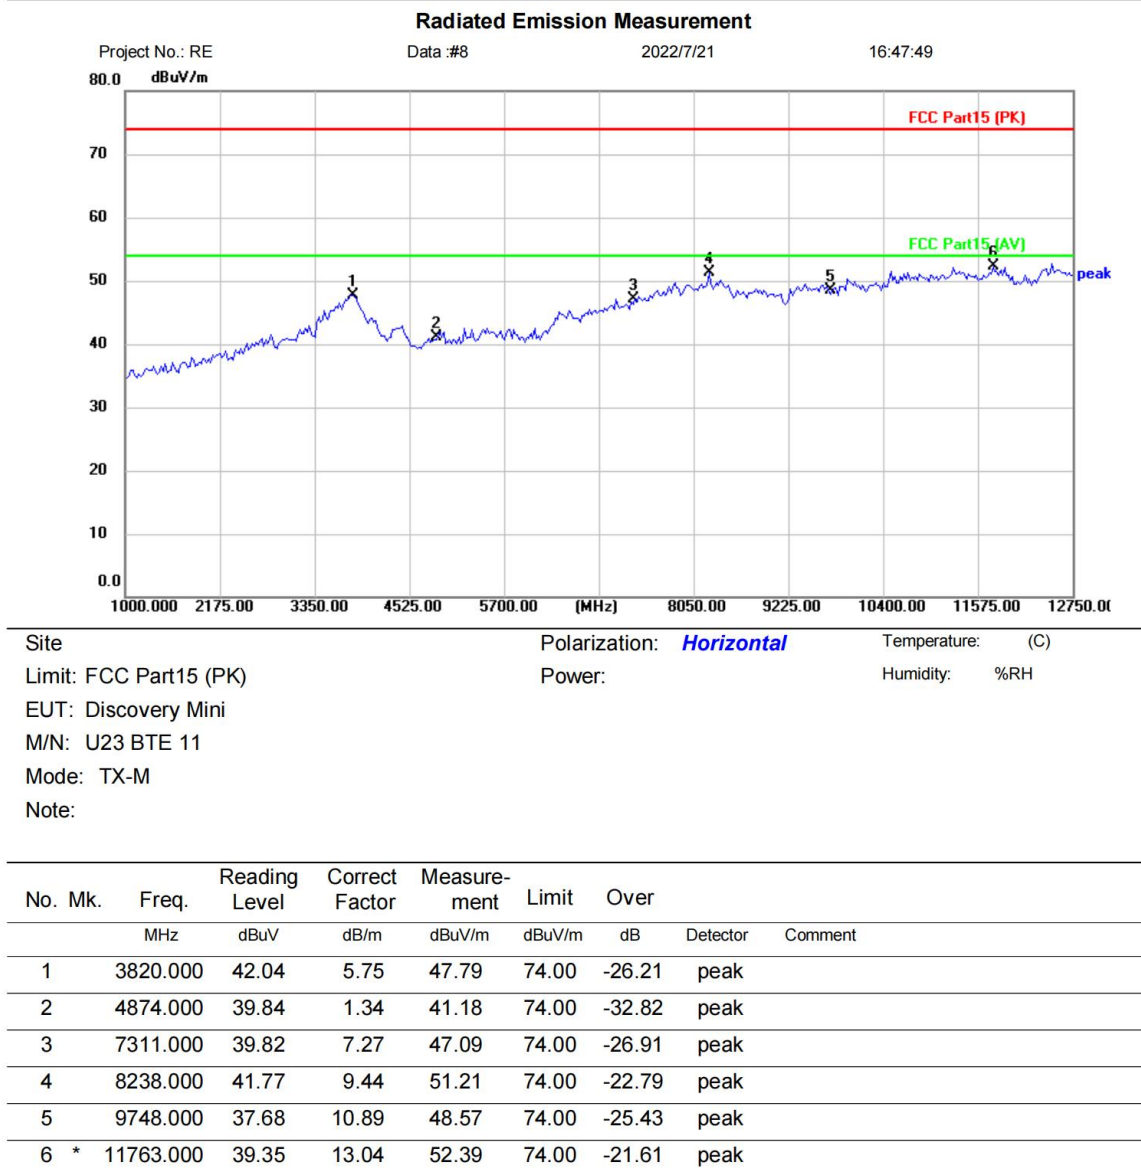


*:Maximum data x:Over limit !:over margin

〈Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

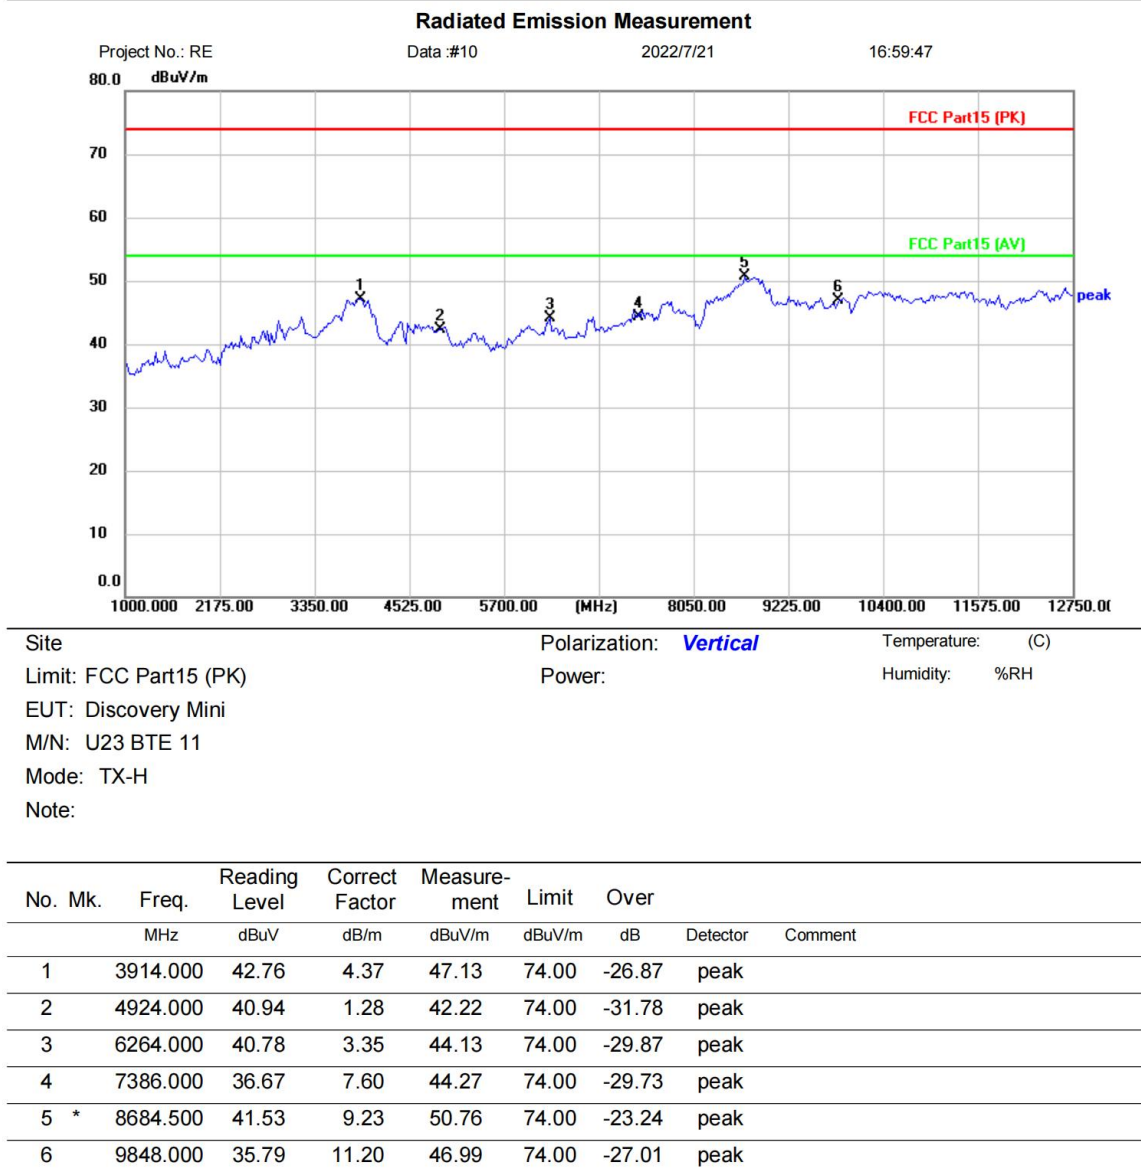


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

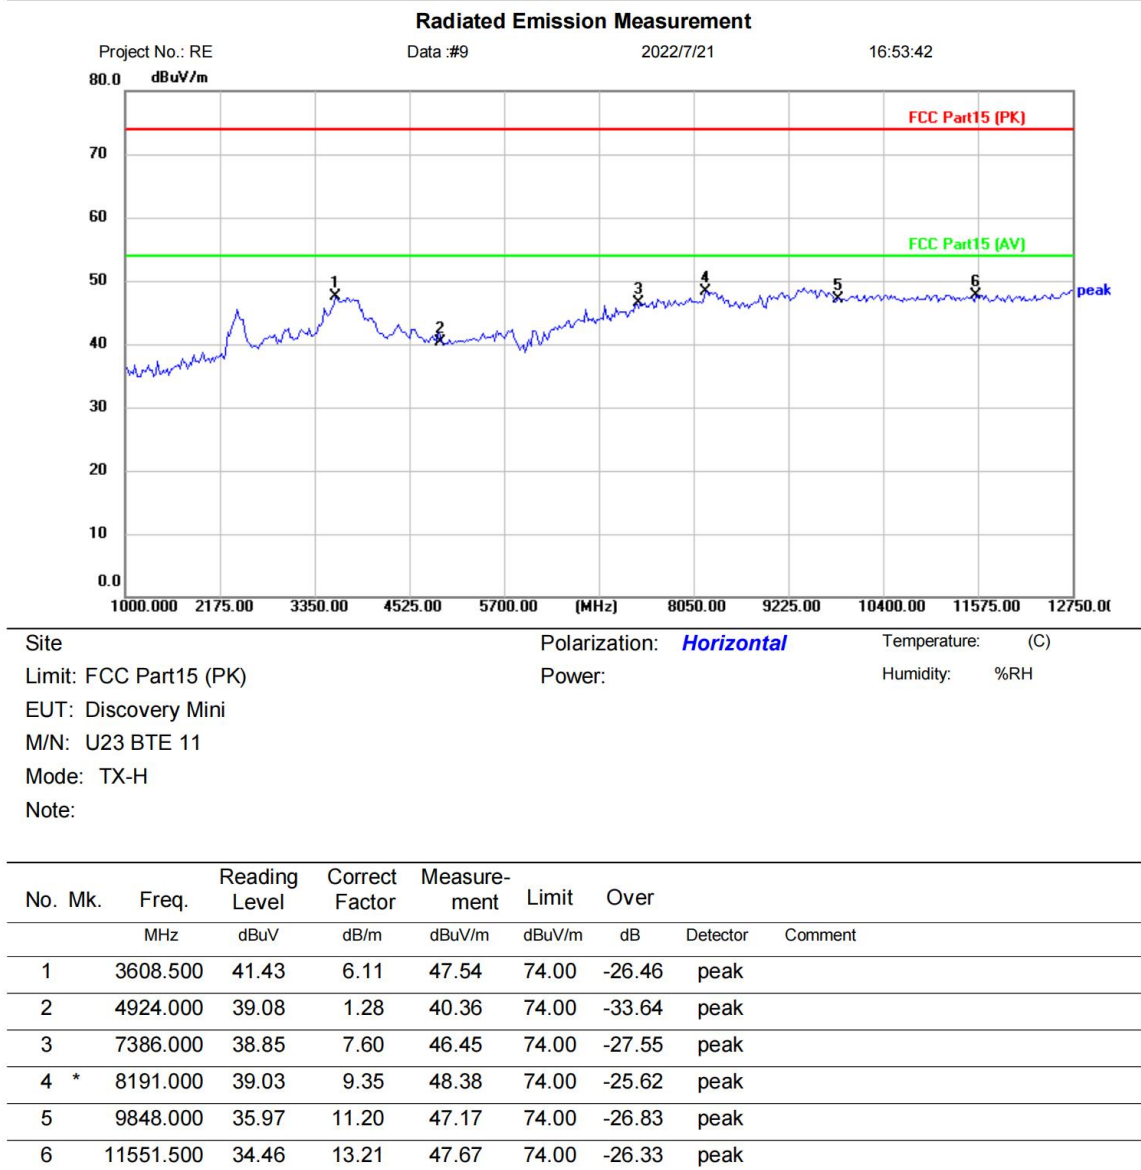

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

BlueAsia


12 RESTRICTED BAND AROUND FUNDAMENTAL FREQUENCY

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.4&6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

12.1 LIMITS

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
Above 1GHz	74.0	Peak Value
Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		

12.2 BLOCK DIAGRAM OF TEST SETUP

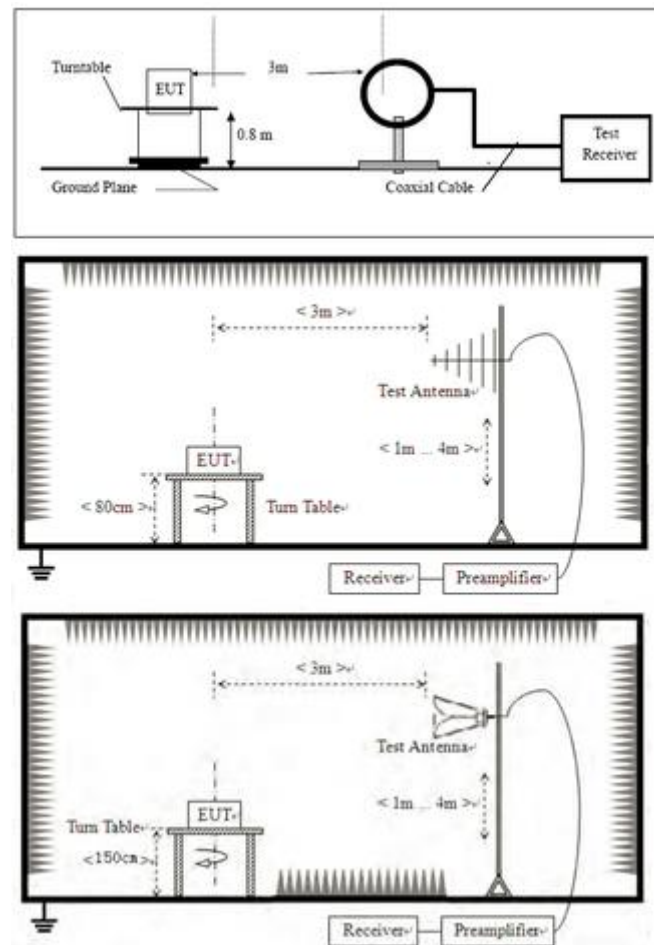

12.3 PROCEDURE


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

BlueAsia

12.4 TEST DATA


[TestMode: TX low channel]; [Polarity: Horizontal]

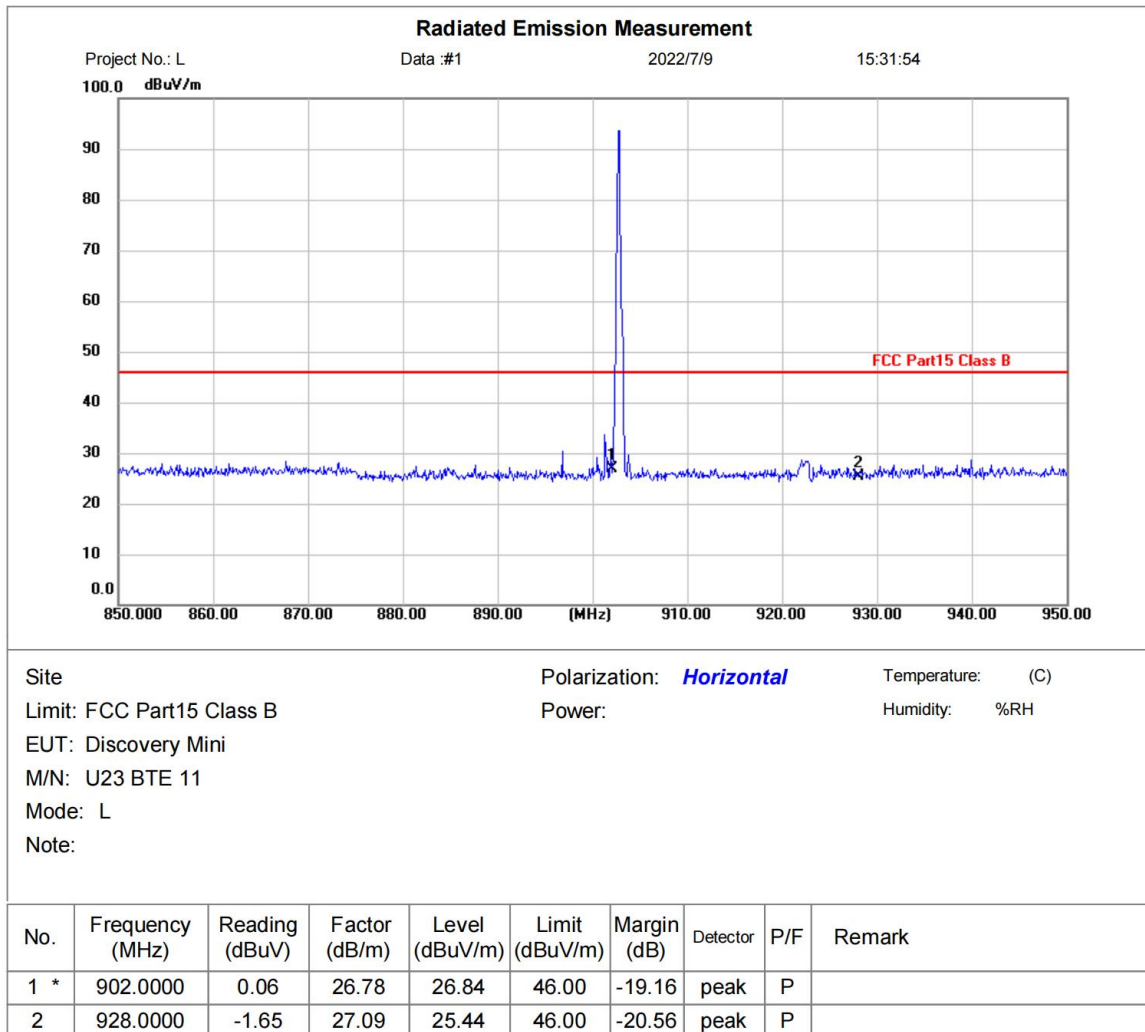

*:Maximum data x:Over limit !:over margin

Test Result: Pass


[TestMode: TX low channel]; [Polarity: Vertical]

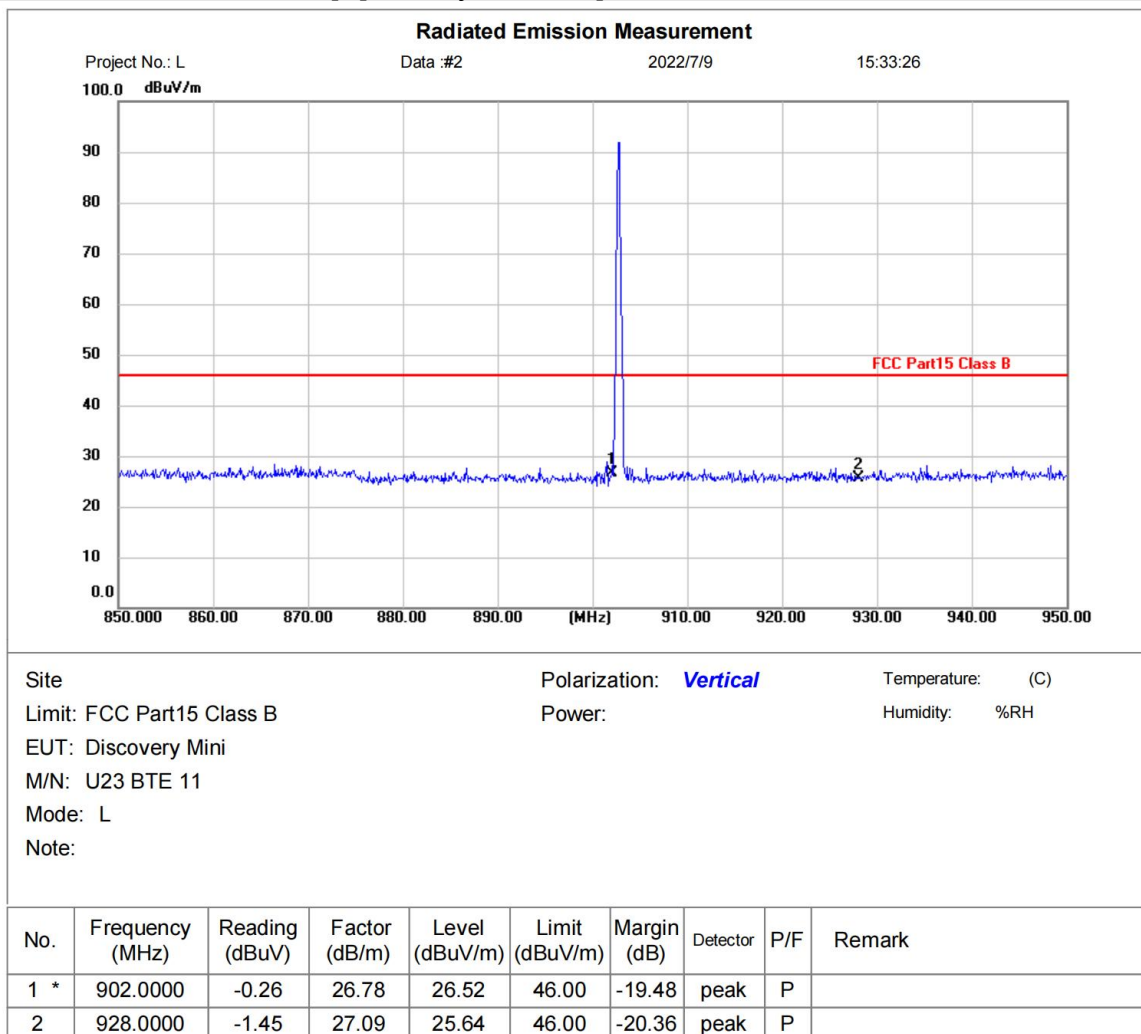

*:Maximum data x:Over limit !:over margin

Test Result: Pass


[TestMode: TX high channel]; [Polarity: Horizontal]

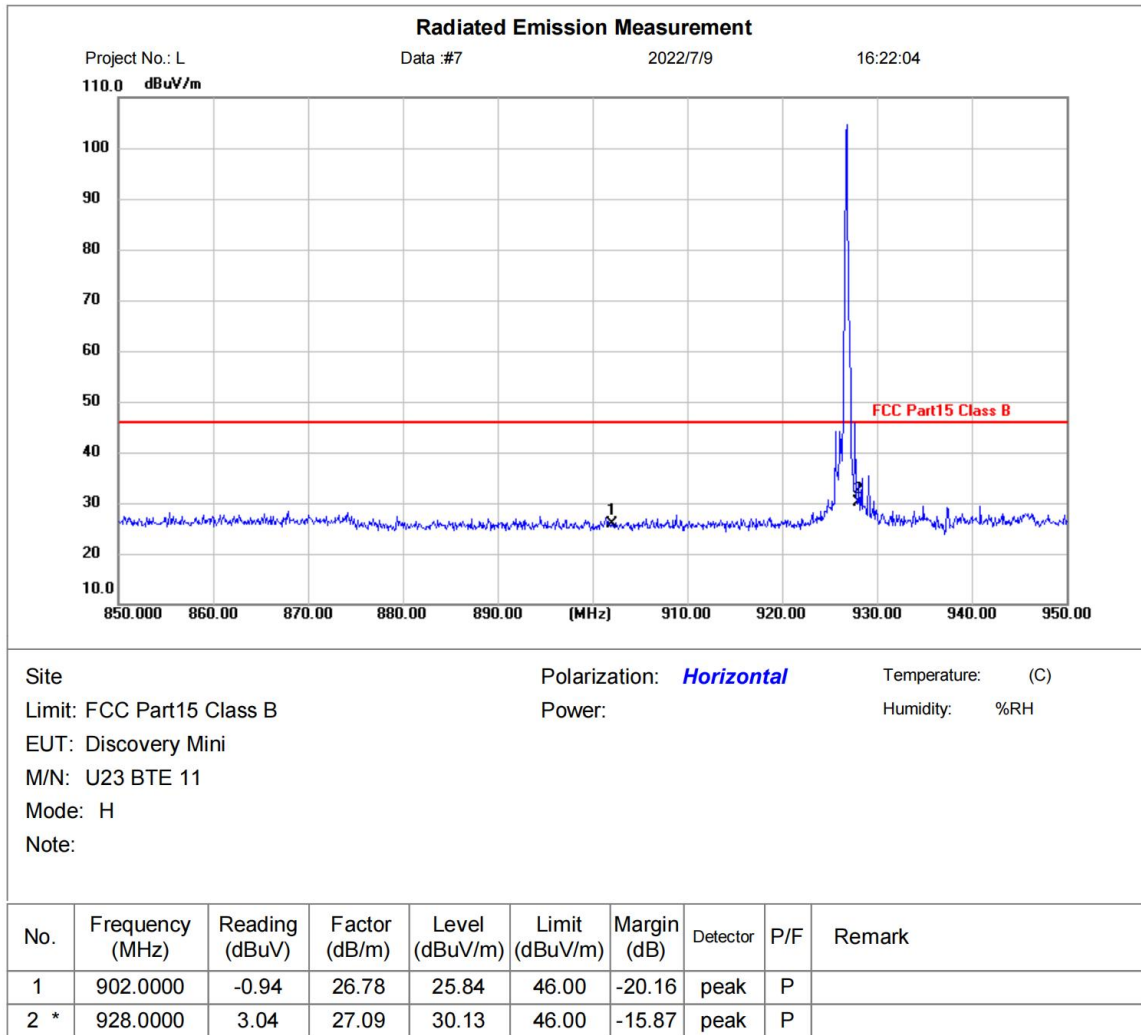

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

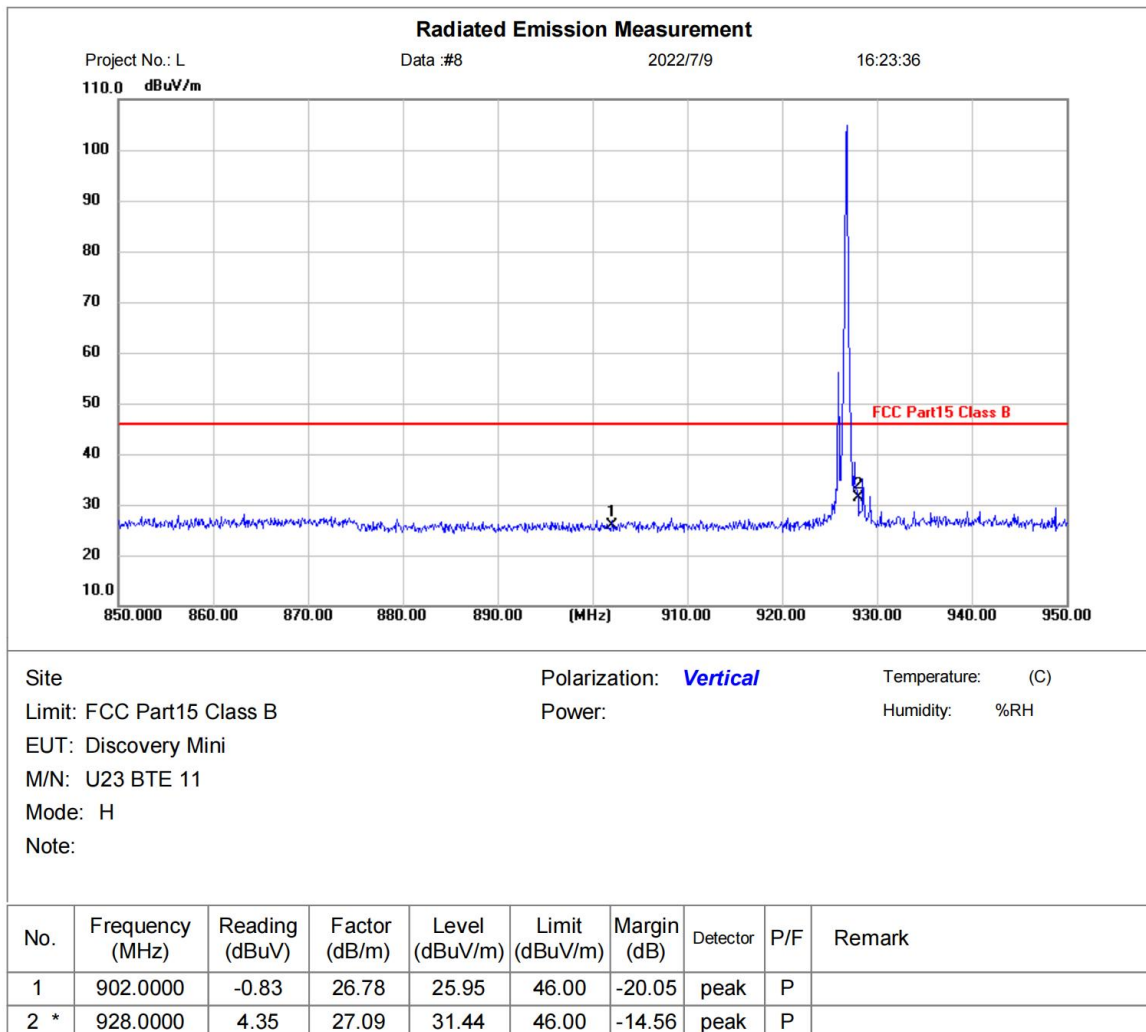

*:Maximum data x:Over limit !:over margin

Test Result: Pass

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

BlueAsia

13 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A))


Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

13.1 LIMITS

Fundamental frequency(MHz)	Field strength of fundamental(microvolts/meter)	Field strength of harmonics(microvolts/meter)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

Remark: The frequencies above 1000MHz are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

13.2 BLOCK DIAGRAM OF TEST SETUP

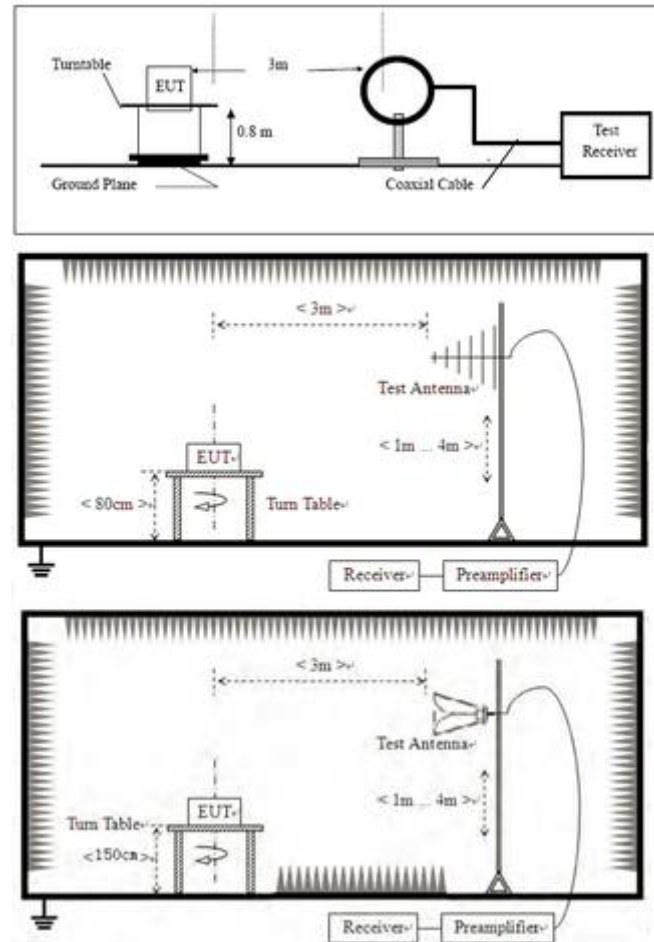

13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
 - i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
 - j. Repeat above procedures until all frequencies measured was complete.
- Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

BlueAsia

13.4 TEST DATA

Quasi-peak value:

Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Over Limit (dB)	Antenna Polaxis
902.75	33.82	36.80	70.62	94.00	-23.38	H
902.75	34.55	36.80	71.35	94.00	-22.65	V
915.25	47.68	36.99	84.67	94.00	-9.33	H
915.25	45.88	36.99	82.87	94.00	-11.13	V
926.75	50.02	37.07	87.09	94.00	-6.91	H
926.75	47.66	37.07	84.73	94.00	-9.27	V


14 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

14.1 LIMITS

Limit:	N/A
--------	-----

14.2 BLOCK DIAGRAM OF TEST SETUP

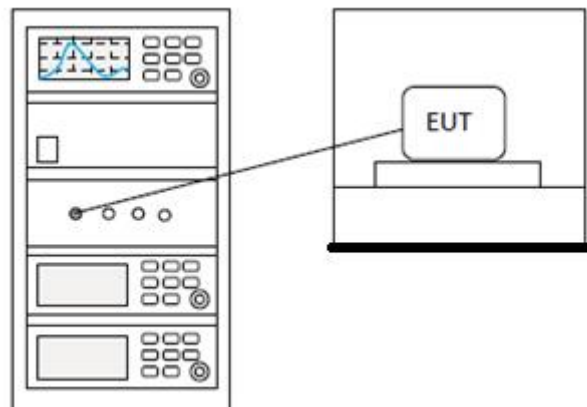


1.1 TEST DATA

Test Frequency MHz	20dB Bandwidth kHz	Result
902.75	324.0	Pass
915.25	364.0	Pass
926.75	338.0	Pass

1.2 TEST PLOTS


902.75:

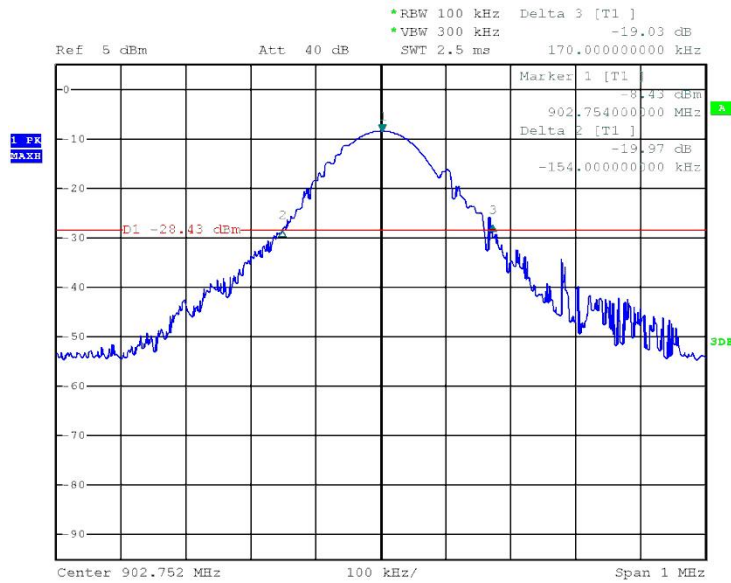

jjjj

Date: 13.JUL.2022 23:01:49


915.25:

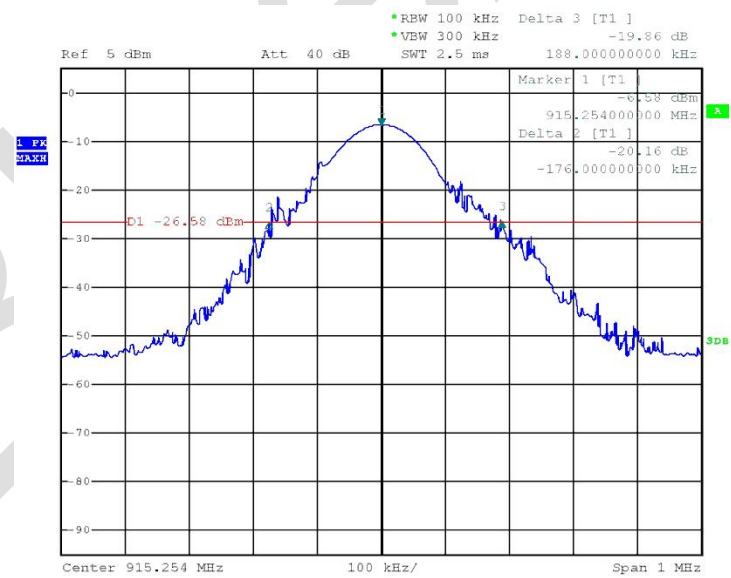

jjjj

Date: 13.JUL.2022 23:06:40

926.75:

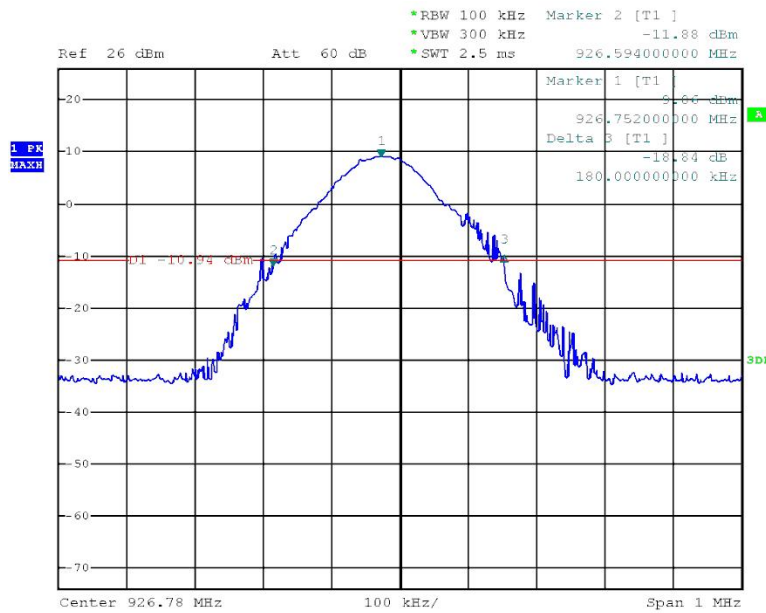

jjjj

Date: 13.JUL.2022 23:24:12

15 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

15.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

15.2 BLOCK DIAGRAM OF TEST SETUP

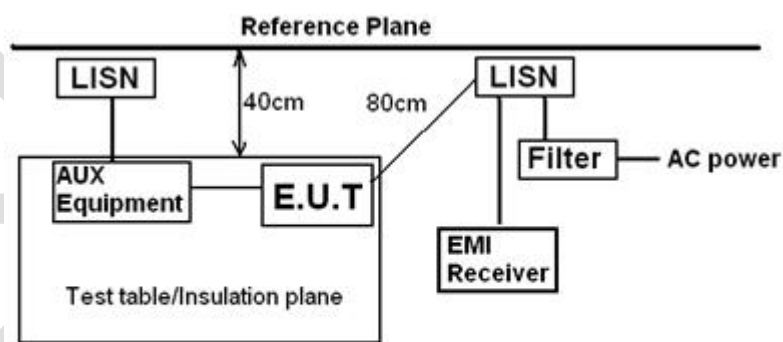

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

15.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.


5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. $LISN = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$

15.4 TEST DATA

[TestMode: TX]; [Line: Nutral] ;[Power:AC120V/60Hz]

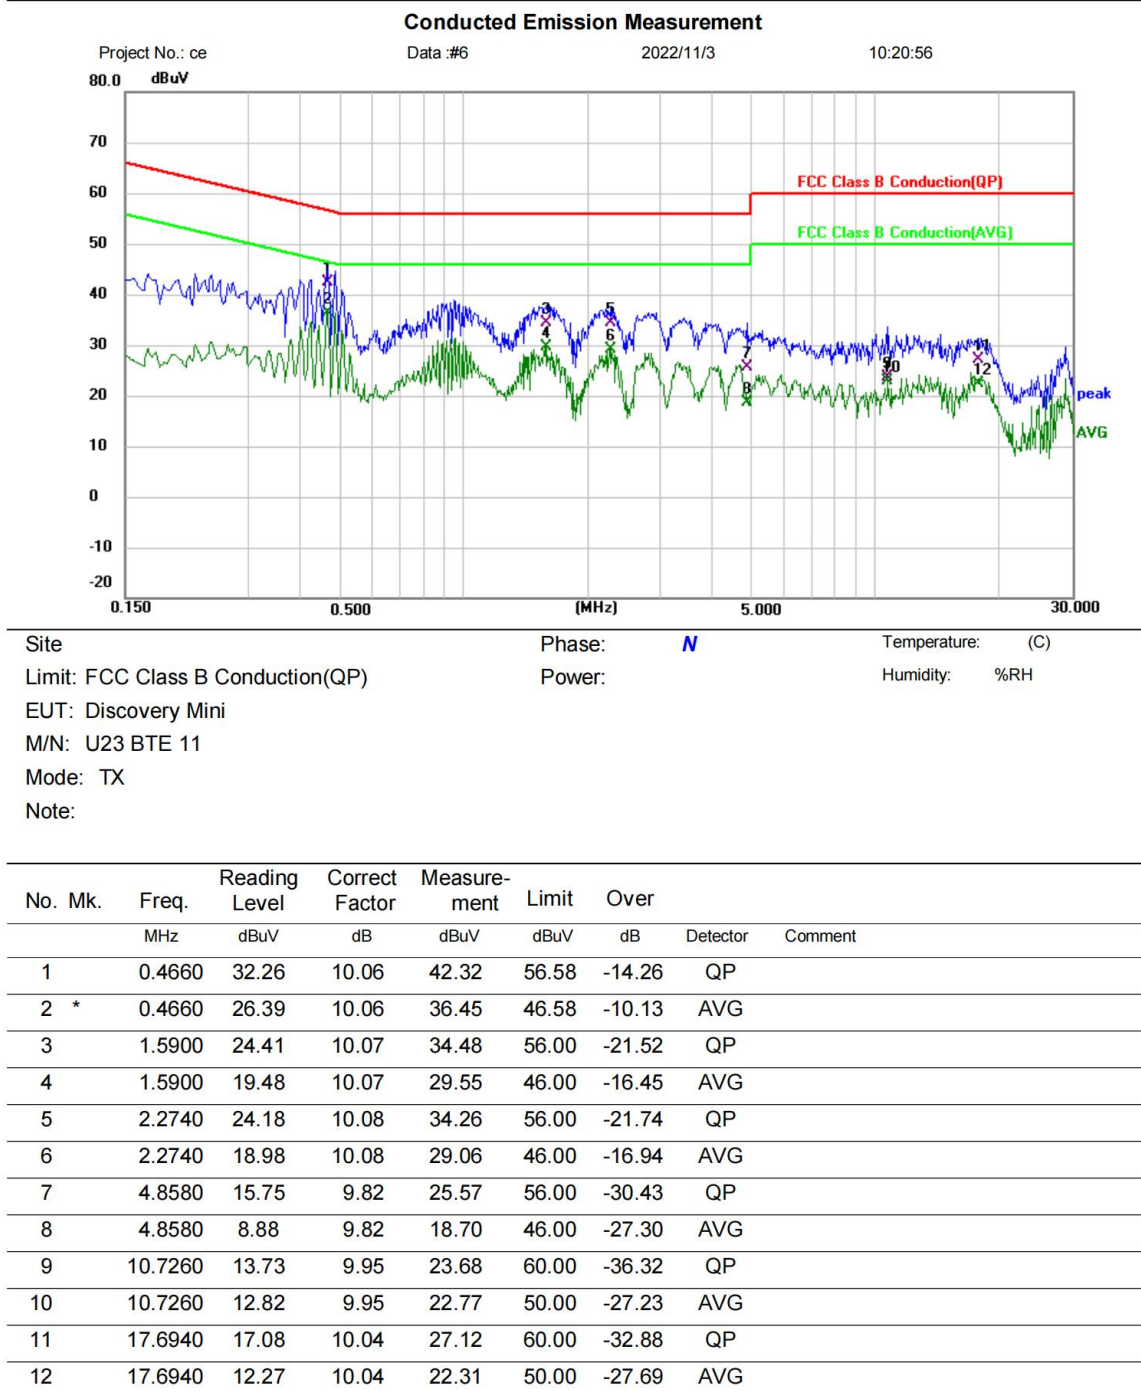


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX]; [Line: Line] ;[Power:AC120V/60Hz]

Conducted Emission Measurement

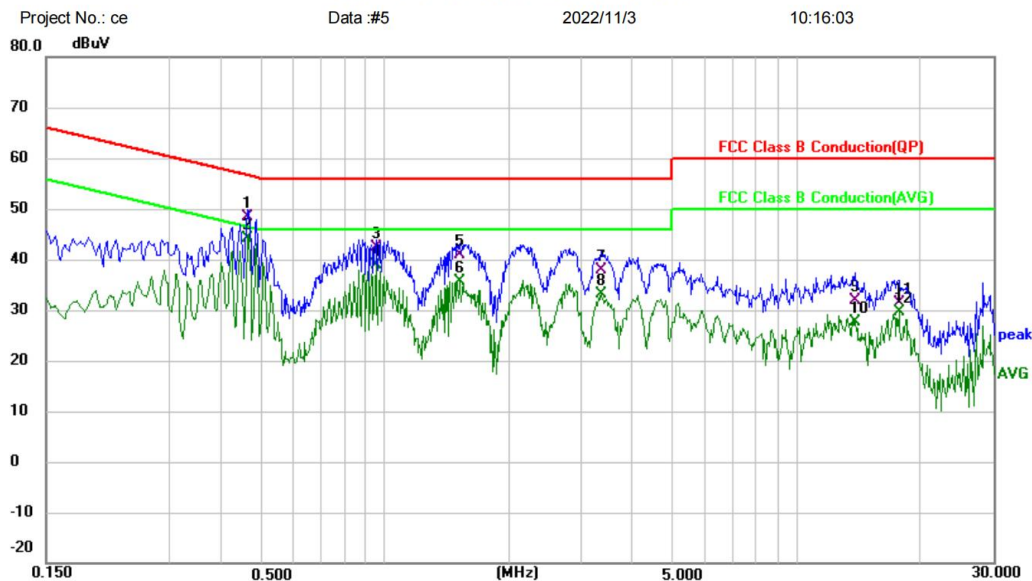

Site: Limit: FCC Class B Conduction(QP) EUT: Discovery Mini M/N: U23 BTE 11 Mode: TX Note:

Phase: **L1** Power: Temperature: (C) Humidity: %RH

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.4620	38.35	10.08	48.43	56.66	-8.23	QP	
2 *	0.4620	34.04	10.08	44.12	46.66	-2.54	AVG	
3	0.9500	32.30	10.10	42.40	56.00	-13.60	QP	
4	0.9500	28.88	10.10	38.98	46.00	-7.02	AVG	
5	1.5180	30.61	10.21	40.82	56.00	-15.18	QP	
6	1.5180	25.30	10.21	35.51	46.00	-10.49	AVG	
7	3.3540	27.74	10.17	37.91	56.00	-18.09	QP	
8	3.3540	23.06	10.17	33.23	46.00	-12.77	AVG	
9	13.8540	21.76	10.00	31.76	60.00	-28.24	QP	
10	13.8540	17.54	10.00	27.54	50.00	-22.46	AVG	
11	17.7420	21.45	9.99	31.44	60.00	-28.56	QP	
12	17.7420	19.67	9.99	29.66	50.00	-20.34	AVG	

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

16 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	N/A


16.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.



EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.5dBi.

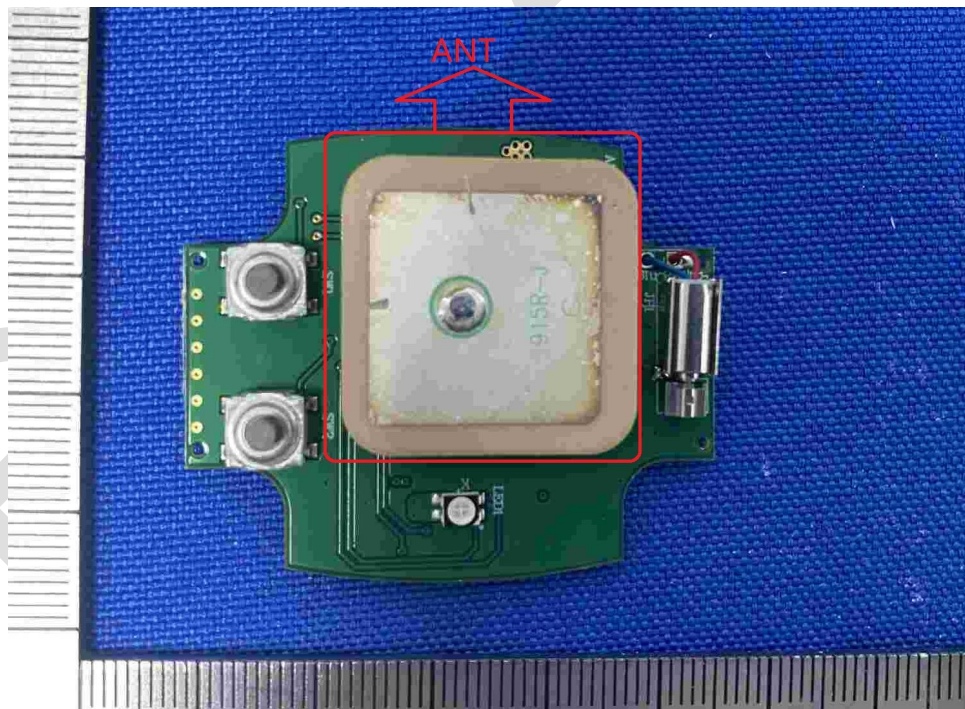

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Emissions

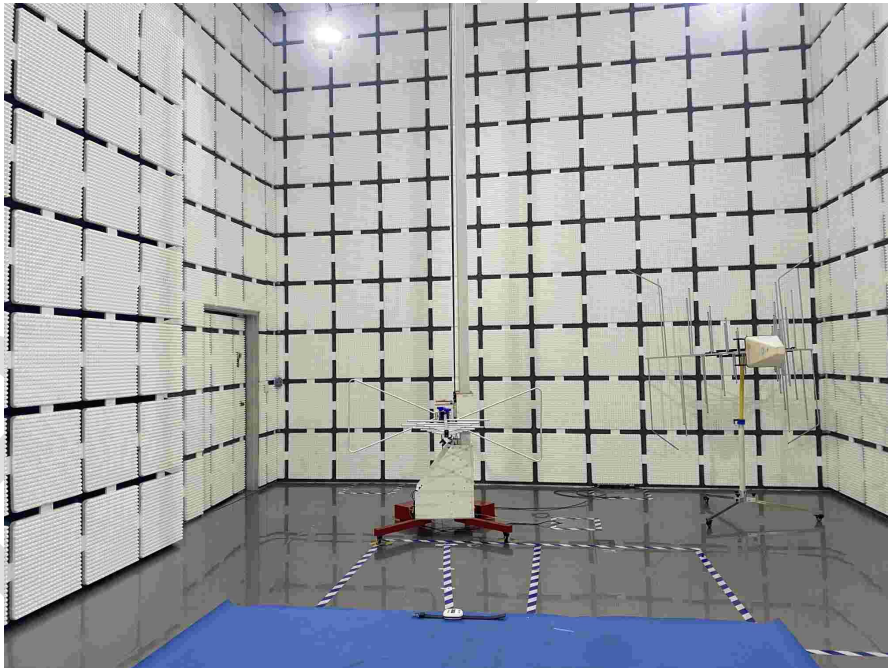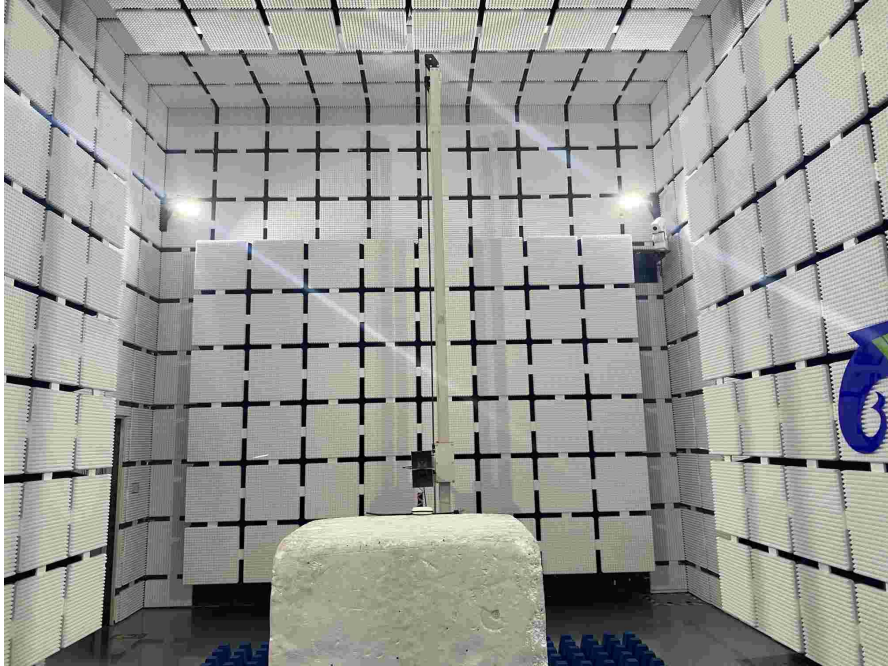

Conducted Emissions at AC Power Line (150kHz-30MHz)



APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202206-A6201

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.