



# Wireless test report – 455375-2TRFWL

Type of assessment:

**Transmitters co-location**

Applicant:

**Sensor ID Srl**

**Corso Amatusio 122, 86021 Bojano (CB), Italy**

Product:

**RFID READER**

Model:

**U27BTW11**

Model variant:

--

FCC ID:

**2AVDNU27BTW11**

IC Registration number:

--

Specifications:

◆ **FCC 47 CFR Part 15 Subpart C, §15.209**

Radiated emission limits; general requirements.

Transmitter Emission Limits

Date of issue: **9 March, 2022**

**D. Guarnone**

Tested by

Signature

**P. Barbieri**

Reviewed by

Signature

This test report shall not be partially reproduced without the prior written consent of Nemko S.p.A. The phase of sampling of equipment under test is carried out by the customer. Results indicated in this test report refer exclusively to the tested samples and apply to the sample as received. This Test Report, when bearing the Nemko name and logo is only valid when issued by a Nemko laboratory, or by a laboratory having special agreement with Nemko.

Doc. n. TRF001; Rev. 0; Date: 2020-11-30

---

**Test location(s)**

---

Company name	Nemko Spa
Address	Via del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+39 039 220 12 01
Facsimile	+39 039 220 12 21
Website	www.nemko.com
Site number	FCC: 682159; IC: 9109A (10 m semi anechoic chamber)

---

**Limits of responsibility**

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report. This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Spa ISO/IEC 17025 accreditation.

---

**Copyright notification**

---

Nemko Spa authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Spa accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

## Table of contents

<b>Table of contents .....</b>	<b>3</b>
<b>Section 1. Report summary .....</b>	<b>4</b>
1.1 Applicant and manufacturer .....	4
1.2 Test specifications .....	4
1.3 Test methods.....	4
1.4 Statement of compliance .....	4
1.5 Exclusions .....	4
1.6 Test report revision history .....	4
<b>Section 2. Summary of test results.....</b>	<b>5</b>
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 ISED RSS-GEN, Issue 5, test results .....	Error! Bookmark not defined.
<b>Section 3. Equipment under test (EUT) details .....</b>	<b>6</b>
3.1 Sample information.....	6
3.2 EUT information .....	6
3.3 Technical information .....	6
3.4 EUT setup diagram .....	6
3.5 Product description and theory of operation .....	6
3.6 EUT exercise details.....	7
<b>Section 4. Engineering considerations.....</b>	<b>8</b>
4.1 Modifications incorporated in the EUT.....	8
4.2 Technical judgment .....	8
4.3 Deviations from laboratory tests procedures .....	8
<b>Section 5. Test conditions.....</b>	<b>9</b>
5.1 Atmospheric conditions .....	9
5.2 Power supply range.....	9
<b>Section 6. Measurement uncertainty .....</b>	<b>10</b>
6.1 Uncertainty of measurement .....	10
<b>Section 7. Test equipment .....</b>	<b>11</b>
7.1 Test equipment list.....	11
<b>Section 8. Testing data .....</b>	<b>12</b>
8.1 FCC 15.209 and RSS-GEN section 8.9 Radiated emission limits; general requirements.....	12
<b>Section 9. Block diagrams of test set-ups .....</b>	<b>22</b>
9.1 Radiated emissions set-up for frequencies below 1 GHz.....	22
9.2 Radiated emissions set-up for frequencies above 1 GHz.....	22
<b>Section 10. Photos.....</b>	<b>23</b>
10.1 Photos of the test set-up .....	23
10.2 Photos of the EUT.....	24

## Section 1. Report summary

---

### 1.1 Applicant and manufacturer

---

Company name	Sensor ID Srl
Address	Via Don G. Mucciardi 5 86020 Campochiaro CB - Italy

### 1.2 Test specifications

---

FCC 47 CFR Part 15 Subpart C, §15.209	Radiated emission limits; general requirements.
RSS-GEN, Issue 5, section 8.9	Transmitter Emission Limits for Licence-Exempt Radio Apparatus

### 1.3 Test methods

---

ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
-------------------	------------------------------------------------------------------------------------------------

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found non-compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.5 below. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

### 1.5 Exclusions

---

As per quote, the purpose of this report is verification of transmitters colocation. Only inter-modulation products within restricted bands were assessed, other requirements were excluded from the scope of this report.

### 1.6 Test report revision history

---

Revision #	Date of issue	Details of changes made to test report
455375-2TRFWL	09-Mar-2022	Original report issued



**Section 2.** Summary of test results

---

2.1 FCC Part 15 Subpart C, general requirements test results

---

Part	Test description	Verdict
§15.209	Radiated emission limits; general requirements.	Pass

## Section 3. Equipment under test (EUT) details

---

### 3.1 Sample information

---

Receipt date	February 14, 2022
Nemko sample ID number	4553750002

### 3.2 EUT information

---

Product name	Portable RFID reader with WiFi / BT connection
Model	U27BTW11
Serial number	4553750002

### 3.3 Technical information

---

Frequency band	WiFi :2400 – 2483.5 MHz BLE: 2400 – 2483.5 MHz RFID: 902 - 928 MHz
EUT power requirements	Battery integrated 2000mAh LiPo. Battery charging 5V with micro USB connector. RF Power max 100mW (20dBm)
Antenna information	The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.

### 3.4 EUT setup diagram

---



**Figure 3.4-1:** Setup diagram

### 3.5 Product description and theory of operation

---

The EUT is a Portable RFID reader with WiFi connection



3.6 EUT exercise details

---

## Section 4. Engineering considerations

---

### 4.1 Modifications incorporated in the EUT

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

The EUT uses a ESP32 radio module with BLE standard.

The radio module Telit uses the following standards GSM, UMTS and LTE. GSM and LTE standards are chosen to be the representative worst-case.

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.



## Section 5. Test conditions

---

### 5.1 Atmospheric conditions

---

In the laboratory, the following ambient conditions are respected for each test reported below:

Temperature	18 – 33 °C
Relative humidity	25 – 70 %
Air pressure	860 – 1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

The following instruments are used to monitor the environmental conditions:

Equipment	Manufacturer	Model no.	Asset no.	Cal date	Next cal.
Thermo-hygrometer data loggers	Testo	175-H2	20012380/305	12/2020	12/2022
Thermo-hygrometer data loggers	Testo	175-H2	38203337/703	12/2020	12/2022
Barometer	Castle	GPB 3300	072015	03/2021	03/2022

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 6. Measurement uncertainty

### 6.1 Uncertainty of measurement

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2 and other specific test standard and is documented in Nemko Spa working manual WML1002.

The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
		Carrier power RF Output Power	0.009 MHz ÷ 30 MHz	1.1 dB	(1)
			30 MHz ÷ 18 GHz	1.5 dB	(1)
			18 MHz ÷ 40 GHz	3.0 dB	(1)
			40 MHz ÷ 140 GHz	5.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.4 dB	(1)
		Conducted spurious emissions	0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter– Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
		Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
	Radiated	Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
		Effective radiated power transmitter	10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)

#### NOTES:

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$ , which for a normal distribution corresponds to a coverage probability of approximately 95 %

## Section 7. Test equipment

### 7.1 Test equipment list

**Table 7.1-1: Equipment list**

Description	Manufacturer	Model	Identifier	Cal Date	Due Date
EMI Receiver	Rohde & Schwarz	ESW44	101620	2021-08	2022-08
EMI Receiver	Rohde & Schwarz	ESU8	100202	2021-09	2022-09
Antenna Trilog 25MHz - 8GHz	Schwarzbeck Mess-Elektronik	VULB9162	9162-025	2021-07	2024-07
Antenna Trilog 25-2000 MHz	Schwarzbeck Mess-Elektronik	VULB9168	9168-242	2021-06	2024-06
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STLP 9148-152	2021-09	2024-09
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STPL 9148-123	2021-06	2024-06
Double Ridge Horn Antenna	RFSpin	DRH40	061106A40	2020-04	2023-04
Broadband Bench Top Amplifier	Sage	STB-1834034030-KFKF-L1	18490-01	2021-04	2022-04
Preamplifier	Schwarzbeck Mess-Elektronik	BBV9718	BBV9718-137	2021-04	2022-04
Semi-anechoic chamber	Nemko S.p.a.	10m semi-anechoic chamber	530	2021-09	2023-09
Common Mode Absorption Device	Schwarzbeck Mess-Elektronik	CMAD1614	00041	2021-05	2022-05
LISN	Rohde & Schwarz	ESH2-Z5	881 362/006	2021-03	2022-03
LISN	Rohde & Schwarz	ESH2-Z5	872 460/041	2021-09	2022-09
Oscilloscope	Agilent	54846A	MY40000254	2020-11	2022-11
Multimeter	Rohde & Schwarz	HMC8012	101577	2021-06	2022-06
Barometer	Castle	GBP 3300	072015	2021-04	2022-04
Data logger con diagnosi in campo	Testo	175-H2	20012380/305	2020-12	2022-12
Data logger con diagnosi in campo	Testo	175-H2	38203337/703	2020-12	2022-12
Attenuator	Aeroflex / Weinschel	2	CC8577	2021-07	2022-07

## Section 8. Testing data

### 8.1 FCC 15.209 and RSS-GEN section 8.9 Radiated emission limits; general requirements

#### 8.1.1 Definitions and limits

**FCC:**

(f) In accordance with §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in §15.109 that are applicable to the incorporated digital device.

**ISED:**

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 8.1-1: FCC §15.209 – Radiated emission limits**

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

**Table 8.1-2: FCC restricted frequency bands**

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

### 8.1.2 Test summary

Test start date	May 10, 2021
Test engineer	D. Guarnone

### 8.1.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to 25.0 GHz.

EUT's LTE and WIFI transmitters were set to transmit continuously, different channel setting has been investigated as per provided by client's setup, only the worst-case is presented.

Radiated measurements were performed at a distance of 3 m for frequency range below 18 GHz, and 1 m for frequency range above 18 GHz. No inter-modulation products emissions were detected above 18 GHz within 6 dB below the limit.

Spectrum analyzer settings for frequencies below 30 MHz:

Detector mode	Quasi-Peak
Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold
Measurement time	100 ms


Spectrum analyser settings for radiated measurements within restricted bands 30 MHz to 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyzer settings for average radiated measurements within restricted bands above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	10 Hz
Detector mode:	Peak
Trace mode:	Max Hold

8.1.4 Test data

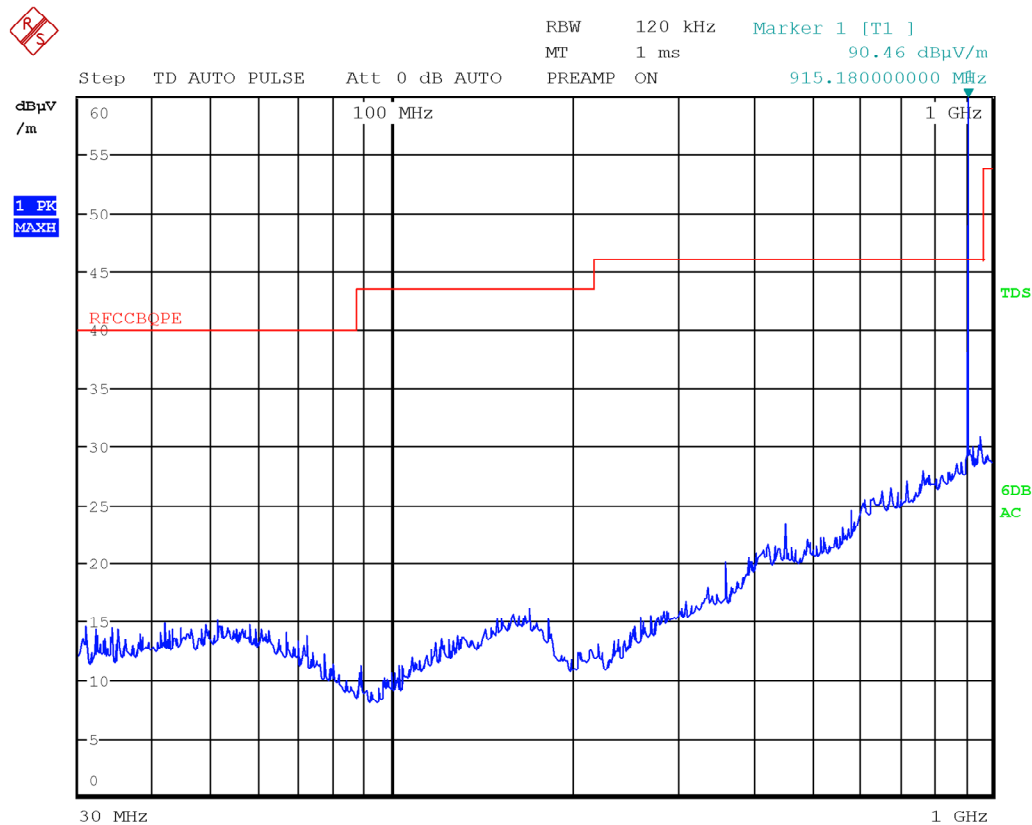


Date: 28.FEB.2022 19:21:24

Figure 8.1-1: Radiated spurious emissions with RFID at mid channel BLE at middle channel and WIFI at mid channel – antenna in horizontal polarization

Note:

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	--
Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.				

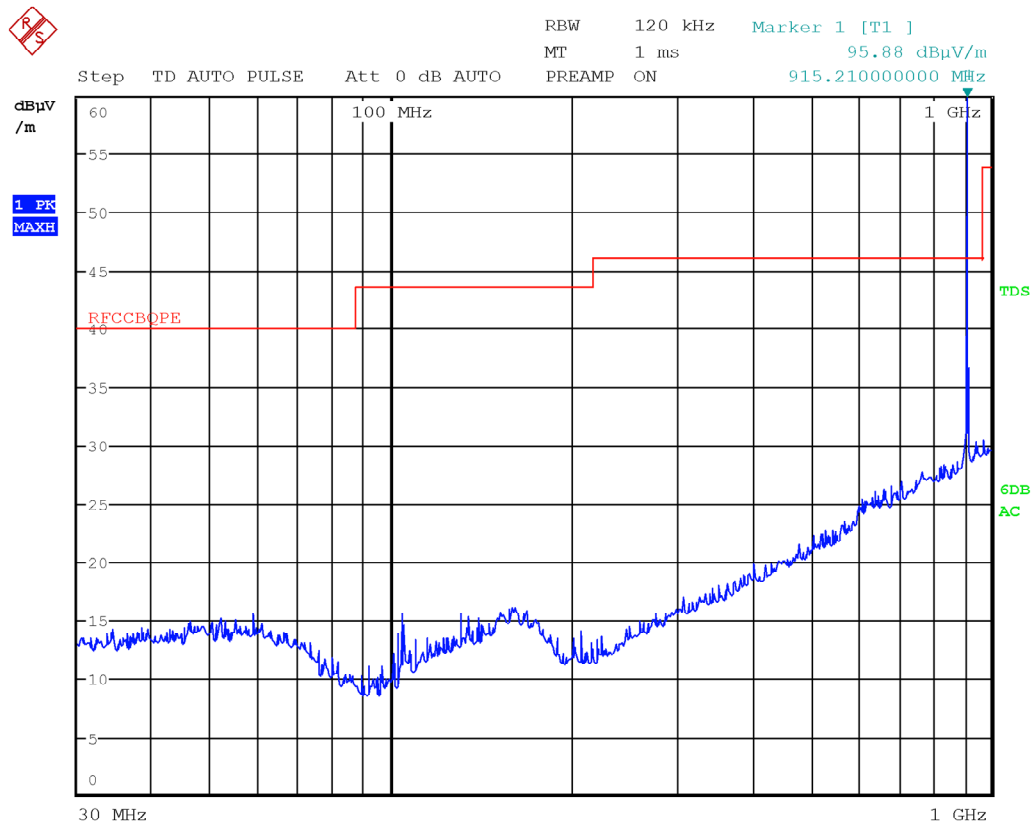

Date: 28.FEB.2022 19:18:33

Figure 8.1-2: Radiated spurious emissions with RFID at mid channel BLE at middle channel and WIFI at mid channel – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions. No intermodulation emissions were detected

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	Q--
Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.				

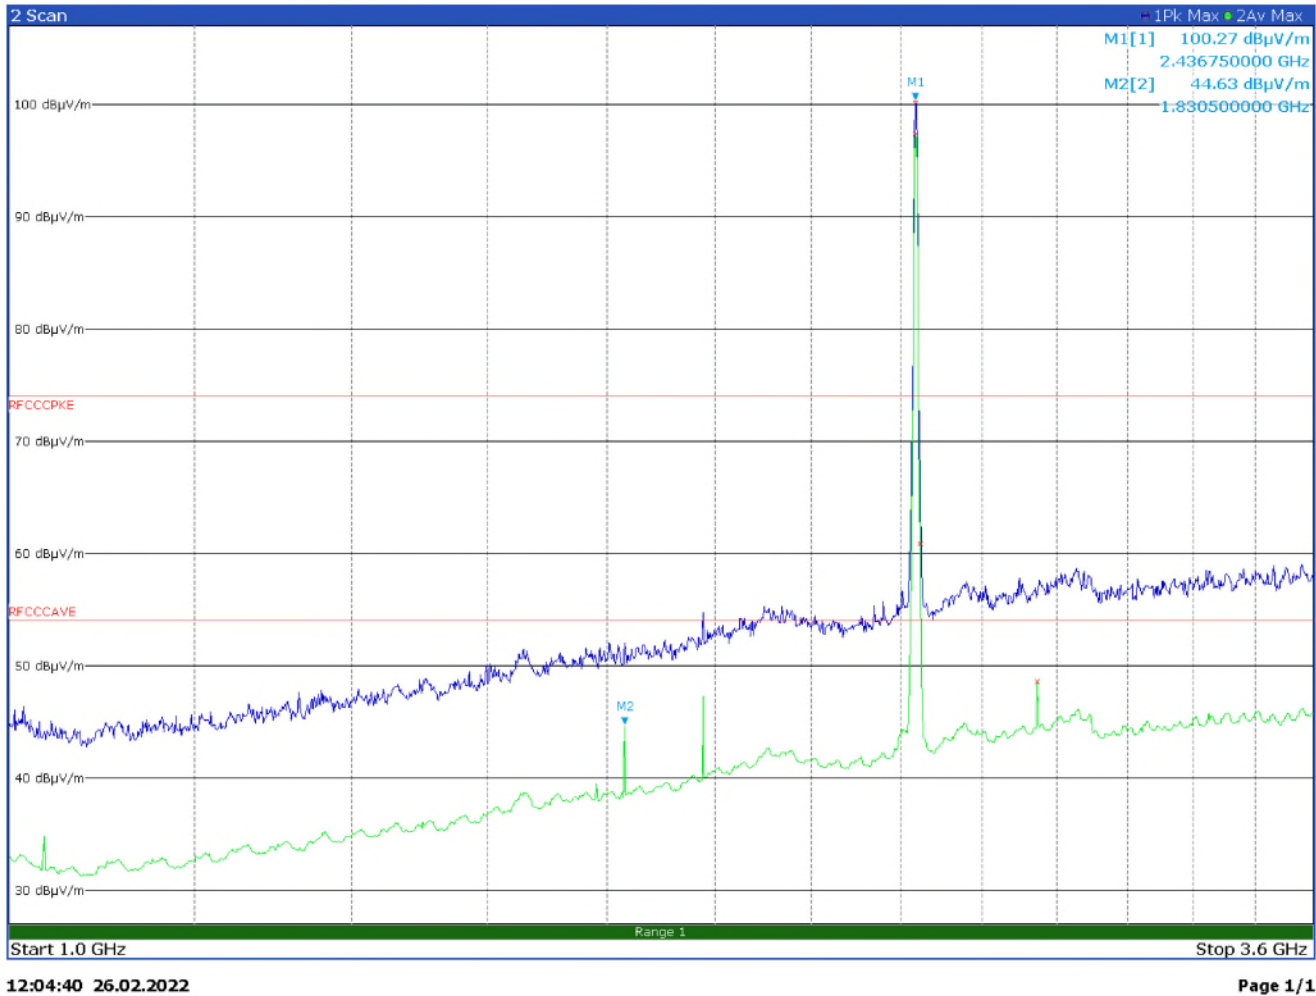



Figure 8.1-3: Radiated spurious emissions with with RFID at mid channel BLE at middle channel and WIFI at mid channel – antenna in horizontal polarization

Note: Emissions above the limit were intentional. No intermodulation emissions were detected

The limit for GSM 850 is -13 dBm. Limit (dBμV/m) = limit (dBm) + 95.23 = 82.2 dBμV/m

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	--
Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.				



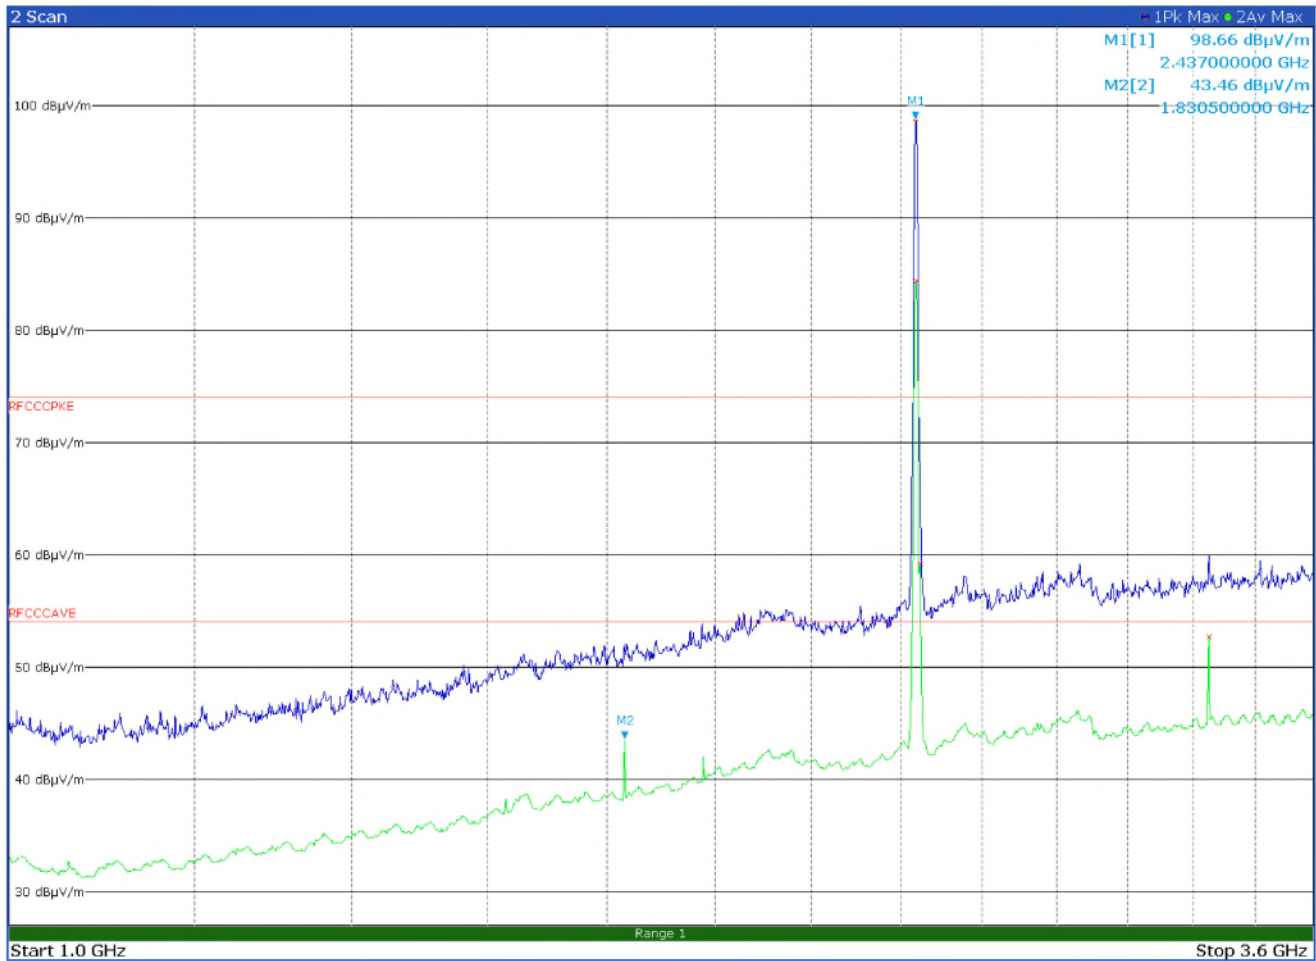

12:03:42 26.02.2022


Page 1/1

Figure 8.1-4: Radiated spurious emissions with RFID at mid channel BLE at middle channel and WIFI at mid channel – antenna in vertical polarization

Note: Emissions above the limit were from intentional emissions.


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
--	--	--	--	--

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

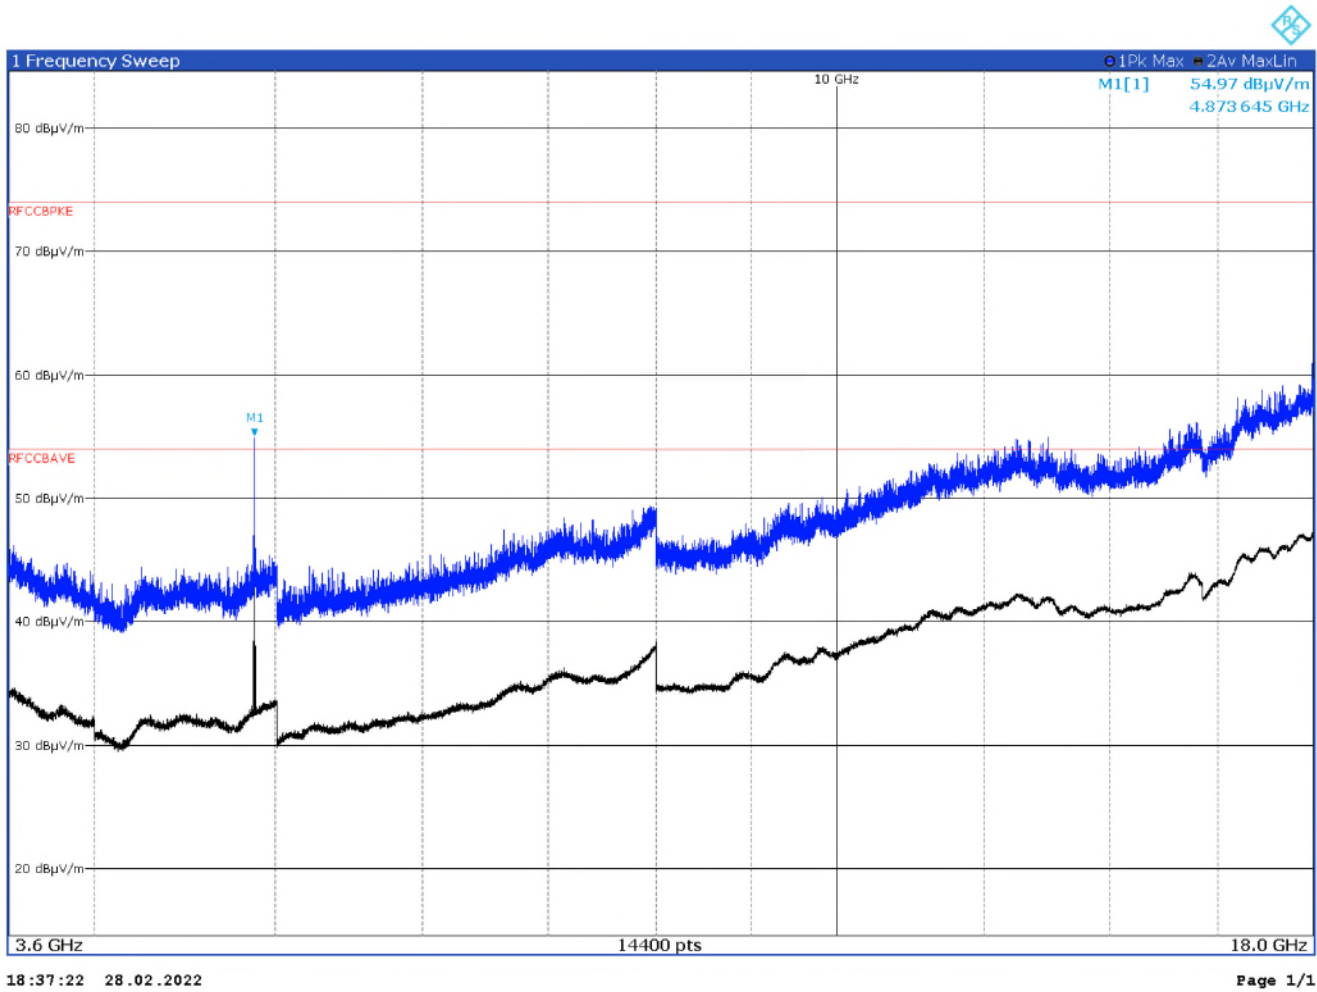

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
4873.65	55.0	--	--	PK
4873.65	45.5	--	--	AV

Figure 8.1-5: Radiated spurious emissions with RFID at mid channel BLE at middle channel and WIFI at mid channel – antenna in horizontal polarization

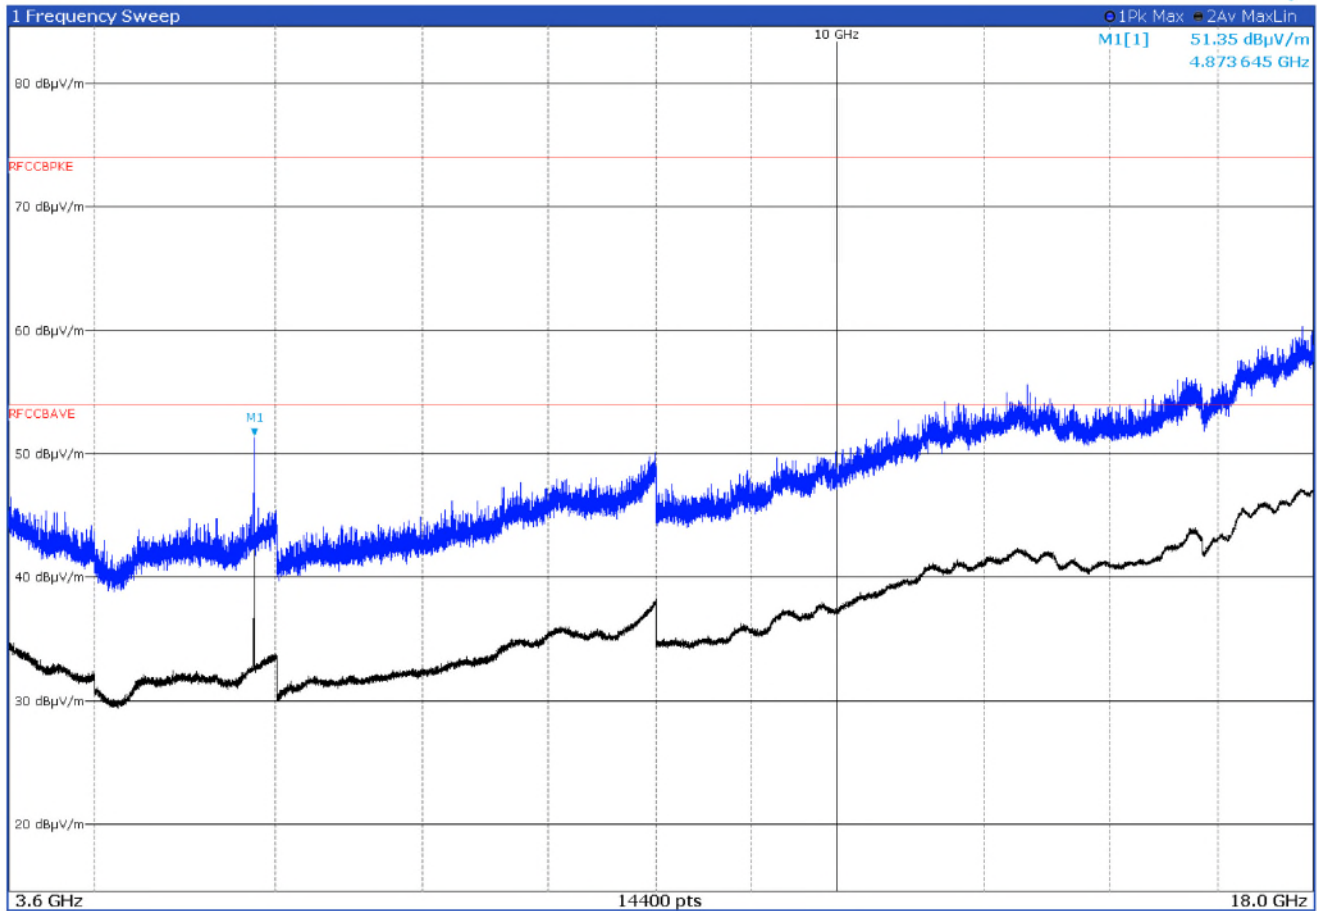


18:35:17 28.02.2022


Page 1/1

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
4873.65	51.3	--	--	PK
4873.65	43.5	--	--	AV

Figure 8.1-6: Radiated spurious emissions with mid channel BLE at middle channel and WIFI at mid channel – antenna in vertical polarization

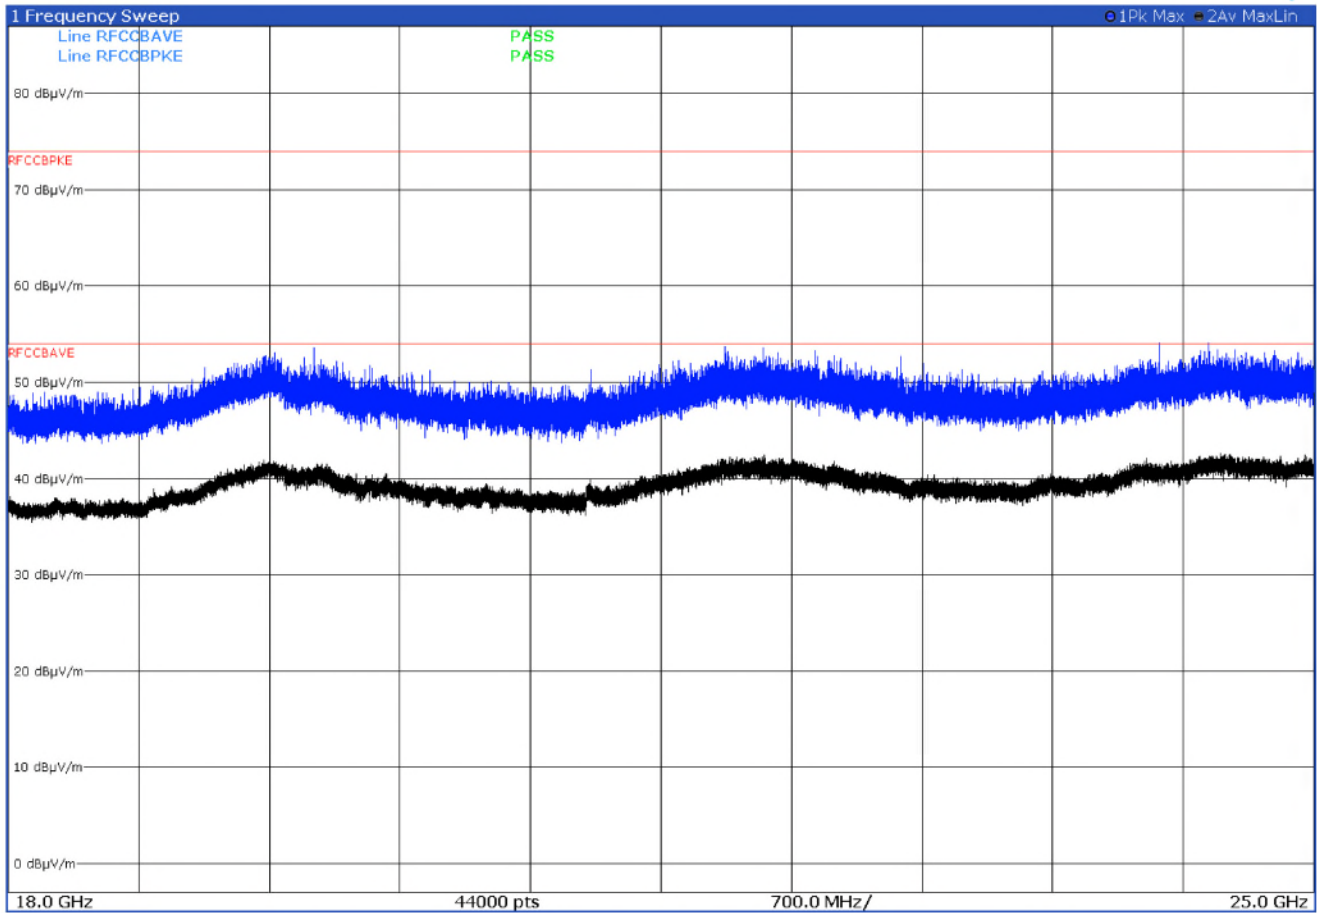


**Figure 8.1-7:** Radiated spurious emissions with RFID at mid channel BLE at middle channel and WIFI at mid channel – antenna in horizontal polarization  
Peak level under the average limit – no additional measures need. No intermodulation emissions were detected

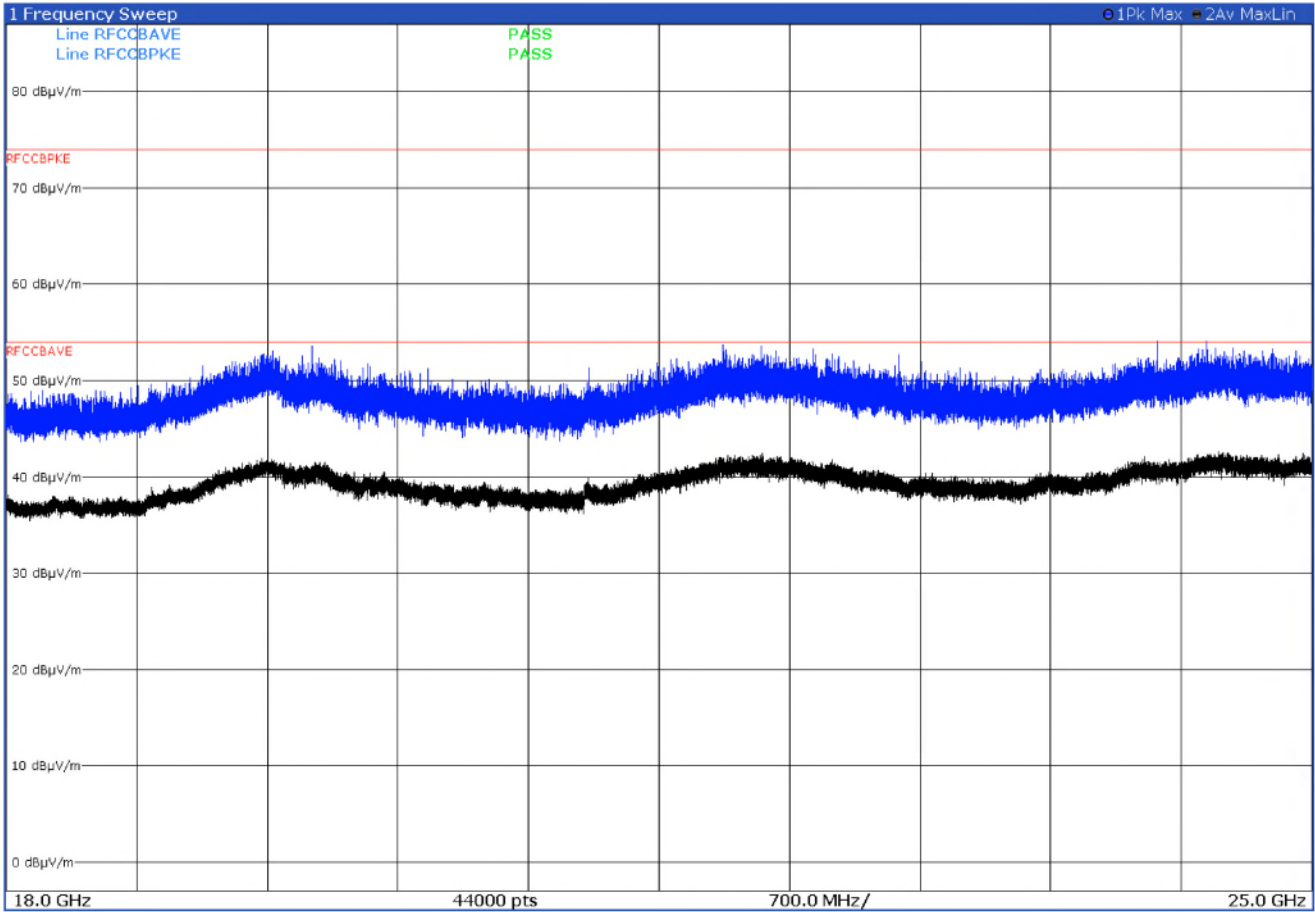


**Figure 8.1-8:** Radiated spurious emissions with RFID at mid channel BLE at middle channel and WIFI at mid channel – antenna in vertical polarization  
*Peak level under the average limit – no additional measures need. No intermodulation emissions were detected*

# Section 9. Block diagrams of test set-ups

## 9.1 Radiated emissions set-up for frequencies below 1 GHz

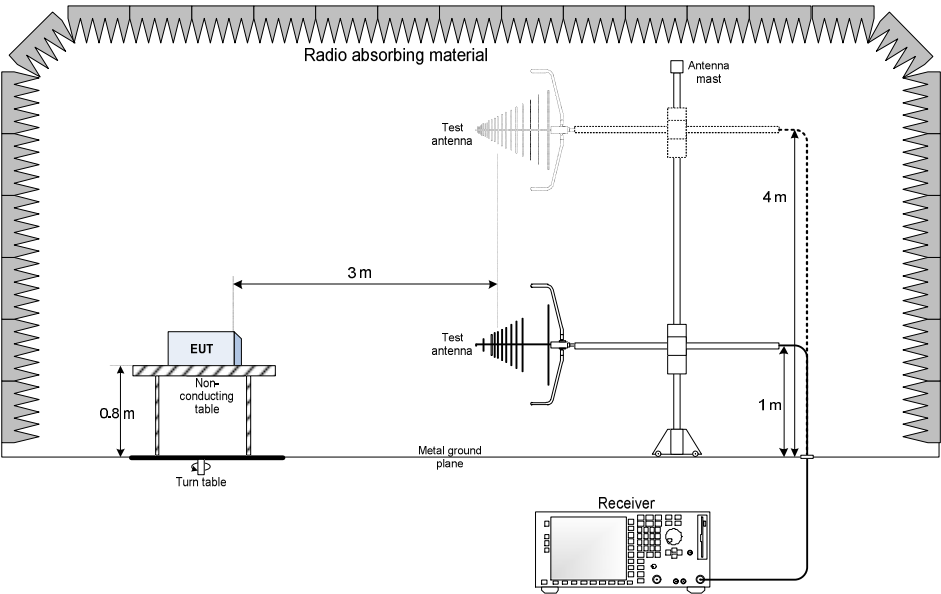

## 9.2 Radiated emissions set-up for frequencies above 1 GHz

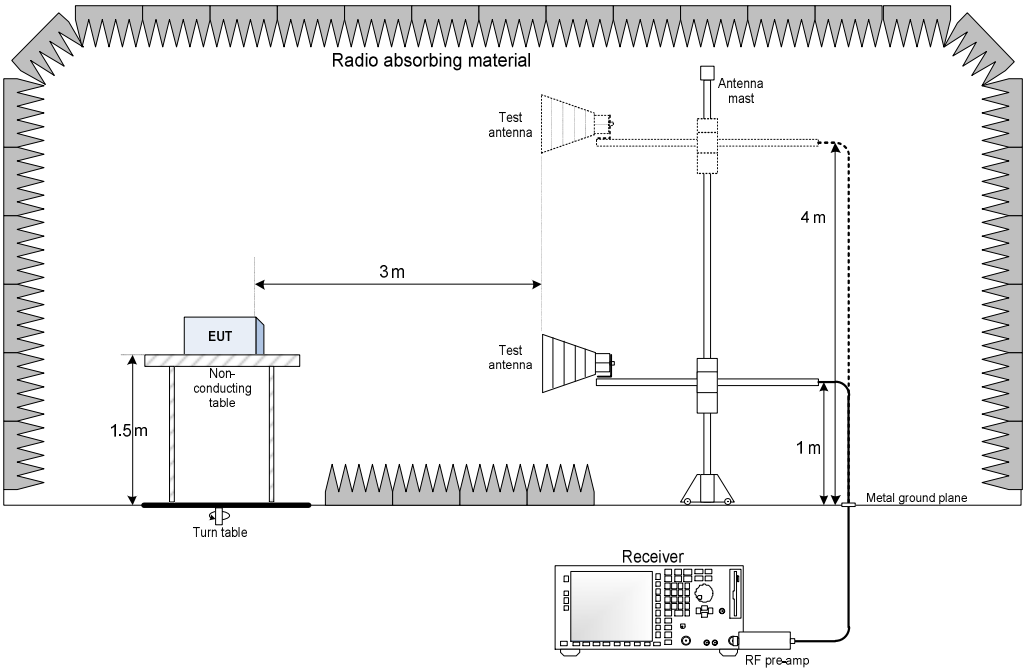

## Section 10. Photos


---

### 10.1 Photos of the test set-up

---



Radiated emission below 1 GHz

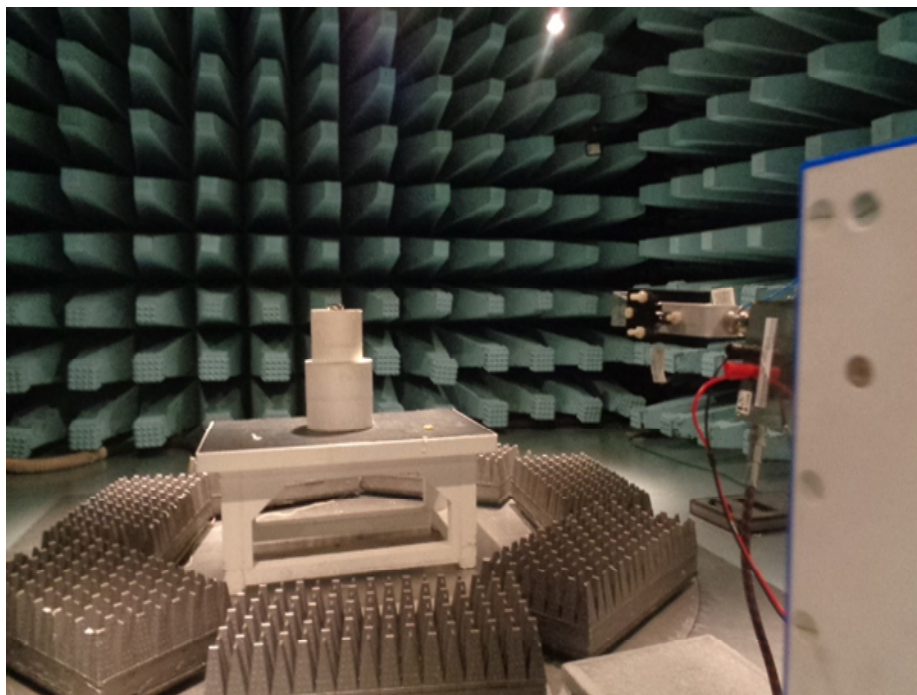

adiated emission above 1 GHz



10.2 Photos of the EUT

---







(End of report)